THE GRID CODE

ISSUE 6

REVISION 47

29 October 2026

© 2026 Copyright owned by **National Energy System Operator**, all rights reserved.

No part of this publication may be reproduced in any material form (including photocopying and restoring in any medium or electronic means and whether or not transiently or incidentally) without the written permission of **National Energy System Operator**, except:

1. to the extent that any party who is required to comply (or is exempt from complying) with the provisions under the Electricity Act 1989 reasonably needs to reproduce this publication to undertake its licence or statutory duties within Great Britain (or any agent appointed so to act on that party's behalf); and

2. in accordance with the provisions of the Copyright, Designs and Patents Act 1988.

THE GRID CODE

CONTENTS

CONTENTS* **(C)**

PREFACE* **(P)**

GLOSSARY AND DEFINITIONS **(GD)**

PLANNING CODE **(PC)**

CONNECTION CONDITIONS **(CC)**

EUROPEAN CONNECTION CONDITIONS **(ECC)**

DEMAND RESPONSE SERVICES **(DRS)**

COMPLIANCE PROCESSES **(CP)**

EUROPEAN COMPLIANCE PROCESSES **(ECP)**

OPERATING CODES **(OC)**

- OC1 Demand Forecasts
- OC2 Operational Planning and Data Provision
- OC3 Systems Incident Report
- OC4 Not Used
- OC5 Testing and Monitoring
- OC6 Demand Control
- OC7 Operational Liaison
- OC8 Safety Co-ordination
- OC9 Contingency Planning
- OC10 Event Information Supply
- OC11 Numbering and Nomenclature of HV Apparatus at Certain Sites
- OC12 System Tests

BALANCING CODES **(BC)**

- BC1 Pre Gate Closure Process
- BC2 Post Gate Closure Process
- BC3 Frequency Control Process
- BC4 TERRE Processes
- BC5

DATA REGISTRATION CODE **(DRC)**

GENERAL CONDITIONS **(GC)**

GOVERNANCE RULES **(GR)**

REVISIONS* **(R)**

*does not constitute part of the Grid Code

PREFACE

(P)

(This section does not form part of the Grid Code)

P.1. The Grid Code sets out the operating procedures and principles governing the relationship between **The Company** and all Users of the **National Electricity Transmission System**, be they **Generators**, **DC Converter** owners, **Suppliers** or **Non-Embedded Customers**. The Grid Code specifies day-to-day procedures for both planning and operational purposes and covers both normal and exceptional circumstances.

P.2 The Grid Code is designed to:

(i) permit the development, maintenance and operation of an efficient, coordinated and economical system for the transmission of electricity;

(ii) facilitate competition in the generation and supply of electricity (and without limiting the foregoing, to facilitate the national electricity transmission system being made available to persons authorised to supply or generate electricity on terms which neither prevent nor restrict competition in the supply or generation of electricity);

(iii) promote the security and efficiency of the electricity generation, transmission and distribution systems in the national electricity transmission system operator area taken as a whole; and

(iv) efficiently discharge the obligations imposed upon the licensee by this license and to comply with the **Electricity Regulation** and any relevant **Legally Binding Decisions of the European Commission and/or the Agency**.

and is conceived as a statement of what is optimal (particularly from a technical point of view) for all **Users** and **The Company** itself in relation to the planning, operation and use of the **National Electricity Transmission System**. It seeks to avoid any undue discrimination between **Users** and categories of **Users**.

P.3 The Grid Code is divided into the following sections:

(a) a **Planning Code** which provides generally for the supply of certain information by **Users** in order for **The Company** to undertake the planning and development of the **National Electricity Transmission System**;

(b) the **Connection Conditions** which specify minimum technical, design and operational criteria which must be complied with by **The Company** at **Connection Sites** and by **Users** connected to or seeking connection with the **National Electricity Transmission System** or by **Generators** (other than in respect of **Small Power Stations**) or **DC Converter** owners, connected to or seeking connection to a **User's System**;

(c) the **Compliance Processes** which specify the process that must be followed by **The Company** and any **Generator** or **DC Converter Station** owner to demonstrate its compliance with the Grid Code in relation to its **Plant** and **Apparatus**.

(d) an **Operating Code**, which is split into a number of sections and deals with **Demand** forecasting (**OC1**); the co-ordination of the outage planning process in respect of **Large Power Stations**, the **National Electricity Transmission System** and **User Systems** for construction, repair and maintenance, and the provision of certain types of **Operating Margin** data (**OC2**); testing and monitoring of **Users** (**OC5**); different forms of reducing **Demand** (**OC6**); the reporting of scheduled and planned actions, and unexpected occurrences such as faults (**OC7**); the co-ordination, establishment and maintenance of **Isolation** and **Earthing** in order that work and/or testing can be carried out safely (**OC8**); certain aspects of contingency planning (**OC9**); the provision of written reports on occurrences such as faults in certain circumstances (**OC10**); the procedures for numbering and nomenclature of **HV Apparatus** at certain sites (**OC11**); and the procedures for the establishment of **System Tests** (**OC12**);

(e) a **Balancing Code**, which is split into three sections and deals with the submission of **BM Unit Data** from **BM Participants**, and of certain other information, for the following day and ahead of **Gate Closure** (**BC1**); the post **Gate Closure** process (**BC2**); and the procedures and requirements in relation to **System Frequency** control (**BC3**);

(f) a **Data Registration Code**, which sets out a unified listing of all data required by **The Company** from **Users**, and by **Users** from **The Company**, under the Grid Code;

(g) **General Conditions**, which are intended to ensure, so far as possible, that the various sections of the Grid Code work together and work in practice and include provisions relating to the establishment of a **Grid Code Review Panel** and other provisions of a general nature.

P.4 This Preface is provided to **Users** and to prospective **Users** for information only and does not constitute part of the Grid Code.

< END OF PREFACE >

GLOSSARY & DEFINITIONS

(GD)

GD.1 In the Grid Code the following words and expressions shall, unless the subject matter or context otherwise requires or is inconsistent therewith, bear the following meanings:

Access Group	A group of **Connection Points** within which a **User** declares under the **Planning Code** (a) An interconnection and/or (b) A need to redistribute **Demand** between those **Connection Points** either pre-fault or post-fault Where a single **Connection Point** does not form part of an **Access Group** in accordance with the above, that single **Connection Point** shall be considered to be an **Access Group** in its own right.
Access Period	A period of time in respect of which each **Transmission Interface Circuit** is to be assessed as whether or not it is capable of being maintained as derived in accordance with PC.A.4.1.4. The period shall commence and end on specified calendar weeks.
Act	The Electricity Act 1989.
Activation Schedule(s)	Schedule(s) of detailed instructions sent by **The Company** to **Network Operators** which includes the designated identifier for each of the **Load Blocks** that are to be disconnected and reconnected and the timings for doing so.
Active Control Based Droop Power	**The Active Control Based Power** output supplied by a **Grid Forming Plant** through controlled means (be it manual or automatic). For **GBGF-I** this is equivalent to a **Synchronous Generating Unit** with a traditional governor coupled to its prime mover. **Active Control Based Droop Power** is used by **The Company** to control **System Frequency** changes through the instruction of **Primary Response** and **Secondary Response**.

Active Control Based Power	The **Active Power** output supplied by a **Grid Forming Plant** through controlled means (be it manual or automatic) of the positive phase sequence Root Mean Square **Active Power** produced at fundamental **System Frequency** by the control system of a **Grid Forming Unit**. For **GBGF-I**, this is equivalent to a **Synchronous Generating Unit** with a traditional governor coupled to its prime mover. **Active Control Based Power** includes **Active Power** changes that results from a change to the **Grid Forming Plant Owners** available set points that have a 5 Hz limit on the bandwidth of the provided response. **Active Control Based Power** also includes **Active Power** components produced by the normal operation of a **Grid Forming Plant** that comply with the **Engineering Recommendation** P28 limits. These **Active Power** components do not have a 5 Hz limit on the bandwidth of the provided response. **Active Control Based Power** does not include **Active Power** components proportional to **System Frequency**, slip or deviation that provide damping power to emulate the natural damping function provided by a real **Synchronous Generating Unit**.
Active Damping Power	The **Active Power** naturally injected or absorbed by a **Grid Forming Plant** to reduce **Active Power** oscillations in the **Total System**. More specifically, **Active Damping Power** is the damped response of a **Grid Forming Plant** to an oscillation between the voltage at the **Grid Entry Point** or **User System Entry Point** and the voltage of the **Internal Voltage Source** of the **Grid Forming Plant**. For the avoidance of doubt, **Active Damping Power** is an inherent capability of a **Grid Forming Plant** that starts to respond naturally, within less than 5ms to low frequency oscillations in the **System Frequency**.
Active Energy	The electrical energy produced, flowing or supplied by an electric circuit during a time interval, being the integral with respect to time of the instantaneous power, measured in units of watt-hours or standard multiples thereof, ie: 1000 Wh = 1 kWh 1000 kWh = 1 MWh 1000 MWh = 1 GWh 1000 GWh = 1 TWh

Active Frequency Response Power	The injection or absorption of **Active Power** by a **Grid Forming Plant** to or from the **Total System** during a deviation of the **System Frequency** away from the **Target Frequency**. For a **GBGF-I** this is very similar to **Primary Response** but with a response time to achieve the declared service capability (which could be the **Maximum Capacity** or **Registered Capacity**) within 1 second. For **GBGF-I** this can rapidly inject or absorb **Active Power** in addition to the phase-based **Active Inertia Power** to provide a system with desirable **NFP** plot characteristics. **Active Frequency Response Power** can be produced by any viable control technology.
Active Inertia Power	The injection or absorption of **Active Power** by a **Grid Forming Plant** to or from the **Total System** during a **System Frequency** change. The transient injection or absorption of **Active Power** from a **Grid Forming Plant** to the **Total System** as a result of the **ROCOF** value at the **Grid Entry Point** or **User System Entry Point**. This requires a sufficient energy storage capacity of the **Grid Forming Plant** to meet the **Grid Forming Capability** requirements specified in ECC.6.3.19. For the avoidance of doubt, this includes the rotational inertial energy of the complete drive train of a **Synchronous Generating Unit**. **Active Inertia Power** is an inherent capability of a **Grid Forming Plant** to respond naturally, within less than 5 ms, to changes in the **System Frequency**. For the avoidance of doubt, the **Active Inertia Power** has a slower frequency response compared with **Active Phase Jump Power**.
Active Phase Jump Power	The transient injection or absorption of **Active Power** from a **Grid Forming Plant** to the **Total System** as a result of changes in the phase angle between the **Internal Voltage Source** of the **Grid Forming Plant** and the **Grid Entry Point** or **User System Entry Point**. In the event of a disturbance or fault on the **Total System**, a **Grid Forming Plant** will instantaneously (within 5 ms) inject or absorb **Active Phase Jump Power** to the **Total System** as a result of the phase angle change. For **GBGF-I** as a minimum value this is up to the **Phase Jump Angle Limit Power**. **Active Phase Jump Power** is an inherent capability of a **Grid Forming Plant** that starts to respond naturally, within less than 5 ms and can have frequency components of over 1000 Hz.

Active Power	The product of voltage and the in-phase component of alternating current measured in units of watts and standard multiples thereof, ie: 1000 Watts = 1 kW 1000 kW = 1 MW 1000 MW = 1 GW 1000 GW = 1 TW
Active ROCOF Response Power	The **Active Inertia Power** developed from a **Grid Forming Plant** plus the **Active Frequency Response Power** that can be supplied by a **Grid Forming Plant** when subject to a rate of change of the **System Frequency**.
Additional BM Unit	Has the meaning as set out in the **BSC**
Affiliate	In relation to any person, any holding company or subsidiary of such person or any subsidiary of a holding company of such person, in each case within the meaning of Section 736, 736A and 736B of the Companies Act 1985 as substituted by section 144 of the Companies Act 1989 and, if that latter section is not in force at the **Transfer Date**, as if such section were in force at such date.
AF Rules	Has the meaning given to "allocation framework" in section 13(2) of the Energy Act 2013.
Agency	As defined in the **ESO Licence.**
Aggregator	A **BM Participant** who controls one or more **Additional BM Units** or **Secondary BM Units**.
Aggregated Energy Source	The aggregation of **Energy Sources** as defined in PC.G.8.1.
Aggregator Impact Matrix	Defined for an **Additional BM Unit** or a **Secondary BM Unit**. Provides data allowing **The Company** to model the result of a **Bid-Offer Acceptance** on each of the **Grid Supply Points** within the **GSP Group** over which the **Additional BM Unit** or **Secondary BM Unit** is defined.
Alternate Member	Shall mean an alternate member for the **Panel Members** elected or appointed in accordance with this GR.7.2(a) or (b).
Anchor	**Plant**, owned and operated by a **Restoration Contractor** which can **Start-Up** from **Shutdown** and energise a part of the **Total System** upon instruction from **The Company** or a **Network Operator** or a relevant **Transmission Licensee** within a defined time period, without an external electrical power supply from the **Total System**.
Anchor DC Converter Test	A test carried out by an **Anchor DC Converter Owner** on an **Anchor DC Converter** while the **Anchor DC Converter** is disconnected from all external electrical power supplies from the **Total System**.
Anchor Generating Unit Test	A test carried out on an **Anchor Generating Unit** or a **CCGT** unit or a **Power Generating Module**, as the case may be, at an **Anchor Power Station** while the **Anchor Power Station** remains energised from the **Total System**.

Anchor HVDC System Test	A test carried out by an **Anchor HVDC System Owner** while the **Anchor HVDC System** is disconnected from all external electrical power supplies from the **Total System**.
Anchor Plant Capability	The ability of a **Restoration Contractor's Plant** to **Start-Up** from **Shutdown** and to energise and maintain a part of the **Total System** upon instruction from **The Company** or **Relevant Transmission Licensee** (in Scotland) or relevant **Network Operator**, within a defined time period, without an external electrical power supply from the **Total System**. In the case of a **Local Joint Restoration Plan** the defined period of time is within 2 hours of an instruction from **The Company** or **Relevant Transmission Licensee**. In the case of a **Distribution Restoration Zone Plan**, the defined period of time is within 8 hours of an instruction from relevant **Network Operator**.
Anchor Plant Test	A test conducted on **Plant** to confirm it is capable of meeting the requirements of an **Anchor Restoration Contract**.
Anchor Power Station Test	A test carried out by an **Anchor Generator** at an **Anchor Power Station** while that **Anchor Power Station** is disconnected from all external electrical power supplies from the **Total System**.
Anchor Restoration Contract	In the case of a **Local Joint Restoration Plan** or **Offshore Local Joint Restoration Plan**, a contract between **The Company** and an **Anchor Restoration Contractor** for the provision of an **Anchor Plant Capability**. In the case of a **Distribution Restoration Zone Plan** is an agreement between **The Company** and relevant **Network Operator** and **Anchor Restoration Contractor** for the provision of an **Anchor Plant Capability**.
Anchor Restoration Contractor	A **Restoration Contractor** with an **Anchor Restoration Contract**.
Anchor Plant Unit Test	A test carried out on a **Generating Unit** or a **CCGT Unit** or a **Power Generating Module**, or a **HVDC System** or a **DC Converter** as the case may be, at the site of an **Anchor Plant** while the **Anchor Plant** is supplied from all external power supplies.
Ancillary Service	A **System Ancillary Service** and/or a **Commercial Ancillary Service**, as the case may be. An **Ancillary Service** may include one or more **Demand Response Services**.
Ancillary Services Agreement	An agreement between a **User** and **The Company** for the payment by **The Company** to that **User** in respect of the provision by such **User** of **Ancillary Services**.
Annual Average Cold Spell Conditions or **ACS Conditions**	A particular combination of weather elements which gives rise to a level of peak **Demand** within a **Financial Year** which has a 50% chance of being exceeded as a result of weather variation alone.
Apparatus	Other than in **OC8**, means all equipment in which electrical conductors are used, supported or of which they may form a part. It includes **Users'** equipment which imposes **Demand** on the **System**. In **OC8**, it means **High Voltage** electrical circuits forming part of a **System** on which **Safety Precautions** may be applied to allow work and/or testing to be carried out on a **System**.

Apparent Power	The product of voltage and of alternating current measured in units of voltamperes and standard multiples thereof, ie: 1000 VA = 1 kVA 1000 kVA = 1 MVA
Approved Fast Track Proposal	Has the meaning given in GR.26.7, provided that no objection is received pursuant to GR.26.12.
Approved Grid Code Self-Governance Proposal	Has the meaning given in GR.24.10.
Approved Modification	Has the meaning given in GR.22.7
Assimilated Law	Has the same meaning as that given by section 6(7) of the European Union (Withdrawal) Act 2018
Authorised Certifier	An entity that issues **Equipment Certificates** and **Power Generating Module Documents** and whose accreditation is given by the United Kingdom Accreditation Service or such other body as may be established from time to time to carry out the function of accreditation.
Authorised Electricity Operator	Any person (other than **The Company**) who is authorised under the **Act** to generate, participate in the transmission of, distribute or supply electricity which shall include any **Interconnector Owner** or **Interconnector User**.
Authority-Led Modification	A **Grid Code Modification Proposal** in respect of a **Significant Code Review**, raised by the Authority pursuant to GR.17
Authority-Led Modification Report	Has the meaning given in GR.17.4.
Authority for Access	An authority which grants the holder the right to unaccompanied access to sites containing exposed **HV** conductors.
Authority Guidance on Code Modification Prioritisation	**Authority Guidance on Code Modification Prioritisation** means the guidance published by the Authority from time to time on code modification prioritisation.
Authority, The	The **Authority** established by section 1 (1) of the Utilities Act 2000.
Automatic Voltage Regulator or **AVR**	The continuously acting automatic equipment controlling the terminal voltage of a **Synchronous Generating Unit** or **Synchronous Power Generating Module** by comparing the actual terminal voltage with a reference value and controlling by appropriate means the output of an **Exciter**, depending on the deviations.
Auxiliaries	Any item of **Plant** and/or **Apparatus** not directly a part of the boiler plant or **Power Generating Module** or **Generating Unit** or **DC Converter** or **HVDC Equipment** or **Power Park Module**, but required for the boiler plant's or **Power Generating Module's** or **Generating Unit's** or **DC Converter's** or **HVDC Equipment's** or **Power Park Module's** functional operation.

Auxiliary Diesel Engine	A diesel engine driving a **Power Generating Module** or **Generating Unit** which can supply a **Unit Board** or **Station Board**, which can start without an electrical power supply from outside the **Power Station** within which it is situated.
Auxiliary Energy Supplies	An electricity supply (which could be derived from an **Auxiliary Diesel Engine** or **Auxiliary Gas Turbine** or other source of energy) that is necessary to power the auxiliary and ancillary equipment on which a **Power Generating Module** or **HVDC System** or **DC Converter** or other item of **Plant** relies for it to be capable of generating **Active** or **Reactive Power** and which is generally supplied via a **Unit Board** or **Station Board**, or equivalent. **Auxiliary Energy Supplies** must be available without an external electrical power supply from the **Total System**. **Auxiliary Energy Supplies** do not include the mains-independent light current supplies necessary to operate **Critical Tools and Facilities**.
Auxiliary Gas Turbine	A **Gas Turbine Unit**, which can supply a **Unit Board** or **Station Board**, which can start without an electrical power supply from outside the **Power Station** within which it is situated.
Average Conditions	That combination of weather elements within a period of time which is the average of the observed values of those weather elements during equivalent periods over many years (sometimes referred to as normal weather).
Back-Up Protection	A **Protection** system which will operate when a system fault is not cleared by other **Protection**.
Balancing and Settlement Code or **BSC**	The code of that title as from time to time amended.
Balancing Code or **BC**	That portion of the Grid Code which specifies the **Balancing Mechanism** process.
Balancing Mechanism	Has the meaning set out in the **ESO Licence.**
Balancing Mechanism Reporting Agent or **BMRA**	Has the meaning set out in the **BSC**.
Balancing Mechanism Reporting Service or **BMRS**	Has the meaning set out in the **BSC**.
Balancing Principles Statement	A statement prepared by **The Company** in accordance with condition C9 of the **ESO Licence**.
Balancing Mechanism Window Period	Has the meaning set out in the BSC.
Baseline Forecast	Has the meaning given to the term ‘baseline forecast’ in Section G of the **BSC**.
Bid Acceptance	An acceptance by a **BM Unit** of a **Bid-Offer Acceptance** to decrease its export onto, or increase its import from, the **National Electricity Transmission System**, where in this context import and export are as defined in the **BSC**.

Bid-Offer Acceptance	(a) A communication issued by **The Company** in accordance with BC2.7; or (b) an **Emergency Instruction** to the extent provided for in BC2.9.2.3.
Bid-Offer Data	Has the meaning set out in the **BSC**.
Bilateral Agreement	Has the meaning set out in the **CUSC**.
Bilateral Embedded Generation Agreement (BEGA)	Has the meaning set out in the **CUSC**.
Block Loading Capability	The **Active Power** step and the time between steps (from no load to **Rated MW**), which a **Generating Unit** or **Power Generating Module** or **Power Park Module** or **HVDC System** or **DC Converter Station** (including **Plant** and **Apparatus** owned and operated by a **Restoration Contractor**) can instantaneously supply without causing it to trip or go outside the **Frequency** range of 47.5 Hz – 52 Hz assuming the **Plant** is initially operating at a nominal **System Frequency** of 50 Hz (or an otherwise agreed **Frequency** range).
BM Participant	A person who is responsible for and controls one or more **BM Units** or where a **Bilateral Agreement** specifies that a **User** is required to be treated as a **BM Participant** for the purposes of the Grid Code. For the avoidance of doubt, it does not imply that they must be active in the **Balancing Mechanism**.
BM Unit	Has the meaning set out in the **BSC**, except that for the purposes of the Grid Code the reference to "Party" in the **BSC** shall be a reference to **User**.
BM Unit Data	The collection of parameters associated with each **BM Unit**, as described in Appendix 1 of **BC1**.
Boiler Time Constant	Determined at **Registered Capacity** or **Maximum Capacity** (as applicable), the boiler time constant will be construed in accordance with the principles of the IEEE Committee Report "Dynamic Models for Steam and Hydro Turbines in Power System Studies" published in 1973 which apply to such phrase.
British Standards or **BS**	Those standards and specifications approved by the British Standards Institution.
BSCCo	Has the meaning set out in the **BSC**.
BSC Panel	Has meaning set out for "Panel" in the **BSC**.
Business Day	Any week day (other than a Saturday) on which banks are open for domestic business in the City of London.
Cancellation of National Electricity Transmission System Warning	The notification given to **Users** when a **National Electricity Transmission System Warning** is cancelled.

Capacity Market Documents	The **Capacity Market Rules**, The **Electricity Capacity Regulations** 2014 and any other Regulations made under Chapter 3 of Part 2 of the Energy Act 2013 which are in force from time to time.
Capacity Market Rules	The rules made under section 34 of the Energy Act 2013 as modified from time to time in accordance with that section and The Electricity Capacity Regulations 2014.
Cascade Hydro Scheme	Two or more hydro-electric **Generating Units**, owned or controlled by the same **Generator**, which are located in the same water catchment area and are at different ordnance datums and which depend upon a common source of water for their operation, known as: (a) Moriston (b) Killin (c) Garry (d) Conon (e) Clunie (f) Beauly which will comprise more than one **Power Station**.
Cascade Hydro Scheme Matrix	The matrix described in Appendix 1 to **BC1** under the heading **Cascade Hydro Scheme Matrix**.
Category 1 Intertripping Scheme	A **System to Generator Operational Intertripping Scheme** arising from a Variation to Connection Design following a request from the relevant **User** which is consistent with the criteria specified in the **Security and Quality of Supply Standard**.
Category 2 Intertripping Scheme	A System to Generator Operational Intertripping Scheme which is:- (i) required to alleviate an overload on a circuit which connects the **Group** containing the **User's Connection Site** to the **National Electricity Transmission System**; and (ii) installed in accordance with the requirements of the planning criteria of the **Security and Quality of Supply Standard** in order that measures can be taken to permit maintenance access for each transmission circuit and for such measures to be economically justified, and the operation of which results in a reduction in **Active Power** on the overloaded circuits which connect the **User's Connection Site** to the rest of the **National Electricity Transmission System** which is equal to the reduction in **Active Power** from the **Connection Site** (once any system losses or third party system effects are discounted).
Category 3 Intertripping Scheme	A **System to Generator Operational Intertripping Scheme** which, where agreed by **The Company** and the **User**, is installed to alleviate an overload on, and as an alternative to, the reinforcement of a third party system, such as the **Distribution System** of a **Public Distribution System Operator**.

Category 4 Intertripping Scheme	A **System to Generator Operational Intertripping Scheme** installed to enable the disconnection of the **Connection Site** from the **National Electricity Transmission System** in a controlled and efficient manner in order to facilitate the timely restoration of the **National Electricity Transmission System**.
Caution Notice	A notice conveying a warning against interference with **Safety Precautions**, which shall be attached (or affixed) at all **Points of Isolation**.
CENELEC	European Committee for Electrotechnical Standardisation.
Citizens Advice	Means the National Association of Citizens Advice Bureaux.
Citizens Advice Scotland	Means the Scottish Association of Citizens Advice Bureaux.
CfD Counterparty	A person designated as a "CfD counterparty" under section 7(1) of the Energy Act 2013.
CfD Documents	The **AF Rules**, The Contracts for Difference (Allocation) Regulations 2014, The Contracts for Difference (Definition of Eligible Generator) Regulations 2014 and The Contracts for Difference (Electricity Supplier Obligations) Regulations 2014 and any other regulations made under Chapter 2 of Part 2 of the Energy Act 2013 which are in force from time to time.
CfD Settlement Services Provider	means any person: (i) appointed for the time being and from time to time by a **CfD Counterparty**; or (ii) who is designated by virtue of Section C1.2.1B of the Balancing and Settlement Code, in either case to carry out any of the CFD settlement activities (or any successor entity performing CFD settlement activities).
CCGT Module Matrix	The matrix described in Appendix 1 to BC1 under the heading **CCGT Module Matrix**.
CCGT Module Planning Matrix	A matrix in the form set out in Appendix 2 of OC2 showing the combination of **CCGT Units** within a **CCGT Module** which would be running in relation to any given MW output.
Closed Distribution System or **CDSO**	A distribution system classified as a **Closed Distribution System** by the **Authority** which distributes electricity within a geographically confined industrial, commercial or shared services site and does not supply household **Customers**, without prejudice to incidental use by a small number of households located within the area served by the **System** and with employment or similar associations with the owner of the **System**.

Common Information Model or CIM	An abstract information model that describes and organises electricity power system data. Such a model provides a standard way of representing assets owned and / or operated by relevant parties and facilitates the integration of independently developed power system modelling applications.
CIM Standard	A standard published by a standards body (e.g., IEC, BSI) which utilises **CIM** concepts. **CIM Standards** describe various facets of **CIM** and its use: the underlying information model, data exchange and serialisation.
CM Administrative Parties	The **Secretary of State**, the **CM Settlement Body**, and any **CM Settlement Services Provider**.
CM Settlement Body	The Electricity Settlements Company Ltd or such other person as may from time to time be appointed as Settlement Body under regulation 80 of the Electricity Capacity Regulations 2014.
CM Settlement Services Provider	Any person with whom the **CM Settlement Body** has entered into a contract to provide services to it in relation to the performance of its functions under the **Capacity Market Documents**.
Code Administration Code of Practice	Means the code of practice approved by the **Authority** and: (a) developed and maintained by the code administrators in existence from time to time; and (b) amended subject to the **Authority's** approval from time to time; and (c) re-published from time to time;
Code Administrator	Means **The Company** carrying out the role of **Code Administrator** in accordance with the General Conditions.
Combined Cycle Gas Turbine Module or **CCGT Module**	A collection of **Generating Units** (registered as a **CCGT Module** (which could be within a **Power Generating Module**) under the **PC**) comprising one or more **Gas Turbine Units** (or other gas based engine units) and one or more **Steam Units** where, in normal operation, the waste heat from the **Gas Turbines** is passed to the water/steam system of the associated **Steam Unit** or **Steam Units** and where the component units within the **CCGT Module** are directly connected by steam or hot gas lines which enable those units to contribute to the efficiency of the combined cycle operation of the **CCGT Module**.
Combined Cycle Gas Turbine Unit or **CCGT Unit**	A **Generating Unit** within a **CCGT Module**.
Commercial Ancillary Services	**Ancillary Services**, other than **System Ancillary Services**, utilised by **The Company** in operating the **Total System** if a **User** (or other person such as a **Demand Response Provider**) has agreed to provide them under an **Ancillary Services Agreement** or under a **Bilateral Agreement** with payment being dealt with under an **Ancillary Services Agreement** or in the case of **Externally Interconnected System Operators** or **Interconnector Users**, under any other agreement (and in the case of **Externally Interconnected System Operators** and **Interconnector Users** includes **Ancillary Services** equivalent to or similar to **System Ancillary Services**).

Commercial Boundary	Has the meaning set out in the **CUSC**
Committed Level	The expected **Active Power** output from a **BM Unit** after accepting a **Bid-Offer Acceptance**.
Committed Project Planning Data	Data relating to a **User Development** once the offer for a **CUSC Contract** is accepted.
Common Collection Busbar	A busbar within a **Power Park Module** to which the higher voltage side of two or more **Power Park Unit** generator transformers are connected.
Competitively Appointed Transmission Licensee	A person granted a **Transmission Licence** (as defined in Section 6(1)b of the Act) to own and operate an **Onshore Transmission System** on the basis of competitive tendering undertaken pursuant to Section 6C of the Electricity Act 1989.
Competitively Appointed Transmission Licensee Interface Point	The electrical point of connection between a **Transmission System** owned by a **Competitively Appointed Transmission Licensee** and the assets of another **Transmission Licensee**.
Completion Date	Has the meaning set out in the **Bilateral Agreement** with each **User** to that term or in the absence of that term to such other term reflecting the date when a **User** is expected to connect to or start using the **National Electricity Transmission System**. In the case of an **Embedded Medium Power Station** or **Embedded DC Converter Station** or **Embedded HVDC System** having a similar meaning in relation to the **Network Operator's System** as set out in the **Embedded Development Agreement**.
Complex	A **Connection Site** together with the associated **Power Station** and/or **Network Operator** substation and/or associated **Plant** and/or **Apparatus**, as appropriate.
Compliance Processes or **CP**	That portion of the Grid Code which is identified as the **Compliance Processes**.

Compliance Statement	A statement completed by the relevant **User** confirming compliance with each of the relevant Grid Code provisions, and the supporting evidence in respect of such compliance, of its: **Generating Unit(s)**; or, **Power Generating Modules** (including **DC Connected Power Park Modules** and/or **Electricity Storage Modules**); or, **CCGT Module(s)**; or, **Power Park Module(s)**; or, **DC Converter(s)**; or **HVDC Systems**; or **Plant** and **Apparatus** at an **EU Grid Supply Point** owned or operated by a **Network Operator**; or **Network Operator's** entire distribution **System** where such **Network Operator's** distribution **System** comprises solely of **Plant** and **Apparatus** procured on or after 7 September 2018 and was connected to the **National Electricity Transmission System** on or after 18 August 2019. In this case, all connections to the **National Electricity Transmission System** would comprise only of **EU Grid Supply Points**; or **Plant** and **Apparatus** at an **EU Grid Supply Point** owned or operated by a **Non-Embedded Customer** where such **Non-Embedded Customer** is defined as an **EU Code User**; In the form provided by **The Company** to the relevant **User** or another format as agreed between the **User** and **The Company**.
Configuration 1 AC Connected Offshore Power Park Module	One or more **Offshore Power Park Modules** that are connected to an AC **Offshore Transmission System** and that AC **Offshore Transmission System** is connected to only one **Onshore** substation and which has one or more **Transmission Interface Points**.
Configuration 2 AC Connected Offshore Power Park Module	One or more **Offshore Power Park Modules** that are connected to a meshed AC **Offshore Transmission System** and that **AC Offshore Transmission System** is connected to two or more **Onshore** substations at its **Transmission Interface Points**.
Configuration 1 DC Connected Power Park Module	One or more **DC Connected Power Park Modules** that are connected to an **HVDC System** or **Transmission DC Converter** and that **HVDC System** or **Transmission DC Converter** is connected to only one **Onshore** substation and which has one or more **Transmission Interface Points**.
Configuration 2 DC Connected Power Park Module	One or more **DC Connected Power Park Modules** that are connected to an **HVDC System** or **Transmission DC Converter** and that **HVDC System** or **Transmission DC Converter** is connected to more than one **Onshore** substation at its **Transmission Interface Points**.
Connection Conditions or **CC**	That portion of the Grid Code which is identified as the **Connection Conditions** being applicable to **GB Code Users**.
Connection Entry Capacity	Has the meaning set out in the **CUSC**.

Connected Planning Data	Data which replaces data containing estimated values assumed for planning purposes by validated actual values and updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**.
Connection Point	A **Grid Supply Point** or **Grid Entry Point**, as the case may be.
Connection Site	A **Transmission Site** or **User Site**, as the case may be.
Construction Agreement	Has the meaning set out in the **CUSC**
Consumer Representative	Means the person appointed by the **Citizens Advice** or the **Citizens Advice Scotland** (or any successor body) representing all categories of customers, appointed in accordance with GR.4.2(b)
Contingency Reserve	The margin of generation over forecast **Demand** which is required in the period from 24 hours ahead down to real time to cover against uncertainties in **Large Power Station** availability and against both weather forecast and **Demand** forecast errors.
Control Based Reactive Power	The **Reactive Power** supplied by a **Grid Forming Plant** through controlled means based on operator adjustment selectable setpoints (these may be manual or automatic).
Control Calls	Telephone calls whose destination and/or origin is a **Control Centre** or **Control Point**, either from dedicated control desk telephone systems or dedicated telephone handsets, and which, for the purpose of **Control Telephony**, have the right to exercise priority over (ie. disconnect) a call of a lower status.
Control Centre	A location used for the purpose of control and operation of the **National Electricity Transmission System** or **DC Converter Station** owner's **System** or **HVDC System Owner's System** or a **User System** other than a **Generator's System** or an **External System**.
Control Engineer	A person nominated by the relevant party for the control of its **Plant** and **Apparatus**.
Control Person	The term used as an alternative to "**Safety Co-ordinator**" on the **Site Responsibility Schedule** only.
Control Phase	The **Control Phase** follows on from the **Programming Phase** and covers the period down to real time.

Control Point	The point from which:- (a) A **Non-Embedded Customer's Plant** and **Apparatus** is controlled; or (b) A **BM Unit** at a **Large Power Station** or at a **Medium Power Station** or representing a **Cascade Hydro Scheme** or with a **Demand Capacity** with a magnitude of: (i) 50 MW or more in **NGET's Transmission Area**; or (ii) 30 MW or more in **SPT's Transmission Area**; or (iii) 10 MW or more in **SHETL's Transmission Area**, (iv) 10 MW or more which is connected to an **Offshore Transmission System** is physically controlled by a **BM Participant**; or (c) In the case of any other **BM Unit** or **Generating Unit** (which could be part of a **Power Generating Module**), data submission is co-ordinated for a **BM Participant** and instructions are received from **The Company**, as the case may be. For a **Generator**, this will normally be at a **Power Station** but may be at an alternative location agreed with **The Company**. In the case of a **DC Converter Station** or **HVDC System**, the **Control Point** will be at a location agreed with **The Company**. In the case of a **BM Unit** of an **Interconnector User**, the **Control Point** will be the **Control Centre** of the relevant **Externally Interconnected System Operator**.
Control Telephony	The principal method by which a **User's Responsible Engineer/Operator**, the relevant **Transmission Licensees' Control Engineers** and **The Company's Control Engineers** speak to one another for the purposes of control of the **Total System** in both normal and emergency operating conditions.
Core Industry Document	As defined in the **ESO Licence.**
Core Industry Document Owner	In relation to a **Core Industry Document**, the body(ies) or entity(ies) responsible for the management and operation of procedures for making changes to such document

Critical Tools and Facilities	**Apparatus** and tools required in relation to **System Restoration**: a) In the case of **The Company** include, but are not limited to: i) Tools for operating and monitoring the **Transmission System** including but not limited to state estimation, the **Balancing Mechanism**, **Load** and **System Frequency** control, alarms, real time system operation and operational security analysis including off line transmission analysis; ii) The ability to control, protect and monitor transmission assets including switchgear, tap changers and other **Transmission System** equipment including where available auxiliary equipment and to ensure the safe operation of **Plant** and **Apparatus** and the safety of personnel; iii) **Control Telephony** systems as provided for in CC.6.5.1 – CC.6.5.5 and ECC.6.5.1 – ECC.6.5.5; iv) Operational telephony as provided for in STCP 04-5; and v) Tools and communications systems to facilitate cross border operations. b) In the case of **Generators**, **HVDC System Owners**, **DC Converter Station Owners**, **Defence Service Providers** and **Restoration Contractors**: i) Tools for monitoring relevant **Plant** and **Apparatus**; ii) The ability to control, protect and monitor their **Plant** and **Apparatus** necessary for **System Restoration** including as applicable primary **Plant**, switchgear, tap changers and other auxiliary equipment and to ensure the safe operation of **Plant** and personnel; and iii) **Control Telephony** as provided for in CC.6.5.1 – CC.6.5.5 and ECC.6.5.1 – ECC.6.5.5. c) In the case of **BM Participants** and **Virtual Lead Parties** who are not **Generators**, **HVDC System Owners**, **DC Converter Station** owners, **Defence Service Providers** or **Restoration Contractors** as provided for in item b) above: i) Tools for monitoring relevant **Plant** and **Apparatus** (excluding **Plant** and **Apparatus** not owned by the **BM Participant** or **Virtual Lead Party**); and ii) **Control Telephony** as provided for in CC.6.5.1 – CC.6.5.5 and ECC.6.5.1 – ECC.6.5.5 d) In the case of **Network Operators**: i) Control room **Apparatus** and tools for monitoring their **System** including but not limited to, alarms, real time system operation and operational security analysis including off line network analysis; ii) The ability to control, protect and monitor those assets necessary for **System Restoration** including switchgear, tap changers and other network equipment including where available auxiliary equipment and to ensure the safe operation of **Plant** and personnel; and iii) **Control Telephony** as provided for in CC.6.5.1 – CC.6.5.5 and ECC.6.5.1 – ECC.6.5.5. e) In the case of **Non-Embedded Customers**: i) Tools for monitoring their **System** including but not limited to, alarms and real time system operation;

	ii) The ability to control, protect and monitor those assets necessary for **System Restoration** including switchgear, tap changers and other network equipment including where available auxiliary equipment and to ensure the safe operation of **Plant** and personnel; and iii) **Control Telephony** as provided for in CC.6.5.1 – CC.6.5.5 and ECC.6.5.1 – ECC.6.5.5.
CUSC	Has the meaning set out in the **ESO Licence.**
CUSC Contract	One or more of the following agreements as envisaged in condition E2 of the **ESO Licence**: (a) the **CUSC Framework Agreement**; (b) a **Bilateral Agreement**; (c) a **Construction Agreement** or a variation to an existing **Bilateral Agreement** and/or **Construction Agreement**;
CUSC Framework Agreement	Has the meaning set out in the **ESO Licence**.
CUSC Party	As defined in the **ESO Licence** and "CUSC Parties" shall be construed accordingly.
Customer	A person to whom electrical power is provided (whether or not they are the same person as the person who provides the electrical power).
Customer Demand Management	Reducing the supply of electricity to a **Customer** or disconnecting a **Customer** in a manner agreed for commercial purposes between a **Supplier** and its **Customer**.
Customer Demand Management Notification Level	The level above which a **Supplier** has to notify **The Company** of its proposed or achieved use of **Customer Demand Management** which is 12 MW in England and Wales and 5 MW in Scotland.
Customer Generating Plant	A **Power Station** or **Generating Unit** or **Power Generating Module** of a **Customer** to the extent that it operates the same exclusively to supply all or part of its own electricity requirements, and does not export electrical power to any part of the **Total System**.
Damping Factor (ζ)	The ratio of the actual damping to critical damping. For a **GBGF-I** the open loop phase angle, for an open loop gain of one, is measured from the systems **Nichols Chart**. This angle is used to define the system's equivalent **Damping Factor** that is the same as the **Damping Factor** of a second order system with the same open loop phase angle. Alternatively, the **Damping Factor** refers to the damping of a specific oscillation mode that is associated with the second order system created by the power to angle transfer function as shown in Figure PC.A.5.8.1(a) and PCA.5.8.1(b).
Data Freeze Date	The date at which the **Structural Data** of a **Network Operator's Solved PSM** reflects the **Network Operator's System**.

Data Publisher	The person providing a reporting service, in relation to data which is submitted to the reporting service under OC2.3.2.3 or a **Transmission Licensee**, in relation to data which the **Transmission Licensee** is required to publish.
Data Registration Code or **DRC**	That portion of the Grid Code which is identified as the **Data Registration Code**.
Data Validation, Consistency and Defaulting Rules	The rules relating to validity and consistency of data, and default data to be applied, in relation to data submitted under the **Balancing Codes**, to be applied by **The Company** under the **Grid Code** as set out in the document "Data Validation, Consistency and Defaulting Rules" - Issue 8, dated 25th January 2012. The document is available on The Company's website or upon request from **The Company**.
DC Connected Power Park Module	A **Power Park Module** that is connected to one or more **HVDC Interface Points**.
DC Converter	Any **Onshore DC Converter** or **Offshore DC Converter** as applicable to **GB Code User's**.
DC Converter Station	An installation comprising one or more **Onshore DC Converters** connecting a direct current interconnector: to the **National Electricity Transmission System**; or, (if the installation has a rating of 50 MW or more) to a **User System**, and it shall form part of the **External Interconnection** to which it relates.
DC Network	All items of **Plant** and **Apparatus** connected together on the direct current side of a **DC Converter** or **HVDC System**.
DCUSA	The Distribution Connection and Use of System Agreement approved by the **Authority** and required to be maintained in force by each **Electricity Distribution Licence** holder.
Defence Service Provider	A **User** with a legal or contractual obligation to provide a service contributing to one or several measures of the **System Defence Plan** or a party with a contract to meet one or more measures of the **System Defence Plan**.
Defined Active Damping Power	The **Active Damping Power** supplied by a **GBGF-I** when it is operating at the **Grid Oscillation Value** defined in Table PC.A.5.8.2.
De-Load	The condition in which a **Genset** has reduced or is not delivering electrical power to the **System** to which it is **Synchronised**.
Δf	Deviation from **Target Frequency**.
Demand	The demand of MW and MVAr of electricity (i.e. both **Active** and **Reactive Power**), unless otherwise stated.
Demand Aggregation	A process where one or more **Demand Facilities** or **Closed Distribution Systems** can be controlled by a **Demand Response Provider** either as a single facility or **Closed Distribution System** for the purposes of offering one or more **Demand Response Services**.

Demand Capacity	Has the meaning as set out in the **BSC**.
Demand Control	Any or all of the following methods of achieving a **Demand** reduction: (a) **Customer** voltage reduction initiated by **Network Operators** (other than following an instruction from **The Company**); (b) **Customer Demand** reduction by **Disconnection** initiated by **Network Operators** (other than following an instruction from **The Company**); (c) **Demand** reduction instructed by **The Company**; (d) automatic low **Frequency Demand Disconnection**; (e) emergency manual **Demand Disconnection**.
Demand Control Notification Level	The level above which a **Network Operator** has to notify **The Company** of its proposed or achieved use of **Demand Control** which is 12 MW in England and Wales and 5 MW in Scotland.
Demand Control Rotation Period	The period of time between **The Company** issuing a **National Electricity Transmission System Notice – DCRP Actuation** and eight hours after **The Company** issuing a **National Electricity Transmission System Notice – DCRP Stand Down**, unless otherwise agreed by **The Company** and the relevant **Network Operator**(s).
Demand Control Rotation Protocol (DCRP)	An industry protocol that details an arrangement between **The Company** and **Network Operators** to manage shortfalls in **Demand** as outlined in OC6.9.
Demand Facility	A facility which consumes electrical energy and is connected at one or more **Grid Supply Points** to the **National Electricity Transmission System** or connection points to a **Network Operator's System**. A **Network Operator's System** and/or auxiliary supplies of a **Power Generating Module** do not constitute a **Demand Facility**.
Demand Facility Owner	A person who owns or operates one or more **Demand Units** within a **Demand Facility**. A **Demand Facility Owner** who owns or operates a **Demand Facility** which is directed connected to the **Transmission System** shall be treated as a **Non-Embedded Customer**.
Demand Response Active Power Control	**Demand** within a **Demand Facility** or **Closed Distribution System** that is available for modulation by **The Company** or **Network Operator** or **Relevant Transmission Licensee**, which results in an **Active Power** modification.
Demand Response Provider	A party (other than **The Company**) who owns, operates, controls or manages **Main Plant and Apparatus** (excluding storage equipment) which was first connected to the **Total System** on or after 18 August 2019 and who had placed **Purchase Contracts** for its **Main Plant and Apparatus** on or after 7 September 2018 or is the subject of a **Substantial Modification** on or after 18 August 2019 and has an agreement with **The Company** to provide a **Demand Response Service**(s). The party may be one or more **Customers**, a **Network Operator** or **Non-Embedded Customer** or **EU Code User** contracting bilaterally with **The Company** for the provision of services, or may be a third party providing **Demand Aggregation** from many individual **Customers**.

Demand Response Reactive Power Control	A **Demand Response Service** derived from **Reactive Power** or **Reactive Power** compensation devices in a **Demand Facility** or **Closed Distribution System** that are available for modulation by **The Company** or **Network Operator** or **Relevant Transmission Licensee**.
Demand Response Transmission Constraint Management	A **Demand Response Service** derived from **Demand** within a **Demand Facility** or **Closed Distribution System** that is available for modulation by **The Company** or **Network Operator** or **Relevant Transmission Licensee** to manage transmission constraints within the **System**.
Demand Response Service	A **Demand Response Service** includes one of more of the following services: (a) **Demand Response Active Power Control**; (b) **Demand Response Reactive Power Control**; (c) **Demand Response Transmission Constraint Management**; (d) **Demand Response System Frequency Control**; (e) **Demand Response Very Fast Active Power Control**. The above **Demand Response Services** are not exclusive and do not preclude **Demand Response Providers** from negotiating other services for demand response capability with **The Company**. Where such services are negotiated they would still be treated as a **Demand Response Service**.
Demand Response Services Code (DRSC)	That portion of the Grid Code which is identified as the **Demand Response Services Code** being applicable to **Demand Response Providers**.
Demand Response System Frequency Control	A **Demand Response Service** derived from a **Demand** within one or more **Demand Facilities** or **Closed Distribution Systems** that is available for the reduction or increase in response to **Frequency** fluctuations, made by an autonomous response from those **Demand Facilities** or **Closed Distribution Systems** to diminish these fluctuations.
Demand Response Unit Document (DRUD)	A document, issued either by the **Non-Embedded Customer**, **Demand Facility Owner** or the **CDSO** to **The Company** or the **Network Operator** (as the case may be) for **Demand Units** with demand response and providing a **Demand Response Service** which confirms the compliance of the **Demand Unit** with the technical requirements set out in the Grid Code and provides the necessary data and statements, including a statement of compliance.
Demand Response Very Fast Active Power Control	A **Demand Response Service** derived from **a Demand** within a **Demand Facility** or **Closed Distribution System** that can be modulated very fast in response to a **Frequency** deviation, which results in a very fast **Active Power** modification.
Demand Unit	An indivisible set of installations containing equipment which can be actively controlled at one or more sites by a **Demand Response Provider**, **Demand Facility Owner**, **CDSO** or by a **Non Embedded Customer**, either individually or commonly as part of **Demand Aggregation** through a third party who has agreed to provide **Demand Response Services**.
Designated Information Exchange System	A facsimile machine or, as agreed between each **User** with respect to their **Control Centre**, **Trading Point** or **Control Point** and **The Company**, an **Electronic Communication Platform** that facilitates the exchange of information between a **User** and **The Company**.

Designed Minimum Operating Level	The output (in whole MW) below which a **Genset** or a **DC Converter** at a **DC Converter Station** (in any of its operating configurations) has no **High Frequency Response** capability.
De-Synchronise	(a) The act of taking a **Power Generating Module** (including a **DC Connected Power Park Module**), **Generating Unit**, **Power Park Module**, **HVDC System** or **DC Converter** off a **System** to which it has been **Synchronised**, by opening any connecting circuit breaker; or (b) The act of ceasing to consume electricity at an importing **BM Unit**; and the term "**De-Synchronising**" shall be construed accordingly.
De-synchronised Island Procedure	A formal procedure as set out in OC9.5.4 for the purpose of **Synchronising Power Islands**
Detailed Planning Data	Detailed additional data which **The Company** requires under the **PC** in support of **Standard Planning Data**, comprising **DPD I** and **DPD II**.
Detailed Planning Data Category I or **DPD I**	The **Detailed Planning Data** categorised as such in the **DRC**, and submitted in accordance with PC.4.4.2 or PC.4.4.4 as applicable.
Detailed Planning Data Category II or **DPD II**	The **Detailed Planning Data** categorised as such in the **DRC**, and submitted in accordance with PC.4.4.2 or PC.4.4.4 as applicable.
Diagram Data	Data in a **PSM** enabling **Structural Data** to be displayed graphically, including a **Single Line Diagram**.
Disconnection	The physical separation of **Users** (or **Customers**) from the **National Electricity Transmission System** or a **User System** as the case may be.
Discrimination	The quality where a relay or protective system is enabled to pick out and cause to be disconnected only the faulty **Apparatus**.
Disputes Resolution Procedure	The procedure described in the **CUSC** relating to disputes resolution.
Distribution Code	The distribution code required to be drawn up by each **Electricity Distribution Licence** holder and approved by the **Authority**, as from time to time revised with the approval of the **Authority**.
Distribution Restoration Contract	An agreement between an **Anchor Plant Owner** or **Top Up Restoration Contractor** and **The Company** and a **Network Operator** under which the **Anchor Restoration Contractor** or **Top Up Restoration Contractor**, on instruction, provides a service to energise and/or contribute to the establishment of a **Distribution Restoration Zone**.

Distribution Restoration Zone	Part of a **Network Operator's System** which is capable of being energised by an **Anchor Plant** following a **Total System Shutdown** or **Partial System Shutdown**. The **Distribution Restoration Zone** shall contain an **Anchor Plant** and may also include one or more **Top Up Restoration Contractor's Plants**. The **Distribution Restoration Zone** primarily comprises part of the **Network Operator's System** but may include relevant parts of the **National Electricity Transmission System** in which case **Relevant Transmission Licensees** would be party to the **Distribution Restoration Zone Plan**.
Distribution Restoration Zone Control System (DRZCS)	A mains-independent automatic control and supervisory system which assesses the status and operational conditions of part of a **Network Operator's System** and where relevant, part of the **Transmission System** for the purposes of operating **Restoration Contractor's Plant** and **Apparatus** and/or modulating **Restoration Contractors' Demand** in addition to operating items of the **Network Operator's Plant** and **Apparatus** and relevant **Transmission Licensee's Plant** and **Apparatus** for the purposes of establishing and operating a **Distribution Restoration Zone**.
Distribution Restoration Zone Plan	A plan produced and agreed by a **Network Operator**, **The Company**, **Restoration Contractors** and in certain situations a **Transmission Licensees** under OC9.4.7.7, detailing the agreed method and procedure by which a **Network Operator** will instruct a **Restoration Contractor** with an **Anchor Plant** to energise, part of a **Network Operator's System Total System** within 8 hours of that instruction, and subsequently meet complementary blocks of local **Demand** so as to form a **Power Island**. A **Distribution Restoration Zone Plan** may require the use of **Top Up Restoration Plant**. A **Distribution Restoration Zone Plan** is distinct from and falls outside the provisions of a **Local Joint Restoration Plan**.
Droop	The ratio of the per unit steady state change in speed (or **Frequency**), to the per unit steady state change in **Active Power** output. Whilst not mandatory, it is often common practice to express **Droop** in percentage terms.
Dynamic Parameters	Those parameters listed in Appendix 1 to **BC1** under the heading **BM Unit Data** – **Dynamic Parameters**.
Dynamic Reactive Compensation Equipment	**Plant** and **Apparatus** capable of injecting or absorbing **Reactive Power** in a controlled manner which includes but is not limited to Synchronous Compensators, Static Var Compensators (SVC), or STATCOM devices.
E&W Offshore Transmission System	An **Offshore Transmission System** with an **Interface Point** in England and Wales.
E&W Offshore Transmission Licensee	A person who owns or operates an **E&W Offshore Transmission System** pursuant to a **Transmission Licence**.
E&W Transmission System	Collectively **NGET's Transmission System**, any **Competitively Appointed Transmission Licensee's Transmission System** with **Plant** and **Apparatus** located in **NGET's Transmission Area** and any **E&W Offshore Transmission Systems**.

E&W User	A **User** in **England** and **Wales** or any **Offshore User** who owns or operates **Plant** and/or **Apparatus** connected (or which will at the **OTSUA Transfer Time** be connected) to an **E&W Offshore Transmission System**.
Earth Fault Factor	At a selected location of a three-phase **System** (generally the point of installation of equipment) and for a given **System** configuration, the ratio of the highest root mean square phase-to-earth power **Frequency** voltage on a sound phase during a fault to earth (affecting one or more phases at any point) to the root mean square phase-to-earth power **Frequency** voltage which would be obtained at the selected location without the fault.
Earthing	A way of providing a connection between conductors and earth by an **Earthing Device** which is either: (a) Immobilised and **Locked** in the earthing position. Where the **Earthing Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be, where reasonably practicable, given to the authorised site representative of the **Requesting Safety Co-ordinator** and is to be retained in safe custody. Where not reasonably practicable the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or (b) maintained and/or secured in position by such other method which must be in accordance with the **Local Safety Instructions** of **NGET** or the **Safety Rules** of the **Relevant Transmission Licensee** or that **User**, as the case may be.
Earthing Device	A means of providing a connection between a conductor and earth being of adequate strength and capability.
Elected Panel Members	Shall mean the following **Panel Members** elected in accordance with GR4.2(a): (a) the representative of the **Suppliers**; (b) the representative of the **Onshore Transmission Licensees**; (c) the representative of the **Offshore Transmission Licensees**; and (d) the representatives of the **Generators**
Electrical Standard	A standard listed in the Annex to the **General Conditions**.
Electricity Balancing Regulation	as defined in the **CUSC**.
Electricity Council	That body set up under the Electricity Act, 1957.
Electricity Distribution Licence	The licence granted pursuant to Section 6(1) (c) of the **Act**.
Electricity Regulation	As defined in the **ESO Licence.**

Electricity Storage	The conversion of electrical energy into a form of energy which can be stored, the storing of that energy, and the subsequent reconversion of that energy back into electrical energy.
Electricity Storage Module	Is either one or more **Synchronous Electricity Storage Unit**(s) or **Non-Synchronous Electricity Storage Unit**(s) which could also be part of a **Power Generating Module**. For the avoidance of doubt, **Non-Controllable Electricity Storage Equipment** would not be considered to be classed as an **Electricity Storage Module** or as an **Electricity Storage Unit**.
Electricity Storage Unit	A **Synchronous Electricity Storage Unit** or **Non-Synchronous Electricity Storage Unit**.
Electricity Supply Industry Arbitration Association	The unincorporated members' club of that name formed inter alia to promote the efficient and economic operation of the procedure for the resolution of disputes within the electricity supply industry by means of arbitration or otherwise in accordance with its arbitration rules.
Electricity Supply Licence	The licence granted pursuant to Section 6(1) (d) of the **Act**.
Electricity System Operator Licence or ESO Licence	Means a licence granted or treated as granted under section 6(1)(da) of the **Act.**
Electricity System Restoration Standard	As defined in Special Condition 2.2 of **The Company's** Transmission Licence.
Electricity Ten Year Statement	A statement of network development information, prepared annually by **The Company** in accordance with the terms of the **ESO Licence** condition C12 for each of the nine succeeding financial years.
Electromagnetic Compatibility Level	Has the meaning set out in **Engineering Recommendation** G5.
Electronic Communication Platform	An information exchange platform established, provided, and maintained by **The Company** that facilitates the exchange of information between a **User** and **The Company**.
Electronic Power Converter	Electrical **Plant and Apparatus** which uses switched solid state power electronic devices to produce a real voltage waveform, that has a fundamental component with harmonics.
Embedded	Having a direct connection to a **User System** or the **System** of any other **User** to which **Customers** and/or **Power Stations** are connected, such connection being either a direct connection or a connection via a busbar of another **User** or of a **Relevant Transmission Licensee** (but with no other connection to the **National Electricity Transmission System**).
Embedded Development	Has the meaning set out in PC.4.4.3(a).
Embedded Development Agreement	An agreement entered into between a **Network Operator** and an **Embedded Person**, identifying the relevant site of connection to the **Network Operator's System** and setting out other site specific details in relation to that use of the **Network Operator's System**.

Embedded Generation Control	Any or all of the following methods by which a **Network Operator** can achieve a reduction in the **Active Power** output of **Embedded Power Stations** to implement an instruction issued by **The Company**: (a) **Embedded Generation De-energisation**; or (b) where this is achievable in a suitable timescale to comply with an instruction, arranging to reduce the **Active Power** output of **Embedded Power Stations** or **Embedded Generator Unit(s)** connected to their **System**.
Embedded Generation Deenergisation	The de-energisation by **Network Operators** of one or more **Embedded Power Stations** or **Embedded Generating Units** from their **System** as part of an **Embedded Generation Control** action.
Embedded Customer Import	Import to a **Customer's** site **Embedded** in a **Network Operator's System** where the primary purpose is other than that of an **Embedded Power Station**. When establishing the primary purpose, the **Network Operator** will consider factors including: • the maximum export capacity relative to the maximum import capacity; • whether the **Customer** has a generation licence or licence exemption; and whether the **Customer** is categorised as having a demand connection or generation connection as defined in DCUSA Schedule 22.
Embedded Power Station Import	Import to a **Customer's** site **Embedded** in a **Network Operator's System** where the primary purpose of that site is wholly or mainly that of an **Embedded Power Station**. When establishing the primary purpose, the **Network Operator** will consider factors including: • the maximum export capacity relative to the maximum import capacity; • whether the **Customer** has a generation licence or licence exemption; and • whether the **Customer** is categorised as having a demand connection or generation connection as defined in DCUSA Schedule 22.
Embedded Power Station Export	Export from an **Embedded Power Station**.
Embedded Person	The party responsible for a **Medium Power Station** not subject to a **Bilateral Agreement** or **DC Converter Station** not subject to a **Bilateral Agreement** or **HVDC System** not subject to a **Bilateral Agreement** connected to or proposed to be connected to a **Network Operator's System**.
Emergency Deenergisation Instruction	An **Emergency Instruction** issued by **The Company** to **De-Synchronise** a **Power Generating Module** (including a **DC Connected Power Park Module**), **Generating Unit**, **Power Park Module, HVDC System** or **DC Converter** in circumstances specified in the **CUSC**.

Emergency Instruction	An instruction issued by **The Company** in emergency circumstances, pursuant to BC2.9, to the **Control Point** of a **User**. In the case of such instructions applicable to a **BM Unit**, it may require an action or response which is outside the **Dynamic Parameters** or **Other Relevant Data**, and may include an instruction to trip a **Genset**.
Emergency Response Team	A group constituted by the relevant government department for energy, containing representation from the UK government, the **Authority**, **The Company**, and impacted industry organisations that meets during an emergency situation to discuss the actions that shall collectively be taken to address the emergency situation.
EMR Administrative Parties	Has the meaning given to "administrative parties" in The Electricity Capacity Regulations 2014 and each **CfD Counterparty** and **CfD Settlement Services Provider**.
EMR Documents	The Energy Act 2013, The Electricity Capacity Regulations 2014, the **Capacity Market Rules**, The Contracts for Difference (Allocation) Regulations 2014, The Contracts for Difference (Definition of Eligible Generator) Regulations 2014, The Contracts for Difference (Electricity Supplier Obligations) Regulations 2014, The Electricity Market Reform (General) Regulations 2014, the **AF Rules** and any other regulations or instruments made under Chapter 2 (contracts for difference), Chapter 3 (capacity market) or Chapter 4 (investment contracts) of Part 2 of the Energy Act 2013 which are in force from time to time.
EMR Functions	Has the meaning given to "EMR functions" in Chapter 5 of Part 2 of the Energy Act 2013.
Energy Source	Any of the sources of energy listed in PC.G.8 used in the production of electricity.
Engineering Recommendations	The documents referred to as such and issued by the Energy Networks Association or the former Electricity Council.
Engineering Recommendation G5	Means Engineering Recommendation G5/5.
Energisation Operational Notification or **EON**	A notification (in respect of **Plant** and **Apparatus** (including **OTSUA**) which is directly connected to the **National Electricity Transmission System**) from **The Company** to a **User** confirming that the **User** can in accordance with the **Bilateral Agreement** and/or **Construction Agreement**, energise such **User's Plant** and **Apparatus** (including **OTSUA**) specified in such notification.
Equipment Certificate	A document issued by an **Authorised Certifier** for equipment used by a **Power Generating Module**, **Demand Unit**, **Network Operators System**, **Non-Embedded Customers System**, **Demand Facility** or **HVDC System**. The **Equipment Certificate** defines the scope of its validity at a national level. For the purpose of replacing specific parts of the compliance process, the **Equipment Certificate** may include models or equivalent information that have been verified against actual test results.

Estimated Registered Data	Those items of **Standard Planning Data** and **Detailed Planning Data** which either upon connection will become **Registered Data**, or which for the purposes of the **Plant** and/or **Apparatus** concerned as at the date of submission are **Registered Data**, but in each case which for the nine succeeding **Financial Years** will be an estimate of what is expected.

EU Code User	A **User** who is any of the following:- (a) A **Generator** in respect of a **Power Generating Module** (excluding a **DC Connected Power Park Module**) or **OTSDUA** (in respect of an AC **Offshore Transmission System**) whose **Main Plant and Apparatus** is connected to the **System** on or after 27 April 2019 and who concluded **Purchase Contracts** for its **Main Plant and Apparatus** on or after 17 May 2018. (b) A **Generator** in respect of any **Type C** or **Type D Power Generating Module** which is the subject of a **Substantial Modification** which is effective on or after 27 April 2019. (c) A **Generator** in respect of any **DC Connected Power Park Module** whose **Main Plant and Apparatus** is connected to the **System** on or after 8 September 2019 and who had concluded **Purchase Contracts** for its **Main Plant and Apparatus** on or after 28 September 2018. (d) A **Generator** in respect of any **DC Connected Power Park Module** which is the subject of a **Substantial Modification** which is effective on or after 8 September 2019. (e) An **HVDC System Owner** or **OTSDUA** (in respect of a DC **Offshore Transmission System** including a **Transmission DC Converter**) whose **Main Plant and Apparatus** is connected to the **System** on or after 8 September 2019 and who had concluded **Purchase Contracts** for its **Main Plant and Apparatus** on or after 28 September 2018. (f) An **HVDC System Owner** or **OTSDUA** (in respect of a DC **Offshore Transmission System** including a **Transmission DC Converter**) whose **HVDC System** or DC **Offshore Transmission System** including a **Transmission DC Converter**) is the subject of a **Substantial Modification** on or after 8 September 2019. (g) A **User** which the **Authority** has determined should be considered as an **EU Code User**. (h) A **Network Operator** whose entire distribution **System** was first connected to the **National Electricity Transmission System** on or after 18 August 2019 and who had placed **Purchase Contracts** for its **Main Plant** and **Apparatus** in respect of its entire distribution **System** on or after 7 September 2018. For the avoidance of doubt, a **Network Operator** will be an **EU Code User** if its entire distribution **System** is connected to the **National Electricity Transmission System** at **EU Grid Supply Points** only. (i) A **Non-Embedded Customer** whose **Main Plant and Apparatus** at each **EU Grid Supply Point** was first connected to the **National Electricity Transmission System** on or after 18 August 2019 and who had placed **Purchase Contracts** for its **Main Plant and Apparatus** at each **EU Grid Supply Point** on or after 7 September 2018 or is the subject of a **Substantial Modification** on or after 18 August 2019. (j) A **Storage User** in respect of an **Electricity Storage Module** whose **Main Plant** and **Apparatus** is connected to the **System** on or after 20 May 2020 and who concluded **Purchase**

	Contracts for its **Main Plant** and **Apparatus** on or after 20 May 2019.
EU Generator	A **Generator** or **OTSDUA** who is also an **EU Code User**.
EU Grid Supply Point	A **Grid Supply Point** where either:- (i) (a) the **Network Operator** or **Non-Embedded Customer** had placed **Purchase Contracts** for all of its **Plant** and **Apparatus** at that **Grid Supply Point** on or after 7 September 2018, and (b) All of the **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** at that **Grid Supply Point** was first connected to the **Transmission System** on or after 18 August 2019; or (ii) the **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** at a **Grid Supply Point** is the subject of a **Substantial Modification** which is effective on or after 18 August 2019.
EU Transparency Availability Data	Such relevant data as **Customers** and **Generators** are required to provide under Articles 7.1(a) and 7.1(b) and Articles 15.1(a), 15.1(b), 15.1(c), 15.1(d) of **Assimilated Law** (Commission Regulation (EU) 543/2013), and which also forms part of **DRC** Schedule 6 (**User**s' Outage Data).
European Compliance Processes or **ECP**	That portion of the Grid Code which is identified as the **European Compliance Processes**.
European Connection Conditions or **ECC**	That portion of the Grid Code which is identified as the **European Connection Conditions** being applicable to **EU Code Users**.
European Specification	A common technical specification, a **British Standard** implementing a European standard or a European technical approval. The terms "common technical specification", "European standard" and "European technical approval" shall have the meanings respectively ascribed to them in the **Regulations**.
Evaluation of Transmission Impact	As defined in the **CUSC**.
Event	An unscheduled or unplanned (although it may be anticipated) occurrence on, or relating to, a **System** (including **Embedded Power Stations**) including, without limiting that general description, faults, incidents and breakdowns and adverse weather conditions being experienced.
Exciter	The source of the electrical power providing the field current of a synchronous machine.
Excitation System	The equipment providing the field current of a machine, including all regulating and control elements, as well as field discharge or suppression equipment and protective devices.

Excitation System No-Load Negative Ceiling Voltage	The minimum value of direct voltage that the **Excitation System** is able to provide from its terminals when it is not loaded, which may be zero or a negative value.
Excitation System Nominal Response	Shall have the meaning ascribed to that term in **IEC** 34-16-1:1991 [equivalent to **British Standard BS**4999 Section 116.1: 1992]. The time interval applicable is the first half-second of excitation system voltage response.
Excitation System On-Load Positive Ceiling Voltage	Shall have the meaning ascribed to the term 'Excitation system on load ceiling voltage' in **IEC** 34-16-1:1991[equivalent to **British Standard BS**4999 Section 116.1: 1992].
Excitation System No-Load Positive Ceiling Voltage	Shall have the meaning ascribed to the term 'Excitation system no load ceiling voltage' in **IEC** 34-16-1:1991[equivalent to **British Standard BS**4999 Section 116.1: 1992].
Exemptable	Has the meaning set out in the **CUSC**.
Existing AGR Plant	The following nuclear advanced gas cooled reactor plant (which was commissioned and connected to the **Total System** at the **Transfer Date**):- (a) Dungeness B (b) Hinkley Point B (c) Heysham 1 (d) Heysham 2 (e) Hartlepool (f) Hunterston B (g) Torness
Existing AGR Plant Flexibility Limit	In respect of each **Genset** within each **Existing AGR Plant** which has a safety case enabling it to so operate, 8 (or such lower number which when added to the number of instances of reduction of output as instructed by **The Company** in relation to operation in **Frequency Sensitive Mode** totals 8) instances of flexibility in any calendar year (or such lower or greater number as may be agreed by the Nuclear Installations Inspectorate and notified to **The Company**) for the purpose of assisting in the period of low **System NRAPM** and/or low **Localised NRAPM** provided that in relation to each **Generating Unit** each change in output shall not be required to be to a level where the output of the reactor is less than 80% of the reactor thermal power limit (as notified to **The Company** and which corresponds to the limit of reactor thermal power as contained in the "Operating Rules" or "Identified Operating Instructions" forming part of the safety case agreed with the Nuclear Installations Inspectorate).
Existing Gas Cooled Reactor Plant	Both **Existing Magnox Reactor Plant** and **Existing AGR Plant**.

Existing Magnox Reactor Plant	The following nuclear gas cooled reactor plant (which was commissioned and connected to the **Total System** at the **Transfer Date**):- (a) Calder Hall (b) Chapelcross (c) Dungeness A (d) Hinkley Point A (e) Oldbury-on-Severn (f) Bradwell (g) Sizewell A (h) Wylfa
Export and Import Limits	Those parameters listed in Appendix 1 to **BC1** under the heading **BM Unit Data** – **Export and Import Limits**.
External Interconnection	**Apparatus** for the transmission of electricity to or from the **National Electricity Transmission System** or a **User System** into or out of an **External System**. For the avoidance of doubt, a single **External Interconnection** may comprise several circuits operating in parallel.
External Interconnection Circuit	**Plant** or **Apparatus** which comprises a circuit and which operates in parallel with another circuit and which forms part of the **External Interconnection**.
Externally Interconnected System Operator or **EISO**	A person who operates an **External System** which is connected to the **National Electricity Transmission System** or a **User System** by an **External Interconnection**.
External System	In relation to an **Externally Interconnected System Operator** means the transmission or distribution system which it owns or operates which is located outside the **National Electricity Transmission System Operator Area** any **Apparatus** or **Plant** which connects that system to the **External Interconnection** and which is owned or operated by such **Externally Interconnected System Operator**.
Fast Load Block	A **Load Block** that can be disconnected by a **Network Operator** within the timescale set out in OC6.5.4 when instructed by **The Company** and which shall be designated by the **Network Operator** with a unique identifier 'R', 'S', 'T' or 'U' (in accordance with the Electricity Supply Emergency Code).
Fast Fault Current	A current delivered by a **Power Park Module** or **HVDC System** during and after a voltage deviation caused by an electrical fault within the **System** with the aim of identifying a fault by network **Protection** systems at the initial stage of the fault, supporting **System** voltage retention at a later stage of the fault and **System** voltage restoration after fault clearance.
Fault Current Interruption Time	The time interval from fault inception until the end of the break time of the circuit breaker (as declared by the manufacturers).

Fault Ride Through	The capability of **Power Generating Modules** (including **DC Connected Power Park Modules**) and **HVDC Systems** to be able to remain connected to the **System** and operate through periods of low voltage at the **Grid Entry Point** or **User System Entry Point** caused by secured faults.
Fast Start	A start by a **Genset** with a **Fast Start Capability**.
Fast Start Capability	The ability of a **Genset** to be **Synchronised** and **Loaded** up to full **Load** within 5 minutes.
Fast Track Criteria	A proposed Grid Code Modification Proposal that, if implemented, (a) would meet the **Self-Governance Criteria**; and (b) is properly a housekeeping modification required as a result of some error or factual change, including but not limited to: (i) updating names or addresses listed in the **Grid Code**; (ii) correcting any minor typographical errors; (iii) correcting formatting and consistency errors, such as paragraph numbering; or (iv) updating out of date references to other documents or paragraphs
Final-Balancing Compliance Notification	A notification from **The Company** to an **EU Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** with **The Company**, with a **Completion Date** on or after 05-09-2024, confirming that the **Generator** has demonstrated compliance with: (a) **Engineering Recommendation** G99 supported by the final operational notification from the relevant **Network Operator**, (b) the relevant sections of the Grid Code as applicable, and (c) the **Bilateral Embedded Generation Agreement**, and that all the items in the schedule of **Unresolved Issues** have been completed to **The Company**'s satisfaction.
Final Generation Outage Programme	An outage programme as agreed by **The Company** with each **Generator** and each **Interconnector Owner** at various stages through the **Operational Planning Phase** and **Programming Phase** which does not commit the parties to abide by it, but which at various stages will be used as the basis on which **National Electricity Transmission System** outages will be planned.

Final Operational Notification or **FON**	A notification from **The Company** to a **Generator** or **DC Converter Station** owner or **HVDC System Owner** or **Network Operator** or **Non-Embedded Customer** confirming that the **User** has demonstrated compliance: (a) with the Grid Code, (or where they apply, that relevant derogations have been granted), and (b) where applicable, with Appendices F1 to F5 of the **Bilateral Agreement**, in each case in respect of the **Plant** and **Apparatus** specified in such notification.
Final Physical Notification Data	Has the meaning set out in the **BSC**.
Final Report	A report prepared by the **Test Proposer** at the conclusion of a **System Test** for submission to **The Company** (if it did not propose the **System Test**) and other members of the **Test Panel**.
Financial Year	As defined in the **ESO Licence.**
Fixed Proposed Implementation Date	The proposed date(s) for the implementation of a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification** such date to be a specific date by reference to an assumed date by which a direction from the **Authority** approving the **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification** is required in order for the **Grid Code Modification Proposal** or any **Workgroup Alternative Grid Code Modification**, if it were approved, to be implemented by the proposed date.
Flicker Severity (Long Term)	A value derived from 12 successive measurements of **Flicker Severity** (**Short Term**) (over a two hour period) and a calculation of the cube root of the mean sum of the cubes of 12 individual measurements, as further set out in **Engineering Recommendation** P28 as current at the **Transfer Date**.
Flicker Severity (Short Term)	A measure of the visual severity of flicker derived from the time series output of a flickermeter over a 10 minute period and as such provides an indication of the risk of **Customer** complaints.
Forecast Data	Those items of **Standard Planning Data** and **Detailed Planning Data** which will always be forecast.
Frequency	The number of alternating current cycles per second (expressed in Hz) at which a **System** is running.
Frequency Containment Reserves (FCR)	means, in the context of **Balancing Services**, the **Active Power** reserves available to contain **System Frequency** after the occurrence of an imbalance.
Frequency Response Deadband	An interval used intentionally to make the **Frequency** control unresponsive. In the case of mechanical governor systems, the **Frequency Response Deadband** is the same as **Frequency Response Insensitivity**.

Frequency Response Insensitivity	The inherent feature of the control system specified as the minimum magnitude of change in the **Frequency** or input signal that results in a change of output power or output signal.
Frequency Restoration Reserves (FRR)	Means, in the context of **Balancing Services**, the **Active Power** reserves available to restore **System Frequency** to the nominal **Frequency**.
Frequency Sensitive AGR Unit	Each **Generating Unit** in an **Existing AGR Plant** for which the **Generator** has notified **The Company** that it has a safety case agreed with the Nuclear Installations Inspectorate enabling it to operate in **Frequency Sensitive Mode**, to the extent that such unit is within its **Frequency Sensitive AGR Unit Limit**. Each such **Generating Unit** shall be treated as if it were operating in accordance with BC3.5.1 provided that it is complying with its **Frequency Sensitive AGR Unit Limit**.
Frequency Sensitive AGR Unit Limit	In respect of each **Frequency Sensitive AGR Unit**, 8 (or such lower number which when added to the number of instances of flexibility for the purposes of assisting in a period of low **System** or **Localised NRAPM** totals 8) instances of reduction of output in any calendar year as instructed by **The Company** in relation to operation in **Frequency Sensitive Mode** (or such greater number as may be agreed between **The Company** and the **Generator**), for the purpose of assisting with **Frequency** control, provided the level of operation of each **Frequency Sensitive AGR Unit** in **Frequency Sensitive Mode** shall not be outside that agreed by the Nuclear Installations Inspectorate in the relevant safety case.
Frequency Sensitive Mode	A **Genset**, or **Type C Power Generating Module** or **Type D Power Generating Module** or **DC Connected Power Park Module** or **HVDC System** operating mode which will result in **Active Power** output changing, in response to a change in **System Frequency**, in a direction which assists in the recovery to **Target Frequency**, by operating so as to provide **Primary Response** and/or **Secondary Response** and/or **High Frequency Response**.
Fuel Security Code	The document of that title designated as such by the **Secretary of State**, as from time to time amended.
Future State of Energy (FSoE)	For each Electricity Storage Module, this is a series of MWh figures and associated times, which is calculated by The Company using the data provided under BC1.A.11.1, making up an estimated profile of the energy stored in that Electricity Storage Module.
Gas System Planner Licence or GSP Licence	Means a licence granted or treated as granted under section 7AA(1) of the **Gas Act 1986.**
Gas Turbine Unit	A **Generating Unit** driven by a gas turbine (for instance by an aero-engine).
Gas Zone Diagram	A single line diagram showing boundaries of, and interfaces between, gas-insulated **HV Apparatus** modules which comprise part, or the whole, of a substation at a **Connection Site** (or in the case of **OTSDUW Plant and Apparatus**, **Transmission Interface Site**), together with the associated stop valves and gas monitors required for the safe operation of the **National Electricity Transmission System** or the **User System**, as the case may be.

Gate Closure	Has the meaning set out in the **BSC**.
GB CIM Governance Group	A **GB** standing group of technical experts who are responsible for the maintenance and coordination of **GB** extensions to the **CIM** and to Common Grid Model Exchange Standard (CGMES) profiles, such that they effectively support the Grid Code and other relevant data exchanges.
GB Code User	A **User** in respect of:- (a) A **Generator** or **OTSDUA** whose **Main Plant and Apparatus** (excluding a **DC Connected Power Park Module**) is connected to the **System** before 27 April 2019, or who had concluded **Purchase Contracts** for its **Main Plant and Apparatus** before 17 May 2018, or whose **Plant and Apparatus** is not the subject of a **Substantial Modification** which is effective on or after 27 April 2019; or (b) A **DC Converter Station** owner whose **Main Plant and Apparatus** is connected to the **System** before 8 September 2019, or who had concluded **Purchase Contracts** for its **Main Plant and Apparatus** before 28 September 2018, or whose **Plant and Apparatus** is not the subject of a **Substantial Modification** which is effective on or after 8 September 2019; or (c) A **Non-Embedded Customer** whose **Main Plant and Apparatus** was connected to the **National Electricity Transmission System** at a **GB Grid Supply Point** before 18 August 2019 or who had placed **Purchase Contracts** for its **Main Plant and Apparatus** before 7 September 2018 or that **Non-Embedded Customer** is not the subject of a **Substantial Modification** which is effective on or after 18 August 2019; or (d) A **Network Operator** whose entire distribution **System** was connected to the **National Electricity Transmission System** at one or more **GB Grid Supply Points** before 18 August 2019 or who had placed **Purchase Contracts** for its **Main Plant and Apparatus** in respect of its entire distribution **System** before 7 September 2018 or its entire distribution **System** is not the subject of a **Substantial Modification** which is effective on or after 18 August 2019. For the avoidance of doubt, a **Network Operator** would still be classed as a **GB Code User** where its entire distribution **System** was connected to the **National Electricity Transmission System** at one or more **GB Grid Supply Points**, even where that entire distribution **System** may have one or more **EU Grid Supply Points** but still comprises of **GB Grid Supply Points**.
GB Generator	A **Generator,** or **OTSDUA**, who is also a **GB Code User**.

GB Generator Final-Balancing Compliance Notification	A notification from **The Company** to a **GB Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** with **The Company**, with a **Completion Date** on or after 5 September 2024, confirming that the **GB Generator** has demonstrated compliance with: (a) the relevant sections of the Grid Code as applicable, and (b) the **Bilateral Embedded Generation Agreement**, and that all the items in the schedule of **Unresolved Issues** have been completed to **The Company**'s satisfaction.
GB Generator Interim-Balancing Compliance Notification	A notification from **The Company** to a **GB Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** with **The Company**, with a **Completion Date** on or after 5 September 2024, acknowledging that the **GB Generator** has demonstrated compliance, except for the **Unresolved Issues**, with: (a) the relevant sections of the Grid Code as applicable, and (b) the **Bilateral Embedded Generation Agreement**.
GBGF Fast Fault Current Injection	The ability of a **Grid Forming Plant** to supply reactive current, that starts to be delivered into the **Total System** in less than 5 ms when the voltage falls below 90% of its nominal value at the **Grid Entry Point** or **User System Entry Point**.
GB Grid Forming - Inverter or **GBGF-I**	Is any **Power Park Module**, **HVDC System**, **DC Converter**, **OTSDUW Plant and Apparatus**, **Non-Synchronous Electricity Storage Module**, **Dynamic Reactive Compensation Equipment** or any **Plant** and **Apparatus** (including a smart load) which is connected or partly connected to the **Total System** via an **Electronic Power Converter** which has a **Grid Forming Capability (GBGF-I)**.
GB Grid Forming – Synchronous or **GBGF-S**	Is a **Synchronous Power Generating Module**, **Synchronous Electricity Storage Module** or **Synchronous Generating Unit** with a **Grid Forming Capability**.
GB Grid Supply Point	A **Grid Supply Point** which is not an **EU Grid Supply Point**.
GB Synchronous Area	The AC power **System** in **Great Britain** which connects **User's**, **Relevant Transmission Licensee's** whose AC **Plant** and **Apparatus** is considered to operate in synchronism with each other at each **Connection Point** or **User System Entry Point** and at the same **System Frequency**.
GCDF	Means the Grid Code Development Forum.
General Conditions or **GC**	That portion of the Grid Code which is identified as the **General Conditions**.
Generating Plant Demand Margin	The difference between **Output Usable** and forecast **Demand**.
Generating Unit	An **Onshore Generating Unit** and/or an **Offshore Generating Unit** which could also be part of a **Power Generating Module**.

Generating Unit Data	The **Physical Notification**, **Export and Import Limits** and **Other Relevant Data** only in respect of each **Generating Unit** (which could be part of a **Power Generating Module**): (a) which forms part of the **BM Unit** which represents that **Cascade Hydro Scheme**; (b) at an **Embedded Exemptable Large Power Station**, where the relevant **Bilateral Agreement** specifies that compliance with **BC1** and/or **BC2** is required: (i) to each **Generating Unit**, or (ii) to each **Power Park Module** where the **Power Station** comprises **Power Park Modules**.
Generation Capacity	Has the meaning set out in the **BSC**.
Generation Planning Parameters	Those parameters listed in Appendix 1 of **OC2**.
Generator	A person who generates electricity or undertakes **Electricity Storage** under licence or exemption under the **Act**, acting in its capacity as a generator in **Great Britain** or **Offshore**. The term **Generator** includes a **EU Generator** and a **GB Generator**.
Generator Performance Chart	A diagram which shows the MW and MVAr capability limits within which a **Generating Unit** will be expected to operate under steady state conditions.
Genset	A **Power Generating Module** (including a **DC Connected Power Park Module** and/or **Electricity Storage Module**), **Generating Unit**, **Power Park Module** or **CCGT Module** at a **Large Power Station** or any **Power Generating Module** (including a **DC Connected Power Park Module**), **Generating Unit**, **Power Park Module** or **CCGT Module** which is directly connected to the **National Electricity Transmission System**.
Good Industry Practice	The exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and experienced operator engaged in the same type of undertaking under the same or similar circumstances.
Governance Rules or **GR**	That portion of the **Grid Code** which is identified as the **Governance Rules**.
Governor Deadband	An interval used intentionally to make the **frequency** control unresponsive.
Great Britain or **GB**	The landmass of England and Wales and Scotland, including internal waters.
Grid Code Fast Track Proposals	A proposal to modify the **Grid Code** which is raised pursuant to GR.26 and has not yet been approved or rejected by the **Grid Code Review Panel**.
Grid Code Modification Fast Track Report	A report prepared pursuant to GR.26

Grid Code Modification Register	Has the meaning given in GR.13.1.
Grid Code Modification Report	Has the meaning given in GR.22.1.
Grid Code Modification Procedures	The procedures for the modification of the **Grid Code** (including the implementation of **Approved Modifications**) as set out in the **Governance Rules**.
Grid Code Modification Proposal	A proposal to modify the **Grid Code** which is not yet rejected pursuant to GR.15.5 or GR.15.6 and has not yet been implemented.
Grid Code Modification Self- Governance Report	Has the meaning given in GR.24.5
Grid Code Objectives	Means the objectives referred to in condition E3.2(b) of the **ESO Licence**.
Grid Code Review Panel or **Panel**	The panel with the functions set out in GR.1.2.
Grid Code Review Panel Recommendation Vote	The vote of **Panel Members** undertaken by the **Panel Chairperson** in accordance with Paragraph GR.22.4 as to whether in their view they believe each proposed **Grid Code Modification Proposal**, or **Workgroup Alternative Grid Code Modification** would better facilitate achievement of the **Grid Code Objective(s)** and so should be made.
Grid Code Review Panel Self-Governance Vote	The vote of **Panel Members** undertaken by the **Panel Chairperson** in accordance with GR.24.9 as to whether they believe each proposed Grid Code Modification Proposal, as compared with the then existing provisions of the **Grid Code** and any **Workgroup Alternative Grid Code Modification** set out in the **Grid Code Modification Self-Governance Report**, would better facilitate achievement of the **Grid Code Objective(s)**.
Grid Code Self-Governance Proposals	**Grid Code Modification Proposals** which satisfy the **Self Governance Criteria**.
Grid Entry Point	An **Onshore Grid Entry Point** or an **Offshore Grid Entry Point**.
Grid Forming Active Power	**Grid Forming Active Power** is the inherent **Active Power** produced by **Grid Forming Plant** that includes **Active Inertia Power** plus **Active Phase Jump Power** plus **Active Damping Power**.

Grid Forming Capability	Is (but not limited to) the capability a **Power Generating Module**, **HVDC Converter** (which could form part of an **HVDC System**), **Generating Unit**, **Power Park Module**, **DC Converter**, **OTSDUW Plant** and **Apparatus**, **Electricity Storage Module**, **Dynamic Reactive Compensation Equipment** or any **Plant** and **Apparatus** (including a smart load) whose supplied **Active Power** is directly proportional to the difference between the magnitude and phase of its **Internal Voltage Source** and the magnitude and phase of the voltage at the **Grid Entry Point** or **User System Entry Point** and the sine of the **Load Angle**. As a consequence, **Plant** and **Apparatus** which has a **Grid Forming Capability** has a frequency of rotation of the **Internal Voltage Source** which is the same as the **System Frequency** for normal operation, with only the **Load Angle** defining the relative position between the two. In the case of a **GBGF-I**, a **Grid Forming Unit** forming part of a **GBGF-I** shall be capable of sustaining a voltage at its terminals irrespective of the voltage at the **Grid Entry Point** or **User System Entry Point** for normal operating conditions. For **GBGF-I**, the control system, which determines the amplitude and phase of the **Internal Voltage Source**, shall have a response to the voltage and **System Frequency** at the **Grid Entry Point** or **User System Entry Point**) with a bandwidth that is less than a defined value as shown by the control system's **NFP** Plot. Exceptions to this requirement are only allowed during transients caused by **System** faults, voltage dips/surges and/or step or ramp changes in the phase angle which are large enough to cause damage to the **Grid Forming Plant** via excessive currents.
Grid Forming Electronic Power Converter	A **Grid Forming Plant** whose output is derived from an **Electronic Power Converter** with a **GBGF-I** capability.
Grid Forming Plant	A site which contains **Plant and Apparatus** which is classified as either a **GBGF-S** or a **GBGF-I**
Grid Forming Plant Owner	The owner or operator of a **Grid Forming Plant**.
Grid Forming Unit	A **Power Park Unit** or **Electricity Storage Unit** or a **Synchronous Power Generating Unit** or individual **Load** with a **Grid Forming Capability**.
Grid Oscillation Value	An injected test frequency signal applied at nominal **System Frequency** with a superimposed oscillatory response overlayed onto the nominal **System Frequency** with an amplitude of 0.05 Hz peak to peak at a frequency of 1 Hz and is used for determining the rating of the **Defined Active Damping Power**.
Grid Supply Point	A point of supply from the **National Electricity Transmission System** to **Network Operators** or **Non-Embedded Customers** which could be a **GB Grid Supply Point** or an **EU Grid Supply Point**.
Gross Demand	The sum of the **Group Demand** and **Embedded Power Station Import**.
Group	Those **National Electricity Transmission System** sub-stations bounded solely by the faulted circuit(s) and the overloaded circuit(s) excluding any third party connections between the **Group** and the rest of the **National Electricity Transmission System**, the faulted circuit(s) being a **Secured Event**.

Group Demand	Aggregated **Embedded Customer Import** summated with the associated **Latent Demand**.
GSP Group	Has the meaning as set out in the **BSC**.
Headroom	The **Power Available** (in MW) less the actual **Active Power** exported from the **Power Park Module** (in MW).
High Frequency Response	An automatic reduction in **Active Power** output in response to an increase in **System Frequency** above the **Target Frequency** (or such other level of **Frequency** as may have been agreed in an **Ancillary Services Agreement**). This reduction in **Active Power** output must be in accordance with the provisions of the relevant **Ancillary Services Agreement** which will provide that it will be released increasingly with time over the period 0 to 10 seconds from the time of the **Frequency** increase on the basis set out in the **Ancillary Services Agreement** and fully achieved within 10 seconds of the time of the start of the **Frequency** increase and it must be sustained at no lesser reduction thereafter. The interpretation of the **High Frequency Response** to a + 0.5 Hz frequency change is shown diagrammatically in Figure CC.A.3.3 and Figure ECC.A.3.3.
High Voltage or **HV**	For **E&W Transmission Systems**, a voltage exceeding 650 V. For **Scottish Transmission Systems**, a voltage exceeding 1000 V.
Historic Frequency Data	**System Frequency** data at a maximum of 1 second intervals for the whole month, published by **The Company** as detailed in OC3.4.4.
Houseload Operation	Operation which ensures that a **Power Station** is able to continue to supply its in-house load in the event of **System** faults resulting in **Power-Generating Modules** being disconnected from the **System** and tripped onto their auxiliary supplies
HP Turbine Power Fraction	Ratio of steady state mechanical power delivered by the HP turbine to the total steady state mechanical power delivered by the total steam turbine at **Registered Capacity** or **Maximum Capacity**.
HV Connections	**Apparatus** connected at the same voltage as that of the **National Electricity Transmission System**, including **Users'** circuits, the higher voltage windings of **Users'** transformers and associated connection **Apparatus**.
HVDC Converter	Any **EU Code User Apparatus** used to convert alternating current electricity to direct current electricity, or vice versa. An **HVDC Converter** is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, reactors, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion. In a bipolar arrangement, an **HVDC Converter** represents the bipolar configuration.
HVDC Converter Station	Part of an **HVDC System** which consists of one or more **HVDC Converters** installed in a single location together with buildings, reactors, filters reactive power devices, control, monitoring, protective, measuring and auxiliary equipment.

HVDC Equipment	Collectively means an **HVDC System** and a **DC Connected Power Park Module** and a **Remote End HVDC Converter Station**.
HVDC Interface Point	A point at which **HVDC Plant** and **Apparatus** is connected to an AC **System** at which technical specifications affecting the performance of the **Plant** and **Apparatus** can be prescribed.
HVDC System	An electrical power system which transfers energy in the form of high voltage direct current between two or more alternating current (AC) buses and comprises at least two **HVDC Converter Stations** with DC **Transmission** lines or cables between the **HVDC Converter Stations**.
HVDC System Owner	A party who owns and is responsible for an **HVDC System**. For the avoidance of doubt a **DC Connected Power Park Module** owner would be treated as a **Generator**.
IEC	International Electrotechnical Commission.
IEC Standard	A standard approved by the International Electrotechnical Commission.
Implementation Date	Is the date and time for implementation of an **Approved Modification** as specified in accordance with Paragraph GR.25.3.
Implementing Safety Co-ordinator	The **Safety Co-ordinator** implementing **Safety Precautions**.
Import Usable	That portion of **Registered Import Capacity** which is expected to be available and which is not unavailable due to a **Planned Outage**.
Incident Centre	A centre established by **The Company** or a **User** as the focal point in **The Company** or in that **User**, as the case may be, for the communication and dissemination of information between the senior management representatives of **The Company**, or of that **User**, as the case may be, and the relevant other parties during a **Joint System Incident** in order to avoid overloading **The Company's**, or that **User's**, as the case may be, existing operational/control arrangements.
Independent Back-Up Protection	A **Back-Up Protection** system which utilises a discrete relay, different current transformers and an alternate operating principle to the **Main Protection** systems(s) such that it can operate autonomously in the event of a failure of the **Main Protection**.
Independent Main Protection	A **Main Protection** system which utilises a physically discrete relay and different current transformers to any other **Main Protection**.
Indicated Constraint Boundary Margin	The difference between a constraint boundary transfer limit and the difference between the sum of **BM Unit** Maximum Export Limits and the forecast of local **Demand** within the constraint boundary.
Indicated Imbalance	The difference between the sum of **Physical Notifications** for **BM Units** comprising **Generating Units** or **CCGT Modules** or **Power Generating Modules** and the forecast of **Demand** for the whole or any part of the **System**.
Indicated Margin	The difference between the sum of **BM Unit** Maximum Export Limits submitted and the forecast of **Demand** for the whole or any part of the **System**.

Inertia Constant H	For a **GBGF-S** the **Inertia Constant H** is measured in MWs/MVA.
Inertia Constant He	For a **GBGF- I Electronic Power Converter** the **Inertia Constant He**, is measured in MWs/MVA and produced by the **Active ROCOF Response Power**.
Information Request Notice	A notice that will be issued by **The Company** to a relevant party setting out **The Company's** reasonable requirements for relevant information in accordance with section 172 of the Energy Act 2023. This will be prepared in accordance with **The Company's** published **Information Request Statement**.
Information Request Statement	A statement prepared and published by **The Company**, in accordance with section 172 of the Energy Act 2023 and condition D2.5 of the **ESO Licence** and **GSP Licence**, setting out the process that **The Company** will follow when requesting information from relevant parties by the issue of an **Information Request Notice.**
Installation Document	A simple structured document containing information about a **Type A Power Generating Module** or a **Demand Unit**, with demand response connected below 1000 V, and confirming its compliance with the relevant requirements.
Instructor Facilities	A device or system which gives certain **Transmission Control Centre** instructions with an audible or visible alarm, and incorporates the means to return message acknowledgements to the **Transmission Control Centre**.
Integral Equipment Test or **IET**	A test on equipment, associated with **Plant** and/or **Apparatus**, which takes place when that **Plant** and/or **Apparatus** forms part of a **Synchronised System** and which, in the reasonable judgement of the person wishing to perform the test, may cause an **Operational Effect**.
Intellectual Property" or "IPRs	Patents, trade marks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same are registered and including applications for registration of any of the same) and rights under licences and consents in relation to any of the same and all rights or forms of protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world.
Interconnector	As defined in the **BSC**.
Interconnection Agreement	An agreement made between **The Company** and an **Externally Interconnected System Operator** and/or an **Interconnector User** and/or other relevant persons for the **External Interconnection** relating to an **External Interconnection** and/or an agreement under which an **Interconnector User** can use an **External Interconnection**.
Interconnector Export Capacity	In relation to an **External Interconnection** means the (daily or weekly) forecast value (in MW) at the time of the (daily or weekly) peak demand, of the maximum level at which the **External Interconnection** can export to the **Grid Entry Point**.

Interconnector Import Capacity	In relation to an **External Interconnection** means the (daily or weekly) forecast value (in MW) at the time of the (daily or weekly) peak demand of the maximum level at which the **External Interconnection** can import from the **Grid Entry Point**.
Interconnector Owner	Has the meaning given to the term in the **Connection and Use of System Code**.
Interconnector Reference Programme	Has the meaning given to that term in section BC1.A.3.
Interconnector User	Has the meaning set out in the **BSC**.
Interface Agreement	Has the meaning set out in the **CUSC**.
Interface Point	As the context admits or requires either; (a) the electrical point of connection between an **Offshore Transmission System** and an **Onshore Transmission System**, or (b) the electrical point of connection between an **Offshore Transmission System** and a **Network Operator's User System**.
Interface Point Capacity	The maximum amount of **Active Power** transferable at the **Interface Point** as declared by a **User** under the **OTSDUW Arrangements** expressed in whole MW.
Interface Point Target Voltage/Power factor	The nominal target voltage/power factor at an **Interface Point** which a **Network Operator** requires **The Company** to achieve by operation of the relevant **Offshore Transmission System**.
Interim-Balancing Compliance Notification	A notification from **The Company** to an **EU Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** with **The Company**, with a **Completion Date** on or after 5 September 2024**,** acknowledging that the **Generator** has demonstrated compliance, except for the **Unresolved Issues**, with: (a) **Engineering Recommendation** G99 as required by the relevant **Network Operator**, (b) The relevant sections of the Grid Code and **Bilateral Embedded Generation Agreement**.

Interim Operational Notification or **ION**	A notification from **The Company** to a **Generator** or **DC Converter Station** owner or **HVDC System Owner** or **Network Operator** or **Non-Embedded Customer** acknowledging that the **User** has demonstrated compliance, except for the **Unresolved Issues**; (a) with the Grid Code, and (b) where applicable, with Appendices F1 to F5 of the **Bilateral Agreement**, in each case in respect of the **Plant** and **Apparatus** (including **OTSUA**) specified in such notification and provided that in the case of the **OTSDUW Arrangements** such notification shall be provided to a **Generator** in two parts dealing with the **OTSUA** and **Generator's Plant** and **Apparatus** (called respectively "**Interim Operational Notification Part A**" or "**ION A**" and "**Interim Operational Notification Part B**" or "**ION B"**) as provided for in the **CP** or **ECP**.
Intermittent Power Source	The primary source of power for a **Generating Unit** or **Power Generating Module** that cannot be considered as controllable, e.g. wind, wave or solar. For the avoidance of doubt, the output from an **Electricity Storage Module** would not be considered to be an **Intermittent Power Source**.
Internal Voltage Source or **IVS**	For a **GBGF-S**, a real magnetic field, that rotates synchronously with the **System Frequency** under normal operating conditions, which as a consequence induces an internal voltage (which is often referred to as the Electro Motive Force (EMF)) in the stationary generator winding that has a real impedance. In a **GBGF-I**, switched power electronic devices are used to produce a voltage waveform, with harmonics, that has a fundamental rotational component called the **Internal Voltage Source (IVS)** that rotates synchronously with the **System Frequency** under normal operating conditions. For a **GBGF-I** there must be an impedance between the **Internal Voltage Source** and the **Grid Entry Point** or **User System Entry Point**. For the avoidance of doubt, the impedance between the **Internal Voltage Source** and the **Grid Entry Point** or **User System Entry Point** could be virtual, real, or a combination of the two.
Intertripping	(a) The tripping of circuit-breaker(s) by commands initiated from **Protection** at a remote location independent of the state of the local **Protection**; or (b) **Operational Intertripping**.
Intertrip Apparatus	**Apparatus** which performs **Intertripping**.
IP Completion Day	31 December 2020 as defined in Section 39 of the European Union (Withdrawal Agreement) Act 2020.
IP Turbine Power Fraction	Ratio of steady state mechanical power delivered by the IP turbine to the total steady state mechanical power delivered by the total steam turbine at **Registered Capacity** or **Maximum Capacity**.
Isolating Device	A device for achieving **Isolation**.

Isolation	The disconnection of **HV Apparatus** (as defined in OC8A.1.6.2 and OC8B.1.7.2) from the remainder of the **System** in which that **HV Apparatus** is situated by either of the following: (a) an **Isolating Device** maintained in an isolating position. The isolating position must either be: (i) maintained by immobilising and **Locking** the **Isolating Device** in the isolating position and affixing a **Caution Notice** to it. Where the **Isolating Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be, where reasonably practicable, given to the authorised site representative of the **Requesting Safety Co-Ordinator** and is to be retained in safe custody. Where not reasonably practicable the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or (ii) maintained and/or secured by such other method which must be in accordance with the **Local Safety Instructions** or the **Safety Rules** of the **Relevant Transmission Licensee** or that **User**, as the case may be; or (b) an adequate physical separation which must be in accordance with and maintained by the method set out in the **Local Safety Instructions** or the **Safety Rules** of the **Relevant Transmission Licensee** or that **User**, as the case may be.
ISOP	Independent System Operator and Planner, means a person designated by the Secretary of State under section 162 of the Energy Act 2023 as the holder of the **ESO Licence**, and the **GSP Licence**. For the time being that person is the **NESO.**
Joint System Incident	An **Event** wherever occurring (other than on an **Embedded Medium Power Station** or an **Embedded Small Power Station**) which, in the opinion of **The Company** or a **User**, has or may have a serious and/or widespread effect, in the case of an **Event** on a **User(s) System(s)** (other than on an **Embedded Medium Power Station** or **Embedded Small Power Station**), on the **National Electricity Transmission System**, and in the case of an **Event** on the **National Electricity Transmission System**, on a **User(s) System(s)** (other than on an **Embedded Medium Power Station** or **Embedded Small Power Station**).
Key Safe	A device for the secure retention of keys.
Key Safe Key	A key unique at a **Location** capable of operating a lock, other than a control lock, on a **Key Safe**.

Large Power Station	A **Power Station** which is (a) directly connected to: (i) **NGET's Transmission System** where such **Power Station** has a **Registered Capacity** of 100 MW or more; or (ii) **SPT's Transmission System** where such **Power Station** has a **Registered Capacity** of 30 MW or more; or (iii) **SHETL's Transmission System** where such **Power Station** has a **Registered Capacity** of 10 MW or more; or (iv) an **Offshore Transmission System** where such **Power Station** has a **Registered Capacity** of 10 MW or more; or, (b) **Embedded** within a **User System** (or part thereof) where such **User System** (or part thereof) is connected under normal operating conditions to: (i) **NGET's Transmission System** and such **Power Station** has a **Registered Capacity** of 100 MW or more; or (ii) **SPT's Transmission System** and such **Power Station** has a **Registered Capacity** of 30 MW or more; or (iii) **SHETL's Transmission System** and such **Power Station** has a **Registered Capacity** of 10 MW or more; or, (c) **Embedded** within a **User System** (or part thereof) where the **User System** (or part thereof) is not connected to the **National Electricity Transmission System**, although such **Power Station** is in: (i) **NGET's Transmission Area** where such **Power Station** has a **Registered Capacity** of 100 MW or more; or (ii) **SPT's Transmission Area** where such **Power Station** has a **Registered Capacity** of 30 MW or more; or (iii) **SHETL's Transmission Area** where such **Power Station** has a **Registered Capacity** of 10 MW or more; For the avoidance of doubt, a **Large Power Station** could comprise of **Type A**, **Type B**, **Type C** or **Type D Power Generating Modules**.
Latent Demand	An increase in **Embedded Customer Import** that would appear: • If any demand side response was not operating; • If any **Suppliers'** time of use tariffs were not implemented; • If any **Network Operator** or **The Company's** price signals were not implemented; • If any other means of suppressing **Embedded Customer Import** were not operating; orIn the event of cold load pickup.
Legally Binding Decisions of the European Commission and/or the Agency	Any relevant legally binding decision or decisions of the European Commission and/or the **Agency**, but a binding decision does not include a decision that is not, or so much of a decision as is not, **Assimilated Law**.

Legal Challenge	Where permitted by law, a judicial review in respect of the **Authority's** decision to approve or not to approve a **Grid Code Modification Proposal**.
Licence	Any licence granted to **The Company** or a **Relevant Transmission Licensee** or a **User**, under Section 6 of the **Act**.
Licence Standards	Those standards set out or referred to in condition E7 of **The Company's ESO Licence** and/or condition D3 and/or condition E16 of a **Relevant Transmission Licensee's Transmission Licence**.
Limited-Balancing Compliance Notification	A notification from **The Company** to an **EU Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** with **The Company**, with a **Completion Date** on or after 5 September 2024, stating that the **Generator's Plant** and/or **Apparatus** specified in such notification may be, or is, unable to comply: (a) with the relevant provisions of the Grid Code and the **Bilateral Embedded Generation Agreement**; and/or (b) in accordance with ECP.9.1 (ii) of the Grid Code, upon receipt of notification from the **Network Operator** concerning an **EU Generator** failing to meet the requirements of **Engineering Recommendation** G99 or any provisions of the Grid Code, or where applicable **Bilateral Agreement**.
Limited Frequency Sensitive Mode	A mode whereby the operation of the **Genset** or **Power Generating Module** (or **DC Converter** at a **DC Converter Station** or **HVDC Systems** exporting **Active Power** to the **Total System)** is **Frequency** insensitive except when the **System Frequency** exceeds 50.4 Hz, from which point **Limited High Frequency Response** must be provided. For **Power Generating Modules** (including **DC Connected Power Park Modules**) and **HVDC Systems**, operation in **Limited Frequency Sensitive Mode** would require **Limited Frequency Sensitive Mode – Overfrequency (LFSM-O)** capability and **Limited Frequency Sensitive Mode – Underfrequency (LFSM-U)** capability.
Limited Frequency Sensitive Mode – Overfrequency or **LFSM-O**	A **Power Generating Module** (including a **DC Connected Power Park Module**) or **HVDC System** operating mode which will result in **Active Power** output reduction in response to a change in **System Frequency** above a certain value.
Limited Frequency Sensitive Mode – Underfrequency or **LFSM-U**	A **Power Generating Module** (including a **DC Connected Power Park Module**) or **HVDC System** operating mode which will result in **Active Power** output increase in response to a change in **System Frequency** below a certain value.
Limited High Frequency Response	A response of a **Genset** (or **DC Converter** at a **DC Converter Station** exporting **Active Power** to the **Total System)** to an increase in **System Frequency** above 50.4 Hz leading to a reduction in **Active Power** in accordance with the provisions of BC3.7.2.1.

Limited Membership Workgroup	A **Workgroup** having less than five (5) but more than two (2) persons that have nominated themselves for membership in addition to the **Code Administrator** representative and the chairperson of the **Workgroup**. Members of a **Limited Membership Workgroup** where employed by companies that are considered to be an **Affiliate** of each other will be considered to be a single workgroup member for the purposes of fulfilling this minimum requirement.
Limited Operational Notification or **LON**	A notification from **The Company** to a **Generator** or **DC Converter Station** owner or **HVDC System Owner** or **Network Operator** or **Non-Embedded Customer** stating that the **User's Plant** and/or **Apparatus** specified in such notification may be, or is, unable to comply: (a) with the provisions of the Grid Code specified in the notice, and (b) where applicable, with Appendices F1 to F5 of the **Bilateral Agreement** , and specifying the **Unresolved Issues**.
Load	The **Active**, **Reactive** or **Apparent Power**, as the context requires, generated, transmitted or distributed.
Loaded	Supplying electrical power to the **System**.
Load Block	Part or parts of a **Network Operator's User System** that the **Network Operator** reasonably believes will effect a reduction in their **Demand** of between 4% and 6% when disconnected by the **Network Operator** via switching operations, and which shall be designated by the **Network Operator** with a unique identifier in the range 'A' to 'E', 'G' to 'N' or 'P' inclusive (in accordance with the Electricity Supply Emergency Code).
Load Angle	The angle in radians between the voltage of the **Internal Voltage Source** and the voltage at the **Grid Entry Point** or **User System Entry Point**.
Load Factor	The ratio of the actual output of a **Generating Unit** or **Power Generating Module** to the possible maximum output of that **Generating Unit** or **Power Generating Module**.
Load Management Block	A block of **Demand** controlled by a **Supplier** or other party through the means of radio teleswitching or by some other means.
Local Joint Restoration Plan	A plan produced and agreed by **The Company**, **Transmission Licensee**, **Restoration Contractors** and a **Network Operator** under OC9.4.7.7, detailing the agreed method and procedure by which **The Company** or **Transmission Licensee** in Scotland will instruct a **Restoration Contractor** with an **Anchor Plant** to energise, part of the **Total System** within 2 hours of that instruction and subsequently meet complementary blocks of local **Demand** so as to form a **Power Island**. A **Local Joint Restoration Plan** may require the use of **Top Up Restoration Plant**. A **Local Joint Restoration Plan** is distinct from and falls outside the provisions of a **Distribution Restoration Zone Plan**.

Local Safety Instructions	For safety co-ordination in England and Wales, instructions on each **User Site** and **Transmission Site**, approved by **NGET's**, the relevant **Competitively Appointed Transmission Licensee's** or **User's** relevant manager as relevant for the **User Site** location, setting down the methods of achieving the objectives of **NGET's** or the relevant **Competitively Appointed Transmission Licensee's** or the **User's Safety Rules**, as the case may be, to ensure the safety of personnel carrying out work or testing on **Plant** and/or **Apparatus** on which their **Safety Rules** apply and, in the case of a **User**, any other document(s) on a **User Site** which contains rules with regard to maintaining or securing the isolating position of an **Isolating Device**, or maintaining a physical separation or maintaining or securing the position of an **Earthing Device**.
Local Switching Procedure	A procedure produced under OC7.6 detailing the agreed arrangements in respect of carrying out of **Operational Switching** at **Connection Sites** and parts of the **National Electricity Transmission System** adjacent to those **Connection Sites**.
Localised Negative Reserve Active Power Margin or **Localised NRAPM**	That margin of **Active Power** sufficient to allow transfers to and from a **System Constraint Group** (as the case may be) to be contained within such reasonable limit as **The Company** may determine.
Location	Any place at which **Safety Precautions** are to be applied.
Locked	A condition of **HV Apparatus** that cannot be altered without the operation of a locking device.
Locking	The application of a locking device which enables **HV Apparatus** to be **Locked**.
London Court of International Arbitration	The leading London-based arbitral institution and not-for-profit company limited by guarantee of that name with a registered company number of 0204767 providing for the resolution of commercial disputes in accordance with its arbitration rules.
Low Frequency Relay	Has the same meaning as **Under Frequency Relay**.
Low Voltage or **LV**	For **E&W Transmission Systems** a voltage not exceeding 250 V. For **Scottish Transmission Systems**, a voltage exceeding 50 V but not exceeding 1000 V.
LV Side of the Offshore Platform	Unless otherwise specified in the **Bilateral Agreement**, the busbar on the **Offshore Platform** (typically 33 kV) at which the relevant **Offshore Grid Entry Point** is located.

Main Plant and Apparatus	In respect of a **Power Station** (including **Power Stations** comprising of **DC Connected Power Park Modules** and **Electricity Storage Modules**) is one or more of the principal items of **Plant** or **Apparatus** required to convert or re-convert the primary source of energy into electricity. In respect of **HVDC Systems** or **DC Converters** or **Transmission DC Converters** is one of the principal items of **Plant** or **Apparatus** used to convert high voltage direct current to high voltage alternating current or vice versa. In respect of a **Network Operator's** equipment or a **Non-Embedded Customer's** equipment, is one of the principal items of **Plant** or **Apparatus** required to facilitate the import or export of **Active Power** or **Reactive Power** to or from a **Network Operator's** or **Non-Embedded Customer's System**.
Main Protection	A **Protection** system which has priority above other **Protection** in initiating either a fault clearance or an action to terminate an abnormal condition in a power system.
Manufacturer's Data & Performance Report	A report submitted by a manufacturer to **The Company** relating to a specific version of a **Power Park Unit** demonstrating the performance characteristics of such **Power Park Unit** in respect of which **The Company** has evaluated its relevance for the purposes of the **Compliance Processes**.
Manufacturer's Test Certificates	A certificate prepared by a manufacturer which demonstrates that its **Power Generating Module** has undergone appropriate tests and conforms to the performance requirements expected by **The Company** in satisfying its compliance requirements and thereby satisfies the appropriate requirements of the Grid Code and **Bilateral Agreement**.
Market Operation Data Interface System (MODIS)	A computer system operated by **The Company** and made available for use by **Customers** connected to or using the **National Electricity Transmission System** for the purpose of submitting **EU Transparency Availability Data** to **The Company**.
Market Suspension Threshold	Has the meaning given to the term 'Market Suspension Threshold' in Section G of the **BSC**.
Material Effect	An effect causing **The Company** or a **Relevant Transmission Licensee** to effect any works or to alter the manner of operation of **Transmission Plant** and/or **Transmission Apparatus** at the **Connection Site** (which term shall, in this definition and in the definition of "**Modification**" only, have the meaning ascribed thereto in the **CUSC**) or the site of connection or a **User** to effect any works or to alter the manner of operation of its **Plant** and/or **Apparatus** at the **Connection Site** or the site of connection which in either case involves that party in expenditure of more than £10,000.
Materially Affected Party	Any person or class of persons designated by the **Authority** as such.
Maximum Delivery Offer (MDO)	As defined in BC1.A.1.5 **Dynamic Parameters**.
Maximum Delivery Bid (MDB)	As defined in BC1.A.1.5 **Dynamic Parameters**.

Maximum Export Capability	The maximum continuous **Active Power** that a **Network Operator** or **Non-Embedded Customer** can export to the **Transmission System** at the **Grid Supply Point**, as specified in the **Bilateral Agreement**.
Maximum Export Capacity	The maximum continuous **Apparent Power** expressed in MVA and maximum continuous **Active Power** expressed in MW which can flow from an **Offshore Transmission System** connected to a **Network Operator's User System**, to that **User System**.
Maximum Capacity or P_{max}	The maximum continuous **Active Power** which a **Power Generating Module** can supply to the **Total System**, less any demand associated solely with facilitating the operation of that **Power Generating Module** and not fed into the **System**. In the case of an **Electricity Storage Module**, the **Maximum Capacity** is the maximum continuous **Active Power** which an **Electricity Storage Module** can export to the **Total System** less any demand associated with facilitating the operation of that **Electricity Storage Module** when fully charged and operating in a mode analogous to **Generation**.
Maximum Generation Service or MGS	A service utilised by **The Company** in accordance with the **CUSC** and the **Balancing Principles Statement** in operating the **Total System**.
Maximum Generation Service Agreement	An agreement between a **User** and **The Company** for the payment by **The Company** to that **User** in respect of the provision by such **User** of a **Maximum Generation Service**.
Maximum HVDC Active Power Transmission Capacity (PHmax)	The maximum continuous **Active Power** which an **HVDC System** can exchange with the network at each **Grid Entry Point** or **User System Entry Point** as specified in the **Bilateral Agreement** or as agreed between **The Company** and the **HVDC System Owner**.
Maximum Import Capability	The maximum continuous **Active Power** that a **Network Operator** or **Non-Embedded Customer** can import from the **Transmission System** at the **Grid Supply Point**, as specified in the **Bilateral Agreement**.
Maximum Import Capacity	The maximum continuous **Apparent Power** expressed in MVA and maximum continuous **Active Power** expressed in MW which can flow to an **Offshore Transmission System** connected to a **Network Operator's User System**, from that **User System**.
Maximum Import Power	The maximum continuous **Active Power** which an **Electricity Storage Module** can import from the **Total System**, when fully discharged and operating in a mode analogous to **Demand**.
Measured Demand	**Demand** measured at the relevant **Connection Point**. Sometimes referred to as the net demand.

Medium Power Station	A **Power Station** which is (a) directly connected to **NGET's Transmission System** where such **Power Station** has a **Registered Capacity** of 50 MW or more but less than 100 MW; or, (b) **Embedded** within a **User System** (or part thereof) where such **User System** (or part thereof) is connected under normal operating conditions to **NGET's Transmission System** and such **Power Station** has a **Registered Capacity** of 50 MW or more but less than 100 MW; or, (c) **Embedded** within a **User System** (or part thereof) where the **User System** (or part thereof) is not connected to the **National Electricity Transmission System**, although such **Power Station** is in **NGET's Transmission Area** and such **Power Station** has a **Registered Capacity** of 50 MW or more but less than 100 MW. For the avoidance of doubt a **Medium Power Station** could comprise of **Type A**, **Type B**, **Type C** or **Type D Power Generating Modules**.
Medium Voltage or **MV**	For **E&W Transmission Systems** a voltage exceeding 250 V but not exceeding 650 V.
Mills	Milling plant which supplies pulverised fuel to the boiler of a coal fired **Power Station**.
Minimum Generation	The minimum output (in whole MW) which a **Genset** can generate or **DC Converter** at a **DC Converter Station** or **Electricity Storage Module** can import or export to the **Total System** under stable operating conditions, as registered with **The Company** under the **PC** (and amended pursuant to the **PC**). For the avoidance of doubt, the output may go below this level as a result of operation in accordance with BC3.7.
Minimum Active Power Transmission Capacity (PHmin)	The minimum continuous **Active Power** which an **HVDC System** can exchange with the **System** at each **Grid Entry Point** or **User System Entry Point** as specified in the **Bilateral Agreement** or as agreed between **The Company** and the **HVDC System Owner**.
Minimum Import Capacity	The minimum input (in whole MW) into a **DC Converter** at a **DC Converter Station** or **HVDC System** at an **HVDC Converter** (in any of its operating configurations) at the **Onshore Grid Entry Point** (or in the case of an **Embedded DC Converter** or an **Embedded HVDC Converter** at the **User System Entry Point**) at which a **DC Converter** or **HVDC Converter** can operate in a stable manner, as registered with **The Company** under the **PC** (and amended pursuant to the **PC**).
Minimum Regulating Level	The minimum **Active Power**, as specified in the **Bilateral Agreement** or as agreed between **The Company** and the **Generator** or **HVDC System Owner**, down to which the **Power Generating Module** (including a **DC Connected Power Park Module**) or **HVDC System** can control **Active Power**.

Minimum Stable Operating Level	The minimum **Active Power**, as specified in the **Bilateral Agreement** or as agreed between **The Company** and the **Generator**, at which the **Power Generating Module** can be operated stably for an unlimited time.
Minister of the Crown	As defined in the **ESO Licence**.
Modification	Any actual or proposed replacement, renovation, modification, alteration or construction by or on behalf of a **User** or **The Company** to either that **User's Plant** or **Apparatus** or **Transmission Plant** or **Apparatus**, as the case may be, or the manner of its operation which has or may have a **Material Effect** on **The Company** or a **User**, as the case may be, at a particular **Connection Site**.
Mothballed DC Connected Power Park Module	A **DC Connected Power Park Module** that has previously generated which the **Generator** plans not to use to generate for the remainder of the current **Financial Year** but which could be returned to service.
Mothballed DC Converter at a DC Converter Station	A **DC Converter** at a **DC Converter Station** that has previously imported or exported power which the **DC Converter Station Owner** plans not to use to import or export power for the remainder of the current **Financial Year** but which could be returned to service.
Mothballed HVDC System	An **HVDC System** that has previously imported or exported power which the **HVDC System Owner** plans not to use to import or export power for the remainder of the current **Financial Year** but which could be returned to service.
Mothballed HVDC Converter	An **HVDC Converter** which is part of an **HVDC System** that has previously imported or exported power which the **HVDC System Owner** plans not to use to import or export power for the remainder of the current **Financial Year** but which could be returned to service.
Mothballed Generating Unit	A **Generating Unit** that has previously generated which the **Generator** plans not to use to generate for the remainder of the current **Financial Year** but which could be returned to service. For the avoidance of doubt a **Mothballed Generating Unit** could be part of a **Power Generating Module**.
Mothballed Power Generating Module	A **Power Generating Module** that has previously generated which the **Generator** plans not to use to generate for the remainder of the current **Financial Year** but which could be returned to service.
Mothballed Power Park Module	A **Power Park Module** that has previously generated which the **Generator** plans not to use to generate for the remainder of the current **Financial Year** but which could be returned to service.
Multiple Point of Connection	A double (or more) **Point of Connection**, being two (or more) **Points of Connection** interconnected to each other through the **User's System**.
MSID	Has the meaning a set out in the **BSC**, covers Metering System Identifier.

National Demand	The amount of electricity supplied from the **Grid Supply Points** plus:- • that supplied by **Embedded Large Power Stations**, and • **National Electricity Transmission System Losses**, minus:- • the **Demand** taken by **Station Transformers** and, **Pumped Storage Units'** and **Electricity Storage Modules'**. and, for the purposes of this definition, does not include:- • any exports from the **National Electricity Transmission System** across **External Interconnections**.
National Electricity Transmission System (NETS)	The **Onshore Transmission System** and, where owned by **Offshore Transmission Licensees**, **Offshore Transmission Systems**.
National Electricity Transmission System Demand	The amount of electricity supplied from the **Grid Supply Points** plus:- • that supplied by **Embedded Large Power Stations**, and • exports from the **National Electricity Transmission System** across **External Interconnections**, and • **National Electricity Transmission System Losses**, and, for the purposes of this definition, includes:- • the **Demand** taken by **Station Transformers** and, **Pumped Storage Units** and **Electricity Storage Modules'.**
National Electricity Transmission System Losses	The losses of electricity incurred on the **National Electricity Transmission System**.
National Electricity Transmission System Notice	A notice issued by **The Company** to **Users** (or to certain **Users** only) in accordance with OC7.4.8.2, which provides information relating to **System** conditions or **Events** and is intended to: (a) alert **Users** to possible or actual **Plant** shortage, **System** problems and/or **Demand** reductions; (b) inform relevant **Users** of the applicable period; (c) indicate intended consequences for **Users**; (d) enable specified **Users** to ensure that their **User System** is in a state of readiness to implement instructions from **The Company**; and (e) provide notice to specified **Users** so that they can implement any instructions issued by **The Company**.
National Electricity Transmission System Notice – DCRP Actuation	A notice issued by **The Company**, in accordance with OC6.9.3, to instruct the relevant **Network Operator**(s) to initiate the **DCRP** and reconfigure their **User System** as required, within 8 hours, to be able to implement the **Activation Schedule**(s).

National Electricity Transmission System Notice – DCRP Implementation	A notice issued by **The Company**, in accordance with OC6.9.5, to instruct the **Network Operator**(s) to make disconnections in accordance with the instructions detailed in the **Activation Schedule**(s). This notice will be sent alongside the first set of **Activation Schedule**(s) required for a **Demand Control Rotation Period**.
National Electricity Transmission System Notice – DCRP Stand Down	A notice issued by **The Company**, in accordance with OC6.9.6, to instruct the relevant **Network Operator**(s) to stand down **DCRP** arrangements as soon as reasonably practicable and securely revert their networks back to normal network configuration and operation without **Demand Disconnection** or to notify the relevant **Network Operator**(s) to transition to the Electricity Supply Emergency Code arrangements.
National Electricity Transmission System Operator Area	Means the area by that name as set out in the terms of the **ESO Licence.**
National Electricity Transmission System Study Network Data File (NETS Study Network Data File)	A computer file produced by **The Company** which in **The Company's** view provides an appropriate representation of the **National Electricity Transmission System** for a specific point in time. The computer file will contain information and data on **Demand** on the **National Electricity Transmission System** and on **Large Power Stations** including **Genset** power output consistent with **Output Usable** and **The Company's** view of prevailing system conditions.
National Electricity Transmission System Warning	A warning issued by **The Company** to **Users** (or to certain **Users** only) in accordance with OC7.4.8.2, which provides information relating to **System** conditions or **Events** and is intended to: (a) alert **Users** to possible or actual **Plant** shortage, **System** problems and/or **Demand** reductions; (b) inform of the applicable period; (c) indicate intended consequences for **Users**; and (d) enable specified **Users** to be in a state of readiness to receive instructions from **The Company**.
National Electricity Transmission System Warning - Demand Control Imminent	A warning issued by **The Company**, in accordance with OC7.4.8.7, which is intended to provide short term notice, where possible, to those **Users** who are likely to receive **Demand** reduction instructions from **The Company** within 30 minutes.
National Electricity Transmission System Warning - Electricity Margin Notice	A warning issued by **The Company**, in accordance with OC7.4.8.5, which is intended to invite a response from and to alert recipients to a decreased **System Margin**.
National Electricity Transmission System Warning – Embedded Generation Control Imminent	A warning issued by **The Company**, in accordance with OC7.4.8.12, which is intended to provide short term notice, where possible, to those **Network Operators** who are likely to receive **Embedded Generation Control** instructions from **The Company** within 30 minutes.

National Electricity Transmission System Warning - High Risk of Demand Reduction	A warning issued by **The Company**, in accordance with OC7.4.8.6, which is intended to alert recipients that there is a high risk of **Demand** reduction being implemented and which may normally result from an **Electricity Margin Notice**.
National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction	A warning issued by **The Company**, in accordance with OC7.4.8.11, which is intended to alert recipients that there is a high risk of **Embedded Generation Control** being implemented and which may result from a **National Electricity Transmission System Warning – System NRAPM.**
National Electricity Transmission System Warning – Localised NRAPM	A warning issued by **The Company**, in accordance with OC.7.4.8.10, which is intended to invite a response from and to alert recipients to a decreased **Localised NRAPM**.
National Electricity Transmission System Warning - Risk of System Disturbance	A warning issued by **The Company**, in accordance with OC7.4.8.8, which is intended to alert **Users** of the risk of widespread and serious **System** disturbance which may affect **Users**.
National Electricity Transmission System Warning – System NRAPM	A warning issued by **The Company**, in accordance with OC.7.4.8.9, which is intended to invite a response from and to alert recipients to a decreased **System NRAPM**.
NETS PSM	A PSM with the scope as set out in PC.10.4.
National Energy System Operator or NESO	The company with registered number 11014226, as the designated **ISOP** and holder of the **ESO Licence** and the **GSP Licence.**
Network Data	The data to be provided by **The Company** to **Users** in accordance with the **PC**, as listed in Part 3 of the Appendix A to the **PC or** PC.10 as appropriate.
Network Frequency Perturbation Plot	A form of Bode Plot which plots the amplitude (%) and phase (degrees) of the resulting output oscillation responding to an applied input oscillation across a frequency base. The plot will be used to assess the capability and performance of a **Grid Forming Plant** and to ensure that it does not pose a risk to other **Plant** and **Apparatus** connected to the **Total System**. For **GBGF-I**, these are used to provide data to **The Company** which together with the associated **Nichols Chart** (or equivalent) defines the effects on a **GBGF-I** for changes in the frequency of the applied input oscillation. The input is the applied as an input oscillation and the output is the resulting oscillations in the **GBGF-I's Active Power**. For the avoidance of doubt, **Generators** in respect of **GBGF-S** can provide their data using the existing formats and do not need to supply **NFP** plots.
Network Gas Supply Emergency	Has the meaning set out in the **BSC**.

Network Operator	A person with a **User System** directly connected to the **National Electricity Transmission System** to which **Customers** and/or **Power Stations** (not forming part of the **User System**) are connected, acting in its capacity as an operator of the **User System**, but shall not include a person acting in the capacity of an **Externally Interconnected System Operator** or a **Generator** in respect of **OTSUA**.
NGET	National Grid Electricity Transmission plc (NO: 2366977) whose registered office is at 1-3 Strand, London, WC2N 5EH.
Nichols Chart	For a **GBGF-I**, a chart derived from the open loop Bode Plots that are used to produce an **NFP Plot**. The **Nichols Chart** plots open loop gain versus open loop phase angle. This enables the open loop phase for an open loop gain of 1 to be identified for use in defining the **GBGF-I**'s equivalent **Damping Factor**.
No-Load Field Voltage	Shall have the meaning ascribed to that term in **IEC** 34-16-1:1991 [equivalent to **British Standard BS**4999 Section 116.1 : 1992].
No System Connection	As defined in OC8A.1.6.2 and OC8B.1.7.2.
Non-CUSC Party	A Party who does not accede to the **Connection and Use of System Code** (**CUSC**).
Non-Synchronous Electricity Storage Module	A **Power Park Module** comprising soley of one or more **Non-Synchronous Electricity Storage Units**.
Notification of User's Intention to Operate	A notification from a **Network Operator** or **Non-Embedded Customer** to **The Company** informing **The Company** of the date upon which any **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** at an **EU Grid Supply Point** will be ready to be connected to the **Transmission System**.
Notification of User's Intention to Synchronise	A notification from a **Generator** or **DC Converter Station** owner or **HVDC System Owner** to **The Company** informing **The Company** of the date upon which any **OTSUA**, a **Generating Unit**(s), **CCGT Module**(s), **Power Park Module**(s), **Power Generating Module**(s) (including a **DC Connected Power Park Module**(s)), **HVDC System** or **DC Converter**(s) will be ready to be **Synchronised** to the **Total System**.
Non-Controllable Electricity Storage Equipment	An item of storage **Plant**, including but not limited to a **Synchronous Flywheel** or **Synchronous Compensation Equipment** or **Regenerative Braking** whose active output power cannot be independently controlled.
Non-Dynamic Frequency Response Service	A **Demand Response Service** in which the **Demand** is controlled through discrete switching rather than through continuous load changes in response to **System Frequency** changes.
Non-Embedded Customer	A **Customer** in **Great Britain**, except for a **Network Operator** acting in its capacity as such, receiving electricity direct from the **Onshore Transmission System** irrespective of from whom it is supplied.
Non-Synchronous Electricity Storage Module	A **Power Park Module** comprising solely of one or more **Non-Synchronous Electricity Storage Units**.

Non-Synchronous Electricity Storage Unit	A **Power Park Unit** which can produce electrical energy by converting or re-converting another source of energy such that the frequency of the generated voltage is not inherently in synchronism with the frequency of the **System**.
Non-Synchronous Generating Unit	An **Onshore Non-Synchronous Generating Unit** or **Offshore Non-Synchronous Generating Unit** which could form part of a **Power Generating Module**.
Normal CCGT Module	A **CCGT Module** other than a **Range CCGT Module**.
Novel Unit	A tidal, wave, wind, geothermal, or any similar, **Generating Unit**.
OC9 De-synchronised Island Procedure	Has the meaning set out in OC9.5.4.
Offer Acceptance	An acceptance by a **BM Unit** of a **Bid-Offer Acceptance** to increase its export onto, or decrease its import from, the **National Electricity Transmission System**, where in this context import and export are as defined in the **BSC**.
Offshore	Means wholly or partly in **Offshore Waters**, and when used in conjunction with another term and not defined means that the associated term is to be read accordingly.
Offshore DC Converter	Any **User Apparatus** located **Offshore** used to convert alternating current electricity to direct current electricity, or vice versa. An **Offshore DC Converter** is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion.
Offshore HVDC Converter	Any **User Apparatus** located **Offshore** used to convert alternating current electricity to direct current electricity, or vice versa. An **Offshore HVDC Converter** is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion.
Offshore Development Information Statement	A statement prepared by **The Company** .
Offshore Generating Unit	Unless otherwise provided in the Grid Code, any **Apparatus** located **Offshore** which produces electrical energy by converting or re-converting another source of energy, including, an **Offshore Synchronous Generating Unit** or **Offshore Non-Synchronous Generating Unit** which could also be part of a **Power Generating Module** or **Electricity Storage Module**

Offshore Grid Entry Point	In the case of:- (a) an **Offshore Generating Unit** or an **Offshore Synchronous Power Generating Module** or an **Offshore DC Converter** or an **Offshore HVDC Converter**, as the case may be, which is directly connected to an **Offshore Transmission System**, the point at which it connects to that **Offshore Transmission System**, or; (b) an **Offshore Power Park Module** which is directly connected to an **Offshore Transmission System**, the point where one **Power Park String** (registered by itself as a **Power Park Module**) or the collection of points where a number of **Offshore Power Park Strings** (registered as a single **Power Park Module**) connects to that **Offshore Transmission System**, or; (c) an **External Interconnection** which is directly connected to an **Offshore Transmission System**, the point at which it connects to that **Offshore Transmission System**.
Offshore Local Joint Restoration Plan	A plan produced and agreed by **The Company**, **Offshore Transmission Licensees**, **Restoration Contractors**, a **Network Operator** and in some cases an **Onshore Transmission Licensee** under OC9.4.7.7, detailing the agreed method and procedure by which **The Company** will instruct a **Restoration Contractor** with an **Anchor Plant** located **Offshore** to energise, part of the **Total System** (including but not limited to parts of the **Offshore Transmission System**) within 2 hours of that instruction and subsequently meet complementary blocks of local **Demand** so as to form a **Power Island**. An **Offshore Local Joint Restoration Plan** may require the use of **Top Up Restoration Plant**. An **Offshore Local Joint Restoration Plan** is distinct from and falls outside the provisions of a **Distribution Restoration Zone Plan**.
Offshore Non-Synchronous Generating Unit	An **Offshore Generating Unit** that is not an **Offshore Synchronous Generating Unit** including for the avoidance of doubt a **Power Park Unit** or **Non-Synchronous Electricity Storage Unit** located **Offshore**.
Offshore Platform	A single structure comprising of **Plant** and **Apparatus** located **Offshore** which includes one or more **Offshore Grid Entry Points**.
Offshore Power Park Module	A collection of one or more **Offshore Power Park Strings** (registered as a **Power Park Module** under the **PC**). There is no limit to the number of **Power Park Strings** within the **Power Park Module**, so long as they either: (a) connect to the same busbar which cannot be electrically split; or (b) connect to a collection of directly electrically connected busbars of the same nominal voltage and are configured in accordance with the operating arrangements set out in the relevant **Bilateral Agreement**.
Offshore Power Park String	A collection of **Offshore Generating Units** or **Power Park Units** or **Non-Synchronous Electricity Storage Unit** that are powered by an **Intermittent Power Source**, joined together by cables forming part of a **User System** with a single point of connection to an **Offshore Transmission System**. The connection to an **Offshore Transmission System** may include a **DC Converter** or **HVDC Converter**.

Offshore Synchronous Generating Unit	A **Generating Unit** or **Synchronous Electricity Storage Unit** located **Offshore** which could be part of an **Offshore Synchronous Power Generating Module** in which, under all steady state conditions, the rotor rotates at a mechanical speed equal to the electrical frequency of the **National Electricity Transmission System** divided by the number of pole pairs of the **Generating Unit**.
Offshore Synchronous Power Generating Module	A **Synchronous Power Generating Module** or **Synchronous Electricity Storage Module** located **Offshore**.
Offshore Tender Process	The process followed by the **Authority** to make, in prescribed cases, a determination on a competitive basis of the person to whom an offshore transmission licence is to be granted.
Offshore Transmission Distribution Connection Agreement	An agreement entered into by **The Company** and a **Network Operator** in respect of the connection to and use of a **Network Operator's User System** by an **Offshore Transmission System**.
Offshore Transmission Licensee	Such person in relation to whose **Transmission Licence** the standard conditions in Section E (offshore transmission owner standard conditions) of such **Transmission Licence** have been given effect, or any person in that prospective role who has acceded to the **STC**.
Offshore Transmission System	A system consisting (wholly or mainly) of high voltage electric lines and used for the transmission of electricity from one **Power Station** to a sub-station or to another **Power Station** or between sub-stations, and includes any **Plant** and **Apparatus** (including **OTSUA**) and meters in connection with the transmission of electricity but does not include any **Remote Transmission Assets**. An **Offshore Transmission System** extends from the **Interface Point**, or the **Offshore Grid Entry Point(s)** and may include **Plant** and **Apparatus** located **Onshore** and **Offshore** and, where the context permits, references to the **Offshore Transmission System** includes **OTSUA**.
Offshore Transmission System Development User Works or **OTSDUW**	In relation to a particular **User** where the **OTSDUW Arrangements** apply, means those activities and/or works for the design, planning, consenting and/or construction and installation of the **Offshore Transmission System** to be undertaken by the **User** as identified in Part 2 of Appendix I of the relevant **Construction Agreement**.
Offshore Transmission System User Assets or **OTSUA**	**OTSDUW Plant and Apparatus** constructed and/or installed by a **User** under the **OTSDUW Arrangements** which form an **Offshore Transmission System** that once transferred to a **Relevant Transmission Licensee** under an **Offshore Tender Process** will become part of the **National Electricity Transmission System**.
Offshore Waters	Has the meaning given to "offshore waters" in Section 90(9) of the Energy Act 2004.
Offshore Works Assumptions	In relation to a particular **User**, means those assumptions set out in Appendix P of the relevant **Construction Agreement** as amended from time to time.
Onshore	Means within **Great Britain**, and when used in conjunction with another term and not defined means that the associated term is to be read accordingly.

Onshore DC Converter	Any **User Apparatus** located **Onshore** with a **Completion Date** after 1st April 2005 used to convert alternating current electricity to direct current electricity, or vice versa. An **Onshore DC Converter** is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion. In a bipolar arrangement, an **Onshore DC Converter** represents the bipolar configuration.
Onshore Generating Unit	Unless otherwise provided in the Grid Code, any **Apparatus** located **Onshore** which produces electrical energy by converting or re-converting another source of energy, including, an **Onshore Synchronous Generating Unit** or **Onshore Non-Synchronous Generating Unit** which could also be part of a **Power Generating Module** or an **Electricity Storage Module**.
Onshore Grid Entry Point	A point at which an **Onshore Generating Unit** or a **CCGT Module** or a **CCGT Unit** or an **Onshore Power Generating Module** or an **Onshore DC Converter** or an **Onshore HVDC Converter** or an **Onshore Power Park Module** or an **Onshore Electricity Storage Module** or an **External Interconnection**, as the case may be, which is directly connected to the **Onshore Transmission System** connects to the **Onshore Transmission System**.
Onshore HVDC Converter	Any **User Apparatus** located **Onshore** used to convert alternating current electricity to direct current electricity, or vice versa. An **Onshore HVDC Converter** is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion. In a bipolar arrangement, an **Onshore HVDC Converter** represents the bipolar configuration.
Onshore Non-Synchronous Generating Unit	A **Generating Unit** located **Onshore** that is not a **Synchronous Generating Unit** or **Synchronous Electricity Storage Unit** including for the avoidance of doubt a **Power Park Unit** or **Non-Synchronous Electricity Storage Unit** located **Onshore**.
Onshore Power Park Module	A collection of **Non-Synchronous Generating Units** that are powered by an **Intermittent Power Source** or connected through power electronic conversion technology or **Non-Synchronous Electricity Storage Units**, joined together by a **System** (registered as a **Power Park Module** under the **PC**) with a single electrical point of connection directly to the **Onshore Transmission System** (or **User System** if **Embedded**) with no intermediate **Offshore Transmission System** connections. The connection to the **Onshore Transmission System** (or **User System** if **Embedded**) may include a **DC Converter** or **HVDC Converter**.
Onshore Synchronous Generating Unit	An **Onshore Generating Unit** or **Onshore Synchronous Electricity Storage Unit** (which could also be part of an **Onshore Power Generating Module**) including, for the avoidance of doubt, a **CCGT Unit** or **Synchronous Electricity Storage Unit** in which, under all steady state conditions, the rotor rotates at a mechanical speed equal to the electrical frequency of the **National Electricity Transmission System** divided by the number of pole pairs of the **Generating Unit**.

Onshore Synchronous Power Generating Module	A **Synchronous Power Generating Module** or **Synchronous Electricity Storage Module** located **Onshore**.
Onshore Transmission Licensee	**NGET**, **SPT**, **SHETL**, or a **Competitively Appointed Transmission Licensee**.
Onshore Transmission System	The system consisting (wholly or mainly) of high voltage electric lines owned or operated by **Onshore Transmission Licensees** or operated by **The Company** and used for the transmission of electricity from one **Power Station** to a substation or to another **Power Station** or between substations or to or from **Offshore Transmission Systems** or to or from any **External Interconnection**, and includes any **Plant** and **Apparatus** and meters owned or operated by any **Onshore Transmission Licensee** in connection with the transmission of electricity but does not include any **Remote Transmission Assets**.
On-Site Generator Site	A site which is determined by the **BSC Panel** to be a Trading Unit under the **BSC** by reason of having fulfilled the Class 1 or Class 2 requirements as such terms are used in the **BSC**.
Operating Code or **OC**	That portion of the Grid Code which is identified as the **Operating Code**.
Operating Margin	**Contingency Reserve** plus **Operating Reserve**.
Operating Reserve	The additional output from **Large Power Stations** or the reduction in **Demand**, which must be realisable in real-time operation to respond in order to contribute to containing and correcting any **System Frequency** fall to an acceptable level in the event of a loss of generation or a loss of import from an **External Interconnection** or mismatch between generation and **Demand**.
Operation	A scheduled or planned action relating to the operation of a **System** (including an **Embedded Power Station**).
Operational Data	Data required under the **Operating Codes** and/or **Balancing Codes**.
Operational Day	The period from 05:00 hours on one day to 05:00 hours on the following day.
Operation Diagrams	Diagrams which are a schematic representation of the **HV Apparatus** and the connections to all external circuits at a **Connection Site** (and in the case of **OTSDUW**, **Transmission Interface Site**), incorporating its numbering, nomenclature and labelling.
Operational Effect	Any effect on the operation of the relevant other **System** which causes the **National Electricity Transmission System** or the **System** of the other **User** or **Users**, as the case may be, to operate (or be at a materially increased risk of operating) differently to the way in which they would or may have operated in the absence of that effect.

Operational Intertripping	The automatic tripping of circuit-breakers to prevent abnormal system conditions occurring, such as over voltage, overload, **System** instability, etc. after the tripping of other circuit-breakers following power **System** fault(s) which includes **System** to **Generating Unit**, **System** to **CCGT Module**, **System** to **Power Park Module**, **System** to **Electricity Storage Module**, **System** to **DC Converter**, **System to Power Generating Module**, **System** to **HVDC Converter** and **System** to **Demand** intertripping schemes.
Operational Notifications	Any **Energisation Operational Notification**, **Interim Operational Notification**, **Final Operational Notification** or **Limited Operational Notification** issued from **The Company** to a **User**.
Operational Planning	Planning through various timescales the matching of generation output with forecast **National Electricity Transmission System Demand** together with a reserve of generation to provide a margin, taking into account outages of certain **Generating Units** or **Power Generating Modules**, of parts of the **National Electricity Transmission System** and of parts of **User Systems** to which **Power Stations** and/or **Customers** are connected, carried out to achieve, so far as possible, the standards of security set out in the **ESO Licence**, each **Relevant Transmission Licensee's Transmission Licence** or **Electricity Distribution Licence**, as the case may be.
Operational Planning Margin	An operational planning margin set by **The Company**.
Operational Planning Phase	The period from 8 weeks to the end of the 5th year ahead of real time operation.
Operational Procedures	Management instructions and procedures, both in support of the **Safety Rules** and for the local and remote operation of **Plant** and **Apparatus**, issued in connection with the actual operation of **Plant** and/or **Apparatus** at or from a **Connection Site**.
Operational Switching	Operation of **Plant** and/or **Apparatus** to the instruction of the relevant **Control Engineer**. For the avoidance of doubt, the operation of **Transmission Plant** and/or **Apparatus** forming part of the **National Electricity Transmission System** will be to the instruction of the **Relevant Transmission Licensee**.
Other Relevant Data	The data listed in BC1.4.2(f) under the heading **Other Relevant Data**.
OTSDUW Arrangements	The arrangements whereby certain aspects of the design, consenting, construction, installation and/or commissioning of transmission assets are capable of being undertaken by a **User** prior to the transfer of those assets to a **Relevant Transmission Licensee** under an **Offshore Tender Process**.
OTSDUW Data and Information	The data and information to be provided by **Users** undertaking **OTSDUW**, to **The Company** in accordance with Appendix F of the **Planning Code**.
OTSDUW DC Converter	A **Transmission DC Converter** designed and/or constructed and/or installed by a **User** under the **OTSDUW Arrangements** and/or operated by the **User** until the **OTSUA Transfer Time**.

OTSDUW Development and Data Timetable	The timetable for both the delivery of **OTSDUW Data and Information** and **OTSDUW Network Data and Information** as referred to in Appendix F of the **Planning Code** and the development of the scope of the **OTSDUW**.
OTSDUW Network Data and Information	The data and information to be provided by **The Company** to **Users** undertaking **OTSDUW** in accordance with Appendix F of the **Planning Code**.
OTSDUW Plant and Apparatus	**Plant** and **Apparatus**, including any **OTSDUW DC Converter**, designed by the **User** under the **OTSDUW Arrangements**.
OTSUA Transfer Time	The time and date at which the **OTSUA** are transferred to a **Relevant Transmission Licensee**.
Out of Synchronism	The condition where a **System** or **Generating Unit** or **Power Generating Module** cannot meet the requirements to enable it to be **Synchronised**.
Output Usable or **OU**	The forecast value (in MW), profiled across the time period affected by the unplanned or planned **Event** of the level at which the **Genset** can export to the **Grid Entry Point**, or in the case of **Embedded Power Stations**, to the **User System Entry Point**. In addition, for a **Genset** powered by an **Intermittent Power Source** the forecast value is based upon the **Intermittent Power Source** being at a level which would enable the **Genset** to generate at **Registered Capacity**. For the purpose of OC2 only, the term **Output Usable** shall include the terms **Interconnector Export Capacity** and **Interconnector Import Capacity** where the term **Output Usable** is being applied to an **External Interconnection**.
Over-excitation Limiter	Shall have the meaning ascribed to that term in **IEC** 34-16-1:1991 [equivalent to **British Standard BS**4999 Section 116.1: 1992].
Panel Chairperson	A person appointed as such in accordance with GR.4.1.
Panel Member	Any of the persons identified as such in GR.4.
Panel Members' Recommendation	The recommendation in accordance with the "**Grid Code Review Panel Recommendation Vote**".
Panel Secretary	A person appointed as such in accordance with GR.3.1.2(d).
Part 1 System Ancillary Services	**Ancillary Services** which are required for **System** reasons and which must be provided by **Users** in accordance with the **Connection Conditions** or **European Connection Conditions**. An exhaustive list of **Part 1 System Ancillary Services** is included in that part of CC.8.1 or ECC.8.1 headed Part 1.
Part 2 System Ancillary Services	**Ancillary Services** which are required for **System** reasons and which must be provided by a **User** if the **User** has agreed to provide them under a **Bilateral Agreement**. A non-exhaustive list of **Part 2 System Ancillary Services** is included in that part of CC.8.1 or ECC.8.1 headed Part 2.
Part Load	The condition of a **Genset**, or **Cascade Hydro Scheme** which is **Loaded** but is not running at its Maximum Export Limit.

Peak Current Rating	For a **GBGF-I** this is the larger of either the: - • The registered maximum steady-state current plus the maximum additional current to supply the **Active ROCOF Response Power** plus the **Defined Active Damping Power**; or. • The registered maximum steady-state current plus the maximum additional current to supply the **Phase Jump Angle** limit power, or. This is the maximum short term total current as declared by the **Grid Forming Plant Owner** in accordance with PC.A.5.8.1.
Permit for Work for proximity work	In respect of **E&W Transmission Systems**, a document issued by the **Relevant E&W Transmission Licensee** or an **E&W User** in accordance with its respective **Safety Rules** to enable work to be carried out in accordance with OC8A.8 and which provides for **Safety Precautions** to be applied and maintained. An example format of a **Relevant E&W Transmission Licensee**'s permit for work is attached as Appendix E to **OC8A**. In respect of **Scottish Transmission Systems**, a document issued by a **Relevant Scottish Transmission Licensee** or a **Scottish User** in accordance with its respective **Safety Rules** to enable work to be carried out in accordance with OC8B.8 and which provides for **Safety Precautions** to be applied and maintained. Example formats of **Relevant Scottish Transmission Licensees'** permits for work are attached as Appendix E to **OC8B**.
Partial Shutdown	The same as a **Total Shutdown** except that all generation has ceased in a separate part of the **Total System** and there is no electricity supply from **External Interconnections** or other parts of the **Total System** to that part of the **Total System** and, therefore, that part of the **Total System** is shutdown, with the result that it is not possible for that part of the **Total System** to begin to function again without **The Company's** directions relating to **System Restoration**.
Pending Grid Code Modification Proposal	A **Grid Code Modification Proposal** in respect of which, at the relevant time, the **Authority** has not yet made a decision as to whether to direct such **Grid Code Modification Proposal** to be made pursuant to the **ESO Licence** (whether or not a **Grid Code Modification Report** has been submitted in respect of such **Grid Code Modification Proposal**) or, in the case of a **Grid Code Self Governance Proposals**, in respect of which the **Grid Code Review Panel** has not yet voted whether or not to approve.
Phase Jump Angle	The difference in the measured phase angle of the voltage at the **Grid Entry Point** or **User System Entry Point** in a given mains half cycle compared with the measured phase angle of the voltage at the **Grid Entry Point** or **User System Entry Point** in the previous mains half cycle.
Phase Jump Angle Limit	The maximum **Phase Jump Angle** when applied to a **GBGF-I** which will result in a linear controlled response without activating current limiting functions. This is specified for a **System** angle near to zero which will be considered to be the normal operating angle under steady state conditions.

Phase Jump Angle Withstand	The maximum **Phase Jump Angle** change when applied to a **GBGF-I** which will result in the **GBGF-I** remaining in stable operation with current limiting functions activated. This is specified for a **System** angle near to zero which will be considered to be the normal operating angle under steady state conditions.
Phase (Voltage) Unbalance	The ratio (in percent) between the rms values of the negative sequence component and the positive sequence component of the voltage.
Physical Notification	Data that describes the **BM Participant**'s best estimate of the expected input or output of **Active Power** of a **BM Unit** and/or (where relevant) **Generating Unit**, except in the instance of a Stage 2 or higher **Network Gas Supply Emergency**, with the accuracy of the **Physical Notification** being commensurate with **Good Industry Practice**.
Planning Code or **PC**	That portion of the Grid Code which is identified as the **Planning Code**.
Planned Maintenance Outage	An outage of **The Company's** electronic data communication facilities as provided for in CC.6.5.8 or ECC.6.5.8 and **The Company's** associated computer facilities of which normally at least 5 days notice is given, but in any event of which at least twelve hours notice has been given by **The Company** to the **User** and which is anticipated to last no longer than 2 hours. The length of such an outage may in exceptional circumstances be extended where at least 24 hours notice has been given by **The Company** to the **User**. It is anticipated that normally any planned outage would only last around one hour.
Planned Outage	An outage of a **Large Power Station** or of part of the **National Electricity Transmission System**, or of part of a **User System**, co-ordinated by **The Company** under **OC2**.
Plant	Fixed and movable items used in the generation and/or supply and/or transmission of electricity, other than **Apparatus**.
Point of Common Coupling	That point on the **National Electricity Transmission System** electrically nearest to the **User** installation at which either **Demands** or **Loads** are, or may be, connected.
Point of Connection	An electrical point of connection between the **National Electricity Transmission System** and a **User's System**.
Point of Isolation	The point on **Apparatus** (as defined in OC8A.1.6.2 and OC8B.1.7.2) at which **Isolation** is achieved.
Post-Control Phase	The period following real time operation.

Power Available	A signal prepared in accordance with good industry practice, representing the instantaneous sum of the potential **Active Power** available from each individual **Power Park Unit** within the **Power Park Module** calculated using any applicable combination of electrical or mechanical or meteorological data (including wind speed) measured at each **Power Park Unit** at a specified time. **Power Available** shall be a value between 0 MW and **Registered Capacity** or **Maximum Capacity** which is the sum of the potential **Active Power** available of each **Power Park Unit** within the **Power Park Module.** A unit that is not generating or supplying power will be considered as not available. For the avoidance of doubt, the **Power Available** signal would be the **Active Power** output that a **Power Park Module** could reasonably be expected to export at the **Grid Entry Point** or **User System Entry Point** taking all the above criteria into account including **Power Park Unit** constraints such as optimisation modes but would exclude a reduction in the **Active Power** export of the **Power Park Module** instructed by **The Company** (for example) for the purposes selecting a **Power Park Module** to operate in **Frequency Sensitive Mode** or when an **Emergency Instruction** has been issued.
Power Factor	The ratio of **Active Power** to **Apparent Power**.
Power-Generating Module	Either a **Synchronous Power Generating Module**, a **Synchronous Electricity Storage Module**, a **Power Park Module** or a **Non-Synchronous Electricity Storage Module** owned or operated by an **EU Generator**.
Power-Generating Module Document (PGMD)	A document provided by the **Generator** to **The Company** for a **Type B** or **Type C Power Generating Module** which confirms that the **Power Generating Module's** compliance with the technical criteria set out in the Grid Code has been demonstrated and provides the necessary data and statements, including a statement of compliance.
Power Generating Module Performance Chart	A diagram showing the **Active Power** (MW) and **Reactive Power** (MVAr) capability limits within which a **Synchronous Power Generating Module** or **Power Park Module** at its **Grid Entry Point** or **User System Entry Point** will be expected to operate under steady state conditions.
Power Island	Part of the **Total System** which is disconnected from, and out of **Synchronism** with, the rest of the **Total System** containing **Generating Unit(s)** at one or more **Power Stations**, and/or **HVDC Systems** and/or **DC Converters**, together with complementary local **Demand**.
Power Park Module	Any **Onshore Power Park Module** or **Offshore Power Park Module**.
Power Park Module Availability Matrix	The matrix described in Appendix 1 to BC1 under the heading **Power Park Module Availability Matrix**.
Power Park Module Planning Matrix	A matrix in the form set out in Appendix 3 of OC2 showing the combination of **Power Park Units** within a **Power Park Module** which would be expected to be running under normal conditions.
Power Park Unit	A **Generating Unit** within a **Power Park Module**.
Power Station	An installation comprising one or more **Generating Units** or **Power Park Modules** or **Power Generating Modules** or **Electricity Storage Modules** (even where sited separately) owned and/or controlled by the same **Generator**, which may reasonably be considered as being managed as one **Power Station**.

Power System Difference Model (PSDM)	A digital model that describes changes to the **Structural Data** of a **PSM**.
Power System Model (PSM)	A digital model of an electricity transmission and/or distribution system created for the purpose of performing studies. It organises the relevant data into: **Structural Data**, **Situation Data**, and **Solution Data**, and facilitates data exchange between relevant parties.
Power System Stabiliser or **PSS**	Equipment controlling the **Exciter** output via the voltage regulator in such a way that power oscillations of the synchronous machines are dampened. Input variables may be speed, frequency or power (or a combination of these).
Preface	The preface to the Grid Code (which does not form part of the Grid Code and therefore is not binding).
Preliminary Notice	A notice in writing, sent by **The Company** both to all **Users** identified by it under OC12.4.2.1 and to the **Test Proposer**, notifying them of a proposed **System Test**.
Preliminary Project Planning Data	Data relating to a proposed **User Development** at the time the **User** applies for a **CUSC Contract** but before an offer is made and accepted.
Primary Response	The automatic increase in **Active Power** output of a **Genset** or, as the case may be, the decrease in **Active Power Demand** in response to a **System Frequency** fall. This increase in **Active Power** output or, as the case may be, the decrease in **Active Power Demand** must be in accordance with the provisions of the relevant **Ancillary Services Agreement** which will provide that it will be released increasingly with time over the period 0 to 10 seconds from the time of the start of the **Frequency** fall on the basis set out in the **Ancillary Services Agreement** and fully available by the latter, and sustainable for at least a further 20 seconds. The interpretation of the **Primary Response** to a – 0.5 Hz frequency change is shown diagrammatically in Figure CC.A.3.2 and Figure ECC.A.3.2
Prioritisation Category	**Prioritisation Category** has the meaning given to that term by the **Authority Guidance on Code Modification Prioritisation**.
Prioritisation Criteria	**Prioritisation Criteria** has the meaning given to that term by the **Authority Guidance on Code Modification Prioritisation**.
Private Network	A network which connects to a **Network Operator's System** and that network belongs to a **User** who is not classified as a **Generator**, **Network Operator** or **Non-Embedded Customer**.
Programming Phase	The period between the **Operational Planning Phase** and the **Control Phase**. It starts at the 8 weeks ahead stage and finishes at 17:00 hours on the day ahead of real time.
Proposal Notice	A notice submitted to **The Company** by a **User** which would like to undertake a **System Test**.

Proposal Report	A report submitted by the **Test Panel** which contains: (a) proposals for carrying out a **System Test** (including the manner in which the **System Test** is to be monitored); (b) an allocation of costs (including un-anticipated costs) between the affected parties (the general principle being that the **Test Proposer** will bear the costs); and (c) such other matters as the **Test Panel** considers appropriate. The report may include requirements for indemnities to be given in respect of claims and losses arising from a **System Test**.
Proposed Implementation Date	The proposed date(s) for the implementation of a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification** such date(s) to be either (i) described by reference to a specified period after a direction from the **Authority** approving the **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification** or (ii) a **Fixed Proposed Implementation Date**.
Proposer	In relation to a particular **Grid Code Modification Proposal**, the person who makes such **Grid Code Modification Proposal**.
Protection	The provisions for detecting abnormal conditions on a **System** and initiating fault clearance or actuating signals or indications.
Protection Apparatus	A group of one or more **Protection** relays and/or logic elements designated to perform a specified **Protection** function.
PSM Change Document	A document associated with a submission describing changes to the **NETS** or **Network Operator's** system or its operation and changes to the assumptions, as described in the **PSM Scenario Document**, used in the creation of a **Solved PSM** and/or the associated schedules forming part of the periodic information exchanges. Additional detail is provided in PC.G.6.
PSM Implementation Date	1st January 2028 unless otherwise agreed in accordance with PC.3.1.1.2.
PSM Interface Node	A point in an interconnected electrical system model that defines the boundary either side of which different parties are responsible for data.
PSM Scenario Document	A document associated with a submission which provides information relating to the assumptions used in preparation of the **Solved PSM** and the associated schedules. Additional detail is provided in PC.G.5.
Pumped Storage	A hydro unit in which water can be raised by means of pumps and stored to be used for the generation of electrical energy.
Pumped Storage Generating Unit	A **Generating Unit** at a **Pumped Storage Plant.**
Pumped Storage Generator	A **Generator** which owns and/or operates any **Pumped Storage Plant**.
Pumped Storage Plant	A **Power Station** comprising **Pumped Storage Generating Units**.

Pumped Storage Unit	A **Generating Unit** within a **Pumped Storage Plant**. For the avoidance of doubt, a **Pumped Storage Unit** is not considered to form part of an **Electricity Storage Unit** unless specifically declared by the **Generator**.
Purchase Contracts	A final and binding contract for the purchase of the **Main Plant and Apparatus**.
Q/Pmax	The ratio of **Reactive Power** to the **Maximum Capacity**. The relationship between **Power Factor** and **Q/Pmax** is given by the formula:- **Power Factor** = Cos $[\arctan[\frac{Q}{Pmax}]]$ For example, a **Power Park Module** with a Q/P value of +0.33 would equate to a **Power Factor** of Cos(arctan0.33) = 0.95 **Power Factor** lag.
Quick Resynchronisation Capability	The capability of a **Type C** or **Type D Power Generating Module** as defined in ECC.6.3.5.6. For the avoidance of doubt this requirement is only mandatory for **EU Code Generators** who own or operate a **Type C** or **Type D Power Generating Module** but does not preclude owners of other generation electing to provide the capability.
Quick Resynchronisation Unit Test	A test undertaken on **Generating Unit** forming part of a **Type C** or **Type D Power Generating Module** as detailed in OC5.7.2.5 necessary to determine its ability to demonstrate a **Quick Resynchronisation Capability**.
Range CCGT Module	A **CCGT Module** where there is a physical connection by way of a steam or hot gas main between that **CCGT Module** and another **CCGT Module** or other **CCGT Modules**, which connection contributes (if open) to efficient modular operation, and which physical connection can be varied by the operator.
Rated Field Voltage	Shall have the meaning ascribed to that term in **IEC** 34-16-1:1991 [equivalent to **British Standard BS**4999 Section 116.1: 1992].

Rated MW	The "rating-plate" MW output of a **Power Generating Module**, **Generating Unit**, **Power Park Module**, **Electricity Storage Module**, **HVDC Converter** or **DC Converter**, being: (a) that output up to which the **Generating Unit** was designed to operate (Calculated as specified in **British Standard BS** EN 60034 – 1: 1995); or (b) the nominal rating for the MW output of a **Power Park Module** or **Power Generating Module** being the maximum continuous electric output power which the **Power Park Module** or **Power Generating Module** was designed to achieve under normal operating conditions; or (c) the nominal rating for the MW import capacity and export capacity (if at a **DC Converter Station** or **HVDC Converter Station**) of a **DC Converter** or **HVDC Converter**. (d) in an importing mode, is that input up to which an **Electricity Storage Module** was designed to operate being the maximum continuous electric input which the **Electricity Storage Module** was designed to achieve under normal operating conditions. In an exporting mode is:- (i) that output up to which the **Synchronous Electricity Storage Unit** was designed to operate (Calculated as specified in **British Standard BS** EN 60034 – 1: 1995); or (ii) the nominal rating for the MW output of a **Non-Synchronous Electricity Storage Module** being the maximum continuous electric output power which the **Non-Synchronous Electricity Storage Module** was designed to achieve under normal operating conditions.
Reactive Despatch Instruction	Has the meaning set out in the **CUSC**.
Reactive Despatch Network Restriction	A restriction placed upon an **Embedded Power Generating Module**, **Embedded Generating Unit**, **Embedded Power Park Module** or **DC Converter** at an **Embedded DC Converter Station** or **HVDC Converter** at an **Embedded HVDC Converter Station** by the **Network Operator** that prevents the **Generator** or **DC Converter Station** owner or **HVDC System Owner** in question (as applicable) from complying with any **Reactive Despatch Instruction** with respect to that **Power Generating Module**, **Generating Unit**, **Power Park Module** or **DC Converter** at a **DC Converter Station** or **HVDC Converter** at a **HVDC Converter Station**, whether to provide MVArs over the range referred to in CC 6.3.2, ECC.6.3.2 or otherwise.
Reactive Despatch to Zero MVAr Network Restriction	A **Reactive Despatch Network Restriction** which prevents an **Embedded Power Generating Module**, an **Embedded Generating Unit**, **Embedded Power Park Module**, **Embedded HVDC System**, **HVDC Converter** at an **Embedded HVDC Converter Station** or **DC Converter** at an **Embedded DC Converter Station** from supplying power at zero MVAr at all **Active Power** output levels up to and including **Rated MW** at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**).
Reactive Energy	The integral with respect to time of the **Reactive Power**.

Reactive Power	The product of voltage and current and the sine of the phase angle between them measured in units of voltamperes reactive and standard multiples thereof, ie: 1000 VAr = 1 kVAr 1000 kVAr = 1 MVAr
Record of Inter-System Safety Precautions or **RISSP**	A written record of inter-system **Safety Precautions** to be compiled in accordance with the provisions of **OC8**.
Regenerative Braking	A method of braking in which energy is extracted from the parts braked, which may be returned directly to the **System** and the purpose of the braking is motion control.

Registered Capacity	(a) In the case of a **Generating Unit** other than that forming part of a **CCGT Module** or **Power Park Module** or **Power Generating Module**, the normal full load capacity of a **Generating Unit** as declared by the **Generator**, less the MW consumed by the **Generating Unit** through the **Generating Unit's Unit Transformer** when producing the same (the resultant figure being expressed in whole MW, or in MW to one decimal place). (b) In the case of a **CCGT Module** or **Power Park Module** owned or operated by a **GB Generator**, the normal full load capacity of the **CCGT Module** or **Power Park Module** (as the case may be) as declared by the **GB Generator**, being the **Active Power** declared by the **GB Generator** as being deliverable by the **CCGT Module** or **Power Park Module** at the **Grid Entry Point** (or in the case of an **Embedded CCGT Module** or **Power Park Module**, at the **User System Entry Point**), expressed in whole MW, or in MW to one decimal place. For the avoidance of doubt **Maximum Capacity** would apply to **Power Generating Modules** which form part of a **Large**, **Medium** or **Small Power Station**. (c) In the case of a **Power Station**, the maximum amount of **Active Power** deliverable by the **Power Station** at the **Grid Entry Point** (or in the case of an **Embedded Power Station** at the **User System Entry Point**), as declared by the **Generator**, expressed in whole MW, or in MW to one decimal place. The maximum **Active Power** deliverable is the maximum amount deliverable simultaneously by the **Power Generating Modules** and/or **Generating Units** and/or **CCGT Modules** and/or **Power Park Modules** less the MW consumed by the **Power Generating Modules** and/or **Generating Units** and/or **CCGT Modules** in producing that **Active Power** and forming part of a **Power Station**. (d) In the case of a **DC Converter** at a **DC Converter Station** or **HVDC Converter** at an **HVDC Converter Station**, the normal full load amount of **Active Power** transferable from a **DC Converter** or **HVDC Converter** at the **Onshore Grid Entry Point** (or in the case of an **Embedded DC Converter Station** or an **Embedded HVDC Converter Station** at the **User System Entry Point**), as declared by the **DC Converter Station** owner or **HVDC System Owner**, expressed in whole MW, or in MW to one decimal place. (e) In the case of a **DC Converter Station** or **HVDC Converter Station**, the maximum amount of **Active Power** transferable from a **DC Converter Station** or **HVDC Converter Station** at the **Onshore Grid Entry Point** (or in the case of an **Embedded DC Converter Station** or **Embedded HVDC Converter Station** at the **User System Entry Point**), as declared by the **DC Converter Station** owner or **HVDC System Owner**, expressed in whole MW, or in MW to one decimal place. (f) In the case of an **Electricity Storage Module**, the normal full load amount of **Active Power** transferable from an **Electricity Storage Module** at the **Grid Entry Point** (or in the case of an **Embedded Electricity Storage Module** at the **User System Entry Point**), as declared by the **Generator**, expressed in whole MW, or in MW to one decimal place.

Registered Data	Those items of **Standard Planning Data** and **Detailed Planning Data** which upon connection become fixed (subject to any subsequent changes).
Registered Import Capability	In the case of a **DC Converter Station** or **HVDC Converter Station** containing **DC Converters** or **HVDC Converters** connected to an **External System**, the maximum amount of **Active Power** transferable into a **DC Converter Station** or **HVDC Converter Station** at the **Onshore Grid Entry Point** (or in the case of an **Embedded DC Converter Station** or **Embedded HVDC Converter Station** at the **User System Entry Point**), as declared by the **DC Converter Station** owner or **HVDC System Owner**, expressed in whole MW. In the case of a **DC Converter** or **HVDC Converter** connected to an **External System** and in a **DC Converter Station** or **HVDC Converter Station**, the normal full load amount of **Active Power** transferable into a **DC Converter** or **HVDC Converter** at the **Onshore Grid Entry Point** (or in the case of an **Embedded DC Converter Station** or **Embedded HVDC Converter Station** at the **User System Entry Point**), as declared by the **DC Converter** owner or **HVDC System Owner**, expressed in whole MW. In the case of an **Electricity Storage Module**, the maximum amount of **Active Power** transferable into an **Electricity Storage Module** at the **Grid Entry Point** (or in the case of an **Embedded Electricity Storage Module** at the **User System Entry Point**), as declared by the **Generator**, expressed in whole MW.
Regulations	The Utilities Contracts Regulations 1996, as amended from time to time.
Regulated Sections	Parts of the Grid Code that are referenced in **Governance Rules** Annex GR.B as amended from time to time with the approval of the **Authority**.
Reheater Time Constant	Determined at **Registered Capacity**, the reheater time constant will be construed in accordance with the principles of the IEEE Committee Report "Dynamic Models for Steam and Hydro Turbines in Power System Studies" published in 1973 which apply to such phrase.
Rejected Grid Code Modification Proposal	A **Grid Code Modification Proposal** in respect of which the **Authority** has decided not to direct **The Company** to modify the **Grid Code** pursuant to the **ESO Licence** in the manner set out herein or, in the case of a **Grid Code Self Governance Proposals**, in respect of which the **Grid Code Review Panel** has voted not to approve.
Related Person	Means, in relation to an individual, any member of their immediate family, their employer (and any former employer of theirs within the previous 12 months), any partner with whom they are in partnership, and any company or **Affiliate** of a company in which they or any member of their immediate family controls more than 20% of the voting rights in respect of the shares of the company;
Relevant E&W Transmission Licensee	As the context requires **NGET**, and/or a **Competitively Appointed Transmission Licensee** with **Plant** and **Apparatus** located in **NGET's Transmission Area** and/or an **E&W Offshore Transmission Licensee**.
Relevant Party	Has the meaning given in GR15.10(a).

Relevant Scottish Transmission Licensee	As the context requires **SPT** and/or **SHETL**, and/or a **Competitively Appointed Transmission Licensee** with **Plant** and **Apparatus** located in either **SPT's** or **SHETL's Transmission Area** and/or a **Scottish Offshore Transmission Licensee**.
Relevant Transmission Licensee	Means National Grid Electricity Transmission plc (**NGET)** in its **Transmission Area** or SP Transmission plc (**SPT**) in its **Transmission Area** or Scottish Hydro-Electric Transmission plc (**SHETL**) in its **Transmission Area** or any **Offshore Transmission Licensee** in its **Transmission Area** or any **Competitively Appointed Transmission Licensee** with **Plant** and **Apparatus** located in **NGET's**, **SPT's** or **SHETL's Transmission Area** as appropriate.
Relevant Unit	As defined in the **STC**, Schedule 3.
Remote End HVDC Converter Station	An **HVDC Converter Station** which forms part of an **HVDC System** and is not directly connected to the AC part of the **GB Synchronous Area**.
Remote Transmission Assets	Any **Plant** and **Apparatus** or meters owned by **NGET** which: (a) are **Embedded** in a **User System** and which are not directly connected by **Plant** and/or **Apparatus** owned by **NGET** to a sub-station owned by **NGET**; and (b) are by agreement between **NGET** and such **User** operated under the direction and control of such **User**.
Replacement Reserves (RR)	Means, in the context of **Balancing Services,** the **Active Power** reserves available to restore or support the required level of FRR to be prepared for additional system imbalances, including generation reserves;
Requesting Safety Co-ordinator	The **Safety Co-ordinator** requesting **Safety Precautions**.
Responsible Engineer/ Operator	A person nominated by a **User** to be responsible for **System** control.
Responsible Manager	A manager who has been duly authorised by a **User** or a **Relevant Transmission Licensee** to sign **Site Responsibility Schedules** on behalf of that **User** or **Relevant Transmission Licensee** as the case may be.
Restoration Contractor	An **Anchor Restoration Contractor** or a **Top Up Restoration Contractor**.
Restoration Plan	Either a **Local Joint Restoration Plan**, a **Distribution Restoration Zone Plan** or an **Offshore Local Joint Restoration Plan** as the context requires.
Restoration Service Provider	A **User** or a party with a legal or contractual obligation to provide a service contributing to one or several measures of the **System Restoration Plan**.
Restoration Service Test	A test carried out on a **Plant** to confirm it has an **Anchor Plant Capablity** or **Top Up Restoration Capability**.

Re-synchronisation	The bringing of parts of the **System** which have become **Out of Synchronism** with any other **System** back into **Synchronism**, and like terms shall be construed accordingly.
ROCOF	**Rate of Change of Frequency**
Safety Co-ordinator	A person or persons nominated by a **Relevant E&W Transmission Licensee** and each **E&W User** in relation to **Connection Points** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Points**) on an **E&W Transmission System** and/or by the **Relevant Scottish Transmission Licensee** and each **Scottish User** in relation to **Connection Points** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Points**) on a **Scottish Transmission System** to be responsible for the co-ordination of **Safety Precautions** at each **Connection Point** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Points**) when work (which includes testing) is to be carried out on a **System** which necessitates the provision of **Safety Precautions** on **HV Apparatus** (as defined in OC8A.1.6.2 and OC8B.1.7.2), pursuant to **OC8**.
Safety From The System	That condition which safeguards persons when work is to be carried out on or near a **System** from the dangers which are inherent in the **System**.
Safety Key	A key unique at the **Location** capable of operating a lock which will cause an **Isolating Device** and/or **Earthing Device** to be **Locked**.
Safety Log	A chronological record of messages relating to safety co-ordination sent and received by each **Safety Co-ordinator** under **OC8**.
Safety Precautions	**Isolation** and/or **Earthing**.
Safety Rules	The rules of the **Relevant Transmission Licensee** or a **User** that seek to ensure that persons working on **Plant** and/or **Apparatus** to which the rules apply are safeguarded from hazards arising from the **System**.
Scottish Offshore Transmission System	An **Offshore Transmission System** with an **Interface Point** in Scotland.
Scottish Offshore Transmission Licensee	A person who owns or operates a **Scottish Offshore Transmission System** pursuant to a **Transmission Licence**.
Scottish Transmission System	Collectively **SPT's Transmission System** and **SHETL's Transmission System**, any **Competitively Appointed Transmission Licensee's Transmission System** with **Plant** and **Apparatus** located in **SPT's** or **SHETL's Transmission Area** and any **Scottish Offshore Transmission Systems**.
Scottish User	A **User** in Scotland or any **Offshore User** who owns or operates **Plant** and/or **Apparatus** connected (or which will at the **OTSUA Transfer Time** be connected) to a **Scottish Offshore Transmission System**.
Secondary BM Unit	Has the same meaning set out in the **BSC**.

Secondary Response	The automatic increase in **Active Power** output of a **Genset** or, as the case may be, the decrease in **Active Power Demand** in response to a **System Frequency** fall. This increase in **Active Power** output or, as the case may be, the decrease in **Active Power Demand** must be in accordance with the provisions of the relevant **Ancillary Services Agreement** which will provide that it will be fully available by 30 seconds from the time of the start of the **Frequency** fall and be sustainable for at least a further 30 minutes. The interpretation of the **Secondary Response** to a -0.5 Hz frequency change is shown diagrammatically in Figure CC.A.3.2 or Figure ECC.A.3.2.
Secretary of State	Has the same meaning as in the **Act**.
Secured Event	Has the meaning set out in the **Security and Quality of Supply Standard**.
Security and Quality of Supply Standard (SQSS)	The version of the document entitled 'Security and Quality of Supply Standard' established pursuant to the **Transmission Licence** and the **ESO Licence** in force at the time of entering into the relevant **Bilateral Agreement**.
Self-Governance Criteria	A proposed **Modification** that, if implemented, (a) is unlikely to have a material effect on: (i) existing or future electricity consumers; and (ii) competition in the generation, storage, distribution, or supply of electricity or any commercial activities connected with the generation, storage, distribution or supply of electricity; and (iii) the operation of the **National Electricity Transmission System**; and (iv) matters relating to sustainable development, safety or security of supply, or the management of market or network emergencies; and (v) the **Grid Code**'s governance procedures or the **Grid Code**'s modification procedures, and (b) is unlikely to discriminate between different classes of Users. (c) other than where the modification meets the **Fast Track Criteria**, will not constitute an amendment to the **Regulated Sections** of the Grid Code.
Self-Governance Modifications	A **Grid Code Modification Proposal** that does not fall within the scope of a **Significant Code Review** and that meets the **Self-Governance Criteria** or which the **Authority** directs is to be treated as such any direction under GR.24.4.
Self-Governance Statement	The statement made by the **Grid Code Review Panel** and submitted to the **Authority**: (a) confirming that, in its opinion, the **Self-Governance Criteria** are met and the proposed **Grid Code Modification Proposal** is suitable for the Self-Governance route; and (b) providing a detailed explanation of the **Grid Code Review Panel**'s reasons for that opinion.

Setpoint Voltage	The value of voltage at the **Grid Entry Point**, or **User System Entry Point** if **Embedded**, on the automatic control system steady state operating characteristic, as a percentage of the nominal voltage, at which the transfer of **Reactive Power** between a **Power Park Module**, **DC Converter**, **HVDC Converter** or **Non-Synchronous Generating Unit** and the **Transmission System**, or **Network Operator's** system if **Embedded**, is zero.
Settlement Period	A period of 30 minutes ending on the hour and half-hour in each hour during a day.
SF_6 Gas Zone	A segregated zone surrounding electrical conductors within a casing containing SF_6 gas.
SHETL	Scottish Hydro-Electric Transmission plc.
Shutdown	In the case of a **Generating Unit** is the condition of a **Generating Unit** where the generator rotor is at rest or on barring or equivalent. In the case of an **HVDC System** or **DC Converter Station**, is the condition of an **HVDC System** or **DC Converter Station** where the **HVDC System** or **DC Converter Station** is de-energised and therefore not importing or exporting **Apparent Power** to or from the **Total System**. In the case of **Auxiliaries**, the state where they are de-energised and not capable of fulfilling their function until restarted or resupplied.
Significant Code Review	Means the period commencing on the start date of a **Significant Code Review** as stated in the notice issued by the **Authority**, and ending in the circumstances described in GR.16.6 or GR.16.7, as appropriate.
Significant Code Review Phase	Means the period commencing on the start date of a **Significant Code Review** as stated in the notice issued by the **Authority**, and ending in the circumstances described in GR.16.6 or GR.16.7, as appropriate.
Significant Event	An **Event**, as defined in OC3.4.1.
Significant Incident	An **Event** which either: (a) was notified by a **User** to **The Company** under **OC7**, and which **The Company** considers has had or may have had a significant effect on the **National Electricity Transmission System**, and **The Company** requires the **User** to report that **Event** in writing in accordance with **OC10** and notifies the **User** accordingly; or (b) was notified by **The Company** to a **User** under **OC7**, and which that **User** considers has had or may have had a significant effect on that **User's System**, and that **User** requires **The Company** to report that **Event** in writing in accordance with the provisions of **OC10** and notifies **The Company** accordingly.
Simultaneous Tap Change	A tap change implemented on the generator step-up transformers of **Synchronised Gensets**, effected by **Generators** in response to an instruction from **The Company** issued simultaneously to the relevant **Power Stations**. The instruction, preceded by advance notice, must be effected as soon as possible, and in any event within one minute of receipt from **The Company** of the instruction.

Single Intraday Coupling	The continuous process where collected orders are matched and cross-zonal capacity is allocated simultaneously for different bidding zones in the intraday market.
Single Line Diagram	A schematic representation of a three-phase network in which the three phases are represented by single lines. The diagram shall include (but not necessarily be limited to) busbars, overhead lines, underground cables, power transformers and reactive compensation equipment. It shall also show where **Large Power Stations** are connected, and the points at which **Demand** is supplied.
Single Point of Connection	A single **Point of Connection**, with no interconnection through the **User's System** to another **Point of Connection**.
Site Common Drawings	Drawings prepared for each **Connection Site** (and in the case of **OTSDUW**, **Transmission Interface Site**) which incorporate **Connection Site** (and in the case of **OTSDUW**, **Transmission Interface Site**) layout drawings, electrical layout drawings, common protection/ control drawings and common services drawings.
Site Responsibility Schedule	A schedule containing the information and prepared on the basis of the provisions set out in Appendix 1 of the **CC** and Appendix E1 of the **ECC**.
Situation Data	Data in a **PSM** representing an operational state of an electricity system, including demand and generation output and the operational position of relevant switching devices.
Slope	The ratio of the steady state change in voltage, as a percentage of the nominal voltage, to the steady state change in **Reactive Power** output, in per unit of **Reactive Power** capability. For the avoidance of doubt, the value indicates the percentage voltage reduction that will result in a 1 per unit increase in **Reactive Power** generation.
Small Participant	Has the meaning given in the **CUSC**.

Small Power Station	A **Power Station** which is (a) directly connected to: (i) **NGET's Transmission System** where such **Power Station** has a **Registered Capacity** of less than 50 MW; or (ii) **SPT's Transmission System** where such **Power Station** has a **Registered Capacity** of less than 30 MW; or (iii) **SHETL's Transmission System** where such a **Power Station** has a **Registered Capacity** of less than 10 MW; or (iv) an **Offshore Transmission System** where such **Power Station** has a **Registered Capacity** of less than 10 MW; or, (b) **Embedded** within a **User System** (or part thereof) where such **User System** (or part thereof) is connected under normal operating conditions to: (i) **NGET's Transmission System** and such **Power Station** has a **Registered Capacity** of less than 50 MW; or (ii) **SPT's Transmission System** and such **Power Station** has a **Registered Capacity** of less than 30 MW; or (iii) **SHETL's Transmission System** and such **Power Station** has a **Registered Capacity** of less than 10 MW; or, (c) **Embedded** within a **User System** (or part thereof) where the **User System** (or part thereof) is not connected to the **National Electricity Transmission System**, although such **Power Station** is in: (i) **NGET's Transmission Area** and such **Power Station** has a **Registered Capacity** of less than 50 MW; or (ii) **SPT's Transmission Area** and such **Power Station** has a **Registered Capacity** of less than 30 MW; or (iii) **SHETL's Transmission Area** and such **Power Station** has a **Registered Capacity** of less than 10 MW; For the avoidance of doubt, a **Small Power Station** could comprise of **Type A**, **Type B**, **Type C** or **Type D Power Generating Modules**.
Solved PSM	A **PSM** which includes **Structural Data**, **Situation Data**, and **Solution Data**.
Solution Data	Data in a **PSM** comprising the results of a steady-state power flow calculation and/or short circuit calculation, together with topology, voltage, and power flow data representing a steady-state solution using coordinated **Structural Data** and **Situation Data**.
Space Weather Advisory Statement	A statement issued by **The Company** to advise of a space weather related matter for information and further consideration.
Space Weather Cancellation Notification	A notification issued by **The Company** following Met Office guidance signalling that a space weather situation has concluded.

Space Weather Cessation Notification	A notification issued by **The Company** following Met Office guidance signalling a return to a **Space Weather Prepare Notification** level.
Space Weather Experienced Notification	A notification issued by **The Company** following Met Office guidance that impacts (consistent with a space weather event) have been seen or experienced in **GB**. This triggers the preparation and issuing of **Space Weather Outcome Statements**.
Space Weather Imminent Notification	A notification issued by **The Company** following Met Office guidance of imminent space weather of a nature and anticipated level of G5 (using the Met Office ranking). A **Space Weather Imminent Notification** is likely to be issued 20 to 60 minutes ahead of a space weather event being forecast to impact the **NETS**.
Space Weather Outcome Statement	A statement that is issued by a **User** to **The Company** where, following the issuing of a **Space Weather Experienced Notification**, their **Plant** or **Apparatus** has seen or experienced impacts that they believe, at the time, are or may be of a nature consistent with a space weather event.
Space Weather Output Usable Declaration	A declaration of the **Output Usable** that would apply to a **Generator** in respect of their **Generating Unit** and/or **Power-Generating Module** and/or **Power Park Module**, or **Interconnector Owner** in respect of their **External Interconnection Circuits** or **Restoration Contractor** in respect of their **Plant** and **Apparatus** following the issue of a **Space Weather Imminent Notification** until such time as specified by the **Generator**, **Interconnector Owner** or **Restoration Contractor** after either a **Space Weather Cessation Notification** or a **Space Weather Cancellation Notification** being issued by **The Company**.
Space Weather Prepare Notification	A notification issued by **The Company** following Met Office guidance of space weather related activity that is of a nature and anticipated level of G5 (using the Met Office ranking). A **Space Weather Prepare Notification** is likely to be issued 12 to 36 hours ahead of a space weather event being forecast to impact the **NETS**.
Speeder Motor Setting Range	The minimum and maximum no-load speeds (expressed as a percentage of rated speed) to which the turbine is capable of being controlled, by the speeder motor or equivalent, when the **Generating Unit** terminals are on open circuit.
SPT	SP Transmission plc.
Standard Contract Terms	The standard terms and conditions applicable to **Ancillary Services** provided by **Demand Response Providers** and published on the **Website** from time to time.
Standard Modifications	A **Grid Code Modification Proposal** that does not fall within the scope of a **Significant Code Review** subject to any direction by the **Authority** pursuant to GR.16.3 and GR.16.4, nor meets the **Self-Governance Criteria** subject to any direction by the **Authority** pursuant to GR.24.4 and in accordance with any direction under GR.24.2. A **Grid Code Modification Proposal** that constitutes an amendment to the **Regulated Sections** of the Grid Code shall be a **Standard Modification** except where it is an **Urgent Modification** or where it meets the **Fast Track Criteria**.

Standard Planning Data	The general data required by **The Company** under the **PC**. It is generally also the data which **The Company** requires from a **User** in an application for a **CUSC Contract**, as reflected in the **PC**.
Standard Product	Means a harmonised balancing product defined by all EU TSOs for the exchange of balance services.
Specific Product	Means in the context of Balancing Services a product that is not a standard product.
Structural Data	Data in a **PSM** representing the characteristics of electricity system assets, including their capabilities and connectivity.
Start Time	The time named as such in an instruction issued by **The Company** pursuant to the **BC**.
Start-Up	In the case of a **Generating Unit** is the action of bringing a **Generating Unit** from **Shutdown** to **Synchronous Speed**. In the case of an **HVDC System** or **DC Converter Station**, is the action of bringing the **HVDC System** or **DC Converter Station** from **Shutdown** to a state where it is energised.
Statement of Readiness	Has the meaning set out in the **Bilateral Agreement** and/or **Construction Agreement**.
Station Board	A switchboard through which electrical power is supplied to the **Auxiliaries** of a **Power Station**, and which is supplied by a **Station Transformer**. It may be interconnected with a **Unit Board**.
Station Transformer	A transformer supplying electrical power to the **Auxiliaries** of (a) a **Power Station**, which is not directly connected to the **Generating Unit** terminals (typical voltage ratios being 132/11 kV or 275/11 kV), or (b) a **DC Converter Station** or **HVDC Converter Station**.
STC Committee	The committee established under the **STC**.
Steam Unit	A **Generating Unit** whose prime mover converts the heat-energy in steam to mechanical energy.
Storage User	A **Generator** who owns or operates one or more **Electricity Storage Modules**. For the avoidance of doubt: (a) **Assimilated Law** (Commission Regulation (EU) 2016/631, Commission Regulation (EU) 2016/1388 and Commission Regulation (EU) 2016/1485) shall not apply to **Storage Users**; and (b) the **European Connection Conditions** (**ECC**'s) shall apply to **Storage Users** on the basis set out in Paragraph ECC1.1(d).
Subtransmission PSM	A **PSM** with the scope as set out in PC.9.4.1.

Subtransmission System	The part of a **User's System** which operates at a single transformation below the voltage of the relevant **Transmission System**.
Substantial Modification	A **Modification** in relation to modernisation or replacement of the **User's Main Plant and Apparatus** which impacts its technical capabilities, which, following notification by the relevant **User** to **The Company**, results in substantial amendment to the **Bilateral Agreement**.
Supergrid Voltage	Any voltage greater than 200 kV.
Supplier	(a) A person supplying electricity under an **Electricity Supply Licence**; or (b) A person supplying electricity under exemption under the **Act**; in each case acting in its capacity as a supplier of electricity to **Customers** in **Great Britain**.
Surplus	A MW figure equal to the total **Output Usable:** (a) minus the forecast of **Active Power Demand**, and (b) minus the **Operational Planning Margin**.
Switch-based Model	A **PSM** that includes all relevant switching devices. Such a model can be used to represent different system topologies, compared to a node and branch model which generally only represents a single system topology.
Synchronised	(a) The condition where an incoming **Power Generating Module**, **Generating Unit** or **Power Park Module** or **DC Converter** or **HVDC Converter** or **System** is connected to the busbars of another **System** so that the **Frequencies** and phase relationships of that **Power Generating Module**, **Generating Unit**, **Power Park Module**, **DC Converter**, **HVDC Converter** or **System**, as the case may be, and the **System** to which it is connected are identical, like terms shall be construed accordingly e.g. **"Synchronism"**. (b) The condition where an importing **BM Unit** is consuming electricity.
Synchronous Area	An area covered by synchronously interconnected **Transmission Licensees**, such as the **Synchronous Areas** of Continental Europe, Great Britain, Ireland-Northern Ireland and Nordic and the power systems of Lithuania, Latvia and Estonia, together referred to as 'Baltic' which are part of a wider **Synchronous Area**.
Synchronous Electricity Storage Module	A **Synchronous Power Generating Module** which can convert or re-convert electrical energy from another source of energy such that the frequency of the generated voltage, the rotor speed and the frequency of network voltage are in a constant ratio and thus in synchronism. For the avoidance of doubt a **Synchronous Electricity Storage Module** could comprise of one or more **Synchronous Electricity Storage Units**.
Synchronous Electricity Storage Unit	A **Synchronous Generating Unit** which can supply or absorb electrical energy such that the frequency of the generated voltage, the rotor speed and the frequency of the equipment are in constant ratio and thus in synchronism with the network.

Synchronising Generation	The amount of MW (in whole MW) produced at the moment of synchronising.
Synchronising Group	A group of two or more **Gensets**) which require a minimum time interval between their **Synchronising** or **De-Synchronising** times.
Synchronous Compensation	The operation of rotating synchronous **Apparatus** for the specific purpose of either the generation or absorption of **Reactive Power**.
Synchronous Compensation Equipment	**Apparatus** which has the function of providing **Synchronous Compensation**. For the avoidance of doubt, one or more **Synchronous Compensation** units would not constitute an **Electricity Storage Module** unless it could be operated in a controllable manner.
Synchronous Electricity Storage Module	A **Synchronous Power Generating Module** which can convert and reconvert electrical energy from another source of energy such that the frequency of the generated voltage, the rotor speed and the frequency of network voltage are in a constant ratio and thus in synchronism. For the avoidance of doubt a **Synchronous Electricity Storage Module** could comprise of one or more **Synchronous Electricity Storage Units**.
Synchronous Electricity Storage Unit	A **Synchronous Generating Unit** which can supply and absorb electrical energy such that the frequency of the generated voltage, the rotor speed and the frequency of the equipment are in constant ratio and thus in synchronism with the network.
Synchronous Flywheel	An item of synchronously rotating **Plant** for the specific purpose of contributing inertia to the **System**. One or more **Synchronous Flywheels** would not be considered to form an **Electricity Storage Module** unless it could be operated in a controllable manner for its AC input and output power.
Synchronous Generating Unit	Any **Onshore Synchronous Generating Unit** or **Offshore Synchronous Generating Unit**.
Synchronous Generating Unit Performance Chart	A diagram showing the **Active Power** (MW) and **Reactive Power** (MVAr) capability limits within which a **Synchronous Generating Unit** at its stator terminals (which is part of a **Synchronous Power Generating Module**) will be expected to operate under steady state conditions.
Synchronous Power-Generating Module	An indivisible set of installations which can convert or re-convert electrical energy from another source of energy such that the frequency of the supplied voltage, the rotor speed and the frequency of network voltage are in a constant ratio and thus in synchronism. For the avoidance of doubt, a **Synchronous Power Generating Module** could comprise of one or more **Synchronous Generating Units** or one or more **Synchronous Electricity Storage Units**.
Synchronous Power Generating Module Matrix	The matrix described in Appendix 1 to BC1 under the heading **Synchronous Power Generating Module Matrix**.
Synchronous Power Generating Module Planning Matrix	A matrix in the form set out in Appendix 2 of OC2 showing the combination of **Synchronous Generating Units** within a **Synchronous Power Generating Module** which would be running in relation to any given MW output.

Synchronous Power Generating Unit	Has the same meaning as a **Synchronous Generating Unit** and would be considered to be part of a **Power Generating Module**.
Synchronous Speed	That speed required by a **Generating Unit** to enable it to be **Synchronised** to a **System**.
System	Any **User System** and/or the **National Electricity Transmission System**, as the case may be.
System Ancillary Services	Collectively **Part 1 System Ancillary Services** and **Part 2 System Ancillary Services**.
System Constraint	A limitation on the use of a **System** due to lack of transmission capacity or other **System** conditions.
System Constrained Capacity	That portion of **Registered Capacity** or Regis**tered Import Capacity** not available due to a **System Constraint**.
System Constraint Group	A part of the **National Electricity Transmission System** which, because of **System Constraints**, is subject to limits of **Active Power** which can flow into or out of (as the case may be) that part.
System Defence Plan	A document prepared by **The Company**, as published on its **Website**, outlining how the requirements of the "defence plan", as provided for by **Assimilated Law** (Commission Regulation (EU) 2017/2196), has been implemented within the **GB Synchronous Area**.
System Fault Dependability Index or **Dp**	A measure of the ability of **Protection** to initiate successful tripping of circuit-breakers which are associated with a faulty item of **Apparatus**. It is calculated using the formula: **Dp** = $1 - F_1/A$ Where: A = Total number of **System** faults F_1 = Number of **System** faults where there was a failure to trip a circuit-breaker.
System Incidents Report	A report submitted to the GCRP on a monthly basis, containing, but not limited to, a list of **Significant Events**, as detailed in OC3.4.1.
System Margin	The margin in any period between (a) the sum of Maximum Export Limits and (b) forecast **Demand** and the **Operating Margin**, for that period.
System Negative Reserve Active Power Margin or **System NRAPM**	That margin of **Active Power** sufficient to allow the largest loss of **Load** at any time.
System Operator - Transmission Owner Code or **STC**	Has the meaning set out in the **ESO Licence.**
System Restoration	The procedure necessary for a recovery from a **Total Shutdown** or **Partial Shutdown**.

System Restoration Region	Those regions of the **Total System** as defined in Appendix 1 of OC9.
System Restoration Plan	A document prepared by **The Company**, as published on its **Website**, outlining how the requirements of the "restoration plan", as defined in **Assimilated Law** (Commission Regulation (EU) 2017/2196), has been implemented within the **GB Synchronous Area**.
System Telephony	An alternative method by which a **User's Responsible Engineer/Operator**, the relevant **Transmission Licensees' Control Engineers** and **The Company's Control Engineer(s)** speak to one and another for the purposes of control of the **Total System** in both normal operating conditions and where practicable, emergency operating conditions.
System Tests	Tests which involve simulating conditions, or the controlled application of irregular, unusual or extreme conditions, on the **Total System**, or any part of the **Total System**, but which do not include commissioning or recommissioning tests or any other tests of a minor nature.
System to Demand Intertrip Scheme	An intertrip scheme which disconnects **Demand** when a **System** fault has arisen to prevent abnormal conditions occurring on the **System**.
System to Generator Operational Intertripping	A **Balancing Service** involving the initiation by a **System to Generator Operational Intertripping Scheme** of automatic tripping of the **User's** circuit breaker(s), or **Relevant Transmission Licensee's** circuit breaker(s) where agreed by **The Company**, the **User** and the **Relevant Transmission Licensee**, resulting in the tripping of **BM Unit(s)** or (where relevant) **Generating Unit(s)** comprised in a **BM Unit** to prevent abnormal system conditions occurring, such as over voltage, overload, **System** instability, etc, after the tripping of other circuit-breakers following power **System** fault(s).
System to Generator Operational Intertripping Scheme	A **System** to **Generating Unit** or **System** to **CCGT Module** or **System** to **Power Park Module** or **System** to **Power Generating Module** or **System** to **Electricity Storage Module Intertripping Scheme** forming a condition of connection and specified in Appendix F3 of the relevant **Bilateral Agreement**, being either a **Category 1 Intertripping Scheme**, **Category 2 Intertripping Scheme**, **Category 3 Intertripping Scheme** or **Category 4 Intertripping Scheme**.
Target Frequency	That **Frequency** determined by **The Company**, in its reasonable opinion, as the desired operating **Frequency** of the **Total System** or of a relevant **Power Island**. This will normally be 50.00 Hz plus or minus 0.05 Hz, except in exceptional circumstances as determined by **The Company** for example which may be operating the **System** during disputes affecting fuel supplies or following a **Total Shutdown** or **Partial Shutdown** where **Power Islands** are established, and each **Power Island** has its own unique **Frequency**.
Technical Specification	In relation to **Plant** and/or **Apparatus**, (a) the relevant **European Specification**; or (b) if there is no relevant **European Specification**, other relevant standards which are in common use in the European Community.
Test Co-ordinator	A person who co-ordinates **System Tests**.

Test Panel	A panel, whose composition is detailed in **OC12**, which is responsible, inter alia, for considering a proposed **System Test**, and submitting a **Proposal Report** and a **Test Programme**.
Test Plan	A document prepared by **The Company**, as published on its **Website**, outlining how the requirements of the "**Test Plan**", as provided for by **Assimilated Law** (Commission Regulation (EU) 2017/2196), has been implemented within the **GB Synchronous Area**.
Test Programme	A programme submitted by the **Test Panel** to **The Company**, the **Test Proposer**, and each **User** identified by **The Company** under OC12.4.2.1, which states the switching sequence and proposed timings of the switching sequence, a list of those staff involved in carrying out the **System Test** (including those responsible for the site safety) and such other matters as the **Test Panel** deems appropriate.
Test Proposer	The person who submits a **Proposal Notice**.
Test Signal	A signal in the form of a sine wave, applied to a **GBGF-I** to demonstrate its ability to contribute to **Active Damping Power**.
The Company	Has the meaning given to **NESO** or **National Energy System Operator**.
The Company Control Engineer	The nominated person employed by **The Company** to direct the operation of the **National Electricity Transmission System** or such person as nominated by **The Company**.
The Company Operational Strategy	**The Company's** operational procedures which form the guidelines for operation of the **National Electricity Transmission System**.
Top Up Restoration Capability	The ability of a **Restoration Contractor's Plant** to **Start-Up** from **Shutdown** and to be **Synchronised** and remain **Synchronised** to a part of the **Total System** upon instruction from **The Company** or **Relevant Transmission Licensee** (in Scotland) or relevant **Network Operator**, within a defined time period, pursuant to the terms of the **Top Up Restoration Contract**, once external electrical power supplies are restored to that **Restoration Contractor's** site. In the case of a **Local Joint Restoration Plan**, an instruction from **The Company** or **Transmission Licensee** in Scotland to a **Restoration Contractor** in respect of their **Top Up Restoration Plant** would generally be issued immediately after an instruction to an **Anchor Restoration Contractor** with the **Top Up Capability** expected to be delivered consecutively after external power supplies had been restored to the **Top Up Restoration Contractor's** site. In the case of a **Distribution Restoration Zone Plan**, an instruction from a **Network Operator** to a **Restoration Contractor** in respect of their **Top Up Restoration Plant** would generally be issued immediately after an instruction to an **Anchor Restoration Contractor** with the **Top Up Capability** expected to be delivered consecutively after external power supplies had been restored to the **Top Up Restoration Contractor's** site. For the avoidance of doubt a **Restoration Contractor** with a **Top Up Restoration Capability** shall have sufficient **Auxiliary Energy Supplies** to be capable of delivering the service they have agreed to provide as soon as their **Connection Point** or **User System Entry Point** is energised.

Top Up Restoration Contract	In the case of a **Local Joint Restoration Plan** or **Offshore Local Joint Restoration Plan** is a contract between **The Company** and **Top Up Restoration Contractor** for the provision of a **Top Up Restoration Capability**. In the case of a **Distribution Restoration Zone Plan**, an agreement between **The Company** and relevant **Network Operator** and **Top Up Restoration Contractor** for the provision of **Top Up Restoration Capability**.
Top Up Restoration Contractor	A **Restoration Contractor** with a **Top Up Restoration Contract.**
Top Up Restoration Plant	**Plant** owned and operated by a **Top Up Restoration Contractor**.
Top Up Restoration Plant Test	A test conducted on a **Top Up Restoration Plant** to confirm it is capable of meeting the requirements of a **Top Up Restoration Contract**.
Total Shutdown	The situation existing when all generation has ceased and there is no electricity supply from **External Interconnections** and, therefore, the **Total System** has shutdown with the result that it is not possible for the **Total System** to begin to function again without **The Company's** directions relating to **System Restoration**.
Total System	The **National Electricity Transmission System** and all **User Systems** in the **National Electricity Transmission System Operator Area**.
Trading Point	A commercial and, where so specified in the Grid Code, an operational interface between a **User** and **The Company**, which a **User** has notified to **The Company**.
Transfer Date	Such date as may be appointed by the **Secretary of State** by order under section 65 of the **Act**.
Transmission	Means, when used in conjunction with another term relating to equipment or a site, whether defined or not, that the associated term is to be read as being part of or directly associated with the **National Electricity Transmission System**, and not of or with the **User System**.
Transmission Area	Has the meaning set out in the **Transmission Licence** of a **Transmission Licensee**.
Transmission Connected Demand Facilities	A **Demand Facility** which has a **Grid Supply Point** to the **National Electricity Transmission System**.
Transmission DC Converter	Any **Transmission Licensee Apparatus** (or **OTSUA** that will become **Transmission Licensee Apparatus** at the **OTSUA Transfer Time**) used to convert alternating current electricity to direct current electricity, or vice versa. A **Transmission Network DC Converter** (which could include an **HVDC System** owned by an **Offshore Transmission Licensee** or **Generator** in respect of **OTSUA**) is a standalone operative configuration at a single site comprising one or more converter bridges, together with one or more converter transformers, converter control equipment, essential protective and switching devices and auxiliaries, if any, used for conversion.
Transmission Entry Capacity	Has the meaning set out in the **CUSC**.

Transmission Interface Circuit	In **NGET's Transmission Area** or a **Competitively Appointed Transmission Licensee** with **Plant and Apparatus** located in **NGET's Transmission Area**, a **Transmission** circuit which connects a **System** operating at a voltage above 132 kV to a **System** operating at a voltage of 132 kV or below. In **SHETL's Transmission Area** and **SPT's Transmission Area**, or a **Competitively Appointed Transmission Licensee** with **Plant** and **Apparatus** located in **SHETL's Transmission Area** and/or **SPT's Transmission Area**, a **Transmission** circuit which connects a **System** operating at a voltage of 132 kV or above to a **System** operating at a voltage below 132 kV.
Transmission Interface Point	Means the electrical point of connection between the **Offshore Transmission System** and an **Onshore Transmission System**.
Transmission Interface Site	The site at which the **Transmission Interface Point** is located.
Transmission Licence	A licence granted under Section 6(1)(b) of the **Act**.
Transmission Licensee	Any **Onshore Transmission Licensee** or **Offshore Transmission Licensee**.
Transmission Site	Means a site owned (or occupied pursuant to a lease, licence or other agreement) by a **Relevant Transmission Licensee** in which there is a **Connection Point**. For the avoidance of doubt, a site owned by a **User** but occupied by the **Relevant Transmission Licensee** as aforesaid, is a **Transmission Site**.
Transmission System	Has the same meaning as the term "licensee's transmission system" in the **Transmission Licence** of a **Transmission Licensee**. Where references are made in this document to **NGET's**, **SPT's**, or **SHETL's Transmission System**, such reference shall be deemed to include: • a **Competitively Appointed Transmission Licensee's Transmission System** where that **Competitively Appointed Transmission Licensee**'s **Transmission System** has onshore interface point(s) with only one of **NGET's, SPT's**, or **SHETL's Transmission Systems**; or • elements of a **Competitively Appointed Transmission Licensee**'s **Transmission System** located within **NGET's**, **SPT's**, or **SHETL's Transmission Area** where the **Competitively Appointed Transmission Licensee's Transmission System** has onshore interface point(s) with more than one of **NGET's**, **SPT's** and/or **SHETL's Transmission Systems**.
Turbine Time Constant	Determined at **Registered Capacity**, the turbine time constant will be construed in accordance with the principles of the IEEE Committee Report "Dynamic Models for Steam and Hydro Turbines in Power System Studies" published in 1973 which apply to such phrase.
Type A Power Generating Module	A **Power Generating Module** (including an **Electricity Storage Module**) with a **Grid Entry Point** or **User System Entry Point** below 110 kV and a **Maximum Capacity** of 0.8 kW or greater but less than 1 MW.

Type B Power Generating Module	A **Power Generating Module** (including an **Electricity Storage Module**) with a **Grid Entry Point** or **User System Entry Point** below 110 kV and a **Maximum Capacity** of 1 MW or greater but less than 10 MW.
Type C Power Generating Module	A **Power Generating Module** (including an **Electricity Storage Module**) with a **Grid Entry Point** or **User System Entry Point** below 110 kV and a **Maximum Capacity** of 10 MW or greater but less than 50 MW.
Type D Power Generating Module	A **Power Generating Module**: (including an **Electricity Storage Module**): with a **Grid Entry Point** or **User System Entry Point** at, or greater than, 110 kV; or with a **Grid Entry Point** or **User System Entry Point** below 110 kV and with **Maximum Capacity** of 50 MW or greater.
Unbalanced Load	The situation where the **Load** on each phase is not equal.
Under-excitation Limiter	Shall have the meaning ascribed to that term in **IEC** 34-16-1:1991 [equivalent to **British Standard BS**4999 Section 116.1: 1992].
Under Frequency Relay	An electrical measuring relay intended to operate when its characteristic quantity (**Frequency**) reaches the relay settings by a decrease in **Frequency**.
Unit Board	A switchboard through which electrical power is supplied to the **Auxiliaries** of a **Generating Unit** and which is supplied by a **Unit Transformer**. It may be interconnected with a **Station Board**.
Unit Transformer	A transformer directly connected to a **Generating Unit's** terminals, and which supplies power to the **Auxiliaries** of a **Generating Unit**. Typical voltage ratios are 23/11 kV and 15/6.6 kV.
Unit Load Controller Response Time Constant	The time constant, expressed in units of seconds, of the power output increase which occurs in the **Secondary Response** timescale in response to a step change in **System Frequency**.
Unresolved Issues	Any relevant Grid Code provisions or **Bilateral Agreement** requirements identified by **The Company** with which the relevant **User** has not demonstrated compliance to **The Company's** reasonable satisfaction at the date of issue of the **Preliminary Operational Notification** and/or **Interim Operational Notification** and/or **Limited Operational Notification** and which are detailed in such **Preliminary Operational Notification** and/or **Interim Operational Notification** and/or **Limited Operational Notification**.
Urgent Modification	A **Grid Code Modification Proposal** treated or to be treated as an **Urgent Modification** in accordance with GR.23.
User	A term utilised in various sections of the Grid Code to refer to the persons using the **National Electricity Transmission System**, as more particularly identified in each section of the Grid Code concerned. In the **Preface** and the **General Conditions** the term means any person to whom the Grid Code applies. The term **User** includes an **EU Code User** and a **GB Code User**.

User Data File Structure	The file structure given at **DRC 18** which will be specified by **The Company** which a **Generator** or **DC Converter Station** owner or **HVDC System Owner** must use for the purposes of the **CP** or the **ECP** to submit **DRC** data Schedules and information demonstrating compliance with the Grid Code and, where applicable, with the **CUSC Contract(s)**, unless otherwise agreed by **The Company**.
User Development	In the **PC** means either **User's Plant** and/or **Apparatus** to be connected to the **National Electricity Transmission System**, or a **Modification** relating to a **User's Plant** and/or **Apparatus** already connected to the **National Electricity Transmission System**, or a proposed new connection or **Modification** to the connection within the **User System**.
User Self Certification of Compliance	A certificate, in the form attached at CP.A.2.(1) or ECP.A.2.(1) completed by a **Generator** or **DC Converter Station** owner or **HVDC System Owner** to which the **Compliance Statement** is attached which confirms that such **Plant** and **Apparatus** complies with the relevant Grid Code provisions and where appropriate, with the **CUSC Contract**(s), as identified in the **Compliance Statement** and, if appropriate, identifies any **Unresolved Issues** and/or any exceptions to such compliance and details the derogation(s) granted in respect of such exceptions.
User Site	A site owned (or occupied pursuant to a lease, licence or other agreement) by a **User** in which there is a **Connection Point**. For the avoidance of doubt, a site owned by a **Relevant Transmission Licensee** but occupied by a **User** as aforesaid, is a **User Site**.
User System	Any system owned or operated by a **User** comprising:- (a) **Power Generating Modules** or **Generating Units**; and/or (b) Systems consisting (wholly or mainly) of electric lines used for the distribution of electricity from **Grid Supply Points** or **Generating Units** or **Power Generating Modules** or other entry points to the point of delivery to **Customers**, or other **Users**; and **Plant** and/or **Apparatus** (including prior to the **OTSUA Transfer Time**, any **OTSUA**) connecting:- (c) The system as described above; or (d) **Non-Embedded Customers** equipment; to the **National Electricity Transmission System** or to the relevant other **User System**, as the case may be. The **User System** includes any **Remote Transmission Assets** operated by such **User** or other person and any **Plant** and/or **Apparatus** and meters owned or operated by the **User** or other person in connection with the distribution of electricity but does not include any part of the **National Electricity Transmission System**.

User System Entry Point	A point at which an **Embedded**; **Power Generating Module**, **Generating Unit**, **CCGT Module**, **CCGT Unit**, **Power Park Module**, **Electricity Storage Module**, **DC Converter**; or **HVDC Converter**, connects to the **User System**.
Virtual Lead Party	As defined in the **BSC**.
Voltage Jump Reactive Power	The transient **Reactive Power** injected or absorbed from a **Grid Forming Plant** to the **Total System** as a result of either a step or ramp change in the difference between the voltage magnitude and/or phase of the voltage of the **Internal Voltage Source** of the **Grid Forming Plant** and **Grid Entry Point** or **User System Entry Point**. In the event of a voltage magnitude and phase change at the **Grid Entry Point** or **User System Entry Point**, a **Grid Forming Plant** will instantaneously (within 5 ms) supply **Voltage Jump Reactive Power** to the **Total System** as a result of the voltage magnitude change.
Water Time Constant	Bears the meaning ascribed to the term "Water inertia time" in **IEC**308.
Weather Corrected	The normalised outturn **Demand** figures based on **Annual ACS Conditions** for dates and times that occur during calendar week 44 through to calendar week 12 (inclusive) or **Average Conditions** for dates and times that occur between calendar weeks 13 to calendar week 43 (inclusive) which shall be established by the relevant **Network Operator** on a best endeavours basis.
Website	The site established by **The Company** on the World-Wide Web for the exchange of information among **Users** and other interested persons in accordance with such restrictions on access as may be determined from time to time by **The Company**.
Weekly ACS Conditions	Means that particular combination of weather elements that gives rise to a level of peak **Demand** within a week, taken to commence on a Monday and end on a Sunday, which has a particular chance of being exceeded as a result of weather variation alone. This particular chance is determined such that the combined probabilities of **Demand** in all weeks of the year exceeding the annual peak **Demand** under **Annual ACS Conditions** is 50%, and in the week of maximum risk the weekly peak **Demand** under **Weekly ACS Conditions** is equal to the annual peak **Demand** under **Annual ACS Conditions**.

WG Consultation Alternative Request	Any request from an **Authorised Electricity Operator**; the **Citizens Advice** or the **Citizens Advice Scotland**, **The Company** or a **Materially Affected Party** for a **Workgroup Alternative Grid Code Modification** to be developed by the **Workgroup** expressed as such and which contains the information referred to at GR.20.16. For the avoidance of doubt, any **WG Consultation Alternative Request** does not constitute either a **Grid Code Modification Proposal** or a **Workgroup Alternative Grid Code Modification**.
Workgroup	A **Workgroup** established by the **Grid Code Review Panel** pursuant to GR.20.1.
Workgroup Consultation	As defined in GR.20.13, and any further consultation which may be directed by the **Grid Code Review Panel** pursuant to GR.20.20.
Workgroup Alternative Grid Code Modification	An alternative modification to the **Grid Code Modification Proposal** developed by the **Workgroup** under the **Workgroup** terms of reference (either as a result of a **Workgroup Consultation** or otherwise) and which is believed by a majority of the members of the **Workgroup** or by the chairperson of the **Workgroup** to better facilitate the **Grid Code Objectives** than the **Grid Code Modification Proposal** or the current version of the **Grid Code**.
Zonal System Security Requirements	That generation required, within the boundary circuits defining the **System Zone**, which when added to the secured transfer capability of the boundary circuits exactly matches the **Demand** within the **System Zone**.

GD.2 Construction of References

GD.2.1 In the Grid Code:

(i) a table of contents, a Preface, a Revision section, headings, and the Appendix to this **Glossary and Definitions** are inserted for convenience only and shall be ignored in construing the Grid Code;

(ii) unless the context otherwise requires, all references to a particular paragraph, sub-paragraph, Appendix or Schedule shall be a reference to that paragraph, sub-paragraph Appendix or Schedule in or to that part of the Grid Code in which the reference is made;

(iii) unless the context otherwise requires, the singular shall include the plural and vice versa, references to any gender shall include all other genders and references to persons shall include any individual, body corporate, corporation, joint venture, trust, unincorporated association, organisation, firm or partnership and any other entity, in each case whether or not having a separate legal personality;

(iv) references to the words "include" or "including" are to be construed without limitation to the generality of the preceding words;

(v) unless there is something in the subject matter or the context which is inconsistent therewith, any reference to an Act of Parliament or any Section of or Schedule to, or other provision of an Act of Parliament shall be construed at the particular time, as including a reference to any modification, extension or re-enactment thereof then in force and to all instruments, orders and regulations then in force and made under or deriving validity from the relevant Act of Parliament;

(vi) where the **Glossary and Definitions** refers to any word or term which is more particularly defined in a part of the Grid Code, the definition in that part of the Grid Code will prevail (unless otherwise stated) over the definition in the **Glossary and Definitions** in the event of any inconsistency;

(vii) a cross-reference to another document or part of the Grid Code shall not of itself impose any additional or further or co-existent obligation or confer any additional or further or co-existent right in the part of the text where such cross-reference is contained;

(viii) nothing in the Grid Code is intended to or shall derogate from **The Company's** statutory or licence obligations;

(ix) a "holding company" means, in relation to any person, a holding company of such person within the meaning of section 736, 736A and 736B of the Companies Act 1985 as substituted by section 144 of the Companies Act 1989 and, if that latter section is not in force at the **Transfer Date**, as if such latter section were in force at such date;

(x) a "subsidiary" means, in relation to any person, a subsidiary of such person within the meaning of section 736, 736A and 736B of the Companies Act 1985 as substituted by section 144 of the Companies Act 1989 and, if that latter section is not in force at the **Transfer Date**, as if such latter section were in force at such date;

(xi) references to time are to London time; and

(xii) (a) Save where (b) below applies, where there is a reference to an item of data being expressed in a whole number of MW, fractions of a MW below 0.5 shall be rounded down to the nearest whole MW and fractions of a MW of 0.5 and above shall be rounded up to the nearest whole MW;

(b) In the case of the definition of **Registered Capacity** or **Maximum Capacity**, fractions of a MW below 0.05 shall be rounded down to one decimal place and fractions of a MW of 0.05 and above shall be rounded up to one decimal place.

(xiii) For the purposes of the Grid Code, physical quantities such as current or voltage are not defined terms as their meaning will vary depending upon the context of the obligation. For example, voltage could mean positive phase sequence root mean square voltage, instantaneous voltage, phase to phase voltage, phase to earth voltage. The same issue equally applies to current, and therefore the terms current and voltage should remain undefined with the meaning depending upon the context of the application. **Assimilated Law** (Commission Regulation (EU) 2016/631) defines requirements of current and voltage but they have not been adopted as part of EU implementation for the reasons outlined above.

(xiv) Except where expressly stated to the contrary, reference to Commission Regulations means the Commission Regulation (EU) as it forms part of **Assimilated Law**, as such regulation may be amended.

< END OF GLOSSARY & DEFINITIONS>

PLANNING CODE
(PC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

PC.1 INTRODUCTION ... 2

PC.2 OBJECTIVE ... 3

PC.3 SCOPE ... 4

PC.4 PLANNING PROCEDURES ... 7

PC.5 PLANNING DATA ... 11

PC.6 PLANNING STANDARDS ... 14

PC.7 PLANNING LIAISON ... 14

PC.8 OTSDUW PLANNING LIAISION ... 16

PC.9 SUBMISSION OF SYSTEM MODELS AND INFORMATION BY NETWORK OPERATORS TO THE COMPANY ... 17

PC.7 PLANNING LIAISON ... 26

PC.10 SUBMISSION OF SYSTEM MODELS AND INFORMATION BY THE COMPANY TO NETWORK OPERATORS ... 27

APPENDIX A - PLANNING DATA REQUIREMENTS ... 34

PART 1 - STANDARD PLANNING DATA ... 38

PC.A.2 USER'S SYSTEM (AND OTSUA) DATA ... 38

PC.A.3 GENERATING UNIT AND DC CONVERTER DATA ... 46

PC.A.4 DEMAND AND ACTIVE ENERGY DATA ... 55

PART 2 - DETAILED PLANNING DATA ... 61

PC.A.5 GENERATING UNIT, POWER PARK MODULE, DC CONVERTER AND OTSDUW PLANT AND APPARATUS DATA ... 61

PC.A.6 USERS' SYSTEM DATA ... 84

PC.A.7 ADDITIONAL DATA FOR NEW TYPES OF POWER STATIONS, DC CONVERTER STATIONS, OTSUA AND CONFIGURATIONS ... 89

PART 3 – DETAILED PLANNING DATA ... 90

APPENDIX B - SINGLE LINE DIAGRAMS ... 99

APPENDIX C - TECHNICAL AND DESIGN CRITERIA ... 102

PART 1 – SHETL's TECHNICAL AND DESIGN CRITERIA ... 102

PART 2 - SPT's TECHNICAL AND DESIGN CRITERIA ... 104

APPENDIX D - DATA NOT DISCLOSED TO A RELEVANT TRANSMISSION LICENSEE ... 105

APPENDIX E - OFFSHORE TRANSMISSION SYSTEM AND OTSDUW PLANT AND APPARATUS TECHNICAL AND DESIGN CRITERIA ... 108

APPENDIX F - OTSDUW DATA AND INFORMATION AND OTSDUW NETWORK DATA AND INFORMATION ... 109

APPENDIX G – PERFORMANCE CHART EXAMPLES ... 111

APPENDIX G - NETWORK OPERATOR AND THE COMPANY PLANNING DATA EXCHANGE ... 113

PC.1 INTRODUCTION

PC.1.1 The **Planning Code** ("**PC**") specifies the technical and design criteria and procedures to be applied by **The Company** in the planning and development of the **National Electricity Transmission System** and to be taken into account by **Users** in the planning and development of their own **Systems**. In the case of **OTSUA**, the **PC** also specifies the technical and design criteria and procedures to be applied by the **User** in the planning and development of the **OTSUA**. It details information to be supplied by **Users** to **The Company**, and certain information to be supplied by **The Company** to **Users**. **The Company** has obligations under the **STC** to inform **Relevant Transmission Licensees** of data required for the planning of the **National Electricity Transmission System**. In respect of **PC** data, **The Company** may pass on **User** data to a **Relevant Transmission Licensee**, as detailed in PC.3.4 and PC.3.5.

PC.1.1A Provisions of the **PC** which apply in relation to **OTSDUW** and **OTSUA** shall apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply, without prejudice to the continuing application of provisions of the **PC** applying in relation to the relevant **Offshore Transmission System** and/or **Connection Site**.

PC.1.1B As used in the **PC**:

(a) **National Electricity Transmission System** excludes **OTSDUW Plant and Apparatus** (prior to the **OTSUA Transfer Time**) unless the context otherwise requires; and

(b) User Development includes **OTSDUW** unless the context otherwise requires.

PC.1.2 The **Users** referred to above are defined, for the purpose of the **PC**, in PC.3.1.

PC.1.3 Development of the **National Electricity Transmission System**, involving its reinforcement or extension, will arise for a number of reasons including, but not limited to:

(a) a development on a **User System** already connected to the **National Electricity Transmission System**;

(b) the introduction of a new **Connection Site** or the **Modification** of an existing **Connection Site** between a **User System** and the **National Electricity Transmission System**;

(c) the cumulative effect of a number of such developments referred to in (a) and (b) by one or more **Users**.

PC.1.4 Accordingly, the reinforcement or extension of the **National Electricity Transmission System** may involve work:

(a) at a substation at a **Connection Site** where **User's Plant** and/or **Apparatus** is connected to the **National Electricity Transmission System** (or in the case of **OTSDUW**, at a substation at an **Interface Point**);

(b) on transmission lines or other facilities which join that **Connection Site** (or in the case of **OTSDUW**, **Interface Point**) to the remainder of the **National Electricity Transmission System**;

(c) on transmission lines or other facilities at or between points remote from that **Connection Site** (or in the case of **OTSDUW**, **Interface Point**).

PC.1.5 The time required for the planning and development of the **National Electricity Transmission System** will depend on the type and extent of the necessary reinforcement and/or extension work, the need or otherwise for statutory planning consent, the associated possibility of the need for a public inquiry and the degree of complexity in undertaking the new work while maintaining satisfactory security and quality of supply on the existing **National Electricity Transmission System**.

PC1.6 For the avoidance of doubt and the purposes of the Grid Code, **DC Connected Power Park Modules** are treated as belonging to **Generators**. **Generators** who own **DC Connected Power Park Modules** would therefore be expected to supply the same data as required under this **PC** in respect of **Power Stations** comprising **Power Park Modules** other than where specific references to **DC Connected Power Park Modules** are made.

PC1.7 As defined in the Glossary and Definitions, **Electricity Storage Modules** are treated as belonging to **Storage Users** who are a subset of **Generators** who own or operate **Electricity Storage Modules** and would therefore be expected to supply the same data as required under this PC in respect of **Power Stations**. In general, and not withstanding the requirements in respect of the Glossary and Definitions and the wider requirements specified in the **Planning Code, Generators** in respect of **Synchronous Electricity Storage Modules** would be expected to supply the same data as required from **Generators** in respect of **Synchronous Power Generating Modules** and **Generators** in respect of **Non-Synchronous Electricity Storage Modules** would be expected to supply the same data as required from **Generators** in respect of **Power Park Modules**.

PC.2 OBJECTIVE

PC.2.1 The objectives of the **PC** are:

(a) to promote **The Company/User** interaction in respect of any proposed development on the **User System** which may impact on the performance of the **National Electricity Transmission System** or the direct connection with the **National Electricity Transmission System**; and

(b) to provide for the supply of information to **The Company** from **Users** in order that planning and development of the **National Electricity Transmission System** can be undertaken in accordance with the relevant **Licence Standards**, to facilitate existing and proposed connections, and also to provide for the supply of relevant information from **The Company** to **Users** in order that planning and development of the **User's System** can be undertaken in accordance with their relevant regulatory requirements; and

(c) to specify the **Licence Standards** which will be used in the planning and development of the **National Electricity Transmission System**; and

(d) to provide for the supply of information required by **The Company** from **Users** in respect of the following to enable **The Company** to carry out its duties under the **Act** and the **ESO Licence**:

(i) **Mothballed Generating Units, Mothballed Power Generating Modules**; and

(ii) capability of gas-fired **Synchronous Power Generating Modules** or **Generating Units** to run using alternative fuels.

The Company will use the information provided under PC.2.1(d) in providing reports to the **Authority** and the **Secretary of State** and, where directed by the **Authority** or the **Secretary of State** to do so, **The Company** may publish the information. Where it is known by **The Company** that such information is intended for wider publication the information provided under PC.2.1(d) shall be aggregated such that individual data items should not be identifiable; and

(e) in the case of **OTSUA**:

(i) to specify the minimum technical and design criteria and procedures to be applied by **Users** in the planning and development of **OTSUA**; and thereby

(ii) to ensure that the **OTSUA** can from the **OTSUA Transfer Time** be operated as part of the **National Electricity Transmission System**; and

(iii) to provide for the arrangements and supply of information and data between **The Company** and a **User** to ensure that the **User** is able to undertake **OTSDUW**; and

(iv) to promote **The Company/User** interaction and co-ordination in respect of any proposed development on the **National Electricity Transmission System** or the

OTSUA, which may impact on the **OTSUA** or (as the case may be) the **National Electricity Transmission System**.

PC.3 SCOPE

PC.3.1 The **PC** applies to **The Company** and to **Users**, which in the **PC** means:

(a) **Generators**;

(b) **Generators** undertaking **OTSDUW**;

(c) **Network Operators**;

(d) **Non-Embedded Customers**;

(e) **DC Converter Station** owners; and

(f) **HVDC System Owners**.

The above categories of **User** will become bound by the **PC** prior to them generating, operating, or consuming or importing/exporting, as the case may be, and references to the various categories (or to the general category) of **User** should, therefore, be taken as referring to them in that prospective role as well as to **Users** actually connected.

PC.3.1.1 Exchanges between **The Company** and **Network Operators**

PC.3.1.1.1 From the **PSM Implementation Date** in relation to information exchanges between **The Company** and **Network Operators**, paragraphs PC.3.2.(c) and (d), PC.3.3, PC.3.4, PC.3.5, PC.3.6, PC3.7, PC.4.3.1, PC.4.3.2, PC.4.5, PC.7, PC.A and PC.B shall no longer apply and paragraphs PC.9, PC.10 and PC.G shall instead apply.

PC.3.1.1.2 In the event that **The Company** and all **Network Operators** are not in a position to implement information exchange as described in PC.9, PC.10 and PC.G, by the **PSM Implementation Date**, **The Company** and **Network Operators** shall use their best endeavours to agree an alternative **PSM Implementation Date**.

PC.3.1.1.3 Subject to written consent between **The Company** and the relevant **Network Operator**, nothing shall prevent **The Company** and that **Network Operator** from applying the information exchange described in PC.9, PC.10, and PC.G before the **PSM Implementation Date**.

PC.3.1.1.4 The **PSM** data exchanges shall conform to the data exchange profile standards and satisfy the implementation requirements outlined in PC.G.4.1. Alternative exchange profile standards and/or appropriate extensions may be used as agreed between **The Company** and all the **Network Operators** or as directed by the **GB CIM Governance Group**, as described in PC.G.4.1.1**,** where agreed by **The Company** and all the **Network Operators**.

PC.3.1.1.5 The **Structural Data** in the exchanged **PSMs** shall utilise unique and persistent identifiers. A unique identifier shall be assigned to the role of each grid component within the **Structural Data** which shall persist throughout the life of that role.

PC.3.1.1.6 For the avoidance of doubt, **Network Operators** will not be in breach of the obligations imposed by PC.9, PC.10 and PC.G where data is omitted due to the data not yet being supported by the data exchange standard identified in PC.G.4.

PC.3.2 In the case of **Embedded Power Station**s, **Embedded DC Converter Stations** and **Embedded HVDC Systems**, unless provided otherwise, the following provisions apply with regard to the provision of data under this **PC**:

(a) each **Generator** shall provide the data direct to **The Company** in respect of (i) **Embedded Large Power Stations**, (ii) **Embedded Medium Power Stations** subject to a **Bilateral Agreement** and (iii) **Embedded Small Power Stations** which form part of a **Cascade Hydro Scheme**;

(b) each **DC Converter** owner or **HVDC System Owner** shall provide the data direct to **The Company** in respect of **Embedded DC Converter Stations** and **Embedded HVDC Systems** subject to a **Bilateral Agreement**;

(c) each **Network Operator** shall provide the data to **The Company** in respect of each **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to a **Bilateral Agreement** or **Embedded HVDC System** not subject to a **Bilateral Agreement** connected, or proposed to be connected within such **Network Operator's System**;

(d) although data is not normally required specifically on **Embedded Small Power Stations** or on **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **HVDC System** under this **PC**, each **Network Operator** in whose **System** they are **Embedded** should provide the data (contained in the Appendix) to **The Company** in respect of **Embedded Small Power Stations** or **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **Embedded** installations of **HVDC Systems** if:

(i) it falls to be supplied pursuant to the application for a **CUSC Contract** or in the **Statement of Readiness** to be supplied in connection with a **Bilateral Agreement** and/or **Construction Agreement**, by the **Network Operator**; or

(ii) it is specifically requested by **The Company** in the circumstances provided for under this **PC**.

PC.3.3 Certain data does not normally need to be provided in respect of certain **Embedded Power Stations**, **Embedded DC Converter Stations** or **Embedded HVDC Systems**, as provided in PC.A.1.12.

In summary, **Network Operators** are required to supply the data described in the below listed paragraphs of Appendix A of this PC in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** or **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** or **Embedded HVDC Systems** not subject to a **Bilateral Agreement** connected, or is proposed to be connected, within such **Network Operator's System**:

PC.A.2.1.1

PC.A.2.2.2

PC.A.2.5.5.2

PC.A.2.5.5.7

PC.A.2.5.6

PC.A.3.1.5

PC.A.3.2.2

PC.A.3.3.1

PC.A.3.4.1

PC.A.3.4.2

PC.A.5.2.2

PC.A.5.3.2

PC.A.5.4

PC.A.5.5.1

PC.A.5.6

For the avoidance of doubt **Network Operators** are required to supply the above data in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** which are located **Offshore** and which are connected or proposed to be connected within such **Network Operator's System**. This is because **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** are treated as **Onshore Generators** or **Onshore DC Converter Station** owners or **HVDC System Owners** connected to an **Onshore User System Entry Point**.

PC.3.4 **The Company** may provide to the **Relevant Transmission Licensees** any data which has been submitted to **The Company** by any **Users** pursuant to the following paragraphs of the **PC**. For the avoidance of doubt, **The Company** will not provide to the **Relevant Transmission Licensees**, the types of data specified in Appendix D. The **Relevant Transmission Licensees'** use of such data is detailed in the **STC**.

PC.A.2.2

PC.A.2.5

PC.A.3.1

PC.A.3.2.1

PC.A.3.2.2

PC.A.3.3

PC.A.3.4

PC.A.4

PC.A.5.1

PC.A.5.2

PC.A.5.3.1

PC.A.5.3.2

PC.A.5.4.1

PC.A.5.4.2

PC.A.5.4.3.1

PC.A.5.4.3.2

PC.A.5.4.3.3

PC.A.5.4.3.4

PC.A.7

(and in addition in respect of the data submitted in respect of the **OTSUA**)

PC.A.2.2

PC.A.2.3

PC.A.2.4

PC.A.2.5

PC.A.3.2.2

PC.A.3.3.1(d)

PC.A.4

PC.A.5.4.3.1

PC.A.5.4.3.2

PC.A.6.2

PC.A.6.3

PC.A.6.4

PC.A.6.5

PC.A.6.6

PC.A.7

PC.3.5 In addition to the provisions of PC.3.4, **The Company** may provide to the **Relevant Transmission Licensees** any data which has been submitted to **The Company** by any **Users** in respect of **Relevant Units** pursuant to the following paragraphs of the **PC**.

PC.A.2.3

PC.A.2.4

PC.A.5.5

PC.A.5.7

PC.A.6.2

PC.A.6.3

PC.A.6.4

PC.A.6.5

PC.A.6.6

PC.3.6 In the case of **Offshore Embedded Power Stations** connected to an **Offshore User System** which directly connects to an **Offshore Transmission System**, any additional data requirements in respect of such **Offshore Embedded Power Stations** may be specified in the relevant **Bilateral Agreement** with the **Network Operator** or in any **Bilateral Agreement** between **The Company** and such **Offshore Embedded Power Station**.

PC.3.7 In the case of a **Generator** undertaking **OTSDUW** connecting to an **Onshore Network Operator's System**, any additional requirements in respect of such **OTSDUW Plant and Apparatus** will be specified in the relevant **Bilateral Agreement** with the **Generator**. For the avoidance of doubt, requirements applicable to **Generators** undertaking **OTSDUW** and connecting to a **Network Operator's User System**, shall be consistent with those applicable requirements of **Generators** undertaking **OTSDUW** and connecting to a **Transmission Interface Point**.

PC.3.8 For the purpose of complying with the requirements of ECC.6.3.17.1.5 and ECC.6.3.17.2.3 **The Company** may share relevant modelling information with a **User** based on the following information submitted by a **User** to **The Company**:

PC.A.5.3.2(a), (b), (c), (d) and (g)

PC.A.5.4.2

PC.A.5.4.3

PC.A.9

PC.3.9 A **User** who receives information from **The Company** under PC.3.8 may only use the information to complete the analysis required by ECC.6.3.17.1 and EEC.6.3.17.2 as applicable and the **Bilateral Agreement.** Further conditions on the sharing of models are detailed in PC.A.9

PC.4 PLANNING PROCEDURES

PC.4.1 Pursuant to condition C12 of the **ESO Licence**, the means by which **Users** and proposed **Users** of the **National Electricity Transmission System** are able to assess opportunities for connecting to, and using, the **National Electricity Transmission System** comprise two distinct parts, namely:

(a) a statement, prepared by **The Company** in accordance with condition C12 of the **ESO Licence**, showing for the current **Financial Year** and each of the nine succeeding **Financial Years**, the opportunities available for connecting to and using the **National Electricity Transmission System** and indicating those parts of the **National Electricity Transmission System** most suited to new connections and transport of further quantities of electricity (the "**Electricity Ten Year Statement**" or **ETYS**); and

(b) an offer, in accordance with its **ESO Licence**, by **The Company** to enter into a **CUSC Contract**. A **Bilateral Agreement** is to be entered into for every **Connection Site** (and for certain **Embedded Power Stations** and **Embedded DC Converter Stations** and **Embedded HVDC Systems**) within the first two of the following categories and the existing **Bilateral Agreement** may be required to be varied in the case of the third category:

(i) existing **Connection Sites** (and for certain **Embedded Power Stations**) as at the **Transfer Date**;

(ii) new Connection **Sites** (and for certain **Embedded Power Stations**, **Embedded DC Converter Stations** and **Embedded HVDC Systems**) with effect from the **Transfer Date**;

(iii) a **Modification** at a **Connection Site** (or in relation to the connection of certain **Embedded Power Stations**, **Embedded DC Converter Stations** and **Embedded HVDC Systems** whether or not the subject of a **Bilateral Agreement**) (whether such **Connection Site** or connection exists on the **Transfer Date** or is new thereafter) with effect from the **Transfer Date**.

In this **PC**, unless the context otherwise requires, "connection" means any of these 3 categories.

PC.4.2 Introduction to Data

User Data

PC.4.2.1 Under the **PC**, two types of data to be supplied by **Users** are called for:

(a) **Standard Planning Data**; and

(b) **Detailed Planning Data**,

as more particularly provided in PC.A.1.4.

PC.4.2.2 The **PC** recognises that these two types of data, namely **Standard Planning Data** and **Detailed Planning Data**, are considered at three different levels:

(a) **Preliminary Project Planning Data**;

(b) **Committed Project Planning Data**; and

(c) **Connected Planning Data**,

as more particularly provided in PC.5

PC.4.2.3 **Connected Planning Data** is itself divided into:

(a) **Forecast Data**;

(b) **Registered Data**; and

(c) **Estimated Registered Data**,

as more particularly provided in PC.5.5

PC.4.2.4 Clearly, an existing **User** proposing a new **Connection Site** (or **Embedded Power Station** or **Embedded DC Converter Station** or **Embedded HVDC System**) in the circumstances outlined in PC.4.1) will need to supply data both in an application for a **Bilateral Agreement** and under the **PC** in relation to that proposed new **Connection Site** (or **Embedded Power Station** or **Embedded DC Converter Station** or **Embedded HVDC System** in the circumstances outlined in PC.4.1) and that will be treated as **Preliminary Project Planning Data** or **Committed Project Planning Data** (as the case may be), but the data it supplies under the **PC** relating to its existing **Connection Sites** will be treated as **Connected Planning Data**.

Network Data

PC.4.2.5 In addition, there is **Network Data** supplied by **The Company** in relation to short circuit current contributions in relation to **OTSUA**.

PC.4.3 Data Provision

PC.4.3.1 **Electricity Ten Year Statement**

To enable the **Electricity Ten Year Statement** to be prepared, each **User** is required to submit to **The Company** (subject to the provisions relating to **Embedded Power Stations** and **Embedded DC Converter Stations** and **Embedded HVDC Systems** in PC.3.2) both the **Standard Planning Data** and the **Detailed Planning Data** as listed in parts I and 2 of Appendix A. This data should be submitted in calendar week 24 of each year (although **Network Operators** may delay the submission of data (other than that to be submitted pursuant to PC.3.2(c) and PC.3.2(d)) until calendar week 28) and should cover the current **Financial Year** and each of the nine succeeding **Financial Years**. Where, from the date of one submission to another, there is no change in the data (or in some of the data) to be submitted, instead of re-submitting the data, a **User** may submit a written statement that there has been no change from the data (or in some of the data) submitted the previous time. In addition, **The Company** will also use the **Transmission Entry Capacity** and **Connection Entry Capacity** data from the **CUSC Contract**, and any data submitted by **Network Operators** in relation to an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to a **Bilateral Agreement**, or **Embedded HVDC System** not subject to a **Bilateral Agreement** in the preparation of the **Electricity Ten Year Statement** and to that extent the data will not be treated as confidential.

PC.4.3.2 Network Data

To enable **Users** to model the **National Electricity Transmission System** in relation to short circuit current contributions, **The Company** is required to submit to **Users**, the **Network Data** as listed in Part 3 of Appendix A. The data will be submitted in week 42 of each year and will cover that **Financial Year**.

PC.4.3.3 To enable **Users** to model the **National Electricity Transmission System** in relation to **OTSUA**, **The Company** is required to submit to **Users** the **Network Data**, as listed in Part 3 of Appendix A and Appendix F. **The Company** shall provide the **Network Data** with the offer of a **CUSC Contract** in the case of the data in PC F2.1 and otherwise in accordance with the **OTSDUW Development and Data Timetable**.

PC.4.4 Offer of Terms for Connection

PC.4.4.1 CUSC Contract – Data Requirements/Offer Timing

The completed application form for a **CUSC Contract** to be submitted by a **User** when making an application for a **CUSC Contract** will include:

(a) a description of the **Plant** and/or **Apparatus** (excluding **OTSDUW Plant and Apparatus**) to be connected to the **National Electricity Transmission System** or of the **Modification** relating to the **User's Plant** and/or **Apparatus** (and prior to the **OTSUA Transfer Time**, any **OTSUA**) already connected to the **National Electricity Transmission System** or, as the case may be, of the proposed new connection or **Modification** to the connection within the **User System** of the **User**, each of which shall be termed a "**User Development**" in the **PC**;

(b) the relevant **Standard Planning Data** as listed in Part 1 of Appendix A (except in respect of any **OTSUA**);

(c) the desired **Completion Date** of the proposed **User Development**; and

(d) the desired **Connection Entry Capacity** and **Transmission Entry Capacity**.

The completed application form for a **CUSC Contract** will be sent to **The Company** as more particularly provided in the application form.

PC.4.4.2 Any offer of a **CUSC Contract** will provide that it must be accepted by the applicant **User** within the period stated in the offer, after which the offer automatically lapses. Except as provided in the **CUSC Contract**, acceptance of the offer renders the **National Electricity Transmission System** works relating to that **User Development**, reflected in the offer, committed and binds both parties to the terms of the offer. The User shall then provide the **Detailed Planning Data** as listed in Part 2 of Appendix A (and in the case of **OTSUA** the **Standard Planning Data** as listed in Part 1 of Appendix A within the timeline provided in PC.A.1.4). In respect of **DPD I** this shall generally be provided within 28 days (or such shorter period as **The Company** may determine, or such longer period as **The Company** may agree, in any particular case) of acceptance of the offer and in respect of **DPD II** this shall generally be provided at least two years (or such longer period as **The Company** may determine, or such shorter period as **The Company** may agree, in any particular case or in the case of **OTSUA** such shorter period as **The Company** shall require) prior to the **Completion Date** of the **User Development**.

PC.4.4.3 Embedded Development Agreement - Data Requirements

The **Network Operator** shall submit the following data in relation to an **Embedded Medium Power Station** not subject to, or proposed to be subject to, a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to, or proposed to be subject to, a **Bilateral Agreement** as soon as reasonably practicable after receipt of an application from an **Embedded Person** to connect to its **System**:

(a) details of the proposed new connection or variation (having a similar effect on the **Network Operator's System** as a **Modification** would have on the **National Electricity Transmission System**) to the connection within the **Network Operator's System**, each of which shall be termed an "**Embedded Development**" in the **PC** (where a **User Development** has an impact on the **Network Operator's System** details shall be supplied in accordance with PC.4.4 and PC.4.5);

(b) the relevant **Standard Planning Data** as listed in Part 1 of Appendix A;

(c) the proposed completion date (having a similar meaning in relation to the **Network Operator's System** as **Completion Date** would have in relation to the **National Electricity Transmission System**) of the **Embedded Development**; and

(d) upon the request of **The Company**, the relevant **Detailed Planning Data** as listed in Part 2 of Appendix A.

PC.4.4.4 The **Network Operator** shall provide the **Detailed Planning Data** as listed in Part 1 of Appendix A. In respect of **DPD I**, this shall generally be provided within 28 days (or such shorter period as **The Company** may determine, or such longer period as **The Company** may agree, in any particular case) of entry into the **Embedded Development Agreement** and in respect to **DPD II** this shall generally be provided at least two years (or such longer period as **The Company** may determine, or such shorter period as **The Company** may agree, in any particular case) prior to the **Completion Date** of the **Embedded Development**.

PC.4.5 Complex Connections

PC.4.5.1 The magnitude and complexity of any **National Electricity Transmission System** extension or reinforcement will vary according to the nature, location and timing of the proposed **User Development** which is the subject of the application and it may, in the event, be necessary for **The Company** to carry out additional more extensive system studies to evaluate more fully the impact of the proposed **User Development** on the **National Electricity Transmission System**. Where **The Company** judges that such additional more detailed studies are necessary the offer may indicate the areas that require more detailed analysis and before such additional studies are required, the **User** shall indicate whether it wishes **The Company** to undertake the work necessary to proceed to make a revised offer within the 3 month period normally allowed or, where relevant, the timescale consented to by the **Authority**.

PC.4.5.2 To enable **The Company** to carry out any of the above mentioned necessary detailed system studies, the **User** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in part 2 of Appendix A in advance of the normal timescale referred in PC.4.4.2 provided that **The Company** can reasonably demonstrate that it is relevant and necessary.

PC.4.5.3 To enable **The Company** to carry out any necessary detailed system studies, the relevant **Network Operator** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in Part 2 of Appendix A in advance of the normal timescale referred in PC.4.4.4 provided that **The Company** can reasonably demonstrate that it is relevant and necessary.

PC.5 PLANNING DATA

PC.5.1 As far as the **PC** is concerned, there are three relevant levels of data in relation to **Users**. These levels, which relate to levels of confidentiality, commitment and validation, are described in the following paragraphs.

Preliminary Project Planning Data

PC.5.2 At the time the **User** applies for a **CUSC Contract** but before an offer is made and accepted by the applicant **User**, the data relating to the proposed **User Development** will be considered as **Preliminary Project Planning Data**. Data relating to an **Embedded Development** provided by a **Network Operator** in accordance with PC.4.4.3, and PC.4.4.4 if requested, will be considered as **Preliminary Project Planning Data**. All such data will be treated as confidential within the scope of the provisions relating to confidentiality in the **CUSC**.

PC.5.3 **Preliminary Project Planning Data** will normally only contain the **Standard Planning Data** unless the **Detailed Planning Data** is required in advance of the normal timescale to enable **The Company** to carry out additional detailed system studies as described in PC.4.5.

Committed Project Planning Data

PC.5.4 Once the offer for a **CUSC Contract** is accepted, the data relating to the **User Development** already submitted as **Preliminary Project Planning Data**, and subsequent data required by **The Company** under this **PC**, will become **Committed Project Planning Data**. Once an **Embedded Person** has entered into an **Embedded Development Agreement**, as notified to **The Company** by the **Network Operator**, the data relating to the **Embedded Development** already submitted as **Preliminary Project Planning Data**, and subsequent data required by **The Company** under the **PC**, will become **Committed Project Planning Data**. Such data, together with **Connection Entry Capacity** and **Transmission Entry Capacity** data from the **CUSC Contract** and other data held by **The Company** relating to the **National Electricity Transmission System** will form the background against which new applications by any **User** will be considered and against which planning of the **National Electricity Transmission System** will be undertaken. Accordingly, **Committed Project Planning Data**, **Connection Entry Capacity** and **Transmission Entry Capacity** data will not be treated as confidential to the extent that **The Company**:

(a) is obliged to use it in the preparation of the **Electricity Ten Year Statement** and in any further information given pursuant to the **Electricity Ten Year Statement**;

(b) is obliged to use it when considering and/or advising on applications (or possible applications) of other **Users** (including making use of it by giving data from it, both orally and in writing, to other **Users** making an application (or considering or discussing a possible application) which is, in **The Company's** view, relevant to that other application or possible application);

(c) is obliged to use it for operational planning purposes;

(d) is obliged under the terms of an **Interconnection Agreement** to pass it on as part of system information on the **Total System**;

(e) is obliged to disclose it under the **STC**;

(f) is obliged to use and disclose it in the preparation of the **Offshore Development Information Statement**;

(g) is obliged to use it in order to carry out its **EMR Functions** or is obliged to disclose it under an **EMR Document**.

To reflect different types of data, **Preliminary Project Planning Data** and **Committed Project Planning Data** are themselves divided into:

(a) those items of **Standard Planning Data** and **Detailed Planning Data** which will always be forecast, known as **Forecast Data**; and

(b) those items of **Standard Planning Data** and **Detailed Planning Data** which relate to **Plant** and/or **Apparatus** which upon connection will become **Registered Data**, but which prior to connection, for the current **Financial Year** and the nine succeeding **Financial Years**, will be an estimate of what is expected, known as **Estimated Registered Data**.

Connected Planning Data

PC.5.5 The **PC** requires that, at the time that a **Statement of Readiness** is submitted under the **Bilateral Agreement** and/or **Construction Agreement**, any estimated values assumed for planning purposes are confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for forecast data items such as **Demand**. In the case of an **Embedded Development** the relevant **Network Operator** will update any estimated values assumed for planning purposes with validated actual values as soon as reasonably practicable after energisation. This data is then termed **Connected Planning Data**.

To reflect the three types of data referred to above, **Connected Planning Data** is itself divided into:

(a) those items of **Standard Planning Data** and **Detailed Planning Data** which will always be forecast data, known as **Forecast Data**; and

(b) those items of **Standard Planning Data** and **Detailed Planning Data** which upon connection become fixed (subject to any subsequent changes), known as **Registered Data**; and

(c) those items of **Standard Planning Data** and **Detailed Planning Data** which for the purposes of the **Plant** and/or **Apparatus** concerned as at the date of submission are **Registered Data** but which for the current **Financial Year** and the nine succeeding **Financial Years** will be an estimate of what is expected, known as **Estimated Registered Data**,

as more particularly provided in Appendix A.

PC.5.6 **Connected Planning Data**, together with **Connection Entry Capacity** and **Transmission Entry Capacity** data from the **CUSC Contract**, and other data held by **The Company** relating to the **National Electricity Transmission System**, will form the background against which new applications by any **User** will be considered and against which planning of the **National Electricity Transmission System** will be undertaken. Accordingly, **Connected Planning Data**, **Connection Entry Capacity** and **Transmission Entry Capacity** data will not be treated as confidential to the extent that **The Company**:

(a) is obliged to use it in the preparation of the **Electricity Ten Year Statement** and in any further information given pursuant to the **Electricity Ten Year Statement**;

(b) is obliged to use it when considering and/or advising on applications (or possible applications) of other **Users** (including making use of it by giving data from it, both orally and in writing, to other **Users** making an application (or considering or discussing a possible application) which is, in **The Company's** view, relevant to that other application or possible application);

(c) is obliged to use it for operational planning purposes;

(d) is obliged under the terms of an **Interconnection Agreement** to pass it on as part of system information on the **Total System**.

(e) is obliged to disclose it under the **STC**;

(f) is obliged to use it in order to carry out its **EMR Functions** or is obliged to disclose it under an **EMR Document**.

PC.5.7 **Committed Project Planning Data** and **Connected Planning Data** will each contain both **Standard Planning Data** and **Detailed Planning Data**.

PC.6 PLANNING STANDARDS

PC.6.1 **The Company** shall apply the **Licence Standards** relevant to it in the planning and development of the **National Electricity Transmission System**. **The Company** shall procure that each **Relevant Transmission Licensee** shall apply the **Licence Standards** relevant to planning and development, in the planning and development of the **Transmission System** of each **Relevant Transmission Licensee** and that a **User** shall apply the **Licence Standards** relevant to planning and development, in the planning and development of the **OTSUA**.

PC.6.2 In relation to Scotland, Appendix C lists the technical and design criteria applied in the planning and development of each **Relevant Transmission Licensee's Transmission System**. The criteria are subject to review in accordance with each **Relevant Transmission Licensee's Transmission Licence** conditions. Copies of these documents are available from **The Company** on request. **The Company** will charge an amount sufficient to recover its reasonable costs incurred in providing this service.

PC.6.3 In relation to **Offshore**, Appendix E lists the technical and design criteria applied in the planning and development of each **Offshore Transmission System**. The criteria are subject to review in accordance with each **Offshore Transmission Licensee's Transmission Licence** conditions. Copies of these documents are available from **The Company** on request. **The Company** will charge an amount sufficient to recover its reasonable costs incurred in providing this service.

PC.6.4 In planning and developing the **OTSUA**, the **User** shall comply with (and shall ensure that (as at the **OTSUA Transfer Time**) the **OTSUA** comply with):

(a) the **Licence Standards**; and

(b) the technical and design criteria in Appendix E.

PC.6.5 In addition the **User** shall, in the planning and development of the **OTSUA**, to the extent it is reasonable and practicable to do so, take into account the reasonable requests of **The Company** (in the context of its obligation to develop an efficient, co-ordinated and economical system) relating to the planning and development of the **National Electricity Transmission System**.

PC.6.6 In planning and developing the **OTSUA** the **User** shall take into account the **Network Data** provided to it by **The Company** under Part 3 of Appendix A and Appendix F, and act on the basis that the **Plant** and **Apparatus** of other **Users** complies with:

(a) the minimum technical design and operational criteria and performance requirements set out in either CC.6.1, CC.6.2, CC.6.3 and CC.6.4 or ECC.6.1, ECC.6.2, ECC.6.3 and ECC.6.4 ; or

(b) such other criteria or requirements as **The Company** may from time to time notify the **User** are applicable to specified **Plant** and **Apparatus** pursuant to PC.6.7.

PC.6.7 Where the **OTSUA** are likely to be materially affected by the design or operation of another **User's Plant** and **Apparatus** and **The Company**:

(a) becomes aware that such other **User** has or is likely to apply for a derogation under the Grid Code;

(b) is itself applying for a derogation under the Grid Code in relation to the **Connection Site** on which such other **User's Plant** and **Apparatus** is located or to which it otherwise relates; or

(c) is otherwise notified by such other **User** that specified **Plant** or **Apparatus** is normally capable of operating at levels better than those set out in CC.6.1, CC.6.2, CC.6.3 and CC.6.4 or ECC.6.1, ECC.6.2, ECC.6.3 and ECC.6.4,

The Company shall notify the **User**.

PC.7 PLANNING LIAISON

PC.7.1 This PC.7 applies to **The Company** and **Users**, which in PC.7 means

(a) **Network Operators**

(b) **Non-Embedded Customers**

PC.7.2 As described in PC.2.1 (b) an objective of the **PC** is to provide for the supply of information to **The Company** by **Users** in order that planning and development of the **National Electricity Transmission System** can be undertaken in accordance with the relevant **Licence Standards**.

PC.7.3 **Grid Code** amendment B/07 ("Amendment B/07") implemented changes to the **Grid Code** which included amendments to the datasets provided by both **The Company** and **Users** to inform the planning and development of the **National Electricity Transmission System**. The **Authority** has determined that these changes are to have a phased implementation. Consequently the provisions of Appendix A to the **PC** include specific years (ranging from 2009 to 2011) with effect from which certain of the specific additional obligations brought about by Amendment B/07 on **The Company** and **Users** are to take effect. Where specific provisions of paragraphs PC.A.4.1.4, PC.A.4.2.2 and PC.A.4.3.1 make reference to a year, then the obligation on **The Company** and the **Users** shall be required to be met by the relevant calendar week (as specified within such provision) in such year.

In addition to the phased implementation of aspects of Amendment B/07, **Users** must discuss and agree with **The Company** by no later than 31 March 2009 a more detailed implementation programme to facilitate the implementation of **Grid Code** amendment B/07.

It shall also be noted by **The Company** and **Users** that the dates set out in PC.A.4 are intended to be minimum requirements and are not intended to restrict a **User** and **The Company** from the earlier fulfilment of the new requirements prior to the specified years. Where **The Company** and a **User** wish to follow the new requirements from earlier dates than those specified, this will be set out in the more detailed implementation programme agreed between **The Company** and the **User**.

The following provisions of PC.7 shall only apply with effect from 1 January 2011.

PC.7.4 Following the submission of data by a **User** in or after week 24 of each year **The Company** will provide information to **Users** by calendar week 6 of the following year regarding the results of any relevant assessment that has been made by **The Company** based upon such data submissions to verify whether **Connection Points** are compliant with the relevant **Licence Standards**.

PC.7.5 Where the result of any assessment identifies possible future non-compliance with the relevant **Licence Standards**, **The Company** shall notify the relevant **User(s)** of this fact as soon as reasonably practicable and shall agree with **Users** any opportunity to resubmit data to allow for a reassessment in accordance with PC.7.6.

PC.7.6 Following any notification by **The Company** to a **User** pursuant to PC.7.5 and following any further discussions held between the **User** and **The Company**:

(i) **The Company** and the **User** may agree revisions to the **Access Periods** for relevant **Transmission Interface Circuits**, such revisions shall not however permit an **Access Period** to be less than 4 continuous weeks in duration or to occur other than between calendar weeks 10 and 43 (inclusive); and/or,

(ii) The **User** shall as soon as reasonably practicable

(a) submit further relevant data to **The Company** that is to **The Company's** reasonable satisfaction; and/or,

(b) modify data previously submitted pursuant to this **PC**, such modified data to be to **The Company's** reasonable satisfaction; and/or

(c) notify **The Company** that it is the intention of the **User** to leave the data as originally submitted to **The Company** to stand as its submission.

PC.7.7 Where an **Access Period** is amended pursuant to PC.7.6 (i) **The Company** shall notify **The Authority** that it has been necessary to do so.

PC.7.8 When it is agreed that any resubmission of data is unlikely to confirm future compliance with the relevant **Licence Standards** the **Modification** process in the **CUSC** may apply.

PC.7.9 A **User** may at any time, in writing, request further specified **National Electricity Transmission System** network data in order to provide **The Company** with viable **User** network data (as required under this **PC**). Upon receipt of such request, **The Company** shall consider, and where appropriate provide such **National Electricity Transmission System** network data to the **User** as soon as reasonably practicable following the request.

PC.8 OTSDUW PLANNING LIAISON

PC.8.1 This PC.8 applies to **The Company** and **Users**, which in PC.8 means **Users** undertaking **OTSDUW.**

PC.8.2 As described in PC.2.1 (e) an objective of the **PC** is to provide for the supply of information between **The Company** and a **User** undertaking **OTSDUW** in order that planning and development of the **National Electricity Transmission System** can be co-ordinated.

PC.8.3 Where the **OTSUA** also require works to be undertaken by any **Relevant Transmission Licensee** on its **Transmission System The Company** and the **User** shall throughout the construction and commissioning of such works:

(a) co-operate and assist each other in the development of co-ordinated construction programmes or any other planning or, in the case of **The Company**, analysis it undertakes in respect of the works; and

(b) provide to each other all information relating to, in the case of the **User** its own works and, in the case of **The Company,** the works on the **Transmission Systems** reasonably necessary to assist each other in the performance of that other's part of the works, and shall use all reasonable endeavours to co-ordinate and integrate their respective part of the works; and

the **User** shall plan and develop the **OTSUA**, taking into account to the extent that it is reasonable and practicable to do so the reasonable requests of **The Company** relating to the planning and development of the **National Electricity Transmission System**.

PC.8.4 Where **The Company** becomes aware that changes made to the investment plans of any **Relevant Transmission Licensee** may have a material effect on the **OTSUA**, **The Company** shall notify the **User** and provide the **User** with the necessary information about the relevant **Transmission Systems** sufficient for the **User** to assess the impact on the **OTSUA**.

PC.9 **SUBMISSION OF SYSTEM MODELS AND INFORMATION BY NETWORK OPERATORS TO THE COMPANY**

PC.9.1 General

PC.9.1.1 PC.9 details the minimum planning data to be submitted by **Network Operators** to **The Company**.

PC.9.1.2 Compliance with the data submission requirements within PC.9 shall only apply after the **PSM Implementation Date**.

PC.9.1.3 The **Network Operator** shall use reasonable endeavours to obtain all applicable information required by PC.9 from any user connected to the **Network Operator's System**, such that the information provided is the best information available at the time of submission.

PC.9.2 Purpose

PC.9.2.1 The purpose of the data submission set out in PC.9 is to ensure that the **Network Operators** provide sufficient information to **The Company** so that it:

(a) Can provide information to the **Relevant Transmission Licensee** so that they can establish the previous, current, and future year's compliance of the **NETS** with the **NETS SQSS**;

(b) Can provide information to the **Relevant Transmission Licensee** so that they can establish that the **NETS** complies with relevant technical standards;

(c) Can provide information to the **Relevant Transmission Licensee** so that they can establish that the **NETS** has sufficient capability to accommodate the connection of, and export from, **Embedded Power Stations** as considered in the **CUSC Evaluation of Transmission Impact** process; and

(d) Can create operational models for use in operational timescales.

PC.9.2.2 The **Data Freeze Date** for the submission in calendar week 2 shall be 31 October of the previous year. The **Data Freeze Date** for the submission in calendar week 28 shall be 31 March of that year.

PC.9.2.3 PC.9 uses definitions of **Group Demand**, **Latent Demand**, **Measured Demand**, **Embedded Power Station Export**, **Embedded Power Station Import** and **Gross Demand**. The interpretation of these definitions is illustrated in the stylised figure PC.9.2.3.

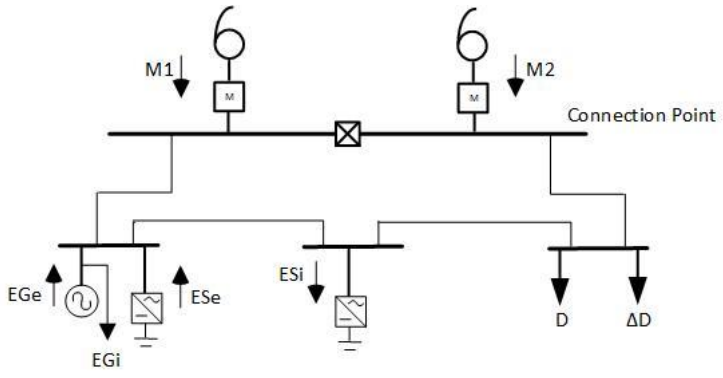

Figure PC.9.2.3

M1, M2	measurement at the **Connection Point**
EGi	import to **Large Power Stations**, **Medium Power Stations** and **Small Power Stations** other than to **Electricity Storage Module(s)**
EGe	export from **Large Power Stations**, **Medium Power Stations** and **Small Power Stations** other than from **Electricity Storage Module(s)**

ESi	import to **Electricity Storage Module(s)**
ESe	export from **Electricity Storage Module(s)**
D	aggregated **Embedded Customer Import**
∆D	aggregated **Latent Demand** of **Embedded Customers**

Where:

Group Demand = D + ∆D

Group Demand = (M1 + M2) + (EGe + ESe) – (EGi + ESi) + ∆D

Latent Demand = ∆D

Gross Demand = (D + ∆D) + (EGi + ESi)

Embedded Power Station Export = EGe + ESe

Embedded Power Station Import = EGi + ESi

Measured Demand (Net Demand) = M1 + M2

PC.9.3 Submissions

PC.9.3.1 Submissions by the **Network Operator** to **The Company** include:

a) Routine submissions each year in calendar week 2 and calendar week 28. These are described in PC.9.3.2 and PC.9.3.3 respectively. A diagram illustrating the coordination of submissions between the **Network Operators** and **The Company** is provided in PC.G.9; and

b) Information provided as part of a **CUSC Evaluation of Transmission Impact** assessment application. This information is described in PC.9.3.4.

Nothing shall prevent the submission of data detailed in PC.9 at additional points during the year where agreed between **The Company** and the **Network Operator**.

At **The Company's** reasonable request and where agreed by the **Network Operator**, additional data on the **Network Operator's System** beyond that described in PC.9 shall be provided.

At **The Company's** reasonable request and where agreed by the **Network Operator** additional information on the **Network Operator's** forecasting methodologies relevant to PC.9 shall be provided.

PC.9.3.2 The data submitted in calendar week 2 shall comprise:

PC.9.3.2.1 A **Solved PSM** of the **Network Operator's System**, which conforms to the **Subtransmission PSM** requirements as described in PC.9.4.2 and which includes:

a) **Structural Data** as at the **Data Freeze Date** for the submission in calendar week 2;

b) **Situation Data** corresponding to the date and time of **NETS** minimum demand as specified by **The Company** in calendar week 43 of the previous year;

c) **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**;

d) **Solution Data** which includes results from a minimum fault level study executed on the **Structural Data** and **Situation Data**; and

e) **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situational Data**.

PC.9.3.2.2 A **PSM Scenario Document** and a **PSM Change Document**, conforming with the requirements described in PC.G.5 and PC.G.6, respectively.

PC.9.3.2.3 A collection of individual **Power System Difference Models** (**PSDM**s) describing new or modified connections or proposed alterations to the **Network Operator's System** that the **Network Operator** is aware of at the **Data Freeze Date**. Individual **PSDM**s shall be supplied for all of the following not represented in the **Structural Data** of the submitted **Solved PSM**:

a) each new or modified generation and/or load connection where the relevant customer has accepted a connection offer from the **Network Operator**; and

b) each authorised reinforcement, asset replacement scheme or similar related to the **Network Operator's System**.

PC.9.3.2.4 A copy of **Data Registration Code** Schedule 21a, populated with demand and generation data corresponding to the date and time of the **NETS** minimum demand as specified by **The Company** in calendar week 43 of the previous year. Schedule 21a provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. the date and time of **NETS** minimum demand specified by **The Company**; and

ii. forecasts for future dates and times of **NETS** minimum demand specified by **The Company**.

PC.9.3.2.5 A copy of **Data Registration Code** Schedule 21b, populated with demand and generation data relating to a date and time established by the **Network Operator** as being the date and time of the **Connection Point** summer minimum **Group Demand**. This summer minimum relates to a time between the hours 04:00 and 06:00 (BST) between April to October inclusive. Schedule 21b provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. the date and time of peak **Connection Point** summer minimum **Group Demand**.

PC.9.3.2.6 A copy of **Data Registration Code** Schedule 21c, populated with demand and generation data relating to a date and time established by the **Network Operator** as being the time and date of the **Connection Point** summer daylight minimum **Group Demand**. Summer daylight relates to a time between the hours 10:00 and 16:00 (BST) between April to October inclusive. Schedule 21c provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. The date and time of peak **Connection Point** summer daylight minimum **Group Demand**.

PC.9.3.2.7 A copy of **Data Registration Code** Schedule 22, populated with:

a) The forecast half hourly **Measured Demand** (**Active Power**) profile for the **Network Operator's System** (summated over all **Connection Points)** for the dates of the forecast **NETS** minimum demand specified by **The Company**; and

b) The aggregate export from all **Embedded Power Stations** at the forecast half-hourly **NETS** minimum demand.

PC.9.3.2.8 A copy of **Data Registration Code** Schedule 29a, populated with information about **Embedded Power Stations** with **Registered Capacities** greater than or equal to 1MW, that provides additional detail related to the generation modelling which is part of the **Structural Data** of the **Solved PSM** as described in PC.9.4.2.2.3.

PC.9.3.2.9 A copy of **Data Registration Code** Schedule 29b, populated with information for each **Connection Point** about **Embedded Power Stations** with **Registered Capacities** less than 1MW, that provides additional detail related to the generation modelling which is part of the **Structural Data** of the **Solved PSM** as described in PC.9.4.2.2.3.

PC.9.3.2.10 A copy of **Data Registration Code** Schedule 30, populated with information for each **Connection Point** detailing:

a) Where a **Network Operator's System** imposes constraints on the import to or export from a **Generating Unit** at an **Embedded Large Power Station**, the following data:

i. outturn and forecast constrained capacity (MW)

ii. any **Reactive Dispatch Network Restriction** (MVAr)

For the avoidance of doubt, a **Generating Unit** as referred to above includes:

i. A **CCGT Unit** or **Synchronous Generating Unit** within a **Synchronous Power Generating Module**;

ii. A **Power Park Module** (including **DC Connected Power Park Modules**);

iii. An **Offshore Transmission System** at an **Interface Point**; or

iv. An **Embedded HVDC System** or **DC Converter** at an **Embedded DC Converter Station**.

Constrained capacity is a limitation of the import to or export from a **Generating Unit** at an **Embedded Large Power Station,** due to the **Network Operator's System** in which the **Large Power Station** is **Embedded**, arising from intrinsic limitations of the **Network Operator's System** or an automated or manual control system designed to limit power flows in the **Network Operator's System** in certain scenarios.

Where **Generating Units** are connected to a **Network Operator's System** via a busbar arrangement which is or is expected to be operated in separate sections, details of busbar running arrangements and connected circuits at the substation to which the **Embedded Generating Unit** is connected, sufficient for **The Company** to determine where the MW generated by each **Generating Unit** would appear onto the **NETS**, shall be provided;

b) Where a **Network Operator System** imposes constraints on the operation of an **Offshore Transmission System** at an **Interface Point** the following data:

i. outturn and forecast maximum import capacity (MW); and

ii. outturn and forecast maximum export capacity (MW).

PC.9.3.3 The data submitted in calendar week 28 shall comprise:

PC.9.3.3.1 A **Solved PSM** of the **Network Operator's System**, which conforms to the **Subtransmission PSM** requirements as described in PC.9.4.2 and which includes:

a) **Structural Data** as at the **Data Freeze Date** for the submission in calendar week 28;

b) **Situation Data** corresponding to the date and time of **NETS** peak demand as specified by **The Company** in calendar week 17;

c) **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**;

d) **Solution Data** which includes results from a maximum fault level study executed on the **Structural Data** and **Situation Data**; and

e) **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

PC.9.3.3.2 A **PSM Scenario Document** and a **PSM Change Document**, conforming with the requirements described in PC.G.5 and PC.G.6, respectively.

PC.9.3.3.3 A collection of individual **PSDM**s describing new or modified connections or proposed alterations to the **Network Operator's System** that the **Network Operator** is aware of at the **Data Freeze Date**. Individual **PSDM**s shall be supplied for all of the following not represented in the **Structural Data** of the submitted **Solved PSM**:

a) each new or modified generation and/or demand connection where the relevant customer has accepted a connection offer from the **Network Operator**; and

b) each authorised reinforcement, asset replacement scheme or similar related to the **Network Operators' System**.

PC.9.3.3.4 A copy of **Data Registration Code** Schedule 23a, populated with demand and generation data corresponding to the date and time of **NETS** peak demand as specified by **The Company** in calendar week 17. Schedule 23a provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. the date and time of **NETS** peak demand specified by **The Company**; and

ii. forecasts for future dates and times of **NETS** peak demand specified by **The Company**.

PC.9.3.3.5 A copy of **Data Registration Code** Schedule 23b, populated with demand and generation data relating to a date and time established by the **Network Operator** as being the time and date of the **Connection Point** peak **Group Demand**. Schedule 23b provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. the time and date of **Connection Point** peak **Group Demand**; and

ii. forecasts of the **Connection Point** peak **Group Demand** times and dates.

b) Associated **Connection Point** data at the dates and times of **Connection Point** peak **Group Demand**. Where an associated **Connection Point** is normally operated in parallel with the **Connection Point**, consideration shall be given to presenting data for the associated **Connection Point** and the **Connection Point** as if it was a single **Connection Point**.

c) A reference to any post fault actions, associated network reconfigurations and demand transfers which shall be described in more detail in the **PSM Scenario Document**.

PC.9.3.3.6 A copy of **Data Registration Code** Schedule 23c, populated with demand and generation data relating to a date and time established by the **Network Operator** as being the time and date of the **Connection Point** peak **Group Demand** during the **Access Period**. Schedule 23c provides information including:

a) **Group Demand** and the export from **Embedded Power Stations** for each **Connection Point** at:

i. the date and time of the **Connection Point** peak **Group Demand** during the **Access Period**; and

ii. forecasts for future dates and times of the **Connection Point** peak **Group Demand** during the **Access Period**.

b) Associated **Connection Point** data at the date and time of **Connection Point** peak **Group Demand** during the **Access Period**. Where an associated **Connection Point** is normally operated in parallel with the **Connection Point**, consideration shall be given to presenting data for the associated **Connection Point** and the **Connection Point** as if it was a single **Connection Point**.

c) A reference to any post fault actions, associated network reconfigurations and demand transfers which shall be described in more detail in the **PSM Scenario Document**.

PC.9.3.3.7 A copy of **Data Registration Code** Schedules 24, populated with **Access Group(s)** and with the associated **Access Period** data demonstrating the maintainability of the **Transmission Interface Circuits**.

PC.9.3.3.8 A copy of **Data Registration Code** Schedules 25a, 25b and 25c, populated in relation to **Demand Control** as described in OC.6.6.2, OC.6.5.3 and OC.6.7.2 respectively.

PC.9.3.3.9 A copy of **Data Registration Code** Schedule 26a, populated with:

a) The forecast half hourly **Measured Demand** (**Active Power**) profile, under **Annual ACS Conditions** for the **Network Operator's System** (summated over all **Connection Points**) for the dates of the forecast yearly peak **Measured Demand** on the **Network Operator's System** (as determined by the **Network Operator**); and

b) The forecast half-hourly **Measured Demand** (**Active Power**) with generation netted out for the **Network Operator's System** (summated over all **Connection Points**) for the days of the forecast yearly peak **Measured Demand** on the **Network Operator's System** (as determined by the **Network Operator**).

PC.9.3.3.10 A copy of **Data Registration Code** Schedule 26b, populated with:

a) The forecast half hourly **Measured Demand** (**Active Power**) profile for the **Network Operator's System** (summated over all **Connection Points**) for the dates of the forecast **NETS** peak demand specified by **The Company**;

b) The actual and **Weather Corrected** outturn half-hourly **Measured Demand** (**Active Power**) for the **Network Operator's System** (summated over all **Connection Points**) for the half hour of the date and time of the **NETS** peak demand specified by **The Company**;

c) The actual outturn **Measured Demand** (**Active Power**) with generation netted out on the **Network Operator's System** for the half-hour of the **NETS** peak demand specified by **The Company**; and

d) The forecast half-hourly average **Measured Demand** (**Active Power**) with generation netted out for the **Network Operator's System** (summated over all **Connection Points**) for the dates of the forecast yearly **NETS** peak demand as specified by **The Company**.

PC.9.3.3.11 A copy of **Data Registration Code** Schedule 27, populated with the total **Active Energy** used on the **Network Operator's System** (summated over all **Connection Points**) in the preceding **Financial Year**, both outturn and **Weather Corrected**, together with a forecast for the current **Financial Year**. Each **Active Energy** submission shall be subdivided into the following categories of **Customer** tariff:

(i) LV1

(ii) LV2

(iii) LV3

(iv) HV

(v) EHV

(vi) Traction

(vii) Public Lighting

In addition, the total **Network Operator System** losses and the **Active Energy** provided by **Embedded Power Stations** shall be supplied.

PC.9.3.3.12 A copy of **Data Registration Code** Schedule 28, populated with the **Network Operator's** forecast of **Power Station Registered Capacity** aggregated by **Aggregated Energy Source** (as set out in PC.G.8.1), per **Connection Point**.

PC.9.3.3.13 A copy of **Data Registration Code** Schedule 29a, as described in PC.9.3.2.8, Schedule 29b as described in PC.9.3.2.9, and Schedule 30, as described in PC.9.3.2.10.

PC.9.3.4 The information in support of a request to **The Company** by a **Network Operator** for an **Evaluation of Transmission Impact** assessment shall comprise:

a) Technical information in compliance with PC.9.4.2.2.3, as appropriate, and the proposed connection dates in respect of the **Power Stations** associated with the **Evaluation of Transmission Impact** assessment and a description of any

proposed alteration to the **Network Operator System** required to accommodate the proposed connection(s); and

b) A representation of the **Network Operator System** at the time of the proposed connection(s), either as a **PSM** or a combination of a **PSM** and **PSDM**s, as appropriate.

PC.9.4 Network Operator Subtransmission PSM

PC.9.4.1 Scope

PC.9.4.1.1 The **Subtransmission PSM** is intended to provide data sufficient for power system studies which support the activities outlined in PC.9.2.1, including:

a) power flow calculations; and

b) short circuit calculations in accordance with **Engineering Recommendation** G74.

Support for dynamic power system studies, including RMS dynamic stability type studies, is not required by the **Subtransmission PSM**.

PC.9.4.1.2 The scope of the **Network Operator's System** to be represented by a **Subtransmission PSM** shall include:

a) all parts of the **Network Operator's System** operating at **Supergrid Voltage**;

b) all parts of the **Network Operator's Subtransmission System** operating at a nominal voltage greater than 30kV;

c) all parts of the **Network Operator's Subtransmission System** at any **Transmission Site** operating at a voltage of 30kV or less;

d) **Network Operator's** assets (including transformers and switchgear) at substations connecting the **Network Operator's Subtransmission System** to a lower voltage;

e) all parts of the **Network Operator's System** operating at the voltage level below the **Subtransmission System** which, under either intact network or **Planned Outage** conditions:

i. interconnects and operates in parallel between **Connection Points**; or

ii. interconnects busbars at a **Connection Point**, which are normally run as separate sections;

f) the relevant assets in **Power Stations** connected to the **Network Operator's Subtransmission System**;

g) aggregated representation of **Power Stations** connected to a voltage less than that of the **Subtransmission System**;

h) any **OTSUA** connected to the **Network Operator's System**; and

i) any parts of the **Offshore Transmission System** connected to the **Network Operator's System**.

For the avoidance of doubt, any assets owned or operated by a **Relevant Transmission Licensee** shall not be included in the **Subtransmission PSM**.

PC.9.4.1.3 The **Situation Data** of all **Subtransmission PSMs** shall reflect an intact system, with each switching device in its normal operational state.

PC.9.4.2 Components of the **Solved PSM**

PC.9.4.2.1 The **Solved PSM** has three main types of data:

a) **Structural Data**, which represents the components of a **Network Operator's System**, including their capabilities and connectivity, at a specified date. The **Structural Data** of the **Solved PSM** describes the electrical characteristics of all relevant grid components within the scope set out in PC.9.4.1, including assets (for example overhead lines, underground cables, circuit breakers, switches, power transformers, reactive compensation equipment and similar equipment) including **Generators'** assets;

b) **Situation Data**, which represents an operational state of the system, under specific conditions (i.e. **NETS** peak demand and **NETS** minimum demand as specified by **The Company**). The **Situation Data** of the **Solved PSM** describes the appropriate circuit breaker and/or switch positions, generation/load injections, and transformer tap positions etc; and

c) **Solution Data**, which represents the results of calculations executed using a coordinated set of **Structural Data** and **Situation Data**. The **Solution Data** of the **Solved PSM** includes both steady-state power flow calculation results (which include topology, voltage, and power flow data) and short circuit calculation results (which include short circuit power and current data).

PC.9.4.2.2 Structural Data

PC.9.4.2.2.1 All equipment in scope as set out in PC.9.4.1 shall be described by the **Structural Data** of the **Solved PSM**, including **Network Operator** assets, **Generators'** assets and the load connection points. Where the **Network Operator** and **The Company** agree, a **Solved PSM** can also contain additional details of the **Network Operator's System**.

PC.9.4.2.2.2 The following assets, with their associated data, shall be modelled:

a) Circuit breakers and/or switches to facilitate network reconfiguration required to ensure compliance with relevant technical standards. For all circuit breakers and/or switches modelled, the supplied data shall be the data specified in PC.G.1, which includes information relating to any substation infrastructure where it limits the capability of the circuit breaker and/or switch. Alternatively, supplied circuit breaker and/or switch data may relate to the most restrictive equipment at that site;

b) All transformers with their associated tap changers within the scope of the model. Supplied data shall be the data specified in PC.G.1;

c) All circuits within the scope of the model. Supplied data shall be the data specified in PC.G.1;

d) All reactive compensation assets, for example series compensators, shunt compensators and static VAr compensators, within the scope of the model. Supplied data shall be the data as specified in PC.G.1;

e) All assets comprising an **HVDC System** within the scope of the model. Supplied data shall be the data specified in PC.G.1; and

f) Any assets not specified above, but considered necessary as part of the **Subtransmission PSM**. Where the currently utilised data exchange specification does not support data about such assets, the data shall be exchanged by agreement between **The Company** and the **Network Operator**.

PC.9.4.2.2.3 Each **Synchronous Power Generating Module** and **Power Park Module** in a **Power Station** shall be modelled as follows:

a) Where connected to the **Subtransmission System**, individually, at its actual grid location, accompanied by information regarding the substation assets via which it is connected to the **Subtransmission System**. In the case of each **Power Park Module**, the representation shall be an equivalent; and

b) Where connected at a voltage below that of the **Subtransmission System**, as an aggregated equivalent, connected to the relevant substation busbar in the **Subtransmission PSM**, grouped by **Aggregated Energy Source** (as described in PC.G.8.1).

Supplied data shall be the data as specified in PC.G.1.

The sum of the generation **Registered Capacities** described in a) and b) above should equal the sum of generation **Registered Capacities** provided in Data Registration Code Schedules 29a and 29b.

Where **The Company** reasonably requires it, the **Network Operator** shall supply individual modelling of specific generation connected at a voltage level below the **Subtransmission System**.

PC.9.4.2.2.4 Load shall be modelled as follows:

a) Each load connected to the **Subtransmission System** shall be represented as an equivalent, together with any associated substation assets, at the relevant **Connection Point**, recognising the existence of the following:

i. Identifiable large motors;

ii. Any **Synchronous Power Generating Modules** or **Power Park Modules** in a **Non-Embedded Customer's** site; and

iii. Asynchronous motors that are not individually represented which form part of the general load, and which are modelled in accordance with **Engineering Recommendation** G74 requirements as a suitable equivalent motor.

b) All load connected at a voltage below that of the **Subtransmission System** shall be represented as aggregated load equivalents connected to the relevant substation busbar in the **Subtransmission PSM**. The load object shall be modelled as per **Engineering Recommendation** G74 requirements.

Supplied data shall be the data specified in PC.G.1.

PC.9.4.2.2.5 Information including nominal voltage ratings and nominal current or **Apparent Power** ratings shall be provided for relevant equipment. Supplied data shall be the data specified in PC.G.1.

Normal capability/operational ratings, including seasonal and post-fault ratings, shall be stated according to the following guidelines:

a) All busbars and connection nodes shall have operational voltage limits; and

b) All circuits and transformers shall have current or **Apparent Power** operational ratings. Transformers shall have both normal direction flow ratings and reverse flow ratings.

The supplied normal capability/operational limits and ratings data shall be as specified in PC.G.1.

PC.9.4.2.2.6 At the **Network Operator's** discretion the geospatial location of substations and lines may be included in the **Structural Data**.

PC.9.4.2.2.7 The **Structural Data** of the **Subtransmission PSM** shall connect to the **Structural Data** of **PSMs** of adjacent **Systems** by means of **PSM Interface Nodes**, which are points that represent a modelling boundary either side of which different parties are responsible for data. The grid locations of **PSM Interface Nodes**, shall be agreed by the parties based on the ownership boundaries detailed in Appendix A of the relevant **Bilateral Agreements**. The grid locations of **PSM Interface Nodes**, between **Network Operators**, shall be agreed by the parties. Additional detail on the application of **PSM Interface Nodes** is specified in PC.G.3.

PC.9.4.2.3 Situation Data

PC.9.4.2.3.1 The **Solved PSMs** required by PC.9.3.2.1 and PC.9.3.3.1 have **Situation Data** that might need to be adjusted to represent a specific **NETS** condition, for example **NETS** minimum or **NETS** peak demand. This may arise for example if the **Structural Data** has changed between the date of the **NETS** condition and the **Data Freeze Date** or if there are permanent changes to the network topology.

PC.9.4.2.3.2 **Situation Data** correlating to the prescribed grid condition shall be provided for each relevant component present in the **Structural Data** of the **Solved PSM** as specified in PC.G.1.

PC.9.4.2.4 Solution Data

PC.9.4.2.4.1 Power flow **Solution Data** shall describe the results of a successful power flow calculation based on each specified set of **Situation Data**, and its related **Structural Data**.

PC.9.4.2.4.2 Short circuit **Solution Data** shall describe the results of a specific short circuit calculation based on each specified set of **Situation Data**, and its related **Structural Data**.

PC.9.4.2.5 Diagram Data

The **Solved PSM** shall include diagrams as described in PC.G.1.6.

PC.9.5 Assessment of Site Compliance

PC.9.5.1 The process that ensures the compliance and operability at **Connection Points** during the maintenance of **Transmission Interface Circuits** and the obligations of **Network Operators** in that process are detailed in PC.G.7.

PC.9.6 Confidentiality and Sharing

PC.9.6.1 The models, supporting documentation and associated data submitted to **Network Operators** pursuant to PC.10 are provided in order that **Network Operators** may carry out their responsibilities to meet their **Electricity Distribution Licence** obligations to develop an efficient, coordinated and economical **Network Operator System**. A **Network Operator** may share such models, supporting documents and associated data with companies/contractors employed by the **Network Operator** to carry out those responsibilities.

PC.9.6.2 A suitable, secure platform, to support the physical exchange of information submitted by **Network Operators** pursuant to PC.9 and **The Company** pursuant to PC.10, shall be established by **The Company**.

PC.9.6.3 A system shall be agreed and implemented by **The Company** and **Network Operators** to support the creation, editing, storage and retrieval by appropriate parties, of data related to the **PSM Interface Nodes**.

PC.10 **SUBMISSION OF SYSTEM MODELS AND INFORMATION BY THE COMPANY TO NETWORK OPERATORS**

PC.10.1 General

PC.10.1.1 PC.10 details the planning data to be submitted by **The Company** to **Network Operators**.

PC.10.1.2 Compliance with the data submission requirements within PC.10 shall only apply after the **PSM Implementation Date**.

PC.10.1.3 **The Company** shall use reasonable endeavours to obtain all applicable information required by PC.10 from any **User** connected to the **NETS** and from **Relevant Transmission Licensees**, such that the information provided is the best information available at the time of submission.

PC.10.2 Purpose

PC.10.2.1 The purpose of the data submission set out in PC.10 is to ensure that **The Company** provides sufficient information to **Network Operators** so that they:

a) Have models of the **NETS** which can be used in the creation of the **Network Operator's** own system model;

b) Can establish that their distribution system complies with relevant technical standards; and

c) Are aware of proposed changes to the **NETS** and connections to the **NETS** that may have an impact on the distribution system, hence facilitating a distribution impact assessment.

PC.10.3 Submissions

PC.10.3.1 Submissions by **The Company** to **Network Operators** include:

a) Routine submissions each year in calendar week 12 and calendar week 38. These are described in PC.10.3.2 and PC.10.3.3 respectively. A diagram illustrating the coordination of submissions between the **Network Operators** and **The Company** is provided in PC.G.9; and

b) Additional supplementary information when **The Company** reasonably believes that a new or modified **User** connection, or proposed alteration to the **NETS** may have an impact on a **Network Operator's System**, or on request by the **Network Operator**. This information, together with the routine submissions, shall provide sufficient data so that the **Network Operator** can assess the impact of such a change, modification or alteration. The supplementary information is described in PC.10.3.4.

Nothing shall prevent the submission of data detailed in PC.10 at additional points during the year where agreed between **The Company** and the **Network Operator(s)**.

At a **Network Operator'**s reasonable request and where agreed by **The Company**, additional data on the **NETS** beyond that described in PC.10 shall be provided by **The Company**, for example dynamic model data or more detailed **HVDC System** models.

PC.10.3.1.1 **The Company** shall use the information in the submission from **Network Operators** in calendar week 2 and calendar week 28:

a) When establishing the forecast dates of the summer and winter **Structural Data** to be used in the **Solved PSMs** referred to in PC.10.3.2 and PC.10.3.3 respectively. Those dates shall be provided in the **PSM Scenario Document**. The **Situation Data** of the demand scenarios reflecting those dates and times shall be estimated by **The Company** based on historical information and forecasts of future demand and generation; and

b) To derive, in a reasonable manner, a cohesive forecast to be used in preparing forecast demand information in the **Electricity Ten Year Statement** and for use in **The Company's Operational Planning**. If a **Network Operator** believes that the cohesive forecast **Demand** information in the **Electricity Ten Year Statement** does not reflect its assumptions on **Demand**, it should contact **The Company** to explain

their concerns and may request that **The Company** explain the rationale underpinning these forecasts.

PC.10.3.1.2 **The Company** shall notify the **Network Operators**, in calendar week 43, of:

a) The date and time of the most recent summer **NETS** minimum demand; and

b) For the current **Financial Year** and for each of the following nine **Financial Years**, the forecast date and time of the **NETS** summer minimum demand.

PC.10.3.1.3 **The Company** shall notify the **Network Operators**, in calendar week 17, of:

a) The date and time of the most recent winter **NETS** peak demand; and

b) For the current **Financial Year** and for each of the following nine **Financial Years**, the forecast date and time of the **NETS** winter peak demand.

PC.10.3.2 The data submitted in calendar week 12 shall comprise:

PC.10.3.2.1 A set of **Solved PSMs** of the **NETS** which conform to the **NETS PSM** requirements as described in PC.10.4.2. Each **Solved PSM** shall be based on the same **Structural Data**, referred to as summer **Structural Data**, which reflects **The Company's** best view of the **System** as it is expected to be at the date and time of the forthcoming summer minimum **NETS** demand and which contains asset characteristics sufficient to support both power flow and short circuit calculations. The set of **Solved PSMs** include:

a) A **NETS** minimum demand **Solved PSM** which includes:

i. Summer **Structural Data**;

ii. **Situation Data** corresponding to the date and time of the forecast **NETS** minimum demand between calendar weeks 13 and 43;

iii. **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situational Data.**

b) A **NETS** minimum daylight demand **Solved PSM** which includes:

i. Summer **Structural Data**;

ii. **Situation Data** corresponding to the date and time of the forecast **NETS** minimum demand during the period 10:00 to 16:00 between calendar weeks 13 and 43;

iii. **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situational Data**.

c) A **NETS** low power transfer **Solved PSM** which includes:

i. Summer **Structural Data**;

ii. **Situation Data** corresponding to the date and time of a forecast **NETS** low power transfer between calendar weeks 13 and 43;

iii. **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

d) A **NETS** minimum fault level **Solved PSM** which includes:

i. Summer **Structural Data**;

ii. **Situation Data** based on **Situation Data** of the **NETS** minimum demand **Solved PSM**, defined under PC.10.3.2.1 a), and additionally includes:

a. Demand short circuit contributions; and

b. All active generation connected and energised to the **System**;

Solution Data reflecting the theoretical minimum **NETS** bus fault levels which results from short circuit calculations executed on the **Structural Data** and **Situation Data**; and

iii. **Solution Data** resulting from a short circuit calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

Where two or more of the **Solved PSMs** defined under PC.10.3.2.1 are identical, only a single **Solved PSM** need be provided for those conditions. The conditions represented by such a single **Solved PSM** shall be described in the **PSM Scenario Document**.

PC.10.3.2.2 A **PSM Scenario Document** and a **PSM Change Document**, conformant to the requirements described in PC.G.5 and PC.G.6, respectively.

PC.10.3.2.3 A collection of individual **PSDMs** describing new or modified **User** connections or proposed alterations to the **NETS** that **The Company** reasonably believes may have a material impact on this submission's set of **Solved PSMs**. Individual **PSDMs** shall be supplied for:

a) each new or modified generation and/or load connection not represented in the summer **Structural Data** where the relevant customer has accepted a connection offer from **The Company** to connect to the **NETS**; and

b) each authorised **NETS** reinforcement, asset replacement scheme or similar not included in the summer **Structural Data**.

PC.10.3.3 The data submitted in calendar week 38 shall comprise:

PC.10.3.3.1 A set of **Solved PSMs** of the **NETS** which conform to the **NETS PSM** requirements as described in PC.10.4.2. Each **Solved PSM** shall be based on the same **Structural Data**, referred to as winter **Structural Data**, which reflects **The Company**'s best view of the **System** as it is expected to be at the date and time of the forthcoming winter peak **NETS** demand and which contains asset characteristics sufficient to support both power flow and short circuit calculations. The set of **Solved PSMs** include:

a) A **NETS** peak demand **Solved PSM** which includes:

i. Winter **Structural Data**;

ii. **Situation Data** corresponding to the date and time of the forecast **NETS** peak demand between calendar weeks 43 and 13;

iii. **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

b) For the current **Financial Year** and for each of the following nine **Financial Years**, the forecast date and time of the **NETS** winter peak demand high power transfer **Solved PSM** which includes:

i. Winter **Structural Data**;

ii. **Situation Data** corresponding to the date and time of a forecast **NETS** high power transfer between calendar weeks 43 and 13;

iii. **Solution Data** resulting from a power flow calculation executed on the **Structural Data** and **Situation Data**; and

iv. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

c) A **NETS** maximum fault level **Solved PSM** which includes:

i. Winter **Structural Data**;

ii. **Situation Data** based on **Situation Data** of the maximum demand **Solved PSM**, defined under PC.10.3.3.1 a), and additionally includes:

a. Demand short circuit contributions; and

b. All generation connected and energised to the **System**;

Solution Data reflecting the theoretical maximum **NETS** bus fault levels which results from short circuit calculations executed on the **Structural Data** and **Situation Data**; and

iii. **Diagram Data** describing diagrams of **Structural Data** and a subset of **Situation Data**.

Where two or more of the **Solved PSMs** defined under PC.10.3.3.1 are identical, only a single **Solved PSM** need be provided for these conditions. The conditions represented by such a single **Solved PSM** shall be described in the **PSM Scenario Document**.

PC.10.3.3.2 A **PSM Scenario Document** and a **PSM Change Document**, conformant to the requirements described in PC.G.5 and PC.G.6, respectively.

PC.10.3.3.3 A collection of individual **PSDMs** describing new or modified **User** connections or proposed alterations to the **NETS** that **The Company** reasonably believes may have a material impact on this submission's set of **Solved PSM**s. Individual **PSDM**s shall be supplied for:

a) Each new or modified generation and/or load connection not represented in the winter **Structural Data** where the relevant customer has accepted a connection offer from **The Company** to connect to the **NETS**; and

b) Each authorised **NETS** reinforcement, asset replacement scheme or similar not included in the winter **Structural Data**.

PC.10.3.4 The supplementary information required under the conditions outlined in PC.10.3.1 b) shall comprise:

a) A **PSDM** describing the new or modified **User** connection or proposed alteration to the **NETS**; and

b) A representation of the **NETS** and its **User** connections at the time the new or modified **User** connection, or proposed **NETS** alteration is planned to be commissioned, supplied in the form of an updated **Structural Data** file or **Solved PSM** and **PSDMs** as required, where:

i. The **PSM** reflects the time of commissioning; or

ii. The **PSM** reflects any earlier time supplemented by **PSDM**s sufficient to enable updating of the **PSM** to reflect the time of commissioning.

PC.10.4 <u>The Company's NETS PSM</u>

PC.10.4.1 Scope

PC.10.4.1.1 The **NETS PSM**(s) is intended to provide data sufficient for power system studies which support the activities outlined in PC.10.2.1, including:

a) power flow calculations; and

b) short circuit calculations in accordance with **Engineering Recommendation** G74.

Support for dynamic power system studies, including RMS dynamic stability type studies, is not required in the **NETS PSM**.

PC.10.4.1.2 The scope of the **NETS PSM** includes the entirety of the **NETS**, including any **HVDC System**s, together with equivalent representation of **Users' Systems**, connected to the **NETS**.

PC.10.4.1.3 The **Structural Data** of the **NETS PSM** shall include:

a) all assets forming the **NETS** including transformers and switchgear at substations connecting **Users** to the **NETS**;

b) the relevant assets in **Power Stations** directly connected to the **NETS**;

c) the relevant assets of **Non-Embedded Customers**, aggregated;

d) a representation of **Power Stations** and the load, which shall be modelled as per **Engineering Recommendation** G74 requirements; and

e) any **OTSUA** connected to the **NETS**.

For the avoidance of doubt, any assets owned or operated by a **Network Operator** shall not be included in the **NETS PSM**.

PC.10.4.1.4 The **Situation Data** of all **NETS PSMs** shall reflect an intact system, with each switching device in its normal operational state.

PC.10.4.2 Components of the **Solved PSM**

PC.10.4.2.1 The **Solved PSM** has three main types of data:

a) **Structural Data**, which represents the equipment forming the **NETS**, including their capabilities and connectivity, at a specified date. The **Structural Data** of the **Solved PSM** describes the electrical characteristics of all relevant **NETS** equipment within the scope set out in PC.10.4.1, including assets (for example overhead lines, underground cables, circuit breakers, switches, power transformers, reactive compensation equipment, quadrature boosters, and similar equipment) as well as **Generators'** assets and the load connection points;

b) **Situation Data**, which represents an operational state of the **System**, under specific conditions (i.e. **NETS** peak and **NETS** minimum as specified by **The Company**). The **Situation Data** of the **Solved PSM** describes the appropriate circuit breaker and/or switch positions, generation/load injections, and transformer tap positions etc.; and

c) **Solution Data**, which represents the results of calculations executed using a coordinated set of **Structural Data** and **Situation Data**. The **Solution Data** of the **Solved PSM** can represent either steady-state power flow calculation results (which include topology, voltage, and power flow data) or short circuit calculation results (which include short circuit power and current data).

PC.10.4.2.2 Structural Data

PC.10.4.2.2.1 All equipment in scope as set out in PC.10.4.1 shall be described by the **Structural Data** of the **Solved PSM**.

PC.10.4.2.2.2 The following assets, with their associated data, shall be modelled:

a) All circuit breakers within the scope of the model and switches that are required to facilitate system reconfiguration. For all circuit breakers and/or switches modelled, the supplied data shall be the data specified in PC.G.1, which includes information relating to any substation infrastructure where it limits the capability of the circuit breaker and/or switch. Alternatively, supplied circuit breaker and/or switch data may relate to the most restrictive equipment at that site;

b) All transformers (including quadrature boosters) with their associated tap changers within the scope of the model. Supplied data shall be the data specified in PC.G.1;

c) All circuits within the scope of the model. Supplied data shall be the data specified in PC.G.1;

d) All reactive compensation assets, for example series compensators, shunt compensators and static VAr compensators, within the scope of the model. Supplied data shall be the data specified in PC.G.1;

e) All assets comprising an **HVDC System** within the scope of the model. Supplied data shall be the data specified in PC.G.1.

In relation to **HVDC Systems** where not all the **HVDC Interface Points** connect to the **NETS**, the model may include an equivalent representation of the **HVDC System**. Reference to the operation of these equivalents shall be made in the **PSM Scenario Document**; and

f) Any assets not specified above, but considered necessary as part of the **NETS PSM**. Where the currently utilised data exchange specification does not support data about such assets, the data shall be exchanged by agreement.

PC.10.4.2.2.3 **Synchronous Power Generating Modules** in **Power Stations** shall be individually represented, and accompanied by information regarding the substation assets, at the relevant **Connection Point**. **Power Park Modules** in **Power Stations** shall be represented as an equivalent, together with any associated substation assets, at the relevant **Connection Point**. Supplied data shall be the data specified in PC.G.1.

PC.10.4.2.2.4 **Non-Embedded Customer's** assets shall be represented as an equivalent, together with any associated substation assets, at the relevant **Connection Point**, recognising the existence of the following:

a) Identifiable large motors;

b) Any **Synchronous Power Generating Modules** or **Power Park Modules** in a **Non-Embedded Customer's** site; and

c) Asynchronous motors that are not individually represented which form part of the general load and which are modelled, in accordance with **Engineering Recommendation** G74 requirements as a suitable equivalent motor.

Supplied data shall be the data specified in PC.G.1.

PC.10.4.2.2.5 Information including nominal voltage ratings and nominal current or **Apparent Power** ratings shall be provided for relevant equipment. Supplied data shall be the data specified in PC.G.1. Normal capability/operational ratings, including seasonal and post-fault ratings, shall be stated according to the following guidelines:

a) All busbars and connection nodes shall have operational voltage limits; and

b) All circuits and transformers shall have current or **Apparent Power** operational ratings. Transformers shall have both normal direction flow ratings and reverse flow ratings.

The supplied normal capability/operational limits and ratings data shall be as specified in PC.G.1.

PC.10.4.2.2.6 At **The Company's** discretion the geospatial location of substations and lines may be modelled.

PC.10.4.2.2.7 The **Structural Data** of the **NETS PSM** shall connect to the **Structural Data** of **Subtransmission PSMs** by means of **PSM Interface Nodes**, which are points that represent a modelling boundary either side of which different parties are responsible for data. The grid locations of **PSM Interface Nodes** shall be agreed by the relevant parties based on the ownership boundaries detailed in Appendix A of the relevant **Bilateral Agreements**. Additional detail on the application of **PSM Interface Nodes** is specified in PC.G.3.

PC.10.4.2.3 Situation Data

PC.10.4.2.3.1 Both the summer and winter **Structural Data** sets shall have one or more sets of related **Situation Data** reflecting each of the forecast operational conditions set out in PC.10.3.2.1 and PC.10.3.3.1.

PC.10.4.2.3.2 **Situation Data** correlating to the prescribed grid condition shall be provided for each relevant component present in the **Structural Data** of the **Solved PSM** as specified in PC.G.1.

PC.10.4.2.4 Solution Data

PC.10.4.2.4.1 Power flow **Solution Data** shall describe the results of a successful power flow calculation based on each specified set of **Situation Data**, and its related **Structural Data**.

PC.10.4.2.4.2 Short circuit **Solution Data** shall describe the results of a specific short circuit calculation based on each specified set of **Situation Data**, and its related **Structural Data**.

PC.10.4.2.5 Diagram Data

The **Solved PSM** shall include diagrams as described in PC.G.1.6.

PC.10.5 Assessment of Site Compliance

PC.10.5.1 The process to ensure the compliance and operability at **Connection Points** during the maintenance of **Transmission Interface Circuit** and the obligations of **The Company** in that process are detailed in PC.G.7.

PC.10.5.2 **The Company** shall, no later than calendar week 7 of each year, in accordance with the requirements of PC.G.7.5, provide each **Network Operator** with a proposed **Transmission Interface Circuit** outage plan in the form of a draft version of Schedule 24.

PC.10.5.3 **The Company** shall notify **The Authority**, where an **Access Period** is amended pursuant to PC.G.7.11 (b).

PC.10.5.4 Following the submission of data by a **Network Operator** by calendar week 28 of each year, **The Company** shall, by calendar week 6 of the following year, submit in writing to the **Network Operator**, the assessment results detailed in PC.G.7.13.

PC.10.6 Confidentiality and Sharing

PC.10.6.1 The models, supporting documentation and associated data submitted to **The Company** pursuant to PC.9 are provided in order that **The Company** and **Transmission Licensees** may carry out their responsibilities to meet their electricity transmission **Licence** obligations to develop efficient, coordinated and economical **NETS** and **Transmission Systems**. **The Company** and **Transmission Licensees** may share such models, supporting document and associated data with companies/contractors employed by **The Company** and **Transmission Licensees** to carry out those responsibilities.

PC.10.6.2 A suitable, secure platform shall be agreed and implemented by **The Company** and **Network Operators** to support the physical exchange of information submitted by **Network Operators** and **The Company**.

PC.10.6.3 A system shall be agreed and implemented by **The Company** and **Network Operators** to support the creation, editing, storage and retrieval by appropriate parties, of data related to the **PSM Interface Nodes**.

APPENDIX A - PLANNING DATA REQUIREMENTS

PC.A.1 INTRODUCTION

PC.A.1.1 Appendix A specifies data requirements to be submitted to **The Company** by **Users**, and in certain circumstances to **Users** by **The Company**.

PC.A.1.2 Submissions by Users

(a) Planning data submissions by **Users** shall be:

(i) with respect to the current **Financial Year** and each of the nine succeeding **Financial Years** (other than in the case of **Registered Data** which will reflect the current position and data relating to **Demand** forecasts which relates also to the current year);

(ii) provided by **Users** in connection with a **CUSC Contract** (PC.4.1, PC.4.4 and PC.4.5 refer);

(iii) provided by **Users** on a routine annual basis in calendar week 24 of each year to maintain an up-to-date data bank (although **Network Operators** may delay the submission of data (other than that to be submitted pursuant to PC.3.2(c) and PC.3.2(d)) until calendar week 28). In addition the structural data in DRC Schedule 5 Tables 5(a), 5(b), 5(d), 5(e) , 5(f) and DRC Schedule 13 (Lumped system susceptance (PC.A.2.3) only) provided by **Network Operators** by calendar week 28 shall be updated by calendar week 50 of each year (again which may be delayed as above until week 2 of the following calendar year). Where from the date of one annual (or in the case of Schedule 5 or Schedule 13 the calendar week 50) submission to another there is no change in the data (or in some of the data) to be submitted, instead of re-submitting the data, a **User** may submit a written statement that there has been no change from the data (or some of the data) submitted the previous time; and

(iv) provided by **Network Operators** in connection with **Embedded Development** (PC.4.4 refers).

(b) Where there is any change (or anticipated change) in **Committed Project Planning Data** or a significant change in **Connected Planning Data** in the category of **Forecast Data** or any change (or anticipated change) in **Connected Planning Data** in the categories of **Registered Data** or **Estimated Registered Data** supplied to **The Company** under the **PC**, notwithstanding that the change may subsequently be notified to **The Company** under the **PC** as part of the routine annual update of data (or that the change may be a **Modification** under the **CUSC**), the **User** shall, subject to PC.A.3.2.3 and PC.A.3.2.4, notify **The Company** in writing without delay.

(c) The notification of the change will be in the form required under this **PC** in relation to the supply of that data and will also contain the following information:

(i) the time and date at which the change became, or is expected to become, effective;

(ii) if the change is only temporary, an estimate of the time and date at which the data will revert to the previous registered form.

(d) The routine annual update of data, referred to in (a)(iii) above, need not be submitted in respect of **Small Power Stations** or **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **HVDC System** (except as provided in PC.3.2.(c)), or unless specifically requested by **The Company**, or unless otherwise specifically provided.

PC.A.1.3 Submissions by The Company

Network Data release by **The Company** shall be:

(a) with respect to the current **Financial Year**;

(b) provided by **The Company** on a routine annual basis in calendar week 42 of each year. Where from the date of one annual submission to another there is no change in the data (or in some of the data) to be released, instead of repeating the data, **The Company** may release a written statement that there has been no change from the data (or some of the data) released the previous time.

The three parts of Appendix A

PC.A.1.4 The data requirements listed in this Appendix are subdivided into the following four parts:

(a) Standard Planning Data

This data (as listed in Part 1 of Appendix A) is first to be provided by a **User** at the time of an application for a **CUSC Contract** or in accordance with PC.4.4.3. It comprises data which is expected normally to be sufficient for **The Company** to investigate the impact on the **National Electricity Transmission System** of any **User Development** or **Embedded Development** associated with an application by the **User** for a **CUSC Contract**. **Users** should note that the term **Standard Planning Data** also includes the information referred to in PC.4.4.1.(a) and PC.4.4.3.(a). In the case of **OTSUA**, this data is first to be provided by a **User** in accordance with the time line in Appendix F.

(b) Detailed Planning Data

This data (as listed in Part 2 of Appendix A) includes both **DPD I** and **DPD II** and is to be provided in accordance with PC.4.4.2 and PC.4.4.4. It comprises additional, more detailed, data not normally expected to be required by **The Company** to investigate the impact on the **National Electricity Transmission System** of any **User Development** associated with an application by the **User** for a **CUSC Contract** or **Embedded Development Agreement**. **Users** and **Network Operators** in respect of **Embedded Developments** should note that the term **Detailed Planning Data** also includes **Operation Diagrams** and **Site Common Drawings** produced in accordance with the **CC** and **ECC**.

The **User** may, however, be required by **The Company** to provide the **Detailed Planning Data** in advance of the normal timescale before **The Company** can make an offer for a **CUSC Contract**, as explained in PC.4.5.

(c) Network Data

The data requirements for **The Company** in this Appendix are in Part 3.

(d) Offshore Transmission System (OTSDUW) Data

Generators who are undertaking **OTSDUW** are required to submit data in accordance with Appendix A as summarised in Schedule 18 of the **Data Registration Code**.

Forecast Data, Registered Data and Estimated Registered Data

PC.A.1.5 As explained in PC.5.4 and PC.5.5, **Planning Data** is divided into:

(i) those items of **Standard Planning Data** and **Detailed Planning Data** known as **Forecast Data**; and

(ii) those items of **Standard Planning Data** and **Detailed Planning Data** known as **Registered Data**; and

(iii) those items of **Standard Planning Data** and **Detailed Planning Data** known as **Estimated Registered Data**.

PC.A.1.6 The following paragraphs in this Appendix relate to **Forecast Data**:

3.2.2(b), (h), (i) and (j)

4.2.1

4.3.1

4.3.2

4.3.3

4.3.4

4.3.5

4.5

4.7.1

5.2.1

5.2.2

5.6.1

PC.A.1.7 The following paragraphs in this Appendix relate to **Registered Data** and **Estimated Registered Data**:

2.2.1

2.2.4

2.2.5

2.2.6

2.3.1

2.4.1

2.4.2

3.2.2(a), (c), (d), (e), (f), (g), (i)(part) and (j)

3.4.1

3.4.2

4.2.3

4.5(a)(i), (a)(iii), (b)(i) and (b)(iii)

4.6

5.3.2

5.4

5.4.2

5.4.3

5.5

5.6.3

6.2

6.3

PC.A.1.8 The data supplied under PC.A.3.3.1, although in the nature of **Registered Data**, is only supplied either upon application for a **CUSC Contract**, or in accordance with PC.4.4.3, and therefore does not fall to be **Registered Data**, but is **Estimated Registered Data**.

PC.A.1.9 **Forecast Data** must contain the **User's** best forecast of the data being forecast, acting as a reasonable and prudent **User** in all the circumstances.

PC.A.1.10 **Registered Data** must contain validated actual values, parameters or other information (as the case may be) which replace the estimated values, parameters or other information (as the case may be) which were given in relation to those data items when they were **Preliminary Project Planning Data** and **Committed Project Planning Data**, or in the case of changes, which replace earlier actual values, parameters or other information (as the case may be). Until amended pursuant to the Grid Code, these actual values, parameters or other information (as the case may be) will be the basis upon which the **National Electricity Transmission System** is planned, designed, built and operated in accordance with, amongst other things, the **Transmission Licence** and the **ESO Licence**, the **STC** and the Grid Code, and on which **The Company** therefore relies. In following the processes set out in the **BC**, **The Company** will use the data which has been supplied to it under the **BC** and the data supplied under **OC2** in relation to **Gensets**, but the provision of such data will not alter the data supplied by **Users** under the **PC**, which may only be amended as provided in the **PC**.

PC.A.1.11 **Estimated Registered Data** must contain the **User's** best estimate of the values, parameters or other information (as the case may be), acting as a reasonable and prudent **User** in all the circumstances.

PC.A.1.12 Certain data does not need to be supplied in relation to **Embedded Power Stations** or **Embedded DC Converter Stations** or **Embedded HVDC Systems** where these are connected at a voltage level below the voltage level directly connected to the **National Electricity Transmission System** except in connection with a **CUSC Contract**, or unless specifically requested by **The Company**.

PC.A.1.13 In the case of **OTSUA**, Schedule 18 of the **Data Registration Code** shall be construed in such a manner as to achieve the intent of such provisions by reference to the **OTSUA** and the **Interface Point** and all **Connection Points**.

PART 1 - STANDARD PLANNING DATA

PC.A.2 USER'S SYSTEM (AND OTSUA) DATA

PC.A.2.1 Introduction

PC.A.2.1.1 Each **User**, whether connected directly via an existing **Connection Point** to the **National Electricity Transmission System**, or seeking such a direct connection, or providing terms for connection of an **Offshore Transmission System** to its **User System** to **The Company**, shall provide **The Company** with data on its **User System** (and any **OTSUA**) which relates to the **Connection Site** (and in the case of **OTSUA**, the **Interface Point**) and/or which may have a system effect on the performance of the **National Electricity Transmission System**. Such data, current and forecast, is specified in PC.A.2.2 to PC.A.2.5. In addition each **Generator** in respect of its **Embedded Large Power Stations** and its **Embedded Medium Power Stations** subject to a **Bilateral Agreement** and each **Network Operator** in respect of **Embedded Medium Power Stations** within its **System** not subject to a **Bilateral Agreement** connected to the **Subtransmission System**, shall provide **The Company** with fault infeed data as specified in PC.A.2.5.5 and each **DC Converter** owner with **Embedded DC Converter Stations** subject to a **Bilateral Agreement** and **Embedded HVDC System Owner** subject to a **Bilateral Agreement**, or **Network Operator** in the case of **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** or **Embedded HVDC Systems** not subject to a **Bilateral Agreement**, connected to the **Subtransmission System** shall provide **The Company** with fault infeed data as specified in PC.A.2.5.6.

PC.A.2.1.2 Each **User** must reflect the system effect at the **Connection Site(s)** of any third party **Embedded** within its **User System** whether existing or proposed.

PC.A.2.1.3 Although not itemised here, each **User** with an existing or proposed **Embedded Small Power Station**, **Embedded Medium Power Station**, **Embedded DC Converter Station or HVDC System** with a **Registered Capacity** of less than 100MW or an **Embedded** installation of direct current converters which does not form a **DC Converter Station** or **HVDC System** in its **User System** may, at **The Company's** reasonable discretion, be required to provide additional details relating to the **User's System** between the **Connection Site** and the existing or proposed **Embedded Small Power Station**, **Embedded Medium Power Station, Embedded DC Converter Station**, **Embedded HVDC System** or **Embedded** installation of direct current converters which does not form a **DC Converter Station** or **Embedded** installation which does not form an **HVDC System**.

PC.A.2.1.4 At **The Company's** reasonable request, additional data on the **User's System** (or **OTSUA**) will need to be supplied. Some of the possible reasons for such a request, and the data required, are given in PC.A.6.2, PC.A.6.4, PC.A.6.5 and PC.A.6.6.

PC.A.2.2 User's System (and OTSUA) Layout

PC.A.2.2.1 Each **User** shall provide a **Single Line Diagram**, depicting both its existing and proposed arrangement(s) of load current carrying **Apparatus** relating to both existing and proposed **Connection Points** (including in the case of **OTSUA**, **Interface Points**).

PC.A.2.2.2 The **Single Line Diagram** (three examples are shown in Appendix B) must include all parts of the **User System** operating at **Supergrid Voltage** throughout **Great Britain** and, in Scotland and **Offshore**, also all parts of the **User System** operating at 132kV or greater, and those parts of its **Subtransmission System** at any **Transmission Site**. In the case of **OTSDUW**, the **Single Line Diagram** must also include the **OTSUA**. In addition, the **Single Line Diagram** must include all parts of the **User's Subtransmission System** (and any **OTSUA**) throughout **Great Britain** operating at a voltage greater than 50kV, and, in Scotland and **Offshore**, also all parts of the **User's Subtransmission System** (and any **OTSUA**) operating at a voltage greater than 30kV, which, under either intact network or **Planned Outage** conditions:

(a) normally interconnects separate **Connection Points**, or busbars at a **Connection Point** which are normally run in separate sections; or

(b) connects **Embedded Large Power Stations**, or **Embedded Medium Power Stations**, or **Embedded DC Converter Stations**, or **Embedded HVDC Systems** or **Offshore Transmission Systems** connected to the **User's Subtransmission System**, to a **Connection Point** or **Interface Point**.

At the **User's** discretion, the **Single Line Diagram** can also contain additional details of the **User's Subtransmission System** (and any **OTSUA**) not already included above, and also details of the transformers connecting the **User's Subtransmission System** to a lower voltage. With **The Company's** agreement, the **Single Line Diagram** can also contain information about the **User's System** (and any **OTSUA**) at a voltage below the voltage of the **Subtransmission System**.

The **Single Line Diagram** for a **Power Park Module** (including **DC Connected Power Park Modules**) must include all parts of the System connecting generating equipment to the **Grid Entry Point** (or **User System Entry Point** if **Embedded**). As an alternative, the **User** may choose to submit a **Single Line Diagram** with the equipment between the equivalent **Power Park Unit** and the **Common Collection Busbar** reduced to an electrically equivalent network. The format for a **Single Line Diagram** for a **Power Park Module** (including **DC Connected Power Park Modules**) electrically equivalent system is shown in Appendix B.

The **Single Line Diagram** must include the points at which **Demand** data (provided under PC.A.4.3.4 and PC.A.4.3.5, or in the case of **Generators**, PC.A.5.) and fault infeed data (provided under PC.A.2.5) are supplied.

PC.A.2.2.3 The above-mentioned **Single Line Diagram** shall include:

(a) electrical circuitry (i.e. overhead lines, identifying which circuits are on the same towers, underground cables, power transformers, reactive compensation equipment and similar equipment); and

(b) substation names (in full or abbreviated form) with operating voltages.

In addition, for all load current carrying **Apparatus** operating at **Supergrid Voltage** throughout **Great Britain** and, in Scotland and **Offshore**, also at 132kV or greater, (and any **OTSUA**) the **Single Line Diagram** shall include:

(a) circuit breakers

(b) phasing arrangements.

PC.A.2.2.3.1 For the avoidance of doubt, the **Single Line Diagram** to be supplied is in addition to the **Operation Diagram** supplied pursuant to CC.7.4 or ECC.7.4.

PC.A.2.2.4 For each circuit shown on the **Single Line Diagram** provided under PC.A.2.2.1, each **User** shall provide the following details relating to that part of its **User System** and **OTSUA**:

Circuit Parameters:

Rated voltage (kV)

Operating voltage (kV)

Positive phase sequence reactance

Positive phase sequence resistance

Positive phase sequence susceptance

Zero phase sequence reactance (both self and mutual)

Zero phase sequence resistance (both self and mutual)

Zero phase sequence susceptance (both self and mutual)

In the case of a **Single Line Diagram** for a **Power Park Module** (including **DC Connected Power Park Modules**) electrically equivalent system the data should be on a 100MVA base. Depending on the equivalent system supplied an equivalent tap changer range may need to be supplied. Similarly mutual values, rated voltage and operating voltage may be inappropriate. Additionally in the case of **OTSUA**, seasonal maximum continuous ratings and circuit lengths are to be provided in addition to the data required under PC.A.2.2.4.

PC.A.2.2.5 For each transformer shown on the **Single Line Diagram** provided under PC.A.2.2.1, each **User** (including those undertaking **OTSDUW**) shall provide the following details:

Rated MVA

Voltage Ratio

Winding arrangement

Positive sequence reactance (max, min and nominal tap)

Positive sequence resistance (max, min and nominal tap)

Zero sequence reactance

PC.A.2.2.5.1. In addition, for all interconnecting transformers between the **User's Supergrid Voltage System** and the **User's Subtransmission System** throughout **Great Britain** and, in Scotland and **Offshore**, also for all interconnecting transformers operating at 132kV or greater between the **User's** System and the **User's Subtransmission System** (and any **OTSUA**) the **User** shall supply the following information:-

Tap changer range

Tap change step size

Tap changer type: on load or off circuit

Earthing method: Direct, resistance or reactance

Impedance (if not directly earthed)

PC.A.2.2.6 Each **User** shall supply the following information about the **User's** equipment installed at a **Transmission Site** (or in the case of **OTSUA**, all **OTSDUW Plant and Apparatus**):-

(a) Switchgear. For all circuit breakers:-

Rated voltage (kV)

Operating voltage (kV)

Rated 3-phase rms short-circuit breaking current, (kA)

Rated 1-phase rms short-circuit breaking current, (kA)

Rated 3-phase peak short-circuit making current, (kA)

Rated 1-phase peak short-circuit making current, (kA)

Rated rms continuous current (A)

DC time constant applied at testing of asymmetrical breaking abilities (secs)

In the case of **OTSDUW Plant and Apparatus** operating times for circuit breaker, **Protection**, trip relay and total operating time should be provided.

(b) Substation Infrastructure. For the substation infrastructure (including, but not limited to, switch disconnectors, disconnectors, current transformers, line traps, busbars, through bushings, etc):-

Rated 3-phase rms short-circuit withstand current (kA)

Rated 1-phase rms short-circuit withstand current (kA).

Rated 3-phase short-circuit peak withstand current (kA)

Rated 1- phase short-circuit peak withstand current (kA)

Rated duration of short circuit withstand (secs)

Rated rms continuous current (A)

A single value for the entire substation may be supplied, provided it represents the most restrictive item of current carrying apparatus.

PC.A.2.2.7 In the case of **OTSUA** the following should also be provided

(a) Automatic switching scheme schedules including diagrams and an explanation of how the **System** will operate and what plant will be affected by the schemes **Operation**.

(b) **Intertripping** schemes both generation and **Demand**. In each case a diagram of the scheme and an explanation of how the **System** will operate and what **Plant** will be affected by the schemes **Operation**.

PC.A.2.3 Lumped System Susceptance

PC.A.2.3.1 For all parts of the **User's Subtransmission System** (and any **OTSUA**) which are not included in the **Single Line Diagram** provided under PC.A.2.2.1, each **User** shall provide the equivalent lumped shunt susceptance at nominal **Frequency**.

PC.A.2.3.1.1 This should include shunt reactors connected to cables which are not normally in or out of service independent of the cable (ie. they are regarded as part of the cable).

PC.A.2.3.1.2 This should not include:

(a) independently switched reactive compensation equipment connected to the **User's System** specified under PC.A.2.4, or;

(b) any susceptance of the **User's System** inherent in the **Demand** (**Reactive Power**) data specified under PC.A.4.3.1.

PC.A.2.4 Reactive Compensation Equipment

PC.A.2.4.1 For all independently switched reactive compensation equipment (including any **OTSUA**), including that shown on the **Single Line Diagram**, not operated by **The Company** and connected to the **User's System** at 132kV and above in England and Wales and 33kV and above in Scotland and **Offshore** (including any **OTSDUW Plant and Apparatus** operating at **High Voltage**), other than **Power Factor** correction equipment associated directly with **Customers' Plant** and **Apparatus**, the following information is required:

(a) type of equipment (eg. fixed or variable);

(b) capacitive and/or inductive rating or its operating range in MVAr;

(c) details of any automatic control logic to enable operating characteristics to be determined;

(d) the point of connection to the **User's System** (including **OTSUA**) in terms of electrical location and **System** voltage.

(e) In the case of **OTSDUW Plant and Apparatus** the **User** should also provide:-

(i) Connection node, voltage, rating, power loss, tap range and connection arrangement.

(ii) A mathematical representation in block diagram format to model the control of any dynamic compensation plant. The model should be suitable for RMS dynamic stability type studies where each time constant should be no less than 10ms.

(iii) For Static Var Compensation equipment the **User** should provide:

HV Node

LV Node

Control Node

Nominal Voltage (kV)

Target Voltage (kV)

Maximum MVAr at HV

Minimum MVAr at HV

Slope %

Voltage dependant Q Limit

Normal Running Mode

Positive and zero phase sequence resistance and reactance

Transformer winding type

Connection arrangements

PC.A.2.4.2 **DC Converter Station** owners, **HVDC System Owners** (and a **User** where the **OTSUA** includes an **OTSDUW DC Converter**) are also required to provide information about the reactive compensation and harmonic filtering equipment required to ensure that their **Plant** and **Apparatus** (and the **OTSUA**) complies with the criteria set out in CC.6.1.5 or ECC.6.1.5 (as applicable).

PC.A.2.5 Short Circuit Contribution to National Electricity Transmission System

PC.A.2.5.1 General

(a) To allow **The Company** to calculate fault currents, each **User** is required to provide data, calculated in accordance with **Good Industry Practice**, as set out in the following paragraphs of PC.A.2.5.

(b) The data should be provided for the **User's System** with all **Generating Units** (including **Synchronous Generating Units**), **Power Park Units**, **HVDC Systems** and **DC Converters Synchronised** to that **User's System** (and any **OTSUA** where appropriate). The **User** must ensure that the pre-fault network conditions reflect a credible **System** operating arrangement.

(c) The list of data items required, in whole or part, under the following provisions, is set out in PC.A.2.5.6. Each of the relevant following provisions identifies which data items in the list are required for the situation with which that provision deals.

The fault currents in sub-paragraphs (a) and (b) of the data list in PC.A.2.5.6 should be based on an a.c. load flow that takes into account any pre-fault current flow across the **Point of Connection** (and in the case of **OTSUA**, **Interface Points** and **Connection Points**) being considered.

Measurements made under appropriate **System** conditions may be used by the **User** to obtain the relevant data.

(d) **The Company** may at any time, in writing, specifically request for data to be provided for an alternative **System** condition, for example minimum plant, and the **User** will, insofar as such request is reasonable, provide the information as soon as reasonably practicable following the request.

PC.A.2.5.2 **Network Operators** and **Non-Embedded Customers** are required to submit data in accordance with PC.A.2.5.4. **Generators**, **DC Converter Station** owners, **HVDC System Owners** and **Network Operators**, in respect of **Embedded Medium Power Stations** not subject to a Bil**ateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** within such **Network Operator's Systems** are required to submit data in accordance with PC.A.2.5.5.

PC.A.2.5.3 Where prospective short-circuit currents on **Transmission** equipment are close to the equipment rating, and in **The Company's** reasonable opinion more accurate calculations of the prospective short circuit currents are required, then **The Company** will request additional data as outlined in PC.A.6.6 below.

PC.A.2.5.4 Data from Network Operators and Non-Embedded Customers

PC.A.2.5.4.1 Data is required to be provided at each node on the **Single Line Diagram** provided under PC.A.2.2.1 at which motor loads and/or **Embedded Small Power Stations** and/or **Embedded Medium Power Stations** and/or **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **HVDC System** are connected, assuming a fault at that location, as follows:-

The data items listed under the following parts of PC.A.2.5.6:-

(a) (i), (ii), (iii), (iv), (v) and (vi);

and the data items shall be provided in accordance with the detailed provisions of PC.A.2.5.6(c) - (f).

PC.A.2.5.4.2 **Network Operators** shall provide the following data items in respect of each **Interface Point** within their **User System**:

(a) **Maximum Export Capacity**;

(b) **Maximum Import Capacity**; and,

(c) **Interface Point Target Voltage**/**Power Factor**

Network Operators shall alongside these parameters include details of any manual or automatic post fault actions to be taken by the owner / operator of the **Offshore Transmission System** connected to such **Interface Point** that are required by the **Network Operator**.

PC.A.2.5.5 Data from **Generators** (including **Generators** undertaking **OTSDUW** and those responsible for **DC Connected Power Park Modules**), **DC Converter Station** owners, **HVDC System Owners** and from **Network Operators** in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** within such **Network Operator's Systems**.

PC.A.2.5.5.1 For each **Generating Unit** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) with one or more associated **Unit Transformers**, the **Generator**, or the **Network Operator** in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** within such **Network Operator's System** is required to provide values for the contribution of the **Power Station Auxiliaries** (including **Auxiliary Energy Supplies**) to the fault current flowing through the **Unit Transformer(s)**.

The data items listed under the following parts of PC.A.2.5.6(a) should be provided:-

(i), (ii) and (v);

(iii) if the associated **Generating Unit** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) step-up transformer can supply zero phase sequence current from the **Generating Unit** side to the **National Electricity Transmission System**;

(iv) if the value is not 1.0 p.u;

and the data items shall be provided in accordance with the detailed provisions of PC.A.2.5.6(c) - (f), and with the following parts of this PC.A.2.5.5.

PC.A.2.5.5.2 Auxiliary motor short circuit current contribution and any **Auxiliary Gas Turbine Unit** contribution through the **Unit Transformers** must be represented as a combined short circuit current contribution at the **Generating Unit's** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) terminals, assuming a fault at that location.

PC.A.2.5.5.3 If the **Power Station** or **HVDC System** or **DC Converter Station** (or **OTSDUW Plant and Apparatus** which provides a fault infeed) has separate **Station Transformers**, data should be provided for the fault current contribution from each transformer at its high voltage terminals, assuming a fault at that location, as follows:-

The data items listed under the following parts of PC.A.2.5.6

(a) (i), (ii), (iii), (iv), (v) and (vi);

and the data items shall be provided in accordance with the detailed provisions of PC.A.2.5.6(b) - (f).

PC.A.2.5.5.4 Data for the fault infeeds through both **Unit Transformers** and **Station Transformers** shall be provided for the normal running arrangement when the maximum number of **Generating Units** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) are **Synchronised** to the **System** or when all the **DC Converters** at a **DC Converter Station** or **HVDC Converters** within an **HVDC System** are transferring **Rated MW** in either direction. Where there is an alternative running arrangement (or transfer in the case of a **DC Converter Station** or **HVDC System**) which can give a higher fault infeed through the **Station Transformers**, then a separate data submission representing this condition shall be made.

PC.A.2.5.5.5 Unless the normal operating arrangement within the **Power Station** is to have the **Station** and **Unit Boards** interconnected within the **Power Station**, no account should be taken of the interconnection between the **Station Board** and the **Unit Board**.

PC.A.2.5.5.6 Auxiliary motor short circuit current contribution and any auxiliary **DC Converter Station** contribution or **HVDC System** contribution through the **Station Transformers** must be represented as a combined short circuit current contribution through the **Station Transformers**.

PC.A.2.5.5.7 Where a **Manufacturer's Data & Performance Report** exists in respect of the model of the **Power Park Unit**, the **User** may opt to reference the Manu**facturer's Data & Performance Report** as an alternative to the provision of data in accordance with this PC.A.2.5.5.7. For the avoidance of doubt, all other data provision pursuant to the Grid Code shall still be provided including a Single Line Diagram and those data pertaining thereto.

For each **Power Park Module** (including **DC Connected Power Park Modules**) and each type of **Power Park Unit** (eg. a Doubly Fed Induction Generator) (and any **OTSDUW Plant and Apparatus** which provides a fault infeed), including any **Auxiliaries**, positive, negative and zero sequence root mean square current values are to be provided of the contribution to the short circuit current flowing at:

(i) the **Power Park Unit** terminals, or the **Common Collection Busbar** if an equivalent **Single Line Diagram** and associated data as described in PC.A.2.2.2 is provided, and

(ii) the **Grid Entry Point** (and in case of **OTSUA**, **Transmission Interface Point**), or **User System Entry Point** if **Embedded**

for the following solid faults at the **Grid Entry Point** (and in case of **OTSUA**, **Interface Point**), or **User System Entry Point** if **Embedded**:

(i) a symmetrical three phase short circuit

(ii) a single phase to earth short circuit

(iii) a phase to phase short circuit

(iv) a two phase to earth short circuit

For a **Power Park Module** (including **DC Connected Power Park Modules**) in which one or more of the **Power Park Units** utilise a protective control such as a crowbar circuit, the data should indicate whether the protective control will act in each of the above cases and the effects of its action shall be included in the data. For any case in which the protective control will act, the data for the fault shall also be submitted for the limiting case in which the protective circuit will not act, which may involve the application of a non-solid fault, and the positive, negative and zero sequence retained voltages at;

(i) the **Power Park Unit** terminals, or the **Common Collection Busbar** if an equivalent **Single Line Diagram** and associated data is provided and

(ii) the **Grid Entry Point**, or **User System Entry Point** if **Embedded**

in this limiting case shall be provided.

For each fault for which data is submitted, the data items listed under the following parts of PC.A.2.5.6(a) shall be provided:-

(iv), (vii), (viii), (ix), (x);

In addition, if an equivalent **Single Line Diagram** has been provided the data items listed under the following parts of PC.A.2.5.6(a) shall be provided:-

(xi), (xii), (xiii);

In addition, for a **Power Park Module** (including **DC Connected Power Park Modules**) in which one or more of the **Power Park Units** utilise a protective control such as a crowbar circuit:-

the data items listed under the following parts of PC.A.2.5.6(a) shall be provided:-

(xiv), (xv);

All of the above data items shall be provided in accordance with the detailed provisions of PC.A.2.5.6(c), (d), (f).

Should actual data in respect of fault infeeds be unavailable at the time of the application for a **CUSC Contract** or **Embedded Development Agreement**, a limited subset of the data, representing the maximum fault infeed that may result from all of the plant types being considered, shall be submitted. This data will, as a minimum, represent the root mean square of the positive, negative and zero sequence components of the fault current for both single phase and three phase solid faults at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) at the time of fault application and 50ms following fault application. Actual data in respect of fault infeeds shall be submitted to **The Company** as soon as it is available, in line with PC.A.1.2

PC.A.2.5.6 Data Items

(a) The following is the list of data utilised in this part of the **PC**. It also contains rules on the data which generally apply:-

(i) Root mean square of the symmetrical three-phase short circuit current infeed at the instant of fault, (I_1");

(ii) Root mean square of the symmetrical three-phase short circuit current after the subtransient fault current contribution has substantially decayed, (I_1');

(iii) the zero sequence source resistance and reactance values of the **User's System** as seen from the node on the **Single Line Diagram** provided under PC.A.2.2.1 (or **Power Generating Module** or **Station Transformer** high voltage terminals or **Generating Unit** terminals or **DC Converter** terminals or **HVDC System** terminals, as appropriate) consistent with the infeed described in PC.A.2.5.1.(b);

(iv) root mean square of the pre-fault voltage at which the maximum fault currents were calculated;

(v) the positive sequence X/R ratio at the instant of fault;

(vi) the negative sequence resistance and reactance values of the **User's System** seen from the node on the **Single Line Diagram** provided under PC.A.2.2.1 (or **Power Generating Module** or **Station Transformer** high voltage terminals, or **Generating Unit** terminals or **DC Converter** terminals or **HVDC System** terminals as appropriate) if substantially different from the values of positive sequence resistance and reactance which would be derived from the data provided above;

(vii) A continuous trace and a table showing the root mean square of the positive, negative and zero sequence components of the short circuit current between zero and 140ms at 10ms intervals;

(viii) The **Active Power** (or **Interface Point Capacity** being exported pre-fault by the **OTSDUW Plant and Apparatus**) being generated pre-fault by the **Power Park Module** (including **DC Connected Power Park Modules**) and by each type of **Power Park Unit**;

(ix) The reactive compensation shown explicitly on the **Single Line Diagram** that is switched in;

(x) The **Power Factor** of the **Power Park Module** (including **DC Connected Power Park Modules**) and of each **Power Park Unit** type;

(xi) The positive sequence X/R ratio of the equivalent at the **Common Collection Busbar** or **Interface Point** in the case of **OTSUA**;

(xii) The minimum zero sequence impedance of the equivalent seen from the **Common Collection Busbar** or **Interface Point** in the case of **OTSUA**;

(xiii) The number of **Power Park Units** represented in the equivalent **Power Park Unit**;

(xiv) The additional rotor resistance and reactance (if any) that is applied to the **Power Park Unit** under a fault condition;

(xv) A continuous trace and a table showing the root mean square of the positive, negative and zero sequence components of the retained voltage at the fault point and **Power Park Unit** terminals, or the **Common Collection Busbar** if an equivalent **Single Line Diagram** and associated data as described in PC.A.2.2.2 is provided or **Interface Point** in the case of **OTSUA**, representing the limiting case, which may involve the application of a non-solid fault, required to not cause operation of the protective control;

(b) In considering this data, unless the **User** notifies **The Company** accordingly at the time of data submission, **The Company** will assume that the time constant of decay of the subtransient fault current corresponding to the change from I_1" to I_1', (T") is not significantly different from 40ms. If that assumption is not correct in relation to an item of data, the **User** must inform **The Company** at the time of submission of the data.

(c) The value for the X/R ratio must reflect the rate of decay of the d.c. component that may be present in the fault current and hence that of the sources of the initial fault current. All shunt elements and loads must therefore be deleted from any system model before the X/R ratio is calculated.

(d) In producing the data, the **User** may use "time step analysis" or "fixed-point-in-time analysis" with different impedances.

(e) If a fixed-point-in-time analysis with different impedances method is used, then in relation to the data submitted under (a) (i) above, the data will be required for "time zero" to give I_1". The figure of 120ms is consistent with a decay time constant T" of 40ms, and if that figure is different, then the figure of 120ms must be changed accordingly.

(f) Where a "time step analysis" is carried out, the X/R ratio may be calculated directly from the rate of decay of the d.c. component. The X/R ratio is not that given by the phase angle of the fault current if this is based on a system calculation with shunt loads, but from the Thévenin equivalent of the system impedance at the instant of fault with all non-source shunts removed.

PC.A.3 POWER GENERATING MODULE, GENERATING UNIT, HVDC SYSTEM AND DC CONVERTER DATA

PC.A.3.1 Introduction

Directly Connected

PC.A.3.1.1 Each **Generator**, **HVDC System Owner** and **DC Converter Station** owner (and a **User** where the **OTSUA** includes an **OTSDUW DC Converter**) with an existing, or proposed, **Power Station** or **DC Converter Station** or **HVDC System** directly connected, or to be directly connected, to the **National Electricity Transmission System** (or in the case of **OTSUA**, the **Interface Point**), shall provide **The Company** with data relating to that **Power Station** or **DC Converter Station** or **HVDC System**, both current and forecast, as specified in PC.A.3.2 to PC.A.3.4.

Embedded

PC.A.3.1.2 (a) Each **Generator**, **HVDC System Owner** and **DC Converter Station** owner in respect of its existing, and/or proposed, **Embedded Large Power Stations** and/or **Embedded HVDC Systems** and/or **Embedded DC Converter Stations** and/or its **Embedded Medium Power Stations** subject to a **Bilateral Agreement** and each **Network Operator** in respect of its **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and/or **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and/or **Embedded HVDC Systems** not subject to a **Bilateral Agreement** within such **Network Operator's System** in each case connected to the **Subtransmission System**, shall provide **The Company** with data relating to that **Power Station** or **DC Converter Station** or **HVC System**, both current and forecast, as specified in PC.A.3.2 to PC.A.3.4.

(b) No data need be supplied in relation to any **Small Power Station** or any **Medium Power Station** or installations of direct current converters which do not form a **DC Converter Station** or **HVDC System**, connected at a voltage level below the voltage level of the **Subtransmission System** except:-

(i) in connection with an application for, or under, a **CUSC Contract**, or

(ii) unless specifically requested by **The Company** under PC.A.3.1.4.

PC.A.3.1.3 (a) Each **Network Operator** shall provide **The Company** with the data specified in PC.A.3.2.2(c)(i) and (ii) and PC.A.3.2.2(i).

(b) **Network Operators** need not submit planning data in respect of an **Embedded Small Power Station** unless required to do so under PC.A.1.2(b) or unless specifically requested under PC.A.3.1.4 below, in which case they will supply such data.

PC.A.3.1.4 (a) PC.A.4.2.4(b) and PC.A.4.3.2(a) explain that the forecast **Demand** submitted by each **Network Operator** must be net of the export of all **Small Power Stations** and **Medium Power Stations** and **Customer Generating Plant** and all installations of direct current converters which do not form a **DC Converter Station** or **HVDC System**, **Embedded** within that **Network Operator's System**. The **Network Operator** must inform **The Company** of:

(i) the number of such **Embedded Power Stations** and such **Embedded** installations of direct current converters (including the number of **Generating Units** or **Power Park Modules** (including **DC Connected Power Park Modules**) or **DC Converters** or **HVDC Systems**) together with their summated capacity; and

(ii) beginning from the 2015 Week 24 data submission, for each **Embedded Small Power Station** of registered capacity (as defined in the **Distribution Code**) of 1MW or more:

1. A reference which is unique to each **Network Operator**;

2. The production type as follows:

a) In the case of an **Embedded Small Power Station** first connected on or after 1 January 2015, the production type must be selected from Table PC.A.3.1.4(a) below together with a statement as to whether the generation forms part of a CHP scheme;

b) In the case of an **Embedded Small Power Station** first connected to the **Users' System** before 1 January 2015, as an alternative to the production type, the technology type(s) used, selected from the list set

out at paragraph 2.23 in Version 2 of the Regulatory Instructions and Guidance relating to the distributed generation incentive, innovation funding incentive and registered power zones, reference 83/07, published by Ofgem in April 2007;

3. The registered capacity (as defined in the **Distribution Code**) in MW;

4. The lowest voltage level node that is specified on the most up-to-date **Single Line Diagram** to which it connects or where it will export most of its power;

5. Where it generates electricity from wind or PV, the geographical location using either latitude or longitude or grid reference coordinates of the primary or higher voltage substation to which it connects;

6. The **Reactive Power** and voltage control mode, including the voltage set-point and reactive range, where it operates in voltage control mode, or the target **Power Factor**, where it operates in **Power Factor** mode;

7. Details of the types of loss of mains **Protection** in place and their relay settings which in the case of **Embedded Small Power Stations** first connected to the **Users' System** before 1 January 2015 shall be provided on a reasonable endeavours basis; and

(iii) beginning from the 2019 Week 24 data submission, for **Embedded Power Stations** with **Registered Capacity** of less than 1MW, their best estimate of the aggregated capacity of all such **Embedded Power Stations** per production type as defined in Table PC.A.3.1.4(a); and

(iv) In the case of an **Embedded Small Power Station** comprising **Electricity Storage Modules** or **Electricity Storage Units** first connected the **User's System** on or after 20 May 2020, the storage type selected from Table PC.A.3.1.4(b) and a statement as to whether the storage forms part of a CHP scheme. Where this information is not held by the **Network Operator** it should provide its best view of the type of storage technology.

(b) On receipt of this data, the **Network Operator** or **Generator** (if the data relates to **Power Stations** referred to in PC.A.3.1.2) may be further required, at **The Company's** reasonable discretion, to provide details of **Embedded Small Power Stations** and **Embedded Medium Power Stations** and **Customer Generating Plant** and **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **HVDC System**, both current and forecast, as specified in PC.A.3.2 to PC.A.3.4. Such requirement would arise where **The Company** reasonably considers that the collective effect of a number of such **Embedded Power Stations** and **Customer Generating Plants** and **Embedded** installations of direct current converters may have a significant system effect on the **National Electricity Transmission System**.

Biomass	Hydro run-of-river and poundage
Fossil brown coal/lignite	Hydro water reservoir
Fossil coal-derived gas	Marine
Fossil gas	Nuclear
Fossil hard coal	Other renewable
Fossil oil	Solar
Fossil oil shale	Waste
Fossil peat	Wind offshore
Geothermal	Wind onshore or
Hydro pumped storage	Other

Table PC.A.3.1.4(a)

Chemical	Ammonia	
	Hydrogen	
	Synthetic Fuels	
	Drop-in Fuels	
	Methanol	
	Synthetic Natural Gas	
Electrical	Supercapacitors	
	Superconducting Magnetic ES (SMES)	
Mechanical	Adiabatic Compressed Air	
	Diabatic Compressed Air	
	Liquid Air Energy Storage	
	Pumped Hydro	
	Flywheels	
Electrochemical	Classical batteries	Lead Acid
		Lithium Polymer (Li-Polymer)
		Metal Air
		Nickle Cadmium (Ni-Cd)
		Sodium Nickle Chloride (Na-$NiCl_2$)
		Lithium Ion (Li–ion)
		Sodium Ion (Na–ion)
		Lithium Sulphur (Li-S)
		Sodium Sulphur(Na-S)
		Nickle –Metal Hydride (Ni-MH)
	Flow batteries	Vanadium Red-Oxide
		Zinc – Iron (Zn –Fe)
		Zinc – Bromine (Zn –Br)
Other		

Table PC.A.3.1.4(b)

Busbar Arrangements

PC.A.3.1.5 Where **Generating Units**, which term includes **CCGT Units** and **Synchronous Generating Units** within a **Synchronous Power Generating Module** and **Power Park Modules** (including **DC Connected Power Park Modules**), and **DC Converters**, and **HVDC Systems** are connected to the **National Electricity Transmission System** via a busbar arrangement which is or is expected to be operated in separate sections, the section of busbar to which each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **DC Converter**, **HVDC System** or **Power Park Module** (including **DC Connected Power Park Modules**) is connected is to be identified in the submission.

PC.A.3.2 Output Data

PC.A.3.2.1 (a) **Large Power Stations** and **Gensets**

Data items PC.A.3.2.2 (a), (b), (c), (d), (e), (f) and (h) are required with respect to each **Large Power Station** and each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module)** and **Power Park Module** (including **DC Connected Power Park Modules**) of each **Large Power Station** and for each **Genset** (although (a) is not required for **CCGT Units** and (b), (d) and (e) are not normally required for **CCGT Units** and (a), (b), (c), (d), (e), (f) and (h) are not normally required for **Power Park Units**).

(b) **Embedded Small Power Stations** and **Embedded Medium Power Stations**

Data item PC.A.3.2.2 (a) is required with respect to each **Embedded Small Power Station** and **Embedded Medium Power Station** and each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) and **Power Park Module** (including **DC Connected Power Park Modules**) of each **Embedded Small Power Station** and **Embedded Medium Power Station** (although (a) is not required for **CCGT Units** or **Power Park Units**). In addition, data item PC.A.3.2.2(c)(ii) is required with respect to each **Embedded Medium Power Station**.

(c) **CCGT Units/Modules**

(i) Data item PC.A.3.2.2 (g) is required with respect to each **CCGT Unit**;

(ii) data item PC.A.3.2.2 (a) is required with respect to each **CCGT Module**; and

(iii) data items PC.A.3.2.2 (b), (c), (d) and (e) are required with respect to each **CCGT Module** unless **The Company** informs the relevant **User** in advance of the submission that it needs the data items with respect to each **CCGT Unit** for particular studies, in which case it must be supplied on a **CCGT Unit** basis.

Where any definition utilised or referred to in relation to any of the data items does not reflect **CCGT Units**, such definition shall be deemed to relate to **CCGT Units** for the purposes of these data items. Any **Schedule** in the **DRC** which refers to these data items shall be interpreted to incorporate the **CCGT Unit** basis where appropriate;

(d) **Cascade Hydro Schemes**

Data item PC.A.3.2.2(i) is required with respect to each **Cascade Hydro Scheme**.

(e) **Power Park Units/Modules**

Data items PC.A.3.2.2 (k) is required with respect to each **Power Park Module** (including **DC Connected Power Park Modules**).

(f) **DC Converters** and **HVDC Systems**

Data items PC.A.3.2.2 (a), (b), (c), (d) (e) (f) (h) and (i) are required with respect of each **HVDC System**, each **DC Converter Station** and each **DC Converter** in each **DC Converter Station**. For installations of direct current converters which do not form a **DC Converter Station** only data item PC.A.3.2.2.(a) is required.

PC.A.3.2.2 Items (a), (b), (d), (e), (f), (g), (h), (i), (j) and (k) are to be supplied by each **Generator**, **DC Converter Station** owner, **HVDC System Owner** or **Network Operator** (as the case may be) in accordance with PC.A.3.1.1, PC.A.3.1.2, PC.A.3.1.3 and PC.A.3.1.4. Items (a), and (f)(iv) are to be supplied (as applicable) by a **User** in the case of **OTSUA** which includes an **OTSDUW DC Converter**. Item (c) is to be supplied by each **Network Operator** in all cases:-

(a) **Registered Capacity** (MW), **Maximum Capacity** (in the case of **Power Generating Modules** in addition to **Registered Capacity** on a **Power Station** basis**)** or **Interface Point Capacity** in the case of **OTSDUW**;

(b) **Output Usable** (MW) on a monthly basis;

(c) (i) **System Constrained Capacity** (MW) ie. any constraint placed on the capacity of the **Embedded Generating Unit** (including a **Synchronous Generating Unit** within a **Synchronous Power Generating Module**), **Embedded Power Park Module** (including **DC Connected Power Park Modules**) an **Offshore Transmission**

System at an **Interface Point**, **Embedded HVDC System** or **DC Converter** at an **Embedded DC Converter Station** due to the **Network Operator's System** in which it is **Embedded.** Where **Generating Units** (which term includes **CCGT Units** and **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **Power Park Modules** (including **DC Connected Power Park Modules**), **Offshore Transmission Systems** at an **Interface Point, HVDC Systems** or **DC Converters** are connected to a **Network Operator's User System** via a busbar arrangement which is or is expected to be operated in separate sections, details of busbar running arrangements and connected circuits at the substation to which the **Embedded Generating Unit** (including **Synchronous Generating Units** within an **Embedded Synchronous Power Generating Module)**, **Embedded Power Park Module** (including **DC Connected Power Park Modules**), **Offshore Transmission System** at an **Interface Point**, or **Embedded HVDC System** or **Embedded DC Converter** is connected sufficient for **The Company** to determine where the MW generated by each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **Power Park Module** (including **DC Connected Power Park Modules**), **HVDC System** or **DC Converter** at that **Power Station** or **DC Converter Station** or **Offshore Transmission System** at an **Interface Point** would appear onto the **National Electricity Transmission System**;

(ii) any **Reactive Despatch Network Restrictions**;

(d) **Minimum Generation** (MW), and in the case of **Power Generating Modules** only **Minimum Stable Operating Level** (MW) and **Minimum Regulating Level**;

(e) MW obtainable from **Generating Units** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **Power Park Modules** (including **DC Connected Power Park Modules**), **HVDC Systems** or **DC Converters** at a **DC Converter Station** in excess of **Registered Capacity** or **Maximum Capacity**;

(f) **Generator Performance Chart**:

(i) **GB Code User**(s) in respect of **Generating Units** shall provide a **Generator Performance Chart** and **EU Code Users** in respect of **Power Generating Modules** shall provide a **Power Generating Module Performance Chart** and a **Synchronous Generating Unit Performance Chart**.

(ii) at the electrical point of connection to the **Offshore Transmission System** for an **Offshore Synchronous Generating Unit** and **Offshore Synchronous Power Generating Module**.

(iii) at the electrical point of connection to the **National Electricity Transmission System** (or **User System** if **Embedded**) for a **Non Synchronous Generating Unit** (excluding a **Power Park Unit**), **Power Park Module** (including **DC Connected Power Park Modules**), **HVDC System** and **DC Converter** at a **DC Converter Station**;

(iv) at the **Interface Point** for **OTSDUW Plant and Apparatus**

(v) the charts referenced in PC.A.3.2.2 (f) (i) shall be in the format indicated in Appendix G of the **Planning Code**.

Where a **Reactive Despatch Network Restriction** applies, its existence and details should be highlighted on the **Generator Performance Chart**, in sufficient detail for **The Company** to determine the nature of the restriction.

(g) a list of the **CCGT Units** within a **CCGT Module**, identifying each **CCGT Unit**, and the **CCGT Module** of which it forms part, unambiguously. In the case of a **Range CCGT Module**, details of the possible configurations should also be submitted, together:-

(i) (in the case of a **Range CCGT Module** connected to the **National Electricity Transmission System**) with details of the single **Grid Entry Point** (there can only be one) at which power is provided from the **Range CCGT Module**;

(ii) (in the case of an **Embedded Range CCGT Module**) with details of the single **User System Entry Point** (there can only be one) at which power is provided from the

Range CCGT Module;

Provided that, nothing in this sub-paragraph (g) shall prevent the busbar at the relevant point being operated in separate sections;

(h) expected running regime(s) at each **Power Station**, **HVDC System** or **DC Converter Station** and type of **Power Generating Module** or **Generating Unit** (as applicable), eg. **Steam Unit**, **Gas Turbine Unit**, **Combined Cycle Gas Turbine Unit**, **Power Park Module** (including **DC Connected Power Park Modules**), **Novel Units** (specify by type), etc;

(i) a list of **Power Stations** and **Generating Units** within a **Cascade Hydro Scheme**, identifying each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) and **Power Station** and the **Cascade Hydro Scheme** of which each form part unambiguously. In addition:

(i) details of the **Grid Entry Point** at which **Active Power** is provided, or if **Embedded** the **Grid Supply Point(s)** within which the **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module)** is connected;

(ii) where the **Active Power** output of a **Generating Unit** is split between more than one **Grid Supply Points** the percentage that would appear under normal and outage conditions at each **Grid Supply Point**.

(j) The following additional items are only applicable to **DC Converters** at **DC Converter Stations** and **HVDC Systems**.

Registered Import Capacity (MW);

Import Usable (MW) on a monthly basis;

Minimum Import Capacity (MW);

MW that may be absorbed by a **DC Converter** or **HVDC System** in excess of **Registered Import Capacity** and **Maximum HVDC Active Power Transmission Capacity** under importing conditions and the duration for which this is available;

(k) the number and types of the **Power Park Units** within a **Power Park Module** (including **DC Connected Power Park Modules**), identifying each **Power Park Unit**, the **Power Park Module** of which it forms part and identifying the **BM Unit** of which each **Power Park Module** forms part, unambiguously. In the case of a **Power Station** directly connected to the **National Electricity Transmission System** with multiple **Power Park Modules** (including **DC Connected Power Park Modules**) where **Power Park Units** can be selected to run in different **Power Park Modules** and/or **Power Park Modules** can be selected to run in different **BM Units**, details of the possible configurations should also be submitted. In addition, for **Offshore Power Park Modules** (including **DC Connected Power Park Modules**), the number of **Offshore Power Park Strings** that are aggregated into one **Offshore Power Park Module** should also be submitted.

(l) the number and types of the **Synchronous Generating Units** within a **Synchronous Power Generating Module**, identifying each **Synchronous Generating Unit**, the **Synchronous Power Generating Module** of which it forms part and identifying the **BM Unit** of which each **Synchronous Power Generating Module** forms part, unambiguously. In the case of a **Power Station** directly connected to the **National Electricity Transmission System** with multiple **Synchronous Power Generating Modules** where **Synchronous Generating Units** can be selected to run in different **Synchronous Power Generating Modules** and/or **Synchronous Power Generating Modules** can be selected to run in different **BM Units**, details of the possible configurations should also be submitted.

PC.A.3.2.3 Notwithstanding any other provision of this PC, the **CCGT Units** within a **CCGT Module**, details of which are required under paragraph (g) of PC.A.3.2.2, can only be amended in accordance with the following provisions:-

(a) if the **CCGT Module** is a **Normal CCGT Module**, the **CCGT Units** within that **CCGT Module** can only be amended such that the **CCGT Module** comprises different **CCGT Units** if **The Company** gives its prior consent in writing. Notice of the wish to amend the **CCGT Units** within such a **CCGT Module** must be given at least 6 months before it is wished for the amendment to take effect;

(b) if the **CCGT Module** is a **Range CCGT Module**, the **CCGT Units** within that **CCGT Module** and the **Grid Entry Point** at which the power is provided can only be amended as described in BC1.A1.6.4.

PC.A.3.2.4 Notwithstanding any other provision of this **PC**, the **Power Park Units** within a **Power Park Module** (including **DC Connected Power Park Modules**), and the **Power Park Modules** (including **DC Connected Power Park Modules**) within a **BM Unit**, details of which are required under paragraph (k) of PC.A.3.2.2, can only be amended in accordance with the following provisions:-

(a) if the **Power Park Units** within that **Power Park Module** can only be amended such that the **Power Park Module** comprises different **Power Park Units** due to repair/replacement of individual **Power Park Units** if **The Company** gives its prior consent in writing. Notice of the wish to amend a **Power Park Unit** within such a **Power Park Module** (including **DC Connected Power Park Modules**) must be given at least 4 weeks before it is wished for the amendment to take effect;

(b) if the **Power Park Units** within that **Power Park Module** (including **DC Connected Power Park Modules**) and/or the **Power Park Modules** (including **DC Connected Power Park Modules**) within that **BM Unit** can be selected to run in different **Power Park Modules** and/or **BM Units** as an alternative operational running arrangement the **Power Park Units** within the **Power Park Module**, the **BM Unit** of which each **Power Park Module** forms part, and the **Grid Entry Point** at which the power is provided can only be amended as described in BC1.A.1.8.4.

PC.A.3.2.5 Notwithstanding any other provision of this **PC**, the **Synchronous Generating Units** within a **Synchronous Power Generating Module**, and the **Synchronous Power Generating Modules** within a **BM Unit**, details of which are required under paragraph (l) of PC.A.3.2.2, can only be amended in accordance with the following provisions:-

(a) if the **Synchronous Generating Units** within that **Synchronous Power Generating Module** can only be amended such that the **Synchronous Power Generating Module** comprises different **Synchronous Generating Units** due to repair/replacement of individual **Synchronous Generating Units** if **The Company** gives its prior consent in writing. Notice of the wish to amend a **Synchronous Generating Unit** within such a **Synchronous Power Generating Module** must be given at least 4 weeks before it is wished for the amendment to take effect;

(b) if the **Synchronous Generating Units** within that **Synchronous Power Generating Module** and/or the **Synchronous Power Generating Modules** within that **BM Unit** can be selected to run in different **Synchronous Power Generating Modules** and/or **BM Units** as an alternative operational running arrangement the **Synchronous Generating Units** within the **Synchronous Power Generating Module**, the **BM Unit** of which each **Synchronous Power Generating Module** forms part, and the **Grid Entry Point** at which the power is provided can only be amended as described in BC1.A.1.9.4(c).The requirements of PC.A.3.2.5 need not be satisfied if **Generators** have already submitted data in respect of PC.A.3.2.3, PC.A.3.2.4 and PC.A.3.2.5 for the same **Power Generating Module**.

PC.A.3.3. Rated Parameters Data

PC.A.3.3.1 The following information is required to facilitate an early assessment, by **The Company**, of the need for more detailed studies;

(a) for all **Generating Units** (excluding **Power Park Units**) and **Power Park Modules** (including **DC Connected Power Park Modules**):

Rated MVA

Rated MW;

(b) for each **Synchronous Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**):

Short circuit ratio

Direct axis transient reactance;

Inertia constant (for whole machine), MWsecs/MVA;

(c) for each **Synchronous Generating Unit** step-up transformer (including the step up transformer of a **Synchronous Generating Unit** within a **Synchronous Power Generating Module**):

Rated MVA

Positive sequence reactance (at max, min and nominal tap);

(d) for each **DC Converter** at a **DC Converter Station**, **HVDC System**, **DC Converter** connecting a **Power Park Module** (including a **DC Connected Power Park Module**) and **Transmission DC Converter** (forming part of an **OTSUA**).

DC Converter or **HVDC Converter** type (e.g. current/voltage sourced)

Rated MW per pole for import and export

Number of poles and pole arrangement

Rated DC voltage/pole (kV)

Return path arrangement

Remote AC connection arrangement (excluding **OTSDUW DC Converters**)

Maximum HVDC Active Power Transmission Capacity

Minimum Active Power Transmission Capacity

(e) for each type of **Power Park Unit** in a **Power Park Module** not connected to the **Total System** by a **DC Converter** or **HVDC System**:

Rated MVA

Rated MW

Rated terminal voltage

Inertia constant, (MWsec/MVA)

Additionally, for **Power Park Units** that are squirrel-cage or doubly-fed induction generators driven by wind turbines:

Stator reactance.

Magnetising reactance.

Rotor resistance (at rated running)

Rotor reactance (at rated running)

The generator rotor speed range (minimum and maximum speeds in RPM) (for doubly-fed induction generators only)

Converter MVA rating (for doubly-fed induction generators only)

For a **Power Park Unit** consisting of a synchronous machine in combination with a back-to-back **DC Converter** or **HVDC Converter**, or for a **Power Park Unit** not driven by a wind turbine, the data to be supplied shall be agreed with **The Company** in accordance with PC.A.7.

This information should only be given in the data supplied in accordance with PC.4.4 and PC.4.5.

PC.A.3.4 General Generating Unit, Power Park Module (including **DC Connected Power Park Modules**), Power Generating Module, HVDC System and DC Converter Data

PC.A.3.4.1 The point of connection to the **National Electricity Transmission System** or the **Total System**, if other than to the **National Electricity Transmission System**, in terms of geographical and electrical location and system voltage is also required.

PC.A.3.4.2 (a) Type of **Generating Unit** (ie **Synchronous Power Generating Unit** within a **Power Generating Module**, **Synchronous Generating Unit**, **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** (including **DC Connected Power Park Modules**) or **HVDC System**).

(b) In the case of a **Synchronous Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module)** details of the **Exciter** category, for example whether it is a rotating **Exciter** or a static **Exciter** or in the case of a **Non-Synchronous Generating Unit** the voltage control system.

(c) Whether a **Power System Stabiliser** is fitted.

PC.A.3.4.3 Each **Generator** shall supply **The Company** with the production type(s) used as the primary source of power in respect of each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), selected from the list set out in Table PC.A.3.1.4(a).

PC.A.3.4.4 In the case of an **Electricity Storage Module** or **Electricity Storage Unit**, each **Generator** shall supply **The Company** with the production type(s) used as the primary **Electricity Storage** source (including **Synchronous Electricity Storage Units** within a **Synchronous Electricity Storage Module**), selected from the list set out in Table PC.A.3.1.4(b).

PC.A.4 DEMAND AND ACTIVE ENERGY DATA

PC.A.4.1 Introduction

PC.A.4.1.1 Each **User** directly connected to the **National Electricity Transmission System** with **Demand** shall provide **The Company** with the **Demand** data, historic, current and forecast, as specified in PC.A.4.2 and PC.A.4.3. Paragraphs PC.A.4.1.2 and PC.A.4.1.3 apply equally to **Active Energy** requirements as to **Demand** unless the context otherwise requires.

PC.A.4.1.2 Data will need to be supplied by:

(a) each **Network Operator**, in relation to **Demand** and **Active Energy** requirements on its **User System**;

(b) each **Non-Embedded Customer, Pumped Storage Generators** (with respect to Pumping **Demand**) and **Generators** in relation to **Electricity Storage Modules** in relation to their **Demand** and **Active Energy** requirements.

(c) each **DC Converter Station** owner or **HVDC System Owner** in relation to **Demand** and **Active Energy** transferred (imported) to its **DC Converter Station** or **HVDC System**.

(d) each **OTSDUW DC Converter** in relation to the Demand at each **Interface Point** and **Connection Point**.

Demand of **Power Stations** directly connected to the **National Electricity Transmission System** is to be supplied by the **Generator** under PC.A.5.2.

PC.A.4.1.3 References in this **PC** to data being supplied on a half hourly basis refer to it being supplied for each period of 30 minutes ending on the hour or half-hour in each hour.

PC.A.4.1.4 **Access Periods** and **Access Groups**

PC.A.4.1.4.1 Each **Connection Point** must belong to one, and only one, **Access Group**.

PC.A.4.1.4.2 Each **Transmission Interface Circuit** must have an **Access Period**.

PC.A.4.1.4.3 The **Access Period** shall

(a) normally be a minimum of 8 continuous weeks and can occur in any one of three maintenance years during the period from calendar week 13 to calendar week 43 (inclusive) in each year; or,

(b) exceptionally and provided that agreement is reached between **The Company** and the relevant **User(s)**, such agreement to be sought in accordance with PC.7, the **Access Period** may be of a period not less than 4 continuous weeks and can occur in any one of three maintenance years during the period from calendar week 10 to calendar week 43 (inclusive) in each year.

PC.A.4.1.4.4 **The Company** shall submit in writing no later than calendar week 6 in each year:

(a) the calendar weeks defining the proposed start and finish of each **Access Period** for each **Transmission Interface Circuit**; and

(b) the **Connection Points** in each **Access Group**.

The submission by **The Company** under PC.A.4.1.4.4 (a) above shall commence in 2010 and shall then continue each year thereafter. The submission by **The Company** under PC.A.4.1.4.4 (b) shall commence in 2009 and then continue each year thereafter.

PC.A.4.1.4.5 It is permitted for **Access Periods** to overlap in the same **Access Group** and in the same maintenance year. However, where possible **Access Periods** will be sought by **The Company** that do not overlap with any other **Access Period** within that **Access Group** for each maintenance year. Where it is not possible to avoid overlapping **Access Periods**, **The Company** will indicate to **Users** by calendar week 6 its initial view of which **Transmission Interface Circuits** will need to be considered out of service concurrently for the purpose of assessing compliance to **Licence Standards**. The obligation on **The Company** to indicate which **Transmission Interface Circuits** will need to be considered out of service concurrently for the purpose of assessing compliance to **Licence Standards** shall commence in 2010 and shall continue each year thereafter.

PC.A.4.1.4.6 Following the submission(s) by **The Company** by week 6 in each year and where required by either party, both **The Company** and the relevant **User**(s) shall use their reasonable endeavours to agree the appropriate **Access Group(s)** and **Access Period** for each **Transmission Interface Circuit** prior to week 17 in each year. The requirement on **The Company** and the relevant **User(s)** to agree, shall commence in respect of **Access Groups** only in 2010. This paragraph PC.A.4.1.4.6 shall apply in its entirety in 2011 and shall then continue each year thereafter.

PC.A.4.1.4.7 In exceptional circumstances, and with the agreement of all parties concerned, where a **Connection Point** is specified for the purpose of the **Planning Code** as electrically independent **Subtransmission Systems**, then data submissions can be on the basis of two (or more) individual **Connection Points**.

PC.A.4.2 User's User System Demand (Active Power) and Active Energy Data

PC.A.4.2.1 Forecast daily **Demand** (**Active Power**) profiles, as specified in (a), (b) and (c) below, in respect of each of the **User's User Systems** (each summated over all **Grid Supply Points** in each **User System**) are required for:

(a) peak day on each of the **User's User Systems** (as determined by the **User**) giving the numerical value of the maximum **Demand** (**Active Power**) that in the **Users'** opinion could reasonably be imposed on the **National Electricity Transmission System**;

(b) day of peak **National Electricity Transmission System Demand** (**Active Power**) as notified by **The Company** pursuant to PC.A.4.2.2;

(c) day of minimum **National Electricity Transmission System Demand** (**Active Power**) as notified by **The Company** pursuant to PC.A.4.2.2.

In addition, the total **Demand** (**Active Power**) in respect of the time of peak **National Electricity Transmission System Demand** in the preceding **Financial Year** in respect of each of the **User's User Systems** (each summated over all **Grid Supply Points** in each **User System**) both outturn and weather corrected shall be supplied.

PC.A.4.2.2 No later than calendar week 17 each year, **The Company** shall notify each **Network Operator** and **Non-Embedded Customer** in writing of the following, for the current **Financial Year** and for each of the following nine **Financial Years**, which will, until replaced by the following year's notification, be regarded as the relevant specified days and times under PC.A.4.2.1:

(a) the date and time of the annual peak of the **National Electricity Transmission System Demand**;

(b) the date and time of the annual minimum of the **National Electricity Transmission System Demand**;

(c) the relevant **Access Period** for each **Transmission Interface Circuit**; and,

(d) concurrent **Access Periods** of two or more **Transmission Interface Circuits** (if any) that are situated in the same **Access Group**.

The submissions by **The Company** made under PC.A.4.2.1 (c) and PC.A.4.2.1 (d) above shall commence in 2010 and shall then continue in respect of each year thereafter.

PC.A.4.2.3 The total **Active Energy** used on each of the **Network Operators'** or **Non-Embedded Customers' User Systems** (each summated over all **Grid Supply Points** in each **User System**) in the preceding **Financial Year**, both outturn and weather corrected, together with a prediction for the current financial year, is required. Each **Active Energy** submission shall be subdivided into the following categories of **Customer** tariff:

LV1

LV2

LV3

HV

EHV

Traction

Lighting

In addition, the total **User System** losses and the **Active Energy** provided by **Embedded Small Power Stations** and **Embedded Medium Power Stations** shall be supplied.

PC.A.4.2.4 All forecast **Demand** (**Active Power**) and **Active Energy** specified in PC.A.4.2.1 and PC.A.4.2.3 shall:

(a) in the case of PC.A.4.2.1(a), (b) and (c), be such that the profiles comprise average **Active Power** levels in 'MW' for each time marked half hour throughout the day;

(b) in the case of PC.A.4.2.1(a), (b) and (c), be that remaining after any deductions reasonably considered appropriate by the **User** to take account of the output profile of all **Embedded Small Power Stations** and **Embedded Medium Power Stations** and **Customer Generating Plant** and imports across **Embedded External Interconnections** including imports across **Embedded** installations of direct current converters which do not form a **DC Converter Station** or **HVDC System** and **Embedded DC Converter Stations** and **Embedded HVDC Systems** with a **Registered Capacity** or **HVDC Active Power Transmission Capacity** of less than 100MW;

(c) be based upon **Annual ACS Conditions** for times that occur during week 44 through to week 12 (inclusive) and based on **Average Conditions** for weeks 13 to 43 (inclusive).

PC.A.4.3 Connection Point Demand (Active and Reactive Power)

PC.A.4.3.1 Forecast **Demand** (**Active Power**) and **Power Factor** (values of the **Power Factor** at maximum and minimum continuous excitation may be given instead where more than 95% of the total **Demand** at a **Connection Point** is taken by synchronous motors) to be met at each **Connection Point** within each **Access Group** is required for:

(a) the time of the maximum **Demand** (**Active Power**) at the **Connection Point** (as determined by the **User**) that in the **User's** opinion could reasonably be imposed on the **National Electricity Transmission System**;

(b) the time of peak **National Electricity Transmission System Demand** as provided by **The Company** under PC.A.4.2.2;

(c) the time of minimum **National Electricity Transmission System Demand** as provided by **The Company** under PC.A.4.2.2;

(d) the time of the maximum **Demand** (**Apparent Power**) at the **Connection Point** (as determined by the **User**) during the **Access Period** of each **Transmission Interface Circuit**;

(e) at a time specified by either **The Company** or a **User** insofar as such a request is reasonable.

Instead of such forecast **Demand** to be met at each **Connection Point** within each **Access Group** the **User** may (subject to PC.A.4.3.4) submit such **Demand** at each node on the **Single Line Diagram**.

In addition, the **Demand** in respect of each of the time periods referred to in PC.A.4.3.1 (a) to (e) in the preceding **Financial Year** in respect of each **Connection Point** within each **Access Group** both outturn and weather corrected shall be supplied. The "weather correction" shall normalise outturn figures to **Annual ACS Conditions** for times that occur during calendar week 44 through to calendar week 12 (inclusive) or **Average Conditions** for the period calendar weeks 13 to calendar week 43 (inclusive) and shall be performed by the relevant **User** on a best endeavours basis.

The submission by a **User** pursuant to PC.A.4.3.1 (d) shall commence in 2011 and shall then continue each year thereafter.

PC.A.4.3.2 All forecast **Demand** specified in PC.A.4.3.1 shall:

(a) be that remaining after any deductions reasonably considered appropriate by the **User** to take account of the output of all **Embedded Small Power Stations** and **Embedded Medium Power Stations** and **Customer Generating Plant** and imports across **Embedded External Interconnections**, including **Embedded** installations of direct current converters which do not form a **DC Converter Station**, **HVDC System** and **Embedded DC Converter Stations** and **Embedded HVDC Systems** and such deductions should be separately stated;

(b) include any **User's System** series reactive losses but exclude any reactive compensation equipment specified in PC.A.2.4 and exclude any network susceptance specified in PC.A.2.3;

(c) be based upon **Annual ACS Conditions** for times that occur during calendar week 44 through to calendar week 12 (inclusive) and based on **Average Conditions** for calendar weeks 13 to calendar week 43 (inclusive), both corrections being made on a best endeavours basis;

(d) reflect the **User's** opinion of what could reasonably be imposed on the **National Electricity Transmission System**.

PC.A.4.3.3 The date and time of the forecast maximum **Demand** (**Apparent Power**) at the **Connection Point** as specified in PC.A.4.3.1 (a) and (d) is required.

PC.A.4.3.4 Each **Single Line Diagram** provided under PC.A.2.2.2 shall include the **Demand** (**Active Power**) and **Power Factor** (values of the **Power Factor** at maximum and minimum continuous excitation may be given instead where more than 95% of the **Demand** is taken by synchronous motors) at the time of the peak **National Electricity Transmission System Demand** (as provided under PC.A.4.2.2) at each node on the **Single Line Diagram**. These **Demands** shall be consistent with those provided under PC.A.4.3.1(b) above for the relevant year.

PC.A.4.3.5 The **Single Line Diagram** must represent the **User's User System** layout under the period specified in PC.A.4.3.1(b) (at the time of peak **National Electricity Transmission System Demand**). Should the **User's User System** layout during the other times specified in PC.A.4.3.1 be planned to be materially different from the **Single Line Diagram** submitted to **The Company** pursuant to PC.A.2.2.1 the **User** shall in respect of such other times submit:

(i) an alternative **Single Line Diagram** that accurately reflects the revised layout and in such case shall also include appropriate associated data representing the relevant changes, or;

(ii) submit an accurate and unambiguous description of the changes to the **Single Line Diagram** previously submitted for the time of peak **National Electricity Transmission System Demand**.

Where a **User** does not submit any changes, **The Company** will assume that the **Single Line Diagram** (and associated circuit and node data) provided at the time of peak **National Electricity Transmission System Demand** will be valid for all other times. In respect of such other times, where the **User** does not submit such nodal demands at the times defined in PC.A.4.3.1(a), (c), (d) and (e), the nodal demands will be pro-rata, to be consistent with the submitted **Connection Point Demands**.

PC.A.4.4 **The Company** will assemble and derive in a reasonable manner, the forecast information supplied to it under PC.A.4.2.1, PC.A.4.3.1, PC.A.4.3.4 and PC.A.4.3.5 above into a cohesive forecast and will use this in preparing **Forecast Demand** information in the **Electricity Ten Year Statement** and for use in **The Company's Operational Planning**. If any **User** believes that the cohesive forecast **Demand** information in the **Electricity Ten Year Statement** does not reflect its assumptions on **Demand**, it should contact **The Company** to explain its concerns and may require **The Company**, on reasonable request, to discuss these forecasts. In the absence of such expressions, **The Company** will assume that **Users** concur with **The Company's** cohesive forecast.

PC.A.4.5 Post Fault User System Layout

PC.A.4.5.1 Where for the purposes of **The Company** assessing against the Licence Standards an **Access Group**, the **User** reasonably considers it appropriate that revised post fault **User System** layouts should be taken into account by **The Company**, the following information is required to be submitted by the **User**:

(i) the specified **Connection Point** assessment period (PC.A.4.3.1,(a)-(e)) that is being evaluated;

(ii) an accurate and unambiguous description of the **Transmission Interface Circuits** considered to be switched out due to a fault;

(iii) appropriate revised **Single Line Diagrams** and/or associated revised nodal **Demand** and circuit data detailing the revised **User System(s)** conditions;

(iv) where the **User's** planned post fault action consists of more than one component, each component must be explicitly identified using the **Single Line Diagram** and associated nodal **Demand** and circuit data;

(v) the arrangements for undertaking actions (eg the time taken, automatic or manual and any other appropriate information);.

The **User** must not submit any action that it does not have the capability or the intention to implement during the assessment period specified (subject to there being no further unplanned outages on the **User's User System**).

PC.A.4.6 Control of Demand or Reduction of Pumping Load Offered as Reserve

Magnitude of **Demand** or pumping load or **Electricity Storage Module** charging load which is tripped	MW
System Frequency at which tripping is initiated	Hz
Time duration of **System Frequency** below trip setting for tripping to be initiated	S
Time delay from trip initiation to tripping	S

PC.A.4.7 General Demand Data

PC.A.4.7.1 The following information is infrequently required and should be supplied (wherever possible) when requested by **The Company**:

(a) details of any individual loads (including (as applicable) the load behaviour of an **Electricity Storage Module** when operating in a mode analogous to demand) which have characteristics significantly different from the typical range of Domestic, Commercial , **Electricity Storage** or Industrial loads supplied;

(b) the sensitivity of the **Demand** (**Active** and **Reactive Power**) to variations in voltage and **Frequency** on the **National Electricity Transmission System** at the time of the peak **Demand** (**Active Power**). The sensitivity factors quoted for the **Demand** (**Reactive Power**) should relate to that given under PC.A.4.3.1 and, therefore, include any **User's System** series reactive losses but exclude any reactive compensation equipment specified in PC.A.2.4 and exclude any network susceptance specified in PC.A.2.3;

(c) details of any traction loads, e.g. connection phase pairs and continuous load variation with time;

(d) the average and maximum phase unbalance, in magnitude and phase angle, which the **User** would expect its **Demand** to impose on the **National Electricity Transmission System**;

(e) the maximum harmonic content which the **User** would expect its **Demand** to impose on the **National Electricity Transmission System**;

(f) details of all loads which may cause **Demand** fluctuations greater than those permitted under **Engineering Recommendation** P28 Issue 2, Stage 1 at a **Point of Common Coupling** including the **Flicker Severity Short Term** and the **Flicker Severity Long Term**.

(g) In the case of **Electricity Storage Modules**, details of the **Maximum Capacity, Maximum Import Power, Registered Import Capability**, charge time, discharge time and operating periods.

PART 2 - DETAILED PLANNING DATA

PC.A.5 POWER GENERATING MODULE, GENERATING UNIT, POWER PARK MODULE (INCLUDING DC CONNECTED POWER PARK MODULES), DC CONVERTER, HVDC EQUIPMENT AND OTSDUW PLANT AND APPARATUS DATA

PC.A.5.1 Introduction

Directly Connected

PC.A.5.1.1 Each **Generator** (including those undertaking **OTSDUW**), with existing or proposed **Power Stations** directly connected, or to be directly connected, to the **National Electricity Transmission System**, shall provide **The Company** with data relating to that **Plant** and **Apparatus**, both current and forecast, as specified in PC.A.5.2, PC.A.5.3, PC.A.5.4 and PC.A.5.7 as applicable.

Each **DC Converter Station** owner or **HVDC System Owner**, with existing or proposed **DC Converter Stations** or **HVDC Systems** (including **Generators** undertaking **OTSDUW** which includes an **OTSDUW DC Converter**) directly connected, or to be directly connected, to the **National Electricity Transmission System**, shall provide **The Company** with data relating to that **Plant** and **Apparatus**, both current and forecast, as specified in PC.A.5.2 and PC.A.5.4.

GB Generators, **DC Converter Station** owners, **EU Generators** and **HVDC System Owners** shall ensure that the models supplied in respect of their **Plant** and **Apparatus** provide a true and accurate behaviour of the plant as built as required under PC.A.5.3.2(c), PC.A.5.4.2(a) and PC.A.5.4.3 and verified through the **Compliance Processes (CP)** or **European Compliance Processes** (**ECP**) as applicable.

Embedded

PC.A.5.1.2 Each **Generator**, in respect of its existing, or proposed, **Embedded Large Power Stations** and its **Embedded Medium Power Stations** subject to a **Bilateral Agreement** and each **Network Operator** in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** within its **System** shall provide **The Company** with data relating to each of those **Large Power Stations** and **Medium Power Stations**, both current and forecast, as specified in PC.A.5.2, PC.A.5.3, PC.A.5.4 and PC.A.5.7 as applicable.

Each **DC Converter Station** owner or **HVDC System Owner**, or **Network Operator** in the case of an **Embedded DC Converter Station** or **Embedded HVDC System** not subject to a **Bilateral Agreement** within its **System** with existing or proposed **HVDC Systems** or **DC Converter Stations** shall provide **The Company** with data relating to each of those **HVDC Systems** or **DC Converter Stations**, both current and forecast, as specified in PC.A.5.2 and PC.A.5.4.

However, no data need be supplied in relation to those **Embedded Medium Power Stations** or **Embedded DC Converter Stations** or **Embedded HVDC Systems** if they are connected at a voltage level below the voltage level of the **Subtransmission System** except in connection with an application for, or under a, **CUSC Contract** or unless specifically requested by **The Company** under PC.A.5.1.4.

GB Generators, **DC Converter Station** owners, **EU Generators** and **HVDC System Owners** shall ensure that the models supplied in respect of their **Plant** and **Apparatus** provide a true and accurate behaviour of the plant as built as required under PC.A.5.3.2(c), PC.A.5.4.2(a) and PC.A.5.4.3 and verified through the **Compliance Processes (CP)** or **European Compliance Processes** (**ECP**) as applicable

PC.A.5.1.3 Each **Network Operator** need not submit **Planning Data** in respect of **Embedded Small Power Stations** unless required to do so under PC.A.1.2(b), PC.A.3.1.4 or unless specifically requested under PC.A.5.1.4 below, in which case they will supply such data.

PC.A.5.1.4 PC.A.4.2.4(b) and PC.A.4.3.2(a) explained that the forecast **Demand** submitted by each **Network Operator** must be net of the output of all **Medium Power Stations** and **Small Power Stations** and **Customer Generating Plant Embedded** within that **User's System**. In such cases, the **Network Operator** must provide **The Company** with the relevant information specified under PC.A.3.1.4 . On receipt of this data further details may be required at **The Company's** discretion as follows:

(i) in the case of details required from the **Network Operator** for **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** and **Embedded Small Power Stations** and **Embedded DC Converters** and **Embedded HVDC Systems** in each case within such **Network Operator's System** and **Customer Generating Plant**; and

(ii) in the case of details required from the **Generator** of **Embedded Large Power Stations** and **Embedded Medium Power Stations** subject to a **Bilateral Agreement**; and

(iii) in the case of details required from the **DC Converter Station** owner of an **Embedded DC Converter** or **DC Converter Station** or **HVDC System Owner** of an **Embedded HVDC System Owner** subject to a **Bilateral Agreement**.

both current and forecast, as specified in PC.A.5.2 and PC.A.5.3. Such requirement would arise when **The Company** reasonably considers that the collective effect of a number of such **Embedded Small Power Stations**, **Embedded Medium Power Stations**, **Embedded DC Converter Stations**, **Embedded HVDC Systems**, **DC Converters** and **Customer Generating Plants** may have a significant system effect on the **National Electricity Transmission System**.

PC.A.5.1.5 DPD I and DPD II

The **Detailed Planning Data** described in this Part 2 of Appendix A comprises both **DPD I** and **DPD II**. The required data is listed and collated in the **Data Registration Code**. The **Users** need to refer to the **DRC** to establish whether data referred to here is **DPD I** or **DPD II**.

PC.A.5.2 Demand

PC.A.5.2.1 For each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module)** which has an associated **Unit Transformer**, the value of the **Demand** supplied through this **Unit Transformer** when the **Generating Unit** is at **Rated MW** output is to be provided.

PC.A.5.2.2 Where the **Power Station** or **DC Converter Station** or **HVDC System** has associated **Demand** additional to the unit-supplied **Demand** of PC.A.5.2.1 which is supplied from either the **National Electricity Transmission System** or the **Generator's User System** the **Generator**, **DC Converter Station** owner, **HVDC System Owner** or the **Network Operator** (in the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** within its **System**), as the case may be, shall supply forecasts for each **Power Station** or **DC Converter Station** or **HVDC System** of:

(a) the maximum **Demand** that, in the **User's** opinion, could reasonably be imposed on the **National Electricity Transmission System** or the **Generator's User System** as appropriate;

(b) the **Demand** at the time of the peak **National Electricity Transmission System Demand**

(c) the **Demand** at the time of minimum **National Electricity Transmission System Demand**.

PC.A.5.2.3 No later than calendar week 17 each year **The Company** shall notify each **Generator** in respect of its **Large Power Stations** and its **Medium Power Stations** and each **DC Converter** owner in respect of its **DC Converter Station** and each **HVDC System Owner** in respect of its **HVDC System** subject to a **Bilateral Agreement** and each **Network Operator** in respect of each **Embedded Medium Power Station** not subject to a **Bilateral Agreement** and each **Embedded DC Converter Station** or **Embedded HVDC System** not subject to a **Bilateral Agreement** within such **Network Operator's System** in writing of the following, for the current **Financial Year** and for each of the following nine **Financial Years**, which will be regarded as the relevant specified days and times under PC.A.5.2.2:

(a) the date and time of the annual peak of the **National Electricity Transmission System Demand** at **Annual ACS Conditions**;

(b) the date and time of the annual minimum of the **National Electricity Transmission System Demand** at **Average Conditions**.

PC.A.5.2.4 At its discretion, **The Company** may also request further details of the **Demand** as specified in PC.A.4.6

PC.A.5.2.5 In the case of **OTSDUW Plant and Apparatus** the following data shall be supplied:

(a) The maximum **Demand** that could occur at the **Interface Point** and each **Connection Point** (in MW and MVAr);

(b) **Demand** at specified time of annual peak half hour of **National Electricity Transmission System Demand** at **Annual ACS Conditions** (in MW and MVAr); and

(c) **Demand** at specified time of annual minimum half-hour of **National Electricity Transmission System Demand** (in MW and MVAr).

For the avoidance of doubt, **Demand** data associated with **Generators** undertaking **OTSDUW** which utilise an **OTSDUW DC Converter** should supply data under PC.A.4.

PC.A.5.3 Synchronous Power Generating Modules, Synchronous Generating Unit and Associated Control System Data

PC.A.5.3.1 The data submitted below are not intended to constrain any **Ancillary Services Agreement**

PC.A.5.3.2 The following **Synchronous Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) and **Power Station** data should be supplied:

(a) **Synchronous Generating Unit** Parameters

Rated terminal volts (kV)

Maximum terminal voltage set point (kV)

Terminal voltage set point step resolution – if not continuous (kV)

* Rated MVA

*** Rated MW**

* Minimum Generation MW

* Short circuit ratio

Direct axis synchronous reactance

* Direct axis transient reactance

Direct axis sub-transient reactance

Direct axis short-circuit transient time constant

Direct axis short-circuit sub-transient time constant

Quadrature axis synchronous reactance

Quadrature axis sub-transient reactance

Quadrature axis short-circuit sub-transient time constant.

Stator time constant

Stator leakage reactance

Armature winding direct-current resistance.

Note: The above data item relating to armature winding direct-current resistance need only be supplied with respect to **Generating Units** commissioned after 1st March 1996 and in cases where, for whatever reason, the **Generator** or the **Network Operator**, as the case may be is aware of the value of the relevant parameter.

* Turbogenerator inertia constant (MWsec/MVA)

Rated field current (amps) at **Rated MW** and MVAr output and at rated terminal voltage.

Field current (amps) open circuit saturation curve for **Generating Unit** terminal voltages ranging from 50% to 120% of rated value in 10% steps as derived from appropriate manufacturers test certificates.

(b) Parameters for **Generating Unit** Step-up Transformers

* Rated MVA

Voltage ratio

* Positive sequence reactance (at max, min, & nominal tap)

Positive sequence resistance (at max, min, & nominal tap)

Zero phase sequence reactance

Tap changer range

Tap changer step size

Tap changer type: on load or off circuit

(c) Excitation Control System parameters

Note: The data items requested under Option 1 below may continue to be provided in relation to **Generating Units** connected to the **System** at 09 January 1995 (in this paragraph, the "relevant date") or the new data items set out under Option 2 may be provided. **Generators** or **Network Operators**, as the case may be, must supply the data as set out under Option 2 (and not those under Option 1) for **Generating Unit** excitation control systems commissioned after the relevant date, those **Generating Unit** excitation control systems recommissioned for any reason such as refurbishment after the relevant date and **Generating Unit** excitation control systems where, as a result of testing or other process, the **Generator** or **Network Operator**, as the case may be, is aware of the data items listed under Option 2 in relation to that **Generating Unit**.

For any excitation control systems associated with a **Generating Unit** or **Synchronous Power Generating Module** with a **Completion Date** after 1 September 2022 and any **Generating Unit** or **Synchronous Power Generating Module** excitation control systems subject to a control system change or **Modification** after 1 September 2022, the **Generator** should supply the control system model in accordance with PC.A.9. For the avoidance of doubt, excitation control system models as detailed in PC.A.9 maybe submitted for any **Generating Unit** regardless of **Completion Date** as an alternative to block diagrams detailed below. The control system model of the **Excitation System** shall include but not limited to, the **PSS** if fitted, **Over-excitation Limiter**, **Under-excitation Limiter** and should have been verified as far as reasonably practicable by simulation studies as representing the expected behaviour of the control system. Additionally the data items listed under Option 2 below are also required.

Option 1

DC gain of Excitation Loop

Rated field voltage

Maximum field voltage

Minimum field voltage

Maximum rate of change of field voltage (rising)

Maximum rate of change of field voltage (falling)

Details of Excitation Loop described in block diagram form showing transfer functions of individual elements.

Dynamic characteristics of **Over-excitation Limiter**

Dynamic characteristics of **Under-excitation Limiter**

Option 2

Excitation System Nominal Response

Rated Field Voltage

No-Load Field Voltage

Excitation System On-Load Positive Ceiling Voltage

Excitation System No-Load Positive Ceiling Voltage

Excitation System No-Load Negative Ceiling Voltage

Stator Current Limiter (applicable only to **Synchronous Power Generating Modules**)

Details of **Excitation System** (including **PSS** if fitted) described in block diagram form showing transfer functions of individual elements.

Details of **Over-excitation Limiter** described in block diagram form showing transfer functions of individual elements.

Details of **Under-excitation Limiter** described in block diagram form showing transfer functions of individual elements.

The block diagrams submitted after 1 January 2009 in respect of the **Excitation System** (including the **Over-excitation Limiter** and the **Under-excitation Limiter**) for **Generating Units** with a **Completion date** after 1 January 2009 or subject to a **Modification** to the **Excitation System** after 1 January 2009, should have been verified as far as reasonably practicable by simulation studies as representing the expected behaviour of the system.

(d) Governor Parameters

Incremental **Droop** values (in %) are required for each **Generating Unit** at six MW loading points (MLP1 to MLP6) as detailed in PC.A.5.5.1 (this data item needs only be provided for **Large Power Stations**).

Note: The data items requested under Option 1 below may continue to be provided by **Generators** in relation to **Generating Units** on the **System** at 09 January 1995 (in this paragraph, the "relevant date") or they may provide the new data items set out under Option 2. **Generators** must supply the data as set out under Option 2 (and not those under Option 1) for **Generating Unit** governor control systems commissioned after the relevant date, those **Generating Unit** governor control systems recommissioned for any reason such as refurbishment after the relevant date and **Generating Unit** governor control systems where, as a result of testing or other process, the **Generator** is aware of the data items listed under Option 2 in relation to that **Generating Unit**. **EU Generators** are also required to submit the data as set out in option 2. Additional data required from **EU Generators** which own or operate **Type C** or **Type D Power Generating Modules** are marked in brackets with an asterisk (eg (*)). For the avoidance of doubt, items marked as (*) need not be supplied by **GB Generators**.

For any governor control systems associated with a **Generating Unit** or **Synchronous Power Generating Module** with a **Completion Date** after 1 September 2022 and any **Generating Unit** or **Synchronous Power Generating Module** governor control systems subject to a control system change or **Modification** after 1 September 2022, the **Generator** should supply the control system model in accordance with PC.A.9. For the avoidance of doubt, governor control system models as detailed in PC.A.9 maybe submitted for any **Generating Unit** regardless of **Completion Date** as an alternative to governor block diagrams. The control system model shall include but not limited to, the governor and prime mover dynamics such as steam flow, boiler, water flow which could impact on representation of the requirements required by the Grid Code. Additional the data items listed under Option 2 are also required.

Option 1

(i) Governor Parameters (for Reheat **Steam Units**)

HP governor average gain MW/Hz

Speeder motor setting range

HP governor valve time constant

HP governor valve opening limits

HP governor valve rate limits

Reheater time constant (**Active Energy** stored in reheater)

IP governor average gain MW/Hz

IP governor setting range

IP governor valve time constant

IP governor valve opening limits

IP governor valve rate limits

Details of acceleration sensitive elements in HP & IP governor loop.

A governor block diagram showing transfer functions of individual elements.

(ii) Governor Parameters (for Non-Reheat **Steam Units** and **Gas Turbine Units**)

Governor average gain

Speeder motor setting range

Time constant of steam or fuel governor valve

Governor valve opening limits

Governor valve rate limits

Time constant of turbine

Governor block diagram

The following data items need only be supplied for **Large Power Stations**:

(iii) Boiler & Steam Turbine Data

Boiler Time Constant (Stored **Active Energy**) s

HP turbine response ratio:

proportion of **Primary Response** arising from HP turbine %

HP turbine response ratio:

proportion of High Frequency Response arising from HP turbine %

[End of Option 1]

Option 2

(i) Governor and associated prime mover Parameters - All **Generating Units** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**)

Governor Block Diagram showing transfer function of individual elements including acceleration sensitive elements.

Governor Time Constant (in seconds)

Speeder Motor Setting Range (%)

Average Gain (MW/Hz)

Governor Deadband need only be provided for **Large Power Stations** owned and operated by **GB Generators** (and both **Frequency Response Deadband** and **Frequency Response Insensitivity** should be supplied in respect of **Type C** and **D Power Generating Modules** within **Large Power Stations** and **Medium Power Stations** excluding **Embedded Medium Power Stations** not subject to a **Bilateral Agreement***) owned and operated by **EU Code Generators**.

- Maximum Setting ±Hz

- Normal Setting ±Hz

- Minimum Setting ±Hz

Where the **Generating Unit** governor does not have a selectable **Governor Deadband** (or **Frequency Response Deadband** and **Frequency Response Insensitivity**)* facility as specified above, then the actual value of the **Governor Deadband** or (**Frequency Response Deadband** and **Frequency Response Insensitivity**)* need only be provided.

The block diagrams submitted after 1 January 2009 in respect of the governor system for **Generating Units** with a **Completion date** after 1 January 2009 or subject to a **Modification** to the governor system after 1 January 2009, should have been verified as far as reasonably practicable by simulation studies as representing the expected behaviour of the system.

(ii) Governor and associated prime mover Parameters - **Steam Units**

HP Valve Time Constant (in seconds)

HP Valve Opening Limits (%)

HP Valve Opening Rate Limits (%/second)

HP Valve Closing Rate Limits (%/second)

HP Turbine Time Constant (in seconds)

IP Valve Time Constant (in seconds)

IP Valve Opening Limits (%)

IP Valve Opening Rate Limits (%/second)

IP Valve Closing Rate Limits (%/second)

IP Turbine Time Constant (in seconds)

LP Valve Time Constant (in seconds)

LP Valve Opening Limits (%)

LP Valve Opening Rate Limits (%/second)

LP Valve Closing Rate Limits (%/second)

LP Turbine Time Constant (in seconds)

Reheater Time Constant (in seconds)

Boiler Time Constant (in seconds)

HP Power Fraction (%)

IP Power Fraction (%)

(iii) Governor and associated prime mover Parameters - **Gas Turbine Units**

Inlet Guide Vane Time Constant (in seconds)

Inlet Guide Vane Opening Limits (%)

Inlet Guide Vane Opening Rate Limits (%/second)

Inlet Guide Vane Closing Rate Limits (%/second)

Fuel Valve Constant (in seconds)

Fuel Valve Opening Limits (%)

Fuel Valve Opening Rate Limits (%/second)

Fuel Valve Closing Rate Limits (%/second)

Waste Heat Recovery Boiler Time Constant (in seconds)

(iv) Governor and associated prime mover Parameters - Hydro Generating Units

Guide Vane Actuator Time Constant (in seconds)

Guide Vane Opening Limits (%)

Guide Vane Opening Rate Limits (%/second)

Guide Vane Closing Rate Limits (%/second)

Water Time Constant (in seconds)

(v) Governor Parameters – Synchronous Electricity Storage Units

For **Synchronous Electricity Storage Modules** which are derived from compressed air energy storage systems, the following data should be provided. For other **Synchronous Electricity Storage Modules**, data should be supplied as required by **The Company** in accordance with PC.A.7

Valve Actuator Time Constant (in seconds)

Valve Opening Limits (%)

Valve Opening Rate Limits (%/second)

Valve Closing Rate Limits (%/second)

[End of Option 2]

(e) Unit Control Options

The following data items need only be supplied with respect to **Large Power Stations**:

Maximum **Droop** %

Normal **Droop** %

Minimum **Droop** %

Maximum **Governor Deadband** or (maximum **Frequency Response Deadband** and maximum **Frequency Response Insensitivity***) ±Hz

Normal **Governor Deadband** or (normal **Frequency Response Deadband** and normal **Frequency Response Insensitivity***) ±Hz

Minimum **Governor Deadba**nd or (minimum **Frequency Response Deadband** and minimum **Frequency Response Insensitivity***) ±Hz

Maximum output **Governor Deadband** (or maximum output **Frequency Response Deadband** and maximum **Frequency Response Insensitivity***) ±MW

Normal output **Governor Deadband** (or normal output **Frequency Response Deadband** and normal output **Frequency Response Insensitivity***) ±MW

Minimum output **Governor Deadband** or (minimum output **Frequency Response Deadband** and minimum output **Frequency Response Insensitivity***) ±MW

Frequency settings between which Unit Load Controller **Droop** applies:

- Maximum Hz
- Normal Hz
- Minimum Hz

State if sustained response is normally selected.

(* **GB Generators** which are not required to satisfy the requirements of the **European Connection Conditions** are not required to supply **Frequency Response Insensitivity** or **Frequency Response Deadband** data but should instead supply **Governor Deadband** data). For the avoidance of doubt, **EU Code Generators** in respect of **Type C** and **Type D Power Generating Modules** are required to supply **Frequency Response Deadband** and **Frequency Response Insensitivity** data).

(f) Plant Flexibility Performance

The following data items need only be supplied with respect to **Large Power Stations**, and should be provided with respect to each **Genset**:

Run-up rate to **Registered Capacity**,

Run-down rate from **Registered Capacity**,

Synchronising Generation,

Regulating range

Load rejection capability while still **Synchronised** and able to supply **Load**.

Data items marked with a hash (#) should be applicable to a **Genset** which has been **Shutdown** for 48 hours.

* Data items marked with an asterisk are already requested under partx1, PC.A.3.3.1, to facilitate an early assessment by **The Company** as to whether detailed stability studies will be required before an offer of terms for a **CUSC Contract** can be made. Such data items have been repeated here merely for completeness and need not, of course, be resubmitted unless their values, known or estimated, have changed.

(g) Generating Unit Mechanical Parameters

It is occasionally necessary for **The Company** to assess the interaction between the **Total System** and the mechanical components of **Generating Units**. For **Generating Units** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) with a **Completion Date** on or after 01 April 2015,

or;

with a **Completion Date** before 01 April 2015 when requested by **The Company** in accordance with good industry practice and without undue delay,

the following data items should be supplied:

The number of turbine generator masses.

Diagram showing the Inertia and parameters for each turbine generator mass (kgm^2) and Stiffness constants and parameters between each turbine generator mass for the complete drive train (Nm/rad).

Number of poles.

Relative power applied to different parts of the turbine (%).

Torsional mode frequencies (Hz).

Modal damping decrement factors for the different mechanical modes.

PC.A.5.4 Power Park Module, Non-Synchronous Generating Unit and Associated Control System Data

PC.A.5.4.1 The data submitted below are not intended to constrain any **Ancillary Services Agreement**

PC.A.5.4.2 The following **Power Park Unit**, **Power Park Module** and **Power Station** data should be supplied in the case of a **Power Park Module** not connected to the **Total System** by a **DC Converter** or **HVDC System** (and in the case of PC.A.5.4.2(f) any **OTSUA**):

Where a **Manufacturer's Data & Performance Report** exists in respect of the model of the **Power Park Unit**, the **User** may subject to **The Company's** agreement, opt to reference the **Manufacturer's Data & Performance Report** as an alternative to the provision of data in accordance with PC.A.5.4.2 except for:

(1) the section marked thus # at sub paragraph (b); and

(2) all of the harmonic and flicker parameters required under sub paragraph (h); and

(3) all of the site specific model parameters relating to the voltage or frequency control systems required under sub paragraphs (d) and (e),

which must be provided by the **User** in addition to the **Manufacturer's Data & Performance Report** reference.

(a) **Power Park Unit** model

A mathematical model of each type of **Power Park Unit** (including **Electricity Storage Units**) capable of representing its transient and dynamic behaviour under both small and large disturbance conditions. The model shall include non-linear effects and represent all equipment relevant to the dynamic performance of the **Power Park Unit** as agreed with **The Company**. The model shall be suitable for the study of balanced, root mean square, positive phase sequence time-domain behaviour, excluding the effects of electromagnetic transients, harmonic and sub-harmonic frequencies.

The model shall accurately represent the overall performance of the **Power Park Unit** over its entire operating range including that which is inherent to the **Power Park Unit** and that which is achieved by use of supplementary control systems providing either continuous or stepwise control. Model resolution should be sufficient to accurately represent **Power Park Unit** behaviour both in response to operation of **Transmission System** protection and in the context of longer-term simulations.

The overall structure of the model shall include:

(i) any supplementary control signal modules not covered by (c), (d) and (e) below.

(ii) any blocking, deblocking and protective trip features that are part of the **Power Park Unit** (e.g. “crowbar”).

(iii) any other information required to model the **Power Park Unit** behaviour to meet the model functional requirement described above.

The model shall be submitted in the form of a transfer function block diagram and may be accompanied by dynamic and algebraic equations.

This model shall display all the transfer functions and their parameter values, any non wind-up logic, signal limits and non-linearities.

The submitted **Power Park Unit** model and the supplementary control signal module models covered by (c), (d) and (e) below shall have been validated and this shall be confirmed by the **Generator**. The validation shall be based on comparing the submitted model simulation results against measured test results. Validation evidence shall also be submitted and this shall include the simulation and measured test results. The latter shall include appropriate short-circuit tests. In the case of an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** the **Network Operator** will provide **The Company** with the validation evidence if requested by **The Company**. The validation of the supplementary control signal module models covered by (c), (d) and (e) below applies only to a **Power Park Module** with a **Completion Date** after 1 January 2009 or **Power Park Modules** within a **Power Generating Module**.

(b) **Power Park Unit** parameters

* Rated MVA
* **Rated MW**
* Rated terminal voltage
* Average site air density (kg/m^3), maximum site air density (kg/m^3) and minimum site air density (kg/m^3) for the year (as applicable)

  Year for which the air density is submitted (as applicable)

  Number of pole pairs (as applicable)

  Blade swept area (m^2) (as applicable)

  Gear box ratio (as applicable)

  Mechanical drive train (as applicable)

  For each **Power Park Unit**, details of the parameters of the drive train (as applicable) represented as an equivalent two mass model should be provided. This model should accurately represent the behaviour of the complete drive train for the purposes of power system analysis studies and should include the following data items:-

  Equivalent inertia constant (MWsec/MVA) of the first mass (e.g. wind turbine rotor and blades) at minimum, synchronous and rated speeds

  Equivalent inertia constant (MWsec/MVA) of the second mass (e.g. generator rotor) at minimum, synchronous and rated speeds

  Equivalent shaft stiffness between the two masses (Nm/electrical radian)

Additionally, for **Power Park Units** that are induction generators (e.g. squirrel cage, doubly-fed) driven by wind turbines:

* Stator resistance
* Stator reactance
* Magnetising reactance.
* Rotor resistance.(at starting)
* Rotor resistance.(at rated running)
* Rotor reactance (at starting)
* Rotor reactance (at rated running)

Additionally for doubly-fed induction generators only:

The generator rotor speed range (minimum and maximum speeds in RPM)

The optimum generator rotor speed versus wind speed submitted in tabular format

Power converter rating (MVA)

The rotor power coefficient (C_p) versus tip speed ratio (λ) curves for a range of blade angles (where applicable) together with the corresponding values submitted in tabular format. The tip speed ratio (λ) is defined as $\Omega R/U$ where Ω is the angular velocity of the rotor, R is the radius of the wind turbine rotor and U is the wind speed.

The electrical power output versus generator rotor speed for a range of wind speeds over the entire operating range of the **Power Park Unit**, together with the corresponding values submitted in tabular format.

The blade angle versus wind speed curve together with the corresponding values submitted in tabular format.

The electrical power output versus wind speed over the entire operating range of the **Power Park Unit**, together with the corresponding values submitted in tabular format.

Transfer function block diagram, including parameters and description of the operation of the power electronic converter and fault ride through capability (where applicable). For any **Power Park Unit**s in a **Power Park Module** with a **Completion Date** after 1 September 2022 and any **Power Park Units** subject to a control system change or **Modification** after 1 September 2022 control system models in accordance with PC.A.9 should be supplied. For the avoidance of doubt, a **User** may submit control system models as detailed in PC.A.9 for any **Power Park Unit** regardless of **Power Park Module Completion Date** as an alternative to this paragraph.

For a **Power Park Unit** consisting of a synchronous machine in combination with a back to back **DC Converter** or **HVDC System**, or for a **Power Park Unit** not driven by a wind turbine, the data to be supplied shall be agreed with **The Company** in accordance with PC.A.7.

(c) Torque / speed and blade angle control systems and parameters

For the type of **Power Park Unit** (as applicable), details of the torque / speed controller and blade angle controller in the case of a wind turbine and power limitation functions (where applicable) described in block diagram form showing transfer functions and parameters of individual elements.

(d) Voltage/**Reactive Power**/**Power Factor** control system parameters

For the **Power Park Unit** and **Power Park Module** details of voltage/**Reactive Power**/**Power Factor** controller (and **PSS** if fitted) described in block diagram form showing transfer functions and parameters of individual elements.

(e) **Frequency** control system parameters

For the **Power Park Unit** and **Power Park Module** details of the **Frequency** controller described in block diagram form showing transfer functions and parameters of individual elements.

(f) **Protection**

Details of settings for the following **Protection** relays (to include): Under **Frequency**, over **Frequency**, under voltage, over voltage, rotor over current, stator over current, high wind speed shut down level.

(g) Complete **Power Park Unit** model, parameters and controls

(i) For any **Power Park Unit**s in a **Power Park Module** with a **Completion Date** after 1 September 2022 and any **Power Park Units** and/or **Power Park Module(s)** subject to a control system change or **Modification** after 1 September 2022, control system models in accordance with PC.A.9 should be supplied covering the full information required under PC.A.5.4.2 (a), (b), (c), (d), (e) and (f).

(ii) For any **Power Park Units** in a **Power Park Module** with a **Completion Date** before 1 September 2022 as an alternative to PC.A.5.4.2 (a), (b), (c), (d), (e) and (f), is the submission of a single complete model that consists of the full information required under PC.A.5.4.2 (a), (b), (c), (d), (e) and (f) provided that all the information required under PC.A.5.4.2 (a), (b), (c), (d), (e) and (f) individually is clearly identifiable. For the avoidance of doubt, a **User** may submit control system models as detailed in PC.A.9 for any **Power Park Unit** or **Power Park Module** regardless of **Completion Date** as an alternative to this clause.

(h) Harmonic and flicker parameters

When connecting a **Power Park Module**, it is necessary for **The Company** to evaluate the production of flicker and harmonics on the **National Electricity Transmission System** and **User's Systems**. At **The Company's** reasonable request, the **User** (a **Network Operator** in the case of an **Embedded Power Park Module** not subject to a **Bilateral Agreement**) is required to submit the following data (as defined in IEC 61400-21 (2001)) for each **Power Park Unit**:-

Flicker coefficient for continuous operation.

Flicker step factor.

Number of switching operations in a 10 minute window.

Number of switching operations in a 2 hour window.

Voltage change factor.

Current Injection at each harmonic for each **Power Park Unit** and for each **Power Park Module**.

* Data items marked with an asterisk are already requested under part 1, PC.A.3.3.1, to facilitate an early assessment by **The Company** as to whether detailed stability studies will be required before an offer of terms for a **CUSC Contract** can be made. Such data items have been repeated here merely for completeness and need not, of course, be resubmitted unless their values, known or estimated, have changed.

PC.A.5.4.3 <u>DC Converter and HVDC Systems</u>

PC.A.5.4.3.1 For a **DC Converter** at a **DC Converter Station** or an **HVDC System** connected to the **Total System** by a **DC Converter** or **HVDC System** (or in the case of **OTSUA** which includes an **OTSDUW DC Converter**) the following information for each **DC Converter**, **HVDC System** and **DC Network** should be supplied:

(a) **DC Converter** and **HVDC System** parameters

* **Rated MW** per pole for transfer in each direction;
* **DC Converter** type (i.e. current or voltage source (including a **HVDC Converter** in an **HVDC System**));
* Number of poles and pole arrangement;
* Rated DC voltage/pole (kV);
* Return path arrangement;

(b) **DC Converter** and **HVDC System** transformer parameters

Rated MVA

Nominal primary voltage (kV);

Nominal secondary (converter-side) voltage(s) (kV);

Winding and earthing arrangement;

Positive phase sequence reactance at minimum, maximum and nominal tap;

Positive phase sequence resistance at minimum, maximum and nominal tap;

Zero phase sequence reactance;

Tap-changer range in %;

number of tap-changer steps;

(c) **DC Network** parameters

Rated DC voltage per pole;

Rated DC current per pole;

Single line diagram of the complete **DC Network** and **HVDC System**;

Details of the complete **DC Network**, including resistance, inductance and capacitance of all DC cables and/or DC lines and **HVDC System**;

Details of any DC reactors (including DC reactor resistance), DC capacitors and/or DC-side filters that form part of the **DC Network** and/or **HVDC System**;

(d) AC filter reactive compensation equipment parameters

Note: The data provided pursuant to this paragraph must not include any contribution from reactive compensation plant.

Total number of AC filter banks.

Type of equipment (e.g. fixed or variable)

Single line diagram of filter arrangement and connections;

Reactive Power rating for each AC filter bank, capacitor bank or operating range of each item of reactive compensation equipment, at rated voltage;

Performance chart showing **Reactive Power** capability of the **DC Converter** and **HVDC System**, as a function of MW transfer, with all filters and reactive compensation plant, belonging to the **DC Converter Station** or **HVDC System** working correctly.

Note: Details in PC.A.5.4.3.1 are required for each **DC Converter** connected to the **DC Network** and **HVDC System**, unless each is identical or where the data has already been submitted for an identical **DC Converter** or **HVDC System** at another **Connection Point**.

Note: For a **Power Park Module** and **DC Connected Power Park Module** connected to the **Grid Entry Point** or (**User System Entry Point** if **Embedded**) by a **DC Converter** or **HVDC System** the equivalent inertia and fault infeed at the **Power Park Unit** should be given.

DC Converter and HVDC System Control System Models

PC.A.5.4.3.2 The following data is required by **The Company** to represent **DC Converters** and associated **DC Networks** and **HVDC Systems** (and including **OTSUA** which includes an **OTSDUW DC Converter**) in dynamic power system simulations,

(a) For **DC Converters** and **HVDC Systems** with a **Completion Date** before 1 September 2022 in which the AC power system is typically represented by a positive sequence equivalent, it is acceptable to represent **DC Converters** and **HVDC Systems** by simplified equations rather than to the switching device level.

(i) Static V_{DC}-I_{DC} (DC voltage - DC current) characteristics, for both the rectifier and inverter modes for a current source converter. Static V_{DC}-P_{DC} (DC voltage - DC power) characteristics, for both the rectifier and inverter modes for a voltage source converter. Transfer function block diagram including parameters representation of the control systems of each **DC Converter** and of the **DC Converter Station** and the **HVDC System**, for both the rectifier and inverter modes. A suitable model would feature the **DC Converter** or **HVDC Converter** firing angle as the output variable.

(ii) Transfer function block diagram representation including parameters of the **DC Converter** or **HVDC Converter** transformer tap changer control systems, including time delays

(iii) Transfer function block diagram representation including parameters of AC filter and reactive compensation equipment control systems, including any time delays.

(iv) Transfer function block diagram representation including parameters of any **Frequency** and/or load control systems.

(v) Transfer function block diagram representation including parameters of any small signal modulation controls such as power oscillation damping controls or sub-synchronous oscillation damping controls, that have not been submitted as part of the above control system data.

(vi) Transfer block diagram representation of the **Reactive Power** control at converter ends for a voltage source converter.

In addition and where not provided for above, **HVDC System Owners** and **Generators** in respect of **OTSDUW DC Converters** who are also **EU Code Users** shall also provide the following dynamic simulation sub-models

(i) **HVDC Converter** unit models

(ii) AC component models

(iii) DC Grid models

(iv) Voltage and power controller

(v) Special control features if applicable (eg power oscillation damping (POD) function, subsynchronous torsional interaction (SSTI) control;

(vi) Multi terminal control, if applicable

(vii) **HVDC System** protection models as agreed between **The Company** and the **HVDC System Owner**

HVDC System Owners are also required to supply an equivalent model of the control system when adverse control interactions may result with **HVDC Converter Stations** and other connections in close proximity if requested by **The Company**. The equivalent model shall contain all necessary data for the realistic simulation of the adverse control interactions.

(b) For any **DC Converters** and **HVDC Systems** with a **Completion Date** after 1 September 2022 and any **DC Converters** and **HVDC Systems** subject to a control system change or **Modification** after 1 September 2022, control system models in accordance with PC.A.9 should be supplied covering the full functionality required under PC.A.5.4.3.2 (a).

For the avoidance of doubt a **User** may submit control system models as detailed in PC.A.9 for any **DC Converters** and **HVDC Systems** regardless of **Completion Date** as an alternative to PC.A.5.4.3.2(a).

Plant Flexibility Performance

PC.A.5.4.3.3 The following information on plant flexibility and performance should be supplied (and also in respect of **OTSUA** which includes an **OTSDUW DC Converter**):

(i) Nominal and maximum (emergency) loading rate with the **DC Converter** or **HVDC Converter** in rectifier mode.

(ii) Nominal and maximum (emergency) loading rate with the **DC Converter** or **HVDC Converter** in inverter mode.

(iii) Maximum recovery time, to 90% of pre-fault loading, following an AC system fault or severe voltage depression.

(iv) Maximum recovery time, to 90% of pre-fault loading, following a transient **DC Network** fault.

Harmonic Assessment Information

PC.A.5.4.3.4 **DC Converter** owners and **HVDC System Owners** shall provide such additional further information as required by **The Company** in order that compliance with CC.6.1.5 or ECC.6.1.5 can be demonstrated.

* Data items marked with an asterisk are already requested under part 1, PC.A.3.3.1, to facilitate an early assessment by **The Company** as to whether detailed stability studies will be required before an offer of terms for a **CUSC Contract** can be made. Such data items have been repeated here merely for completeness and need not, of course, be resubmitted unless their values, known or estimated, have changed.

PC.A.5.5 Response Data For Frequency Changes

The information detailed below is required to describe the actual frequency response capability profile as illustrated in Figure CC.A.3.1 of the **Connection Conditions** or Figure ECC.A.3.1 of the **European Connection Conditions**, and need only be provided for each:

(i) **Genset** at **Large Power Stations**; and

(ii) **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **Power Park Module** (including a **DC Connected Power Park Module**) or **CCGT Module** at a **Medium Power Station** or **DC Converter Station** or **HVDC System** that has agreed to provide **Frequency** response in accordance with a **CUSC Contract**.

In the case of (ii) above for the rest of this PC.A.5.5 where reference is made to **Gensets**, it shall include such **Generating Units** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**), **CCGT Modules**, **Power Park Modules** (including **DC Connected Power Park Module**s), **HVDC Systems** and **DC Converters** as appropriate, but excludes **OTSDUW Plant and Apparatus** utilising **OTSDUW DC Converters**.

In this PC.A.5.5, for a **CCGT Module** with more than one **Generating Unit**, the phrase **Minimum Generation** or **Minimum Regulating Level** applies to the entire **CCGT Module** operating with all **Generating Units** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) **Synchronised** to the **System**. Similarly for a **Power Park Module** (including a **DC Connected Power Park Module**) with more than one **Power Park Unit**, the phrase **Minimum Generation** or **Minimum Regulating Level** applies to the entire **Power Park Module** operating with all **Power Park Units Synchronised** to the **System**.

PC.A.5.5.1 MW Loading Points At Which Data Is Required

Response values are required at six MW loading points (MLP1 to MLP6) for each **Genset**. **Primary** and **Secondary Response** values need not be provided for MW loading points which are below **Minimum Generation** or **Minimum Stable Operating Level**. MLP1 to MLP6 must be provided to the nearest MW.

Prior to the **Genset** being first **Synchronised**, the MW loading points must take the following values :

MLP1	**Designed Minimum Operating Level** or **Minimum Regulating Level**
MLP2	**Minimum Generation** or **Minimum Stable Operating Level**
MLP3	70% of **Registered Capacity** or **Maximum Capacity**
MLP4	80% of **Registered Capacity** or **Maximum Capacity**
MLP5	95% of **Registered Capacity** or **Maximum Capacity**
MLP6	**Registered Capacity** or **Maximum Capacity**

When data is provided after the **Genset** is first **Synchronised**, the MW loading points may take any value between the **Designed Minimum Operating Level** or **Minimum Regulating Level** and **Registered Capacity** or **Maximum Capacity** but the value of the **Designed Minimum Operating Level** or **Minimum Regulating Level** must still be provided if it does not form one of the MW loading points.

PC.A.5.5.2 Primary And Secondary Response To Frequency Fall

Primary and **Secondary Response** values for a -0.5Hz ramp are required at six MW loading points (MLP1 to MLP6) as detailed above

PC.A.5.5.3 High Frequency Response To Frequency Rise

High Frequency Response values for a +0.5Hz ramp are required at six MW loading points (MLP1 to MLP6) as detailed above.

PC.A.5.5.4 Each **Generator** or **Defence Service Provider** or **Restoration Contractor** or **Non-Embedded Customer** in respect of an **Electricity Storage Module**, shall provide **Frequency** response curves that demonstrate the ability of their **Electricity Storage Modules** to transition from a mode analogous to **Demand** to a mode analogous to generation (excluding **Auxiliary Supplies**) within a period of 20 seconds or less in accordance with the requirements of ECC.6.3.7.2.3, unless the provisions of ECC.6.3.7.2.3.1 apply where the requirements of OC6.6.6. relate.

PC.A.5.6 Mothballed Power Generating Module, Mothballed Generating Unit, Mothballed Power Park Module (including DC Connected Power Park Modules), Mothballed HVDC Systems or Mothballed DC Converter at a DC Converter Station And Alternative Fuel Information

Data identified under this section PC.A.5.6 must be submitted as required under PC.A.1.2 and at **The Company's** reasonable request.

In the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement, Embedded HVDC Systems** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**, upon request from **The Company** each **Network Operator** shall provide the information required in PC.A.5.6.1, PC.A.5.6.2, PC.A.5.6.3 and PC.A.5.6.4 on respect of such **Embedded Medium Power Stations** and **Embedded DC Converters Stations** and **Embedded HVDC Systems** with their **System**.

PC.A.5.6.1 Mothballed Generating Unit Information

Generators, **HVDC System Owners** and **DC Converter Station** owners must supply with respect to each **Mothballed Power Generating Module**, **Mothballed Generating Unit**, **Mothballed Power Park Module** (including a **DC Connected Power Park Module**), **Mothballed HVDC System** or **Mothballed DC Converter** at a **DC Converter Station** the estimated **MW** output which could be returned to service within the following time periods from the time that a decision to return was made:

< 1 month;

1-2 months;

2-3 months;

3-6 months;

6-12 months; and

>12 months.

The return to service time should be determined in accordance with **Good Industry Practice** assuming normal working arrangements and normal plant procurement lead times. The MW output values should be the incremental values made available in each time period as further described in the **DRC**.

PC.A.5.6.2 **Generators**, **HVDC System Owners** and **DC Converter Station** owners must also notify **The Company** of any significant factors which may prevent the **Mothballed Power Generating Module**, **Mothballed Generating Unit**, **Mothballed Power Park Module** (including **DC Connected Power Park Modules**), **Mothballed HVDC Systems** or **Mothballed DC Converter** at a **DC Converter Station** achieving the estimated values provided under PC.A.5.6.1 above, excluding factors relating to **Transmission Entry Capacity**.

PC.A.5.6.3 Alternative Fuel Information

The following data items must be supplied with respect to each **Generating Unit** (including **Synchronous Generating Units** within a **Synchronous Power Generating Module**) whose main fuel is gas.

For each alternative fuel type (if facility installed):

(a) Alternative fuel type e.g. oil distillate, alternative gas supply

(b) For the changeover from main to alternative fuel:

- Time to carry out off-line and on-line fuel changeover (minutes).
- Maximum output following off-line and on-line changeover (MW).
- Maximum output during on-line fuel changeover (MW).
- Maximum operating time at full load assuming typical and maximum possible stock levels (hours).
- Maximum rate of replacement of depleted stocks (MWh electrical/day) on the basis of **Good Industry Practice**.
- Is changeover to alternative fuel used in normal operating arrangements?
- Number of successful changeovers carried out in the last of **The Company's Financial Year** (choice of 0, 1-5, 6-10, 11-20, >20).

(c) For the changeover back to main fuel:

- Time to carry out off-line and on-line fuel changeover (minutes).
- Maximum output during on-line fuel changeover (MW).

PC.A.5.6.4 **Generators** must also notify **The Company** of any significant factors and their effects which may prevent the use of alternative fuels achieving the estimated values provided under PC.A.5.6.3 above (e.g. emissions limits, distilled water stocks etc.)

PC.A.5.7 System Restoration Related Information

PC.A.5.7.1 Data identified under this section PC.A.5.7.1 must be submitted as required under PC.A.1.2. This information may also be requested by **The Company** during **System Restoration** and should be provided by **Generators**, **HVDC System Owners** and **DC Converter Station Owners** where reasonably possible. For the avoidance of doubt, **Generators** in this section PC.A.5.7.1 means each **Generator** in respect of their **BM Unit** at any directly connected **Power Station** or **Large Power Station** (excluding **Generators** in respect of **Embedded Medium Power Stations** and **Embedded Small Power Stations**).

The data items/text in (a) and (b) below must be supplied, by each **Generator** and **HVDC System Owner** and **DC Converter Station** owner to **The Company**. In the case of **Generators**, the data supplied should be with respect to each **BM Unit** at any directly connected **Power Station** or **Large Power Station**. For the avoidance of doubt, the data required under PC.A.5.7.1(a) and (b) below, i) does not need to be supplied in respect of **Restoration Contractors Plant** and ii), only needs to be supplied in respect of each **BM Unit** at a **Large Power Station** or any directly connected **Power Station** and does not need to include **Generating Unit** data;

(a) The expected time for each **BM Unit** to be **Synchronised** following a **Total Shutdown** or **Partial Shutdown**. The assessment should include the **Power Stations** or **HVDC Systems** or **DC Converter Stations** ability to re-synchronise all **BM Units**, if all were running immediately prior to the **Total Shutdown** or **Partial Shutdown** once auxiliary supplies have been restored, or supplies have been restored to the **User's Site** where the **Plant** was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours before the **BM Unit** had been **Shutdown**. Additionally this should highlight any specific issues (i.e. those that would have an impact on the **BM Unit's** time to be **Synchronised**) that may arise, as time progresses without external supplies being restored or the availability of primary fuel supplies. In submitting this data, **Generators**, **HVDC System Owners** and **DC Converter Station** owners should be aware of the requirements in CC.7.11 or ECC.7.11.

(b) **Block Loading Capability**. This should be provided in either graphical or tabular format showing the estimated block loading capability from 0MW to **Registered Capacity** and the time between each incremental step. Any particular **Active Power** loading points at which the **BM Unit** should be operated until further changes in output can be accommodated should also be identified. The data of each **BM Unit** should be provided for the condition of a **Generating Unit** (which was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours before the **BM Unit** had been **Shutdown**. In the case of an **HVDC System** or **DC Converter Station**, data should be provided when the **HVDC System** or **DC Converter Station** (which was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours prior to the **HVDC System** or **DC Converter Station** had been **Shutdown**. The block loading assessment should be done against a frequency variation of 47.5Hz – 52Hz.

PC.A.5.7.2 Where a **Network Operator** has a **Distribution Restoration Zone Plan** in place, the data specified in this section shall be submitted as required under PC.A.1.2 by **Network Operators** to **The Company** annually by calendar week 28. This information may also be requested by **The Company** from the relevant **Network Operator** during **System Restoration** and should be provided by **Network Operators** where reasonably practicable. **Restoration Contractors** party to a **Distribution Restoration Zone Plan** shall, where reasonably practicable, submit the relevant information to the **Network Operator** who shall then supply the relevant information to **The Company**. The following data shall be provided;

(a) The expected time for each **Restoration Contractor's Plant** to **Re-Synchronise** to the **Network Operator's System** following a **Total Shutdown** or **Partial Shutdown**. The assessment should include the **Restoration Contractor's** ability to **Re-Synchronise** all their **Plant**, if all were running immediately prior to the **Total Shutdown** or **Partial Shutdown**. Additionally, the data and supporting text should highlight any specific issues (eg those that would affect the time before which the **Restoration Contractor's Plant** could be energised) that may arise as time progresses from **Shutdown** without external supplies being restored or the availability of primary fuel supplies..

(b) The **Restoration Contractor's Plants Block Loading Capability** as required in PC.A.5.7.1(b).

PC.A.5.7.3 From 31st December 2026 onwards, all **Users** and **Restoration Contractors** are required to confirm annually they comply with the applicable requirements of OC5.7. In the case of **Generators**, **HVDC System Owners**, **DC Converter** owners, **Non-Embedded Customers**, and **Network Operators** this confirmation shall be provided in their Week 24 submission. From 1st January 2024 until 31st December 2026, evidence to support the work **Generators**, **HVDC System Owners**, **DC Converter** owners, **Non-Embedded Customers**, and **Network Operators** are carrying out to achieve these requirements on or after 31st December 2026 shall be provided in their Week 24 submission.

PC.A.5.7.4 From 1st January 2025 onwards, **Restoration Contractors**, **Generators**, **HVDC System Owners** and **DC Converter** owners, shall supply the governor setting information in accordance with the applicable requirements of CC.6.3.7(g), (h) and (i) or ECC.6.3.7.3.8.

PC.A.5.8 Grid Forming Related Information

PC.A.5.8.1 The following data need only be supplied by **Users** (be they a **GB Code User** or **EU Code User**) or **Non-CUSC Parties** who wish to offer a **Grid Forming Capability** as provided for ECC.6.3.19.3. Where such a **Grid Forming Capability** is provided then the following data items and models are to be supplied.

(i) Each **GBGF-I** shall be designed so as not to interact and affect the operation, performance, safety or capability of other **User's Plant** and **Apparatus** connected to the **Total System**. To achieve this requirement, each **User** shall be required to submit a **Network Frequency Perturbation Plot** and **Nichols Chart** (or equivalent as agreed with **The Company**) which shall be assessed in accordance with the requirements of ECP.A.3.9.3.

Each **User** or **Non-CUSC Party** is required to supply a high level equivalent architecture diagram of their **Grid Forming Plant** as shown in Figure PC.A.5.8.1 together with the equivalent linear classical block diagram model (using the Laplace Operator) of their **Grid Forming Plant** which should preferably be in the general form shown in Figure PC.A.5.8.1 (a) or Figure PC.A.5.8.1 (b). When submitting either Figure PC.A.5.8.1 (a) or Figure PC.A.5.8.1 (b), each **User** or **Non-CUSC Party** can use their own design, that may be very different to Figures PC.A.5.8.1 (a) or PC.A.5.8.1 (b), but should contain all relevant functions that can include simulation models and other equivalent data and documentation.

Each **User** or **Non-CUSC Party** shall provide a model of their **Grid Forming Plant** which provides a true and accurate reflection of its **Grid Forming Capability**.

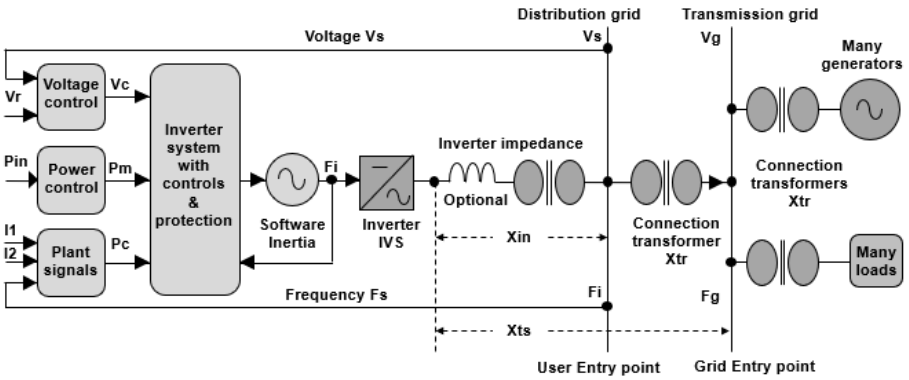

Figure PC.A.5.8.1

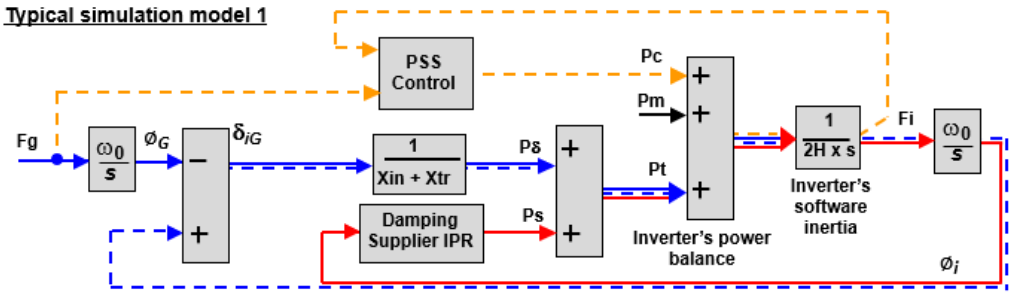

Figure PC.A.5.8.1 (a) Preferred simplified diagram of a **GBGF-I** with a **Power System Stabiliser** "**PSS**" that can add damping to the **GBGF-I**'s closed loop function shown by the solid red line and the dotted blue line.

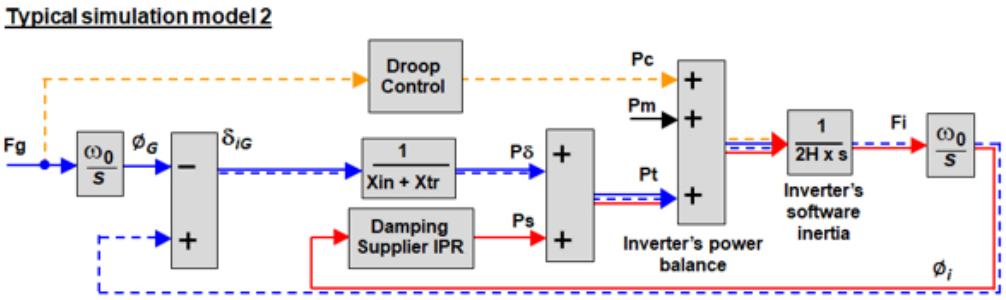

Figure PC.A.5.8.1 (b) – Preferred simplified diagram of a system with a droop control ability that can add **Control-Based Active Droop Power**. This diagram does not add extra closed loop damping to the **GBGF-I's** closed loop function shown by the solid red line and the dotted blue line.

(ii) In order to participate in the **Grid Forming Capability** market, **User's** and **Non-CUSC Parties** are required to provide data of their **GBGF-I** in accordance with Figures PC.A.5.8.1(a) and PC.A.5.8.1(b). **Users** and **Non-CUSC Parties** in respect of **Grid Forming Plants** should indicate if the data is submitted on a unit or aggregated basis. Table PC.A.5.8.1(a) defines the notation used in Figure PC.5.8.1

Parameter	Symbol	Units
The primary reactance of the **Grid Forming Unit**, in pu.	Xin or Xts	pu on MVA **Rating of Grid Forming Unit**
The additional reactance, in pu, between the terminals of the **Grid Forming Unit** and the **Grid Entry Point** or **User System Entry Point** (if **Embedded**).	X_{tr}	pu on MVA **Rating of Grid Forming Unit**
The rated angle between the **Internal Voltage Source** and the input terminals of the **Grid Forming Unit**.		radians
The rated angle between the **Internal Voltage Source** and **Grid Entry Point** or **User System Entry Point** (if **Embedded**).		radians
The rated voltage and phase of the **Internal Voltage Source** of the **Grid Forming Unit**.		Voltage - pu Phase - radians
The rated electrical angle between current and voltage at the input to the Grid transformer.		radians

Table PC.A.5.8.1

(iii) In order to participate in a **Grid Forming Capability** market, **User's** and **Non-CUSC Parties** are also required to provide the data of their **GBGF-I** in accordance with Table PC.A.5.8.1.2 to **The Company**. The details and arrangements for **Users** and **Non-CUSC Parties** participating in this market shall be published on **The Company's Website**.

Quantity	Units	Range (where Applicable)	User Defined Parameter
Type of **Grid Forming Plant** (eg **Generating Unit**, **Electricity Storage Module**, **Dynamic Reactive Compensation Equipment** etc)	N/A		
Maximum Continuous Rating at **Registered Capacity** or **Maximum Capacity**	MVA		
Primary reactance Xin or Xts (see Table PC.A.5.8.1)	pu on MVA		
Additional reactance X_{tr} (See Table PC.A.5.8.1)	pu on MVA		

Maximum Capacity	MW		
Active ROCOF Response Power (MW) injected or absorbed at 1Hz/s **System Frequency** change (which is the maximum frequency change for linear operation of the **Grid Forming Plant**)	MW		
Phase Jump Angle Withstand	degrees		60 degrees specified
Phase Jump Angle limit	degrees		5 degrees recommended
Phase Jump Power (MW) at the rated angle	MW		
Defined Active Damping Power for a **Grid Oscillation Value** of 0.05 Hz peak to peak at 1 Hz	MW		
The cumulative energy delivered for a 1Hz/s **System Frequency** fall from 52 Hz to 47 Hz. This is the total **Active Power** transient output of the **Grid Forming Plant**	MWs or MJ		
Inertia Constant (**H**) using equation 1 or declared in accordance with the simulation results of ECP.A.3.9.4	MWs/MVA		
Inertia Constant (**He**) using equation 2 or declared in accordance with the simulation results of ECP.A.3.9.4	MWs/MVA		
Continuous Overload Capability	% on MVA		
Short Term duration Overload capability			
Duration of Short Term Overload Capability	s		
Peak Current Rating	Pu		
Nominal **Grid Entry Point** or **User System Entry Point** voltage	kV		
Grid Entry Point or **User System Entry Point**	- Location		
Continuous or defined time duration MVA Rating	MVA		
Continuous or defined time duration MW Rating	MW		

For a **GBGF-I** the inverters maximum **Internal Voltage Source** (**IVS**) for the worst case condition – for example operation at maximum exporting **Reactive Power** at the maximum AC **System** voltage	pu		
Maximum Three Phase Short Circuit Infeed at **Grid Entry Point** or **User System Entry Point**	kA		
Maximum Single Phase Short Circuit Infeed at **Grid Entry Point** or **User System Entry Point**	kA		
Will the **Grid Forming Plant** contribute to any other form of commercial service – for example Dynamic Containment, Firm Frequency Response,	Details to be provided		
Equivalent Damping Factor.	Z		0.2 to 5.0 allowed

Table PC.A.5.8.2

H = Installed MWs / Rated installed MVA

(equation 1)

He = (**Active ROCOF Response Power** at 1 Hz / s x **System Frequency**) / (Installed MVA x 2)

(equation 2)

PC.A.6 USERS' SYSTEM DATA

PC.A.6.1 Introduction

PC.A.6.1.1 Each **User**, whether connected directly via an existing **Connection Point** to the **National Electricity Transmission System** or seeking such a direct connection, or providing terms for connection of an **Offshore Transmission System** to its **User System** to **The Company** or undertaking **OTSDUW**, shall provide **The Company** with data on its **User System** or **OTSDUW Plant and Apparatus** which relates to the **Connection Site** containing the **Connection Point** (or **Interface Points** or **Connection Points** in the case of **OTSUA**) both current and forecast, as specified in PC.A.6.2 to PC.A.6.6.

PC.A.6.1.2 Each **User** must reflect the system effect at the **Connection Site(s)** of any third party **Embedded** within its **User System** whether existing or proposed.

PC.A.6.1.3 PC.A.6.2, and PC.A.6.4 to PC.A.6.7 consist of data which is only to be supplied to **The Company** at **The Company's** reasonable request. In the event that **The Company** identifies a reason for requiring this data, **The Company** shall write to the relevant **User**(s), requesting the data, and explaining the reasons for the request. If the **User**(s) wishes, **The Company** shall also arrange a meeting at which the request for data can be discussed, with the objective of identifying the best way in which **The Company's** requirements can be met. In respect of **EU Code User**(s) only, **The Company** may request the need for electromagnetic transient simulations at **The Company's** reasonable request. **Users** with **EU Grid Supply Points** may be required to provide electromagnetic transient simulations in relation to those **EU Grid Supply Points** at **The Company**'s reasonable request.

Where **The Company** makes a request to a **User** for dynamic models under PC.A.6.7, each relevant **User** shall ensure that the models supplied in respect of their **Plant** and **Apparatus** reflect the true and accurate behaviour of the **Plant** and **Apparatus** as built and verified through the **Compliance Processes** (**CP**'s) or **European Compliance Processes** (**ECP**).

PC.A.6.2 Transient Overvoltage Assessment Data

PC.A.6.2.1 It is occasionally necessary for **The Company** to undertake transient overvoltage assessments (e.g. capacitor switching transients, switchgear transient recovery voltages, etc). At **The Company's** reasonable request, each **User** is required to provide the following data with respect to the **Connection Site** (and in the case of **OTSUA**, **Interface Points** and **Connection Points**), current and forecast, together with a **Single Line Diagram** where not already supplied under PC.A.2.2.1, as follows:

(a) busbar layout plan(s), including dimensions and geometry showing positioning of any current and voltage transformers, through bushings, support insulators, disconnectors, circuit breakers, surge arresters, etc. Electrical parameters of any associated current and voltage transformers, stray capacitances of wall bushings and support insulators, and grading capacitances of circuit breakers;

(b) Electrical parameters and physical construction details of lines and cables connected at that busbar. Electrical parameters of all plant e.g., transformers (including neutral earthing impedance or zig-zag transformers, if any), series reactors and shunt compensation equipment connected at that busbar (or to the tertiary of a transformer) or by lines or cables to that busbar;

(c) Basic insulation levels (BIL) of all **Apparatus** connected directly, by lines or by cables to the busbar;

(d) characteristics of overvoltage **Protection** devices at the busbar and at the termination points of all lines, and all cables connected to the busbar;

(e) fault levels at the lower voltage terminals of each transformer connected directly or indirectly to the **National Electricity Transmission System** (including **OTSUA** at each **Interface Point** and **Connection Point**) without intermediate transformation;

(f) the following data is required on all transformers operating at **Supergrid Voltage** throughout **Great Britain** and, in Scotland and **Offshore**, also at 132kV or greater (including **OTSUA**): three or five limb cores or single phase units to be specified, and operating peak flux density at nominal voltage;

(g) an indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

PC.A.6.3 User's Protection Data

PC.A.6.3.1 Protection

The following information is required which relates only to **Protection** equipment which can trip or inter-trip or close any **Connection Point** circuit-breaker or any **Transmission** circuit-breaker (or in the case of **OTSUA**, any **Interface Point** or **Connection Point** circuit breaker). This information need only be supplied once, in accordance with the timing requirements set out in PC.A.1.4(b), and need not be supplied on a routine annual basis thereafter, although **The Company** should be notified if any of the information changes;

(a) a full description, including estimated settings, for all relays and **Protection** systems installed or to be installed on the **User's System**;

(b) a full description of any auto-reclose facilities installed or to be installed on the **User's System**, including type and time delays;

(c) a full description, including estimated settings, for all relays and **Protection** systems or to be installed on the generator, generator transformer, **Station Transformer** and their associated connections;

(d) for **Generating Units** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module** but excluding **Power Park Units**) or **Power Park Modules** (including **DC Connected Power Park Modules**) or **HVDC Systems** or **DC Converters** at a **DC Converter Station** or **OTSDUW Plant and Apparatus** having (or intended to have) a circuit breaker at the generator terminal voltage, clearance times for electrical faults within the **Generating Unit** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module** but excluding a **Power Park Unit**) or **Power Park Module** (including **DC Connected Power Park Modules**) zone, or within the **OTSDUW Plant and Apparatus**;

(e) the most probable fault clearance time for electrical faults on any part of the **User's System** directly connected to the **National Electricity Transmission System** including **OTSDUW Plant and Apparatus**; and

(f) in the case of **OTSDUW Plant and Apparatus**, synchronisation facilities and delayed auto reclose sequence schedules (where applicable).

(g) **Restoration Contractors** and **Network Operators** shall provide the above **Protection** data where different settings are used in respect of their **Plant** and **Apparatus** which are associated with a **Restoration Plan**.

PC.A.6.4 Harmonic Studies

PC.A.6.4.1 It is occasionally necessary for **The Company** to evaluate the production/magnification of harmonic distortion on the **National Electricity Transmission System** and **User's Systems** (and **OTSUA**), especially when **The Company** is connecting equipment such as capacitor banks. At **The Company's** reasonable request, each **User** is required to submit data with respect to the **Connection Site** (and in the case of **OTSUA**, each **Interface Point** and **Connection Point**), current and forecast, and where not already supplied under PC.A.2.2.4 and PC.A.2.2.5, as follows:

PC.A.6.4.2 Overhead lines and underground cable circuits of the **User's Subtransmission System** must be differentiated and the following data provided separately for each type:

Positive phase sequence resistance;

Positive phase sequence reactance;

Positive phase sequence susceptance;

and for all transformers connecting the **User's Subtransmission System** and **OTSDUW Plant and Apparatus** to a lower voltage:

Rated MVA;

Voltage Ratio;

Positive phase sequence resistance;

Positive phase sequence reactance;

and at the lower voltage points of those connecting transformers:

Equivalent positive phase sequence susceptance;

Connection voltage and MVAr rating of any capacitor bank and component design parameters if configured as a filter;

Equivalent positive phase sequence interconnection impedance with other lower voltage points;

The minimum and maximum **Demand** (both MW and MVAr) that could occur;

Harmonic current injection sources in Amps at the Connection voltage points. Where the harmonic injection current comes from a diverse group of sources, the equivalent contribution may be established from appropriate measurements;

Details of traction loads, eg connection phase pairs, continuous variation with time, etc;

An indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

PC.A.6.5 Voltage Assessment Studies

It is occasionally necessary for **The Company** to undertake detailed voltage assessment studies (e.g., to examine potential voltage instability, voltage control co-ordination or to calculate voltage step changes). At **The Company's** reasonable request, each **User** is required to submit the following data where not already supplied under PC.A.2.2.4 and PC.A.2.2.5:

For all circuits of the User's Subtransmission System (and any OTSUA):-

Positive Phase Sequence Reactance;

Positive Phase Sequence Resistance;

Positive Phase Sequence Susceptance;

MVAr rating of any reactive compensation equipment;

and for all transformers connecting the **User's Subtransmission System** to a lower voltage (and any **OTSUA**):

Rated MVA;

Voltage Ratio;

Positive phase sequence resistance;

Positive Phase sequence reactance;

Tap-changer range;

Number of tap steps;

Tap-changer type: on-load or off-circuit;

AVC/tap-changer time delay to first tap movement;

AVC/tap-changer inter-tap time delay;

and at the lower voltage points of those connecting transformers (and any **OTSUA**):-

Equivalent positive phase sequence susceptance;

MVAr rating of any reactive compensation equipment;

Equivalent positive phase sequence interconnection impedance with other lower voltage points;

The maximum **Demand** (both MW and MVAr) that could occur;

Estimate of voltage insensitive (constant power) load content in % of total load at both winter peak and 75% off-peak load conditions.

PC.A.6.6 Short Circuit Analysis

PC.A.6.6.1 Where prospective short-circuit currents on **Transmission** equipment are greater than 90% of the equipment rating, and in **The Company's** reasonable opinion more accurate calculations of short-circuit currents are required, then at **The Company's** request each **User** is required to submit data with respect to the **Connection Site** (and in the case of **OTSUA**, each **Interface Point** and **Connection Point**), current and forecast, and where not already supplied under PC.A.2.2.4 and PC.A.2.2.5, as follows:

PC.A.6.6.2 For all circuits of the **User's Subtransmission System** (and any **OTSUA**):

Positive phase sequence resistance;

Positive phase sequence reactance;

Positive phase sequence susceptance;

Zero phase sequence resistance (both self and mutuals);

Zero phase sequence reactance (both self and mutuals);

Zero phase sequence susceptance (both self and mutuals);

and for all transformers connecting the **User's Subtransmission System** to a lower voltage (and any **OTSUA**):

Rated MVA;

Voltage Ratio;

Positive phase sequence resistance (at max, min and nominal tap);

Positive Phase sequence reactance (at max, min and nominal tap);

Zero phase sequence reactance (at nominal tap);

Tap changer range;

Earthing method: direct, resistance or reactance;

Impedance if not directly earthed;

and at the lower voltage points of those connecting transformers (and any **OTSUA**):

The maximum **Demand** (in MW and MVAr) that could occur;

Short-circuit infeed data in accordance with PC.A.2.5.6 unless the **User**'s lower voltage network runs in parallel with the **User**'s **Subtransmission System**, when to prevent double counting in each node infeed data, a π equivalent comprising the data items of PC.A.2.5.6 for each node together with the positive phase sequence interconnection impedance between the nodes shall be submitted.

PC.A.6.7 Dynamic Models

PC.A.6.7.1 It is occasionally necessary for **The Company** to evaluate the dynamic performance of **User's Plant** and **Apparatus** at each **EU Grid Supply Point** or in the case of **EU Code Users**, their **System**. At **The Company's** reasonable request and as agreed between **The Company** and the relevant **Network Operator** or **Non-Embedded Customer**, each **User** is required to provide the following data. Where such data is required, **The Company** will work with the **Network Operator** or **Non-Embedded Customer** to establish the scope of the dynamic modelling work and share the required information where it is available:-

(a) Dynamic model structure and block diagrams including parameters, transfer functions and individual elements (as applicable);

(b) Power control functions and block diagrams including parameters, transfer functions and individual elements (as applicable);

(c) Voltage control functions and block diagrams including parameters, transfer functions and individual elements (as applicable);

(d) Converter control models and block diagrams including parameters, transfer functions and individual elements (as applicable).

PC.A.7 ADDITIONAL DATA FOR NEW TYPES OF POWER STATIONS, DC CONVERTER STATIONS, OTSUA AND CONFIGURATIONS

Notwithstanding the **Standard Planning Data** and **Detailed Planning Data** set out in this Appendix, as new types of configurations and operating arrangements of **Power Stations**, **HVDC Systems**, **DC Converter Stations** and **OTSUA** emerge in future, **The Company** may reasonably require additional data to represent correctly the performance of such **Plant** and **Apparatus** on the **System**, where the present data submissions would prove insufficient for the purpose of producing meaningful **System** studies for the relevant parties.

PART 3 - DETAILED PLANNING DATA

PC.A.8 To allow a **User** to model the **National Electricity Transmission System**, **The Company** will provide, upon request, the following **Network Data** to **Users**, calculated in accordance with **Good Industry Practice**:

To allow a **User** to assess undertaking **OTSDUW** and except where provided for in Appendix F, **The Company** will provide upon request the following **Network Data** to **Users**, calculated in accordance with **Good Industry Practice**:

PC.A.8.1 Single Point of Connection

For a **Single Point of Connection** to a **User's System** (and **OTSUA**), as a Transmission System voltage source, the data (as at the HV side of the **Point of Connection** (and in the case of **OTSUA**, each **Interface Point** and **Connection Point**) reflecting data given to **The Company** by **Users**) will be given to a **User** as follows:

The data items listed under the following parts of PC.A.8.3:

(a) (i), (ii), (iii), (iv), (v) and (vi) and the data items shall be provided in accordance with the detailed provisions of PC.A.8.3 (b) - (e).

PC.A.8.2 Multiple Point of Connection

For a **Multiple Point of Connection** to a **User's System** equivalents suitable for use in loadflow and fault level analysis shall be provided. These equivalents will normally be in the form of a π model or extension with a source (or demand for a loadflow equivalent) at each node and a linking impedance. The boundary nodes for the equivalent shall be either at the **Connection Point** (and in the case of **OTSDUW**, each **Interface Point** and **Connection Point**) or (where **The Company** agrees) at suitable nodes (the nodes to be agreed with the **User**) within the **National Electricity Transmission System**. The data at the **Connection Point** (and in the case of **OTSDUW**, each **Interface Point** and **Connection Point**) will be given to a **User** as follows:

The data items listed under the following parts of PC.A.8.3:-

(a) (i), (ii), (iv), (v), (vi), (vii), (viii), (ix), (x) and (xi)

and the data items shall be provided in accordance with the detailed provisions of PC.A.8.3 (b) - (e).

When an equivalent of this form is not required **The Company** will not provide the data items listed under the following parts of PC.A.8.3:-

(a) (vii), (viii), (ix), (x) and (xi)

PC.A.8.3 Data Items

(a) The following is a list of data utilised in this part of the **PC**. It also contains rules on the data which generally apply.

(i) symmetrical three-phase short circuit current infeed at the instant of fault from the **National Electricity Transmission System**, (I_1");

(ii) symmetrical three-phase short circuit current from the **National Electricity Transmission System** after the subtransient fault current contribution has substantially decayed, (I_1');

(iii) the zero sequence source resistance and reactance values at the **Point of Connection** (and in case of **OTSUA**, each **Interface Point** and **Connection Point**), consistent with the maximum infeed below;

(iv) the pre-fault voltage magnitude at which the maximum fault currents were calculated;

(v) the positive sequence X/R ratio at the instant of fault;

(vi) the negative sequence resistance and reactance values of the **National Electricity Transmission System** seen from the **Point of Connection** (and in case of **OTSUA**, each **Interface Point** and **Connection Point**), if substantially different from the

values of positive sequence resistance and reactance which would be derived from the data provided above;

(vii) the initial positive sequence resistance and reactance values of the two (or more) sources and the linking impedance(s) derived from a fault study constituting the (π) equivalent and evaluated without the **User** network and load and where appropriate without elements of the **National Electricity Transmission System** between the **User** network and agreed boundary nodes (and in case of **OTSUA**, each **Interface Point** and **Connection Point**);

(viii) the positive sequence resistance and reactance values of the two (or more) sources and the linking impendence(s) derived from a fault study, considering the short circuit current contributions after the subtransient fault current contribution has substantially decayed, constituting the (π) equivalent and evaluated without the **User** network and load, and where appropriate without elements of the **National Electricity Transmission System** between the **User** network and agreed boundary nodes (and in case of **OTSUA**, each **Interface Point** and **Connection Point**);

(ix) the corresponding zero sequence impedance values of the (π) equivalent produced for use in fault level analysis;

(x) the **Demand** and voltage at the boundary nodes and the positive sequence resistance and reactance values of the linking impedance(s) derived from a loadflow study considering **National Electricity Transmission System** peak **Demand** constituting the (π) loadflow equivalent; and,

(xi) where the agreed boundary nodes are not at a **Connection Point** (and in case of **OTSUA**, **Interface Point** or **Connection Point**), the positive sequence and zero sequence impedances of all elements of the **National Electricity Transmission System** between the **User** network and agreed boundary nodes that are not included in the equivalent (and in case of **OTSUA**, each **Interface Point** and **Connection Point**).

(b) To enable the model to be constructed, **The Company** will provide data based on the following conditions.

(c) The initial symmetrical three phase short circuit current and the transient period three phase short circuit current will normally be derived from the fixed impedance studies. The latter value should be taken as applying at times of 120ms and longer. Shorter values may be interpolated using a value for the subtransient time constant of 40ms. These fault currents will be obtained from a full **System** study based on load flow analysis that takes into account any existing flow across the point of connection being considered.

(d) **The Company** will provide the appropriate supergrid transformer data for the **National Electricity Transmission System** associated with equivalent voltage source data.

(e) The positive sequence X/R ratio and the zero sequence impedance value will correspond to **The Company's** source network only, that is with the section of network if any with which the equivalent is to be used excluded. These impedance values will be derived from the condition when all **Generating Units** (including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) are **Synchronised** to the **National Electricity Transmission System** or a **User's System** and will take account of active sources only including any contribution from the load to the fault current. The passive component of the load itself or other system shunt impedances should not be included.

(f) A **User** may at any time, in writing, specifically request for an equivalent to be prepared for an alternative **System** condition, for example where the **User's System** peak does not correspond to the **National Electricity Transmission System** peak, and **The Company** will, insofar as such request is reasonable, provide the information as soon as reasonably practicable following the request.

PC.A.9 **CONTROL SYSTEM MODEL REQUIREMENTS FOR USERS**

PC.A.9.1 OBJECTIVE

PC.A.9.1.1 Control and protection system models, along with other **Plant** and **Apparatus** information are required by this **PC**, with supporting documentation provided to **The Company** in order for **The Company** and **Transmission Licensees** to assess the impact of the **User's Plant and Apparatus** on the transient performance, security and stability of the **Transmission System**.

PC.A.9.1.2 The control and protection system models submitted by the **User** shall be representative of the **User's Plant and Apparatus** at the **Connection** Point appropriate to the type of model eg. RMS or EMT. All control and protection system models must take into account all communication, controller and processing delays relevant to modelling the performance of the **User's Plant and Apparatus**. If all **Power Park Units** or **DC Convertors** or **HVDC Converters** contained within the **Users Plant and Apparatus** are not identical, the control system model shall account for this by accurately representing the overall performance of the **Users Plant and Apparatus** at the **Connection Point**.

PC.A.9.1.3 The control and protection system models shall include representation of all relevant functionality required by the Grid Code including services provided to **The Company**. For example, this includes voltage control, LFSM-O, LFSM-U, frequency response, fault ride through, fast fault current injection, protection and automatic switching of shunt devices. Where modes of operation are selectable, the ability to select the mode of operation shall be included within the control system model. Additional guidance on relevant functionality will be published on **The Company** website.

PC.A.9.2. SCOPE

PC.A.9.2.1 All **Users** shall provide root mean-square (RMS) models which represent the **Users Plant and Apparatus** and controllers in balanced, RMS, positive phase-sequence, time domain studies.

PC.A.9.2.2 All **Generators**, **HVDC Convertor Station Owners**, or **HVDC System Owners** directly connected to the **Transmission System** or **Generators** with **Large Power Stations** and **HVDC Convertor Station** Owners or **HVDC System Owners** with **DC Converter Stations** or **HVDC Systems** embedded within a **User** system which employ convertors/invertors to import or export power to or from the **System** shall provide Electro-Magnetic Transient (EMT) models which represent the **Users Plant and Apparatus** in electromagnetic transient studies on the transmission and distribution system. For the avoidance of doubt this includes **Generators** who own and operate a **Power Park Module** comprising doubly fed induction generators and may include the excitation and governor control systems associated with **Synchronous Generating Units** if these impact on the types of study described on **The Company** website.

PC.A.9.2.3 **The Company** may specify requirements for other models in the **Bilateral Agreement** if required for specific connections in accordance with good industry practice. For example Real Time Dynamic Simulator (RTDS) Models may be required for protection co-ordination.

PC.A.9.3 Balanced Root Mean Squared (RMS) Control System Model

PC.A.9.3.1 The balanced, root mean-square positive sequence time-domain models shall be able to calculate how aspects, (including but not limited to; **Active Power** and **Reactive Power)** of the **User's Plant and Apparatus** vary due to changes in **System Frequency** and voltage at the **Connection Point**.

PC.A.9.3.2 The RMS models shall include all electrical and mechanical phenomena that impact on the **Active Power** and/or **Reactive Power** of the **User's Plant and Apparatus** for sub-transient, transient and synchronous dynamics within the context of an RMS study assumptions up to and including **Primary** and **Secondary Response** timeframes or when post-event steady state conditions have been achieved.

PC.A.9.3.3 The **User** shall provide RMS models in the software package specified in PC.A.9.8.1.

PC.A.9.3.4 The RMS models maybe either a User specific model or a standard open-source models, such as a standard WECC, IEEE or IEC control system model available in the software format as specified by **The Company** provided this model represents the **User's Plant and Apparatus** at the **Connection Point**. Where the **User** is referencing a standard model, the **User** will submit an unambiguous reference to the model and a full set of parameters for the control system model representing the control system performance of the real **Plant and Apparatus**.

PC.A.9.3.4.1 Where a **User** specific model is provided sufficient information shall be provided by the **User** to allow for **The Company** to redevelop RMS models in the event of future software environment changes or version updates. All models shall be accompanied with appropriate documentation with sufficient detail as specified and deemed complete by **The Company** (such agreement not to be unreasonably withheld).

PC.A.9.3.4.2 Where a **User** specific model is provided the **User** shall provide information:

(i) a full description of the models structure, functionality and the **User's Plant and Apparatus** represented.

(ii) inputs/outputs and functionality,

(iii) the information described in PC.A.5 relevant to the technology modelled.

PC.A.9.3.5 **The Company** may, when necessary, require the **User** to provide details of the proper operation of its complete RMS system representation or to facilitate its understanding of the results of a RMS dynamic simulation or request additional information concerning the RMS control system model. This should take place no later than the issuance of the FON.

PC.A.9.3.5 The performance requirements for the RMS models are included in Appendix PC.A.9.8

PC.A.9.4 **Electromagnetic Transient (EMT) Model**

PC.A.9.4.1 The three-phase electromagnetic transient control and supporting informtion shall include all material aspects of the **User's Plant and Apparatus** that affect the voltage and current outputs, including those of the control and protection response from the **User's Plant and Apparatus**. The models shall represent phenomena that materially affect the voltage and **Frequency** on the **Total System** over timeframes of sub-cycle up to 50 cycles including, but not limited to, switching electronic devices, transformer saturation and equipment energisation.

PC.A.9.4.2 The **User** shall provide EMT models in the software package specified in PC.A.9.9.1.

PC.A.9.4.3 The performance requirements for the EMT control system model are included in Appendix PC.A.9.9

PC.A.9.5 Replica Control Systems, RTDS, RSCAd

PC.A.9.5.1 Where required by the Bilateral Agreement, the **User** shall provide replica and/or suitable Real Time Dynamic Simulator models. The details of any such models will be included in the Bilateral Agreement.

PC.A.9.6 CONFIDENTIALITY AND SHARING

PC.A.9.6.1 CONFIDENTIALITY AND SHARING RMS TYPE MODELS

PC.A.9.6.1.1 The models, supporting documentation and associated data are provided to **The Company** in order to carry out its duties to meet its **ESO Licence** and Grid Code obligations. In that regard, **the Company** is entitled to share the models, supporting documentation and associated data with the **Transmission Licensees**. **The Company** and/or **Transmission Licensees** may share the models with companies/contractors employed by **the Company** or **Transmission Licensees** to carry out licensed activities. Where such data is shared with third parties working with **The Company** or **Transmission Licensees**, this data will be shared as provided in GC.12.

PC.A.9.6.1.2 It is the responsibility of the **User** to provide the RMS models, supporting documentation and associated data to **The Company**. **The Company** will accept the models, supporting documentation and associated data from a manufacturer as a **Manufacturers Data and Performance Report** (See ECP.10). **The Company** will only accept this information from a third party manufacturer provided the third party manufacturer agrees to enter into **The Company's** standard confidentiality agreement for **User**s for sharing of the model as outlined in PC.A.9.6.1. In the event the third party manufacturer is unable to enter into **The Company's** standard confidentiality agreement, the **User** shall be responsible for the provision of the RMS models, supporting documentation and associated data to **The Company**.

PC.A.9.6.1.3 It may also be necessary for **The Company** to share a representative RMS model with another **User** to comply with applicable Grid Code requirements (e.g. ECC.6.3.17.1.5 and ECC.6.3.17.2.3) and Bilateral Agreement. For these purposes the **User** must recorded in the **Compliance Statements** either:

(i) A declaration that the models submitted for compliance purposes may be shared; or,

(ii) provide an equivalent encrypted version of the model that may be shared. In this event the **User** shall demonstrate that the performance of the models and the encrypted model are comparable.

PC.A.9.6.1.4 The **User** shall notify **The Company** of any changes to RMS models in accordance with PC.A.1.2. Unless specified otherwise in the **Bilateral Agreement**, RMS models must be submitted:

(i) at least 3 months prior to date requested for issue of the **Interim Operational Notification**

(ii) at least 1 month prior to date of issue of a **Limited Operational Notification**

for the **Users Plant and Apparatus**.

PC.A.9.6.2 CONFIDENTIALITY AND SHARING EMT TYPE MODELS

PC.A.9.6.2.1 The EMT model, supporting documentation and associated data are provided to **The Company** in order to carry out its duties to meet its **ESO Licence** and Grid Code obligations. In that regard, **the Company** is entitled to share the EMT models, supporting documentation and associated data with the **Transmission Licensees**. **The Company** and/or **Transmission Licensees** may share the EMT model with companies/contractors employed by **the Company** or **Transmission Licensees** to carry out licensed activities. Where such data is shared with third parties working with **The Company** or **Transmission Licensees**, this data will be shared and protected as provided in GC.12.

PC.A.9.6.2.2 It is the responsibility of the **User** to provide the EMT models, supporting documentation and associated data to **The Company**. **The Company** will accept the EMT models, supporting documentation and associated data from a manufacturer as a **Manufacturers Data and Performance Report** (See ECP.10). **The Company** will only accept this information from a third party manufacturer provided the third party manufacturer agrees to enter into **The Company's** standard confidentiality agreement for **User**s for sharing of the model as outlined in PC.A.9.6.2. In the event the third party manufacturer is unable to enter into **The Company's** standard confidentiality agreement, the **User** shall be responsible for the provision of the EMT models, supporting documentation and associated data to **The Company**.

PC.A.9.6.2.3 It may be necessary for **The Company** to share a representative EMT model with another **User** to comply with applicable Grid Code requirements (e.g. ECC.6.3.17.1.5 and ECC.6.3.17.2.3) and Bilateral Agreement. For these purposes the **User** must record in the **Compliance Statements** either:

(i) a declaration that the EMT model submitted for compliance purposes (PC.A.9.6.2.1) may be shared with another **User** for the purpose of fulfilling relevant Grid Code requirements; or,

(ii) provide an equivalent EMT model that maybe shared with another **User** for the purpose of fulfilling relevant Grid Code requirements. In this event the **User** shall declare that the performance of the equivalent EMT model is adequate for the purposes of fulfilling relevant Grid Requirements as published on **The Company** website.

PC.A.9.6.2.4 Where it is necessary for **The Company** to share a representative EMT model with another **User**, the **User** in receipt of the model shall:

(i) limit of the use of the EMT model to a specific purpose agreed with **The Company** (e.g. simulation requirements to demonstrate compliance with Grid Code including ECC.6.3.17.1 and ECC.6.3.17.2 and Bilateral Agreement)

(ii) control access to the EMT model to only those individuals who are strictly necessary for the execution of the specific purpose.

(iii) establish and maintain security measures to restrict access to and prevent distribution of the EMT model (e.g. single computer terminal containing the EMT model and restricting access to file areas where the model resides)

(iv) ensure any publication is only for demonstrating compliance with the specific purpose agreed with **The Company** and shall not include any data directly derived from the EMT model

(v) not disclose the EMT model

(vi) destroy all copies of the EMT model and supporting material in a confidentially secure manner after the execution of the specific purpose is complete. Destruction of the EMT model and supporting material shall be confirmed to **The Company** in writing.

PC.A.9.6.2.5 The **User** shall notify **The Company** of any changes to EMT models in accordance with PC.A.1.2. Unless specified otherwise in the **Bilateral Agreement**, EMT models must be submitted:

(i) at least 3 months prior to date requested for issue of the **Interim Operational Notification**

(ii) at least 1 month prior to date of issue of a **Limited Operational Notification**

for the **Users Plant and Apparatus**.

PC.A.9.7 VALIDATION

PC.A.9.7.1 The **User** shall submit evidence that the models have been validated demonstrating that the models under simulation conditions is representative of the **User's Plant and Apparatus** under equivalent conditions. Validation of models before commissioning may be against test results at other comparable sites, Factory Acceptance Tests of comparable equipment, or type test results to show that the responses shown by the models are representative of the **Users Plant and Apparatus**. Results from model validation in accordance internationally recommended standards (for example IEC) where applicable are also acceptable.

PC.A.9.7.2 A User may request agreement from **The Company** on the process for validating the models. In particular, for **Users Plant and Apparatus** where Factory Acceptance Testing is to be carried out details of any additional model validation at this stage should be agreed in a timely manner prior to the testing being carried out. Tests should generally include steady state **Reactive Power** capability, voltage control, **Fault Ride Through** and **Frequency** response.

PC.A.9.7.3 After final compliance testing as required under the **CP** or **ECP**, the **User** shall carry out validation of the model simulation results against measurements from final compliance testing in accordance with CP.A.3 or ECP.A.3, to ensure the model responses are representative of the **Users Plant and Apparatus.**

PC.A.9.7.4 If these tests show the models are not representative of the **User's Plant and Apparatus**, the **User** shall provide updated models, supporting documentation and associated data to ensure the responses shown by the model is representative of the responses shown by **User's Plant and Apparatus** during testing.

PC.A.9.7.5 In the event **The Company** identifies through lifetime monitoring (OC5) that that the response of the models are not representative of the **User's Plant and Apparatus**, **The Company** shall notify the **User**. The **User** shall provide the revised models, supporting documentation and associated data whose response is representative of the **Users Plant and Apparatus** as soon as reasonably practicable, but in any case no longer than 54 days after notification by **The Company**. In the event of revised models not being made available a **Limited Operational Notification** (as detailed in CP.9 or ECP.9 as applicable) may be issued with appropriate restrictions.

PC.A.9.7.6 The **User** is responsible for ensuring the models remain representative of the **User's Plant and Apparatus** throughout the operational lifetime of the **User's Plant and Apparatus**. In the event of the **User** modifying hardware/software which affects the control and/or operation of the **Users Plant and Apparatus**, the **User** shall provide **The Company** with updated models, supporting documentation and associated data to enable **The Company** to assess the impact of the modification of the **Users Plant and Apparatus** on the **Total System**. Such changes may require other compliance activity as described in the **CP** or **ECP** as applicable.

PC.A.9.7.7 The **User** shall demonstrate that the representation of a **User's Plant and Apparatus** and models perform correctly in a sample network model published by **The Company** before being accepted. The **User** should represent the **User's Plant and Apparatus** modelled in accordance with the **Single Line Diagram** and parameters submitted under the **Planning Code** and **DRC** in Schedules 1, 5 or 18 aggregating multiple **Power Park Units** and the collector grid to a single **Power Park Unit** representing a **Power Park Module**.

PC.A.9.8 RMS MODEL PERFORMANCE SPECIFICATION

PC.A.9.8.1 The RMS models shall be provided in the format required by **The Company**. **The Company** shall publish on **The Company** website acceptable software versions. **The Company** will act reasonable in determining acceptable software versions or compatible formats. In accordance with good industry practice **The Company** will consult with the industry prior to changing the format required. Prior to the start of model development the **User** may request formal agreement from **The Company** of the software version.The RMS models shall be compatible with Objectives as outlined in Grid Code PC.A.9.1 Additional guidance on RMS model is published on **The Company** website.

PC.A.9.8.2 GENERAL

PC.A.9.8.2.1 User RMS models shall interface with the software in a manner that is consistent with the behaviour of standard library models.

PC.A.9.8.2.1 The models shall use standard library functional blocks representing using standard Laplace block diagram format to the extent practicable.. Where user defined functional blocks have been submitted the **User** must provide **The Company** with the relevant documentation for the model including transfer block diagrams and an explanation of any coding to the satisfaction of **The Company**.

PC.A.9.8.2.2 The use of any "black boxes" encrypted code or external DLLs is not acceptable. An additional RMS model with these features maybe provided for comparison but for the avoidance of doubt does not meet the requirements of PC.A.9.

PC.A.9.8.2.3 The **User** shall specify the operating ranges for the model and shall be consistent with the real physical values and the actual performance of the **Plant and Apparatus**. This may include **Reactive Power** limits and allowable voltage ranges with control mode and **Droop** settings configured according to the usual operation. This information shall be provided either on the appropriate per unit base or in physical units.

PC.A.9.8.2.4 The RMS model must compile without errors. Warnings must be kept to a minimum.

PC.A.9.8.3 INITIALISATION

PC.A.9.8.3.1 The RMS model shall be self contained. The combined load-flow and dynamic model shall solve with minimal warnings without the need for manual adjustment or to run external software routines that adjust parameters in either the load-flow case or the dynamic case or both. External software or automation routines to integrate the model are not acceptable.

PC.A.9.8.3.2 The RMS model shall automatically initialise its parameters from load flow simulations without errors and with minimal warnings , must not result in run time errors and run with minimal warnings , and there must not be any interactions or conflicts with other models. The RMS models initialisation shall be invariant to simulation start time (i.e. not require the simulation to be initialised at a particular time). External software or automation routines to initialise the model are not acceptable.

PC.A.9.8.3.3 The RMS model is expected to be numerically stable and must adequately represent the expected equipment behaviour over the operational range of the **Plant and Apparatus** at the **Connection Point**. This includes the full load and **Reactive Power** range of the **Plant and Apparatus**, the range of system voltage and **frequency** operating range (described in Grid Code CC.6.1/ECC.6.1), short circuit levels and X/R ratio at the **Connection Point** where it would be in operation. These values maybe requested from **The Company or** the **Distribution Network Owner** during the compliance process. If necessary, the **User** shall provide a supplementary model for specific conditions. All information on the model capabilities shall be addressed in the model documentation provided to **The Company**.

PC.A.9.8.4 OUTPUT MESSAGES

PC.A.9.8.4.1 It is not acceptable for the models to crash catastrophically and provide no documentary evidence as to why the simulation failed.

PC.A.9.8.4.2 RMS models shall allow all appropriate internal variables to be requested for output for the duration of the simulation.

PC.A.9.8.4.3 In the case where the **User's Plant** trips during simulation, the relevant RMS models shall set the flag that indicates that the **User's Plant** has tripped.

PC.A.9.8.4.4 For protection events (e.g. crow bar controller operation) the simulation events, including initial detection, operation, and time-out, should be reported to the PowerFactory output window during the simulation.

PC.A.9.8.5 Integration Time Step

PC.A.9.8.5.1 The dynamic model must support time domain simulations with a minimum integration step size of 0.01 s.

PC.A.9.8.5.2 The models must not include algorithms that require use of a particular integration step size (for example the control system model should not fail to solve, or the response be materially different for an integration step size of 0.005 s).

PC.A.9.8.5.3 Time constants below 0.01 s should only be included if their inclusion is critical to the performance of the dynamic model and should be agreed with **The Company**. In this case, an alternative model may be requested according to PC.A.9.8.3.3, if required.

PC.A.9.8.5.4 Internal integration algorithms should only be included if their inclusion is critical to meeting the accuracy requirements, and should not materially detract from model simulation speed performance.

PC.A.9.9 EMT MODEL PERFORMANCE SPECIFICATION

PC.A.9.9.1 The **User** shall provide EMT models in the format required by **The Company**. **The Company** shall maintain a list of acceptable software versions, and compiler version which shall be published on **The Company** website. **The Company** will act reasonable in determining acceptable software versions or compatible formats. In accordance with good industry practice **The Company** will consult with the industry prior to changing the format required. The EMT models shall be compatible with Objectives as outlined in Grid Code PC.A.9.1 and **The Company** shall also publish on **The Company** website a description of the types of study that **The Company** and **Transmission Licensees** will use the EMT control system models in. Additional guidance on EMT model is also published on **The Company** website.

PC.A.9.9.2 The EMT models maybe encrypted. The scope, behaviour and performance of all encrypted elements must be documented. Documentation should include behaviour and performance of all encrypted inner and outer loop control functionality such as voltage control, frequency control, protection systems, convertor controls and phase locked loop controllers (PLL). Aspects of the control system may be omitted provided the study objectives published by **The Company** in accordance with PC.A.9.4.2 are met in which case the documentation should explain any functionality not included in the EMT control system model.

PC.A.9.9.3 The EMT model shall:

i) have adjustable operational control parameters. For example this would be expected to include setpoints, control drops, operational limits, relay thresholds. The **User** may seek agreement from **The Company** on the list of adjustable parameters prior to submission of the model.

ii) be based on plant design and validated against testing of the **Plant and Apparatus** (See Model Validation)

iii) include all control systems from outer loop control down to inner and switching functions

iv) represent all electrical, mechanical and control features appropriate for the **Plant** and **Apparatus** including switching algorithms of power convertors applicable to studies described by **The Company**.

v) Have all appropriate protection systems modelled for power system transient stability analysis including balanced and unbalanced fault conditions, **Frequency** and voltage disturbances configured to match the site specific installation of the **Plant** and **Apparatus**. Any protections which relate to multiple disturbances should have an option to be disabled.

vi) Allow **Plant** and **Apparatus** to be scaled where appropriate in accordance with good industry practice. For example representation of multiple **Power Park Units** by a single equivalent unit.

vii) Have time steps which must be appropriate for the accurate representation of the switching algorithms used in the **Plant and Apparatus** and compatible with study time steps down to 10us.

viii) Be portable between network models which may be any size between a single machine infinite bus power system representation and a full multi node power system network depending on the studies that need to be undertaken.

ix) Allow multiple instances within a network and be compatible with other control system models within a network.

x) Be capable of self initiation to **User** defined terminal conditions within 4 seconds of the simulation time when connected to an equivalent Thevenin source. In the case of complex models **The Company** may agree a self initiation simulation time within 6 seconds.

xi) Warn the **User** by way of an output message when **System** conditions exceed the operational limits of the **Plant** and **Apparatus** or are not valid for continued operation.

xii) Be able to be initialised from a snapshot of network conditions

APPENDIX B - SINGLE LINE DIAGRAMS

PC.B.1 The diagrams below show three examples of single line diagrams, showing the detail that should be incorporated in the diagram. The first example is for an **Network Operator** connection, the second for a **Generator** connection, the third for a **Power Park Module** electrically equivalent system.

Network Operator Single Line Diagram

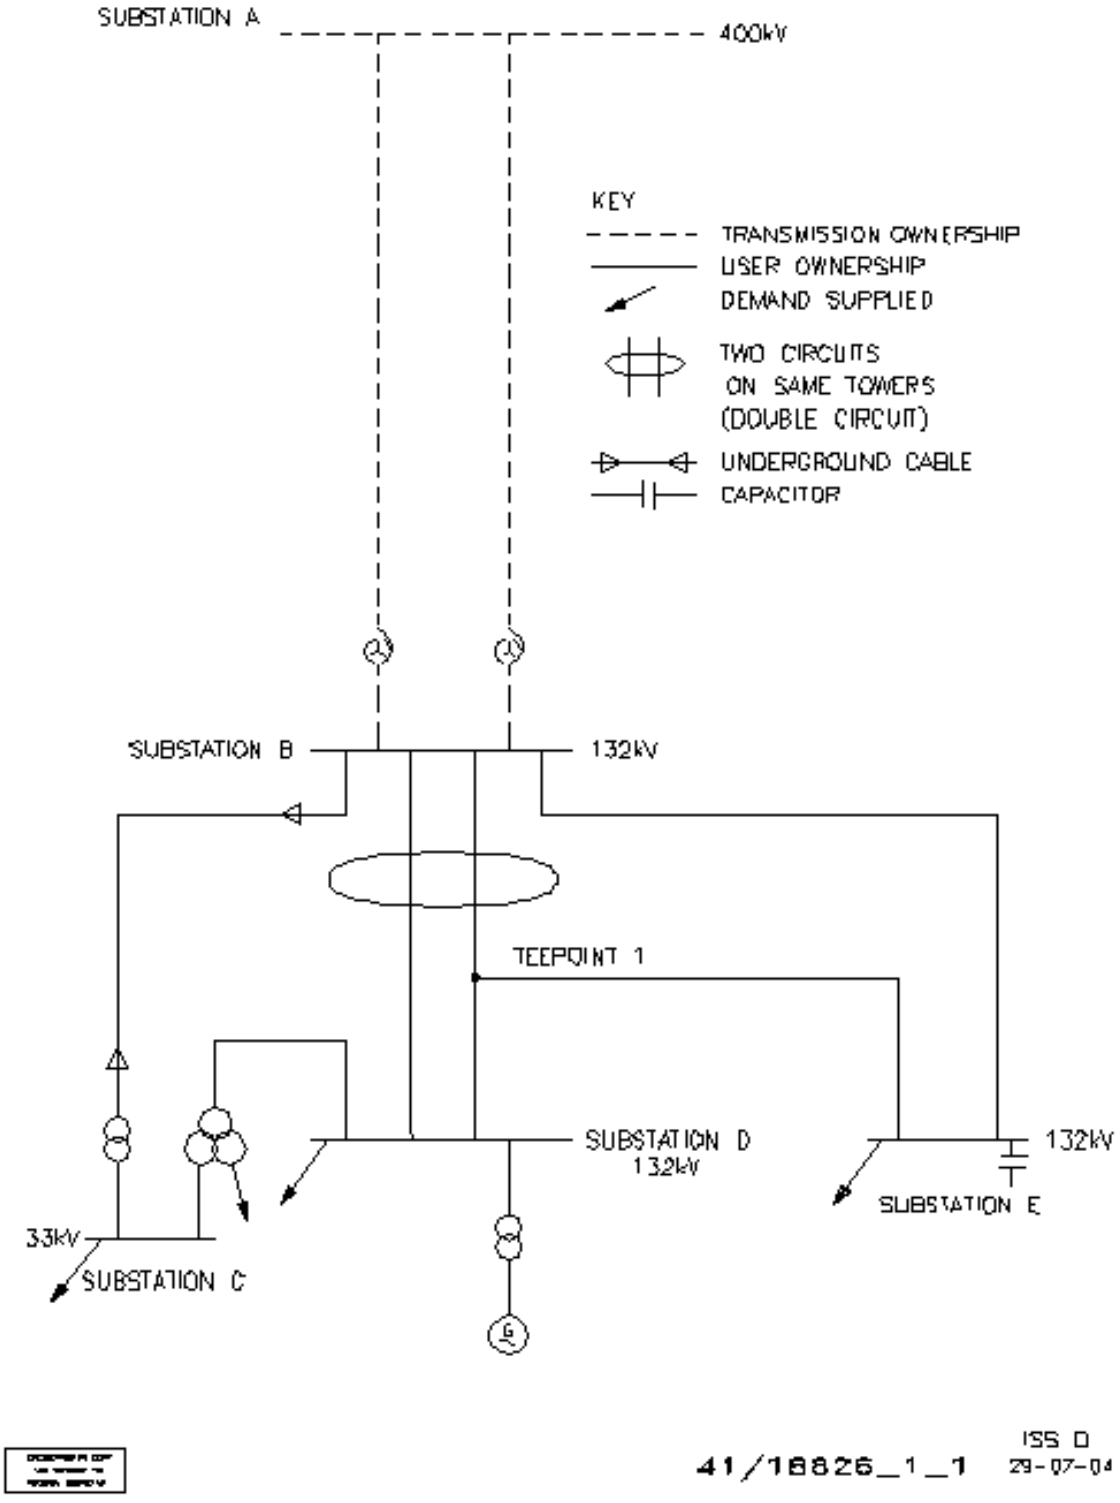

Generator Single Line Diagram

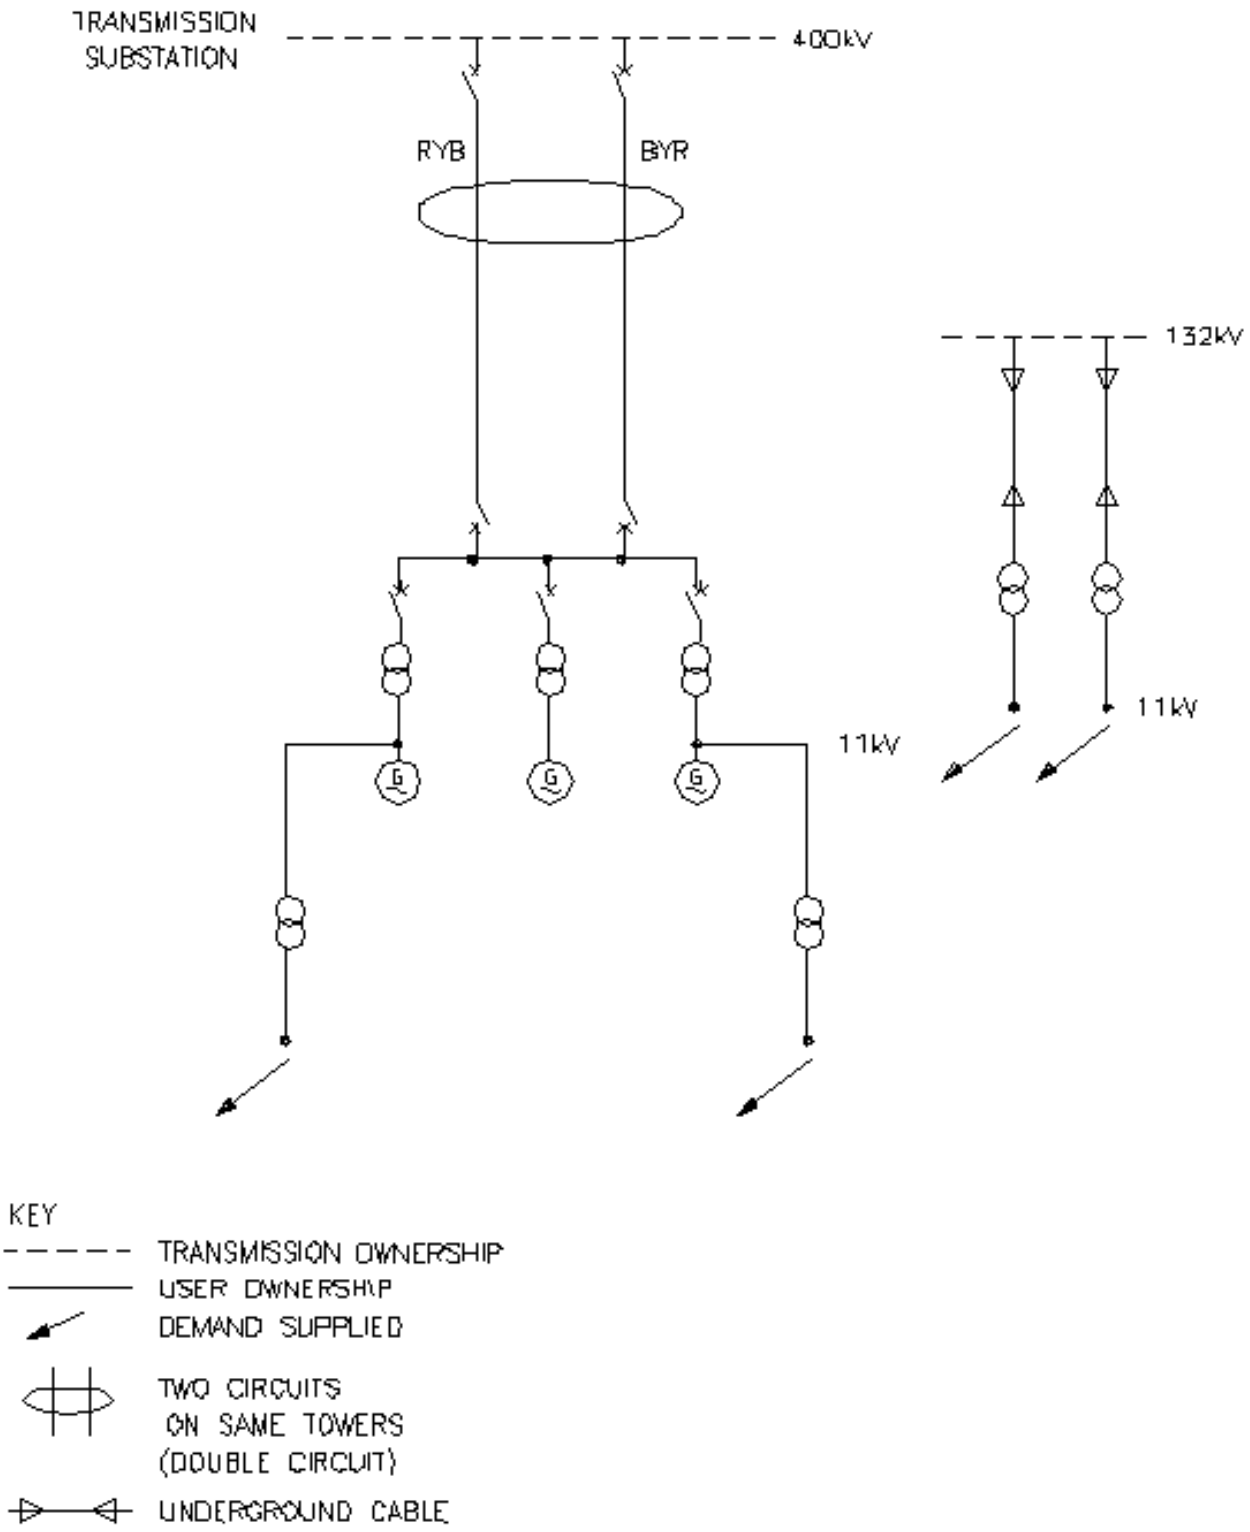

41/19468_1_1

ISS D
29-07-04

Power Park Module Single Line Diagram

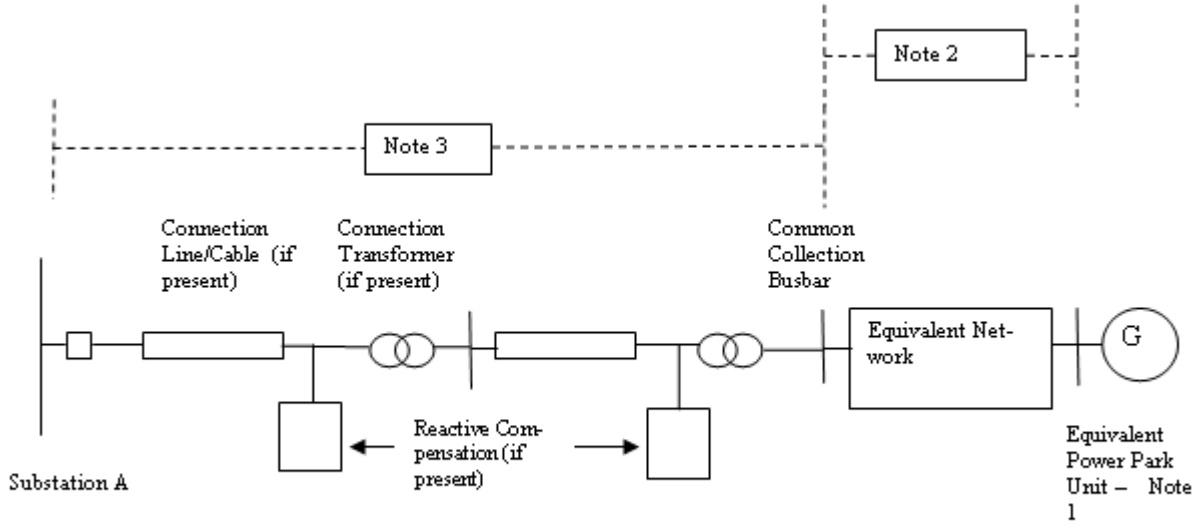

Notes:

(1) The electrically equivalent **Power Park Unit** consists of a number of actual **Power Park Units** of the same type ie. any equipment external to the **Power Park Unit** terminals is considered as part of the equivalent network. **Power Park Units** of different types shall be included in separate electrically equivalent **Power Park Units**. The total number of equivalent **Power Park Units** shall represent all of the actual **Power Park Units** in the **Power Park Module** (which could be a **DC Connected Power Park Module**).

(2) Separate electrically equivalent networks are required for each different type of electrically equivalent **Power Park Unit**. The electrically equivalent network shall include all equipment between the **Power Park Unit** terminals and the **Common Collection Busbar**.

(3) All **Plant** and **Apparatus** including the circuit breakers, transformers, lines, cables and reactive compensation plant between the **Common Collection Busbar** and Substation A shall be shown.

APPENDIX C - TECHNICAL AND DESIGN CRITERIA

PC.C.1 Planning and design of the **SPT** and **SHETL Transmission Systems** is based generally, but not totally, on criteria which evolved from joint consultation among various **Transmission Licensees** responsible for design of the **National Electricity Transmission System**.

PC.C.2 The above criteria are set down within the standards, memoranda, recommendations and reports and are provided as a guide to system planning. It should be noted that each scheme for reinforcement or modification of the **Transmission System** is individually designed in the light of economic and technical factors associated with the particular system limitations under consideration.

PC.C.3 The tables below identify the literature referred to above, together with the main topics considered within each document.

PART 1 – SHETL's TECHNICAL AND DESIGN CRITERIA

ITEM No.	DOCUMENT	REFERENCE No.
1	National Electricity Transmission System Security and Quality of Supply Standard	Version [ ]
2	System Phasing	TPS 13/4
3	Not used	
4	Voltage fluctuations and the connection of disturbing equipment to transmission systems and distribution networks in the United Kingdom	EREC P28 Issue 2
5	EHV or HV Supplies to Induction Furnaces Voltage unbalance limits. Harmonic current limits.	ER P16 (Supported by ACE Report No.48)
6	Planning Levels for Harmonic Voltage Distortion and the Connection of Non-Linear Loads to Transmission Systems and Public Electricity Supply Systems in the United Kingdom Harmonic distortion (waveform). Harmonic voltage distortion. Harmonic current distortion. Stage 1 limits. Stage 2 limits. Stage 3 Limits Addition of Harmonics Short Duration Harmonics Site Measurements	ER G5 (Supported by ACE Report No.73)
7	AC Traction Supplies to British Rail Type of supply point to railway system. Estimation of traction loads. Nature of traction current. System disturbance estimation. Earthing arrangements.	ER P24

ITEM No.	DOCUMENT	REFERENCE No.
8	Operational Memoranda	(SOM)
	Main System operating procedure.	SOM 1
	Operational standards of security.	SOM 3
	Voltage and reactive control on main system.	SOM 4
	System warnings and procedures for instructed load reduction.	SOM 7
	Continuous tape recording of system control telephone messages and instructions.	SOM 10
	Emergency action in the event of an exceptionally serious breakdown of the main system.	SOM 15
9	Planning Limits for Voltage Unbalance in the United Kingdom.	ER P29

The applicable **SHETL's** technical and design criteria shall also be used in the design and development of a **Competitively Appointed Transmission Licensee's System** having a **Competitively Appointed Transmission Licensee's Interface Point** to **SHETL's Transmission System**.

PART 2 - SPT's TECHNICAL AND DESIGN CRITERIA

ITEM No.	DOCUMENT	REFERENCE No.
1	National Electricity Transmission System Security and Quality of Supply Standard	Version [ ]
2	System Phasing	TDM 13/10,002 Issue 4
3	Not used	
4	Voltage fluctuations and the connection of disturbing equipment to transmission systems and distribution networks in the United Kingdom	EREC P28 Issue 2
5	EHV or HV Supplies to Induction Furnaces Voltage Unbalance limits. Harmonic current limits.	ER P16 (Supported by ACE Report No.48)
6	Planning Levels for Harmonic Voltage Distortion and the Connection of Non-Linear Loads to Transmission Systems and Public Electricity Supply Systems in the United Kingdom Harmonic distortion (waveform). Harmonic voltage distortion. Harmonic current distortion. Stage 1 limits. Stage 2 limits. Stage 3 Limits Addition of Harmonics Short Duration Harmonics Site Measurements	ER G5 (Supported by ACE Report No.73)
7	AC Traction Supplies to British Rail Type of supply point to railway system. Estimation of traction loads. Nature of traction current. System disturbance estimation. Earthing arrangements.	ER P24

The applicable **SPT's** technical and design criteria shall also be used in the design and development of a **Competitively Appointed Transmission System** having a **Competitively Appointed Transmission Licensee Interface Point** to **SPT's Transmission System**.

APPENDIX D - DATA NOT DISCLOSED TO A RELEVANT TRANSMISSION LICENSEE

PC.D.1 Pursuant to PC.3.4, **The Company** will not disclose to a **Relevant Transmission Licensee** data items specified in the below extract:

PC REFERENCE	DATA DESCRIPTION	UNITS	DATA CATEGORY
PC.A.3.2.2 (f) (i)	**(i)** For **GB Code Users** The **Generator Performance Chart** at the **Generating Unit** stator terminals **(ii)** For **EU Code Users:-** The **Power Generating Module Performance Chart**, and **Synchronous Generating Unit Performance Chart;**		**SPD**
PC.A.3.2.2 (b)	**Output Usable** (on a monthly basis)	MW	**SPD**
PC.A.5.3.2 (d) Option 1 (iii)	GOVERNOR AND ASSOCIATED PRIME MOVER PARAMETERS Option 1 BOILER & STEAM TURBINE DATA		
	Boiler time constant (Stored **Active Energy**)	S	**DPD II**
	HP turbine response ratio: (Proportion of **Primary Response** arising from HP turbine)	%	**DPD II**
	HP turbine response ratio: (Proportion of **High Frequency Response** arising from HP turbine)	%	**DPD II**
Part of PC.A.5.3.2 (d) Option 2 (i)	Option 2 All **Generating Units (**including **Synchronous Generating Units** forming part of a **Synchronous Power Generating Module**) **Governor Deadband** or (**Frequency Response Deadband** and **Frequency Response Insensitivity**)*		
	- Maximum Setting	±Hz	**DPD II**
	- Normal Setting	±Hz	**DPD II**
	- Minimum Setting	±Hz	**DPD II**
	*(Note **GB Generators** who are not required to satisfy the requirements of the **European Connection Conditions** do not need to supply **Frequency Response Deadband** or **Frequency Response Insensitivity** data).		
Part of PC.A.5.3.2 (d) Option 2 (ii)	**Steam Units**		

PC REFERENCE	DATA DESCRIPTION	UNITS	DATA CATEGORY
	Reheater Time Constant	sec	**DPD II**
	Boiler Time Constant	sec	**DPD II**
	HP Power Fraction	%	**DPD II**
	IP Power Fraction	%	**DPD II**
Part of PC.A.5.3.2 (d) Option 2 (iii)	**Gas Turbine Units** Waste Heat Recovery Boiler Time Constant		
Part of PC.A.5.3.2 (e)	UNIT CONTROL OPTIONS		
	Maximum droop	%	**DPD II**
	Minimum droop	%	**DPD II**
	Maximum **Governor Deadband** or (Maximum Frequency **Response Deadband** and Maximum **Frequency Response Insensitivity**)*	±Hz	**DPD II**
	Normal **Governor Deadband** or (normal **Frequency Response Deadband** and normal **Frequency Response Insensitivity)***	±Hz	**DPD II**
	Minimum **Governor Deadband** or (minimum **Frequency Response Deadband** and minimum **Frequency Response Insensitivity**)*	±Hz	**DPD II**
	Maximum Output **Governor Deadband** or (Maximum Output **Frequency Response Deadband** and Maximum Output **Frequency Response Insensitivity**)*	±MW	**DPD II**
	Normal Output **Governor Deadband** or (Normal Output **Frequency Response Deadband** and Normal Output **Frequency Response Insensitivity)***	±MW	**DPD II**
	Minimum Output **Governor Deadband** or (Minimum Output **Frequency Response Deadband** and Minimum Output **Frequency Response Insensitivity**)*	±MW	**DPD II**
	(Note **Generators** who are not required to satisfy the requirements of the **European Connection Conditions** do not need to supply **Frequency Response Deadband** and **Frequency Response Insensitivity** data). Frequency settings between which Unit Load Controller droop applies:		
	Maximum	Hz	**DPD II**
	Normal	Hz	**DPD II**
	Minimum	Hz	**DPD II**
	Sustained response normally selected	Yes/No	**DPD II**
PC.A.3.2.2 (f) (ii)	Performance Chart of a **Power Park Modules** (including **DC Connected Power Park Modules**) at the connection point		**SPD**

PC REFERENCE	DATA DESCRIPTION	UNITS	DATA CATEGORY
PC.A.3.2.2 (b)	**Output Usable** (on a monthly basis)	MW	**SPD**
PC.A.3.2.2 (e) and (j)	**DC CONVERTER STATION** AND **HVDC SYSTEM** DATA		
	ACTIVE POWER TRANSFER CAPABILITY (PC.A.3.2.2)		
	Import MW available in excess of **Registered Import Capacity**.	MW	**SPD**
	Time duration for which MW in excess of **Registered Import Capacity** is available	Min	**SPD**
	Export MW available in excess of **Registered Capacity**.	MW	**SPD**
	Time duration for which MW in excess of **Registered Capacity** is available	Min	**SPD**
Part of PC.A.5.4.3.3	LOADING PARAMETERS		
	MW Export	MW	**SPD**
	Nominal loading rate	MW/s	**DPD I**
	Maximum (emergency) loading rate	MW/s	**DPD I**
	MW Import		
	Nominal loading rate	MW/s	**DPD I**
	Maximum (emergency) loading rate	MW/s	**DPD I**

APPENDIX E - OFFSHORE TRANSMISSION SYSTEM AND OTSDUW PLANT AND APPARATUS TECHNICAL AND DESIGN CRITERIA

PC.E.1 In the absence of any relevant **Electrical Standards**, **Offshore Transmission Licensees** and **Generators** undertaking **OTSDUW** are required to ensure that all equipment used in the construction of their network is:

(i) Fully compliant and suitably designed to any relevant **Technical Specification**;

(ii) Suitable for use and operation in an **Offshore** environment, where such parts of the **Offshore Transmission System** and **OTSDUW Plant and Apparatus** are located in **Offshore Waters** and are not installed in an area that is protected from that **Offshore** environment, and

(iii) Compatible with any relevant **Electrical Standards** or **Technical Specifications** at the **Offshore Grid Entry Point** and **Interface Point**.

PC.E.2 The table below identifies the technical and design criteria that will be used in the design and development of an **Offshore Transmission System** and **OTSDUW Plant and Apparatus**.

ITEM No.	DOCUMENT	REFERENCE No.
1	National Electricity Transmission System Security and Quality of Supply Standard	Version [ ]
2*	Voltage fluctuations and the connection of disturbing equipment to transmission systems and distribution networks in the United Kingdom	EREC P28 Issue 2
3*	Planning Levels for Harmonic Voltage Distortion and the Connection of Non-Linear Loads to Transmission Systems and Public Electricity Supply Systems in the United Kingdom	ER G5
4*	Planning Limits for Voltage Unbalance in the United Kingdom	ER P29

* Note:- Items 2, 3 and 4 above shall only apply at the **Interface Point**.

APPENDIX F - OTSDUW DATA AND INFORMATION AND OTSDUW NETWORK DATA AND INFORMATION

PC.F.1 Introduction

PC.F.1.1 Appendix F specifies data requirements to be submitted to **The Company** by **Users** and **Users** by **The Company** in respect of **OTSDUW**.

PC.F.1.2 Such **User** submissions shall be in accordance with the **OTSDUW Development and Data Timetable** in a **Construction Agreement**.

PC.F.1.3 Such submissions shall be issued to **The Company** with the offer of a **CUSC Contract** in the case of the data in Part 1 and otherwise in accordance with the **OTSDUW Development and Data Timetable** in a **Construction Agreement**.

PC.F.2. OTSDUW Network Data and Information

PC.F.2.1 With the offer of a **CUSC Contract** under the **OTSDUW Arrangements The Company** shall provide:

(a) the site specific technical design and operational criteria for the **Connection Site**;

(b) the site specific technical design and operational criteria for the **Interface Point**, and

(c) details of **The Company's** preliminary identification and consideration of the options available for the **Interface Point** in the context of the **User's** application for connection or modification, the preliminary costs used by **The Company** in assessing such options and the **Offshore Works Assumption**s including the assumed **Interface Point** identified during these preliminary considerations.

PC.F.2.2 In accordance with the **OTSDUW Development and Data Timetable** in a **Construction Agreement The Company** shall provide the following information and data to a **User**:

(a) equivalent of the fault infeed or fault level ratings at the Interface Point (as identified in the **Offshore Works Assumptions**)

(b) notification of numbering and nomenclature of the **HV Apparatus** comprised in the **OTSDUW**;

(i) past or present physical properties, including both actual and designed physical properties, of **Plant** and **Apparatus** forming part of the **National Electricity Transmission System** at the Interface Point at which the **OTSUA** will be connected to the extent it is required for the design and construction of the **OTSDUW**, including but not limited to:

(ii) the voltage of any part of such **Plant** and **Apparatus**;

(iii) the electrical current flowing in or over such **Plant** and **Apparatus**;

(iv) the configuration of any part of such **Plant** and **Apparatus**

(v) the temperature of any part of such **Plant** and **Apparatus**;

(vi) the pressure of any fluid forming part of such **Plant** and **Apparatus**

(vii) the electromagnetic properties of such **Plant** and **Apparatus**; and

(viii) the technical specifications, settings or operation of any **Protection Systems** forming part of such **Plant** and **Apparatus**.

(c) information necessary to enable the **User** to harmonise the **OTSDUW** with construction works elsewhere on the **National Electricity Transmission System** that could affect the **OTSDUW**;

(d) information related to the current or future configuration of any circuits of the **Onshore Transmission System** with which the **OTSUA** are to connect;

(e) any changes which are planned on the **National Electricity Transmission System** in the current or following six **Financial Years** and which will materially affect the planning or development of the **OTSDUW**.

PC.F.2.3 At the **Users** reasonable request, additional information and data in respect of the **National Electricity Transmission System** shall be provided.

PC.F.2.4 OTSDUW Data And Information

PC.F.2.4.1 In accordance with the **OTSDUW Development and Data Timetable** in a **Construction Agreement**, the **User** shall provide to **The Company**, the following information and data relating to the **OTSDUW Plant and Apparatus** in accordance with Appendix A of the **Planning Code**.

APPENDIX G – PERFORMANCE CHART EXAMPLES

PC.G1.1 **Generator Performance Chart** within a **Power Station** or **CCGT Module** (**GB Code User**)

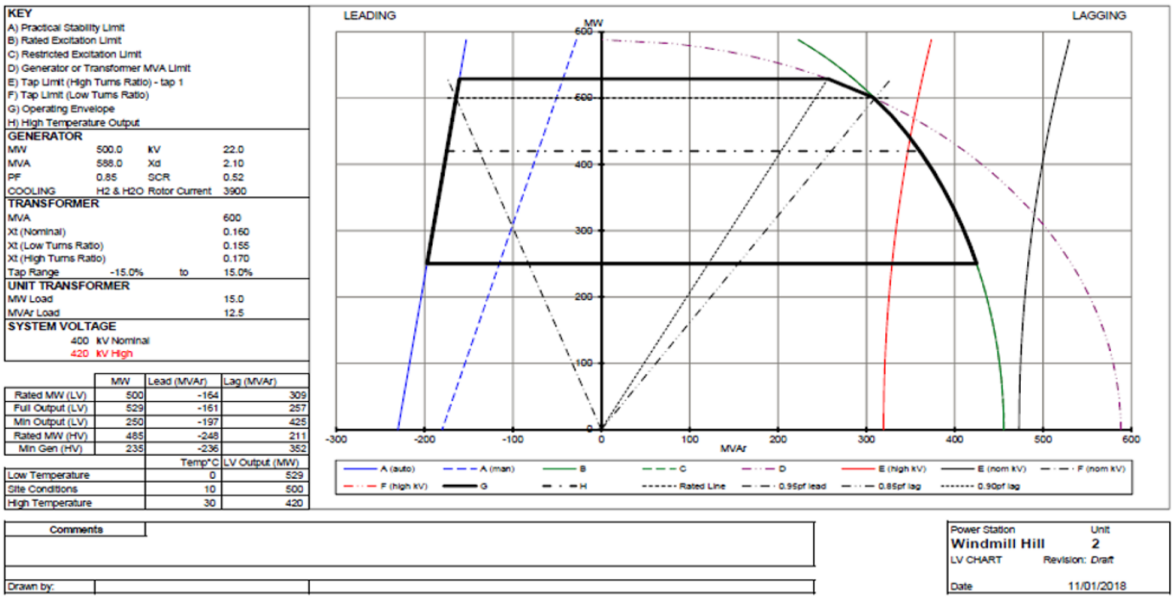

PC.G.1.2 **Synchronous Generating Unit Performance Chart** within a **Synchronous Power Generating Module** (**EU Code User**)

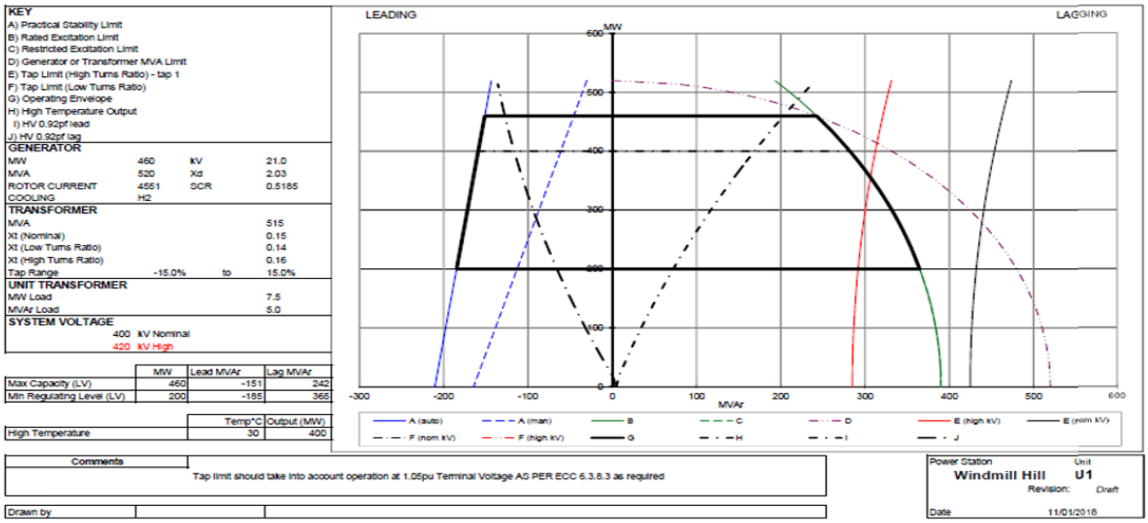

PC.G.2 **Power Generating Module Perfomance Chart** relating to a **Power Park Module**

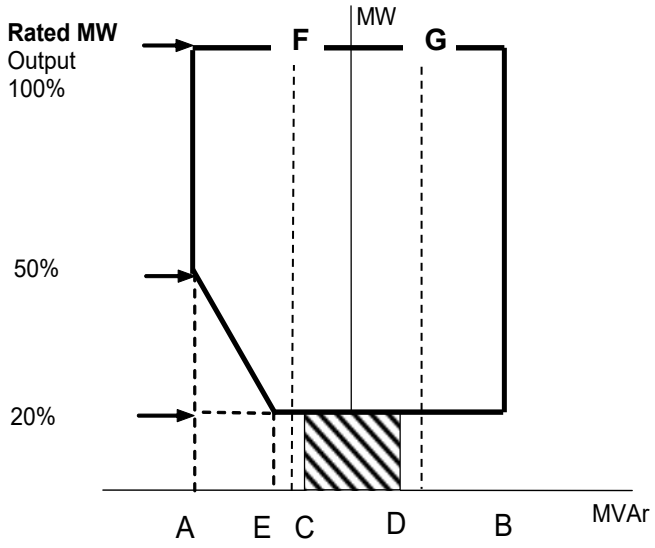

LEADING LAGGING

Point A is equivalent (in MVAr) to:	0.95 leading **Power Factor** at **Rated MW** output
Point B is equivalent (in MVAr) to:	0.95 lagging **Power Factor** at **Rated MW** output
Point C is equivalent (in MVAr) to:	-5% of **Rated MW** output
Point D is equivalent (in MVAr) to:	+5% of **Rated MW** output
Point E is equivalent (in MVAr) to:	-12% of **Rated MW** output
Line F is equivalent (in MVAr) to:	Leading **Power Factor Reactive Despatch Network Restriction**
Line G is equivalent (in MVAr) to:	Lagging **Power Factor Reactive Despatch Network Restriction**

☐ Where a **Reactive Despatch Network Restriction** is in place which requires following of local voltage conditions, alternatively to Line F and G, please check this box.

APPENDIX G – NETWORK OPERATOR AND THE COMPANY PLANNING DATA EXCHANGE

PC.G.1 Data to be Included in the Solved PSM

PC.G.1.1 The **Solved PSM**:

(a) Shall include **Structural Data**, **Situation Data**, and **Solution Data** relating to all relevant equipment within the scope of the **Network Operator Subtransmission PSM** or **The Company NETS PSM** as set out in PC.9.4 and PC.10.4, respectively.

(b) Shall conform to the data exchange definitions and implementation requirements described in PC.G.4**.**

(c) May include additional data if supported by the data exchange definitions.

PC.G.1.2 **PSM** data shall meet the following general requirements regarding **Structural Data**:

i. Define the connectivity of all relevant equipment;

ii. Have identifiers which are unique and remain consistent throughout the life of the data as required in PC.3.1.1.5; and

iii. Have a name and description sufficient to provide human readability.

PC.G.1.3 Equipment

PC.G.1.3.1 For all equipment the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. The line, substation or substation voltage level, as applicable, of which it is a part.

(b) **Situation Data**:

i. In-service status, which indicates whether or not the equipment is to be included in the development of **Solution Data**. Status “false” means that the equipment is considered as being disconnected from the **System**.

PC.G.1.3.2 For each busbar the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Node by which it is represented;

ii. Nominal voltage; and

iii. Maximum and minimum operational voltage limits.

(b) **Situation Data**:

i. Operational voltage limits to be used as power flow solution violation limits.

(c) **Solution Data**:

i. Voltage magnitude and angle if energised.

PC.G.1.3.2.1 For each busbar designated as a **PSM Interface Node**, or by exception at alternative points agreed by the relevant parties, the following data shall additionally be included in the **PSM**:

(a) **Solution Data** (short circuit) (as defined in **Engineering Recommendation** G74):

i. Fault kind (single- or 3-phase);

ii. Steady state current;

iii. Maximum steady state current;

iv. Minimum steady state current;

v. Peak current;

vi. Decaying component current ;

vii. Initial symmetrical current; and

viii. Symmetrical breaking current.

PC.G.1.3.3 For each switching device required to facilitate **System** reconfiguration, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. For all devices:

(a) Normal operating status (open/closed).

ii. For all circuit breakers or circuit switchers inclusive of their relevant substation infrastructure:

(a) Rated RMS continuous current;

(b) Rated 3-phase RMS short-circuit withstand current and duration;

(c) Rated 1-phase RMS short-circuit withstand current and duration;

(d) Rated 3-phase short-circuit peak withstand current; and

(e) Rated 1-phase short-circuit peak withstand current.

iii. Additionally, for all circuit breakers or circuit switchers:

(a) DC time constant applied at testing of asymmetrical breaking abilities;

(b) Break time;

(c) Rated 3-phase RMS short-circuit breaking current; and

(d) Rated 1-phase RMS short-circuit breaking current.

iv. Additionally, for all circuit breakers or circuit switchers with current making capability:

(a) Rated 3-phase peak short-circuit making current; and

(b) Rated 1-phase peak short-circuit making current.

(b) **Situation Data**:

i. Operational position.

(c) **Solution Data**:

i. Operational position.

PC.G.1.3.4 For each transformer (including step-up transformers, auto transformers, and phase shifting transformers) the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. For each transformer winding:

(a) Rated **Apparent Power**;

(b) Rated voltage;

(c) Positive sequence reactance and resistance;

(d) Zero sequence reactance and resistance;

(e) Positive sequence susceptance and conductance;

(f) Zero sequence susceptance and conductance;

(g) Connection type, for instance type D, Y, Yn, including any tertiary winding;

(h) Vector group;

(i) Grounding reactance and resistance;

(j) Earthing method (direct, resistance, reactance, through earthing transformer or none);

(k) Positive sequence reactance and resistance at minimum and maximum tap;

(l) Normal seasonal operational **Apparent Power** limits (Winter, Spring, Summer and Autumn):

i. For two-winding transformer, of the HV winding;

ii. For multi-winding transformers, of all windings; and

iii. Date of commencement of each season.

(m) Reverse power-flow operational limits (applied to the HV winding).

ii. For the tap changer:

(a) Tap changer steps information (high step, low step, neutral step);

(b) Tap changer on-load change capability;

(c) Type of phase tap changer: symmetrical, asymmetrical described in a linear, non-linear, or tabular way;

(d) Tap changer control mode;

(e) Impedance information per tap step, if applicable;

(f) Operational limit per tap step, if applicable; and

(g) Transformer winding on which tap-changer operates.

(b) **Situation Data**:

i. For each winding:

(a) Operational apparent power limits to be used as power flow solution violation limits:

i. For two-winding transformer, of the HV winding; and

ii. For multi-winding transformers, of all windings.

ii. For the tap changer:

(a) Tap changer regulating status;

(b) Tap changer regulating quantity target value;

(c) Tap changer regulating deadband; and

(d) Tap changer step.

(c) **Solution Data**:

i. For the tap changer:

(a) Tap changer step.

PC.G.1.3.5 For each circuit the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. For all circuits, to support power flow and short circuit calculations:

(a) Nominal voltage;

(b) Length of circuit;

(c) Max permitted temperature at the end of the short circuit ;

(d) Circuit composition: Overhead/underground/mixed;

(e) Normal seasonal operational current limits (Winter, Spring, Summer and Autumn):

i. Date of commencement of each season.

(f) Positive sequence resistance, reactance and susceptance;

(g) Negative sequence resistance, reactance and susceptance; and

(h) Zero sequence resistance, reactance and susceptance.

ii. In addition to the information presented in PC.G.1.3.5.a).i, for overhead lines where applicable:

a) Relevant zero sequence mutual coupling resistance, reactance and susceptance.

(b) **Situation Data**:

i. Operating limits to be used in the analysis of the power flow solution.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** flows for the circuit.

PC.G.1.3.6 For each compensating equipment (including linear and non-linear shunts, series compensators, and static var compensators), the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Operating type of compensation equipment (switched equipment with automated module activation or fixed equipment that can only be operated manually);

ii. For shunt compensators, the compensation type (for instance, R-L, R-L-C, C, R-L-C);

iii. Nominal voltage;

iv. For controllable compensating equipment, the regulating mode and regulating range;

v. For discrete shunt compensating equipment:

i. Positive sequence conductance and susceptance per section;

ii. Zero sequence conductance and susceptance per section; and

iii. Number of maximum sections.

vi. For series compensating equipment:

i. Positive sequence reactance and resistance;

ii. Zero sequence reactance and resistance; and

iii. Rated current and voltage threshold, if a variable resistor is present.

vii. For continuous compensating equipment, for instance static Var compensators:

i. Nominal compensation range;

ii. Capacitive and inductive rating;

iii. Slope characteristics is the slope that defines how the **Reactive Power** output changes in proportion to the difference between the regulated bus voltage and the voltage setpoint;

iv. Positive and zero sequence reactance; and

v. Positive and zero sequence resistance.

(b) **Situation Data**:

i. Section or initial compensation setting according to the type of compensating equipment;

ii. Regulating status; and

iii. Regulating quantity target value.

(c) **Solution Data**:

i. Section or final compensation setting according to the type of compensating equipment

PC.G.1.3.7 For each **HVDC System**, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. A reduced representation of the **HVDC System** comprised of:

i. information on the power output including active and reactive regulation range; and

ii. voltage regulation capabilities, if applicable.

(b) **Situation Data**:

i. **Active Power**;

ii. **Reactive Power**;

iii. Regulating status, if applicable; and

iv. Regulating quantity target value, if applicable.

(c) **Solution Data**:

i. **Reactive Power**.

(d) Specific requirements to related to representation in **The Company NETS PSM**:

i. For **HVDC Systems** internal to the **NETS** losses need to be accounted for and defined in the **PSM Scenario Document**.

PC.G.1.4 Generation and Storage

PC.G.1.4.1 For each **Synchronous Power Generating Module**, which is not an **Electricity Storage Module**, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Nominal **Apparent Power**;

ii. Nominal **Active Power**;

iii. Nominal terminal voltage;

iv. Nominal **Power Factor**;

v. Rotor type by construction;

vi. Rotor type for the purpose of short circuit calculation in accordance with **Engineering Recommendation** G74;

vii. Relevant points from the **Generator Performance Chart** defining a reactive capability curve, including **Active Power** and **Reactive Power** limits at nominal voltage;

viii. Direct axis reactances (saturated and unsaturated):

(a) Subtransient reactance (Xd");

(b) Transient reactance (Xd'); and

(c) Synchronous reactance (Xd).

ix. Direct axis time constants (saturated and unsaturated):

(a) Subtransient time constants (Td"); and

(b) Transient time constant (Td).

x. Quadrature axis reactances (saturated and unsaturated):

(a) Subtransient reactance (Xq");

(b) Transient reactance (Xq'); and

(c) Synchronous reactance (Xq).

xi. Quadrature time constants (saturated and unsaturated):

(a) Subtransient time constants (Tq"); and

(b) Transient time constant (Tq').

xii. Zero sequence reactance and resistance;

xiii. Negative sequence reactance and resistance;

xiv. Stator resistance;

xv. Inertia constant (H);

xvi. Primary **Energy Source** (from the list given in PC.G.8.1);

xvii. Control mode; and

xviii. Earthing star point reactance and resistance, if applicable.

(b) **Situation Data**:

i. Active and reactive power;

ii. Regulating status (enabled/disabled); and

iii. Regulating quantity target value.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.2 For each **Power Park Module**, which is not an **Electricity Storage Module**, comprising **Non-Synchronous Generating Units** or **Offshore Power Park Strings** none of which are connected through power electronic conversion technology, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Nominal **Apparent Power**;

ii. Nominal **Active Power**;

iii. Nominal mechanical power;

iv. Nominal terminal voltage;

v. Nominal speed;

vi. Nominal frequency ;

vii. Nominal **Power Factor**;

viii. Pole pair number;

ix. Locked r/x rotor ratio;

x. Nominal efficiency;

xi. Ratio of locked-rotor current to the rated current of the motor;

xii. Information if it is converter fed drive and reversable capability;

xiii. Primary **Energy Source** (from the list given in PC.G.8.1);

xiv. Energy conversion technology (from the list given in PC.G.8.2); and

xv. Regulating mode and regulating range.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**;

ii. Regulating status; and

iii. Regulating quantity target value.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.3 For each **Power Park Module**, which is not an **Electricity Storage Module**, comprising **Non-Synchronous Generating Units** or **Offshore Power Park Strings** which are all connected through power electronic conversion technology, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Nominal **Apparent Power**;

ii. Nominal **Active Power**;

iii. Nominal terminal voltage;

iv. Primary **Energy Source** (from the list given in PC.G.8.1);

v. Energy conversion technology (from the list given in PC.G.8.2); and

vi. Regulating mode and regulating range.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**;

ii. Regulating status; and

iii. Regulating quantity target value.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.4 For each **Synchronous Electricity Storage Module** the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Nominal energy capability;

ii. Nominal **Apparent Power** when supplying;

iii. Nominal **Apparent Power** when consuming;

iv. Nominal terminal voltage;

v. Primary **Energy Source** (from the list given in PC.G.8.1);

vi. Energy conversion technology (from the list given in PC.G.8.2);

vii. Regulating mode and regulating range; and

viii. Minimum and maximum **Active Power** and **Reactive Power**.

(b) **Situation Data**:

i. Stored energy, where available;

ii. Storage status, where available;

iii. **Active Power** and **Reactive Power**;

iv. Regulating status; and

v. Regulating quantity target value.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.5 For each **Non-Synchronous Electricity Storage Module** the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Nominal energy capability;

ii. Nominal **Apparent Power** when supplying;

iii. Nominal apparent power when consuming;

iv. Nominal terminal voltage;

v. Primary **Energy Source** (from the list given in PC.G.8.1);

vi. Energy conversion technology (from the list given in PC.G.8.2);

vii. Regulating mode and regulating range; and

viii. Minimum and maximum **Active Power** and **Reactive Power**.

(b) **Situation Data**:

i. Stored energy, where available;

ii. Storage status, where available;

iii. **Active Power** and **Reactive Power**;

iv. Regulating status; and

v. Regulating quantity target value.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.6 For each connection between a **Power-Generating Module** and either the **NETS** or the **Subtransmission System**, the equipment providing that connection, including the **Station Transformer** data and the auxiliary load it serves, shall be included in the **PSM**. The following data shall be included for the auxiliary load:

(a) **Structural Data**:

i. Subtransient short-circuit current maximum and minimum;

ii. Transient short-circuit current maximum and minimum;

iii. X/R maximum and minimum ratios;

iv. Indication of whether the auxiliary load is scalable (conform type) or not (non-conform type); and

v. Load response components i.e. constant power, constant impedance, constant current components.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.4.7 The detail specified in PC.G.1.4.1 through PC.G.1.4.5 is required only for **Power Generating Modules** connected to the **NETS** or the **Subtransmission System**. **Power Generating Modules** connected at a voltage level below that of the **Subtransmission System** shall be represented as aggregated equivalents, grouped by **Aggregated Energy Source**. The following data shall be included in the **PSM** for such equivalents:

(a) **Structural Data**:

i. **Aggregated Energy Source**, reflecting the dominant generation type of the aggregation (synchronous, asynchronous, inverter-based) (from the list given in PC.G.8.1);

ii. Aggregate short circuit current;

iii. X/R ratio of the equivalent;

iv. Control capability and mode; and

v. Relevant points from an assumed **Generator Performance Chart** relating to the aggregated equivalent defining a reactive capability curve, including active and reactive power limits at nominal voltage.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**; and

ii. Control (enabled or disabled).

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output.

PC.G.1.5 Load

PC.G.1.5.1 For each **Demand Facility** connected to the **Subtransmission System** or the **NETS**, the following data shall be included in the **PSM**:

(a) **Structural Data**:

i. Indication of whether the load is scalable (conform type) or not (non-conform type);

ii. Load response components i.e. constant power, constant impedance, constant current components;

iii. Transient short-circuit current maximum and minimum;

iv. Subtransient short-circuit current maximum and minimum; and

v. X/R maximum and minimum ratios.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output; and

ii. Short circuit current results.

PC.G.1.5.2 The detail specified in PC.G.1.5.1 is required only for **Demand Facilities** connected to the **Subtransmission System** or the **NETS**. Any demand connected at a voltage below that of the **Subtransmission System** shall be represented as an aggregated demand equivalent connected to the lower voltage busbar at substations connecting the **Subtransmission System** to a lower voltage. The following data shall be included in the **PSM** for such equivalents:

(a) **Structural Data**:

i. Indication of whether the load is scalable (conform type) or not (non-conform type);

ii. Transient short-circuit current maximum and minimum level;

iii. Subtransient short-circuit current maximum and minimum level; and

iv. X/R maximum and minimum ratios.

(b) **Situation Data**:

i. **Active Power** and **Reactive Power**.

(c) **Solution Data**:

i. Calculated **Active Power** and **Reactive Power** output; and

ii. Short circuit current results.

PC.G.1.6 Diagram Data

PC.G.1.6.1 For each of the following types of diagrams, **Diagram Data** shall be included in the **PSM**. The diagram data shall define the arrangement of the listed **Structural Data** on the diagram:

(a) A **PSM** overview diagram containing references to **Structural Data** representing:

i. All major substations in the **PSM**;

ii. Lines connecting the above substations;

iii. Names of the substations and lines; and

iv. Voltage levels of lines.

(b) A schematic diagram for each substation in the **PSM** containing references to **Structural Data** representing:

i. All equipment (e.g., lines, transformers, switches, busbars, compensation equipment), load, and generation/storage, both AC and DC, in the substation;

ii. Connectivity of equipment, load and generation/storage;

iii. Normal operating status (open/closed) of switches; and

iv. Voltage levels of busses.

PC.G.2 Additional Data Not Included in the **Solved PSM**

PC.G.2.1 Several sections of the **Planning Code**, including PC.9.3.1 and PC.10.3.1, anticipate the need for the exchange of **PSM**-related data which is not yet supported by the data exchange standard specified in PC.G.4. Several types of such data are described below.

PC.G.2.2 Full Technical **HVDC System** Models

PC.G.2.2.1 Due to the complexity of modelling **HVDC Systems**, **The Company** will model **HVDC System Connection Points** using a simplistic method. This will comprise of either:

(a) A single generator connection for **HVDC Systems** that connect the **NETS** to an **EU Grid Supply Point**;

(b) A single generator connection for **HVDC Systems** that connect the **NETS** to an **Offshore Transmission System** which provides the connection to one or more **Offshore Power Park Modules**;

(c) For **HVDC Systems** which form part of the **NETS** and have only two **Onshore Grid Entry Points**, both these points will be represented by a simple generation but with additional information around system loss allowance listed in the **PSM Scenario Document**;

(d) For **HVDC Systems** which form part of the **NETS** and have more than two **Onshore Grid Entry Points**:

(i) Those **Onshore Grid Entry Points** which are located on the GB mainland shall be represented by a simple generator with additional information detailing relevant system loss allowances listed in the **PSM Scenario Document**; or

(ii) Those **Onshore Grid Entry Points** which are located outside the GB mainland shall be represented by a simple generator, relevant **NETS** data and additional information detailing relevant system loss allowances listed in the **PSM Scenario Document**.

PC.G.2.2.2 **The Company** will consider any request from a **Network Operator** for a full **HVDC System** model connected to the NETS. **The Company** will, where possible, use the data exchange profile standard specified in PC.G.4.1.1 to make this **HVDC System** model available. A **PSM Scenario Document** will be provided with this model to assist the **Network Operator** to use this data.

PC.G.2.2.3 Should **The Company** be unable to facilitate a **Network Operator's** request, an alternative method to provide data will be agreed.

PC.G.2.2.4 The provision of models representing **HVDC System(s)**, with more than two **Onshore Grid Entry Points**, by **The Company** shall be agreed with the relevant **Network Operator(s)**. These models may be outside of the **NETS Solved PSM**. At such time as the **GB CIM Governance Group** update the **GB CIM** profile, these models may be exchanged as part of the **NETS Solved PSM**.

PC.G.2.3 General Demand Data

PC.G.2.3.1 The following information is infrequently required and should be supplied (wherever possible) when requested by **The Company**:

(a) Details of any individual loads (including (as applicable) the load behaviour of an **Electricity Storage Module** when operating in a mode analogous to demand) which have characteristics significantly different from the typical range of domestic, commercial, **Electricity Storage** or industrial loads;

(b) The sensitivity of the **Demand** to variations in voltage and **Frequency** on the **NETS** at the time of the **NETS** peak demand. The sensitivity factors quoted for the **Reactive Power** should relate to that given under PC.G.2.5;

(c) Details of any traction loads, e.g. connection phase pairs and continuous load variation with time;

(d) The average and maximum phase unbalance, in magnitude and phase angle, which the **User** would expect its **Demand** to impose on the **NETS**;

(e) The maximum harmonic content which the **User** would expect its **Demand** to impose on the **NETS**;

(f) Details of all loads which may cause **Demand** fluctuations greater than those permitted under **Engineering Recommendation** P28 Issue 2, Stage 1 at a **Point of Common Coupling** including the **Flicker Severity (Short Term)** and the **Flicker Severity (Long Term)**.

(g) In the case of **Electricity Storage Modules**, details of the **Maximum Capacity**, **Maximum Import Power**, **Registered Import Capability**, charge time, discharge time and operating periods.

PC.G.2.4 Import to Embedded Power Stations

PC.G.2.4.1 Introduction

PC.G.2.4.1.1 The import to **Embedded Power Stations** (excluding the import to **Electricity Storage Module(s)**) shall be treated, for the purpose of providing **Demand** related data to T**he Company**, in the same manner as import to other types of **Demand Facility**.

PC.G.2.4.1.2 In relation to **Embedded Large Power Stations** and **Embedded Medium Power Stations** (excluding the import to **Electricity Storage Module(s)**), **The Company** may request the **Network Operator** to provide the following:

(a) the maximum **Demand** that, in the **Network Operator's** opinion, could reasonably be imposed on the **NETS**;

(b) the **Demand** at the time of the **NETS** peak demand; and

(c) the **Demand** at the time of the **NETS** minimum demand.

PC.G.2.4.1.3 At its discretion **The Company** may also request the following details of the control of demand or reduction of pumping load offered as reserve:

(a) Magnitude of **Demand** or pumping load or **Electricity Storage Module** charging load which is tripped

(b) **System Frequency** at which tripping is initiated

(c) Time duration of **System Frequency** below trip setting for tripping to be initiated

(d) Time delay from trip initiation to tripping

PC.G.2.5 Network Operators' System Data

PC.G.2.5.1 Introduction

PC.G.2.5.2, PC.G.2.5.4 to PC.G.2.5.5 consist of data which is only to be supplied to **The Company** at **The Company's** reasonable request. In the event that **The Company** identifies a reason for requiring this data, **The Company** shall write to the relevant **Network Operator(s)**, requesting the data, and explaining the reasons for the request. If the **Network Operator(s)** wishes, **The Company** shall also arrange a meeting at which the request for data can be discussed, with the objective of identifying the best way in which **The Company's** requirements can be met.

Where **The Company** makes a request to a **Network Operator** for dynamic models under PC.G.2.5.5, each relevant **Network Operator** shall ensure that the models supplied in respect of their **Plant** and **Apparatus** reflect the true and accurate behaviour of the **Plant** and **Apparatus** as built and verified through the **Compliance Processes**.

PC.G.2.5.2 Network Operator's Protection Data

The following information is required which relates only to **Protection** equipment which can trip or inter-trip or close any **Connection Point** circuit-breaker or any **Transmission** circuit-breaker. This information need only be supplied once, in accordance with the timing requirements set out in PC.A.1.4(b), and need not be supplied on a routine annual basis thereafter, although **The Company** should be notified if any of the information changes;

(a) a full description, including actual or estimated settings as appropriate, for all relays and **Protection** systems installed or to be installed on the **Network Operator's System**;

(b) a full description of any auto-reclose facilities installed or to be installed on the **Network Operator's System**, including type and time delays; and

(c) the most probable fault clearance time for electrical faults on any part of the **Network Operator's System** directly connected to the **NETS** including **OTSDUW Plant** and **Apparatus**.

PC.G.2.5.3 Harmonic Studies

PC.G.2.5.3.1 It is occasionally necessary for **The Company** to evaluate the production/magnification of harmonic distortion on the **NETS**, **OTSUA** and **Network Operator's Systems**, especially when equipment such as capacitor banks are being connected to the **NETS**. At **The Company's** reasonable request, each **Network Operator** shall submit data with respect to the **Connection Site**, relating to the existing and forecast harmonic distortion levels, and:

(a) At the lower voltage busbar at substations connecting the **Subtransmission System** to a lower voltage:

(i) Connection voltage and MVAr rating of any capacitor bank and component design parameters if configured as a filter;

(ii) The minimum and maximum **Demand** (both MW and MVAr) that could occur;

(iii) Harmonic current injection sources in Amps at locations agreed between **Network Operators** and **The Company**. Where the harmonic injection current comes from a diverse group of sources, the equivalent contribution may be established from appropriate measurements; and

(iv) Details of traction loads, eg connection phase pairs, continuous variation with time, etc;

(b) An indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

PC.G.2.5.4 Dynamic Models

It is occasionally necessary for **The Company** to evaluate the dynamic performance of **Network Operator's Plant** and **Apparatus** at each **EU Grid Supply Point** or in the case of **EU Code Users**, their **System**. At **The Company's** reasonable request and as agreed between **The Company** and the relevant **Network Operator**, each **Network Operator** is required to provide the following data. Where such data is required, **The Company** will work with the **Network Operator** to establish the scope of the dynamic modelling work and share the required information where it is available:

(a) Dynamic model structure and block diagrams including parameters, transfer functions and individual elements (as applicable);

(b) Power control functions and block diagrams including parameters, transfer functions and individual elements (as applicable);

(c) Voltage control functions and block diagrams including parameters, transfer functions and individual elements (as applicable); and

(d) Converter control models and block diagrams including parameters, transfer functions and individual elements (as applicable).

Where **The Company** makes a request to a **Network Operator** for dynamic models, the **Network Operator**, to the best of its ability, shall ensure that the models supplied in respect of the **Plant** and **Apparatus** reflect the true and accurate behaviour of the **Plant** and **Apparatus** as built and verified through the **Compliance Processes**.

PC.G.2.5.5 Transient Overvoltage Assessment Data

It is occasionally necessary for **The Company** to undertake transient overvoltage assessments (e.g. capacitor switching transients, switchgear transient recovery voltages, etc). At **The Company's** reasonable request, each **Network Operator** is required to provide the following data with respect to the **Connection Site**, as follows:

(a) busbar layout plan(s), including dimensions and geometry showing positioning of any current and voltage transformers, through bushings, support insulators, disconnectors, circuit breakers, surge arresters, etc. Electrical parameters of any associated current and voltage transformers, stray capacitances of wall bushings and support insulators, and grading capacitances of circuit breakers;

(b) Electrical parameters and physical construction details of lines and cables connected at that busbar. Electrical parameters of all plant not previously supplied as part of the **Structural Data** e.g., transformers (including neutral earthing impedance or zig-zag transformers, if any), series reactors and shunt compensation equipment connected at that busbar (or to the tertiary of a transformer) or by lines or cables to that busbar;

(c) Basic insulation levels (BIL) of all **Apparatus** connected directly, by lines or by cables to the busbar;

(d) characteristics of overvoltage protection devices at the busbar and at the termination points of all lines, and all cables connected to the busbar;

(e) the following data is required on all transformers operating at **Supergrid Voltage** throughout Great Britain and, in Scotland, also at 132kV or greater: three or five limb cores or single phase units to be specified, and operating peak flux density at nominal voltage; and

(f) an indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

PC.G.2.6 System Restoration Related Information

PC.G.2.6.1 Data identified under this section PC.G.2.6.1 must be submitted as required under OC9.5.

PC.G.2.6.2 Where a **Network Operator** has a **Distribution Restoration Zone Plan** in place, the data specified in this section shall be submitted as required by **Network Operator(s)** to **The Company** annually by calendar week 28. This information may also be requested by **The Company** from the relevant **Network Operator(s)** during **System Restoration** and should be provided by **Network Operator(s)** were reasonably practicable. **Restoration Contractors** party to a **Distribution Restoration Zone Plan** shall, where reasonably practicable, submit the relevant information to the **Network Operator** who shall then supply the relevant information to **The Company**. The following data shall be provided;

(a) The expected time for each **Restoration Contractor's Plant** to **Re-Synchronise** to the **Network Operator's System** following a **Total Shutdown** or **Partial Shutdown**. The assessment should include the **Restoration Contractor's** ability to **Re-Synchronise** all their **Plant** if all were running immediately prior to the **Total Shutdown** or **Partial Shutdown**. Additionally, the data and supporting text should highlight any specific issues (e.g., those that would affect the time before which the **Restoration Contractor's Plant** could be energised) that may arise as time progresses from **Shutdown** without external supplies being restored or the availability of primary fuel supplies; and

(b) The **Restoration Contractor's Plants Block Loading Capability** as required in PC.G.2.6.1(b).

PC.G.2.6.3 From 31st December 2026 onwards, all **Network Operators** are required to confirm annually they comply with the applicable requirements of OC5.7. In the case of **Network Operators** this confirmation shall be provided in their Week 28 submission. From 1st January 2024 until 31st December 2026, evidence to support the work **Network Operators** are carrying out to achieve these requirements on or after 31st December 2026 shall be provided in their week 24 submission.

PC.G.3 Organisation of **PSM** data

PC.G.3.1 Sections 9 and 10 of the **Planning Code** require **The Company** and **Network Operators** to use **Solved PSMs** to describe the equipment, connectivity and operating condition of their portion of the **System**. This section describes how the data of a **Solved PSM** is organised and is included for information purposes.

Four main organizational concepts work together to allow the description of grid model data in building block 'modules'. These organizational constructs are:

- Profiles – Profiles divide data by type (Structural, Situation or Solution).
- Frames and Boundaries – Frames and Boundaries represent grid extents (sometimes call territories). A Frame is typically used to define a grid extent under the data mastership of one modelling party. A Boundary exists between Frames whose systems are connected.
- Models – Models are snapshots of grid objects representing a specific system or system operating condition.
- Assembly – Assemblies are collections of Models, typically for a specific purpose.

Planning Code Section 9, Section 10, and Appendix G.1 reference the concept of **CIM** profiles in their definition of data requirements. This Appendix will explore the other organisational concepts.

PC.G.3.2 Frame, Boundary, Model and Assembly concepts

Frames and Boundaries define grid extents which enable the maintenance of power system models in 'modules' which can be easily combined to create cohesive input data for various network analysis studies. Every Boundary is associated with two or more Frames. (Two is the most common number of Frames per Boundary, however, three or more Frames can be associated with a Boundary if necessary to accurately express the relationships among the systems of the various modelling-responsible parties.) There is an electrical connection between one or more pieces of equipment in the grid extent defined by each Frame and the equipment in the Boundary. All connections between the equipment of one Frame and that of another Frame (or set of Frames) are defined using a single Boundary.

Models contain grid objects which represent some facet of the portion of the power system contained in a Frame or Boundary. The grid objects in a Model all conform to a Profile describing a type of data. The Structural Profile describes information about the characteristics of electricity system equipment, including their capabilities and connectivity. The Situation Profile describes information about the operational state of an electricity system, including demand and generation output and switch positions. The Solution Profile describes information regarding the results of a steady-state power flow calculation and/or short circuit calculation performed by a power system modelling application.

Assemblies are collections of Models grouped to support a purpose. An Assembly can contain multiple Models whose data conforms to the same Profile or Models conforming to multiple different Profiles.

PC.G.3.3 Organising grid model data using the four concepts

Figure illustrates how an electrical power system composed of a transmission system and seven distribution systems could be divided into the Frames and Boundaries which delineate modelling responsibility.

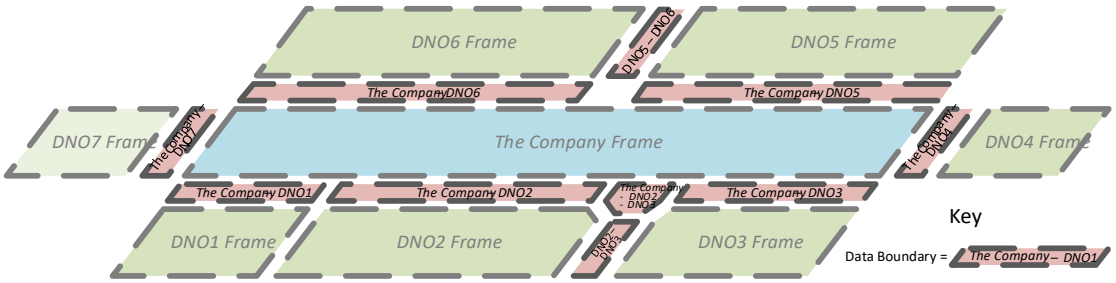

Figure 1 - Frames and Boundaries of a typical transmission and distribution power system

In this diagram, seven **Network Operators** each have modelling responsibility for their own system – their Frames are labelled DNO1 Frame through DNO7 Frame. **The Company** has modelling responsibility for the transmission system - its Frame is called The Company Frame. There is a Boundary defined wherever the system of one Frame connects to the system of another Frame. In Figure , the system of every DNO Frame connects to the system of The Company Frame. These connections are reflected by the presence of The Company-DNO1, The Company-DNO2, The Company-DNO3, The Company-DNO4, The Company-DNO5, The Company-DNO6, and The Company-DNO7 Boundaries. The systems of the DNO2 and the DNO3 Frames connect to each other and the systems of the DNO6 and DNO7 Frames connect to each other - the DNO2-DNO3 Boundary and DNO6-DNO7 Boundary, respectively, reflect these connections. Additionally, the systems of the DNO2 and DNO3 Frames happen to have shared connection points with the system of The Company Frame, thus there is one tri-lateral Boundary, The Company-DNO2-DNO3.

In the straightforward situation where a detailed master Structural Model of the entire system is being constructed, each modelling-responsible party would create a Structural Model (a model of the equipment and connectivity of its system) describing the power system in its Frame. Each set of modelling-responsible parties whose Frames adjoin a given Boundary would agree on the modelling of their connections and would create a Structural Model for that Boundary. Each Structural Model would essentially ‘fit into’ or ‘fill’ its Frame or Boundary. This is illustrated in Figure .

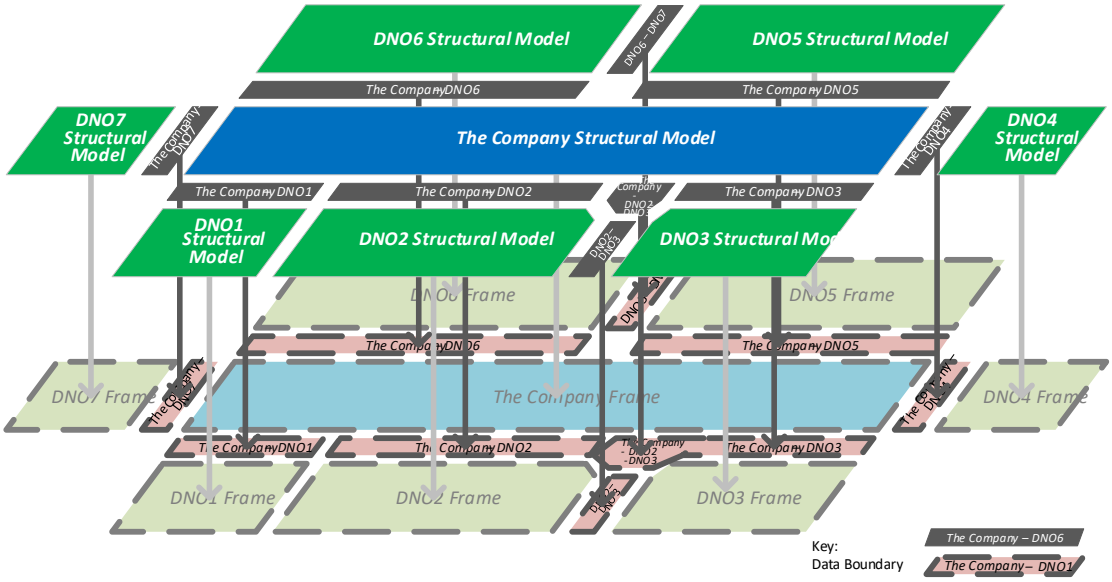

Figure 2 - Models 'fit into' Frames and Boundaries

The Structural grid model data that results from combining all the Models is complete model of the system, which is modular, and reflective of each parties modelling responsibility.

This collection of Models – the Structural Models which together describe the complete, master Structural data of the power system – could be shared as an Assembly (a collection of Models for a purpose), as shown in **Error! Reference source not found.**.

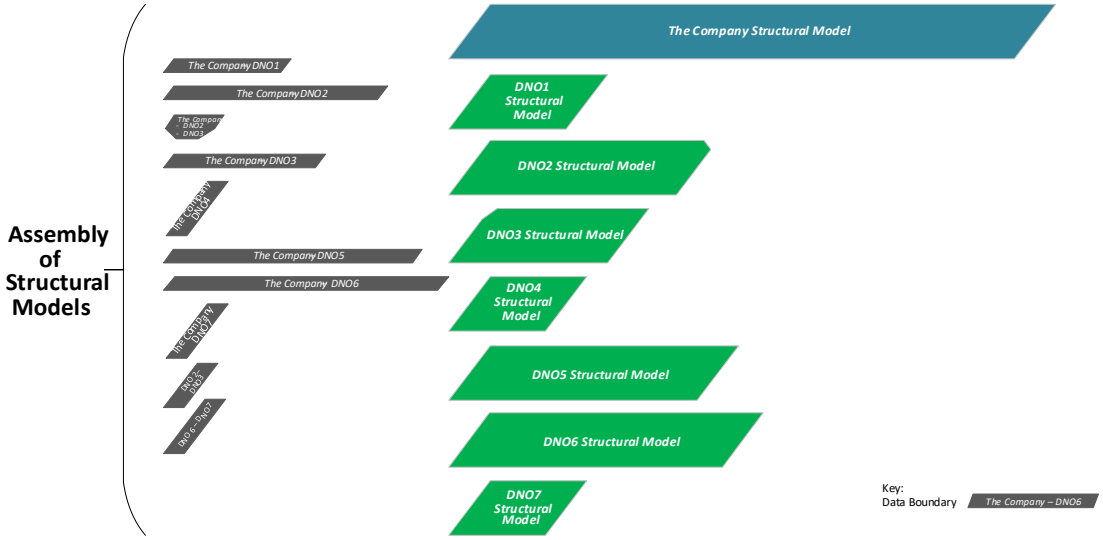

Figure 3 - An Assembly of Structural Models describing the equipment and connectivity of the complete power system

To describe the operating condition for a given study, the set of Structural Models could be augmented with Situation Models for each of the Frames. The Situation Models are shown in the upper portion of Figure .

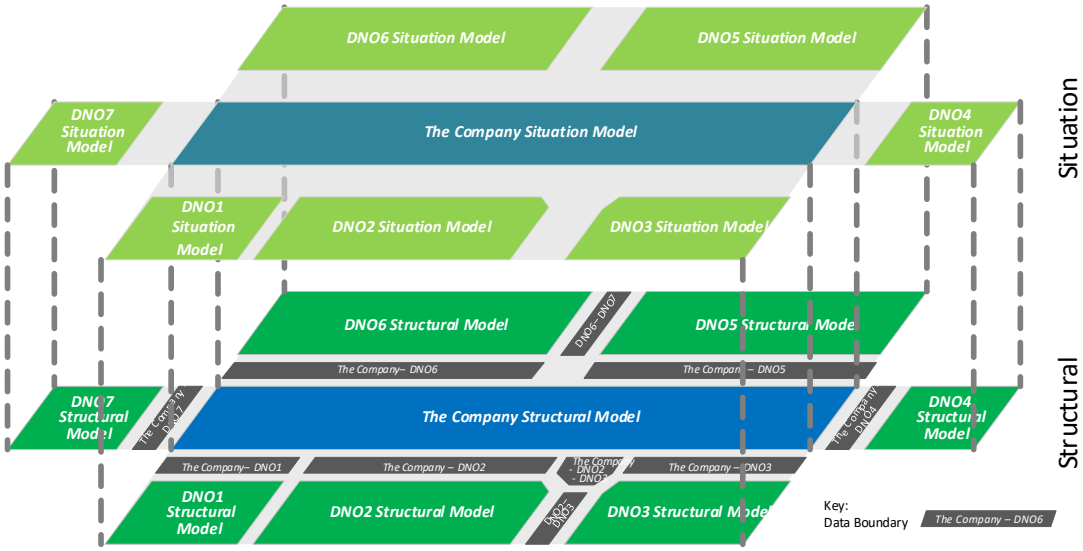

Figure 4 - A set of Situation Models augmenting their relevant Structural Models

Situation Models are typically needed only for Frames because Boundaries should not include equipment that needs to have Situation (system operating condition) data defined for it. An Assembly, made up of the Structural and Situation Models shown in Figure , could be created to facilitate the sharing of the inputs necessary to run a given type of network analysis.

If the appropriate type of network analysis were run using the set of Structural and Situation Models shown in Figure as input, a single Solution Model for the entire power system would be created. It is shown at the top of Figure , which, for context, also shows the Structural and Situation Models.

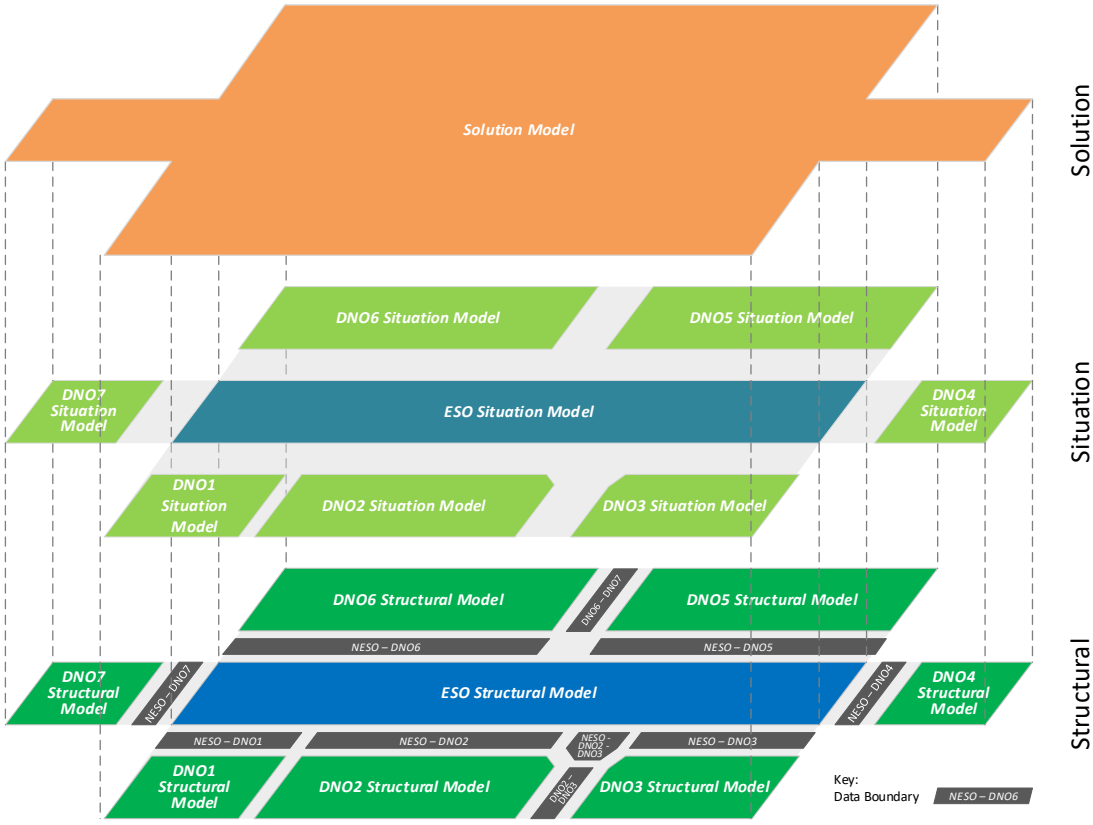

Figure 5 – A Solution Model created by network analysis using the relevant Structural and Situation Models as input

This complete case, composed of Models describing both the inputs and outputs of a specific network analysis execution, could also be shared as an Assembly.

PC.G.3.4 A Great Britain example

PC.G.3.4.1. Structural Models and their Frames and Boundaries

This section explores how grid objects in Models can connect across Frames and Boundaries using a very small, hypothetical portion of a system as an example. The red outline in Figure indicates the portion of the power system presented in PC.G.3.3 which the small system example encompasses.

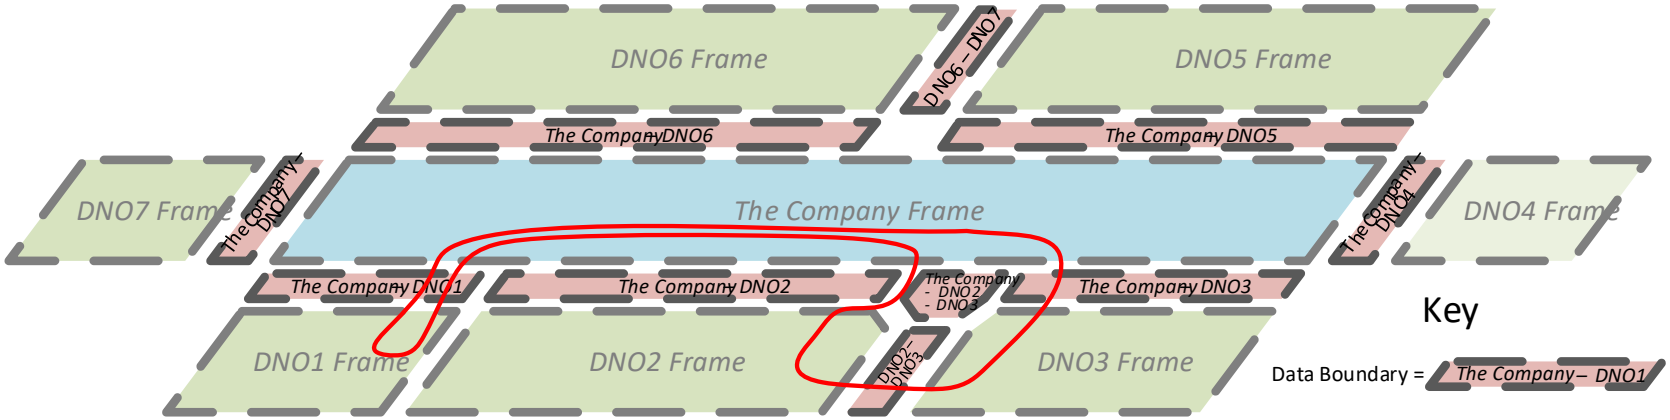

Figure 6 – Portion of the power system represented by the small system example

The small system example, whose schematic is shown in Figure , reflects a variety of system configuration characteristics found in the GB **System**. It focuses on points of connection among three **Network Operator Systems** and the **NETS**. The example has three substations:

- Substation A – A **GSP** substation where the DNO1 **Network Operator System** connects to the **NETS**. It is connected at a voltage level lower than that of Substation B and C and could be viewed as representing a **GSP** in Scotland.
- Substation B – A **GSP** substation where the **Systems** of the DNO2 and DNO3 **Network Operators** both connect to the **NETS**. It reflects an uncommon connection configuration, but one that is present in England
- Substation C – A **GSP** substation where the DNO3 **Network Operator System** connects to the **NETS**. It reflects a connection configuration commonly present in England.

The example also includes three types of connection configurations between the **Systems** of the DNO2 and DNO3 **Network Operators**. Additionally it contains a subtransmission line operated by **The Company**, which is connected to the low-voltage bus of Substation B and the high-voltage bus of Substation A.

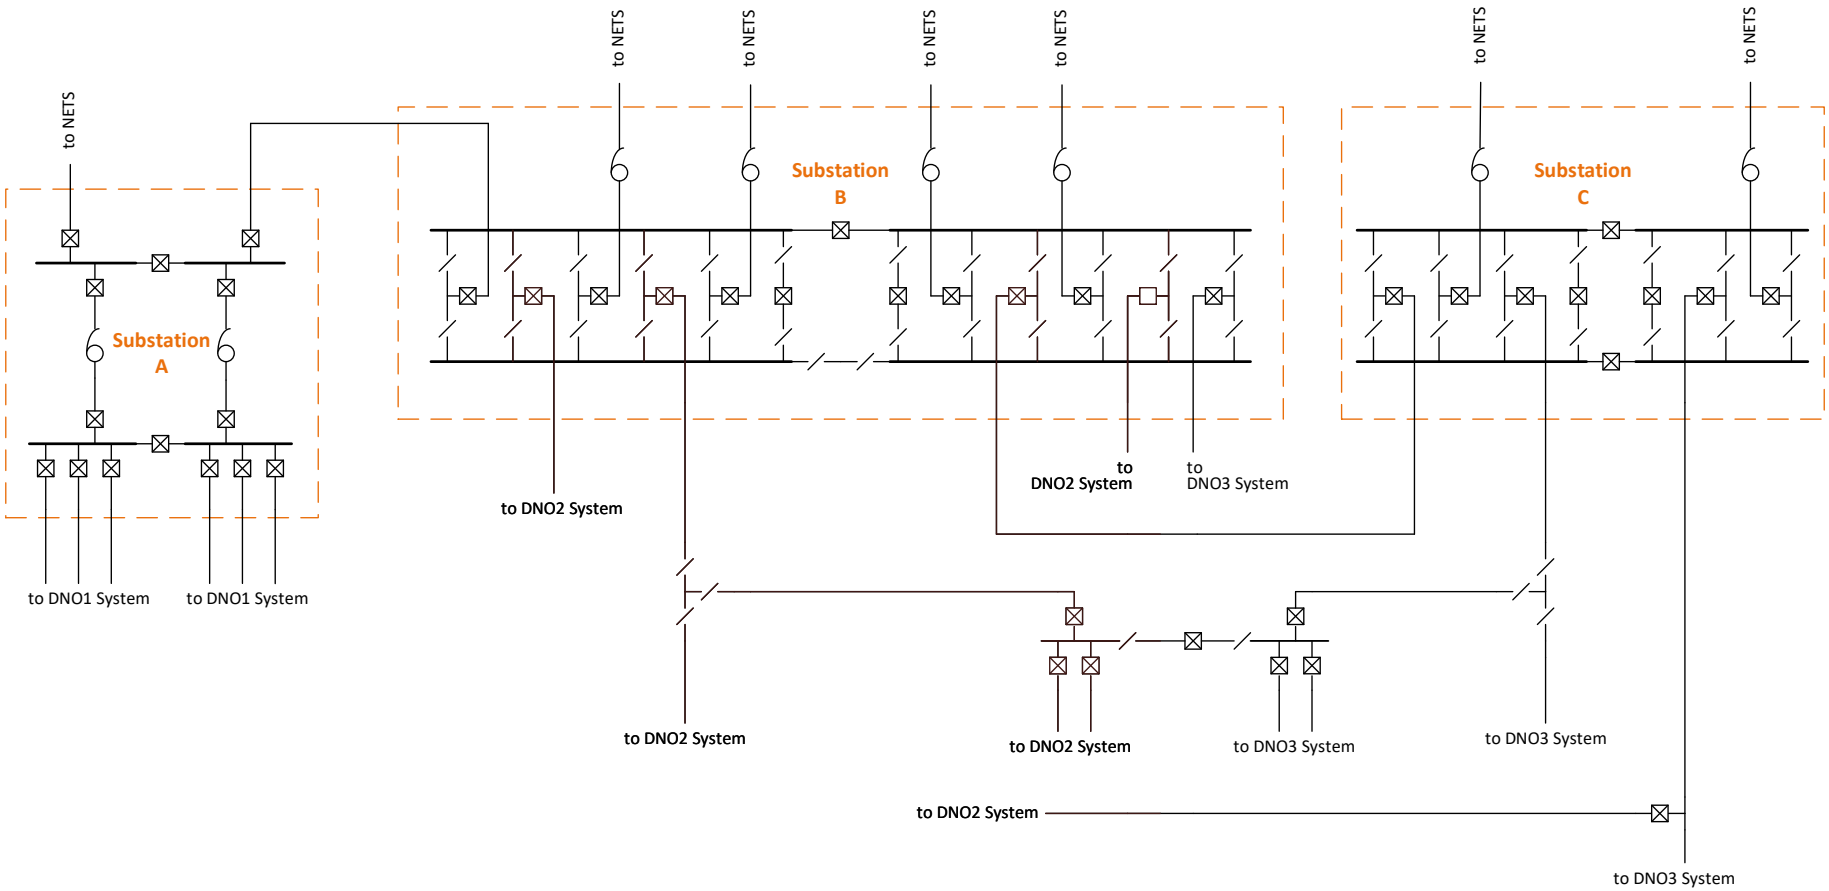

Figure 7 - Schematic of the small system example

The major grid objects used in a **PSM** representation of the small system example are superimposed on the schematic in Figure .

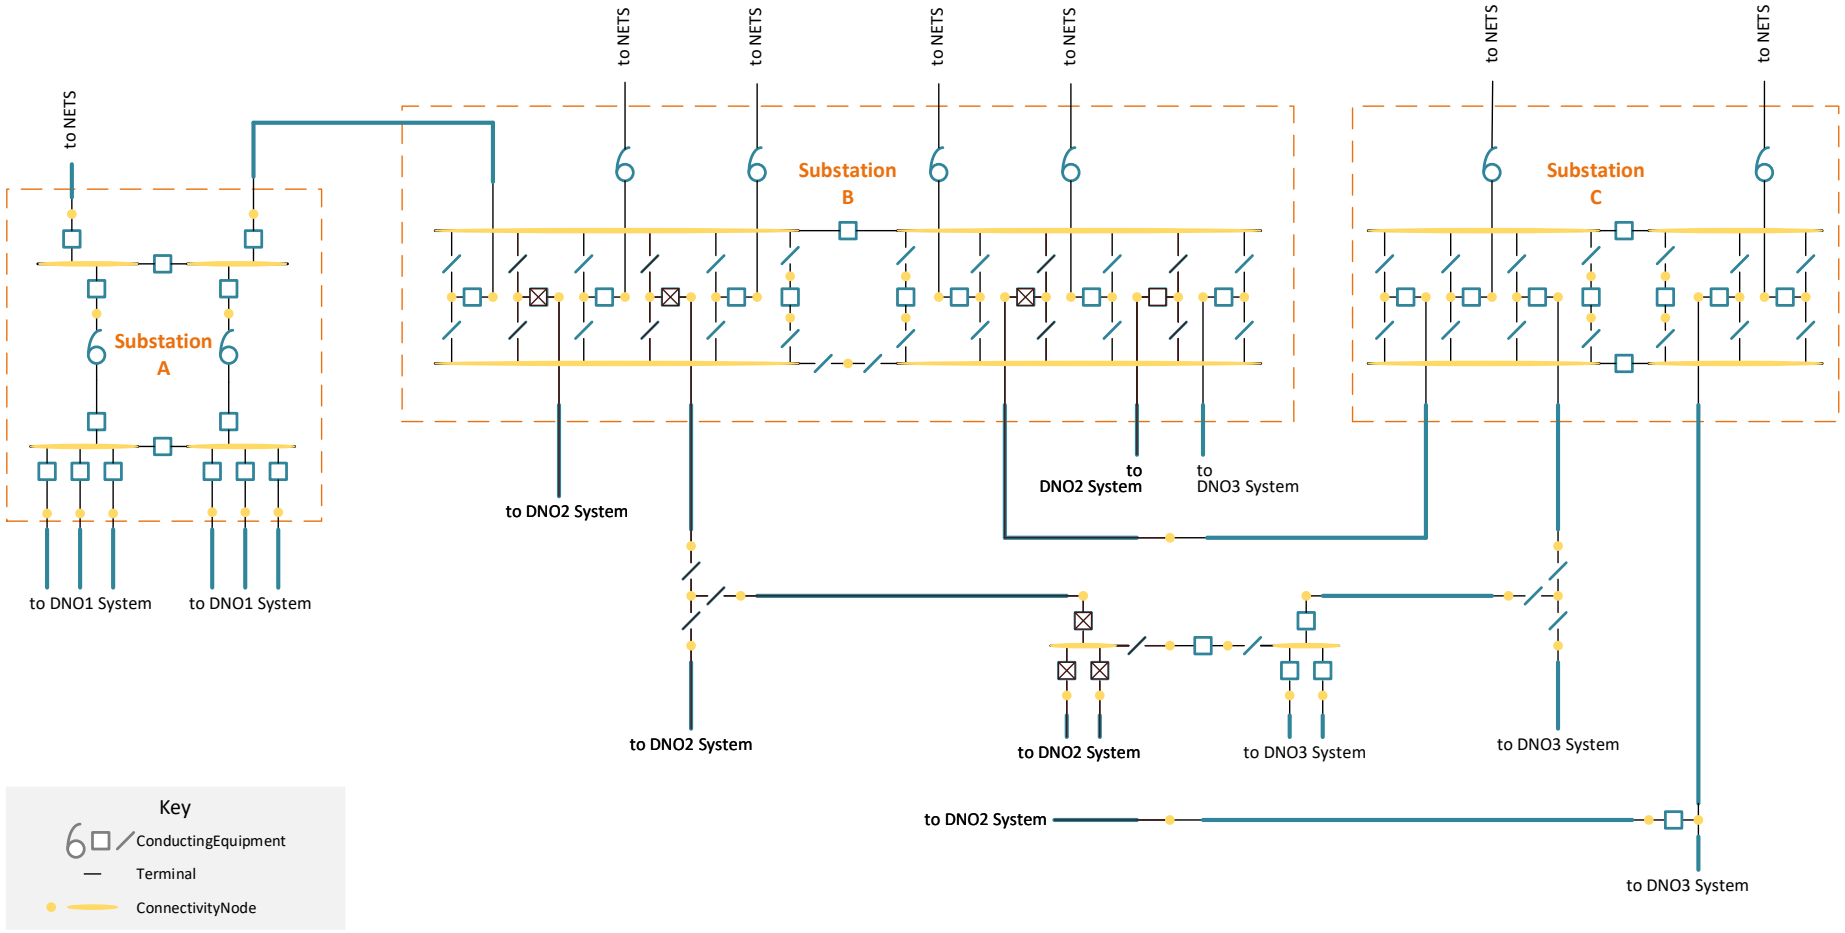

Figure 8 – Foundational grid objects used to represent the equipment and connectivity of small system example

Figure illustrates, using the small system example, the philosophy typically followed in allocating grid operating responsibility among **The Company** and **Network Operators**. The circuit breakers and switches which couple busbars and those which connect the main and reserve busbars are the operating responsibility of the relevant **Network Operators** for Substations A and C because only one **Network Operator System** connects to the **NETS** at those substations. At Substation B, however, **The Company** has operating responsibility for the busbar circuit breakers and switches because two **Network Operators' Systems** connect to the **NETS** there.

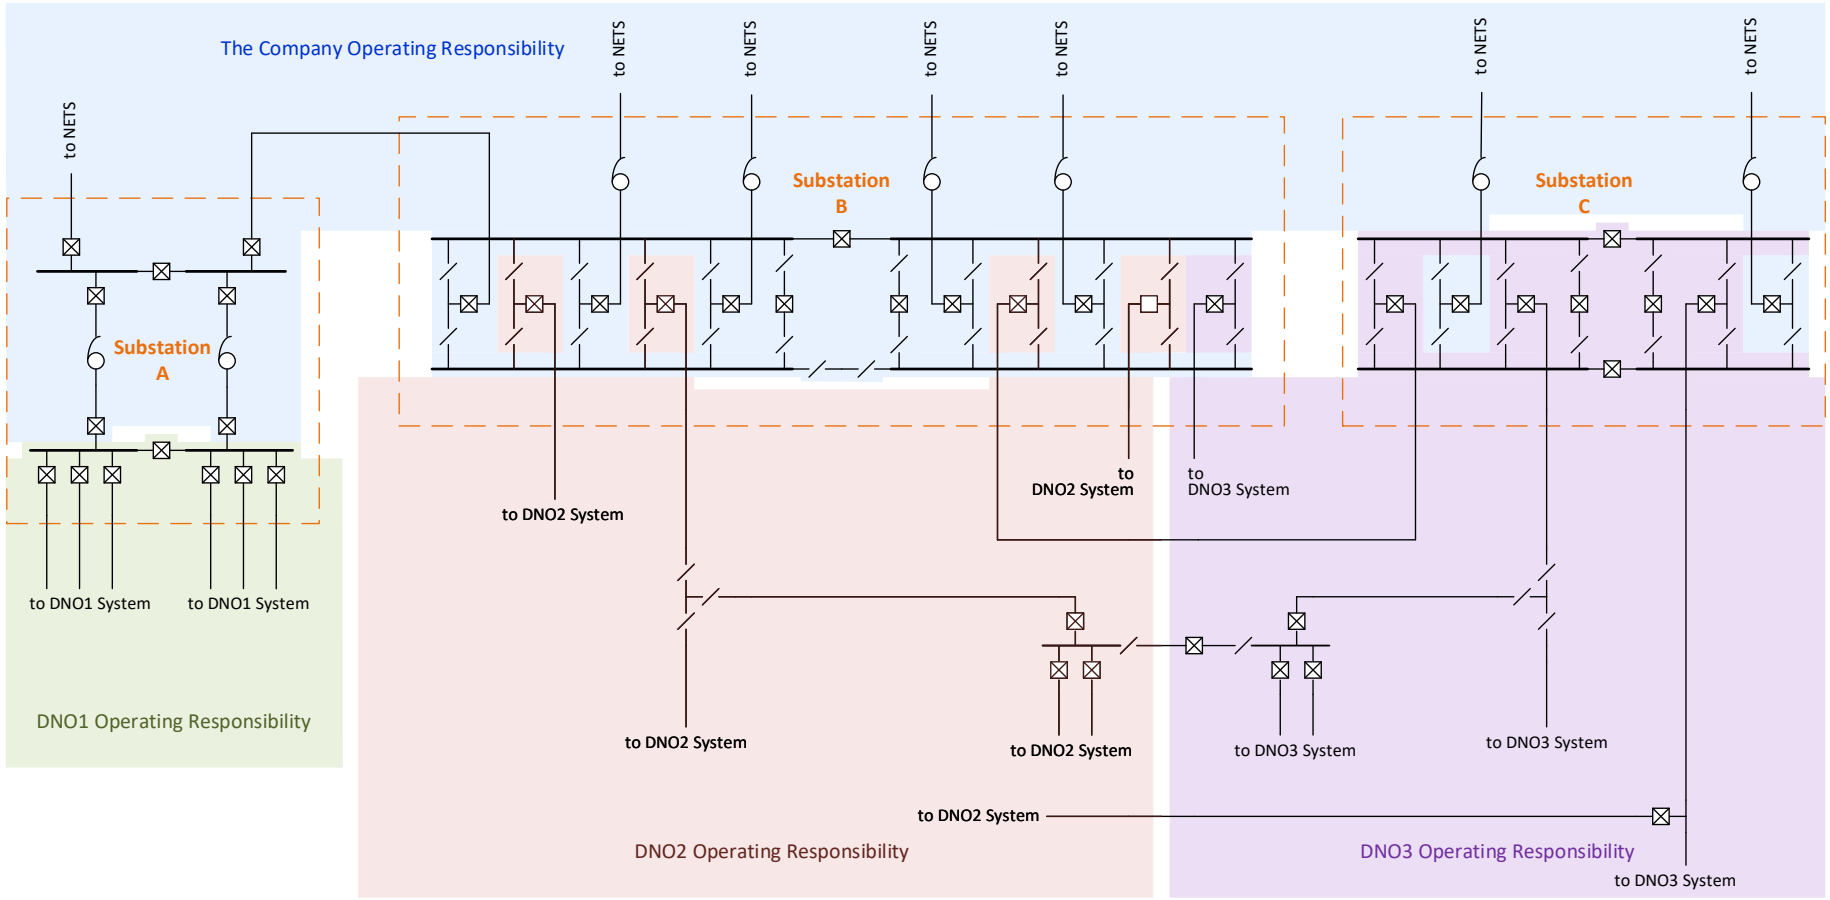

Figure 9 – Allocation of operating responsibility for the small system example

The decision has been taken to align modelling responsibility with operating responsibility in Planning Code data exchanges. The four Frames (The Company Frame, DNO1 Frame, DNO2 Frame and DNO3 Frame) and four Boundaries (The Company-DNO1, The Company-DNO2-DNO3, The Company-DNO3, and DNO2-DNO3) outlined in Figure reflect that decision.

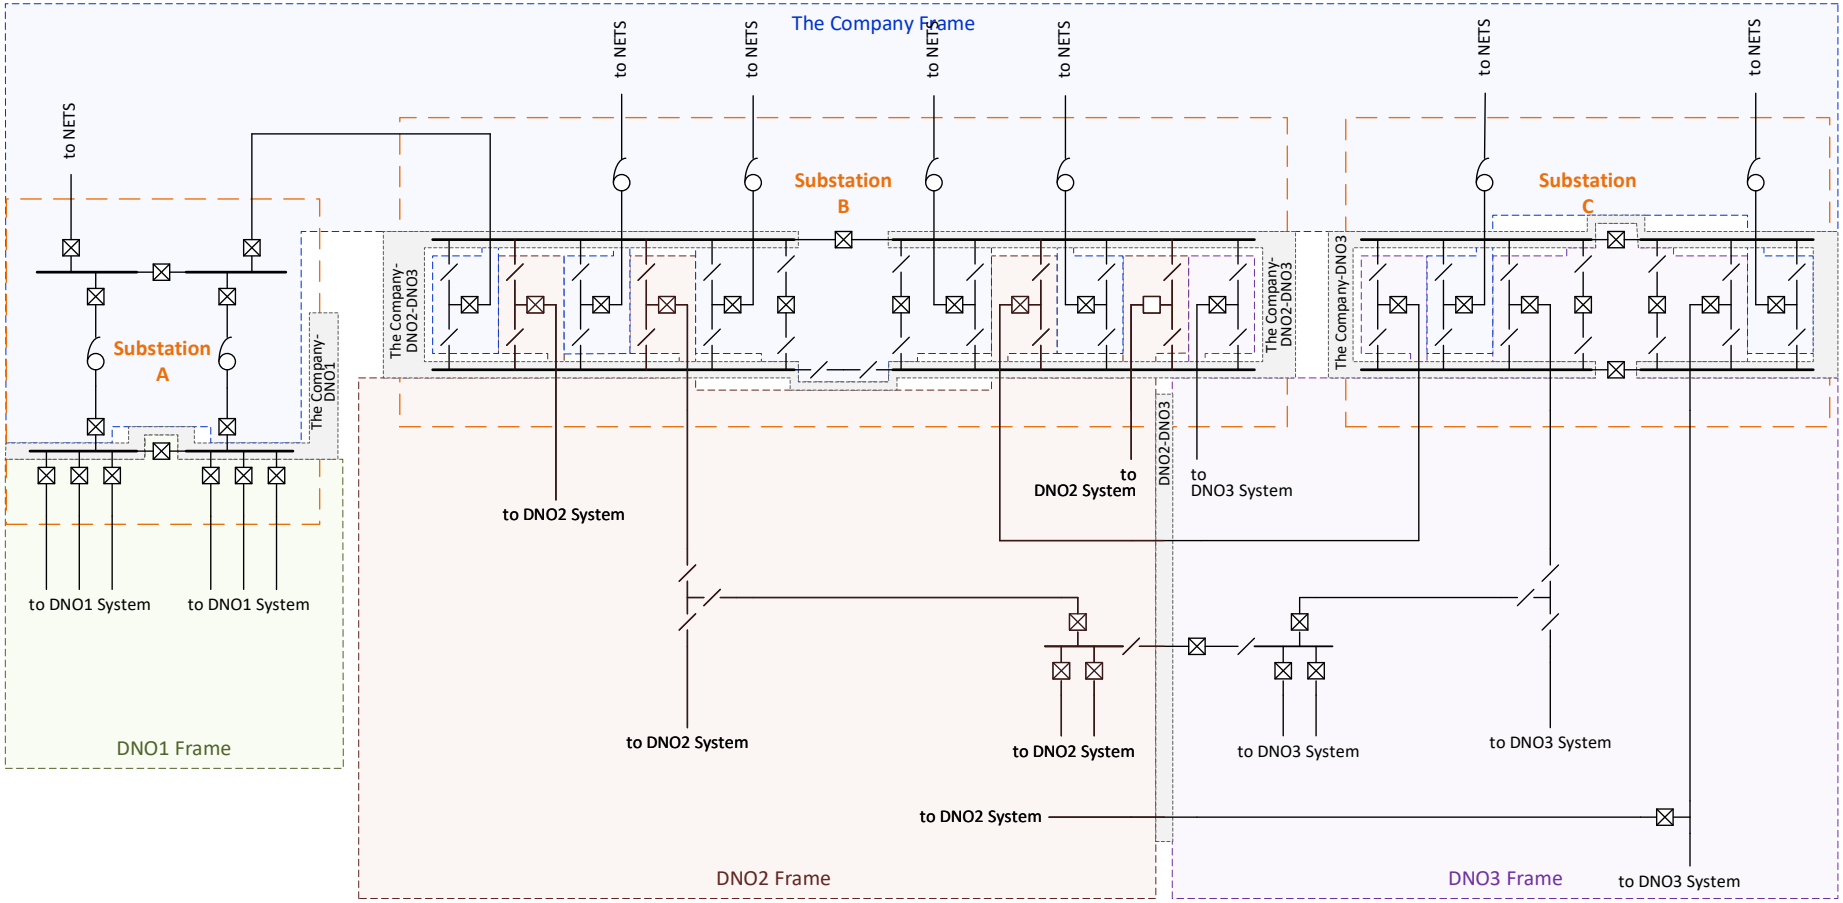

Figure 10 - The Frames and Boundaries of the small system example

Figure shows the major grid objects contained in the various master Structural Models which ‘fit into’ each of the Frames and Boundaries of the small system example.

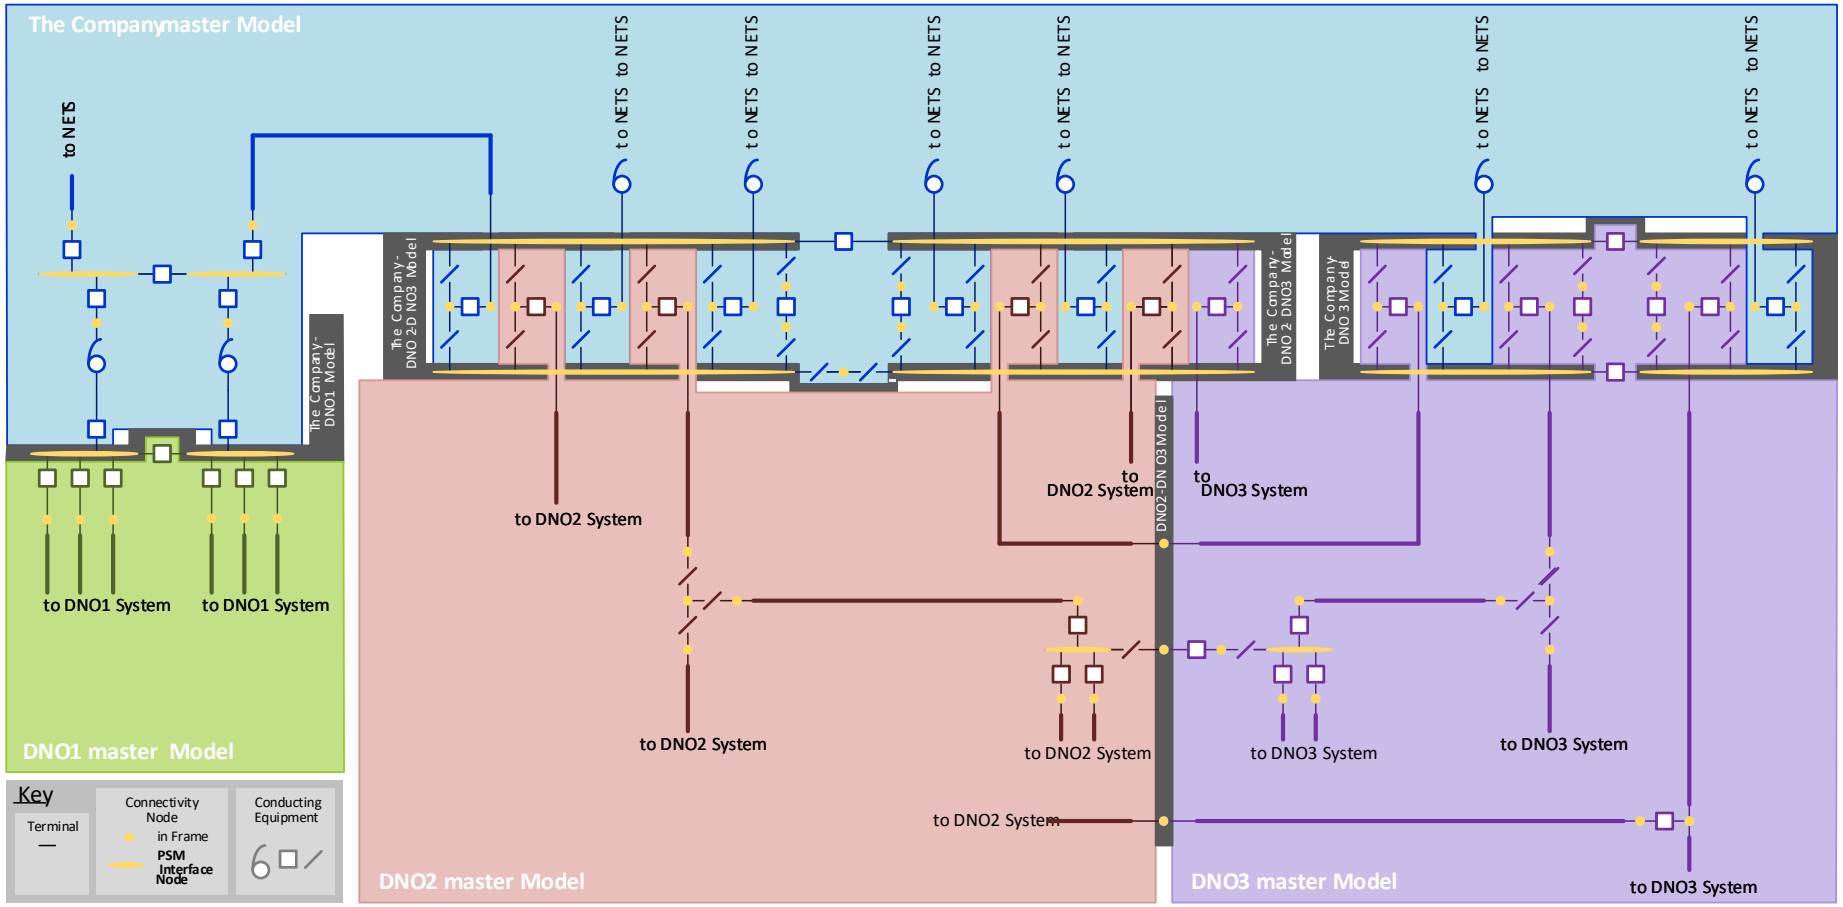

Figure 11 – Major grid objects comprising the master Structural Models which ‘fit into’ each Frame and Boundary

Note that the only grid objects in the Structural Boundary Models in Figure are the Connectivity Nodes representing **PSM Interface Nodes** which are shown as gold oblongs with green glow.

PC.G.3.4.2 Assemblies for the exchange of **Solved PSMs**

The **Solved PSMs** required by PC.9 and PC.10 are exchanged using Assemblies of Models. In creating their **Solved PSMs**, it is anticipated that both **The Company** and the **Network Operators** will execute a process similar to the following:

The **Solved PSM** creator performs studies in its own power systems analysis software tool using appropriately detailed models representing both its portion of the **System** and adjacent portions. When a study solution of suitable quality is achieved, the **Solved PSM** is created by trimming off the adjacent portions, leaving only the Structural, Situation and Solution Models which 'fit into' the creator's Frame along with the Structural Models which 'fit into' all Boundaries adjacent to their Frame.

The resulting **Solved PSMs** are then submitted to the receiving party as an Assembly. Within the Assembly, there are references by grid objects in one Model to grid objects in other Models:

- Situation and Solution Frame Model grid objects point to grid objects in the Structural Frame Model.
- Structural Frame Model grid objects point to grid objects representing **PSM Interface Nodes** in Structural Boundary Models.

However, for the Assembly as a whole, there are no dangling references.

The receiving party typically uses the Assembly in the following manner:

- The Structural Frame Model is incorporated into the model of the receiving party's study tool, replacing the previous modelling for that Frame and connecting to the **PSM Interface Nodes** contained in the study tool model.
- The Situation and Solution Models are used as reference inputs into various studies set up and run by the receiver as part of its own business processes.

For the small system example outlined in PC.G.3.4.1, the Models shown in Figure would comprise the **Solved PSMs** submitted by **The Company** and by the DNO1, DNO2 and DNO3 **Network Operators**.

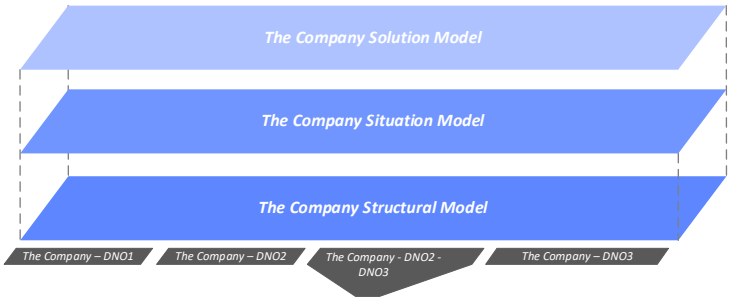

A **Solved PSM** from **The Company**

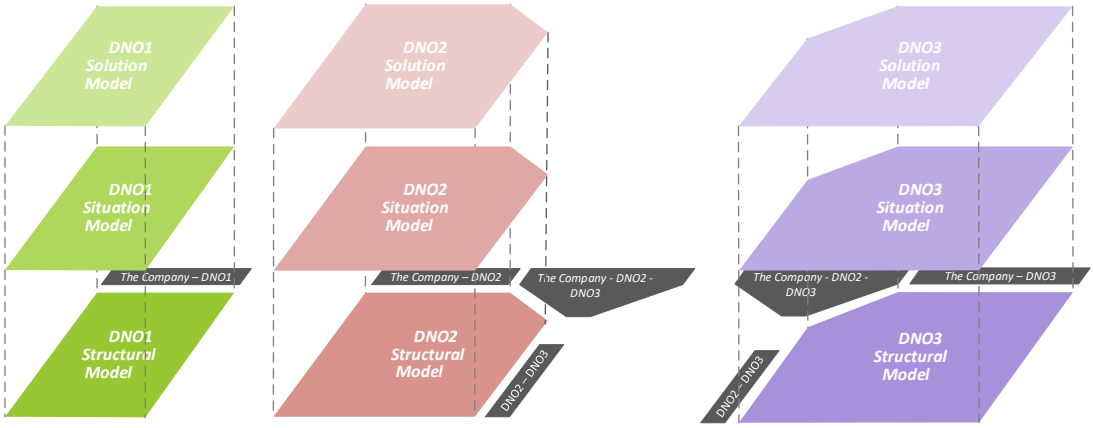

A **Solved PSM** from DNO1 A **Solved PSM** from DNO2 A **Solved PSM** from DNO3

Figure 12 – Models appearing the Solved PSMs from The Company and Network Operators

PC.G.4 PSM/PSDM data exchange standards

PC.G.4.1 The data of the **Solved PSMs** or **PSDMs** required under PC.9, PC.10, PC.G.1 and whose organisation is described in PC.G.3 shall conform to the schema and constraints defined by the designated data exchange profile standards listed in PC.G.4.1.1.

PC.G.4.1.1 The currently designated data exchange profile standard is defined by a combination of:

- IEC 61970-600-2:2021 Common Grid Model Exchange Specification (CGMES) - Exchange profiles specification, commonly known as CGMES v3.0; plus
- **Planning Code**-specific extensions to CGMES v3.0 as identified and managed by the **GB CIM Governance Group**.

PC.G.5 PSM Scenario Document

PC.G.5.1 A **PSM Scenario Document** shall be submitted to **The Company** as part of each **Network Operator's** submission in calendar weeks 2 and 28. A **PSM Scenario Document**, tailored to the individual **Network Operator**, shall be submitted to each **Network Operator** by **The Company** as part of its submission in calendar weeks 12 and 38. The aim of the **PSM Scenario Document** is to provide contextual information to help the receiving party better understand the submission and the assumptions made in developing it. The **PSM Scenario Document** shall contain:

PC.G.5.1.1 Information related to the content and creation of **Solved PSMs**, including:

PC.G.5.1.1.1 For the **Structural Data** underlying the **Solved PSMs** of a submission, the following:

(a) To be supplied by **Network Operators**:

i. Descriptions of the simple representation of **HVDC Systems**.

(b) To be supplied by **The Company**:

i. Descriptions of the simple representation of **HVDC Systems**; and

ii. The identification of all schemes which are nearing completion as of the time of submission which are included in the **Structural Data** of the **Solved PSM**. Such schemes include **NETS** reinforcement, asset replacement, or similar schemes and new generation or load schemes where the relevant customer has accepted a connection offer from **The Company** to connect to the **NETS** but is not yet connected at the time of submission.

PC.G.5.1.1.2 For each **Solved PSM** in a submission, the following:

(a) To be supplied by **Network Operators**:

i. A summary of the **Network Operator's System** conditions reflected by the **Solved PSM** and any general information regarding the **Solved PSM** that would aid in its use;

ii. Description of running arrangements where they are different to that described by the **Situation Data** of the **Solved PSM** (e.g. where there is a different post outage running arrangement, or modifications to the **Network Operator's System** due to the commissioning of a system reinforcement project);

iii. Demand and generation assumptions used in developing the **Situation Data** (e.g., generation dispatch assumptions like PV generation export being zero at the time of the **NETS** peak demand on the basis that the **NETS** peak demand occurs when it's dark). Describing these assumptions should address any differences in **Demand** and generation values between the **Solved PSM** and Schedule 21;

iv. Where the information is known by the **Network Operator**, the extent to which any customer demand has been influenced by a flexible demand contract with any party; and

v. For fault level **Solved PSMs**, a description of the assumptions made in the process of developing the **Situation Data** used in the fault level **Solved PSM** e.g. generation energisation / export and running arrangement assumption.

(b) To be supplied by **The Company**

i. A summary of the condition(s) specified in PC.10.3.2.1 a) or PC.10.3.3.1 a), as applicable, which are represented by each **Solved PSM** and any general information regarding the **Solved PSM** that would aid in its use. In the case of the low power transfer and high power transfer **Solved PSMs**, this would include an indication of the direction of flow (e.g., north to south);

ii. Description of changes to current running arrangements as a result of planned modifications to the **NETS** which are included in the summer or winter **Structural Data**, and which reflect future not-yet-commissioned reinforcement or asset replacement schemes or generator or load connections;

iii. Demand and generation assumptions used in developing the **Situation Data** (e.g., generation dispatch assumptions, or how generation injections were adjusted to accommodate new, not-yet-connected generation included in the summer/winter **Structural Data**, or how demand and/or generation injections supplied by **Network Operators** were modified to facilitate power flow convergence or specific **Real Power** (P) and **Reactive Power** (Q) results at the **PSM Interface Nodes**);

iv. Dispatch assumptions for external **HVDC Systems**, including both export and import;

v. For fault level **Solved PSMs**, a description of the assumptions made in the process of developing the **Situation Dat**a used in the fault level **Solved PSM** e.g. generation energisation / dispatch and running arrangement assumptions; and

vi. An identification of known discrepancies in the **Structural Data**, **Situation Data** or **Solution Data** due to changes occurring during the timeframe the **Solved PSM** was being built. Such discrepancies are assumed to be minor as any change occurring during the construction process with significant impact should have been incorporated into the **Solved PSM**.

PC.G.5.1.2 Information helpful in utilising the **Solved PSMs**, including:

PC.G.5.1.2.1 Descriptions of network constraints:

(a) To be supplied by **Network Operators**:

i. Any constraints which could impact the capability of the **Network Operator's Subtransmission System** to accommodate import to demand customers or export from generation under normal operational conditions. For example, this could include a limit of the import from and/or the export to a **Connection Point** implemented by an **Active Network Management** scheme. The **Network Operator** may provide further information about other constraints on their **System** operating at voltages below the **Substansmission System**.

(b) To be supplied by **The Company**:

i. Any **NETS** operational schemes that could have an impact on the **Network Operator's System**.

PC.G.5.1.2.2 Modelling guidance:

(a) To be supplied by **The Company**:

i. Guidance that would assist recipients using the model, e.g. guidance on the generation connected to the **NETS** whose modelled output may be modified by a **Network Operator** to facilitate studies outside the standard exchanged scenarios; and

ii. Guidance that would assist recipients using the model, e.g. guidance on the **HVDC** plant connected to the **NETS** whose modelled output may be modified by a **Network Operator** to facilitate studies outside the standard exchanged scenarios.

PC.G.5.1.2.3 Descriptions of contingency actions:

(a) To be supplied by **The Company**:

i. A description of changes to the **NETS** so that the **Network Operator** may undertake analysis of the impact of additional operational arrangements other than that included in the **Situational Data** of the **Solved PSM**.

PC.G.5.1.2.4 Descriptions of additional network constraint actions:

(a) To be supplied by **Network Operators**:

i. Where agreed with **The Company** a description of additional actions that would be taken with respect to their **System** when analysing a scenario outside the ones included in the information exchanges defined in PC.9

(b) To be supplied by **The Company**:

i. Where agreed with the **Network Operator** a description of additional actions that would be taken with respect to the **NETS** when analysing a scenario outside the ones included in the information exchanges defined in PC.10.

PC.G.5.1.3 Information related to Schedules 23b and 23c:

PC.G.5.1.3.1 For Schedules 23b and 23c, the following post fault **Network Operator System** information, relating to the **Connection Point Access Period**, shall be provided by the **Network Operators**:

(a) An accurate and unambiguous description of the **Transmission Interface Circuits** considered to be switched out due to a planned outage being assessed; and

(b) The reconfiguration plan to transfer demand from one **Connection Point** to another **Connection Point**. Details of the switching operation or reconfiguration which implements any demand transfer, including arrangements for undertaking actions (e.g. the time taken, automatic or manual and any other appropriate information), shall be provided for:

i. Those actions which would be implemented for a first planned outage; and

ii. Those actions that would be implemented following a subsequent fault outage during a planned outage.

The **Network Operator** must not submit any action that it does not have the capability or the intention to implement during the assessment period specified (subject to there being no further unplanned outages on the **Network Operator's System**).

PC.G.6 PSM Change Document

PC.G.6.1 A **PSM Change Document** shall be submitted as part of each **Network Operator** submission in calendar weeks 2 and 28 and each submission made by **The Company** in calendar weeks 12 and 38. The aim of the **PSM Change Document** is to provide contextual information to help the receiving party understand what has changed in the **Solved PSMs** of this submission relative to the preceding submitted **Solved PSMs**. The **PSM Change Document** shall contain:

PC.G.6.1.1 Information related to the content of **Solved PSMs**, including:

PC.G.6.1.1.1 An overview of the major changes to **Structural Data**.

(a) To be supplied by **Network Operators**:

i. A description, including the purpose and in-service date, of any new or modified connections or alterations to the **Network Operator's System** whose changes are included in the **Structural Data** of this submission; and

ii. A description of any other changes to the **Structural Data** of this submission, for example, the inclusion of new network data, or changes to operating parameters like ratings or normal positions of transformer taps or switches.

(b) To be supplied by **The Company**:

i. A description, including the purpose and in-service date, of any new or modified connections or alterations to the **NETS** whose changes are included in the **Structural Data** of this submission;

ii. A description including the purpose and reason for non-implementation of each delayed or cancelled connection or alteration to the **NETS** whose changes were included in the **Structural Data** of the preceding submitted **Solved PSM**(s) but which are not included in the **Structural Data** of this submission's **Solved PSM**(s); and

iii. A description of any other changes to the **Structural Data** of this submission, for example, the renaming of an asset, the inclusion of a new type of data, or changes to operating parameters like ratings or normal positions of taps or switches.

PC.G.6.1.1.2 An overview of any significant changes in the assumptions, approach, or inputs used in the creation of **Situation Data**.

(a) To be supplied by **Network Operators**:

i. A description of significant differences of demand or generation patterns, constraints, or running arrangements (e.g., commissioning of a new Active Network Management scheme in **Network Operator's System** to manage power flow at a **Connection Point**, or a newly implemented curtailment agreement, or unusual growth of EV-related demand at a given substation);

ii. For the **Situation Data** of **Solved PSM**(s) providing steady state power flow information, a description of any changes made to the process by which the **Situation Data** is created (e.g., changes have been made in the treatment of the import to **Electricity Storage**, or a new technique is being used for calculating historic demand or generation values from field monitoring data, or improved mechanics are being used to 'fit' **Situation Data** reflective of a particular grid condition to the **Structural Data** reflective of the **Data Freeze Date**); and

iii. For the **Situation Data** of **Solved PSM**(s) providing fault level information, a description of any changes made to the process by which fault level data is created (e.g., new software or a new process is being used to perform fault level calculations, or an improved mechanism is being used to determine demand short circuit contributions).

(b) To be supplied by **The Company**:

i. A description of significant differences of demand or generation patterns, constraints, or running arrangements (e.g., a change to the permitted export from parts of the **NETS** due to dispatch related constraints on the **NETS** becoming permanent, or a changed summer operating arrangement due to a new demand customer);

ii. For the **Situation Data** of **Solved PSM**(s) providing steady state power flow information, a description of any changes made to the process by which the **Situation Data** is created (e.g., changes have been made to demand or generation prediction techniques, or a new philosophy for designing off-normal running arrangements has been implemented); and

iii. For the **Situation Data** of **Solved PSM**(s) providing fault level information, a description of any changes made to the process by which fault level data is created (e.g., new software or a new process is being used to perform fault level calculations, or an improved mechanism is being used to determine demand short circuit contributions).

PC.G.7 Assessment of Connection Point Compliance process

Overview of the assessment of Access Group

PC.G.7.1 An **Access Group** is a group of **Connection Points**, which are either permanently interconnected or are interconnected following a pre or post outage action, and hence there is transfer of demand from one **Connection Point** to another.

PC.G.7.2 All **Connection Points** are considered as either an **Access Group** on their own (if they are not interconnected through the **Network Operator's System** to another **Connection Point**), or as a group of interconnected **Connection Points** to be considered as an **Access Group**. Each **Connection Point** is only in one **Access Group**.

PC.G.7.3 Once **Access Groups** have been identified, **The Company** carries out assessments on each **Access Group** to identify those **Connection Points** (and the associated **Transmission Interface Circuits**) which need to be assessed simultaneously and whether each **Transmission Interface Circuit** is theoretically maintainable in accordance with the **SQSS**.

PC.G.7.4 For planning purposes, **The Company** assumes that the maintenance season is during British Summer Time i.e., calendar weeks 13 to 43.

PC.G.7.5 **The Company** shall submit to the **Network Operator** no later than calendar week 7 in each year, a proposed **Transmission Interface Circuit** outage plan, including:

(a) the calendar weeks defining the proposed start and finish of each **Access Period** for each **Transmission Interface Circuit**; and

(b) the **Connection Points** in each **Access Group**.

This information shall be provided by populating the appropriate cells in Schedule 24. Where it is not possible to avoid overlapping **Access Periods**, **The Company** will indicate to **Network Operators** its initial view of which **Transmission Interface Circuits** shall be considered as being out of service concurrently for the purpose of assessing compliance to **Licence Standards**.

PC.G.7.6 Each **Connection Point** must belong to one, and only one, **Access Group**.

PC.G.7.6.1 Each **Transmission Interface Circuit** must have an **Access Period**.

PC.G.7.6.2 The **Access Period** shall:

(a) normally be a minimum of 8 continuous weeks and can occur in any one of three maintenance years during the period from calendar week 13 to calendar week 43 (inclusive) in each year; or

(b) exceptionally and provided that agreement is reached between **The Company** and the relevant **User(s)**, such agreement to be sought in accordance with PC.7, the **Access Period** may be of a period not less than 4 continuous weeks and can occur in any one of three maintenance years during the period from calendar week 10 to calendar week 43 (inclusive) in each year.

PC.G.7.7 **The Company** and the relevant **Network Operator(s)** shall use their reasonable endeavours to agree the appropriate **Access Group(s)** and **Access Period** for each **Transmission Interface Circuit** prior to calendar week 17 in each year.

PC.G.7.8 **Network Operators**, in calendar week 28, shall submit the data detailed in PC.9.3.3.6 and PC.9.3.3.7.

PC.G.7.9 Following the submission of data by a **Network Operator**, **The Company** shall perform assessments to verify whether **Connection Points** are compliant with the relevant **Licence Standards**. This shall include identifying which **Transmission Interface Circuits** will need to be considered out of service concurrently for the purpose of assessing compliance.

PC.G.7.10 Where the result of any assessment identifies possible future non-compliance with the relevant **Licence Standards**, **The Company** shall notify the relevant **Network Operator(s)** of this fact as soon as reasonably practicable and shall agree with **Network Operator(s)** any requirement to resubmit data to allow for a reassessment.

PC.G.7.11 Following any notification by **The Company** to a **Network Operator** pursuant to PC.G.7.7, and following any further discussions between the **Network Operator** and **The Company**;

(a) **The Company** and the **Network Operator** may agree revisions to the **Access Periods**, provided they are not less than 4 continuous weeks in duration and occur between calendar weeks 10 and 43 (inclusive), for relevant **Transmission Interface Circuits**.

(b) **The Company** and the **Network Operator** may agree revisions to the **Access Periods** less than 4 continuous weeks in duration and which occur other than between calendar weeks 10 and 43 (inclusive), for relevant **Transmission Interface Circuits**. In such cases **The Company** shall notify **The Authority** where this has been necessary.

(c) The **Network Operator** shall as soon as reasonably practicable:

i. submit further relevant data to **The Company** that is to **The Company's** reasonable satisfaction; and/or

ii. modify data previously submitted pursuant to this PC, such modified data to be to **The Company's** reasonable satisfaction; and/or

iii. notify **The Company** that it is the intention of the **Network Operator** to leave the data as originally submitted to **The Company** to stand as its submission.

PC.G.7.12 When it is agreed that any resubmission of data is unlikely to confirm future compliance with the relevant **Licence Standards** the **Modification** process in the **CUSC** may apply.

PC.G.7.13 By calendar week 6 of the following year, as specified in PC.10.5.4, **The Company** shall notify the **Network Operator** of the results of any relevant assessment.

PC.G.7.14 Where **The Company** or **Network Operator(s)** agree that any resubmission of data is unlikely to confirm future compliance with the relevant **Licence Standards**, **The Company** and the **Network Operator(s**) shall agree the best way of addressing non-compliance.

PC.G.8 Generation

PC.G.8.1 Table of **Aggregated Energy Source** types to be used for developing aggregated equivalent model as required by PC.G.1.4.7:

Energy Source	Aggregated Energy Source (for aggregated equivalent modelling required by PC.G.1.4.7)	Aggregate equivalent modelled as:		
		Synchronous	Asynchronous	Inverter-Based
Advanced Fuel (produced via gasification or pyrolysis of biofuel or waste)	Advanced Fuel	Default		
Biofuel - Biogas from anaerobic digestion (excluding landfill & sewage)	Biofuel	Default		
Biofuel - Landfill gas				
Biofuel - Sewage gas				
Biofuel - Other				
Biomass	Biomass	Default		
Fossil - Brown coal/lignite	Fossil	Default		
Fossil - Coal gas				
Fossil - Gas				
Fossil - Hard coal				
Fossil - Oil				
Fossil - Oil shale				
Fossil - Peat				
Fossil - Other				
Geothermal	Geothermal	Default		
Hydrogen	Hydrogen	Optional		Default
Nuclear	Nuclear	Default		
Solar	Solar			Default
Stored Energy (all stored energy irrespective of the original energy source)	Stored Energy	Optional		Default
Waste	Waste	Default		
Water (flowing water or head of water)	Water	Default		
Wind	Wind		Optional	Default
Other	Other	Default		

PC.G.8.2 Table of **Energy Source** types and energy conversion technology to be used for **Power Generation Modules** as required in PC.G.1.4.1 to PC.G.1.4.5:

Energy Source	Energy Conversion Technology
Advanced Fuel (produced via gasification or pyrolysis of biofuel or waste)	Engine (Combustion/reciprocating) Gas Turbine Steam Turbine (Thermal Power Plant) Steam-gas Turbine (CCGT) Other
Biofuel - Biogas from anaerobic digestion (excluding landfill & sewage)	
Biofuel - Landfill gas	
Biofuel - Sewage gas	
Biofuel - Other	
Fossil - Coal gas	
Fossil - Gas	
Fossil - Oil	
Fossil - Oil shale	
Fossil - Other	
Biomass	Steam Turbine (Thermal Power Plant) Other
Fossil - Brown coal/lignite	
Fossil - Hard coal	
Fossil - Peat	
Nuclear	
Waste	
Geothermal	Geothermal Power Plant Other
Hydrogen	Engine (Combustion/reciprocating) Gas Turbine Steam Turbine (Thermal Power Plant) Steam-gas Turbine (CCGT) Fuel Cell Other
Solar	Photovoltaic Other
Stored Energy (all stored energy irrespective of the original energy source)	Storage – Chemical Storage – Electrical Storage – Mechanical - Compressed Air (Adiabatic & Diabatic) Storage – Mechanical – Liquid Air Storage – Mechanical – Pumped Hydro Storage – Mechanical – Flywheels Storage – Thermal Storage – Electrochemical (Batteries) Storage - Other
Water (flowing water or head of water)	Hydro – Reservoir (not pumped) Hydro – Run of River Hydro – Other Tidal Lagoons Tidal Steam Devices Wave Devices Other
Wind	Offshore Wind Turbines Onshore Wind Turbines Other
Other	Interconnector Engine (Combustion/reciprocating) Gas Turbine Steam Turbine (Thermal Power Plant) Steam-gas Turbine (CCGT) Other

PC.G.9 Submission Cycle

PC.G.9.1 The diagram below illustrates the annual, coordinated process of submissions between **Network Operators** and **The Company**.

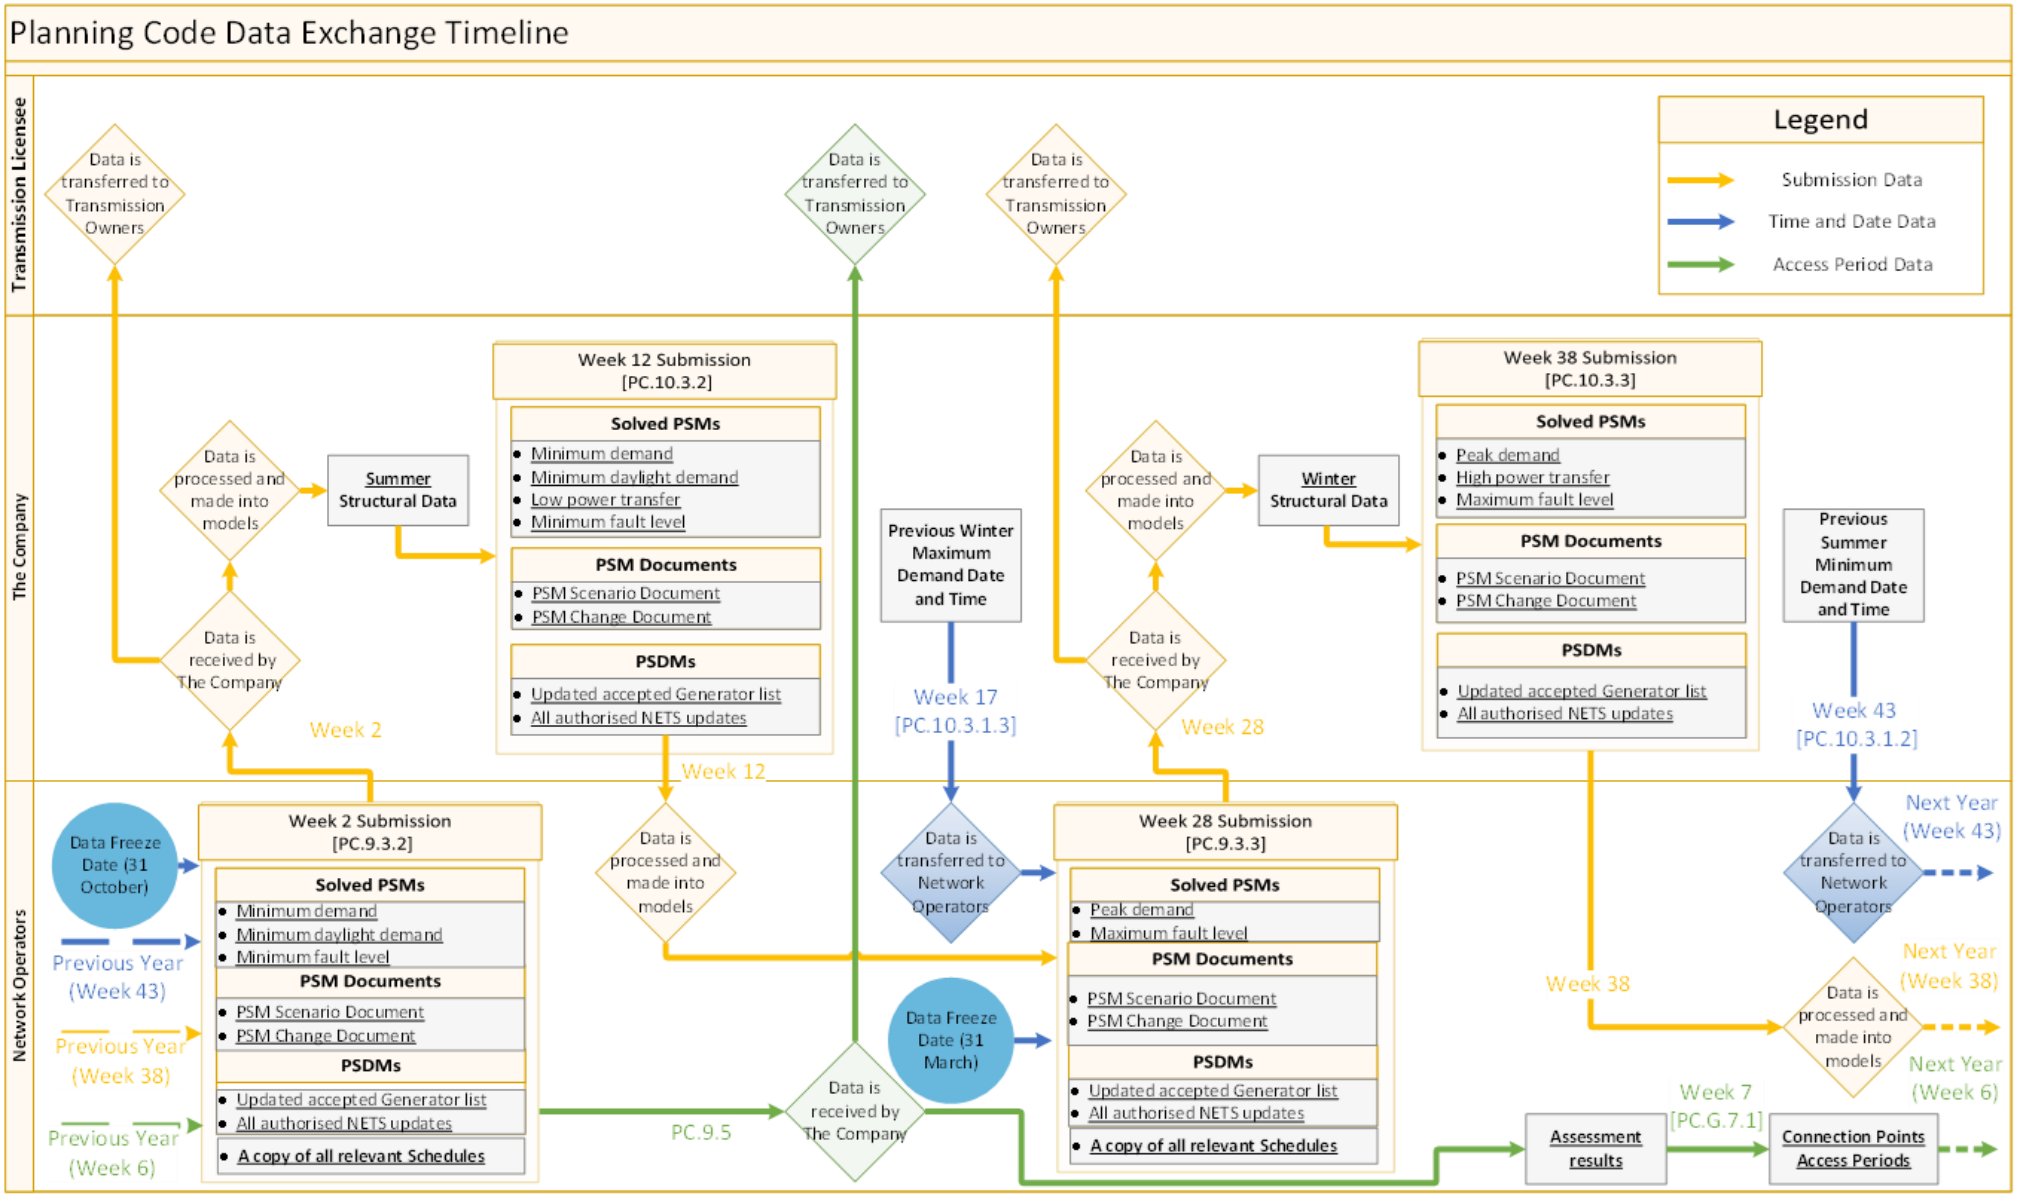
Planning Code Data Exchange Timeline
Transmission Licensee
The Company
Network Operators
Legend
Submission Data
Time and Date Data
Access Period Data
Data is transferred to Transmission Owners
Data is transferred to Transmission Owners
Data is transferred to Transmission Owners
Data is processed and made into models
Summer Structural Data
Week 12 Submission [PC.10.3.2]
Solved PSMs
Minimum demand
Minimum daylight demand
Low power transfer
Minimum fault level
PSM Documents
PSM Scenario Document
PSM Change Document
PSDMs
Updated accepted Generator list
All authorised NETS updates
Data is received by The Company
Week 2
Week 12
Previous Winter Maximum Demand Date and Time
Week 17 [PC.10.3.1.3]
Data is processed and made into models
Winter Structural Data
Week 38 Submission [PC.10.3.3]
Solved PSMs
Peak demand
High power transfer
Maximum fault level
PSM Documents
PSM Scenario Document
PSM Change Document
PSDMs
Updated accepted Generator list
All authorised NETS updates
Data is received by The Company
Week 28
Previous Summer Minimum Demand Date and Time
Week 43 [PC.10.3.1.2]
Data Freeze Date (31 October)
Previous Year (Week 43)
Previous Year (Week 38)
Previous Year (Week 6)
Week 2 Submission [PC.9.3.2]
Solved PSMs
Minimum demand
Minimum daylight demand
Minimum fault level
PSM Documents
PSM Scenario Document
PSM Change Document
PSDMs
Updated accepted Generator list
All authorised NETS updates
A copy of all relevant Schedules
Data is processed and made into models
Data is transferred to Network Operators
Week 28 Submission [PC.9.3.3]
Solved PSMs
Peak demand
Maximum fault level
PSM Documents
PSM Scenario Document
PSM Change Document
PSDMs
Updated accepted Generator list
All authorised NETS updates
A copy of all relevant Schedules
Data is transferred to Network Operators
Next Year (Week 43)
Week 38
Data is processed and made into models
Next Year (Week 38)
Next Year (Week 6)
PC.9.5
Data Freeze Date (31 March)
Data is received by The Company
Week 7 [PC.G.7.1]
Assessment results
Connection Points Access Periods

< END OF PLANNING CODE >

CONNECTION CONDITIONS
(CC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

CC.1 INTRODUCTION 2
CC.2 OBJECTIVE 2
CC.3 SCOPE 2
CC.4 PROCEDURE 4
CC.5 CONNECTION 4
CC.6 TECHNICAL, DESIGN AND OPERATIONAL CRITERIA 6
CC.7 SITE RELATED CONDITIONS 48
CC.8 ANCILLARY SERVICES 56
APPENDIX 1 - SITE RESPONSIBILITY SCHEDULES 58
PROFORMA FOR SITE RESPONSIBILITY SCHEDULE 61
APPENDIX 2 - OPERATION DIAGRAMS 65
PART 1A - PROCEDURES RELATING TO OPERATION DIAGRAMS 65
PART 1B - PROCEDURES RELATING TO GAS ZONE DIAGRAMS 68
PART 2 - NON-EXHAUSTIVE LIST OF APPARATUS TO BE INCLUDED ON OPERATION DIAGRAMS 69
APPENDIX 3 - MINIMUM FREQUENCY RESPONSE REQUIREMENT PROFILE AND OPERATING RANGE FOR NEW POWER STATIONS AND DC CONVERTER STATIONS 71
APPENDIX 4 - FAULT RIDE THROUGH REQUIREMENTS 76
APPENDIX 4A - FAULT RIDE THROUGH REQUIREMENTS FOR ONSHORE SYNCHRONOUS GENERATING UNITS, ONSHORE POWER PARK MODULES, ONSHORE DC CONVERTERS OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT, OFFSHORE SYNCHRONOUS GENERATING UNITS IN A LARGE POWER STATION, OFFSHORE POWER PARK MODULES IN A LARGE POWER STATION AND OFFSHORE DC CONVERTERS IN A LARGE POWER STATION WHICH SELECT TO MEET THE FAULT RIDE THROUGH REQUIREMENTS AT THE INTERFACE POINT 76
APPENDIX 4B - FAULT RIDE THROUGH REQUIREMENTS FOR OFFSHORE GENERATING UNITS IN A LARGE POWER STATION, OFFSHORE POWER PARK MODULES IN A LARGE POWER STATION AND OFFSHORE DC CONVERTERS IN A LARGE POWER STATION WHICH SELECT TO MEET THE FAULT RIDE THROUGH REQUIREMENTS AT THE LV SIDE OF THE OFFSHORE PLATFORM AS SPECIFIED IN CC.6.3.15.2 82
APPENDIX 5 - TECHNICAL REQUIREMENTS LOW FREQUENCY RELAYS FOR THE AUTOMATIC DISCONNECTION OF SUPPLIES AT LOW FREQUENCY 88
APPENDIX 6 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC EXCITATION CONTROL SYSTEMS FOR ONSHORE SYNCHRONOUS GENERATING UNITS 91
APPENDIX 7 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR ONSHORE NON-SYNCHRONOUS GENERATING UNITS, ONSHORE DC CONVERTERS, ONSHORE POWER PARK MODULES AND OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT 95

CC.1 INTRODUCTION

CC.1.1 The **Connection Conditions** ("**CC**") specify both:

(a) the minimum technical, design and operational criteria which must be complied with by:

(i) any **GB Code User** connected to or seeking connection with the **National Electricity Transmission System**, or

(ii) **GB Code User's** in respect of **GB Generators** (other than in respect of **Small Power Stations**) or **GB Code User's** in respect of **DC Converter Station** owners connected to or seeking connection to a **User's System** which is located in **Great Britain** or **Offshore**, and

(b) the minimum technical, design and operational criteria with which **The Company** will comply in relation to the part of the **National Electricity Transmission System** at the **Connection Site** with **GB Code Users**. In the case of any **OTSDUW Plant and Apparatus**, the **CC** also specify the minimum technical, design and operational criteria which must be complied with by those **GB Code Users** when undertaking **OTSDUW**.

(c) For the avoidance of doubt, the requirements of these **CC's** do not apply to **EU Code User's** for whom the requirements of the **ECC's** shall apply.

CC.2 OBJECTIVE

CC.2.1 The objective of the **CC** is to ensure that by specifying minimum technical, design and operational criteria, the basic rules for connection to the **National Electricity Transmission System** and (for certain **GB Code Users**) to a **User's System** are similar for all **GB Code Users** of an equivalent category and will enable **The Company** to comply with its statutory and **ESO Licence** obligations.

CC.2.2 In the case of any **OTSDUW**, the objective of the **CC** is to ensure that by specifying the minimum technical, design and operational criteria, the basic rules relating to an **Offshore Transmission System** designed and constructed by an **Offshore Transmission Licensee** or designed and/or constructed by an **GB Code User** under the **OTSDUW Arrangements** are equivalent.

CC.2.3 Provisions of the **CC** which apply in relation to **OTSDUW** and **OTSUA**, and/or a **Transmission Interface Site**, shall (in any particular case) apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply, without prejudice to the continuing application of provisions of the **CC** applying in relation to the relevant **Offshore Transmission System** and/or **Connection Site**. It is the case therefore that in cases where the **OTSUA** becomes operational prior to the **OTSUA Transfer Time** that a **GB Generator** is required to comply with this **CC** both as it applies to its **Plant** and **Apparatus** at a **Connection Site\Connection Point** and the **OTSUA** at the **Transmission Interface Site/Transmission Interface Point** until the **OTSUA Transfer Time** and this **CC** shall be construed accordingly.

CC.2.4 In relation to **OTSDUW**, provisions otherwise to be contained in a **Bilateral Agreement** may be contained in the **Construction Agreement**, and accordingly a reference in the **CC** to a relevant **Bilateral Agreement** includes the relevant **Construction Agreement**.

CC.3 SCOPE

CC.3.1 The **CC** applies to **The Company** and to **GB Code Users**, which in the **CC** means:

(a) **GB Generators** (other than those which only have **Embedded Small Power Stations**), including those undertaking **OTSDUW**;

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **DC Converter Station** owners;

(e) **BM Participants** and **Externally Interconnected System Operators** who are also **GB Code Users** in respect of CC.6.5, CC.7.9, CC.7.10 and CC.7.11 only; and

(f) In relation to **Distribution Restoration Zones**, **Restoration Contractors** who are **Non- CUSC Parties** and whose **Embedded Plant** needs to comply with the requirements of EREC G59, other than those included in (a) to (e) above, shall only be required to satisfy CC.6.1.2, CC.6.1.3, CC.6.2.2.2.1.2, CC.6.2.2.6, CC.6.3, CC.7.10, CC.7.11 and CC.8.1 unless additional technical requirements are provided for in the **Anchor Restoration Contract** or **Top Up Restoration Contract**. **Restoration Contractors** who are **Non-CUSC Parties** and whose **Embedded Plant** needs to comply with EREC G99 are not included in the scope of the **CC** and should refer to the **ECC**.

CC.3.2 The above categories of **GB Code User** will become bound by the **CC** prior to them generating, distributing, supplying or consuming, as the case may be, and references to the various categories should, therefore, be taken as referring to them in that prospective role as well as to **GB Code Users** actually connected.

CC.3.3 **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** Provisions.

The following provisions apply in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**.

CC.3.3.1 The obligations within the **CC** that are expressed to be applicable to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** (where the obligations are in each case listed in CC.3.3.2) shall be read and construed as obligations that the **Network Operator** within whose **System** any such **Medium Power Station** or **DC Converter Station** is **Embedded** must ensure are performed and discharged. **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** which are located **Offshore** and which are connected to an **Onshore GB Code Users System** will be required to meet the applicable requirements of the Grid Code as though they are an **Onshore GB Generator** or **Onshore DC Converter Station Owner** connected to an **Onshore User System Entry Point**.

CC.3.3.2 The **Network Operator** within whose **System** a **Medium Power Station** not subject to a **Bilateral Agreement** is **Embedded** or a **DC Converter Station** not subject to a **Bilateral Agreement** is **Embedded**, must ensure that the following obligations in the **CC** are performed and discharged by the owner and/or operator of the **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or the **DC Converter Station** owner in the case of an **Embedded DC Converter Station** not subject to a **Bilateral Agreement**:

CC.5.1

CC.5.2.2

CC.5.3

CC.6.1.3

CC.6.1.5 (b)

CC.6.3.2, CC.6.3.3, CC.6.3.4, CC.6.3.6, CC.6.3.7, CC.6.3.8, CC.6.3.9, CC.6.3.10, CC.6.3.12, CC.6.3.13, CC.6.3.15, CC.6.3.16

CC.6.4.4

CC.6.5.6 (where required by CC.6.4.4)

In respect of CC.6.2.2.2, CC.6.2.2.3, CC.6.2.2.5, CC.6.1.5(a), CC.6.1.5(b) and CC.6.3.11 equivalent provisions as co-ordinated and agreed with the **Network Operator** and the owner/or operator of the **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or owner and/or operator of the **Embedded DC Converter Station** not subject to a **Bilateral Agreement** may be required. Details of any such requirements will be notified to the **Network Operator** in accordance with CC.3.5.

CC.3.3.3 In the case of **Embedded Medium Power Station**s not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** the requirements in:

CC.6.1.6

CC.6.3.8

CC.6.3.12

CC.6.3.15

CC.6.3.16

that would otherwise have been specified in a **Bilateral Agreement** will be notified to the relevant **Network Operator** in writing in accordance with the provisions of the **CUSC** and the **Network Operator** must ensure such requirements are performed and discharged by the owner and/or operator of the **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or by the owner and/or operator of the **Embedded DC Converter Station** not subject to a **Bilateral Agreement**.

CC.3.4 In the case of **Offshore Embedded Power Stations** connected to an **Offshore GB Code User's System** which directly connects to an **Offshore Transmission System**, any additional requirements in respect of such **Offshore Embedded Power Stations** may be specified in the relevant **Bilateral Agreement** with the **Network Operator** or in any **Bilateral Agreement** between **The Company** and such **Offshore Embedded Power Station**.

CC.3.5 In the case of a **GB Generator** undertaking **OTSDUW** connecting to an **Onshore Network Operator's System**, any additional requirements in respect of such **OTSDUW Plant and Apparatus** will be specified in the relevant **Bilateral Agreement** with the **GB Generator**. For the avoidance of doubt, requirements applicable to **GB Generators** undertaking **OTSDUW** and connecting to a **Network Operator's System**, shall be consistent with those applicable requirements of **GB Generators** undertaking **OTSDUW** and connecting to a **Transmission Interface Point**.

CC.4 PROCEDURE

CC.4.1 The **CUSC** contains certain provisions relating to the procedure for connection to the **National Electricity Transmission System** or, in the case of **Embedded Power Stations** or **Embedded DC Converter Stations**, becoming operational and includes provisions relating to certain conditions to be complied with by **GB Code Users** prior to and during the course of **The Company** notifying the **GB Code User** that it has the right to become operational. The procedure for a **GB Code User** to become connected is set out in the **Compliance Processes**.

CC.5 CONNECTION

CC.5.1 The provisions relating to connecting to the **National Electricity Transmission System** (or to a **User's System** in the case of a connection of an **Embedded Large Power Station** or **Embedded Medium Power Station** or **Embedded DC Converter Station**) are contained in:

(a) the **CUSC** and/or **CUSC Contract** (or in the relevant application form or offer for a **CUSC Contract**);

(b) or, in the case of an **Embedded Development**, the relevant **Distribution Code** and/or the **Embedded Development Agreement** for the connection (or in the relevant application form or offer for an **Embedded Development Agreement**),

and include provisions relating to both the submission of information and reports relating to compliance with the relevant **Connection Conditions** for that **GB Code User**, **Safety Rules**, commissioning programmes, **Operation Diagrams** and approval to connect (and their equivalents in the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** or **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**). References in the **CC** to the "**Bilateral Agreement**" and/or "**Construction Agreement**" and/or "**Embedded Development Agreement**" shall be deemed to include references to the application form or offer therefor.

CC.5.2 Items For Submission

CC.5.2.1 Prior to the **Completion Date** (or, where the **GB Generator** is undertaking **OTSDUW**, any later date specified) under the **Bilateral Agreement** and/or **Construction Agreement**, the following is submitted pursuant to the terms of the **Bilateral Agreement** and/or **Construction Agreement**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in CC.6;

(c) copies of all **Safety Rules** and **Local Safety Instructions** applicable at **Users' Sites** which will be used at the **Transmission/User** interface (which, for the purpose of **OC8**, must be to **The Company's** satisfaction regarding the procedures for **Isolation** and **Earthing**. **The Company** will consult the **Relevant Transmission Licensee** when determining whether the procedures for **Isolation** and **Earthing** are satisfactory);

(d) information to enable the preparation of the **Site Responsibility Schedules** on the basis of the provisions set out in Appendix 1;

(e) an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point** as described in CC.7;

(f) the proposed name of the **User Site** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

(g) written confirmation that **Safety Co-ordinators** acting on behalf of the **User** are authorised and competent pursuant to the requirements of **OC8**;

(h) Such **RISSP** prefixes pursuant to the requirements of **OC8**. Prefixes shall be circulated utilising a proforma in accordance with **OC8**;

(i) a list of the telephone numbers for **Joint System Incidents** at which senior management representatives nominated for the purpose can be contacted and confirmation that they are fully authorised to make binding decisions on behalf of the **User**, pursuant to **OC9**;

(j) a list of managers who have been duly authorised to sign **Site Responsibility Schedules** on behalf of the **User**;

(k) information to enable the preparation of the **Site Common Drawings** as described in CC.7;

(l) confirmation of access to the **Designated Information Exchange System** as referenced in CC.6.5.9;

(m) for **Sites** in Scotland and **Offshore** a list of persons appointed by the **User** to undertake operational duties on the **User's System** (including any **OTSDUW** prior to the **OTSUA Transfer Time**) and to issue and receive operational messages and instructions in relation to the **User's System** (including any **OTSDUW** prior to the **OTSUA Transfer Time**); and an appointed person or persons responsible for the maintenance and testing of **User's Plant** and **Apparatus**.

(n) a list of contact details for outage and network planning, which shall be updated by the **GB Code User** as needed; and

(o) a list of email and telephone contact details for the **User Site**, which shall be updated by the **User** as needed. The persons specified in the contact details should be able to assist in the sharing of dynamic system behaviour monitoring data as well as supporting any post-**Event** investigations.

CC.5.2.2 Prior to the **Completion Date** the following must be submitted to **The Company** by the **Network Operator** in respect of an **Embedded Development**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in CC.6;

(c) the proposed name of the **Embedded Medium Power Station** or **Embedded DC Converter Station Site** (which shall be agreed with **The Company** unless it is the same as, or confusingly similar to, the name of other **Transmission Site** or **User Site**);

CC.5.2.3 Prior to the **Completion Date** contained within an **Offshore Transmission Distribution Connection Agreement**, the following must be submitted to **The Company** by the **Network Operator** in respect of a proposed new **Interface Point** within its **User System**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in CC.6;

(c) the proposed name of the **Interface Point** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

CC.5.2.4 In the case of **OTSDUW Plant and Apparatus** (in addition to items under CC.5.2.1 in respect of the **Connection Site**), prior to the **Completion Date** (or any later date specified) under the **Construction Agreement** the following must be submitted to **The Company** by the **GB Code User** in respect of the proposed new **Connection Point** and **Interface Point**:

(a) updated **Planning Code** data (**Standard Planning Data**, **Detailed Planning Data** and **OTSDUW Data and Information**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in CC.6;

(c) information to enable preparation of the **Site Responsibility Schedules** at the **Transmission Interface Site** on the basis of the provisions set out in Appendix 1.

(d) the proposed name of the **Interface Point** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

CC.5.3 (a) Of the items CC.5.2.1 (c), (e), (g), (h), (k) and (m) need not be supplied in respect of **Embedded Power Stations** or **Embedded DC Converter Stations**,

(b) item CC.5.2.1(i) need not be supplied in respect of **Embedded Small Power Stations** and **Embedded Medium Power Stations** or **Embedded DC Converter Stations** with a **Registered Capacity** of less than 100MW, and

(c) items CC.5.2.1(d) and (j) are only needed in the case where the **Embedded Power Station** or the **Embedded DC Converter Station** is within a **Connection Site** with another **User**.

CC.6 TECHNICAL, DESIGN AND OPERATIONAL CRITERIA

CC.6.1 National Electricity Transmission System Performance Characteristics

CC.6.1.1 **The Company** shall ensure that, subject as provided in the **Grid Code**, the **National Electricity Transmission System** complies with the following technical, design and operational criteria in relation to the part of the **National Electricity Transmission System** at the **Connection Site** with a **GB Code User** and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point** (unless otherwise specified in CC.6) although in relation to operational criteria **The Company** may be unable (and will not be required) to comply with this obligation to the extent that there are insufficient **Power Stations** or **User Systems** are not available, or **Users** do not comply with **The Company's** instructions or otherwise do not comply with the **Grid Code** and each **GB Code User** shall ensure that its **Plant** and **Apparatus** complies with the criteria set out in CC.6.1.5.

Grid Frequency Variations

CC.6.1.2 The **Frequency** of the **National Electricity Transmission System** shall be nominally 50Hz and shall be controlled within the limits of 49.5 - 50.5Hz unless exceptional circumstances prevail, for example but not limited to, situations such as **System Restoration**.

CC.6.1.3 The **System Frequency** could rise to 52Hz or fall to 47Hz in exceptional circumstances. Design of **GB Code User's Plant** and **Apparatus**, **OTSDUW Plant and Apparatus** and **Restoration Contractor's Plant** and **Apparatus** must enable operation of that **Plant** and **Apparatus** within that range in accordance with the following:

Frequency Range	Requirement
51.5Hz - 52Hz	Operation for a period of at least 15 minutes is required each time the **Frequency** is above 51.5Hz.
51Hz - 51.5Hz	Operation for a period of at least 90 minutes is required each time the **Frequency** is above 51Hz.
49.0Hz - 51Hz	Continuous operation is required
47.5Hz - 49.0Hz	Operation for a period of at least 90 minutes is required each time the **Frequency** is below 49.0Hz.
47Hz - 47.5Hz	Operation for a period of at least 20 seconds is required each time the **Frequency** is below 47.5Hz.

For the avoidance of doubt, disconnection, by **Frequency** or speed based relays is not permitted within the **Frequency** range 47.5Hz to 51.5Hz, unless agreed with **The Company** in accordance with CC.6.3.12.

Grid Voltage Variations

CC.6.1.4 Subject as provided below, the voltage on the 400kV part of the **National Electricity Transmission System** at each **Connection Site** with a **GB Code User** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**) will normally remain within ±5% of the nominal value unless abnormal conditions prevail. The minimum voltage is -10% and the maximum voltage is +10% unless abnormal conditions prevail, but voltages between +5% and +10% will not last longer than 15 minutes unless abnormal conditions prevail. Voltages on the 275kV and 132kV parts of the **National Electricity Transmission System** at each **Connection Site** with a **User** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**) will normally remain within the limits ±10% of the nominal value unless abnormal conditions prevail for example but not limited to, situations such as during **System Restoration**. At nominal **System** voltages below 132kV the voltage of the **National Electricity Transmission System** at each **Connection Site** with a **User** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**) will normally remain within the limits ±6% of the nominal value unless abnormal conditions prevail for example but not limited to, situations such as during **System Restoration**. Under fault conditions, voltage may collapse transiently to zero at the point of fault until the fault is cleared. The normal operating ranges of the **National Electricity Transmission System** are summarised below:

National Electricity Transmission System Nominal Voltage	Normal Operating Range
400kV	400kV ±5%
275kV	275kV ±10%
132kV	132kV ±10%

The Company and a **GB Code User** may agree greater or lesser variations in voltage to those set out above in relation to a particular **Connection Site**, and insofar as a greater or lesser variation is agreed, the relevant figure set out above shall, in relation to that **GB Code User** at the particular **Connection Site**, be replaced by the figure agreed.

Voltage Waveform Quality

CC.6.1.5 All **Plant** and **Apparatus** connected to the **National Electricity Transmission System**, and that part of the **National Electricity Transmission System** at each **Connection Site** or, in the case of **OTSDUW Plant and Apparatus**, at each **Interface Point**, should be capable of withstanding the following distortions of the voltage waveform in respect of harmonic content and phase unbalance:

(a) Harmonic Content

The **Electromagnetic Compatibility Levels** for harmonic distortion on the **Onshore Transmission System** from all sources under both **Planned Outage** and fault outage conditions, (unless abnormal conditions prevail) shall comply with **Engineering Recommendation G5**. The **Electromagnetic Compatibility Levels** for harmonic distortion on an **Offshore Transmission System** will be defined in relevant **Bilateral Agreements**.

Engineering Recommendation G5 contains planning criteria which **The Company** will apply to the connection of non-linear **Load** to the **National Electricity Transmission System**, which may result in harmonic emission limits being specified for these **Loads** in the relevant **Bilateral Agreement**. The application of the planning criteria will take into account the position of **GB Code Users'** and **EU Code Users' Plant** and **Apparatus** (and **OTSDUW Plant and Apparatus**) in relation to harmonic emissions. **GB Code Users** must ensure that connection of distorting loads to their **User Systems** do not cause any harmonic emission limits specified in the **Bilateral Agreement**, or where no such limits are specified, the relevant planning levels specified in **Engineering Recommendation G5** to be exceeded.

(b) Phase Unbalance

Under **Planned Outage** conditions, the weekly 95 percentile of **Phase (Voltage) Unbalance,** calculated in accordance with IEC 61000-4-30 and IEC 61000-3-13, on the **National Electricity Transmission System** for voltages above 150kV should remain, in England and Wales, below 1.5%, and in Scotland, below 2%, and for voltages of 150kV and below, across GB below 2%, unless abnormal conditions prevail and **Offshore** (or in the case of **OTSDUW**, **OTSDUW Plant and Apparatus**) will be defined in relevant **Bilateral Agreements**.

The **Phase (Voltage) Unbalance** is calculated from the ratio of root mean square (rms) of negative phase sequence voltage to rms of positive phase sequence voltage, based on 10-minute average values, in accordance with IEC 61000-4-30.

CC.6.1.6 Across GB, under the **Planned Outage** conditions stated in CC.6.1.5(b) infrequent short duration peaks with a maximum value of 2% are permitted for **Phase (Voltage) Unbalance**, for voltages above 150kV, subject to the prior agreement of **The Company** under the **Bilateral Agreement** and in relation to **OTSDUW**, the **Construction Agreement**. **The Company** will only agree following a specific assessment of the impact of these levels on **Transmission Apparatus** and other **Users Apparatus** with which it is satisfied.

Voltage Fluctuations

CC.6.1.7 Voltage changes at a **Point of Common Coupling** on the **Onshore Transmission System** shall not exceed:

(a) The limits specified in Table CC.6.1.7(a) with the stated frequency of occurrence, where:

(i)

$$\%\Delta V_{steadystate} = \left| 100 \times \frac{\Delta V_{steadystate}}{Vn} \right|$$

and

$$\%\Delta V_{max} = 100 \times \frac{\Delta V_{max}}{V_n} \ ;$$

(ii) V_n is the nominal system voltage;

(iii) $V_{steadystate}$ is the voltage at the end of a period of 1 s during which the rate of change of system voltage over time is ≤ 0.5%;

(iv) $\Delta V_{steadystate}$ is the difference in voltage between the initial steady state voltage prior to the RVC (V_0) and the final steady state voltage after the RVC ($V_{0'}$);

(v) ΔV_{max} is the absolute change in the system voltage relative to the initial steady state system voltage (V_0);

(vi) All voltages are the r.m.s. of the voltage measured over one cycle refreshed every half a cycle as per BS EN 61000-4-30; and

(vii) The applications in the 'Example Applicability' column are examples only and are not definitive.

Cat-egory	Title	Maximum number of occurrence	Limits $\%\Delta V_{max}$ & $\%\Delta V_{steadystate}$	Example Applicability
1	Frequent events	(see NOTE 1)	As per Figure CC.6.1.7 (1)	Any single or repetitive RVC that falls inside Figure CC.6.1.7 (1)
2	Infrequent events	4 events in 1 calendar month (see NOTE 2)	As per Figure CC.6.1.7 (2) $\lvert \%\Delta V_{steadystate} \rvert \leq 3\%$ For decrease in voltage: $\lvert \%\Delta V_{max} \rvert \leq 10\%$ (see NOTE 3) For increase in voltage: $\lvert \%\Delta V_{max} \rvert \leq 6\%$ (see NOTE 4)	Infrequent motor starting, transformer energisation, re-energisation (see NOTE 7)
3	Very infrequent events	1 event in 3 calendar months (see NOTE 2)	As per Figure CC.6.1.7 (3) $\lvert \%\Delta V_{steadystate} \rvert \leq 3\%$ For decrease in voltage: $\lvert \%\Delta V_{max} \rvert \leq 12\%$ (see NOTE 5) For increase in voltage: $\lvert \%\Delta V_{max} \rvert \leq 6\%$ (see NOTE 6)	Commissioning, maintenance & post fault switching (see NOTE 7)

NOTE 1: ±6% is permissible for 100 ms reduced to ±3% thereafter as per Figure CC.6.1.7 (1).
If the profile of repetitive voltage change(s) falls within the envelope given in Figure CC.6.1.7 (1) , the assessment of such voltage change(s) shall be undertaken according to the recommendations for assessment of flicker and shall conform to the planning levels provided for flicker.
If any part of the voltage change(s) falls outside the envelope given in Figure CC.6.1.7(1), the assessment of such voltage changes, repetitive or not, shall be done according to the guidance and limits for RVCs.

NOTE 2: No more than 1 event is permitted per day, consisting of up to 4 RVCs, each separated by at least 10 minutes with all switching completed within a two-hour window.

NOTE 3: −10% is permissible for 100 ms reduced to -6% until 2 s then reduced to -3% thereafter as per Figure CC.6.1.7 (2).

NOTE 4: +6% is permissible for 0.8 s from the instant the event begins then reduced to +3% thereafter as per Figure CC.6.1.7 (2).

NOTE 5: −12% is permissible for 100 ms reduced to −10% until 2 s then reduced to -3% thereafter as per Figure CC.6.1.7 (3).

NOTE 6: +6% is permissible for 0.8 s from the instant the event begins then reduced to +3% thereafter as per Figure CC.6.1.7 (3).

NOTE 7: These are examples only. Customers may opt to conform to the limits of another category providing the frequency of occurrence is not expected to exceed the 'Maximum number of occurrence' for the chosen category.

Table CC.6.1.7 (a) – Planning levels for RVC

(b) The voltage change limit is the absolute maximum allowed of either the phase-to-earth voltage change or the phase-to-phase voltage change, whichever is the highest. The limits do not apply to single phasor equivalent voltages, e.g. positive phase sequence (PPS) voltages. For high impedance earthed systems, the maximum phase-to-phase, i.e. line voltage, should be used for assessment.

(c) The RVCs in Category 2 and 3 should not exceed the limits depicted in the time dependent characteristic shown in Figure CC.6.1.7 (2) and Figure CC.6.1.7 (3) respectively. These limits do not apply to: 1) fault clearance operations; or 2) immediate operations in response to fault conditions; or 3) operations relating to post fault system restoration (for the avoidance of doubt this third exception pertains to a fault that is external to the **Users Plant** and **Apparatus**).

(d) Any RVCs permitted in Category 2 and Category 3 should be at least 10 minutes apart.

(e) The value of $V_{steadystate}$ should be established immediately prior to the start of a RVC. Following a RVC, the voltage should remain within the relevant envelope, as shown in Figures CC.6.1.7 (1), CC.6.1.7 (2), CC.6.1.7 (3), until a $V_{steadystate}$ condition has been satisfied.

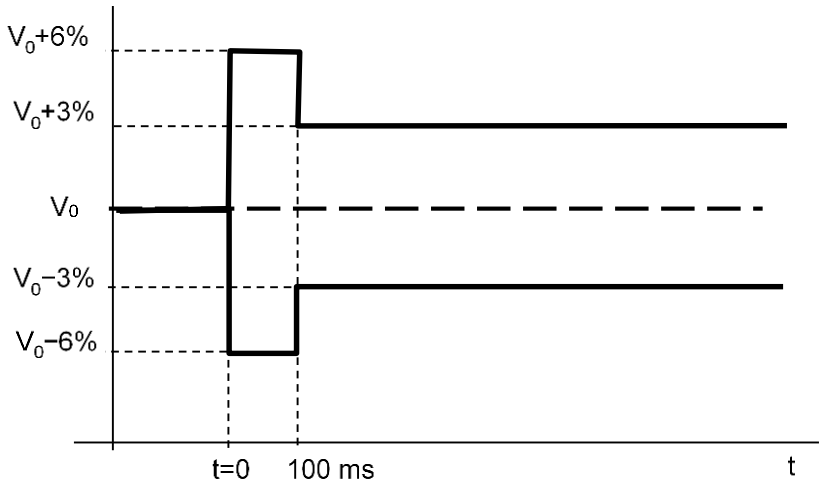

Figure CC.6.1.7 (1) — Voltage characteristic for frequent events

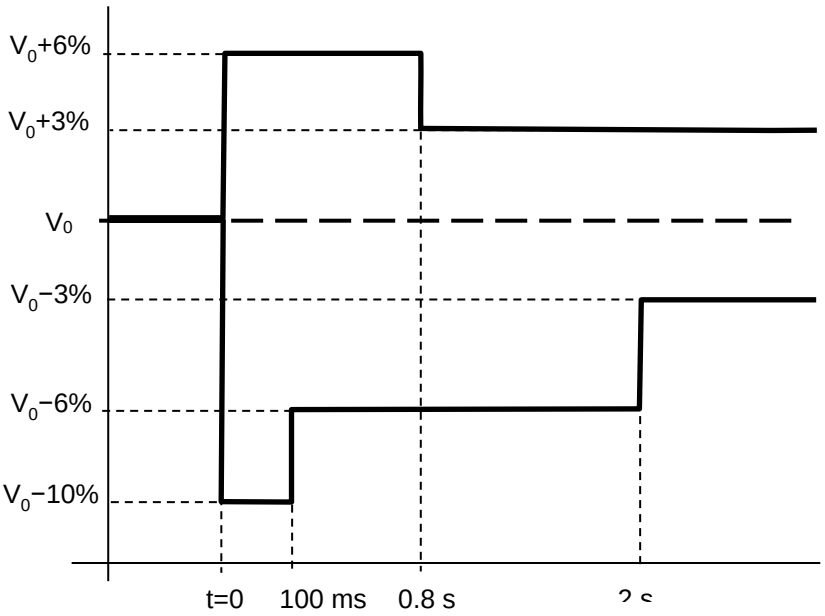

Figure CC.6.1.7 (2) — Voltage characteristic for infrequent events

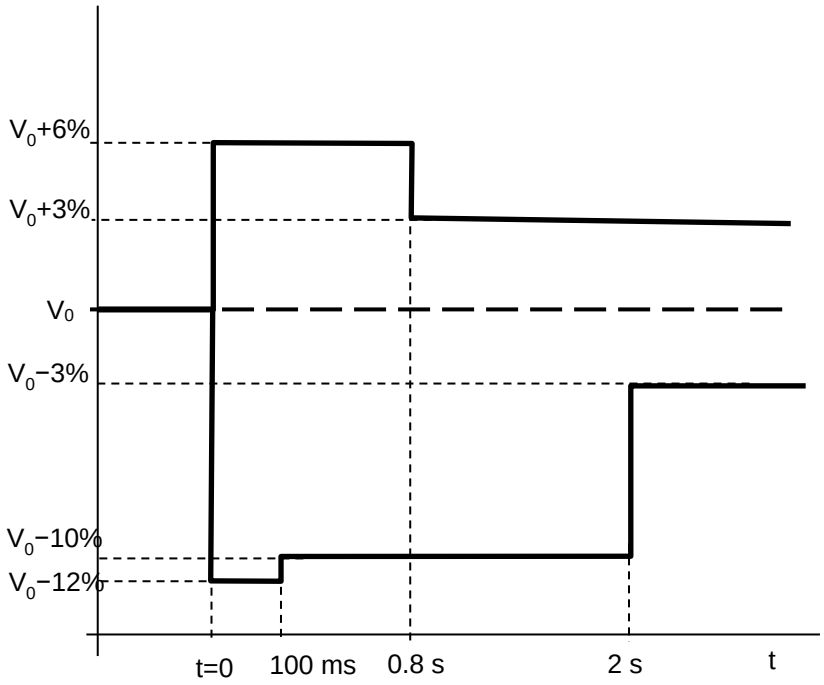

Figure CC.6.1.7 (3) — Voltage characteristic for very infrequent events

(f) The voltage change between two steady state voltage conditions should not exceed 3%. (The limit is based on 3% of the nominal voltage of the system (V_n) as measured at the Point of Common Coupling. The step voltage change as measured at the customer's supply terminals or equipment terminals could be greater. For example: The step voltage change limit stated in BS EN 61000-3-3 and BS EN 61000-3-11 is 3.3% when measured at the equipment terminals.)

(g) The limits apply to voltage changes measured at the **Point of Common Coupling**.

(h) Category 3 events that are planned should be notified to **The Company** in advance.

(i) For connections with a **Completion Date** after 1st September 2015 and where voltage changes would constitute a risk to the **National Electricity Transmission System** or, in **The Company's** view, the **System** of any **GB Code User**, **Bilateral Agreements** may include provision for **The Company** to reasonably limit the number of voltage changes in Category 2 or 3 to a lower number than specified in Table CC.6.1.7(a) to ensure that the total number of voltage changes at the **Point of Common Coupling** across multiple **Users** remains within the limits of Table CC.6.1.7(a).

(j) The planning levels applicable to **Flicker Severity Short Term** (Pst) and **Flicker Severity Long Term** (Plt) are set out in Table CC.6.1.7(b).

Supply system Nominal voltage	**Planning level**	
	Flicker Severity Short Term (Pst)	**Flicker Severity Long Term (Plt)**
3.3 kV, 6.6 kV, 11 kV, 20 kV, 33 kV	0.9	0.7
66 kV, 110 kV, 132 kV, 150 kV, 200 kV, 220 kV, 275 kV, 400 kV	0.8	0.6
NOTE 1: The magnitude of P_{st} is linear with respect to the magnitude of the voltage changes giving rise to it. NOTE 2: Extreme caution is advised in allowing any excursions of P_{st} and P_{lt} above the planning level.		

Table CC.6.7.1(b) — Planning levels for flicker

The values and figures referred to in this paragraph CC.6.1.7 are derived from Engineering Recommendation P28 Issue 2.

CC.6.1.8 Voltage fluctuations at a **Point of Common Coupling** with a fluctuating **Load** directly connected to an **Offshore Transmission System** (or in the case of **OTSDUW**, **OTSDUW Plant and Apparatus**) shall not exceed the limits set out in the **Bilateral Agreement**.

Sub-Synchronous Resonance and Sub-Synchronous Torsional Interaction

CC.6.1.9 **The Company** shall ensure that **GB Code Users' Plant and Apparatus** will not be subject to unacceptable Sub-Synchronous Oscillation conditions as specified in the relevant **Licence Standards**.

CC.6.1.10 **The Company** shall ensure where necessary, and in consultation with **Relevant Transmission Licensees** where required, that any relevant site specific conditions applicable at a **GB Code User's Connection Site**, including a description of the Sub-Synchronous Oscillation conditions considered in the application of the relevant **License Standards**, are set out in the **GB Code User's Bilateral Agreement**.

CC.6.2 Plant and Apparatus relating to Connection Site and Interface Point

The following requirements apply to **Plant** and **Apparatus** relating to the **Connection Point**, and **OTSDUW Plant and Apparatus** relating to the **Interface Point** (until the **OTSUA Transfer Time**) and **Connection Point** which (except as otherwise provided in the relevant paragraph) each **GB Code User** must ensure are complied with in relation to its **Plant** and **Apparatus** and which in the case of CC.6.2.2.2.2, CC.6.2.3.1.1 and CC.6.2.1.1(b) only, **The Company** must ensure are complied with in relation to **Transmission Plant** and **Apparatus**, as provided in those paragraphs.

CC.6.2.1 General Requirements

CC.6.2.1.1 (a) The design of connections between the **National Electricity Transmission System** and:

(i) any **Generating Unit** (other than a **CCGT Unit** or **Power Park Unit**), **DC Converter**, **Power Park Module** or **CCGT Module**, or

(ii) any **Network Operator's System**, or

(iii) **Non-Embedded Customers** equipment;

will be consistent with the **Licence Standards**.

In the case of **OTSDUW**, the design of the **OTSUA's** connections at the **Interface Point** and **Connection Point** will be consistent with **Licence Standards**.

(b) The **National Electricity Transmission System** (and any **OTSDUW Plant and Apparatus**) at nominal **System** voltages of 132kV and above is/shall be designed to be earthed with an **Earth Fault Factor** of, in England and Wales or **Offshore**, below 1.4 and in Scotland, below 1.5. Under fault conditions the rated **Frequency** component of voltage could fall transiently to zero on one or more phases or, in England and Wales, rise to 140% phase-to-earth voltage, or in Scotland, rise to 150% phase-to-earth voltage. The voltage rise would last only for the time that the fault conditions exist. The fault conditions referred to here are those existing when the type of fault is single or two phase-to-earth.

(c) For connections to the **National Electricity Transmission System** at nominal **System** voltages of below 132kV the earthing requirements and voltage rise conditions will be advised by **The Company** as soon as practicable prior to connection and in the case of **OTSDUW Plant and Apparatus** shall be advised to **The Company** by the **GB Code User**.

CC.6.2.1.2 Substation Plant and Apparatus

(a) The following provisions shall apply to all **Plant** and **Apparatus** which is connected at the voltage of the **Connection Point** (and **OTSDUW Plant** and **Apparatus** at the **Interface Point**) and which is contained in equipment bays that are within the **Transmission** busbar **Protection** zone at the **Connection Point**. This includes circuit breakers, switch disconnectors, disconnectors, **Earthing Devices**, power transformers, voltage transformers, reactors, current transformers, surge arresters, bushings, neutral equipment, capacitors, line traps, coupling devices, external insulation and insulation co-ordination devices. Where necessary, this is more precisely defined in the **Bilateral Agreement**.

(i) Plant and/or Apparatus prior to 1st January 1999

Each item of such **Plant** and/or **Apparatus** which at 1st January 1999 is either :

installed; or

owned (but is either in storage, maintenance or awaiting installation); or

ordered;

and is the subject of a **Bilateral Agreement** with regard to the purpose for which it is in use or intended to be in use, shall comply with the relevant standards/specifications applicable at the time that the **Plant** and/or **Apparatus** was designed (rather than commissioned) and any further requirements as specified in the **Bilateral Agreement**.

(ii) Plant and/or Apparatus post 1st January 1999 for a new Connection Point (including OTSDUW Plant and Apparatus at the Interface Point)

Each item of such **Plant** and/or **Apparatus** installed in relation to a new **Connection Point** (or **OTSDUW Plant and Apparatus** at the **Interface Point**) after 1st January 1999 shall comply with the relevant **Technical Specifications** and any further requirements identified by **The Company**, acting reasonably, to reflect the options to be followed within the **Technical Specifications** and/or to complement if necessary the **Technical Specifications** so as to enable **The Company** to comply with its obligations in relation to the **National Electricity Transmission System** or the **Relevant Transmission Licensee** to comply with its obligations in relation to its **Transmission System**. This information, including the application dates of the relevant **Technical Specifications**, will be as specified in the **Bilateral Agreement**.

(iii) New Plant and/or Apparatus post 1st January 1999 for an existing Connection Point (including OTSDUW Plant and Apparatus at the Interface Point)

Each new additional and/or replacement item of such **Plant** and/or **Apparatus** installed in relation to a change to an existing **Connection Point** (or **OTSDUW Plant and Apparatus** at the **Interface Point** and **Connection Point**) after 1st January 1999 shall comply with the standards/specifications applicable when the change was designed, or such other standards/specifications as necessary to ensure that the item of **Plant** and/or **Apparatus** is reasonably fit for its intended purpose having due regard to the obligations of **The Company**, the relevant **GB Code User** and the **Relevant Transmission Licensee** under their respective **Licences**. Where appropriate this information, including the application dates of the relevant standards/specifications, will be as specified in the varied **Bilateral Agreement**.

(iv) Used Plant and/or Apparatus being moved, re-used or modified

If, after its installation, any such item of **Plant** and/or **Apparatus** is subsequently:

moved to a new location; or

used for a different purpose; or

otherwise modified;

then the standards/specifications as described in (i), (ii), or (iii) above or in ECC.6.2.1.2 (as applicable) will apply as appropriate to such **Plant** and/or **Apparatus**, which must be reasonably fit for its intended purpose having due regard to the obligations of **The Company**, the relevant **GB Code User** or **EU Code User** (as applicable) and the **Relevant Transmission Licensee** under their respective **Licences**.

(b) **The Company** shall at all times maintain a list of those **Technical Specifications** and additional requirements which might be applicable under this CC.6.2.1.2 and which may be referenced by **The Company** in the **Bilateral Agreement**. **The Company** shall provide a copy of the list upon request to any **User**.

(c) Where the **GB Code User** provides **The Company** with information and/or test reports in respect of **Plant** and/or **Apparatus** which the **GB Code User** reasonably believes demonstrate the compliance of such items with the provisions of a **Technical Specification**, then **The Company** shall promptly and without unreasonable delay give due and proper consideration to such information.

(d) **Plant** and **Apparatus** shall be designed, manufactured and tested in premises with an accredited certificate in accordance with the quality assurance requirements of the relevant standard in the BS EN ISO 9000 series (or equivalent as reasonably approved by **The Company**) or in respect of test premises which do not include a manufacturing facility premises with an accredited certificate in accordance with BS EN 45001.

(e) Each connection between an **GB Code User** and the **National Electricity Transmission System** must be controlled by a circuit-breaker (or circuit breakers) capable of interrupting the maximum short circuit current at the point of connection. The **Electricity Ten Year Statement** gives values of short circuit current and the rating of **Transmission** circuit breakers at existing and committed **Connection Points** for future years.

(f) Each connection between a **GB Generator** undertaking **OTSDUW** or an **Onshore Transmission Licensee**, must be controlled by a circuit breaker (or circuit breakers) capable of interrupting the maximum short circuit current at the **Transmission Interface Point**. The **Electricity Ten Year Statement** gives values of short circuit current and the rating of **Transmission** circuit breakers at existing and committed **Transmission Interface Points** for future years.

CC.6.2.2 Requirements at Connection Points or, in the case of OTSDUW at Interface Points that relate to GB Generators or OTSDUW Plant and Apparatus or DC Converter Station owners

CC.6.2.2.1 Not Used.

CC.6.2.2.2 Generating Unit, OTSDUW Plant and Apparatus and Power Station Protection Arrangements

CC.6.2.2.2.1 Minimum Requirements

CC.6.2.2.2.1.1 **Protection** of **Generating Units** (other than **Power Park Units**), **DC Converters**, **OTSDUW Plant and Apparatus** or **Power Park Modules** and their connections to the **National Electricity Transmission System** shall meet the requirements given below. These are necessary to reduce the impact on the **National Electricity Transmission System** of faults on **OTSDUW Plant and Apparatus** circuits or circuits owned by **GB Generators** or **DC Converter Station** owners.

CC.6.2.2.2.1.2 **Restoration Contractors** shall, if required in a **Restoration Plan**, have the ability to switch:-

a) From the normal to the alternative **Protection** settings on their **Plant** and **Apparatus** and:-
b) From the alternative to the normal **Protection** settings whilst their **Plant** remains in service.

Any alternative **Protection** settings shall be included in the **Restoration Plan**. Normal and alternative **Protection** settings shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** and **Restoration Contractor** as part of developing a **Restoration Plan**.

CC.6.2.2.2.2 Fault Clearance Times

(a) The required fault clearance time for faults on the **GB Generator's** or **DC Converter Station** owner's equipment directly connected to the **National Electricity Transmission System** or **OTSDUW Plant and Apparatus** and for faults on the **National Electricity Transmission System** directly connected to the **GB Generator** or **DC Converter Station** owner's equipment or **OTSDUW Plant and Apparatus**, from fault inception to the circuit breaker arc extinction, shall be set out in the **Bilateral Agreement**. The fault clearance time specified in the **Bilateral Agreement** shall not be shorter than the durations specified in (i), (ii) and (iii) below:

(i) 80ms at 400kV

(ii) 100ms at 275kV

(iii) 120ms at 132kV and below

but this shall not prevent the **GB Code User** or the **Relevant Transmission Licensee** or the **GB Generator** (including in respect of **OTSDUW Plant and Apparatus**) from selecting a shorter fault clearance time on their own **Plant** and **Apparatus** provided **Discrimination** is achieved.

A longer fault clearance time may be specified in the **Bilateral Agreement** for faults on the **National Electricity Transmission System**. A longer fault clearance time for faults on the **GB Generator** or **DC Converter Station** owner's equipment or **OTSDUW Plant and Apparatus** may be agreed with **The Company** in accordance with the terms of the **Bilateral Agreement** but only if **System** requirements, in **The Company's** view, permit. The probability that the fault clearance time stated in the **Bilateral Agreement** will be exceeded by any given fault, must be less than 2%.

(b) In the event that the required fault clearance time is not met as a result of failure to operate on the **Main Protection System(s)** provided, **GB Generators** or **DC Converter Station** owners or **GB Generators** in the case of **OTSDUW Plant and Apparatus** shall, except as specified below provide **Independent Back-Up Protection**. The **Relevant Transmission Licensee** will also provide **Back-Up Protection**; and the **Relevant Transmission Licensee's** and the **GB Code User's Back-Up Protections** will be co-ordinated so as to provide **Discrimination**.

On a **Generating Unit** (other than a **Power Park Unit**), **DC Converter** or **Power Park Module** or **OTSDUW Plant and Apparatus** in respect of which the **Completion Date** is after 20 January 2016 and connected to the **National Electricity Transmission System** at 400kV or 275kV and where two **Independent Main Protections** are provided to clear faults on the **HV Connections** within the required fault clearance time, the **Back-Up Protection** provided by **GB Generators** (including in respect of **OTSDUW Plant and Apparatus**) and **DC Converter Station** owner shall operate to give a fault clearance time of no longer than 300ms at the minimum infeed for normal operation for faults on the **HV Connections**. Where two **Independent Main Protections** are installed, the **Back-Up Protection** may be integrated into one (or both) of the **Independent Main Protection** relays.

On a **Generating Unit** (other than a **Power Park Unit**), **DC Converter** or **Power Park Module** or **OTSDUW Plant and Apparatus** in respect of which the **Completion Date** is after 20 January 2016 and connected to the **National Electricity Transmission System** at 132 kV and where only one **Main Protection** is provided to clear faults on the **HV Connections** within the required fault clearance time, the **Independent Back-Up Protection** provided by the **GB Generator** (including in respect of **OTSDUW Plant and Apparatus**) and the **DC Converter Station** owner shall operate to give a fault clearance time of no longer than 300ms at the minimum infeed for normal operation for faults on the **HV Connections**.

On a **Generating Unit** (other than a **Power Park Unit**), **DC Converter** or **Power Park Module** or **OTSDUW Plant** and **Apparatus** connected to the **National Electricity Transmission System** and on **Generating Units** (other than a **Power Park Unit**), **DC Converters** or **Power Park Modules** or **OTSDUW Plant and Apparatus** connected to the **National Electricity Transmission System** at 400 kV or 275 kV or 132 kV, in respect of which the **Completion Date** is before the 20 January 2016, the **Back-Up Protection** or **Independent Back-Up Protection** shall operate to give a fault clearance time of no longer than 800ms in England and Wales or 300ms in Scotland at the minimum infeed for normal operation for faults on the **HV Connections**.

A Generating Unit (other than a **Power Park Unit**), **DC Converter** or **Power Park Module** or **OTSDUW Plant and Apparatus**) with **Back-Up Protection** or **Independent Back-Up Protection** will also be required to withstand, without tripping, the loading incurred during the clearance of a fault on the **National Electricity Transmission System** by breaker fail **Protection** at 400kV or 275kV or of a fault cleared by **Back-Up Protection** where the **GB Generator** (including in the case of **OTSDUW Plant and Apparatus**) or **DC Converter** is connected at 132kV and below. This will permit **Discrimination** between **GB Generator** in respect of **OTSDUW Plant** and **Apparatus** or **DC Converter Station** owners' **Back-Up Protection** or **Independent Back-Up Protection** and the **Back-Up Protection** provided on the **National Electricity Transmission System** and other **Users' Systems**.

(c) When the **Generating Unit** (other than **Power Park Units**), or the **DC Converter** or **Power Park Module** or **OTSDUW Plant and Apparatus** is connected to the **National Electricity Transmission System** at 400kV or 275kV, and in Scotland and **Offshore** also at 132kV, and a circuit breaker is provided by the **GB Generator** (including in respect of **OTSDUW Plant and Apparatus**) or the **DC Converter Station** owner, or the **Relevant Transmission Licensee**, as the case may be, to interrupt fault current interchange with the **National Electricity Transmission System**, or **GB Generator's System**, or **DC Converter Station** owner's **System**, as the case may be, circuit breaker fail **Protection** shall be provided by the **GB Generator** (including in respect of **OTSDUW Plant and Apparatus**) or **DC Converter Station** owner, or the **Relevant Transmission Licensee** as the case may be, on this circuit breaker. In the event, following operation of a **Protection** system, of a failure to interrupt fault current by these circuit-breakers within the **Fault Current Interruption Time**, the circuit breaker fail **Protection** is required to initiate tripping of all the necessary electrically adjacent circuit-breakers so as to interrupt the fault current within the next 200ms.

(d) The target performance for the **System Fault Dependability Index** shall be not less than 99%. This is a measure of the ability of **Protection** to initiate successful tripping of circuit breakers which are associated with the faulty item of **Apparatus**.

CC.6.2.2.3 Equipment to be provided

CC.6.2.2.3.1 Protection of Interconnecting Connections

The requirements for the provision of **Protection** equipment for interconnecting connections will be specified in the **Bilateral Agreement**. In this **CC**, the term "interconnecting connections" means the primary conductors from the current transformer accommodation on the circuit side of the circuit breaker to the **Connection Point** or the primary conductors from the current transformer accommodation on the circuit side of the **OTSDUW Plant and Apparatus** of the circuit breaker to the **Transmission Interface Point**.

CC.6.2.2.3.2 Circuit-breaker fail Protection

The **GB Generator** or **DC Converter Station** owner will install circuit breaker fail **Protection** equipment in accordance with the requirements of the **Bilateral Agreement**. The **GB Generator** or **DC Converter Station** owner will also provide a back-trip signal in the event of loss of air from its pressurised head circuit breakers, during the **Generating Unit** (other than a **CCGT Unit** or **Power Park Unit**) or **CCGT Module** or **DC Converter** or **Power Park Module** run-up sequence, where these circuit breakers are installed.

CC.6.2.2.3.3 Loss of Excitation

The **GB Generator** must provide **Protection** to detect loss of excitation on a **Generating Unit** and initiate a **Generating Unit** trip.

CC.6.2.2.3.4 Pole-Slipping Protection

Where, in **The Company's** reasonable opinion, **System** requirements dictate, **The Company** will specify in the **Bilateral Agreement** a requirement for **GB Generators** to fit pole-slipping **Protection** on their **Generating Units**.

CC.6.2.2.3.5 Signals for Tariff Metering

GB Generators and **DC Converter Station** owners will install current and voltage transformers supplying all tariff meters at a voltage to be specified in, and in accordance with, the **Bilateral Agreement**.

CC.6.2.2.4 Work on Protection Equipment

No busbar **Protection**, mesh corner **Protection**, circuit-breaker fail **Protection** relays, AC or DC wiring (other than power supplies or DC tripping associated with the **Generating Unit**, **DC Converter** or **Power Park Module** itself) may be worked upon or altered by the **GB Generator** or **DC Converter Station** owner personnel in the absence of a representative of the **Relevant Transmission Licensee**, or written authority from the **Relevant Transmission Licensee** to perform such work or alterations in the absence of a representative of the **Relevant Transmission Licensee**.

CC.6.2.2.5 Relay Settings

Protection and relay settings will be co-ordinated (both on connection and subsequently) across the **Connection Point** in accordance with the **Bilateral Agreement** and in relation to **OTSDUW Plant and Apparatus**, across the **Interface Point** in accordance with the **Bilateral Agreement** to ensure effective disconnection of faulty **Apparatus**.

CC.6.2.2.6 Control Schemes and Settings

CC.6.2.2.6.1 The schemes and settings of the different control devices on a **Generating Unit**, **Power Park Module** or **DC Converter** that are necessary for **Transmission System** stability and for taking emergency action shall be agreed with **The Company** in coordination with the **Relevant Transmission Licensee** and the **GB Generator** or **DC Converter** owner or **Restoration Contractor**. **Restoration Contractors** shall have the ability to switch from alternative control schemes and settings on their **Plant** and **Apparatus** and to be capable of switching from the agreed alternative settings to normal settings whilst remaining in service if they are required to satisfy their obligations in a **Restoration Plan**. Changes to any control schemes and settings shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** as part of developing a **Restoration Plan**.

CC.6.2.2.6.2 Subject to the requirements of CC.6.2.2.6.1, any changes to the schemes and settings, defined in CC.6.2.2.6.1, of the different control devices of the **Generating Unit** or **Power Park Module** or **Restoration Contractor's Plant** and **Apparatus** or **DC Converter** shall be coordinated and agreed between the **Relevant Transmission Licensee**, the **GB Generator**, **Restoration Contractor** and **DC Converter** owner.

CC.6.2.3 Requirements at Connection Points relating to Network Operators and Non-Embedded Customers

CC.6.2.3.1 Protection Arrangements for Network Operators and Non-Embedded Customers

CC.6.2.3.1.1 **Protection** of **Network Operator** and **Non-Embedded Customers Systems** directly connected to the **National Electricity Transmission System**, shall meet the requirements given below:

Fault Clearance Times

(a) The required fault clearance time for faults on **Network Operator** and **Non-Embedded Customer** equipment directly connected to the **National Electricity Transmission System**, and for faults on the **National Electricity Transmission System** directly connected to the **Network Operator's** or **Non-Embedded Customer's** equipment, from fault inception to the circuit breaker arc extinction, shall be set out in each **Bilateral Agreement**. The fault clearance time specified in the **Bilateral Agreement** shall not be shorter than the durations specified in (i), (ii) and (iii) below:

(i) 80ms at 400kV

(ii) 100ms at 275kV

(iii) 120ms at 132kV and below

but this shall not prevent the **GB Code User** or the **Relevant Transmission Licensee** from selecting a shorter fault clearance time on its own **Plant** and **Apparatus** provided **Discrimination** is achieved.

For the purpose of establishing the **Protection** requirements in accordance with CC.6.2.3.1.1 only, the point of connection of the **Network Operator** or **Non-Embedded Customer** equipment to the **National Electricity Transmission System** shall be deemed to be the low voltage busbars at a **GB Grid Supply Point**, irrespective of the ownership of the equipment at the **GB Grid Supply Point**.

A longer fault clearance time may be specified in the **Bilateral Agreement** for faults on the **National Electricity Transmission System**. A longer fault clearance time for faults on the **Network Operator** and **Non-Embedded Customers** equipment may be agreed with **The Company** in accordance with the terms of the **Bilateral Agreement** but only if **System** requirements in **The Company's** view permit. The probability that the fault clearance time stated in the **Bilateral Agreement** will be exceeded by any given fault must be less than 2%.

(b) (i) For the event of failure of the **Protection** systems provided to meet the above fault clearance time requirements, **Back-Up Protection** shall be provided by the **Network**

Operator or **Non-Embedded Customer** as the case may be.

(ii) The **Relevant Transmission Licensee** will also provide **Back-Up Protection**, which will result in a fault clearance time longer than that specified for the **Network Operator** or **Non-Embedded Customer Back-Up Protection** so as to provide **Discrimination**.

(iii) For connections with the **National Electricity Transmission System** at 132kV and below, it is normally required that the **Back-Up Protection** on the **National Electricity Transmission System** shall discriminate with the **Network Operator** or **Non-Embedded Customer's Back-Up Protection**.

(iv) For connections with the **National Electricity Transmission System** at 400kV or 275kV, the **Back-Up Protection** will be provided by the **Network Operator** or **Non-Embedded Customer**, as the case may be, with a fault clearance time not longer than 300ms for faults on the **Network Operator's** or **Non-Embedded Customer's Apparatus**.

(v) Such **Protection** will also be required to withstand, without tripping, the loading incurred during the clearance of a fault on the **National Electricity Transmission System** by breaker fail **Protection** at 400kV or 275kV. This will permit **Discrimination** between **Network Operator's Back-Up Protection** or **Non-Embedded Customer's Back-Up Protection**, as the case may be, and **Back-Up Protection** provided on the **National Electricity Transmission System** and other **User Systems**. The requirement for and level of **Discrimination** required will be specified in the **Bilateral Agreement**.

(c) (i) Where the **Network Operator** or **Non-Embedded Customer** is connected to the **National Electricity Transmission System** at 400kV or 275kV, and in Scotland also at 132kV, and a circuit breaker is provided by the **Network Operator** or **Non-Embedded Customer**, or the **Relevant Transmission Licensee**, as the case may be, to interrupt the interchange of fault current with the **National Electricity Transmission System** or the **System** of the **Network Operator** or **Non-Embedded Customer**, as the case may be, circuit breaker fail **Protection** will be provided by the **Network Operator** or **Non-Embedded Customer**, or the **Relevant Transmission Licensee**, as the case may be, on this circuit breaker.

(ii) In the event, following operation of a **Protection** system, of a failure to interrupt fault current by these circuit-breakers within the **Fault Current Interruption Time**, the circuit breaker fail **Protection** is required to initiate tripping of all the necessary electrically adjacent circuit-breakers so as to interrupt the fault current within the next 200ms.

(d) The target performance for the **System Fault Dependability Index** shall be not less than 99%. This is a measure of the ability of **Protection** to initiate successful tripping of circuit breakers which are associated with the faulty items of **Apparatus**.

CC.6.2.3.2 Fault Disconnection Facilities

(a) Where no **Transmission** circuit breaker is provided at the **GB Code User's** connection voltage, the **GB Code User** must provide **The Company** with the means of tripping all the **GB Code User's** circuit breakers necessary to isolate faults or **System** abnormalities on the **National Electricity Transmission System**. In these circumstances, for faults on the **GB Code User's System**, the **GB Code User's Protection** should also trip higher voltage **Transmission** circuit breakers. These tripping facilities shall be in accordance with the requirements specified in the **Bilateral Agreement**.

(b) **The Company** may require the installation of a **System to Generator Operational Intertripping Scheme** in order to enable the timely restoration of circuits following power **System** fault(s). These requirements shall be set out in the relevant **Bilateral Agreement**.

CC.6.2.3.3 Automatic Switching Equipment

Where automatic reclosure of **Transmission** circuit breakers is required following faults on the **GB Code User's System**, automatic switching equipment shall be provided in accordance with the requirements specified in the **Bilateral Agreement**.

CC.6.2.3.4 Relay Settings

Protection and relay settings will be co-ordinated (both on connection and subsequently) across the **Connection Point** in accordance with the **Bilateral Agreement** to ensure effective disconnection of faulty **Apparatus**.

CC.6.2.3.5 Work on Protection equipment

Where a **Transmission Licensee** owns the busbar at the **Connection Point**, no busbar **Protection**, mesh corner **Protection** relays, AC or DC wiring (other than power supplies or DC tripping associated with the **Network Operator** or **Non-Embedded Customer's Apparatus** itself) may be worked upon or altered by the **Network Operator** or **Non-Embedded Customer** personnel in the absence of a representative of the **Relevant Transmission Licensee** or written authority from the **Relevant Transmission Licensee** to perform such work or alterations in the absence of a representative of the **Relevant Transmission Licensee**.

CC.6.2.3.6 Equipment to be provided

CC.6.2.3.6.1 Protection of Interconnecting Connections

The requirements for the provision of **Protection** equipment for interconnecting connections will be specified in the **Bilateral Agreement**.

CC.6.2.3.7 Network Operators Systems

Network Operators shall, if required in a **Restoration Plan**, have the ability to switch:-

a) From the normal to the alternative **Protection** settings and control settings on their **Plant** and **Apparatus**; and:-
b) From the alternative to the normal **Protection** settings and control settings whilst their **Plant** remains in service,

Any alternative **Protection** settings or control settings shall be included in the **Restoration Plan**. Normal and alternative **Protection** settings and control settings shall be agreed between **The Company** and the **Network Operator** as part of developing a **Restoration Plan**.

CC.6.3 GENERAL GENERATING UNIT (AND OTSDUW) REQUIREMENTS

CC.6.3.1 This section sets out the technical and design criteria and performance requirements for **Generating Units**, **DC Converters** and **Power Park Modules** (whether directly connected to the **National Electricity Transmission System** or **Embedded**) and (where provided in this section) **OTSDUW Plant and Apparatus** which each **GB Generator** or **DC Converter Station** owner must ensure are complied with in relation to its **Generating Units**, **DC Converters** and **Power Park Modules** and **OTSDUW Plant and Apparatus** but does not apply to **Small Power Stations** or individually to **Power Park Units**. References to **Generating Units**, **DC Converters** and **Power Park Modules** in this CC.6.3 should be read accordingly. The performance requirements that **OTSDUW Plant and Apparatus** must be capable of providing at the **Interface Point** under this section may be provided using a combination of **GB Generator Plant** and **Apparatus** and/or **OTSDUW Plant and Apparatus**.

Plant Performance Requirements

CC.6.3.2 (a) When supplying **Rated MW** all **Onshore Synchronous Generating Units** must be capable of continuous operation at any point between the limits 0.85 **Power Factor** lagging and 0.95 **Power Factor** leading at the **Onshore Synchronous Generating Unit** terminals. At **Active Power** output levels other than **Rated MW**, all **Onshore Synchronous Generating Units** must be capable of continuous operation at any point between the **Reactive Power** capability limits identified on the **Generator Performance Chart**.

In addition to the above paragraph, where **Onshore Synchronous Generating Unit(s)**:

(i) have a **Connection Entry Capacity** which has been increased above **Rated MW** (or the **Connection Entry Capacity** of the **CCGT module** has increased above the sum of the **Rated MW** of the **Generating Units** compromising the **CCGT module**), and such increase takes effect after 1st May 2009, the minimum lagging **Reactive Power** capability at the terminals of the **Onshore Synchronous Generating Unit(s)** must be 0.9 **Power Factor** at all **Active Power** output levels in excess of **Rated MW**. Further, the **User** shall comply with the provisions of and any instructions given pursuant to BC1.8 and the relevant **Bilateral Agreement**; or

(ii) have a **Connection Entry Capacity** in excess of **Rated MW** (or the **Connection Entry Capacity** of the **CCGT module** exceeds the sum of **Rated MW** of the **Generating Units** comprising the **CCGT module**) and a **Completion Date** before 1st May 2009, alternative provisions relating to **Reactive Power** capability may be specified in the **Bilateral Agreement** and where this is the case such provisions must be complied with.

The short circuit ratio of **Onshore Synchronous Generating Units** with an **Apparent Power** rating of less than 1600MVA shall be not less than 0.5. The short circuit ratio of **Onshore Synchronous Generating Units** with a rated **Apparent Power** of 1600MVA or above shall be not less than 0.4.

(b) Subject to paragraph (c) below, all **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters** and **Onshore Power Park Modules** must be capable of maintaining zero transfer of **Reactive Power** at the **Onshore Grid Entry Point** (or **User System Entry Point** if **Embedded**) at all **Active Power** output levels under steady state voltage conditions. For **Onshore Non-Synchronous Generating Units** and **Onshore Power Park Modules** the steady state tolerance on **Reactive Power** transfer to and from the **National Electricity Transmission System** expressed in MVAr shall be no greater than 5% of the **Rated MW**. For **Onshore DC Converters** the steady state tolerance on **Reactive Power** transfer to and from the **National Electricity Transmission System** shall be specified in the **Bilateral Agreement**.

(c) Subject to the provisions of CC.6.3.2(d) below, all **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters** (excluding current source technology) and **Onshore Power Park Modules** (excluding those connected to the **Total System** by a current source **Onshore DC Converter**) and **OTSDUW Plant and Apparatus** at the **Interface Point** with a **Completion Date** on or after 1 January 2006 must be capable of supplying **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus** at any point between the limits 0.95 **Power Factor** lagging and 0.95 **Power Factor** leading at the **Onshore Grid Entry Point** in England and Wales or **Interface Point** in the case of **OTSDUW Plant and Apparatus** or at the HV side of the 33/132kV or 33/275kV or 33/400kV transformer for **GB Generators** directly connected to the **Onshore Transmission System** in Scotland (or **User System Entry Point** if **Embedded**). With all **Plant** in service, the **Reactive Power** limits defined at **Rated MW** or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus** at Lagging **Power Factor** will apply at all **Active Power** output levels above 20% of the **Rated MW** or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus** output as defined in Figure 1. With all **Plant** in service, the **Reactive Power** limits defined at **Rated MW** at Leading **Power Factor** will apply at all **Active Power** output levels above 50% of the **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus** as defined in Figure 1. With all **Plant** in service, the **Reactive Power** limits will reduce linearly below 50% **Active Power** output as shown in Figure 1 unless the requirement to maintain the **Reactive Power** limits defined at **Rated MW** or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus** at Leading **Power Factor** down to 20% **Active Power** output is specified in the **Bilateral Agreement**. These **Reactive Power** limits will be reduced pro rata to the amount of **Plant** in service.

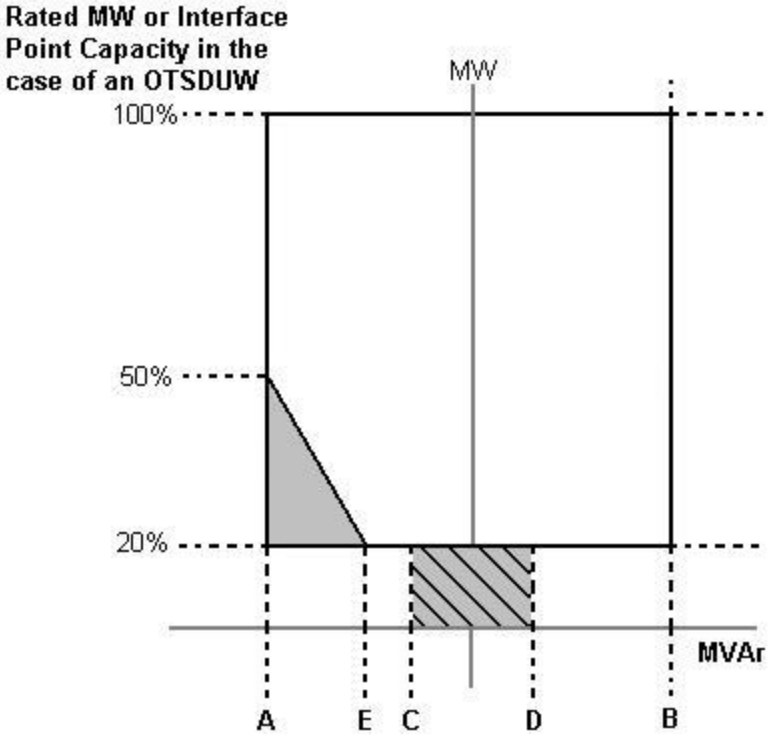

Figure 1

Point A is equivalent (in MVAr) to	0.95 leading **Power Factor** at **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**
Point B is equivalent (in MVAr) to:	0.95 lagging **Power Factor** at **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**
Point C is equivalent (in MVAr) to:	-5% of **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**
Point D is equivalent (in MVAr) to:	+5% of **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**

Point E is equivalent (in MVAr) to:	-12% of **Rated MW** output or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**

(d) All **Onshore Non-Synchronous Generating Units** and **Onshore Power Park Modules** in Scotland with a **Completion Date** after 1 April 2005 and before 1 January 2006 must be capable of supplying **Rated MW** at the range of power factors either:

(i) from 0.95 lead to 0.95 lag as illustrated in Figure 1 at the **User System Entry Point** for **Embedded GB Generators** or at the HV side of the 33/132kV or 33/275kV or 33/400kV transformer for **GB Generators** directly connected to the **Onshore Transmission System**. With all **Plant** in service, the **Reactive Power** limits defined at **Rated MW** will apply at all **Active Power** output levels above 20% of the **Rated MW** output as defined in Figure 1. These **Reactive Power** limits will be reduced pro rata to the amount of **Plant** in service, or

(ii) from 0.95 lead to 0.90 lag at the **Onshore Non-Synchronous Generating Unit** (including **Power Park Unit**) terminals. For the avoidance of doubt **GB Generators** complying with this option (ii) are not required to comply with CC.6.3.2(b).

(e) The short circuit ratio of **Offshore Synchronous Generating Units** at a **Large Power Station** shall be not less than 0.5. At a **Large Power Station** all **Offshore Synchronous Generating Units**, **Offshore Non-Synchronous Generating Units**, **Offshore DC Converters** and **Offshore Power Park Modules** must be capable of maintaining:

(i) zero transfer of **Reactive Power** at the **Offshore Grid Entry Point** for all **GB Generators** with an **Offshore Grid Entry Point** at the **LV Side of the Offshore Platform** at all **Active Power** output levels under steady state voltage conditions. The steady state tolerance on **Reactive Power** transfer to and from an **Offshore Transmission System** expressed in MVAr shall be no greater than 5% of the **Rated MW**, or

(ii) a transfer of **Reactive Power** at the **Offshore Grid Entry Point** at a value specified in the **Bilateral Agreement** that will be equivalent to zero at the **LV Side of the Offshore Platform**. In addition, the steady state tolerance on **Reactive Power** transfer to and from an **Offshore Transmission System** expressed in MVAr at the **LV Side of the Offshore Platform** shall be no greater than 5% of the **Rated MW**, or

(iii) the **Reactive Power** capability (within an associated steady state tolerance) specified in the **Bilateral Agreement** if any alternative has been agreed with the **GB Generator**, **Offshore Transmission Licensee** and **The Company**. In the case of **Generators** and/or **DC Converter** owners who are **GB Code User's** and also **Restoration Contractors** who own and operate **Anchor Plant** and/or **Top Up Restoration Plant**, or **GB Code Users** who own and operate **Plant** and **Apparatus** which is operating with a **Grid Forming Capability** in service, the **Reactive Power** capability requirements at the **Offshore Grid Entry Point** shall be agreed between the **Restoration Contractor** or **GB Code User**, the **Offshore Transmission Licensee** and **The Company** in order to facilitate the operation of an **Offshore Local Joint Restoration Plan**.

(f) In addition, a **Genset** shall meet the operational requirements as specified in BC2.A.2.6.

CC.6.3.3 Each **Generating Unit**, **DC Converter** (including an **OTSDUW DC Converter**), **Power Park Module** and/or **CCGT Module** must be capable of:

(a) continuously maintaining constant **Active Power** output for **System Frequency** changes within the range 50.5 to 49.5 Hz; and

(b) (subject to the provisions of CC.6.1.3) maintaining its **Active Power** output at a level not lower than the figure determined by the linear relationship shown in Figure 2 for **System Frequency** changes within the range 49.5 to 47 Hz, such that if the **System Frequency** drops to 47 Hz the **Active Power** output does not decrease by more than 5%. In the case of a **CCGT Module**, the above requirement shall be retained down to the **Low Frequency Relay** trip setting of 48.8 Hz, which reflects the first stage of the automatic low **Frequency Demand Disconnection** scheme notified to **Network Operators** under OC6.6.2. For **System Frequency** below that setting, the existing requirement shall be retained for a minimum period of 5 minutes while **System Frequency** remains below that setting, and special measure(s) that may be required to meet this requirement shall be kept in service during this period. After that 5 minute period, if **System Frequency** remains below that setting, the special measure(s) must be discontinued if there is a materially increased risk of the **Gas Turbine** tripping. The need for special measure(s) is linked to the inherent **Gas Turbine Active Power** output reduction caused by reduced shaft speed due to falling **System Frequency**.

Figure 2

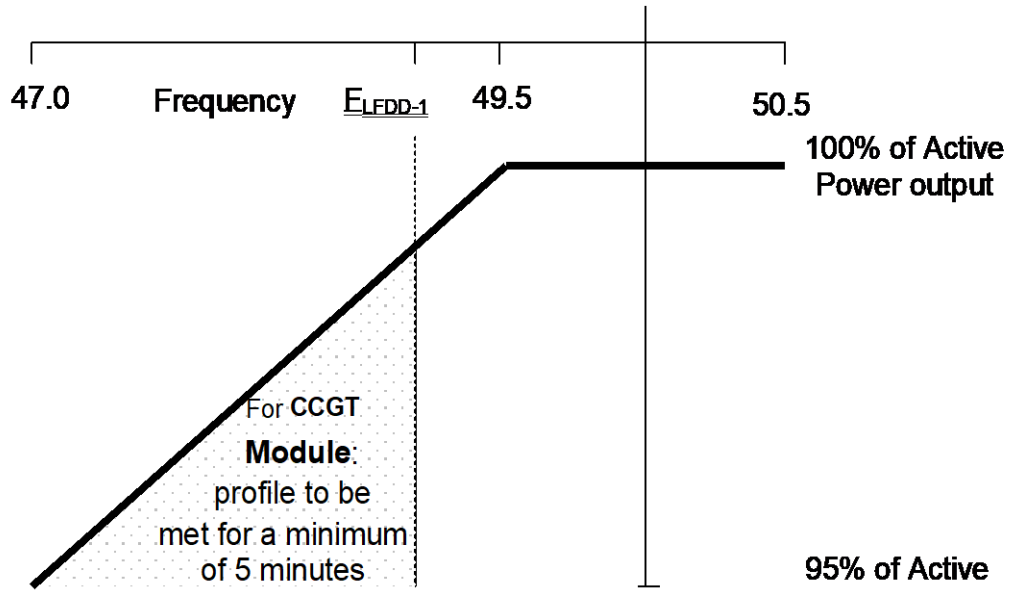

Note: **Frequency** F_{LFDD-1} **is the relay trip setting of the first stage of the Automatic Low Frequency Demand Disconnection Scheme**

(c) For the avoidance of doubt, in the case of a **Generating Unit** or **Power Park Module** (or **OTSDUW DC Converters** at the **Interface Point**) using an **Intermittent Power Source** where the mechanical power input will not be constant over time, the requirement is that the **Active Power** output shall be independent of **System Frequency** under (a) above and should not drop with **System Frequency** by greater than the amount specified in (b) above.

(d) A **DC Converter Station** must be capable of maintaining its **Active Power** input (i.e. when operating in a mode analogous to **Demand**) from the **National Electricity Transmission System** (or **User System** in the case of an **Embedded DC Converter Station**) at a level not greater than the figure determined by the linear relationship shown in Figure 3 for **System Frequency** changes within the range 49.5 to 47 Hz, such that if the **System Frequency** drops to 47.8 Hz the **Active Power** input decreases by more than 60%.

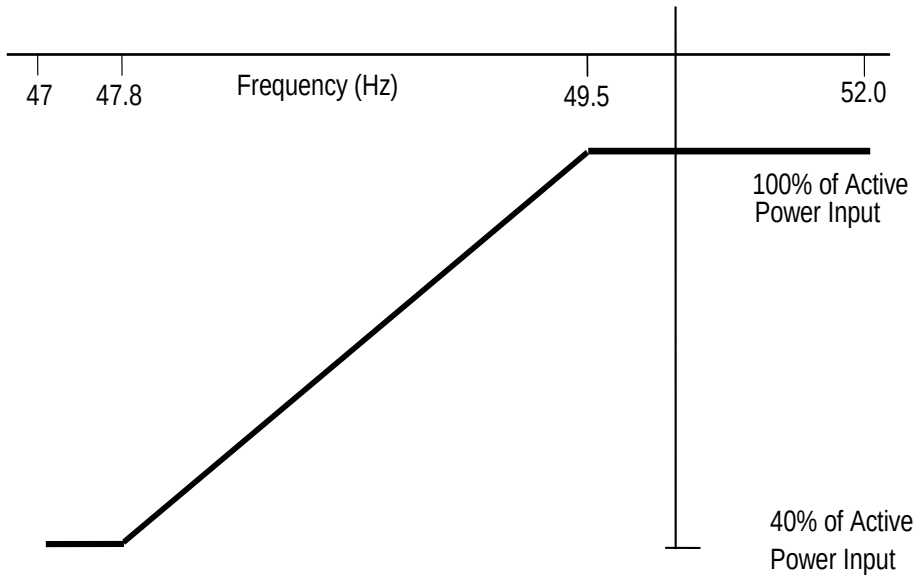

Figure 3

(e) At a **Large Power Station**, in the case of an **Offshore Generating Unit**, **Offshore Power Park Module**, **Offshore DC Converter** and **OTSDUW DC Converter**, the **GB Generator** shall comply with the requirements of CC.6.3.3. **GB Generators** should be aware that Section K of the **STC** places requirements on **Offshore Transmission Licensees** which utilise a **Transmission DC Converter** as part of their **Offshore Transmission System** to make appropriate provisions to enable **GB Generators** to fulfil their obligations.

(f) In the case of an **OTSDUW DC Converter** the **OTSDUW Plant and Apparatus** shall provide a continuous signal indicating the real time **Frequency** measured at the **Interface Point** to the **Offshore Grid Entry Point**.

CC.6.3.4 At the **Grid Entry Point**, the **Active Power** output under steady state conditions of any **Generating Unit**, **DC Converter** or **Power Park Module** directly connected to the **National Electricity Transmission System** or in the case of **OTSDUW**, the **Active Power** transfer at the **Interface Point**, under steady state conditions of any **OTSDUW Plant and Apparatus** should not be affected by voltage changes in the normal operating range specified in paragraph CC.6.1.4 by more than the change in **Active Power** losses at reduced or increased voltage. In addition:

(a) For any **Onshore Generating Unit**, **Onshore DC Converter** and **Onshore Power Park Module** or **OTSDUW Plant and Apparatus**, the **Reactive Power** output under steady state conditions should be fully available within the voltage range ±5% at 400kV, 275kV and 132kV and lower voltages, except for an **Onshore Power Park Module** or **Onshore Non-Synchronous Generating Unit** if **Embedded** at 33kV and below (or directly connected to the **Onshore Transmission System** at 33kV and below) where the requirement shown in Figure 4 applies.

(b) At a **Large Power Station**, in the case of an **Offshore Generating Unit**, **Offshore DC Converter** and **Offshore Power Park Module** where an alternative reactive capability has been agreed with the **GB Generator**, as specified in CC.6.3.2(e) (iii), the voltage / **Reactive Power** requirement shall be specified in the **Bilateral Agreement**. The **Reactive Power** output under steady state conditions shall be fully available within the voltage range ±5% at 400kV, 275kV and 132kV and lower voltages.

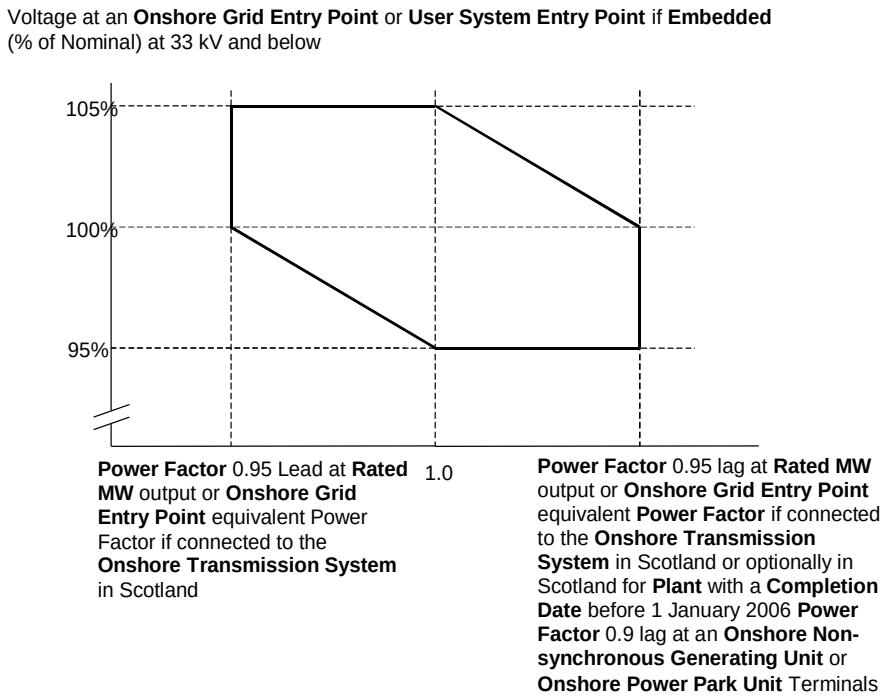

Figure 4

CC.6.3.5 System Restoration

CC.6.3.5.1 It is an essential requirement that **The Company** has a means of implementing **System Restoration** in accordance with the requirements of the **Electricity System Restoration Standard**. This is facilitated by agreeing contracts with **Restoration Contractors** who have **Plant** at a number of strategically located sites. In the case of **Restoration Contractors** who are party to a **Distribution Restoration Zone Plan**, **The Company** shall agree the requirements with the relevant **Network Operator** and **Restoration Contractors**.

CC.6.3.5.2 A **GBGF-I** designed with an **Anchor Plant Capability** will also be capable of satisfying the relevant **Grid Forming Capability** requirements defined in ECC.6.3.19 as agreed with **The Company**.

CC.6.3.5.3 **Restoration Contractors** who are **Offshore Generators** and **Transmission DC Converter** owners who are part of an **Offshore Local Joint Restoration Plan**, shall ensure their **Plant** and **Apparatus** is designed to satisfy the requirements of CC.7.10 and CC.7.11.

Control Arrangements

CC.6.3.6 (a) Each:

(i) **Offshore Generating Unit** in a **Large Power Station** or **Onshore Generating Unit**; or,

(ii) **Onshore DC Converter** with a **Completion Date** on or after 1 April 2005 or **Offshore DC Converter** at a **Large Power Station**; or,

(iii) **Onshore Power Park Module** in England and Wales with a **Completion Date** on or after 1 January 2006; or,

(iv) **Onshore Power Park Module** in operation in Scotland on or after 1 January 2006 (with a **Completion Date** after 1 July 2004 and in a **Power Station** with a **Registered Capacity** of 50MW or more); or,

(v) **Offshore Power Park Module** in a **Large Power Station** with a **Registered Capacity** of 50MW or more;

must be capable of contributing to **Frequency** control by continuous modulation of **Active Power** supplied to the **National Electricity Transmission System** or the **User System** in which it is **Embedded**. For the avoidance of doubt, each **OTSDUW DC Converter** shall provide each **GB Code User** in respect of its **Offshore Power Stations** connected to and/or using an **Offshore Transmission System** a continuous signal indicating the real time **Frequency** measured at the **Transmission Interface Point**.

(b) Each:

(i) **Onshore Generating Unit**; or,

(ii) **Onshore DC Converter** (with a **Completion Date** on or after 1 April 2005 excluding current source technologies); or

(iii) **Onshore Power Park Module** in England and Wales with a **Completion Date** on or after 1 January 2006; or,

(iv) **Onshore Power Park Module** in Scotland irrespective of **Completion Date**; or,

(v) **Offshore Generating Unit** at a **Large Power Station**, **Offshore DC Converter** at a **Large Power Station** or **Offshore Power Park Module** at a **Large Power Station** which provides a reactive range beyond the minimum requirements specified in CC.6.3.2(e) (iii); or,

(vi) **OTSDUW Plant and Apparatus** at a **Transmission Interface Point**

must be capable of contributing to voltage control by continuous changes to the **Reactive Power** supplied to the **National Electricity Transmission System** or the **User System** in which it is **Embedded**.

CC.6.3.7 (a) Each **Generating Unit**, **DC Converter** or **Power Park Module** (excluding **Onshore Power Park Modules** in Scotland with a **Completion Date** before 1 July 2004 or **Onshore Power Park Modules** in a **Power Station** in Scotland with a **Registered Capacity** less than 50MW or **Offshore Power Park Modules** in a **Large Power Station** located **Offshore** with a **Registered Capacity** less than 50MW) must be fitted with a fast acting proportional **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device to provide **Frequency** response under normal operational conditions in accordance with **Balancing Code 3** (**BC3**). In the case of a **Power Park Module** the **Frequency** or speed control device(s) may be on the **Power Park Module** or on each individual **Power Park Unit** or be a combination of both. The **Frequency** control device(s) (or speed governor(s)) must be designed and operated to the appropriate:

(i) **European Specification**; or

(ii) in the absence of a relevant **European Specification**, such other standard which is in common use within the European Community (which may include a manufacturer specification);

as at the time when the installation of which it forms part was designed or (in the case of modification or alteration to the **Frequency** control device (or turbine speed governor)) when the modification or alteration was designed.

The **European Specification** or other standard utilised in accordance with sub-paragraph CC.6.3.7 (a) (ii) will be notified to **The Company** by the **GB Generator** or **DC Converter Station** owner or, in the case of an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to a **Bilateral Agreement**, the relevant **Network Operator**:

(i) as part of the application for a **Bilateral Agreement**; or

(ii) as part of the application for a varied **Bilateral Agreement**; or

(iii) in the case of an **Embedded Development**, within 28 days of entry into the **Embedded Development Agreement** (or such later time as agreed with **The Company**); or

(iv) as soon as possible prior to any modification or alteration to the **Frequency** control device (or governor); and

(b) The **Frequency** control device (or speed governor) in co-ordination with other control devices must control the **Generating Unit**, **DC Converter** or **Power Park Module Active Power Output** with stability over the entire operating range of the **Generating Unit**, **DC Converter** or **Power Park Module**; and

(c) The **Frequency** control device (or speed governor) must meet the following minimum requirements:

(i) Where a **Generating Unit**, **DC Converter** or **Power Park Module** becomes isolated from the rest of the **Total System** but is still supplying **Customers**, the **Frequency** control device (or speed governor) must also be able to control **System Frequency** below 52Hz unless this causes the **Generating Unit**, **DC Converter** or **Power Park Module** to operate below its **Designed Minimum Operating Level** when it is possible that it may, as detailed in BC 3.7.3, trip after a time. For the avoidance of doubt, the **Generating Unit**, **DC Converter** or **Power Park Module** is only required to operate within the **System Frequency** range 47 - 52 Hz as defined in CC.6.1.3;

(ii) the **Frequency** control device (or speed governor) must be capable of being set so that it operates with an overall speed **Droop** of between 3% and 5%. For the avoidance of doubt, in the case of a **Power Park Module** the speed **Droop** should be equivalent of a fixed setting between 3% and 5% applied to each **Power Park Unit** in service;

(iii) in the case of all **Generating Units**, **DC Converter** or **Power Park Module** other than the **Steam Unit** within a **CCGT Module** the **Frequency** control device (or speed governor) deadband should be no greater than 0.03Hz (for the avoidance of doubt, ±0.015Hz). In the case of the **Steam Unit** within a **CCGT Module**, the speed **Governor Deadband** should be set to an appropriate value consistent with the requirements of CC.6.3.7(c)(i) and the requirements of BC3.7.2 for the provision of **Limited High Frequency Response**;

For the avoidance of doubt, the minimum requirements in (ii) and (iii) for the provision of **System Ancillary Services** do not restrict the negotiation of **Commercial Ancillary Services** between **The Company** and the **GB Code User** using other parameters; and

(d) A facility to modify, so as to fulfil the requirements of the **Balancing Codes**, the **Target Frequency** setting either continuously or in a maximum of 0.05 Hz steps over at least the range 50 ±0.1 Hz should be provided in the unit load controller or equivalent device.

(e) (i) Each **Onshore Generating Unit** and/or **CCGT Module** which has a **Completion Date** after 1 January 2001 in England and Wales, and after 1 April 2005 in Scotland, must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix 3.

(ii) Each **DC Converter** at a **DC Converter Station** which has a **Completion Date** on or after 1 April 2005 and each **Offshore DC Converter** at a **Large Power Station** must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix 3.

(iii) Each **Onshore Power Park Module** in operation in England and Wales with a **Completion Date** on or after 1 January 2006 must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix 3.

(iv) Each **Onshore Power Park Module** in operation on or after 1 January 2006 in Scotland (with a **Completion Date** on or after 1 April 2005 and a **Registered Capacity** of 50MW or more) must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix 3.

(v) Each **Offshore Generating Unit** in a **Large Power Station** must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix 3.

(vi) Each **Offshore Power Park Module** in a **Large Power Station** with a **Registered Capacity** of 50 MW or greater, must be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix

3.

(vii) Subject to the requirements of CC.6.3.7(e), **Offshore Generating Units** at a **Large Power Station**, **Offshore Power Park Modules** at a **Large Power Station** and **Offshore DC Converters** in a **Large Power Station** shall comply with the requirements of CC.6.3.7. **GB Generators** should be aware that Section K of the **STC** places requirements on **Offshore Transmission Licensees** which utilise a **Transmission DC Converter** as part of their **Offshore Transmission System** to make appropriate provisions to enable **GB Generators** to fulfil their obligations.

(viii) Each **OTSDUW DC Converter** must be capable of providing a continuous signal indicating the real time **Frequency** measured at the **Interface Point** to the **Offshore Grid Entry Point**.

(f) For the avoidance of doubt, the requirements of Appendix 3 do not apply to:

(i) **Generating Units** and/or **CCGT Modules** which have a **Completion Date** before 1 January 2001 in England and Wales, and before 1 April 2005 in Scotland, for whom the remaining requirements of this clause CC.6.3.7 shall continue to apply unchanged: or

(ii) **DC Converters** at a **DC Converter Station** which have a **Completion Date** before 1 April 2005; or

(iii) **Onshore Power Park Modules** in England and Wales with a **Completion Date** before 1 January 2006 for whom only the requirements of **Limited Frequency Sensitive Mode** (BC3.5.2) operation shall apply; or

(iv) **Onshore Power Park Modules** in operation in Scotland before 1 January 2006 for whom only the requirements of **Limited Frequency Sensitive Mode** (BC3.5.2) operation shall apply; or

(v) **Onshore Power Park Modules** in operation after 1 January 2006 in Scotland which have a **Completion Date** before 1 April 2005 for whom the remaining requirements of this clause CC.6.3.7 shall continue to apply unchanged; or

(vi) **Offshore Power Park Modules** which are in a **Large Power Station** with a **Registered Capacity** less than 50MW for whom only the requirements of **Limited Frequency Sensitive Mode** (BC3.5.2) operation shall apply; or

(g) **Restoration Contractors** shall be capable of operating their **Generating Units** or **DC Converters** or **Power Park Modules** such that the **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device can be switched to **Frequency** control only with no load influence, during the early stages of a **System Restoration** whilst in island operation.

(h) **Generators** and **DC Converter** owners shall advise **The Company** of the capability of operating their **Generating Units** or **Power Park Modules** or **DC Converters** such that the **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device can be switched to **Frequency** control only with no load influence, during the early stages of **System Restoration** whilst in island operation. If there is a suitable capability, **The Company** and the **User** shall agree on how it shall be used and kept available.

(i) In addition to the requirements of CC.6.3.7 (g) and CC.6.3.7(h) the following shall apply:-

(i) Changes to any control schemes and settings identified from CC.6.3.7(g) and (h) shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** as recorded in the **Restoration Plan**.

(ii) During **System Restoration**, any changes to the schemes and settings defined in CC.6.3.7(g) and (h) of the different control devices of the **Generating Unit** or **Power Park Module** or **Restoration Contractor's Plant** or **DC Converter** shall be coordinated and agreed between the **Relevant Transmission Licensee**, the **GB Generator**, **Restoration Contractor** and **DC Converter** owner as part of a **Restoration Plan**.

<u>Excitation and Voltage Control Performance Requirements</u>

CC.6.3.8 (a) Excitation and voltage control performance requirements applicable to **Onshore Generating Units**, **Onshore Power Park Modules**, **Onshore DC Converters** and **OTSDUW Plant and Apparatus**.

(i) A continuously-acting automatic excitation control system is required to provide constant terminal voltage control of the **Onshore Synchronous Generating Unit** without instability over the entire operating range of the **Onshore Generating Unit**.

(ii) In respect of **Onshore Synchronous Generating Units** with a **Completion Date** before 1 January 2009, the requirements for excitation control facilities, including **Power System Stabilisers**, where in **The Company's** view these are necessary for system reasons, will be specified in the **Bilateral Agreement**. If any **Modification** to the excitation control facilities of such **Onshore Synchronous Generating Units** is made on or after 1 January 2009 the requirements that shall apply may be specified in the **Bilateral Agreement** as varied. To the extent that the **Bilateral Agreement** does not specify, the requirements given or referred to in CC.A.6 shall apply. The performance requirements for a continuously acting automatic excitation control system that shall be complied with by the **GB Code User** in respect of such **Onshore Synchronous Generating Units** with a **Completion Date** on or after 1 January 2009 are given or referred to in CC.A.6. Reference is made to on-load commissioning witnessed by **The Company** in BC2.11.2.

(iii) In the case of an **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** at the **Interface Point** a continuously-acting automatic control system is required to provide control of the voltage (or zero transfer of **Reactive Power** as applicable to CC.6.3.2) at the **Onshore Grid Entry Point** or **User System Entry Point** or in the case of **OTSDUW Plant and Apparatus** at the **Interface Point** without instability over the entire operating range of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **Onshore Power Park Module** or **OTSDUW Plant and Apparatus**. Any **Plant** or **Apparatus** used in the provisions of such voltage control within an **Onshore Power Park Module** may be located at the **Power Park Unit** terminals, an appropriate intermediate busbar or the **Connection Point**. **OTSDUW Plant and Apparatus** used in the provision of such voltage control may be located at the **Offshore Grid Entry Point**, an appropriate intermediate busbar or at the **Interface Point**. In the case of an **Onshore Power Park Module** in Scotland with a **Completion Date** before 1 January 2009, voltage control may be at the **Power Park Unit** terminals, an appropriate intermediate busbar or the **Connection Point** as specified in the **Bilateral Agreement**. When operating below 20% **Rated MW** the automatic control system may continue to provide voltage control utilising any available reactive capability. If voltage control is not being provided, the automatic control system shall be designed to ensure a smooth transition between the shaded area bound by CD and the non-shaded area bound by AB in Figure 1 of CC.6.3.2 (c).

(iv) The performance requirements for a continuously acting automatic voltage control system in respect of **Onshore Power Park Modules**, **Onshore Non-Synchronous Generating Units** and **Onshore DC Converters** with a **Completion Date** before 1 January 2009 will be specified in the **Bilateral Agreement**. If any **Modification** to the continuously acting automatic voltage control system of such **Onshore Power Park Modules**, **Onshore Non-Synchronous Generating Units** and **Onshore DC Converters** is made on or after 1 January 2009 the requirements that shall apply may be specified in the **Bilateral Agreement** as varied. To the extent that the **Bilateral Agreement** does not specify, the requirements given or referred to in CC.A.7 shall apply. The performance requirements for a continuously acting automatic voltage control system that shall be complied with by the **GB Code User** in respect of **Onshore Power Park Modules**, **Onshore Non-Synchronous Generating Units** and **Onshore DC Converters** or **OTSDUW Plant and Apparatus** at the **Interface Point** with a **Completion Date** on or after 1 January 2009 are given or referred to in CC.A.7.

(v) Unless otherwise required for testing in accordance with OC5.A.2, the automatic excitation control system of an **Onshore Synchronous Generating Unit** shall always be operated such that it controls the **Onshore Synchronous Generating Unit** terminal voltage to a value that is

- equal to its rated value; or
- only where provisions have been made in the **Bilateral Agreement**, greater than its rated value.

(vi) In particular, other control facilities, including constant **Reactive Power** output control modes and constant **Power Factor** control modes (but excluding VAr limiters) are not required. However, if present in the excitation or voltage control system they will be disabled unless the **Bilateral Agreement** records otherwise. Operation of such control facilities will be in accordance with the provisions contained in **BC2**.

(b) Excitation and voltage control performance requirements applicable to **Offshore Generating Units** at a **Large Power Station**, **Offshore Power Park Modules** at a **Large Power Station** and **Offshore DC Converters** at a **Large Power Station**.

A continuously acting automatic control system is required to provide either:

(i) control of **Reactive Power** (as specified in CC.6.3.2(e) (i) (ii)) at the **Offshore Grid Entry Point** without instability over the entire operating range of the **Offshore Generating Unit**, **Offshore DC Converter** or **Offshore Power Park Module**. The performance requirements for this automatic control system will be specified in the **Bilateral Agreement** or;

(ii) where an alternative reactive capability has been specified in the **Bilateral Agreement**, in accordance with CC.6.3.2 (e) (iii), the **Offshore Generating Unit**, **Offshore Power Park Module** or **Offshore DC Converter** will be required to control voltage and / or **Reactive Power** without instability over the entire operating range of the **Offshore Generating Unit**, **Offshore Power Park Module** or **Offshore DC Converter**. The performance requirements of the control system will be specified in the **Bilateral Agreement**.

In addition to CC.6.3.8(b) (i) and (ii) the requirements for excitation control facilities, including **Power System Stabilisers**, where in **The Company's** view these are necessary for system reasons, will be specified in the **Bilateral Agreement**. Reference is made to on-load commissioning witnessed by **The Company** in BC2.11.2.

Steady state Load Inaccuracies

CC.6.3.9 The standard deviation of **Load** error at steady state **Load** over a 30 minute period must not exceed 2.5 per cent of a **Genset's Registered Capacity**. Where a **Genset** is instructed to **Frequency** sensitive operation, allowance will be made in determining whether there has been an error according to the governor droop characteristic registered under the **PC**.

For the avoidance of doubt in the case of a **Power Park Module** allowance will be made for the full variation of mechanical power output.

Negative Phase Sequence Loadings

CC.6.3.10 In addition to meeting the conditions specified in CC.6.1.5(b), each **Synchronous Generating Unit** will be required to withstand, without tripping, the negative phase sequence loading incurred by clearance of a close-up phase-to-phase fault, by **System Back-Up Protection** on the **National Electricity Transmission System** or **User System** located **Onshore** in which it is **Embedded**.

Neutral Earthing

CC.6.3.11 At nominal **System** voltages of 132kV and above the higher voltage windings of a transformer of a **Generating Unit**, **DC Converter**, **Power Park Module** or transformer resulting from **OTSDUW** must be star connected with the star point suitable for connection to earth. The earthing and lower voltage winding arrangement shall be such as to ensure that the **Earth Fault Factor** requirement of paragraph CC.6.2.1.1 (b) will be met on the **National Electricity Transmission System** at nominal **System** voltages of 132kV and above.

Frequency Sensitive Relays

CC.6.3.12 As stated in CC.6.1.3, the **System Frequency** could rise to 52Hz or fall to 47Hz. Each **Generating Unit**, **DC Converter**, **OTSDUW Plant and Apparatus**, **Power Park Module** or any constituent element must continue to operate within this **Frequency** range for at least the periods of time given in CC.6.1.3 unless **The Company** has agreed to any **Frequency**-level relays and/or rate-of-change-of-**Frequency** relays which will trip such **Generating Unit**, **DC Converter**, **OTSDUW Plant and Apparatus**, **Power Park Module** and any constituent element within this **Frequency** range, under the **Bilateral Agreement**.

CC.6.3.13 **GB Generators** (including in respect of **OTSDUW Plant and Apparatus**) and **DC Converter Station** owners will be responsible for protecting all their **Generating Units** (and **OTSDUW Plant and Apparatus**), **DC Converters** or **Power Park Modules** against damage should **Frequency** excursions outside the range 52Hz to 47Hz ever occur. Should such excursions occur, it is up to the **GB Generator** or **DC Converter Station** owner to decide whether to disconnect their **Apparatus** for reasons of safety of **Apparatus**, **Plant** and/or personnel.

CC.6.3.14 It may be agreed in the **Bilateral Agreement** that a **Genset** shall have a **Fast-Start Capability**. Such **Gensets** may be used for **Operating Reserve** and their **Start-Up** may be initiated by **Frequency**-level relays with settings in the range 49Hz to 50Hz as specified pursuant to **OC2**.

CC.6.3.15 Fault Ride Through

This section sets out the fault ride through requirements on **Generating Units**, **Power Park Modules**, **DC Converters** and **OTSDUW Plant and Apparatus**. **Onshore Generating Units**, **Onshore Power Park Modules**, **Onshore DC Converters** (including **Embedded Medium Power Stations** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement** and with an **Onshore User System Entry Point** (irrespective of whether they are located **Onshore** or **Offshore**)) and **OTSDUW Plant and Apparatus** are required to operate through **System** faults and disturbances as defined in CC.6.3.15.1 (a), CC.6.3.15.1 (b) and CC.6.3.15.3. **Offshore GB Generators** in respect of **Offshore Generating Units** at a **Large Power Station**, **Offshore Power Park Modules** at a **Large Power Station** and **DC Converter Station** owners in respect of **Offshore DC Converters** at a **Large Power Station** shall have the option of meeting either:

(i) CC.6.3.15.1 (a), CC.6.3.15.1 (b) and CC.6.3.15.3, or:

(ii) CC.6.3.15.2 (a), CC.6.3.15.2 (b) and CC.6.3.15.3

Offshore GB Generators and **Offshore DC Converter** owners, should notify **The Company** which option they wish to select within 28 days (or such longer period as **The Company** may agree, in any event this being no later than 3 months before the **Completion Date** of the offer for a final **CUSC Contract** which would be made following the appointment of the **Offshore Transmission Licensee**).

For up to 30 minutes following such a fault or disturbance **Generating Units**, **Power Park Modules**, **DC Converters** and **OTSDUW Plant and Apparatus** are required to remain connected and stable provided **System** operating conditions have returned within those specified in CC.6.1**.**

CC.6.3.15.1 Fault Ride through applicable to **Generating Units**, **Power Park Modules** and **DC Converters** and **OTSDUW Plant and Apparatus**

(a) Short circuit faults on the **Onshore Transmission System** (which may include an **Interface Point**) at **Supergrid Voltage** up to 140ms in duration.

(i) Each **Generating Unit**, **DC Converter**, or **Power Park Module** and any constituent **Power Park Unit** thereof and **OTSDUW Plant and Apparatus** shall remain transiently stable and connected to the **System** without tripping of any **Generating Unit**, **DC Converter** or **Power Park Module** and / or any constituent **Power Park Unit**, **OTSDUW Plant and Apparatus**, and for **Plant and Apparatus** installed on or after 1 December 2017, reactive compensation equipment, for a close-up solid three-phase short circuit fault or any unbalanced short circuit fault on the **Onshore Transmission System** (including in respect of **OTSDUW Plant and Apparatus**, the **Interface Point**) operating at **Supergrid Voltages** for a total fault clearance time of up to 140 ms. A solid three-phase or unbalanced earthed fault results in zero voltage on the faulted phase(s) at the point of fault. The duration of zero voltage is dependent on local **Protection** and circuit breaker operating times. This duration and the fault clearance times will be specified in the **Bilateral Agreement**. Following fault

clearance, recovery of the **Supergrid Voltage** on the **Onshore Transmission System** to 90% may take longer than 140ms as illustrated in Appendix 4A Figures CC.A.4A.1 (a) and (b). It should be noted that in the case of an **Offshore Generating Unit**, **Offshore DC Converter** or **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) which is connected to an **Offshore Transmission System** which includes a **Transmission DC Converter** as part of that **Offshore Transmission System**, the **Offshore Grid Entry Point** voltage may not indicate the presence of a fault on the **Onshore Transmission System**. The fault will affect the level of **Active Power** that can be transferred to the **Onshore Transmission System** and therefore subject the **Offshore Generating Unit**, **Offshore DC Converter** or **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) to a load rejection.

(ii) Each **Generating Unit**, **Power Park Module** and **OTSDUW Plant and Apparatus**, shall be designed such that upon both clearance of the fault on the **Onshore Transmission System** as detailed in CC.6.3.15.1 (a) (i) and within 0.5 seconds of the restoration of the voltage at the **Onshore Grid Entry Point** (for **Onshore Generating Units** or **Onshore Power Park Modules**) or **Interface Point** (for **Offshore Generating Units**, **Offshore Power Park Modules** or **OTSDUW Plant and Apparatus**) to the minimum levels specified in CC.6.1.4 (or within 0.5 seconds of restoration of the voltage at the **User System Entry Point** to 90% of nominal or greater if **Embedded**), **Active Power** output or in the case of **OTSDUW Plant and Apparatus**, **Active Power** transfer capability, shall be restored to at least 90% of the level available immediately before the fault. Once the **Active Power** output, or in the case of **OTSDUW Plant and Apparatus**, **Active Power** transfer capability, has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped

During the period of the fault as detailed in CC.6.3.15.1 (a) (i) for which the voltage at the **Grid Entry Point** (or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) is outside the limits specified in CC.6.1.4, each **Generating Unit** or **Power Park Module** or **OTSDUW Plant and Apparatus** shall generate maximum reactive current without exceeding the transient rating limit of the **Generating Unit**, **OTSDUW Plant and Apparatus** or **Power Park Module** and / or any constituent **Power Park Unit** or reactive compensation equipment. For **Plant and Apparatus** installed on or after 1 December 2017, switched reactive compensation equipment (such as mechanically switched capacitors and reactors) shall be controlled such that it is not switched in or out of service during the fault but may act to assist in post fault voltage recovery.

(iii) Each **DC Converter** shall be designed to meet the **Active Power** recovery characteristics (and **OTSDUW DC Converter** shall be designed to meet the **Active Power** transfer capability at the **Interface Point**) as specified in the **Bilateral Agreement** upon clearance of the fault on the **Onshore Transmission System** as detailed in CC.6.3.15.1 (a) (i).

(b) **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration

(1b) Requirements applicable to **Synchronous Generating Units** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

In addition to the requirements of CC.6.3.15.1 (a) each **Synchronous Generating Unit**, each with a **Completion Date** on or after **1 April 2005** shall:

(i) remain transiently stable and connected to the **System** without tripping of any **Synchronous Generating Unit** for balanced **Supergrid Voltage** dips and associated durations on the **Onshore Transmission System** (which could be at the **Interface Point**) anywhere on or above the heavy black line shown in Figure 5a. Appendix 4A and Figures CC.A.4A.3.2 (a), (b) and (c) provide an explanation and illustrations of Figure 5a; and,

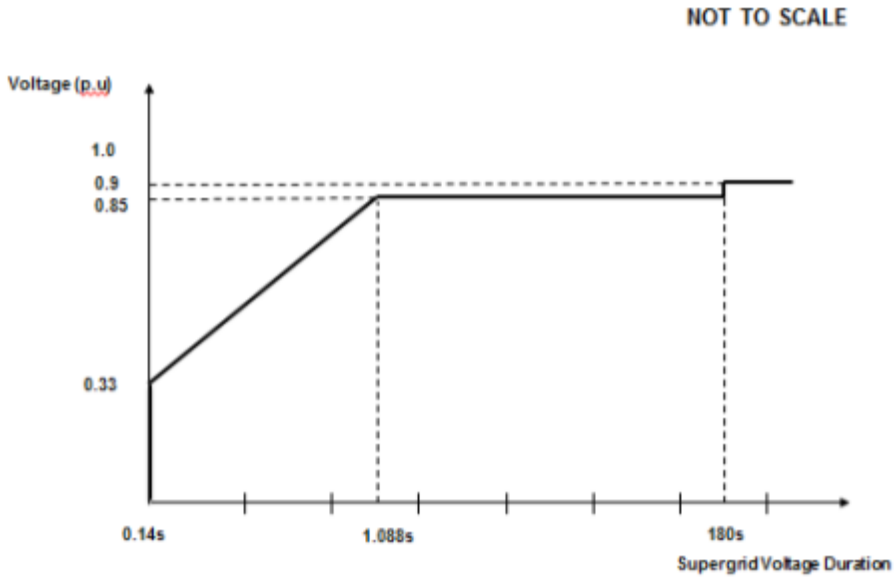

Figure 5a

(ii) provide **Active Power** output at the **Grid Entry Point**, during **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure 5a, at least in proportion to the retained balanced voltage at the **Onshore Grid Entry Point** (for **Onshore Synchronous Generating Units**) or **Interface Point** (for **Offshore Synchronous Generating Units**) (or the retained balanced voltage at the **User System Entry Point** if **Embedded**) and shall generate maximum reactive current (where the voltage at the **Grid Entry Point** is outside the limits specified in CC.6.1.4) without exceeding the transient rating limits of the **Synchronous Generating Unit** and,

(iii) restore **Active Power** output following **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure 5a, within 1 second of restoration of the voltage to 1.0p.u of the nominal voltage at the:

Onshore Grid Entry Point for directly connected **Onshore Synchronous Generating Units** or,

Interface Point for **Offshore Synchronous Generating Units** or,

User System Entry Point for **Embedded Onshore Synchronous Generating Units** or,

User System Entry Point for **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** which comprise **Synchronous Generating Units** and with an **Onshore User System Entry Point** (irrespective of whether they are located **Onshore** or **Offshore**)

to at least 90% of the level available immediately before the occurrence of the dip. Once the **Active Power** output has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped.

For the avoidance of doubt a balanced **Onshore Transmission System Supergrid Voltage** meets the requirements of CC.6.1.5 (b) and CC.6.1.6.

(2b) Requirements applicable to **OTSDUW Plant and Apparatus** and **Power Park Modules** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration

In addition to the requirements of CC.6.3.15.1 (a) each **OTSDUW Plant and Apparatus** or each **Power Park Module** and / or any constituent **Power Park Unit**, each with a **Completion Date** on or after the 1 April 2005 shall:

(i) remain transiently stable and connected to the **System** without tripping of any **OTSDUW Plant and Apparatus**, or **Power Park Module** and / or any constituent **Power Park Unit**, for balanced **Supergrid Voltage** dips and associated durations on the **Onshore Transmission System** (which could be at the **Interface Point**) anywhere on or above the heavy black line shown in Figure 5b. Appendix 4A and Figures CC.A.4A.3.4 (a), (b) and (c) provide an explanation and illustrations of Figure 5b; and,

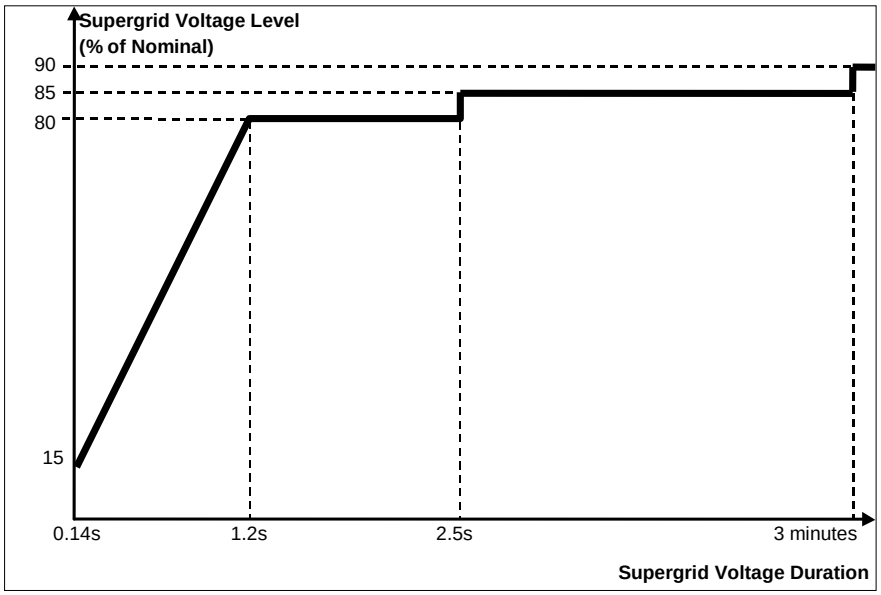

Figure 5b

(ii) provide **Active Power** output at the **Grid Entry Point** or in the case of an **OTSDUW**, **Active Power** transfer capability at the **Transmission Interface Point**, during **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure 5b, at least in proportion to the retained balanced voltage at the **Onshore Grid Entry Point** (for **Onshore Power Park Modules**) or **Interface Point** (for **OTSDUW Plant and Apparatus** and **Offshore Power Park Modules**) (or the retained balanced voltage at the **User System Entry Point** if **Embedded**) except in the case of a **Non-Synchronous Generating Unit** or **OTSDUW Plant and Apparatus** or **Power Park Module** where there has been a reduction in the **Intermittent Power Source** or in the case of **OTSDUW Active Power** transfer capability in the time range in Figure 5b that restricts the **Active Power** output or in the case of an **OTSDUW Active Power** transfer capability below this level and shall generate maximum reactive current (where the voltage at the **Grid Entry Point**, or in the case of an **OTSDUW Plant and Apparatus**, the **Interface Point** voltage, is outside the limits specified in CC.6.1.4) without exceeding the transient rating limits of the **OTSDUW Plant and Apparatus** or **Power Park Module** and any constituent **Power Park Unit**; and,

(iii) restore **Active Power** output (or, in the case of **OTSDUW**, **Active Power** transfer capability), following **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure 5b, within 1 second of restoration of the voltage at the:

Onshore Grid Entry Point for directly connected **Onshore Power Park Modules** or,

Interface Point for **OTSDUW Plant and Apparatus** and **Offshore Power Park Modules** or,

User System Entry Point for **Embedded Onshore Power Park Modules** or,

User System Entry Point for **Embedded Medium Power Stations** which comprise **Power Park Modules** not subject to a **Bilateral Agreement** and with an **Onshore**

User System Entry Point (irrespective of whether they are located **Onshore** or **Offshore**)

to the minimum levels specified in CC.6.1.4 to at least 90% of the level available immediately before the occurrence of the dip except in the case of a **Non-Synchronous Generating Unit**, **OTSDUW Plant and Apparatus** or **Power Park Module** where there has been a reduction in the **Intermittent Power Source** in the time range in Figure 5b that restricts the **Active Power** output or, in the case of **OTSDUW**, **Active Power** transfer capability below this level. Once the **Active Power** output or, in the case of **OTSDUW**, **Active Power** transfer capability has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped.

For the avoidance of doubt a balanced **Onshore Transmission System Supergrid Voltage** meets the requirements of CC.6.1.5 (b) and CC.6.1.6.

CC.6.3.15.2 Fault Ride Through applicable to **Offshore Generating Units** at a **Large Power Station**, **Offshore Power Park Modules** at a **Large Power Station** and **Offshore DC Converters** at a **Large Power Station** who choose to meet the fault ride through requirements at the **LV side of the Offshore Platform**

(a) Requirements on **Offshore Generating Units**, **Offshore Power Park Modules** and **Offshore DC Converters** to withstand voltage dips on the **LV Side of the Offshore Platform** for up to 140ms in duration as a result of faults and / or voltage dips on the **Onshore Transmission System** operating at **Supergrid Voltage**.

(i) Each **Offshore Generating Unit**, **Offshore DC Converter**, or **Offshore Power Park Module** and any constituent **Power Park Unit** thereof shall remain transiently stable and connected to the **System** without tripping of any **Offshore Generating Unit**, or **Offshore DC Converter** or **Offshore Power Park Module** and / or any constituent **Power Park Unit** or, in the case of **Plant and Apparatus** installed on or after 1 December 2017, reactive compensation equipment, for any balanced or unbalanced voltage dips on the **LV Side of the Offshore Platform** whose profile is anywhere on or above the heavy black line shown in Figure 6. For the avoidance of doubt, the profile beyond 140ms in Figure 6 shows the minimum recovery in voltage that will be seen by the **Generator's Plant** and **Apparatus** following clearance of the fault at 140ms. Appendix 4B and Figures CC.A.4B.2 (a) and (b) provide further illustration of the voltage recovery profile that may be seen. It should be noted that in the case of an **Offshore Generating Unit**, **Offshore DC Converter** or **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) which is connected to an **Offshore Transmission System** which includes a **Transmission DC Converter** as part of that **Offshore Transmission System**, the **Offshore Grid Entry Point** voltage may not indicate the presence of a fault on the **Onshore Transmission System**. The voltage dip will affect the level of **Active Power** that can be transferred to the **Onshore Transmission System** and therefore subject the **Offshore Generating Unit**, **Offshore DC Converter** or **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) to a load rejection.

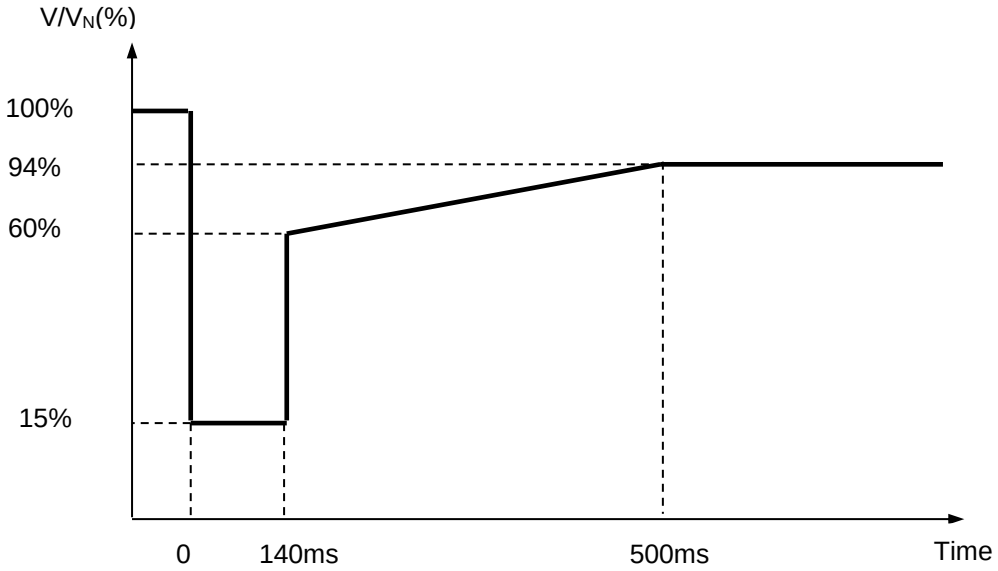

Figure 6

V/V_N is the ratio of the actual voltage on one or more phases at the **LV Side of the Offshore Platform** to the nominal voltage of the **LV Side of the Offshore Platform**.

(ii) Each **Offshore Generating Unit**, or **Offshore Power Park Module** and any constituent **Power Park Unit** thereof shall provide **Active Power** output, during voltage dips on the **LV Side of the Offshore Platform** as described in Figure 6, at least in proportion to the retained voltage at the **LV Side of the Offshore Platform** except in the case of an **Offshore Non-Synchronous Generating Unit** or **Offshore Power Park Module** where there has been a reduction in the **Intermittent Power Source** in the time range in Figure 6 that restricts the **Active Power** output below this level and shall generate maximum reactive current without exceeding the transient rating limits of the **Offshore Generating Unit** or **Offshore Power Park Module** and any constituent **Power Park Unit** or, in the case of **Plant and Apparatus** installed on or after 1 December 2017, reactive compensation equipment. Once the **Active Power** output has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped

and;

(iii) Each **Offshore DC Converter** shall be designed to meet the **Active Power** recovery characteristics as specified in the **Bilateral Agreement** upon restoration of the voltage at the **LV Side of the Offshore Platform**.

(b) Requirements of **Offshore Generating Units**, **Offshore Power Park Modules**, to withstand voltage dips on the **LV Side of the Offshore Platform** greater than 140ms in duration.

(1b) Requirements applicable to **Offshore Synchronous Generating Units** to withstand voltage dips on the **LV Side of the Offshore Platform** greater than 140ms in duration.

In addition to the requirements of CC.6.3.15.2. (a) each **Offshore Synchronous Generating Unit** shall:

(i) remain transiently stable and connected to the **System** without tripping of any **Offshore Synchronous Generating Unit** for any balanced voltage dips on the **LV side of the Offshore Platform** and associated durations anywhere on or above the heavy black line

shown in Figure 7a. Appendix 4B and Figures CC.A.4B.3.2 (a), (b) and (c) provide an explanation and illustrations of Figure 7a. It should be noted that in the case of an **Offshore Synchronous Generating Unit** which is connected to an **Offshore Transmission System** which includes a **Transmission DC Converter** as part of that **Offshore Transmission System**, the **Offshore Grid Entry Point** voltage may not indicate the presence of a voltage dip on the **Onshore Transmission System**. The voltage dip will affect the level of **Active Power** that can be transferred to the **Onshore Transmission System** and therefore subject the **Offshore Generating Unit**, to a load rejection.

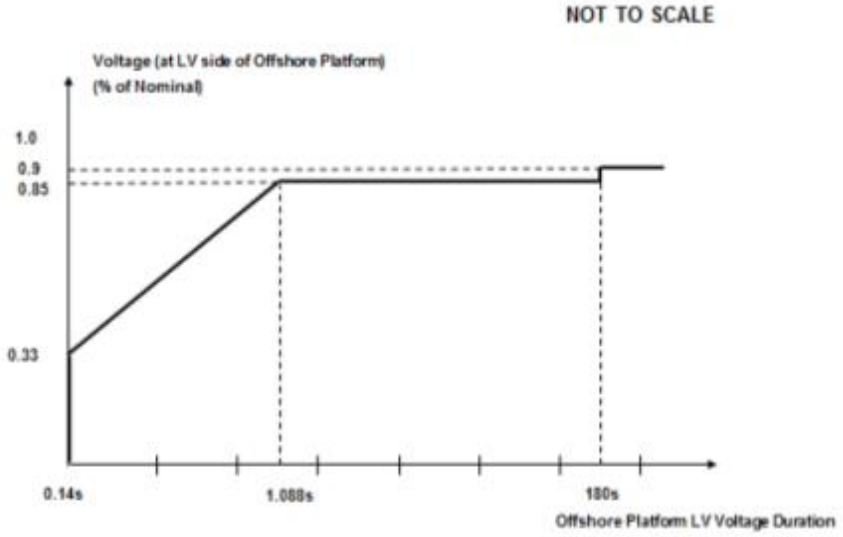

(ii) provide **Active Power** output, during voltage dips on the **LV Side of the Offshore Platform** as described in Figure 7a, at least in proportion to the retained balanced or unbalanced voltage at the **LV Side of the Offshore Platform** and shall generate maximum reactive current (where the voltage at the **Offshore Grid Entry Point** is outside the limits specified in CC.6.1.4) without exceeding the transient rating limits of the **Offshore Synchronous Generating Unit** and,

(iii) within 1 second of restoration of the voltage to 1.0p.u of the nominal voltage at the **LV Side of the Offshore Platform**, restore **Active Power** to at least 90% of the **Offshore Synchronous Generating Unit's** immediate pre-disturbed value, unless there has been a reduction in the **Intermittent Power Source** in the time range in Figure 7a that restricts the **Active Power** output below this level. Once the **Active Power** output has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped

(2b) Requirements applicable to **Offshore Power Park Modules** to withstand voltage dips on the **LV Side of the Offshore Platform** greater than 140ms in duration.

In addition to the requirements of CC.6.3.15.2. (a) each **Offshore Power Park Module** and / or any constituent **Power Park Unit**, shall:

(i) remain transiently stable and connected to the **System** without tripping of any **Offshore Power Park Module** and / or any constituent **Power Park Unit**, for any balanced voltage

dips on the **LV side of the Offshore Platform** and associated durations anywhere on or above the heavy black line shown in Figure 7b. Appendix 4B and Figures CC.A.4B.5. (a), (b) and (c) provide an explanation and illustrations of Figure 7b. It should be noted that in the case of an **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) which is connected to an **Offshore Transmission System** which includes a **Transmission DC Converter** as part of that **Offshore Transmission System**, the **Offshore Grid Entry Point** voltage may not indicate the presence of a voltage dip on the **Onshore Transmission System**. The voltage dip will affect the level of **Active Power** that can be transferred to the **Onshore Transmission System** and therefore subject the **Offshore Power Park Module** (including any **Offshore Power Park Unit** thereof) to a load rejection.

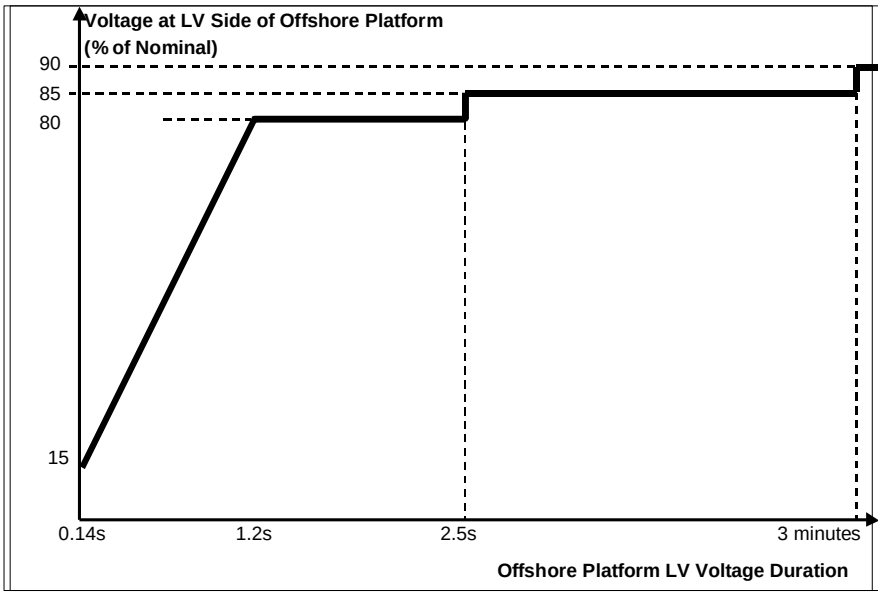

Figure 7b

(ii) provide **Active Power** output, during voltage dips on the **LV Side of the Offshore Platform** as described in Figure 7b, at least in proportion to the retained balanced or unbalanced voltage at the **LV Side of the Offshore Platform** except in the case of an **Offshore Non-Synchronous Generating Unit** or **Offshore Power Park Module** where there has been a reduction in the **Intermittent Power Source** in the time range in Figure 7b that restricts the **Active Power** output below this level and shall generate maximum reactive current (where the voltage at the **Offshore Grid Entry Point** is outside the limits specified in CC.6.1.4) without exceeding the transient rating limits of the **Offshore Power Park Module** and any constituent **Power Park Unit** or reactive compensation equipment. For **Plant and Apparatus** installed on or after 1 December 2017, switched reactive compensation equipment (such as mechanically switched capacitors and reactors) shall be controlled such that it is not switched in or out of service during the fault but may act to assist in post fault voltage recovery; and,

(iii) within 1 second of the restoration of the voltage at the **LV Side of the Offshore Platform** (to the minimum levels specified in CC.6.1.4) restore **Active Power** to at least 90% of the **Offshore Power Park Module's** immediate pre-disturbed value, unless there has been a reduction in the **Intermittent Power Source** in the time range in Figure 7b that restricts the **Active Power** output below this level. Once the **Active Power** output has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped

CC.6.3.15.3 Other Requirements

(i) In the case of a **Power Park Module** (comprising of wind-turbine generator units), the requirements in CC.6.3.15.1 and CC.6.3.15.2 do not apply when the **Power Park Module** is operating at less than 5% of its **Rated MW** or during very high wind speed conditions when more than 50% of the wind turbine generator units in a **Power Park Module** have been shut down or disconnected under an emergency shutdown sequence to protect **GB Code User's Plant** and **Apparatus**.

(ii) In addition to meeting the conditions specified in CC.6.1.5(b) and CC.6.1.6, each **Non-Synchronous Generating Unit**, **OTSDUW Plant and Apparatus** or **Power Park Module** with a **Completion Date** after 1 April 2005 and any constituent **Power Park Unit** thereof will be required to withstand, without tripping, the negative phase sequence loading incurred by clearance of a close-up phase-to-phase fault, by **System Back-Up Protection** on the **Onshore Transmission System** operating at **Supergrid Voltage**.

(iii) In the case of an **Onshore Power Park Module** in Scotland with a **Completion Date** before 1 January 2004 and a **Registered Capacity** less than 30MW, the requirements in CC.6.3.15.1 (a) do not apply. In the case of an **Onshore Power Park Module** in Scotland with a **Completion Date** on or after 1 January 2004 and before 1 July 2005 and a **Registered Capacity** less than 30MW the requirements in CC.6.3.15.1 (a) are relaxed from the minimum **Onshore Transmission System Supergrid Voltage** of zero to a minimum **Onshore Transmission System Supergrid Voltage** of 15% of nominal. In the case of an **Onshore Power Park Module** in Scotland with a **Completion Date** before 1 January 2004 and a **Registered Capacity** of 30MW and above the requirements in CC.6.3.15.1 (a) are relaxed from the minimum **Onshore Transmission System Supergrid Voltage** of zero to a minimum **Onshore Transmission System Supergrid Voltage** of 15% of nominal.

(iv) To avoid unwanted island operation, **Non-Synchronous Generating Units** in Scotland (and those directly connected to a **Scottish Offshore Transmission System**), **Power Park Modules** in Scotland (and those directly connected to a **Scottish Offshore Transmission System**), or **OTSDUW Plant and Apparatus** with an **Interface Point** in Scotland shall be tripped for the following conditions:

(1) **Frequency** above 52Hz for more than 2 seconds

(2) **Frequency** below 47Hz for more than 2 seconds

(3) Voltage as measured at the **Onshore Connection Point** or **Onshore User System Entry Point** or **Offshore Grid Entry Point** or **Interface Point** in the case of **OTSDUW Plant and Apparatus** is below 80% for more than 2.5 seconds

(4) Voltage as measured at the **Onshore Connection Point** or **Onshore User System Entry Point** or **Offshore Grid Entry Point** or **Interface Point** in the case of **OTSDUW Plant and Apparatus** is above 120% (115% for 275kV) for more than 1 second.

The times in sections (1) and (2) are maximum trip times. Shorter times may be used to protect the **Non-Synchronous Generating Units**, or **OTSDUW Plant and Apparatus** or **Power Park Modules**.

Additional Damping Control Facilities for DC Converters

CC.6.3.16 (a) **DC Converter** owners, or **GB Generators** in respect of **OTSDUW DC Converters** or **Network Operators** in the case of an **Embedded DC Converter Station** not subject to a **Bilateral Agreement** must ensure that any of their **Onshore DC Converters** or **OTSDUW DC Converters** will not cause a sub-synchronous resonance problem on the **Total System**. Each **DC Converter** or **OTSDUW DC Converter** is required to be provided with sub-synchronous resonance damping control facilities.

(b) Where specified in the **Bilateral Agreement**, each **DC Converter** or **OTSDUW DC Converter** is required to be provided with power oscillation damping or any other identified additional control facilities.

System to Generator Operational Intertripping Scheme

CC.6.3.17 **The Company** may require that a **System to Generator Operational Intertripping Scheme** be installed as part of a condition of the connection of the **GB Generator**. Scheme specific details shall be included in the relevant **Bilateral Agreement** and shall, in respect of **Bilateral Agreements** entered into on or after 16th March 2009 include the following information:

(1) the relevant category(ies) of the scheme (referred to as Category 1 Intertripping Scheme, Category 2 Intertripping Scheme, Category 3 Intertripping Scheme and Category 4 Intertripping Scheme);

(2) the **Generating Unit(s)** or **CCGT Module(**s) or **Power Park Module(s)** to be either permanently armed or that can be instructed to be armed in accordance with BC2.8;

(3) the time within which the **Generating Unit(s)** or **CCGT Module(s)** or **Power Park Module(s)** circuit breaker(s) are to be automatically tripped;

(4) the location to which the trip signal will be provided by **The Company**. Such location will be provided by **The Company** prior to the commissioning of the **Generating Unit(s)** or **CCGT Module(s)** or **Power Park Module(s)**.

Where applicable, the **Bilateral Agreement** shall include the conditions on the **National Electricity Transmission System** during which **The Company** may instruct the **System to Generator Operational Intertripping Scheme** to be armed and the conditions that would initiate a trip signal.

CC.6.3.18 The time within which the **Generating Unit(s)** or **CCGT Module** or **Power Park Module** circuit breaker(s) need to be automatically tripped is determined by the specific conditions local to the **GB Generator**. This 'time to trip' (defined as time from provision of the trip signal by **The Company** to the specified location, to circuit breaker main contact opening) can typically range from 100ms to 10sec. A longer time to trip may allow the initiation of an automatic reduction in the **Generating Unit(s)** or **CCGT Module(s)** or **Power Park Module(s)** output prior to the automatic tripping of the **Generating Unit(s)** or **CCGT Module(s)** or **Power Park Module(s)** circuit breaker. Where applicable **The Company** may provide separate trip signals to allow for either a longer or shorter 'time to trip' to be initiated.

CC.6.4 General Network Operator And Non-Embedded Customer Requirements

CC.6.4.1 This part of the **Grid Code** describes the technical and design criteria and performance requirements for **Network Operators** and **Non-Embedded Customers**.

Neutral Earthing

CC.6.4.2 At nominal **System** voltages of 132kV and above the higher voltage windings of three phase transformers and transformer banks connected to the **National Electricity Transmission System** must be star connected with the star point suitable for connection to earth. The earthing and lower voltage winding arrangement shall be such as to ensure that the **Earth Fault Factor** requirement of paragraph CC.6.2.1.1 (b) will be met on the **National Electricity Transmission System** at nominal **System** voltages of 132kV and above.

Frequency Sensitive Relays

CC.6.4.3 As explained under OC6, each **Network Operator**, will make arrangements that will facilitate automatic low **Frequency Disconnection** of **Demand** (based on **Annual ACS Conditions**). CC.A.5.5. of Appendix 5 includes specifications of the local percentage **Demand** that shall be disconnected at specific frequencies. The manner in which **Demand** subject to low **Frequency** disconnection will be split into discrete MW blocks is specified in OC6.6. Technical requirements relating to **Low Frequency Relays** are also listed in Appendix 5.

Operational Metering

CC.6.4.4 Where **The Company** can reasonably demonstrate that an **Embedded Medium Power Station** or **Embedded DC Converter Station** has a significant effect on the **National Electricity Transmission System**, it may require the **Network Operator** within whose **System** the **Embedded Medium Power Station** or **Embedded DC Converter Station** is situated to ensure that the operational metering equipment described in CC.6.5.6 is installed such that **The Company** can receive the data referred to in CC.6.5.6. In the case of an **Embedded Medium Power Station** subject to, or proposed to be subject to a **Bilateral Agreement**, **The Company** shall notify such **Network Operator** of the details of such installation in writing within 3 months of being notified of the application to connect under **CUSC** and in the case of an **Embedded Medium Power Station** not subject to, or not proposed to be subject to a **Bilateral Agreement** in writing as a **Site Specific Requirement** in accordance with the timescales in CUSC 6.5.5. In either case the **Network Operator** shall ensure that the data referred to in CC.6.5.6 is provided to **The Company**.

CC.6.4.5 System Restoration

CC.6.4.5.1 **Distribution Restoration Zone Plans** are dependent upon **Restoration Contractors** who have an **Anchor Restoration Contract** which requires the capability to **Start-Up** from **Shutdown** within 8 hours and to energise a part of a **Network Operator's System** (and in some cases could extend to energisation of parts of the **Transmission System**) upon instruction from a relevant **Network Operator** without an external electrical power supply. **Distribution Restoration Zone Plans** may also be dependent upon **Top Up Restoration Contractors**. **Network Operators** shall be responsible for instructing **Restoration Contractors** in accordance with a **Distribution Restoration Zone Plan** once **The Company** has issued an instruction to the **Network Operator** to activate a **Distribution Restoration Zone** as provided for in OC9.4.7.8.1.

CC.6.4.5.2. Where a need for a **Distribution Restoration Zone** is agreed in accordance with OC9, the following requirements shall apply:-

(a) Where there is a requirement for two adjacent **Distribution Restoration Zones** to be **Synchronised** as part of the wider **System Restoration** process, and as catered for in the relevant **Distribution Restoration Zone Plans**, appropriate **Synchronising** facilities shall exist, or shall be installed by the **Network Operator** or **Relevant Transmission Licensee** as set out in OC9.4.7.6.3(d). Such **Synchronising** facilities shall be identified as part of the development of the **Restoration Plan** as set out in OC9.4.7.6.1. Where a **Distribution Restoration Zone** extends to **Transmission Plant** and **Apparatus** as provided for in OC9.4.7.8.15, the responsibility for the provision of these facilities on **Transmission** equipment is the responsibility of the **Relevant Transmission Licensee**.

(b) **The Company** and the **Network Operator** and **Relevant Transmission Licensee** (where necessary) shall agree the monitoring and operational metering which shall be installed in the **Network Operator's System**, including but not limited to, operational metering signals, status indications, and the topology of the **Network Operator's System** falling within the scope of the **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**, and the output and status of **Restoration Contractor's Plant** and **Apparatus**. Where appropriate, some of this information may be supplied as outputs from the **Distribution Restoration Zone Control System** within the **Distribution Restoration Zone** where one is installed. This data shall be provided to **The Company** and **Relevant Transmission Licensee** (where necessary) through appropriate data links as agreed between **The Company** and the **Network Operator**.

(c) **Network Operators** shall have secure, robust and power resilient communications systems between their **Control Centres** and the point at which **Restoration Contractor's Plant** and **Apparatus** is connected to the **Network Operator's System** as provided for in CC.7.10 and CC.7.11.

CC.6.5 Communications Plant

CC.6.5.1 In order to ensure control of the **National Electricity Transmission System**, telecommunications between **GB Code Users** and **The Company** must (including in respect of any **OTSDUW Plant and Apparatus** at the **OTSUA Transfer Time**), if required by **The Company**, be established in accordance with the requirements set down below.

CC.6.5.2 Control Telephony and System Telephony

CC.6.5.2.1 **Control Telephony** provides secure point to point telephony for routine **Control Calls**, priority **Control Calls** and emergency **Control Calls**.

CC.6.5.2.2 **System Telephony** uses an appropriate public communications network to provide telephony for **Control Calls**, inclusive of emergency **Control Calls**. For the avoidance of doubt, **System Telephony** could include, but shall not be limited to: an analogue or digital telephone line; a mobile telephone or an internet-based voice communication system, all of which shall be connected to an appropriate public communications network.

CC.6.5.2.3 Calls made and received over **Control Telephony** and **System Telephony** may be recorded and subsequently replayed for commercial and operational reasons.

CC.6.5.4 Obligations in respect of Control Telephony and System Telephony

CC.6.5.4.1 Where **The Company** requires **Control Telephony**, **Users** are required to use the **Control Telephony** to communicate with **The Company** and / or the **Transmission Licensees'** in respect of all **Connection Points** with the **National Electricity Transmission System**, all **Embedded Large Power Stations**, all **Embedded DC Converter Stations** and **Network Operators Control Centres** as appropriate. **The Company** shall provide **Control Telephony** interface equipment at the **GB Code User's Control Point** or the **Network Operators Control Centre** as appropriate. Where the **GB Code User's** or **Network Operators Control Centre** telephony equipment is not capable of providing the required facilities or is otherwise incompatible with the **Transmission Control Telephony, The Company** shall provide a **Control Telephony** handset(s). Details of the **Control Telephony** required are contained in the **Bilateral Agreement** with **GB Code User's**.

CC.6.5.4.2 Where in **The Company's** sole opinion the installation of **Control Telephony** is not practicable at a **GB Code User's Control Point(s)**, **The Company** shall specify in the **Bilateral Agreement** whether **System Telephony** is required. Where **System Telephony** is required by **The Company**, the **GB Code User** shall ensure that **System Telephony** is installed.

CC.6.5.4.3 Where **System Telephony** is installed, **GB Code Users** are required to use the **System Telephony** for communication with **The Company** and the relevant **Transmission Licensees' Control Engineers** in respect of those **Control Point(s)** for which it has been installed. Details of and relating to the **System Telephony** required are contained in the **Bilateral Agreement**.

CC.6.5.4.4 Where **Control Telephony** or **System Telephony** is installed, routine testing of such facilities may be required by **The Company** (not normally more than once in any calendar month). The **GB Code User** and **The Company** shall use reasonable endeavours to agree a test programme and where **The Company** requests the assistance of the **GB Code User** in performing the agreed test programme the **User** shall provide such assistance. **The Company** requires the **GB Code User** to test the backup power supplies feeding its **Control Telephony** facilities at least once every 5 years.

CC.6.5.4.5 **Control Telephony** and **System Telephony** shall only be used for the purposes of operational voice communication between **The Company** and the relevant **User**.

CC.6.5.4.6 **Control Telephony** contains emergency calling functionality to be used for operational communication only under normal and emergency conditions. Functionality enables **The Company** and **Users** to prioritise a call in the event of an emergency. **The Company** and **GB Code Users** shall only use such priority call functionality for urgent operational communications.

CC.6.5.5 Technical Requirements for Control Telephony and System Telephony

CC.6.5.5.1 Detailed information on the technical interfaces and support requirements for **Control Telephony** is provided in the **Control Telephony Electrical Standard** identified in the Annex to the **General Conditions**. Where additional information, or information in relation to **Control Telephony** applicable in Scotland, is requested by **GB Code Users**, this will be provided, where possible, by **The Company**.

CC.6.5.5.2 **System Telephony** shall consist of a dedicated telephone connected to an appropriate public communications network, that shall be configured by the relevant **GB Code User**. **The Company** shall provide a dedicated free phone number (UK only), for the purposes of receiving incoming calls to **The Company**, which **GB Code Users** shall utilise for **System Telephony**. **System Telephony** shall only be utilised by **The Company Control Engineer** the relevant **Transmission Licensees' Control Engineers** and the **GB Code User's Responsible Engineer/Operator** for the purposes of operational communications.

Operational Metering

CC.6.5.6 (a) **The Company** or The **Relevant Transmission Licensee**, as applicable, shall provide system control and data acquisition (SCADA) outstation interface equipment. The **GB Code User** shall provide such voltage, current, **Frequency**, **Active Power** and **Reactive Power** measurement outputs and plant status indications and alarms to the **Transmission** SCADA outstation interface equipment as required by **The Company** in accordance with the terms of the **Bilateral Agreement**. In the case of **OTSDUW**, the **GB Code User** shall provide such SCADA outstation interface equipment and voltage, current, **Frequency**, **Active Power** and **Reactive Power** measurement outputs and plant status indications and alarms to the SCADA outstation interface equipment as required by **The Company** in accordance with the terms of the **Bilateral Agreement**.

(b) For the avoidance of doubt, for **Active Power** and **Reactive Power** measurements, circuit breaker and disconnector status indications from:

(i) **CCGT Modules** at **Large Power Stations**, the outputs and status indications must each be provided to **The Company** on an individual **CCGT Unit** basis. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements from **Unit Transformers** and/or **Station Transformers** must be provided.

(ii) **DC Converters** at **DC Converter Stations** and **OTSDUW DC Converters**, the outputs and status indications must each be provided to **The Company** on an individual **DC Converter** basis. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements from converter and/or station transformers must be provided.

(iii) **Power Park Modules** at **Embedded Large Power Stations** and at directly connected **Power Stations**, the outputs and status indications must each be provided to **The Company** on an individual **Power Park Module** basis. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements from station transformers must be provided.

(iv) In respect of **OTSDUW Plant and Apparatus**, the outputs and status indications must be provided to **The Company** for each piece of electrical equipment. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements at the **Interface Point** must be provided.

(c) For the avoidance of doubt, the requirements of CC.6.5.6(a) in the case of a **Cascade Hydro Scheme** will be provided for each **Generating Unit** forming part of that **Cascade Hydro Scheme**. In the case of **Embedded Generating Units** forming part of a **Cascade Hydro Scheme** the data may be provided by means other than the SCADA outstation located at the **Power Station**, such as, with the agreement of the **Network Operator** in whose system such **Embedded Generating Unit** is located, from the **Network Operator's** SCADA system to **The Company**. Details of such arrangements will be contained in the relevant **Bilateral Agreements** between **The Company** and the **GB Generator** and the **Network Operator**.

(d) In the case of a **Power Park Module,** additional energy input signals (e.g. wind speed, and wind direction) may be specified in the **Bilateral Agreement**. For **Power Park Modules** with a **Completion Date** on or after 1st April 2016, a **Power Available** signal will also be specified in the **Bilateral Agreement**. The signals would be used to establish the potential level of energy input from the **Intermittent Power Source** for monitoring pursuant to CC.6.6.1 and **Ancillary Services** and will, in the case of a wind farm, be used to provide **The Company** with advanced warning of excess wind speed shutdown and to determine the level of **Headroom** available from **Power Park Modules** for the purposes of calculating response and reserve. For the avoidance of doubt, the **Power Available** signal would be automatically provided to **The Company** and represent the sum of the potential output of all available and operational **Power Park Units** within the **Power Park Module**. The refresh rate of the **Power Available** signal shall be specified in the **Bilateral Agreement**.

(e) In addition to the above requirements, **Restoration Contractors** shall be capable of providing the operational metering requirements specified in the **Anchor Restoration Contract** or **Top Up Restoration Contract** during **System Restoration**. In particular for renewable generation, the volume of primary energy such as wind speed and in the case of storage, storage capacity shall be provided.

Instructor Facilities

CC.6.5.7 The **User** shall accommodate **Instructor Facilities** provided by **The Company** for the receipt of operational messages relating to **System** conditions.

Electronic Data Communication Facilities

CC.6.5.8 (a) All **BM Participants** must ensure that appropriate electronic data communication facilities are in place to permit the submission of data, as required by the **Grid Code**, to **The Company**.

(b) In addition,

(1) any **GB Code User** that wishes to participate in the **Balancing Mechanism**;

or

(2) any **BM Participant** in respect of its **BM Units** at a **Power Station** where the **Construction Agreement** and/or a **Bilateral Agreement** has a **Completion Date** on or after 1 January 2013 and the **BM Participant** is required to provide all **Part 1 System Ancillary Services** in accordance with CC.8.1 (unless **The Company** has otherwise agreed)

must ensure that appropriate automatic logging devices are installed at the **Control Points** of its **BM Units** to submit data to and to receive instructions from **The Company**, as required by the **Grid Code**. For the avoidance of doubt, in the case of an **Interconnector User**, the **Control Point** will be at the **Control Centre** of the appropriate **Externally Interconnected System Operator**.

(c) Detailed specifications of these required electronic facilities will be provided by **The Company** on request and they are listed as **Electrical Standards** in the Annex to the **General Conditions**.

Facsimile Machines and **Electronic Communication Platform**

CC.6.5.9 Each **GB Code User** and **The Company** shall provide a facsimile machine or machines:

(a) in the case of **GB Generators**, at the **Control Point** of each **Power Station** and at its **Trading Point**;

(b) in the case of **The Company** and **Network Operators**, at the **Control Centre(s)**; and

(c) in the case of **Non-Embedded Customers** and **DC Converter Station** owners at the **Control Point**.

Each **GB Code User** shall notify, prior to connection to the **System** of the **GB Code User's Plant** and **Apparatus**, **The Company** of its or their telephone number or numbers, and will notify **The Company** of any changes. Prior to connection to the **System** of the **GB Code User's Plant** and **Apparatus**, **The Company** shall notify each **GB Code User** of the telephone number or numbers of its facsimile machine or machines and will notify any changes.

On a date agreed between **The Company** and a **GB Code User**, **The Company** shall provide an **Electronic Communication Platform** accessible to that **GB Code User** and that **GB Code User** shall provide access facilities at the following locations:

(a) in the case of **GB Generators**, at the **Control Point** of each **Power Station** and at their **Trading Point(s)**;

(b) in the case of **Network Operators**, at their **Control Centre(s**); and

(c) in the case of **Non-Embedded Customers** and **DC Converter Station** owners at their **Control Point(s)**.

The **GB Code User** shall ensure the facilities required to access the **Electronic Communication Platform** are maintained at all times.

CC.6.5.10 Busbar Voltage

The **Relevant Transmission Licensee** shall, subject as provided below, provide each **GB Generator** or **DC Converter Station** owner at each **Grid Entry Point** where one of its **Power Stations** or **DC Converter Stations** is connected with appropriate voltage signals to enable the **GB Generator** or **DC Converter Station** owner to obtain the necessary information to permit its **Gensets** or **DC Converters** to be **Synchronised** to the **National Electricity Transmission System**. The term "**voltage signal**" shall mean in this context, a point of connection on (or wire or wires from) a relevant part of **Transmission Plant** and/or **Apparatus** at the **Grid Entry Point**, to which the **GB Generator** or **DC Converter Station** owner, with **The Company's** agreement (not to be unreasonably withheld) in relation to the **Plant** and/or **Apparatus** to be attached, will be able to attach its **Plant** and/or **Apparatus** (normally a wire or wires) in order to obtain measurement outputs in relation to the busbar.

CC.6.5.11 Bilingual Message Facilities

(a) A Bilingual Message Facility is the method by which the **User's Responsible Engineer/Operator**, the **Externally Interconnected System Operator** and **The Company's Control Engineers** communicate clear and unambiguous information in two languages for the purposes of control of the **Total System** in both normal and emergency operating conditions.

(b) A Bilingual Message Facility, where required, will provide up to two hundred pre-defined messages with up to five hundred and sixty characters each. A maximum of one minute is allowed for the transmission to, and display of, the selected message at any destination. The standard messages must be capable of being displayed at any combination of locations and can originate from any of these locations. Messages displayed in the UK will be displayed in the English language.

(c) Detailed information on a Bilingual Message Facility and suitable equipment required for individual **GB Code User** applications will be provided by **The Company** upon request.

CC.6.6 System Monitoring

CC.6.6.1 Monitoring equipment is provided on the **National Electricity Transmission System** to enable **The Company** to monitor its power system dynamic performance conditions. Where this monitoring equipment requires voltage and current signals on the **Generating Unit** (other than **Power Park Unit**), **DC Converter** or **Power Park Module** circuit from the **GB Code User** or from **OTSDUW Plant and Apparatus**, **The Company** will inform the **GB Code User** and they will be provided by the **GB Code User** with both the timing of the installation of the equipment for receiving such signals and its exact position being agreed (the **GB Code User's** agreement not to be unreasonably withheld) and the costs being dealt with, pursuant to the terms of the **Bilateral Agreement**.

CC.6.6.2 For all on site monitoring by **The Company** of witnessed tests pursuant to the **CP** or **OC5** the **GB Code User** shall provide suitable test signals as outlined in OC5.A.1.

CC.6.6.2.1 The signals which shall be provided by the **GB Code User** to **The Company** for onsite monitoring shall be of the following resolution, unless otherwise agreed by **The Company**:

(i) 1 Hz for reactive range tests

(ii) 10 Hz for **Frequency** control tests

(iii) 100 Hz for voltage control tests

CC.6.6.2.2 The **GB Code User** will provide all relevant signals for this purpose in the form of d.c. voltages within the range -10V to +10V. In exceptional circumstances, some signals may be accepted as d.c. voltages within the range -60V to +60V with prior agreement between the **GB Code User** and **The Company**. All signals shall:

(i) in the case of an **Onshore Power Park Module**, **DC Convertor Station** or **Synchronous Generating Unit**, be suitably terminated in a single accessible location at the **GB Generator** or **DC Converter Station** owner's site.

(ii) in the case of an **Offshore Power Park Module** and **OTSDUW Plant and Apparatus**, be transmitted onshore without attenuation, delay or filtering which would result in the inability to fully demonstrate the objectives of the test, or identify any potential safety or plant instability issues, and be suitably terminated in a single robust location normally located at or near the onshore **Interface Point** of the **Offshore Transmission System** to which it is connected.

CC.6.6.2.3 All signals shall be suitably scaled across the range. The following scaling would (unless **The Company** notify the **GB Code User** otherwise) be acceptable to **The Company**:

(a) 0MW to **Registered Capacity** or **Interface Point Capacity** 0-8V dc

(b) Maximum leading **Reactive Power** to maximum lagging **Reactive Power** -8 to 8V dc

(c) 48 – 52Hz as -8 to 8V dc

(d) Nominal terminal or connection point voltage -10% to +10% as -8 to 8V dc

CC.6.6.2.4 The **GB Code User** shall provide to **The Company** a 230V power supply adjacent to the signal terminal location.

CC.7 SITE RELATED CONDITIONS

CC.7.1 Not used.

CC.7.2 Responsibilities For Safety

CC.7.2.1 Any **User** entering and working on its **Plant** and/or **Apparatus** (including, until the **OTSUA Transfer Time**, any **OTSUA**) on a **Transmission Site** will work to the **Safety Rules** of the **Relevant Transmission Licensee**, as advised by **The Company**.

CC.7.2.2 For **User Sites**, **The Company** shall procure that the **Relevant Transmission Licensee** entering and working on **Transmission Plant** and/or **Apparatus** on a **User Site** will work to the **User's Safety Rules**.

CC.7.2.3 A **User** may, with a minimum of six weeks notice, apply to **The Company** for permission to work according to that **Users** own **Safety Rules** when working on its **Plant** and/or **Apparatus** on a **Transmission Site** rather than those set out in CC.7.2.1. If **The Company** is of the opinion that the **User's Safety Rules** provide for a level of safety commensurate with those set out in CC.7.2.1, **The Company** will notify the **User**, in writing, that, with effect from the date requested by the **User**, the **User** may use its own **Safety Rules** when working on its **Plant** and/or **Apparatus** on the **Transmission Site**. In forming its opinion, **The Company** will seek the opinion of the **Relevant Transmission Licensee**. Until receipt of such written approval from **The Company**, the **GB Code User** will continue to use the **Safety Rules** as set out in CC.7.2.1.

CC.7.2.4 In the case of a **User Site**, **The Company** may, with a minimum of six weeks notice, apply to a **User** for permission for the **Relevant Transmission Licensee** to work according to the **Relevant Transmission Licensee's Safety Rules** when working on **Transmission Plant** and/or **Apparatus** on that **User Site**, rather than the **User's Safety Rules**. If the **User** is of the opinion that the **Relevant Transmission Licensee's Safety Rules**, provide for a level of safety commensurate with that of that **User's Safety Rules**, it will notify **The Company**, in writing, that, with effect from the date requested by **The Company**, that the **Relevant Transmission Licensee** may use its own **Safety Rules** when working on its **Transmission Plant** and/or **Apparatus** on that **User's Site**. Until receipt of such written approval from the **User**, **The Company** shall procure that the **Relevant Transmission Licensee** shall continue to use the **User's Safety Rules**.

CC.7.2.5 For a **Transmission Site**, if **The Company** gives its approval for the **User's Safety Rules** to apply to the **User** when working on its **Plant** and/or **Apparatus**, that does not imply that the **User's Safety Rules** will apply to entering the **Transmission Site** and access to the **User's Plant** and/or **Apparatus** on that **Transmission Site**. Bearing in mind the **Relevant Transmission Licensee's** responsibility for the whole **Transmission Site**, entry and access will always be in accordance with the **Relevant Transmission Licensee's** site access procedures. For a **User Site**, if the **User** gives its approval for **Relevant Transmission Licensee Safety Rules** to apply to the **Relevant Transmission Licensee** when working on its **Plant** and **Apparatus**, that does not imply that the **Relevant Transmission Licensee's Safety Rules** will apply to entering the **User Site**, and access to the **Transmission Plant** and **Apparatus** on that **User Site**. Bearing in mind the **User's** responsibility for the whole **User Site**, entry and access will always be in accordance with the **User's** site access procedures.

CC.7.2.6 For **User Sites**, **Users** shall notify **The Company** of any **Safety Rules** that apply to the **Relevant Transmission Licensee's** staff working on **User Sites**. **The Company** shall procure that the **Relevant Transmission Licensee** shall notify **Users** of any **Safety Rules** that apply to the **User's** staff working on the **Transmission Site**.

CC.7.2.7 Each **Site Responsibility Schedule** must have recorded on it the **Safety Rules** which apply to each item of **Plant** and/or **Apparatus**.

CC.7.2.8 In the case of **OTSUA** a **User Site** or **Transmission Site** shall, for the purposes of this CC.7.2, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System**.

CC.7.3 Site Responsibility Schedules

CC.7.3.1 In order to inform site operational staff and **The Company's Control Engineers** of agreed responsibilities for **Plant** and/or **Apparatus** at the operational interface, a **Site Responsibility Schedule** shall be produced for **Connection Sites** (and in the case of **OTSUA**, until the **OTSUA Transfer Time**, **Interface Sites**) for **The Company**, the **Relevant Transmission Licensee** and **Users** with whom they interface.

CC.7.3.2 The format, principles and basic procedure to be used in the preparation of **Site Responsibility Schedules** are set down in Appendix 1.

CC.7.4 Operation And Gas Zone Diagrams

Operation Diagrams

CC.7.4.1 An **Operation Diagram** shall be prepared for each **Connection Site** at which a **Connection Point** exists (and in the case of **OTSDUW Plant and Apparatus**, by **User's** for each **Interface Point**) using, where appropriate, the graphical symbols shown in Part 1A of Appendix 2. **Users** should also note that the provisions of **OC11** apply in certain circumstances.

CC.7.4.2 The **Operation Diagram** shall include all **HV Apparatus** and the connections to all external circuits and incorporate numbering, nomenclature and labelling, as set out in **OC11**. At those **Connection Sites** (or in the case of **OTSDUW Plant and Apparatus**, **Interface Points**) where gas-insulated metal enclosed switchgear and/or other gas-insulated **HV Apparatus** is installed, those items must be depicted within an area delineated by a chain dotted line which intersects gas-zone boundaries. The nomenclature used shall conform with that used on the relevant **Connection Site** and circuit (and in the case of **OTSDUW Plant and Apparatus**, **Interface Point** and circuit). The **Operation Diagram** (and the list of technical details) is intended to provide an accurate record of the layout and circuit interconnections, ratings and numbering and nomenclature of **HV Apparatus** and related **Plant**.

CC.7.4.3 A non-exhaustive guide to the types of **HV Apparatus** to be shown in the **Operation Diagram** is shown in Part 2 of Appendix 2, together with certain basic principles to be followed unless equivalent principles are approved by **The Company**.

Gas Zone Diagrams

CC.7.4.4 A **Gas Zone Diagram** shall be prepared for each **Connection Site** at which a **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, by **User's** for an **Interface Point**) exists where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised. They shall use, where appropriate, the graphical symbols shown in Part 1B of Appendix 2.

CC.7.4.5 The nomenclature used shall conform with that used in the relevant **Connection Site** and circuit (and in the case of **OTSDUW Plant and Apparatus**, relevant **Interface Point** and circuit).

CC.7.4.6 The basic principles set out in Part 2 of Appendix 2 shall be followed in the preparation of **Gas Zone Diagrams** unless equivalent principles are approved by **The Company**.

Preparation of Operation and Gas Zone Diagrams for Users' Sites and Transmission Interface Sites

CC.7.4.7 In the case of a **User Site**, the **User** shall prepare and submit to **The Company**, an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, on what will be the **Offshore Transmission** side of the **Connection Point** and the **Interface Point**) and **The Company** shall provide the **User** with an **Operation Diagram** for all **HV Apparatus** on the **Transmission** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus** on what will be the **Onshore Transmission** side of the **Interface Point**), in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** prior to the **Completion Date** under the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.4.8 The **User** will then prepare, produce and distribute, using the information submitted on the **User's Operation Diagram** and **The Company Operation Diagram**, a composite **Operation Diagram** for the complete **Connection Site** (and in the case of **OTSDUW Plant and Apparatus**, **Interface Point**), also in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** .

CC.7.4.9 The provisions of CC.7.4.7 and CC.7.4.8 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised.

Preparation of Operation and Gas Zone Diagrams for Transmission Sites

CC.7.4.10 In the case of an **Transmission Site**, the **User** shall prepare and submit to **The Company** an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point**, in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.4.11 **The Company** will then prepare, produce and distribute, using the information submitted on the **User's Operation Diagram**, a composite **Operation Diagram** for the complete **Connection Site**, also in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.4.12 The provisions of CC.7.4.10 and CC.7.4.11 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised.

CC.7.4.13 Changes to Operation and Gas Zone Diagrams

CC.7.4.13.1 When the **Relevant Transmission Licensee** has decided that it wishes to install new **HV Apparatus** or it wishes to change the existing numbering or nomenclature of **Transmission HV Apparatus** at a **Transmission Site**, **The Company**, in coordination with the **Relevant Transmission Licensee** will (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) one month prior to the installation or change, send to each such **User** a revised **Operation Diagram** of that **Transmission Site**, incorporating the new **Transmission HV Apparatus** to be installed and its numbering and nomenclature or the changes, as the case may be. **OC11** is also relevant to certain **Apparatus**.

CC.7.4.13.2 When a **User** has decided that it wishes to install new **HV Apparatus**, or it wishes to change the existing numbering or nomenclature of its **HV Apparatus** at its **User Site**, the **User** will (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) one month prior to the installation or change, send to **The Company** a revised **Operation Diagram** of that **User Site** incorporating the new **User HV Apparatus** to be installed and its numbering and nomenclature or the changes as the case may be. **OC11** is also relevant to certain **Apparatus**.

CC.7.4.13.3 The provisions of CC.7.4.13.1 and CC.7.4.13.2 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is installed.

Validity

CC.7.4.14 (a) The composite **Operation Diagram** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Operation Diagram** for all operational and planning activities associated with the **Connection Site**. If a dispute arises as to the accuracy of the composite **Operation Diagram**, a meeting shall be held at the **Connection Site**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(b) The composite **Operation Diagram** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Operation Diagram** for all operational and planning activities associated with the **Interface Point** until the **OTSUA Transfer Time**. If a dispute arises as to the accuracy of the composite **Operation Diagram** prior to the **OTSUA Transfer Time**, a meeting shall be held at the **Interface Point**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(c) An equivalent rule shall apply for **Gas Zone Diagrams** where they exist for a **Connection Site**.

CC.7.4.15 In the case of **OTSUA**, a **User Site** and **Transmission Site** shall, for the purposes of this CC.7.4, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System** and references to **HV Apparatus** in this CC.7.4 shall include references to **HV OTSUA**.

CC.7.5 Site Common Drawings

CC.7.5.1 **Site Common Drawings** will be prepared for each **Connection Site** (and in the case of **OTSDUW**, each **Interface Point**) and will include **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) layout drawings, electrical layout drawings, common **Protection**/control drawings and common services drawings.

Preparation of Site Common Drawings for a User Site and Transmission Interface Site

CC.7.5.2 In the case of a **User Site**, **The Company** shall prepare and submit to the **User**, **Site Common Drawings** for the **Transmission** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, on what will be the **Onshore Transmission** side of the **Interface Point**,) and the **User** shall prepare and submit to **The Company**, **Site Common Drawings** for the **User** side of the **Connection Point** (and in the case of **OTSDUW**, on what will be the **Offshore Transmission** side of the **Interface Point**) in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.5.3 The **User** will then prepare, produce and distribute, using the information submitted on the **Transmission Site Common Drawings**, **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** .

Preparation of Site Common Drawings for a Transmission Site

CC.7.5.4 In the case of a **Transmission Site**, the **User** will prepare and submit to **The Company Site Common Drawings** for the **User** side of the **Connection Point** in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.5.5 **The Company** will then prepare, produce and distribute, using the information submitted in the **User's Site Common Drawings**, **Site Common Drawings** for the complete **Connection Site** in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

CC.7.5.6 When a **User** becomes aware that it is necessary to change any aspect of the **Site Common Drawings** at a **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) it will:

(a) if it is a **User Site**, as soon as reasonably practicable, prepare, produce and distribute revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**); and

(b) if it is a **Transmission Site**, as soon as reasonably practicable, prepare and submit to **The Company** revised **Site Common Drawings** for the **User** side of the **Connection Point** (and in the case of **OTSDUW**, **Interface Point**) and **The Company** will then, as soon as reasonably practicable, prepare, produce and distribute, using the information submitted in the **User's Site Common Drawings**, revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**).

In either case, if in the **User's** reasonable opinion the change can be dealt with by it notifying **The Company** in writing of the change and for each party to amend its copy of the **Site Common Drawings** (or where there is only one set, for the party holding that set to amend it), then it shall so notify and each party shall so amend. If the change gives rise to a **Modification** under the **CUSC**, the provisions of the **CUSC** as to timing will apply.

CC.7.5.7 When **The Company** becomes aware that it is necessary to change any aspect of the **Site Common Drawings** at a **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) it will:

(a) if it is a **Transmission Site**, as soon as reasonably practicable, prepare, produce and distribute revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**); and

(b) if it is a **User Site**, as soon as reasonably practicable, prepare and submit to the **User** revised **Site Common Drawings** for the **Transmission** side of the **Connection Point** (in the case of **OTSDUW**, **Interface Point**) and the **User** will then, as soon as reasonably practicable, prepare, produce and distribute, using the information submitted in the **Transmission Site Common Drawings**, revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**).

In either case, if in **The Company's** reasonable opinion the change can be dealt with by it notifying the **User** in writing of the change and for each party to amend its copy of the **Site Common Drawings** (or where there is only one set, for the party holding that set to amend it), then it shall so notify and each party shall so amend. If the change gives rise to a **Modification** under the **CUSC**, the provisions of the **CUSC** as to timing will apply.

Validity

CC.7.5.8 (a) The **Site Common Drawings** for the complete **Connection Site** prepared by the **User** or **The Company**, as the case may be, will be the definitive **Site Common Drawings** for all operational and planning activities associated with the **Connection Site**. If a dispute arises as to the accuracy of the **Site Common Drawings**, a meeting shall be held at the **Site**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(b) The **Site Common Drawing** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Site Common Drawing** for all operational and planning activities associated with the **Interface Point** until the **OTSUA Transfer Time**. If a dispute arises as to the accuracy of the composite **Operation Diagram** prior to the **OTSUA Transfer Time**, a meeting shall be held at the **Interface Point**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

CC.7.5.9 In the case of **OTSUA**, a **User Site** and **Transmission Site** shall, for the purposes of this CC.7.5, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System**.

CC.7.6 Access

CC.7.6.1 The provisions relating to access to **Transmission Sites** by **Users**, and to **Users' Sites** by **Relevant Transmission Licensees**, are set out in each **Interface Agreement** (or in the case of **Interfaces Sites** prior to the **OTSUA Transfer Time** agreements in similar form) with, the **Relevant Transmission Licensee** and each **User**.

CC.7.6.2 In addition to those provisions, where a **Transmission Site** contains exposed **HV** conductors, unaccompanied access will only be granted to individuals holding an **Authority for Access** issued by the **Relevant Transmission Licensee**.

CC.7.6.3 The procedure for applying for an **Authority for Access** is contained in the **Interface Agreement**.

CC.7.7 Maintenance Standards

CC.7.7.1 It is the **User's** responsibility to ensure that all its **Plant** and **Apparatus** (including, until the **OTSUA Transfer Time**, any **OTSUA**) on a **Transmission Site** is tested and maintained adequately for the purpose for which it is intended, and to ensure that it does not pose a threat to the safety of any **Transmission Plant**, **Apparatus** or personnel on the **Transmission Site**. **The Company** will have the right to inspect the test results and maintenance records relating to such **Plant** and **Apparatus** at any time

CC.7.7.2 For **User Sites**, **The Company** shall procure that the **Relevant Transmission Licensee** has a responsibility to ensure that all **Transmission Plant** and **Apparatus** on a **User Site** is tested and maintained adequately for the purposes for which it is intended and to ensure that it does not pose a threat to the safety of any **User's Plant**, **Apparatus** or personnel on the **User Site**.

The **User** will have the right to inspect the test results and maintenance records relating to such **Plant** and **Apparatus** on its **User Site** at any time.

CC.7.8 Site Operational Procedures

CC.7.8.1 Where there is an interface with **National Electricity Transmission System**, **The Company** and **Users**, must make available staff to take necessary **Safety Precautions** and carry out operational duties as may be required to enable work/testing to be carried out and for the operation of **Plant** and **Apparatus** (including, prior to the **OTSUA Transfer Time**, any **OTSUA**) connected to the **Total System**.

CC.7.9 **GB Generators, DC Converter Station** owners and **BM Participants** (including **Virtual Lead** Parties) shall provide a **Control Point.**

a) In the case of **GB Generators** and **DC Converter Station** owners, for each **Power Station** or **DC Converter Station** directly connected to the **National Electricity Transmission System** and for each **Embedded Large Power Station** or **Embedded DC Converter Station**, the **Control Point** shall receive and act upon instructions pursuant to OC7 and BC2 at all times that **Generating Units** or **Power Park Modules** at the **Power Station** are generating or available to generate or **DC Converters** at the **DC Converter Station** are importing or exporting or available to do so. In the case of all **BM Participants**, the **Control Point** shall be continuously staffed except where the **Bilateral Agreement** specifies that compliance with BC2 is not required, in which case the **Control Point** shall be staffed between the hours of 0800 and 1800 each day.

b) In the case of **BM Participants**, the **BM Participant's Control Point** shall be capable of receiving and acting upon instructions from **The Company** and the relevant **Transmission Licensees' Control Engineers**.

The Company will normally issue instructions via automatic logging devices in accordance with the requirements of CC.6.5.8(b).

Where the **BM Participant's Plant** and **Apparatus** does not respond to an instruction from **The Company** via automatic logging devices, or where it is not possible for **The Company** to issue the instruction via automatic logging devices, **The Company** shall issue the instruction by telephone.

In the case of **BM Participants** who own and/or operate a **Power Station** or **DC Converter Station** with an aggregated **Registered Capacity** or **BM Participants** with **BM Units** with an aggregated **Demand Capacity** per **Control Point** of less than 50MW, or, where a site is not part of a **Virtual Lead Party** as defined in the **BSC**, a **Registered Capacity** or **Demand Capacity** per site of less than 10MW:

a) where this situation arises, a representative of the **BM Participant** is required to be available to respond to instructions from **The Company** via the **Control Telephony** or **System Telephony** system, as provided for in CC.6.5.4, between the hours of 0800-1800 each day.
b) Outside the hours of 0800-1800 each day, the requirements of BC2.9.7 shall apply.

For the avoidance of doubt, where **The Company** has agreed with a **BM Participant** that **Control Telephony** is not required and where the **BM Participant** does not have a continuously staffed **Control Point** the **BM Participant** may be unable to act as a **Defence Service Provider** and shall be unable to act as a **Restoration Contractor** where these require **Control Telephony** or a **Control Point** in respect of the specification of any such services falling into these categories.

CC.7.10 Obligations on Users in respect of Critical Tools and Facilities

CC.7.10.1 From 04/09/2024 **The Company**, each **Generator, DC Converter Station** owner**, Network Operator, Non-Embedded Customer** and each **Restoration Contractor** with a continuously staffed **Control Point** or **Control Centre** as provided for in CC.7.9 shall

(i) Ensure they have the appropriate **Critical Tools and Facilities** necessary to control their assets during **System Restoration**, from their **Control Point** or **Control Centre** as appropriate for a minimum period of 72 hours (or such longer period as agreed between the **Generator**, **DC Converter Station** owner, **Network Operator**, **Non-Embedded Customer** and/or **Restoration Contractor** and **The Company**) following a **Total Shutdown** or **Partial Shutdown**.

(ii) Ensure as far as reasonably practical that they have adequate control equipment redundancy in place so that in the event of a failure of one or more components of the control system its function is unimpaired.

(iii) Report on the results of their management and testing for their **Critical Tools and Facilities** on request by **The Company**.

CC.7.10.2 From 04/09/2024 each **BM Participant** including a **Virtual Lead Party** with a continuously staffed **Control Point** as provided for in CC.7.9 (excluding those **BM Participants** covered by the requirements of CC.7.10.1), shall:-

(i) Ensure they have the appropriate **Critical Tools and Facilities** (as defined in clause (c) of the definition of **Critical Tools** and **Facilities** in the **Grid Code Glossary and Definitions**) for a minimum period of 72 hours (or such longer period as agreed between the **BM Participant** including a **Virtual Lead Party** and **The Company**) following a **Total Shutdown** or **Partial Shutdown**.

(ii) Ensure as far as reasonably practical that they have adequate control equipment redundancy in place at their **Control Point** so that in the event of a failure of one or more components of their **Critical Tools and Facilities** its function is unimpaired.

(iii) Report on the results of their management and testing for their **Critical Tools and Facilities** on request by **The Company**.

CC.7.10.3 In the case of a **BM Participant** or **Virtual Lead Party** which has an **Anchor Restoration Contract** or **Top Up Restoration Contract** in respect of one or more of its aggregated **Plants**, the requirements of CC.7.10.1 shall only apply between the **Control Point** of the **BM Participant** or **Virtual Lead Party** and that **Plant** with an **Anchor Plant Capability** or **Top Up Restoration Capability**. For other non-contracted **Plants** under the control of the **BM Participant** or **Virtual Lead Party**, the requirements of CC.7.10.2 shall continue to apply.

CC.7.10.4 Where a **Network Operator** installs a **Distribution Restoration Zone Control System** to facilitate operation of a **Distribution Restoration Zone Plan**, the high level functional requirements of the **Distribution Restoration Zone Control System** shall be in accordance with the guidance provided in the applicable **Electrical Standard** listed in the annex to the **General Conditions**.

CC.7.10.5 **Network Operators** shall ensure that their substations which are required to be operable during **System Restoration** have 72 hour electrical supply resilience to facilitate **Network Operators** being able to:

- restore auxiliary supplies to **Transmission** substations;
- switch **Demand** in accordance with a **Restoration Plan**;
- support **The Company** in satisfying the requirements of the **Electricity System Restoration Standard**.

CC.7.10.6 **The Company**, each **GB Code User** and **Restoration Contractor** shall ensure their **Critical Tools and Facilities** are cyber secure accordance with the Security of Network and Information System (NIS) Regulations. This requirement applies to **The Company**, **GB Code Users** and **Restoration Contractors** at all times.

CC.7.10.7 Notwithstanding the requirements of CC.7.10.1, **The Company**, each **GB Code User** and **Restoration Contractor** shall ensure that their **Critical Tools and Facilities** are sufficiently robust and reliable such that they are capable of handling, processing and prioritising the significant volumes of data that could reasonably be expected to occur during **System Restoration**.

CC.7.10.8 Where an **Offshore Generator** is connected to an **Offshore Transmission System** and the **Offshore Transmission Licensee** does not have **Critical Tools and Facilities** installed on its **Offshore Transmission System**, **The Company** will make an allowance for the **Critical Tools and Facilities** required to be installed by the **Offshore Generator**.

CC.7.11 Obligations on and Assurance from The Company, GB Code Users and Restoration Contractors during Total Shutdown and Partial Shutdown conditions

CC.7.11.1 In respect of **The Company**, its **Apparatus** shall be designed such that it can safely shutdown and does not pose a risk to personnel or **Apparatus** in the event of a total loss of supply.

CC.7.11.2 All **GB Code Users** and **Restoration Contractors** shall ensure their **Plant** and **Apparatus** can safely shut down and does not pose a risk to **Plant** and/or personnel in the event of a total loss of supplies at a **GB Code User's Site**(s) or **Restoration Contractor's** site be it caused by a **Total Shutdown**, **Partial Shutdown** or such other event. In satisfying this requirement, **Generators**, **DC Converter** owners and **Restoration Contractors** shall be able to demonstrate to **The Company** that in the event supplies were to be lost to their **Site**, then on the restoration of supplies, their **Plant** can be made operational and begin to operate in at least the same way and as quickly as would be expected for a cold start following a **Total System Shutdown** or **Partial System Shutdown** in accordance with the data submitted in PC.A.5.7 in accordance with the Week 24 process. For **GB**

Code Users where they believe this requirement is cost prohibitive or technically impossible, such **GB Code Users** shall discuss the issue with **The Company**, and **The Company** shall inform **The Authority** of the details agreed. Where such an issue cannot be agreed by **The Company**, following all reasonable attempts, or where the capability provided by the **GB Code User** cannot be agreed by **The Company** as being sufficient after examining all reasonable alternative solutions through the **Compliance Processes**, the **GB Code User** may apply for a derogation from the Grid Code.

CC.7.11.3 The requirements of CC.7.11.1 and CC.7.11.2 shall apply for a period of total loss of supplies to **The Company's** operational sites or a **GB Code User's Site** or **Restoration Contractor's** site of up to 72 hours. **GB Code Users** and **Restoration Contractors** shall confirm to **The Company** that the total loss of supplies to their **Site** for a period of up to 72 hours shall not result in damage to **Plant** and **Apparatus** such that it would then be unable to operate upon the restoration of electrical supplies to the site.

CC.7.11.4 **Network Operators** shall ensure that in coordination with **The Company** and relevant **Transmission Licensees**, they have the capability to switch **Demand** at sufficient speed to support **The Company** in satisfying the requirements of the **Electricity System Restoration Standard**. This requirement assumes:

- the successful implementation of **Restoration Plans**,
- the successful delivery of the obligations of **Restoration Contractors** who are parties to these plans; and
- the further requirements of OC9 have been implemented.

CC.8 ANCILLARY SERVICES

CC.8.1 System Ancillary Services

The **CC's** contain requirements for the capability for certain **Ancillary Services**, which are needed for **System** reasons ("**System Ancillary Services**"). There follows a list of these **System Ancillary Services**, together with the paragraph number of the **CC** (or other part of the **Grid Code**) in which the minimum capability is required or referred to. The list is divided into two categories: Part 1 lists the **System Ancillary Services** which

(a) **GB Generators** in respect of **Large Power Stations** are obliged to provide (except **GB Generators** in respect of **Large Power Stations** which have a **Registered Capacity** of less than 50MW and comprise **Power Park Modules**); and,

(b) **GB Generators** in respect of **Large Power Stations** with a **Registered Capacity** of less than 50MW and comprise **Power Park Modules** are obliged to provide in respect of **Reactive Power** only; and,

(c) **DC Converter Station** owners are obliged to have the capability to supply; and

(d) **GB Generators** in respect of **Medium Power Stations** (except **Embedded Medium Power Stations**) are obliged to provide in respect of **Reactive Power** only:

and Part 2 lists the **System Ancillary Services** which **GB Generators** or **Restoration Contractors** will provide only if agreement to provide them is reached with **The Company** or in the case where a **Restoration Contractor** is party to a **Distribution Restoration Zone Plan**, agreement is reached with **The Company** and **Network Operator**:

Part 1

(a) **Reactive Power** supplied (in accordance with CC.6.3.2) otherwise than by means of synchronous or static compensators (except in the case of a **Power Park Module** where synchronous or static compensators within the **Power Park Module** may be used to provide **Reactive Power**)

(b) **Frequency** Control by means of **Frequency** sensitive generation - CC.6.3.7 and BC3.5.1

Part 2

(c) **Frequency** Control by means of **Fast Start** - CC.6.3.14.

(d) **Anchor Plant Capability** or **Top Up Restoration Capability** - CC.6.3.5

(e) **System to Generator Operational Intertripping**.

(f) Services provided by **Restoration Contractors**.

CC.8.2 Commercial Ancillary Services

Other **Ancillary Services** are also utilised by **The Company** in operating the **Total System** if these have been agreed to be provided by a **GB Code User** (or other person) under an **Ancillary Services Agreement** or under a **Bilateral Agreement**, with payment being dealt with under an **Ancillary Services Agreement** or in the case of **Externally Interconnected System Operators** or **Interconnector Users**, under any other agreement (and in the case of **Externally Interconnected System Operators** and **Interconnector Users** includes **Ancillary Services** equivalent to or similar to **System Ancillary Services**) ("**Commercial Ancillary Services**"). The capability for these **Commercial Ancillary Services** is set out in the relevant **Ancillary Services Agreement** or **Bilateral Agreement** (as the case may be).

APPENDIX 1 - SITE RESPONSIBILITY SCHEDULES

FORMAT, PRINCIPLES AND BASIC PROCEDURE TO BE USED IN THE PREPARATION OF SITE RESPONSIBILITY SCHEDULES

CC.A.1.1 Principles

Types of Schedules

CC.A.1.1.1 At all **Complexes** (which in the context of this **CC** shall include, **Interface Sites** until the **OTSUA Transfer Time**) the following **Site Responsibility Schedules** shall be drawn up using the relevant proforma attached or with such variations as may be agreed between **The Company** and **Users**, but in the absence of agreement the relevant proforma attached will be used. In addition, in the case of **OTSDUW Plant and Apparatus**, and in readiness for the **OTSUA Transfer Time**, the **User** shall provide **The Company** with the necessary information such that **Site Responsibility Schedules** in this form can be prepared by the **Relevant Transmission Licensees** for the **Transmission Interface Site**:

(a) Schedule of **HV Apparatus**

(b) Schedule of **Plant**, **LV/MV Apparatus**, services and supplies;

(c) Schedule of telecommunications and measurements **Apparatus**.

Other than at **Generating Unit**, **DC Converter**, **Power Park Module** and **Power Station** locations, the schedules referred to in (b) and (c) may be combined.

New Connection Sites

CC.A.1.1.2 In the case of a new **Connection Site** each **Site Responsibility Schedule** for a **Connection Site** shall be prepared by **The Company** in consultation with relevant **GB Code Users** at least 2 weeks prior to the **Completion Date** (or, where the **OTSUA** is to become **Operational** prior to the **OTSUA Transfer Time**, an alternative date) under the **Bilateral Agreement** and/or **Construction Agreement** for that **Connection Site** (which may form part of a **Complex**). In the case of a new **Interface Site** where the **OTSUA** is to become **Operational** prior to the **OTSUA Transfer Time** each **Site Responsibility Schedule** for an **Interface Site** shall be prepared by **The Company** in consultation with relevant **GB Code Users** at least 2 weeks prior to the **Completion Date** under the **Bilateral Agreement** and/or **Construction Agreement** for that **Interface Site** (which may form part of a **Complex**) (and references to and requirements placed on "**Connection Site**" in this **CC** shall also be read as "**Interface Site**" where the context requires and until the **OTSUA Transfer Time**). Each **GB Code User** shall, in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**, provide information to **The Company** to enable it to prepare the **Site Responsibility Schedule**.

Sub-division

CC.A.1.1.3 Each **Site Responsibility Schedule** will be subdivided to take account of any separate **Connection Sites** on that **Complex**.

Scope

CC.A.1.1.4 Each **Site Responsibility Schedule** shall detail for each item of **Plant** and **Apparatus**:

(a) **Plant/Apparatus** ownership;

(b) Site Manager (Controller) (except in the case of **Plant/Apparatus** located in **SPT's Transmission Area**);

(c) Safety issues comprising applicable **Safety Rules** and **Control Person** or other responsible person (**Safety Co-ordinator**), or such other person who is responsible for safety;

(d) Operations issues comprising applicable **Operational Procedures** and **Control Engineer**;

(e) Responsibility to undertake statutory inspections, fault investigation and maintenance.

Each **Connection Point** shall be precisely shown.

Detail

CC.A.1.1.5 (a) In the case of **Site Responsibility Schedules** referred to in CC.A.1.1.1(b) and (c), with the exception of **Protection Apparatus** and **Intertrip Apparatus** operation, it will be sufficient to indicate the responsible **User** or **Transmission Licensee**, as the case may be.

(b) In the case of the **Site Responsibility Schedule** referred to in CC.A.1.1.1(a) and for **Protection Apparatus** and **Intertrip Apparatus**, the responsible management unit must be shown in addition to the **User** or **Transmission Licensee**, as the case may be.

CC.A.1.1.6 The **HV Apparatus Site Responsibility Schedule** for each **Connection Site** must include lines and cables emanating from or traversing[1] the **Connection Site**.

Issue Details

CC.A.1.1.7 Every page of each **Site Responsibility Schedule** shall bear the date of issue and the issue number.

Accuracy Confirmation

CC.A.1.1.8 When a **Site Responsibility Schedule** is prepared it shall be sent by **The Company** to the **Users** involved for confirmation of its accuracy.

CC.A.1.1.9 The **Site Responsibility Schedule** shall then be signed on behalf of **The Company** by its **Responsible Manager** (see CC.A.1.1.16) and on behalf of each **User** involved by its **Responsible Manager** (see CC.A.1.1.16), by way of written confirmation of its accuracy. The **Site Responsibility Schedule** will also be signed on behalf of the **Relevant Transmission Licensee** by its **Responsible Manager**.

Distribution and Availability

CC.A.1.1.10 Once signed, two copies will be distributed by **The Company**, not less than two weeks prior to its implementation date, to each **User** which is a party on the **Site Responsibility Schedule**, accompanied by a note indicating the issue number and the date of implementation.

CC.A.1.1.11 **The Company** and **Users** must make the **Site Responsibility Schedules** readily available to operational staff at the **Complex** and at the other relevant control points.

Alterations to Existing Site Responsibility Schedules

CC.A 1.1.12 Without prejudice to the provisions of CC.A.1.1.15 which deals with urgent changes, when a **User** identified on a **Site Responsibility Schedule** becomes aware that an alteration is necessary, it must inform **The Company** immediately and in any event 8 weeks prior to any change taking effect (or as soon as possible after becoming aware of it, if less than 8 weeks remain when the **User** becomes aware of the change). This will cover the commissioning of new **Plant** and/or **Apparatus** at the **Connection Site**, whether requiring a revised **Bilateral Agreement** or not, de-commissioning of **Plant** and/or **Apparatus**, and other changes which affect the accuracy of the **Site Responsibility Schedule**.

CC.A 1.1.13 Where **The Company** has been informed of a change by an **GB Code User**, or itself proposes a change, it will prepare a revised **Site Responsibility Schedule** by not less than six weeks prior to the change taking effect (subject to it having been informed or knowing of the change eight weeks prior to that time) and the procedure set out in CC.A.1.1.8 shall be followed with regard to the revised **Site Responsibility Schedule**.

CC.A 1.1.14 The revised **Site Responsibility Schedule** shall then be signed in accordance with the procedure set out in CC.A.1.1.9 and distributed in accordance with the procedure set out in CC.A.1.1.10, accompanied by a note indicating where the alteration(s) has/have been made, the new issue number and the date of implementation.

Urgent Changes

[1] Details of circuits traversing the **Connection Site** are only needed from the date which is the earlier of the date when the **Site Responsibility Schedule** is first updated and 15th October 2004. In Scotland or **Offshore**, from a date to be agreed between **The Company** and **the Relevant Transmission Licensee**.

CC.A.1.1.15 When an **GB Code User** identified on a **Site Responsibility Schedule**, or **The Company**, as the case may be, becomes aware that an alteration to the **Site Responsibility Schedule** is necessary urgently to reflect, for example, an emergency situation which has arisen outside its control, the **GB Code User** shall notify **The Company**, or **The Company** shall notify the **GB Code User**, as the case may be, immediately and will discuss:

(a) what change is necessary to the **Site Responsibility Schedule**;

(b) whether the **Site Responsibility Schedule** is to be modified temporarily or permanently;

(c) the distribution of the revised **Site Responsibility Schedule**.

The Company will prepare a revised **Site Responsibility Schedule** as soon as possible, and in any event within seven days of it being informed of or knowing the necessary alteration. The **Site Responsibility Schedule** will be confirmed by **GB Code Users** and signed on behalf of **The Company** and **GB Code Users** and the **Relevant Transmission Licensee** (by the persons referred to in CC.A.1.1.9) as soon as possible after it has been prepared and sent to **GB Code Users** for confirmation.

Responsible Managers

CC.A.1.1.16 Each **GB Code User** shall, prior to the **Completion Date** under each **Bilateral Agreement** and/or **Construction Agreement**, supply to **The Company** a list of Managers who have been duly authorised to sign **Site Responsibility Schedules** on behalf of the **GB Code User** and **The Company** shall, prior to the **Completion Date** under each **Bilateral Agreement** and/or **Construction Agreement**, supply to that **GB Code User** the name of the **Relevant Transmission Licensee's Responsible Manager** and each shall supply to the other any changes to such list six weeks before the change takes effect where the change is anticipated, and as soon as possible after the change, where the change was not anticipated.

De-commissioning of Connection Sites

CC.A.1.1.17 Where a **Connection Site** is to be de-commissioned, whichever of **The Company** or the **GB Code User** who is initiating the de-commissioning must contact the other to arrange for the **Site Responsibility Schedule** to be amended at the relevant time.

PROFORMA FOR SITE RESPONSIBILITY SCHEDULE

_____ AREA

COMPLEX: _____ SCHEDULE: _____

CONNECTION SITE: _____

ITEM OF PLANT/ APPARATUS	PLANT APPARATUS OWNER	SITE MANAGER	SAFETY		OPERATIONS		PARTY RESPONSIBLE FOR UNDERTAKING STATUTORY INSPECTIONS, FAULT INVESTIGATION & MAINTENANCE	REMARKS
			SAFETY RULES	CONTROL OR OTHER RESPONSIBLE PERSON (SAFETY CO-ORDINATOR	OPERATIONAL PROCEDURES	CONTROL OR OTHER RESPONSIBLE ENGINEER		

PAGE: _____ ISSUE NO: _____ DATE: _____

PROFORMA FOR SITE RESPONSIBILITY SCHEDULE

_____ AREA

COMPLEX: _____ SCHEDULE: _____

CONNECTION SITE: _____

ITEM OF PLANT/ APPARATUS	PLANT APPARATUS OWNER	SITE MANAGER	SAFETY		OPERATIONS		PARTY RESPONSIBLE FOR UNDERTAKING STATUTORY INSPECTIONS, FAULT INVESTIGATION & MAINTENANCE	REMARKS
			SAFETY RULES	CONTROL OR OTHER RESPONSIBLE PERSON (SAFETY CO-ORDINATOR	OPERATIONAL PROCEDURES	CONTROL OR OTHER RESPONSIBLE ENGINEER		

NOTES:

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

PAGE: _____ ISSUE NO: _____ DATE: _____

SP TRANSMISSION Ltd
SITE RESPONSIBILITY SCHEDULE
OWNERSHIP, MAINTENANCE AND OPERATIONS OF EQUIPMENT
IN JOINT USER SITUATIONS

Network Area: _____

Sheet No. _____
Revision: _____
Date: _____

SECTION 'A' BUILDING AND SITE

OWNER		ACCESS REQUIRED:-	
LESSEE			
MAINTENANCE		SPECIAL CONDITIONS:-	
SAFETY			
SECURITY		LOCATION OF SUPPLY TERMINALS:-	

SECTION 'B' CUSTOMER OR OTHER PARTY

NAME:-						
ADDRESS:-						
TEL NO:-						
SUB STATION:-						
LOCATION:-						

SECTION 'C' PLANT

ITEM Nos.	EQUIPMENT	IDENTIFICATION	OWNER	SAFETY RULES APPLICABLE	OPERATION				MAINTENANCE		FAULT INVESTIGATION			TESTING		RELAY SETTINGS	REMARKS
					Tripping	Closing	Isolating	Earthing	Primary Equip.	Protection Equip.	Primary Equip.	Protection Equip.	Reclosure	Trip and Alarm	Primary Equip.		

SECTION 'D' CONFIGURATION AND CONTROL

ITEM Nos.	CONFIGURATION RESPONSIBILITY	TELEPHONE NUMBER	REMARKS
ITEM Nos.	CONTROL RESPONSIBILITY	TELEPHONE NUMBER	REMARKS

SECTION 'E' ADDITIONAL INFORMATION

ABBREVIATIONS:-
D - SP AUTHORISED PERSON - DISTRIBUTION SYSTEM
NGC - NATIONAL GRID COMPANY
SPD - SP DISTRIBUTION Ltd
SPPS - POWERSYSTEMS
SPT - SP TRANSMISSION Ltd
ST - SCOTTISH POWER TELECOMMUNICATIONS
T - SP AUTHORISED PERSON - TRANSMISSION SYSTEM
U - USER

SIGNED _____ FOR SP Transmission DATE _____

SIGNED _____ FOR SP Distribution DATE _____

SIGNED _____ FOR PowerSystems/User DATE _____

Scottish Hydro-Electric Transmission Limited

Site Responsibility Schedule

Substation Type		Number:		Revision:	

Equipment	Owner	Controller	Maintainer	Responsible System User	Responsible Management Unit	Control Authority	Safety Rules	Operational Procedures	Notes

APPENDIX 2 - OPERATION DIAGRAMS

PART 1A - PROCEDURES RELATING TO OPERATION DIAGRAMS

FIXED CAPACITOR



EARTH



EARTHING RESISTOR



LIQUID EARTHING RESISTOR



ARC SUPPRESSION COIL



FIXED MAINTENANCE EARTHING DEVICE



CARRIER COUPLING EQUIPMENT
(WITHOUT VT)



CARRIER COUPLING EQUIPMENT
(WITH VT ON ONE PHASE)



CARRIER COUPLING EQUIPMENT
(WITH VT ON 3 PHASES)



AC GENERATOR



SYNCHRONOUS COMPENSATOR



CIRCUIT BREAKER



CIRCUIT BREAKER
WITH DELAYED AUTO RECLOSE



WITHDRAWABLE METALCLAD
SWITCHGEAR



SWITCH DISCONNECTOR



SWITCH DISCONNECTOR
WITH INCORPORATED
EARTH SWITCH



DISCONNECTOR
(CENTRE ROTATING POST)



DISCONNECTOR
(SINGLE BREAK
DOUBLE ROTATING)



DISCONNECTOR
(SINGLE BREAK)



DISCONNECTOR
(NON-INTERLOCKED)



DISCONNECTOR
(POWER OPERATED)
NA - NON-AUTOMATIC
A - AUTOMATIC
SO - SEQUENTIAL OPERATION
FI - FAULT INTERFERING OPERATION



EARTH SWITCH



FAULT THROWING SWITCH
(PHASE TO PHASE)



FAULT THROWING SWITCH
(EARTH FAULT)



SURGE ARRESTOR



THYRISTOR



TRANSFORMERS
(VECTORS TO INDICATE
WINDING CONFIGURATION)

TWO WINDING



THREE WINDING



AUTO



AUTO WITH DELTA TERTIARY



EARTHING OR AUX. TRANSFORMER

(-) INDICATE REMOTE SITE
IF APPLICABLE



VOLTAGE TRANSFORMERS

SINGLE PHASE WOUND



THREE PHASE WOUND



SINGLE PHASE CAPACITOR



TWO SINGLE PHASE CAPACITOR



THREE PHASE CAPACITOR



* CURRENT TRANSFORMER
(WHERE SEPARATE PRIMARY
APPARATUS)



* COMBINED VT/CT UNIT
FOR METERING



REACTOR



* BUSBARS

* OTHER PRIMARY CONNECTIONS

* CABLE & CABLE SEALING END



* THROUGH WALL BUSHING



* BYPASS FACILITY



* CROSSING OF CONDUCTORS
(LOWER CONDUCTOR
TO BE BROKEN)



PREFERENTIAL ABBREVIATIONS

AUXILIARY TRANSFORMER	Aux T
EARTHING TRANSFORMER	ET
GAS TURBINE	Gas T
GENERATOR TRANSFORMER	Gen T
GRID TRANSFORMER	Gr T
SERIES REACTOR	Ser Reac
SHUNT REACTOR	Sh Reac
STATION TRANSFORMER	Stn T
SUPERGRID TRANSFORMER	SGT
UNIT TRANSFORMER	UT

* NON-STANDARD SYMBOL

PORTABLE MAINTENANCE
EARTH DEVICE



DISCONNECTOR
(PANTOGRAPH TYPE)



QUADRATURE BOOSTER



DISCONNECTOR
(KNEE TYPE)



SHORTING/DISCHARGE SWITCH



CAPACITOR
(INCLUDING HARMONIC FILTER)



SINGLE PHASE TRANSFORMER(BR)
NEUTRAL AND PHASE CONNECTIONS



RESISTOR WITH INHERENT
NON-LINEAR VARIABILITY,
VOLTAGE DEPENDANT



PART 1B - PROCEDURES RELATING TO GAS ZONE DIAGRAMS

GAS INSULATED BUSBAR



DOUBLE-BREAK DISCONNECTOR



GAS BOUNDARY



EXTERNAL MOUNTED CURRENT TRANSFORMER (WHERE SEPARATE PRIMARY APPARATUS)



GAS/GAS BOUNDARY



STOP VALVE NORMALLY CLOSED



GAS/CABLE BOUNDARY



STOP VALVE NORMALLY OPEN



GAS/AIR BOUNDARY



GAS MONITOR



GAS/TRANSFORMER BOUNDARY



FILTER



MAINTENANCE VALVE



QUICK ACTING COUPLING



PART 2 - NON-EXHAUSTIVE LIST OF APPARATUS TO BE INCLUDED ON OPERATION DIAGRAMS

Basic Principles

(1) Where practicable, all the **HV Apparatus** on any **Connection Site** shall be shown on one **Operation Diagram**. Provided the clarity of the diagram is not impaired, the layout shall represent as closely as possible the geographical arrangement on the **Connection Site**.

(2) Where more than one **Operation Diagram** is unavoidable, duplication of identical information on more than one **Operation Diagram** must be avoided.

(3) The **Operation Diagram** must show accurately the current status of the **Apparatus** e.g. whether commissioned or decommissioned. Where decommissioned, the associated switchbay will be labelled "spare bay".

(4) Provision will be made on the **Operation Diagram** for signifying approvals, together with provision for details of revisions and dates.

(5) **Operation Diagrams** will be prepared in A4 format or such other format as may be agreed with **The Company**.

(6) The **Operation Diagram** should normally be drawn single line. However, where appropriate, detail which applies to individual phases shall be shown. For example, some **HV Apparatus** is numbered individually per phase.

Apparatus To Be Shown On Operation Diagram

(1) Busbars

(2) Circuit Breakers

(3) Disconnector (Isolator) and Switch Disconnecters (Switching Isolators)

(4) Disconnectors (Isolators) - Automatic Facilities

(5) Bypass Facilities

(6) Earthing Switches

(7) Maintenance Earths

(8) Overhead Line Entries

(9) Overhead Line Traps

(10) Cable and Cable Sealing Ends

(11) Generating Unit

(12) Generator Transformers

(13) Generating Unit Transformers, Station Transformers, including the lower voltage circuit-breakers.

(14) Synchronous Compensators

(15) Static Variable Compensators

(16) Capacitors (including Harmonic Filters)

(17) Series or Shunt Reactors (Referred to as "Inductors" at nuclear power station sites)

(18) Supergrid and Grid Transformers

(19) Tertiary Windings

(20) Earthing and Auxiliary Transformers

(21) Three Phase VT's

(22) Single Phase VT & Phase Identity

(23) High Accuracy VT and Phase Identity

(24) Surge Arrestors/Diverters

(25) Neutral Earthing Arrangements on HV Plant

(26) Fault Throwing Devices

(27) Quadrature Boosters

(28) Arc Suppression Coils

(29) Single Phase Transformers (BR) Neutral and Phase Connections

(30) Current Transformers (where separate plant items)

(31) Wall Bushings

(32) Combined VT/CT Units

(33) Shorting and Discharge Switches

(34) Thyristor

(35) Resistor with Inherent Non-Linear Variability, Voltage Dependent

(36) Gas Zone

APPENDIX 3 - MINIMUM FREQUENCY RESPONSE REQUIREMENT PROFILE AND OPERATING RANGE FOR NEW POWER STATIONS AND DC CONVERTER STATIONS

CC.A.3.1 Scope

The **Frequency** response capability is defined in terms of **Primary Response**, **Secondary Response** and **High Frequency Response**. This appendix defines the minimum **Frequency** response requirement profile for:

(a) each **Onshore Generating Unit** and/or **CCGT Module** which has a **Completion Date** after 1 January 2001 in England and Wales and 1 April 2005 in Scotland and **Offshore Generating Unit** in a **Large Power Station**,

(b) each **DC Converter** at a **DC Converter Station** which has a **Completion Date** on or after 1 April 2005 or each **Offshore DC Converter** which is part of a **Large Power Station**.

(c) each **Onshore Power Park Module** in England and Wales with a **Completion Date** on or after 1 January 2006.

(d) each **Onshore Power Park Module** in operation in Scotland after 1 January 2006 with a **Completion Date** after 1 April 2005 and in **Power Stations** with a **Registered Capacity** of 50MW or more.

(e) each **Offshore Power Park Module** in a **Large Power Station** with a **Registered Capacity** of 50MW or more.

For the avoidance of doubt, this appendix does not apply to:

(i) **Generating Units** and/or **CCGT Modules** which have a **Completion Date** before 1 January 2001 in England and Wales and before 1 April 2005 in Scotland,

(ii) **DC Converters** at a **DC Converter Station** which have a **Completion Date** before 1 April 2005.

(iii) **Power Park Modules** in England and Wales with a **Completion Date** before 1 January 2006.

(iv) **Power Park Modules** in operation in Scotland before 1 January 2006.

(v) **Power Park Modules** in Scotland with a **Completion Date** before 1 April 2005.

(vi) **Power Park Modules** in **Power Stations** with a **Registered Capacity** less than 50MW.

(vii) **Small Power Stations** or individually to **Power Park Units**; or.

(viii) an **OTSDUW DC Converter** where the **Interface Point Capacity** is less than 50MW.

OTSDUW Plant and Apparatus should facilitate the delivery of **Frequency** response services provided by **Offshore Generating Units** and **Offshore Power Park Modules** at the **Interface Point**.

The functional definition provides appropriate performance criteria relating to the provision of **Frequency** control by means of **Frequency** sensitive generation in addition to the other requirements identified in CC.6.3.7.

In this Appendix 3 to the **CC**, for a **CCGT Module** or a **Power Park Module** with more than one **Generating Unit**, the phrase **Minimum Generation** applies to the entire **CCGT Module** or **Power Park Module** operating with all **Generating Units Synchronised** to the **System**.

The minimum **Frequency** response requirement profile is shown diagrammatically in Figure CC.A.3.1. The capability profile specifies the minimum required levels of **Primary Response**, **Secondary Response** and **High Frequency Response** throughout the normal plant operating range. The definitions of these **Frequency** response capabilities are illustrated diagrammatically in Figures CC.A.3.2 & CC.A.3.3.

CC.A.3.2 Plant Operating Range

The upper limit of the operating range is the **Registered Capacity** of the **Generating Unit** or **CCGT Module** or **DC Converter** or **Power Park Module**.

The **Minimum Generation** level may be less than, but must not be more than, 65% of the **Registered Capacity**. Each **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** and/or **DC Converter** must be capable of operating satisfactorily down to the **Designed Minimum Operating Level** as dictated by **System** operating conditions, although it will not be instructed to below its **Minimum Generation** level. If a **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** is operating below **Minimum Generation** because of high **System Frequency**, it should recover adequately to its **Minimum Generation** level as the **System Frequency** returns to **Target Frequency** so that it can provide **Primary** and **Secondary Response** from **Minimum Generation** if the **System Frequency** continues to fall. For the avoidance of doubt, under normal operating conditions steady state operation below **Minimum Generation** is not expected. The **Designed Minimum Operating Level** must not be more than 55% of **Registered Capacity**.

In the event of a **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** load rejecting down to no less than its **Designed Minimum Operating Level** it should not trip as a result of automatic action as detailed in BC3.7. If the load rejection is to a level less than the **Designed Minimum Operating Level** then it is accepted that the condition might be so severe as to cause it to be disconnected from the **System**.

CC.A.3.3 Minimum Frequency Response Requirement Profile

Figure CC.A.3.1 shows the minimum **Frequency** response requirement profile diagrammatically for a 0.5 Hz change in **Frequency**. The percentage response capabilities and loading levels are defined on the basis of the **Registered Capacity** of the **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter**. Each **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** and/or **DC Converter** must be capable of operating in a manner to provide **Frequency** response at least to the solid boundaries shown in the figure. If the **Frequency** response capability falls within the solid boundaries, the **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** is providing response below the minimum requirement which is not acceptable. Nothing in this appendix is intended to prevent a **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** from being designed to deliver a **Frequency** response in excess of the identified minimum requirement.

The **Frequency** response delivered for **Frequency** deviations of less than 0.5 Hz should be no less than a figure which is directly proportional to the minimum **Frequency** response requirement for a **Frequency** deviation of 0.5 Hz. For example, if the **Frequency** deviation is 0.2 Hz, the corresponding minimum **Frequency** response requirement is 40% of the level shown in Figure CC.A.3.1. The **Frequency** response delivered for **Frequency** deviations of more than 0.5 Hz should be no less than the response delivered for a **Frequency** deviation of 0.5 Hz.

Each **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** and/or **DC Converter** must be capable of providing some response, in keeping with its specific operational characteristics, when operating between 95% to 100% of **Registered Capacity** as illustrated by the dotted lines in Figure CC.A.3.1.

At the **Minimum Generation** level, each **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** and/or **DC Converter** is required to provide high and low frequency response depending on the **System Frequency** conditions. Where the **Frequency** is high, the **Active Power** output is therefore expected to fall below the **Minimum Generation** level.

The **Designed Minimum Operating Level** is the output at which a **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** and/or **DC Converter** has no **High Frequency Response** capability. It may be less than, but must not be more than, 55% of the **Registered Capacity**. This implies that a **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** is not obliged to reduce its output to below this level unless the **Frequency** is at or above 50.5 Hz (cf BC3.7).

CC.A.3.4 Testing of Frequency Response Capability

The response capabilities shown diagrammatically in Figure CC.A.3.1 are measured by taking the responses as obtained from some of the dynamic response tests specified by **The Company** and carried out by **GB Generators** and **DC Converter Station** owners for compliance purposes and to validate the content of **Ancillary Services Agreements** using an injection of a **Frequency** change to the plant control system (i.e. governor and load controller). The injected signal is a linear ramp from zero to 0.5 Hz **Frequency** change over a ten second period, and is sustained at 0.5 Hz **Frequency** change thereafter, as illustrated diagrammatically in figures CC.A.3.2 and CC.A.3.3. In the case of an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to a **Bilateral Agreement**, **The Company** may require the **Network Operator** within whose **System** the **Embedded Medium Power Station** or **Embedded DC Converter Station** is situated, to ensure that the **Embedded Person** performs the dynamic response tests reasonably required by **The Company** in order to demonstrate compliance within the relevant requirements in the **CC**.

The **Primary Response** capability (P) of a **Generating Unit** or a **CCGT Module** or **Power Park Module** or **DC Converter** is the minimum increase in **Active Power** output between 10 and 30 seconds after the start of the ramp injection as illustrated diagrammatically in Figure CC.A.3.2. This increase in **Active Power** output should be released increasingly with time over the period 0 to 10 seconds from the time of the start of the **Frequency** fall as illustrated by the response from Figure CC.A.3.2.

The **Secondary Response** capability (S) of a **Generating Unit** or a **CCGT Module** or **Power Park Module** or **DC Converter** is the minimum increase in **Active Power** output between 30 seconds and 30 minutes after the start of the ramp injection as illustrated diagrammatically in Figure CC.A.3.2.

The **High Frequency Response** capability (H) of a **Generating Unit** or a **CCGT Module** or **Power Park Module** or **DC Converter** is the decrease in **Active Power** output provided 10 seconds after the start of the ramp injection and sustained thereafter as illustrated diagrammatically in Figure CC.A.3.3. This reduction in **Active Power** output should be released increasingly with time over the period 0 to 10 seconds from the time of the start of the **Frequency** rise as illustrated by the response in Figure CC.A.3.2.

CC.A.3.5 Repeatability Of Response

When a **Generating Unit** or **CCGT Module** or **Power Park Module** or **DC Converter** has responded to a significant **Frequency** disturbance, its response capability must be fully restored as soon as technically possible. Full response capability should be restored no later than 20 minutes after the initial change of **System Frequency** arising from the **Frequency** disturbance.

Figure CC.A.3.1 - Minimum Frequency Response Requirement Profile for a 0.5 HzFrequency change from Target Frequency

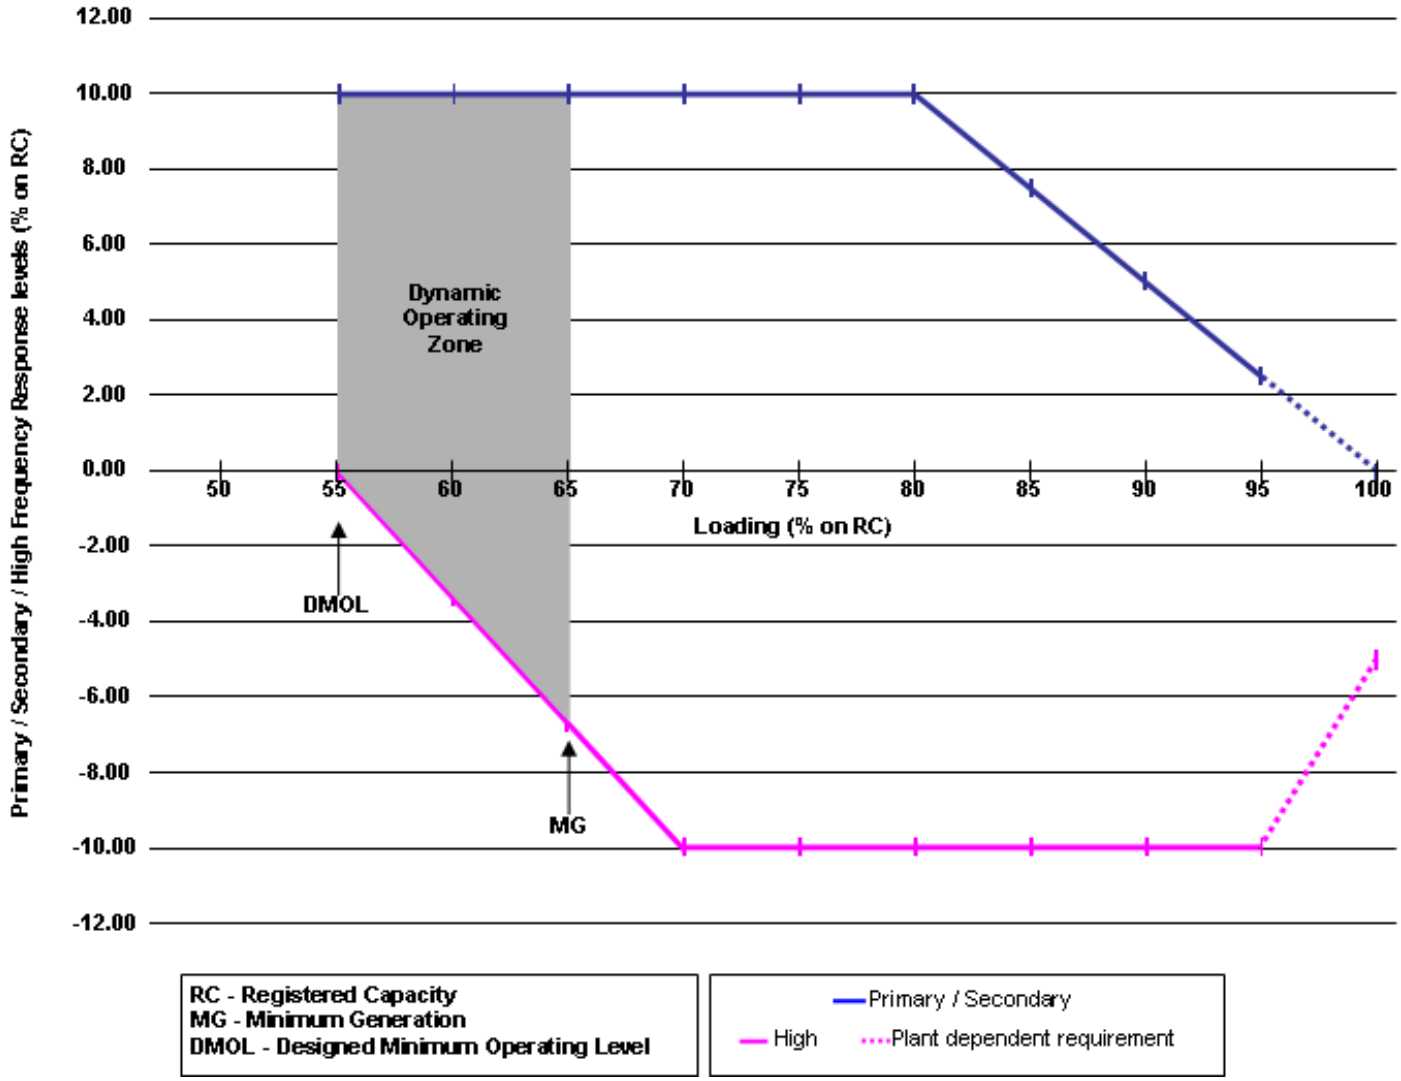

Figure CC.A.3.2 - Interpretation of Primary and Secondary Response Values

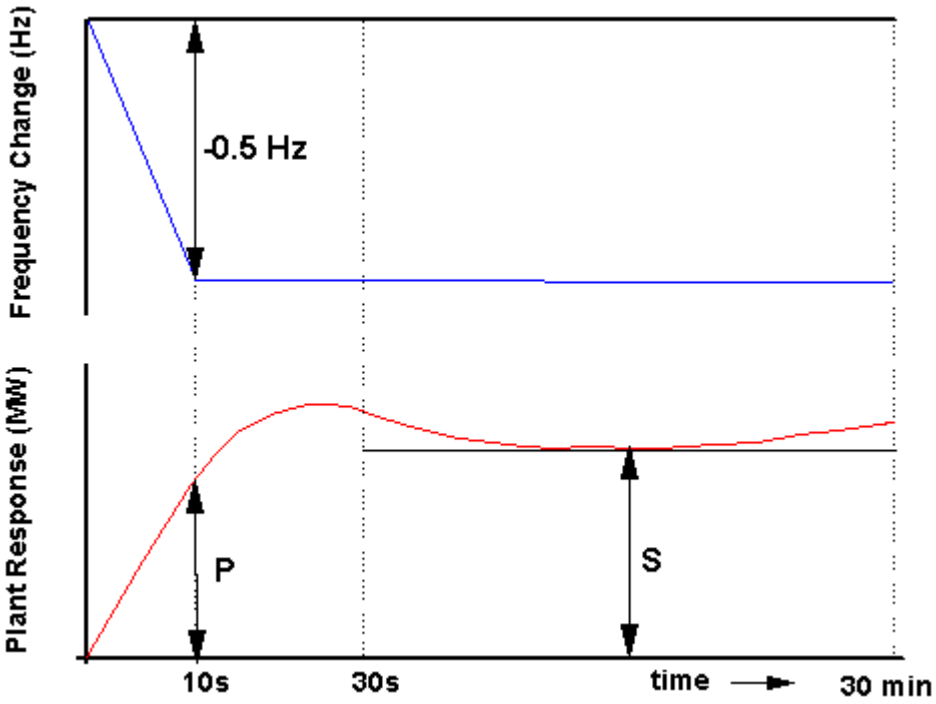

Figure CC.A.3.3 - Interpretation of High Frequency Response Values

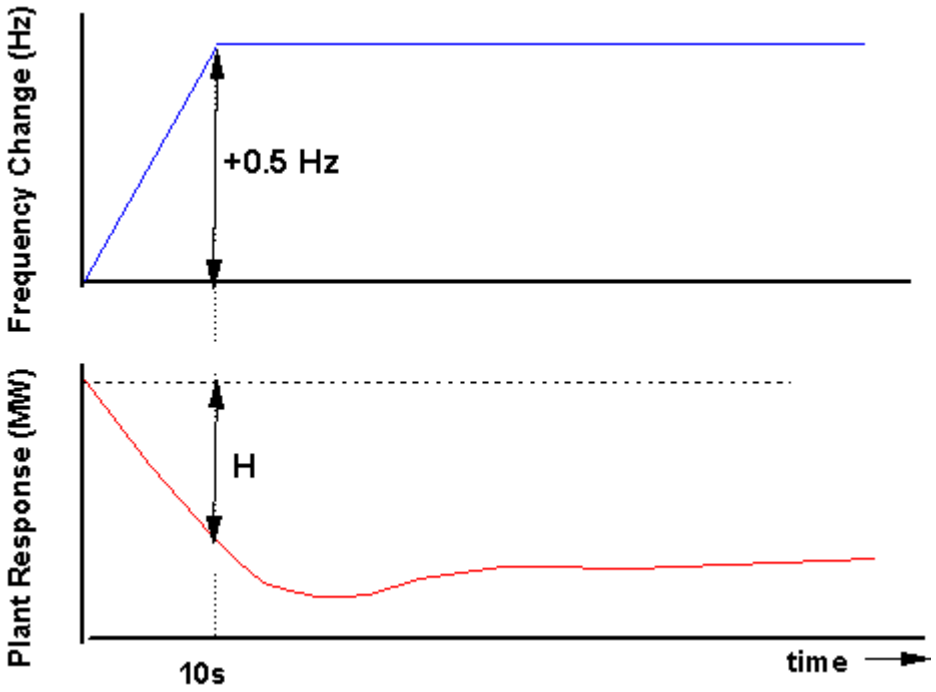

APPENDIX 4 - FAULT RIDE THROUGH REQUIREMENTS

APPENDIX 4A - FAULT RIDE THROUGH REQUIREMENTS FOR ONSHORE SYNCHRONOUS GENERATING UNITS, ONSHORE POWER PARK MODULES, ONSHORE DC CONVERTERS OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT, OFFSHORE SYNCHRONOUS GENERATING UNITS IN A LARGE POWER STATION, OFFSHORE POWER PARK MODULES IN A LARGE POWER STATION AND OFFSHORE DC CONVERTERS IN A LARGE POWER STATION WHICH SELECT TO MEET THE FAULT RIDE THROUGH REQUIREMENTS AT THE INTERFACE POINT

CC.A.4A.1 Scope

The fault ride through requirement is defined in CC.6.3.15.1 (a), (b) and CC.6.3.15.3. This Appendix provides illustrations by way of examples only of CC.6.3.15.1 (a) (i) and further background and illustrations to CC.6.3.15.1 (1b) (i) and CC.6.3.15.1 (2b) (i) and is not intended to show all possible permutations.

CC.A.4A.2 Short Circuit Faults At Supergrid Voltage On The Onshore Transmission System Up To 140ms In Duration

For short circuit faults at **Supergrid Voltage** on the **Onshore Transmission System** (which could be at an **Interface Point**) up to 140ms in duration, the fault ride through requirement is defined in CC.6.3.15.1 (a) (i). Figures CC.A.4A.1 (a) and (b) illustrate two typical examples of voltage recovery for short-circuit faults cleared within 140ms by two circuit breakers (a) and three circuit breakers (b) respectively.

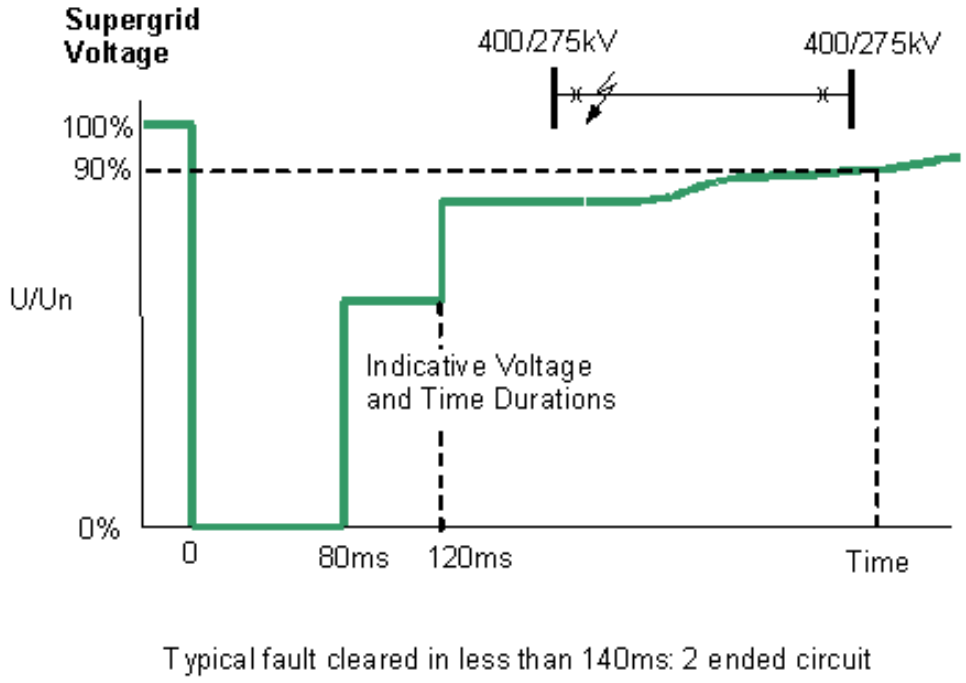

Figure CC.A.4A.1 (a)

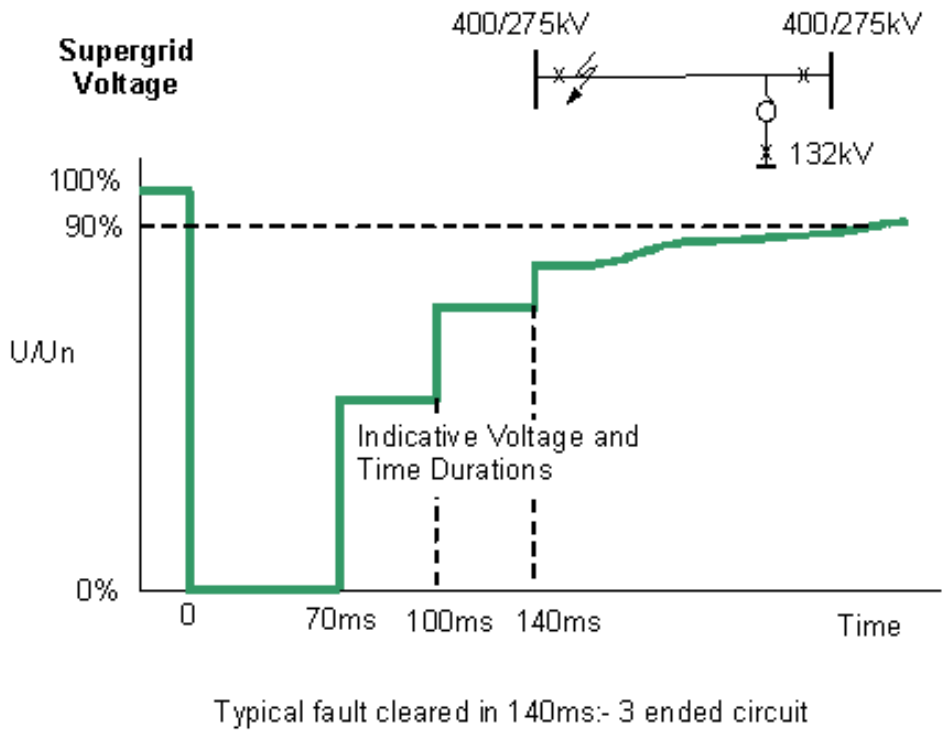

Figure CC.A.4A.1 (b)

CC.A.4A.3 Supergrid Voltage Dips On The Onshore Transmission System Greater Than 140ms In Duration

CC.A.4A3.1 Requirements applicable to **Synchronous Generating Units** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

For balanced **Supergrid Voltage** dips on the **Onshore Transmission System** having durations greater than 140ms and up to 3 minutes, the fault ride through requirement is defined in CC.6.3.15.1 (1b) and Figure 5a which is reproduced in this Appendix as Figure CC.A.4A3.1 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at a point on the **Onshore Transmission System** (or **User System** if located **Onshore**) to a disturbance. Rather, each point on the profile (i.e. the heavy black line) represents a voltage level and an associated time duration which connected **Synchronous Generating Units** must withstand or ride through.

Figures CC.A.4A3.2 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

NOT TO SCALE

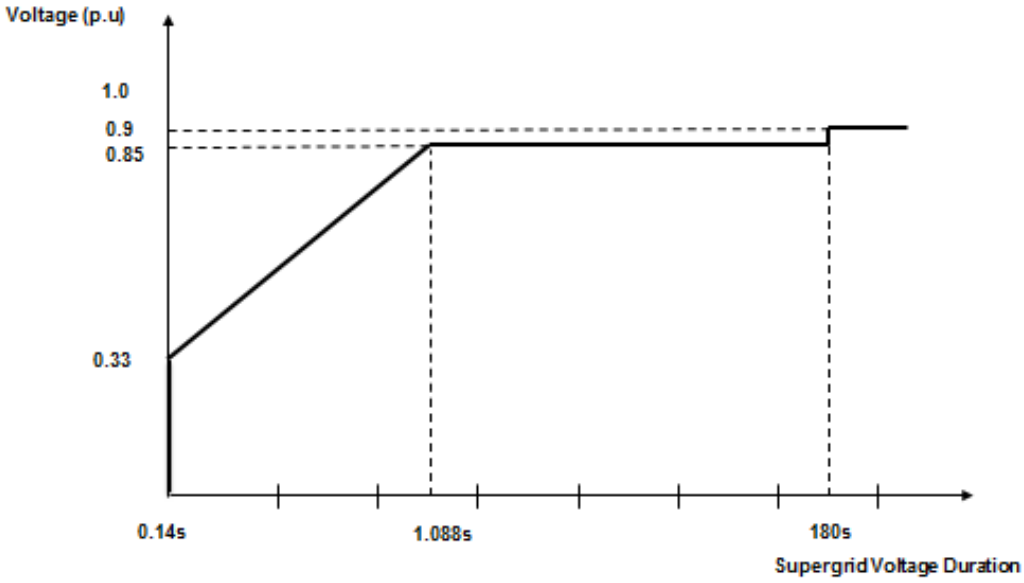

Figure CC.A.4A3.1

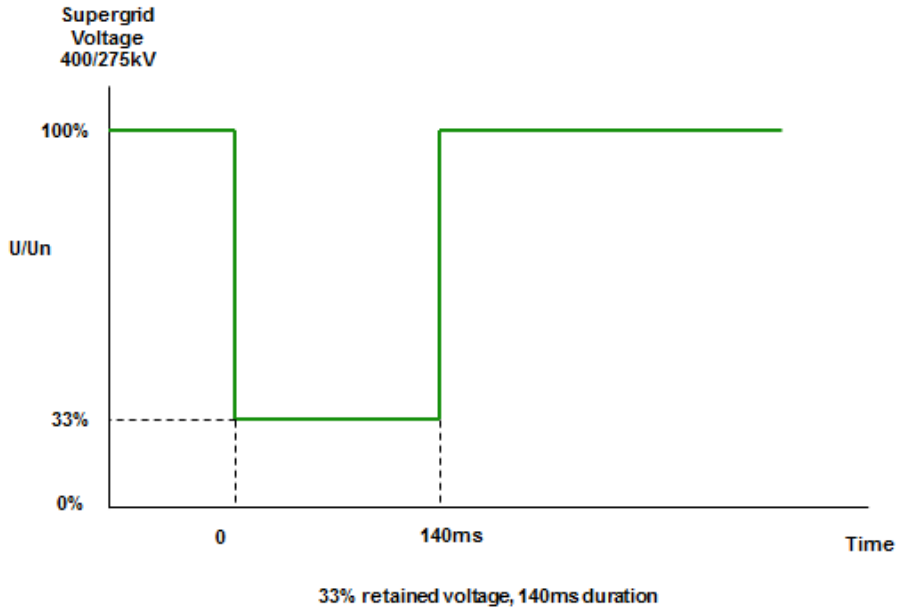

Figure CC.A.4A3.2 (a)

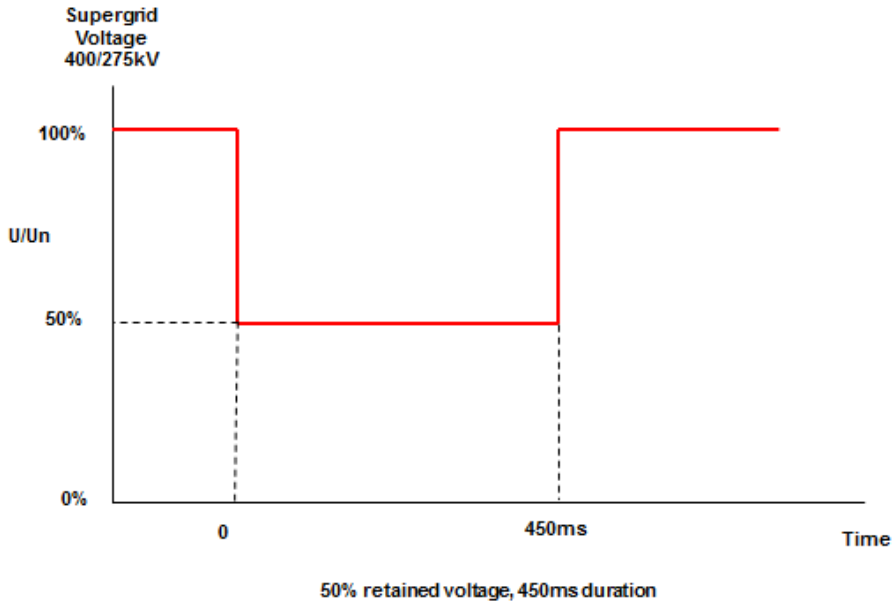

Figure CC.A.4A3.2 (b)

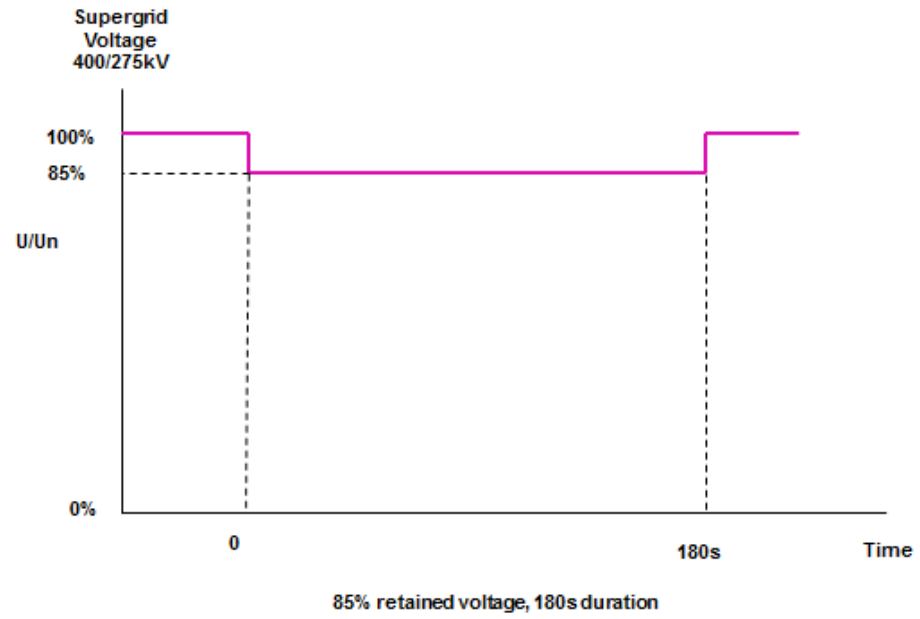

Figure CC.A.4A3.2 (c)

CC.A.4A3.2 Requirements applicable to **Power Park Modules** or **OTSDUW Plant and Apparatus** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

For balanced **Supergrid Voltage** dips on the **Onshore Transmission System** (which could be at an **Interface Point**) having durations greater than 140ms and up to 3 minutes the fault ride through requirement is defined in CC.6.3.15.1 (2b) and Figure 5b which is reproduced in this Appendix as Figure CC.A.4A3.3 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at a point on the **Onshore Transmission System** (or **User System** if located **Onshore**) to a disturbance. Rather, each point on the profile (i.e. the heavy black line) represents a voltage level and an associated time duration which connected **Power Park Modules** or **OTSDUW Plant and Apparatus** must withstand or ride through.

Figures CC.A.4A.4 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

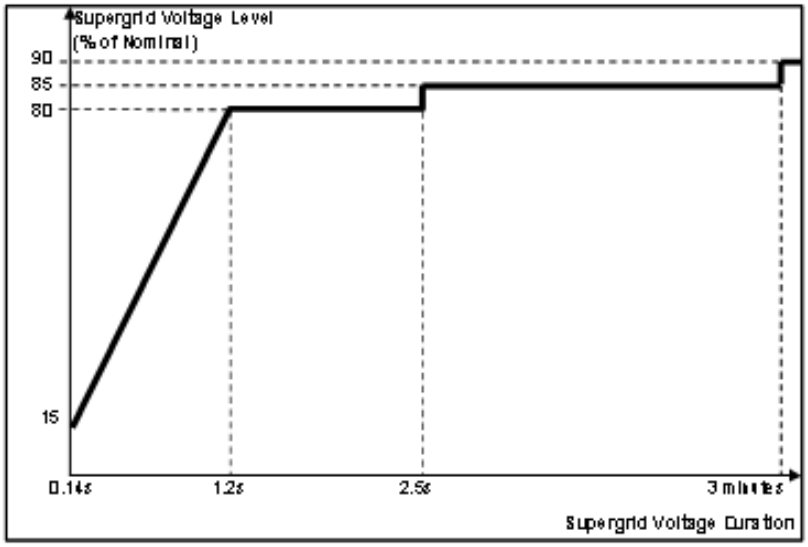

Figure CC.A.4A3.3

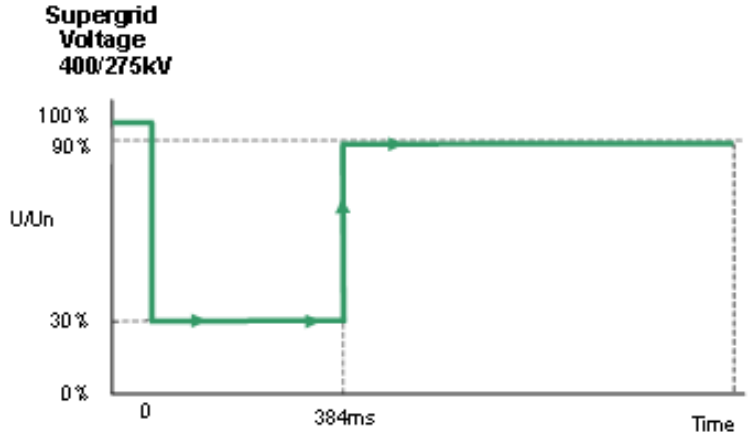

30% retained voltage, 384ms duration

Figure CC.A.4A3.4 (a)

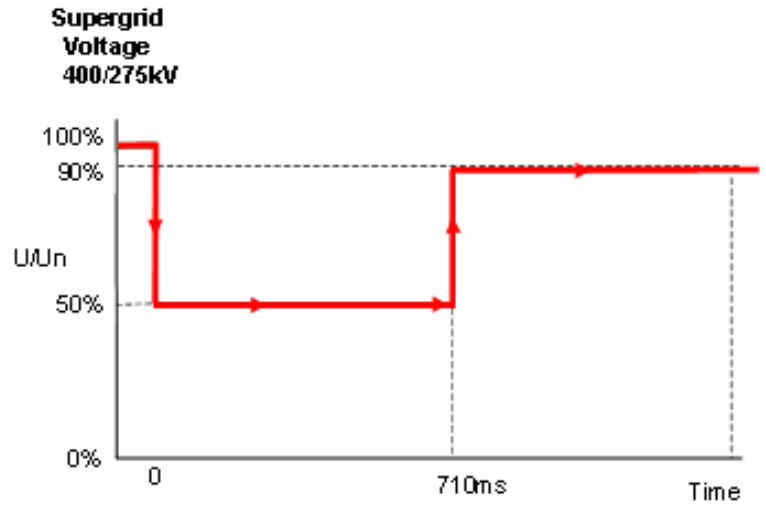

50% retained voltage, 710ms duration

Figure CC.A.4A3.4 (b)

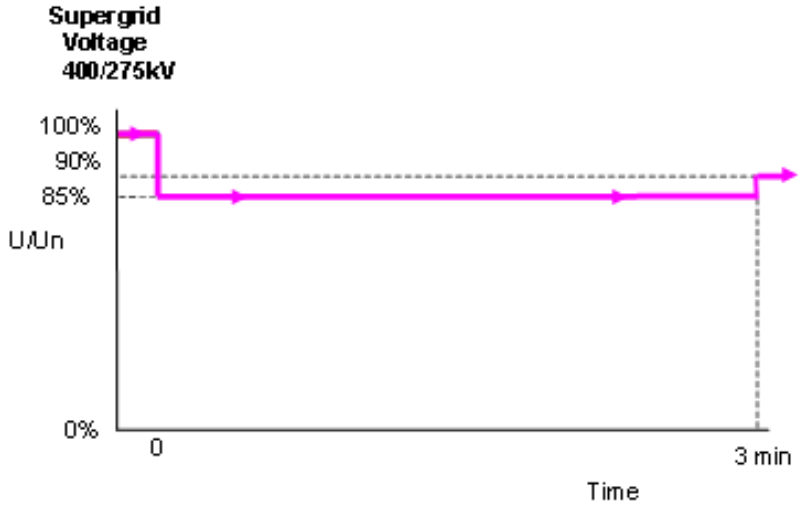

85% retained voltage, 3 minutes duration

Figure CC.A.4A3.4 (c)

APPENDIX 4B - FAULT RIDE THROUGH REQUIREMENTS FOR OFFSHORE GENERATING UNITS IN A LARGE POWER STATION, OFFSHORE POWER PARK MODULES IN A LARGE POWER STATION AND OFFSHORE DC CONVERTERS IN A LARGE POWER STATION WHICH SELECT TO MEET THE FAULT RIDE THROUGH REQUIREMENTS AT THE LV SIDE OF THE OFFSHORE PLATFORM AS SPECIFIED IN CC.6.3.15.2

CC.A.4B.1 Scope

The fault ride through requirement is defined in CC.6.3.15.2 (a), (b) and CC.6.3.15.3. This Appendix provides illustrations by way of examples only of CC.6.3.15.2 (a) (i) and further background and illustrations to CC.6.3.15.2 (1b) and CC.6.3.15.2 (2b) and is not intended to show all possible permutations.

CC.A.4B.2 Voltage Dips On The LV Side Of The Offshore Platform Up To 140ms In Duration

For voltage dips on the **LV Side of the Offshore Platform** which last up to 140ms in duration, the fault ride through requirement is defined in CC.6.3.15.2 (a) (i). This includes Figure 6 which is reproduced here in Figure CC.A.4B.1. The purpose of this requirement is to translate the conditions caused by a balanced or unbalanced fault which occurs on the **Onshore Transmission System** (which may include the **Interface Point)** at the **LV Side of the Offshore Platform**.

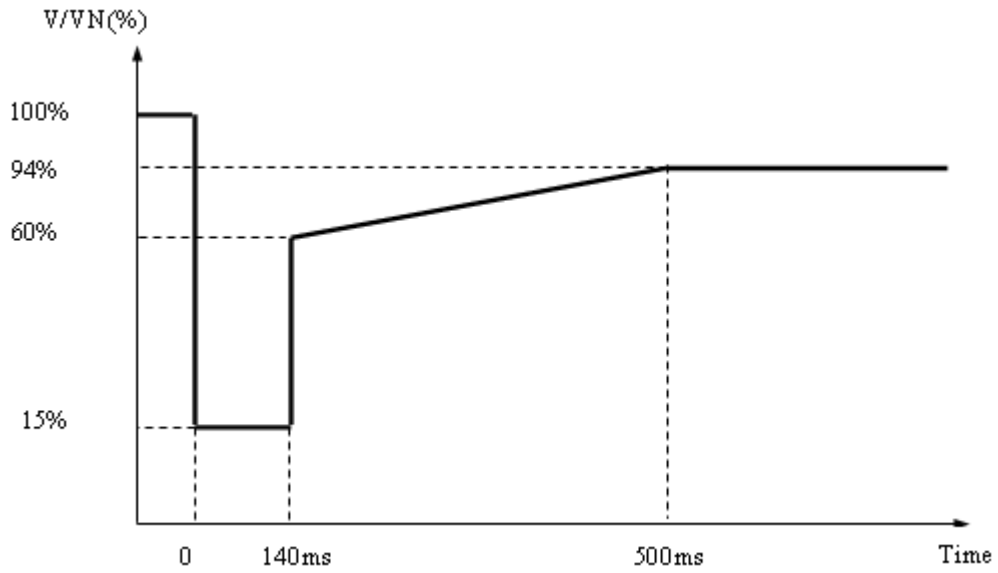

V/V_N is the ratio of the voltage at the **LV side of the Offshore Platform** to the nominal voltage of the LV side of the **Offshore Platform**.

Figure CC.A.4B.1

Figures CC.A.4B.2 (a) and CC.A.4B.2 (b) illustrate two typical examples of the voltage recovery seen at the **LV Side of the Offshore Platform** for a short circuit fault cleared within 140ms by (a) two circuit breakers and (b) three circuit breakers on the **Onshore Transmission System**.

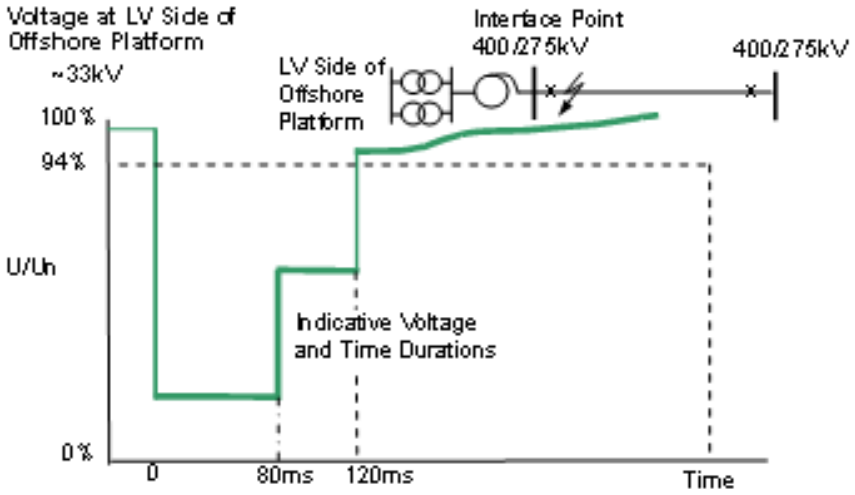

Typical fault cleared in less than 140ms: 2 ended circuit

Figure CC.A.4B.2 (a)

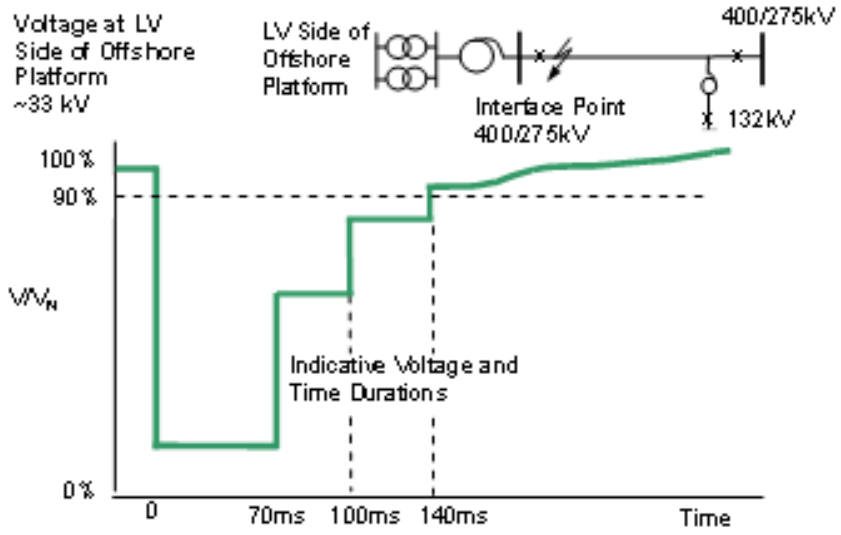

Typical fault cleared in 140ms:- 3 ended circuit

Figure CC.A.4B.2 (b)

CCA.4B.3 Voltage Dips Which Occur On The **LV Side Of The Offshore Platform** Greater Than 140ms In Duration

CC.A.4B.3.1 Requirements applicable to **Offshore Synchronous Generating Units** subject to voltage dips which occur on the **LV Side of the Offshore Platform** greater than 140ms in duration.

In addition to CC.A.4B.2 the fault ride through requirements applicable to **Offshore Synchronous Generating Units** during balanced voltage dips which occur at the **LV Side of the Offshore Platform** and having durations greater than 140ms and up to 3 minutes are defined in CC.6.3.15.2 (1b) and Figure 7a which is reproduced in this Appendix as Figure CC.A.4B3.1 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at the **LV Side of the Offshore Platform** to a disturbance. Rather, each point on the profile (i.e. the heavy black line) represents a voltage level and an associated time duration which connected **Offshore Synchronous Generating Units** must withstand or ride through.

Figures CC.A.4B3.2 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

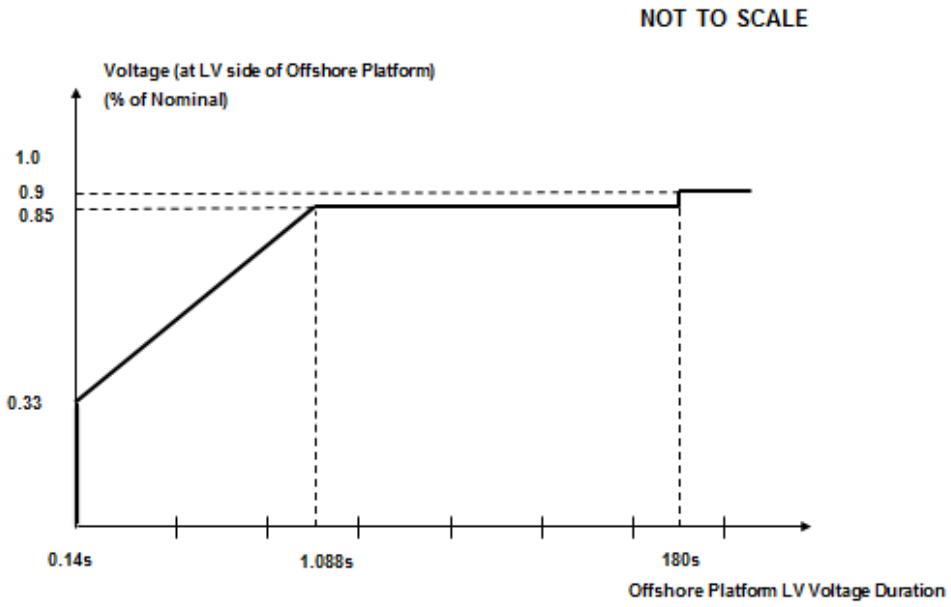

Figure CC.A.4B3.1

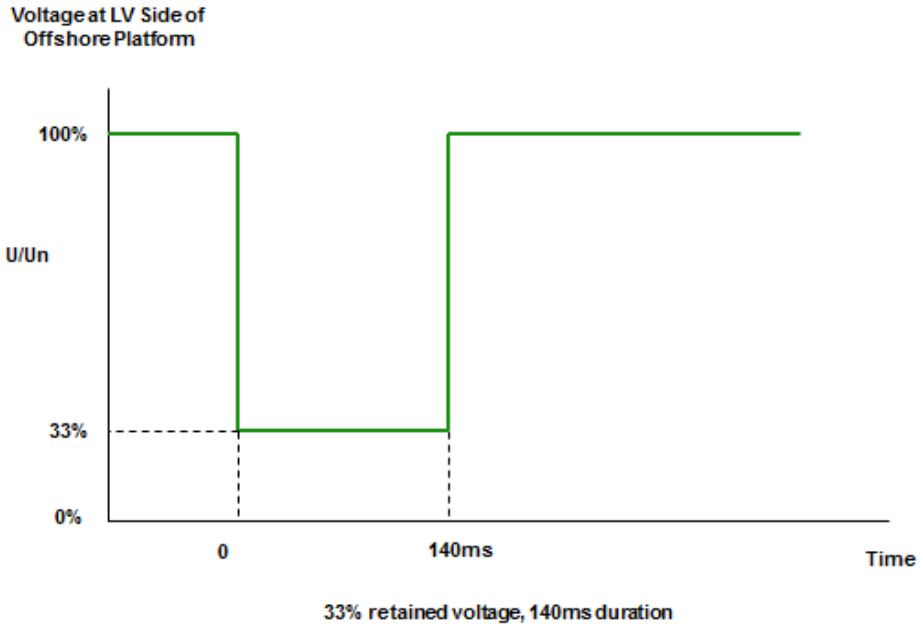

Figure CC.A.4B3.2 (a)

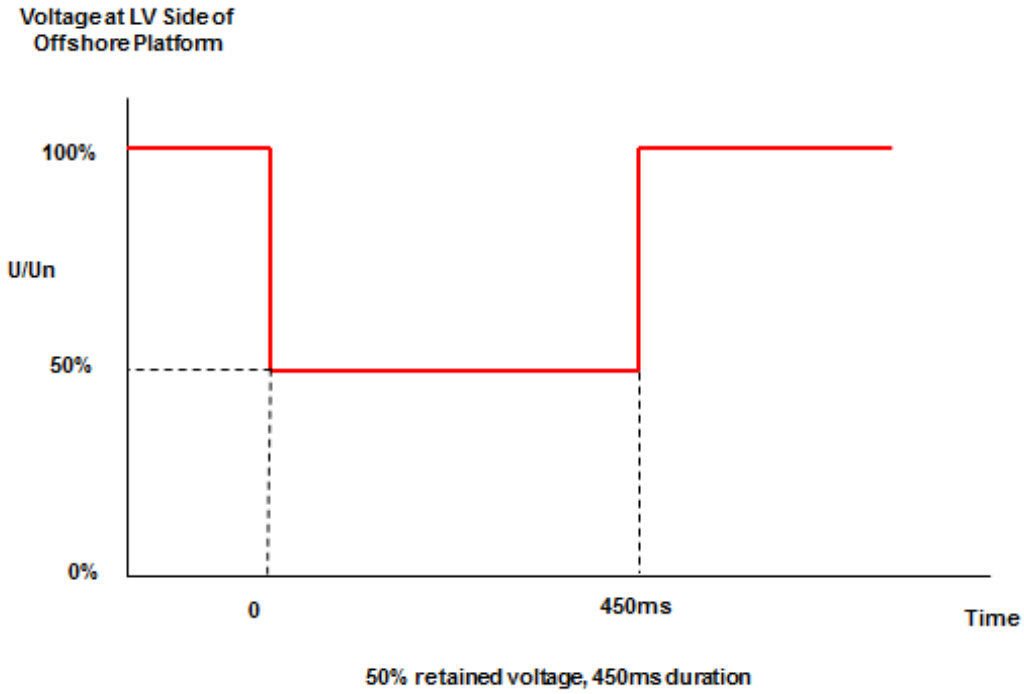

Figure CC.A.4B3.2 (b)

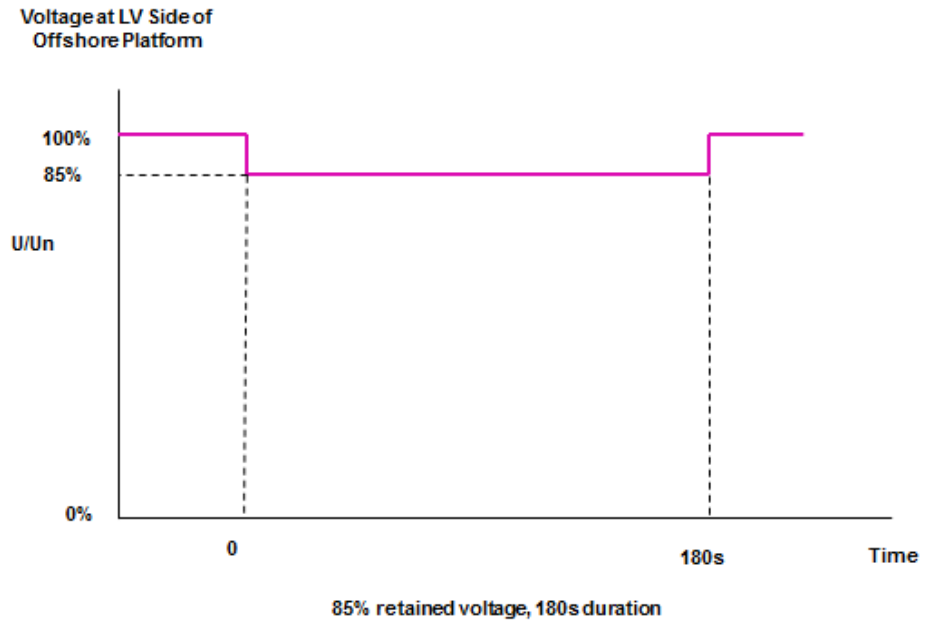

Figure CC.A.4B3.2 (c)

CC.A.4B.3.2 Requirements applicable to **Offshore Power Park Modules** subject to Voltage which occur on **The LV Side Of The Offshore Platform** greater than 140ms in duration.

In addition to CCA.4B.2 the fault ride through requirements applicable for **Offshore Power Park Modules** during balanced voltage dips which occur at the **LV Side of the Offshore Platform** and have durations greater than 140ms and up to 3 minutes are defined in CC.6.3.15.2 (2b) (i) and Figure 7b which is reproduced in this Appendix as Figure CC.A.4B.4 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at the **LV Side of the Offshore Platform** to a disturbance. Rather, each point on the profile (i.e. the heavy black line) represents a voltage level and an associated time duration which connected **Offshore Power Park Modules** must withstand or ride through.

Figures CC.A.4B.5 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

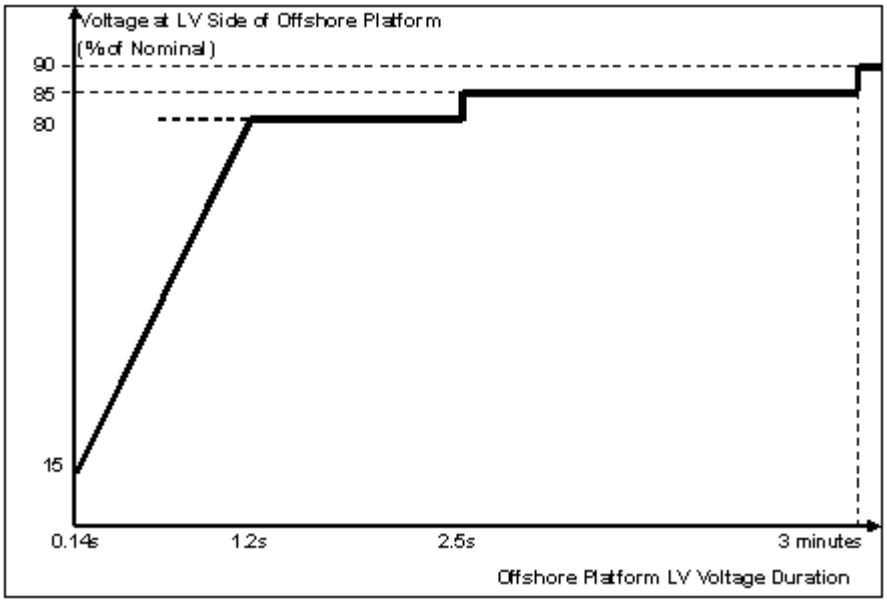

Figure CC.A.4B.4

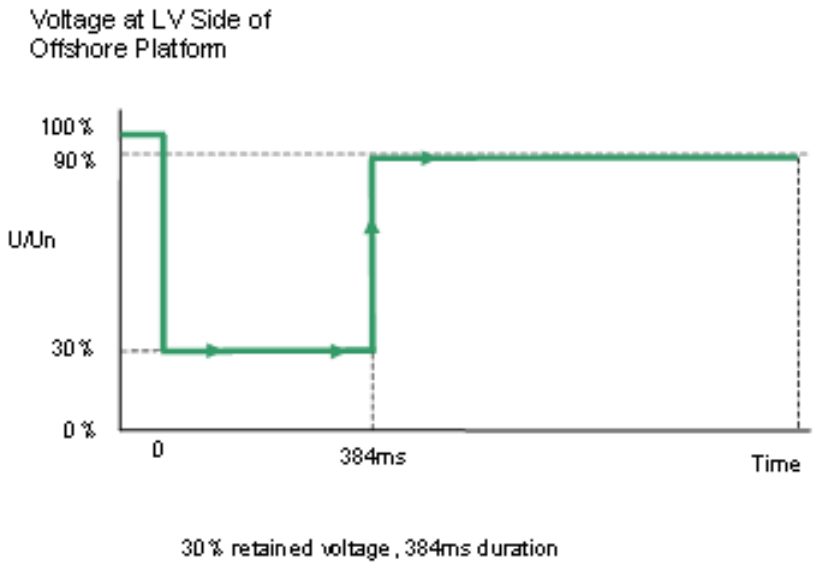

Figure CC.A.4B.5 (a)

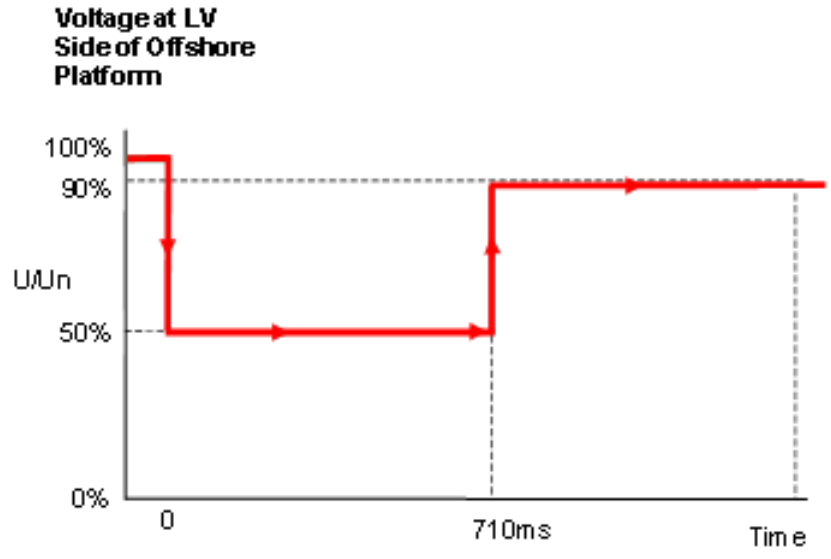

50% retained voltage, 710ms duration

Figure CC.A.4B.5(b)

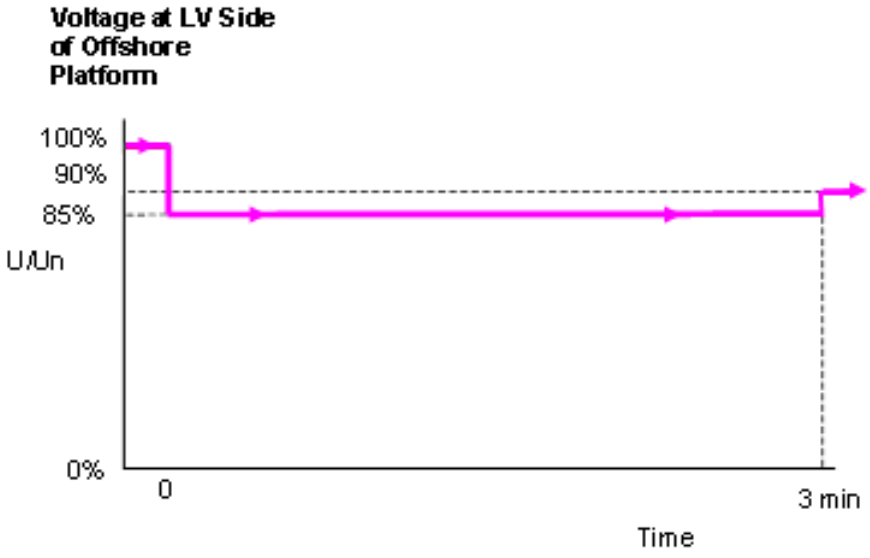

85% retained voltage, 3 minutes duration

Figure CC.A.4B.5(c)

APPENDIX 5 - TECHNICAL REQUIREMENTS LOW FREQUENCY RELAYS FOR THE AUTOMATIC DISCONNECTION OF SUPPLIES AT LOW FREQUENCY

CC.A.5.1 Low Frequency Relays

CC.A.5.1.1 The **Low Frequency Relays** to be used shall have a setting range of 47.0 to 50Hz and be suitable for operation from a nominal AC input of 63.5, 110 or 240V. The following general parameters specify the requirements of approved **Low Frequency Relays** for automatic installations installed and commissioned after 1st April 2007 and provide an indication, without prejudice to the provisions that may be included in a **Bilateral Agreement**, for those installed and commissioned before 1st April 2007:

(a) **Frequency** settings:	47-50Hz in steps of 0.05Hz or better, preferably 0.01Hz;
(b) Operating time:	Relay operating time shall not be more than 150 ms;
(c) Voltage lock-out:	Selectable within a range of 55 to 90% of nominal voltage;
(d) Facility stages:	One or two stages of **Frequency** operation;
(e) Output contacts:	Two output contacts per stage to be capable of repetitively making and breaking for 1000 operations:
(f) Accuracy:	0.01 Hz maximum error under reference environmental and system voltage conditions. 0.05 Hz maximum error at 8% of total harmonic distortion **Electromagnetic Compatibility Level**.

CC.A.5.2 Low Frequency Relay Voltage Supplies

CC.A.5.2.1 It is essential that the voltage supply to the **Low Frequency Relays** shall be derived from the primary **System** at the supply point concerned so that the **Frequency** of the **Low Frequency Relays** input voltage is the same as that of the primary **System**. This requires either:

(a) the use of a secure supply obtained from voltage transformers directly associated with the grid transformer(s) concerned, the supply being obtained where necessary via a suitable automatic voltage selection scheme; or

(b) the use of the substation 240V phase-to-neutral selected auxiliary supply, provided that this supply is always derived at the supply point concerned and is never derived from a standby supply **Generating Unit** or from another part of the **User System**.

CC.A.5.3 Scheme Requirements

CC.A.5.3.1 The tripping facility should be engineered in accordance with the following reliability considerations:

(a) Dependability

Failure to trip at any one particular **Demand** shedding point would not harm the overall operation of the scheme. However, many failures would have the effect of reducing the amount of **Demand** under low **Frequency** control. An overall reasonable minimum requirement for the dependability of the **Demand** shedding scheme is 96%, i.e. the average probability of failure of each **Demand** shedding point should be less than 4%. Thus the **Demand** under low **Frequency** control will not be reduced by more than 4% due to relay failure.

(b) Outages

Low **Frequency Demand** shedding schemes will be engineered such that the amount of **Demand** under control is as specified in Table CC.A.5.5.1a and is not reduced unacceptably during equipment outage or maintenance conditions.

CC.A.5.3.2 The total operating time of the scheme, including circuit breakers operating time, shall where reasonably practicable, be less than 200ms. For the avoidance of doubt, the replacement of plant installed prior to October 2009 will not be required in order to achieve lower total scheme operating times.

CC.A.5.4 Low Frequency Relay Testing

CC.A.5.4.1 **Low Frequency Relays** installed and commissioned after 1st January 2007 shall be type tested in accordance with and comply with the functional test requirements for **Frequency Protection** contained in Energy Networks Association Technical Specification 48-6-5 Issue 1 dated 2005 "ENA **Protection** Assessment Functional Test Requirements – Voltage and **Frequency Protection**".

For the avoidance of doubt, **Low Frequency Relays** installed and commissioned before 1st January 2007 shall comply with the version of CC.A.5.1.1 applicable at the time such **Low Frequency Relays** were commissioned.

CC.A.5.4.2 Each **Non-Embedded Customer** shall aim to execute testing on its low **Frequency** demand disconnection relays installed within its network and in service at least once every three years, although this may be extended to no more than every five years if considered to be required for operational purposes.

CC.A.5.4.3 Each **Network Operator** and **Relevant Transmission Licensee** shall aim to execute testing on its low **Frequency** demand disconnection relays installed within its network and in service at least once every three years, although this may be extended to no more than every five years if considered to be required for operational purposes.

CC.A.5.5 Scheme Settings

CC.A.5.5.1 Table CC.A.5.5.1a shows, for each **Transmission Area**, the percentage of **Demand** (based on **Annual ACS Conditions**) at the time of forecast **National Electricity Transmission System** peak **Demand** that each **Network Operator** whose **System** is connected to the **Onshore Transmission System** within such **Transmission Area** shall disconnect by **Low Frequency Relays** at a range of frequencies. Where a **Network Operator's System** is connected to the **National Electricity Transmission System** in more than one **Transmission Area**, the settings for the **Transmission Area** in which the majority of the **Demand** is connected shall apply.

Frequency (Hz)	% **Demand** disconnection for each Network Operator in Transmission Area		
	NGET	SPT	SHETL
48.8	5		
48.75	5		
48.7	10		
48.6	7.5		10
48.5	7.5	10	
48.4	7.5	10	10
48.2	7.5	10	10
48.0	5	10	10
47.8	5		
Total % **Demand**	60	40	40

Table CC.A.5.5.1a

Note – the percentages in table CC.A.5.5.1a are cumulative such that, for example, should the **Frequency** fall to 48.6 Hz in the **NGET Transmission Area**, 27.5% of the total **Demand** connected to the **National Electricity Transmission System** in the **NGET Transmission Area** shall be disconnected by the action of **Low Frequency Relays**.

The percentage **Demand** at each stage shall be allocated as far as reasonably practicable. The cumulative total percentage **Demand** is a minimum.

CC.A.5.5.2 During **System Restoration**, the **Total System** may be operated outside of **Licence Standards** as provided for in OC9.4.3. During such periods, on or after 31 December 2026, **Transmission Licensees** in accordance with the requirements of the **STC**, **Network Operators** and **Non-Embedded Customers** shall have the remote capability to inhibit and restore the operation of their **Low Frequency Relays** upon instruction from **The Company** as provided for in OC9.5.7(a).

APPENDIX 6 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC EXCITATION CONTROL SYSTEMS FOR ONSHORE SYNCHRONOUS GENERATING UNITS

CC.A.6.1 Scope

CC.A.6.1.1 This Appendix sets out the performance requirements of continuously acting automatic excitation control systems for **Onshore Synchronous Generating Units** that must be complied with by the **GB Code User**. This Appendix does not limit any site specific requirements that may be included in a **Bilateral Agreement** where in **The Company's** reasonable opinion these facilities are necessary for system reasons.

CC.A.6.1.2 Where the requirements may vary the likely range of variation is given in this Appendix. It may be necessary to specify values outside this range where **The Company** identifies a system need, and notwithstanding anything to the contrary **The Company** may specify in the **Bilateral Agreement** values outside of the ranges provided in this Appendix 6. The most common variations are in the on-load excitation ceiling voltage requirements and the response time required of the **Exciter**. Actual values will be included in the **Bilateral Agreement**.

CC.A.6.1.3 Should a **GB Generator** anticipate making a change to the excitation control system it shall notify **The Company** under the **Planning Code** (PC.A.1.2(b) and (c)) as soon as the **GB Generator** anticipates making the change. The change may require a revision to the **Bilateral Agreement**.

CC.A.6.2 Requirements

CC.A.6.2.1 The **Excitation System** of an **Onshore Synchronous Generating Unit** shall include an excitation source (**Exciter**), a **Power System Stabiliser** and a continuously acting **Automatic Voltage Regulator** (**AVR**) and shall meet the following functional specification.

CC.A.6.2.2 In respect of **Onshore Synchronous Generating Units** with a **Completion Date** on or after 1 January 2009, and **Onshore Synchronous Generating Units** with a **Completion Date** before 1 January 2009 subject to a **Modification** to the excitation control facilities where the **Bilateral Agreement** does not specify otherwise, the continuously acting automatic excitation control system shall include a **Power System Stabiliser (PSS)** as a means of supplementary control. The functional specification of the **Power System Stabiliser** is included in CC.A.6.2.5.

CC.A.6.2.3 Steady State Voltage Control

CC.A.6.2.3.1 An accurate steady state control of the **Onshore Generating Unit** pre-set terminal voltage is required. As a measure of the accuracy of the steady-state voltage control, the **Automatic Voltage Regulator** shall have static zero frequency gain, sufficient to limit the change in terminal voltage to a drop not exceeding 0.5% of rated terminal voltage, when the **Onshore Generating Unit** output is gradually changed from zero to rated MVA output at rated voltage, **Active Power** and **Frequency**.

CC.A.6.2.4 Transient Voltage Control

CC.A.6.2.4.1 For a step change from 90% to 100% of the nominal **Onshore Generating Unit** terminal voltage, with the **Onshore Generating Unit** on open circuit, the **Excitation System** response shall have a damped oscillatory characteristic. For this characteristic, the time for the **Onshore Generating Unit** terminal voltage to first reach 100% shall be less than 0.6 seconds. Also, the time to settle within 5% of the voltage change shall be less than 3 seconds.

CC.A.6.2.4.2 To ensure that adequate synchronising power is maintained, when the **Onshore Generating Unit** is subjected to a large voltage disturbance, the **Exciter** whose output is varied by the **Automatic Voltage Regulator** shall be capable of providing its achievable upper and lower limit ceiling voltages to the **Onshore Generating Unit** field in a time not exceeding that specified in the **Bilateral Agreement**. This will normally be not less than 50ms and not greater than 300ms. The achievable upper and lower limit ceiling voltages may be dependent on the voltage disturbance.

CC.A.6.2.4.3 The **Exciter** shall be capable of attaining an **Excitation System On Load Positive Ceiling Voltage** of not less than a value specified in the **Bilateral Agreement** that will be:

not less than 2 per unit (pu)

normally not greater than 3 pu

exceptionally up to 4 pu

of **Rated Field Voltage** when responding to a sudden drop in voltage of 10 percent or more at the **Onshore Generating Unit** terminals. **The Company** may specify a value outside the above limits where **The Company** identifies a **System** need.

CC.A.6.2.4.4 If a static type **Exciter** is employed:

(i) the field voltage should be capable of attaining a negative ceiling level specified in the **Bilateral Agreement** after the removal of the step disturbance of CC.A.6.2.4.3. The specified value will be 80% of the value specified in CC.A.6.2.4.3. **The Company** may specify a value outside the above limits where **The Company** identifies a system need.

(ii) the **Exciter** must be capable of maintaining free firing when the **Onshore Generating Unit** terminal voltage is depressed to a level which may be between 20% to 30% of rated terminal voltage

(iii) the **Exciter** shall be capable of attaining a positive ceiling voltage not less than 80% of the **Excitation System On Load Positive Ceiling Voltage** upon recovery of the **Onshore Generating Unit** terminal voltage to 80% of rated terminal voltage following fault clearance. **The Company** may specify a value outside the above limits where **The Company** identifies a system need.

(iv) The requirement to provide a separate power source for the **Exciter** will be specified in the **Bilateral Agreement** if **The Company**, in coordination with the **Relevant Transmission Licensee,** identifies a **Transmission System** need.

CC.A.6.2.5 Power Oscillations Damping Control

CC.A.6.2.5.1 To allow the **Onshore Generating Unit** to maintain second and subsequent swing stability and also to ensure an adequate level of low frequency electrical damping power, the **Automatic Voltage Regulator** shall include a **Power System Stabiliser** as a means of supplementary control.

CC.A.6.2.5.2 Whatever supplementary control signal is employed, it shall be of the type which operates into the **Automatic Voltage Regulator** to cause the field voltage to act in a manner which results in the damping power being improved while maintaining adequate synchronising power.

CC.A.6.2.5.3 The arrangements for the supplementary control signal shall ensure that the **Power System Stabiliser** output signal relates only to changes in the supplementary control signal and not the steady state level of the signal. For example, if generator electrical power output is chosen as a supplementary control signal then the **Power System Stabiliser** output should relate only to changes in generator electrical power output and not the steady state level of power output. Additionally the **Power System Stabiliser** should not react to mechanical power changes in isolation for example during rapid changes in steady state load or when providing **Frequency** response.

CC.A.6.2.5.4 The output signal from the **Power System Stabiliser** shall be limited to not more than ±10% of the **Onshore Generating Unit** terminal voltage signal at the **Automatic Voltage Regulator** input. The gain of the **Power System Stabiliser** shall be such that an increase in the gain by a factor of 3 shall not cause instability.

CC.A.6.2.5.5 The **Power System Stabiliser** shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5Hz would be judged to be acceptable for this application.

CC.A.6.2.5.6 The **GB Generator** will agree **Power System Stabiliser** settings with **The Company**, in coordination with the **Relevant Transmission Licensee** prior to the on-load commissioning detailed in BC2.11.2(d). To allow assessment of the performance before on-load commissioning the **GB Generator** will provide to **The Company** a report covering the areas specified in CP.A.3.2.1.

CC.A.6.2.5.7 The **Power System Stabiliser** must be active within the **Excitation System** at all times when **Synchronised** including when the **Under Excitation Limiter** or **Over Excitation Limiter** are active. When operating at low load when **Synchronising** or **De-Synchronising** an **Onshore Generating Unit**, the **Power System Stabiliser** may be out of service.

CC.A.6.2.5.8 Where a **Power System Stabiliser** is fitted to a **Pumped Storage Unit** it must function when the **Pumped Storage Unit** is in both generating and pumping modes.

CC.A.6.2.6 Overall **Excitation System** Control Characteristics

CC.A.6.2.6.1 The overall **Excitation System** shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must be consistent with the speed of response requirements and ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5 Hz will be judged to be acceptable for this application.

CC.A.6.2.6.2 The response of the **Automatic Voltage Regulator** combined with the **Power System Stabiliser** shall be demonstrated by injecting similar step signal disturbances into the **Automatic Voltage Regulator** reference as detailed in OC5A.2.2 and OC5.A.2.4. The **Automatic Voltage Regulator** shall include a facility to allow step injections into the **Automatic Voltage Regulator** voltage reference, with the **Onshore Generating Unit** operating at points specified by **The Company** (up to rated MVA output). The damping shall be judged to be adequate if the corresponding **Active Power** response to the disturbances decays within two cycles of oscillation.

CC.A.6.2.6.3 A facility to inject a band limited random noise signal into the **Automatic Voltage Regulator** voltage reference shall be provided for demonstrating the frequency domain response of the **Power System Stabiliser**. The tuning of the **Power System Stabiliser** shall be judged to be adequate if the corresponding **Active Power** response shows improved damping with the **Power System Stabiliser** in combination with the **Automatic Voltage Regulator** compared with the **Automatic Voltage Regulator** alone over the frequency range 0.3Hz – 2Hz.

CC.A.6.2.7 Under-Excitation Limiters

CC.A.6.2.7.1 The security of the power system shall also be safeguarded by means of MVAr **Under Excitation Limiters** fitted to the generator **Excitation System**. The **Under Excitation Limiter** shall prevent the **Automatic Voltage Regulator** reducing the generator excitation to a level which would endanger synchronous stability. The **Under Excitation Limiter** shall operate when the excitation system is providing automatic control. The **Under Excitation Limiter** shall respond to changes in the **Active Power** (MW) and the **Reactive Power** (MVAr), and to the square of the generator voltage in such a direction that an increase in voltage will permit an increase in leading MVAr. The characteristic of the **Under Excitation Limiter** shall be substantially linear from no-load to the maximum **Active Power** output of the **Onshore Generating Unit** at any setting and shall be readily adjustable.

CC.A.6.2.7.2 The performance of the **Under Excitation Limiter** shall be independent of the rate of change of the **Onshore Generating Unit** load and shall be demonstrated by testing as detailed in OC5.A.2.5. The resulting maximum overshoot in response to a step injection which operates the **Under Excitation Limiter** shall not exceed 4% of the **Onshore Generating Unit** rated MVA. The operating point of the **Onshore Generating Unit** shall be returned to a steady state value at the limit line and the final settling time shall not be greater than 5 seconds. When the step change in **Automatic Voltage Regulator** reference voltage is reversed, the field voltage should begin to respond without any delay and should not be held down by the **Under Excitation Limiter**. Operation into or out of the preset limit levels shall ensure that any resultant oscillations are damped so that the disturbance is within 0.5% of the **Onshore Generating Unit** MVA rating within a period of 5 seconds.

CC.A.6.2.7.3 The **GB Generator** shall also make provision to prevent the reduction of the **Onshore Generating Unit** excitation to a level which would endanger synchronous stability when the **Excitation System** is under manual control.

CC.A.6.2.8 Over-Excitation Limiters

CC.A.6.2.8.1 The settings of the **Over-Excitation Limiter**, where it exists, shall ensure that the **Generating Unit's** excitation is not limited to less than the maximum value that can be achieved whilst ensuring the **Onshore Generating Unit** is operating within its design limits. If the **Generating Unit's** excitation is reduced following a period of operation at a high level, the rate of reduction shall not exceed that required to remain within any time dependent operating characteristics of the **Onshore Generating Unit**.

CC.A.6.2.8.2 The performance of the **Over-Excitation Limiter**, where it exists, shall be demonstrated by testing as described in OC5.A.2.6. Any operation beyond the **Over-Excitation Limit** shall be controlled by the **Over-Excitation Limiter** without the operation of any **Protection** that could trip the **Onshore Generating Unit**.

CC.A.6.2.8.3 The **GB Generator** shall also make provision to prevent any over-excitation restriction of the generator when the **Excitation System** is under manual control, other than that necessary to ensure the **Onshore Generating Unit** is operating within its design limits.

APPENDIX 7 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR ONSHORE NON-SYNCHRONOUS GENERATING UNITS, ONSHORE DC CONVERTERS, ONSHORE POWER PARK MODULES AND OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT

CC.A.7.1 Scope

CC.A.7.1.1 This Appendix sets out the performance requirements of continuously acting automatic voltage control systems for **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters**, **Onshore Power Park Modules** and **OTSDUW Plant and Apparatus** at the **Interface Point** that must be complied with by the **GB Code User**. This Appendix does not limit any site specific requirements that may be included in a **Bilateral Agreement** where in **The Company's** reasonable opinion these facilities are necessary for system reasons.

CC.A.7.1.2 Proposals by **GB Generators** to make a change to the voltage control systems are required to be notified to **The Company** under the **Planning Code** (PC.A.1.2(b) and (c)) as soon as the **GB Generator** anticipates making the change. The change may require a revision to the **Bilateral Agreement**.

CC.A.7.2 Requirements

CC.A.7.2.1 **The Company** requires that the continuously acting automatic voltage control system for the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter** or **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** shall meet the following functional performance specification. If a **Network Operator** has confirmed to **The Company** that its network to which an **Embedded Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** is connected is restricted such that the full reactive range under the steady state voltage control requirements (CC.A.7.2.2) cannot be utilised, **The Company** may specify in the **Bilateral Agreement** alternative limits to the steady state voltage control range that reflect these restrictions. Where the **Network Operator** subsequently notifies **The Company** that such restriction has been removed, **The Company** may propose a **Modification** to the **Bilateral Agreement** (in accordance with the **CUSC** contract) to remove the alternative limits such that the continuously acting automatic voltage control system meets the following functional performance specification. All other requirements of the voltage control system will remain as in this Appendix.

CC.A.7.2.2 Steady State Voltage Control

CC.A.7.2.2.1 The **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** shall provide continuous steady state control of the voltage at the **Onshore Grid Entry Point** (or **Onshore User System Entry Point** if **Embedded**) (or the **Interface Point** in the case of **OTSDUW Plant and Apparatus**) with a **Setpoint Voltage** and **Slope** characteristic as illustrated in Figure CC.A.7.2.2a. It should be noted that where the **Reactive Power** capability requirement of a directly connected **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **Onshore Power Park Module** in Scotland, or **OTSDUW Plant and Apparatus** in Scotland as specified in CC.6.3.2 (c), is not at the **Onshore Grid Entry Point** or **Interface Point**, the values of Qmin and Qmax shown in this figure will be as modified by the 33/132kV or 33/275kV or 33/400kV transformer.

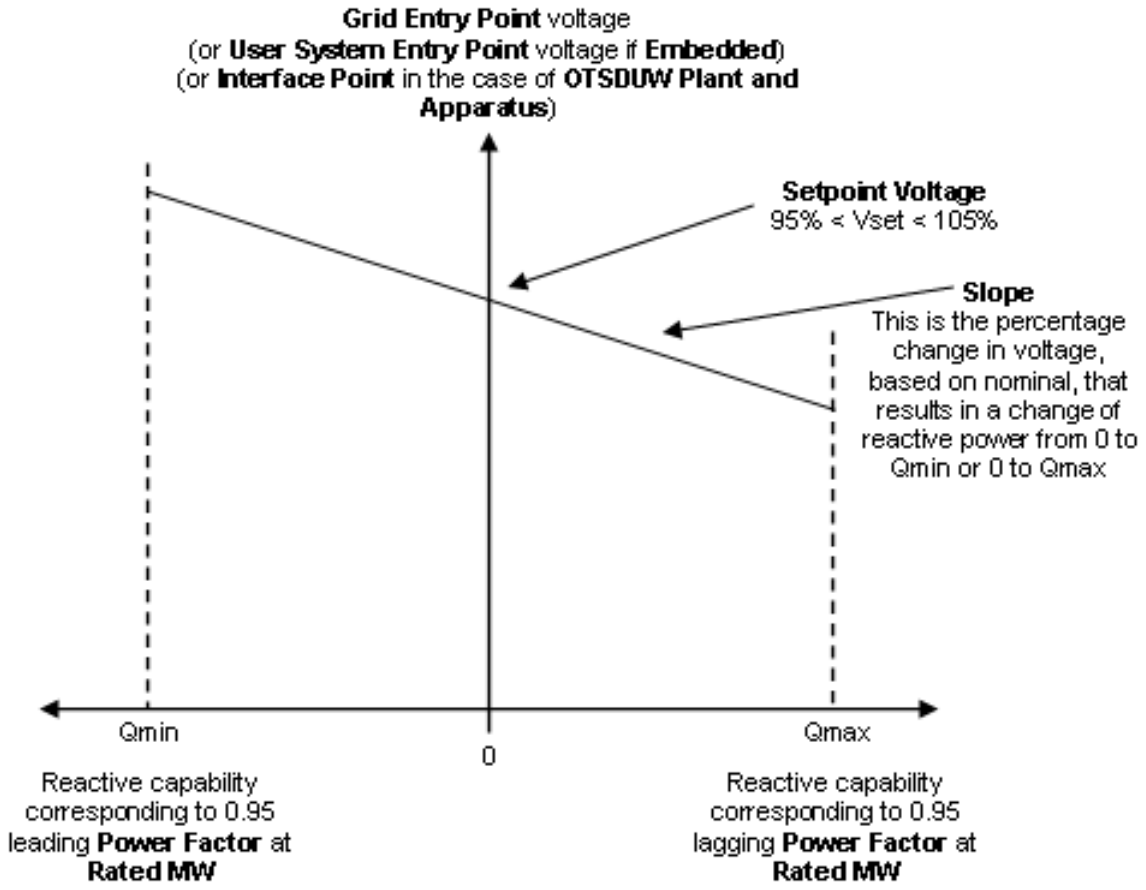

Figure CC.A.7.2.2a

CC.A.7.2.2.2 The continuously acting automatic control system shall be capable of operating to a **Setpoint Voltage** between 95% and 105% with a resolution of 0.25% of the nominal voltage. For the avoidance of doubt, values of 95%, 95.25%, 95.5% … may be specified, but not intermediate values. The initial **Setpoint Voltage** will be 100%. The tolerance within which this **Setpoint Voltage** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.25% and a **Setpoint Voltage** of 100%, the achieved value shall be between 99.75% and 100.25%. **The Company** may request the **GB Generator** to implement an alternative **Setpoint Voltage** within the range of 95% to 105%. For **Embedded GB Generators** the **Setpoint Voltage** will be discussed between **The Company** and the relevant **Network Operator** and will be specified to ensure consistency with CC.6.3.4.

CC.A.7.2.2.3 The **Slope** characteristic of the continuously acting automatic control system shall be adjustable over the range 2% to 7% (with a resolution of 0.5%). For the avoidance of doubt values of 2%, 2.5%, 3% may be specified, but not intermediate values. The initial **Slope** setting will be 4%. The tolerance within which this **Slope** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.5% and a **Slope** setting of 4%, the achieved value shall be between 3.5% and 4.5%. **The Company** may request the **GB Generator** to implement an alternative slope setting within the range of 2% to 7%. For **Embedded GB Generators** the **Slope** setting will be discussed between **The Company** and the relevant **Network Operator** and will be specified to ensure consistency with CC.6.3.4.

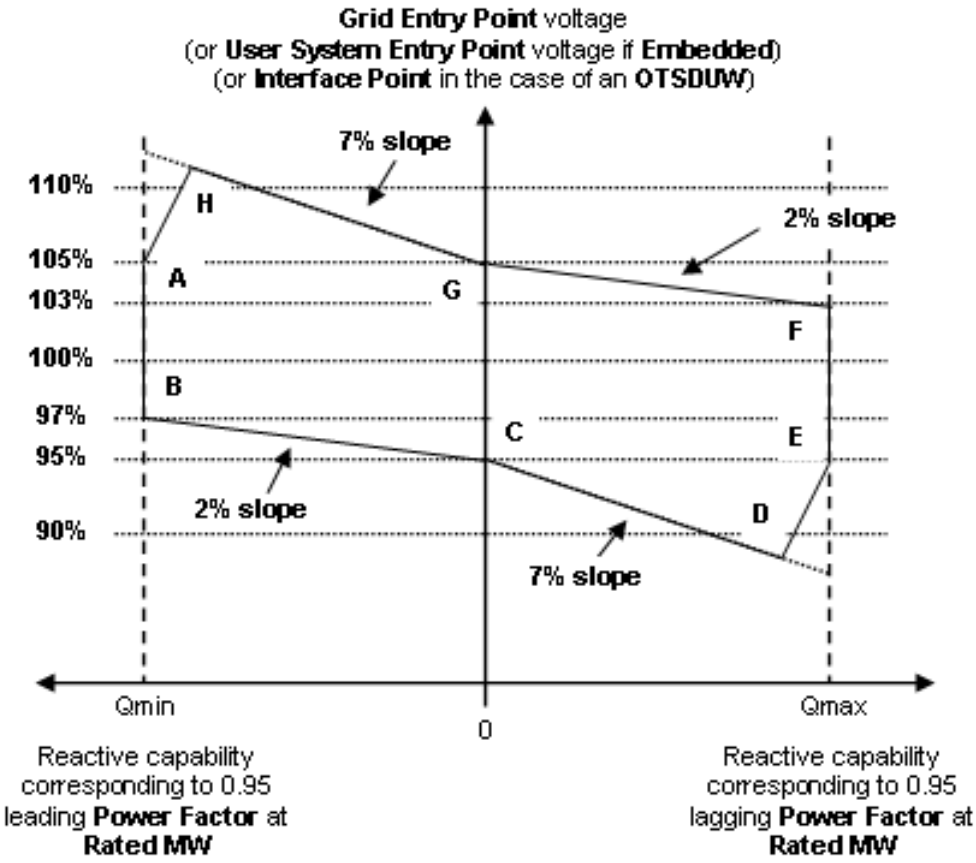

Figure CC.A.7.2.2b

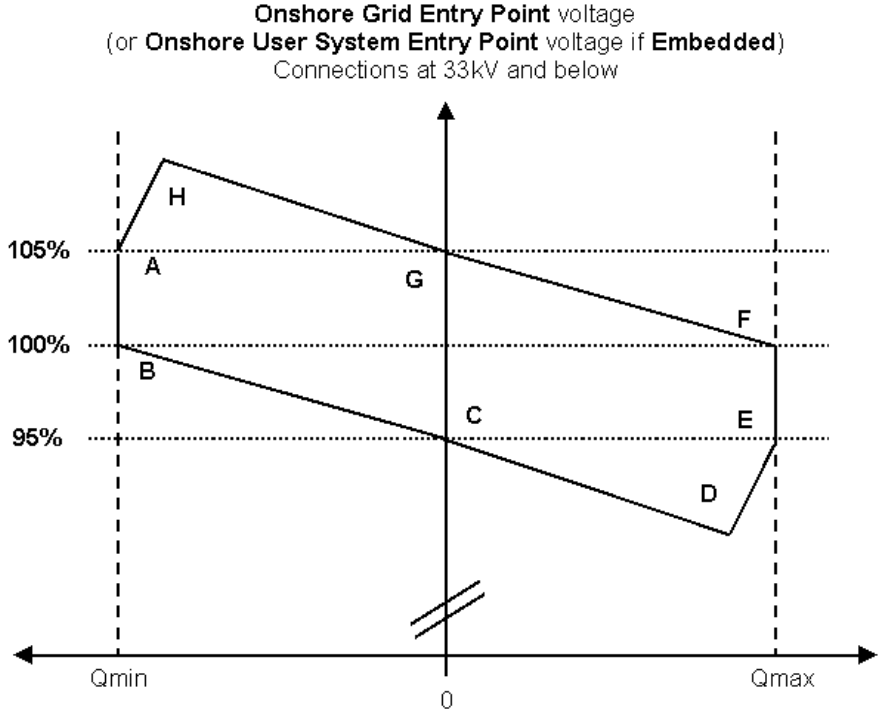

Figure CC.A.7.2.2c

CC.A.7.2.2.4 Figure CC.A.7.2.2b shows the required envelope of operation for **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters**, **OTSDUW Plant and Apparatus** and **Onshore Power Park Modules** except for those **Embedded** at 33kV and below or directly connected to the **National Electricity Transmission System** at 33kV and below. Figure CC.A.7.2.2c shows the required envelope of operation for **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters** and **Onshore Power Park Modules Embedded** at 33kV and below or directly connected to the **National Electricity Transmission System** at 33kV and below. Where the **Reactive Power** capability requirement of a directly connected **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** in Scotland, as specified in CC.6.3.2 (c), is not at the **Onshore Grid Entry Point** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**, the values of Qmin and Qmax shown in this figure will be as modified by the 33/132kV or 33/275kV or 33/400kV transformer. The enclosed area within points ABCDEFGH is the required capability range within which the **Slope** and **Setpoint Voltage** can be changed.

CC.A.7.2.2.5 Should the operating point of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** deviate so that it is no longer a point on the operating characteristic (figure CC.A.7.2.2a) defined by the target **Setpoint Voltage** and **Slope**, the continuously acting automatic voltage control system shall act progressively to return the value to a point on the required characteristic within 5 seconds.

CC.A.7.2.2.6 Should the **Reactive Power** output of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** reach its maximum lagging limit at an **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) above 95%, the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** shall maintain maximum lagging **Reactive Power** output for voltage reductions down to 95%. This requirement is indicated by the line EF in figures CC.A.7.2.2b and CC.A.7.2.2c. Should the **Reactive Power** output of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** reach its maximum leading limit at an **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) below 105%, the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** shall maintain maximum leading **Reactive Power** output for voltage increases up to 105%. This requirement is indicated by the line AB in figures CC.A.7.2.2b and CC.A.7.2.2c.

CC.A.7.2.2.7 For **Onshore Grid Entry Point** voltages (or **Onshore User System Entry Point** voltages if Embedded or **Interface Point** voltages) below 95%, the lagging **Reactive Power** capability of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** should be that which results from the supply of maximum lagging reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line DE in figures CC.A.7.2.2b and CC.A.7.2.2c. For **Onshore Grid Entry Point** voltages (or **User System Entry Point** voltages if **Embedded** or **Interface Point** voltages) above 105%, the leading **Reactive Power** capability of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** should be that which results from the supply of maximum leading reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line AH in figures CC.A.7.2.2b and CC.A.7.2.2c. Should the **Reactive Power** output of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** reach its maximum lagging limit at an **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) below 95%, the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter** or **Onshore Power Park Module** shall maintain maximum lagging reactive current output for further voltage decreases. Should the **Reactive Power** output of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** reach its maximum leading limit at a **Onshore Grid Entry Point** voltage (or **User System Entry Point** voltage if **Embedded** or **Interface Point** voltage in the case of an **OTSDUW Plant and Apparatus**) above 105%, the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** shall maintain maximum leading reactive current output for further voltage increases.

CC.A.7.2.2.8 All **OTSDUW Plant and Apparatus** must be capable of enabling **GB Code Users** undertaking **OTSDUW** to comply with an instruction received from **The Company** relating to a variation of the **Setpoint Voltage** at the **Interface Point** within 2 minutes of such instruction being received.

CC.A.7.2.2.9 For **OTSDUW Plant and Apparatus** connected to a **Network Operator's System** where the **Network Operator** has confirmed to **The Company** that its **System** is restricted in accordance with CC.A.7.2.1, clause CC.A.7.2.2.8 will not apply unless **The Company** can reasonably demonstrate that the magnitude of the available change in **Reactive Power** has a significant effect on voltage levels on the **Onshore National Electricity Transmission System**.

CC.A.7.2.3 Transient Voltage Control

CC.A.7.2.3.1 For an on-load step change in **Onshore Grid Entry Point** or **Onshore User System Entry Point** voltage, or in the case of **OTSDUW Plant and Apparatus** an on-load step change in **Transmission Interface Point** voltage, the continuously acting automatic control system shall respond according to the following minimum criteria:

(i) the **Reactive Power** output response of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** shall commence within 0.2 seconds of the application of the step. It shall progress linearly although variations from a linear characteristic shall be acceptable provided that the MVAr seconds delivered at any time up to 1 second are at least those that would result from the response shown in figure CC.A.7.2.3.1a.

(ii) the response shall be such that 90% of the change in the **Reactive Power** output of the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module**, will be achieved within

- 1 second, where the step is sufficiently large to require a change in the steady state **Reactive Power** output from zero to its maximum leading value or maximum lagging value, as required by CC.6.3.2 (or, if appropriate, CC.A.7.2.2.6 or CC.A.7.2.2.7); and

– 2 seconds, for **Plant and Apparatus** installed on or after 1 December 2017, where the step is sufficiently large to require a change in the steady state **Reactive Power** output from its maximum leading value to its maximum lagging value or vice versa.

(iii) the magnitude of the **Reactive Power** output response produced within 1 second shall vary linearly in proportion to the magnitude of the step change.

(iv) within 2 seconds from achieving 90% of the response as defined in CC.A.7.2.3.1 (ii), the peak to peak magnitude of any oscillations shall be less than 5% of the change in steady state **Reactive Power**.

(v) following the transient response, the conditions of CC.A.7.2.2 apply.

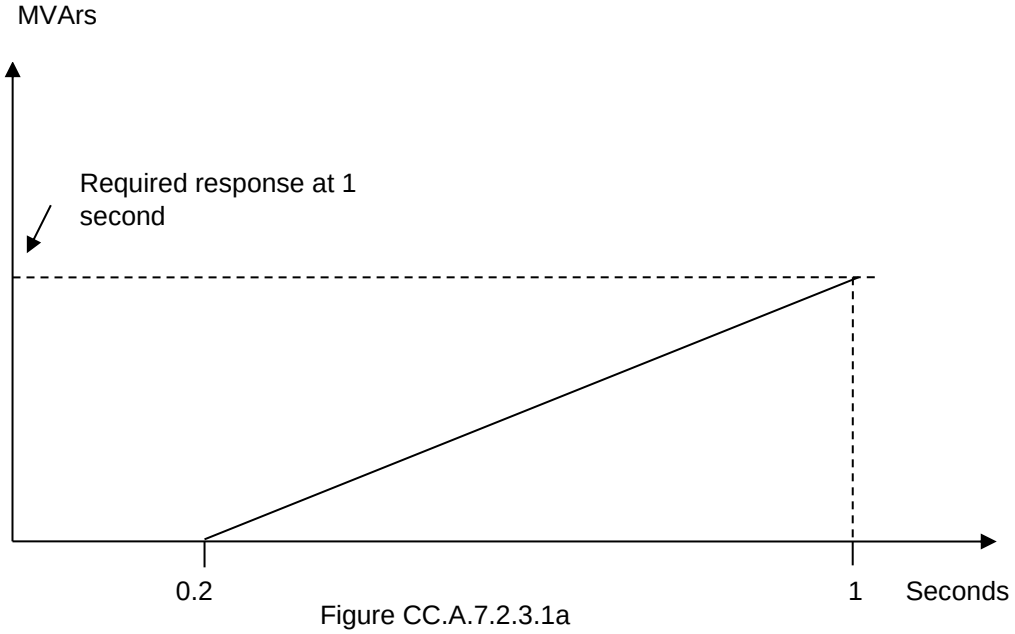

Figure CC.A.7.2.3.1a

CC.A.7.2.3.2 An **Onshore Non-Synchronous Generating Unit, Onshore DC Converter, OTSDUW Plant and Apparatus** or **Onshore Power Park Module** installed on or after 1 December 2017 shall be capable of;

(a) changing its **Reactive Power** output from its maximum lagging value to its maximum leading value, or vice versa, then reverting back to the initial level of **Reactive Power** output once every 15 seconds for at least 5 times within any 5 minute period; and

(b) changing its **Reactive Power** output from zero to its maximum leading value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period and from zero to its maximum lagging value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period. Any subsequent restriction on reactive capability shall be notified to **The Company** in accordance with BC2.5.3.2, and BC2.6.1.

In all cases, the response shall be in accordance to CC.A.7.2.3.1 where the change in **Reactive Power** output is in response to an on-load step change in **Onshore Grid Entry Point** or **Onshore User System Entry Point** voltage, or in the case of **OTSDUW Plant and Apparatus** an on-load step change in **Transmission Interface Point** voltage.

CC.A.7.2.4 Power Oscillation Damping

CC.A.7.2.4.1 The requirement for the continuously acting voltage control system to be fitted with a **Power System Stabiliser (PSS)** shall be specified in the **Bilateral Agreement** if, in **The Company's** view, this is required for system reasons. However if a **Power System Stabiliser** is included in the voltage control system its settings and performance shall be agreed with **The Company** and commissioned in accordance with BC2.11.2. To allow assessment of the performance before on-load commissioning the **GB Generator** will provide to **The Company** a report covering the areas specified in CP.A.3.2.2.

CC.A.7.2.5 Overall Voltage Control System Characteristics

CC.A.7.2.5.1 The continuously acting automatic voltage control system is required to respond to minor variations, steps, gradual changes or major variations in **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** voltage in the case of **OTSDUW Plant and Apparatus**).

CC.A.7.2.5.2 The overall voltage control system shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must be consistent with the speed of response requirements and ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5Hz would be judged to be acceptable for this application. All other control systems employed within the **Onshore Non-Synchronous Generating Unit**, **Onshore DC Converter**, **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** should also meet this requirement

CC.A.7.2.5.3 The response of the voltage control system (including the **Power System Stabiliser** if employed) shall be demonstrated by testing in accordance with OC5A.A.3.

< END OF CONNECTION CONDITIONS >

Public

EUROPEAN CONNECTION CONDITIONS

(ECC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

ECC.1 INTRODUCTION 2
ECC.2 OBJECTIVE 3
ECC.3 SCOPE 3
ECC.4 PROCEDURE 5
ECC.5 CONNECTION 5
ECC.6 TECHNICAL, DESIGN AND OPERATIONAL CRITERIA 8
ECC.7 SITE RELATED CONDITIONS 88
ECC.8 ANCILLARY SERVICES 96
APPENDIX E1 - SITE RESPONSIBILITY SCHEDULES 98
PROFORMA FOR SITE RESPONSIBILITY SCHEDULE 101
APPENDIX E2 - OPERATION DIAGRAMS 106
PART 1A - PROCEDURES RELATING TO OPERATION DIAGRAMS 106
PART E1B - PROCEDURES RELATING TO GAS ZONE DIAGRAMS 109
PART E2 - NON-EXHAUSTIVE LIST OF APPARATUS TO BE INCLUDED ON OPERATION DIAGRAMS 110
APPENDIX E3 - MINIMUM FREQUENCY RESPONSE CAPABILITY REQUIREMENT PROFILE AND OPERATING RANGE FOR POWER GENERATING MODULES AND HVDC EQUIPMENT 112
APPENDIX 4 - FAULT RIDE THROUGH REQUIREMENTS 118
APPENDIX E5 - TECHNICAL REQUIREMENTS LOW FREQUENCY RELAYS FOR THE AUTOMATIC DISCONNECTION OF SUPPLIES AT LOW FREQUENCY 124
APPENDIX E6 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC EXCITATION CONTROL SYSTEMS FOR ONSHORE SYNCHRONOUS POWER GENERATING MODULES, ... 127
APPENDIX E7 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR AC CONNECTED ONSHORE POWER PARK MODULES AND OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT HVDC SYSTEMS AND REMOTE END HVDC CONVERTER STATIONS 131
APPENDIX E8 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR CONFIGURATION 2 AC CONNECTED OFFSHORE POWER PARK MODULES AND CONFIGURATION 2 DC CONNECTED POWER PARK MODULES 138

ECC.1 INTRODUCTION

ECC.1.1 The **European Connection Conditions** ("**ECC**") specify both:

(a) the minimum technical, design and operational criteria which must be complied with by:

(i) any **EU Code User** connected to or seeking connection with the **National Electricity Transmission System**, or

(ii) **EU Generators** or **HVDC System Owners** connected to or seeking connection to a **User's System** which is located in **Great Britain** or **Offshore**, or

(iii) **Network Operators** who are **EU Code Users**

(iv) **Network Operators** who are **GB Code Users** but only in respect of:-

(a) Their obligations in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** for whom the requirements of ECC.3.1(b)(iii) apply alone; and/or

(b) The requirements of this **ECC** only in relation to each **EU Grid Supply Point**. **Network Operators** in respect of all other **Grid Supply Points** should continue to satisfy the requirements as specified in the **CC**s.

(v) **Non-Embedded Customers** who are **EU Code Users**

(b) the minimum technical, design and operational criteria with which **The Company** will comply in relation to the part of the **National Electricity Transmission System** at the **Connection Site** with **Users**. In the case of any **OTSDUW Plant and Apparatus**, the **ECC** also specify the minimum technical, design and operational criteria which must be complied with by the **User** when undertaking **OTSDUW**.

(c) The requirements of **Assimilated Law** (Commission Regulation (EU) 2016/631) shall not apply to

(i) **Power Generating Modules** that are installed to provide backup power and operate in parallel with the **Total System** for less than 5 minutes per calendar month while the **System** is in normal state. Parallel operation during maintenance or commissioning of tests of that **Power Generating Module** shall not count towards that five minute limit.

(ii) **Power Generating Modules** connected to the **Transmission System** or **Network Operators System** which are not operated in synchronism with a **Synchronous Area**.

(iii) **Power Generating Modules** that do not have a permanent **Connection Point** or **User System Entry Point** and used by **The Company** to temporarily provide power when normal **System** capacity is partly or completely unavailable.

(iv) **Electricity Storage Modules**.

(d) **Storage Users** are required to comply with the entirety of the **ECC** but are not subject to the requirements of **Assimilated Law** (Commission Regulation (EU) 2016/631, Commission Regulation (EU) 2016/1388 and Commission Regulation (EU) 2016/1485). The requirements of the **ECC** shall therefore be enforceable against **Storage Users** under the Grid Code only (and not under any of the aforementioned **Assimilated Law**) and any derogation sought by a **Storage User** in respect of the **ECC** shall be deemed a derogation from the Grid Code only (and not from the aforementioned **Assimilated Law**).

ECC.2 OBJECTIVE

ECC.2.1 The objective of the **ECC** is to ensure that by specifying minimum technical, design and operational criteria the basic rules for connection to the **National Electricity Transmission System** and (for certain **Users**) to a **User's System** are similar for all **Users** of an equivalent category and will enable **The Company** to comply with its statutory and **ESO Licence** obligations and the applicable **Assimilated Law**.

ECC.2.2 In the case of any **OTSDUW** the objective of the **ECC** is to ensure that by specifying the minimum technical, design and operational criteria the basic rules relating to an **Offshore Transmission System** designed and constructed by an **Offshore Transmission Licensee** and designed and/or constructed by a **User** under the **OTSDUW Arrangements** are equivalent.

ECC.2.3 Provisions of the **ECC** which apply in relation to **OTSDUW** and **OTSUA**, and/or a **Transmission Interface Site**, shall (in any particular case) apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply, without prejudice to the continuing application of provisions of the **ECC** applying in relation to the relevant **Offshore Transmission System** and/or **Connection Site**. It is the case therefore that in cases where the **OTSUA** becomes operational prior to the **OTSUA Transfer Time** that a **EU Generator** is required to comply with this **ECC** both as it applies to its **Plant** and **Apparatus** at a **Connection Site\Connection Point** and the **OTSUA** at the **Transmission Interface Site/Transmission Interface Point** until the **OTSUA Transfer Time** and this **ECC** shall be construed accordingly.

ECC.2.4 In relation to **OTSDUW**, provisions otherwise to be contained in a **Bilateral Agreement** may be contained in the **Construction Agreement**, and accordingly a reference in the **ECC** to a relevant **Bilateral Agreement** includes the relevant **Construction Agreement**.

ECC.3 SCOPE

ECC.3.1 The **ECC** applies to **The Company** and to **Users**, which in the **ECC** means:

(a) **EU Generators** (other than those which only have **Embedded Small Power Stations**), including those undertaking **OTSDUW** including **Power Generating Modules,** and **DC Connected Power Park Modules.** For the avoidance of doubt, **Electricity Storage Modules** are included within the definition of **Power Generating Modules** for which the requirements of the **ECC** would be equally applicable.

(b) **Network Operators** but only in respect of:-

(i) **Network Operators** who are **EU Code Users**

(ii) **Network Operators** who only have **EU Grid Supply Points**

(iii) **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** as provided for in ECC.3.2, ECC.3.3, EC3.4, EC3.5, ECC5.1, ECC.6.4.4 and ECA.3.4;

(iv) Notwithstanding the requirements of ECC3.1(b)(i)(ii) and (iii), **Network Operators** who own and/or operate **EU Grid Supply Points**, are only required to satisfy the requirements of this **ECC** in relation to each **EU Grid Supply Point**. **Network Operators** in respect of all other **Grid Supply Points** should continue to satisfy the requirements as specified in the **CC**s.

(c) **Non-Embedded Customers** who are also **EU Code Users**;

(d) **HVDC System Owners** who are also **EU Code Users**;

(e) **BM Participants** and **Externally Interconnected System Operators** who are also **EU Code Users** in respect of ECC.6.5, ECC.7.9, ECC.7.10 and ECC.7.11 only; and.

(f) In relation to **Distribution Restoration Zones**, **Restoration Contractors** who are **Non-CUSC Parties** and whose **Embedded Plant** needs to comply with the requirements of EREC G99, other than those included in (a) to (e) above, shall only be required to satisfy ECC.6.1.2, ECC.6.2.2.2.1.2, ECC.6.2.2.7, ECC.6.3, ECC.6.6, ECC.7.10, ECC.7.11 and ECC.8.1 unless additional technical requirements are provided for in the **Anchor Restoration Contract** or **Top Up Restoration Contract**. **Restoration Contractors** who are **Non-CUSC Parties** and whose **Embedded Plant** needs to comply with EREC G59 are not included in the scope of the **ECC** and should refer to the **CC**.

ECC.3.2 The above categories of **User** will become bound by the applicable sections of the **ECC** prior to them generating, distributing, storing, supplying or consuming, as the case may be, and references to the various categories should, therefore, be taken as referring to them in that prospective role.

ECC.3.3 **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** Provisions.

The following provisions apply in respect of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement**.

ECC.3.3.1 The obligations within the **ECC** that are expressed to be applicable to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** (where the obligations are in each case listed in ECC.3.3.2) shall be read and construed as obligations that the **Network Operator** within whose **System** any such **Medium Power Station** or **HVDC System** is **Embedded** must ensure are performed and discharged. **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** which are located **Offshore** and which are connected to an **Onshore User System** will be required to meet the applicable requirements of the Grid Code as though they are an **Onshore Generator** or **Onshore HVDC System Owner** connected to an **Onshore User System Entry Point**.

ECC.3.3.2 The **Network Operator** within whose **System** a **Medium Power Station** not subject to a **Bilateral Agreement** is **Embedded** or an **HVDC System** not subject to a **Bilateral Agreement** is **Embedded**, must ensure that the following obligations in the **ECC** are performed and discharged by the owner and/or operator of the **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or the **Embedded HVDC System** not subject to a **Bilateral Agreement**:

ECC.5.1

ECC.5.2.2

ECC.5.3

ECC.6.1.3

ECC.6.1.5 (b)

ECC.6.3.2, ECC.6.3.3, ECC.6.3.4, ECC.6.3.6, ECC.6.3.7, ECC.6.3.8, ECC.6.3.9, ECC.6.3.10, ECC.6.3.12, ECC.6.3.13, ECC.6.3.15, ECC.6.3.16

ECC.6.4.4

ECC.6.5.6 (where required by ECC.6.4.4)

In respect of ECC.6.2.2.2, ECC.6.2.2.3, ECC.6.2.2.5, ECC.6.1.5(a), ECC.6.1.5(b) and ECC.6.3.11 equivalent provisions as co-ordinated and agreed with the **Network Operator** and the owner and/or operator of the **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or owner and/or operator of the **Embedded HVDC System** not subject to a **Bilateral Agreement** may be required. Details of any such requirements will be notified to the **Network Operator** in accordance with ECC.3.5.

ECC.3.3.3 In the case of **Embedded Medium Power Station**s not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement** the requirements in:

ECC.6.1.6

ECC.6.3.8

ECC.6.3.12

ECC.6.3.15

ECC.6.3.16

ECC.6.3.17

that would otherwise have been specified in a **Bilateral Agreement** will be notified to the relevant **Network Operator** in writing in accordance with the provisions of the **CUSC** and the **Network Operator** must ensure such requirements are performed and discharged by the owner and/or operator of the **Embedded Medium Power Station(s)** not subject to a **Bilateral Agreement** or owner and/or operator of **Embedded HVDC Systems** not subject to a **Bilateral Agreement**.

ECC.3.4 In the case of **Offshore Embedded Power Generating Modules** connected to an **Offshore User's System** which directly connects to an **Offshore Transmission System**, any additional requirements in respect of such **Offshore ~~Embedded~~ Power Generating Modules** may be specified in the relevant **Bilateral Agreement** with the **Network Operator** or in any **Bilateral Agreement** between **The Company** and such **Offshore Generator**.

ECC.3.5 In the case of a **Generator** undertaking **OTSDUW** connecting to an **Onshore Network Operator's System**, any additional requirements in respect of such **OTSDUW Plant and Apparatus** will be specified in the relevant **Bilateral Agreement** with the **EU Generator**. For the avoidance of doubt, requirements applicable to **EU Generators** undertaking **OTSDUW** and connecting to a **Network Operator's User System**, shall be consistent with those applicable requirements of **Generators** undertaking **OTSDUW** and connecting to a **Transmission Interface Point**.

ECC.3.6 The requirements of this **ECC** shall apply to **EU Code Users** in respect of **Power Generating Modules** (including **DC Connected Power Park Modules** and **Electricity Storage Modules**) and **HVDC Systems**.

ECC.4 PROCEDURE

ECC.4.1 The **CUSC** contains certain provisions relating to the procedure for connection to the **National Electricity Transmission System** or, in the case of **Embedded Power Stations** or **Embedded HVDC Systems**, becoming operational and includes provisions relating to certain conditions to be complied with by **EU Code Users** prior to and during the course of **The Company** notifying the **User** that it has the right to become operational. The procedure for an **EU Code User** to become connected is set out in the **Compliance Processes**.

ECC.5 CONNECTION

ECC.5.1 The provisions relating to connecting to the **National Electricity Transmission System** (or to a **User's System** in the case of a connection of an **Embedded Large Power Station** or **Embedded Medium Power Stations** or **Embedded HVDC System**) are contained in:

(a) the **CUSC** and/or **CUSC Contract** (or in the relevant application form or offer for a **CUSC Contract**);

(b) or, in the case of an **Embedded Development**, the relevant **Distribution Code** and/or the **Embedded Development Agreement** for the connection (or in the relevant application form or offer for an **Embedded Development Agreement**),

and include provisions relating to both the submission of information and reports relating to compliance with the relevant **European Connection Conditions** for that **EU Code User**, **Safety Rules**, commissioning programmes, **Operation Diagrams** and approval to connect (and their equivalents in the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** or **Embedded HVDC Systems** not subject to a **Bilateral Agreement**). References in the **ECC** to the "**Bilateral Agreement**" and/or "**Construction Agreement**" and/or "**Embedded Development Agreement**" shall be deemed to include references to the application form or offer therefor.

ECC.5.2 Items For Submission

ECC.5.2.1 Prior to the **Completion Date** (or, where the **EU Generator** is undertaking **OTSDUW**, any later date specified) under the **Bilateral Agreement** and/or **Construction Agreement**, the following is submitted pursuant to the terms of the **Bilateral Agreement** and/or **Construction Agreement**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in ECC.6;

(c) copies of all **Safety Rules** and **Local Safety Instructions** applicable at **Users' Sites** which will be used at the **Transmission/User** interface (which, for the purpose of **OC8**, must be to **The Company's** satisfaction regarding the procedures for **Isolation** and **Earthing**. **The Company** will consult the **Relevant Transmission Licensee** when determining whether the procedures for **Isolation** and **Earthing** are satisfactory);

(d) information to enable the preparation of the **Site Responsibility Schedules** on the basis of the provisions set out in Appendix 1;

(e) an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point** as described in ECC.7;

(f) the proposed name of the **User Site** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

(g) written confirmation that **Safety Co-ordinators** acting on behalf of the **User** are authorised and competent pursuant to the requirements of **OC8**;

(h) Such **RISSP** prefixes pursuant to the requirements of **OC8**. Such **RISSP** prefixes shall be circulated utilising a proforma in accordance with **OC8**;

(i) a list of the telephone numbers for **Joint System Incidents** at which senior management representatives nominated for the purpose can be contacted and confirmation that they are fully authorised to make binding decisions on behalf of the **User**, pursuant to **OC9**;

(j) a list of managers who have been duly authorised to sign **Site Responsibility Schedules** on behalf of the **User**;

(k) information to enable the preparation of the **Site Common Drawings** as described in ECC.7;

(l) confirmation of access to the **Designated Information Exchange System** as referenced in ECC.6.5.9;

(m) for **Sites** in Scotland and **Offshore** a list of persons appointed by the **User** to undertake operational duties on the **User's System** (including any **OTSDUW** prior to the **OTSUA Transfer Time**) and to issue and receive operational messages and instructions in relation to the **User's System** (including any **OTSDUW** prior to the **OTSUA Transfer Time**); and an appointed person or persons responsible for the maintenance and testing of **User's Plant** and **Apparatus**.

(n) a list of contact details for outage and network planning, which shall be updated by the **EU Code User** as needed; and

(o) a list of email and telephone contact details for the **User Site**, which shall be updated by the **User** as needed. The persons specified in the contact details should be able to assist in the sharing of dynamic system behaviour monitoring data as well as supporting any post-**Event** investigations.

ECC.5.2.2 Prior to the **Completion Date** the following must be submitted to **The Company** by the **Network Operator** in respect of an **Embedded Development**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in ECC.6;

(c) the proposed name of the **Embedded Medium Power Station** or **Embedded HVDC System** (which shall be agreed with **The Company** unless it is the same as, or confusingly similar to, the name of other **Transmission Site** or **User Site**);

ECC.5.2.3 Prior to the **Completion Date** contained within an **Offshore Transmission Distribution Connection Agreement** the following must be submitted to **The Company** by the **Network Operator** in respect of a proposed new **Interface Point** within its **User System**:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in ECC.6;

(c) the proposed name of the **Interface Point** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

ECC.5.2.4 In the case of **OTSDUW Plant and Apparatus** (in addition to items under ECC.5.2.1 in respect of the **Connection Site**), prior to the **Completion Date** (or any later date specified) under the **Construction Agreement** the following must be submitted to **The Company** by the **User** in respect of the proposed new **Connection Point** and **Interface Point**:

(a) updated **Planning Code** data (**Standard Planning Data**, **Detailed Planning Data** and **OTSDUW Data and Information**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**, pursuant to the requirements of the **Planning Code**;

(b) details of the **Protection** arrangements and settings referred to in ECC.6;

(c) information to enable preparation of the **Site Responsibility Schedules** at the **Transmission Interface Site** on the basis of the provisions set out in Appendix E1.

(d) the proposed name of the **Interface Point** (which shall not be the same as, or confusingly similar to, the name of any **Transmission Site** or of any other **User Site**);

ECC.5.3 (a) Of the items ECC.5.2.1 (c), (e), (g), (h), (k) and (m) need not be supplied in respect of **Embedded Power Stations** or **Embedded HVDC Systems**,

(b) item ECC.5.2.1(i) need not be supplied in respect of **Embedded Small Power Stations** and **Embedded Medium Power Stations** or **Embedded HVDC Systems** with a **Registered Capacity** of less than 100MW, and

(c) items ECC.5.2.1(d) and (j) are only needed in the case where the **Embedded Power Station** or the **Embedded HVDC System** is within a **Connection Site** with another **User**.

ECC.6 TECHNICAL, DESIGN AND OPERATIONAL CRITERIA

ECC.6.1 National Electricity Transmission System Performance Characteristics

ECC.6.1.1 **The Company** shall ensure that, subject as provided in the **Grid Code**, the **National Electricity Transmission System** complies with the following technical, design and operational criteria in relation to the part of the **National Electricity Transmission System** at the **Connection Site** with a **User** and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point** (unless otherwise specified in ECC.6) although in relation to operational criteria **The Company** may be unable (and will not be required) to comply with this obligation to the extent that there are insufficient **Power Stations** or **User Systems** are not available or **Users** do not comply with **The Company's** instructions or otherwise do not comply with the **Grid Code** and each **User** shall ensure that its **Plant** and **Apparatus** complies with the criteria set out in ECC.6.1.5.

ECC.6.1.2 Grid Frequency Variations

ECC.6.1.2.1 Grid Frequency Variations

ECC.6.1.2.1.1 The **Frequency** of the **National Electricity Transmission System** shall be nominally 50Hz and shall be controlled within the limits of 49.5 - 50.5Hz unless exceptional circumstances prevail, for example but not limited to, situations such as during **System Restoration**.

ECC.6.1.2.1.2 The **System Frequency** could rise to 52Hz or fall to 47Hz in exceptional circumstances. Design of **User's Plant** and **Apparatus** and **OTSDUW Plant and Apparatus** must enable operation of that **Plant** and **Apparatus** within that range in accordance with the following:

Frequency Range	Requirement
51.5Hz - 52Hz	Operation for a period of at least 15 minutes is required each time the **Frequency** is above 51.5Hz.
51Hz - 51.5Hz	Operation for a period of at least 90 minutes is required each time the **Frequency** is above 51Hz.
49.0Hz - 51Hz	Continuous operation is required
47.5Hz - 49.0Hz	Operation for a period of at least 90 minutes is required each time the **Frequency** is below 49.0Hz.
47Hz - 47.5Hz	Operation for a period of at least 20 seconds is required each time the **Frequency** is below 47.5Hz.

ECC.6.1.2.1.3 For the avoidance of doubt, disconnection, by **Frequency** or speed based relays is not permitted within the **Frequency** range 47.5Hz to 51.5Hz. **EU Generators** should however be aware of the combined voltage and **Frequency** operating ranges as defined in ECC.6.3.12 and ECC.6.3.13.

ECC.6.1.2.1.4 **The Company** in co-ordination with the **Relevant Transmission Licensee** and/or **Network Operator** and a **User** may agree on wider variations in **Frequency** or longer minimum operating times to those set out in ECC.6.1.2.1.2 or specific requirements for combined **Frequency** and voltage deviations, for example but not limited to, situations such as during **System Restoration**. Any such requirements in relation to **Power Generating Modules** shall be in accordance with ECC.6.3.12 and ECC.6.3.13. A **User** shall not unreasonably withhold consent to apply wider **Frequency** ranges or longer minimum times for operation taking account of their economic and technical feasibility.

ECC.6.1.2.2 Grid Frequency variations for **HVDC Systems** and **Remote End HVDC Converter Stations**

ECC.6.1.2.2.1 **HVDC Systems** and **Remote End HVDC Converter Stations** shall be capable of staying connected to the **System** and remaining operable within the **Frequency** ranges and time periods specified in Table ECC.6.1.2.2 below. This requirement shall continue to apply during the **Fault Ride Through** conditions defined in ECC.6.3.15. For the avoidance of doubt, disconnection by **Frequency** or speed based relays is not permitted within the **Frequency** range 47.5Hz to 51.5Hz. **HVDC System Owners** should however be aware of the combined voltage and **Frequency** operating ranges as defined in ECC.6.3.12 and ECC.6.3.13.

Frequency Range (Hz)	Time Period for Operation
47.0 – 47.5Hz	60 seconds
47.5 – 49.0Hz	90 minutes 30 seconds
49.0 – 51.0Hz	Unlimited
51.0 – 51.5Hz	90 minutes 30 seconds
51.5Hz – 52 Hz	20 minutes

Table ECC.6.1.2.2 – Minimum time periods **HVDC Systems** and **Remote End HVDC Converter Stations** shall be able to operate for different frequencies deviating from a nominal value without disconnecting from the **National Electricity Transmission System**

ECC.6.1.2.2.2 **The Company** in coordination with the **Relevant Transmission Licensee** and a **HVDC System Owner** may agree wider **Frequency** ranges or longer minimum operating times if required to preserve or restore system security, for example but not limited to, situations such as during **System Restoration**. If wider **Frequency** ranges or longer minimum times for operation are economically and technically feasible, the HV**DC System Owner** shall not unreasonably withhold consent.

ECC.6.1.2.2.3 Not-withstanding the requirements of ECC.6.1.2.2.1, an **HVDC System** or **Remote End HVDC Converter Station** shall be capable of automatic disconnection at frequencies specified by **The Company** and/or **Relevant Network Operator**.

ECC.6.1.2.2.4 In the case of **Remote End HVDC Converter Stations** where the **Remote End HVDC Converter Station** is operating at either nominal **Frequency** other than 50Hz or a variable **Frequency**, the requirements defined in ECC6.1.2.2.1 to ECC.6.1.2.2.3 shall apply to the **Remote End HVDC Converter Station** other than in respect of the **Frequency** ranges and time periods.

ECC.6.1.2.3 Grid Frequency Variations for **DC Connected Power Park Modules**

ECC.6.1.2.3.1 **DC Connected Power Park Modules** shall be capable of staying connected to the **Remote End DC Converter** network at the **HVDC Interface Point** and operating within the **Frequency** ranges and time periods specified in Table ECC.6.1.2.3 below. For the avoidance of doubt, disconnection by **Frequency** or speed based relays is not permitted within the **Frequency** range 47.5 Hz to 51.5 Hz. **EU Generators** should however be aware of the combined voltage and **Frequency** operating ranges as defined in ECC.6.3.12 and ECC.6.3.13. Where a nominal **Frequency** other than 50Hz, or a **Frequency** variable by design is used as agreed with **The Company** and the **Relevant Transmission Licensee** the applicable **Frequency** ranges and time periods shall be specified in the **Bilateral Agreement** which shall (where applicable) reflect the requirements in Table ECC.6.1.2.3.

Frequency Range (Hz)	Time Period for Operation
47.0 – 47.5Hz	20 seconds
47.5 – 49.0Hz	90 minutes
49.0 – 51.0Hz	Unlimited
51.0 – 51.5Hz	90 minutes
51.5Hz – 52 Hz	15 minutes

Table ECC.6.1.2.3 – Minimum time periods a **DC Connected Power Park Module** shall be able to operate for different frequencies deviating from a nominal value without disconnecting from the **System**

ECC.6.1.2.3.2 **The Company** in coordination with the **Relevant Transmission Licensee** and a **Generator** may agree wider **Frequency** ranges or longer minimum operating times if required to preserve or restore system security and to ensure the optimum capability of the **DC Connected Power Park Module**, for example but not limited to, situations such as during **System Restoration**. If wider **Frequency** ranges or longer minimum times for operation are economically and technically feasible, the **EU Generator** shall not unreasonably withhold consent.

ECC.6.1.3 Not used

ECC.6.1.4 Grid Voltage Variations

ECC.6.1.4.1 Grid Voltage Variations for **Users** excluding **DC Connected Power Park Modules** and **Remote End HVDC Converters**

The voltage on part of the **National Electricity Transmission System** operating at nominal voltages of greater than 300kV at each **Connection Site** with a **User** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**, excluding **DC Connected Power Park Modules** and **Remote End HVDC Converters**) will normally remain within ±5% of the nominal value unless abnormal conditions prevail. The minimum voltage is -10% and the maximum voltage is +10% unless abnormal conditions prevail, for example, but not limited to, situations such as during **System Restoration**, but voltages between +5% and +10% will not last longer than 15 minutes unless abnormal conditions prevail. For nominal voltages of 110kV and up to and including 300kV voltages on the parts of the **National Electricity Transmission System** at each **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**) will normally remain within the limits ±10% of the nominal value unless abnormal conditions prevail for example, but not limited to, situations such as during **System Restoration**. At nominal **System** voltages below 110kV the voltage of the **National Electricity Transmission System** at each **Connection Site** with a **User** (and in the case of **OTSDUW Plant and Apparatus**, a **Transmission Interface Point**), excluding **Connection Sites** for **DC Connected Power Park Modules** and **Remote End HVDC Converters**) will normally remain within the limits ±6% of the nominal value unless abnormal conditions prevail for example but not limited to, situations such as during **System Restoration**. Under fault conditions, the voltage may collapse transiently to zero at the point of fault until the fault is cleared. The normal operating ranges of the **National Electricity Transmission System** are summarised below:

National Electricity Transmission System Nominal Voltage	**Normal Operating Range**		**Time period for Operation**
	Voltage (percentage of Nominal Voltage)	Pu (1pu relates to the Nominal Voltage)	
Greater than 300kV	V -10% to +5% V +5% to +10%	0.90pu- 1.05pu 1.05pu- 1.10pu	Unlimited 15 minutes
110kV up to 300kV	V ±10%	0.90- 1.10pu	Unlimited
Below 110kV	±6%	0.94pu- 1.06pu	Unlimited

The Company and a **User** may agree greater variations or longer minimum time periods of operation in voltage to those set out above in relation to a particular **Connection Site**, and insofar as a greater variation is agreed, the relevant figure set out above shall, in relation to that **User** at the particular **Connection Site**, be replaced by the figure agreed.

ECC.6.1.4.2 Grid Voltage Variations for all **DC Connected Power Park Modules**

ECC.6.1.4.2.1 All **DC Connected Power Park Modules** shall be capable of staying connected to the **Remote End HVDC Converter Station** at the **HVDC Interface Point** and operating within the voltage ranges and time periods specified in Tables ECC.6.1.4.2(a) and ECC.6.1.4.2(b) below. The applicable voltage range and time periods specified are selected based on the reference 1pu voltage.

Voltage Range (pu)	Time Period for Operation
0.85pu – 0.9pu	60 minutes
0.9pu – 1.1pu	Unlimited
1.1pu – 1.15pu	15 minutes

Table ECC.6.1.4.2(a) – Minimum time periods for which **DC Connected Power Park Modules** shall be capable of operating for different voltages deviating from reference 1pu without disconnecting from the network where the nominal voltage base is 110kV or above and less than 300kV.

Voltage Range (pu)	Time Period for Operation
0.85pu – 0.9pu	60 minutes
0.9pu – 1.05pu	Unlimited
1.05pu – 1.15pu	15 minutes

Table ECC.6.1.4.2(b) – Minimum time periods for which **DC Connected Power Park Modules** shall be capable of operating for different voltages deviating from reference 1pu without disconnecting from the network where the nominal voltage base is from 300kV up to and including 400kV.

ECC.6.1.4.2.2 **The Company** and a **EU Generator** in respect of a **DC Connected Power Park Module** may agree greater voltage ranges or longer minimum operating times. If greater voltage ranges or longer minimum times for operation are economically and technically feasible, the **EU Generator** shall not unreasonably withhold any agreement .

ECC.6.1.4.2.3 For **DC Connected Power Park Modules** which have an **HVDC Interface Point** to the **Remote End HVDC Converter Station**, **The Company** in coordination with the **Relevant Transmission Licensee** may specify voltage limits at the **HVDC Interface Point** at which the **DC Connected Power Park Module** is capable of automatic disconnection.

ECC.6.1.4.2.4 For **HVDC Interface Points** which fall outside the scope of ECC.6.1.4.2.1, ECC.6.1.4.2.2 and ECC.6.1.4.2.3, **The Company** in coordination with the **Relevant Transmission Licensee** shall specify any applicable requirements at the **Grid Entry Point** or **User System Entry Point**.

ECC.6.1.4.2.5 Where the nominal **Frequency** of the AC collector **System** which is connected to an **HVDC Interface Point** is at a value other than 50Hz, the voltage ranges and time periods specified by **The Company** in coordination with the **Relevant Transmission Licensee** shall be proportional to the values specified in Table ECC.6.1.4.2(a) and Table ECC.6.1.4.2(b).

ECC.6.1.4.3 Grid Voltage Variations for all **Remote End HVDC Converters**

ECC.6.1.4.3.1 All **Remote End HVDC Converter Stations** shall be capable of staying connected to the **HVDC Interface Point** and operating within the voltage ranges and time periods specified in Tables ECC.6.1.4.3(a) and ECC.6.1.4.3(b) below. The applicable voltage range and time periods specified are selected based on the reference 1pu voltage.

Voltage Range (pu)	Time Period for Operation
0.85pu – 0.9pu	60 minutes
0.9pu – 1.1pu	Unlimited
1.1pu – 1.15pu	15 minutes

Table ECC.6.1.4.3(a) – Minimum time periods for which a **Remote End HVDC Converter** shall be capable of operating for different voltages deviating from reference 1pu without disconnecting from the network where the nominal voltage base is 110kV or above and less than 300kV.

Voltage Range (pu)	Time Period for Operation
0.85pu – 0.9pu	60 minutes
0.9pu – 1.05pu	Unlimited
1.05pu – 1.15pu	15 minutes

Table ECC.6.1.4.3(b) – Minimum time periods for which **a Remote End HVDC Converter** shall be capable of operating for different voltages deviating from reference 1pu without disconnecting from the network where the nominal voltage base is from 300kV up to and including 400kV.

ECC.6.1.4.3.2 **The Company** and a **HVDC System Owner** may agree greater voltage ranges or longer minimum operating times which shall be in accordance with the requirements of ECC.6.1.4.2.

ECC.6.1.4.3.4 For **HVDC Interface Points** which fall outside the scope of ECC.6.1.4.3.1 **The Company** in coordination with the **Relevant Transmission Licensee** shall specify any applicable requirements at the **Grid Entry Point** or **User System Entry Point**.

ECC.6.1.4.3.5 Where the nominal **Frequency** of the AC collector **System** which is connected to an **HVDC Interface Point** is at a value other than 50Hz, the voltage ranges and time periods specified by **The Company** in coordination with the **Relevant Transmission Licensee** shall be proportional to the values specified in Table ECC.6.1.4.3(a) and Table ECC.6.1.4.3(b).

Voltage Waveform Quality

ECC.6.1.5 All **Plant** and **Apparatus** connected to the **National Electricity Transmission System**, and that part of the **National Electricity Transmission System** at each **Connection Site** or, in the case of **OTSDUW Plant and Apparatus**, at each **Interface Point**, should be capable of withstanding the following distortions of the voltage waveform in respect of harmonic content and phase unbalance:

(a) Harmonic Content

The **Electromagnetic Compatibility Levels** for harmonic distortion on the **Onshore Transmission System** from all sources under both **Planned Outage** and fault outage conditions, (unless abnormal conditions prevail) shall comply with **Engineering Recommendation G5**. The **Electromagnetic Compatibility Levels** for harmonic distortion on an **Offshore Transmission System** will be defined in relevant **Bilateral Agreements**.

Engineering Recommendation G5 contains planning criteria which **The Company** will apply to the connection of non-linear **Load** to the **National Electricity Transmission System**, which may result in harmonic emission limits being specified for these **Loads** in the relevant **Bilateral Agreement**. The application of the planning criteria will take into account the position of existing **GB Code User's** and **EU Code Users' Plant** and **Apparatus** (and **OTSDUW Plant and Apparatus**) in relation to harmonic emissions. **EU Code Users** must ensure that connection of distorting loads to their **User Systems** do not cause any harmonic emission limits specified in the **Bilateral Agreement**, or where no such limits are specified, the relevant planning levels specified in **Engineering Recommendation G5** to be exceeded.

(b) Phase Unbalance

Under **Planned Outage** conditions, the weekly 95 percentile of **Phase (Voltage) Unbalance,** calculated in accordance with IEC 61000-4-30 and IEC 61000-3-13, on the **National Electricity Transmission System** for voltages above 150kV should remain, in England and Wales, below 1.5%, and in Scotland, below 2%, and for voltages of 150kV and below, across GB below 2%, unless abnormal conditions prevail and **Offshore** (or in the case of **OTSDUW**, **OTSDUW Plant and Apparatus**) will be defined in relevant **Bilateral Agreements**.

The Phase Unbalance is calculated from the ratio of root mean square (rms) of negative phase sequence voltage to rms of positive phase sequence voltage, based on 10-minute average values, in accordance with IEC 61000-4-30.

ECC.6.1.6 Across GB, under the **Planned Outage** conditions stated in ECC.6.1.5(b) infrequent short duration peaks with a maximum value of 2% are permitted for **Phase (Voltage) Unbalance**, for voltages above 150kV, subject to the prior agreement of **The Company** under the **Bilateral Agreement** and in relation to **OTSDUW**, the **Construction Agreement**. **The Company** will only agree following a specific assessment of the impact of these levels on **Transmission Apparatus** and other **Users Apparatus** with which it is satisfied.

Voltage Fluctuations

ECC.6.1.7 Voltage changes at a **Point of Common Coupling** on the **Onshore Transmission System** shall not exceed:

(a) The limits specified in Table ECC.6.1.7(a) with the stated frequency of occurrence, where:

(i)

$$\%\Delta V_{steadystate} = \left| 100 \times \frac{\Delta V_{steadystate}}{Vn} \right| \quad \text{and}$$

$$\%\Delta V_{max} = 100 \times \frac{\Delta V_{max}}{V_n} \ ;$$

(ii) V_n is the nominal system voltage;

(iii) $V_{steadystate}$ is the voltage at the end of a period of 1 s during which the rate of change of system voltage over time is ≤ 0.5%;

(iv) $\Delta V_{steadystate}$ is the difference in voltage between the initial steady state voltage prior to the RVC (V_0) and the final steady state voltage after the RVC ($V_{0'}$);

(v) ΔV_{max} is the absolute change in the system voltage relative to the initial steady state system voltage (V_0);

(vi) All voltages are the r.m.s. of the voltage measured over one cycle refreshed every half a cycle as per BS EN 61000-4-30; and

(vii) The applications in the 'Example Applicability' column are examples only and are not definitive.

Cat-egory	Title	Maximum number of occurrence	Limits $\%\Delta V_{max}$ & $\%\Delta V_{steadystate}$	Example Applicability
1	Frequent events	(see NOTE 1)	As per Figure ECC.6.1.7 (1)	Any single or repetitive RVC that falls inside Figure ECC.6.1.7 (1)

2	Infrequent events	4 events in 1 calendar month (see NOTE 2)	As per Figure ECC.6.1.7 (2) $\lvert \%\Delta V_{steadystate} \rvert \leq 3\%$ For decrease in voltage: $\lvert \%\Delta V_{max} \rvert \leq 10\%$ (see NOTE 3) For increase in voltage: $\lvert \%\Delta V_{max} \rvert \leq 6\%$ (see NOTE 4)	Infrequent motor starting, transformer energisation, re-energisation (see NOTE 7)
3	Very infrequent events	1 event in 3 calendar months (see NOTE 2)	As per Figure ECC.6.1.7 (3) $\lvert \%\Delta V_{steadystate} \rvert \leq 3\%$ For decrease in voltage: $\lvert \%\Delta V_{max} \rvert \leq 12\%$ (see NOTE 5) For increase in voltage: $\lvert \%\Delta V_{max} \rvert \leq 6\%$ (see NOTE 6)	Commissioning, maintenance & post fault switching (see NOTE 7)

NOTE 1: ±6% is permissible for 100 ms reduced to ±3% thereafter as per Figure ECC.6.1.7 (1) .
If the profile of repetitive voltage change(s) falls within the envelope given in Figure ECC.6.1.7 (1) , the assessment of such voltage change(s) shall be undertaken according to the recommendations for assessment of flicker and shall conform to the planning levels provided for flicker.
If any part of the voltage change(s) falls outside the envelope given in Figure ECC.6.1.7(1), the assessment of such voltage changes, repetitive or not, shall be done according to the guidance and limits for RVCs.

NOTE 2: No more than 1 event is permitted per day, consisting of up to 4 RVCs, each separated by at least 10 minutes with all switching completed within a two-hour window.

NOTE 3: −10% is permissible for 100 ms reduced to -6% until 2 s then reduced to -3% thereafter as per Figure ECC.6.1.7 (2).

NOTE 4: +6% is permissible for 0.8 s from the instant the event begins then reduced to +3% thereafter as per Figure ECC.6.1.7 (2).

NOTE 5: −12% is permissible for 100 ms reduced to −10% until 2 s then reduced to -3% thereafter as per Figure ECC.6.1.7 (3).

NOTE 6: +6% is permissible for 0.8 s from the instant the event begins then reduced to +3% thereafter as per Figure ECC.6.1.7 (3).

NOTE 7: These are examples only. Customers may opt to conform to the limits of another category providing the frequency of occurrence is not expected to exceed the 'Maximum number of occurrence' for the chosen category.

Table ECC.6.1.7 (a) – Planning levels for RVC

(b) The voltage change limit is the absolute maximum allowed of either the phase-to-earth voltage change or the phase-to-phase voltage change, whichever is the highest. The limits do not apply to single phasor equivalent voltages, e.g. positive phase sequence (PPS) voltages. For high impedance earthed systems, the maximum phase-to-phase, i.e. line voltage, should be used for assessment.

(c) The RVCs in Category 2 and 3 should not exceed the limits depicted in the time dependent characteristic shown in Figure ECC.6.1.7 (2) and Figure ECC.6.1.7 (3) respectively. These limits do not apply to: 1) fault clearance operations; or 2) immediate operations in response to fault conditions; or 3) operations relating to post fault system restoration (for the avoidance of doubt this third exception pertains to a fault that is external to the **Users** plant and apparatus).

(d) Any RVCs permitted in Category 2 and Category 3 should be at least 10 minutes apart.

(e) The value of $V_{steadystate}$ should be established immediately prior to the start of a RVC. Following a RVC, the voltage should remain within the relevant envelope, as shown in Figures ECC.6.1.7 (1), ECC.6.1.7 (2), ECC.6.1.7 (3), until a $V_{steadystate}$ condition has been satisfied.

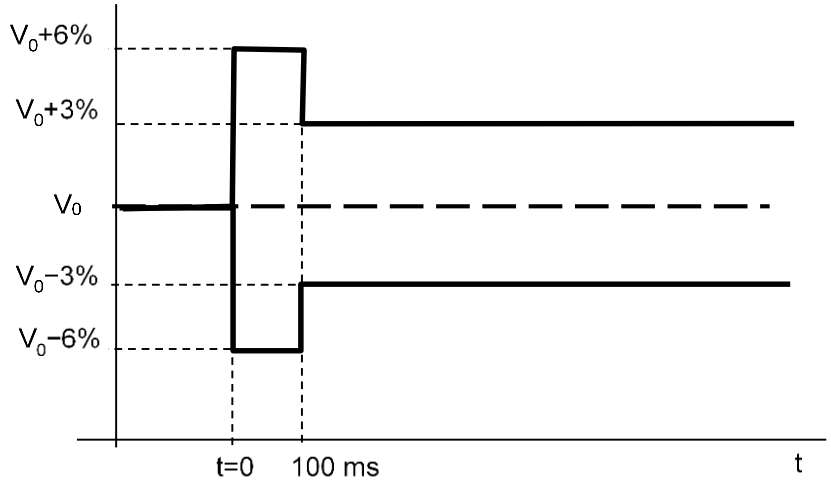

Figure ECC.6.1.7 (1) — Voltage characteristic for frequent events

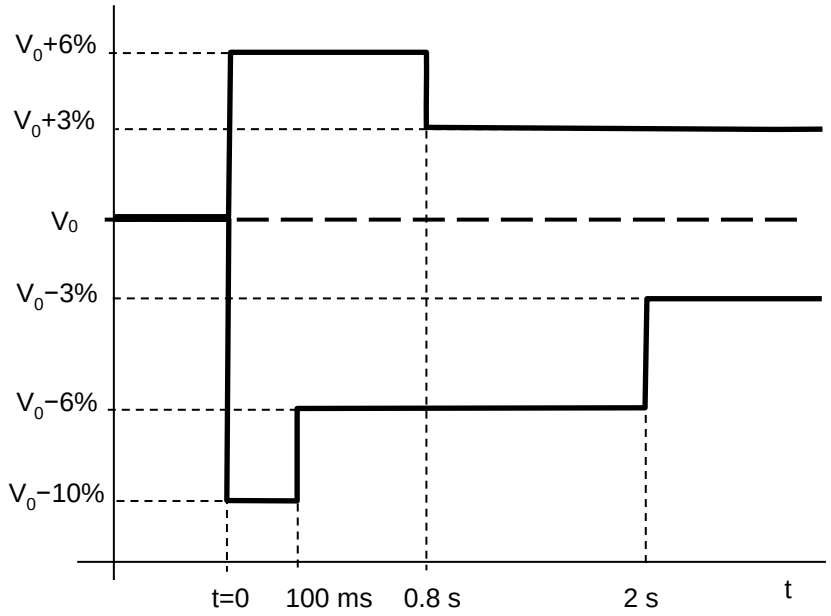

Figure ECC.6.1.7 (2) — Voltage characteristic for infrequent events

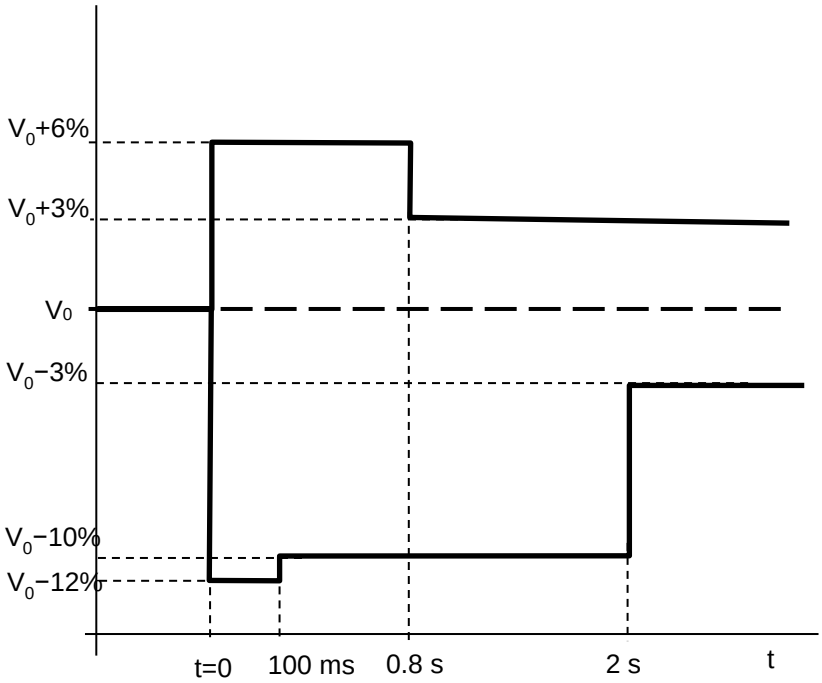

Figure ECC.6.1.7 (3) — Voltage characteristic for very infrequent events

(f) The voltage change between two steady state voltage conditions should not exceed 3%. (The limit is based on 3% of the nominal voltage of the system (V_n) as measured at the PCC. The step voltage change as measured at the customer's supply terminals or equipment terminals could be greater. For example: The step voltage change limit stated in BS EN 61000-3-3 and BS EN 61000-3-11 is 3.3% when measured at the equipment terminals.)

(g) The limits apply to voltage changes measured at the **Point of Common Coupling**.

(h) Category 3 events that are planned should be notified to the Company in advance.

(i) For connections where voltage changes would constitute a risk to the **National Electricity Transmission System** or, in **The Company's** view, the **System** of any **GB Code User**, **Bilateral Agreements** may include provision for **The Company** to reasonably limit the number of voltage changes in Category 2 or 3 to a lower number than specified in Table ECC.6.1.7(a) to ensure that the total number of voltage changes at the **Point of Common Coupling** across multiple **Users** remains within the limits of Table ECC.6.1.7(a).

(j) The planning levels applicable to Flicker Severity Short Term (Pst) and Flicker Severity Long Term (Plt) are set out in Table ECC.6.1.7(b).

Supply system Nominal voltage	Planning level	
	Flicker Severity Short Term (Pst)	Flicker Severity Long Term (Plt)
Up to and including 33 kV	0.9	0.7
66kV and greater	0.8	0.6
NOTE 1: The magnitude of Pst is linear with respect to the magnitude of the voltage changes giving rise to it. NOTE 2: Extreme caution is advised in allowing any excursions of Pst and Plt above the planning level.		

Table ECC.6.7.1(b) — Planning levels for flicker

The values and figures referred to in this paragraph ECC.6.1.7 are derived from Engineering Recommendation P28 Issue 2.

ECC.6.1.8 Voltage fluctuations at a **Point of Common Coupling** with a fluctuating **Load** directly connected to an **Offshore Transmission System** (or in the case of **OTSDUW**, **OTSDUW Plant and Apparatus**) shall not exceed the limits set out in the **Bilateral Agreement**.

Sub-Synchronous Resonance and Sub-Synchronous Torsional Interaction (SSTI)

ECC.6.1.9 **The Company** shall ensure that **Users' Plant and Apparatus** will not be subject to unacceptable Sub-Synchronous Oscillation conditions as specified in the relevant **License Standards**.

ECC.6.1.10 **The Company** shall ensure where necessary, and in consultation with **Relevant Transmission Licensees** where required, that any relevant site specific conditions applicable at a **User's Connection Site**, including a description of the Sub-Synchronous Oscillation conditions considered in the application of the relevant **License Standards**, are set out in the **User's Bilateral Agreement**.

ECC.6.2 Plant and Apparatus relating to Connection Sites and Interface Points and HVDC Interface Points

The following requirements apply to **Plant** and **Apparatus** relating to the **Connection Point** and **OTSDUW Plant and Apparatus** relating to the **Interface Point** (until the **OTSUA Transfer Time**), **HVDC Interface Point**s relating to **Remote End HVDC Converters** and **Connection Points** which (except as otherwise provided in the relevant paragraph) each **EU Code User** must ensure are complied with in relation to its **Plant** and **Apparatus** and which in the case of ECC.6.2.2.2.2, ECC.6.2.3.1.1 and ECC.6.2.1.1(b) only, **The Company** must ensure are complied with in relation to **Transmission Plant** and **Apparatus**, as provided in those paragraphs.

ECC.6.2.1 General Requirements

ECC.6.2.1.1 (a) The design of connections between the **National Electricity Transmission System** and:

(i) any **Power Generating Module Generating Unit** (other than a **CCGT Unit** or **Power Park Unit**) **HVDC Equipment**, **Power Park Module** or **CCGT Module**, or

(ii) any **Network Operator's User System**, or

(iii) **Non-Embedded Customers** equipment;

will be consistent with the **License Standards**.

In the case of **OTSDUW**, the design of the **OTSUA's** connections at the **Interface Point** and **Connection Point** will be consistent with **License Standards**.

(b) The **National Electricity Transmission System** (and any **OTSDUW Plant and Apparatus**) at nominal **System** voltages of 132kV and above is/shall be designed to be earthed with an **Earth Fault Factor** of, in England and Wales or **Offshore**, below 1.4 and in Scotland, below 1.5. Under fault conditions the rated **Frequency** component of voltage could fall transiently to zero on one or more phases or, in England and Wales, rise to 140% phase-to-earth voltage, or in Scotland, rise to 150% phase-to-earth voltage. The voltage rise would last only for the time that the fault conditions exist. The fault conditions referred to here are those existing when the type of fault is single or two phase-to-earth.

(c) For connections to the **National Electricity Transmission System** at nominal **System** voltages of below 132kV the earthing requirements and voltage rise conditions will be advised by **The Company** as soon as practicable prior to connection and in the case of **OTSDUW Plant and Apparatus** shall be advised to **The Company** by the **EU Code User**.

ECC.6.2.1.2 Substation Plant and Apparatus

(a) The following provisions shall apply to all **Plant** and **Apparatus** which is connected at the voltage of the **Connection Point** (and **OTSDUW Plant and Apparatus** at the **Interface Point**) and which is contained in equipment bays that are within the **Transmission** busbar **Protection** zone at the **Connection Point**. This includes circuit breakers, switch disconnectors, disconnectors, **Earthing Devices**, power transformers, voltage transformers, reactors, current transformers, surge arresters, bushings, neutral equipment, capacitors, line traps, coupling devices, external insulation and insulation co-ordination devices. Where necessary, this is more precisely defined in the **Bilateral Agreement**.

(i) Plant and/or Apparatus in respect of EU Code Users connecting to a new Connection Point (including OTSDUW Plant and Apparatus at the Interface Point)

Each item of such **Plant** and/or **Apparatus** installed in relation to a new **Connection Point** (or **OTSDUW Plant and Apparatus** at the **Interface Point** or **Remote End HVDC Converter Station** at the **HVDC Interface Point**) shall comply with the relevant **Technical Specifications** and any further requirements identified by **The Company**, acting reasonably, to reflect the options to be followed within the **Technical Specifications** and/or to complement if necessary the **Technical Specifications** so as to enable **The Company** to comply with its obligations in relation to the **National Electricity Transmission System** or the **Relevant Transmission Licensee** to comply with its obligations in relation to its **Transmission System**. This information, including the application dates of the relevant **Technical Specifications**, will be as specified in the **Bilateral Agreement**.

(ii) EU Code User's Plant and/or Apparatus connecting to an existing Connection Point (including OTSDUW Plant and Apparatus at the Interface Point)

Each new additional and/or replacement item of such **Plant** and/or **Apparatus** installed in relation to a change to an existing **Connection Point** (or **OTSDUW Plant and Apparatus** at the **Interface Point** and **Connection Point** or **Remote End HVDC Converter Stations** at the **HVDC Interface Point**)–shall comply with the standards/specifications applicable when the change was designed, or such other standards/specifications as necessary to ensure that the item of **Plant** and/or **Apparatus** is reasonably fit for its intended purpose having due regard to the obligations of **The Company**, the relevant **User** the **Relevant Transmission Licensee** under their respective **Licenses**. Where appropriate this information, including the application dates of the relevant standards/specifications, will be as specified in the varied **Bilateral Agreement**.

(iii) Used Plant and/or Apparatus being moved, re-used or modified

If, after its installation, any such item of **Plant** and/or **Apparatus** is subsequently:

moved to a new location; or

used for a different purpose; or

otherwise modified;

then the standards/specifications as described in (i) or (ii) above as applicable will apply as appropriate to such **Plant** and/or **Apparatus**, which must be reasonably fit for its intended purpose having due regard to the obligations of **The Company**, the relevant **User** and the **Relevant Transmission Licensee** under their respective **Licenses**.

(b) **The Company** shall at all times maintain a list of those **Technical Specifications** and additional requirements which might be applicable under this ECC.6.2.1.2 and which may be referenced by **The Company** in the **Bilateral Agreement**. **The Company** shall provide a copy of the list upon request to any **EU Code User**. **The Company** shall also provide a copy of the list to any **EU Code User** upon receipt of an application form for a **Bilateral Agreement** for a new **Connection Point**.

(c) Where the **EU Code User** provides **The Company** with information and/or test reports in respect of **Plant** and/or **Apparatus** which the **EU Code User** reasonably believes demonstrate the compliance of such items with the provisions of a **Technical Specification** then **The Company** shall promptly and without unreasonable delay give due and proper consideration to such information.

(d) **Plant** and **Apparatus** shall be designed, manufactured and tested in premises with an accredited certificate in accordance with the quality assurance requirements of the relevant standard in the BS EN ISO 9000 series (or equivalent as reasonably approved by **The Company**) or in respect of test premises which do not include a manufacturing facility premises with an accredited certificate in accordance with BS EN 45001.

(e) Each connection between a **User** and the **National Electricity Transmission System** must be controlled by a circuit-breaker (or circuit breakers) capable of interrupting the maximum short circuit current at the point of connection. The **Electricity Ten Year Statement** gives values of short circuit current and the rating of **Transmission** circuit breakers at existing and committed **Connection Points** for future years.

(f) Each connection between a **Generator** undertaking **OTSDUW** or an **Onshore Transmission Licensee**, must be controlled by a circuit breaker (or circuit breakers) capable of interrupting the maximum short circuit current at the **Transmission Interface Point**. The **Electricity Ten Year Statement** gives values of short circuit current and the rating of **Transmission** circuit breakers at existing and committed **Transmission Interface Points** for future years.

ECC.6.2.2 Requirements at **Connection Points** or, in the case of **OTSDUW** at **Interface Points** that relate to **Generators** or **OTSDUW Plant and Apparatus**

ECC.6.2.2.1 Not Used.

ECC.6.2.2.2 **Power Generating Module**, **OTSDUW Plant and Apparatus**, **HVDC Equipment** and **Power Station** Protection Arrangements

ECC.6.2.2.2.1 Minimum Requirements

ECC.6.2.2.2.1.1 **Protection** of **Power Generating Modules** (other than **Power Park Units**), **HVDC Equipment**, **OTSDUW Plant and Apparatus** and their connections to the **National Electricity Transmission System** shall meet the requirements given below. These are necessary to reduce the impact on the **National Electricity Transmission System** of faults on **OTSDUW Plant and Apparatus** circuits or circuits owned by **Generators** (including **DC Connected Power Park Modules**) or **HVDC System Owners**.

ECC.6.2.2.2.1.2 **Restoration Contractors** shall, if required by a **Restoration Plan**, have the ability to switch:-

a) From the normal to the alternative **Protection** settings on their **Plant** and **Apparatus** and:-

b) From the alternative to the normal **Protection** settings whilst their **Plant** remains in service.

Any alternative **Protection** settings shall be included in the **Restoration Plan**. Normal and alternative **Protection** settings shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** as part of developing a **Restoration Plan**.

ECC.6.2.2.2.2 Fault Clearance Times

(a) The required fault clearance time for faults on the **Generator's** (including **DC Connected Power Park Modules**) or **HVDC System Owner's** equipment directly connected to the **National Electricity Transmission System** or **OTSDUW Plant and Apparatus** and for faults on the **National Electricity Transmission System** directly connected to the **EU Generator** (including **DC Connected Power Park Modules**) or **HVDC System Owner's** equipment or **OTSDUW Plant and Apparatus**, from fault inception to the circuit breaker arc extinction, shall be set out in the **Bilateral Agreement**. The fault clearance time specified in the **Bilateral Agreement** shall not be shorter than the durations specified in (i), (ii) and (iii) below:

(i) 80ms for connections operating at a nominal voltage of greater than 300kV

(ii) 100ms for connections operating at a nominal voltage of greater than 132kV and up to 300kV

(iii) 120ms for connections operating at a nominal voltage of 132kV and below

but this shall not prevent the **User** or **The Company** or the **Relevant Transmission Licensee** or the **EU Generator** (including in respect of **OTSDUW Plant and Apparatus** and **DC Connected Power Park Modules**) from selecting a shorter fault clearance time on their own **Plant** and **Apparatus** provided **Discrimination** is achieved.

A longer fault clearance time may be specified in the **Bilateral Agreement** for faults on the **National Electricity Transmission System**. A longer fault clearance time for faults on the **EU Generator** or **HVDC System Owner's** equipment or **OTSDUW Plant and Apparatus** may be agreed with **The Company** in accordance with the terms of the **Bilateral Agreement** but only if **System** requirements, in **The Company's** view, permit. The probability that the fault clearance time stated in the **Bilateral Agreement** will be exceeded by any given fault, must be less than 2%.

(b) In the event that the required fault clearance time is not met as a result of failure to operate on the **Main Protection System(s)** provided, the **Generators** or **HVDC System Owners** or **Generators** in the case of **OTSDUW Plant and Apparatus** shall, except as specified below provide **Independent Back-Up Protection**. The **Relevant Transmission Licensee** will also provide **Back-Up Protection** and the **Relevant Transmission Licensee's** and the **User's Back-Up Protections** will be co-ordinated so as to provide **Discrimination**.

On a **Power Generating Module** (other than a **Power Park Unit**), **HVDC Equipment** or **OTSDUW Plant and Apparatus** and connected to the **National Electricity Transmission System** operating at a nominal voltage of greater than 132kV and where two **Independent Main Protections** are provided to clear faults on the **HV Connections** within the required fault clearance time, the **Back-Up Protection** provided by **EU Generators** (including in respect of **OTSDUW Plant and Apparatus** and **DC Connected Power Park Modules**) and **HVDC System Owners** shall operate to give a fault clearance time of no longer than 300ms at the minimum infeed for normal operation for faults on the **HV Connections**. Where two **Independent Main Protections** are installed the **Back-Up Protection** may be integrated into one (or both) of the **Independent Main Protection** relays.

On a **Power Generating Module** (other than a **Power Park Unit**), **HVDC Equipment** or **OTSDUW Plant and Apparatus** and connected to the **National Electricity Transmission System** at 132 kV and below and where only one **Main Protection** is provided to clear faults on the **HV Connections** within the required fault clearance time, the **Independent Back-Up Protection** provided by the **Generator** (including in respect of **OTSDUW Plant and Apparatus** and **DC Connected Power Park Modules**) and the **HVDC System Owner** shall operate to give a fault clearance time of no longer than 300ms at the minimum infeed for normal operation for faults on the **HV Connections**.

A Power Generating Module (other than a **Power Park Unit**), **HVDC Equipment** or **OTSDUW Plant and Apparatus**) with **Back-Up Protection** or **Independent Back-Up Protection** will also be required to withstand, without tripping, the loading incurred during the clearance of a fault on the **National Electricity Transmission System** by breaker fail **Protection** at a nominal voltage of greater than 132kV or of a fault cleared by **Back-Up Protection** where the **EU Generator** (including in the case of **OTSDUW Plant and Apparatus** or **DC Connected Power Park Module**) or **HVDC System** is connected at 132kV and below. This will permit **Discrimination** between the **Generator** in respect of **OTSDUW Plant** and **Apparatus** or **DC Connected Power Park Modules** or **HVDC System Owners' Back-Up Protection** or **Independent Back-Up Protection** and the **Back-Up Protection** provided on the **National Electricity Transmission System** and other **Users' Systems**.

(c) When the **Power Generating Module** (other than **Power Park Units**), or the **HVDC Equipment** or **OTSDUW Plant and Apparatus** is connected to the **National Electricity Transmission System** operating at a nominal voltage of greater than 132kV, and in Scotland and **Offshore** also at 132kV, and a circuit breaker is provided by the **Generator** (including in respect of **OTSDUW Plant and Apparatus** or **DC Connected Power Park Modules**) or the **HVDC System** owner, or the **Relevant Transmission Licensee**, as the case may be, to interrupt fault current interchange with the **National Electricity Transmission System**, or **Generator's System**, or **HVDC System Owner's System**, as the case may be, circuit breaker fail **Protection** shall be provided by the **Generator** (including in respect of **OTSDUW Plant and Apparatus** or **DC Connected Power Park Modules**) or **HVDC System Owner**, or the **Relevant Transmission Licensee**, as the case may be, on this circuit breaker. In the event, following operation of a **Protection** system, of a failure to interrupt fault current by these circuit-breakers within the **Fault Current Interruption Time**, the circuit breaker fail **Protection** is required to initiate tripping of all the necessary electrically adjacent circuit-breakers so as to interrupt the fault current within the next 200ms.

(d) The target performance for the **System Fault Dependability Index** shall be not less than 99%. This is a measure of the ability of **Protection** to initiate successful tripping of circuit breakers which are associated with the faulty item of **Apparatus**.

ECC.6.2.2.3 Equipment including **Protection** equipment to be provided

The **Relevant Transmission Licensee** shall specify the **Protection** schemes and settings necessary to protect the **National Electricity Transmission System**, taking into account the characteristics of the **Power Generating Module** or **HVDC Equipment**.

The protection schemes needed for the **Power Generating Module** or **HVDC Equipment** and the **National Electricity Transmission System** as well as the settings relevant to the **Power Generating Module** and/or **HVDC Equipment** shall be coordinated and agreed between **The Company** and the **EU Generator** or **HVDC System Owner.** The agreed **Protection** schemes and settings will be specified in the **Bilateral Agreement**.

The protection schemes and settings for internal electrical faults must not prevent the **Power Generating Module** or **HVDC Equipment** from satisfying the requirements of the Grid Code although **EU Generators** should be aware of the requirements of ECC.6.3.13.1.

Protection of the **Power Generating Module** or **HVDC Equipment** shall take precedence over operational controls, taking into account the security of the **National Electricity Transmission System** and the health and safety of personnel, as well as mitigating any damage to the **Power Generating Module** or **HVDC Equipment**.

ECC.6.2.2.3.1 Protection of Interconnecting Connections

The requirements for the provision of **Protection** equipment for interconnecting connections will be specified in the **Bilateral Agreement**. In this E**CC** the term "interconnecting connections" means the primary conductors from the current transformer accommodation on the circuit side of the circuit breaker to the **Connection Point** or the primary conductors from the current transformer accommodation on the circuit side of the **OTSDUW Plant and Apparatus** of the circuit breaker to the **Transmission Interface Point**.

ECC.6.2.2.3.2 Circuit-breaker fail Protection

The **EU Generator** or **HVDC System Owner** will install circuit breaker fail **Protection** equipment in accordance with the requirements of the **Bilateral Agreement**. The **EU Generator** or **HVDC System Owner** will also provide a back-trip signal in the event of loss of air from its pressurised head circuit breakers, during the **Power Generating Module** (other than a **CCGT Unit** or **Power Park Unit**) or **HVDC Equipment** run-up sequence, where these circuit breakers are installed.

ECC.6.2.2.3.3 Loss of Excitation

The **EU Generator** must provide **Protection** to detect loss of excitation in respect of each of its **Generating Units** within a **Synchronous Power Generating Module** to initiate a **Generating Unit** trip.

ECC.6.2.2.3.4 Pole-Slipping Protection

Where, in **The Company's** reasonable opinion, **System** requirements dictate, **The Company** will specify in the **Bilateral Agreement** a requirement for **EU Generators** to fit pole-slipping **Protection** on their **Generating Units** within each **Synchronous Power Generating Module**.

ECC.6.2.2.3.5 Signals for Tariff Metering

EU Generators and **HVDC System Owners** will install current and voltage transformers supplying all tariff meters at a voltage to be specified in, and in accordance with, the **Bilateral Agreement**.

ECC.6.2.2.3.6 Commissioning of Protection Systems

No **EU Generator** or **HVDC System Owner** equipment shall be energised until the **Protection** settings have been finalised. The **EU Generator** or **HVDC System Owner** shall agree with **The Company** (in coordination with the **Relevant Transmission Licensee**) and carry out a combined commissioning programme for the **Protection** systems, and generally, to a minimum standard as specified in the **Bilateral Agreement**.

ECC.6.2.2.4 Work on Protection Equipment

No busbar **Protection**, mesh corner **Protection**, circuit-breaker fail **Protection** relays, AC or DC wiring (other than power supplies or DC tripping associated with the **Power Generating Module**, **HVDC Equipment** itself) may be worked upon or altered by the **EU Generator** or **HVDC System Owner** personnel in the absence of a representative of the **Relevant Transmission Licensee** or written authority from the **Relevant Transmission Licensee** to perform such work or alterations in the absence of a representative of the **Relevant Transmission Licensee**.

ECC.6.2.2.5 Relay Settings

Protection and relay settings will be co-ordinated (both on connection and subsequently) across the **Connection Point** in accordance with the **Bilateral Agreement** and in relation to **OTSDUW Plant and Apparatus**, across the **Interface Point** in accordance with the **Bilateral Agreement** to ensure effective disconnection of faulty **Apparatus**.

ECC.6.2.2.6 Changes to **Protection** Schemes and **HVDC System** Control Modes

ECC.6.2.2.6.1 Any subsequent alterations to the protection settings (whether by **The Company**, the **Relevant Transmission Licensee**, the **EU Generator**, or the **HVDC System Owner**) shall be agreed between **The Company** (in co-ordination with the **Relevant Transmission Licensee**) and the **EU Generator** or **HVDC System Owner** in accordance with the Grid Code (ECC.6.2.2.5). No alterations are to be made to any protection schemes unless agreement has been reached between **The Company**, the **Relevant Transmission Licensee**, the **EU Generator** or **HVDC System Owner**.

ECC.6.2.2.6.2 The parameters of different control modes of the **HVDC System** shall be able to be changed in the **HVDC Converter Station**, if required by **The Company** in coordination with the **Relevant Transmission Licensee** and in accordance with ECC.6.2.2.6.4.

ECC.6.2.2.6.3 Any change to the schemes or settings of parameters of the different control modes and protection of the **HVDC System** including the procedure shall be agreed with **The Company** in coordination with the **Relevant Transmission Licensee** and the **HVDC System Owner**.

ECC.6.2.2.6.4 The control modes and associated set points shall be capable of being changed remotely, as specified by **The Company** in coordination with the **Relevant Transmission Licensee**.

ECC.6.2.2.7 Control Schemes and Settings

ECC.6.2.2.7.1 The schemes and settings of the different control devices on the **Power Generating Module** and **HVDC Equipment** that are necessary for **Transmission System** stability and for taking emergency action shall be agreed with **The Company** in coordination with the **Relevant Transmission Licensee** and the **EU Generator** or **HVDC System Owner**. **Restoration Contractors** shall have the ability to switch from alternative control schemes and settings on their **Plant** and **Apparatus** whilst remaining in service if they are required to satisfy their obligations in a **Restoration Plan**. Changes to any control schemes and settings shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** as part of developing a **Restoration Plan** which shall be in accordance with the requirements of ECC.6.2.2.6.

ECC.6.2.2.7.2 Subject to the requirements of ECC.6.2.2.7.1 any changes to the schemes and settings, defined in ECC.6.2.2.7.1, of the different control devices of the **Power Generating Module** or **Restoration Contractor** or **HVDC Equipment** shall be coordinated and agreed between the **Relevant Transmission Licensee**, the **EU Generator**, **Restoration Contractor** and **HVDC System Owner**.

ECC.6.2.2.8 Ranking of **Protection** and Control

ECC.6.2.2.8.1 **The Company** in coordination with **Relevant Transmission Licensees**, shall agree and coordinate the protection and control devices of **EU Generators Plant** and **Apparatus** in accordance with the following general priority ranking (from highest to lowest):

(i) The interface between the **National Electricity Transmission System** and the **Power Generating Module** or **HVDC Equipment Protection** equipment;

(ii) **Frequency** control (active power adjustment);

(iii) power restriction; and

(iv) power gradient constraint;

ECC.6.2.2.8.2 A control scheme, specified by the **HVDC System Owner** consisting of different control modes, including the settings of the specific parameters, shall be coordinated and agreed between **The Company** in coordination with the **Relevant Transmission Licensee** and the **HVDC System Owner**. These details would be specified in the **Bilateral Agreement**.

ECC.6.2.2.8.3 **The Company** in coordination with **Relevant Transmission Licensees**, shall agree and coordinate the protection and control devices of **HVDC System Owners Plant** and **Apparatus** in accordance with the following general priority ranking (from highest to lowest)

(i) The interface between the **National Electricity Transmission System** and **HVDC System Protection** equipment;

(ii) **Active Power** control for emergency assistance

(iii) automatic remedial actions as specified in ECC.6.3.6.1.2.5

(iv) **Limited Frequency Sensitive Mode** (LFSM) of operation;

(v) **Frequency Sensitive Mode** of operation and **Frequency** control; and

(vi) power gradient constraint.

ECC.6.2.2.9 Synchronising

ECC.6.2.2.9.1 For any **Power Generating Module** directly connected to the **National Electricity Transmission System** or **Type D Power Generating Module**, synchronisation shall be performed by the **EU Generator** only after instruction by **The Company** in accordance with the requirements of BC.2.5.2.

ECC.6.2.2.9.2 Each **Power Generating Module** directly connected to the **National Electricity Transmission System** or **Type D Power Generating Module** shall be equipped with the necessary synchronisation facilities. Synchronisation shall be possible within the range of frequencies specified in ECC.6.1.2.

ECC.6.2.2.9.3 The requirements for synchronising equipment shall be specified in accordance with the requirements in the **Electrical Standards** listed in the annex to the **General Conditions**. The synchronisation settings shall include the following elements below. Any variation to these requirements shall be pursuant to the terms of the **Bilateral Agreement**.

(a) voltage

(b) **Frequency**

(c) phase angle range

(d) phase sequence

(e) deviation of voltage and **Frequency**

ECC.6.2.2.9.4 **HVDC Equipment** shall be required to satisfy the requirements of ECC.6.2.2.9.1 – ECC.6.2.2.9.3. In addition, unless otherwise specified by **The Company**, during the synchronisation of a **DC Connected Power Park Module** to the **National Electricity Transmission System**, any **HVDC Equipment** shall have the capability to limit any steady state voltage changes to the limits specified within ECC.6.1.7 or ECC.6.1.8 (as applicable) which shall not exceed 5% of the pre-synchronisation voltage. **The Company** in coordination with the **Relevant Transmission Licensee** shall specify any additional requirements for the maximum magnitude, duration and measurement of the voltage transients over and above those defined in ECC.6.1.7 and ECC.6.1.8 in the **Bilateral Agreement**.

ECC.6.2.2.9.5 **EU Generators** in respect of **DC Connected Power Park Modules** shall also provide output synchronisation signals specified by **The Company** in co-ordination with the **Relevant Transmission Licensee**.

ECC.6.2.2.9.6 In addition to the requirements of ECC.6.2.2.9.1 to ECC.6.2.2.9.5, **EU Generators** and **HVDC System Owners** should also be aware of the requirements of ECC.6.5.10 relating to busbar voltage

ECC.6.2.2.9.10 HVDC Parameters and Settings

ECC.6.2.2.9.10.1 The parameters and settings of the main control functions of an **HVDC System** shall be agreed between the **HVDC System** owner and **The Company** , in coordination with the **Relevant Transmission Licensee**. The parameters and settings shall be implemented within such a control hierarchy that makes their modification possible if necessary. Those main control functions are at least:

(a) **Frequency Sensitive Modes** (FSM, LFSM-O, LFSM-U);

(b) **Frequency** control, if applicable;

(c) **Reactive Power** control mode, if applicable;

(d) power oscillation damping capability;

(e) subsynchronous torsional interaction damping capability.

ECC.6.2.2.11 Automatic Reconnection

ECC.6.2.2.11.1 **EU Generators** in respect of **Type A**, **Type B**, **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**) which have signed a **CUSC Contract** with **The Company** are not permitted to automatically reconnect to the **Total System** without instruction from **The Company**. **The Company** will issue instructions for re-connection or re-synchronisation in accordance with the requirements of BC2.5.2. Where synchronising is permitted in accordance with BC2.5.2, the voltage and **Frequency** at the **Grid Entry Point** or **User System Entry Point** shall be within the limits defined in ECC.6.1.2 and ECC.6.1.4 and the ramp rate limits pursuant to BC1.A.1.1. For the avoidance of doubt this requirement does not apply to **EU Generators** who are not required to satisfy the requirements of the Balancing Codes.

ECC.6.2.2.12 Automatic Disconnection

ECC.6.2.2.12.1 No **Power Generating Module** or **HVDC Equipment** shall disconnect within the **Frequency** range or voltage range defined in ECC.6.1.2 and ECC.6.1.4.

ECC.6.2.2.13 Special Provisions relating to Power Generating Modules embedded within Industrial Sites which supply electricity as a bi-product of their industrial process

ECC.6.2.2.13.1 **Generators** in respect of **Power Generating Modules** which form part of an industrial network, where the **Power Generating Module** is used to supply critical loads within the industrial process shall be permitted to operate isolated from the **Total System** if agreed with **The Company** in the **Bilateral Agreement**.

ECC.6.2.2.13.2 Except for the requirements of ECC.6.3.3 and ECC.6.3.7.1, **Power Generating Modules** which are embedded within industrial sites are not required to satisfy the requirements of ECC.6.3.6.2.1 and ECC.6.3.9. In this case this exception would only apply to **Power Generating Modules** on industrial sites used for combined heat and power production which are embedded in the network of an industrial site where all the following criteria are met.

(a) The primary purpose of these sites is to produce heat for production processes of the industrial site concerned,

(b) Heat and power generation is inextricably interlinked, that is to say any change to heat generation results inadvertently in a change of active power generating and vica versa.

(c) The **Power Generating Modules** are of **Type A**, **Type B** or **Type C**.

(d) Combined heat and power generating facilities shall be assessed on the basis of their electrical **Maximum Capacity**.

ECC.6.2.3 Requirements at EU Grid Supply Points relating to Network Operators and Non-Embedded Customers

ECC.6.2.3.1 Protection Arrangements for EU Code Users in respect of Network Operators and Non-Embedded Customers

ECC.6.2.3.1.1 **Protection** arrangements for **EU Code Users** in respect of **Network Operators** and **Non-Embedded Customers User Systems** directly connected to the **National Electricity Transmission System**, shall meet the requirements given below:

Fault Clearance Times

(a) The required fault clearance time for faults on **Network Operator** and **Non-Embedded Customer** equipment directly connected to the **National Electricity Transmission System**, and for faults on the **National Electricity Transmission System** directly connected to the **Network Operator's** or **Non-Embedded Customer's equipment**, from fault inception to the circuit breaker arc extinction, shall be set out in each **Bilateral Agreement**. The fault clearance time specified in the **Bilateral Agreement** shall not be shorter than the durations specified in (i), (ii) and (iii) below:

(i) 80ms for connections operating at a nominal voltage of greater than 300kV

(ii) 100ms for connections operating at a nominal voltage of greater than 132kV and up to 300kV

(iii) 120ms for connections operating at a nominal voltage of greater than 132kV and below

but this shall not prevent the **User** or **The Company** or **Relevant Transmission Licensee** from selecting a shorter fault clearance time on its own **Plant** and **Apparatus** provided **Discrimination** is achieved.

For the purpose of establishing the **Protection** requirements in accordance with ECC.6.2.3.1.1 only, the point of connection of the **Network Operator** or **Non-Embedded Customer** equipment to the **National Electricity Transmission System** shall be deemed to be the low voltage busbars at an **EU Grid Supply Point**, irrespective of the ownership of the equipment at the **EU Grid Supply Point**.

A longer fault clearance time may be specified in the **Bilateral Agreement** for faults on the **National Electricity Transmission System**. A longer fault clearance time for faults on the **Network Operator** and **Non-Embedded Customers** equipment may be agreed with **The Company** in accordance with the terms of the **Bilateral Agreement** but only if **System** requirements in **The Company's** view permit. The probability that the fault clearance time stated in the **Bilateral Agreement** will be exceeded by any given fault must be less than 2%.

(b) (i) For the event of failure of the **Protection** systems provided to meet the above fault clearance time requirements, **Back-Up Protection** shall be provided by the **Network Operator** or **Non-Embedded Customer** as the case may be.

(ii) The **Relevant Transmission Licensee** will also provide **Back-Up Protection**, which will result in a fault clearance time longer than that specified for the **Network Operator** or **Non-Embedded Customer Back-Up Protection** so as to provide **Discrimination**.

(iii) For connections with the **National Electricity Transmission System** at 132kV and below, it is normally required that the **Back-Up Protection** on the **National Electricity Transmission System** shall discriminate with the **Network Operator** or **Non-Embedded Customer's Back-Up Protection**.

(iv) For connections with the **National Electricity Transmission System** operating at a nominal voltage greater than 132kV, the **Back-Up Protection** will be provided by the **Network Operator** or **Non-Embedded Customer**, as the case may be, with a fault clearance time not longer than 300ms for faults on the **Network Operator's** or **Non-Embedded Customer's Apparatus**.

(v) Such **Protection** will also be required to withstand, without tripping, the loading incurred during the clearance of a fault on the **National Electricity Transmission System** by breaker fail **Protection** operating at a nominal voltage of greater than 132kV. This will permit **Discrimination** between **Network Operator's Back-Up Protection** or **Non-Embedded Customer's Back-Up Protection**, as the case may be, and **Back-Up Protection** provided on the **National Electricity Transmission System** and other **User Systems**. The requirement for and level of **Discrimination** required will be specified in the **Bilateral Agreement**.

(c) (i) Where the **Network Operator** or **Non-Embedded Customer** is connected to part of the **National Electricity Transmission System** operating at a nominal voltage greater than 132kV and in Scotland also at 132kV, and a circuit breaker is provided by the **Network Operator** or **Non-Embedded Customer**, or the **Relevant Transmission Licensee**, as the case may be, to interrupt the interchange of fault current with the **National Electricity Transmission System** or the **System** of the **Network Operator** or **Non-Embedded Customer**, as the case may be, circuit breaker fail **Protection** will be provided by the **Network Operator** or **Non-Embedded Customer**, or the **Relevant Transmission Licensee**, as the case may

be, on this circuit breaker.

(ii) In the event, following operation of a **Protection** system, of a failure to interrupt fault current by these circuit-breakers within the **Fault Current Interruption Time**, the circuit breaker fail **Protection** is required to initiate tripping of all the necessary electrically adjacent circuit-breakers so as to interrupt the fault current within the next 200ms.

(d) The target performance for the **System Fault Dependability Index** shall be not less than 99%. This is a measure of the ability of **Protection** to initiate successful tripping of circuit breakers which are associated with the faulty items of **Apparatus**.

ECC.6.2.3.2 Fault Disconnection Facilities

(a) Where no **Transmission** circuit breaker is provided at the **User's** connection voltage, the **User** must provide **The Company** with the means of tripping all the **User's** circuit breakers necessary to isolate faults or **System** abnormalities on the **National Electricity Transmission System**. In these circumstances, for faults on the **User's System**, the **User's Protection** should also trip higher voltage **Transmission** circuit breakers. These tripping facilities shall be in accordance with the requirements specified in the **Bilateral Agreement**.

(b) **The Company** may require the installation of a **System to Generator Operational Intertripping Scheme** in order to enable the timely restoration of circuits following power **System** fault(s). These requirements shall be set out in the relevant **Bilateral Agreement**.

ECC.6.2.3.3 Automatic Switching Equipment

Where automatic reclosure of **Transmission** circuit breakers is required following faults on the **User's System**, automatic switching equipment shall be provided in accordance with the requirements specified in the **Bilateral Agreement**.

ECC.6.2.3.4 Relay Settings

Protection and relay settings will be co-ordinated (both on connection and subsequently) across the **Connection Point** in accordance with the **Bilateral Agreement** to ensure effective disconnection of faulty **Apparatus**.

ECC.6.2.3.5 Work on Protection equipment

Where a **Transmission Licensee** owns the busbar at the **Connection Point**, no busbar **Protection**, mesh corner **Protection** relays, AC or DC wiring (other than power supplies or DC tripping associated with the **Network Operator** or **Non-Embedded Customer's Apparatus** itself) may be worked upon or altered by the **Network Operator** or **Non-Embedded Customer** personnel in the absence of a representative of the **Relevant Transmission Licensee** or written authority from the **Relevant Transmission Licensee** to perform such work or alterations in the absence of a representative of the **Relevant Transmission Licensee**.

ECC.6.2.3.6 Equipment including **Protection** equipment to be provided

The Company in coordination with the **Relevant Transmission Licensee** shall specify and agree the **Protection** schemes and settings at each **EU Grid Supply Point** required to protect the **National Electricity Transmission System** in accordance with the characteristics of the **Network Operator**'s or **Non Embedded Customer**'s **System**. **The Company** in coordination with the **Relevant Transmission Licensee** and the **Network Operator** or **Non Embedded Customer** shall agree on the protection schemes and settings in respect of the busbar protection zone in respect of each **EU Grid Supply Point**.

Protection of the **Network Operator**'s or **Non Embedded Customer**'s **System** shall take precedence over operational controls whilst respecting the security of the **National Electricity Transmission System** and the health and safety of staff and the public.

ECC.6.2.3.6.1 Protection of Interconnecting Connections

The requirements for the provision of **Protection** equipment for interconnecting connections will be specified in the **Bilateral Agreement**.

ECC.6.2.3.7 Changes to **Protection** Schemes

ECC.6.2.3.7.1 At EU Grid Supply Points

Any alterations to the busbar protection settings at the **EU Grid Supply Point** (whether by **The Company**, the **Relevant Transmission Licensee**, the **Network Operator** or the **Non Embedded Customer**) shall be agreed between **The Company** (in co-ordination with the **Relevant Transmission Licensee**) and the **Network Operator** or **Non Embedded Customer** in accordance with the Grid Code (ECC.6.2.3.4). No alterations are to be made to any busbar protection schemes unless agreement has been reached between **The Company**, the **Relevant Transmission Licensee**, the **Network Operator** or **Non Embedded Customer**.

No **Network Operator** or **Non-Embedded Customer** equipment shall be energised until the **Protection** settings have been agreed prior to commissioning. The **Network Operator** or **Non-Embedded Customer** shall agree with **The Company** (in coordination with the **Relevant Transmission Licensee**) and carry out a combined commissioning programme for the **Protection** systems, and generally, to a minimum standard as specified in the **Bilateral Agreement**.

ECC.6.2.3.7.2 Network Operators Systems

Network Operators shall, if required in a **Restoration Plan**, have the ability to switch:-

a) From the normal to the alternative **Protection** settings on their **Plant** and **Apparatus**; and:-
b) From the alternative to the normal **Protection** settings whilst their **Plant** remains in service,

Any alternative **Protection** settings shall be included in the **Restoration Plan**. Normal and alternative **Protection** settings shall be agreed between **The Company** and the **Network Operator** as part of developing a **Restoration Plan**.

ECC.6.2.3.8 Control Requirements

ECC.6.2.3.8.1 **The Company** in coordination with the **Relevant Transmission Licensee** and the **Network Operator** or **Non Embedded Customer** shall agree on the control schemes and settings at each **EU Grid Supply Point** of the different control devices of the **Network Operator**'s or **Non Embedded Customer**'s **System** relevant for security of the **National Electricity Transmission System**. Such requirements would be pursuant to the terms of the **Bilateral Agreement** which shall also cover at least the following elements:

(a) Isolated (**National Electricity Transmission System**) operation;

(b) Damping of oscillations;

(c) Disturbances to the **National Electricity Transmission System**;

(d) Automatic switching to emergency supply and restoration to normal topology;

(e) Automatic circuit breaker re-closure (on 1-phase faults).

ECC.6.2.3.8.2 Subject to the requirements of ECC.6.2.3.8.1, any changes to the schemes and settings, defined in ECC.6.2.3.8.1 of the different control devices of the **Network Operator's** or **Non-Embedded Customer's System** at the **EU Grid Supply Point** shall be coordinated and agreed between **The Company**, the **Relevant Transmission Licensee**, the **Network Operator** or **Non Embedded Customer**. **Network Operators** shall have the ability to switch between alternative control settings on their **Plant** and **Apparatus** if they are required to do so to be able to satisfy their obligations of a **Restoration Plan**. Any alternative control settings shall be included in the **Restoration Plan**.

ECC.6.2.3.9 Ranking of **Protection** and Control

ECC.6.2.3.9.1 The **Network Operator** or the **Non Embedded Customer** who owns or operates an **EU Grid Supply Point** shall set the **Protection** and control devices of its **System**, in compliance with the following priority ranking, organised in decreasing order of importance:

(a) **National Electricity Transmission System Protection**;

(b) **Protection** equipment at each **EU Grid Supply Point**;

(c) **Frequency** control (**Active Power** adjustment);

(d) Power restriction.

ECC.6.2.3.10 Synchronising

ECC.6.2.3.10.1 Each **Network Operator** or **Non Embedded Customer** at each **EU Grid Supply Point** shall be capable of synchronisation within the range of frequencies specified in ECC.6.1.2 unless otherwise agreed with **The Company**.

ECC.6.2.3.10.2 **The Company** and the **Network Operator** or **Non Embedded Customer** shall agree on the settings of the synchronisation equipment at each **EU Grid Supply Point** prior to the **Completion Date**. **The Company** and the relevant **Network Operator** or **Non-Embedded Customer** shall agree the synchronisation settings which shall include the following elements.

(a) Voltage;

(b) **Frequency**;

(c) phase angle range;

(d) deviation of voltage and **Frequency**.

ECC.6.3 GENERAL POWER GENERATING MODULE, OTSDUW AND HVDC EQUIPMENT REQUIREMENTS

ECC.6.3.1 This section sets out the technical and design criteria and performance requirements for **Power Generating Modules** (which includes **Electricity Storage Modules**) and **HVDC Equipment** (whether directly connected to the **National Electricity Transmission System** or **Embedded**) and (where provided in this section) **OTSDUW Plant and Apparatus** which each **Generator** or **HVDC System Owner** must ensure are complied with in relation to its **Power Generating Modules**, **HVDC Equipment** and **OTSDUW Plant and Apparatus**. References to **Power Generating Modules**, **HVDC Equipment** in this ECC.6.3 should be read accordingly. For the avoidance of doubt, the requirements applicable to **Synchronous Power Generating Modules** also apply to **Synchronous Electricity Storage Modules** and the requirements applicable to **Power Park Modules** apply to **Non-Synchronous Electricity Storage Modules**. In addition, the requirements applicable to **Electricity Storage Modules** also apply irrespective of whether the **Electricity Storage Module** operates in such a mode as to import or export power from the **Total System**.

Plant Performance Requirements

ECC.6.3.2 REACTIVE CAPABILITY

ECC.6.3.2.1 Reactive Capability for **Type B Synchronous Power Generating Modules**

ECC.6.3.2.1.1 When operating at **Maximum Capacity**, all **Type B Synchronous Power Generating Modules** must be capable of continuous operation at any points between the limits of 0.95 **Power Factor** lagging and 0.95 **Power Factor** leading at the **Grid Entry Point** or **User System Entry Point** unless otherwise agreed with **The Company** or relevant **Network Operator**. At **Active Power** output levels other than **Maximum Capacity**, all **Generating Units** within a **Type B Synchronous Power Generating Module** must be capable of continuous operation at any point between the **Reactive Power** capability limits identified on the **HV Generator Performance Chart** unless otherwise agreed with **The Company** or relevant **Network Operator**.

ECC.6.3.2.2 Reactive Capability for **Type B Power Park Modules**

ECC.6.3.2.2.1 When operating at **Maximum Capacity** all **Type B Power Park Modules** must be capable of continuous operation at any points between the limits of 0.95 **Power Factor** lagging and 0.95 **Power Factor** leading at the **Grid Entry Point** or **User System Entry Point** unless otherwise agreed with **The Company** or relevant **Network Operator**. At **Active Power** output levels other than **Maximum Capacity**, each **Power Park Module** must be capable of continuous operation at any point between the **Reactive Power** capability limits identified on the **HV Generator Performance Chart** unless otherwise agreed with **The Company** or **Network Operator**.

ECC.6.3.2.3 Reactive Capability for **Type C** and **D Synchronous Power Generating Modules**

ECC.6.3.2.3.1 In addition to meeting the requirements of ECC.6.3.2.3.2 – ECC.6.3.2.3.4, **EU Generators** which connect a **Type C** or **Type D Synchronous Power Generating Module**(s) to a **Non Embedded Customers System** or private network, may be required to meet additional reactive compensation requirements at the point of connection between the **System** and the **Non Embedded Customer** or private network where this is required for **System** reasons.

ECC.6.3.2.3.2 All **Type C** and **Type D Synchronous Power Generating Modules** shall be capable of satisfying the **Reactive Power** capability requirements at the **Grid Entry Point** or **User System Entry Point** as defined in Figure ECC.6.3.2.3 when operating at **Maximum Capacity**.

ECC.6.3.2.3.3 At **Active Power** output levels other than **Maximum Capacity**, all **Generating Units** within a **Synchronous Power Generating Module** must be capable of continuous operation at any point between the **Reactive Power** capability limit identified on the **HV Generator Performance Chart** at least down to the **Minimum Stable Operating Level**. At reduced **Active Power** output, **Reactive Power** supplied at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) shall correspond to the **HV Generator Performance Chart** of the **Synchronous Power Generating Module**, taking the auxiliary supplies and the **Active Power** and **Reactive Power** losses of the **Generating Unit** transformer or **Station Transformer** into account.

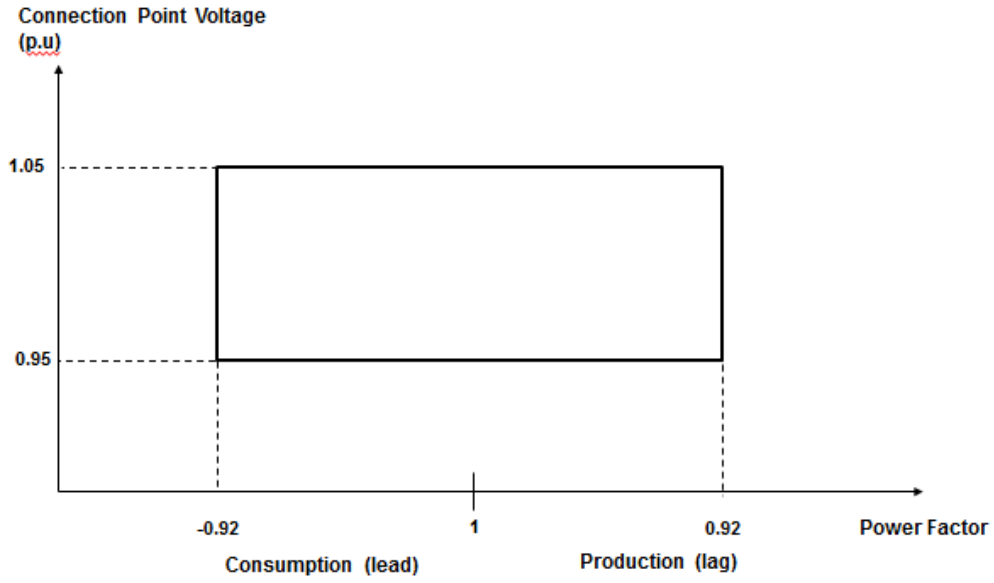

Figure ECC.6.3.2.3

ECC.6.3.2.3.4 In addition, to the requirements of ECC.6.3.2.3.1 – ECC.6.3.2.3.3 the short circuit ratio of all **Onshore Synchronous Generating Units** with an **Apparent Power** rating of less than 1600MVA shall not be less than 0.5. The short circuit ratio of **Onshore Synchronous Generating Units** with a rated **Apparent Power** of 1600MVA or above shall be not less than 0.4.

ECC.6.3.2.4 Reactive Capability for **Type C** and **D Power Park Modules**, **HVDC Equipment** and **OTSDUW Plant and Apparatus** at the **Interface Point**

ECC.6.3.2.4.1 **EU Generators** or **HVDC System Owners** which connect an **Onshore Type C** or **Onshore Type D Power Park Module** or **HVDC Equipment** to a **Non Embedded Customers System** or private network, may be required to meet additional reactive compensation requirements at the point of connection between the **System** and the **Non Embedded Customer** or private network where this is required for **System** reasons.

ECC.6.3.2.4.2 All **Onshore Type C Power Park Modules** and **Onshore Type D Power Park Modules** or **HVDC Converters** at an **HVDC Converter Station** with a **Grid Entry Point** or **User System Entry Point** voltage above 33kV, or **Remote End HVDC Converters** with an **HVDC Interface Point** voltage above 33kV, or **OTSDUW Plant and Apparatus** with an **Interface Point** voltage above 33kV shall be capable of satisfying the **Reactive Power** capability requirements at the **Grid Entry Point** or **User System Entry Point** (or **Interface Point** in the case of **OTSDUW Plant and Apparatus**, or **HVDC Interface Point** in the case of a **Remote End HVDC Converter Station**) as defined in Figure ECC.6.3.2.4(a) when operating at **Maximum Capacity** (or **Interface Point Capacity** in the case of **OTSUW Plant and Apparatus**). In the case of **Remote End HVDC Converters** and **DC Connected Power Park Modules**, **The Company** in co-ordination with the **Relevant Transmission Licensee** may agree to alternative reactive capability requirements to those specified in Figure ECC.6.3.2.4(a), where it is demonstrated that it is uneconomic and inefficient to do so, for example in the case of new technologies or advanced control strategies. For the avoidance of doubt, the requirements for **Offshore Power Park Modules** and **DC Connected Power Park Modules** are defined in ECC.6.3.2.5 and ECC.6.3.2.6.

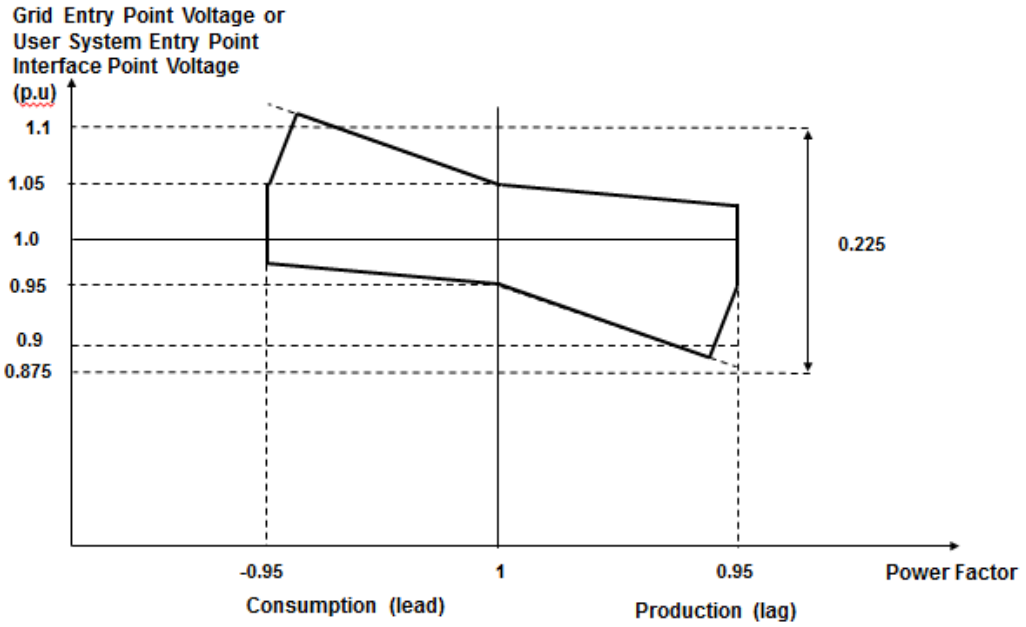

Figure ECC.6.3.2.4(a)

ECC.6.3.2.4.3 All **Onshore Type C** or **Type D Power Park Modules** or **HVDC Converters** at a **HVDC Converter Station** with a **Grid Entry Point** or **User System Entry Point** voltage at or below 33kV or **Remote End HVDC Converter Station** with an **HVDC Interface Point Voltage** at or below 33kV shall be capable of satisfying the **Reactive Power** capability requirements at the **Grid Entry Point** or **User System Entry Point** as defined in Figure ECC.6.3.2.4(b) when operating at **Maximum Capacity**. In the case **of Remote End HVDC Converters The Company** in co-ordination with the **Relevant Transmission Licensee** may agree to alternative reactive capability requirements to those specified in Figure ECC.6.3.2.4(b), where it is demonstrated that it is uneconomic and inefficient to do so, for example in the case of new technologies or advanced control strategies. For the avoidance of doubt, the requirements for **Offshore Power Park Modules** and **DC Connected Power Park Modules** are defined in ECC.6.3.2.5 and ECC.6.3.2.6.

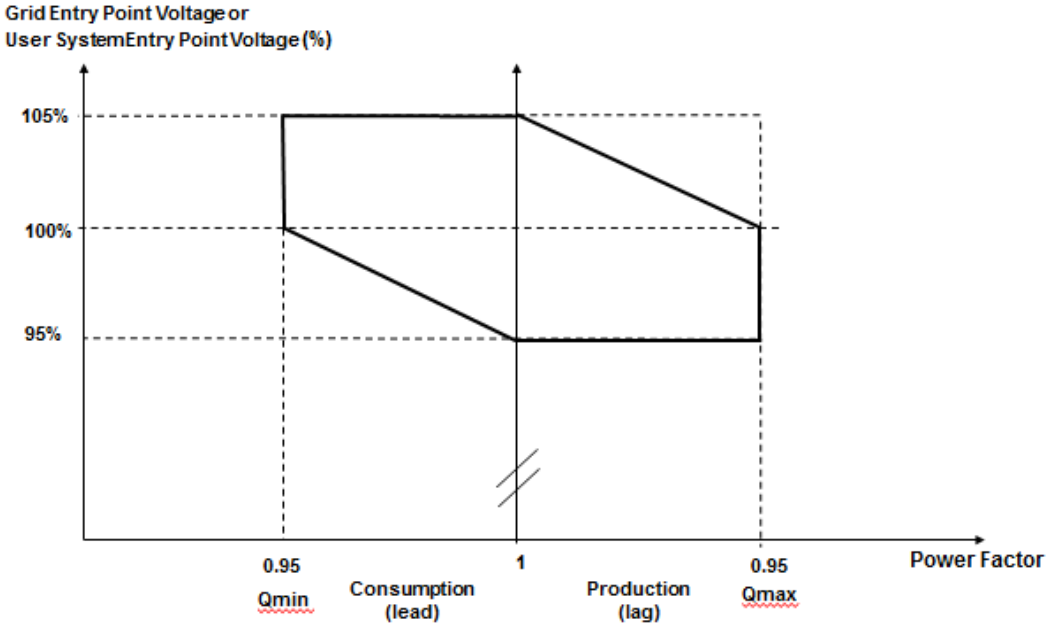

Figure ECC.6.3.2.4(b)

ECC.6.3.2.4.4 All **Type C** and **Type D Power Park Modules**, **HVDC Converters** at a **HVDC Converter Station** including **Remote End HVDC Converters** or **OTSDUW Plant and Apparatus**, shall be capable of satisfying the **Reactive Power** capability requirements at the **Grid Entry Point** or **User System Entry Point** (or **Interface Point Capacity** in the case of **OTSUW Plant and Apparatus** or **HVDC Interface Point** in the case of **Remote End HVDC Converter Stations**) as defined in Figure ECC.6.3.2.4(c) when operating below **Maximum Capacity**. With all **Plant** in service, the **Reactive Power** limits will reduce linearly below 50% **Active Power** output as shown in Figure ECC.6.3.2.4(c) unless the requirement to maintain the **Reactive Power** limits defined at **Maximum Capacity** (or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**) under absorbing **Reactive Power** conditions down to 20% **Active Power** output has been specified by **The Company**. These **Reactive Power** limits will be reduced pro rata to the amount of **Plant** in service. In the case of **Remote End HVDC Converters**, **The Company** in co-ordination with the **Relevant Transmission Licensee** may agree to alternative reactive capability requirements to those specified in Figure ECC.6.3.2.4(a), where it is demonstrated that it is uneconomic and inefficient to do so, for example in the case of new technologies or advanced control strategies. For the avoidance of doubt, the requirements for **Offshore Power Park Modules** and **DC Connected Power Park Modules** are defined in ECC.6.3.2.5 and ECC.6.3.2.6.

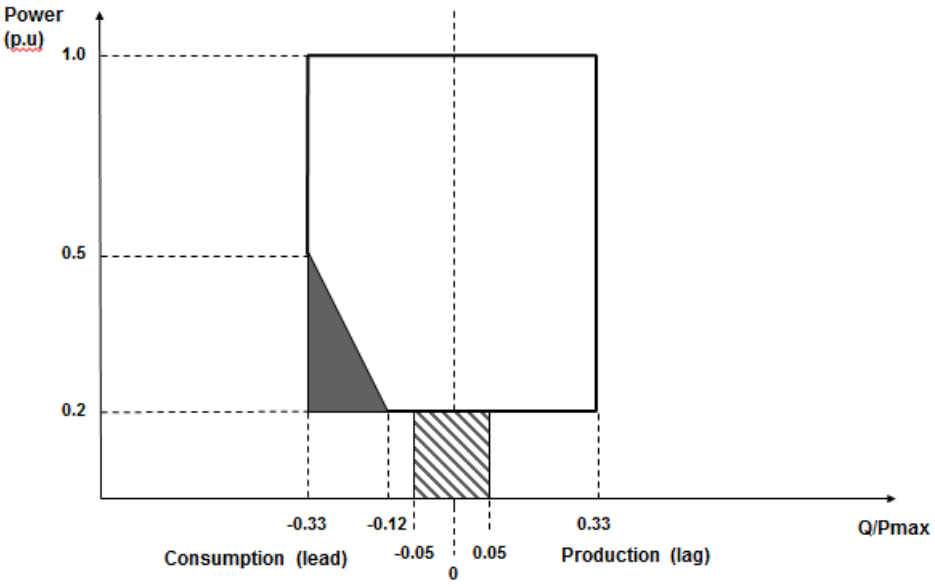

Figure ECC.6.3.2.4(c)

ECC.6.3.2.5 Reactive Capability for **Offshore Synchronous Power Generating Modules**, **Configuration 1 AC connected Offshore Power Park Modules** and **Configuration 1 DC Connected Power Park Modules.**

ECC.6.3.2.5.1 The short circuit ratio of any **Offshore Synchronous Generating Units** within a **Synchronous Power Generating Module** shall not be less than 0.5. Notwithstanding the requirements of ECC.6.3.2.5.2 and ECC.6.3.2.5.3, all **Offshore Synchronous Generating Units**, **Configuration 1 AC Connected Offshore Power Park Modules** or **Configuration 1 DC Connected Power Park Modules** must be capable of maintaining zero transfer of **Reactive Power** at the **Offshore Grid Entry Point**. The steady state tolerance on **Reactive Power** transfer to and from an **Offshore Transmission System** expressed in **MVAr** shall be no greater than 5% of the **Maximum Capacity**.

ECC.6.3.2.5.2 If an **EU Generator** (including those in respect of **DC Connected Power Park Modules** or those which are **Restoration Contractors**), wish to provide a **Reactive Power** capability in excess of the minimum requirements defined in ECC.6.3.2.5.1, then such capability (including steady state tolerance) shall be agreed between the **Generator**, **Offshore Transmission Licensee** and **The Company** and/or the relevant **Network Operator**.

ECC.6.3.2.5.3 In the case of **EU Code Users** and **Restoration Contractors** who own and operate **Anchor Plant** and/or **Top Up Restoration Plant** or **EU Code Users** who own and operate **Plant** and **Apparatus** which is operating with a **Grid Forming Capability** in service, the **Reactive Power** capability requirements (including steady state tolerance) at the **Offshore Grid Entry Point** shall be agreed between the **Restoration Contractor** or **EU Code User**, the **Offshore Transmission Licensee** and **The Company** in order to facilitate the operation of an **Offshore Local Joint Restoration Plan**.

ECC.6.3.2.6 Reactive Capability for **Configuration 2 AC Connected Offshore Power Park Modules** and **Configuration 2 DC Connected Power Park Modules**.

ECC.6.3.2.6.1 All **Configuration 2 AC connected Offshore Power Park Modules** and **Configuration 2 DC Connected Power Park Modules** shall be capable of satisfying the minimum **Reactive Power** capability requirements at the **Offshore Grid Entry Point** as defined in Figure ECC.6.3.2.6(a) when operating at **Maximum Capacity**. **The Company** in co-ordination with the **Relevant Transmission Licensee** may agree to alternative reactive capability requirements to those specified in Figure ECC.6.3.2.6(a), where it is demonstrated that it is uneconomic and inefficient to do so, for example in the case of new technologies or advanced control strategies.

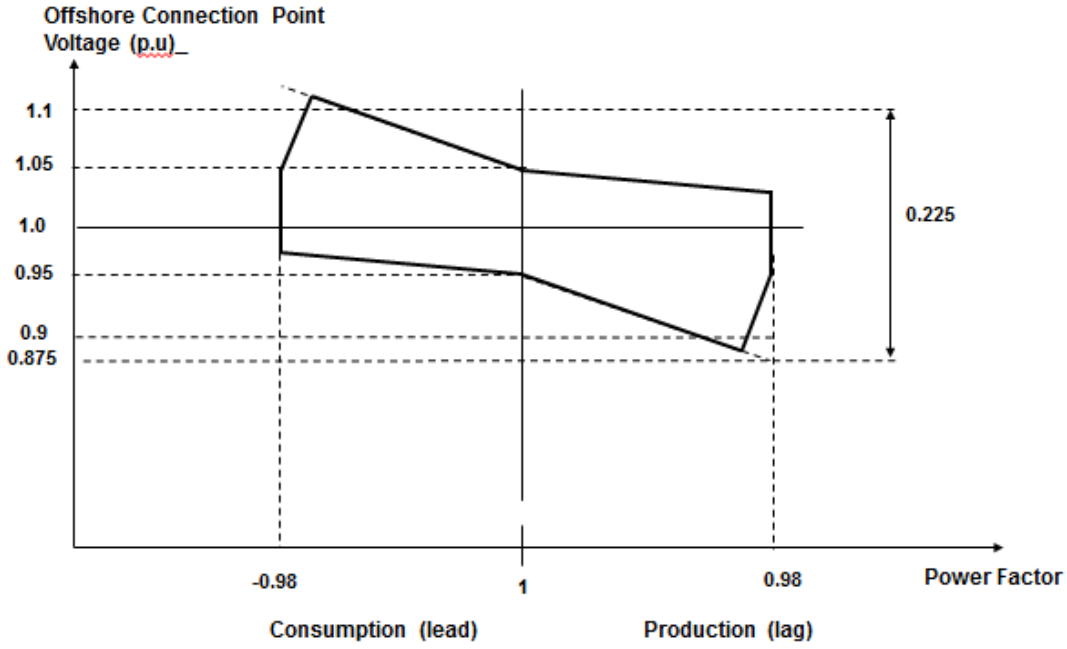

Figure ECC.6.3.2.6(a)

ECC.6.3.2.6.2 All **AC Connected Configuration 2 Offshore Power Park Modules** and **Configuration 2 DC Connected Power Park Modules** shall be capable of satisfying the **Reactive Power** capability requirements at the **Offshore Grid Entry Point** as defined in Figure ECC.6.3.2.6(b) when operating below **Maximum Capacity**. With all **Plant** in service, the **Reactive Power** limits will reduce linearly below 50% **Active Power** output as shown in Figure ECC.6.3.2.6(b) unless the requirement to maintain the **Reactive Power** limits defined at **Maximum Capacity** (or **Interface Point Capacity** in the case of **OTSDUW Plant and Apparatus**) under absorbing **Reactive Power** conditions down to 20% **Active Power** output has been specified with **The Company**. These **Reactive Power** limits will be reduced pro rata to the amount of **Plant** in service. **The Company** in co-ordination with the **Relevant Transmission Licensee** may agree to alternative reactive capability requirements to those specified in Figure ECC.6.3.2.6(b), where it is demonstrated that it is uneconomic and inefficient to do so, for example in the case of new technologies or advanced control strategies.

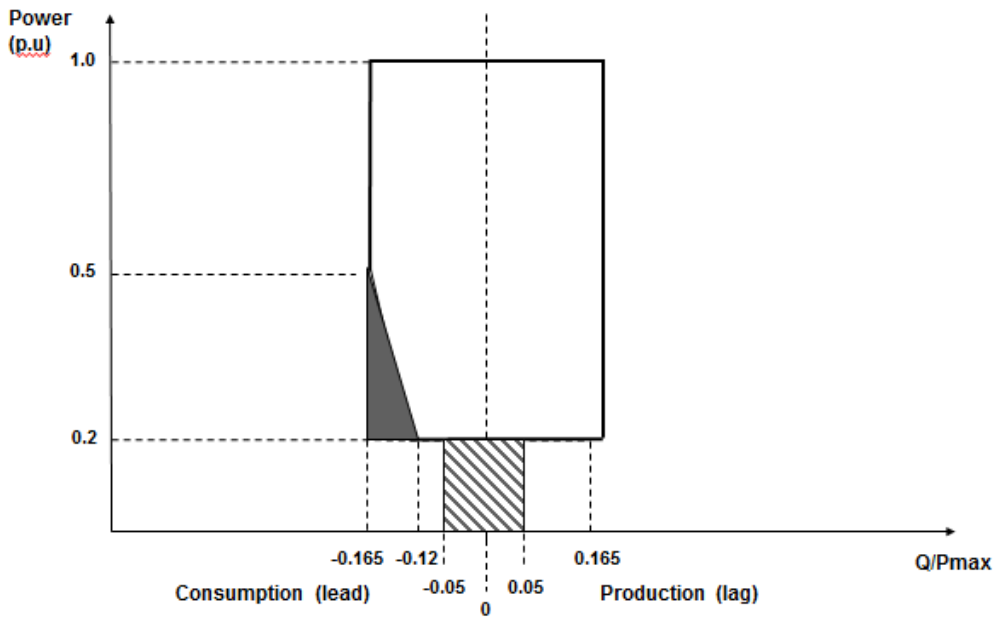

Figure ECC.6.3.2.6(b)

ECC.6.3.2.6.3 For the avoidance of doubt, if an **EU Generator** (including **Generators** in respect of **DC Connected Power Park Modules** or those which are **Restoration Contractors** referred to in ECC.6.3.2.6.2) wishes to provide a **Reactive Power** capability in excess of the minimum requirements defined in ECC.6.3.2.6.1, then such capability (including any steady state tolerance) shall be agreed between the **EU Generator**, **Offshore Transmission Licensee** and **The Company** and/or the relevant **Network Operator**.

ECC.6.3.2.6.4 In addition to the requirements of ECC.6.3.2.6.2, **EU Generators** and **HVDC System Owners** and **Restoration Contractors** who own and operate **Anchor Plant** and/or **Top Up Restoration Plant**, then the **Reactive Power** capability requirements (including steady state tolerance) at the **Offshore Grid Entry Point** shall be agreed between the **Generator**, **Offshore Transmission Licensee** and **The Company** in order to facilitate the operation of an **Offshore Local Joint Restoration Plan**.

ECC.6.3.3 OUTPUT POWER WITH FALLING FREQUENCY

ECC.6.3.3.1 Output power with falling **Frequency** for **Power Generating Modules** and **HVDC Equipment**

ECC.6.3.3.1.1 Each **Power Generating Module** and **HVDC Equipment** must be capable of:

(a) continuously maintaining constant **Active Power** output for **System Frequency** changes within the range 50.5 to 49.5 Hz; and

(b) (subject to the provisions of ECC.6.1.2) maintaining its **Active Power** output at a level not lower than the figure determined by the linear relationship shown in Figure ECC.6.3.3(a) for **System Frequency** changes within the range 49.5 to 47 Hz for all ambient temperatures up to and including 25^0C, such that if the **System Frequency** drops to 47 Hz the **Active Power** output does not decrease by more than 5%. In the case of a **CCGT Module**, the above requirement shall be retained down to the **Low Frequency Relay** trip setting of 48.8 Hz, which reflects the first stage of the Automatic Low **Frequency Demand Disconnection** scheme notified to **Network Operators** under OC6.6.2. For **System Frequency** below that setting, the existing requirement shall be retained for a minimum period of 5 minutes while **System Frequency** remains below that setting, and special measure(s) that may be required to meet this requirement shall be kept in service during this period. After that 5 minutes period, if **System Frequency** remains below that setting, the special measure(s) must be discontinued if there is a materially increased risk of the **Gas Turbine** tripping. The need for special measure(s) is linked to the inherent **Gas Turbine Active Power** output reduction caused by reduced shaft speed due to falling **System Frequency**. Where the need for special measures is identified in order to maintain output in line with the level identified in Figure ECC.6.3.3(a) these measures should be still continued at ambient temperatures above 25^0C maintaining as much of the **Active Power** achievable within the capability of the plant. For the avoidance of doubt, **Generators** in respect of **Pumped Storage** shall also be required to satisfy the requirements of OC6.6.6.

Figure ECC.6.3.3(a) **Active Power** Output with falling **Frequency** for **Power Generating Modules** and **HVDC Systems** and **Electricity Storage Modules** when operating in an exporting mode of operation

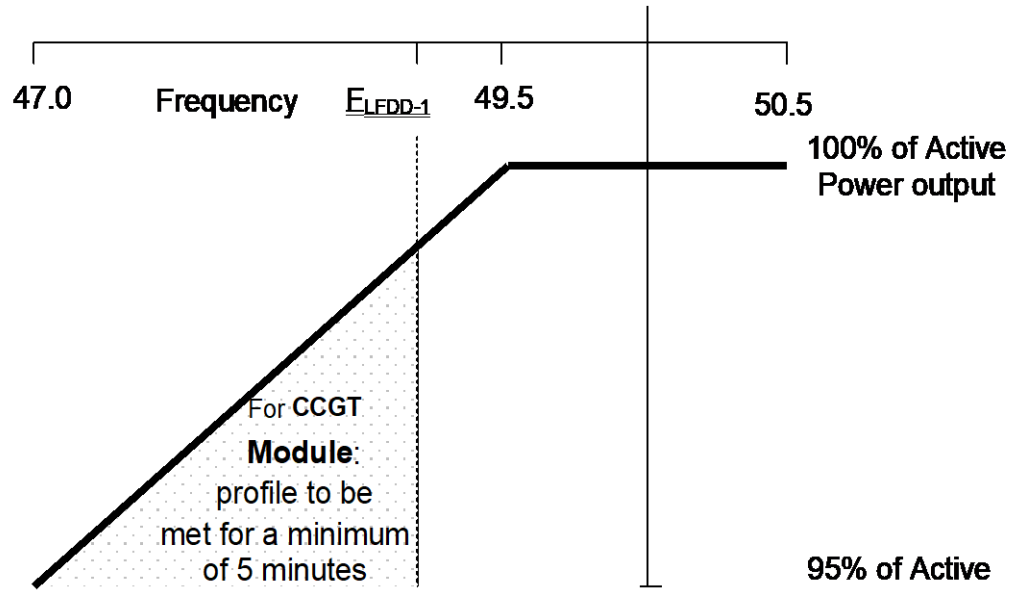

Note: **Frequency** F_{LFDD-1} **is the relay trip setting of the first stage of the Automatic Low Frequency Demand Disconnection Scheme**

(c) For the avoidance of doubt, in the case of a **Power Generating Module** including a **DC Connected Power Park Module** using an **Intermittent Power Source** where the mechanical power input will not be constant over time, the requirement is that the **Active Power** output shall be independent of **System Frequency** under (a) above and should not drop with **System Frequency** by greater than the amount specified in (b) above.

(d) An **HVDC System** must be capable of maintaining its **Active Power** input (i.e. when operating in a mode analogous to **Demand**) from the **National Electricity Transmission System** (or **User System** in the case of an **Embedded HVDC System**) at a level not greater than the figure determined by the linear relationship shown in Figure ECC.6.3.3(b) for **System Frequency** changes within the range 49.5 to 47 Hz, such that if the **System Frequency** drops to 47.8 Hz the **Active Power** input decreases by more than 60%.

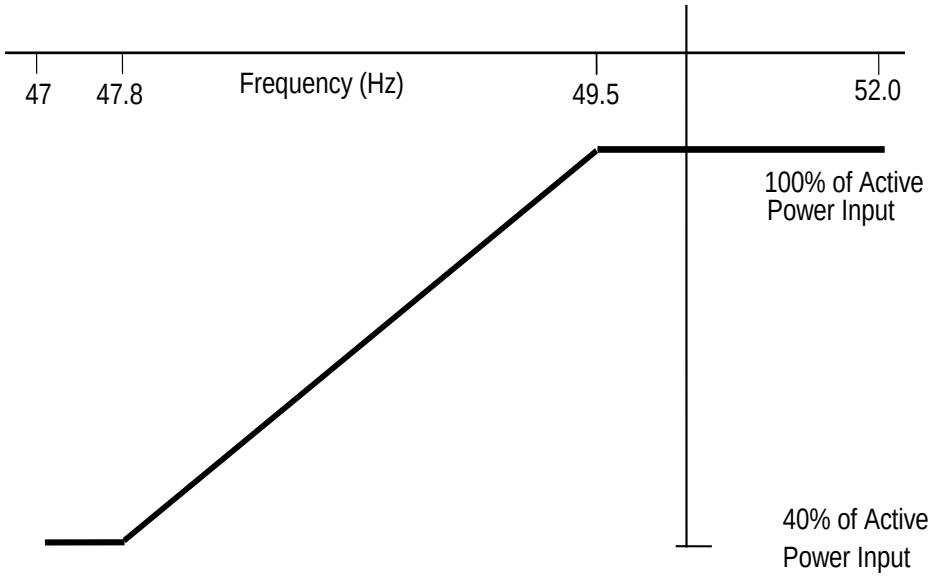

Figure ECC.6.3.3(b) **Active Power** input with falling **Frequency** for **HVDC Systems**

(e) In the case of an **Offshore Generating Unit** or **Offshore Power Park Module** or **DC Connected Power Park Module** or **Remote End HVDC Converter** or **Transmission DC Converte**r, the **EU Generator** shall comply with the requirements of ECC.6.3.3. **EU Generators** should be aware that Section K of the **STC** places requirements on **Offshore Transmission Licensees** which utilise a **Transmission DC Converter** as part of their **Offshore Transmission System** to make appropriate provisions to enable **EU Generators** to fulfil their obligations.

(f) **Transmission DC Converters** and **Remote End HVDC Converters** shall provide a continuous signal indicating the real time **Frequency** measured at the **Interface Point** to the **Offshore Grid Entry Point** or **HVDC Interface Point** for the purpose of **Offshore Generators** or **DC Connected Power Park Modules** to respond to changes in **System Frequency** on the Main Interconnected **Transmission System**. A **DC Connected Power Park Module** or **Offshore Power Generating Module** shall be capable of receiving and processing this signal within 100ms.

(g) For **HVDC Systems** with a **Completion Date** on or after 31 December 2026, **HVDC System Owners** shall ensure that each **HVDC System** has the capability to provide a continuous signal indicating the real time **Frequency** measured at the **Grid Entry Point** and **HVDC Interface Point** and other signals as agreed with **The Company** for the purpose of participating in a **Local Joint Restoration Plan** or wider **System Restoration** event. The **Frequency** signal at the **Interface Point** shall be capable of being received and processed within 100ms.

(h) For **Transmission DC Converters** with a **Completion Date** on or after 31 December 2026, **Offshore Transmission Licensees** shall ensure that each **Transmission DC Converter** has the capability to provide a continuous signal indicating the real time **Frequency** measured at the **Offshore Grid Entry Point** and **HVDC Interface Point** to the **Interface Point** for the purpose of participating in an **Offshore Local Joint Restoration Plan** or wider **System Restoration** event. The **Frequency** signal at the **Interface Point** shall be capable of being received and processed within 100ms. This requirement shall be necessary where one or more **Offshore Generators** are part of an **Offshore Local Joint Restoration Zone Plan**.

ECC.6.3.4 ACTIVE POWER OUTPUT UNDER SYSTEM VOLTAGE VARIATIONS

ECC.6.3.4.1 At the **Grid Entry Point** or **User System Entry Point** , the **Active Power** output under steady state conditions of any **Power Generating Module** or **HVDC Equipment** directly connected to the **National Electricity Transmission System** or in the case of **OTSDUW**, the **Active Power** transfer at the **Interface Point**, under steady state conditions of any **OTSDUW Plant and Apparatus** should not be affected by voltage changes in the normal operating range specified in paragraph ECC.6.1.4 by more than the change in **Active Power** losses at reduced or increased voltage.

ECC.6.3.5 SYSTEM RESTORATION

ECC.6.3.5.1 It is not a mandatory requirement for **Generators**, or **HVDC System Owners** to provide an **Anchor Plant Capability** or **Top Up Restoration Capability**, however **EU Code Users** may wish to notify **The Company** of their ability to provide such a facility and the cost of the service. **The Company** will then consider whether it wishes to contract with the **EU Code User** for the provision of such a service which would be specified via an **Anchor Restoration Contract** or **Top Up Restoration Contract**. Where an **EU Code User** does not offer to provide a cost for the provision of an **Anchor Plant Capability**, **The Company** may make such a request if it considers **System** security to be at risk due to a lack of **Anchor Plant** capability.

ECC.6.3.5.2 It is an essential requirement that **The Company** has a means of implementing **System Restoration** in accordance with the requirements of the **Electricity System Restoration Standard**. This is facilitated by agreeing contracts with **Restoration Contractors** who have **Plant** at a number of strategically located sites. In the case of **Restoration Contractors** who are party to a **Distribution Restoration Zone Plan**, **The Company** shall agree the requirements with the relevant **Network Operator** and **Restoration Contractors**.

ECC.6.3.5.3 The following requirements shall apply in respect of each **Type C Power Generating Module**, **Type D Power Generating Module** and **DC Connected Power Park Module** which have an **Anchor Restoration Contract**.

(i) The **Power-Generating Module** or **DC Connected Power Park Module** shall be capable of starting from a **Total Shutdown** or **Partial Shutdown** without any external electrical energy supply within either 2 hours of receiving an instruction from **The Company** in the case of **Local Joint Restoration Plan** or alternatively 8 hours of receiving an instruction from a **Network Operator** in the case of a **Distribution Restoration Zone Plan**;

(ii) Each **Power Generating Module** or **DC Connected Power Park Module** shall be able to synchronise within the **Frequency** limits defined in ECC.6.1.2 and, where applicable, voltage limits specified in ECC.6.1.4;

(iii) The **Power Generating Module** or **DC Connected Power Park Module** shall be capable of energising an unenergised part of the **System**;

(iv) The **Power-Generating Module** or **DC Connected Power Park Module** shall be capable of automatically regulating dips in voltage caused by connection of demand;

(v) The **Power Generating Module** or **DC Connected Power Park Module** shall;

be capable of a **Block Load Capability**,

be capable of operating in **LFSM-O** and **LFSM-U**, as specified in ECC.6.3.7.1 and ECC.6.3.7.2,

control **Frequency** in case of overfrequency and underfrequency within the whole **Active Power** output range between the **Minimum Regulating Level** and **Maximum Capacity** as well as at **Houseload Operation** levels, and

be capable of parallel operation together with other **Power Generating Modules** including **DC Connected Power Park Modules** within an isolated part of the **Total System** that is still supplying **Customers**, and controlling voltage automatically during the system restoration phase;

(vi) **Power Park Modules** (including **DC Connected Power Park Modules**) and **HVDC Equipment** which provide an **Anchor Plant Capability**, shall also be capable of satisfying the relevant **Grid Forming Capability** requirements defined in ECC.6.3.19 as agreed with **The Company**.

ECC.6.3.5.4 Each **HVDC System** or **Remote End HVDC Converter Station** which has **Anchor Plant Capability** and an **Anchor Restoration Contract** shall be capable of energising the busbar of an AC substation to which another **HVDC Converter Station** is connected. The timeframe after shutdown of the **HVDC System** prior to energisation of the AC substation shall be pursuant to the terms of the **Anchor Restoration Contract**. The **HVDC System** shall be able to synchronise within the **Frequency** limits defined in ECC.6.1.2.1.2 and voltage limits defined in ECC.6.1.4.1 unless otherwise specified in the **Anchor Restoration Contract**. Wider **Frequency** and voltage ranges can be specified in the **Anchor Restoration Contract** in order to restore **System** security.

ECC.6.3.5.5 With regard to the capability to take part in operation of an isolated part of the **Total System** that is still supplying **Customers**:

i **Power Generating Modules** including **DC Connected Power Park Modules** shall be capable of taking part in island operation if specified in the **Anchor Restoration Contract** or **Top Up Restoration Contract** and:

ii the **Frequency** limits for island operation shall be those specified in ECC.6.1.2;

iii the voltage limits for island operation shall be those defined in ECC.6.1.4;

iv **Power Generating Modules** including **DC Connected Power Park Modules** shall be able to operate in **Frequency Sensitive Mode** during island operation, as specified in ECC.6.3.7.3. In the event of a power surplus, **Power Generating Modules** including **DC Connected Power Park Modules** shall be capable of reducing the **Active Power** output from a previous operating point to any new operating point within the **Power Generating Module Performance Chart**. **Power Generating Modules** including **DC Connected Power Park Modules** shall be capable of reducing **Active Power** output as much as inherently technically feasible, but to at least 55 % of **Maximum Capacity**~~;~~

v The method for detecting a change from interconnected system operation to island operation shall be agreed between the **EU Generator**, **The Company** and the **Relevant Transmission Licensee**. The agreed method of detection must not rely solely on **The Company**, **Relevant Transmission Licensee's** or **Network Operators** switchgear position signals;

vi **Power Generating Modules** including **DC Connected Power Park Modules** shall be able to operate in **LFSM-O** and **LFSM-U** during island operation, as specified in ECC.6.3.7.1 and ECC.6.3.7.2;

ECC.6.3.5.6 With regard to quick re-synchronisation capability:

(i) In case of disconnection of the **Power Generating Module** including **DC Connected Power Park Modules** from the **System**, the **Power Generating Module** shall be capable of quick re-synchronisation in line with the **Protection** strategy agreed between **The Company** and/or **Network Operator** in co-ordination with the **Relevant Transmission Licensee** and the **Generator**;

(ii) A **Power Generating Module** including a **DC Connected Power Park Module** with a minimum re-synchronisation time greater than 15 minutes after its disconnection from any external power supply must be capable of **Houseload Operation** from any operating point on its **Power Generating Module Performance Chart**. In this case, the identification of **Houseload Operation** must not be based solely on the **Total System's**-switchgear position signals;

(iii) **Power Generating Modules** including **DC Connected Power Park Modules** shall be capable of **Houseload Operation**, irrespective of any auxiliary connection to the **Total System**. The minimum operation time shall be specified by **The Company**, taking into consideration the specific characteristics of prime mover technology.

ECC.6.3.5.7 **Restoration Contractors** who are **Offshore Generators** and **Transmission DC Converter** owners who are part of an **Offshore Local Joint Restoration Plan** shall ensure their **Plant** and **Apparatus** is designed to satisfy the requirements of ECC.7.10 and ECC.7.11.

ECC.6.3.6 CONTROL ARRANGEMENTS

ECC.6.3.6.1 **ACTIVE POWER** CONTROL

ECC.6.3.6.1.1 **Active Power** control in respect of **Power Generating Modules** including **DC Connected Power Park Modules**

ECC.6.3.6.1.1.1 **Type A Power Generating Modules** shall be equipped with a logic interface (input port) in order to cease **Active Power** output within five seconds following receipt of a signal from **The Company**. **The Company** shall specify the requirements for such facilities, including the need for remote operation, in the **Bilateral Agreement** where they are necessary for **System** reasons .

ECC.6.3.6.1.1.2 **Type B Power Generating Modules** shall be equipped with an interface (input port) in order to be able to reduce **Active Power** output following receipt of a signal from **The Company**. **The Company** shall specify the requirements for such facilities, including the need for remote operation, in the **Bilateral Agreement** where they are necessary for **System** reasons.

ECC.6.3.6.1.1.3 **Type C** and **Type D Power Generating Modules** and **DC Connected Power Park Modules** shall be capable of adjusting the **Active Power** setpoint in accordance with instructions issued by **The Company.**

ECC.6.3.6.1.2 **Active Power** control in respect of **HVDC Systems** and **Remote End HVDC Converter Stations**

ECC.6.3.6.1.2.1 **HVDC Systems** shall be capable of adjusting the transmitted **Active Power** upon receipt of an instruction from **The Company** which shall be in accordance with the requirements of BC2.6.1.

ECC.6.3.6.1.2.2 The requirements for fast **Active Power** reversal (if required) shall be specified by **The Company**. Where **Active Power** reversal is specified in the **Bilateral Agreement**, each **HVDC System** and **Remote End HVDC Converter Station** shall be capable of operating from maximum import to maximum export in a time which is as fast as technically feasible or in a time that is no greater than 2 seconds except where a **HVDC Converter Station Owner** has justified to **The Company** that a longer reversal time is required.

ECC.6.3.6.1.2.3 Where an **HVDC System** connects various **Control Areas** or **Synchronous Areas**, each **HVDC System** or **Remote End HVDC Converter Station** shall be capable of responding to instructions issued by **The Company** under the **Balancing Code** to modify the transmitted **Active Power** for the purposes of cross-border balancing.

ECC.6.3.6.1.2.4 An **HVDC System** shall be capable of adjusting the ramping rate of **Active Power** variations within its technical capabilities in accordance with instructions issued by **The Company** . In case of modification of **Active Power** according to ECC.6.3.15 and ECC.6.3.6.1.2.2, there shall be no adjustment of ramping rate.

ECC.6.3.6.1.2.5 If specified by **The Company**, in coordination with the **Relevant Transmission Licensees**, the control functions of an **HVDC System** shall be capable of taking automatic remedial actions including, but not limited to, stopping the ramping and blocking FSM, LFSM-O, LFSM-U and **Frequency** control. The triggering and blocking criteria shall be specified by **The Company**.

ECC.6.3.6.2 MODULATION OF ACTIVE POWER

ECC.6.3.6.2.1 Each **Power Generating Module** (including **DC Connected Power Park Modules**) and **Onshore HVDC Converters** at an **Onshore HVDC Converter Station** must be capable of contributing to **Frequency** control by continuous modulation of **Active Power** supplied to the **National Electricity Transmission System**. For the avoidance of doubt each **Onshore HVDC Converter** at an **Onshore HVDC Converter Station** and/or **OTSDUW DC Converter** shall provide each **EU Code User** in respect of its **Offshore Power Stations** connected to and/or using an **Offshore Transmission System** a continuous signal indicating the real time **Frequency** measured at the **Transmission Interface Point**. A **DC Connected Power Park Module** or **Offshore Power Generating Module** shall be capable of receiving and processing this signal within 100ms.

ECC.6.3.6.3 MODULATION OF REACTIVE POWER

ECC.6.3.6.3.1 Notwithstanding the requirements of ECC.6.3.2, each **Power Generating Module** or **HVDC Equipment** (and **OTSDUW Plant and Apparatus** at a **Transmission Interface Point** and **Remote End HVDC Converter** at an **HVDC Interface Point**) (as applicable) must be capable of contributing to voltage control by continuous changes to the **Reactive Power** supplied to the **National Electricity Transmission System** or the **User System** in which it is **Embedded**.

ECC.6.3.7 FREQUENCY RESPONSE

ECC.6.3.7.1 Limited Frequency Sensitive Mode – Overfrequency (LFSM-O)

ECC.6.3.7.1.1 Each **Power Generating Module** (including **DC Connected Power Park Modules**) and **HVDC Systems** shall be capable of reducing **Active Power** output in response to **Frequency** on the **Total System** when this rises above 50.4Hz. For the avoidance of doubt, the provision of this reduction in **Active Power** output is not an **Ancillary Service**. Such provision is known as **Limited High Frequency Response**. The **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** shall be capable of operating stably during **LFSM-O** operation. However for a **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** operating in **Frequency Sensitive Mode** the requirements of LFSM-O shall apply when the **Frequency** exceeds 50.5Hz.

ECC.6.3.7.1.2 (i) The rate of change of **Active Power** output must be at a minimum a rate of 2 percent of output per 0.1 Hz deviation of **System Frequency** above 50.4Hz (ie a **Droop** of 10%) as shown in Figure ECC.6.3.7.1 below. This would not preclude a **EU Generator** or **HVDC System Owner** from designing their **Power Generating Module** with a **Droop** of less than 10% but in all cases the **Droop** should be 2% or greater.

(ii) The reduction in **Active Power** output must be continuously and linearly proportional, as far as is practicable, to the excess of **Frequency** above 50.4 Hz and must be provided increasingly with time over the period specified in (iii) below.

(iii) As much as possible of the proportional reduction in **Active Power** output must result from the **Frequency** control device (or speed governor) action and must be achieved within 10 seconds of the time of the **Frequency** increase above 50.4 Hz. The **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** shall be capable of initiating a power **Frequency** response with an initial delay that is as short as possible. If the delay exceeds 2 seconds the **EU Generator** or **HVDC System Owner** shall justify the variation, providing technical evidence to **The Company**.

(iv) The residue of the proportional reduction in **Active Power** output which results from automatic action of the **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC System** output control devices other than the **Frequency** control devices (or speed governors) must be achieved within 3 minutes for the time of the **Frequency** increase above 50.4Hz.

(v) For the avoidance of doubt, the **LFSM-O** response must be reduced when the **Frequency** falls again and, when to a value less than 50.4Hz, as much as possible of the increase in **Active Power** must be achieved within 10 seconds.

(vi) For **Type A** and **Type B Power Generating Modules** which are not required to have **Frequency Sensitive Mode (FSM)** as described in ECC.6.3.7.3 for deviations in **Frequency** up to 50.9Hz at least half of the proportional reduction in **Active Power** output must be achieved in 10 seconds of the time of the **Frequency** increase above 50.4Hz. For deviations in **Frequency** beyond 50.9Hz the measured rate of change of **Active Power** reduction must exceed 0.5%/sec of the initial output. The **LFSM-O** response must be reduced when the **Frequency** subsequently falls again and when to a value less than 50.4Hz, at least half the increase in **Active Power** must be achieved in 10 seconds. For a **Frequency** excursion returning from beyond 50.9Hz the measured rate of change of **Active Power** increase must exceed 0.5%/second.

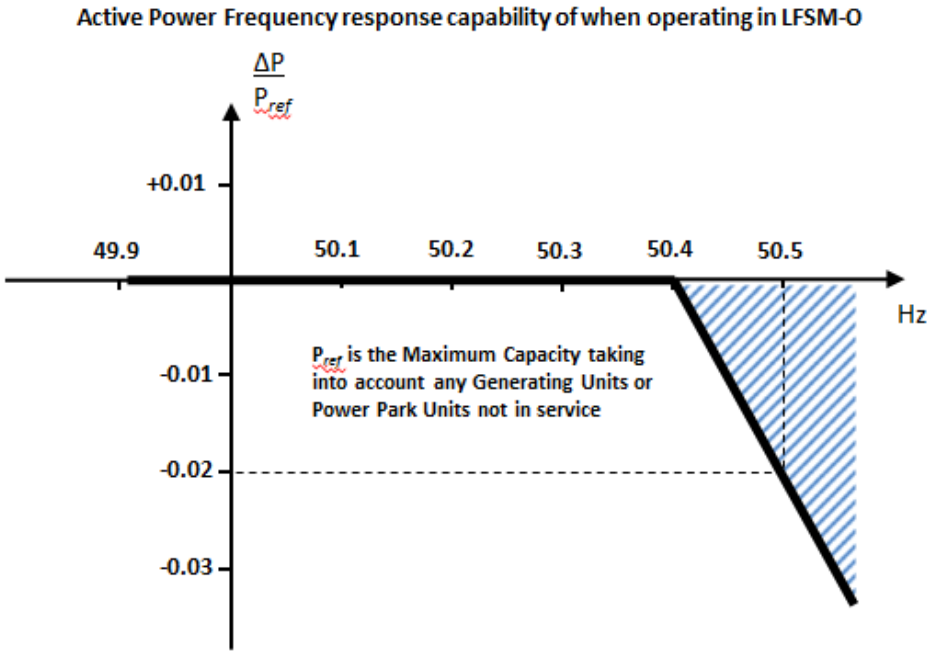

Figure ECC.6.3.7.1 – P_{ref} is the reference **Active Power** to which ΔP is related and ΔP is the change in **Active Power** output from the **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC System**. The **Power Generating Module** (including **DC Connected Power Park Modules** or **HVDC Systems)** has to provide a negative **Active Power** output change with a droop of 10% or less based on Pref.

ECC.6.3.7.1.3 Each **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** which is providing **Limited High Frequency Response (LFSM-O)** must continue to provide it until the **Frequency** has returned to or below 50.4Hz or until otherwise instructed by **The Company**. **EU Generators** in respect of **Gensets** and **HVDC Converter Station Owners** in respect of an **HVDC System** should also be aware of the requirements in BC.3.7.2.2.

ECC.6.3.7.1.4 Steady state operation below the **Minimum Stable Operating Level** in the case of **Power Generating Modules** including **DC Connected Power Park Modules** or **Minimum Active Power Transmission Capacity** in the case of **HVDC Systems** is not expected but if **System** operating conditions cause operation below the **Minimum Stable Operating Level** or **Minimum Active Power Transmission Capacity** which could give rise to operational difficulties for the **Power Generating Module** including a **DC Connected Power Park Module** or **HVDC Systems** then the **EU Generator** or HV**DC System Owner** shall be able to return the output of the **Power Generating Module** including a **DC Connected Power Park Module** to an output of not less than the **Minimum Stable Operating Level** or **HVDC System** to an output of not less than the **Minimum Active Power Transmission Capacity**.

ECC.6.3.7.1.5 All reasonable efforts should in the event be made by the **EU Generator** or **HVDC System Owner** to avoid such tripping provided that the **System Frequency** is below 52Hz in accordance with the requirements of ECC.6.1.2. If the **System Frequency** is at or above 52Hz, the requirement to make all reasonable efforts to avoid tripping does not apply and the **EU Generator** or **HVDC System Owner** is required to take action to protect its **Power Generating Modules** including **DC Connected Power Park Modules** or **HVDC Converter Stations**.

ECC.6.3.7.2 Limited Frequency Sensitive Mode – Underfrequency (LFSM-U)

ECC.6.3.7.2.1 Each **Type C Power Generating Module** and **Type D Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** operating in **Limited Frequency Sensitive Mode** shall be capable of increasing **Active Power** output in response to **System Frequency** when this falls below 49.5Hz. For the avoidance of doubt, the provision of this increase in **Active Power** output is not a mandatory **Ancillary Service** and it is not anticipated **Power Generating Modules** (including **DC Connected Power Park Modules**) or **HVDC Systems** are operated in an inefficient mode to facilitate delivery of **LFSM-U** response, but any inherent capability (where available) should be made without undue delay. The **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** shall be capable of stable operation during **LFSM-U Mode**. For example, an **EU Generator** which is operating with no headroom (eg it is operating at maximum output or is de-loading as part of a run down sequence and has no headroom) would not be required to provide **LFSM-U**.

ECC.6.3.7.2.2 (i) The rate of change of **Active Power** output must be at a minimum a rate of 2 percent of output per 0.1 Hz deviation of **System Frequency** below 49.5Hz (ie a **Droop** of 10%) as shown in Figure ECC.6.3.7.2.2 below. This requirement only applies if the **Power Generating Module** has headroom and the ability to increase **Active Power** output. In the case of a **Power Park Module** or **DC Connected Power Park Module** the requirements of Figure ECC.6.3.7.2.2 shall be reduced pro-rata to the amount of **Power Park Units** in service and available to generate. For the avoidance of doubt, this would not preclude an **EU Generator** or **HVDC System Owner** from designing their **Power Generating Module** with a lower **Droop** setting, for example between 3 – 5%.

(ii) As much as possible of the proportional increase in **Active Power** output must result from the **Frequency** control device (or speed governor) action and must be achieved for **Frequencies** below 49.5 Hz. The **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** shall be capable of initiating a power **Frequency** response with minimal delay. If the delay exceeds 2 seconds the **EU Generator** or HV**DC System Owner** shall justify the delay, providing technical evidence to **The Company***)*.

(iii) The actual delivery of **Active Power Frequency Response** in **LFSM-U** mode shall take into account

The ambient conditions when the response is to be triggered

The operating conditions of the **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** in particular limitations on operation near **Maximum Capacity** or **Maximum HVDC Active Power Transmission Capacity** at low frequencies and the respective impact of ambient conditions as detailed in ECC.6.3.3.

The availability of primary energy sources.

(iv) In **LFSM_U Mode**, the **Power Generating Module** (including **DC Connected Power Park Modules**) and **HVDC Systems**, shall be capable of providing a power increase up to its **Maximum Capacity** or **Maximum HVDC Active Power Transmission Capacity** (as applicable).

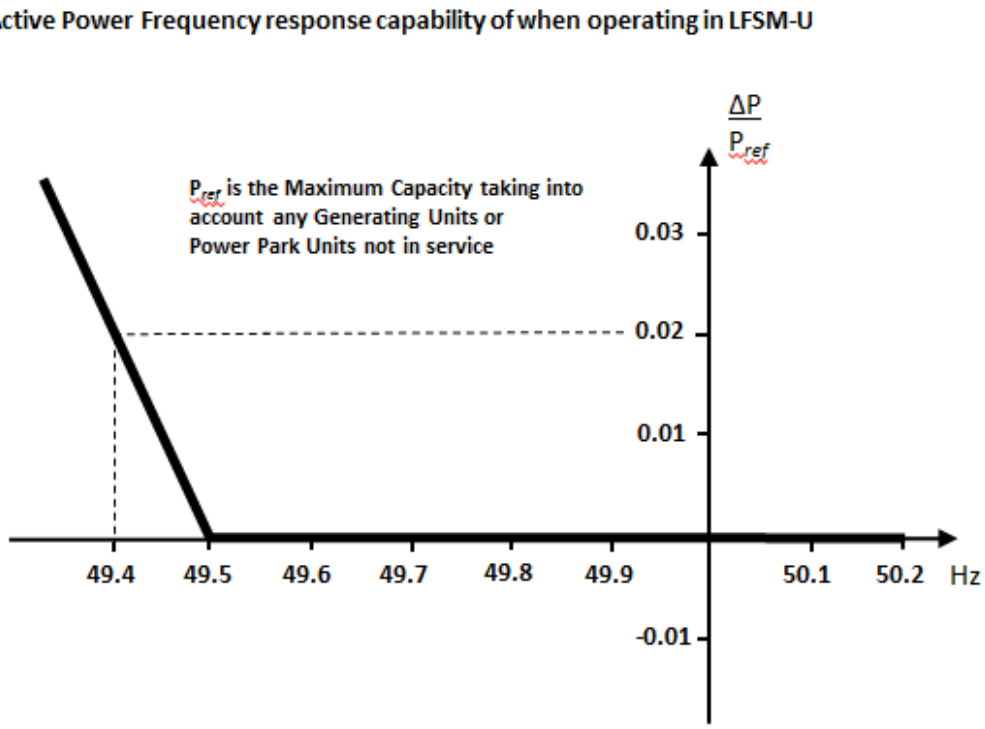

Figure ECC.6.3.7.2.2 – P_{ref} is the reference **Active Power** to which ΔP is related and ΔP is the change in **Active Power** output from the **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC System**. The **Power Generating Module** (including **DC Connected Power Park Modules** or **HVDC Systems)** has to provide a positive **Active Power** output change with a droop of 10% or less based on Pref.

ECC.6.3.7.2.3 Limited Frequency Sensitive Mode **Electricity Storage Modules** when operating in an importing mode of operation

ECC.6.3.7.2.3.1 Each **Generator** or **Defence Service Provider** or **Restoration Contractor** or **Non-Embedded Customer** in respect of an **Electricity Storage Module** is required to meet the requirements of ECC.6.3.7.2.3.1 (a) – (f) except where it has been agreed with **The Company** that such an **Electricity Storage Module** is unable to meet these requirements in which case the requirements of OC6.6.6 shall apply:-

(a) Be capable of automatically maintaining its **Active Power** output within the shaded operating region shown in Figure ECC.6.3.7.2.3(a) until the stored energy has been depleted, except in the case of a **Restoration Contractor** which shall not deplete its stored energy below the level required to meet its contractual obligations. The **Electricity Storage Module** could initially be operating at any level of import between zero **Active Power** and the **Maximum Import Power** within a **System Frequency** range of 50Hz and 49.5Hz as shown in Figure ECC.6.3.7.2.3(a). For the avoidance of doubt, the **Electricity Storage Module** would only be required to reach its **Maximum Capacity** if the **Electricity Storage Module** has headroom and the ability to increase **Active Power** output. A typical value of the **Droop** would be 0.6% where this does not result in control system instability or plant difficulties. In all cases the **Droop** shall be between 0.6% and 1.2% and shall be agreed with **The Company**.

(b) Automatically respond in accordance with the characteristic of Figure ECC.6.3.7.2.3(a) when the **System Frequency** falls to 49.5Hz and below.

(c) The reduction in **Active Power** import (during an import mode of operation), and the transition to the final value of **Active Power** output shall be continuously and linearly proportional, as far as is practicable, to the reduction in **Frequency** below 49.5 Hz. **Active Power** output must be provided increasingly with time as required by ECC.6.3.7.2.3.1 (d) below.

(d) As much as possible of the proportional reduction in **Active Power** import (when the **Electricity Storage Module** is in a mode analogous to **Demand**) must result from the **Frequency** control device (or speed governor) action and must be achieved within 10 seconds of the time of the **Frequency** decreases below 49.5 Hz. The **Electricity Storage Module** shall be capable of initiating a power **Frequency** response with an initial delay that is as short as possible. Delays that exceed 2 seconds shall be justified by the **Generator** or **Defence Service Provider** or **Restoration Contractor** or **Non-Embedded Customer** providing technical evidence to **The Company** and in any event as much as possible of the proportional reduction in **Active Power** import shall be achieved within 10 seconds. This performance requirement is to be maintained when the **Electricity Storage Module** makes the transition to an **Active Power** export mode of operation unless the energy store is depleted, in which case it shall be required to operate at zero **Active Power** output.

(e) Where the **Electricity Storage Module** is not capable of making a transition from import operation to export operation within 20 seconds of the **System Frequency** falling to 49.2Hz, then it shall then immediately reduce its **Active Power** import to zero.

(f) If the **Electricity Storage Module** has not achieved at least a zero **Active Power** import when the **System Frequency** has reached 48.9Hz, it shall be instantaneously tripped. Where a **Electricity Storage Module** trips, it shall not be permitted to reconnect to the **System** until instructed by **The Company** in accordance with BC2.5.2 and as provided for in ECC.6.2.2.11.

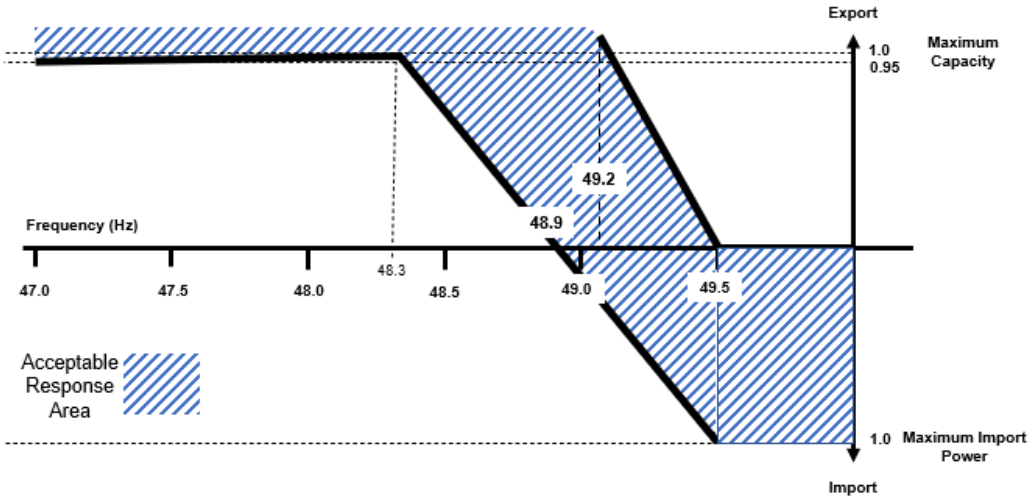

Figure ECC.6.3.7.2.3(a) **Active Power** performance with falling **Frequency**

ECC.6.3.7.2.3.2 Where an **Electricity Storage Module** has been importing and has responded in accordance with the requirements of ECC.6.3.7.2.3.1, its performance, once the **System Frequency** starts to rise above the minimum reached, shall be in accordance with Figure ECC.6.3.7.2.3(b) in respect of the **Active Power** output and **Active Power** import. For example, Figure ECC.6.3.7.2.3(b), illustrates the four operating points W, X, Y and Z. If points W, X, Y and Z denotes the minimum **Frequency** that the **Total System** reached during a particular low **System Frequency** event, as the **System Frequency** starts to rise, the **Active Power** output of the **Electricity Storage Module** should remain at a constant level (where the energy source has not been depleted) until 49.5Hz is reached as denoted by the dashed black lines. Once the **System Frequency** has risen above 49.5Hz the **Electricity Storage Module** is permitted to reduce **Active Power** output so long as it is operates within the shaded area above 49.5Hz shown in Figure ECC.6.3.7.2.3(b), unless the **Electricity Storage Module** has insufficient capability in which case it shall operate at zero **Active Power**.

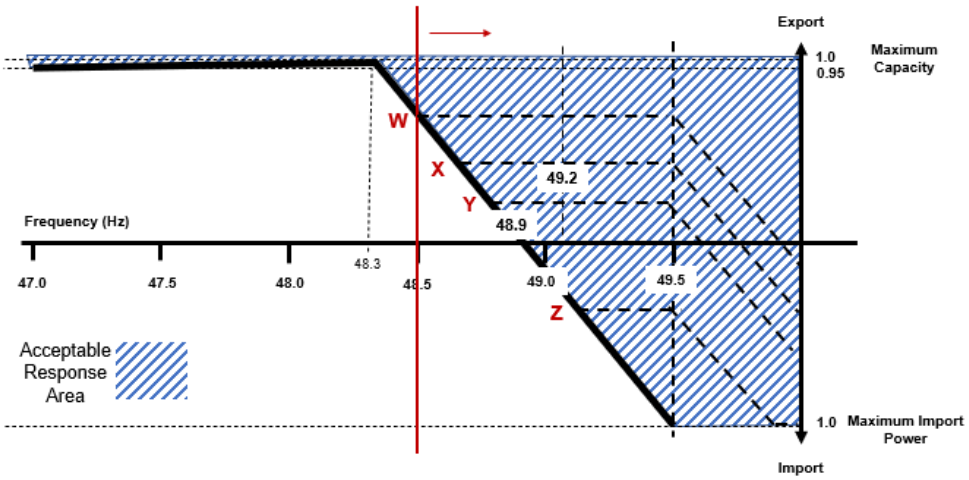

Figure ECC.6.3.7.2.3(b) **Active Power** performance with increasing **Frequency**

ECC.6.3.7.2.3.3 Where an **Electricity Storage Module** is exporting **Active Power** to the **Total System** (including zero) and the **System Frequency** falls below 49.5Hz the requirements of ECC.6.3.7.2.1 and ECC.6.3.7.2.2 shall apply.

ECC.6.3.7.3 Frequency Sensitive Mode – (FSM)

ECC.6.3.7.3.1 In addition to the requirements of ECC.6.3.7.1 and ECC.6.3.7.2 each **Type C Power Generating Module** and **Type D Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** must be fitted with a fast acting proportional **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device to provide **Frequency** response under normal operational conditions in accordance with **Balancing Code 3** (**BC3**). In the case of a **Power Park Module** including a **DC Connected Power Park Module**, the **Frequency** or speed control device(s) may be on the **Power Park Module** (including a **DC Connected Power Park Module**) or on each individual **Power Park Unit** (including a **Power Park Unit** within a **DC Connected Power Park Module**) or be a combination of both. The **Frequency** control device(s) (or speed governor(s)) must be designed and operated to the appropriate:

(i) **European Specification**: or

(ii) in the absence of a relevant **European Specification**, such other standard which is in common use within the European Community (which may include a manufacturer specification);

as at the time when the installation of which it forms part was designed or (in the case of modification or alteration to the **Frequency** control device (or turbine speed governor)) when the modification or alteration was designed.

The **European Specification** or other standard utilised in accordance with sub paragraph ECC.6.3.7.3.1 (a) (ii) will be notified to **The Company** by the **EU Generator** or **HVDC System Owner**:

(i) as part of the application for a **Bilateral Agreement**; or

(ii) as part of the application for a varied **Bilateral Agreement**; or

(iii) in the case of an Embedded Development, within 28 days of entry into the Embedded Development Agreement (or such later time as agreed with **The Company**) or

(iv) as soon as possible prior to any modification or alteration to the **Frequency** control device (or governor); and

ECC.6.3.7.3.2 The **Frequency** control device (or speed governor) in co-ordination with other control devices must control each **Type C Power Generating Module** and **Type D Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems Active Power Output** or **Active Power** transfer capability with stability over the entire operating range of the **Power Generating Module** (including **DC Connected Power Park Modules**) or **HVDC Systems** ; and

ECC.6.3.7.3.3 **Type C** and **Type D Power Generating Modules** and **DC Connected Power Park Modules** shall also meet the following minimum requirements:

(i) capable of providing **Active Power Frequency** response in accordance with the performance characteristic shown in Figure 6.3.7.3.3(a) and parameters in Table 6.3.7.3.3(a)

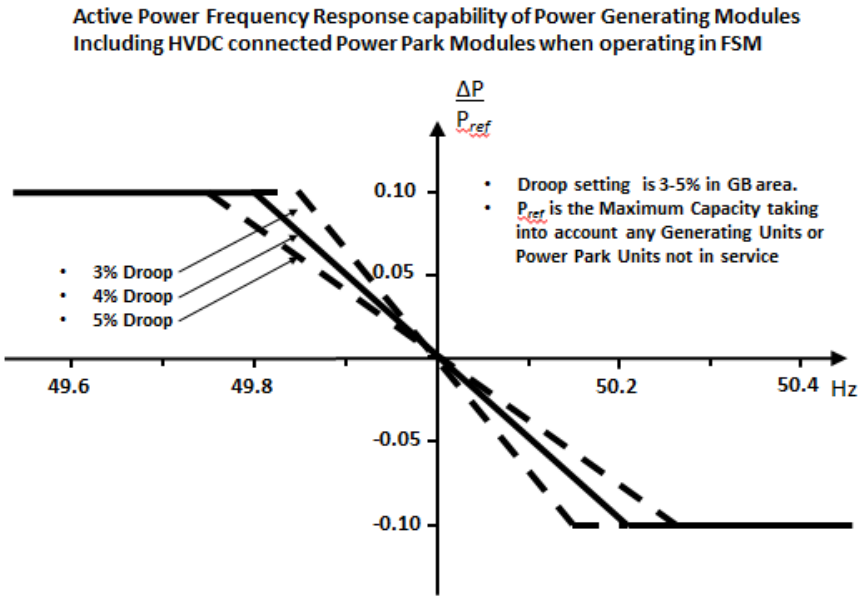

Figure 6.3.7.3.3(a) – **Frequency Sensitive Mode** capability of **Power Generating Modules** and **DC Connected Power Park Modules**

Parameter	Setting
Nominal **System Frequency**	50Hz
Active Power as a percentage of **Maximum Capacity** ($\frac{\lvert\Delta P_1\rvert}{P_{max}}$)	10%

Frequency Response Insensitivity in mHz ($\|\Delta f_i\|$)	±15mHz
Frequency Response Insensitivity as a percentage of nominal **Frequency** ($\frac{\|\Delta f_i\|}{f_n}$)	±0.03%
Frequency Response Deadband in mHz	0 (mHz)
Droop (%)	3 – 5%

Table 6.3.7.3.3(a) – Parameters for **Active Power Frequency** response in **Frequency Sensitive Mode** including the mathematical expressions in Figure 6.3.7.3.3(a).

(ii) In satisfying the performance requirements specified in ECC.6.3.7.3(i) **EU Generators** in respect of each **Type C** and **Type D Power Generating Modules and DC Connected Power Park Module** should be aware:-

in the case of overfrequency, the **Active Power Frequency** response is limited by the **Minimum Regulating Level**,

in the case of underfrequency, the **Active Power Frequency** response is limited by the **Maximum Capacity,**

the actual delivery of **Active Power Frequency** response depends on the operating and ambient conditions of the **Power Generating Module** (including **DC Connected Power Park Modules**) when this response is triggered, in particular limitations on operation near **Maximum Capacity** at low **Frequencies** as specified in ECC.6.3.3 and available primary energy sources.

The **Frequency** control device (or speed governor) must also be capable of being set so that it operates with an overall speed **Droop** of between 3 – 5%. The **Frequency Response Deadband** and **Droop** must be able to be reselected repeatedly. For the avoidance of doubt, in the case of a **Power Park Module** (including **DC Connected Power Park Modules**) the speed **Droop** should be equivalent of a fixed setting between 3% and 5% applied to each **Power Park Unit** in service.

(iii) In the event of a **Frequency** step change, each **Type C** and **Type D Power Generating Module** and **DC Connected Power Park Module** shall be capable of activating full and stable **Active Power Frequency** response (without undue power oscillations), in accordance with the performance characteristic shown in Figure 6.3.7.3.3(b) and parameters in Table 6.3.7.3.3(b).

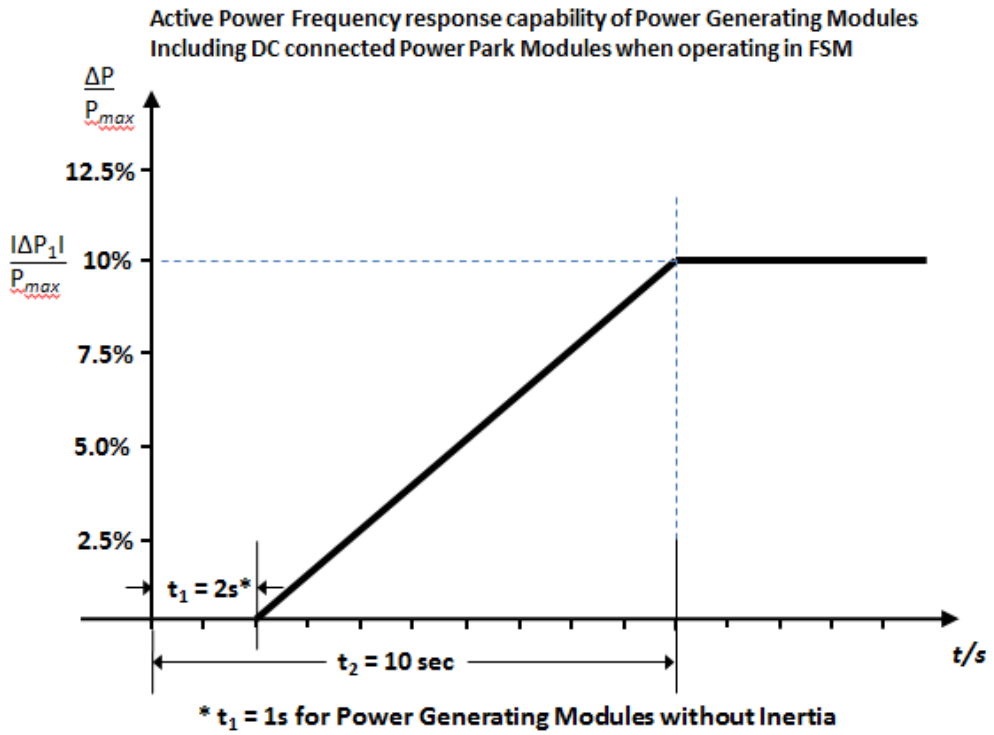

Figure 6.3.7.3.3(b) **Active Power Frequency Response** capability.

Parameter	Setting
Active Power as a percentage of **Maximum Capacity (frequency response range)** ($\frac{\lvert\Delta P_1\rvert}{P_{max}}$)	10%
Maximum admissible initial delay t_1 for **Power Generating Modules** (including **DC Connected Power Park Modules**) with inertia unless justified as specified in ECC.6.3.7.3.3 (iv)	2 seconds
Maximum admissible initial delay t_1 for **Power Generating Modules** (including **DC Connected Power Park Modules**) which do not contribute to **System** inertia unless justified as specified in ECC.6.3.7.3.3 (iv)	1 second
Activation time t_2	10 seconds

Table 6.3.7.3.3(b) – Parameters for full activation of **Active Power Frequency** response resulting from a **Frequency** step change. Table 6.3.7.3.3(b) also includes the mathematical expressions used in Figure 6.3.7.3.3(b).

(iv) The initial activation of **Active Power Primary Frequency** response shall not be unduly delayed. For **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**) with inertia the delay in initial **Active Power Frequency** response shall not be greater than 2 seconds. For **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**) without inertia, the delay in initial **Active Power Frequency** response shall not be greater than 1 second. If the **Generator** cannot meet this requirement they shall provide technical evidence to **The Company** demonstrating why a longer time is needed for the initial activation of **Active Power Frequency** response.

(v) in the case of **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**) other than the **Steam Unit** within a **CCGT Module** the combined effect of the **Frequency Response Insensitivity** and **Frequency Response Deadband** of the **Frequency** control device (or speed governor) should be no greater than 0.03Hz (for the avoidance of doubt, ±0.015Hz). In the case of the **Steam Unit** within a **CCGT Module**, the **Frequency Response Deadband** should be set to an appropriate value consistent with the requirements of ECC.6.3.7.3.5(ii) and the requirements of BC3.7.2.2 for the provision of **LFSM-O** taking account of any **Frequency Response Insensitivity** of the **Frequency** control device (or speed governor);

ECC.6.3.7.3.4 **HVDC Systems** shall also meet the following minimum requirements:

(i) **HVDC Systems** shall be capable of responding to **Frequency** deviations in each connected AC **System** by adjusting their **Active Power** import or export as shown in Figure 6.3.7.3.4(a) with the corresponding parameters in Table 6.3.7.3.4(a).

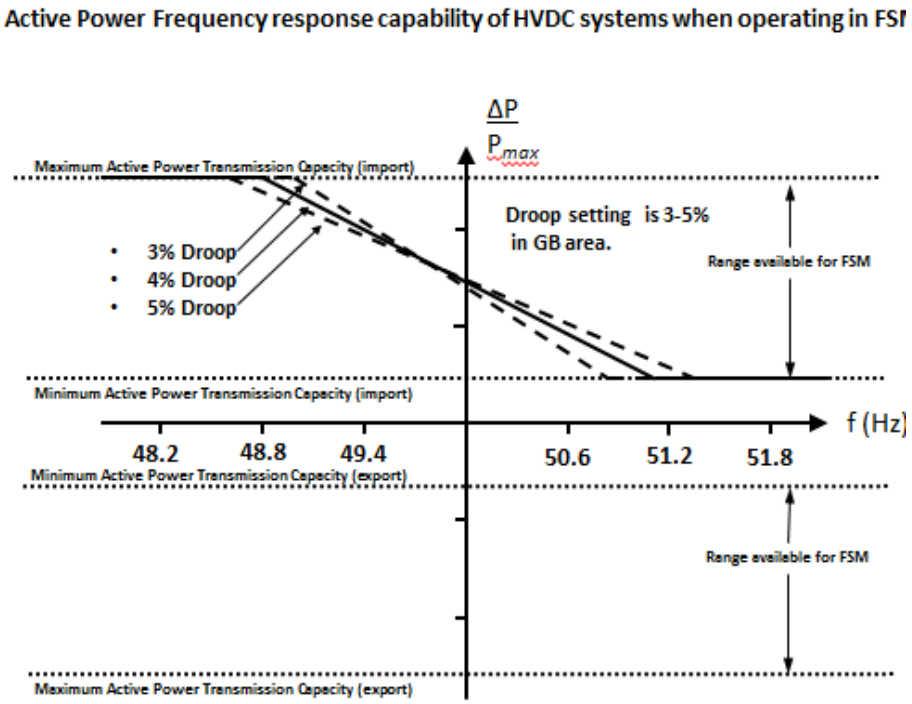

Figure 6.3.7.3.4(a) – **Active Power Frequency** response capability of a **HVDC System** operating in **Frequency Sensitive Mode** (FSM). ΔP is the change in active power output from the **HVDC System**..

Parameter	Setting
Frequency Response Deadband	0

Droop S1 and S2 (upward and downward regulation) where S1=S2.	3 – 5%
Frequency Response Insensitivity	±15mHz

Table 6.3.7.3.4(a) – Parameters for **Active Power Frequency** response in **FSM** including the mathematical expressions in Figure 6.3.7.3.4.

(ii) Each **HVDC System** shall be capable of adjusting the **Droop** for both upward and downward regulation and the **Active Power** range over which **Frequency Sensitive Mode** of operation is available as defined in ECC.6.3.7.3.4.

(iii) In addition to the requirements in ECC.6.3.7.4(i) and ECC.6.3.7.4(ii) each **HVDC System** shall be capable of:-

delivering the response as soon as technically feasible

delivering the response on or above the solid line in Figure 6.3.7.3.4(b) in accordance with the parameters shown in Table 6.3.7.3.4(b)

initiating the delivery of **Primary Response** in no less than 0.5 seconds unless otherwise agreed with **The Company**. Where the initial delay time (t_1 – as shown in Figure 6.3.7.3.4(b)) is longer than 0.5 seconds the **HVDC Converter Station Owner** shall reasonably justify it to **The Company**.

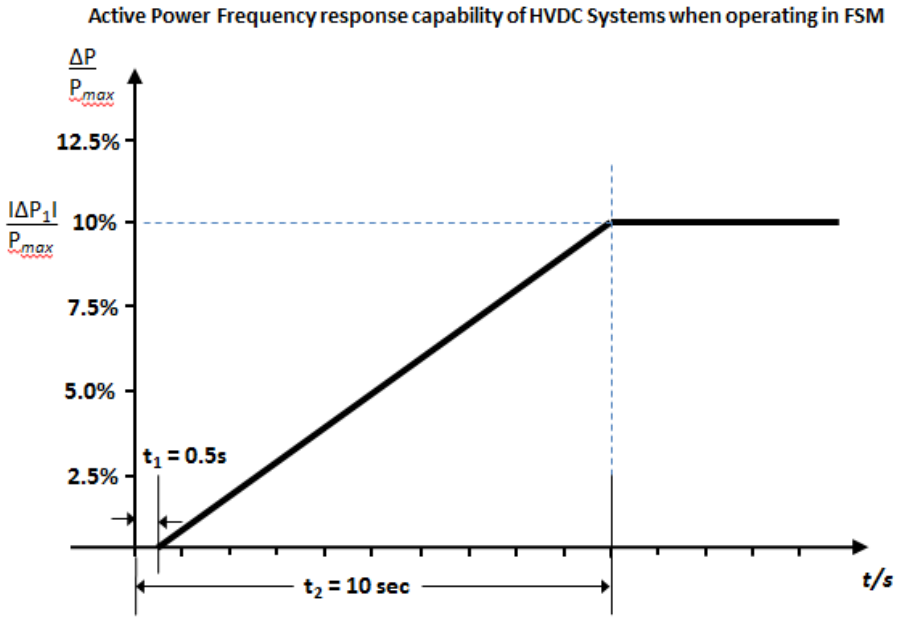

Figure 6.3.7.3.4(b) **Active Power Frequency Response** capability of a **HVDC System**. ΔP is the change in **Active Power** triggered by the step change in **Frequency**

Parameter	Setting
Active Power as a percentage of **Maximum Capacity (frequency response range)** ($\frac{\lvert\Delta P_1\rvert}{P_{max}}$)	10%
Maximum admissible delay t_1	0.5 seconds

Maximum admissible time for full activation t_2, unless longer activation times are agreed with **The Company**	10 seconds

Table 6.3.7.3.4(b) – Parameters for full activation of **Active Power Frequency** response resulting from a **Frequency** step change.

(iv) For **HVDC Systems** connecting various **Synchronous Areas**, each **HVDC System** shall be capable of adjusting the full **Active Power Frequency Response** when operating in **Frequency Sensitive Mode** at any time and for a continuous time period. In addition, the **Active Power** controller of each **HVDC System** shall not have any adverse impact on the delivery of **Frequency** response.

ECC.6.3.7.3.5 For **HVDC Systems** and **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**), other than the **Steam Unit** within a **CCGT Module** the combined effect of the **Frequency Response Insensitivity** and **Frequency Response Deadband** of the **Frequency** control device (or speed governor) should be no greater than 0.03Hz (for the avoidance of doubt, ±0.015Hz). In the case of the **Steam Unit** within a **CCGT Module**, the **Frequency Response Deadband** should be set to an appropriate value consistent with the requirements of ECC.6.3.7.3.5(ii) and the requirements of BC3.7.2.2 for the provision of **LFSM-O** taking account of any **Frequency Response Insensitivity** of the **Frequency** control device (or speed governor);

(i) With regard to disconnection due to underfrequency, **EU Generators** responsible for **Type C** and **Type D Power Generating Modules** (including **DC Connected Power Park Modules**) capable of acting as a load, including but not limited to **Pumped Storage** and tidal **Power Generating Modules**, **HVDC Systems** and **Remote End HVDC Converter Stations**, shall be capable of disconnecting their load in case of underfrequency which will be agreed with **The Company**. For the avoidance of doubt this requirement does not apply to station auxiliary supplies; **EU Generators** in respect of **Type C** and **Type D Pumped Storage Power Generating Modules** should also be aware of the requirements in OC.6.6.6.

(ii) Where a **Type C** or **Type D Power Generating Module**, **DC Connected Power Park Module** or **HVDC System** becomes isolated from the rest of the **Total System** but is still supplying **Customers**, the **Frequency** control device (or speed governor) must also be able to control **System Frequency** below 52Hz unless this causes the **Type C** or **Type D Power Generating Module** or **DC Connected Power Park Module** to operate below its **Minimum Regulating Level** or **Minimum Active Power Transmission Capacity** when it is possible that it may, as detailed in BC 3.7.3, trip after a time. For the avoidance of doubt **Power Generating Modules** (including **DC Connected Power Park Modules**) and **HVDC Systems** are only required to operate within the **System Frequency** range 47 - 52 Hz as defined in ECC.6.1.2 and for converter based technologies, the remaining island contains sufficient fault level for effective commutation;

(iii) Each **Type C** and **Type D Power Generating Module** and **HVDC Systems** shall have the facility to modify the **Target Frequency** setting either continuously or in a maximum of 0.05Hz steps over at least the range 50 ±0.1Hz should be provided in the unit load controller or equivalent device.

ECC.6.3.7.3.6 In addition to the requirements of ECC.6.3.7.3 each **Type C** and **Type D Power Generating Module** and **HVDC System** shall be capable of meeting the minimum **Frequency** response requirement profile subject to and in accordance with the provisions of Appendix A3.

ECC.6.3.7.3.7 For the avoidance of doubt, the requirements of Appendix A3 do not apply to **Type A** and **Type B Power Generating Modules**.

ECC.6.3.7.3.8 Frequency control device (or speed governor) requirements during System Restoration

ECC.6.3.7.3.8.1 **Restoration Contractors** shall be capable of operating their **Generating Units** or **Power Generating Modules** or **HVDC Systems** such that the **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device can be switched to **Frequency** control only with no load influence, during the early stages of a **System Restoration** whilst in island operation.

ECC.6.3.7.8.3.2 **Generators** and **HVDC System Owners** shall advise **The Company** of the capability of operating their **Generating Units** or **Power Generating Modules** or **HVDC Systems** such that the **Frequency** control device (or turbine speed governor) and unit load controller or equivalent control device can be switched to **Frequency** control only with no load influence during the early stages of **System Restoration** whilst in island operation. If there is a suitable capability, **The Company** and the **User** shall agree on how it shall be used and kept available.

ECC.6.3.7.8.3.3 In addition to the requirements of ECC.6.3.7.8.3.1 and ECC.6.3.7.8.3.2 the following shall apply:-

(i) Changes to any control schemes and settings identified from ECC.6.3.7.8.3.1, and ECC.6.3.7.8.3.2 shall be agreed between **The Company** and/or **Relevant Transmission Licensee** and/or **Network Operator** as recorded in the **Restoration Plan**.

(ii) During **System Restoration**, any changes to the schemes and settings defined in ECC.6.3.7.8.3.1 and ECC.6.3.7.8.3.2, of the different control devices of the **Generating Unit** or **Power Generating Module** or **Restoration Contractor's Plant** or **HVDC System** shall be coordinated and agreed between the **Relevant Transmission Licensee**, the **EU Generator**, **Restoration Contractor** and **HVDC System Owner** as part of a **Restoration Plan**.

ECC.6.3.8 EXCITATION AND VOLTAGE CONTROL PERFORMANCE REQUIREMENTS

ECC.6.3.8.1 Excitation Performance Requirements for Type B Synchronous Power Generating Modules

ECC.6.3.8.1.1 Each **Synchronous Generating Unit** within a **Type B Synchronous Power Generating Module** shall be equipped with a permanent automatic excitation control system that shall have the capability to provide constant terminal voltage control at a selectable setpoint without instability over the entire operating range of the **Type B Synchronous Power Generating Module**.

ECC.6.3.8.1.2 In addition to the requirements of ECC.6.3.8.1.1, **The Company** or the relevant **Network Operator** will specify if the control system of the **Type B Synchronous Power Generating Module** shall contribute to voltage control or **Reactive Power** control or **Power Factor** control at the **Grid Entry Point** or **User System Entry Point** (or other defined busbar). The performance requirements of the control system including slope (where applicable) shall be agreed between **The Company** and/or the relevant **Network Operator** and the **EU Generator**.

ECC.6.3.8.2 Voltage Control Requirements for **Type B Power Park Modules**

ECC.6.3.8.2.1 **The Company** or the relevant **Network Operator** will specify if the control system of the **Type B Power Park Module** shall contribute to voltage control or **Reactive Power** control or **Power Factor** control at the **Grid Entry Point** or **User System Entry Point** (or other defined busbar). The performance requirements of the control system including slope (where applicable) shall be agreed between **The Company** and/or the relevant **Network Operator** and the **EU Generator**.

ECC.6.3.8.3 Excitation Performance Requirements for **Type C** and **Type D Onshore Synchronous Power Generating Modules**

ECC.6.3.8.3.1 Each **Synchronous Generating Unit** within a **Type C** and **Type D Onshore Synchronous Power Generating Modules** shall be equipped with a permanent automatic excitation control system that shall have the capability to provide constant terminal voltage control at a selectable setpoint without instability over the entire operating range of the **Synchronous Power Generating Module**.

ECC.6.3.8.3.2 The requirements for excitation control facilities are specified in ECC.A.6. Any site specific requirements shall be specified by **The Company** or the relevant **Network Operator**.

ECC.6.3.8.3.3 Unless otherwise required for testing in accordance with OC5.A.2 or ECP.A.5, the automatic excitation control system of an **Onshore Synchronous Power Generating Module** shall always be operated such that it controls the **Onshore Synchronous Generating Unit** terminal voltage to a value that is

- equal to its rated value: or
- only where provisions have been made in the **Bilateral Agreement**, greater than its rated value.

ECC.6.3.8.3.4 In particular, other control facilities including constant **Reactive Power** output control modes and constant **Power Factor** control modes (but excluding VAR limiters) are not required. However if present in the excitation or voltage control system they will be disabled unless otherwise agreed with **The Company** or the relevant **Network Operator**. Operation of such control facilities will be in accordance with the provisions contained in **BC2**.

ECC.6.3.8.3.5 The excitation performance requirements for **Offshore Synchronous Power Generating Modules** with an **Offshore Grid Entry Point** shall be specified by **The Company**.

ECC.6.3.8.4 Voltage Control Performance Requirements for **Type C** and **Type D Onshore Power Park Modules**, **Onshore HVDC Converters** and **OTSUW Plant and Apparatus** at the **Interface Point**

ECC.6.3.8.4.1 Each **Type C** and **Type D Onshore Power Park Module**, **Onshore HVDC Converter** and **OTSDUW Plant and Apparatus** shall be fitted with a continuously acting automatic control system to provide control of the voltage at the **Grid Entry Point** or **User System Entry Point** (or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) without instability over the entire operating range of the **Onshore Power Park Module**, or **Onshore HVDC Converter** or **OTSDUW Plant and Apparatus**. Any **Plant** or **Apparatus** used in the provisions of such voltage control within an **Onshore Power Park Module** may be located at the **Power Park Unit** terminals, an appropriate intermediate busbar or the **Grid Entry Point** or **User System Entry Point**. In the case of an **Onshore HVDC Converter** at a **HVDC Converter Station** any **Plant** or **Apparatus** used in the provisions of such voltage control may be located at any point within the **User's Plant and Apparatus** including the **Grid Entry Point** or **User System Entry Point**. **OTSDUW Plant and Apparatus** used in the provision of such voltage control may be located at the **Offshore Grid Entry Point** an appropriate intermediate busbar or at the **Interface Point**. When operating below 20% **Maximum Capacity** the automatic control system may continue to provide voltage control using any available reactive capability. If voltage control is not being provided, the automatic control system shall be designed to ensure a smooth transition between the shaded area below 20% of **Active Power** output and the non-shaded area above 20% of **Active Power** output in Figure ECC.6.3.2.4(c) and Figure ECC.6.3.2.6(b) The performance requirements for a continuously acting automatic voltage control system that shall be complied with by the **User** in respect of **Onshore Power Park Modules**, **Onshore HVDC Converters** at an **Onshore HVDC Converter Station**, **OTSDUW Plant and Apparatus** at the **Interface Point** are defined in ECC.A.7.

ECC.6.3.8.4.3 In particular, other control facilities, including constant **Reactive Power** output control modes and constant **Power Factor** control modes (but excluding VAR limiters) are not required. However if present in the voltage control system they will be disabled unless otherwise agreed with **The Company** or the relevant **Network Operator**. Operation of such control facilities will be in accordance with the provisions contained in BC2. Where **Reactive Power** output control modes and constant **Power Factor** control modes have been fitted within the voltage control system they shall be required to satisfy the requirements of ECC.A.7.3 and ECC.A.7.4.

ECC.6.3.8.5 Excitation Control Performance requirements applicable to AC Connected **Offshore Synchronous Power Generating Modules** and voltage control performance requirements applicable to AC connected **Offshore Power Park Modules**, **DC Connected Power Park Modules** and **Remote End HVDC Converters**

ECC.6.3.8.5.1 A continuously acting automatic control system is required to provide control of **Reactive Power** (as specified in ECC.6.3.2.5) at the **Offshore Grid Entry Point** (or **HVDC Interface Point** in the case of **Configuration 1 DC Connected Power Park Modules** and **Remote End HVDC Converters**) without instability over the entire operating range of the AC connected **Offshore Synchronous Power Generating Module** or **Configuration 1 AC connected Offshore Power Park Module** or **Configuration 1 DC Connected Power Park Modules** or **Remote End HVDC Converter**. The performance requirements for this automatic control system will be specified by **The Company** which would be consistent with the requirements of ECC.6.3.2.5.

ECC.6.3.8.5.2 A continuously acting automatic control system is required to provide control of the voltage at the **Offshore Grid Entry Point** (or **HVDC Interface Point** in the case of **Configuration 2 DC Connected Power Park Modules**) without instability over the entire operating range of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** in accordance with the reactive capability requirements specified in ECC.6.3.2.6. The performance requirements for this automatic control system are specified in ECC.A.8.

ECC.6.3.8.5.3 In addition to ECC.6.3.8.5.1 and ECC.6.3.8.5.2 the requirements for excitation or voltage control facilities, including **Power System Stabilisers**, where these are necessary for system reasons, will be specified by **The Company**. Reference is made to on-load commissioning witnessed by **The Company** in BC2.11.2.

ECC.6.3.9 STEADY STATE LOAD INACCURACIES

ECC.6.3.9.1 The standard deviation of **Load** error at steady state **Load** over a 30 minute period must not exceed 2.5 per cent of a **Type C** or **Type D Power Generating Modules** (including a **DC Connected Power Park Module**) **Maximum Capacity**. Where a **Type C** or **Type D Power Generating Module** (including a **DC Connected Power Park Module**) is instructed to **Frequency** sensitive operation, allowance will be made in determining whether there has been an error according to the governor droop characteristic registered under the **PC**.

For the avoidance of doubt in the case of a **Power Park Module** (excluding a **Non-Synchronous Electricity Storage Module**) an allowance will be made for the full variation of mechanical power output.

In the case of an **Electricity Storage Module**, an allowance will be made for the storage reserve capability of the **Electricity Storage Module**.

ECC.6.3.10 NEGATIVE PHASE SEQUENCE LOADINGS

ECC.6.3.10.1 In addition to meeting the conditions specified in ECC.6.1.5(b), each **Synchronous Power Generating Module** will be required to withstand, without tripping, the negative phase sequence loading incurred by clearance of a close-up phase-to-phase fault, by **System Back-Up Protection** on the **National Electricity Transmission System** or **User System** located **Onshore** in which it is **Embedded**.

ECC.6.3.11 NEUTRAL EARTHING

ECC.6.3.11 At nominal **System** voltages of 110kV and above the higher voltage windings of a transformer of a **Power Generating Module** or **HVDC Equipment** or transformer resulting from **OTSDUW** must be star connected with the star point suitable for connection to earth. The earthing and lower voltage winding arrangement shall be such as to ensure that the **Earth Fault Factor** requirement of paragraph ECC.6.2.1.1 (b) will be met on the **National Electricity Transmission System** at nominal **System** voltages of 110kV and above.

ECC.6.3.12 FREQUENCY AND VOLTAGE DEVIATIONS

ECC.6.3.12.1 As stated in ECC.6.1.2, the **System Frequency** could rise to 52 Hz or fall to 47 Hz. Each **Power Generating Module** (including **DC Connected Power Park Modules**) must continue to operate within this **Frequency** range for at least the periods of time given in ECC.6.1.2 unless **The Company** has specified any requirements for combined **Frequency** and voltage deviations which are required to ensure the best use of technical capabilities of **Power Generating Modules** (including **DC Connected Power Park Modules**) if required to preserve or restore system security or unless **The Company** has agreed to any rate-of-change of **Frequency** relays which will trip such **Generating Unit**, **HVDC System**, **OTSDUW Plant** and **Apparatus**, **Power Park Module** and any constituent element within this **Frequency** range, under the **Bilateral Agreement**. Notwithstanding this requirement, **EU Generators** should also be aware of the requirements of ECC.6.3.13.

ECC.6.3.13 FREQUENCY, RATE OF CHANGE OF FREQUENCY AND VOLATGE PROTECTION SETTING ARRANGEMENTS

ECC.6.3.13.1 **EU Generators** (including in respect of **OTSDUW Plant and Apparatus**) and **HVDC** System Owners will be responsible for protecting all their **Power Generating Modules** (and **OTSDUW Plant and Apparatus**) or **HVDC Equipment** against damage should **Frequency** excursions outside the range 52Hz to 47Hz ever occur. Should such excursions occur, it is up to the **EU Generator** or **HVDC System Owner** to decide whether to disconnect their **Apparatus** for reasons of safety of **Apparatus**, **Plant** and/or personnel.

ECC.6.3.13.2 Each **Power Park Module** with a **Grid Forming Capability** as provided for in ECC.6.3.19, when connected and synchronised to the **System**, is required to be capable of withstanding without tripping a rate of change of **Frequency** up to and including 2 Hzs^{-1} as measured over a rolling 500 ms period. All other **Power Generating Modules** when connected and synchronised to the **System**, shall be capable of withstanding without tripping a rate of change of **Frequency** up to and including 1 Hzs^{-1} as measured over a rolling 500 ms period. Voltage dips may cause localised rate of change of **Frequency** values in excess of 1 Hzs^{-1} (or 2Hzs^{-1} in the case of **Power Park Modules** with a **Grid Forming Capability**) for short periods, and in these cases, the requirements under ECC.6.3.15 (fault ride through) supersedes this clause.

ECC.6.3.13.3 Each **HVDC System** and **Remote End HVDC Converter Station** when connected and synchronised to the **System**, shall be capable of withstanding without tripping a rate of change of **Frequency** up to and including ±2.5Hzs^{-1} as measured over the previous 1 s period. Voltage dips may cause localised rate of change of **Frequency** values in excess of ± 2.5 Hzs^{-1} for short periods, and in these cases, the requirements under ECC.6.3.15 (fault ride through) supersedes this clause.

ECC.6.3.13.4 Each **DC Connected Power Park Module** when connected to the **System**, shall be capable of withstanding without tripping a rate of change of **Frequency** up to and including ±2.0 Hzs^{-1} as measured over the previous 1 s period. **Voltage** dips may cause localised rate of change of **Frequency** values in excess of ±2.0 Hzs^{-1} for short periods, and in these cases, the requirements under ECC.6.3.15 (fault ride through) supersedes this clause.

ECC.6.3.13.5 As stated in ECC.6.1.2, the **System Frequency** could rise to 52 Hz or fall to 47 Hz and the **System** voltage at the **Grid Entry Point** or **User System Entry Point** could rise or fall within the values outlined in ECC.6.1.4. Each **Type C** and **Type D Power Generating Module** (including **DC Connected Power Park Modules**) or any constituent element must continue to operate within this **Frequency** range for at least the periods of time given in ECC.6.1.2 and voltage range as defined in ECC.6.1.4 unless **The Company** has agreed to any simultaneous overvoltage and underfrequency relays and/or simultaneous undervoltage and over frequency relays which will trip such **Power Generating Module** (including **DC Connected Power Park Modules**), and any constituent element within this **Frequency** or voltage range or unless **The Company** has agreed to any rate-of-change of **Frequency** relays which will trip such **Generating Unit**, **HVDC System**, **OTSDUW Plant** and **Apparatus**, **Power Park Module** and any constituent element within this **Frequency** range, under the **Bilateral Agreement**. In the case of **Grid Forming Plant**, **Grid Forming Plant Owners** are also required to satisfy the **System Frequency** and **System** voltage requirements as defined in ECC.6.3.19.

ECC.6.3.14 FAST START CAPABILITY

ECC.6.3.14.1 It may be agreed in the **Bilateral Agreement** that a **Genset** shall have a **Fast-Start Capability**. Such **Gensets** may be used for **Operating Reserve** and their **Start-Up** may be initiated by **Frequency**-level relays with settings in the range 49Hz to 50Hz as specified pursuant to **OC2**.

ECC.6.3.15 FAULT RIDE THROUGH

ECC.6.3.15.1 General **Fault Ride Through** requirements, principles and concepts applicable to **Type B**, **Type C** and **Type D Power Generating Modules** and **OTSDUW Plant and Apparatus** subject to faults up to 140ms in duration

ECC.6.3.15.1.1 ECC.6.3.15.1 – ECC.6.3.15.8 section sets out the **Fault Ride Through** requirements on **Type B**, **Type C** and **Type D Power Generating Modules**, **OTSDUW Plant and Apparatus** and **HVDC Equipment** that shall apply in the event of a fault lasting up to 140ms in duration.

ECC.6.3.15.1.2 Each **Power Generating Module**, **Power Park Module**, **HVDC Equipment** and **OTSDUW Plant and Apparatus** is required to remain connected and stable for any balanced and unbalanced fault where the voltage at the **Grid Entry Point** or **User System Entry Point** or (**HVDC Interface Point** in the case of **Remote End DC Converter Stations** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) remains on or above the heavy black line defined in sections ECC.6.3.15.2 – ECC.6.3.15.7 below. For up to 30 minutes following such a fault event each **Power Generating Module**, **Power Park Module**, **HVDC Equipment** and **OTSDUW Plant and Apparatus** is required to remain connected and stable provided **System** operating conditions have returned within those specified in ECC.6.1.

ECC.6.3.15.1.3 The voltage against time curves defined in ECC.6.3.15.2 – ECC.6.3.15.7 expresses the lower limit (expressed as the ratio of its actual value and its reference 1pu) of the actual course of the phase to phase voltage (or phase to earth voltage in the case of asymmetrical/unbalanced faults) on the **System** voltage level at the **Grid Entry Point** or **User System Entry Point** (or **HVDC Interface Point** in the case of **Remote End HVDC Converter Stations** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) during a symmetrical or asymmetrical/unbalanced fault, as a function of time before, during and after the fault.

ECC.6.3.15.2 Voltage against time curve and parameters applicable to **Type B Synchronous Power Generating Modules**

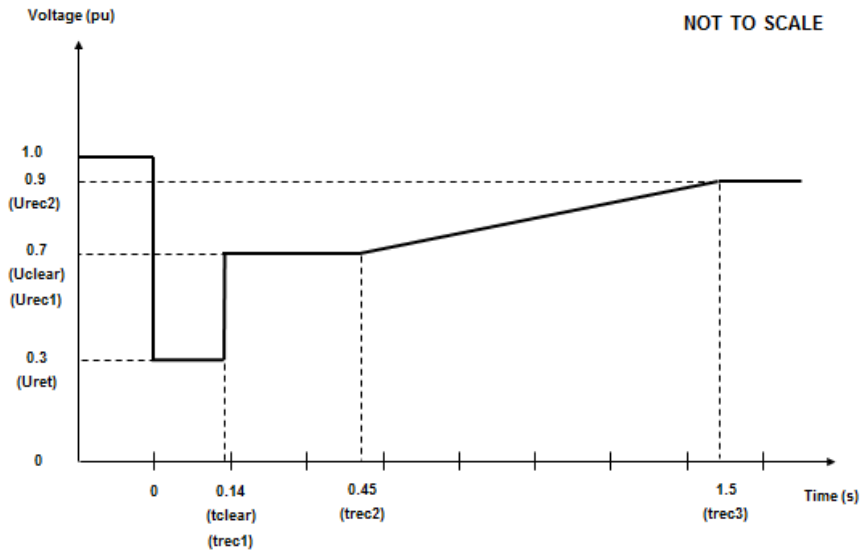

Figure ECC.6.3.15.2 - Voltage against time curve applicable to **Type B Synchronous Power Generating Modules**

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0.3	tclear	0.14
Uclear	0.7	trec1	0.14
Urec1	0.7	trec2	0.45
Urec2	0.9	trec3	1.5

Table ECC.6.3.15.2 Voltage against time parameters applicable to **Type B Synchronous Power Generating Modules**

ECC.6.3.15.3 Voltage against time curve and parameters applicable to **Type C** and **D Synchronous Power Generating Modules** connected below 110kV

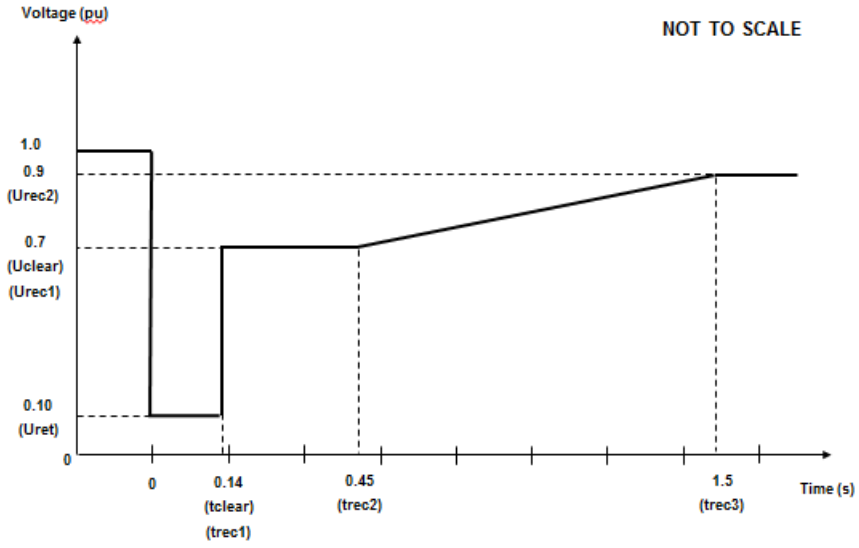

Figure ECC.6.3.15.3 - Voltage against time curve applicable to **Type C** and **D Synchronous Power Generating Modules** connected below 110kV

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0.1	tclear	0.14
Uclear	0.7	trec1	0.14
Urec1	0.7	trec2	0.45
Urec2	0.9	trec3	1.5

Table ECC.6.3.15.3 Voltage against time parameters applicable to **Type C** and **D Synchronous Power Generating Modules** connected below 110kV

ECC.6.3.15.4 Voltage against time curve and parameters applicable to **Type D Synchronous Power Generating Modules** connected at or above 110kV

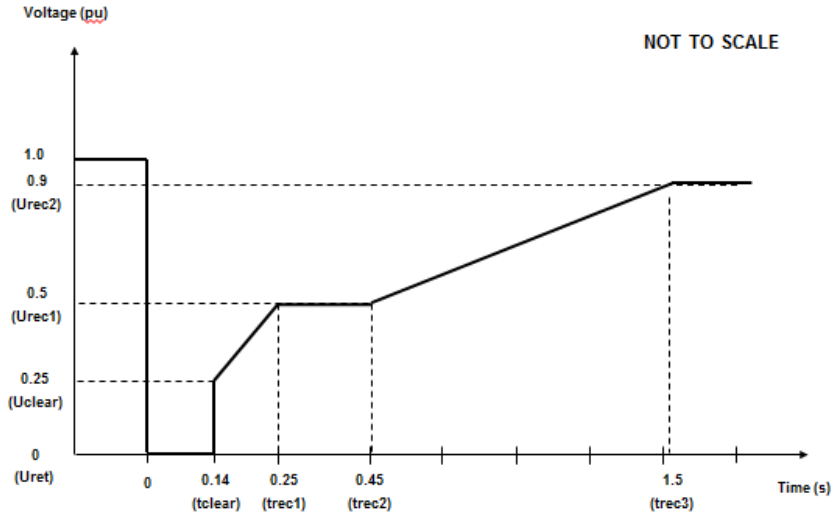

Figure ECC.6.3.15.4 - Voltage against time curve applicable to **Type D Synchronous Power Generating Modules** connected at or above 110kV

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0	tclear	0.14
Uclear	0.25	trec1	0.25
Urec1	0.5	trec2	0.45
Urec2	0.9	trec3	1.5

Table ECC.6.3.15.4 Voltage against time parameters applicable to **Type D Synchronous Power Generating Modules** connected at or above 110kV

ECC.6.3.15.5 Voltage against time curve and parameters applicable to **Type B**, **C** and **D Power Park Modules** connected below 110kV

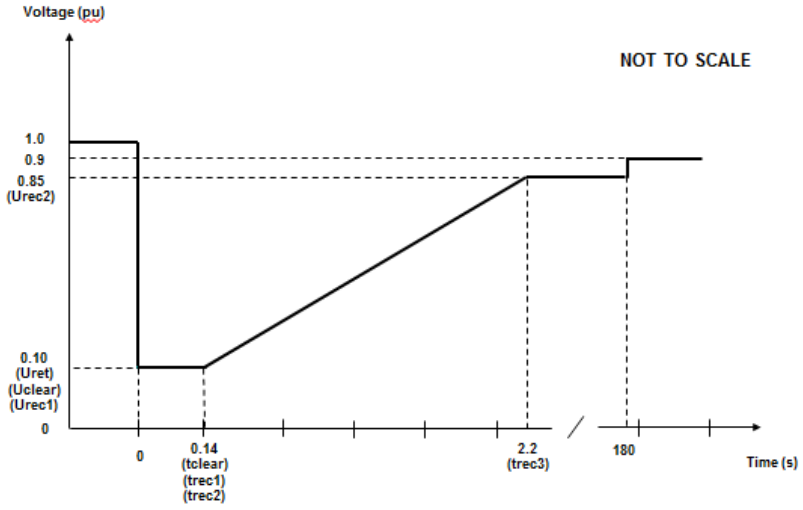

Figure ECC.6.3.15.5 - Voltage against time curve applicable to **Type B**, **C** and **D Power Park Modules** connected below 110kV

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0.10	tclear	0.14

Uclear	0.10	trec1	0.14
Urec1	0.10	trec2	0.14
Urec2	0.85	trec3	2.2

Table ECC.6.3.15.5 Voltage against time parameters applicable to **Type B**, **C** and **D Power Park Modules** connected below 110kV

ECC.6.3.15.6 Voltage against time curve and parameters applicable to **Type D Power Park Modules** with a **Grid Entry Point** or **User System Entry Point** at or above 110kV, **DC Connected Power Park Modules** at the **HVDC Interface Point** or **OTSDUW Plant and Apparatus** at the **Interface Point**.

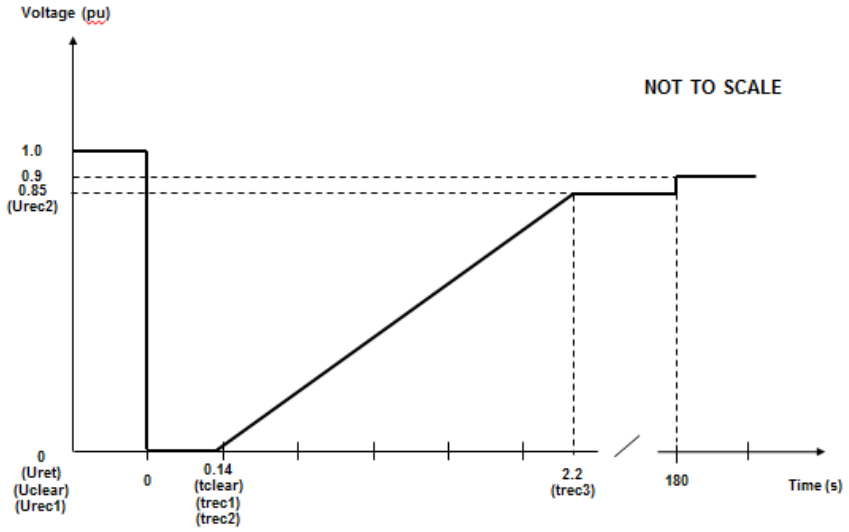

Figure ECC.6.3.15.6 - Voltage against time curve applicable to **Type D Power Park Modules** with a **Grid Entry Point** or **User System Entry Point** at or above 110kV, **DC Connected Power Park Modules** at the **HVDC Interface Point** or **OTSDUW Plant and Apparatus** at the **Interface Point**.

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0	tclear	0.14
Uclear	0	trec1	0.14
Urec1	0	trec2	0.14
Urec2	0.85	trec3	2.2

Table ECC.6.3.15.6 Voltage against time parameters applicable to a **Type D Power Park Modules** with a **Grid Entry Point** or **User System Entry Point** at or above 110kV, **DC Connected Power Park Modules** at the **HVDC Interface Point** or **OTSDUW Plant and Apparatus** at the **Interface Point**.

ECC.6.3.15.7 Voltage against time curve and parameters applicable to **HVDC Systems** and **Remote End HVDC Converter Stations**

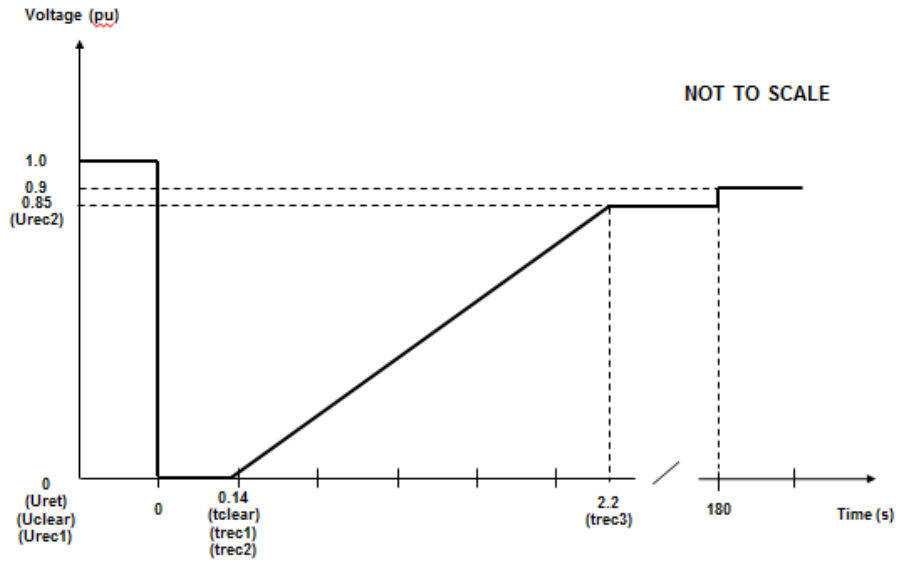

Figure ECC.6.3.15.7 - Voltage against time curve applicable to **HVDC Systems** and **Remote End HVDC Converter Stations**

Voltage parameters (pu)		**Time parameters (seconds)**	
Uret	0	tclear	0.14
Uclear	0	trec1	0.14
Urec1	0	trec2	0.14
Urec2	0.85	trec3	2.2

Table ECC.6.3.15.7 Voltage against time parameters applicable to **HVDC Systems** and **Remote End HVDC Converter Stations**

ECC.6.3.15.8 In addition to the requirements in ECC.6.3.15.1 – ECC.6.3.15.7:

(i) Each **Type B**, **Type C** and **Type D Power Generating Module** at the **Grid Entry Point** or **User System Entry Point**, **HVDC Equipment** (or **OTSDUW Plant and Apparatus** at the **Interface Point**) shall be capable of satisfying the above requirements when operating at **Rated MW** output and maximum leading **Power Factor**.

(ii) **The Company** will specify upon request by the **User** the pre-fault and post fault short circuit capacity (in MVA) at the **Grid Entry Point** or **User System Entry Point** (or **HVDC Interface Point** in the case of a remote end **HVDC Converter Stations** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**).

(iii) The pre-fault voltage shall be taken to be 1.0pu and the post fault voltage shall not be less than 0.9pu**.**

(iv) To allow a **User** to model the **Fault Ride Through** performance of its **Type B**, **Type C** and/or **Type D Power Generating Modules** or **HVDC Equipment**, **The Company** will provide additional network data as may reasonably be required by the **EU Code User** to undertake such study work in accordance with PC.A.8. Alternatively, **The Company** may provide generic values derived from typical cases.

(v) **The Company** will publish fault level data under maximum and minimum demand conditions in the **Electricity Ten Year Statement**.

(vi) Each **EU Generator** (in respect of **Type B**, **Type C**, **Type D Power Generating Modules** and **DC Connected Power Park Modules**) and **HVDC System Owners** (in respect of **HVDC Systems**) shall satisfy the requirements in ECC.6.3.15.8(i) – (vii) unless the protection schemes and settings for internal electrical faults trips the **Type B**, **Type C** and **Type D Power Generating Module**, **HVDC Equipment** (or **OTSDUW Plant and Apparatus**) from the **System**. The protection schemes and settings should not jeopardise **Fault Ride Through** performance as specified in ECC.6.3.15.8(i) – (vii). The undervoltage protection at the **Grid Entry Point** or **User System Entry Point** (or **HVDC Interface Point** in the case of a **Remote End HVDC Converter Stations** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) shall be set by the **EU Generator** (or **HVDC System Owner** or **OTSDUA** in the case of **OTSDUW Plant and Apparatus**) according to the widest possible range unless **The Company** and the **EU Code User** have agreed to narrower settings. All protection settings associated with undervoltage protection shall be agreed between the **EU Generator** and/or **HVDC System Owner** with **The Company** and **Relevant Transmission Licensee's** and relevant **Network Operator** (as applicable).

(vii) Each **Type B**, **Type C** and **Type D Power Generating Module**, **HVDC System** and **OTSDUW Plant and Apparatus** at the **Interface Point** shall be designed such that upon clearance of the fault on the **Onshore Transmission System** and within 0.5 seconds of restoration of the voltage at the **Grid Entry Point** or **User System Entry Point** or **HVDC Interface Point** in the case of a **Remote End HVDC Converter Stations** or **Interface Point** in the case of **OTSDUW Plant and Apparatus** to 90% of nominal voltage or greater, **Active Power** output (or **Active Power** transfer capability in the case of **OTSDW Plant and Apparatus** or **Remote End HVDC Converter Stations**) shall be restored to at least 90% of the level immediately before the fault. Once **Active Power** output (or **Active Power** transfer capability in the case of **OTSDUW Plant and Apparatus** or **Remote End HVDC Converter Stations**) has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- The total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- The oscillations are adequately damped.
- In the event of power oscillations, **Power Generating Modules** shall retain steady state stability when operating at any point on **the Power Generating Module Performance Chart**.

For AC Connected **Onshore** and **Offshore Power Park Modules** comprising switched reactive compensation equipment (such as mechanically switched capacitors and reactors), such switched reactive compensation equipment shall be controlled such that it is not switched in or out of service during the fault but may act to assist in post fault voltage recovery.

ECC.6.3.15.9 General Fault Ride Through requirements for faults in excess of 140ms in duration.

ECC.6.3.15.9.1 General Fault Ride Through requirements applicable to HVDC Equipment and OTSDUW DC Converters subject to faults and voltage dips in excess of 140ms.

ECC.6.3.15.9.1.1 The requirements applicable to **HVDC Equipment** including **OTSDUW DC Converters** subject to faults and voltage disturbances at the **Grid Entry Point** or **User System Entry Point** or **Interface Point** or **HVDC Interface Point**, including **Active Power** transfer capability shall be specified in the **Bilateral Agreement**.

ECC.6.3.15.9.2 Fault Ride Through requirements for Type C and Type D Synchronous Power Generating Modules and Type C and Type D Power Park Modules and OTSDUW Plant and Apparatus subject to faults and voltage disturbances on the Onshore Transmission System in excess of 140ms

ECC.6.3.15.9.2.1 The **Fault Ride Through** requirements for **Type C** and **Type D Synchronous Power Generating Modules** subject to faults and voltage disturbances on the **Onshore Transmission System** in excess of 140ms are defined in ECC.6.3.15.9.2.1(a) and the **Fault Ride Through Requirements** for **Type C** and **Type D Power Park Modules** and **OTSDUW Plant and Apparatus** subject to faults and voltage disturbances on the **Onshore Transmission System** greater than 140ms in duration are defined in ECC.6.3.15.9.2.1(b).

(a) Requirements applicable to **Synchronous Power Generating Modules** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

In addition to the requirements of ECC.6.3.15.1 – ECC.6.3.15.8 each **Synchronous Power Generating Module** shall:

(i) remain transiently stable and connected to the **System** without tripping of any **Synchronous Power Generating Module** for balanced **Supergrid Voltage** dips and associated durations on the **Onshore Transmission System** (which could be at the **Interface Point**) anywhere on or above the heavy black line shown in Figure ECC.6.3.15.9(a) Appendix 4 and Figures EA.4.3.2(a), (b) and (c) provide an explanation and illustrations of Figure ECC.6.3.15.9(a); and,

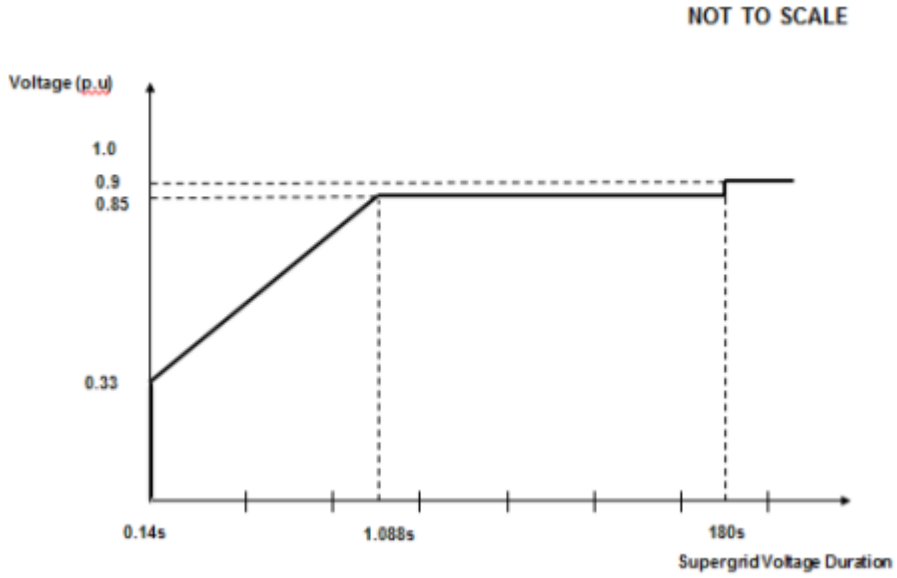

Figure ECC.6.3.15.9(a)

(ii) provide **Active Power** output at the **Grid Entry Point**, during **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure ECC.6.3.15.9(a), at least in proportion to the retained balanced voltage at the **Onshore Grid Entry Point** (for **Onshore Synchronous Power Generating Modules)** or **Interface Point** (for **Offshore Synchronous Power Generating Modules**) (or the retained balanced voltage at the **User System Entry Point** if **Embedded**) and shall generate maximum reactive current (where the voltage at the **Grid Entry Point** is outside the limits specified in ECC.6.1.4) without exceeding the transient rating limits of the **Synchronous Power Generating Module** and,

(iii) restore **Active Power** output following **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure ECC.6.3.15.9(a), within 1 second of restoration of the voltage to 1.0pu of the nominal voltage at the:

Onshore Grid Entry Point for directly connected **Onshore Synchronous Power Generating Modules** or,

Interface Point for **Offshore Synchronous Power Generating Modules** or,

User System Entry Point for **Embedded Onshore Synchronous Power Generating Modules**

or,
User System Entry Point for **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** which comprise **Synchronous Generating Units** and with an **Onshore User System Entry Point** (irrespective of whether they are located **Onshore** or **Offshore**)

to at least 90% of the level available immediately before the occurrence of the dip. Once the **Active Power** output has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped.

For the avoidance of doubt a balanced **Onshore Transmission System Supergrid Voltage** meets the requirements of ECC.6.1.5 (b) and ECC.6.1.6.

(iv) For up to 30 minutes following such a **Supergrid Voltage** dip on the **Onshore Transmission System** each **Synchronous Power Generating Module** is required to remain connected and stable provided **System** operating conditions have returned within those specified in ECC.6.1

(b) Requirements applicable to **Type C** and **Type D Power Park Modules** and **OTSDUW Plant and Apparatus** (excluding **OTSDUW DC Converters**) subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

In addition to the requirements of ECC.6.3.15.5, ECC.6.3.15.6 and ECC.6.3.15.8 (as applicable) each **OTSDUW Plant and Apparatus** or each **Power Park Module** and / or any constituent **Power Park Unit**, shall:

(i) remain transiently stable and connected to the **System** without tripping of any **OTSDUW Plant and Apparatus**, or **Power Park Module** and / or any constituent **Power Park Unit**, for balanced **Supergrid Voltage** dips and associated durations on the **Onshore Transmission System** (which could be at the **Interface Point**) anywhere on or above the heavy black line shown in Figure ECC.6.3.15.9(b). Appendix 4 and Figures EA.4.3.4 (a), (b) and (c) provide an explanation and illustrations of Figure ECC.6.3.15.9(b) ; and,

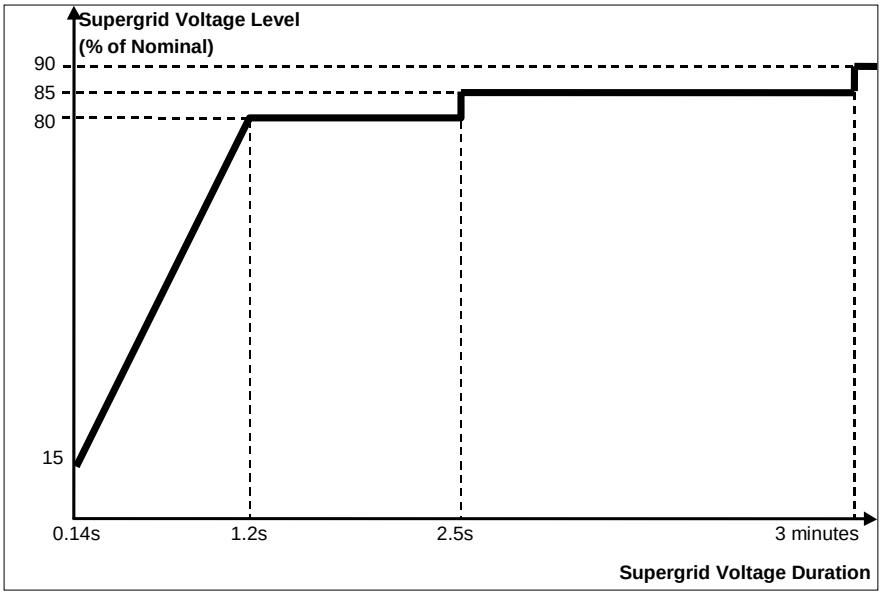

Figure ECC.6.3.15.9(b)

(ii) be required to satisfy the requirements of ECC.6.3.16. In the case of a **Non-Synchronous Generating Unit** or **OTSDUW Plant and Apparatus** or **Power Park Module** where there has been a reduction in the **Intermittent Power Source** or in the case of **OTSDUW Active Power** transfer capability in the time range in Figure ECC.6.3.15.9(b) an allowance shall be made for the fall in input power and the

corresponding reduction of real and reactive current.

(iii) restore **Active Power** output (or, in the case of **OTSDUW**, **Active Power** transfer capability), following **Supergrid Voltage** dips on the **Onshore Transmission System** as described in Figure ECC.6.3.15.9(b), within 1 second of restoration of the voltage to 0.9 pu of the nominal voltage at the:

Onshore Grid Entry Point for directly connected **Onshore Power Park Modules** or,

Interface Point for **OTSDUW Plant and Apparatus** and **Offshore Power Park Modules** or,

User System Entry Point for **Embedded Onshore Power Park Modules** or ,

User System Entry Point for **Embedded Medium Power Stations** which comprise **Power Park Modules** not subject to a **Bilateral Agreement** and with an **Onshore User System Entry Point** (irrespective of whether they are located **Onshore** or **Offshore**)

to at least 90% of the level available immediately before the occurrence of the dip except in the case of a **Non-Synchronous Generating Unit**, **OTSDUW Plant and Apparatus** or **Power Park Module** where there has been a reduction in the **Intermittent Power Source** in the time range in Figure ECC.6.3.15.9(b) that restricts the **Active Power** output or, in the case of **OTSDUW**, **Active Power** transfer capability below this level. Once the **Active Power** output or, in the case of **OTSDUW**, **Active Power** transfer capability has been restored to the required level, **Active Power** oscillations shall be acceptable provided that:

- the total **Active Energy** delivered during the period of the oscillations is at least that which would have been delivered if the **Active Power** was constant
- the oscillations are adequately damped.

For the avoidance of doubt a balanced **Onshore Transmission System Supergrid Voltage** meets the requirements of ECC.6.1.5 (b) and ECC.6.1.6.

(iv) For up to 30 minutes following such a **Supergrid Voltage** dip on the **Onshore Transmission System** each **Power Park Module** and / or any constituent **Power Park Unit** and **OTSDUW Plant and Apparatus** is required to remain connected and stable provided **System** operating conditions have returned within those specified in ECC.6.1.

ECC.6.3.15.10 Other **Fault Ride Through** Requirements

(i) In the case of a **Power Park Module** (excluding **Non-Synchronous Electricity Storage Modules**), the requirements in ECC.6.3.15.9 do not apply when the **Power Park Module** (excluding **Non-Synchronous Electricity Storage Modules**) is operating at less than 5% of its **Rated MW** or during very high primary energy source conditions when more than 50% of the **Power Park Units** in a **Power Park Module** have been shut down or disconnected under an emergency shutdown sequence to protect **User's Plant** and **Apparatus**.

(ii) In addition to meeting the conditions specified in ECC.6.1.5(b) and ECC.6.1.6, each **Non-Synchronous Generating Unit**, **OTSDUW Plant and Apparatus** or **Power Park Module** and any constituent **Power Park Unit** thereof will be required to withstand, without tripping, the negative phase sequence loading incurred by clearance of a close-up phase-to-phase fault, by **System Back-Up Protection** on the **Onshore Transmission System** operating at **Supergrid Voltage**.

(iii) **Generators** in respect of **Type B**, **Type C** and **Type D Power Park Modules** and **HVDC System Owners** are required to confirm to **The Company**, their repeated ability to operate through balanced and unbalanced faults and **System** disturbances each time the voltage at the **Grid Entry Point** or **User System Entry Point** falls outside the limits specified in ECC.6.1.4. Demonstration of this capability would be satisfied by **EU Generators** and **HVDC System Owners** supplying the protection settings of their plant, informing **The Company** of the maximum number of repeated operations that can be performed under such conditions and any limiting factors to repeated operation such as protection or thermal rating; and

(iv) Notwithstanding the requirements of ECC.6.3.15(v), **Power Generating Modules** shall be capable of remaining connected during single phase or three phase auto-reclosures to the **National Electricity Transmission System** and operating without power reduction as long as the voltage and **Frequency** remain within the limits defined in ECC.6.1.4 and ECC.6.1.2; and

(v) For the avoidance of doubt the requirements specified in ECC.6.3.15 do not apply to **Power Generating Modules** connected to either an unhealthy circuit and/or islanded from the **Transmission System** even for delayed auto reclosure times.

(vi) To avoid unwanted island operation, **Non-Synchronous Generating Units** in Scotland (and those directly connected to a **Scottish Offshore Transmission System**), **Power Park Modules** in Scotland (and those directly connected to a **Scottish Offshore Transmission System**), or **OTSDUW Plant and Apparatus** with an **Interface Point** in Scotland shall be tripped for the following conditions:

(1) **Frequency** above 52 Hz for more than 2 seconds

(2) **Frequency** below 47 Hz for more than 2 seconds

(3) Voltage as measured at the **Onshore Connection Point** or **Onshore User System Entry Point** or **Offshore Grid Entry Point** or **Interface Point** in the case of **OTSDUW Plant and Apparatus** is below 80% for more than 2.5 seconds

Voltage as measured at the **Onshore Connection Point** or **Onshore User System Entry Point** or **Offshore Grid Entry Point** or **Interface Point** in the case of **OTSDUW Plant and Apparatus** is above 120% (115% for 275kV) for more than 1 second. The times in sections (1) and (2) are maximum trip times. Shorter times may be used to protect the **Non-Synchronous Generating Units**, or **OTSDUW Plant and Apparatus**.

ECC.6.3.15.11 HVDC System Robustness

ECC.6.3.15.11.1 The **HVDC System** shall be capable of finding stable operation points with a minimum change in **Active Power** flow and voltage level, during and after any planned or unplanned change in the **HVDC System** or AC **System** to which it is connected. **The Company** shall specify the changes in the System conditions for which the **HVDC Systems** shall remain in stable operation.

ECC.6.3.15.11.2 The **HVDC System** owner shall ensure that the tripping or disconnection of an **HVDC Converter Station**, as part of any multi-terminal or embedded **HVDC System**, does not result in transients at the **Grid Entry Point** or **User System Entry Point** beyond the limit specified by **The Company** in co-ordination with the **Relevant Transmission Licensee**.

ECC.6.3.15.11.3 The **HVDC System** shall withstand transient faults on HVAC lines in the network adjacent or close to the **HVDC System**, and shall not cause any of the equipment in the **HVDC System** to disconnect from the network due to autoreclosure of lines in the **System**.

ECC.6.3.15.11.4 The **HVDC System Owner** shall provide information to **The Company** on the resilience of the **HVDC System** to AC **System** disturbances.

ECC.6.3.16 FAST FAULT CURRENT INJECTION

ECC.6.3.16.1 General Fast Fault Current injection, principles and concepts applicable to Type B, Type C and Type D Power Park Modules and HVDC Equipment

ECC.6.3.16.1.1 In addition to the requirements of ECC.6.1.4, ECC.6.3.2, ECC.6.3.8 and ECC.A.7, each **Type B**, **Type C** and **Type D Power Park Module** or each **Power Park Unit** within a **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall be required to satisfy the following requirements unless operating in a **Grid Forming Capability** mode in which case the requirements of ECC.6.3.19 shall apply instead. For the purposes of this requirement, current and voltage are assumed to be positive phase sequence values.

ECC.6.3.16.1.2 For any balanced fault which results in the positive phase sequence voltage falling below the voltage levels specified in ECC.6.1.4 at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**), each **Type B**, **Type C** and **Type D Power Park Module** or each **Power Park Unit** within a **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall, as a minimum (unless an alternative type registered solution has otherwise been agreed with **The Company**), be required to inject a reactive current above the heavy black line shown in Figure ECC.16.3.16(a)

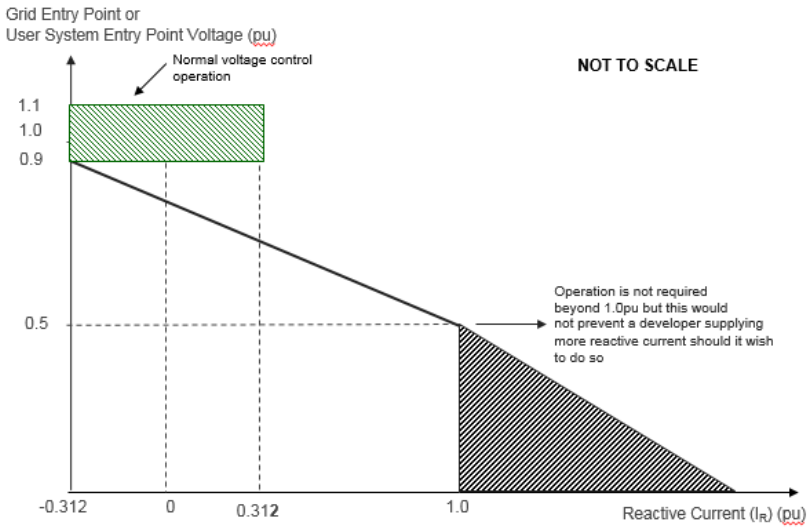

Figure ECC.6.3.16(a)

ECC.6.3.16.1.3 Figure ECC.6.3.16(a) defines the reactive current (I_R) to be supplied under a faulted condition which shall be dependent upon the pre-fault operating condition and the retained voltage at the **Grid Entry Point** or **User System Entry Point** voltage. For the avoidance of doubt, each **Power Park Module** (and any constituent element thereof) or **HVDC Equipment**, shall be required to inject a reactive current (I_R) which shall be not less than its pre-fault reactive current and which shall as a minimum increase with the fall in the retained voltage each time the voltage at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) falls below 0.9pu whilst ensuring the overall rating of the **Power Park Module** (or constituent element thereof) or **HVDC Equipment** shall not be exceeded.

ECC.6.3.16.1.4 In addition to the requirements of ECC.6.3.16.1.2 and ECC.6.3.16.1.3, each **Type B**, **Type C** and **Type D Power Park Module** or each **Power Park Unit** within a **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall be required to inject reactive current above the shaded area shown in Figure ECC.6.3.16(b) and Figure ECC.6.3.16(c) which illustrates how the reactive current shall be injected over time from fault inception in which the value of I_R is determined from Figure ECC.6.3.16(a). In figures ECC.6.3.16(b) and ECC.6.3.16(c) ΔI_R is the value of the reactive current (I_R) less the prefault current. In this context fault inception is taken to be when the voltage at the **Grid Entry Point** or **User System Entry Point** falls below 0.9pu.

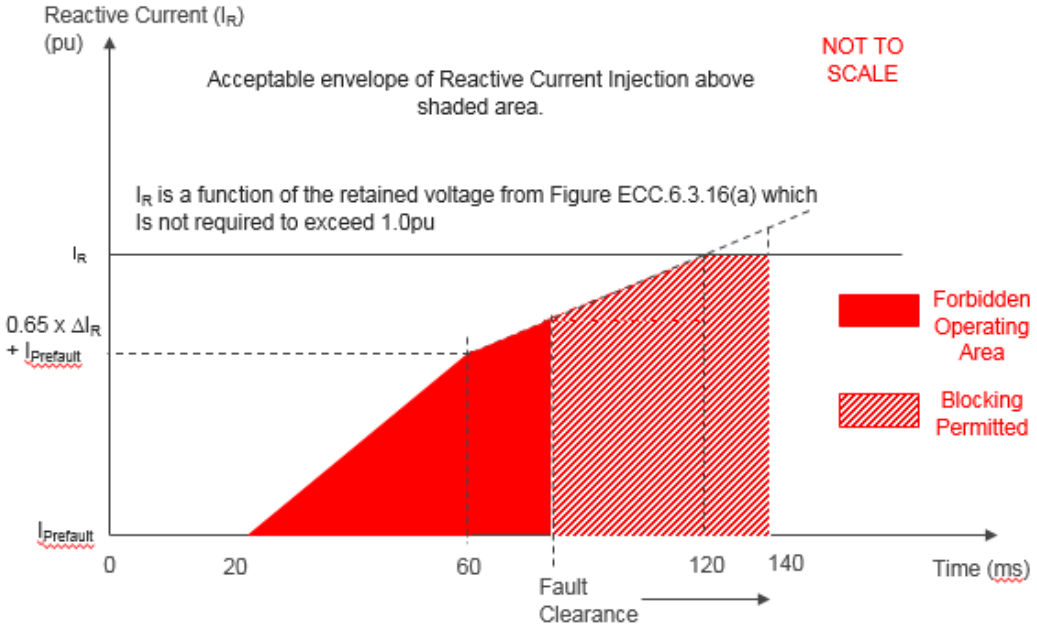

Figure ECC.16.3.16(b)

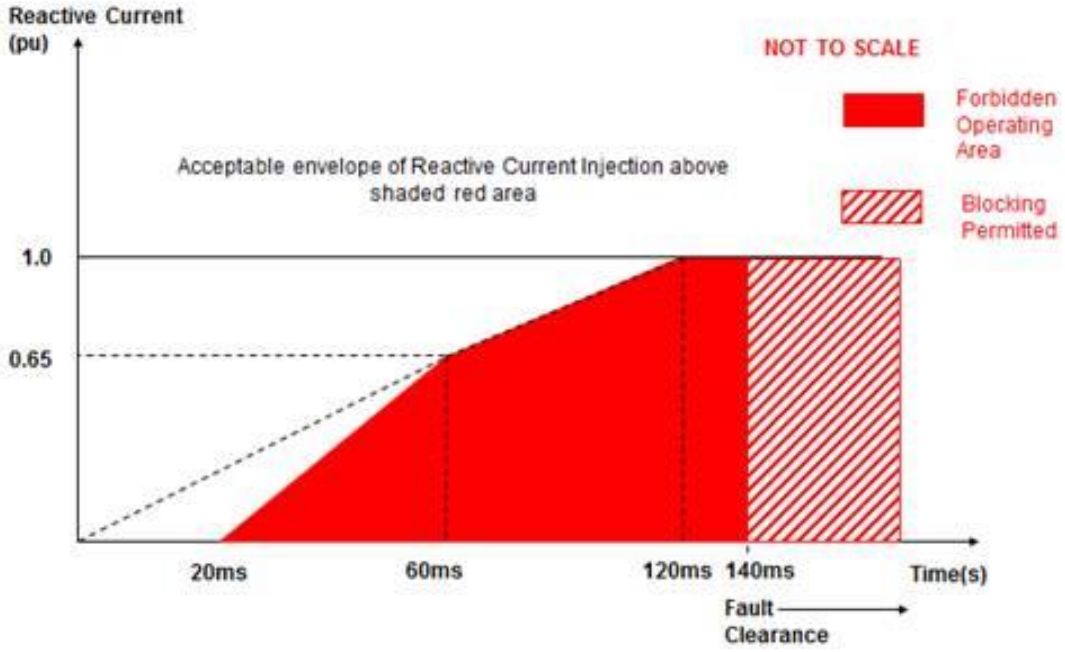

Figure ECC.16.3.16(c)

ECC.6.3.16.1.5 The injected reactive current (I_R)shall be above the shaded area shown in Figure ECC.6.3.16(b) and Figure ECC.6.3.16(c) with priority being given to reactive current injection with any residual capability being supplied as active current. Under any faulted condition, where the voltage falls outside the limits specified in ECC.6.1.4, there would be no requirement for each **Power Park Module** or constituent **Power Park Unit** or **HVDC Equipment** to exceed its transient or steady state rating of 1.0pu as defined in ECC.6.3.16.1.7.

ECC.6.3.16.1.6 For any planned or switching events (as outlined in ECC.6.1.7 of the Grid Code) or unplanned events which results in temporary power **Frequency** over voltages (TOV's), each **Type B**, **Type C** and **Type D Power Generating Module** or each **Power Park Unit** within a **Type B**, **Type C** or **Type D Power Park Module** or **HVDC Equipment** will be required to satisfy the transient overvoltage limits specified in the **Bilateral Agreement**.

ECC.6.3.16.1.7 For the purposes of this requirement, the maximum rated current is taken to be the maximum current each **Power Park Module** (or the sum of the constituent **Power Park Units** which are connected to the **System** at the **Grid Entry Point** or **User System Entry Point**) or **HVDC Converter** is capable of supplying. In the case of a **Power Park Module** this would be the maximum rated current at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) when the **Power Park Module** is operating at rated **Active Power** and rated **Reactive Power** (as required under ECC.6.3.2) whilst operating over the nominal voltage range as required under ECC.6.1.4 at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**). In the case of a **Power Park Unit** forming part of a **Type B**, **Type C** and **Type D Power Park Module**, the maximum rated current expected would be the maximum current supplied from each constituent **Power Park Unit** when the **Power Park Module** is operating at rated **Active Power** and rated **Reactive Power** over the nominal voltage operating range as defined in ECC.6.1.4 less the contribution from the reactive compensation equipment.

For example, in the case of a 100MW **Power Park Module** (consisting of 50 x 2MW Power Park Units and +10MVAr reactive compensation equipment) the **Rated Active Power** at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) would be taken as 100MW and the rated **Reactive Power** at the **Grid Entry Point** or (**User System Entry Point** if **Embedded**) would be taken as 32.8MVArs (ie **Rated MW** output operating at 0.95 **Power Factor** lead or 0.95 **Power Factor** lag as required under ECC.6.3.2.4). In this example, the maximum rating of each constituent **Power Park Unit** is obtained when the **Power Park Module** is operating at 100MW, and +32.8MVAr less 10MVAr equal to 22.8MVAr or –32.8MVAr (less the reactive compensation equipment component of 10MVAr (ie -22.8MVAr) when operating within the normal voltage operating range as defined under ECC.6.1.4 (allowing for any reactive compensation equipment or losses in the **Power Park Module** array network).

For the avoidance of doubt, the total current of 1.0pu would be assumed to be on the MVA rating of the **Power Park Module** or **HVDC Equipment** (less losses). Under all normal and abnormal conditions, the steady state or transient rating of the **Power Park Module** (or any constituent element including the **Power Park Units**) or **HVDC Equipment**, would not be required to exceed the locus shown in Figure 16.3.16(d).

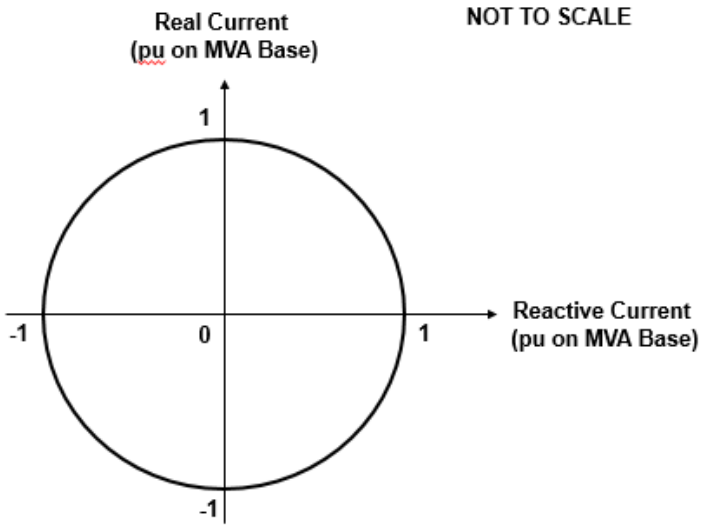

Figure ECC.16.3.16(d)

ECC.6.3.16.1.7 Each **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall be designed to ensure a smooth transition between voltage control mode and fault ride through mode in order to prevent the risk of instability which could arise in the transition between the steady state voltage operating range as defined under ECC.6.1.4 and abnormal conditions where the retained voltage falls below 90% of nominal voltage. Such a requirement is necessary to ensure adequate performance between the pre-fault operating condition of the **Power Park Module** or **HVDC Equipment** and its subsequent behaviour under faulted conditions. **EU Generators** and **HVDC System Owners** are required to both advise and agree with **The Company** the control strategy employed to mitigate the risk of such instability.

ECC.6.3.16.1.8 Each **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall be designed to reduce the risk of transient over voltage levels arising following clearance of the fault and in order to mitigate the risk of any form of instability which could result. **EU Generators** or **HVDC System Owners** shall be permitted to block or employ other means where the anticipated transient overvoltage would otherwise exceed the maximum permitted values specified in ECC.6.1.7. Figure ECC.16.3.16(b) and Figure ECC.16.3.16(c) shows the impact of variations in fault clearance time. For main protection operating times this would not exceed 140ms. The requirements for the maximum transient overvoltage withstand capability and associated time duration, shall be agreed between the **EU Code User** and **The Company** as part of the **Bilateral Agreement**. Where the **EU Code User** is able to demonstrate to **The Company** that blocking or other control strategies are required in order to prevent the risk of transient over voltage excursions as specified in ECC.6.3.16.1.5, **EU Generators** and **HVDC System Owners** are required to both advise and agree with **The Company** the control strategy, which must also include the approach taken to de-blocking

ECC.6.3.16.1.9 In addition to the requirements of ECC.6.3.15, **Generators** in respect of **Type B**, **Type C** and **Type D Power Park Modules** or each **Power Park Unit** within a **Type B**, **Type C** and **Type D Power Park Module** or **DC Connected Power Park Modules** and **HVDC System Owners** in respect of **HVDC Systems** are required to confirm to **The Company,** their repeated ability to supply **Fast Fault Current** to the **System** each time the voltage at the **Grid Entry Point** or **User System Entry Point** falls outside the limits specified in ECC.6.1.4. **EU Generators** and **HVDC Equipment Owners** should inform **The Company** of the maximum number of repeated operations that can be performed under such conditions and any limiting factors to repeated operation such as protection or thermal rating.

ECC.6.3.16.1.10 To permit additional flexibility for example from **Power Park Modules** made up of full converter machines, DFIG machines, induction generators or **HVDC Systems** or **Remote End HVDC Converters**, **The Company** will permit transient or marginal deviations below the shaded area shown in Figures ECC.16.3.16(b) or ECC.16.3.16(c) provided the injected reactive current supplied exceeds the area bound in Figure ECC.6.3.16(b) or ECC.6.3.16(c). Such agreement would be confirmed and agreed between **The Company** and **Generator**.

ECC.6.3.16.1.11 In the case of a **Power Park Module** or **DC Connected Power Park Module**, where it is not practical to demonstrate the compliance requirements of ECC.6.3.16.1.1 to ECC.6.3.16.1.6 at the **Grid Entry Point** or **User System Entry Point**, **The Company** will accept compliance of the above requirements at the **Power Park Unit** terminals.

ECC.6.3.16.1.12 For the avoidance of doubt, **Generators** in respect of **Type C** and **Type D Power Park Modules** and **OTSDUW Plant and Apparatus** are also required to satisfy the requirements of ECC.6.3.15.9.2.1(b) which specifies the requirements for fault ride through for voltage dips in excess of 140ms.

ECC.6.3.16.1.13 In the case of an unbalanced fault, each **Type B**, **Type C** and **Type D Power Park Module** or each **Power Park Unit** within a **Type B**, **Type C** and **Type D Power Park Module** or **HVDC Equipment** shall be required to inject reactive current (I_R) which shall as a minimum increase with the fall in the retained unbalanced voltage up to its maximum reactive current without exceeding the transient rating of the **Power Park Module** (or constituent element thereof) or **HVDC Equipment**.

ECC.6.3.16.1.14 In the case of an unbalanced fault, the **Generator** or **HVDC System Owner** shall confirm to **The Company** their ability to prevent transient overvoltages arising on the remaining healthy phases and the control strategy employed.

ECC.6.3.17 SUBSYNCHRONOUS TORSIONAL INTERACTION DAMPING CAPABILITY, POWER OSCILLATION DAMPING CAPABILITY AND CONTROL FACILITIES FOR HVDC SYSTEMS

ECC.6.3.17.1 Subsynchronous Torsional Interaction Damping Capability

ECC.6.3.17.1.1 **HVDC System Owners**, or **Generators** in respect of **OTSDUW DC Converters** or **Network Operators** in the case of an **Embedded HVDC Systems** not subject to a **Bilateral Agreement** must ensure that any of their **Onshore HVDC Systems** or **OTSDUW DC Converters** will not cause a sub-synchronous resonance problem on the **Total System**. Each **HVDC System** or **OTSDUW DC Converter** is required to be provided with sub-synchronous resonance damping control facilities. **HVDC System Owners** and **EU Generators** in respect of **OTSDUW DC Converters** should also be aware of the requirements in ECC.6.1.9 and ECC.6.1.10.

ECC.6.3.17.1.2 Where specified in the **Bilateral Agreement**, each **OTSDUW DC Converter** is required to be provided with power oscillation damping or any other identified additional control facilities.

ECC.6.3.17.1.3 Each **HVDC System** shall be capable of contributing to the damping of power oscillations on the **National Electricity Transmission System**. The control system of the **HVDC System** shall not reduce the damping of power oscillations. **The Company** in coordination with the **Relevant Transmission Licensee** (as applicable) shall specify a frequency range of oscillations that the control scheme shall positively damp and the **System** conditions when this occurs, at least accounting for any dynamic stability assessment studies undertaken by the **Relevant Transmission Licensee** or **The Company** (as applicable) to identify the stability limits and potential stability problems on the **National Electricity Transmission System**. The selection of the control parameter settings shall be agreed between **The Company** in coordination with the **Relevant Transmission Licensee** and the **HVDC System Owner**.

ECC.6.3.17.1.4 **The Company** shall specify the necessary extent of SSTI studies and provide input parameters, to the extent available, related to the equipment and relevant system conditions on the **National Electricity Transmission System**. The SSTI studies shall be provided by the **HVDC System Owner**. The studies shall identify the conditions, if any, where SSTI exists and propose any necessary mitigation procedure. The responsibility for undertaking the studies in accordance with these requirements lies with the **Relevant Transmission Licensee** in co-ordination with **The Company**. All parties shall be informed of the results of the studies.

ECC.6.3.17.1.5 All parties identified by **The Company** as relevant to each **Grid Entry Point** or **User System Entry Point** (if **Embedded**) , including the **Relevant Transmission Licensee**, shall contribute to the studies and shall provide all relevant data and models as reasonably required to meet the purposes of the studies. **The Company** shall collect this data and, where applicable, pass it on to the party responsible for the studies in accordance with **Assimilated Law** (Article 10 of Commission Regulation (EU) 2016/1447). Specific information relating to the interface schedules, input/output requirements, timing and submission of any studies or data would be agreed between the **User** and **The Company** and specified (where applicable) in the **Bilateral Agreement**.

ECC.6.3.17.1.6 **The Company** in coordination with the **Relevant Transmission Licensee** shall assess the result of the SSTI studies. If necessary for the assessment, **The Company** in coordination with the **R**elevant **Transmission Licensee** may request that the **HVDC System Owner** perform further SSTI studies in line with this same scope and extent.

ECC.6.3.17.1.7 **The Company** in coordination with the **Relevant Transmission Licensee** may review or replicate the study. The **HVDC System Owner** shall provide **The Company** with all relevant data and models that allow such studies to be performed. Submission of this data to **Relevant Transmission Licensee's** shall be in accordance with the requirements of **Assimilated Law** (Article 10 of Commission Regulation (EU) 2016/1447).

ECC.6.3.17.1.8 Any necessary mitigating actions identified by the studies carried out in accordance with paragraphs ECC.6.3.17.1.4 or ECC.6.3.17.1.6, and reviewed by **The Company** in coordination with the **Relevant Transmission Licensees**, shall be undertaken by the **HVDC System Owner** as part of the connection of the new **HVDC Converter Station**.

ECC.6.3.17.1.9 As part of the studies and data flow in respect of ECC.6.3.17.1 – ECC.6.3.17.8 the following data exchange would take place with the time scales being pursuant to the terms of the Bilateral Agreement.

Information supplied by **The Company** and **Relevant Transmission Licensees**

Studies provided by the **User**

User review

The Company review

Changes to studies and agreed updates between **The Company**, the **Relevant Transmission Licensee** and **User**

Final review

ECC.6.3.17.2 Interaction between **HVDC Systems** or other **User's Plant** and **Apparatus**

ECC.6.3.17.2.1 Notwithstanding the requirements of ECC6.1.9 and ECC.6.1.10, when several **HVDC Converter Stations** or other **User's Plant** and **Apparatus** are within close electrical proximity, **The Company** may specify that a study is required, and the scope and extent of that study, to demonstrate that no adverse interaction will occur. If adverse interaction is identified, the studies shall identify possible mitigating actions to be implemented to ensure compliance with the requirements of ECC.6.1.9

ECC.6.3.17.2.2 The studies shall be carried out by the connecting **HVDC System Owner** with the participation of all other **User's** identified by **The Company** in coordination with **Relevant Transmission Licensees** as relevant to each **Connection Point**.

ECC.6.3.17.2.3 All **User's** identified by **The Company** as relevant to the connection, and where applicable **Relevant Transmission Licensee's**, shall contribute to the studies and shall provide all relevant data and models as reasonably required to meet the purposes of the studies. **The Company** shall collect this input and, where applicable, pass it on to the party responsible for the studies in accordance with **Assimilated Law** (Article 10 of Commission Regulation (EU) 2016/1447). Specific information relating to the interface schedules, input/output requirements, timing and submission of any studies or data would be agreed between the **User** and **The Company** and specified (where applicable) in the **Bilateral Agreement.**

ECC.6.3.17.2.4 **The Company** in coordination with **Relevant Transmission Licensees** shall assess the result of the studies based on their scope and extent as specified in accordance with ECC.6.3.17.2.1. If necessary for the assessment, **The Company** in coordination with the **Relevant Transmission Licensee** may request the **HVDC System Owner** to perform further studies in line with the scope and extent specified in accordance with ECC.6.3.17.2.1.

ECC.6.3.17.2.5 **The Company** in coordination with the **Relevant Transmission Licensee** may review or replicate some or all of the studies. The **HVDC System Owner** shall provide **The Company** all relevant data and models that allow such studies to be performed.

ECC.6.3.17.2.6 The **EU Code User** and **The Company,** in coordination with the **Relevant Transmission Licensee,** shall agree any mitigating actions identified by the studies carried out following the site specific requirements and works, including any transmission reinforcement works and / or **User** works required to ensure that all sub-synchronous oscillations are sufficiently damped.

ECC.6.1.17.3 Fast Recovery from DC faults

ECC.6.1.17.3.1 **HVDC Systems**, including DC overhead lines, shall be capable of fast recovery from transient faults within the **HVDC System**. Details of this capability shall be subject to the **Bilateral Agreement** and the protection requirements specified in ECC.6.2.2 .

ECC.6.1.17.4 Maximum loss of **Active Power**

ECC.6.1.14.4.1 An **HVDC System** shall be configured in such a way that its loss of **Active Power** injection in the **GB Synchronous Area** shall be in accordance with the requirements of the **SQSS**.

ECC.6.3.18 SYSTEM TO GENERATOR OPERATIONAL INTERTRIPPING SCHEMES

ECC.6.3.18.1 **The Company** may require that a **System to Generator Operational Intertripping Scheme** be installed as part of a condition of the connection of the **EU Generator**. Scheme specific details shall be included in the relevant **Bilateral Agreement** and shall, include the following information:

(1) the relevant category(ies) of the scheme (referred to as **Category 1 Intertripping Scheme**, **Category 2 Intertripping Scheme**, **Category 3 Intertripping Scheme** and **Category 4 Intertripping Scheme**);

(2) the **Power Generating Module** to be either permanently armed or that can be instructed to be armed in accordance with BC2.8;

(3) the time within which the **Power Generating Module** circuit breaker(s) are to be automatically tripped;

(4) the location to which the trip signal will be provided by **The Company**. Such location will be provided by **The Company** prior to the commissioning of the **Power Generating Module**.

Where applicable, the **Bilateral Agreement** shall include the conditions on the **National Electricity Transmission System** during which **The Company** may instruct the **System to Generator Operational Intertripping Scheme** to be armed and the conditions that would initiate a trip signal.

ECC.6.3.18.2 The time within which the **Power Generating Module(s)** circuit breaker(s) need to be automatically tripped is determined by the specific conditions local to the **EU Generator**. This 'time to trip' (defined as the time from provision of the trip signal by **The Company** to the specified location, to circuit breaker main contact opening) can typically range from 100ms to 10sec. A longer time to trip may allow the initiation of an automatic reduction in the **Power Generating Module(s)** output prior to the automatic tripping of the **Power Generating Module(s)** circuit breaker. Where applicable **The Company** may provide separate trip signals to allow for either a longer or shorter 'time to trip' to be initiated.

ECC.6.3.19 **GRID FORMING CAPABILITY**

ECC.6.3.19.1 In order for the **National Electricity Transmission System** to satisfy the stability requirements defined in the **National Electricity Transmission System Security and Quality of Supply Standards**, it is an essential requirement that an appropriate volume of **Grid Forming Plant** is available and capable of providing a **Grid Forming Capability**.

ECC.6.3.19.2 **Grid Forming Capability** is not a mandatory requirement but one which will be delivered through market arrangements, the details of which shall be published on **The Company's Website**. **Grid Forming Capability** can be implemented by any technology including **Electronic Power Converters** with a **GBGF- I** ability, rotating **Synchronous Generating Units** or a combination of the two.

ECC.6.3.19.3 As noted in ECC.6.3.19.2, **Grid Forming Capability** is not a mandatory requirement, however where a **User** (be they a **GB Code User** or **EU Code User**) or **Non-CUSC Party** wishes to offer a **Grid Forming Capability**, then they will be required to ensure their **Grid Forming Plant** meets the following requirements.

(i) The **Grid Forming Plant** must fully comply with the applicable requirements of the Grid Code including but not limited to the **Planning Code** (**PC**), **Connection Conditions** (**CC**'s) or **European Connection Conditions** (**ECC**'s) (as applicable), **Compliance Processes** (**CP**'s) or **European Compliance Processes** (**ECP**'s) (as applicable), **Operating Codes** (**OC**'s), **Balancing Codes** (**BC**'s) and **Data Registration Code** (**DRC**).

(ii) Each **GBGF-I** shall be capable of behaving at the **Grid Entry Point** or **User System Entry Point** or terminals of individual unit(s) as **Internal Voltage Source** behind an impedance.

(iii) In addition to meeting the requirements of CC.6.3.15 or ECC.6.3.15, each **Grid Forming Plant** is required to remain in synchronism with the **Total System** and maintain a **Load Angle** whose value can vary between 0 and 90 degrees (π/2 radians).

(iv) When subject to a fault or disturbance, or **System Frequency** change, each **Grid Forming Plant** shall be capable of supplying **Active ROCOF Response Power**, **Active Phase Jump Power**, **Active Damping Power**, **Active Control Based Power**, **Control Based Reactive Power**, **Voltage Jump Reactive Power** and **GBGF Fast Fault Current Injection**.

(v) Each **GBGF-I** shall be capable of:-

(a) Providing a symmetrical ability for importing and exporting **Active ROCOF Response Power**, **Active Phase Jump Power**, **Active Damping Power** and **Active Control Based Power** under both rising and falling **System Frequency** conditions. Such requirements will apply over the full **System Frequency** range as detailed in CC.6.1.2 and CC.6.1.3 or ECC.6.1.2 (as applicable). In satisfying these requirements, **User's** and **Non-CUSC Parties** should be aware of (but not limited to) the exclusions in CC.6.3.3, CC.6.3.7 and BC3.7.2.1 (as applicable for **GB Code User's**) or ECC.6.1.2, ECC.6.3.3, ECC.6.3.7 and BC3.7.2.1(b)(i) (as applicable for **EU Code User's** and **Non-CUSC Parties**) during **System Frequencies** between 47Hz – 52Hz, excluding CC.6.1.3 or ECC.6.1,2.1,2 for a **Grid Forming Plant** with time limited output ratings. For the avoidance of doubt, an asymmetrical response is permissible as agreed with **The Company** when required to protect **User's** and **Non-CUSC Parties Plant** and **Apparatus** or asymmetry in energy availability.

(b) Operating as a voltage source behind an impedance.

(c) being designed so as not to cause any undue interactions which could cause damage to the **Total System** or other **User's Plant** and **Apparatus**.

(d) include an **Active Control Based Power** part of the control system that can respond to changes in the **Grid Forming Plant** or external signals from the **Total System** available at the **Grid Entry Point** or **User System Entry Point** but with a bandwidth below 5 Hz to avoid AC **System** resonance problems.

(e) meeting the requirements of ECC.6.3.13 irrespective of being owned or operated by a **GB Code User**, **EU Code User** or **Non-CUSC Party**.

(f) **GBGF-I** with an importing capability mode of operation such as **DC Converters**, **HVDC Systems** and **Electricity Storage Modules** are required to have a predefined **Frequency** response operating characteristic over the full import and export range which is contained within the envelope defined by the red and blue lines shown in Figure ECC.6.3.19.3. This characteristic shall be submitted to **The Company**. For the avoidance of doubt, **Grid Forming Plants** which are only capable of exporting **Active Power** to the **Total System** are only required to operate over the exporting power region

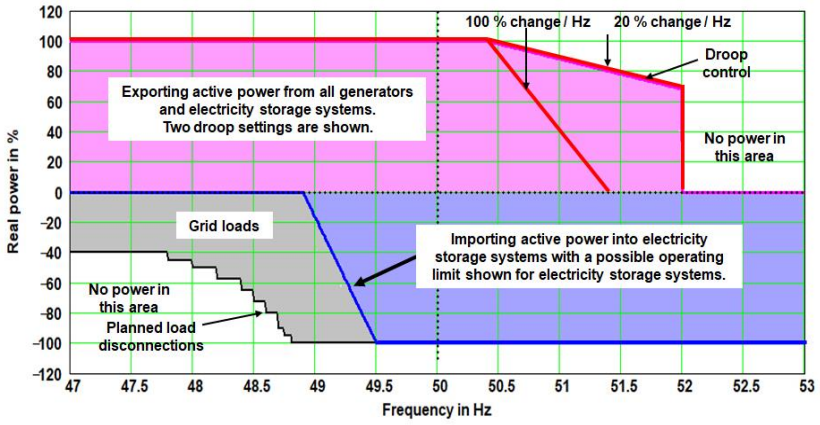

Figure ECC.6.3.19.3

(vi) Each **User** or **Non-CUSC Party** shall design their **GBGF-I** system with an equivalent **Damping Factor** of between 0.2 and 5.0. It is down to the **User** or **Non-CUSC Party** to determine the **Damping Factor**, whose value shall be agreed with **The Company**. It is typical for the **Damping Factor** to be less than 1.0, though this will be dependent upon the parameters of the **Grid Forming Plant** and the equivalent **System** impedance at the **Grid Entry Point** or **User System Entry Point**.

The output of the **Grid Forming Plant** shall be designed such that following a disturbance on the **System**, the **Active Power** output and **Reactive Power** output shall be adequately damped. The damping shall be judged to be adequate if the corresponding **Active Power** response to a disturbance decays with a response that is in line with the response of second order system that has the same equivalent **Damping Factor**.

(vii) Each **GBGF-I** shall be designed so as not to interact and affect the operation, performance, safety or capability of other **User's Plant** and **Apparatus** connected to the **Total System**. To achieve this requirement, each **User** and **Non-CUSC Party** shall be required to submit the data required in PC.A.5.8

ECC.6.3.19.4 In addition to the requirements of ECC.6.3.19.1 – ECC.6.3.19.3 each **Grid Forming Plant** shall also be capable of: -

(i) satisfying the requirements of ECC.6.3.19.5.

(ii) operating at a minimum short circuit level of zero MVA at the **Grid Entry Point** or **User System Entry Point**.

(iii) providing any additional quality of supply requirements, including but not limited to reductions in the permitted frequency of Temporary Power **System** Over-voltage events (TOV's) and **System Frequency** bandwidth limitations, as agreed with **The Company**. Such requirements will be pursuant to the terms of the **Bilateral Agreement**. For the avoidance of doubt, this requirement is in addition the minimum quality of supply requirements detailed in CC.6.1.5, CC.6.1.6 and CC.6.1.7 (as applicable) or ECC.6.1.5, ECC.6.1.6 and ECC.6.1.7 (as applicable),

ECC.6.3.19.5 **GBGF Fast Fault Current Injection**

ECC.6.3.19.5.1 For any balanced fault which results in the positive phase sequence voltage falling below the voltage levels specified in CC.6.1.4 or ECC.6.1.4 (as applicable) at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**), a **Grid Forming Plant** shall, as a minimum be required to inject a reactive current of at least their **Peak Current Rating** when the voltage at the **Grid Entry Point** or **User System Entry Point** drops to zero. For intermediate retained voltages at the **Grid Entry Point** or **User System Entry Point**, the injected reactive current shall be on or above a line drawn from the bottom left hand corner of the normal voltage control operating zone (shown in the rectangular green shaded area of Figure ECC.6.3.19.5(a)) and the specified **Peak Current Rating** at a voltage of zero at the **Grid Entry Point** or **User System Entry Point** as shown in Figure ECC.16.3.19.5(a). Typical examples of limit lines are shown in Figure ECC.16.3.19.5(a) for a **Peak Current Rating** of 1.0pu where the injected reactive current must be on or above the black line and a **Peak Current Rating** of 1.5pu where injected reactive current must be on or above the red line.

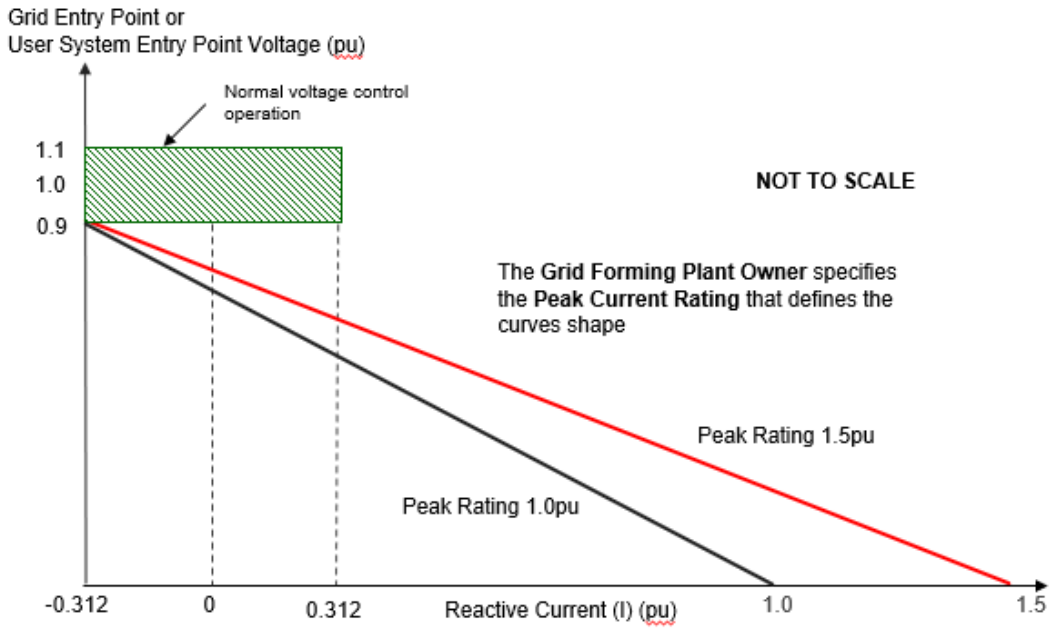

Figure ECC.6.3.19.5(a)

ECC.6.3.19.5.2 Figure ECC.6.3.19.5(a) defines the reactive current to be supplied under a faulted condition which shall be dependent upon the pre-fault operating condition and the retained voltage at the **Grid Entry Point** or **User System Entry Point** voltage. For the avoidance of doubt, each **Grid Forming Plant** (and any constituent element thereof), shall be required to inject a reactive current which shall be not less than its pre-fault reactive current and which shall as a minimum, increase each time the voltage at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) falls below 0.9pu whilst ensuring the overall rating of the **Grid Forming Plant** (or constituent element thereof) shall not be exceeded.

ECC.6.3.19.5.3 In addition to the requirements of ECC.6.3.19.5.1 and ECC.6.3.19.5.2, each **Grid Forming Plant** shall be required to inject reactive current above the shaded area shown in Figure ECC.6.3.19.5(b) when the retained voltage at the **Grid Entry Point** or **User System Entry Point** falls to 0pu. Where the retained voltage at the **Grid Entry Point** or **User System Entry Point** is below 0.9pu but above 0pu (for example when significant active current is drawn by loads and/or resistive components arising from both local and remote faults or disturbances from other **Plant** and **Apparatus** connected to the **Total System**) the injected reactive current component shall be in accordance with Figure ECC.6.3.19.5(a).

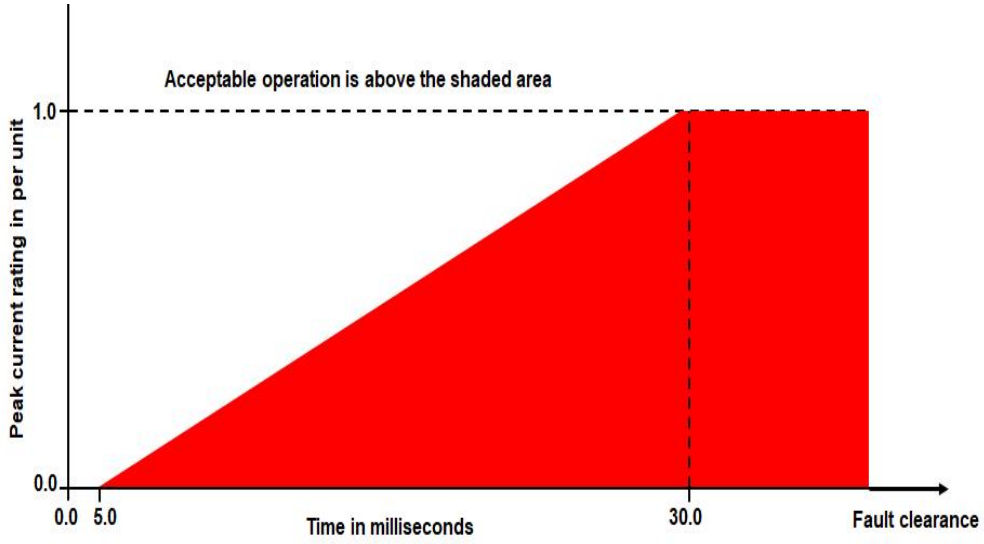

Figure ECC.6.3.19.5(b)

ECC.6.3.19.5.4 The injected current shall be above the shaded area shown in Figure ECC.6.3.19.5(b) for the duration of the fault clearance time which for faults on the **Transmission System** cleared in **Main Protection** operating times shall be up to 140ms. Under any faulted condition, where the voltage falls outside the limits specified in CC.6.1.4 or ECC.6.1.4 (as applicable), there will be no requirement for each **Grid Forming Plant** or constituent part to exceed its transient or steady state rating as defined in Table PC.A.5.8.2.

ECC.6.3.19.5.5 For any planned or switching events (as outlined in CC.6.1.7 or ECC.6.1.7 of the Grid Code) or unplanned events which results in Temporary Power **System** Over Voltages (TOV's), each **Grid Forming Plant** will be required to satisfy the transient overvoltage limits specified in the **Bilateral Agreement**.

ECC.6.3.19.5.6 For the purposes of this requirement, the maximum rated current will be the **Peak Current Rating** declared by the **Grid Forming Plant Owner** in accordance with Table PC.A.5.8.2.

ECC.6.3.19.5.7 Each **Grid Forming Plant** shall be designed to ensure a smooth transition between voltage control mode and **Fault Ride Through** mode in order to prevent the risk of instability which could arise in the transition between the steady state voltage operating range as defined under CC.6.1.4 or ECC.6.1.4 (as applicable) and abnormal conditions where the retained voltage falls below 90% of nominal voltage. Such a requirement is necessary to ensure adequate performance between the pre-fault operating condition of the **Grid Forming Plant** and its subsequent behaviour under faulted conditions. **Grid Forming Plant Owners** are required to both advise and agree with **The Company** the control strategy employed to mitigate the risk of such instability.

ECC.6.3.19.5.8. Each **Grid Forming Plant** shall be designed to reduce the risk of transient over voltage levels arising following clearance of the fault and in order to mitigate the risk of any form of instability which could result. The requirements for the maximum transient overvoltage withstand capability and associated time duration, shall be agreed between the **User** or **Non-CUSC Party** and **The Company** as part of the **Bilateral Agreement**.

ECC.6.3.19.5.9 In addition to the requirements of CC.6.3.15 or ECC.6.3.15, each **Grid Forming Plant Owner** is required to confirm to **The Company**, their repeated ability to supply **GBGF Fast Fault Current Injection** to the **System** each time the voltage at the **Grid Entry Point** or **User System Entry Point** falls outside the limits specified in CC.6.1.4 or ECC.6.1.4 (as applicable). **Grid Forming Plant Owners** should inform **The Company** of the maximum number of repeated operations that can be performed under such conditions and any limiting factors to repeated operation such as protection or thermal rating.

ECC.6.3.19.5.10 In the case of a **Power Park Module** or **DC Connected Power Park Module**, where it is not practical to demonstrate the compliance requirements of ECC.6.3.19.5.1 to ECC.6.3.19.5.5 at the **Grid Entry Point** or **User System Entry Point**, **The Company** will accept compliance of the above requirements at the **Power Park Unit** terminals.

ECC.6.3.19.5.11 In the case of an unbalanced fault, each **Grid Forming Plant**, shall be required to inject current which shall as a minimum increase with the fall in the unbalanced voltage without exceeding the transient **Peak Current Rating** of the **Grid Forming Plant** (or constituent element thereof).

ECC.6.3.19.5.12 In the case of an unbalanced fault, the **User** or **Non-CUSC Party** shall confirm to **The Company** their ability to prevent transient overvoltages arising on the remaining healthy phases and the control strategy employed.

ECC.6.4 General Network Operator And Non-Embedded Customer Requirements

ECC.6.4.1 This part of the **Grid Code** describes the technical and design criteria and performance requirements for **Network Operators** and **Non-Embedded Customers**.

Neutral Earthing

ECC.6.4.2 At nominal **System** voltages of 132kV and above the higher voltage windings of three phase transformers and transformer banks connected to the **National Electricity Transmission System** must be star connected with the star point suitable for connection to earth. The earthing and lower voltage winding arrangement shall be such as to ensure that the **Earth Fault Factor** requirement of paragraph ECC.6.2.1.1 (b) will be met on the **National Electricity Transmission System** at nominal **System** voltages of 132kV and above.

Frequency Sensitive Relays

ECC.6.4.3 As explained under **OC6**, each **Network Operator** and **Non Embedded Customer**, will make arrangements that will facilitate automatic low **Frequency Disconnection** of **Demand** (based on **Annual ACS Conditions**). ECC.A.5.5. of Appendix E5 includes specifications of the local percentage **Demand** that shall be disconnected at specific frequencies. The manner in which **Demand** subject to low **Frequency** disconnection will be split into discrete MW blocks is specified in OC6.6. Technical requirements relating to **Low Frequency Relays** are also listed in Appendix E5.

Operational Metering

ECC.6.4.4 Where **The Company** can reasonably demonstrate that an **Embedded Medium Power Station** or **Embedded HVDC System** has a significant effect on the **National Electricity Transmission System**, it may require the **Network Operator** within whose **System** the **Embedded Medium Power Station or Embedded HVDC System** is situated to ensure that the operational metering equipment described in ECC.6.5.6 is installed such that **The Company** can receive the data referred to in ECC.6.5.6. In the case of an **Embedded Medium Power Station** subject to, or proposed to be subject to a **Bilateral Agreement**, **The Company** shall notify such **Network Operator** of the details of such installation in writing within 3 months of being notified of the application to connect under **CUSC** and in the case of an **Embedded Medium Power Station** not subject to, or not proposed to be subject to a **Bilateral Agreement** in writing as a **Site Specific Requirement** in accordance with the timescales in CUSC 6.5.5. In either case the **Network Operator** shall ensure that the data referred to in ECC.6.5.6 is provided to **The Company**.

ECC.6.4.5 Reactive Power Requirements at each EU Grid Supply Point

ECC.6.4.5.1 At each **EU Grid Supply Point**, **Non-Embedded Customers** and **Network Operators** who are **EU Code Users** shall ensure their **Systems** are capable of steady state operation within the **Reactive Power** limits as specified in ECC.6.4.5.1(a) and ECC.6.4.5.1(b). Where **The Company** requires a **Reactive Power** range which is broader than the limits defined in ECC.6.4.5.1(a) and ECC.6.4.5.1(b), this will be agreed as a reasonable requirement through joint assessment between the relevant **EU Code User** and **The Company** and justified in accordance with the requirements of ECC.6.4.5.1(c), (d), (e) and (f). For **Non-Embedded Customers** who are **EU Code Users**, the **Reactive Power** range at each **EU Grid Supply Point**, under both importing and exporting conditions, shall not exceed 48% of the larger of the **Maximum Import Capability** or **Maximum Export Capability** (0.9 **Power Factor** import or export of **Active Power**), except in situations where either technical or financial system benefits are demonstrated for **Non-Embedded Customers** and accepted by **The Company** in coordination with the **Relevant Transmission Licensee**.

(a) For **Network Operators** who are **EU Code Users** at each **EU Grid Supply Point**, the **Reactive Power** range shall not exceed:

(i) 48 percent (i.e. 0.9 **Power Factor**) of the larger of the **Maximum Import Capability** or **Maximum Export Capability** during **Reactive Power** import (consumption); and

(ii) 48 percent (i.e. 0.9 **Power Factor**) of the larger of the **Maximum Import Capability** or **Maximum Export Capability** during **Reactive Power** export (production);

Except in situations where either technical or financial system benefits are proved by **The Company** in coordination with the **Relevant Transmission Licensee** and the relevant **Network Operator** through joint analysis.

(b) **The Company** in co-ordination with the **Relevant Transmission Licensee** shall agree with the **Network Operator** on the scope of the analysis, which shall determine the optimal solution for **Reactive Power** exchange between their **Systems** at each **EU Grid Supply Point**, taking adequately into consideration the specific **System** characteristics, variable structure of power exchange, bidirectional flows and the **Reactive Power** capabilities of the **Network Operator's System**. Any proposed solutions shall take the above issues into account and shall be agreed as a reasonable requirement through joint assessment between the relevant **Network Operator** or **Non-Embedded Customer** and **The Company** in coordination with the **Relevant Transmission Licensee**. In the event of a shared site between a **GB Code User** and **EU Code User**, the requirements would generally be allocated to each **User** on the basis of their **Demand** in the case of a **Network Operator** who is a **GB Code User** and applied on the basis of the **Maximum Import Capability** or **Maximum Export Capability** as specified in ECC.6.4.5.1 in the case of a **Network Operator** who is an **EU Code User**.

(c) **The Company** in coordination with the **Relevant Transmission Licensee** may specify the **Reactive Power** capability range at the **EU Grid Supply Point** in another form other than **Power Factor**.

(d) Notwithstanding the ability of **Network Operators** or **Non Embedded Customers** to apply for a derogation from ECC.6.4.5.1 (e), where an **EU Grid Supply Point** is shared between a **Power Generating Module** and a **Non-Embedded Customers System**, the **Reactive Power** range would be apportioned to each **EU Code User** at their **Connection Point**.

ECC.6.4.5.2 Where agreed with the **Network Operator** who is an **EU Code User** and justified though appropriate **System** studies, **The Company** may reasonably require the **Network Operator** not to export **Reactive Power** at the **EU Grid Supply Point** (at nominal voltage) at an **Active Power** flow of less than 25 % of the **Maximum Import Capability**. Where applicable, the **Authority** may require **The Company** in coordination with the **Relevant Transmission Licensee** to justify its request through a joint analysis with the relevant **Network Operator** and demonstrate that any such requirement is reasonable. If this requirement is not justified based on the joint analysis, **The Company** in coordination with the **Relevant Transmission Licensee** and the **Network Operator** shall agree on necessary requirements according to the outcomes of a joint analysis.

ECC.6.4.5.3 Notwithstanding the requirements of ECC.6.4.5.1(b) and subject to agreement between **The Company** and the relevant **Network Operator** there may be a requirement to actively control the exchange of **Reactive** P**ower** at the **EU Grid Supply Point** for the benefit of the **Total System**. **The Company** and the relevant **Network Operator** shall agree on a method to carry out this control, to ensure the justified level of security of supply for both parties. Any such solution including joint study work and timelines would be agreed between **The Company** and the relevant **Network Operator** as reasonable, efficient and proportionate.

ECC.6.4.5.4 In accordance with ECC.6.4.5.3, the relevant **Network Operator** may require **The Company** to consider its **Network Operator's System** for **Reactive Power** management. Any such requirement would need to be agreed between **The Company** and the relevant **Network Operator** and justified by **The Company**.

ECC.6.4.6 System Restoration

ECC.6.4.6.1 **Distribution Restoration Zone Plans** are dependent upon **Restoration Contractors** who, have an **Anchor Restoration Contract** which requires the capability to **Start-Up** from **Shutdown** within 8 hours and to energise a part of a **Network Operator's System** (and in some cases could extend to energisation of parts of the **Transmission System**) upon instruction from a relevant **Network Operator**, without an external electrical power supply. **Distribution Restoration Zone Plans** may also be dependent upon **Top Up Restoration Contractors**. **Network Operators** shall be responsible for instructing **Restoration Contractors** in accordance with a **Distribution Restoration Zone Plan** once **The Company** has issued an instruction to the **Network Operator** to activate a **Distribution Restoration Zone** as provided for in OC9.4.7.8.1.

ECC.6.4.6.2. Where a need for a **Distribution Restoration Zone** is agreed in accordance with OC9, the following requirements shall apply:-

(a) Where there is a requirement for two adjacent **Distribution Restoration Zones** to be **Synchronised** as part of the wider **System Restoration** process and as catered for in the relevant **Distribution Restoration Zone Plans**, appropriate **Synchronising** facilities shall exist or shall be installed by the **Network Operator** or **Relevant Transmission Licensee** as set out in OC9.4.7.6.3(d). Such **Synchronising** facilities shall be identified as part of the development of the **Restoration Plan** as set out in OC9.4.7.6.1. Where a **Distribution Restoration Zone** extends to **Transmission Plant** and **Apparatus** as provided for in OC9.4.7.8.15, the responsibility for the provision of these facilities on **Transmission** equipment is the responsibility of the **Relevant Transmission Licensee**.

(b) **The Company** and the **Network Operator** and **Relevant Transmission Licensee** (where necessary) shall agree the monitoring and operational metering which shall be installed in the **Network Operator's System**, including but not limited to, operational metering signals, status indications and the topology of the **Network Operator's System** falling within the scope of the **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**, and the output and status of **Restoration Contractor's Plant** and **Apparatus**. Where appropriate, some of this information may be supplied as outputs from the **Distribution Restoration Zone Control System** within the **Distribution Restoration Zone** where one is installed. This data shall be provided to **The Company** and **Relevant Transmission Licensee** (where necessary) through appropriate data links as agreed between **The Company** and the **Network Operator**.

(c) **Network Operators** shall have secure, robust and power resilient communications systems between their **Control Centres** and the point at which **Restoration Contractor's Plant** and **Apparatus** is connected to the **Network Operator's System** as provided for in ECC.7.10 and ECC.7.11.

ECC.6.5 Communications Plant

ECC.6.5.1 In order to ensure control of the **National Electricity Transmission System**, telecommunications between **Users** and **The Company** must (including in respect of any **OTSDUW Plant and Apparatus** at the **OTSUA Transfer Time**), if required by **The Company**, be established in accordance with the requirements set down below.

ECC.6.5.2 Control Telephony and System Telephony

ECC.6.5.2.1 **Control Telephony** provides secure point to point telephony for routine **Control Calls**, priority **Control Calls** and emergency **Control Calls**.

ECC.6.5.2.2 **System Telephony** uses an appropriate public communications network to provide telephony for **Control Calls**, inclusive of emergency **Control Calls**. For the avoidance of doubt, **System Telephony** could include but shall not be limited to: an analogue or digital telephone line; a mobile telephone or an internet-based voice communication system, all of which would be connected to an appropriate public communications network.

ECC.6.5.2.3 Calls made and received over **Control Telephony** and **System Telephony** may be recorded and subsequently replayed for commercial and operational reasons.

ECC.6.5.3 Not Used

ECC.6.5.4 Obligations in respect of Control Telephony and System Telephony

ECC.6.5.4.1 Where **The Company** requires **Control Telephony**, **Users** are required to use the **Control Telephony** to communicate with **The Company** and / or the **Transmission Licensees'** in respect of all **Connection Points** with the **National Electricity Transmission System**, all **Embedded Large Power Stations**, **Embedded HVDC Systems and Network Operator's Control Centres** as appropriate. **The Company** shall provide **Control Telephony** interface equipment at the **User's Control Point** or the **Network Operators Control Centre** as appropriate. Where the **EU Code User's** or **Network Operators Control Centre** telephony equipment is not capable of providing the required facilities or is otherwise incompatible with the **Transmission Control Telephony**, **The Company** shall provide a **Control Telephony** handset(s). Details of and relating to the **Control Telephony** requirements are contained in the **Bilateral Agreement** with **EU Code User's**.

ECC.6.5.4.2 Where in **The Company's** sole opinion the installation of **Control Telephony** is not practicable at a **User's Control Point(s)**, **The Company** shall specify in the **Bilateral Agreement** whether **System Telephony** is required. Where **System Telephony** is required by **The Company**, the **User** shall ensure that **System Telephony** is installed.

ECC.6.5.4.3 Where **System Telephony** is installed, **EU Code Users** are required to use the **System Telephony** for communication with **The Company** and the relevant **Transmission Licensees' Control Engineers** in respect of those **Control Point(s)** for which it has been installed. Details of and relating to the **System Telephony** required are contained in the **Bilateral Agreement**.

ECC.6.5.4.4 Where **Control Telephony** or **System Telephony** is installed, routine testing of such facilities may be required by **The Company** (not normally more than once in any calendar month). The **User** and **The Company** shall use reasonable endeavours to agree a test programme and where **The Company** requests the assistance of the **User** in performing the agreed test programme the **User** shall provide such assistance. **The Company** requires the **EU Code User** to test the backup power supplies feeding its **Control Telephony** facilities at least once every 5 years.

ECC.6.5.4.5 **Control Telephony** and **System Telephony** shall only be used for the purposes of operational voice communication between **The Company** and the relevant **User**.

ECC.6.5.4.6 **Control Telephony** contains emergency calling functionality to be used for operational communication only under normal and emergency conditions. Functionality enables **The Company** and **Users** to utilise a priority call in the event of an emergency. **The Company** and **EU Code Users** shall only use such priority call functionality for urgent operational communications.

ECC.6.5.5 Technical Requirements for Control Telephony and System Telephony

ECC.6.5.5.1 Detailed information on the technical interfaces and support requirements for **Control Telephony** is provided in the **Control Telephony Electrical Standard** identified in the Annex to the **General Conditions**. Where additional information, or information in relation to **Control Telephony** applicable in Scotland, is requested by **Users**, this will be provided, where possible, by **The Company**.

ECC.6.5.5.2 **System Telephony** shall consist of a dedicated telephone connected to an appropriate public communications network that shall be configured by the relevant **User**. **The Company** shall provide a dedicated free phone number (UK only), for the purposes of receiving incoming calls to **The Company**, which **Users** shall utilise for **System Telephony**. **System Telephony** shall only be utilised by **The Company's Control Engineer** and the **User's Responsible Engineer/Operator** for the purposes of operational communications.

ECC.6.5.6 Operational Metering

ECC.6.5.6.1 It is an essential requirement for **The Company** and **Network Operators** to have visibility of the real time output and status of indications of **User's Plant and Apparatus** so they can control the operation of the **System**.

ECC.6.5.6.2 **Type B**, **Type C** and **Type D Power Park Modules**, **HVDC Equipment**, **Network Operators** and **Non Embedded Customers** are required to be capable of exchanging operational metering data with **The Company** and **Relevant Transmission Licensees** (as applicable) with time stamping. Time stamping would generally be to a sampling rate of 1 second or better unless otherwise specified by **The Company** in the **Bilateral Agreement**.

ECC.6.5.6.3 **The Company** in coordination with the **Relevant Transmission Licensee** shall specify in the **Bilateral Agreement** the operational metering signals to be provided by the **EU Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer**. In the case of **Network Operators** and **Non-Embedded Customers**, detailed specifications relating to the operational metering standards at **EU Grid Supply Points** and the data required are published as **Electrical Standards** in the Annex to the **General Conditions**.

ECC.6.5.6.4 (a) **The Company** or The **Relevant Transmission Licensee,** as applicable, shall provide system control and data acquisition (SCADA) outstation interface equipment. Each **EU Code User** shall provide such voltage, current, **Frequency**, **Active Power** and **Reactive Power** measurement outputs and plant status indications and alarms to the **Transmission** SCADA outstation interface equipment as required by **The Company** in accordance with the terms of the **Bilateral Agreement**. In the case of **OTSDUW**, the **User** shall provide such SCADA outstation interface equipment and voltage, current, **Frequency**, **Active Power** and **Reactive Power** measurement outputs and plant status indications and alarms to the SCADA outstation interface equipment as required by **The Company** in accordance with the terms of the **Bilateral Agreement**.

(b) For the avoidance of doubt, for **Active Power** and **Reactive Power** measurements, circuit breaker and disconnector status indications from:

(i) **CCGT Modules** from **Type B**, **Type C** and **Type D Power Generating Modules**, the outputs and status indications must each be provided to **The Company** on an individual **CCGT Unit** basis. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements from **Unit Transformers** and/or **Station Transformers** must be provided.

(ii) For **Type B**, **Type C** and **Type D Power Park Modules** the outputs and status indications must each be provided to **The Company** on an individual **Power Park Module** basis. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements from station transformers must be provided.

(iii) In respect of **OTSDUW Plant and Apparatus**, the outputs and status indications must be provided to **The Company** for each piece of electrical equipment. In addition, where identified in the **Bilateral Agreement**, **Active Power** and **Reactive Power** measurements at the **Interface Point** must be provided.

(c) For the avoidance of doubt, the requirements of ECC.6.5.6.4(a) in the case of a **Cascade Hydro Scheme** will be provided for each **Generating Unit** forming part of that **Cascade Hydro Scheme**. In the case of **Embedded Generating Units** forming part of a **Cascade Hydro Scheme** the data may be provided by means other than the SCADA outstation located at the **Power Station**, such as, with the agreement of the **Network Operator** in whose system such **Embedded Generating Unit** is located, from the **Network Operator's** SCADA system to **The Company**. Details of such arrangements will be contained in the relevant **Bilateral Agreements** between **The Company** and the **Generator** and the **Network Operator**.

(d) In the case of a **Power Park Module,** additional energy input signals (e.g. wind speed, and wind direction) may be specified in the **Bilateral Agreement**. A **Power Available** signal will also be specified in the **Bilateral Agreement**. The signals would be used to establish the potential level of energy input from the **Intermittent Power Source** for monitoring pursuant to ECC.6.6.1 and **Ancillary Services** and will, in the case of a wind farm, be used to provide **The Company** with advanced warning of excess wind speed shutdown and to determine the level of **Headroom** available from **Power Park Modules** for the purposes of calculating response and reserve. For the avoidance of doubt, the **Power Available** signal would be automatically provided to **The Company** and represent the sum of the potential output of all available and operational **Power Park Units** within the **Power Park Module**. The refresh rate of the **Power Available** signal shall be specified in the **Bilateral Agreement**. In the case of an **Electricity Storage Module**, the requirement to provide a **Power Available Signal** when the **Plant** is in both an importing and exporting mode of operation would be specified in the **Bilateral Agreement**.

(e) In the case of an **Electricity Storage Module**, additional input signals (e.g. state of energy (MWhr, and system availability) may be specified in the **Bilateral Agreement**. A **Power Available** signal will also be specified in the **Bilateral Agreement** in accordance with the requirements of ECC.6.5.6.4(d).

ECC.6.5.6.5 In addition to the requirements of the **Balancing Codes**, each **HVDC Converter** unit of an **HVDC system** shall be equipped with an automatic controller capable of receiving instructions from **The Company**. This automatic controller shall be capable of operating the **HVDC Converter** units of the **HVDC System** in a coordinated way. **The Company** shall specify the automatic controller hierarchy per **HVDC Converter** unit.

ECC.6.5.6.6 The automatic controller of the **HVDC System** referred to in paragraph ECC.6.5.6.5 shall be capable of sending the following signal types to **The Company** (where applicable) :

(a) operational metering signals, providing at least the following:

(i) start-up signals;

(ii) AC and DC voltage measurements;

(iii) AC and DC current measurements;

(iv) **Active** and **Reactive Power** measurements on the AC side;

(v) DC power measurements;

(vi) **HVDC Converter** unit level operation in a multi-pole type **HVDC Converter**;

(vii) elements and topology status; and

(viii) **Frequency Sensitive Mode**, **Limited Frequency Sensitive Mode Overfrequency** and **Limited Frequency Sensitive Mode Underfrequency Active Power** ranges (where applicable).

(b) alarm signals, providing at least the following:

(i) emergency blocking;

(ii) ramp blocking;

(iii) fast **Active Power** reversal (where applicable)

ECC.6.5.6.7 The automatic controller referred to in ECC.6.5.6.5 shall be capable of receiving the following signal types from **The Company** (where applicable) :

(a) operational metering signals, receiving at least the following:

(i) start-up command;

(ii) **Active Power** setpoints;

(iii) **Frequency Sensitive Mode** settings;

(iv) **Reactive Power**, voltage or similar setpoints;

(v) **Reactive Power** control modes;

(vi) power oscillation damping control; and

(b) alarm signals, receiving at least the following:

(i) emergency blocking command;

(ii) ramp blocking command;

(iii) **Active Power** flow direction; and

(iv)) fast **Active Power** reversal command.

ECC.6.5.6.8 With regards to operational metering signals, the resolution and refresh rate required would be 1 second or better unless otherwise agreed with **The Company**

ECC.6.5.6.9 In addition to the above requirements, **Restoration Contractors** shall be capable of providing the operational metering requirements specified in the **Anchor Restoration Contract** or **Top Up Restoration Contract** during **System Restoration**. In particular for renewable generation, the volume of primary energy such as wind speed and in the case of storage, storage capacity shall be provided.

Instructor Facilities

ECC.6.5.7 The **EU Code User** shall accommodate **Instructor Facilities** provided by **The Company** for the receipt of operational messages relating to **System** conditions.

Electronic Data Communication Facilities

ECC.6.5.8 (a) All **BM Participants** must ensure that appropriate electronic data communication facilities are in place to permit the submission of data, as required by the **Grid Code**, to **The Company**.

(b) In addition,

(1) any **User** that wishes to participate in the **Balancing Mechanism**;

or

(2) any **BM Participant** in respect of its **BM Units** at a **Power Station** and the **BM Participant** is required to provide all **Part 1 System Ancillary Services** in accordance with ECC.8.1 (unless **The Company** has otherwise agreed)

must ensure that appropriate automatic logging devices are installed at the **Control Points** of its **BM Units** to submit data to and to receive instructions from **The Company**, as required by the **Grid Code**. For the avoidance of doubt, in the case of an **Interconnector User** the **Control Point** will be at the **Control Centre** of the appropriate **Externally Interconnected System Operator**.

(c) Detailed specifications of these required electronic facilities will be provided by **The Company** on request and they are listed as **Electrical Standards** in the Annex to the **General Conditions**.

Facsimile Machines and **Electronic Communication Platform**

ECC.6.5.9 Each **User** and **The Company** shall provide a facsimile machine or machines:

(a) in the case of **Generators**, at the **Control Point** of each **Power Station** and at its **Trading Point**;

(b) in the case of **The Company** and **Network Operators**, at the **Control Centre(s)**; and

(c) in the case of **Non-Embedded Customers** and **HVDC Equipment** owners at the **Control Point**.

Each **User** shall notify, prior to connection to the **System** of the **User's Plant** and **Apparatus**, **The Company** of its or their telephone number or numbers, and will notify **The Company** of any changes. Prior to connection to the **System** of the **User's Plant** and **Apparatus The Company** shall notify each **User** of the telephone number or numbers of its facsimile machine or machines and will notify any changes.

Electronic Communication Platform

On a date agreed between **The Company** and an **EU Code User**, **The Company** shall provide an **Electronic Communication Platform** accessible to that **EU Code User** and that **EU Code User** shall provide access facilities at the following locations:

(a) in the case of **EU Generators**, at the **Control Point** of each **Power Station** and at their **Trading Point(s)**;

(b) in the case of **Network Operators**, at their **Control Centre(s)**; and

(c) in the case of **Non-Embedded Customers** and **DC Converter Station** owners at their **Control Point(s)**.

The **EU Code User** shall ensure the facilities required to access the **Electronic Communication Platform** are maintained at all times.

ECC.6.5.10 Busbar Voltage

The Relevant Transmission Licensee shall, subject as provided below, provide each **Generator** or **HVDC System Owner** at each **Grid Entry Point** where one of its **Power Stations** or **HVDC Systems** is connected with appropriate voltage signals to enable the **Generator** or **HVDC System** owner to obtain the necessary information to permit its **Power Generating Modules** (including **DC Connected Power Park Modules**) or **HVDC System** to be **Synchronised** to the **National Electricity Transmission System**. The term "**voltage signal**" shall mean in this context, a point of connection on (or wire or wires from) a relevant part of **Transmission Plant** and/or **Apparatus** at the **Grid Entry Point**, to which the **Generator** or **HVDC System Owner**, with **The Company's** agreement (not to be unreasonably withheld) in relation to the **Plant** and/or **Apparatus** to be attached, will be able to attach its **Plant** and/or **Apparatus** (normally a wire or wires) in order to obtain measurement outputs in relation to the busbar.

ECC.6.5.11 Bilingual Message Facilities

(a) A Bilingual Message Facility is the method by which the **User's Responsible Engineer/Operator**, the **Externally Interconnected System Operator** and **The Company's Control Engineers** communicate clear and unambiguous information in two languages for the purposes of control of the **Total System** in both normal and emergency operating conditions.

(b) A Bilingual Message Facility, where required, will provide up to two hundred pre-defined messages with up to five hundred and sixty characters each. A maximum of one minute is allowed for the transmission to, and display of, the selected message at any destination. The standard messages must be capable of being displayed at any combination of locations and can originate from any of these locations. Messages displayed in the UK will be displayed in the English language.

(c) Detailed information on a Bilingual Message Facility and suitable equipment required for individual **User** applications will be provided by **The Company** upon request.

ECC.6.6 Monitoring

ECC.6.6.1 System Monitoring

ECC.6.6.1.1 Each **Type C** and **Type D Power Generating Module** including **DC Connected Power Park Modules** shall be equipped with a facility to provide fault recording and monitoring of dynamic system behaviour. These requirements are necessary to record conditions during **System** faults and detect poorly damped power oscillations. This facility shall record the following parameters:

— voltage,

— **Active Power**,

— **Reactive Power**, and

— **Frequency**.

ECC.6.6.1.2 Detailed specifications for fault recording and dynamic system monitoring equipment including triggering criteria and sample rates are listed as **Electrical Standards** in the **Annex** to the **General Conditions**. For Dynamic System Monitoring, the specification for the communication protocol and recorded data shall also be included in the **Electrical Standard**.

ECC.6.6.1.3 **The Company** in coordination with the **Relevant Transmission Licensee** shall specify any requirements for **Power Quality Monitoring** in the **Bilateral Agreement**. The power quality parameters to be monitored, the communication protocols for the recorded data and the time frames for compliance shall be agreed between **The Company**, the **Relevant Transmission Licensee** and **EU Generator**.

ECC.6.6.1.4 **HVDC Systems** shall be equipped with a facility to provide fault recording and dynamic system behaviour monitoring of the following parameters for each of its **HVDC Converter Stations**:

(a) AC and DC voltage;

(b) AC and DC current;

(c) **Active Power**;

(d) **Reactive Power**; and

(e) **Frequency**.

ECC.6.6.1.5 **The Company** in coordination with the **Relevant Transmission Licensee** may specify quality of supply parameters to be complied with by the **HVDC System**, provided a reasonable prior notice is given.

ECC.6.6.1.6 The particulars of the fault recording equipment referred to in ECC.6.6.1.4, including analogue and digital channels, the settings, including triggering criteria and the sampling rates, shall be agreed between the **HVDC System Owner** and **The Company** in coordination with the **Relevant Transmission Licensee**.

ECC.6.6.1.7 All dynamic system behaviour monitoring equipment shall include an oscillation trigger, specified by **The Company**, in coordination with the **Relevant Transmission Licensee**, with the purpose of detecting poorly damped power oscillations.

ECC.6.6.1.8 The facilities for quality of supply and dynamic system behaviour monitoring shall include arrangements for the **HVDC System Owner** and **The Company** and/or **Relevant Transmission Licensee** to access the information electronically. The communications protocols for recorded data shall be agreed between the **HVDC System Owner**, **The Company** and the **Relevant Transmission Licensee**.

ECC.6.6.1.9 In order to accurately monitor the performance of a **Grid Forming Plant**, each **Grid Forming Plant** shall be equipped with a facility to accurately record the following parameters at a rate of 10ms : -

- **System Frequency** using a nominated algorithm as defined by **The Company**
- The **ROCOF** rate using a nominated algorithm as defined by **The Company** based on a 500ms rolling average
- A technique for recording the **Grid Phase Jump Angle** by using either a nominated algorithm as defined by **The Company** or an algorithm that records the time period of each half cycle with a time resolution of 10 microseconds. For a 50Hz **System**, a 1 degree phase jump is a time period change of 55.6 microseconds.

ECC.6.6.1.10 Detailed specifications for **Grid Forming Capability Plant** dynamic performance including triggering criteria, sample rates, the communication protocol and recorded data shall be specified by **The Company** in the **Bilateral Agreement**.

ECC.6.6.2 Frequency Response Monitoring

ECC.6.6.2.1 Each **Type C** and **Type D Power Generating Module** including **DC Connected Power Park Modules** shall be fitted with equipment capable of monitoring the real time **Active Power** output of a **Power Generating Module** when operating in **Frequency Sensitive Mode**.

ECC.6.6.2.2

Detailed specifications of the **Active Power Frequency** response requirements including the communication requirements are listed as **Electrical Standards** in the **Annex** to the **General Conditions**.

ECC.6.6.2.3 **The Company** in co-ordination with the **Relevant Transmission Licensee** shall specify additional signals to be provided by the **EU Generator** by monitoring and recording devices in order to verify the performance of the **Active Power Frequency** response provision of participating **Power Generating Modules**.

ECC.6.6.3 Compliance Monitoring

ECC.6.6.3.1 For all on site monitoring by **The Company** of witnessed tests pursuant to the **CP** or **OC5** or **ECP** the **User** shall provide suitable test signals as outlined in either OC5.A.1or ECP.A.4 (as applicable).

ECC.6.6.3.2 The signals which shall be provided by the **User** to **The Company** for onsite monitoring shall be of the following resolution, unless otherwise agreed by **The Company**:

(i) 1 Hz for reactive range tests

(ii) 10 Hz for **Frequency** control tests

(iii) 100 Hz for voltage control tests

(iv) 1 kHz for **Grid Forming Plant** signals including fast fault current measurements

(v) 100Hz for the other **Grid Forming Plant** tests carried out in accordance with ECC.6.6.1.9

ECC.6.6.3.3 The **User** will provide all relevant signals for this purpose in the form of d.c. voltages within the range -10V to +10V. In exceptional circumstances some signals may be accepted as d.c. voltages within the range -60V to +60V with prior agreement between the **User** and **The Company**. All signals shall:

(i) in the case of an **Onshore Power Generating Module** or **Onshore HVDC Convertor Station**~~,~~ be suitably terminated in a single accessible location at the **Generator** or **HVDC Converter Station** owner's site.

(ii) in the case of an **Offshore Power Generating Module** and **OTSDUW Plant and Apparatus**, be transmitted onshore without attenuation, delay or filtering which would result in the inability to fully demonstrate the objectives of the test, or identify any potential safety or plant instability issues, and be suitably terminated in a single robust location normally located at or near the onshore **Interface Point** of the **Offshore Transmission System** to which it is connected.

ECC.6.6.3.4 All signals shall be suitably scaled across the range. The following scaling would (unless **The Company** notify the **User** otherwise) be acceptable to **The Company**:

(a) 0MW to **Maximum Capacity** or **Interface Point Capacity** 0-8V dc

(b) Maximum leading **Reactive Power** to maximum lagging **Reactive Power** -8 to 8V dc

(c) 48 – 52Hz as -8 to 8V dc

(d) Nominal terminal or connection point voltage -10% to +10% as -8 to 8V dc

ECC.6.6.3.5 The **User** shall provide to **The Company** a 230V power supply adjacent to the signal terminal location.

ECC.7 SITE RELATED CONDITIONS

ECC.7.1 Not used.

ECC.7.2 Responsibilities For Safety

ECC.7.2.1 Any **User** entering and working on its **Plant** and/or **Apparatus** (including, until the **OTSUA Transfer Time**, any **OTSUA**) on a **Transmission Site** will work to the **Safety Rules** of the **Relevant Transmission Licensee**, as advised by **The Company**.

ECC.7.2.2 For **User Sites**, **The Company** shall procure that the **Relevant Transmission Licensee** entering and working on **Transmission Plant** and/or **Apparatus** on a **User Site** will work to the **User's Safety Rules**.

ECC.7.2.3 A **User** may, with a minimum of six weeks notice, apply to **The Company** for permission to work according to that **Users** own **Safety Rules** when working on its **Plant** and/or **Apparatus** on a **Transmission Site** rather than those set out in ECC.7.2.1. If **The Company** is of the opinion that the **User's Safety Rules** provide for a level of safety commensurate with those set out in ECC.7.2.1, **The Company** will notify the **User**, in writing, that, with effect from the date requested by the **User**, the **User** may use its own **Safety Rules** when working on its **Plant** and/or **Apparatus** on the **Transmission Site**. For a **Transmission Site**, in forming its opinion, **The Company** will seek the opinion of the **Relevant Transmission Licensee**. Until receipt of such written approval from **The Company**, the **User** will continue to use the **Safety Rules** as set out in ECC.7.2.1.

ECC.7.2.4 In the case of a **User Site**, **The Company** may, with a minimum of six weeks notice, apply to a **User** for permission for the **Relevant Transmission Licensee** to work according to the **Relevant Transmission Licensee's Safety Rules** when working on **Transmission Plant** and/or **Apparatus** on that **User Site**, rather than the **User's Safety Rules**. If the **User** is of the opinion that the **Relevant Transmission Licensee's Safety Rules**, provide for a level of safety commensurate with that of that **User's Safety Rules**, it will notify **The Company**, in writing, that, with effect from the date requested by **The Company**, that the **Relevant Transmission Licensee** may use its own **Safety Rules** when working on its **Transmission Plant** and/or **Apparatus** on that **User's Site**. Until receipt of such written approval from the **User**, **The Company** shall procure that the **Relevant Transmission Licensee** shall continue to use the **User's Safety Rules**.

ECC.7.2.5 For a **Transmission Site**, if **The Company** gives its approval for the **User's Safety Rules** to apply to the **User** when working on its **Plant** and/or **Apparatus**, that does not imply that the **User's Safety Rules** will apply to entering the **Transmission Site** and access to the **User's Plant** and/or **Apparatus** on that **Transmission Site**. Bearing in mind the **Relevant Transmission Licensee's** responsibility for the whole **Transmission Site**, entry and access will always be in accordance with the **Relevant Transmission Licensee's** site access procedures. For a **User Site**, if the **User** gives its approval for **Relevant Transmission Licensee Safety Rules** to apply to the **Relevant Transmission Licensee** when working on its **Plant** and **Apparatus**, that does not imply that the **Relevant Transmission Licensee's Safety Rules** will apply to entering the **User Site**, and access to the **Transmission Plant** and **Apparatus** on that **User Site**. Bearing in mind the **User's** responsibility for the whole **User Site**, entry and access will always be in accordance with the **User's** site access procedures.

ECC.7.2.6 For **User Sites**, **Users** shall notify **The Company** of any **Safety Rules** that apply to the **Relevant Transmission Licensee's** staff working on **User Sites**. **The Company** shall procure that the **Relevant Transmission Licensee** shall notify **Users** of any **Safety Rules** that apply to the **User's** staff working on the **Transmission Site**.

ECC.7.2.7 Each **Site Responsibility Schedule** must have recorded on it the **Safety Rules** which apply to each item of **Plant** and/or **Apparatus**.

ECC.7.2.8 In the case of **OTSUA** a **User Site** or **Transmission Site** shall, for the purposes of this ECC.7.2, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System**.

ECC.7.3 Site Responsibility Schedules

ECC.7.3.1 In order to inform site operational staff and **The Company's Control Engineers** of agreed responsibilities for **Plant** and/or **Apparatus** at the operational interface, a **Site Responsibility Schedule** shall be produced for **Connection Sites** (and in the case of **OTSUA**, until the **OTSUA Transfer Time**, **Interface Sites**) for **The Company**, the **Relevant Transmission Licensee** and **Users** with whom they interface.

ECC.7.3.2 The format, principles and basic procedure to be used in the preparation of **Site Responsibility Schedules** are set down in Appendix 1.

ECC.7.4 Operation And Gas Zone Diagrams

Operation Diagrams

ECC.7.4.1 An **Operation Diagram** shall be prepared for each **Connection Site** at which a **Connection Point** exists (and in the case of **OTSDUW Plant and Apparatus**, by **User's** for each **Interface Point**) using, where appropriate, the graphical symbols shown in Part 1A of Appendix 2. **Users** should also note that the provisions of **OC11** apply in certain circumstances.

ECC.7.4.2 The **Operation Diagram** shall include all **HV Apparatus** and the connections to all external circuits and incorporate numbering, nomenclature and labelling, as set out in **OC11**. At those **Connection Sites** (or in the case of **OTSDUW Plant and Apparatus**, **Interface Points**) where gas-insulated metal enclosed switchgear and/or other gas-insulated **HV Apparatus** is installed, those items must be depicted within an area delineated by a chain dotted line which intersects gas-zone boundaries. The nomenclature used shall conform with that used on the relevant **Connection Site** and circuit (and in the case of **OTSDUW Plant and Apparatus**, **Interface Point** and circuit). The **Operation Diagram** (and the list of technical details) is intended to provide an accurate record of the layout and circuit interconnections, ratings and numbering and nomenclature of **HV Apparatus** and related **Plant**.

ECC.7.4.3 A non-exhaustive guide to the types of **HV Apparatus** to be shown in the **Operation Diagram** is shown in Part 2 of Appendix 2, together with certain basic principles to be followed unless equivalent principles are approved by **The Company**.

Gas Zone Diagrams

ECC.7.4.4 A **Gas Zone Diagram** shall be prepared for each **Connection Site** at which a **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, by **User's** for an **Interface Point**) exists where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised. They shall use, where appropriate, the graphical symbols shown in Part 1B of Appendix 2.

ECC.7.4.5 The nomenclature used shall conform with that used in the relevant **Connection Site** and circuit (and in the case of **OTSDUW Plant and Apparatus**, relevant **Interface Point** and circuit).

ECC.7.4.6 The basic principles set out in Part 2 of Appendix 2 shall be followed in the preparation of **Gas Zone Diagrams** unless equivalent principles are approved by **The Company**.

Preparation of Operation and Gas Zone Diagrams for Users' Sites and Transmission Interface Sites

ECC.7.4.7 In the case of a **User Site**, the **User** shall prepare and submit to **The Company**, an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, on what will be the **Offshore Transmission** side of the **Connection Point** and the **Interface Point**) and **The Company** shall provide the **User** with an **Operation Diagram** for all **HV Apparatus** on the **Transmission** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus** on what will be the **Onshore Transmission** side of the **Interface Point**, in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** prior to the **Completion Date** under the **Bilateral Agreement** and/or **Construction Agreement**.

ECC.7.4.8 The **User** will then prepare, produce and distribute, using the information submitted on the **User's Operation Diagram** and **The Company's Operation Diagram**, a composite **Operation Diagram** for the complete **Connection Site** (and in the case of **OTSDUW Plant and Apparatus**, **Interface Point**), also in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** .

ECC.7.4.9 The provisions of ECC.7.4.7 and ECC.7.4.8 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised.

Preparation of Operation and Gas Zone Diagrams for Transmission Sites

ECC.7.4.10 In the case of an **Transmission Site**, the **User** shall prepare and submit to **The Company** an **Operation Diagram** for all **HV Apparatus** on the **User** side of the **Connection Point**, in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

ECC.7.4.11 **The Company** will then prepare, produce and distribute, using the information submitted on the **User's Operation Diagram**, a composite **Operation Diagram** for the complete **Connection Site**, also in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** .

ECC.7.4.12 The provisions of ECC.7.4.10 and ECC.7.4.11 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is utilised.

ECC.7.4.13 Changes to Operation and Gas Zone Diagrams

ECC.7.4.13.1 When **The Company** has decided that it wishes to install new **HV Apparatus** or it wishes to change the existing numbering or nomenclature of **Transmission HV Apparatus** at a **Transmission Site**, **The Company** will (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) one month prior to the installation or change, send to each such **User** a revised **Operation Diagram** of that **Transmission Site**, incorporating the new **Transmission HV Apparatus** to be installed and its numbering and nomenclature or the changes, as the case may be. **OC11** is also relevant to certain **Apparatus**.

ECC.7.4.13.2 When a **User** has decided that it wishes to install new **HV Apparatus**, or it wishes to change the existing numbering or nomenclature of its **HV Apparatus** at its **User Site**, the **User** will (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) one month prior to the installation or change, send to **The Company** a revised **Operation Diagram** of that **User Site** incorporating the **EU Code User HV Apparatus** to be installed and its numbering and nomenclature or the changes as the case may be. **OC11** is also relevant to certain **Apparatus**.

ECC.7.4.13.3 The provisions of ECC.7.4.13.1 and ECC.7.4.13.2 shall apply in relation to **Gas Zone Diagrams** where gas-insulated switchgear and/or other gas-insulated **HV Apparatus** is installed.

Validity

ECC.7.4.14 (a) The composite **Operation Diagram** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Operation Diagram** for all operational and planning activities associated with the **Connection Site**. If a dispute arises as to the accuracy of the composite **Operation Diagram**, a meeting shall be held at the **Connection Site**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(b) The composite **Operation Diagram** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Operation Diagram** for all operational and planning activities associated with the **Interface Point** until the **OTSUA Transfer Time**. If a dispute arises as to the accuracy of the composite **Operation Diagram** prior to the **OTSUA Transfer Time**, a meeting shall be held at the **Interface Point**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(c) An equivalent rule shall apply for **Gas Zone Diagrams** where they exist for a **Connection Site**.

ECC.7.4.15 In the case of **OTSUA**, a **User Site** and **Transmission Site** shall, for the purposes of this ECC.7.4, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System** and references to **HV Apparatus** in this ECC.7.4 shall include references to **HV OTSUA**.

ECC.7.5 Site Common Drawings

ECC.7.5.1 **Site Common Drawings** will be prepared for each **Connection Site** (and in the case of **OTSDUW**, each **Interface Point**) and will include **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) layout drawings, electrical layout drawings, common **Protection**/control drawings and common services drawings.

Preparation of Site Common Drawings for a User Site and Transmission Interface Site

ECC.7.5.2 In the case of a **User Site**, **The Company** shall prepare and submit to the **User**, **Site Common Drawings** for the **Transmission** side of the **Connection Point** (and in the case of **OTSDUW Plant and Apparatus**, on what will be the **Onshore Transmission** side of the **Interface Point**,) and the **User** shall prepare and submit to **The Company**, **Site Common Drawings** for the **User** side of the **Connection Point** (and in the case of **OTSDUW**, on what will be the **Offshore Transmission** side of the **Interface Point**) in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

ECC.7.5.3 The **User** will then prepare, produce and distribute, using the information submitted on the **Transmission Site Common Drawings**, **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** .

Preparation of Site Common Drawings for a Transmission Site

ECC.7.5.4 In the case of a **Transmission Site**, the **User** will prepare and submit to **The Company Site Common Drawings** for the **User** side of the **Connection Point** in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

ECC.7.5.5 **The Company** will then prepare, produce and distribute, using the information submitted in the **User's Site Common Drawings**, **Site Common Drawings** for the complete **Connection Site** in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement**.

ECC.7.5.6 When a **User** becomes aware that it is necessary to change any aspect of the **Site Common Drawings** at a **Connection Site** (and in the case of **OTSDUW**, **Interface Point**) it will:

(a) if it is a **User Site**, as soon as reasonably practicable, prepare, produce and distribute revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**); and

(b) if it is a **Transmission Site**, as soon as reasonably practicable, prepare and submit to **The Company** revised **Site Common Drawings** for the **User** side of the **Connection Point** (and in the case of **OTSDUW**, **Interface Point**) and **The Company** will then, as soon as reasonably practicable, prepare, produce and distribute, using the information submitted in the **User's Site Common Drawings**, revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**).

In either case, if in the **User's** reasonable opinion the change can be dealt with by it notifying **The Company** in writing of the change and for each party to amend its copy of the **Site Common Drawings** (or where there is only one set, for the party holding that set to amend it), then it shall so notify and each party shall so amend. If the change gives rise to a **Modification** under the **CUSC**, the provisions of the **CUSC** as to timing will apply.

ECC.7.5.7 When **The Company** becomes aware that it is necessary to change any aspect of the **Site Common Drawings** at a **Connection Site**(and in the case of **OTSDUW**, **Interface Point**) it will:

(a) if it is a **Transmission Site**, as soon as reasonably practicable, prepare, produce and distribute revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**); and

(b) if it is a **User Site**, as soon as reasonably practicable, prepare and submit to the **User** revised **Site Common Drawings** for the **Transmission** side of the **Connection Point** (in the case of **OTSDUW**, **Interface Point**) and the **User** will then, as soon as reasonably practicable, prepare, produce and distribute, using the information submitted in the **Transmission Site Common Drawings**, revised **Site Common Drawings** for the complete **Connection Site** (and in the case of **OTSDUW**, **Interface Point**).

In either case, if in **The Company's** reasonable opinion the change can be dealt with by it notifying the **User** in writing of the change and for each party to amend its copy of the **Site Common Drawings** (or where there is only one set, for the party holding that set to amend it), then it shall so notify and each party shall so amend. If the change gives rise to a **Modification** under the **CUSC**, the provisions of the **CUSC** as to timing will apply.

Validity

ECC.7.5.8 (a) The **Site Common Drawings** for the complete **Connection Site** prepared by the **User** or **The Company**, as the case may be, will be the definitive **Site Common Drawings** for all operational and planning activities associated with the **Connection Site**. If a dispute arises as to the accuracy of the **Site Common Drawings**, a meeting shall be held at the **Site**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

(b) The **Site Common Drawing** prepared by **The Company** or the **User**, as the case may be, will be the definitive **Site Common Drawing** for all operational and planning activities associated with the **Interface Point** until the **OTSUA Transfer Time**. If a dispute arises as to the accuracy of the composite **Operation Diagram** prior to the **OTSUA Transfer Time**, a meeting shall be held at the **Interface Point**, as soon as reasonably practicable, between **The Company** and the **User**, to endeavour to resolve the matters in dispute.

ECC.7.5.9 In the case of **OTSUA**, a **User Site** and **Transmission Site** shall, for the purposes of this ECC.7.5, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** when it becomes part of the **National Electricity Transmission System**.

ECC.7.6 Access

ECC.7.6.1 The provisions relating to access to **Transmission Sites** by **Users**, and to **Users' Sites** by **Relevant Transmission Licensees**, are set out in each **Interface Agreement** (or in the case of **Interfaces Sites** prior to the **OTSUA Transfer Time** agreements in similar form) with, the **Relevant Transmission Licensee** and each **User**.

ECC.7.6.2 In addition to those provisions, where a **Transmission Site** contains exposed **HV** conductors, unaccompanied access will only be granted to individuals holding an **Authority for Access** issued by the **Relevant Transmission Licensee**.

ECC.7.6.3 The procedure for applying for an **Authority for Access** is contained in the **Interface Agreement**.

ECC.7.7 Maintenance Standards

ECC.7.7.1 It is the **User's** responsibility to ensure that all its **Plant** and **Apparatus** (including, until the **OTSUA Transfer Time**, any **OTSUA**) on a **Transmission Site** is tested and maintained adequately for the purpose for which it is intended, and to ensure that it does not pose a threat to the safety of any **Transmission Plant**, **Apparatus** or personnel on the **Transmission Site**. **The Company** will have the right to inspect the test results and maintenance records relating to such **Plant** and **Apparatus** at any time

ECC.7.7.2 For **User Sites**, **The Company** shall procure that the **Relevant Transmission Licensee** has a responsibility to ensure that all **Transmission Plant** and **Apparatus** on a **User Site** is tested and maintained adequately for the purposes for which it is intended and to ensure that it does not pose a threat to the safety of any **User's Plant**, **Apparatus** or personnel on the **User Site**.

The **User** will have the right to inspect the test results and maintenance records relating to such **Plant** and **Apparatus** on its **User Site** at any time.

ECC.7.8 Site Operational Procedures

ECC.7.8.1 Where there is an interface with **National Electricity Transmission System The Company** and **Users** must make available staff to take necessary **Safety Precautions** and carry out operational duties as may be required to enable work/testing to be carried out and for the operation of **Plant** and **Apparatus** (including, prior to the **OTSUA Transfer Time**, any **OTSUA**) connected to the **Total System**.

ECC.7.9 **Generators**, **HVDC System** owners and **BM Participants** (including **Virtual Lead Parties**) shall provide a **Control Point**.

a) In the case of **EU Generators** and **HVDC System** owners, for each **Power Station** or **HVDC System** directly connected to the **National Electricity Transmission System** and for each **Embedded Large Power Station** or **Embedded HVDC System**, the **Control Point** shall receive and act upon instructions pursuant to OC7 and BC2 at all times that **Power Generating Modules** at the **Power Station** are generating or available to generate or **HVDC Systems** are importing or exporting or available to do so. In the case of all **BM Participants**, the **Control Point** shall be continuously staffed except where the **Bilateral Agreement** specifies that compliance with BC2 is not required, in which case the **Control Point** shall be staffed between the hours of 0800 and 1800 each day.

b) In the case of **BM Participants**, the **BM Participant**'s **Control Point** shall be capable of receiving and acting upon instructions from **The Company** and the relevant **Transmission Licensees' Control Engineers**.

The Company will normally issue instructions via automatic logging devices in accordance with the requirements of ECC.6.5.8(b).

Where the **BM Participant**'s **Plant** and **Apparatus** does not respond to an instruction from **The Company** via automatic logging devices, or where it is not possible for **The Company** to issue the instruction via automatic logging devices, **The Company** shall issue the instruction by telephone.

In the case of **BM Participants** who own and/or operate a **Power Station** or **HVDC System** with an aggregated **Registered Capacity** or **BM Participants** with **BM Units** with an aggregated **Demand Capacity** per **Control Point** of less than 50MW, or, where a site is not part of a **Virtual Lead Party** as defined in the **BSC**, a **Registered Capacity** or **Demand Capacity** per site of less than 10MW

a) where this situation arises, a representative of the **BM Participant** is required to be available to respond to instructions from **The Company** via the **Control Telephony** or **System Telephony** system, as provided for in ECC.6.5.4, between the hours of 0800-1800 each day.

b) Outside the hours of 0800-1800 each day, the requirements of BC2.9.7 shall apply.

For the avoidance of doubt, **BM Participants** who are unable to provide **Control Telephony** and do not have a continuously staffed **Control Point** may be unable to act as a **Defence Service Provider** and shall be unable to act as a **Restoration Contractor** where these require **Control Telephony** or a **Control Point** in respect of the specification of any such services falling into these categories.

ECC.7.10 Obligations on Users in respect of Critical Tools and Facilities

ECC.7.10.1 From 04/09/2024 **The Company**, each **Generator**, **HVDC System Owner**, **Network Operator**, **Non-Embedded Customer** and each **Restoration Contractor** with a continuously staffed **Control Point** or **Control Centre** as provided for in ECC.7.9 shall:-

(i) Ensure they have the appropriate **Critical Tools and Facilities**, necessary to control their assets for **System Restoration**, from their **Control Point** or **Control Centre**, as appropriate, for a minimum period of 72 hours (or such longer period as agreed between the **Generator**, **HVDC System Owner**, **Network Operator**, **Non-Embedded Customer** and/or **Restoration Contractor** and **The Company**) following a **Total Shutdown** or **Partial Shutdown**.

(ii) Ensure as far as reasonably practical that they have adequate control equipment redundancy in place so that in the event of a failure of one or more components of the control system its function is unimpaired.

(iii) Report on the results of their management and testing for their **Critical Tools and Facilities** on request from **The Company**.

ECC.7.10.2 From 04/09/2024 each **BM Participant** including a **Virtual Lead Party** with a continuously staffed **Control Point** as provided for in ECC.7.9 (excluding those **BM Participants** covered

by the requirements of ECC.7.10.1), shall:-

(i) Ensure they have the appropriate **Critical Tools and Facilities** (as defined in clause (c) of the definition of **Critical Tools** and **Facilities** in the **Grid Code Glossary and Definitions**) for a minimum period of 72 hours (or such longer period as agreed between the **BM Participant** including a **Virtual Lead Party** and **The Company**) following a **Total Shutdown** or **Partial Shutdown**.

(ii) Ensure as far as reasonably practical that they have adequate control equipment redundancy in place at their **Control Point** so that in the event of a failure of one or more components of their **Critical Tools and Facilities** its function is unimpaired.

(iii) Report on the results of their management and testing for their **Critical Tools and Facilities** on request by **The Company**.

ECC.7.10.3 In the case of a **BM Participant** or **Virtual Lead Party** which has an **Anchor Restoration Contract** or **Top Up Restoration Contract** in respect of one or more of its aggregated **Plants**, the requirements of ECC.7.10.1 shall only apply between the **Control Point** of the **BM Participant** or **Virtual Lead Party** and that **Plant** with an **Anchor Plant Capability** or **Top Up Restoration Capability**. For other non-contracted **Plants** under the control of the **BM Participant** or **Virtual Lead Party**, the requirements of ECC.7.10.2 shall continue to apply**.**

ECC.7.10.4 Where a **Network Operator** installs a **Distribution Restoration Zone Control System** to facilitate operation of a **Distribution Restoration Zone Plan**, the high level functional requirements of the **Distribution Restoration Zone Control System** shall be in accordance with the guidance provided in the applicable electrical standard listed in the annex to the **General Conditions**.

ECC.7.10.5 **Network Operators** shall ensure that their substations which are required to be operable during **System Restoration** have 72 hour electrical supply resilience to facilitate **Network Operators** being able to**:**

- restore auxiliary supplies to **Transmission** substations;
- switch **Demand** in accordance with a **Restoration Plan**;
- support **The Company** in satisfying the requirements of the **Electricity System Restoration Standard**.

ECC.7.10.6 **The Company**, each **EU Code User** and **Restoration Contractor** shall ensure their **Critical Tools and Facilities** are cyber secure accordance with the Security of Network and Information System (NIS) Regulations. This requirement applies to **The Company**, **EU Code Users** and **Restoration Contractors** at all times.

ECC.7.10.7 Notwithstanding the requirements of ECC.7.10.1, **The Company**, each **EU Code User** and **Restoration Contractor** shall ensure that their control systems, communications systems, operational metering and telemetry systems including SCADA, are sufficiently robust and reliable such that they are capable of handling, processing and prioritising the significant volumes of data that could reasonably be expected to occur during **System Restoration**.

ECC.7.10.8 Where an **Offshore Generator** is connected to an **Offshore Transmission System** and the **Offshore Transmission Licensee** does not have **Critical Tools and Facilities** installed on its **Offshore Transmission System**, **The Company** will make an allowance for the **Critical Tools and Facilities** required to be installed by the **Offshore Generator**.

ECC.7.11 Obligations on and Assurance from The Company, EU Code Users and Restoration Contractors during Total Shutdown and Partial Shutdown conditions

ECC.7.11.1 In respect of **The Company**, its **Apparatus** shall be designed such that it can safely shutdown and does not pose a risk to personnel or **Apparatus** in the event of a total loss of supply.

ECC.7.11.2 All **EU Code Users** and **Restoration Contractors** shall ensure their **Plant** and **Apparatus** can safely shut down and does not pose a risk to **Plant** and/or personnel in the event of a total loss of supplies at a **EU Code User's Site**(s) or **Restoration Contractor's** site be it caused by a **Total Shutdown**, **Partial Shutdown** or such other event. In satisfying this requirement, **Generators**, **HVDC System Owners** and **Restoration Contractors** shall be able to demonstrate to **The Company** that in the event supplies were to be lost to their **Site**, then on the restoration of supplies, their **Plant** can be made operational and begin to operate in at least the same way and as quickly as would be expected for a cold start following a **Total System Shutdown** or **Partial System Shutdown** in accordance with the data submitted in PC.A.5.7 in accordance with the Week 24 process. For **EU Code Users** where they believe this requirement is cost prohibitive or technically impossible, such **EU Code Users** shall discuss the issue with **The Company**, and **The Company** shall inform **The Authority** of the details agreed. Where such an issue cannot be agreed by **The Company** following all reasonable attempts or where the capability provided by the **EU Code User** cannot be agreed by **The Company** as being sufficient after examining all reasonable alternative solutions through the **Compliance Processes**, the **EU Code User** may apply for a derogation from the Grid Code.

ECC.7.11.3 The requirements of ECC.7.11.1 and ECC.7.11.2 shall apply for a period of total loss of supplies to **The Company's** operational sites or an **EU Code User's Site** or **Restoration Contractor's** site of up to 72 hours. **EU Code Users** and **Restoration Contractors** shall confirm to **The Company** that the total loss of supplies to their **Site** for a period of up to 72 hours shall not result in damage to **Plant** and **Apparatus** such that it would then be unable to operate upon restoration of electrical supplies to the site.

ECC.7.11.4 **Network Operators** shall ensure that in coordination with **The Company** and relevant **Transmission Licensees**, they have the capability to switch **Demand** at sufficient speed to support **The Company** in satisfying the requirements of the **Electricity System Restoration Standard**. This requirement assumes:

- the successful implementation of **Restoration Plans**;
- the successful delivery of the obligations of **Restoration Contractors** who are parties to these plans; and
- the further requirements of OC9 have been implemented.

ECC.8 ANCILLARY SERVICES

ECC.8.1 System Ancillary Services

The **ECC** contain requirements for the capability for certain **Ancillary Services**, which are needed for **System** reasons ("**System Ancillary Services**"). There follows a list of these **System Ancillary Services**, together with the paragraph number of the **ECC** (or other part of the **Grid Code**) in which the minimum capability is required or referred to. The list is divided into two parts, Part 1 and Part 2:

Part 1

(a) **Reactive Power** supplied - ECC.6.3.2

(b) **Frequency** Control by means of **Frequency** sensitive generation - ECC.6.3.7 and BC3.5.1.

Part 2

(a) **Frequency** Control by means of **Fast Start** - ECC.6.3.14.

(b) **Anchor Plant Capability** or **Top Up Restoration Capability** - ECC.6.3.5.

(c) **System to Generator Operational Intertripping** – ECC.6.3.18.

(d) Services provided by **Restoration Contractors** – ECC.6.3.5.

Part 1 applies to:-

(i) Any **EU Generator** who has signed a **CUSC Contract** with **The Company** in respect of a **Large**, **Medium** or **Small Power Station** comprising one or more **Type C** or **Type**

D Power Generating Modules; and

(ii) **HVDC System Owners**: and

Part 2 applies to:-

Those **System Ancillary Services** which **EU Generators**, **HVDC System Owners** or **Restoration Contractors** provide only if agreement to provide them is reached with **The Company** or in the case where a **Restoration Contractor** is party to a **Distribution Restoration Zone Plan**, agreement is reached with **The Company** and **Network Operator**.

For the avoidance of doubt, Part 1 mandatory **System Ancillary Services** do not apply to **EU Generators** who have not signed a **CUSC Contract** and who own and/or operate **Embedded Small Power Stations** or **Embedded Medium Power Stations** including **Embedded Medium Power Stations** not subject to a **Bilateral Agreement**. This exclusion also applies to **Embedded HVDC Systems** not subject to **Bilateral Agreement** provisions.

ECC.8.2 Commercial Ancillary Services

Other **Ancillary Services** are also utilised by **The Company** in operating the **Total System** if these have been agreed to be provided by a **User** (or other person) under an **Ancillary Services Agreement** or under a **Bilateral Agreement**, with payment being dealt with under an **Ancillary Services Agreement** or in the case of **Externally Interconnected System Operators** or **Interconnector Users**, under any other agreement (and in the case of **Externally Interconnected System Operators** and **Interconnector Users** includes ancillary services equivalent to or similar to **System Ancillary Services**) ("**Commercial Ancillary Services**"). The capability for these **Commercial Ancillary Services** is set out in the relevant **Ancillary Services Agreement** or **Bilateral Agreement** (as the case may be).

APPENDIX E1 - SITE RESPONSIBILITY SCHEDULES

FORMAT, PRINCIPLES AND BASIC PROCEDURE TO BE USED IN THE PREPARATION OF SITE RESPONSIBILITY SCHEDULES

ECC.A.1.1 Principles

Types of Schedules

ECC.A.1.1.1 At all **Complexes** (which in the context of this ECC shall include, **Interface Sites** until the **OTSUA Transfer Time**) the following **Site Responsibility Schedules** shall be drawn up using the relevant proforma attached or with such variations as may be agreed between **The Company** and **EU Code Users**, but in the absence of agreement the relevant proforma attached will be used. In addition, in the case of **OTSDUW Plant and Apparatus**, and in readiness for the **OTSUA Transfer Time**, the **User** shall provide **The Company** with the necessary information such that **Site Responsibility Schedules** in this form can be prepared by the **Relevant Transmission Licensees** for the **Transmission Interface Site**:

(a) Schedule of **HV Apparatus**

(b) Schedule of **Plant**, **LV/MV Apparatus**, services and supplies;

(c) Schedule of telecommunications and measurements **Apparatus**.

Other than at **Power Generating Module** (including **DC Connected Power Park Modules**) and **Power Station** locations, the schedules referred to in (b) and (c) may be combined.

New Connection Sites

ECC.A.1.1.2 In the case of a new **Connection Site** each **Site Responsibility Schedule** for a **Connection Site** shall be prepared by **The Company** in consultation with relevant **Users** at least 2 weeks prior to the **Completion Date** (or, where the **OTSUA** is to become **Operational** prior to the **OTSUA Transfer Time**, an alternative date) under the **Bilateral Agreement** and/or **Construction Agreement** for that **Connection Site** (which may form part of a **Complex**). In the case of a new **Interface Site** where the **OTSUA** is to become **Operational** prior to the **OTSUA Transfer Time** each **Site Responsibility Schedule** for an **Interface Site** shall be prepared by **The Company** in consultation with relevant **Users** at least 2 weeks prior to the **Completion Date** under the **Bilateral Agreement** and/or **Construction Agreement** for that **Interface Site** (which may form part of a **Complex**) (and references to and requirements placed on "**Connection Site**" in this **ECC** shall also be read as "**Interface Site**" where the context requires and until the **OTSUA Transfer Time**). Each **User** shall, in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** , provide information to **The Company** to enable it to prepare the **Site Responsibility Schedule**.

Sub-division

ECC.A.1.1.3 Each **Site Responsibility Schedule** will be subdivided to take account of any separate **Connection Sites** on that **Complex**.

Scope

ECC.A.1.1.4 Each **Site Responsibility Schedule** shall detail for each item of **Plant** and **Apparatus**:

(a) **Plant/Apparatus** ownership;

(b) Site Manager (Controller) (except in the case of **Plant/Apparatus** located in **SPT's Transmission Area**);

(c) Safety issues comprising applicable **Safety Rules** and **Control Person** or other responsible person (**Safety Co-ordinator**), or such other person who is responsible for safety;

(d) Operations issues comprising applicable **Operational Procedures** and control engineer;

(e) Responsibility to undertake statutory inspections, fault investigation and maintenance.

Each **Connection Point** shall be precisely shown.

Detail

ECC.A.1.1.5 (a) In the case of **Site Responsibility Schedules** referred to in ECC.A.1.1.1(b) and (c), with the exception of **Protection Apparatus** and **Intertrip Apparatus** operation, it will be sufficient to indicate the responsible **User** or **Transmission Licensee**, as the case may be.

(b) In the case of the **Site Responsibility Schedule** referred to in ECC.A.1.1.1(a) and for **Protection Apparatus** and **Intertrip Apparatus**, the responsible management unit must be shown in addition to the **User** or **Transmission Licensee**, as the case may be.

ECC.A.1.1.6 The **HV Apparatus Site Responsibility Schedule** for each **Connection Site** must include lines and cables emanating from or traversing[1] the **Connection Site**.

Issue Details

ECC.A.1.1.7 Every page of each **Site Responsibility Schedule** shall bear the date of issue and the issue number.

Accuracy Confirmation

ECC.A.1.1.8 When a **Site Responsibility Schedule** is prepared it shall be sent by **The Company** to the **Users** involved for confirmation of its accuracy.

ECC.A.1.1.9 The **Site Responsibility Schedule** shall then be signed on behalf of **The Company** by its **Responsible Manager** (see ECC.A.1.1.16) and on behalf of each **User** involved by its **Responsible Manager** (see ECC.A.1.1.16), by way of written confirmation of its accuracy. The **Site Responsibility Schedule** will also be signed on behalf of the **Relevant Transmission Licensee** by its **Responsible Manager**.

Distribution and Availability

ECC.A.1.1.10 Once signed, two copies will be distributed by **The Company**, not less than two weeks prior to its implementation date, to each **User** which is a party on the **Site Responsibility Schedule**, accompanied by a note indicating the issue number and the date of implementation.

ECC.A.1.1.11 **The Company** and **Users** must make the **Site Responsibility Schedules** readily available to operational staff at the **Complex** and at the other relevant control points.

Alterations to Existing Site Responsibility Schedules

ECC.A 1.1.12 Without prejudice to the provisions of ECC.A.1.1.15 which deals with urgent changes, when a **User** identified on a **Site Responsibility Schedule** becomes aware that an alteration is necessary, it must inform **The Company** immediately and in any event 8 weeks prior to any change taking effect (or as soon as possible after becoming aware of it, if less than 8 weeks remain when the **User** becomes aware of the change). This will cover the commissioning of new **Plant** and/or **Apparatus** at the **Connection Site**, whether requiring a revised **Bilateral Agreement** or not, de-commissioning of **Plant** and/or **Apparatus**, and other changes which affect the accuracy of the **Site Responsibility Schedule**.

ECC.A 1.1.13 Where **The Company** has been informed of a change by a **User**, or itself proposes a change, it will prepare a revised **Site Responsibility Schedule** by not less than six weeks prior to the change taking effect (subject to it having been informed or knowing of the change eight weeks prior to that time) and the procedure set out in ECC.A.1.1.8 shall be followed with regard to the revised **Site Responsibility Schedule**.

ECC.A 1.1.14 The revised **Site Responsibility Schedule** shall then be signed in accordance with the procedure set out in ECC.A.1.1.9 and distributed in accordance with the procedure set out in ECC.A.1.1.10, accompanied by a note indicating where the alteration(s) has/have been made, the new issue number and the date of implementation.

[1] Details of circuits traversing the **Connection Site** are only needed from the date which is the earlier of the date when the **Site Responsibility Schedule** is first updated and 15th October 2004. In Scotland or **Offshore**, from a date to be agreed between **The Company** and **the Relevant Transmission Licensee**.

Urgent Changes

ECC.A.1.1.15 When a **User** identified on a **Site Responsibility Schedule**, or **The Company**, as the case may be, becomes aware that an alteration to the **Site Responsibility Schedule** is necessary urgently to reflect, for example, an emergency situation which has arisen outside its control, the **User** shall notify **The Company**, or **The Company** shall notify the **User**, as the case may be, immediately and will discuss:

(a) what change is necessary to the **Site Responsibility Schedule**;

(b) whether the **Site Responsibility Schedule** is to be modified temporarily or permanently;

(c) the distribution of the revised **Site Responsibility Schedule**.

The Company will prepare a revised **Site Responsibility Schedule** as soon as possible, and in any event within seven days of it being informed of or knowing the necessary alteration. The **Site Responsibility Schedule** will be confirmed by **Users** and signed on behalf of **The Company** and **Users** and the **Relevant Transmission Licensee** (by the persons referred to in ECC.A.1.1.9) as soon as possible after it has been prepared and sent to **Users** for confirmation.

Responsible Managers

ECC.A.1.1.16 Each **User** shall, prior to the **Completion Date** under each **Bilateral Agreement** and/or **Construction Agreement**, supply to **The Company** a list of Managers who have been duly authorised to sign **Site Responsibility Schedules** on behalf of the **User** and **The Company** shall, prior to the **Completion Date** under each **Bilateral Agreement** and/or **Construction Agreement**, supply to that **User** the name of its **Responsible Manager** and the name of the **Relevant Transmission Licensee's Responsible Manager** and each shall supply to the other any changes to such list six weeks before the change takes effect where the change is anticipated, and as soon as possible after the change, where the change was not anticipated.

De-commissioning of Connection Sites

ECC.A.1.1.17 Where a **Connection Site** is to be de-commissioned, whichever of **The Company** or the **User** who is initiating the de-commissioning must contact the other to arrange for the **Site Responsibility Schedule** to be amended at the relevant time.

Public

PROFORMA FOR SITE RESPONSIBILITY SCHEDULE

_____ AREA

COMPLEX: _____ SCHEDULE: _____

CONNECTION SITE: _____

			SAFETY		OPERATIONS		PARTY RESPONSIBLE FOR UNDERTAKING STATUTORY INSPECTIONS, FAULT INVESTIGATION & MAINTENANCE	
ITEM OF PLANT/ APPARATUS	PLANT APPARATUS OWNER	SITE MANAGER	SAFETY RULES	CONTROL OR OTHER RESPONSIBLE PERSON (SAFETY CO-ORDINATOR	OPERATIONAL PROCEDURES	CONTROL OR OTHER RESPONSIBLE ENGINEER		REMARKS

PAGE: _____ ISSUE NO: _____ DATE: _____

Public

PROFORMA FOR SITE RESPONSIBILITY SCHEDULE

_____ AREA

COMPLEX: _____ SCHEDULE: _____

CONNECTION SITE: _____

ITEM OF PLANT/ APPARATUS	PLANT APPARATUS OWNER	SITE MANAGER	SAFETY		OPERATIONS		PARTY RESPONSIBLE FOR UNDERTAKING STATUTORY INSPECTIONS, FAULT INVESTIGATION & MAINTENANCE	REMARKS
			SAFETY RULES	CONTROL OR OTHER RESPONSIBLE PERSON (SAFETY CO-ORDINATOR	OPERATIONAL PROCEDURES	CONTROL OR OTHER RESPONSIBLE ENGINEER		

NOTES:

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

SIGNED: _____ NAME: _____ COMPANY: _____ DATE: _____

PAGE: _____ ISSUE NO: _____ DATE: _____

Public

SP TRANSMISSION Ltd
SITE RESPONSIBILITY SCHEDULE
OWNERSHIP, MAINTENANCE AND OPERATIONS OF EQUIPMENT
IN JOINT USER SITUATIONS

Network Area:

Sheet No.
Revision:
Date:

SECTION 'A' BUILDING AND SITE

OWNER		ACCESS REQUIRED:-	
LESSEE			
MAINTENANCE		SPECIAL CONDITIONS:-	
SAFETY			
SECURITY		LOCATION OF SUPPLY TERMINALS:-	

SECTION 'B' CUSTOMER OR OTHER PARTY

NAME:-					
ADDRESS:-					
TEL NO:-					
SUB STATION:-					
LOCATION:-					

SECTION 'C' PLANT

ITEM Nos.	EQUIPMENT	IDENTIFICATION	OWNER	SAFETY RULES APPLICABLE	OPERATION				MAINTENANCE		FAULT INVESTIGATION			TESTING		RELAY SETTINGS	REMARKS
					Tripping	Closing	Isolating	Earthing	Primary Equip.	Protection Equip.	Primary Equip.	Protection Equip	Reclosure	Trip and Alarm	Primary Equip.		

SECTION 'D' CONFIGURATION AND CONTROL

ITEM Nos.	CONFIGURATION RESPONSIBILITY	TELEPHONE NUMBER	REMARKS
ITEM Nos.	CONTROL RESPONSIBILITY	TELEPHONE NUMBER	REMARKS

SECTION 'E' ADDITIONAL INFORMATION

ABBREVIATIONS:-
D - SP AUTHORISED PERSON - DISTRIBUTION SYSTEM
NGC - NATIONAL GRID COMPANY
SPD - SP DISTRIBUTION Ltd
SPPS - POWERSYSTEMS
SPT - SP TRANSMISSION Ltd
ST - SCOTTISH POWER TELECOMMUNICATIONS
T - SP AUTHORISED PERSON - TRANSMISSION SYSTEM
U - USER

SIGNED _____ FOR SP Transmission DATE _____

SIGNED _____ FOR SP Distribution DATE _____

SIGNED _____ FOR PowerSystems/User DATE _____

Public

Scottish Hydro-Electric Transmission Limited

Site Responsibility Schedule

Substation Type		Number:		Revision:	

Equipment	Owner	Controller	Maintainer	Responsible System User	Responsible Management Unit	Control Authority	Safety Rules	Operational Procedures	Notes

Public

APPENDIX E2 - OPERATION DIAGRAMS

PART 1A - PROCEDURES RELATING TO OPERATION DIAGRAMS

FIXED CAPACITOR



EARTH



EARTHING RESISTOR



LIQUID EARTHING RESISTOR



ARC SUPPRESSION COIL



FIXED MAINTENANCE EARTHING DEVICE



CARRIER COUPLING EQUIPMENT
(WITHOUT VT)



CARRIER COUPLING EQUIPMENT
(WITH VT ON ONE PHASE)



CARRIER COUPLING EQUIPMENT
(WITH VT ON 3 PHASES)



AC GENERATOR



SYNCHRONOUS COMPENSATOR



CIRCUIT BREAKER



CIRCUIT BREAKER
WITH DELAYED AUTO RECLOSE



WITHDRAWABLE METALCLAD
SWITCHGEAR



SWITCH DISCONNECTOR



SWITCH DISCONNECTOR
WITH INCORPORATED
EARTH SWITCH



DISCONNECTOR
(CENTRE ROTATING POST)



DISCONNECTOR
(SINGLE BREAK
DOUBLE ROTATING)



DISCONNECTOR
(SINGLE BREAK)



DISCONNECTOR
(NON-INTERLOCKED)



DISCONNECTOR
(POWER OPERATED)
NA - NON-AUTOMATIC
A - AUTOMATIC
SO - SEQUENTIAL OPERATION
FI - FAULT INTERFERING OPERATION



EARTH SWITCH



FAULT THROWING SWITCH
(PHASE TO PHASE)



FAULT THROWING SWITCH
(EARTH FAULT)



SURGE ARRESTOR



THYRISTOR



Public

TRANSFORMERS
(VECTORS TO INDICATE
WINDING CONFIGURATION)

TWO WINDING



THREE WINDING



AUTO



AUTO WITH DELTA TERTIARY



EARTHING OR AUX. TRANSFORMER

(-) INDICATE REMOTE SITE
IF APPLICABLE



VOLTAGE TRANSFORMERS

SINGLE PHASE WOUND



THREE PHASE WOUND



SINGLE PHASE CAPACITOR



TWO SINGLE PHASE CAPACITOR



THREE PHASE CAPACITOR



* CURRENT TRANSFORMER
(WHERE SEPARATE PRIMARY
APPARATUS)



* COMBINED VT/CT UNIT
FOR METERING



REACTOR



* BUSBARS

* OTHER PRIMARY CONNECTIONS

* CABLE & CABLE SEALING END



* THROUGH WALL BUSHING



* BYPASS FACILITY



* CROSSING OF CONDUCTORS
(LOWER CONDUCTOR
TO BE BROKEN)



PREFERENTIAL ABBREVIATIONS

AUXILIARY TRANSFORMER	Aux T
EARTHING TRANSFORMER	ET
GAS TURBINE	Gas T
GENERATOR TRANSFORMER	Gen T
GRID TRANSFORMER	Gr T
SERIES REACTOR	Ser Reac
SHUNT REACTOR	Sh Reac
STATION TRANSFORMER	Stn T
SUPERGRID TRANSFORMER	SGT
UNIT TRANSFORMER	UT

* NON-STANDARD SYMBOL

Public

PORTABLE MAINTENANCE
EARTH DEVICE



DISCONNECTOR
(PANTOGRAPH TYPE)



QUADRATURE BOOSTER



DISCONNECTOR
(KNEE TYPE)



SHORTING/DISCHARGE SWITCH



CAPACITOR
(INCLUDING HARMONIC FILTER)



SINGLE PHASE TRANSFORMER(BR)
NEUTRAL AND PHASE CONNECTIONS



RESISTOR WITH INHERENT
NON-LINEAR VARIABILITY,
VOLTAGE DEPENDANT



Public

PART E1B - PROCEDURES RELATING TO GAS ZONE DIAGRAMS

GAS INSULATED BUSBAR



DOUBLE-BREAK DISCONNECTOR



GAS BOUNDARY

EXTERNAL MOUNTED CURRENT TRANSFORMER (WHERE SEPARATE PRIMARY APPARATUS)



GAS/GAS BOUNDARY



STOP VALVE NORMALLY CLOSED



GAS/CABLE BOUNDARY



STOP VALVE NORMALLY OPEN



GAS/AIR BOUNDARY



GAS MONITOR



GAS/TRANSFORMER BOUNDARY



FILTER



MAINTENANCE VALVE



QUICK ACTING COUPLING



PART E2 - NON-EXHAUSTIVE LIST OF APPARATUS TO BE INCLUDED ON OPERATION DIAGRAMS

Basic Principles

(1) Where practicable, all the **HV Apparatus** on any **Connection Site** shall be shown on one **Operation Diagram**. Provided the clarity of the diagram is not impaired, the layout shall represent as closely as possible the geographical arrangement on the **Connection Site**.

(2) Where more than one **Operation Diagram** is unavoidable, duplication of identical information on more than one **Operation Diagram** must be avoided.

(3) The **Operation Diagram** must show accurately the current status of the **Apparatus** e.g. whether commissioned or decommissioned. Where decommissioned, the associated switchbay will be labelled "spare bay".

(4) Provision will be made on the **Operation Diagram** for signifying approvals, together with provision for details of revisions and dates.

(5) **Operation Diagrams** will be prepared in A4 format or such other format as may be agreed with **The Company**.

(6) The **Operation Diagram** should normally be drawn single line. However, where appropriate, detail which applies to individual phases shall be shown. For example, some **HV Apparatus** is numbered individually per phase.

Apparatus To Be Shown On Operation Diagram

(1) Busbars

(2) Circuit Breakers

(3) Disconnector (Isolator) and Switch Disconnecters (Switching Isolators)

(4) Disconnectors (Isolators) - Automatic Facilities

(5) Bypass Facilities

(6) Earthing Switches

(7) Maintenance Earths

(8) Overhead Line Entries

(9) Overhead Line Traps

(10) Cable and Cable Sealing Ends

(11) Generating Unit

(12) Generator Transformers

(13) Generating Unit Transformers, Station Transformers, including the lower voltage circuit-breakers.

(14) Synchronous Compensators

(15) Static Variable Compensators

(16) Capacitors (including Harmonic Filters)

(17) Series or Shunt Reactors (Referred to as "Inductors" at nuclear power station sites)

(18) Supergrid and Grid Transformers

(19) Tertiary Windings

(20) Earthing and Auxiliary Transformers

(21) Three Phase VT's

(22) Single Phase VT & Phase Identity

(23) High Accuracy VT and Phase Identity

(24) Surge Arrestors/Diverters

(25) Neutral Earthing Arrangements on HV Plant

(26) Fault Throwing Devices

(27) Quadrature Boosters

(28) Arc Suppression Coils

(29) Single Phase Transformers (BR) Neutral and Phase Connections

(30) Current Transformers (where separate plant items)

(31) Wall Bushings

(32) Combined VT/CT Units

(33) Shorting and Discharge Switches

(34) Thyristor

(35) Resistor with Inherent Non-Linear Variability, Voltage Dependent

(36) Gas Zone

APPENDIX E3 - MINIMUM FREQUENCY RESPONSE CAPABILITY REQUIREMENT PROFILE AND OPERATING RANGE FOR POWER GENERATING MODULES AND HVDC EQUIPMENT

ECC.A.3.1 Scope

The **Frequency** response capability is defined in terms of **Primary Response**, **Secondary Response** and **High Frequency Response**. In addition to the requirements defined in ECC.6.3.7 this appendix defines the minimum **Frequency** response requirements for:-

(a) each **Type C** and **Type D Power Generating Module**

(b) each **DC Connected Power Park Module**

(c) each **HVDC System**

For the avoidance of doubt, this appendix does not apply to **Type A** and **Type B Power Generating Modules**.

OTSDUW Plant and Apparatus should facilitate the delivery of **Frequency** response services provided by **Offshore Generating Units** and **Offshore Power Park Units**.

The functional definition provides appropriate performance criteria relating to the provision of **Frequency** control by means of **Frequency** sensitive generation in addition to the other requirements identified in ECC.6.3.7.

In this Appendix 3 to the **ECC**, for a **Power Generating Module** including a **CCGT Module** or a **Power Park Module** or **DC Connected Power Park Module**, the phrase **Minimum Regulating Level** applies to the entire **CCGT Module** or **Power Park Module** or **DC Connected Power Park Module** operating with all **Generating Units Synchronised** to the **System**.

The minimum **Frequency** response requirement profile is shown diagrammatically in Figure ECC.A.3.1. The capability profile specifies the minimum required level of **Frequency Response** Capability throughout the normal plant operating range.

ECC.A.3.2 Plant Operating Range

The upper limit of the operating range is the **Maximum Capacity** of the **Power Generating Module** or **Generating Unit** or **CCGT Module** or **HVDC Equipment**.

The **Minimum Stable Operating Level** may be less than, but must not be more than, 65% of the **Maximum Capacity**. Each **Power Generating Module** and/or **Generating Unit** and/or **CCGT Module** and/or **Power Park Module or HVDC Equipment** must be capable of operating satisfactorily down to the **Minimum Regulating Level** as dictated by **System** operating conditions, although it will not be instructed to below its **Minimum Stable Operating Level** . If a **Power Generating Module** or **Generating Unit** or **CCGT Module** or **Power Park Module**, or **HVDC Equipment** is operating below **Minimum Stable Operating Level** because of high **System Frequency**, it should recover adequately to its **Minimum Stable Operating Level** as the **System Frequency** returns to **Target Frequency** so that it can provide **Primary** and **Secondary Response** from its **Minimum Stable Operating Level** if the **System Frequency** continues to fall. For the avoidance of doubt, under normal operating conditions steady state operation below the **Minimum Stable Operating Level** is not expected. The **Minimum Regulating Level** must not be more than 55% of **Maximum Capacity**.

In the event of a **Power Generating Module** or **Generating Unit** or **CCGT Module** or **Power Park Module** or **HVDC Equipment** load rejecting down to no less than its **Minimum Regulating Level** it should not trip as a result of automatic action as detailed in BC3.7. If the load rejection is to a level less than the **Minimum Regulating Level** then it is accepted that the condition might be so severe as to cause it to be disconnected from the **System**.

ECC.A.3.3 Minimum Frequency Response Requirement Profile

Figure ECC.A.3.1 shows the minimum **Frequency** response capability requirement profile diagrammatically for a 0.5 Hz change in **Frequency**. The percentage response capabilities and loading levels are defined on the basis of the **Maximum Capacity** of the **Power Generating Module** or **CCGT Module** or **Power Park Module** or **HVDC Equipment**. Each **Power Generating Module** or and/or **CCGT Module** or **Power Park Module** (including a **DC Connected Power Park Module**) and/or **HVDC Equipment** must be capable of operating in a manner to provide **Frequency** response at least to the solid boundaries shown in the figure. If the **Frequency** response capability falls within the solid boundaries, the **Power Generating Module** or **CCGT Module** or **Power Park Module** or **HVDC Equipment** is providing response below the minimum requirement which is not acceptable. Nothing in this appendix is intended to prevent a **Power Generating Module** or **CCGT Module** or **Power Park Module** or **HVDC Equipment** from being designed to deliver a **Frequency** response in excess of the identified minimum requirement.

The **Frequency** response delivered for **Frequency** deviations of less than 0.5 Hz should be no less than a figure which is directly proportional to the minimum **Frequency** response requirement for a **Frequency** deviation of 0.5 Hz. For example, if the **Frequency** deviation is 0.2 Hz, the corresponding minimum **Frequency** response requirement is 40% of the level shown in Figure ECC.A.3.1. The **Frequency** response delivered for **Frequency** deviations of more than 0.5 Hz should be no less than the response delivered for a **Frequency** deviation of 0.5 Hz.

Each **Power Generating Module** and/or **CCGT Module** and/or **Power Park Module** or **HVDC Equipment** must be capable of providing some response, in keeping with its specific operational characteristics, when operating between 95% to 100% of **Maximum Capacity** as illustrated by the dotted lines in Figure ECC.A.3.1.

At the **Minimum Stable Operating** level, each **Power Generating Module** and/or **CCGT Module** and/or **Power Park Module** and/or HV**DC Equipment** is required to provide high and low **Frequency** response depending on the **System Frequency** conditions. Where the **Frequency** is high, the **Active Power** output is therefore expected to fall below the **Minimum Stable Operating** level.

The **Minimum Regulating Level** is the output at which a **Power Generating Module** and/or **CCGT Module** and/or **Power Park Module** and/or HV**DC Equipment** has no **High Frequency Response** capability. It may be less than, but must not be more than, 55% of the **Maximum Capacity**. This implies that a **Power Generating Module** or **CCGT Module** or **Power Park Module**) or **HVDC Equipment** is not obliged to reduce its output to below this level unless the **Frequency** is at or above 50.5 Hz (cf BC3.7).

ECC.A.3.4 Testing of Frequency Response Capability

The **Frequency** response capabilities shown diagrammatically in Figure ECC.A.3.1 are measured by taking the responses as obtained from some of the dynamic step response tests specified by **The Company** and carried out by **Generators** and HV**DC System** owners for compliance purposes. The injected signal is a step of 0.5Hz from zero to 0.5 Hz **Frequency** change, and is sustained at 0.5 Hz **Frequency** change thereafter, the latter as illustrated diagrammatically in figures ECC.A.3.4 and ECC.A.3.5.

In addition to provide and/or to validate the content of **Ancillary Services Agreements** a progressive injection of a **Frequency** change to the plant control system (i.e. governor and load controller) is used. The injected signal is a ramp of 0.5Hz from zero to 0.5 Hz **Frequency** change over a ten second period, and is sustained at 0.5 Hz **Frequency** change thereafter, the latter as illustrated diagrammatically in figures ECC.A.3.2 and ECC.A.3.3. In the case of an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded HVDC System** not subject to a **Bilateral Agreement**, **The Company** may require the **Network Operator** within whose System the **Embedded Medium Power Station** or **Embedded HVDC System** is situated, to ensure that the **Embedded Person** performs the dynamic response tests reasonably required by **The Company** in order to demonstrate compliance within the relevant requirements in the **ECC**.

The **Primary Response** capability (P) of a **Power Generating Module** or a **CCGT Module** or **Power Park Module** or **HVDC Equipment** is the minimum increase in **Active Power** output between 10 and 30 seconds after the start of the ramp injection as illustrated diagrammatically in Figure ECC.A.3.2. This increase in **Active Power** output should be released increasingly with time over the period 0 to 10 seconds from the time of the start of the **Frequency** fall as illustrated by the response from Figure ECC.A.3.2.

The **Secondary Response** capability (S) of a **Power Generating Module** or a **CCGT Module** or **Power Park Module** or **HVDC Equipment** is the minimum increase in **Active Power** output between 30 seconds and 30 minutes after the start of the ramp injection as illustrated diagrammatically in Figure ECC.A.3.2.

The **High Frequency Response** capability (H) of a **Power Generating Module** or a **CCGT Module** or **Power Park Module** or **HVDC Equipment** is the decrease in **Active Power** output provided 10 seconds after the start of the ramp injection and sustained thereafter as illustrated diagrammatically in Figure ECC.A.3.3. This reduction in **Active Power** output should be released increasingly with time over the period 0 to 10 seconds from the time of the start of the **Frequency** rise as illustrated by the response in Figure ECC.A.3.2.

ECC.A.3.5 Repeatability of Response

When a **Power Generating Module** or **CCGT Module** or **Power Park Module** or **HVDC Equipment** has responded to a significant **Frequency** disturbance, its response capability must be fully restored as soon as technically possible. Full response capability should be restored no later than 20 minutes after the initial change of **System Frequency** arising from the **Frequency** disturbance.

Figure ECC.A.3.1 - Minimum **Frequency** Response requirement profile for a 0.5 Hz **Frequency** change from **Target Frequency**

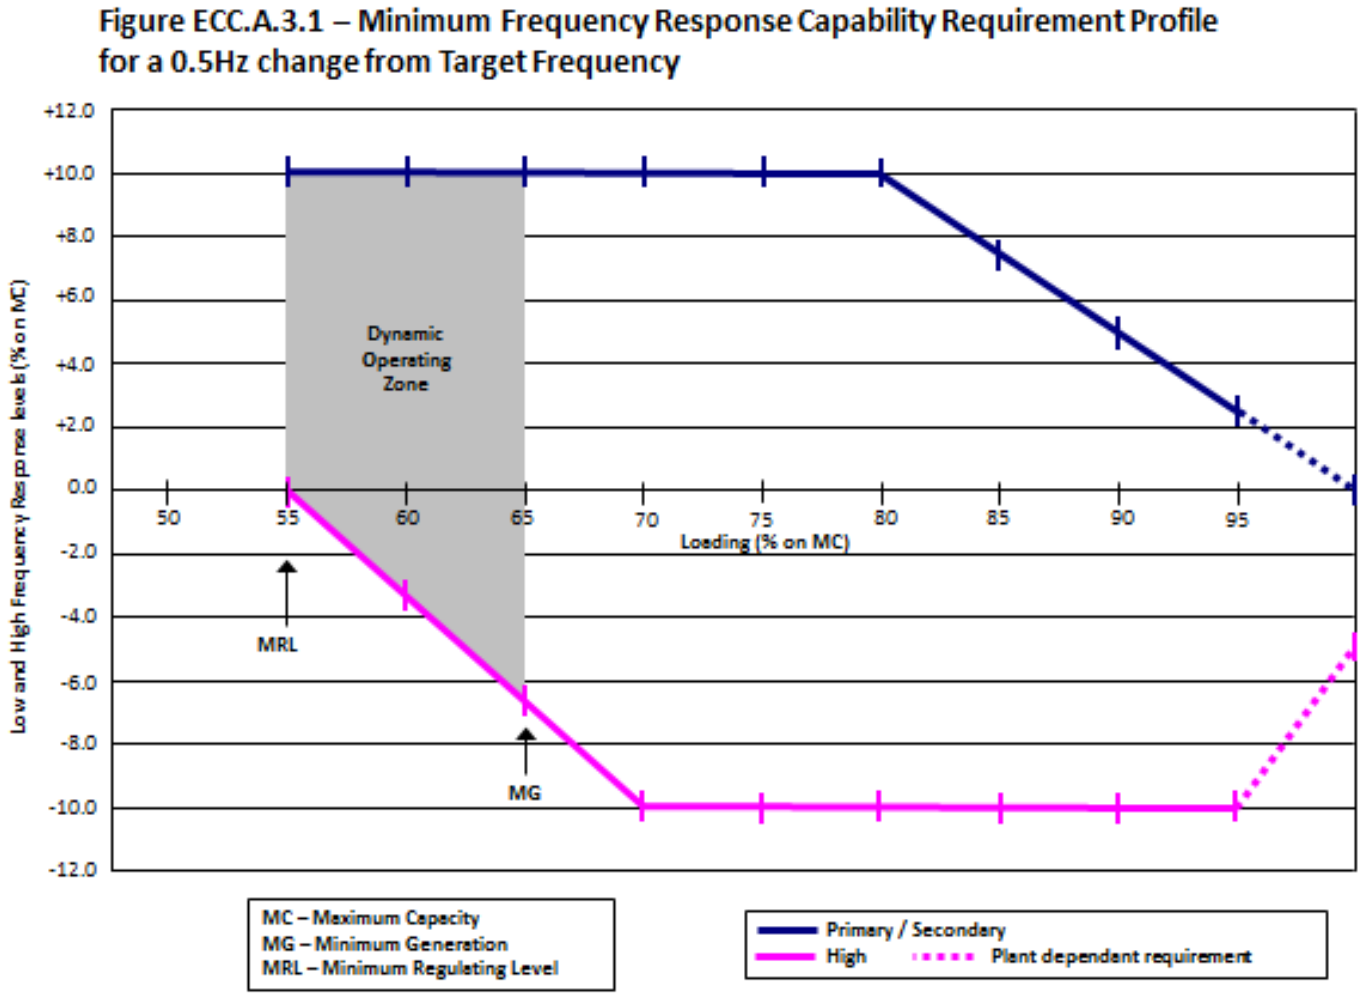

Figure ECC.A.3.2 – Interpretation of Primary and Secondary Response Service Values

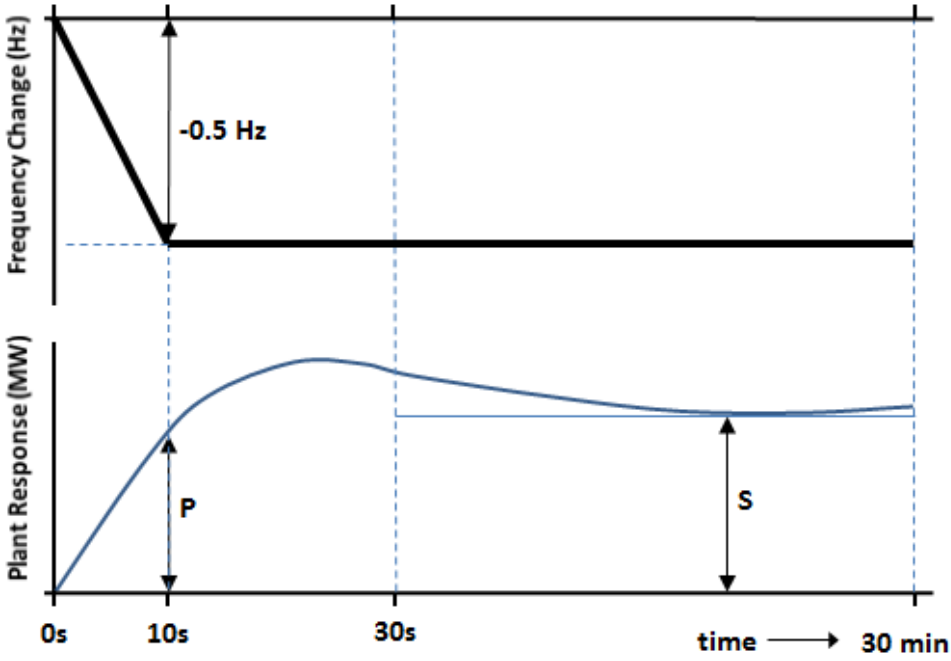

Figure ECC.A.3.3 – Interpretation of High Frequency Response Service Values

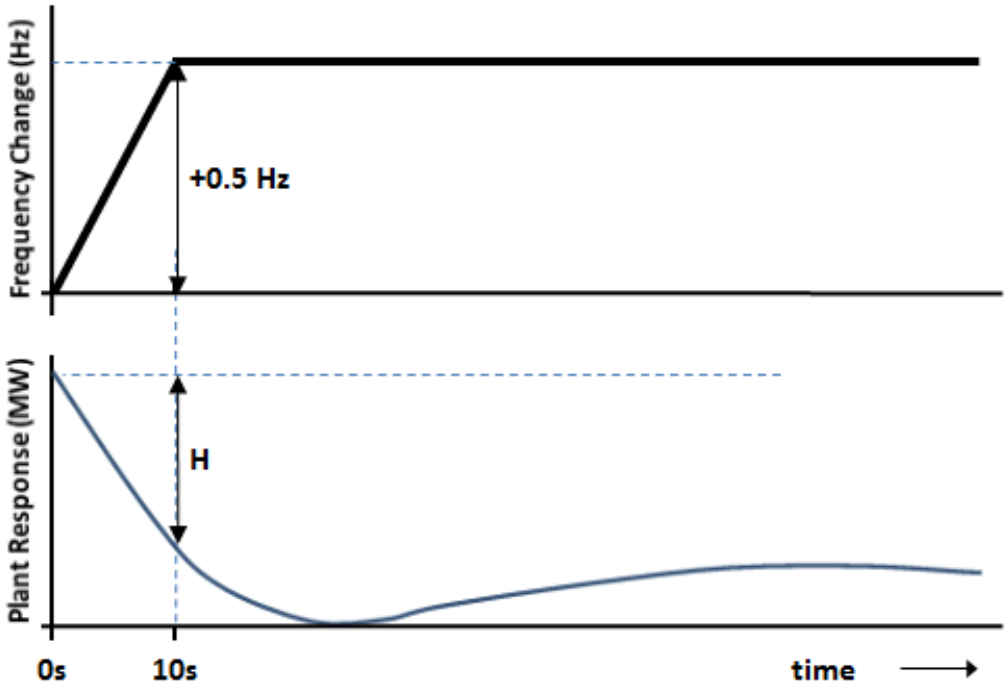

Figure ECC.A.3.4 – Interpretation of Low Frequency Response Capability Values

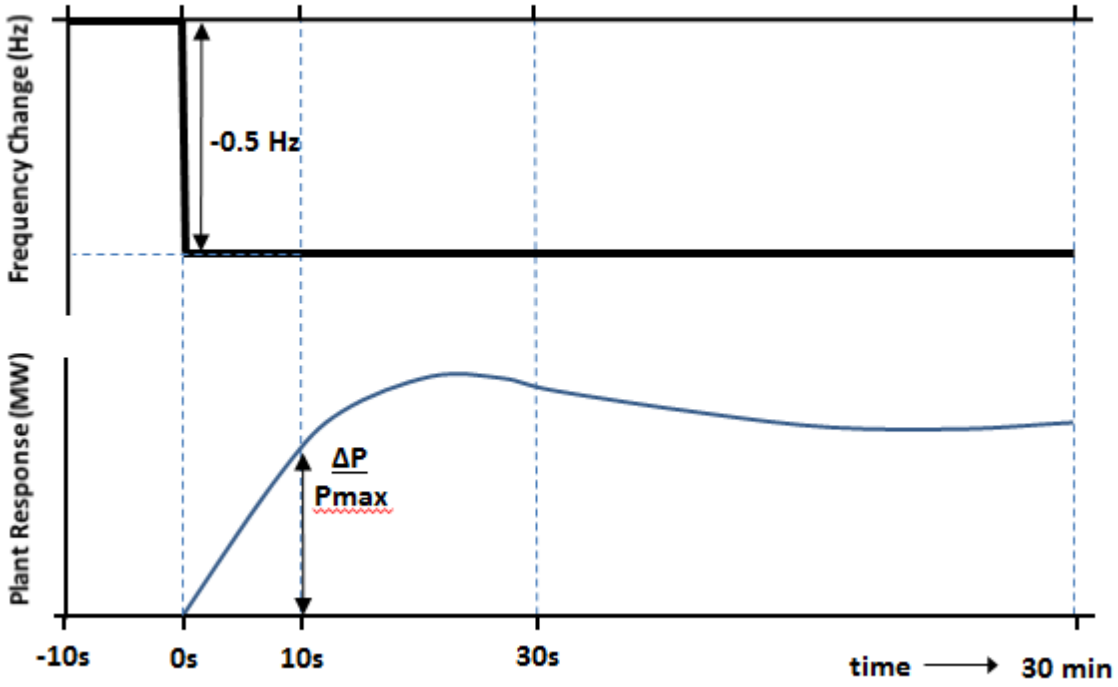

Figure ECC.A.3.5 – Interpretation of High Frequency Response Capability Values

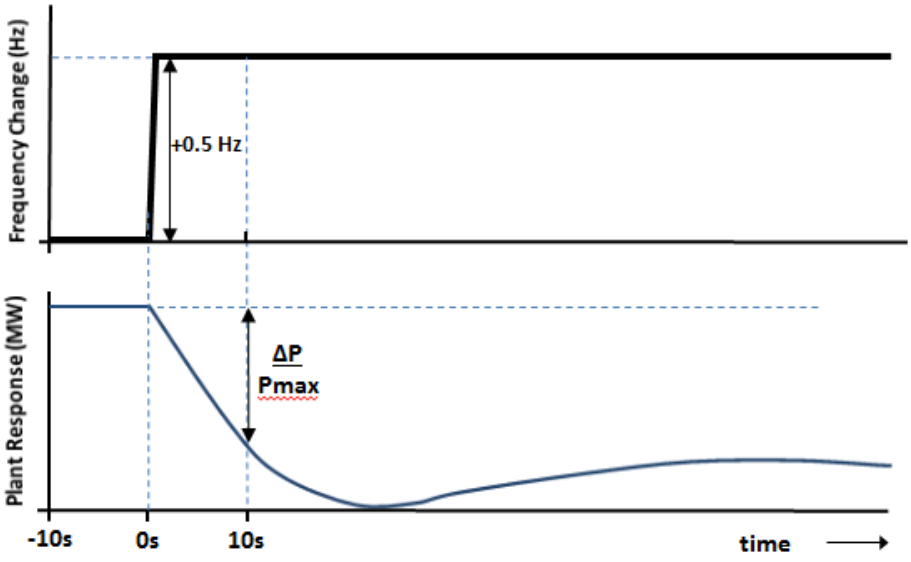

ECC.4 - APPENDIX 4 - FAULT RIDE THROUGH REQUIREMENTS

FAULT RIDE THROUGH REQUIREMENTS FOR TYPE B, TYPE C AND TYPE D POWER GENERATING MODULES (INCLUDING OFFSHORE POWER PARK MODULES WHICH ARE EITHER AC CONNECTED POWER PARK MODULES OR DC CONNECTED POWER PARK MODULES), HVDC SYSTEMS AND OTSDUW PLANT AND APPARATUS

ECC.A.4A.1 Scope

The **Fault Ride Through** requirements are defined in ECC.6.3.15. This Appendix provides illustrations by way of examples only of ECC.6.3.15.1 to ECC.6.3.15.10 and further background and illustrations and is not intended to show all possible permutations.

ECC.A.4A.2 Short Circuit Faults At Supergrid Voltage On The Onshore Transmission System Up To 140ms In Duration

For short circuit faults at **Supergrid Voltage** on the **Onshore Transmission System** (which could be at an **Interface Point**) up to 140ms in duration, the **Fault Ride Through** requirement is defined in ECC.6.3.15. In summary any **Power Generating Module** (including a **DC Connected Power Park Module**) or **HVDC System** is required to remain connected and stable whilst connected to a healthy circuit. Figure ECC.A.4.A.2 illustrates this principle.

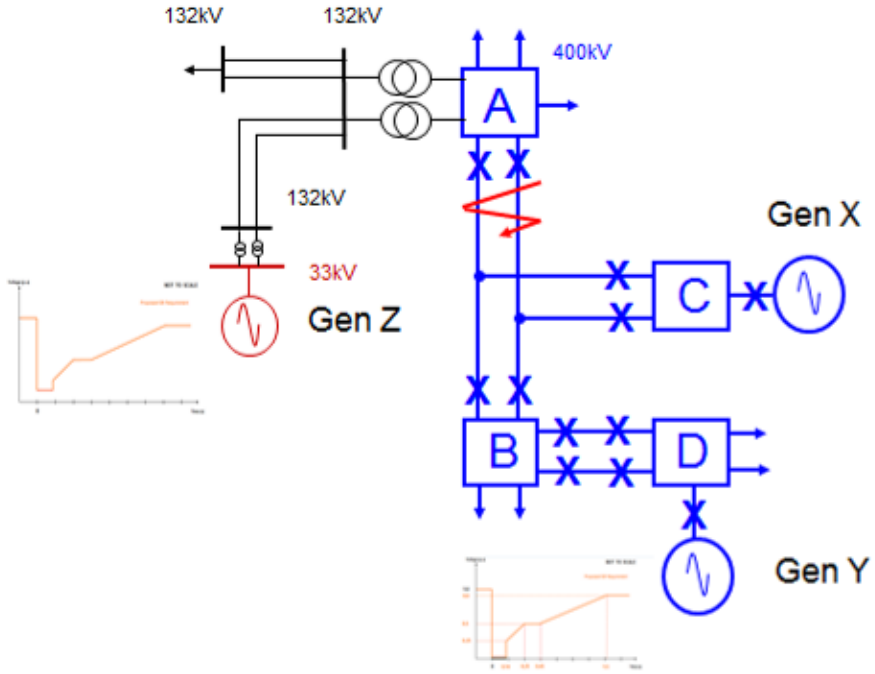

Figure ECC.A.4.A.2

In Figure ECC.A.4.A.2 a solid three phase short circuit fault is applied adjacent to substation A resulting in zero voltage at the point of fault. All circuit breakers on the faulty circuit (Lines ABC) will open within 140ms resulting in Gen X tripping. The effect of this fault, due to the low impedance of the network, will be the observation of a low voltage at each substation node across the **Total System** until the fault has been cleared. In this example, Gen Y and Gen Z (an **Embedded Generator**) would need to remain connected and stable as both are still connected to the **Total System** and remain connected to healthy circuits.

The criteria for assessment is based on a voltage against time curve at each **Grid Entry Point** or **User System Entry Point**. The voltage against time curve at the **Grid Entry Point** or **User System Entry Point** varies for each different type and size of **Power Generating Module** as detailed in ECC.6.3.15.2. – ECC.6.3.15.7.

The voltage against time curve represents the voltage profile at a **Grid Entry Point or User System Entry Point** that would be obtained by plotting the voltage at that **Grid Entry Point** or **User System Entry Point** before during and after the fault. This is not to be confused with a voltage duration curve (as defined under ECC.6.3.15.9) which represents a voltage level and associated time duration.

The post fault voltage at a **Grid Entry Point** or **User System Entry Point** is largely influenced by the topology of the network rather than the behaviour of the **Power Generating Module** itself. The **EU Generator** therefore needs to ensure each **Power Generating Module** remains connected and stable for a close up solid three phase short circuit fault for 140ms at the **Grid Entry Point** or **User System Entry Point**.

Two examples are shown in Figure EA.4.2(a) and Figure EA4.2(b). In Figure EA.4.2(a) the post fault profile is above the heavy black line. In this case the **Power Generating Module** must remain connected and stable. In Figure EA4.2(b) the post fault voltage dips below the heavy black line in which case the **Power Generating Module** is permitted to trip.

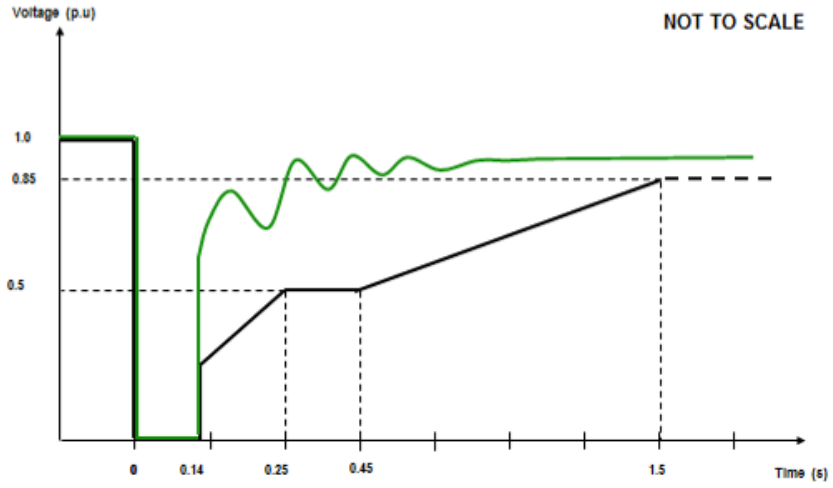

Figure EA.4.2(a)

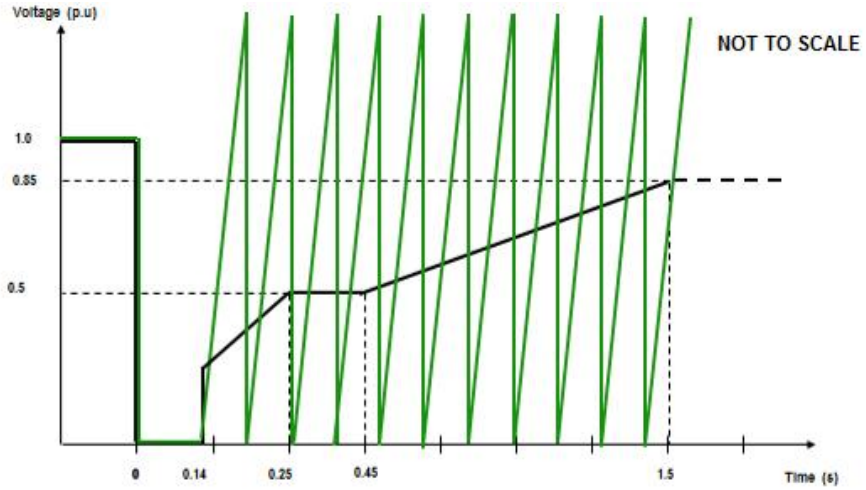

Figure EA.4.2(b)

The process for demonstrating **Fault Ride Through** compliance against the requirements of ECC.6.3.15 is detailed in ECP.A.3.5 and ECP.A.6.7 (as applicable).

ECC.A.4A.3 Supergrid Voltage Dips On The Onshore Transmission System Greater Than 140ms In Duration

ECC.A.4A3.1 Requirements applicable to **Synchronous Power Generating Modules** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration.

For balanced **Supergrid Voltage** dips on the **Onshore Transmission System** having durations greater than 140ms and up to 3 minutes, the **Fault Ride Through** requirement is defined in ECC.6.3.15.9.2.1(a) and Figure ECC.6.3.15.9(a) which is reproduced in this Appendix as Figure EA.4.3.1 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at a point on the **Onshore Transmission System** (or **User System** if located **Onshore**) to a disturbance. Rather, each point on the profile (ie the heavy black line) represents a voltage level and an associated time duration which connected **Synchronous Power Generating Modules** must withstand or ride through.

Figures EA.4.3.2 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

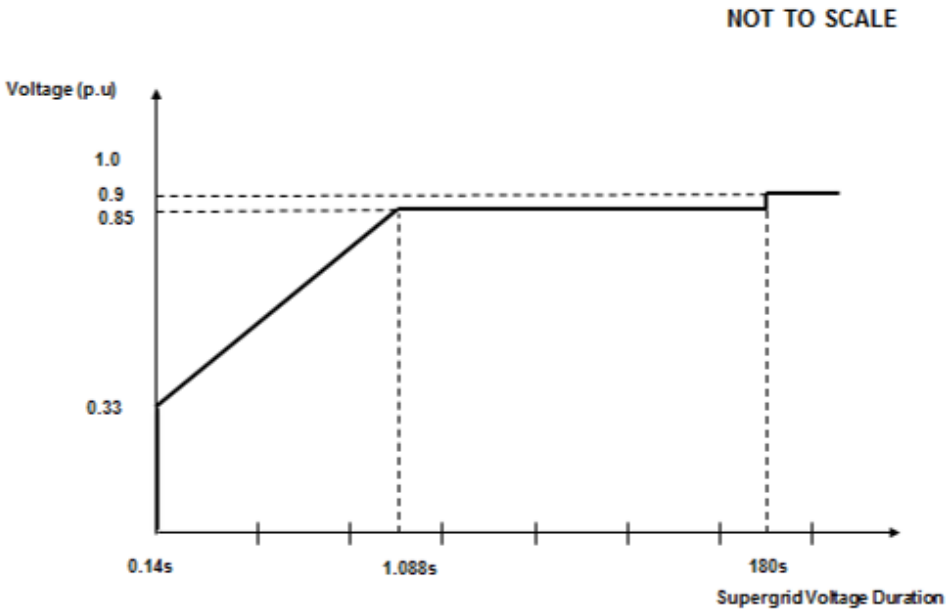

Figure EA.4.3.1

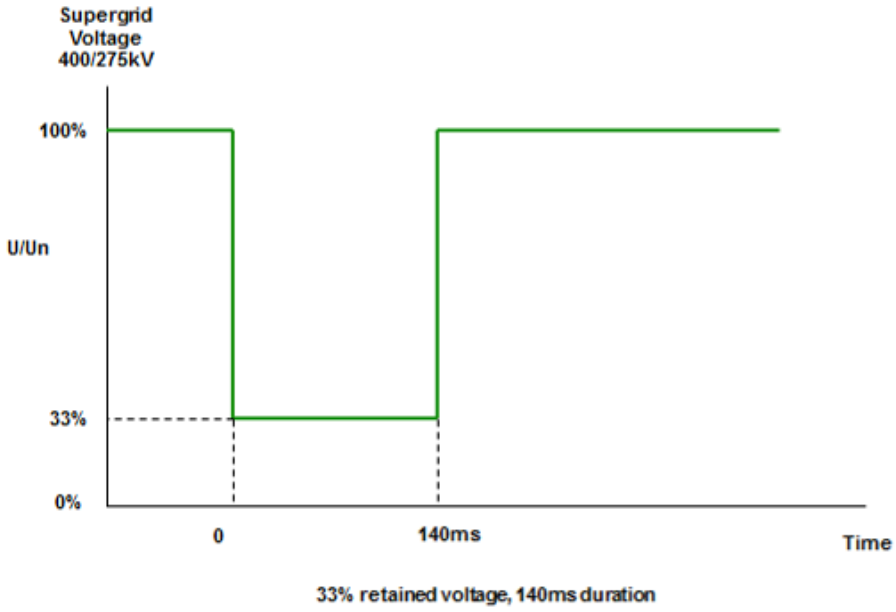

Figure EA.4.3.2 (a)

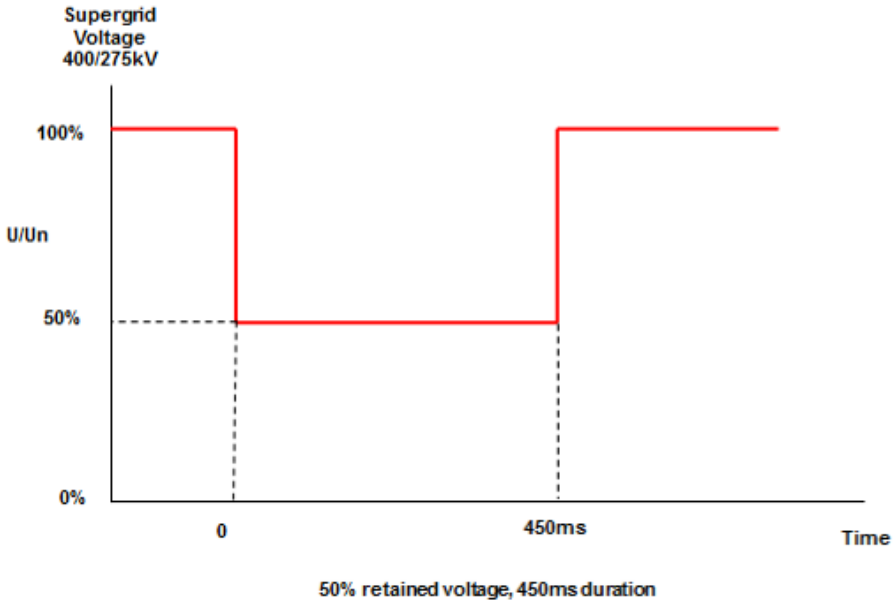

Figure EA.4.3.2 (b)

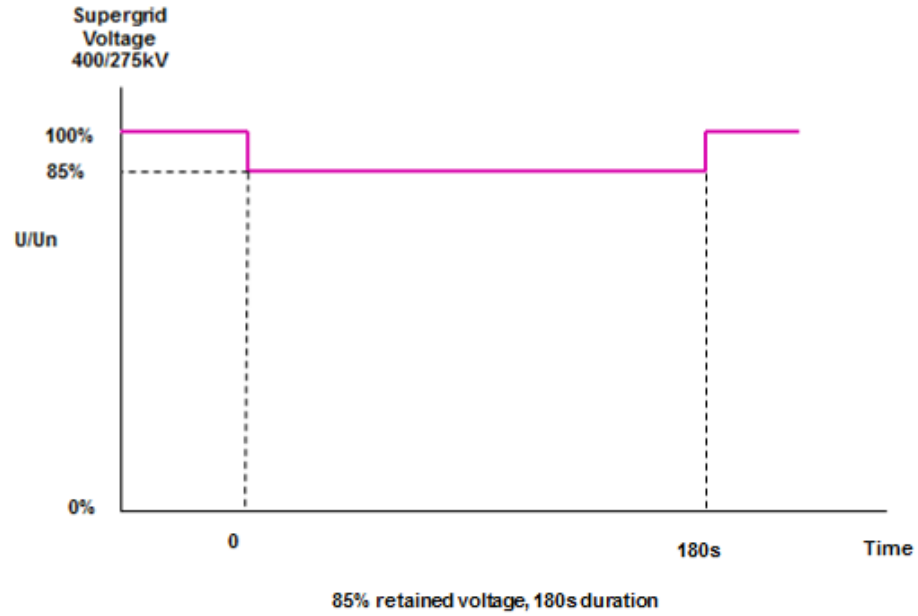

Figure EA.4.3.2 (c)

ECC.A.4A3.2 Requirements applicable to **Power Park Modules** or **OTSDUW Plant and Apparatus** subject to **Supergrid Voltage** dips on the **Onshore Transmission System** greater than 140ms in duration

For balanced **Supergrid Voltage** dips on the **Onshore Transmission System** (which could be at an **Interface Point**) having durations greater than 140ms and up to 3 minutes the **Fault Ride Through** requirement is defined in ECC.6.3.15.9.2.1(b) and Figure ECC.6.3.15.9(b) which is reproduced in this Appendix as Figure EA.4.3.3 and termed the voltage–duration profile.

This profile is not a voltage-time response curve that would be obtained by plotting the transient voltage response at a point on the **Onshore Transmission System** (or **User System** if located **Onshore**) to a disturbance. Rather, each point on the profile (ie the heavy black line) represents a voltage level and an associated time duration which connected **Power Park Modules** or **OTSDUW Plant and Apparatus** must withstand or ride through.

Figures EA.4.3.4 (a), (b) and (c) illustrate the meaning of the voltage-duration profile for voltage dips having durations greater than 140ms.

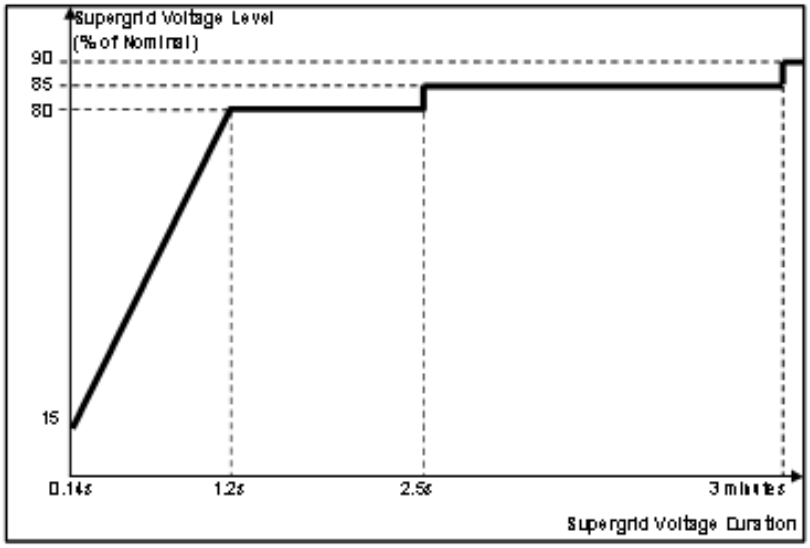

Figure EA.4.3.3

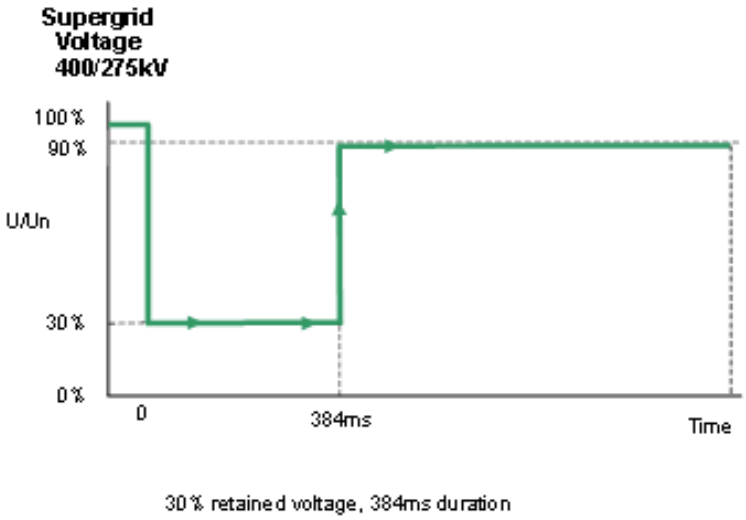

Figure EA.4.3.4(a)

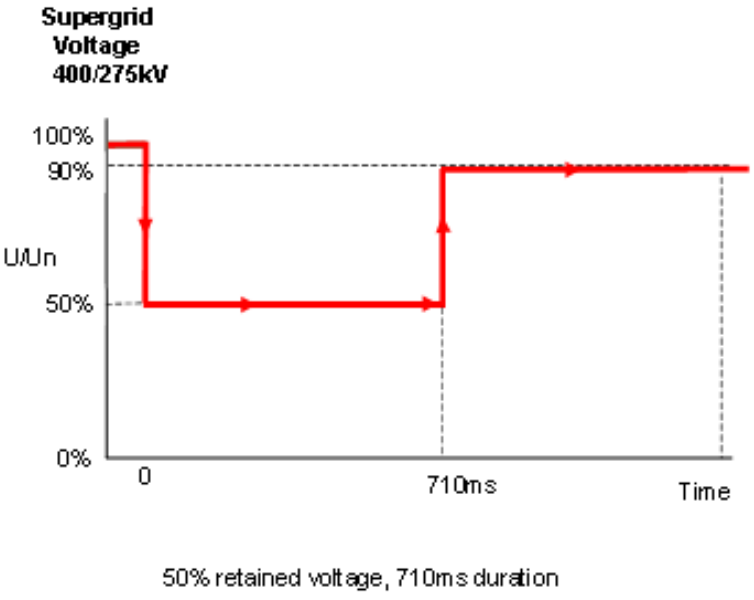

Figure EA.4.3.4 (b)

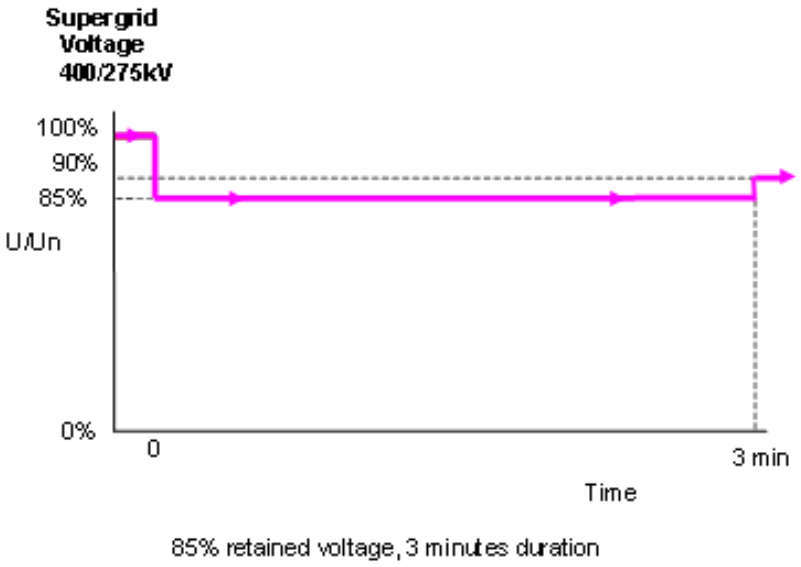

Figure EA.4.3.4 (c)

APPENDIX E5 - TECHNICAL REQUIREMENTS LOW FREQUENCY RELAYS FOR THE AUTOMATIC DISCONNECTION OF SUPPLIES AT LOW FREQUENCY

ECC.A.5.1 Low Frequency Relays

ECC.A.5.1.1 The **Low Frequency Relays** to be used shall have a setting range of 47.0 to 50Hz and be suitable for operation from a nominal AC input of 63.5, 110 or 240V. The following parameters specify the requirements of approved **Low Frequency Relays**:

(a) **Frequency** settings:	47-50Hz in steps of 0.05Hz or better, preferably 0.01Hz;
(b) Operating time:	Relay operating time shall not be more than 150 ms;
(c) Voltage lock-out:	Selectable within a range of 55 to 90% of nominal voltage;
(d) Direction	Tripping interlock for forward or reverse power flow capable of being set in either position or off
(e) Facility stages:	One or two stages of **Frequency** operation;
(f) Output contacts:	Two output contacts per stage to be capable of repetitively making and breaking for 1000 operations:
(g) Accuracy:	0.01 Hz maximum error under reference environmental and system voltage conditions. 0.05 Hz maximum error at 8% of total harmonic distortion **Electromagnetic Compatibility Level**.

In the case of **Network Operators** who are **GB Code Users**, the above requirements only apply to a relay (if any) installed at the **EU Grid Supply Point**. **Network Operators** who are also **GB Code Users** should continue to satisfy the requirements for low **Frequency** relays as specified in the **CCs** as applicable to their **System**.

ECC.A.5.2 Low Frequency Relay Voltage Supplies

ECC.A.5.2.1 It is essential that the voltage supply to the **Low Frequency Relays** shall be derived from the primary **System** at the supply point concerned so that the **Frequency** of the **Low Frequency Relays** input voltage is the same as that of the primary **System**. This requires either:

(a) the use of a secure supply obtained from voltage transformers directly associated with the grid transformer(s) concerned, the supply being obtained where necessary via a suitable automatic voltage selection scheme; or

(b) the use of the substation 240V phase-to-neutral selected auxiliary supply, provided that this supply is always derived at the supply point concerned and is never derived from a standby supply **Power Generating Module** or from another part of the **User System**.

ECC.A.5.3 Scheme Requirements

ECC.A.5.3.1 The tripping facility should be engineered in accordance with the following reliability considerations:

(a) Dependability

Failure to trip at any one particular **Demand** shedding point would not harm the overall operation of the scheme. However, many failures would have the effect of reducing the amount of **Demand** under low **Frequency** control. An overall reasonable minimum requirement for the dependability of the **Demand** shedding scheme is 96%, i.e. the average probability of failure of each **Demand** shedding point should be less than 4%. Thus the **Demand** under low **Frequency** control will not be reduced by more than 4% due to relay failure.

(b) Outages

Low **Frequency Demand** shedding schemes will be engineered such that the amount of **Demand** under control is as specified in Table ECC.A.5.5.1a and is not reduced unacceptably during equipment outage or maintenance conditions.

ECC.A.5.3.2 The total operating time of the scheme, including circuit breakers operating time, shall where reasonably practicable, be less than 200 ms. For the avoidance of doubt, the replacement of plant installed prior to October 2009 will not be required in order to achieve lower total scheme operating times.

ECC.A.5.4 Low Frequency Relay Testing

ECC.A.5.4.1 **Low Frequency Relays** installed and commissioned after 1st January 2007 shall be type tested in accordance with and comply with the functional test requirements for **Frequency Protection** contained in Energy Networks Association Technical Specification 48-6-5 Issue 1 dated 2005 "ENA **Protection** Assessment Functional Test Requirements – Voltage and **Frequency Protection**".

For the avoidance of doubt, **Low Frequency Relays** installed and commissioned before 1st January 2007 shall comply with the version of ECC.A.5.1.1 applicable at the time such **Low Frequency Relays** were commissioned.

ECC.A.5.4.2 Each **Non-Embedded Customer** shall aim to execute testing on its low **Frequency** demand disconnection relays installed within its network and in service at least once every three years, although this may be extended to no more than every five years if considered to be required for operational purposes.

ECC.A.5.4.3 Each **Network Operator** and **Relevant Transmission Licensee** shall aim to execute testing on its low **Frequency** demand disconnection relays installed within its network and in service at least once every three years, although this may be extended to no more than every five years if considered to be required for operational purposes.

ECC.A.5.5 Scheme Settings

ECC.A.5.5.1 Table CC.A.5.5.1a shows, for each **Transmission Area**, the percentage of **Demand** (based on **Annual ACS Conditions**) at the time of forecast **National Electricity Transmission System** peak **Demand** that each **Network Operator** whose **System** is connected to the **Onshore Transmission System** within such **Transmission Area** shall disconnect by **Low Frequency Relays** at a range of frequencies. Where a **Network Operator's System** is connected to the **National Electricity Transmission System** in more than one **Transmission Area**, the settings for the **Transmission Area** in which the majority of the **Demand** is connected shall apply.

Frequency (Hz)	% **Demand** disconnection for each Network Operator in Transmission Area		
	NGET	SPT	SHETL
48.8	5		
48.75	5		
48.7	10		

48.6	7.5		10
48.5	7.5	10	
48.4	7.5	10	10
48.2	7.5	10	10
48.0	5	10	10
47.8	5		
Total % **Demand**	60	40	40

Table ECC.A.5.5.1a

Note – the percentages in table ECC.A.5.5.1a are cumulative such that, for example, should the **Frequency** fall to 48.6 Hz in **NGET's Transmission Area**, 27.5% of the total **Demand** connected to the **National Electricity Transmission System** in **NGET's Transmission Area** shall be disconnected by the action of **Low Frequency Relays**.

The percentage **Demand** at each stage shall be allocated as far as reasonably practicable. The cumulative total percentage **Demand** is a minimum.

ECC.A.5.5.2 In the case of a **Non-Embedded Customer** (who is also an **EU Code User**) the percentage of **Demand** (based on **Annual ACS Conditions**) at the time of forecast **National Electricity Transmission System** peak **Demand** that each **Non-Embedded Customer** whose **System** is connected to the **Onshore Transmission System** which shall be disconnected by **Low Frequency Relays** shall be in accordance with OC6.6 and the **Bilateral Agreement**.

ECC.A.5.6 Connection and Reconnection

ECC.A.5.6.1 As defined under OC.6.6 once automatic low **Frequency Demand Disconnection** has taken place, the **Network Operator** on whose **User System** it has occurred, will not reconnect until **The Company** instructs that **Network Operator** to do so in accordance with OC6. The same requirement equally applies to **Non-Embedded Customers.**

ECC.A.5.6.2 Once **The Company** instructs the **Network Operator** or **Non Embedded Customer** to reconnect to the **National Electricity Transmission System** following operation of the **Low Frequency Demand Disconnection** scheme it shall do so in accordance with the requirements of ECC.6.2.3.10 and OC6.6.

ECC.A.5.6.3 **Network Operators** or **Non Embedded Customers** shall be capable of being remotely disconnected from the **National Electricity Transmission System** when instructed by **The Company**. Any requirement for the automated disconnection equipment for reconfiguration of the **National Electricity Transmission System** in preparation for block loading and the time required for remote disconnection shall be specified by **The Company** in accordance with the terms of the **Bilateral Agreement**.

ECC.A.5.6.4 During **System Restoration**, the **Total System** may be operated outside of **License Standards** as provided for in OC9.4.3. During such periods, on or after 31 December 2026, **Transmission Licensees** in accordance with the requirements of the **STC**, **Network Operators** and **Non-Embedded Customers** shall have the remote capability to inhibit and restore the operation of their **Low Frequency Relays** upon instruction from **The Company** as provided for in OC9.5.7(a).

APPENDIX E6 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC EXCITATION CONTROL SYSTEMS FOR ONSHORE SYNCHRONOUS POWER GENERATING MODULES,

ECC.A.6.1 Scope

ECC.A.6.1.1 This Appendix sets out the performance requirements of continuously acting automatic excitation control systems for **Type C** and **Type D Onshore Synchronous Power Generating Modules** that must be complied with by the **User**. This Appendix does not limit any site specific requirements where in **The Company's** reasonable opinion these facilities are necessary for system reasons.

ECC.A.6.1.2 Where the requirements may vary the likely range of variation is given in this Appendix. It may be necessary to specify values outside this range where **The Company** identifies a system need, and notwithstanding anything to the contrary **The Company** may specify values outside of the ranges provided in this Appendix 6. The most common variations are in the on-load excitation ceiling voltage requirements and the response time required of the **Exciter**. Actual values will be included in the **Bilateral Agreement**.

ECC.A.6.1.3 Should an **EU Generator** anticipate making a change to the excitation control system it shall notify **The Company** under the **Planning Code** (PC.A.1.2(b) and (c)) as soon as the **EU Generator** anticipates making the change. The change may require a revision to the **Bilateral Agreement**.

ECC.A.6.2 Requirements

ECC.A.6.2.1 The **Excitation System** of a **Type C** or **Type D Onshore Synchronous Power Generating Module** shall include an excitation source (**Exciter**), and a continuously acting **Automatic Voltage Regulator** (**AVR**) and shall meet the following functional specification. **Type D Synchronous Power Generating Modules** are also required to be fitted with a **Power System Stabiliser** in accordance with the requirements of ECC.A.6.2.5.

ECC.A.6.2.3 Steady State Voltage Control

ECC.A.6.2.3.1 An accurate steady state control of the **Onshore Synchronous Power Generating Module** pre-set **Synchronous Generating Unit** terminal voltage is required. As a measure of the accuracy of the steady-state voltage control, the **Automatic Voltage Regulator** shall have static zero frequency gain, sufficient to limit the change in terminal voltage to a drop not exceeding 0.5% of rated terminal voltage, when the output of a **Synchronous Generating Unit** within an **Onshore Synchronous Power Generating Module** is gradually changed from zero to rated MVA output at rated voltage, **Active Power** and **Frequency**.

ECC.A.6.2.4 Transient Voltage Control

ECC.A.6.2.4.1 For a step change from 90% to 100% of the nominal **Onshore Synchronous Generating Unit** terminal voltage, with the **Onshore Synchronous Generating Unit** on open circuit, the **Excitation System** response shall have a damped oscillatory characteristic. For this characteristic, the time for the **Onshore Synchronous Generating Unit** terminal voltage to first reach 100% shall be less than 0.6 seconds. Also, the time to settle within 5% of the voltage change shall be less than 3 seconds.

ECC.A.6.2.4.2 To ensure that adequate synchronising power is maintained, when the **Onshore Power Generating Module** is subjected to a large voltage disturbance, the **Exciter** whose output is varied by the **Automatic Voltage Regulator** shall be capable of providing its achievable upper and lower limit ceiling voltages to the **Onshore Synchronous Generating Unit** field in a time not exceeding that specified in the **Bilateral Agreement**. This will normally be not less than 50 ms and not greater than 300 ms. The achievable upper and lower limit ceiling voltages may be dependent on the voltage disturbance.

ECC.A.6.2.4.3 The **Exciter** shall be capable of attaining an **Excitation System On Load Positive Ceiling Voltage** of not less than a value specified in the **Bilateral Agreement** that will be:

not less than 2 per unit (pu)

normally not greater than 3 pu

exceptionally up to 4 pu

of **Rated Field Voltage** when responding to a sudden drop in voltage of 10 percent or more at the **Onshore Synchronous Generating Unit** terminals. **The Company** may specify a value outside the above limits where **The Company** identifies a system need.

ECC.A.6.2.4.4 If a static type **Exciter** is employed:

(i) the field voltage should be capable of attaining a negative ceiling level specified in the **Bilateral Agreement** after the removal of the step disturbance of ECC.A.6.2.4.3. The specified value will be 80% of the value specified in ECC.A.6.2.4.3. **The Company** may specify a value outside the above limits where **The Company** identifies a system need.

(ii) the **Exciter** must be capable of maintaining free firing when the **Onshore Synchronous Generating Unit** terminal voltage is depressed to a level which may be between 20% to 30% of rated terminal voltage

(iii) the **Exciter** shall be capable of attaining a positive ceiling voltage not less than 80% of the **Excitation System On Load Positive Ceiling Voltage** upon recovery of the **Onshore Synchronous Generating Unit** terminal voltage to 80% of rated terminal voltage following fault clearance. **The Company** may specify a value outside the above limits where **The Company** identifies a system need.

(iv) the requirement to provide a separate power source for the **Exciter** will be specified if **The Company** identifies a **Transmission System** need.

ECC.A.6.2.5 Power Oscillations Damping Control

ECC.A.6.2.5.1 To allow **Type D Onshore Power Generating Modules** to maintain second and subsequent swing stability and also to ensure an adequate level of low frequency electrical damping power, the **Automatic Voltage Regulator** of each **Onshore Synchronous Generating Unit** within each **Type D Onshore Synchronous Power Generating Module** shall include a **Power System Stabiliser** as a means of supplementary control.

ECC.A.6.2.5.2 Whatever supplementary control signal is employed, it shall be of the type which operates into the **Automatic Voltage Regulator** to cause the field voltage to act in a manner which results in the damping power being improved while maintaining adequate synchronising power.

ECC.A.6.2.5.3 The arrangements for the supplementary control signal shall ensure that the **Power System Stabiliser** output signal relates only to changes in the supplementary control signal and not the steady state level of the signal. For example, if generator electrical power output is chosen as a supplementary control signal then the **Power System Stabiliser** output should relate only to changes in the **Synchronous Generating Unit** electrical power output and not the steady state level of power output. Additionally the **Power System Stabiliser** should not react to mechanical power changes in isolation for example during rapid changes in steady state load or when providing **Frequency** response.

ECC.A.6.2.5.4 The output signal from the **Power System Stabiliser** shall be limited to not more than ±10% of the **Onshore Synchronous Generating Unit** terminal voltage signal at the **Automatic Voltage Regulator** input. The gain of the **Power System Stabiliser** shall be such that an increase in the gain by a factor of 3 shall not cause instability.

ECC.A.6.2.5.5 The **Power System Stabiliser** shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5Hz would be judged to be acceptable for this application.

ECC.A.6.2.5.6 The **EU Generator** in respect of its **Type D Synchronous Power Generating Modules** will agree **Power System Stabiliser** settings with **The Company** prior to the on-load commissioning detailed in BC2.11.2(d). To allow assessment of the performance before on-load commissioning the **EU Generator** will provide to **The Company** a report covering the areas specified in ECP.A.3.2.1.

ECC.A.6.2.5.7 The **Power System Stabiliser** must be active within the **Excitation System** at all times when **Synchronised** including when the **Under Excitation Limiter** or **Over Excitation Limiter** are active. When operating at low load when **Synchronising** or **De-Synchronising** an **Onshore Synchronous Generating Unit**, within a **Type D Synchronous Power Generating Module**, the **Power System Stabiliser** may be out of service.

ECC.A.6.2.5.8 Where a **Power System Stabiliser** is fitted to a **Pumped Storage Unit** within a **Type D Synchronous Power Generating Module** it must function when the **Pumped Storage Unit** is in both generating and pumping modes. In addition, where a **Power System Stabiliser** is fitted to an **Electricity Storage Unit** within a **Type D Synchronous Electricity Storage Module**, it must function when the **Synchronous Electricity Storage Unit** is in both importing and exporting modes of operation.

ECC.A.6.2.6 Overall **Excitation System** Control Characteristics

ECC.A.6.2.6.1 The overall **Excitation System** shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must be consistent with the speed of response requirements and ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5 Hz will be judged to be acceptable for this application.

ECC.A.6.2.6.2 The response of the **Automatic Voltage Regulator** combined with the **Power System Stabiliser** shall be demonstrated by injecting similar step signal disturbances into the **Automatic Voltage Regulator** reference as detailed in ECPA.5.2 and ECPA.5.4. The **Automatic Voltage Regulator** shall include a facility to allow step injections into the **Automatic Voltage Regulator** voltage reference, with the **Onshore Type D Power Generating Module** operating at points specified by **The Company** (up to rated MVA output). The damping shall be judged to be adequate if the corresponding **Active Power** response to the disturbances decays within two cycles of oscillation.

ECC.A.6.2.6.3 A facility to inject a band limited random noise signal into the **Automatic Voltage Regulator** voltage reference shall be provided for demonstrating the frequency domain response of the **Power System Stabiliser**. The tuning of the **Power System Stabiliser** shall be judged to be adequate if the corresponding **Active Power** response shows improved damping with the **Power System Stabiliser** in combination with the **Automatic Voltage Regulator** compared with the **Automatic Voltage Regulator** alone over the frequency range 0.3Hz – 2Hz.

ECC.A.6.2.7 Under-Excitation Limiters

ECC.A.6.2.7.1 The security of the power system shall also be safeguarded by means of MVAr **Under Excitation Limiters** fitted to the **Synchronous Power Generating Module Excitation System**. The **Under Excitation Limiter** shall prevent the **Automatic Voltage Regulator** reducing the **Synchronous Generating Unit** excitation to a level which would endanger synchronous stability. The **Under Excitation Limiter** shall operate when the excitation system is providing automatic control. The **Under Excitation Limiter** shall respond to changes in the **Active Power** (MW) the **Reactive Power** (MVAr) and to the square of the **Synchronous Generating Unit** voltage in such a direction that an increase in voltage will permit an increase in leading MVAr. The characteristic of the **Under Excitation Limiter** shall be substantially linear from no-load to the maximum **Active Power** output of the **Onshore Power Generating Module** at any setting and shall be readily adjustable.

ECC.A.6.2.7.2 The performance of the **Under Excitation Limiter** shall be independent of the rate of change of the **Onshore Synchronous Power Generating Module** load and shall be demonstrated by testing as detailed in ECP.A.5.5. The resulting maximum overshoot in response to a step injection which operates the **Under Excitation Limiter** shall not exceed 4% of the **Onshore Synchronous Generating Unit** rated MVA. The operating point of the **Onshore Synchronous Generating Unit** shall be returned to a steady state value at the limit line and the final settling time shall not be greater than 5 seconds. When the step change in **Automatic Voltage Regulator** reference voltage is reversed, the field voltage should begin to respond without any delay and should not be held down by the **Under Excitation Limiter**. Operation into or out of the preset limit levels shall ensure that any resultant oscillations are damped so that the disturbance is within 0.5% of the **Onshore Synchronous Generating Unit** MVA rating within a period of 5 seconds.

ECC.A.6.2.7.3 The **EU Generator** shall also make provision to prevent the reduction of the **Onshore Synchronous Generating Unit** excitation to a level which would endanger synchronous stability when the **Excitation System** is under manual control.

ECC.A.6.2.8 Over-Excitation and Stator Current Limiters

ECC.A.6.2.8.1 The settings of the **Over-Excitation Limiter** and stator current limiter, shall ensure that the **Onshore Synchronous Generating Unit** excitation is not limited to less than the maximum value that can be achieved whilst ensuring the **Onshore Synchronous Generating Unit** is operating within its design limits. If the **Onshore Synchronous Generating Unit** excitation is reduced following a period of operation at a high level, the rate of reduction shall not exceed that required to remain within any time dependent operating characteristics of the **Onshore Synchronous Power Generating Module**.

ECC.A.6.2.8.2 The performance of the **Over-Excitation Limiter**, shall be demonstrated by testing as described in ECP.A.5.6. Any operation beyond the **Over-Excitation Limit** shall be controlled by the **Over-Excitation Limiter** or stator current limiter without the operation of any **Protection** that could trip the **Onshore Synchronous Power Generating Module**.

ECC.A.6.2.8.3 The **EU Generator** shall also make provision to prevent any over-excitation restriction of the **Onshore Synchronous Generating Unit** when the **Excitation System** is under manual control, other than that necessary to ensure the **Onshore Power Generating Module** is operating within its design limits.

APPENDIX E7 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR AC CONNECTED ONSHORE POWER PARK MODULES AND OTSDUW PLANT AND APPARATUS AT THE INTERFACE POINT HVDC SYSTEMS AND REMOTE END HVDC CONVERTER STATIONS

ECC.A.7.1 Scope

ECC.A.7.1.1 This Appendix sets out the performance requirements of continuously acting automatic voltage control systems for **Onshore Power Park Modules**, **Onshore HVDC Converters Remote End HVDC Converter Stations** and **OTSDUW Plant and Apparatus** at the **Interface Point** that must be complied with by the **User**. This Appendix does not limit any site specific requirements where in **The Company's** reasonable opinion these facilities are necessary for system reasons. The control performance requirements applicable to **Configuration 2 AC Connected Offshore Power Park Modules** and **Configuration 2 DC Connected Power Park Modules** are defined in Appendix E8.

ECC.A.7.1.2 Proposals by **EU Generators** or **HVDC System Owners** to make a change to the voltage control systems are required to be notified to **The Company** under the **Planning Code** (PC.A.1.2(b) and (c)) as soon as the **Generator** or **HVDC System Owner** anticipates making the change. The change may require a revision to the **Bilateral Agreement**.

ECC.A.7.1.3 In the case of a **Remote End HVDC Converter** at a **HVDC Converter Station,** the control performance requirements shall be specified in the **Bilateral Agreement**. These requirements shall be consistent with those specified in ECC.6.3.2.4. In the case where the **Remote End HVDC Converter** is required to ensure the zero transfer of **Reactive Power** at the **HVDC Interface Point** then the requirements shall be specified in the **Bilateral Agreement** which shall be consistent with those requirements specified in ECC.A.8 . In the case where a wider reactive capability has been specified in ECC.6.3.2.4, then the requirements consistent with those specified in ECC.A.7.2 shall apply with any variations being agreed between the **User** and **The Company**.

ECC.A.7.2 Requirements

ECC.A.7.2.1 **The Company** requires that the continuously acting automatic voltage control system for the **Onshore Power Park Module**, **Onshore HVDC Converter** or **OTSDUW Plant and Apparatus** shall meet the following functional performance specification. If a **Network Operator** has confirmed to **The Company** that its network to which an **Embedded Onshore Power Park Module** or **Onshore HVDC Converter** or **OTSDUW Plant and Apparatus** is connected is restricted such that the full reactive range under the steady state voltage control requirements (ECC.A.7.2.2) cannot be utilised, **The Company** may specify alternative limits to the steady state voltage control range that reflect these restrictions. Where the **Network Operator** subsequently notifies **The Company** that such restriction has been removed, **The Company** may propose a **Modification** to the **Bilateral Agreement** (in accordance with the **CUSC** contract) to remove the alternative limits such that the continuously acting automatic voltage control system meets the following functional performance specification. All other requirements of the voltage control system will remain as in this Appendix.

ECC.A.7.2.2 Steady State Voltage Control

ECC.A.7.2.2.1 The **Onshore Power Park Module**, **Onshore HVDC Converter** or **OTSDUW Plant and Apparatus** shall provide continuous steady state control of the voltage at the **Onshore Grid Entry Point** (or **Onshore User System Entry Point** if **Embedded**) (or the **Interface Point** in the case of **OTSDUW Plant and Apparatus**) with a **Setpoint Voltage** and **Slope** characteristic as illustrated in Figure ECC.A.7.2.2a.

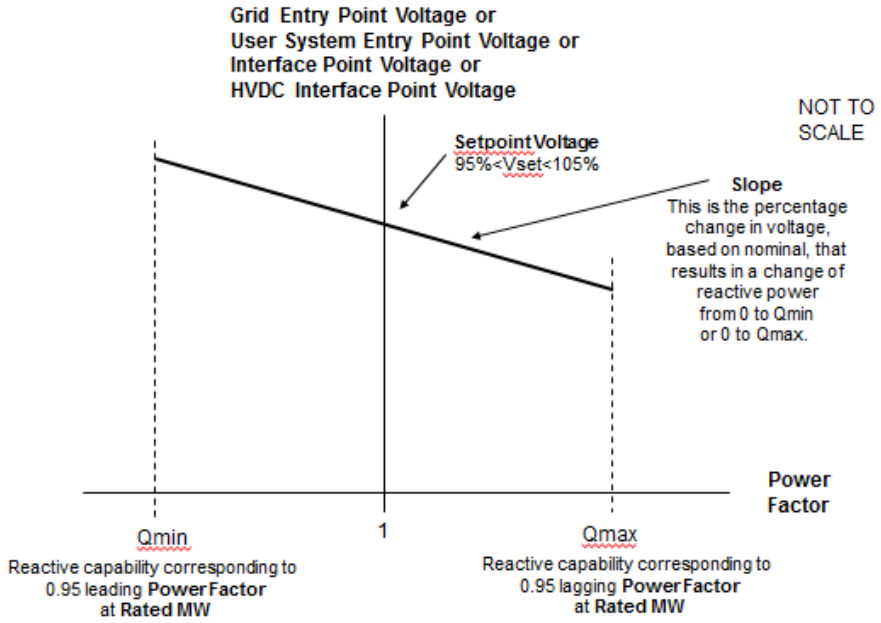

Figure ECC.A.7.2.2a

ECC.A.7.2.2.2 The continuously acting automatic control system shall be capable of operating to a **Setpoint Voltage** between 95% and 105% with a resolution of 0.25% of the nominal voltage. For the avoidance of doubt values of 95%, 95.25%, 95.5% … may be specified, but not intermediate values. The initial **Setpoint Voltage** will be 100%. The tolerance within which this **Setpoint Voltage** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.25% and a Setpoint Voltage of 100%, the achieved value shall be between 99.75% and 100.25%. **The Company** may request the **EU Generator** or **HVDC System Owner** to implement an alternative **Setpoint Voltage** within the range of 95% to 105%. For **Embedded Generators** and **Embedded HVDC System Owners** the **Setpoint Voltage** will be discussed between **The Company** and the relevant **Network Operator** and will be specified to ensure consistency with ECC.6.3.4.

ECC.A.7.2.2.3 The **Slope** characteristic of the continuously acting automatic control system shall be adjustable over the range 2% to 7% (with a resolution of 0.5%). For the avoidance of doubt values of 2%, 2.5%, 3% may be specified, but not intermediate values. The initial **Slope** setting will be 4%. The tolerance within which this **Slope** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.5% and a **Slope** setting of 4%, the achieved value shall be between 3.5% and 4.5%. **The Company** may request the **EU Generator** or **HVDC System Owner** to implement an alternative slope setting within the range of 2% to 7%. For **Embedded Generators** and **Onshore Embedded HVDC Converter Station Owners** the **Slope** setting will be discussed between **The Company** and the relevant **Network Operator** and will be specified to ensure consistency with ECC.6.3.4.

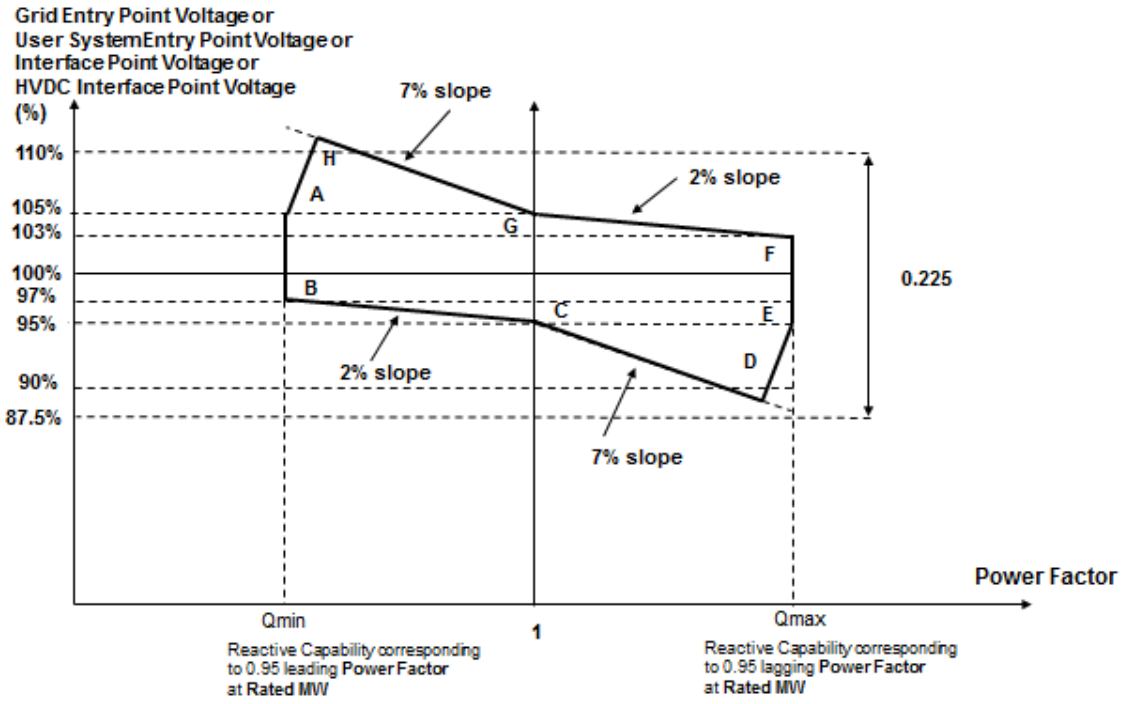

Figure ECC.A.7.2.2b

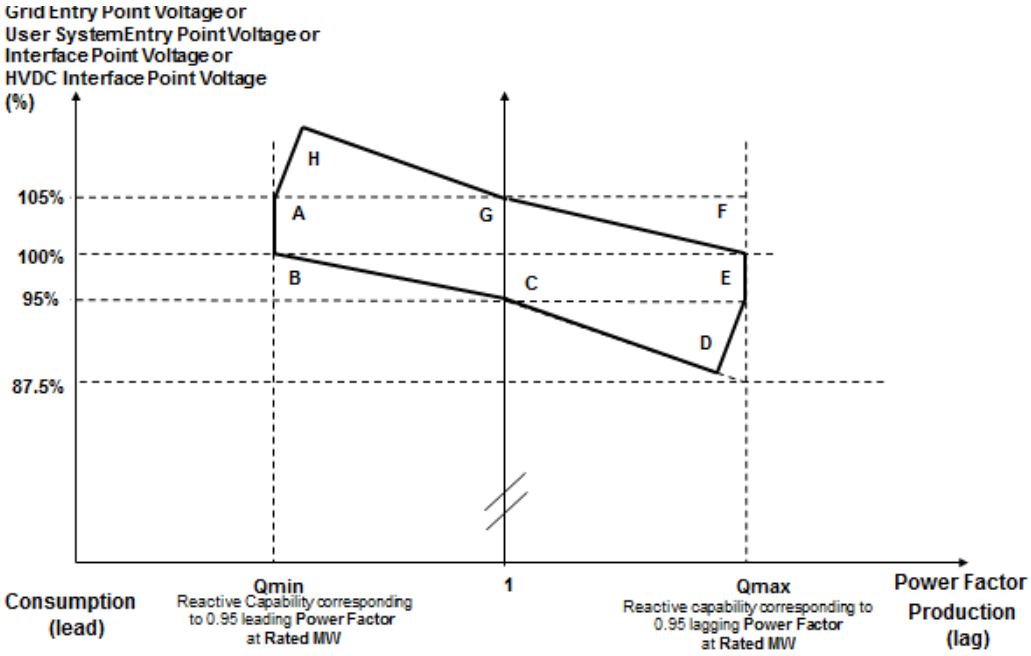

Figure ECC.A.7.2.2c

ECC.A.7.2.2.4 Figure ECC.A.7.2.2b shows the required envelope of operation for **-**, **OTSDUW Plant** and **Apparatus**, **Onshore Power Park Modules** and **Onshore HVDC Converters** except for those **Embedded** at 33kV and below or directly connected to the **National Electricity Transmission System** at 33kV and below. Figure ECC.A.7.2.2c shows the required envelope of operation for **Onshore Power Park Modules Embedded** at 33kV and below, or directly connected to the **National Electricity Transmission System** at 33kV and below. The enclosed area within points ABCDEFGH is the required capability range within which the **Slope** and **Setpoint Voltage** can be changed.

ECC.A.7.2.2.5 Should the operating point of the~~,~~ **OTSDUW Plant and Apparatus** or **Onshore Power Park Module**, or **Onshore HVDC Converter** deviate so that it is no longer a point on the operating characteristic (figure ECC.A.7.2.2a) defined by the target **Setpoint Voltage** and **Slope**, the continuously acting automatic voltage control system shall act progressively to return the value to a point on the required characteristic within 5 seconds.

ECC.A.7.2.2.6 Should the **Reactive Power** output of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** reach its maximum lagging limit at a **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** (or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) above 95%, the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **HVDC System** shall maintain maximum lagging **Reactive Power** output for voltage reductions down to 95%. This requirement is indicated by the line EF in figures ECC.A.7.2.2b and ECC.A.7.2.2c as applicable. Should the **Reactive Power** output of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module**, or **Onshore HVDC Converter** reach its maximum leading limit at a **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) below 105%, the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module**, or **Onshore HVDC Converter** shall maintain maximum leading **Reactive Power** output for voltage increases up to 105%. This requirement is indicated by the line AB in figures ECC.A.7.2.2b and ECC.A.7.2.2c as applicable.

ECC.A.7.2.2.7 For **Onshore Grid Entry Point** voltages (or **Onshore User System Entry Point** voltages if Embedded or **Interface Point** voltages) below 95%, the lagging **Reactive Power** capability of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converters** should be that which results from the supply of maximum lagging reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line DE in figures ECC.A.7.2.2b and ECC.A.7.2.2c. For **Onshore Grid Entry Point** voltages (or **User System Entry Point** voltages if **Embedded** or **Interface Point** voltages) above 105%, the leading **Reactive Power** capability of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC System Converter** should be that which results from the supply of maximum leading reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line AH in figures ECC.A.7.2.2b and ECC.A.7.2.2c as applicable. Should the **Reactive Power** output of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** reach its maximum lagging limit at an **Onshore Grid Entry Connection Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** in the case of **OTSDUW Plant and Apparatus**) below 95%, the **Onshore Power Park Module**, **Onshore HVDC Converter** shall maintain maximum lagging reactive current output for further voltage decreases. Should the **Reactive Power** output of the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** reach its maximum leading limit at a **Onshore Grid Entry Point** voltage (or **User System Entry Point** voltage if **Embedded** or **Interface Point** voltage in the case of an **OTSDUW Plant and Apparatus**) above 105%, the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** shall maintain maximum leading reactive current output for further voltage increases.

ECC.A.7.2.2.8 All **OTSDUW Plant and Apparatus** must be capable of enabling **EU Code Users** undertaking **OTSDUW** to comply with an instruction received from **The Company** relating to a variation of the **Setpoint Voltage** at the **Interface Point** within 2 minutes of such instruction being received.

ECC.A.7.2.2.9 For **OTSDUW Plant and Apparatus** connected to a **Network Operator's System** where the **Network Operator** has confirmed to **The Company** that its **System** is restricted in accordance with ECC.A.7.2.1, clause ECC.A.7.2.2.8 will not apply unless **The Company** can reasonably demonstrate that the magnitude of the available change in **Reactive Power** has a significant effect on voltage levels on the **Onshore National Electricity Transmission System**.

ECC.A.7.2.3 Transient Voltage Control

ECC.A.7.2.3.1 For an on-load step change in **Onshore Grid Entry Point** or **Onshore User System Entry Point** voltage, or in the case of **OTSDUW Plant and Apparatus** an on-load step change in **Transmission Interface Point** voltage, the continuously acting automatic control system shall respond according to the following minimum criteria:

(i) the **Reactive Power** output response of the~~,~~ **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** shall commence within 0.2 seconds of the application of the step. It shall progress linearly although variations from a linear characteristic shall be acceptable provided that the MVAr seconds delivered at any time up to 1 second are at least those that would result from the response shown in figure ECC.A.7.2.3.1a.

(ii) the response shall be such that 90% of the change in the **Reactive Power** output of the~~,~~ **OTSDUW Plant and Apparatus** or **Onshore Power Park Module**, or **Onshore HVDC Converter** will be achieved within

- 2 seconds, where the step is sufficiently large to require a change in the steady state **Reactive Power** output from its maximum leading value to its maximum lagging value or vice versa and
- 1 second where the step is sufficiently large to require a change in the steady state **Reactive Power** output from zero to its maximum leading value or maximum lagging value as required by ECC.6.3.2 (or, if appropriate ECC.A.7.2.2.6 or ECC.A.7.2.2.7);

(iii) the magnitude of the **Reactive Power** output response produced within 1 second shall vary linearly in proportion to the magnitude of the step change.

(iv) within 5 seconds from achieving 90% of the response as defined in ECC.A.7.2.3.1 (ii), the peak to peak magnitude of any oscillations shall be less than 5% of the change in steady state maximum **Reactive Power**.

(v) following the transient response, the conditions of ECC.A.7.2.2 apply.

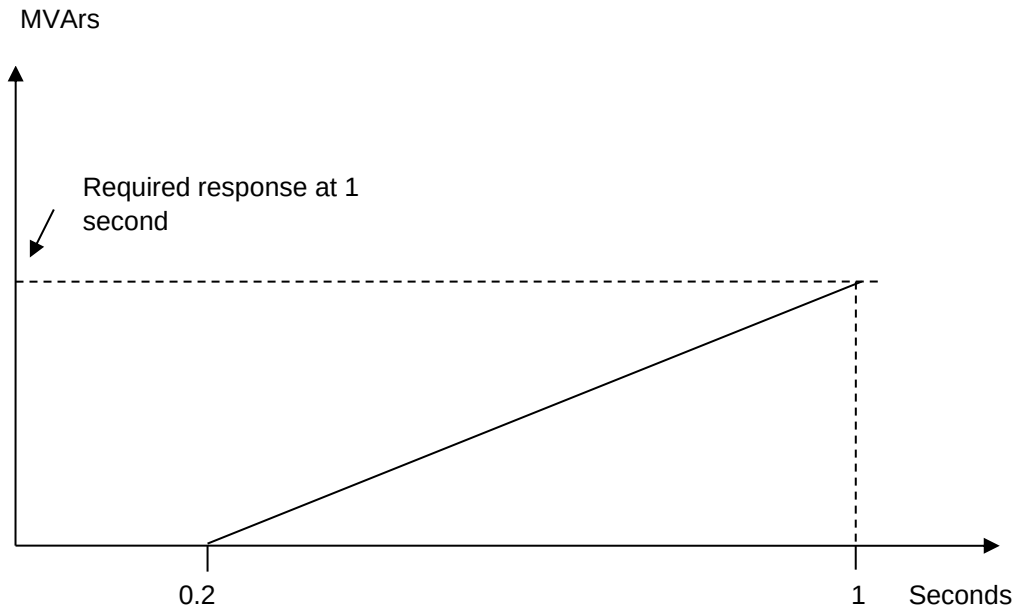

Figure ECC.A.7.2.3.1a

ECC.A.7.2.3.2 **OTSDUW Plant and Apparatus** or **Onshore Power Park Modules** or **Onshore HVDC Converters** shall be capable of

(a) changing its **Reactive Power** output from its maximum lagging value to its maximum

leading value, or vice versa, then reverting back to the initial level of **Reactive Power** output once every 15 seconds for at least 5 times within any 5 minute period; and

(b) changing its **Reactive Power** output from zero to its maximum leading value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period and from zero to its maximum lagging value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period. Any subsequent restriction on reactive capability shall be notified to **The Company** in accordance with BC2.5.3.2, and BC2.6.1.

In all cases, the response shall be in accordance to ECC.A.7.2.3.1 where the change in **Reactive Power** output is in response to an on-load step change in **Onshore Grid Entry Point** or **Onshore User System Entry Point** voltage, or in the case of **OTSDUW Plant and Apparatus** an on-load step change in **Transmission Interface Point** voltage.

ECC.A.7.2.4 Power Oscillation Damping

ECC.A.7.2.4.1 The requirement for the continuously acting voltage control system to be fitted with a **Power System Stabiliser (PSS)** shall be specified if, in **The Company's** view, this is required for system reasons. However if a **Power System Stabiliser** is included in the voltage control system its settings and performance shall be agreed with **The Company** and commissioned in accordance with BC2.11.2. To allow assessment of the performance before on-load commissioning the **Generator** will provide to **The Company** a report covering the areas specified in ECP.A.3.2.2.

ECC.A.7.2.5 Overall Voltage Control System Characteristics

ECC.A.7.2.5.1 The continuously acting automatic voltage control system is required to respond to minor variations, steps, gradual changes or major variations in **Onshore Grid Entry Point** voltage (or **Onshore User System Entry Point** voltage if **Embedded** or **Interface Point** voltage in the case of **OTSDUW Plant and Apparatus**).

ECC.A.7.2.5.2 The overall voltage control system shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must be consistent with the speed of response requirements and ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5Hz would be judged to be acceptable for this application. All other control systems employed within the **OTSDUW Plant and Apparatus** or **Onshore Power Park Module** or **Onshore HVDC Converter** should also meet this requirement

ECC.A.7.2.5.3 The response of the voltage control system (including the **Power System Stabiliser** if employed) shall be demonstrated by testing in accordance with ECP.A.6.

ECC.A.7.3 **Reactive Power** Control

ECC.A.7.3.1 As defined in ECC.6.3.8.3.4, **Reactive Power** control mode of operation is not required in respect of **Onshore Power Park Modules** or **OTSDUW Plant and Apparatus** or **Onshore HVDC Converters** unless otherwise specified by **The Company** in coordination with the relevant **Network Operator**. However where there is a requirement for **Reactive Power** control mode of operation, the following requirements shall apply.

ECC.A.7.3.2 The **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** or **Onshore HVDC Converter** shall be capable of setting the **Reactive Power** setpoint anywhere in the **Reactive Power** range as specified in ECC.6.3.2.4 with setting steps no greater than 5 MVAr or 5% (whichever is smaller) of full **Reactive Power**, controlling the reactive power at the **Grid Entry Point** or **User System Entry Point** if **Embedded** to an accuracy within plus or minus 5MVAr or plus or minus 5% (whichever is smaller) of the full **Reactive Power**.

ECC.A.7.3.3 Any additional requirements for **Reactive Power** control mode of operation shall be specified by **The Company** in coordination with the relevant **Network Operator**..

ECC.A.7.4 **Power Factor** Control

ECC.A.7.4.1 As defined in ECC.6.3.8.4.3, **Power Factor** control mode of operation is not required in respect of **Onshore Power Park Modules** or **OTSDUW Plant and Apparatus** or **Onshore HVDC Converters** unless otherwise specified by **The Company** in coordination with the relevant **Network Operator.** However where there is a requirement for **Power Factor** control mode of operation, the following requirements shall apply.

ECC.A.7.4.2 The **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** or **Onshore HVDC Converter** shall be capable of controlling the **Power Factor** at the **Grid Entry Point or User System Entry Point** (if **Embedded**) within the required **Reactive Power** range as specified in ECC.6.3.2.2.1 and ECC.6.3.2.4 to a specified target **Power Factor**. **The Company** shall specify the target **Power Factor** value (which shall be achieved within 0.01 of the set **Power Factor**), its tolerance and the period of time to achieve the target **Power Factor** following a sudden change of **Active Power** output. The tolerance of the target **Power Factor** shall be expressed through the tolerance of its corresponding **Reactive Power**. This **Reactive Power** tolerance shall be expressed by either an absolute value or by a percentage of the maximum **Reactive Power** of the **Onshore Power Park Module** or **OTSDUW Plant and Apparatus** or **Onshore HVDC Converter**. The details of these requirements being pursuant to the terms of the **Bilateral Agreement**.

ECC.A.7.4.3 Any additional requirements for **Power Factor** control mode of operation shall be specified by **The Company** in coordination with the relevant **Network Operator**.

APPENDIX E8 - PERFORMANCE REQUIREMENTS FOR CONTINUOUSLY ACTING AUTOMATIC VOLTAGE CONTROL SYSTEMS FOR CONFIGURATION 2 AC CONNECTED OFFSHORE POWER PARK MODULES AND CONFIGURATION 2 DC CONNECTED POWER PARK MODULES

ECC.A.8.1 Scope

ECC.A.8.1.1 This Appendix sets out the performance requirements of continuously acting automatic voltage control systems for **Configuration 2 AC Connected Offshore Power Park Modules** and **Configuration 2 DC Connected Power Park Modules** that must be complied with by the **EU Code User**. This Appendix does not limit any site specific requirements that may be specified where in **The Company's** reasonable opinion these facilities are necessary for system reasons.

ECC.A.8.1.2 These requirements also apply to **Configuration 2 DC Connected Power Park Modules**. In the case of a **Configuration 1 DC Connected Power Park Module** the technical performance requirements shall be specified by **The Company**. Where the **EU Generator** in respect of a **DC Connected Power Park Module** has agreed to a wider reactive capability range as defined under ECC.6.3.2.5 and ECC.6.2.3.6 then the requirements that apply will be specified by **The Company** and which shall reflect the performance requirements detailed in ECC.A.8.2 below but with different parameters such as droop and **Setpoint Voltage**.

ECC.A.8.1.3 Proposals by **EU Generators** to make a change to the voltage control systems are required to be notified to **The Company** under the **Planning Code** (PC.A.1.2(b) and (c)) as soon as the **Generator** anticipates making the change. The change may require a revision to the **Bilateral Agreement**.

ECC.A.8.2 Requirements

ECC.A.8.2.1 **The Company** requires that the continuously acting automatic voltage control system for the **Configuration 2 AC connected Offshore Power Park Module** and **Configuration 2 DC Connected Power Park Module** shall meet the following functional performance specification.

ECC.A.8.2.2 Steady State Voltage Control

ECC.A.8.2.2.1 The **Configuration 2 AC connected Offshore Power Park Module** and **Configuration 2 DC Connected Power Park Module** shall provide continuous steady state control of the voltage at the **Offshore Connection Point** with a **Setpoint Voltage** and **Slope** characteristic as illustrated in Figure ECC.A.8.2.2a.

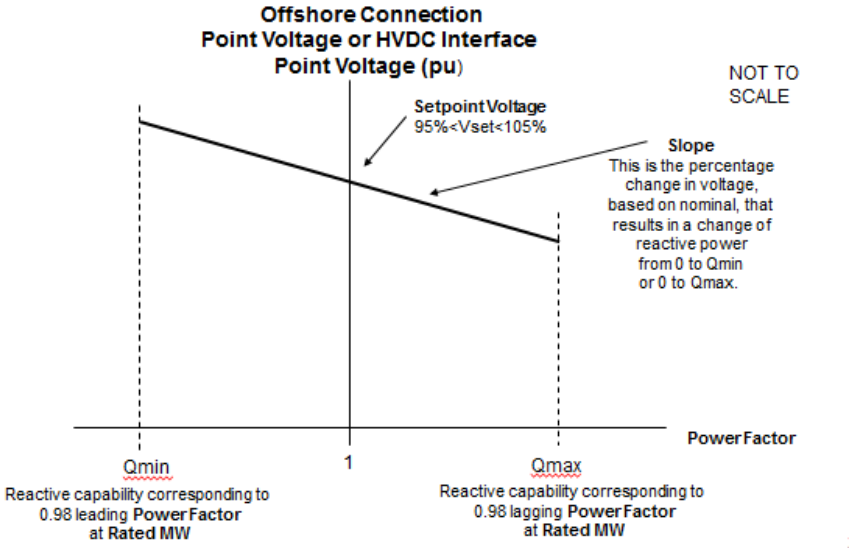

Figure ECC.A.8.2.2a

ECC.A.8.2.2.2 The continuously acting automatic control system shall be capable of operating to a **Setpoint Voltage** between 95% and 105% with a resolution of 0.25% of the nominal voltage. For the avoidance of doubt values of 95%, 95.25%, 95.5% … may be specified, but not intermediate values. The initial **Setpoint Voltage** will be 100%. The tolerance within which this **Setpoint Voltage** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.25% and a Setpoint Voltage of 100%, the achieved value shall be between 99.75% and 100.25%. **The Company** may request the **EU Generator** to implement an alternative **Setpoint Voltage** within the range of 95% to 105%.

ECC.A.8.2.2.3 The **Slope** characteristic of the continuously acting automatic control system shall be adjustable over the range 2% to 7% (with a resolution of 0.5%). For the avoidance of doubt values of 2%, 2.5%, 3% may be specified, but not intermediate values. The initial **Slope** setting will be 4%. The tolerance within which this **Slope** shall be achieved is specified in BC2.A.2.6. For the avoidance of doubt, with a tolerance of 0.5% and a **Slope** setting of 4%, the achieved value shall be between 3.5% and 4.5%. **The Company** may request the **EU Generator** to implement an alternative slope setting within the range of 2% to 7%.

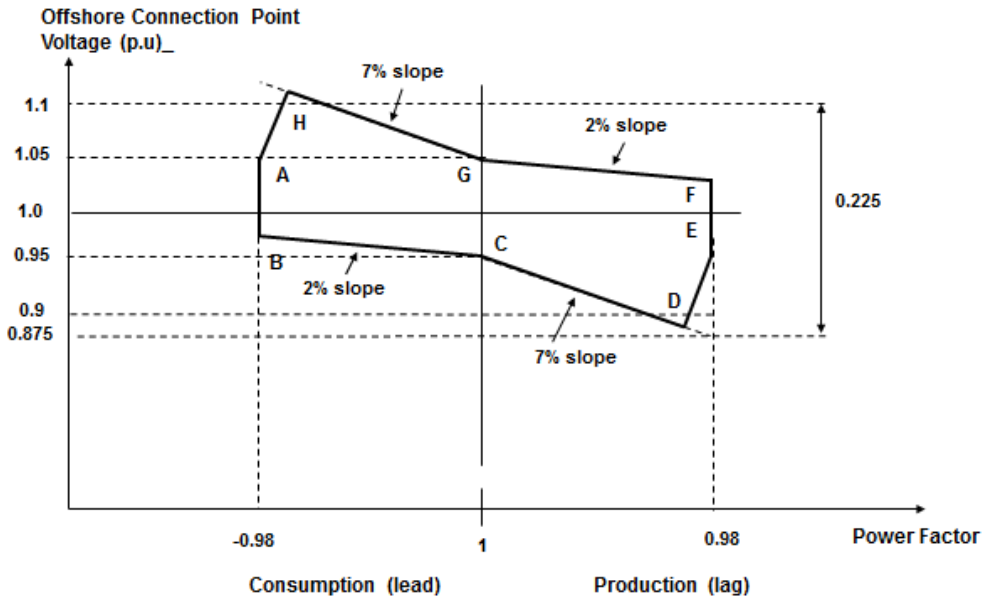

Figure ECC.A.8.2.2b

ECC.A.8.2.2.4 Figure ECC.A.8.2.2b shows the required envelope of operation for **Configuration 2 AC connected Offshore Power Park Module** and **Configuration 2 DC Connected Power Park Module**. The enclosed area within points ABCDEFGH is the required capability range within which the **Slope** and **Setpoint Voltage** can be changed.

ECC.A.8.2.2.5 Should the operating point of the **Configuration 2 AC connected Offshore Power Park or Configuration 2 DC Connected Power Park Module** deviate so that it is no longer a point on the operating characteristic (Figure ECC.A.8.2.2a) defined by the target **Setpoint Voltage** and **Slope**, the continuously acting automatic voltage control system shall act progressively to return the value to a point on the required characteristic within 5 seconds.

ECC.A.8.2.2.6 Should the **Reactive Power** output of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** reach its maximum lagging limit at an **Offshore Grid Entry Point** or **Offshore User System Entry Point** or **HVDC Interface Point** voltage above 95%, the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall maintain maximum lagging **Reactive Power** output for voltage reductions down to 95%. This requirement is indicated by the line EF in figure ECC.A.8.2.2b. Should the **Reactive Power** output of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** reach its maximum leading limit at the **Offshore Grid Entry Point** or **Offshore User System Entry Point** or **HVDC Interface Point** voltage below 105%, the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall maintain maximum leading **Reactive Power** output for voltage increases up to 105%. This requirement is indicated by the line AB in figures ECC.A.8.2.2b.

ECC.A.8.2.2.7 For **Offshore Grid Entry Point** or **User System Entry Point** or **HVDC Interface Point** voltages below 95%, the lagging **Reactive Power** capability of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** should be that which results from the supply of maximum lagging reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line DE in figures ECC.A.8.2.2b. For **Offshore Grid Entry Point** or **Offshore User System Entry Point** voltages or **HVDC Interface Point** voltages above 105%, the leading **Reactive Power** capability of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** should be that which results from the supply of maximum leading reactive current whilst ensuring the current remains within design operating limits. An example of the capability is shown by the line AH in figures ECC.A.8.2.2b. Should the **Reactive Power** output of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** reach its maximum lagging limit at an **Offshore Grid Entry Point** or **Offshore User System Entry** voltage or **HVDC Interface Point** voltage below 95%, the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall maintain maximum lagging reactive current output for further voltage decreases. Should the **Reactive Power** output of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** reach its maximum leading limit at an **Offshore Grid Entry Point** or **Offshore User System Entry** voltage or **HVDC Interface Point** voltage above 105%, the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall maintain maximum leading reactive current output for further voltage increases.

ECC.A.8.2.3 Transient Voltage Control

ECC.A.8.2.3.1 For an on-load step change in **Offshore Grid Entry Point** or **Offshore User System Entry Point** voltage or **HVDC Interface Point** voltage, the continuously acting automatic control system shall respond according to the following minimum criteria:

(i) the **Reactive Power** output response of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall commence within 0.2 seconds of the application of the step. It shall progress linearly although variations from a linear characteristic shall be acceptable provided that the MVAr seconds delivered at any time up to 1 second are at least those that would result from the response shown in figure ECC.A.8.2.3.1a.

(ii) the response shall be such that 90% of the change in the **Reactive Power** output of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** will be achieved within

- 2 seconds, where the step is sufficiently large to require a change in the steady state **Reactive Power** output from its maximum leading value to its maximum lagging value or vice versa and

– 1 second where the step is sufficiently large to require a change in the steady state **Reactive Power** output from zero to its maximum leading value or maximum lagging value as required by ECC.6.3.2 (or, if appropriate ECC.A.8.2.2.6 or ECC.A.8.2.2.7);

(iii) the magnitude of the **Reactive Power** output response produced within 1 second shall vary linearly in proportion to the magnitude of the step change.

(iv) within 5 seconds from achieving 90% of the response as defined in ECC.A.8.2.3.1 (ii), the peak to peak magnitude of any oscillations shall be less than 5% of the change in steady state maximum **Reactive Power**.

(v) following the transient response, the conditions of ECC.A.8.2.2 apply.

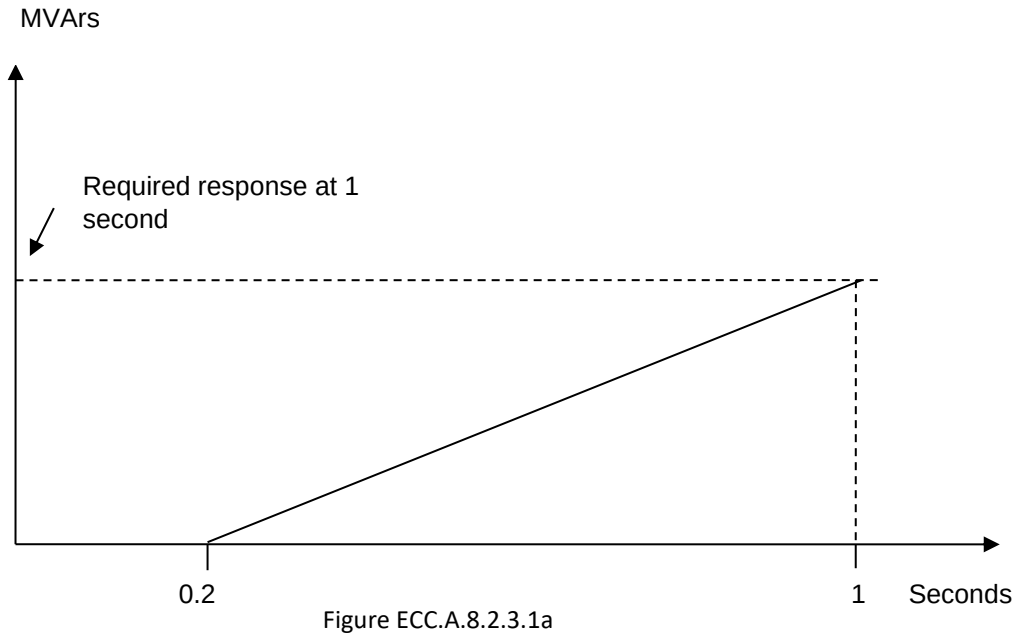

Figure ECC.A.8.2.3.1a

ECC.A.8.2.3.2 **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** shall be capable of

(a) changing their **Reactive Power** output from maximum lagging value to maximum leading value, or vice versa, then reverting back to the initial level of **Reactive Power** output once every 15 seconds for at least 5 times within any 5 minute period; and

(b) changing **Reactive Power** output from zero to maximum leading value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period and from zero to its maximum lagging value then reverting back to zero **Reactive Power** output at least 25 times within any 24 hour period. Any subsequent restriction on reactive capability shall be notified to **The Company** in accordance with BC2.5.3.2, and BC2.6.1.

In all cases, the response shall be in accordance to ECC.A.8.2.3.1 where the change in **Reactive Power** output is in response to an on-load step change in **Offshore Grid Entry Point** or **Offshore User System Entry Point** voltage or **HVDC Interface Point** voltage.

ECC.A.8.2.4 Power Oscillation Damping

ECC.A.8.2.4.1 The requirement for the continuously acting voltage control system to be fitted with a **Power System Stabiliser (PSS)** shall be specified if, in **The Company's** view, this is required for system reasons. However if a **Power System Stabiliser** is included in the voltage control system its settings and performance shall be agreed with **The Company** and commissioned in accordance with BC2.11.2. To allow assessment of the performance before on-load commissioning the **Generator** or **HVDC System Owner** will provide to **The Company** a report covering the areas specified in ECP.A.3.2.2.

ECC.A.8.2.5 Overall Voltage Control System Characteristics

ECC.A.8.2.5.1 The continuously acting automatic voltage control system is required to respond to minor variations, steps, gradual changes or major variations in **Offshore Grid Entry Point** or **Offshore User System Entry Point** or **HVDC Interface Point** voltage.

ECC.A.8.2.5.2 The overall voltage control system shall include elements that limit the bandwidth of the output signal. The bandwidth limiting must be consistent with the speed of response requirements and ensure that the highest frequency of response cannot excite torsional oscillations on other plant connected to the network. A bandwidth of 0-5Hz would be judged to be acceptable for this application. All other control systems employed within the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module** should also meet this requirement

ECC.A.8.2.5.3 The response of the voltage control system (including the **Power System Stabiliser** if employed) shall be demonstrated by testing in accordance with ECP.A.6.

ECC.A.8.3 Reactive Power Control

ECC.A.8.3.1 **Reactive Power** control mode of operation is not required in respect of **Configuration 2 AC connected Offshore Power Park Modules** or **Configuration 2 DC Connected Power Park Modules** unless otherwise specified by **The Company**. However where there is a requirement for **Reactive Power** control mode of operation, the following requirements shall apply.

ECC.A.8.3.2 **Configuration 2 AC connected Offshore Power Park Modules** or **Configuration 2 DC Connected Power Park Modules** shall be capable of setting the **Reactive Power** setpoint anywhere in the **Reactive Power** range as specified in ECC.6.3.2.8.2 with setting steps no greater than 5 MVAr or 5% (whichever is smaller) of full **Reactive Power**, controlling the **Reactive Power** at the **Offshore Grid Entry Point or Offshore User System Entry Point** or **HVDC Interface Point** to an accuracy within plus or minus 5MVAr or plus or minus 5% (whichever is smaller) of the full **Reactive Power**.

ECC.A.8.3.3 Any additional requirements for **Reactive Power** control mode of operation shall be specified by **The Company**.

ECC.A.8.4 Power Factor Control

ECC.A.8.4.1 **Power Factor** control mode of operation is not required in respect of **Configuration 2 AC connected Offshore Power Park Modules** or **Configuration 2 DC Connected Power Park Modules** unless otherwise specified by **The Company**. However where there is a requirement for **Power Factor** control mode of operation, the following requirements shall apply.

ECC.A.8.4.2 **Configuration 2 AC connected Offshore Power Park Modules** or **Configuration 2 DC Connected Power Park Modules** shall be capable of controlling the **Power Factor** at the **Offshore Grid Entry Point** or **Offshore User System Entry Point** or **HVDC Interface Point** within the required **Reactive Power** range as specified in ECC.6.3.2.8.2 with a target **Power Factor**. **The Company** shall specify the target **Power Factor** (which shall be achieved to within 0.01 of the set **Power Factor**), its tolerance and the period of time to achieve the target

Power Factor following a sudden change of **Active Power** output. The tolerance of the target **Power Factor** shall be expressed through the tolerance of its corresponding **Reactive Power**. This **Reactive Power** tolerance shall be expressed by either an absolute value or by a percentage of the maximum **Reactive Power** of the **Configuration 2 AC connected Offshore Power Park Module** or **Configuration 2 DC Connected Power Park Module.** The details of these requirements being specified by **The Company**.

ECC.A.8.4.3 Any additional requirements for **Power Factor** control mode of operation shall be specified by **The Company**.

< END OF EUROPEAN CONNECTION CONDITIONS >

DEMAND RESPONSE SERVICES CODE
(DRSC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title		Page Number
DRSC.1	INTRODUCTION	2
DRSC.2	OBJECTIVE	2
DRSC.3	SCOPE	2
DRSC.4	GENERAL PROVISIONS	2
DRSC.5	SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE ACTIVE POWER CONTROL AND TRANSMISSION CONSTRAINT MANAGEMENT	3
DRSC.6	SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE FREQUENCY CONTROL	4
DRSC.7	SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE VERY FAST ACTIVE POWER CONTROL	4
DRSC.8	DATA REQUIRED BY THE COMPANY FROM DEMAND RESPONSE PROVIDER'S	5
DRSC.9	OPERATIONAL METERING REQUIREMENTS	5
DRSC.10	INSTRUCTIONS ISSUED TO DEMAND RESPONSE PROVIDER'S	5
DRSC.11	OPERATIONAL NOTIFICATION PROCEDURE	5
DRSC.11.1	GENERAL PROVISIONS	5
DRSC 11.2	OPERATIONAL NOTIFICATION PROCEDURES FOR DEMAND RESPONSE PROVIDERS	6
DRSC.11.3	COMPLIANCE	6
DRSC.11.4	COMPLIANCE TESTING	7
DRSC.11.5	COMPLIANCE TESTING FOR DEMAND RESPONSE PROVIDER'S WITH DEMAND RESPONSE ACTIVE POWER CONTROL, REACTIVE POWER CONTROL AND TRANSMISSION CONSTRAINT MANAGEMENT	8
DRSC.11.6	COMPLIANCE SIMULATION	9
APPENDIX I -	DRSC.A.2 - DEMAND RESPONSE UNIT DOCUMENT (DRUD) STATEMENT OF COMPLIANCE FOR DEMAND RESPONSE PROVIDER'S	11

PART I

DRSC.1 INTRODUCTION

DRSC.1.1 The **Demand Response Services Code** is concerned with **Demand Response Providers** who contract with **The Company** for the provision of **Ancillary Services**.

DRSC.1.2 **Ancillary Services** are non-mandatory services used by **The Company** in operating the **System**. They are provided by **Demand Response Providers** with payment being dealt with under the terms of the relevant agreement for the **Ancillary Service**.

DRSC.1.3 Where a **Demand Response Provider** is interested in offering an **Ancillary Service** to **The Company**, then further details and additional information of the **Ancillary Services** are available from the Balancing Services section of the **Website**.

DRSC.1.4 Where **The Company** and a **Demand Response Provider** enter into an **Ancillary Services** agreement, it shall be in accordance with **ESO Licence** condition C9 and the **Standard Contract Terms**.

DRSC 1.5 **The Demand Response Services Code** which would form part of an **Ancillary Services** agreement between a **Demand Response Provider** and **The Company** and to discharge the obligations under **Assimilated EU Law** (Commission Regulation (EU) 2016/1388). The **Ancillary Services** agreement will include an obligation on the **Demand Response Provider** to satisfy the applicable requirements of this **Demand Response Services Code**.

DRSC.1.6 The **Demand Response Services Code** applies only to **Demand Response Providers** who have entered into an agreement with **The Company** to provide an **Ancillary Service**. This **Demand Response Services Code** does not apply to **Users** who are not **Demand Response Providers**.

DRSC.1.7 For the avoidance of doubt, **Network Operators** and **Non Embedded Customers** in respect of **EU Grid Supply Points** are required to satisfy the compliance requirements in section DRSC.11 of this code in addition to the **European Compliance Processes** only if they are also a **Demand Response Provider.**

DRSC.2 OBJECTIVE

The objectives of the **DRSC** are to

DRSC.2.1 Ensure the obligations of **Assimilated EU Law** (Commission Regulation (EU) 2016/1388) have been discharged; and

DRSC.2.2 Complement the requirements of the **Ancillary Services** agreement between **The Company** and a **Demand Response Provider**; and

DRSC.2.3 Define the minimum technical and compliance requirements **Demand Response Providers** are required to satisfy if they provide a **Demand Response Service** to **The Company** under an **Ancillary Services** agreement.

DRSC.3 SCOPE

DRSC.3.1 The **DRSC** applies to any **Demand Response Provider** who has entered into an agreement to provide **Ancillary Services** with **The Company**.

DRSC.3.2 The **DRSC** does not apply to **Users**, **BM Participants** or other parties unless they are also a **Demand Response Provider**.

DRSC.4 GENERAL PROVISIONS

DRSC.4.1 **Demand Response Services** shall be based on the following categories.

(a) Controlled by instruction from **The Company**

(i) **Demand Response Active Power Control**

(ii) **Demand Response Reactive Power Control**

(iii) **Demand Response Transmission Constraint Management**

(b) Automatic operation once the facility has been instructed into operation upon instruction from **The Company** pursuant to the terms of the **Ancillary Services** agreement.

(i) **Demand Response System Frequency Control**

(ii) **Demand Response Very Fast Active Power Control**

DRSC.4.2 **Demand Response Providers** who own, operate, control or manage **Plant** and **Apparatus** or **Demand Unit(s)** within a **Demand Facility** and/or **Closed Distribution System**(s) or on an aggregated basis may provide **Demand Response Services** to **The Company**. **Demand Response Providers** can offer **Demand Response Services** on an individual or collective basis and increase or decrease their **Demand** in accordance with the terms of their **Ancillary Services** agreement.

DRSC.4.3 The **Demand Response Services** specified in DRSC.4.1 are not exclusive and do not preclude **Demand Response Providers** from negotiating other services with **The Company**. These services would be pursuant to the terms of the **Ancillary Services** agreement.

DRSC.5 SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE ACTIVE POWER CONTROL AND TRANSMISSION CONSTRAINT MANAGEMENT

DRSC.5.1 Where a **Demand Response Provider** provides **Demand Response Active Power Control**, **Demand Response Reactive Power Control** or **Demand Response Transmission Constraint Management** to **The Company**, then the following requirements as detailed below shall apply. For the avoidance of doubt, these requirements shall apply either individually or where it is not part of a **Demand Facility**, collectively as part of a **Demand Aggregation** scheme through a **Demand Response Provider**. **Demand Response Providers** shall ensure that any **Demand Unit** which they own, operate, control or manage and which is used to provide **Demand Response Services** shall:-

(a) Be capable of satisfying the **Frequency** range requirements as specified in ECC.6.1.2.1.

(b) Be capable of satisfying the voltage range requirements as specified in ECC.6.1.4.1.

(c) Be capable of controlling the power consumption from the **Total System** in accordance with the terms of the **Ancillary Services** agreement.

(d) Be capable of receiving instructions from **The Company** either directly or through a third party to modify their demand in accordance with the **Demand Response Service** they have agreed to provide..

(e) Be capable of adjusting its **Real Power** or **Reactive Power** flow within a time period pursuant to the terms of the **Ancillary Services** agreement.

(f) Be capable of full execution of an instruction issued by **The Company** to modify its power flow.

(g) Be capable of further demand changes as instructed by **The Company**, following the execution of a previous instruction issued by **The Company** in accordance with the **Ancillary Services** agreement. Any such instruction shall not exceed the normal safe operating conditions of the **Demand Response Provider**'s **Plant** and **Apparatus** or **Demand Unit(s)** which could cause such equipment to trip. Instructions to modify **Active Power** or **Reactive Power** flow may have immediate or delayed effects but in any event would need to comply with the requirements of the **Ancillary Services** agreement.

(h) Notify **The Company** of any change in the available capacity in accordance with the relevant **Ancillary Services** agreement.

(i) Be capable of withstanding a rate of change of **System Frequency** of up to a maximum of 1Hz/s measured over a 500ms time frame.

DRSC.5.2 In addition to the requirements of DRSC.5.1, where a **Demand Response Provider** automatically modifies its **Demand** in response to changes in **System Frequency** or **System** voltage or both, **The Company** will have previously instructed the **Demand Response Provider** to switch these facilities into service in accordance with the terms of the **Ancillary Services** agreement prior to any automatic action taking place. The ability for **The Company** to issue instructions, receive acknowledgement of those instructions and receive operational metering data (for example voltage, current, **Active Power** and **Reactive Power** signals) from the **Demand Response Provider** will be dependent upon the type of **Demand Response Service** provided and shall be defined in the **Ancillary Services** agreement which shall be pursuant to the **Standard Contract Terms**.

DRSC.5.3 **Non Embedded Customers** who are also **Demand Response Provider**'s shall be capable of providing **Demand Response Reactive Power Control** by switching static compensation equipment into or out of service.

DRSC.6 SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE FREQUENCY CONTROL

DRSC.6.1 Where a **Demand Response Provider** provides **Demand Response System Frequency Control** to **The Company**, then the following requirements as detailed below shall apply. For the avoidance of doubt, these requirements apply either individually or where it is not part of a **Demand Facility**, collectively as part of a **Demand Aggregation** scheme through a **Demand Response Provider**. **Demand Response Providers** shall ensure that any **Plant** and **Apparatus** or **Demand Unit(s)** which they own, operate, control or manage, and which is used to provide **Demand Response System Frequency Control** shall:-

(a) Be capable of satisfying the **Frequency** range requirements as specified in ECC.6.1.2.1.

(b) Be capable of satisfying the voltage range requirements as specified in ECC.6.1.4.1.

(c) Be fitted with a deadband facility no greater than 0.03Hz unless otherwise specified in the **Ancillary Services** agreement. This requirement shall not apply to **Demand Response Providers** where only a **Non–Dynamic Frequency Response Service** is provided.

(d) The envelope of operation of the **Demand Response System Frequency Control** shall be in accordance with the terms of the **Ancillary Services** agreement. For the avoidance of doubt, continuous operation would not be required in respect of a static **Frequency** response service.

(e) Be fitted with a control system which is capable of responding to changes in **System Frequency** outside the nominal value of 50Hz. A deadband either side of nominal **Frequency** shall be permitted which shall be in accordance with the requirement of the **Ancillary Services** agreement.

(f) Be equipped with a controller that measures the actual **System Frequency**. The refresh rate for this controller shall be no longer than 0.2 seconds.

(g) Be able to detect a change in **System Frequency** of 0.01Hz. Each **Demand Unit** owned, operated, controlled or managed by a **Demand Response Provider** shall be capable of a rapid detection and respond to changes in **System Frequency** which shall be pursuant to the terms of the **Ancillary Services** agreement. An offset in the steady state measurement of **Frequency** shall be acceptable up to 0.05Hz. **Frequency** measurements must be recorded at each **Demand Facility** and must not be derived on an aggregated basis.

DRSC.7 SPECIFIC PROVISIONS FOR DEMAND UNITS WITH DEMAND RESPONSE VERY FAST ACTIVE POWER CONTROL

DRSC.7.1 Where a **Demand Response Provider** provides **Demand Response Very Fast Active Power Control** to **The Company**, then the applicable requirements shall be pursuant to the terms of the **Ancillary Services** agreement which shall specify:-

(a) The relationship between the change in **Active Power** and the rate of change of **System Frequency** over the **Demand** range of the **Demand Response Provider**'s **Demand Unit(s)** which they own, operate, control or manage.

(b) The operating principles of the **Demand Response Very Fast Active Power Control** and associated performance parameters.

(c) The response time of the **Demand Response Very Fast Active Power Control** which shall be no longer than 2 seconds from the inception of the **System Frequency** change.

DRSC.8 DATA REQUIRED BY THE COMPANY FROM DEMAND RESPONSE PROVIDER'S

DRSC.8.1 The data required to be submitted to **The Company** by a **Demand Response Provider** will vary depending upon the type of **Demand Response Service** provided and will be set out in the **Ancillary Services** agreement.

DRSC.9 OPERATIONAL METERING REQUIREMENTS

DRSC.9.1 The operational metering data required to be submitted to **The Company** will vary depending upon the type of **Demand Response Service** provided. **Demand Response Providers** may be required to install such operational metering equipment in accordance with the **Ancillary Services** agreement.

DRSC.10 INSTRUCTIONS ISSUED TO DEMAND RESPONSE PROVIDER'S

DRSC.10.1 **Demand Response Providers** may be required to be fitted with communication and instruction facilities to enable **The Company** to instruct them in the operational timeframe. These requirements will vary depending upon the type of **Demand Response Service** provided and will be set out in the **Ancillary Services** agreement.

PART II

COMPLIANCE REQUIREMENTS FOR DEMAND RESPONSE SERVICES

DRSC.11 OPERATIONAL NOTIFICATION PROCEDURE

DRSC.11.1 General Provisions

DRSC.11.1.1 **Demand Response Providers** who enter into an agreement with **The Company** to provide **Ancillary Services** are required to undertake a compliance process to ensure the **Plant** and **Apparatus** or **Demand Unit(s)** which they own, operate, control or manage, satisfies the requirements of the **Ancillary Services** agreement and the **Demand Response Services Code**. For the avoidance of doubt, **Demand Response Providers** who are also **EU Code Users**, will also be required to satisfy the requirements of the applicable requirements of the **European Compliance Processes** (**ECP**'s).

DRSC.11.1.2 Each **Demand Response Provider**, shall confirm to **The Company** its ability to comply with the requirements of the **Ancillary Services** agreement.

DRSC.11.1.3 Each **Demand Response Provider** shall notify **The Company** of any change to the **Plant** or **Apparatus** which they own, operate, control or manage such they are no longer able to satisfy the conditions specified in the **Ancillary Services** agreement and/or the relevant provisions of the **DRSC**. Such changes shall be notified to **The Company** in accordance with the terms of the **Ancillary Services** agreement.

DRSC.11.2 Operational Notification Procedures for Demand Response Providers

DRSC.11.2.1 All **Demand Response Providers** are required to undertake an **Operational Notification** procedure which shall comprise a **Demand Response Unit Document** (**DRUD**).

DRSC.11.2.2 The format of the **Demand Response Unit Document** (**DRUD**) shall take the form shown in DRSC.A.1 and shall provide sufficient information to demonstrate the **Plant** and **Apparatus** or **Demand Unit(s)** which a **Demand Response Provider** owns, operates, controls or manages, is capable of satisfying the full requirements of the **Ancillary Services** agreement and the applicable requirements of the **DRSC**. The compliance requirements can be simplified to a single operational notification stage as well as be reduced as agreed with **The Company**. **Demand Response Providers** shall be required to submit a new **DRUD** for each subsequent **Demand Unit** added to its portfolio.

DRSC.11.2.3 When the **Demand Response Provider** has submitted a final **DRUD** to the satisfaction of **The Company**, which clearly demonstrates full compliance with the **Ancillary Services** agreement, **The Company** shall issue a **Final Operational Notification** to the **Demand Response Provider**.

DRSC.11.3 COMPLIANCE

DRSC.11.3.1 Responsibility of the Demand Response Provider

DRSC.11.3.1.1 **Demand Response Providers** are required to satisfy the requirements of the **Ancillary Services** agreement which shall include satisfying the applicable requirements of this **Demand Response Services Code**.

DRSC.11.3.1.2 Should the **Demand Response Provider** wish to modify the technical capability of the **Plant** and **Apparatus** or **Demand Unit(s)** which it owns, operates, controls or manages and which affects its compliance with the **Ancillary Services** agreement, it should notify and agree any timescales for the change with **The Company** prior to making any change.

DRSC.11.3.1.3 Any operational incidents or failure of the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by the **Demand Response Provider** which impacts its ability to satisfy the compliance requirements detailed in this **Demand Response Services Code** shall be notified to **The Company** as soon as possible after occurrence of the incident.

DRSC.11.3.1.4 Any planned test schedules and procedures to verify compliance of the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by the **Demand Response Provider** shall be submitted to **The Company** in advance of the tests. **The Company** shall assess the test schedules and procedures in a timely manner prior to agreeing that the **Demand Response Provider** can carry out the tests.

DRSC.11.3.1.5 **The Company** may witness such tests and record the performance of the **Plant** and **Apparatus** owned, operated, controlled or managed by the **Demand Response Provider** to verify compliance with the **Ancillary Services** agreement and the **Demand Response Services Code**.

DRSC.11.3.2 Role of The Company

DRSC.11.3.2.1 **The Company** shall assess the compliance of the **Demand Response Provider** and shall undertake monitoring throughout the life time of the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by the **Demand Response Provider** to ensure compliance with the requirements of the **Ancillary Services** agreement. **The Company** shall inform the **Demand Response Provider** of the

outcome of such assessment.

DRSC.11.3.2.2 **The Company** may require **Demand Response Providers** to carry out compliance tests and simulations according to a repeat plan or general scheme or replacement of equipment which may have an impact on the compliance of the **Plant** and **Apparatus** or **Demand Units** owned, operated, controlled or managed by the **Demand Response Provider** as detailed in DRSC.11.3.1.3 and DRSC.11.3.1.4. **The Company** shall inform the **Demand Response Provider** of the results of these tests.

DRSC.11.3.2.3 As part of this compliance process, the **Demand Response Provider** shall provide the following items:-

(a) Relevant documentation and certificates associated with the compliance process.

(b) Details of the technical data required to ensure compliance with the **Ancillary Services** agreement.

(c) Steady state and dynamic models (as applicable) of their **Demand Units** or **Plant** and **Apparatus** (or equivalent) as required and agreed with **The Company**.

(d) Timelines for the submission of system data required to perform **System** studies.

(e) Study results showing the expected steady state and dynamic performance of the **Plant** and **Apparatus** or **Demand Unit(s)** or the performance of their **Demand Response Service** on an aggregated basis as required and agreed with **The Company**.

(f) Submission of registered **Equipment Certificates** or otherwise as agreed with **The Company**.

(g) Conditions and procedures for the use of relevant **Equipment Certificates** issued by an **Authorised Certifier** to a **Demand Response Provider** or equivalent to the satisfaction of **The Company**.

DRSC.11.3.2.4 If compliance tests or simulations cannot be carried out as agreed between the **Demand Response Provider** and **The Company** due to reasons attributable to **The Company**, then **The Company** shall not unreasonably withhold the **Operational Notification** referred to in DRSC.11.2.3.

DRSC.11.4 Compliance Testing

DRSC.11.4.1 Common Provisions for Compliance Testing

DRSC.11.4.1.1 The purpose of compliance testing is to ensure that the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by a **Demand Response Provider** is capable of satisfying the requirements of the **Ancillary Services** agreement and applicable sections of this **Demand Response Services Code** in addition to verifying that the models and data submitted provide a true and accurate representation of the **Plant** as built.

DRSC.11.4.1.2 Notwithstanding the minimum requirements for compliance testing detailed in DRSC.11.4 of this **Demand Response Services Code**, **The Company** shall:-

(a) Allow the **Demand Response Provider** to carry out an alternative set of tests provided that they are efficient and sufficient to demonstrate that the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by a **Demand Response Provider** is capable of satisfying the requirements of the **Ancillary Services** agreement and the applicable sections of the **Demand Response Services Code**.

(b) Require the **Demand Response Provider** to carry out additional or alternative tests (where reasonable) to those specified in DRSC.11.5 where they would otherwise be

insufficient to demonstrate compliance with the **Ancillary Services** agreement.

(c) Require the **Demand Response Provider** to be responsible for carrying out the tests in accordance with the requirements specified in DRSC.11.4 and DRSC.11.5 of the **Demand Response Services Code**. **The Company** shall cooperate with the **Demand Response Provider** and will not unduly delay the scheduling of the tests.

DRSC.11.4.1.3 **The Company** may witness such tests (either on site or remotely from **The Company**'s control room) to record the performance of the **Demand Response Providers** capability to verify compliance with the **Ancillary Services** agreement and the **Demand Response Services Code**. Where **The Company** witnesses the tests remotely, the **Demand Response Provider** shall provide the monitoring equipment necessary to record all relevant test signals and measurements in addition to ensuring that necessary representatives from the **Demand Response Provider** are available on site for the entire testing period. Signals specified by **The Company** shall be provided, if for selected tests, **The Company** wishes to use its own equipment to record performance. **The Company** will inform the **Demand Response Provider** if it wishes to witness the tests.

DRSC.11.5 Compliance Testing for Demand Response Providers with Demand Response Active Power Control, Reactive Power Control and Transmission Constraint Management.

DRSC.11.5.1 Demand Modification Tests

DRSC.11.5.1.1 **Demand Response Providers** who have signed an **Ancillary Services** agreement with **The Company** to provide **Demand Response Active Power Control**, **Demand Response Reactive Power Control** or **Demand Response Transmission Constraint Management**, are required to demonstrate (through site tests) the capability of the **Plant** and **Apparatus** or **Demand Unit(s)** they own, operate, control or manage to satisfy the requirements of the **Ancillary Services** agreement and the applicable requirements of DRSC.5. The site tests should demonstrate the capability of the **Demand Response Providers** ability to operate with instruction over the agreed timeframes, **Demand** range and duration pursuant to the terms of the **Ancillary Services** agreement. The tests can be completed individually or as part of a **Demand** aggregation scheme.

DRSC.11.5.1.2 The tests shall be carried out either by instruction from **The Company**'s **Control Centre** or by site tests through injections applied to the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by the **Demand Response Provider**.

DRSC.11.5.1.3 The test shall be deemed as passed if the requirements of the **Ancillary Services** agreement have been satisfied and the applicable requirements of DRSC.5 demonstrated to the satisfaction of **The Company**.

DRSC.11.5.1.4 A list of references to **Equipment Certificates** issued by an **Authorised Certifier** (or otherwise) as agreed with **The Company,** which can be supplied by the **Demand Response Provider** to demonstrate part of the evidence of compliance;

DRSC.11.5.2 Disconnection and Reconnection of Static Compensation Facilities

DRSC.11.5.2.1 **Demand Response Providers** who have signed an **Ancillary Services** agreement with **The Company** to provide **Demand Response Active Power Control**, **Demand Response Reactive Power Control** or **Demand Response Transmission Constraint Management** and have also agreed to disconnect or reconnect (or both) static compensation facilities when receiving an instruction from **The Company** in accordance with the requirements of the **Ancillary Services** agreement and DRSC.5.3,

shall be required to demonstrate the performance of the **Plant** and **Apparatus** or **Demand Unit(s)** they own, operate, control or manage to satisfy these requirements. These requirements can be demonstrated individually or collectively as part of a demand aggregation scheme.

DRSC.11.5.2.2 The tests shall be carried out either by instruction from **The Company**'s **Control Centre** or by site tests resulting in the disconnection and subsequent re-connection of the static compensation facilities.

DRSC.11.5.2.3 The test shall be deemed as passed if the requirements of the **Ancillary Services** agreement have been satisfied and the applicable requirements of DRSC.5.3 demonstrated to the satisfaction of **The Company**.

DRSC.11.6 Compliance Simulation

DRSC.11.6.1 Common Provisions on Compliance Simulations

DRSC.11.6.1.1 **Demand Response Providers** who agree to provide **Demand Response Very Fast Active Power Control** are required to demonstrate their ability to satisfy the requirements of the **Ancillary Services** agreement and DRSC.7 through necessary simulation studies to the satisfaction of **The Company**.

DRSC.11.6.1.2 **Demand Response Providers** who have contracted to provide a **Demand Response Very Fast Active Power Control** service, are required to submit further simulation studies where there has been a development, replacement or modernisation of the **Plant** and **Apparatus** or **Demand Unit(s)**_ owned, operated, controlled or managed by the **Demand Response Provider**, or **The Company** has identified a non–compliance with the **Demand Response Provider's** ability to satisfy the requirements of the **Ancillary Services** agreement or DRSC.7.

DRSC.11.6.1.3 Notwithstanding the requirements of DRSC.11.6.1.1 and DRSC.11.6.1.2 **The Company** shall be entitled to:-

(a) Allow the **Demand Response Provider** to carry out an alternative set of simulations provided that they are efficient and sufficient to demonstrate that the **Plant** and **Apparatus** or **Demand Unit(s)** owned, operated, controlled or managed by the **Demand Response Provider** is capable of satisfying the requirements of the **Ancillary Services** agreement and the applicable sections of the **Demand Response Services Code**.

(b) Require the **Demand Response Provider** to carry out additional or alternative simulations to those specified in DRSC11.6.1.1 and DRSC.11.6.1.28 where they would otherwise be insufficient to demonstrate compliance with the **Ancillary Services** agreement.

DRSC.11.6.1.4 **The Company** may check that the **Demand Response Provider** complies with the requirements of the **Ancillary Services** agreement and the applicable sections of the **Demand Response Services Code** by carrying out its own compliance simulations based on the simulation reports, models and test measurements.

DRSC.11.6.1.5 **The Company** will supply upon request from the **Demand Response Provider**, data to enable the **Demand Response Provider** to carry out the required simulations in accordance with the requirements of the **Ancillary Services** agreement and DRSC.11.6.

DRSC.11.7 Additional Testing requirements for Non-Embedded Customers and CUSC Parties who are also Demand Response Providers

DRSC.11.7.1 **Non-Embedded Customers** and **CUSC Parties** who are also **Demand Response**

Providers shall be required to execute a demand modification test after two consecutive unsuccessful responses in the operational environment or at least every year as agreed with **The Company**.

DRSC.11.7.2 Each **Non-Embedded Customer** and **CUSC Party** who are also **Demand Response Providers** and provide demand response low frequency demand disconnection shall execute a low frequency demand disconnection test at least once every three years.

APPENDIX I – DRSC.A.1
Format of the **Demand Response Unit Document** (**DRUD**)

Demand Response Unit Document (DRUD)
Statement of Compliance for Demand Response Providers

Contract company details

Contracted company name	
Primary contact name	
Contact number /s	
Email address	

Demand Response Service Details

Contract ID	
Type of **Demand Response Service** type,	
Asset type,	
Unit make up	
Aggregation methodology (if appropriate)	
Maximum capacity of the **Demand Response Service** (MW)	
Equipment Certificates (as applicable)_	
Unit location/ connection point / ID	
Contract signed date	
Service start date	
Desired test date	

Compliance Requirements

DRSC Requirement	Compliance Y/N	Demand Response Provider Statement
All documentation and certificates demonstrating compliance with the **DRSC**.		
Details of the technical data required to ensure compliance with the **Ancillary Services** agreement.		
Steady state and dynamic models (or equivalent information) of **Plant** and **Apparatus** or **Demand Unit(s)**.		
Timelines for the submission of system studies or equivalent data.		
Study results showing the expected steady state and dynamic performance of the **Plant** and **Apparatus** or **Demand Unit(s)**		
Conditions and procedures including the scope for registering **Equipment Certificates** or otherwise as agreed with **The Company**.		
Conditions and procedures for the use of relevant **Equipment Certificates** issued by an **Authorised Certifier** to a **Demand Response Provider**.		
Operational Metering Data to be submitted in accordance with **Ancillary Services** agreement.		

DRSC Requirement	Compliance Y/N	Demand Response Provider Statement
Ability to receive instructions to and from **The Company** accordance with the **Ancillary Services** agreement.		
Ability to operate over **Frequency** range as specified in DRSC.5.1(a).		
Ability to operate over voltage range as specified in DRSC.5.1(b).		
Ability to withstand a rate of change of system frequency up to a maximum of 1Hz per second as measured over a 500ms timeframe as specified in DRSC.5.1(i).		
Non-Embedded Customers who are also **Demand Response Providers** ability to switch static compensation equipment into or out of service in accordance with DRSC5.3 as applicable.		
Deadband settings as applicable.		
Control system block diagrams, parameters and settings as applicable.		

Declaration
Declaration – to be completed by **Customer** or the **Demand Response Provider**'s appointed technical representative
I declare that for all the **Demand Response Provider**'s information associated with this contract: 1. Compliance with the requirements of the **Demand Response Services Code** is achieved. 2. The commissioning checks have been successfully completed.
Name:
Signature:
Company Name:
Position:
Declaration – to be completed by **The Company** Witnessing Representative if applicable. Delete if not witnessed by the **The Company**.
I confirm that I have witnessed the commissioning checks in this document on behalf of _____ and that the results are an accurate record of the checks
Name:
Signature:
Company Name:

< END OF DEMAND RESPONSE SERVICES CODE >

COMPLIANCE PROCESSES
(CP)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

CP.1 INTRODUCTION 2
CP.2 OBJECTIVE 2
CP.3 SCOPE 2
CP.4 CONNECTION PROCESS 3
CP.5 ENERGISATION OPERATIONAL NOTIFICATION 4
CP.6 INTERIM OPERATIONAL NOTIFICATION 4
CP.7 FINAL OPERATIONAL NOTIFICATION 7
CP.8 COMPLIANCE REPORT PLAN 9
CP.9 LIMITED OPERATIONAL NOTIFICATION 10
CP.10 PROCESSES RELATING TO DEROGATIONS 13
CP.11 MANUFACTURER'S DATA & PERFORMANCE REPORT 13
APPENDIX 1 - ILLUSTRATIVE PROCESS DIAGRAMS 16
APPENDIX 2 - USER SELF CERTIFICATION OF COMPLIANCE 21
APPENDIX 3 - SIMULATION STUDIES 22

CP.1 INTRODUCTION

CP.1.1 The **Compliance Processes** ("**CP**") specifies:

the process (leading to an **Energisation Operational Notification**) which must be followed by **The Company** and any **GB Code User** to demonstrate its compliance with the Grid Code in relation to its **Plant** and **Apparatus** (including **OTSUA**) prior to the relevant **Plant** and **Apparatus** (including any **OTSUA**) being energised.

the process (leading to an **Interim Operational Notification** and **Final Operational Notification**) which must be followed by **The Company** and any **Generator** or **DC Converter Station** owner to demonstrate its compliance with the Grid Code in relation to its **Plant** and **Apparatus** (including any dynamically controlled **OTSUA**). This process shall be followed prior to and during the course of the relevant **Plant** and **Apparatus** (including **OTSUA**) being energised and **Synchronised**.

the process (leading to a **Limited Operational Notification**) which must be followed by **The Company** and each **Generator** and **DC Converter Station** owner where any of its **Plant** and/or **Apparatus** (including any **OTSUA**) becomes unable to comply with relevant provisions of the Grid Code, and where applicable with Appendices F1 to F5 (and in the case of **OTSUA**, Appendices OF1 to OF5 of the **Bilateral Agreement**). This process also includes when changes or **Modifications** are made to **Plant** and/or **Apparatus** (including **OTSUA**). This process applies to such **Plant** and/or **Apparatus** after the **Plant** and/or **Apparatus** has become **Operational** and until **Disconnected** from the **Total System**, (or until, in the case of **OTSUA**, the **OTSUA Transfer Time**), when changes or **Modifications** are made.

CP.1.2 As used in this **CP**, references to **OTSUA** means **OTSUA** to be connected or connected to the **National Electricity Transmission System** prior to the **OTSUA Transfer Time**.

CP1.3 Where the **Generator** or **DC Convertor Station Owner** and/or **The Company** are required to apply for a derogation from the **Authority**, this is not in respect of the **OTSUA**.

CP.2 OBJECTIVE

CP.2.1 The objective of the **CP** is to ensure that there is a clear and consistent process for demonstration of compliance by **GB Code Users** with the **Connection Conditions** and **Bilateral Agreement** which are similar for all **GB Code Users** of an equivalent category and will enable **The Company** to comply with its statutory and **ESO Licence** obligations.

CP.2.2 Provisions of the **CP** which apply in relation to **OTSDUW** and **OTSUA** shall (in any particular case) apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply.

CP.2.3 In relation to **OTSDUW**, provisions otherwise to be contained in a **Bilateral Agreement** may be contained in the **Construction Agreement**, and accordingly a reference in the **CP** to a relevant **Bilateral Agreement** includes the relevant **Construction Agreement**.

CP.3 SCOPE

CP.3.1 The **CP** applies to **The Company** and to **GB Code Users**, which in the **CP** means:

(a) **GB Generators** (other than in relation to **Embedded Small Power Stations** or **Embedded Medium Power Stations** not subject to a **Bilateral Agreement**) including those undertaking **OTSDUW**.

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **DC Converter Station** owners (other than those which only have **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**).

CP.3.2 The above categories of **GB Code User** will become bound by the **CP** prior to them generating, distributing, supplying or consuming, or in the case of **OTSUA**, transmitting, as the case may be, and references to the various categories should, therefore, be taken as referring to them in that prospective role as well as to **Users** actually connected.

CP3.3 This **CP** does not apply to **EU Code Users** for whom the requirements of the **ECP** applies.

CP.3.4 This **CP** does not apply to **GB Generators** in respect of **Embedded Small Power Stations** which have a **Bilateral Embedded Generation Agreement** with **The Company**. **The Company** will however need to ensure that **GB Generators** in respect of **Embedded Small Power Stations** which have a **Bilateral Embedded Generation Agreement** and a **Completion Date** on or after 05-09-2024, are capable of meeting the requirements of CC.6.5, CC.7.9, CC.7.10 and CC.7.11 of the Grid Code and the requirements of the **Bilateral Embedded Generation Agreement**. **The Company** shall notify such **GB Generators** of their compliance with these requirements through the issue of a **GB Code User Interim-Balancing Compliance Notification** with full compliance being confirmed by **The Company** through the issue of a **GB Code User Final-Balancing Compliance Notification**.

CP.4 CONNECTION PROCESS

CP.4.1 The **CUSC Contract(s)** contain certain provisions relating to the procedure for connection to the **National Electricity Transmission System** or, in the case of **Embedded Power Stations** or **Embedded DC Converter Stations**, becoming operational and include provisions to be complied with by **GB Code Users** prior to and during the course of **The Company** notifying the **User** that it has the right to become operational. In addition to such provisions, this **CP** sets out in further detail the processes to be followed to demonstrate compliance. Whilst this **CP** does not expressly address the processes to be followed in the case of **OTSUA** connecting to a **Network Operator's User System** prior to the **OTSUA Transfer Time**, the processes to be followed by **The Company** and the **Generator** in respect of **OTSUA** in such circumstances shall be consistent with those set out below by reference **OTSUA** directly connected to the **National Electricity Transmission System**.

CP.4.2 The provisions contained in CP.5 to CP.7 detail the process to be followed in order for the **GB Code User's Plant** and **Apparatus** (including **OTSUA**) to become operational. This process includes **EON** (energisation) **ION** (interim synchronising) and **FON** (final).

CP.4.2.1 The provisions contained in CP.5 relate to the connection and energisation of **User's Plant** and **Apparatus** (including **OTSUA**) to the **National Electricity Transmission System** or where **Embedded**, to a **User's System** and is shown diagrammatically at CP.A.1.1.

CP.4.2.2 The provisions contained in CP.6 and CP.7 provide the process for **Generators** and **DC Converter Station** owners to demonstrate compliance with the Grid Code and with, where applicable, the **CUSC Contract(s)** prior to and during the course of such **Generator's** or **DC Converter Station** owner's **Plant** and **Apparatus** (including **OTSUA** up to the **OTSUA Transfer Time**) becoming operational and is shown diagrammatically at CP.A.1.2 and CP.A.1.3.

CP.4.2.3 The provisions in CP.8 detail the process to be followed to confirm continued compliance (the Compliance Repeat Plan).

CP.4.2.4 The provisions contained in CP.9 detail the process to be followed when:

(a) a **Generator** or **DC Converter Station** owner's **Plant** and/or **Apparatus** (including the **OTSUA**) is unable to comply with any provisions of the Grid Code and **Bilateral Agreement**; or,

(b) following any notification by a **Generator** or a **DC Converter Station** owner under the **PC** of any change to its **Plant** and **Apparatus** (including any **OTSUA**); or,

(c) a **Modification** to a **Generator** or a **DC Converter Station** owner's **Plant** and/or **Apparatus**.

The process is shown diagrammatically at Appendix CP.A.1.4 for condition (a) and Appendix CP.A.1.5 for conditions (b) and (c)

CP.4.3 Embedded Medium Power Stations not subject to a Bilateral Agreement and Embedded DC Converter Stations not subject to a Bilateral Agreement

CP.4.3.1 For the avoidance of doubt, the process in this **CP** does not apply to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**.

CP.5 ENERGISATION OPERATIONAL NOTIFICATION

CP.5.1 The following provisions apply in relation to the issue of an **Energisation Operational Notification**.

CP.5.1.1 Certain provisions relating to the connection and energisation of the **GB Code User's Plant** and **Apparatus** at the **Connection Site** and **OTSUA** at the **Transmission Interface Point** and in certain cases of **Embedded Plant** and **Apparatus** are specified in the **CUSC** and/or **CUSC Contract(s)**. For other **Embedded Plant** and **Apparatus**, the **Distribution Code**, the **DCUSA** and the **Embedded Development Agreement** for the connection specify equivalent provisions. Further detail on this is set out in CP.5 below.

CP.5.2 The items for submission prior to the issue of an **Energisation Operational Notification** are set out in CC.5.2

CP.5.3 In the case of a **Generator** or **DC Converter Station** owner, the items referred to in CC.5.2 shall be submitted using the **User Data File Structure**.

CP.5.4 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **GB Code User** wishing to energise its **Plant** and **Apparatus** (including passive **OTSUA**) for the first time, the **GB Code User** will submit to **The Company**, a Certificate of Readiness to Energise **High Voltage** Equipment which specifies the items of **Plant** and **Apparatus** (including **OTSUA**) ready to be energised in a form acceptable to **The Company**.

CP.5.5 If the relevant obligations under the provisions of the **CUSC** and/or **CUSC Contract(s)** and the conditions of CP.5 have been completed to **The Company's** reasonable satisfaction, then **The Company** shall issue an **Energisation Operational Notification**. Any dynamically controlled reactive compensation **OTSUA** (including Statcoms or Static Var Compensators) shall not be **Energised** until the appropriate **Interim Operational Notification** has been issued in accordance with CP.6.

CP.6 INTERIM OPERATIONAL NOTIFICATION

CP.6.1 The following provisions apply in relation to the issue of an **Interim Operational Notification**.

CP.6.2 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **DC Converter Station** owner wishing to **Synchronise** its **Plant** and **Apparatus** or dynamically controlled **OTSUA** for the first time, the **Generator** or **DC Converter Station** owner will:

(i) submit to **The Company**, a **Notification of User's Intention to Synchronise**; and

(il) submit to **The Company** the items referred to at CP.6.3.

CP.6.3 Items for submission prior to issue of the **Interim Operational Notification**.

CP.6.3.1 Prior to the issue of an **Interim Operational Notification** in respect of the **GB Code User's Plant** and **Apparatus** or dynamically controlled **OTSUA**.

the **Generator** or **DC Converter Station** owner must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand**;

(b) details of any special **Power Station**, **Generating Unit(s)**, **Power Park Module(s)** or **DC Converter Station(s)** protection as applicable. This may include Pole Slipping protection and islanding protection schemes;

(c) any items required by CP.5.2, updated by the **GB Code User** as necessary;

(d) simulation study provisions of Appendix CP.A.3 and the results demonstrating compliance with Grid Code requirements of:

PC.A.5.4.2

PC.A.5.4.3.2,

CC.6.3.4,

CC.6.3.7(c)(i),

CC.6.3.15,

CC.A.6.2.5.6,

CC.A.7.2.3.1,

as applicable to the **Power Station**, **Generating Unit(s)**, **Power Park Module(s)** or **DC Converter(s)** or dynamically controlled **OTSUA** unless agreed otherwise by **The Company**;

(e) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Generator** or **DC Converter Station** owner under CP.7.2 to demonstrate compliance with relevant Grid Code requirements. Such schedule to be consistent with Appendix OC5.A.2 (in the case of **Generating Units** other than **Power Park Modules**) or Appendix OC5.A.3 (in the case of **Generating Units** comprising **Power Park Modules**) and **OTSUA** as applicable); and

(f) an interim **Compliance Statement** and a **User Self Certification of Compliance** completed by the **GB Code User** (including any **Unresolved Issues**) against the relevant Grid Code requirements including details of any requirements that the **Generator** or **DC Converter Station** owner has identified that will not or may not be met or demonstrated.

CP.6.3.2 The items referred to in CP.6.3 shall be submitted by the **Generator** or **DC Converter Station** owner using the **User Data File Structure**.

CP.6.4 No **Generating Unit**, **CCGT Module**, **Power Park Module** or **DC Converter** or dynamically controlled **OTSUA** shall be **Synchronised** to the **Total System** (and for the avoidance of doubt, dynamically controlled **OTSUA** will not be able to transmit), until the later of:

(a) the date specified by **The Company** in the **Interim Operational Notification** issued in respect of the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)** or **DC Converter(s)** or dynamically controlled **OTSUA**; and,

(b) if **Embedded**, the date of receipt of a confirmation from the **Network Operator** in whose **System** the **Plant** and **Apparatus** is connected that it is acceptable to the **Network Operator** that the **Plant** and **Apparatus** be connected and **Synchronised**; and,

(c) in the case of **Synchronous Generating Unit(s)** only after the date of receipt by a **Generator** of written confirmation from **The Company** that the **Generating Unit** or **CCGT Module** as applicable, has completed the following tests to demonstrate compliance with the relevant provisions of the **Connection Conditions** to **The Company's** satisfaction:

(i) those tests required to establish the open and short circuit saturation characteristics of the **Generating Unit** (as detailed in Appendix OC5.A.2.3) to enable assessment of the short circuit ratio in accordance with CC.6.3.2. Such tests may be carried out at a location other than the **Power Station** site; and

(ii) open circuit step response tests (as detailed in Appendix OC5.A.2.2) to demonstrate compliance with CC.A.6.2.4.1.

CP.6.5 **The Company** shall assess the schedule of tests submitted by the **Generator** or **DC Converter Station** owner with the **Notification of User's Intention to Synchronise** under CP.6.1 and shall determine whether such schedule has been completed to **The Company's** satisfaction.

CP.6.6 When the requirements of CP.6.2 to CP.6.5 have been met, **The Company** will notify the **Generator** or **DC Converter Station** owner that the:

Generating Unit,

CCGT Module,

Power Park Module,

Dynamically controlled **OTSUA** or

DC Converter,

as applicable may (subject to the **Generator** or **DC Converter Station** owner having fulfilled the requirements of CP.6.3 where that applies) be **Synchronised** to the **Total System** through the issue of an **Interim Operational Notification**. Where the **Generator** is undertaking **OTSDUW**, then the **Interim Operational Notification** will be in two parts, with the "**Interim Operational Notification Part A**" applicable to the **OTSUA** and the "**Interim Operational Notification Part B**" applicable to the **GB Code Users Plant and Apparatus**. For the avoidance of doubt, the **Interim Operational Notification Part A** and the **Interim Operational Notification Part B** can be issued together or at different times. In respect of an **Embedded Power Station** or **Embedded DC Converter Station** (other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**), **The Company** will notify the **Network Operator** that an **Interim Operational Notification** has been issued.

CP.6.6.1 The **Interim Operational Notification** will be time limited, the expiration date being specified at the time of issue. The **Interim Operational Notification** may be renewed by **The Company**.

CP.6.6.2 The **Generator** or **DC Converter Station** owner must operate the **Generating Unit**, **CCGT Module**, **Power Park Module**, **OTSUA** or **DC Converter** in accordance with the terms, arising from the **Unresolved Issues**, of the **Interim Operational Notification**. Where practicable, **The Company** will discuss such terms with the **Generator** or **DC Converter Station** owner prior to including them in the **Interim Operational Notification**.

CP.6.6.3 The **Interim Operational Notification** will include the following limitations:

(a) In the case of **OTSUA**, the **Interim Operational Notification Part A** permits **Synchronisation** of the dynamically controlled **OTSUA** to the **Total System** only for the purposes of active control of voltage and **Reactive Power** and not for the purpose of exporting **Active Power**.

(b) In the case of a **Power Park Module**, the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the **Interim Operational Notification Part B**) will limit the proportion of the **Power Park Module** which can be simultaneously **Synchronised** to the **Total System** such that neither of the following figures are exceeded:

(i) 20% of the **Registered Capacity** of the **Power Park Module** (or the output of a single **Power Park Unit**, where this exceeds 20% of the **Power Station's Registered Capacity**); nor

(ii) 50MW

until the **Generator** has completed the voltage control tests (detailed in OC5.A.3.2) (including in respect of any dynamically controlled **OTSUA**) to **The Company's** reasonable satisfaction. Following successful completion of this test, each additional **Power Park Unit** should be included in the voltage control scheme as soon as is technically possible (unless **The Company** agrees otherwise).

(b) In the case of a **Power Park Module** with a **Registered Capacity** greater or equal to 100MW, the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the **Interim Operational Notification Part B**) will limit the proportion of the **Power Park Module** which can be simultaneously **Synchronised** to the **Total System** to 70% of **Registered Capacity** until the **Generator** has completed the **Limited Frequency Sensitive Mode** control tests with at least 50% of the **Registered Capacity** of the **Power Park Module** in service (detailed in OC5.A.3.3) to **The Company's** reasonable satisfaction.

(c) In the case of a **Synchronous Generating Unit**, employing a static **Excitation System** the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the **Interim Operational Notification Part B**) may if applicable limit the maximum **Active Power** output and reactive power output of the **Synchronous Generating Unit** or **CCGT module** prior to the successful commissioning of the **Power System Stabiliser** to **The Company's** satisfaction.

CP.6.6.4 When a **GB Code User** and **The Company** are acting/operating in accordance with the provisions of an **Interim Operational Notification**, whilst it is in force, the relevant provisions of the Grid Code to which that **Interim Operational Notification** relates will not apply to the **GB Code User** or **The Company** to the extent and for the period set out in the **Interim Operational Notification**.

CP.6.7 Other than **Unresolved Issues** that are subject to tests required under CP.7.2 to be witnessed by **The Company**, the **Generator** or **DC Converter Station** owner must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Generator** or **DC Converter Station** owner must liaise with **The Company** in respect of such resolution. The tests that may be witnessed by **The Company** are specified in CP.7.2.

CP.6.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **DC Converter Station** owner wishing to commence tests required under CP.7 to be witnessed by **The Company**, the **Generator** or **DC Converter Station** owner will notify **The Company** that the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)** or **DC Converter(s)** as applicable, is ready to commence such tests.

CP.6.9 The items referred to at CP.7.3 shall be submitted by the **Generator** or the **DC Converter Station** owner after successful completion of the tests required under CP.7.2.

CP.7. FINAL OPERATIONAL NOTIFICATION

CP.7.1 The following provisions apply in relation to the issue of a **Final Operational Notification**.

CP.7.2 Tests to be carried out prior to issue of the **Final Operational Notification**

CP.7.2.1 Prior to the issue of a **Final Operational Notification**, the **Generator** or **DC Converter Station** owner must have completed the tests specified in this CP.7.2.2 to **The Company's** satisfaction to demonstrate compliance with the relevant Grid Code provisions.

CP.7.2.2 In the case of any **Generating Unit**, **CCGT Module**, **Power Park Module**, **OTSUA** (if applicable) and **DC Converter** these tests will comprise one or more of the following:

(a) reactive capability tests to demonstrate that the **Generating Unit**, **CCGT Module**, **Power Park Module**, **OTSUA** (if applicable) and **DC Converter** can meet the requirements of CC.6.3.2. These may be witnessed by **The Company** on site if there is no metering to **The Company Control Centre**.

(b) voltage control system tests to demonstrate that the **Generating Unit**, **CCGT Module**, **Power Park Module**, **OTSUA** (if applicable) and **DC Converter** can meet the requirements of CC.6.3.6, CC.6.3.8 and, in the case of a **Power Park Module**, **OTSUA** (if applicable) and **DC Converter**, the requirements of CC.A.7 and, in the case of a **Generating Unit** and/or **CCGT Module**, the requirements of CC.A.6, and any terms specified in the **Bilateral Agreement** as applicable. These tests may also be used to validate the **Excitation System** model (PC.A.5.3) or voltage control system model (PC.A.5.4) as applicable. These tests may be witnessed by **The Company**.

(c) governor or frequency control system tests to demonstrate that the **Generating Unit**, **CCGT Module**, **OTSUA** (if applicable) and **Power Park Module** can meet the requirements of CC.6.3.6, CC.6.3.7, where applicable CC.A.3, and BC.3.7. The results will also validate the **Mandatory Service Agreement** required by CC.8.1. These tests may also be used to validate the Governor model (PC.A.5.3) or frequency control system model (PC.A.5.4) as applicable. These tests may be witnessed by **The Company**.

(d) fault ride through tests in respect of a **Power Station** with a **Registered Capacity** of 100MW or greater, comprised of one or more **Power Park Modules**, to demonstrate compliance with CC.6.3.15 (a), (b) and (c), CC.A.4.1, CC.A.4.2 and CC.A.4.3. Where test results from a **Manufacturers Data & Performance Report** as defined in CP.11 have been accepted this test will not be required.

(e) any further tests reasonably required by **The Company**, and agreed with the **GB Code User** to demonstrate any aspects of compliance with the Grid Code and the **CUSC Contract**.

CP.7.2.3 **The Company's** preferred range of tests to demonstrate compliance with the **CC** are specified in Appendix OC5.A.2 (in the case of **Generating Units** other than **Power Park Modules**) or Appendix OC5.A.3 (in the case of **Generating Units** comprising **Power Park Modules** or **OTSUA** if applicable) or Appendix OC5.A.4 (in the case of **DC Converters**) and are to be carried out by the **GB Code User** with the results of each test provided to **The Company**. The **GB Code User** may carry out an alternative range of tests if this is agreed with **The Company**. **The Company** may agree a reduced set of tests where there is a relevant **Manufacturers Data & Performance Report** as detailed in CP.11.

CP.7.2.4 In the case of **Offshore Power Park Modules** which do not contribute to **Offshore Transmission Licensee Reactive Power** capability as described in CC.6.3.2(e)(i) or CC.6.3.2(e)(ii) or Voltage Control as described in CC.6.3.8(b)(i), the tests outlined in CP.7.2.2 (a) and CP.7.2.2 (b) are not required. However, the offshore **Reactive Power** transfer tests outlined in OC5.A.2.8 shall be completed in their place.

CP.7.2.5 Following completion of each of the tests specified in this CP.7.2, **The Company** will notify the **Generator** or **DC Converter Station** owner whether, in the opinion of **The Company**, the results demonstrate compliance with the relevant Grid Code conditions.

CP.7.2.6 The **Generator** or **DC Converter Station** owner is responsible for carrying out the tests and retains the responsibility for safety and personnel during the test.

CP.7.3 Items for submission prior to issue of the **Final Operational Notification**

CP.7.3.1 Prior to the issue of a **Final Operational Notification**, the **Generator** or **DC Converter Station** owner must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with validated actual values and updated estimates for the future including **Forecast Data** items such as **Demand**;

(b) any items required by CP.5.2 and CP.6.3, updated by the **GB Code User** as necessary;

(c) evidence to **The Company's** satisfaction that demonstrates that the controller models and/or parameters (as required under PC.A.5.3.2(c) option 2, PC.A.5.3.2(d) option 2, PC.A.5.4.2, and/or PC.A.5.4.3.2) supplied to **The Company** provide a reasonable representation of the behaviour of the **GB Code User's Plant** and **Apparatus** and **OTSUA** if applicable;

(d) results from the tests required in accordance with CP.7.2 carried out by the **Generator** to demonstrate compliance with relevant Grid Code requirements including the tests witnessed by **The Company**; and

(e) the final **Compliance Statement** and a **User Self Certification of Compliance** signed by the **GB Code User** and a statement of any requirements that the **Generator** or **DC Converter Station** owner has identified that have not been met together with a copy of the derogation in respect of the same from the **Authority**.

CP.7.3.2 The items in CP.7.3 should be submitted by the **Generator** (including in respect of any **OTSUA** if applicable) or **DC Converter Station** owner using the **User Data File Structure**.

CP.7.4 If the requirements of CP.7.2 and CP.7.3 have been successfully met, **The Company** will notify the **Generator** or **DC Converter Station** owner that compliance with the relevant Grid Code provisions has been demonstrated for the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA**, if applicable or **DC Converter(s)** as applicable through the issue of a **Final Operational Notification**. In respect of an **Embedded Power Station** or **Embedded DC Converter Station** other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**, **The Company** will notify the **Network Operator** that a **Final Operational Notification** has been issued, subject to the requirement to confirm continued compliance as per CP.8.2 as part of the Compliance Repeat Plan.

CP.7.5 If a **Final Operational Notification** cannot be issued because the requirements of CP.7.2 and CP.7.3 have not been successfully met prior to the expiry of an **Interim Operational Notification**, then the **Generator** or **DC Converter Station** owner (where licensed in respect of its activities) and/or **The Company**, shall apply to the **Authority** for a derogation. The provisions of CP.10 shall then apply.

CP.8 COMPLIANCE REPORT PLAN

CP.8.1 No later than 4 calendar years and 6 months after the issue of a **Final Operational Notification**, **The Company** will notify the **Generator** or **DC Converter Station** owner that confirmation of continued compliance with the requirements of the Grid Code and/or the **Bilateral Agreement** is required.

CP.8.2 No later than 5 calendar years after the issue of a **Final Operational Notification** the **Generator** or **DC Converter Station** owner shall confirm that the **Plant** and/or **Apparatus** (including **OTSUA** if applicable) is fully compliant with the requirements of the Grid Code and/or the **Bilateral Agreement**. The confirmation of compliance will include:

(a) a **Compliance Statement** and a **User Self Certification of Compliance** signed by the **GB Code User** and a statement of any requirements that the **Generator** or **DC Converter Station** owner has identified that have not been met together with a copy of the derogation in respect of the same from the **Authority**.

(b) complete set of relevant **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with validated actual values and updated estimates for the future including **Forecast Data** items such as **Demand**. Simulation studies and results from tests detailed in Appendix CP.A.3 and OC5 are not required as part of the Compliance Repeat Plan.

(c) an updated list of contact details for outage and network planning, which shall be updated by the **GB Code User** as needed; and

(d) an updated list of email and telephone contact details for the **User Site**, which shall be updated by the **GB Code User** as needed. The persons specified in the contact details should be able to assist in the sharing of dynamic system behaviour monitoring data as well as supporting any post-**Event** investigations.

For the avoidance of doubt the **Generator** or **DC Converter Station** owner is responsible for ensuring that **Plant** and/or **Apparatus** (including **OTSUA** if applicable) remains compliant with the relevant clauses of the Grid Code and/or the **Bilateral Agreement** and/or changes to connection site conditions notified by **The Company**.

CP.8.3 If the requirements of CP.8.2 have been completed to **The Company's** satisfaction, **The Company** will notify the **Generator** or **DC Converter Station** owner that compliance with the relevant Grid Code provisions has been demonstrated for the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA**, if applicable or **DC Converter(s)** as applicable through the issue of a **Final Operational Notification** subject to Compliance Repeat Plan (CP.8) no later than 5 years from the date of issue. In respect of an **Embedded Power Station** or **Embedded DC Converter Station** other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**, **The Company** will notify the **Network Operator** that a **Final Operational Notification** has been issued.

CP.8.4 If a **Final Operational Notification** cannot be issued because the requirements of CP.8.2 have not been successfully met prior to the date 5 years from the date of issue of the **Final Operational Notification**, then **The Company** will issue the **Generator** or **DC Converter Station** owner (where licensed in respect of its activities) a **Limited Operational Notification** with respect to the **Unresolved Issues**. The provisions of CP.9 shall then apply.

CP.9 LIMITED OPERATIONAL NOTIFICATION

CP.9.1 Following the issue of a **Final Operational Notification** if:

(i) the **Generator** or **DC Converter Station** owner becomes aware, that the capability of its **Plant** and/or **Apparatus'** (including **OTSUA** if applicable) to meet any provisions of the Grid Code, or where applicable the **Bilateral Agreement** is not fully available, then the **Generator** or **DC Converter Station** owner shall follow the process in CP.9.2 to CP.9.11; or,

(ii) a **Network Operator** becomes aware, that the capability of **Plant** and/or **Apparatus'** belonging to an **Embedded Power Station** or **Embedded DC Converter Station** (other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**) is failing to meet any provisions of the Grid Code, or where applicable the **Bilateral Agreement**, then the **Network Operator** shall inform **The Company** and **The Company** shall inform the **Generator** or **DC Converter Station** owner to then follow the process in CP.9.2 to CP.9.11; or,

(iii) **The Company** becomes aware through monitoring as described in OC5.4, that a **Generator** or **DC Converter Station** owner **Plant** and/or **Apparatus'** (including **OTSUA** if applicable) capability to meet any provisions of the Grid Code, or where applicable the **Bilateral Agreement** is not fully available, then **The Company** shall inform the other party. Where **The Company** and the **Generator** or **DC Converter Station** owner cannot agree from the monitoring as described in OC5.4 whether the **Plant and/or Apparatus** (including **OTSUA** if applicable) is fully available and/or is compliant with the requirements of the Grid Code and where applicable the **Bilateral Agreement**, the parties shall first apply the process in OC5.5.1, before applying the process defined in CP.9 (**LON**) if applicable. Where the testing instructed in accordance with OC.5.5.1 indicates that the **Plant** and/or **Apparatus** (including **OTSUA** if applicable) is not fully available and/or is not compliant with the requirements of the Grid Code and/or the **Bilateral Agreement**, or if the parties so agree, the process in CP.9.2 to CP.9.11 shall be followed.

CP.9.2 Immediately upon a **Generator** or **DC Converter Station** owner becoming aware that its **Generating Unit**, **CCGT Module**, **Power Park Module**, **OTSUA** (if applicable) or **DC Converter Station** as applicable may be unable to comply with certain provisions of the Grid Code or (where applicable) the **Bilateral Agreement**, the **Generator** or **DC Converter Station** owner shall notify **The Company** in writing. Additional details of any operating restrictions or changes in applicable data arising from the potential non-compliance and an indication of the date from when the restrictions will be removed and full compliance demonstrated shall be provided as soon as reasonably practical.

CP.9.3 If the nature of any unavailability and/or potential non-compliance described in CP.9.1 causes or can reasonably be expected to cause a material adverse effect on the business or condition of **The Company** or other **Users** or the **National Electricity Transmission System** or any **User Systems**, then **The Company** may, notwithstanding the provisions of this CP.9, follow the provisions of Paragraph 5.4 of the **CUSC**.

CP.9.4 Except where the provisions of CP.9.3 apply, where the restriction notified in CP.9.2 is not resolved in 28 days, then the **Generator** or **DC Converter Station** owner with input from and discussion of conclusions with **The Company**, and the **Network Operator** where the **Generating Unit**, **CCGT Module**, **Power Park Module** or **Power Station** as applicable is **Embedded**, shall undertake an investigation to attempt to determine the causes of and solution to the non-compliance. Such investigation shall continue for no longer than 56 days. During such investigation, the **Generator** or **DC Converter Station** owner shall provide to **The Company**, the relevant data which has changed due to the restriction in respect of CP.7.3.1 as notified to the **Generator** or **DC Converter Station** owner by **The Company** as being required to be provided.

CP.9.5 Issue and Effect of LON

CP.9.5.1 Following the issue of a **Final Operational Notification**, **The Company** will issue to the **Generator** or **DC Converter Station** owner, a **Limited Operational Notification** if:

(a) by the end of the 56 day period referred to at CP.9.4, the investigation has not resolved the non-compliance to **The Company's** satisfaction; or

(b) **The Company** is notified by a **Generator** or **DC Converter Station** owner of a **Modification** to its **Plant** and **Apparatus** (including **OTSUA** if applicable); or

(c) **The Company** receives a submission of data, or a statement from a **Generator** or **DC Converter Station** owner indicating a change in **Plant** or **Apparatus** (including **OTSUA** if applicable) or settings (including but not limited to governor and excitation control systems) that may in **The Company's** reasonable opinion, acting in accordance with **Good Industry Practice** be expected to result in a material change of performance.

In the case of an **Embedded Generator** or **Embedded DC Converter Station** owner, **The Company** will issue a copy of the **Limited Operational Notification** to the **Network Operator**.

CP.9.5.2 The **Limited Operational Notification** will be time limited to expire no later than 12 months from the start of the non-compliance or restriction or from reconnection following a change. **The Company** may agree a longer duration in the case of a **Limited Operational Notification** following a **Modification** or whilst the **Authority** is considering the application for a derogation in accordance with CP.10.1.

CP.9.5.3 The **Limited Operational Notification** will notify the **Generator** or **DC Converter Station** owner of any restrictions on the operation of the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA** (if applicable) or **DC Converter(s)** and will specify the **Unresolved Issues**. The **Generator** or **DC Converter Station** owner must operate in accordance with any notified restrictions and must resolve the **Unresolved Issues**.

CP.9.5.4 When a **GB Code User** and **The Company** are acting/operating in accordance with the provisions of a **Limited Operational Notification**, whilst it is in force, the relevant provisions of the Grid Code to which that **Limited Operational Notification** relates will not apply to the **GB Code User** or **The Company** to the extent and for the period set out in the **Limited Operational Notification**.

CP.9.5.5 The **Unresolved Issues** included in a **Limited Operational Notification** will show the extent that the provisions of CP.7.2 (testing) and CP.7.3 (final data submission) shall apply. In respect of selecting the extent of any tests which may in **The Company's** view reasonably be needed to demonstrate the restored capability and in agreeing the time period in which the tests will be scheduled, **The Company** shall, where reasonably practicable, take account of the **Generator** or **DC Converter Station** owner's input to contain its costs associated with the testing.

CP.9.5.6 In the case of a change or **Modification** the **Limited Operational Notification** may specify that the affected **Plant** and/or **Apparatus** (including **OTSUA** if applicable) or associated **Generating Unit(s)** or **Power Park Unit(s)** must not be **Synchronised** until all of the following items, that in **The Company's** reasonable opinion are relevant, have been submitted to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**);

(b) details of any relevant special **Power Station**, **Generating Unit(s)**, **Power Park Module(s)**, **OTSUA** (if applicable) or **DC Converter Station(s)** protection as applicable. This may include **Pole Slipping** protection and islanding protection schemes; and

(c) simulation study provisions of Appendix CP.A.3 and the results demonstrating compliance with Grid Code requirements relevant to the change or **Modification** as agreed by **The Company**; and

(d) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Generator** or **DC Converter Station** to demonstrate compliance with relevant Grid Code requirements as agreed by **The Company**. The schedule of tests shall be consistent with Appendix OC5.A.2 or Appendix OC5.A.3 as appropriate; and

(e) an interim **Compliance Statement** and a **User Self Certification of Compliance** completed by the **GB Code User** (including any **Unresolved Issues**) against the relevant Grid Code requirements including details of any requirements that the **Generator** or **DC Converter Station** owner has identified that will not or may not be met or demonstrated; and

(f) any other items specified in the **LON**.

CP.9.5.7 The items referred to in CP.9.5.6 shall be submitted by the **Generator** (including in respect of any **OTSUA** if applicable) or **DC Converter Station** owner using the **User Data File Structure**.

CP.9.5.8 In the case of **Synchronous Generating Unit(s**) only, the **Unresolved Issues** of the **LON** may require that the **Generator** must complete the following tests to **The Company's** satisfaction to demonstrate compliance with the relevant provisions of the **CC**s prior to the **Generating Unit** being **Synchronised** to the **Total System**:

(a) those tests required to establish the open and short circuit saturation characteristics of the **Generating Unit** (as detailed in Appendix OC5.A.2.3) to enable assessment of the short circuit ratio in accordance with CC.6.3.2. Such tests may be carried out at a location other than the **Power Station** site; and

(b) open circuit step response tests (as detailed in Appendix OC5.A.2.2) to demonstrate compliance with CC.A.6.2.4.1.

CP.9.6 In the case of a change or **Modification**, not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **DC Converter Station** owner wishing to **Synchronise** its **Plant** and **Apparatus** (including **OTSUA** if applicable) for the first time following the change or **Modification**, the **Generator** or **DC Converter Station** owner will:

(i) submit a **Notification of User's Intention to Synchronise**; and

(ii) submit to **The Company** the items referred to at CP.9.5.6.

CP.9.7 Other than **Unresolved Issues** that are subject to tests to be witnessed by **The Company**, the **Generator** or **DC Converter Station** owner must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Generator** or **DC Converter Station** owner must liaise with **The Company** in respect of such resolution. The tests that may be witnessed by **The Company** are specified in CP.7.2.2.

CP.9.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **DC Converter Station** owner wishing to commence tests listed as **Unresolved Issues** to be witnessed by **The Company**, the **Generator** or **DC Converter Station** owner will notify **The Company** that the **Generating Unit(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA** (if applicable) or **DC Converter(s)** as applicable is ready to commence such tests.

CP.9.9 The items referred to at CP.7.3 and listed as **Unresolved Issues** shall be submitted by the **Generator** or the **DC Converter Station** owner after successful completion of the tests.

CP.9.10 Where the **Unresolved Issues** have been resolved, a **Final Operational Notification** will be issued to the **GB Code User**.

CP.9.11 If a **Final Operational Notification** has not been issued by **The Company** within the 12 month period referred to at CP.9.5.2 (or where agreed following a **Modification** by the expiry time of the **LON**) then the **Generator** or **DC Converter Station** owner (where licensed in respect of its activities) and **The Company** shall apply to the **Authority** for a derogation.

CP.10 PROCESSES RELATING TO DEROGATIONS

CP.10.1 Whilst the **Authority** is considering the application for a derogation, the **Interim Operational Notification** or **Limited Operational Notification** will be extended to remain in force until the **Authority** has notified **The Company** and the **Generator** or **DC Converter Station** owner of its decision. Where the **Generator** or **DC Converter Station** owner is not licensed, **The Company** may propose any necessary changes to the **Bilateral Agreement** with such unlicensed **Generator** or **DC Converter Station** owner.

CP.10.2 If the **Authority**:

(a) grants a derogation in respect of the **Plant** and/or **Apparatus**, then **The Company** shall issue a **Final Operational Notification** once all other **Unresolved Issues** are resolved; or

(b) decides a derogation is not required in respect of the **Plant** and/or **Apparatus**, then **The Company** will reconsider the relevant **Unresolved Issues** and may issue a **Final Operational Notification** once all other **Unresolved Issues** are resolved; or

(c) decides not to grant any derogation in respect of the **Plant** and/or **Apparatus**, then there will be no **Operational Notification** in place and **The Company** and the **GB Code User** shall consider its rights pursuant to the **CUSC**.

CP.10.3 Where an **Interim Operational Notification** or **Limited Operational Notification** is so conditional upon a derogation and such derogation includes any conditions (including any time limit to such derogation), the **Generator** or **DC Converter Station** owner will progress the resolution of any **Unresolved Issues** and / or progress and / or comply with any conditions upon such derogation and the provisions of CP.6.9 to CP.7.4 shall apply and shall be followed.

CP.11 MANUFACTURER'S DATA & PERFORMANCE REPORT

CP.11.1.1 Data and performance characteristics in respect of certain Grid Code requirements may be registered with **The Company** by **Power Park Unit** manufacturers in respect of specific models of **Power Park Units** by submitting information in the form of a **Manufacturer's Data and Performance Report** to **The Company**.

CP.11.1.2 A **GB Generator** planning to construct a **Power Station** containing the appropriate version of **Power Park Units** in respect of which a **Manufacturer's Data & Performance Report** has been submitted to **The Company** may reference the **Manufacturer's Data & Performance Report** in its submissions to **The Company**. Any **Generator** considering referring to a **Manufacturer's Data & Performance Report** for any aspect of its **Plant** and **Apparatus** may contact **The Company** to discuss the suitability of the relevant **Manufacturer's Data & Performance Report** to its project to determine if, and to what extent, the data included in the **Manufacturer's Data & Performance Report** contributes towards demonstrating compliance with those aspects of the Grid Code applicable to the **Generator**. **The Company** will inform the **Generator** if the reference to the **Manufacturer's Data & Performance Report** is not appropriate or not sufficient for its project.

CP.11.1.3 The process to be followed by **Power Park Unit** manufacturers submitting a **Manufacturer's Data & Performance Report** is agreed by **The Company**. CP.11.2 indicates the specific Grid Code requirement areas in respect of which a **Manufacturer's Data & Performance Report** may be submitted.

CP.11.1.4 **The Company** will maintain and publish a register of those **Manufacturer's Data & Performance Reports** which **The Company** has received and accepted as being an accurate representation of the performance of the relevant **Plant** and / or **Apparatus**. Such register will identify the manufacturer, the model(s) of **Power Park Unit(s)** to which the report applies and the provisions of the Grid Code in respect of which the report contributes towards the demonstration of compliance. The inclusion of any report in the register does not in any way confirm that any **Power Park Modules** which utilise any **Power Park Unit(s)** covered by a report is or will be compliant with the Grid Code.

CP.11.2 A **Manufacturer's Data & Performance Report** in respect of **Power Park Units** may cover one (or part of one) or more of the following provisions of the Grid Code:

(a) Fault Ride Through capability CC.6.3.15

(b) **Power Park Module** mathematical model PC.A.5.4.2

CP.11.3 Reference to a **Manufacturer's Data & Performance Report** in a **GB Code User's** submissions does not by itself constitute compliance with the Grid Code.

CP.11.4 A **Generator** referencing a **Manufacturer's Data & Performance Report** should insert the relevant **Manufacturer's Data & Performance Report** reference in the appropriate place in the **DRC** data submission and / or in the **User Data File Structure**. **The Company** will consider the suitability of a **Manufacturer's Data & Performance Report**:

(a) in place of **DRC** data submissions, a mathematical model suitable for representation of the entire **Power Park Module** as per CP.A.3.4.4. For the avoidance of doubt only the relevant sections as specified in PC.A.2.5.5.7 apply. Site specific parameters will still need to be submitted by the **Generator**.

(b) in place of fault simulation studies as follows;

The Company will not require Fault Ride Through simulation studies to be conducted as per CP.A.3.5.1 and qualified in CP.A.3.5.2 provided that;

(i) Adequate and relevant **Power Park Unit** data is included in respect of Fault Ride Through testing covered in CP.A.14.7.1 in the relevant **Manufacturer's Data & Performance Report**, and

(ii) For each type and duration of fault as detailed in CP.A.3.5.1, the expected minimum retained voltage is greater than the corresponding minimum voltage achieved and successfully ridden through in the fault ride through tests covered by the **Manufacturer's Data & Performance Report**.

(c) to reduce the scope of compliance site tests as follows;

(i) Where there is a **Manufacturer's Data & Performance Report** in respect of a **Power Park Unit** which covers Fault Ride Through, **The Company** may agree that no Fault Ride Through testing is required.

CP.11.5 It is the responsibility of the **GB Code User** to ensure that the correct reference for the **Manufacturer's Data & Performance Report** is used and the **GB Code User** by using that reference accepts responsibility for the accuracy of the information. The **GB Code User** shall ensure that the manufacturer has kept **The Company** informed of any relevant variations in plant specification since the submission of the relevant **Manufacturer's Data & Performance Report** which could impact on the validity of the information.

CP.11.6 **The Company** may contact the **Power Park Unit** manufacturer directly to verify the relevance of the use of such **Manufacturer's Data & Performance Report**. If **The Company** believe the use some or all of such **Manufacturer's Data & Performance Report** information is incorrect or the referenced data is inappropriate then the reference to the **Manufacturer's Data & Performance Report** may be declared invalid by **The Company**. Where, and to the extent possible, the data included in the **Manufacturer's Data & Performance Report** is appropriate, the compliance assessment process will be continued using the data included in the **Manufacturer's Data & Performance Report**.

APPENDIX 1 - ILLUSTRATIVE PROCESS DIAGRAMS

CP.A.1.1 Illustrative Compliance Process for Energisation of a User

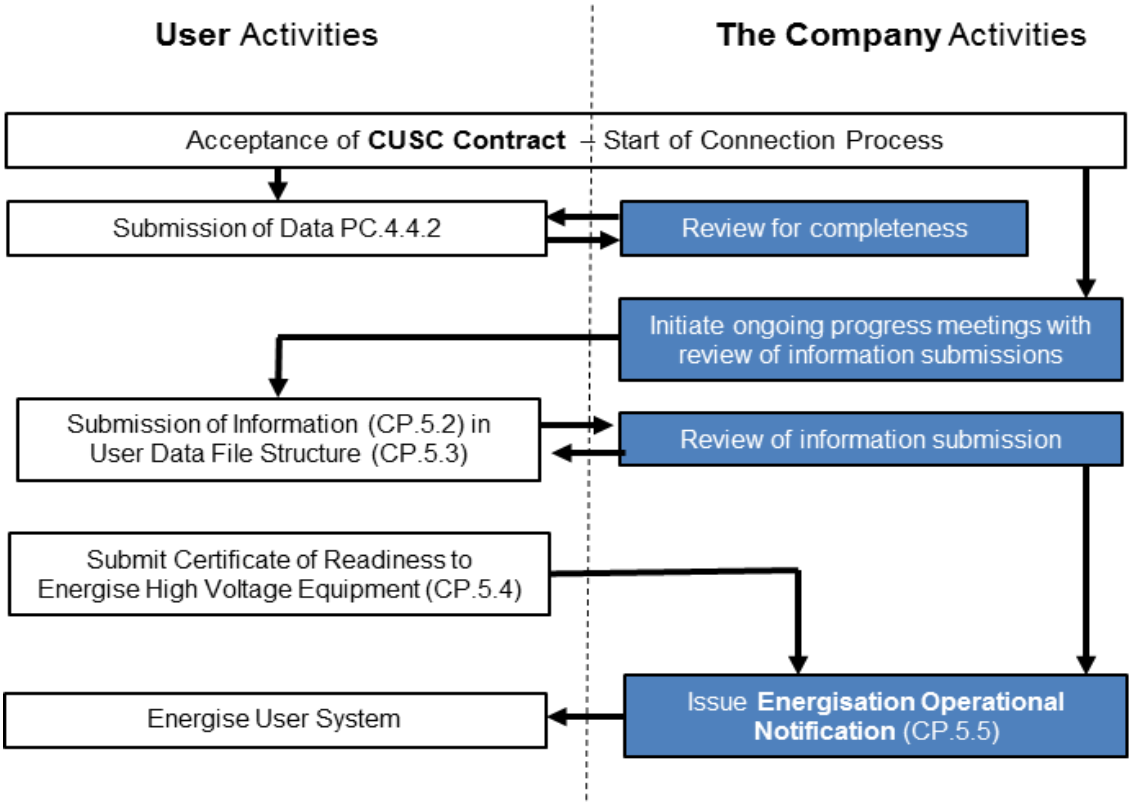

The process illustrated in CP.A.1.1 applies to all **GB Code Users** energising passive network **Plant** and **Apparatus** including **Distribution Network Operators**, **Non-Embedded Customers**, **Generators** and **DC Converter Station** owners. This process is a subset of the full process for **Generators** and **DC Converter Station** owners shown in CP.A.1.2. This diagram illustrates the process in the **CP** and includes references in brackets to specific Grid Code clauses.

CP.A.1.2 Illustrative Compliance Process for Power Stations/DC Converter Stations

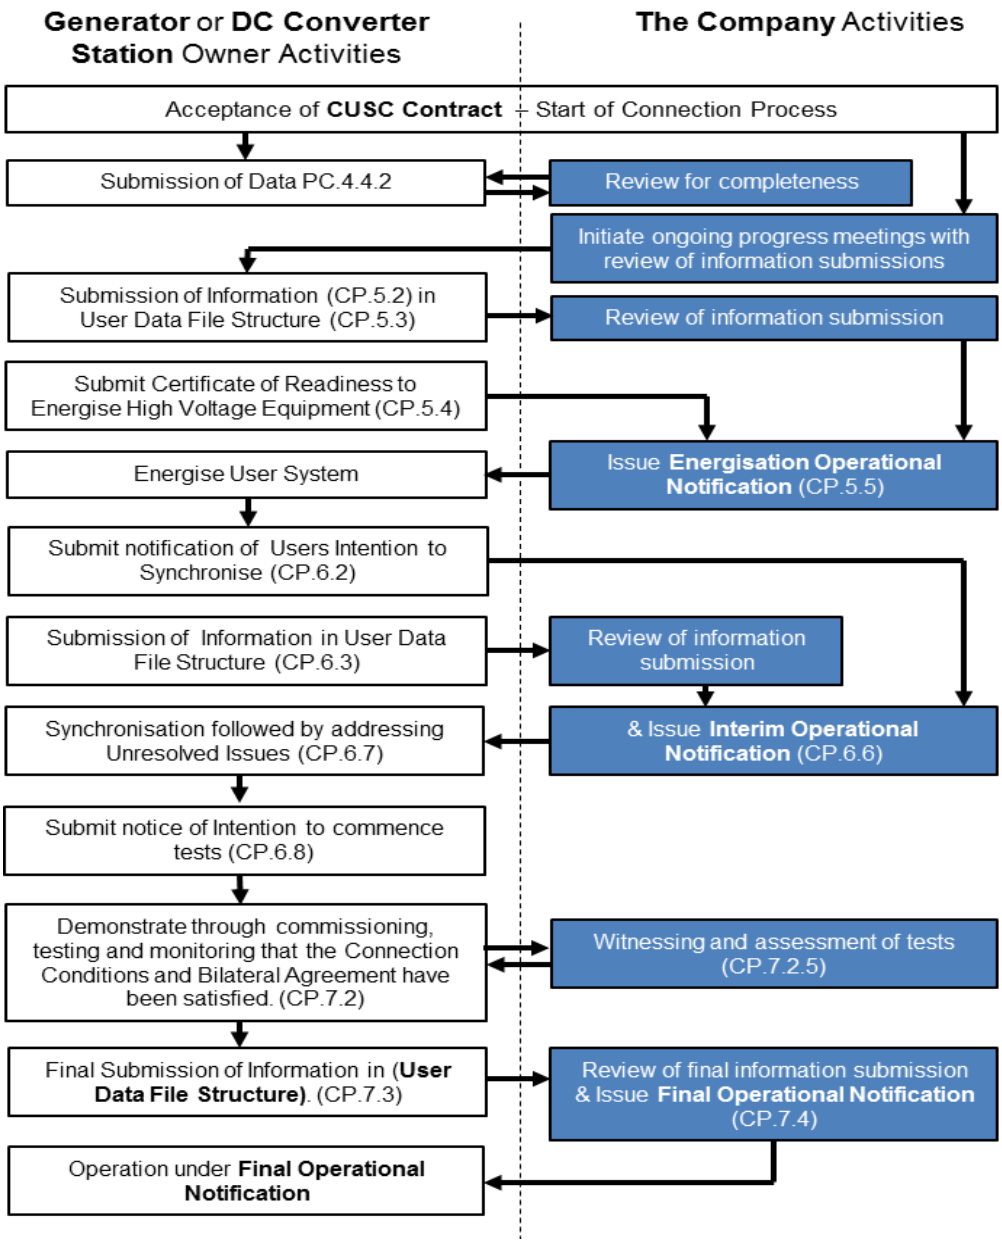

This diagram illustrates the process in the **CP** and includes references in brackets to specific Grid Code clauses. For the avoidance of doubt this process does not apply to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**.

CP.A.1.3 Illustrative Compliance Process for Offshore Power Stations and OTSUA

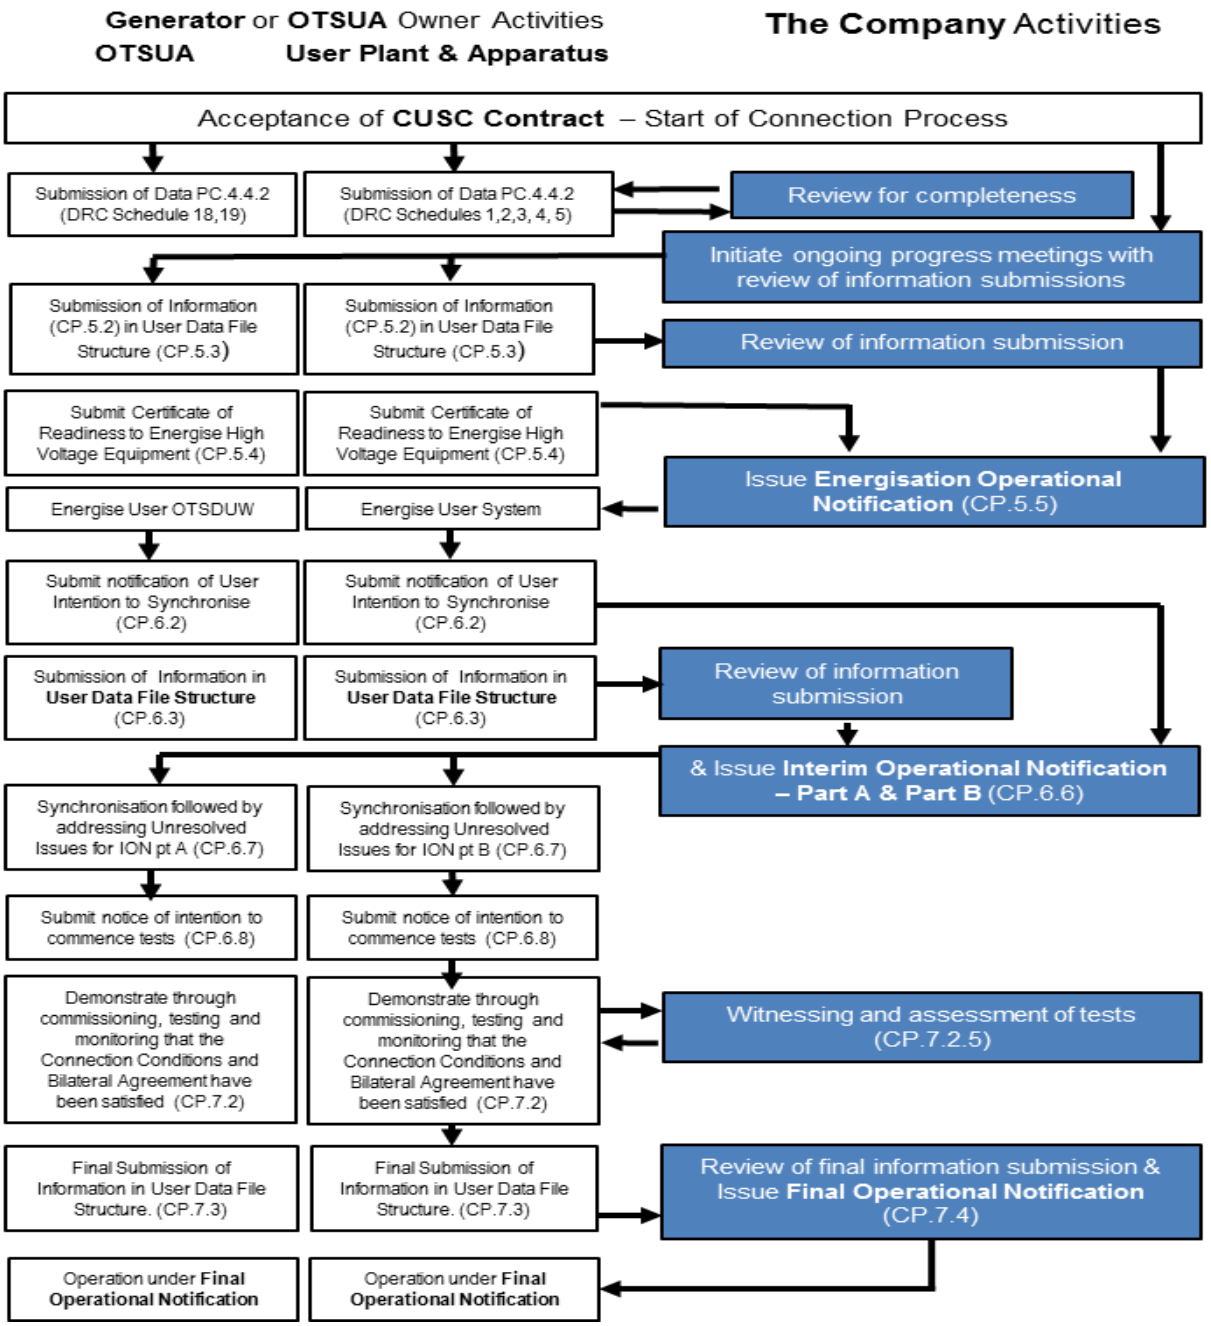

This diagram illustrates the process in the **CP** and includes references in brackets to specific Grid Code clauses.

CP.A.1.4 Illustrative Compliance Process for Ongoing Compliance

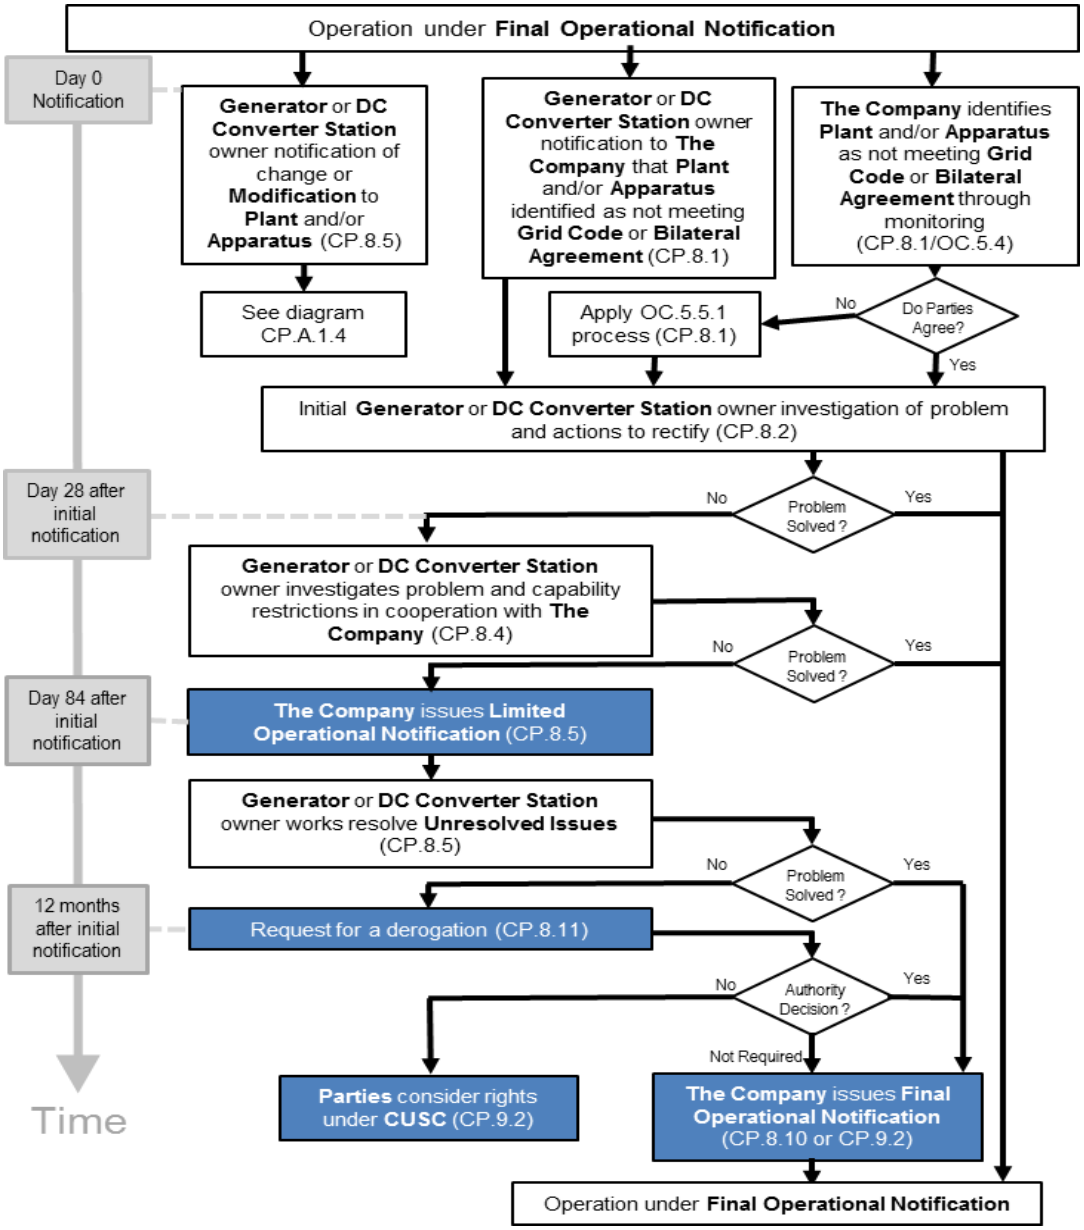

This diagram illustrates the process in the **CP** and includes references in brackets to specific Grid Code clauses. For the avoidance of doubt this process does not apply to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**.

CP.A.1.5 Illustrative Compliance Process for Modification or change

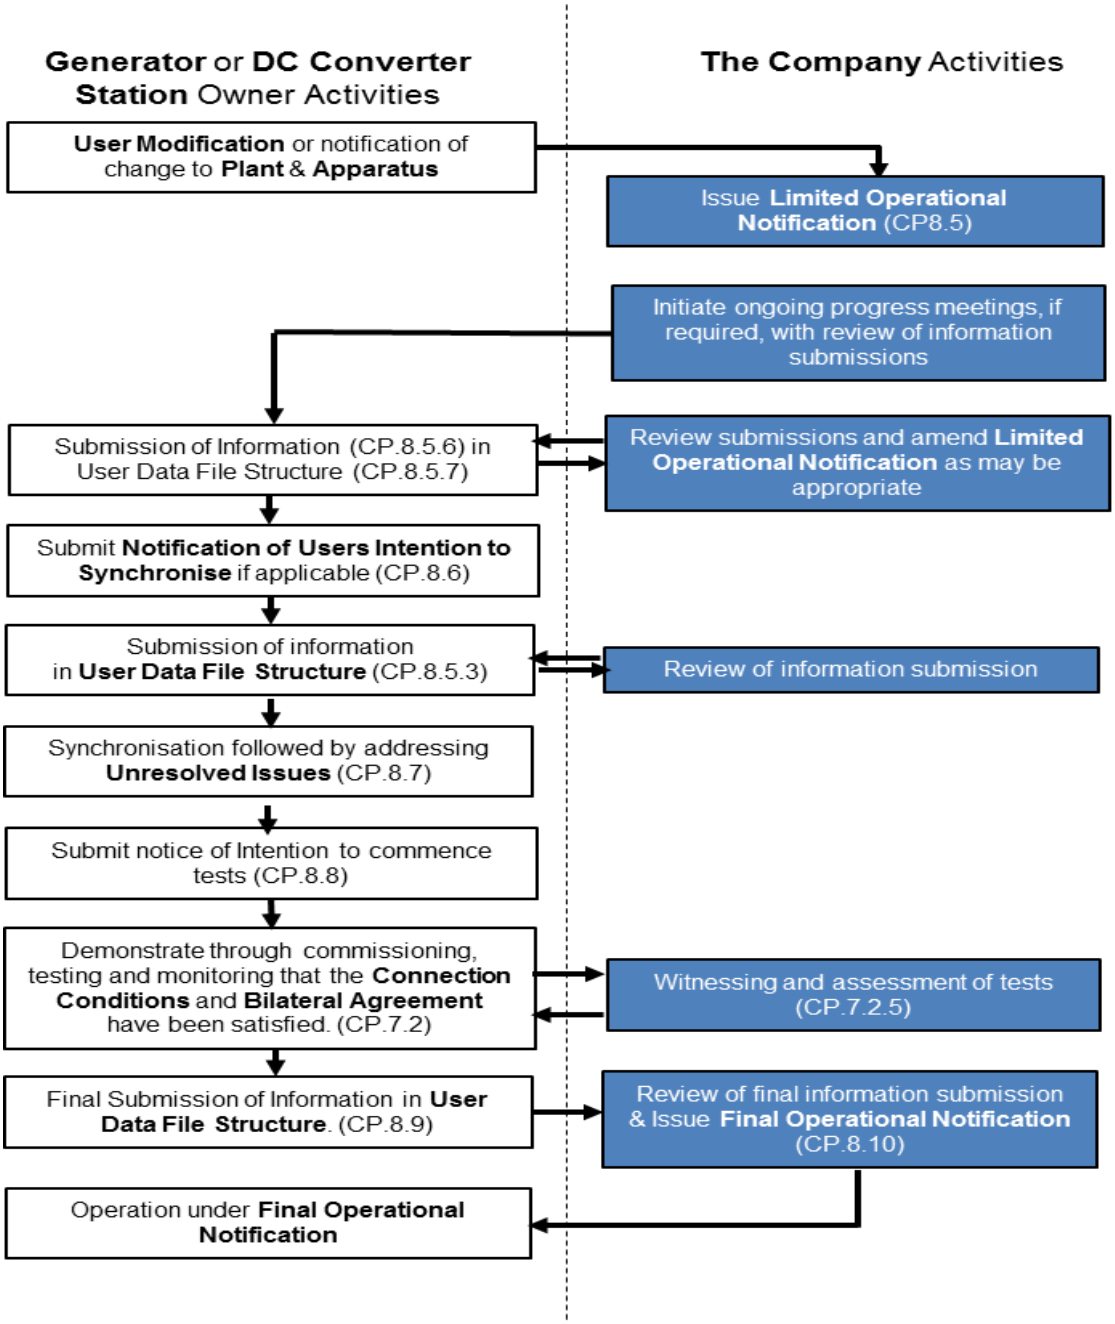

This diagram illustrates the process in the **CP** and includes references in brackets to specific Grid Code clauses. For the avoidance of doubt this process does not apply to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**.

APPENDIX 2 - USER SELF CERTIFICATION OF COMPLIANCE

USER SELF CERTIFICATION OF COMPLIANCE (Interim/Final)

Power Station/ DC Converter Station:	[Name of Connection Site/site of connection]
OTSUA	[Name of Interface Site]
GB Code User:	[Full User name]
Registered Capacity (MW) of Plant:	

This **User Self Certification of Compliance** records the compliance by the **GB Code User** in respect of [NAME] **Power Station/DC Converter Station** [and, in the case of **OTSDUW Arrangements**, **OTSUA**] with the Grid Code and the requirements of the **Bilateral Agreement** and **Construction Agreement** dated [ ] with reference number [ ]. It is completed by the **Power Station/DC Converter Station** owner in the case of **Plant** and/or **Apparatus** (including **OTSUA**) connected to the **National Electricity Transmission System** and for **Embedded Plant**.

We have recorded our compliance against each requirement of the Grid Code which applies to the **Power Station/DC Converter Station/OTSUA**, together with references to supporting evidence and a commentary where this is appropriate, and have provided this to **The Company**. A copy of the **Compliance Statement** is attached.

Supporting evidence, in the form of simulation results, test results, manufacturer's data and other documentation, is attached in the **User Data File Structure**.

The **GB Code User** hereby certifies that, to the best of its knowledge and acting in accordance with **Good Industry Practice**, [the **Power Station** is compliant with the Grid Code and the **Bilateral Agreement**] [the **OTSUA** is compliant with the Grid Code and the **Construction Agreement**] in all aspects [with the following **Unresolved Issues***] [with the following derogation(s)**]:

Connection Condition	Requirement	Ref:	Issue

Compliance certified by:	Name: [PERSON] Signature: [PERSON] Date:	Title: [PERSON DESIGNATION] Of [GB CODE USER DETAILS]

* Include for Interim User Self Certification of Compliance ahead of Interim Operational Notification.

** Include for final User Self Certification of Compliance ahead of Final Operational Notification where derogation(s) have been granted. If no derogation(s) required delete wording and Table.

APPENDIX 3 - SIMULATION STUDIES

CP.A.3.1.1 This Appendix sets out the simulation studies required to be submitted to **The Company** to demonstrate compliance with the **Connection Conditions** unless otherwise agreed with **The Company**. This Appendix should be read in conjunction with CP.6 with regard to the submission of the reports to **The Company**. Where there is any inconsistency in the technical requirements in respect of which compliance is being demonstrated by simulation in this Appendix and CC.6.3 and the **Bilateral Agreement**, the provisions of the **Bilateral Agreement** and CC.6.3 prevail. The studies specified in this Appendix will normally be sufficient to demonstrate compliance. However **The Company** may agree an alternative set of studies proposed by the **Generator** or **DC Converter Station** owner provided **The Company** deem the alternative set of studies sufficient to demonstrate compliance with the Grid Code and the **Bilateral Agreement**.

CP.A.3.1.2 The **Generator** or **DC Converter Station** owner shall submit simulation studies in the form of a report to demonstrate compliance. In all cases, the simulation studies must utilise models applicable to the **Generating Unit**, **DC Converter** or **Power Park Module** with proposed or actual parameter settings. Reports should be submitted in English with all diagrams and graphs plotted clearly with legible axes and scaling provided to ensure any variations in plotted values is clear.

CP.A.3.1.3 In the case of an **Offshore Power Station** where **OTSDUW Arrangements** apply, simulation studies by the **Generator** should include the action of any relevant **OTSUA** where applicable to demonstrate compliance with the Grid Code and the **Bilateral Agreement** at the **Interface Point**.

CP.A.3.2 Power System Stabiliser Tuning

CP.A.3.2.1 In the case of a **Synchronous Generating Unit**, the **Power System Stabiliser** tuning simulation study report required by CC.A.6.2.5.6 or required by the **Bilateral Agreement** shall contain:

(i) the **Excitation System** model including the **Power System Stabiliser** with settings as required under the **Planning Code** (PC.A.5.3.2(c)).

(ii) open circuit time series simulation study of the response of the **Excitation System** to a +10% step change from 90% to 100% terminal voltage.

(iii) on load time series dynamic simulation studies of the response of the **Excitation System** with and without the **Power System Stabiliser** to 2% and 10% steps in the reference voltage and a three phase short circuit fault applied to the higher voltage side of the **Generating Unit** transformer for 100ms. The simulation studies should be carried out with the **Generating Unit** operating at full **Active Power** and maximum leading **Reactive Power** import with the fault level at the **Supergrid HV Connection Point** at minimum or as otherwise agreed with **The Company**. The results should show **Generating Unit** field voltage, **Generating Unit** terminal voltage, **Power System Stabiliser** output, **Generating Unit Active Power** and **Generating Unit Reactive Power** output.

(iv) gain and phase Bode diagrams for the open loop frequency domain response of the **Generating Unit Excitation System** with and without the **Power System Stabiliser**. These should be in a suitable format to allow assessment of the phase contribution of the **Power System Stabiliser** and the gain and phase margin of the **Excitation System** with and without the **Power System Stabiliser** in service.

(v) an eigenvalue plot to demonstrate that all modes remain stable when the **Power System Stabiliser** gain is increased by at least a factor of 3 from the designed operating value.

(vi) gain Bode diagram for the closed loop on load frequency domain response of the **Generating Unit Excitation System** with and without the **Power System Stabiliser** with the **Generating Unit** operating at full load and at unity **Power Factor**. These diagrams should be in a suitable format to allow comparison of the **Active Power** damping across the frequency range specified in CC.A.6.2.6.3 with and without the **Power System Stabiliser** in service

In the case of **a Synchronous Generating Unit** that may operate as demand (eg. **Pump Storage**) the on load simulations (ii) to (vi) should also be carried out in both modes of operation.

CP.A.3.2.2 In the case of **Onshore Non-Synchronous Generating Units**, **Onshore DC Converters** and **Onshore Power Park Modules** and **OTSDUW Plant and Apparatus** at the **Interface Point** the **Power System Stabiliser** tuning simulation study report required by CC.A.7.2.4.1 or required by the **Bilateral Agreement** shall contain:

(i) the **Voltage Control System** model including the **Power System Stabiliser** with settings as required under the **Planning Code** (PC.A.5.4) and **Bilateral Agreement**.

(ii) on load time series dynamic simulation studies of the response of the **Voltage Control System** with and without the **Power System Stabiliser** to 2% and 10% steps in the reference voltage and a three phase short circuit fault applied to the **Grid Entry Point** or the **Interface Point** in the case of **OTSDUW Plant and Apparatus** for 100ms. The simulation studies should be carried out operating at full **Active Power** and maximum leading **Reactive Power** (import condition) with the fault level at the **Supergrid HV Connection Point** at minimum or as otherwise agreed with **The Company**. The results should show appropriate signals to demonstrate the expected damping performance of the **Power System Stabiliser**.

(iii) any other simulation as specified in the **Bilateral Agreement** or agreed between the **Generator** or **DC Converter Owner** or **Offshore Transmission Licensee** and **The Company**.

CP.A.3.3 Reactive Capability across the Voltage Range

CP.A.3.3.1 The **Generator** or **DC Converter station** owner shall supply simulation studies to demonstrate the capability to meet CC.6.3.4 by submission of a report containing:

(i) a load flow simulation study result to demonstrate the maximum lagging **Reactive Power** capability of the **Synchronous Generating Unit**, **DC Converter**, **OTSUA** or **Power Park Module** at **Rated MW** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in case of **OTSUA**) voltage is at 105% of nominal.

(ii) a load flow simulation study result to demonstrate the maximum leading **Reactive Power** capability of the **Synchronous Generating Unit**, **DC Converter**, **OTSUA** or **Power Park Module** at **Rated MW** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in case of **OTSUA**) voltage is at 95% of nominal.

CP.A.3.3.2 In the case of a **Synchronous Generating Unit** the terminal voltage in the simulation should be the nominal voltage for the machine. Where necessary to demonstrate compliance with CC.6.3.4 and subject to compliance with CC.6.3.8 (a) (v), the **Generator** shall repeat the two simulation studies with the terminal voltage being greater than the nominal voltage and less than or equal to the maximum terminal voltage. The two additional simulations do not need to have the same terminal voltage.

CP.A.3.3.3 In the case of a **Synchronous Generating Unit**, the **Generator** shall supply two sets of simulation studies to demonstrate the capability to meet the operational requirements of BC2.A.2.6 and CC.6.1.7 at the minimum and maximum short circuit levels when changing tap position. Each set of simulation studies shall be at the same **System** conditions. None of the simulation studies shall include the **Synchronous Generating Unit** operating at the limits of its **Reactive Power** output.

The simulation results shall include the **Reactive Power** output of the **Synchronous Generating Unit** and the voltage at the **Grid Entry Point** or, if **Embedded**, the **User System Entry Point** with the **Generating Unit** transformer at two adjacent tap positions with the greatest interval between them and the terminal voltage of the **Synchronous Generating Unit** equal to

- its nominal value; and
- subject to compliance with CC.6.3.8 (a) (v), its maximum value.

CP.A.3.3.4 In the case of a **Power Park Module** where the load flow simulation studies show that the individual **Power Park Units** deviate from nominal voltage to meet the **Reactive Power** requirements, then evidence must be provided from factory (e.g. in a **Manufacturer's Data & Performance Report**) or site testing that the **Power Park Unit** is capable of operating continuously at the operating points determined in the load flow simulation studies.

CP.A.3.4 Voltage Control and Reactive Power Stability

CP.A.3.4.1 In the case of a **Power Station** containing **Power Park Modules** and/or **OTSUA** the **Generator** shall provide a report to demonstrate the dynamic capability and control stability of the **Power Park Module**. The report shall contain:

(i) a dynamic time series simulation study result of a sufficiently large negative step in **System** voltage to cause a change in **Reactive Power** from zero to the maximum lagging value at **Rated MW**.

(ii) a dynamic time series simulation study result of a sufficiently large positive step in **System** voltage to cause a change in **Reactive Power** from zero to the maximum leading value at **Rated MW**.

(iii) a dynamic time series simulation study result to demonstrate control stability at the lagging **Reactive Power** limit by application of a -2% voltage step while operating within 5% of the lagging **Reactive Power** limit.

(iv) a dynamic time series simulation study result to demonstrate control stability at the leading **Reactive Power** limit by application of a +2% voltage step while operating within 5% of the leading **Reactive Power** limit.

(v) a dynamic time series simulation study result of a sufficiently negative step in **System** voltage to cause a change in **Reactive Power** from the maximum leading value to the maximum lagging value at **Rated MW**.

The **Generator** should also provide the voltage control study specified in CP.A.3.7.4.

CP.A.3.4.2 All the above studies should be completed with a nominal network voltage for zero **Reactive Power** transfer at the **Grid Entry Point** or **User System Entry Point** if **Embedded** or, in the case of **OTSUA**, **Interface Point** unless stated otherwise and the fault level at the **HV** connection point at minimum as agreed with **The Company**.

CP.A.3.4.3 **The Company** may permit relaxation from the requirements of CP.A.3.4.1(i) and (ii) for voltage control if the **Power Park Modules** are comprised of **Power Park Units** in respect of which the **GB Code User** has in its submissions to **The Company**, referenced an appropriate **Manufacturer's Data & Performance Report** which is acceptable to **The Company** for voltage control.

CP.A.3.4.4 In addition, **The Company** may permit a further relaxation from the requirements of CP.A.3.4.1(iii) and (iv) if the **GB Code User** has in its submissions to **The Company** referenced an appropriate **Manufacturer's Data & Performance Report** for a **Power Park Module** mathematical model for voltage control acceptable to **The Company**.

CP.A.3.5 Fault Ride Through

CP.A.3.5.1 The **Generator**, (including where undertaking **OTSDUW**) or **DC Converter Station** owner shall supply time series simulation study results to demonstrate the capability of **Non-Synchronous Generating Units**, **DC Converters**, **Power Park Modules** and **OTSUA** to meet CC.6.3.15 by submission of a report containing:

(i) a time series simulation study of a 140ms solid three phase short circuit fault applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA**.

(ii) time series simulation study of 140ms unbalanced short circuit faults applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA**. The unbalanced faults to be simulated are:

1. a phase to phase fault
2. a two phase to earth fault
3. a single phase to earth fault.

For a **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA**, the simulation study should be completed with the **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA** operating at full **Active Power** and maximum leading **Reactive Power** import and the fault level at the **Supergrid HV Connection Point** at minimum or as otherwise agreed with **The Company**.

(iii) time series simulation studies of balanced **Supergrid** voltage dips applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA**. The simulation studies should include:

1. 30% retained voltage lasting 0.384 seconds
2. 50% retained voltage lasting 0.71 seconds
3. 80% retained voltage lasting 2.5 seconds
4. 85% retained voltage lasting 180 seconds.

For a **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA**, the simulation study should be completed with the **Non-Synchronous Generating Unit**, **DC Converter**, **Power Park Module** or **OTSUA** operating at full **Active Power** and zero **Reactive Power** output and the fault level at the **Supergrid HV Connection Point** at minimum or as otherwise agreed with **The Company**. Where the **Non-Synchronous Generating Unit**, **DC Converter** or **Power Park Module** is **Embedded** the minimum **Network Operator's System** impedance to the **Supergrid HV Connection Point** shall be used which may be calculated from the maximum fault level at the **User System Entry Point**.

For **DC Converters** the simulations should include the duration of each voltage dip 1 to 4 above for which the **DC Converter** will remain connected.

CP.A.3.5.2 In the case of **Power Park Modules** comprised of **Power Park Units** in respect of which the **GB Code User's** reference to a **Manufacturer's Data & Performance Report** has been accepted by **The Company** for Fault Ride Through, CP.A.3.5.1 will not apply provided:

(i) the **Generator** or **DC Converter Station** owner demonstrates by load flow simulation study result that the faults and voltage dips at either side of the **Power Park Unit** transformer corresponding to the required faults and voltage dips in CP.A.3.5.1 applied at the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage are less than those included in the **Manufacturer's Data & Performance Report**,

or;

(ii) the same or greater percentage faults and voltage dips in CP.A.3.5.1 have been applied at either side of the **Power Park Unit** transformer in the **Manufacturer's Data & Performance Report**.

CP.A.3.5.3 In the case of an **Offshore Power Park Module** or **Offshore DC Converter**, the studies may instead be completed at the **LV Side of the Offshore Platform**. For fault simulation studies described in CCA.8.5.1(i) and CCA.8.5.1(ii) a retained voltage of 15% or lower may be applied at the **LV Side of the Offshore Platform** on the faulted phases. For voltage dip simulation studies described in CP.A.3.5.1(iii) the same voltage levels and durations as normally applied at the **National Electricity Transmission System** operating at **Supergrid Voltage** will be applied at the **LV Side of the Offshore Platform**.

CP.A.3.5.4 In the case of a **Power Park Module**, the studies detailed in CP.A.3.5.1 should be repeated to demonstrate compliance during foreseeable running arrangements resulting from outages of major **Plant** and **Apparatus** (for example outage of the main export cable in the case of **OTSDUW** or module step up transformer where alternative export connections are possible). For these conditions, the **Power Park Module Active Power** output may be reduced to

levels appropriate to the planned operating regime proposed by the **Generator**. The **Generator** shall consult **The Company** on alternative running arrangements and agree with **The Company** the running arrangements that will be studied prior to the **Generator** undertaking the studies. For the avoidance of doubt, compliance of a **Power Park Module** with **Fault Ride Through** requirements remains the responsibility of the **Generator** under all operating conditions.

CP.A.3.5.5 In the case of a **Power Park Module** with a **Registered Capacity** greater or equal to 100MW, the studies detailed in CP.A.3.5.1 should be repeated with 50% of the **Power Park Units Synchronised** to the **Total System**. In the case of a **Power Station** containing multiple **Power Park Modules** or multiple **Offshore Power Park Modules** connected to an **Offshore Transmission System** or **OTSDUW** the study should include all **Power Park Modules** with 50% of the **Power Park Units Synchronised** to the **Total System**.

CP.A.3.5.6 In the case of **DC Networks** the studies detailed in CP.A.3.5.1 should be repeated to demonstrate compliance during foreseeable running arrangements resulting from outages of major **Plant** and **Apparatus** (for example outage of an HVDC cable or converter). For these conditions, the **DC Converter Active Power** transfer may be reduced to levels appropriate to the planned operating regime. The **Generator** or **DC Converter Station** Owner shall consult **The Company** on alternative running arrangements and agree with **The Company** the running arrangements that will be studied prior to the **DC Converter Station** Owner undertaking the studies. For the avoidance of doubt, compliance of **DC Converter Station** with **Fault Ride Through** requirements remains the responsibility of the **DC Converter Station** Owner under all operating conditions.

CP.A.3.6 Load Rejection

CP.A.3.6.1 In respect of **Generating Units** or **DC Converters** or **Power Park Modules** with a **Completion Date** on or after 1 January 2012, the **Generator** or **DC Converter Station** owner shall demonstrate the speed control performance of the plant under a part load rejection condition as required by CC.6.3.7(c)(i), through simulation study. In respect of **Generating Units** or **DC Converters** or **Power Park Modules**, including those with a **Completion Date** before 1 January 2013, the load rejection capability while still supplying load must be stated in accordance with PC.A.5.3.2(f).

CP.A.3.6.2 For **Power Park Modules** comprised of **Power Park Units** having a corresponding generically verified and validated model included in the **Manufacturer's Data & Performance Report**, this study may not be required by The Company if the correct **Manufacturer's Data & Performance Report** reference has been submitted in the appropriate location in the **Data Registration Code**.

CP.A.3.6.3 The simulation study should comprise of a **Generating Unit**, **DC Converter** or **Power Park Module** connected to the total **System** with a local load shown as "X" in figure CP.A.3.6.1. The load "X" is in addition to any auxiliary load of the **Power Station** connected directly to the **Generating Unit**, **DC Converter** or **Power Park Module** and represents a small portion of the **System** to which the **Generating Unit**, **DC Converter** or **Power Park Module** is attached. The value of "X" should be the minimum for which the **Generating Unit**, **DC Converter** or **Power Park Module** can control the power island **Frequency** to less than 52Hz. Where transient excursions above 52Hz occur the **Generator** or **DC Converter Owner** should ensure that the duration above 52Hz is less than any high frequency protection system applied to the **Generating Unit**, **DC Converter** or **Power Park Module**.

CP.A.3.6.4 At the start of the simulation study the **Generating Unit**, **DC Converter** or **Power Park Module** will be operating maximum **Active Power** output. The **Generating Unit**, **DC Converter** or **Power Park Module** will then be islanded from the **Total System** but still supplying load "X" by the opening of a breaker, which is not the **Generating Unit**, **DC Converter** or **Power Park Module** connection circuit breaker (the governor should therefore, not receive any signals that the breaker has opened other than the reduction in load and subsequent increase in speed). A schematic arrangement of the simulation study is illustrated by Figure CP.A.3.6.1.

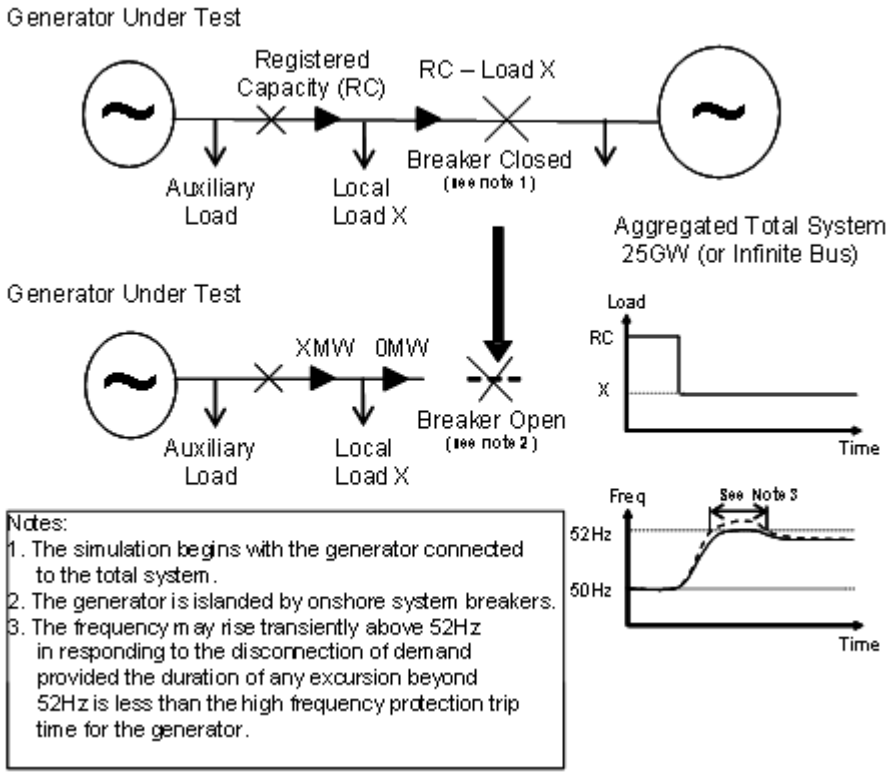

Figure CP.A.3.6.1 – Diagram of Load Rejection Study

CP.A.3.6.5 The simulation study shall be performed for both control modes, **Frequency Sensitive Mode** (FSM) and **Limited Frequency Sensitive Mode** (LFSM). The simulation study results should indicate **Active Power** and **Frequency** in the island system that includes the **Generating Unit**, **DC Converter** or **Power Park Module**.

CP.A.3.6.6 To allow validation of the model used to simulate load rejection in accordance with CC.6.3.7(c)(i) as described, a further simulation study is required to represent the largest positive **Frequency** injection step or fast ramp (BC1 and BC3 of Figure 2) that will be applied as a test as described in OC5.A.2.8 and OC5.A.3.6.

CP.A.3.7 Voltage and Frequency Controller Model Verification and Validation

CP.A.3.7.1 For **Generating Units**, **DC Converters** or **Power Park Modules** with a **Completion Date** after 1 January 2012 or subject to a **Modification** to a **Excitation System**, voltage control system, governor control system or **Frequency** control system after 1 January 2012 the **Generator or DC Converter Station** owner shall provide simulation studies to verify that the proposed controller models supplied to **The Company** under the **Planning Code** are fit for purpose. These simulation study results shall be provided in the timescales stated in the **Planning Code**. For **Power Park Modules** comprised of **Power Park Units** having a corresponding generically verified and validated model in a **Manufacturer's Data & Performance Report**, **The Company** may permit the simulation studies detailed in CP.A.3.7.2, CP.A.3.7.4 and CP.A.3.7.5 to be replaced by submission of the correct **Manufacturer's Data & Performance Report** reference in the appropriate location in the **Data Registration Code**.

CP.A.3.7.2 To demonstrate the **Frequency** control or governor/load controller/plant model, the **Generator** or **DC Converter Station** owner shall submit a simulation study representing the response of the **Synchronous Generating Unit**, **DC Converter** or **Power Park Module** operating at 80% of **Registered Capacity**. The simulation study event shall be equivalent to:

(i) a ramped reduction in the measured **System Frequency** of 0.5Hz in 10 seconds followed by

(ii) 20 seconds of steady state with the measured **System Frequency** depressed by 0.5Hz followed by

(iii) a ramped increase in measured **System Frequency** of 0.3Hz over 30 seconds followed by

(iv) 60 seconds of steady state with the measured **System Frequency** depressed by 0.2Hz as illustrated in Figure CP.A.3.7.2 below.

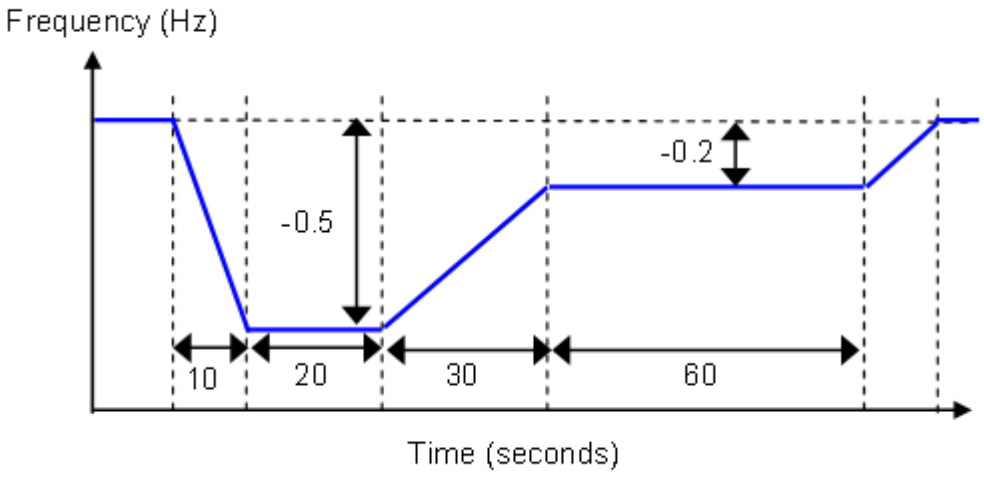

Figure CP.A.3.7.2

The simulation study shall show **Active Power** output (MW) and the equivalent of **Frequency** injected.

CP.A.3.7.3 To demonstrate the **Excitation System** model the **Generator** shall submit simulation studies representing the response of the **Synchronous Generating Unit** as follows:

(i) operating open circuit at rated terminal voltage and subjected to a 2% step increase in terminal voltage reference.

(ii) operating at **Rated MW**, nominal terminal voltage and unity **Power Factor** subjected to a 2% step increase in the voltage reference. Where a **Power System Stabiliser** is included within the **Excitation System** this shall be in service.

The simulation study shall show the terminal voltage, field voltage of the **Generating Unit**, **Active Power**, **Reactive Power** and **Power System Stabiliser** output signal as appropriate.

CP.A.3.7.4 To demonstrate the Voltage Controller model, the **Generator** or **DC Converter Station** owner shall submit a simulation study representing the response of the **Non-Synchronous Generating Unit**, **DC Converter** or **Power Park Module** operating at **Rated MW** and unity **Power Factor** at the connection point to a 2% step increase in the voltage reference. The simulation study shall show the terminal voltage, **Active Power**, **Reactive Power** and **Power System Stabiliser** output signal as appropriate.

CP.A.3.7.5 To validate that the excitation and voltage control models submitted under the **Planning Code** are a reasonable representation of the dynamic behaviour of the **Synchronous Generating Unit**, **DC Converter Station** or **Power Park Module** as built, the **Generator** or **DC Converter Station** owner shall repeat the simulation studies outlined above but using the operating conditions of the equivalent tests. The simulation study results shall be displayed overlaid on the actual test results.

CP.A.3.7.6 For **Generating Units** or **DC Converters** with a **Completion Date** after 1 January 2012 or subject to a **Modification** to the governor system or **Frequency** control system after 1 January 2013 to validate that the governor/load controller/plant or **Frequency** control models submitted under the **Planning Code** is a reasonable representation of the dynamic behaviour of the **Synchronous Generating Unit** or **DC Converter Station** as built, the **Generator** or **DC Converter Station** owner shall repeat the simulation studies outlined above but using the operating conditions of the equivalent tests. The simulation study results shall be displayed overlaid on the actual test results.

CP.A.3.8 Sub-synchronous Resonance Control and Power Oscillation Damping Control for DC Converters

CP.A.3.8.1 To demonstrate the compliance of the sub-synchronous control function with CC.6.3.16(a) and the terms of the **Bilateral Agreement**, the **DC Converter Station** owner or **Generator** undertaking **OTSDUW** shall submit a simulation study report.

CP.A.3.8.2 Where power oscillation damping control function is specified on a **DC Converter** the **DC Converter Station** owner or **Generator** undertaking **OTSDUW** shall submit a simulation study report to demonstrate the compliance with CC.6.3.16(b) and the terms of the **Bilateral Agreement**.

CP.A.3.8.3 The simulation studies should utilise the **DC Converter** control system models including the settings as required under the **Planning Code** (PC.A.5.3.2). The network conditions for the above simulation studies should be discussed with **The Company** prior to commencing any simulation studies.

< END OF COMPLIANCE PROCESSES >

Public

EUROPEAN COMPLIANCE PROCESSES

(ECP)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page No

ECP.1 INTRODUCTION 3
ECP.2 OBJECTIVE 4
ECP.3 SCOPE 5
ECP.4 CONNECTION PROCESS 5
ECP.5 ENERGISATION OPERATIONAL NOTIFICATION 7
ECP.6 OPERATIONAL NOTIFICATION PROCESSES 7
ECP.6.1 OPERATIONAL NOTIFICATION PROCESS (Type A) 7
ECP.6.2 INTERIM OPERATIONAL NOTIFICATION (Type B and Type C) 9
ECP.6.3 INTERIM OPERATIONAL NOTIFICATION (Type D and HVDC Equipment) 12
ECP.6.4 INTERIM OPERATIONAL NOTIFICATION (Network Operator's or Non-Embedded Customer's Plant and Apparatus) 16
ECP.7 FINAL OPERATIONAL NOTIFICATION 18
ECP.8 COMPLIANCE REPEAT PLAN 22
ECP.9 LIMITED OPERATIONAL NOTIFICATION 23
ECP.10 PROCESSES RELATING TO DEROGATIONS 28
ECP.11 MANUFACTURER'S DATA & PERFORMANCE REPORT 28
APPENDIX 1 31
NOT USED 31
APPENDIX 2 32
USER SELF CERTIFICATION OF COMPLIANCE (Interim/Final) 32
APPENDIX 3 33
SIMULATION STUDIES 33
APPENDIX 4 52
ONSITE SIGNAL PROVISION FOR WITNESSING TESTS 52
APPENDIX 5 59
COMPLIANCE TESTING OF SYNCHRONOUS POWER GENERATING MODULES 59
ECP.A.5.2 Excitation System Open Circuit Step Response Tests 60
ECP.A.5.3 Open & Short Circuit Saturation Characteristics 60
ECP.A.5.6 Over-excitation Limiter Performance Test 63
ECP.A.5.8 Governor and Load Controller Response Performance 64
ECP.A.5.9 Compliance with ECC.6.3.3 Functionality Test 69
ECP.A.5.10 Compliance of Synchronous Electricity Storage Modules during low System Frequencies 69
APPENDIX 6 71

COMPLIANCE TESTING OF POWER PARK MODULES 71

APPENDIX 7 85

COMPLIANCE TESTING FOR HVDC EQUIPMENT 85

APPENDIX 8 94

SIMULATION STUDIES AND COMPLIANCE TESTING FOR NETWORK OPERATORS AND NON-EMBEDDED CUSTOMERS PLANT AND APPARATUS 94

EUROPEAN COMPLIANCE PROCESSES

ECP.1 INTRODUCTION

ECP.1.1 The **European Compliance Processes** ("**ECP**") specifies the compliance process in relation to directly connected and **Embedded Power Stations** (subject to a **Bilateral Agreement**), **HVDC Systems**, **Grid Forming Plant** and **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus.** For the avoidance of doubt, the requirements of the **European Compliance Processes** do not apply to **Demand Response Providers** unless they are also an **EU Code User** and have entered into a **CUSC Contract** with **The Company**. **Generators** in respect of **Electricity Storage Modules** are required to meet the requirements of this **ECC** but are not required to satisfy the requirements of **Assimilated EU Law** (Commission Regulation (EU) 2016/631, Commission Regulation (EU) 2016/1388 or Commission Regulation (EU) 2016/1485). Any derogation in respect of **Electricity Storage Modules** would therefore be against the GB Grid Code as the requirements applicable to **Electricity Storage Modules** are not enforceable by EU Law:

(i) **Type A Power Generating Modules**:

the process for issuing and receiving an **Installation Document** which must be followed by **The Company** and any **User** with a **Type A Power Generating Module** to demonstrate its compliance with the **Grid Code** in relation to its **Plant** and **Apparatus** prior to the relevant **Plant** and **Apparatus** being energised.

(ii) **Type B**, **Type C** or **Type D Power Generating Modules and HVDC Systems**:

the process (leading to an **Energisation Operational Notification**) which must be followed by **The Company** and any **User** with a **Type B**, **Type C** or **Type D Power Generating Module** or **HVDC System** to demonstrate its compliance with the **Grid Code** in relation to its **Plant** and **Apparatus** (including **OTSUA**) prior to the relevant **Plant** and **Apparatus** (including any **OTSUA**) being energised.

the process (leading to an **Interim Operational Notification** and **Final Operational Notification**) which must be followed by **The Company** and any **User** with a **Type B**, **Type C** or **Type D Power Generating Module** or **HVDC System** or **HVDC System Owner** to demonstrate its compliance with the **Grid Code** in relation to its **Plant** and **Apparatus** (including and dynamically controlled **OTSUA**). This process shall be followed prior to and during the course of the relevant **Plant** and **Apparatus** (including **OTSUA**) being energised and **Synchronised**.

the process (leading to a **Limited Operational Notification**) which must be followed by **The Company** and each **User** with a **Type B**, **Type C** or **Type D Power Generating Module** or **HVDC System** where any of its **Plant** and/or **Apparatus** (including any **OTSUA**) becomes unable to comply with relevant provisions of the **Grid Code**, and where applicable with Appendices F1 to F5 of the **Bilateral Agreement** (and in the case of **OTSUA** Appendices OF1 to OF5 of the **Bilateral Agreement**). This process also includes when changes or **Modifications** are made to **Plant** and/or **Apparatus** (including **OTSUA**). This process applies to such **Plant** and/or **Apparatus** after the **Plant** and/or **Apparatus** has become **Operational** and until **Disconnected** from the **Total System**, (or until, in the case of

OTSUA, the **OTSUA Transfer Time**) when changes or **Modifications** are made.

(iii) **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus:**

the process (leading to an **Energisation Operational Notification**) which must be followed by **The Company** and any **Network Operator** or **Non-Embedded Customer** to demonstrate its compliance with the **Grid Code** in relation to its **Plant** and **Apparatus** prior to the relevant **Plant** and **Apparatus** being energised.

the process (leading to an **Interim Operational Notification** and **Final Operational Notification**) which must be followed by **The Company** and any **Network Operator** or **Non-Embedded Customer** to demonstrate its compliance with the **Grid Code** in relation to its **Plant** and **Apparatus**. This process shall be followed prior to and during the course of the relevant **Plant** and **Apparatus** being energised and operated by using the grid connection.

the process (leading to a **Limited Operational Notification**) which must be followed by **The Company** and each **Network Operator** or **Non-Embedded Customer** where any of its **Plant** and/or **Apparatus** becomes unable to comply with relevant provisions of the **Grid Code**, and where applicable with Appendices F1 to F5 of the **Bilateral Agreement**. This process also includes changes or **Modifications** made to the **Plant** and/or **Apparatus**. This process applies to such **Plant** and/or **Apparatus** after the **Plant** and/or **Apparatus** has become operational and until **Disconnected** from the **Transmission System**.

ECP.1.2 As used in the **ECP**, references to **OTSUA** means **OTSUA** to be connected or connected to the **National Electricity Transmission System** prior to the **OTSUA Transfer Time**.

ECP.1.3 Where a **Generator** or **HVDC System Owner** and/or **The Company** are required to apply for a derogation to the **Authority**, this is not in respect of **OTSUA**.

ECP.1.4 In the case of **an Electricity Storage Plant** comprising of separate generating units and demand taking plant (eg a pump) then compliance would be assessed individually on the generating units and the demand taking elements.

ECP.2 OBJECTIVE

ECP.2.1 The objective of the **ECP** is to ensure that there is a clear and consistent process for demonstration of compliance by **Users** with the **European Connection Conditions** and **Bilateral Agreement** and will enable **The Company** to comply with its statutory and **ESO Licence** obligations. For the avoidance of doubt, the requirements of the **European Compliance Processes** do not apply to **Demand Response Providers** unless they are also an **EU Code User** and have entered into a **CUSC Contract** with **The Company.**

ECP.2.2 Provisions of the **ECP** which apply in relation to **OTSDUW** and **OTSUA** shall (in any particular case) apply up to the **OTSUA Transfer Time**, whereupon

such provisions shall (without prejudice to any prior non-compliance) cease to apply.

ECP.2.3 In relation to **OTSDUW**, provisions otherwise to be contained in a **Bilateral Agreement** may be contained in the **Construction Agreement**, and accordingly a reference in the **ECP** to a relevant **Bilateral Agreement** includes the relevant **Construction Agreement**.

ECP.3 SCOPE

ECP.3.1 The **ECP** applies to **The Company** and to **Users**, which in the **ECP** means:

(a) **EU Generators** (other than in relation to **Embedded Power Stations** not subject to a **Bilateral Agreement**) including those undertaking **OTSDUW**.

(b) **Network Operators** who are either;

(i) **EU Code Users** in respect of their entire distribution **System;** or
(ii) **GB Code Users** in respect of their **EU Grid Supply Points** only

(c) **Non-Embedded Customers** who are **EU Code Users;**

(d) **HVDC System Owners** (other than those which only have **Embedded HVDC Systems** not subject to a **Bilateral Agreement**).

(e) **Grid Forming Plant Owners** who own and operate a **Grid Forming Plant** and intend to satisfy the requirements of ECC.6.3.19

ECP.3.2 The above categories of **User** will become bound by the **ECP** prior to them generating, distributing, supplying or consuming, or in the case of **OTSUA**, transmitting, as the case may be, and references to the various categories should, therefore, be taken as referring to them in that prospective role.

ECP.3.3 For the avoidance of doubt, **Demand Response Providers** do not need to satisfy the requirements of this **ECP** unless they are also defined as an **EU Code User** and have a **CUSC Contract** with **The Company**. Where a **Demand Response Provider** is not an **EU Code User** and does not have a **CUSC Contract** with **The Company**, the requirements of the **Demand Response Services Code** shall only apply.

ECP.3.4 For the avoidance of doubt, this **ECP** does not apply to **GB Code Users** other than in respect of **Network Operator's EU Grid Supply Points**.

ECP.4 CONNECTION PROCESS

ECP.4.1 The **CUSC Contract(s)** contain certain provisions relating to the procedure for connection to the **National Electricity Transmission System** or, in the case of **Embedded Power Stations** or **Embedded HVDC Systems**, becoming operational and include provisions to be complied with by **Users** prior to and during the course of **The Company** notifying the **User** that it has the right to become operational. In addition to such provisions, this **ECP** sets out in further detail the processes to be followed to demonstrate compliance. While this **ECP** does not expressly address the processes to be followed in the case of **OTSUA** connecting to a **Network Operator's User System** prior to **OTSUA Transfer Time**, the processes to be followed by **The Company**

and the **Generator** in respect of the **OTSUA** in such circumstances shall be consistent with those set out below by reference to **OTSUA** directly connected to the **National Electricity Transmission System**.

ECP.4.2 The provisions contained in ECP.5 to ECP.7 detail the process to be followed in order for the **User's Plant** and **Apparatus** (including **OTSUA**) to become operational. This process includes

(i) the acceptance of an **Installation Document** for a **Type A Power Generating Module**;

(ii) for energisation an **EON** for **Type B**, **Type C** or **Type D Power Generating Modules**, or **HVDC Equipment, Grid Forming Plant** or **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus**;

(iii) for synchronising an **ION** for **Type B**, **Type C** or **Type D Power Generating Modules** or **HVDC Equipment**;

(iv) for operating by using the **Grid Supply Point** an **ION** for;

a. **Network Operators** who are **EU Code Users** in respect of their entire distribution **System;**
b. **Network Operators** who are **GB Code Users** in respect of their **EU Grid Supply Points** only; or
c. **Non-Embedded Customers** who are **EU Code Users;**

(v) for final certification a **FON**.

ECP.4.2.1 The provisions contained in ECP.5 relate to the connection and energisation of **User's Plant** and **Apparatus** (including **OTSUA**) to the **National Electricity Transmission System** or where **Embedded**, to a **User's System**.

ECP.4.2.2 The provisions contained in ECP.6 and ECP.7 provide the process for **Generators**, **HVDC System Owners**, **Grid Forming Plant Owners, Network Operators** and **Non-Embedded Customers** to demonstrate compliance with the **Grid Code** and with, where applicable, the **CUSC Contract(s)** prior to and during the course of such **Generator's**, **HVDC System Owner's** (including **OTSUA** up to the **OTSUA Transfer Time**), **Network Operator's** and **Non-Embedded Customer's Plant** and **Apparatus**) becoming operational.

ECP.4.2.3 The provisions contained in ECP.8 detail the process to be followed to confirm continued compliance (the "Compliance Repeat Plan").

ECP.4.2.4 The provisions contained in ECP.9 detail the process to be followed when:

(a) a **Generator's** or **HVDC System Owner**'s, or **Grid Forming Plant Owner's,** or **Network Operator's** or **Non-Embedded Customer's Plant** and/or **Apparatus** (including the **OTSUA**) is unable to comply with any provisions of the **Grid Code** and **Bilateral Agreement**; or,

(b) following any notification by a **Generator** or a **HVDC System Owner** or a **Grid Forming Plant Owner** or a **Network Operator** or a **Non-Embedded Customer** under the **PC** of any change to its **Plant** and **Apparatus** (including any **OTSUA**); or,

(c) a **Modification** to a **Generator's** or a **HVDC System Owner's** or a **Grid Forming Plant Owner's** or a **Network Operator's** or a **Non-Embedded Customer's Plant** and/or **Apparatus.**

ECP.4.2.4 For **Grid Forming Plant Owners**, the **Operational Notification Process** of this **ECP** shall apply in relation to the type of **Plant** to which the **Grid Forming Capability** is provided (be it a **GBGF-S** or **GBGF-I**),

ECP.4.3 **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment** not subject to a **Bilateral Agreement**

ECP.4.3.1 In the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement**, ensuring the obligations of the **ECC** and Appendix E of the relevant **Bilateral Agreement** between **The Company** and the host **Network Operator** are performed and discharged by the relevant party. For the avoidance of doubt the process in this **ECP** does not apply to **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment** not subject to a **Bilateral Agreement**.

ECP.5 ENERGISATION OPERATIONAL NOTIFICATION

ECP.5.1 The following provisions apply in relation to the issue of an **Energisation Operational Notification** in respect of a **Power Station** consisting of **Type B**, **Type C** or **Type D Power Generating Modules** or an **HVDC System** or a **Network Operator's** or a **Non-Embedded Customer's Plant** and **Apparatus**.

ECP.5.1.1 Certain provisions relating to the connection and energisation of the **User's Plant** and **Apparatus** at the **Connection Site** and **OTSUA** at the **Transmission Interface Point** and in certain cases of **Embedded Plant** and **Apparatus** are specified in the **CUSC** and/or **CUSC Contract(s)**. For other **Embedded Plant** and **Apparatus**, the **Distribution Code**, the **DCUSA** and the **Embedded Development Agreement** for the connection specify equivalent provisions. Further detail on this is set out in ECP.5 below.

ECP.5.2 The items for submission prior to the issue of an **Energisation Operational Notification** are set out in ECC.5.2.

ECP.5.3 In the case of a **Generator** or **HVDC System Owner** the items referred to in ECC.5.2 shall be submitted using the **Power Generating Module Document** or **User Data File Structure** as applicable.

ECP.5.4 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **User** wishing to energise its **Plant** and **Apparatus** (including passive **OTSUA**) for the first time, the **User** will submit to **The Company** a Certificate of Readiness to Energise **High Voltage** Equipment which specifies the items of **Plant** and **Apparatus** (including **OTSUA**) ready to be energised in a form acceptable to **The Company**.

ECP.5.5 If the relevant obligations under the provisions of the **CUSC** and/or **CUSC Contract(s)** and the conditions of ECP.5 have been completed to **The Company's** reasonable satisfaction then **The Company** shall issue an **Energisation Operational Notification**. Any dynamically controlled reactive compensation **OTSUA** (including Statcoms or Static Var Compensators) shall not be **Energised** until the appropriate **Interim Operational Notification** has been issued in accordance with ECP.6.

ECP.6 OPERATIONAL NOTIFICATION PROCESSES

ECP.6.1 OPERATIONAL NOTIFICATION PROCESS (Type A)

ECP.6.1.1 The following provisions apply in relation to the notification process in in respect of a **Power Station** consisting of **Type A Power Generating Modules**.

ECP.6.1.2 Not less than 7 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** wishing to **Synchronise** its **Plant** and **Apparatus** for the first time, the **Generator** will:

submit to **The Company**, a **Notification of the User's Intention to Connect**; and

submit to **The Company** an **Installation Document** containing at least but not limited to the items referred to at ECP.6.1.3.

ECP.6.1.3 Items for submission prior to connection**.**

ECP.6.1.3.1 Prior to the issue of an acknowledgment to connect, the **Generator** must submit to **The Company**, to **The Company's** satisfaction, an **Installation Document** containing at least but not limited to:

(i) The location at which the connection is made**;**

(ii) The date of the connection;

(iii) The **Maximum Capacity** of the installation in kW;

(iv) The type of primary energy source;

(v) The classification of the **Power Generating Module** as an emerging technology;

(vi) A list of references to **Equipment Certificates** issued by an authorised certifier or otherwise agreed with **The Company** used for equipment that is installed at the site or copies of the relevant **Equipment Certificates** issued by an **Authorised Certifier** or otherwise where these are relied upon as part of the evidence of compliance;

(vii) As regards equipment used, for which an **Equipment Certificate** has not been received, information shall be provided as directed by **The Company** or the **Relevant Network Operator**; and

(viii) The contact details of the **Generator** and the installer and their signatures.

ECP.6.1.3.2 The items referred to in ECP.6.1.3 shall be submitted by the **Generator** in the form of an **Installation Document** for each applicable **Power Generating Module**.

ECP.6.1.4 No **Power Generating Module** shall be **Synchronised** to the **Total System** until the later of:

(a) the date specified by the **Generator** in the **Installation Document** issued in respect of each applicable **Power Generating Module(s)**; and,

(b) acknowledgement is received from **The Company** confirming receipt of the **Installation Document**.

ECP.6.1.5 When the requirements of ECP.6.1.2 to ECP.6.1.4 have been met, **The Company** will notify the **Generator** that the **Power Generating Module** may (subject to the **Generator** having fulfilled the requirements of ECP.6.1.3 where that applies) be **Synchronised** to the **Total System**.

ECP.6.1.6 Not less than 7 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** wishing to decommission its **Plant** and **Apparatus**, the **Generator** will submit to **The Company** a **Notification of User's Intention to Disconnect**.

ECP.6.2 INTERIM OPERATIONAL NOTIFICATION (Type B and Type C)

ECP.6.2.1 The following provisions apply in relation to the issue of an **Interim Operational Notification** in respect of a **Power Station** consisting of **Type B** and(or) **Type C Power Generating Modules**. In the case of **Generators** in respect of **Embedded Small Power Stations** with a **Bilateral Embedded Generation Agreement**, and a **Completion Date** on or after 05-09-2024, only the requirements of ECP.6.2.10 shall apply.

ECP.6.2.2 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** wishing to **Synchronise** its **Plant** and **Apparatus** or dynamically controlled **OTSUA** for the first time the **Generator or HVDC Equipment** owner will:

(i) submit to **The Company** a **Notification of User's Intention to Synchronise**; and

(ii) submit to **The Company** an initial **Power Generating Module Document** containing at least but not limited to the items referred to at ECP.6.2.3.

ECP.6.2.3 Items for submission prior to issue of the **Interim Operational Notification**.

ECP.6.2.3.1 Prior to the issue of an **Interim Operational Notification** in respect of the **EU Code User's Plant** and **Apparatus** or dynamically controlled **OTSUA**, the **Generator** must submit to **The Company** to **The Company's** satisfaction an Interim **Power Generating Module Document** containing at least but not limited to:

(i) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand;**

(ii) for **Type C Power Generating Modules** the simulation models;

(iii) details of any special **Power Generating Module(s)** protection as required by ECC.6.2.2.3. This may include Pole Slipping protection and islanding protection schemes as applicable;

(iv) simulation study provisions of Appendix ECP.A.3 and the results demonstrating compliance with **Grid Code** requirements of:

PC.A.5.4.2
PC.A.5.4.3.2,
ECC.6.3.4,

ECC.6.3.7.3.1 to ECC.6.3.7.3.6,
ECC.6.3.15, ECC.6.3.16
ECC.A.6.2.5.6
ECC.A.7.2.3.1

as applicable to the **Power Generating Module(s)** or dynamically controlled **OTSUA** unless agreed otherwise by **The Company**;

(v) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Generator** under ECP.7.2 to demonstrate compliance with relevant **Grid Code** requirements. Such schedule to be consistent with Appendix ECP.A.5 (in the case of a **Synchronous Power Generating Module**) or Appendix ECP.A.6 (in the case of a **Power Park Modules**) and **OTSUA** as applicable);

(vi) copies of **Manufacturer's Test Certificates** or **Equipment Certificates** issued by an **Authorised Certifier** or equivalent as agreed with **The Company** where these are relied upon as part of the evidence of compliance; and

(vii) a **Compliance Statement** and a **User Self Certification of Compliance** completed by the **EU Code User** (including any **Unresolved Issues**) against the relevant **Grid Code** requirements including details of any requirements that the **Generator** has identified that will not or may not be met or demonstrated.

ECP.6.2.3.2 The items referred to in ECP.6.2.3 shall be submitted by the **Generator** in the form of a **Power Generating Module Document (PGMD)** for each applicable **Power Generating Module**.

ECP.6.2.4 No **Generating Unit** or dynamically controlled **OTSUA** shall be **Synchronised** to the **Total System** (and for the avoidance of doubt, dynamically controlled **OTSUA** will not be able to transmit) until the later of:

(a) the date specified by **The Company** in the **Interim Operational Notification** issued in respect of each applicable **Power Generating Module(s)** or dynamically controlled **OTSUA**; and,

(b) in the case of **Synchronous Power Generating Module(s**) only after the date of receipt by the **Generator** of written confirmation from **The Company** that the **Synchronous Power Generating Module** or **CCGT Module** as applicable has completed the following tests to demonstrate compliance with the relevant provisions of the **Connection Conditions** to **The Company's** satisfaction:

(i) those tests required to establish the open and short circuit saturation characteristics of the **Synchronous Power Generating Module** (as detailed in Appendix ECP.A.4.3) to enable assessment of the short circuit ratio in accordance with ECC.6.3.2. Such tests may be carried out at a location other than the **Power Station** site and supplied in the form of an **Equipment Certificate** or as otherwise agreed by **The Company**; and

(ii) open circuit step response tests (as detailed in Appendix ECP.A.5.2) to demonstrate compliance with ECC.A.6.2.4.1.

ECP.6.2.5 **The Company** shall assess the schedule of tests submitted by the **Generator** with the **Notification of User's Intention to Synchronise** under ECP.6.2.3

and shall determine whether such schedule has been completed to **The Company's** satisfaction.

ECP.6.2.6 When the requirements of ECP.6.2.2 to ECP.6.2.5 have been met, **The Company** will notify the **Generator** that the:

Synchronous Power Generating Module,
CCGT Module,
Power Park Module or
Dynamically controlled **OTSUA**

as applicable may (subject to the **Generator** having fulfilled the requirements of ECP.6.2.3 where that applies) be **Synchronised** to the **Total System** through the issue of an **Interim Operational Notification**. Where the **Generator** is undertaking **OTSDUW** then the **Interim Operational Notification** will be in two parts, with the "**Interim Operational Notification Part A**" applicable to **OTSUA** and the **Interim Operational Notification Part B**" applicable to the **EU Code Users Plant** and **Apparatus**. For the avoidance of doubt, the "**Interim Operational Notification Part A**" and the "**Interim Operational Notification Part B**" can be issued together or at different times. In respect of an **Embedded Power Station** or **Embedded HVDC Equipment Station** (other than an **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment Stations** not subject to a **Bilateral Agreement**), **The Company** will notify the **Network Operator** that an **Interim Operational Notification** has been issued.

ECP.6.2.6.1 The **Interim Operational Notification** will be time limited, the expiration date being specified at the time of issue. The **Interim Operational Notification** may be renewed by **The Company**.

ECP.6.2.6.2 The **Generator** must operate the **Power Generating Module** or **OTSUA** in accordance with the terms, arising from the **Unresolved Issues**, of the **Interim Operational Notification**. Where practicable, **The Company** will discuss such terms with the **Generator** prior to including them in the **Interim Operational Notification**.

ECP.6.2.6.3 The **Interim Operational Notification** will include the following limitations:

(a) In the case of **OTSUA**, the **Interim Operational Notification Part A** permits **Synchronisation** of the dynamically controlled **OTSUA** to the **Total System** only for the purposes of active control of voltage and reactive power and not for the purpose of exporting **Active Power**.

(b) In the case of a **Power Park Module** the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the **Interim Operational Notification Part B**) will limit the proportion of the **Power Park Module** which can be simultaneously **Synchronised** to the **Total System** such that neither of the following figures is exceeded:

(i) 20% of the **Maximum Capacity** of the **Power Park Module** (or the output of a single **Power Park Unit** where this exceeds 20% of the **Power Station**'s **Maximum Capacity**)

until the **Generator** has completed the voltage control tests (detailed in ECP.A.6.2) (including in respect of any dynamically controlled **OTSUA**) to **The Company's** reasonable satisfaction. Following successful completion of this test each additional **Power Park Unit** should be included in the voltage control scheme as soon as is technically possible (unless **The Company** agrees otherwise).

(c) In the case of a **Synchronous Power Generating Module** employing a static **Excitation System** the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the **Interim Operational Notification Part B**) may, if applicable, limit the maximum **Active Power** output and **Reactive Power** output of the **Synchronous Power Generating Module** or **CCGT module** prior to the successful commissioning of the **Power System Stabiliser** to **The Company's** satisfaction, if applicable.

ECP.6.2.6.4 Operation in accordance with the **Interim Operational Notification** whilst it is in force will meet the requirements for compliance by the **Generator** and **The Company** of all the relevant provisions of the **European Connection Conditions**.

ECP.6.2.7 Other than **Unresolved Issues** that are subject to tests required under ECP.7.2 to be witnessed by **The Company**, the **Generator** must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Generator** must liaise with **The Company** in respect of such resolution. The tests that may be witnessed by **The Company** are specified in ECP.7.2.

ECP.6.2.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** wishing to commence tests required under ECP.7 to be witnessed by **The Company**, the **Generator** will notify **The Company** that the **Power Generating Module(s)** as applicable is ready to commence such tests.

ECP.6.2.9 The items referred to at ECP.7.3 shall be submitted by the **Generator** after successful completion of the tests required under ECP.7.2.

ECP.6.2.10 In relation to a **Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement**, and a **Completion Date** on or after 05-09-2024, prior to **The Company** issuing an **Interim-Balancing Compliance Notification**, the **Generator** shall submit to **The Company** the following documents:

(i) A final operational notification from the relevant **Network Operator** (as applicable),

(ii) A copy of the **Power-Generating Module Document** along with the confirmation from the relevant **Network Operator** on the compliance status of the **Generator's Power-Generating Module Document** in accordance with **Engineering Recommendation** G99, and

(iii) Document(s) demonstrating compliance with ECC.6.5, ECC.7.9, ECC.7.10 and ECC.7.11 of the Grid Code and **Bilateral Embedded Generation Agreement**,

which shall be to **The Company**'s satisfaction.

ECP.6.3 INTERIM OPERATIONAL NOTIFICATION (Type D and HVDC Equipment)

ECP.6.3.1 The following provisions apply in relation to the issue of an **Interim Operational Notification** in respect of a **Power Station** consisting of **Type D Power Generating Modules** or an **HVDC System**. In the case of **Generators** in respect of **Embedded Small Power Stations** with a **Bilateral Embedded Generation Agreement**, and a **Completion Date** on or after 05-09-2024, only the requirements of ECP.6.3.10 shall apply.

ECP.6.3.2 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **HVDC System Owner** wishing to **Synchronise** its **Plant** and **Apparatus** or dynamically controlled **OTSUA** for the first time the **Generator** or **HVDC System Owner** will:

i. submit to **The Company** a **Notification of User's Intention to Synchronise**; and

ii. submit to **The Company** the items referred to at ECP.6.3.3.

ECP.6.3.3 Items for submission prior to issue of the **Interim Operational Notification.**

ECP.6.3.3.1 Prior to the issue of an **Interim Operational Notification** in respect of the **EU Code User's Plant** and **Apparatus** or dynamically controlled **OTSUA** the **Generator** or **HVDC System Owner** must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand;**

(b) details of any special **Power Generating Module(s)** or **HVDC Equipment** protection as applicable. This may include Pole Slipping protection and islanding protection schemes;

(c) any items required by ECP.5.2, updated by the **EU Code User** as necessary;

(d) simulation study provisions of Appendix ECP.A.3 and the results demonstrating compliance with **Grid Code** requirements of:

PC.A.5.4.2
PC.A.5.4.3.2,
ECC.6.3.4,
ECC.6.3.7.3.1 to ECC.6.3.7.3.6,
ECC.6.3.15, ECC.6.3.16
ECC.A.6.2.5.6
ECC.A.7.2.3.1

as applicable to the **Power Station**, **Synchronous Power Generating Module(s)**, **Power Park Module(s)**, **HVDC Equipment** or dynamically controlled **OTSUA** unless agreed otherwise by **The Company**;

(e) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Generator** or **HVDC System Owner** under ECP.7.2 to demonstrate compliance with relevant **Grid Code** requirements. Such schedule to be consistent with Appendix ECP.A.5 (in the case of **Synchronous Power Generating Modules**) or Appendix ECP.A.6 (in the case of **Power Park** Modules and **OTSUA** as applicable) or Appendix ECP.A.7 (in the case of **HVDC Equipment**; and

(f) an interim **Compliance Statement** and a **User Self Certification of Compliance** completed by the **EU Code User** (including any **Unresolved Issues**) against the relevant **Grid Code** requirements including details of any requirements that the **Generator** or **HVDC**

System Owner has identified that will not or may not be met or demonstrated.

ECP.6.3.3.2 The items referred to in ECP.6.3.3 shall be submitted by the **Generator** or **HVDC System Owner** using the **User Data File Structure**.

ECP.6.3.4 No **Power Generating Module** or **HVDC Equipment** shall be **Synchronised** to the **Total System** (and for the avoidance of doubt, dynamically controlled **OTSUA** will not be able to transmit) until the later of:

(a) the date specified by **The Company** in the **Interim Operational Notification** issued in respect of the **Power Generating Module(s)** or **HVDC Equipment or** dynamically controlled **OTSUA**; and,

(b) if **Embedded**, the date of receipt of a confirmation from the **Network Operator** in whose **System** the **Plant and Apparatus** is connected that it is acceptable to the **Network Operator** that the **Plant and Apparatus** be connected and **Synchronised**; and,

(c) in the case of **Synchronous Power Generating Module(s**) only after the date of receipt by **Generator** of written confirmation from **The Company** that the **Synchronous Power Generating Module** has completed the following tests to demonstrate compliance with the relevant provisions of the **Connection Conditions** to **The Company's** satisfaction:

(i) those tests required to establish the open and short circuit saturation characteristics of the **Synchronous Power Generating Module** (as detailed in Appendix ECP.A.5.3) to enable assessment of the short circuit ratio in accordance with ECC.6.3.2. Such tests may be carried out at a location other than the **Power Station** site; and

(ii) open circuit step response tests (as detailed in Appendix ECP.A.5.2) to demonstrate compliance with ECC.A.6.2.4.1.

ECP.6.3.5 **The Company** shall assess the schedule of tests submitted by the **Generator** or **HVDC System Owner** with the **Notification of User's Intention to Synchronise** under ECP.6.3.1 and shall determine whether such schedule has been completed to **The Company's** satisfaction.

ECP.6.3.6 When the requirements of ECP.6.3.2 to ECP.6.3.5 have been met, **The Company** will notify the **Generator** or **HVDC System Owner** that the:

Synchronous Power Generating Module,
CCGT Module,
Power Park Module
Dynamically controlled **OTSUA** or
HVDC Equipment,

as applicable may (subject to the **Generator** or **HVDC System Owner** having fulfilled the requirements of ECP.6.3.3 where that applies) be **Synchronised** to the **Total System** through the issue of an **Interim Operational Notification**. Where the **Generator** is undertaking **OTSDUW** then the **Interim Operational Notification** will be in two parts, with the "**Interim Operational Notification Part A**" applicable to OTSUA and the "**Interim Operational Notification Part B**" applicable to the **EU Code Users Plant** and **Apparatus**. For the avoidance of doubt, the "**Interim Operational Notification Part A**" and the "I**nterim Operational Notification Part B**" can be issued together or at different times. In respect of an **Embedded Power Station or Embedded HVDC Equipment Station** (other than **Embedded**

Medium Power Stations not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment** not subject to a **Bilateral Agreement**), **The Company** will notify the **Network Operator** that an **Interim Operational Notification** has been issued.

ECP.6.3.6.1 The **Interim Operational Notification** will be time limited, the expiration date being specified at the time of issue. The **Interim Operational Notification** may be renewed by **The Company** for up to a maximum of 24 months from the date of the first issue of the **Interim Operational Notification**. **The Company** may only issue an extension to an **Interim Operational Notification** beyond 24 months provided the **Generator** or **HVDC System Owner** has applied for a derogation for any remaining **Unresolved Issues** to the **Authority** as detailed in ECP.10.

ECP.6.3.6.2 The **Generator** or **HVDC System Owner** must operate the **Power Generating Module** or **HVDC Equipment** in accordance with the terms, arising from the **Unresolved Issues**, of the **Interim Operational Notification**. Where practicable, **The Company** will discuss such terms with the **Generator** or **HVDC System Owner** prior to including them in the **Interim Operational Notification**.

ECP.6.3.6.3 The **Interim Operational Notification** will include the following limitations:

(a) In the case of **OTSUA**, the **Interim Operational Notification Part A** permits **Synchronisation** of the dynamically controlled **OTSUA** to the **Total System** only for the purposes of active control of voltage and **Reactive Power** and not for the purpose of exporting **Active Power**.

(b) In the case of a **Power Park Module** the **Interim Operational Notification** (and where **OTSDUW** Arrangements apply, this reference will be to the **Interim Operational Notification Part B**) will limit the proportion of the **Power Park Module** which can be simultaneously **Synchronised** to the **Total System** such that neither of the following figures is exceeded:

(i) 20% of the **Maximum Capacity** of the **Power Park Module** (or the output of a single **Power Park Unit** where this exceeds 20% of the **Power Station**'s **Maximum Capacity**); nor

(ii) 50MW

until the **Generator** has completed the voltage control tests (detailed in ECP.A.6.2) to **The Company's** reasonable satisfaction. Following successful completion of this test, each additional **Power Park Unit** should be included in the voltage control scheme as soon as is technically possible (unless **The Company** agrees otherwise).

(c) In the case of a **Power Park Module** with a **Maximum Capacity** greater or equal to 100MW, the **Interim Operational Notification** (and where **OTSDUW** Arrangements apply, this reference will be to the **Interim Operational Notification Part B**) will limit the proportion of the **Power Park Module** which can be simultaneously **Synchronised** to the **Total System** to 70% of **Maximum Capacity** until the **Generator** has completed the **Limited Frequency Sensitive Mode (LFSM-O)** control tests with at least 50% of the **Maximum Capacity** of the **Power Park Module** in service (detailed in ECP.A.6.3.1) to **The Company's** reasonable satisfaction.

(d) In the case of a **Synchronous Power Generating Module** employing a static **Excitation System** or a **Power Park Module** employing a

Power System Stabiliser, the **Interim Operational Notification** (and where **OTSDUW Arrangements** apply, this reference will be to the Interim **Operational Notification Part B**) may if applicable limit the maximum **Active Power** output and **Reactive Power** output of the **Synchronous Power Generating Module** or **CCGT module** prior to the successful commissioning of the **Power System Stabiliser** to **The Company's** satisfaction.

ECP.6.3.6.4 Operation in accordance with the **Interim Operational Notification** whilst it is in force will meet the requirements for compliance by the **Generator** or **HVDC System Owner** and **The Company** of all the relevant provisions of the **European Connection Conditions**.

ECP.6.3.7 Other than **Unresolved Issues** that are subject to tests required under ECP.7.2 to be witnessed by **The Company**, the **Generator** or **HVDC System Owner** must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Generator** or **HVDC System Owner** must liaise with **The Company** in respect of such resolution. The tests that may be witnessed by **The Company** are specified in ECP.7.2.

ECP.6.3.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **HVDC System Owner** wishing to commence tests required under ECP.7 to be witnessed by **The Company**, the **Generator** or **HVDC System Owner** will notify **The Company** that the **Power Generating Module(s)** or **HVDC Equipment(s)** as applicable is ready to commence such tests.

ECP.6.3.9 The items referred to at ECP.7.3 shall be submitted by the **Generator** or the **HVDC System Owner** after successful completion of the tests required under ECP.7.2.

ECP.6.3.10 In relation to a **Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** and a **Completion Date** on or after 05-09-2024, prior to **The Company** issuing an **Interim-Balancing Compliance Notification**, the **Generator** shall submit to **The Company** the following documents:

(i) A final operational notification or an interim operational notification from the relevant **Network Operator** (as applicable).

(ii) A copy of **Power-Generating Module Document** along with confirmation from the relevant **Network Operator** on the compliance status of the **Generator's Power-Generating Module Document** in accordance with **Engineering Recommendation** G99.

(iii) Document(s) demonstrating compliance with ECC.6.5, ECC.7.9, ECC.7.10 and ECC.7.11 of the Grid Code and **Bilateral Embedded Generation Agreement**.

which shall be to **The Company's** satisfaction.

ECP.6.4 INTERIM OPERATIONAL NOTIFICATION (Network Operator's or Non-Embedded Customer's Plant and Apparatus)

ECP.6.4.1 The following provisions apply in relation to the issue of an **Interim Operational Notification** in respect of **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus.**

ECP.6.4.2 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Network Operator** or **Non-Embedded Customer** wishing to operate its **Plant** and **Apparatus** by using the **EU Grid Supply Point** for the first time, the **Network Operator** or **Non-Embedded Customer** will:

i. submit to **The Company** a **Notification of User's Intention to Operate**; and

ii. submit to **The Company** the items referred to at ECP.6.4.3.

ECP.6.4.3 Items for submission prior to issue of the **Interim Operational Notification**.

ECP.6.4.3.1 Prior to the issue of an **Interim Operational Notification** in respect of the **User's Plant** and **Apparatus** at an **EU Grid Supply Point**, the **Network Operator** or **Non-Embedded Customer** must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for **Forecast Data** items such as **Demand;**

(b) details of any special protection as applicable;

(c) any items required by ECP.5.2, updated as necessary;

(d) data submission and results required by Appendix ECP.A.8 demonstrating compliance with **Grid Code** requirements of:

PC.A.2.2
PC.A.2.3
PC.A.2.4
PC.A.2.5.2
PC.A.2.5.3
PC.A.2.5.4
PC.A.2.5.6
PC.A.4
PC.A.6.1.3
PC.A.6.3
PC.A.6.7.1

as applicable to the **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** unless agreed otherwise by **The Company**;

(e) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Network Operator** or **Non-Embedded Customer** under ECP.7.8 (or **Equipment Certificates** as relevant) to demonstrate compliance with relevant **Grid Code** requirements. Such schedule is to be consistent with Appendix ECP.A.8.

(f) an interim **Compliance Statement** and a **User Self Certification of Compliance** completed by the **User** (including any **Unresolved Issues**) against the relevant **Grid Code** requirements including details of any requirements that the **Network Operator** or **Non-Embedded Customer** has identified that will not or may not be met or demonstrated.

ECP.6.4.4 No **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** shall be operated by using the **EU Grid Supply Point** until the date specified by **The Company** in the **Interim Operational Notification**.

ECP.6.4.5 **The Company** shall assess the schedule of tests submitted by the **Network Operator** or **Non-Embedded Customer** with the **Notification of User's Intention to Operate** under ECP.6.4.1 and shall determine whether such schedule has been completed to **The Company's** satisfaction.

ECP.6.4.6 When the requirements of ECP.6.4.2 to ECP.6.4.5 have been met, **The Company** will notify the **Network Operator** or **Non-Embedded Customer** that the **Plant** and **Apparatus** may (subject to the **Network Operator** or **Non-Embedded Customer** having fulfilled the requirements of ECP.6.4.3 where that applies) be operated by using the **EU Grid Supply Point** through the issue of an **Interim Operational Notification**.

ECP.6.4.6.1 The **Interim Operational Notification** will be time limited, the expiration date being specified at the time of issue. The **Interim Operational Notification** may be renewed by **The Company** for up to a maximum of 24 months from the date of the first issue of the **Interim Operational Notification**. **The Company** may only issue an extension to an **Interim Operational Notification** beyond 24 months provided the **Network Operator** or **Non-Embedded Customer** has applied for a derogation for any remaining **Unresolved Issues** to the **Authority** as detailed in ECP.10.

ECP.6.4.6.2 The **Network Operator** or **Non-Embedded Customer** must operate the **Plant** and **Apparatus** in accordance with the terms, arising from the **Unresolved Issues**, of the **Interim Operational Notification**. Where practicable, **The Company** will discuss such terms with the **Network Operator** or **Non-Embedded Customer** prior to including them in the **Interim Operational Notification**.

ECP.6.4.7 The **Network Operator** or **Non-Embedded Customer** must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Network Operator** or **Non-Embedded Customer** must liaise with **The Company** in respect of such resolution.

ECP.6.4.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Network Operator** or **Non-Embedded Customer** wishing to commence tests required under ECP.7.8(e) and ECP.A.8 to be witnessed by **The Company** the **Network Operator** or **Non-Embedded Customer** will notify **The Company** that the **Network Operator** or **Non-Embedded Customer** as applicable is ready to commence such tests.

ECP.7 FINAL OPERATIONAL NOTIFICATION

Final Operational Notification in respect of Generators and HVDC System Owners

ECP.7.1 The following provisions apply in relation to the issue of a **Final Operational Notification** in respect of a **Power Station** consisting of **Type B**, **Type C** and **Type D Power Generating Modules** or an **HVDC System**.

ECP.7.2 Tests to be carried out prior to issue of the **Final Operational Notification**.

ECP.7.2.1 Prior to the issue of a **Final Operational Notification** the **Generator** or **HVDC System Owner** must have completed the tests specified in this ECP.7.2.2 to **The Company's** satisfaction to demonstrate compliance with the relevant **Grid Code** provisions.

ECP.7.2.2 In the case of any **Power Generating Module**, **OTSUA** (if applicable) or **HVDC Equipment** these tests will reflect the relevant technical requirements and will comprise one or more of the following:

(a) Reactive capability tests to demonstrate that the **Power Generating Module**, **OTSUA** (if applicable) or **HVDC Equipment** can meet the requirements of ECC.6.3.2. These may be witnessed by **The Company** on site if there is no metering to **The Company** Control Centre.

(b) voltage control system tests to demonstrate that the **Power Generating Module, OTSUA** (if applicable) or **HVDC Equipment** can meet the requirements of ECC.6.3.6.3, ECC.6.3.8 and, in the case of a **Power Park Module**, **OTSUA** (if applicable) and **HVDC Equipment**, the requirements of ECC.A.7 or ECC.A.8 and, in the case of **Synchronous Power Generating Module** and **CCGT Module,** the requirements of ECC.A.6, and any terms specified in the **Bilateral Agreement** as applicable. These tests may also be used to validate the **Excitation System** model (PC.A.5.3) or voltage control system model (PC.A.5.4) as applicable. These tests may be witnessed by **The Company**.

(c) governor or frequency control system tests to demonstrate that the **Power Generating Module**, **OTSUA** (if applicable) or **HVDC Equipment** can meet the requirements of ECC.6.3.6.2, ECC.6.3.7, where applicable ECC.A.3, and BC.3.7. In the case of a **Type B Power Generating Module** only tests BC3 and BC4 in ECP.A.5.8 Figure 2 or ECP.A.6.6 Figure 2 must be completed. The results will also validate the **Mandatory Service Agreement** required by ECC.8.1. These tests may also be used to validate the governor model (PC.A.5.3) or frequency control system model (PC.A.5.4) as applicable. These tests may be witnessed by **The Company**.

(d) fault ride through tests in respect of a **Power Station** with a **Maximum Capacity** of 100MW or greater, comprised of one or more **Power Park Modules**, to demonstrate compliance with ECC.6.3.15, ECC.6.3.16 and ECC.A.4. Where test results from a **Manufacturers Data & Performance Report** as defined in ECP.11 have been accepted this test will not be required.

(e) any further tests reasonably required by **The Company** and agreed with the **EU Code User** to demonstrate any aspects of compliance with the **Grid Code** and the **CUSC Contracts**.

ECP.7.2.3 **The Company's** preferred range of tests to demonstrate compliance with the **ECCs** are specified in Appendix ECP.A.5 (in the case of **Synchronous Power Generating Modules**) or Appendix ECP.A.6 (in the case of a **Power Park Modules** or **OTSUA** (if applicable)) or Appendix ECP.A.7 (in the case of **HVDC Equipment** and are to be carried out by the **EU Code User** with the results of each test provided to **The Company**. The **EU Code User** may carry out an alternative range of tests if this is agreed with **The Company**. **The Company** may agree a reduced set of tests where there is a relevant **Manufacturers Data & Performance Report** as detailed in ECP.10 or an applicable **Equipment Certificate** has been accepted.

ECP.7.2.4 In the case of **Offshore Power Park Modules** which do not contribute to **Offshore Transmission Licensee Reactive Power** capability as described in ECC.6.3.2.5 or ECC.6.3.2.6 or Voltage Control as described in ECC.6.3.8.5 the tests outlined in ECP.7.2.2 (a) and ECP.7.2.2 (b) are not required. However, the offshore **Reactive Power** transfer tests outlined in ECP.A.5.8 shall be completed in their place.

ECP.7.2.5 Following completion of each of the tests specified in this ECP.7.2, **The Company** will notify the **Generator** or **HVDC System Owner** whether, in the opinion of **The Company**, the results demonstrate compliance with the relevant **Grid Code** conditions. When the **Generator** or **HVDC System Owner** submits test results to **The Company**, the **Generator** or **HVDC System Owner** may request **The Company** to advise when the notification is expected to be provided. **The Company** should not unduly delay the notification.

ECP.7.2.6 The **Generator** or **HVDC System Owner** is responsible for carrying out the tests and retains the responsibility for safety and personnel during the test.

ECP.7.3 Items for submission prior to issue of the **Final Operational Notification**

ECP.7.3.1 Prior to the issue of a **Final Operational Notification** the **Generator** or **HVDC System Owner** must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with validated actual values and updated estimates for the future including **Forecast Data** items such as **Demand**;

(b) any items required by ECP.5.2 and ECP.6.2.3 or ECP.6.3.3 as applicable, updated by the **EU Code User** as necessary;

(c) evidence to **The Company's** satisfaction that demonstrates that the controller models and/or parameters (as required under PC.A.5.3.2(c) option 2, PC.A.5.3.2(d) option 2, PC.A.5.4.2, and/or PC.A.5.4.3.2) supplied to **The Company** provide a reasonable representation of the behaviour of the **EU Code User's Plant** and **Apparatus** and **OTSUA** if applicable;

(d) copies of **Manufacturer's Test Certificates** or **Equipment Certificates** issued by an **Authorised Certifier** or equivalent where these are relied upon as part of the evidence of compliance;

(e) results from the tests required in accordance with ECP.7.2 carried out by the **Generator** to demonstrate compliance with relevant **Grid Code** requirements including the tests witnessed by **The Company**; and

(f) the final **Compliance Statement** and a **User Self Certification of Compliance** signed by the **EU Code User** and a statement of any requirements that the **Generator** or **HVDC System Owner** has identified that have not been met together with a copy of the derogation in respect of the same from the **Authority**.

ECP.7.3.2 The items in ECP.7.3 should be submitted by the **Generator** (including in respect of any **OTSUA** if applicable) or **HVDC System Owner** using the **User Data File Structure**.

ECP.7.4 If the requirements of ECP.7.2 and ECP.7.3 have been successfully met, **The Company** will notify the **Generator** or **HVDC System Owner** that compliance with the relevant **Grid Code** provisions has been demonstrated for the **Power Generating Module(s)**, **OTSUA** if applicable or **HVDC Equipment** as applicable through the issue of a **Final Operational Notification**. In respect of an **Embedded Power Station** or **Embedded HVDC Equipment** other than an **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment** not subject to a **Bilateral Agreement, The Company** will notify the **Network Operator** that a **Final Operational Notification** has been issued, subject to the requirement to confirm continued compliance as per CP.8.2 as part of the Compliance Repeat Plan.

In relation to a **Generator** in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** and a **Completion Date** on or after 05-09-2024, **The Company** shall issue **a Final-Balancing Compliance Notification** provided the following requirements are fulfilled:

(i) The relevant **Network Operator** has issued a final operational notification; and

(ii) All the unresolved items (if any) on the **Interim-Balancing Compliance Notification** are fulfilled to **The Company's** satisfaction.

ECP.7.5 If a **Final Operational Notification** cannot be issued because the requirements of ECP.7.2 and ECP.7.3 have not been successfully met prior to the expiry of an **Interim Operational Notification** then the **Generator** or **HVDC System Owner** (where licensed in respect of its activities) and/or **The Company** shall apply to the **Authority** for a derogation. The provisions of ECP.10 shall then apply.

Final Operational Notification in respect of Network Operator's and Non-Embedded Customer's Plant and Apparatus

ECP.7.6 The following provisions apply in relation to the issue of a **Final Operational Notification** in respect of **Network Operators** and **Non-Embedded Customers Plant** and **Apparatus**.

ECP.7.7 Prior to the issue of a **Final Operational Notification** the **Network Operator** and **Non-Embedded Customer** must have addressed the **Unresolved Issues** to **The Company's** satisfaction to demonstrate compliance with the relevant **Grid Code** provisions.

ECP.7.8 Prior to the issue of a **Final Operational Notification** the **Network Operator** and **Non-Embedded Customer** must submit to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with validated actual values and updated estimates for the future including **Forecast Data** items such as **Demand**;

(b) any items required by ECP.5.2 and ECP.6.4 updated by the **User** as necessary;

(c) evidence to **The Company's** reasonable satisfaction that demonstrates that the models and/or parameters as required under PC.A.2.2, PC.A.2.3, PC.A.2.4, PC.A.2.5, PC.A.4 and PC.A.6 (as

applicable), supplied to **The Company** provide a reasonable representation of the behaviour of the **User's Plant** and **Apparatus**;

(d) copies of **Manufacturer's Test Certificates** or **Equipment Certificates** issued by an **Authorised Certifier** or equivalent where these are relied upon as part of the evidence of compliance;

(e) results from the tests and simulations required in accordance with ECP.A.8 carried out by the **Network Operator** or **Non-Embedded Customer** to demonstrate compliance with relevant **Grid Code** requirements including any tests witnessed by **The Company**; and

(f) the final **Compliance Statement** and a **User Self Certification of Compliance** signed by the **User** and a statement of any requirements that the **Network Operator** or **Non-Embedded Customer** has identified that have not been met together with a copy of the derogation in respect of the same from the **Authority**.

ECP.7.9 The items referred to at ECP.7.8 shall be submitted by the **Network Operator** or **Non-Embedded Customer** after successful completion of the tests required under ECP.7.8.

ECP.7.10 If the requirements of ECP.7.8 have been successfully met, **The Company** will notify the **Network Operator** or **Non-Embedded Customer** that compliance with the relevant **Grid Code** provisions has been demonstrated for **Network Operators** or **Non-Embedded Customers Plant** and **Apparatus** as applicable through the issue of a **Final Operational Notification**.

ECP.7.11 If a **Final Operational Notification** cannot be issued because the requirements of ECP.7.8 have not been successfully met prior to the expiry of an **Interim Operational Notification**, then the **Network Operator** or **Non-Embedded Customer** and/or **The Company** shall apply to the **Authority** for a derogation. The provisions of ECP.10 shall then apply.

ECP.8 COMPLIANCE REPEAT PLAN

ECP.8.1 No later than 4 calendar years and 6 months after the issue of a **Final Operational Notification**, **The Company** will notify the **Generator** or **HVDC System Owner** that confirmation of continued compliance with the requirements of the Grid Code and/or the **Bilateral Agreement**.

ECP.8.2 No later than 5 calendar years after the issue of a **Final Operational Notification**, the **Generator** or **HVDC System Owner** shall confirm that the **Plant** and/or **Apparatus** (including **OTSUA** if applicable) is fully compliant with the requirements of the Grid Code and/or the **Bilateral Agreement**. The confirmation of compliance will include:

(a) a **Compliance Statement** and a **User Self Certification of Compliance** signed by the **EU Code User** and a statement of any requirements that the **Generator** or **HVDC System Owner** has identified that have not been met together with a copy of the derogation in respect of the same from The **Authority**.

(b) complete set of relevant **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**), with validated actual values and updated estimates for the future including **Forecast Data** items such as **Demand**. Simulation Studies and results from tests detailed in Appendix ECP.A.3 – ECP.A.8 inclusive are not required as part of the Compliance Repeat Plan.

(c) an updated list of contact details for outage and network planning, which shall be updated by the **EU Code User** as needed; and

(d) an updated list of email and telephone contact details for the **User Site**, which shall be updated by the **EU Code User** as needed. The persons specified in the contact details should be able to assist in the sharing of dynamic system behaviour monitoring data as well as supporting any post-**Event** investigations.

For the avoidance of doubt the **Generator** or **HVDC System Owner** is responsible for ensuring that **Plant** and/or **Apparatus** (including **OTSUA** if applicable) remains compliant with the relevant clauses of the Grid Code and/or the **Bilateral Agreement** and/or connection site conditions notified by **The Company**.

ECP.8.3 If the requirements of ECP.8.2 have been completed to **The Company's** satisfaction, **The Company** will notify the **Generator** or **HVDC System Owner** that compliance with the relevant Grid Code provisions has been demonstrated for the **Power Generating Module(s)**, including **DC Connected Power Park Module(s)** and **OTSUA**, if applicable or **HVDC Equipment** as applicable through the issue of a **Final Operational Notification** subject to Compliance Repeat Plan (ECP.8) no later than 5 years from the date of issue. In respect of an **Embedded Power Station** or **Embedded DC Converter Station** other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Systems** not subject to a **Bilateral Agreement**, **The Company** will notify the **Network Operator** that a **Final Operational Notification** has been issued.

ECP.8.4 If a **Final Operational Notification** cannot be issued because the requirements of ECP.8.2 have not been successfully met prior to 5 years from the date of issue of the **Final Operational Notification**, then **The Company** will issue the **Generator** or **HVDC System Owner** (where licensed in respect of its activities) a **Limited Operational Notification** with respect to the **Unresolved Issues**. The provisions of ECP.9 shall then apply.

ECP.9 LIMITED OPERATIONAL NOTIFICATION

ECP.9.1 Following the issue of a **Final Operational Notification** (or **Final-Balancing Compliance Notification**) for a **Power Station** consisting of **Type B**, **Type C** or **Type D Power Generating Module** or an **HVDC System** or **Network Operators** or **Non-Embedded Customers Plant** and **Apparatus** if:

(i) the **Generator** or **HVDC System Owner** or **Network Operator** or **Non-Embedded Customer** becomes aware, that its **Plant** and/or **Apparatus'** (including **OTSUA** if applicable) capability to meet any provisions of the **Grid Code**, or where applicable the **Bilateral Agreement** is not fully available then the **Generator** or **HVDC System Owner** or **Network Operator** or **Non-Embedded Customer** shall follow the process in ECP.9.2 to ECP.9.11; or,

(ii) a **Network Operator** becomes aware, that the capability of **Plant** and/or **Apparatus** belonging to an **Embedded Power Station** or **Embedded HVDC Equipment Station** (other than **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded HVDC Equipment Stations** not subject to a **Bilateral Agreement)** is failing to meet any provisions of the **Grid Code**, or where applicable the **Bilateral Agreement**, then the **Network Operator** shall inform **The Company** and **The Company** shall inform

the **Generator** or **HVDC System Owner** to then follow the process in ECP.9.2 to ECP.9.11; or,

(iii) **The Company** becomes aware through monitoring as described in OC5.4, that a **Generator** or **HVDC System Owner Plant** and/or **Apparatus** (including **OTSUA** if applicable) capability to meet any provisions of the **Grid Code**, or where applicable the **Bilateral Agreement** is not fully available then **The Company** shall inform the other party. Where **The Company** and the **Generator** or **HVDC System Owner** cannot agree from the monitoring as described in OC5.4 whether the **Plant and/or Apparatus** (including **OTSUA** if applicable) is fully available and/or is compliant with the requirements of the **Grid Code** and where applicable the **Bilateral Agreement**, the parties shall first apply the process in OC5.5.1, before applying the process defined in ECP.9 **(LON)** if applicable**.** Where the testing instructed in accordance with OC.5.5.1 indicates that the **Plant** and/or **Apparatus** (including **OTSUA** if applicable) is not fully available and/or is not compliant with the requirements of the **Grid Code** and/or the **Bilateral Agreement**, or if the parties so agree, the process in ECP.9.2 to ECP.9.11 shall be followed.

(iv) **The Company** becomes aware that a **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** capability to meet any provisions of the **Grid Code**, or where applicable the **Bilateral Agreement**, is not fully available then **The Company** shall inform the other party and the process in ECP.9.2 to ECP.9.11 shall be followed.

(v) **The Company** becomes aware that a **Generator's** ability in respect of an **Embedded Small Power Station** with a **Bilateral Embedded Generation Agreement** and a **Completion Date** on or after 05-09-2024, to meet any provisions of the **Grid Code**, or where applicable the **Bilateral Agreement** is not fully available, then **The Company** shall issue a **Limited-Balancing Compliance Notification**.

ECP.9.2 Immediately upon a **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** becoming aware that its **Power Generating Module**, **OTSUA** (if applicable), **HVDC Equipment** or **Plant** and **Apparatus,** as applicable may be unable to comply with certain provisions of the **Grid Code** or (where applicable) the **Bilateral Agreement**, the **Generator**, **HVDC System Owner Network Operator** or **Non-Embedded Customer** shall notify **The Company** in writing. Additional details of any operating restrictions or changes in applicable data arising from the potential non-compliance and an indication of the date from when the restrictions will be removed and full compliance demonstrated shall be provided as soon as reasonably practical.

ECP.9.3 If the nature of any unavailability and/or potential non-compliance described in ECP.9.1 causes or can reasonably be expected to cause a material adverse effect on the business or condition of **The Company** or other **Users** or the **National Electricity Transmission System** or any **User Systems,** then **The Company** may, notwithstanding the provisions of this ECP.9, follow the provisions of Paragraph 5.4 of the **CUSC**.

ECP.9.4 Except where the provisions of ECP.9.3 apply, where the restriction notified in ECP.9.2 is not resolved in 28 days, then

(i) the **Generator** or **HVDC System Owner** with input from and discussion of conclusions with **The Company**, and the **Network Operator** where the **Synchronous Power Generating Module**, **CCGT Module**, **Power Park Module** or **Power Station** as applicable is **Embedded**, shall undertake an investigation to attempt to determine

the causes of and determine a solution to the non-compliance. Such investigation shall continue for no longer than 56 days. During such investigation, the **Generator** or **HVDC System Owner** shall provide to **The Company** the relevant data which has changed due to the restriction in respect of ECP.7.3.1 as notified to the **Generator** or **HVDC System Owner** by **The Company** as being required to be provided; or

(ii) the **Network Operator** or **Non-Embedded Customer** in discussion with **The Company**, shall undertake an investigation to attempt to determine the causes of and a solution to the non-compliance. Such investigation shall continue for no longer than 56 days. During such investigation the **Network Operator** or **Non-Embedded Customer** shall provide to **The Company** the relevant data which has changed due to the restriction in respect of ECP.7.8 as being required to be provided by **The Company**.

ECP.9.5 Issue and Effect of LON

ECP.9.5.1 Following the issue of a **Final Operational Notification**, **The Company** will issue to the **Generator**, **HVDC System Owner, Network Operator** or **Non-Embedded Customer** a **Limited Operational Notification** if:

(a) by the end of the 56 day period referred to at ECP.9.4, the investigation has not resolved the non-compliance to **The Company's** satisfaction; or

(b) **The Company** is notified by a **Generator**, **HVDC System Owner** (including **OTSUA** if applicable), **Network Operator** or **Non-Embedded Customer** of a **Modification** to its **Plant** and **Apparatus**; or

(c) **The Company** receives a submission of data, or a statement from a **Generator**, **HVDC System Owner** (including **OTSUA** if applicable), **Network Operator** or **Non-Embedded Customer** indicating a change in **Plant** or **Apparatus** or settings (including but not limited to governor and excitation control systems) that may in **The Company's** reasonable opinion, acting in accordance with **Good Industry Practice** be expected to result in a material change of performance.

In the case of an **Embedded Generator** or **Embedded HVDC System Owner**, **The Company** will issue a copy of the **Limited Operational Notification** to the **Network Operator**.

ECP.9.5.2 The **Limited Operational Notification** will be time limited (in the case of **Type D Power Generating Modules**, **HVDC Systems**, **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** to expire no later than 12 months from the start of the non-compliance or restriction or from reconnection following a change). **The Company** may agree a longer duration in the case of a **Limited Operational Notification** following a **Modification** or whilst the **Authority** is considering the application for a derogation in accordance with ECP.10.1.

ECP.9.5.3 The **Limited Operational Notification** will notify the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** of any restrictions on the operation of the **Synchronous Power Generating Module(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA** if applicable, **HVDC Equipment** or **Plant** and **Apparatus** and will specify the **Unresolved Issues**. The **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** must operate in accordance with any notified restrictions and must resolve the **Unresolved Issues**.

ECP.9.5.4 The **User** and **The Company** will be deemed compliant with all the relevant provisions of the **Grid Code** provided operation is in accordance with the **Limited Operational Notification**, whilst it is in force, and that the provisions of and referred to in ECP.9 are complied with.

ECP.9.5.5 The **Unresolved Issues** included in a **Limited Operational Notification** will show the extent that the provisions of ECP.7.2 (testing) and ECP.7.3 (final data submission) or ECP.7.8 (d) - (e) (testing) and ECP7.8 (a) – (c) (data submission, as applicable, shall apply. In respect of selecting the extent of any tests which may in **The Company's** view reasonably be needed to demonstrate the restored capability and in agreeing the time period in which the tests will be scheduled, **The Company** shall, where reasonably practicable, take account of the **Generator** or **HVDC System Owner**'s input to contain its costs associated with the testing.

ECP.9.5.6 In the case of a change or **Modification**, the **Limited Operational Notification** may specify that the affected **Plant** and **Apparatus** (including **OTSUA** if applicable) or associated **Synchronous Power Generating Module(s)** or **Power Park Unit(s)** must not be **Synchronised** or, in the case of **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus**, operated until all of the following items, that in **The Company's** reasonable opinion are relevant, have been submitted to **The Company** to **The Company's** satisfaction:

(a) updated **Planning Code** data (both **Standard Planning Data** and **Detailed Planning Data**);

(b) details of any relevant special **Power Station**, **Synchronous Power Generating Module(s)**, **Power Park Module(s), OTSUA** (if applicable), **HVDC Equipment Station(s)** or **Network Operator's** or **Non-Embedded Customer's Plant** and **Apparatus** protection as applicable. This may include Pole Slipping protection and islanding protection schemes; and

(c) simulation study provisions of Appendix ECP.A.3 or Appendix ECP.A.8 as appropriate and the results demonstrating compliance with **Grid Code** requirements relevant to the change or **Modification** as agreed by **The Company**; and

(d) a detailed schedule of the tests and the procedures for the tests required to be carried out by the **Generator**, **HVDC Equipment Station**, **Network Operator** or **Non-Embedded Customer** to demonstrate compliance with relevant **Grid Code** requirements as agreed by **The Company**. The schedule of tests shall be consistent with Appendix ECP.A.5, Appendix ECP.A.6 or Appendix ECP.A.8 as appropriate; and

(e) an interim **Compliance Statement** and a **User Self Certification of Compliance** completed by the **User** (including any **Unresolved Issues**) against the relevant **Grid Code** requirements including details of any requirements that the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** has identified that will not or may not be met or demonstrated; and

(f) any other items specified in the **LON**.

ECP.9.5.7 The items referred to in ECP.9.5.6 shall be submitted by the **Generator** (including in respect of any **OTSUA** if applicable) or **HVDC System Owner**

using the **User Data File Structure** or **Power Generation Module Document** as applicable.

ECP.9.5.8 In the case of **Synchronous Power Generating Module(s**) only, the **Unresolved Issues** of the **LON** may require that the **Generator** must complete the following tests to **The Company's** satisfaction to demonstrate compliance with the relevant provisions of the **ECC**s prior to the **Synchronous Power Generating Module** being **Synchronised** to the **Total System**:

(a) those tests required to establish the open and short circuit saturation characteristics of the **Synchronous Power Generating Module** (as detailed in Appendix ECP.A.5.3) to enable assessment of the short circuit ratio in accordance with ECC.6.3.2.3.4 or ECC.6.3.2.5. Such tests may be carried out at a location other than the **Power Station** site; and

(b) open circuit step response tests (as detailed in Appendix ECP.A.5.2) to demonstrate compliance with ECC.A.6.2.4.1.

ECP.9.6 In the case of a change or **Modification**, not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion:

(a) prior to the **Generator** or **HVDC System Owner** (including OTSUA if applicable) wishing to **Synchronise** its **Plant** and **Apparatus** for the first time following the change or **Modification**, the **Generator** or **HVDC System Owner** will:

(i) submit a **Notification of User's Intention to Synchronise**; and

(ii) submit to **The Company** the items referred to at ECP.9.5.6.

(b) prior to the **Network Operator** or **Non-Embedded Customer** wishing to operate its **Plant** and **Apparatus** for the first time following the change or **Modification**, the **Network Operator** or **Non-Embedded Customer** will;

(i) submit a **Notification of User's intention to operate**; and

(ii) submit to **The Company** the items referred to at ECP.9.5.6

ECP.9.7 Other than **Unresolved Issues** that are subject to tests to be witnessed by **The Company**, the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** must resolve any **Unresolved Issues** prior to the commencement of the tests, unless **The Company** agrees to a later resolution. The **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** must liaise with **The Company** in respect of such resolution. The tests that may be witnessed by **The Company** are specified in ECP.7.2.2.

ECP.9.8 Not less than 28 days, or such shorter period as may be acceptable in **The Company's** reasonable opinion, prior to the **Generator** or **HVDC System Owner** wishing to commence tests listed as **Unresolved Issues** to be witnessed by **The Company**, the **Generator** or **HVDC System Owner** will notify **The Company** that the **Synchronous Power Generating Module(s)**, **CCGT Module(s)**, **Power Park Module(s)**, **OTSUA** if applicable or **HVDC Equipment** as applicable is ready to commence such tests.

ECP.9.9 The items referred to at ECP.7.3 or ECP.7.8 as applicable and listed as **Unresolved Issues** shall be submitted by the **Generator**, **HVDC System Owner**, **Network Operator** or **Embedded Customer** after successful completion of the tests.

ECP.9.10 Where the **Unresolved Issues** have been resolved a **Final Operational Notification** will be issued to the **User**.

ECP.9.11 If a **Final Operational Notification** has not been issued by **The Company** as referred to at ECP.9.5.2 (or where agreed following a **Modification** by the expiry time of the **LON**) then the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** (where licensed in respect of its activities) and **The Company** shall apply to the **Authority** for a derogation.

ECP.10 PROCESSES RELATING TO DEROGATIONS

ECP.10.1 Whilst the **Authority** is considering the application for a derogation, the **Interim Operational Notification** or **Limited Operational Notification** will be extended to remain in force until the **Authority** has notified **The Company** and the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** of its decision. Where the **Generator** or **HVDC System Owner** is not licensed, **The Company** may propose any necessary changes to the **Bilateral Agreement** with such unlicensed **Generator** or **HVDC System Owner**.

ECP.10.2 If the **Authority**:

(a) grants a derogation in respect of the **Plant** and/or **Apparatus**, then **The Company** shall issue **Final Operational Notification** once all other **Unresolved Issues** are resolved; or
(b) decides a derogation is not required in respect of the **Plant** and/or **Apparatus** then **The Company** will reconsider the relevant **Unresolved Issues** and may issue a **Final Operational Notification** once all other Unresolved Issues are resolved; or
(c) decides not to grant any derogation in respect of the **Plant** and/or **Apparatus**, then there will be no **Operational Notification** in place and **The Company** and the **User** shall consider its rights pursuant to the **CUSC**.

ECP.10.3 Where an **Interim Operational Notification** or **Limited Operational Notification** is so conditional upon a derogation and such derogation includes any conditions (including any time limit to such derogation) the **Generator**, **HVDC System Owner**, **Network Operator** or **Non-Embedded Customer** will progress the resolution of any **Unresolved Issues** and / or progress and / or comply with any conditions upon such derogation and the provisions of ECP.6 to ECP.7.11 shall apply and shall be followed.

ECP.11 MANUFACTURER'S DATA & PERFORMANCE REPORT

ECP.11.1.1 Data and performance characteristics in respect of certain **Grid Code** requirements may be registered with **The Company** by **Power Park Unit** manufacturers in respect of specific models of **Power Park Units** by submitting information in the form of a **Manufacturer's Data and Performance Report** to **The Company**.

ECP.11.1.2 A **Generator** planning to construct a new **Power Station** containing the appropriate version of **Power Park Units** in respect of which a **Manufacturer's Data & Performance Report** has been submitted to **The Company** may reference the **Manufacturer's Data & Performance Report** in its submissions to **The Company**. Any **Generator** considering referring to a **Manufacturer's Data & Performance Report** for any aspect of its **Plant** and **Apparatus** may contact **The Company** to discuss the suitability of the relevant **Manufacturer's**

Data & Performance Report to its project to determine if, and to what extent, the data included in the **Manufacturer's Data & Performance Report** contributes towards demonstrating compliance with those aspects of the **Grid Code** applicable to the **Generator**. **The Company** will inform the **Generator** if the reference to the **Manufacturer's Data & Performance Report** is not appropriate or not sufficient for its project.

ECP.11.1.3 The process to be followed by **Power Park Unit** manufacturers submitting a **Manufacturer's Data & Performance Report** is agreed by **The Company**. ECP.11.2 indicates the specific **Grid Code** requirement areas in respect of which a **Manufacturer's Data & Performance Report** may be submitted.

ECP.11.1.4 **The Company** will maintain and publish a register of those **Manufacturer's Data & Performance Reports** which **The Company** has received and accepted as being an accurate representation of the performance of the relevant **Plant** and / or **Apparatus**. Such register will identify the manufacturer, the model(s) of **Power Park Unit(s)** to which the report applies and the provisions of the **Grid Code** in respect of which the report contributes towards the demonstration of compliance. The inclusion of any report in the register does not in any way confirm that any **Power Park Modules** which utilise any **Power Park Unit(s)** covered by a report is or will be compliant with the **Grid Code**.

ECP.11.2 A **Manufacturer's Data & Performance Report** in respect of **Power Park Units** may cover one (or part of one) or more of the following provisions of the **Grid Code**:

(a) Fault Ride Through capability ECC.6.3.15, ECC.6.3.16.

(b) Power Park Module mathematical model PC.A.5.4.2.

ECP.11.3 Reference to a **Manufacturer's Data & Performance Report** in a **EU Code User's** submissions does not by itself constitute compliance with the **Grid Code**.

ECP.11.4 A **Generator** referencing a **Manufacturer's Data & Performance Report** should insert the relevant **Manufacturer's Data & Performance Report** reference in the appropriate place in the **DRC** data submission, **Power Generating Module Document** and / or in the **User Data File Structure**. **The Company** will consider the suitability of a **Manufacturer's Data & Performance Report**:

(a) in place of **DRC** data submissions, a mathematical model suitable for representation of the entire **Power Park Module** as per ECP.A.3.4.4. For the avoidance of doubt only the relevant sections as specified in PC.A.2.5.5.7 apply. Site specific parameters will still need to be submitted by the **Generator**.

(b) Not Used.

(c) to reduce the scope of compliance site tests as follows;

(i) Where there is a **Manufacturer's Data & Performance Report** in respect of a **Power Park Unit** which covers Fault Ride Through, **The Company** may agree that no Fault Ride Through testing is required.

ECP.11.5 It is the responsibility of the **EU Code User** to ensure that the correct reference for the **Manufacturer's Data & Performance Report** is used and the **EU Code User** by using that reference accepts responsibility for the accuracy of the information. The **EU Code User** shall ensure that the manufacturer has kept **The Company** informed of any relevant variations in plant specification since the submission of the relevant **Manufacturer's Data & Performance Report** which could impact on the validity of the information.

ECP.11.6 **The Company** may contact the **Power Park Unit** manufacturer directly to verify the relevance of the use of such **Manufacturer's Data & Performance Report**. If **The Company** believe the use some or all of such **Manufacturer's Data & Performance Report** information is incorrect or the referenced data is inappropriate, then the reference to the **Manufacturer's Data & Performance Report** may be declared invalid by **The Company**. Where, and to the extent possible, the data included in the **Manufacturer's Data & Performance Report** is appropriate, the compliance assessment process will be continued using the data included in the **Manufacturer's Data & Performance Report.**

ECP.11.7 In the case of a co-located site, for example **Electricity Storage Modules** or **Grid Forming Plant** connected within a new or existing **Power Station**, **The Company** will accept demonstration of compliance at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) through a combination of the capabilities of the **Power Generating Modules** and **Electricity Storage Modules** (which could include **Grid Forming Plant**) or **Electricity Storage Modules** and **Generating Units** or **Power Park Modules** (which could include **Grid Forming Plant**). **Generators** or **Grid Forming Plant Owners** should however be aware that for the purposes of compliance, full Grid Code compliance should be demonstrated when, for example, the **Electricity Storage Module** or **Grid Forming Plant** is out of service and the remaining **Power Generating Module** is in service or the **Electricity Storage Module** or **Grid Forming Plant** is in service and the **Power Generating Module** is out of service. Equally, **The Company** will accept **Manufacturer's Data & Performance Reports** for the purposes of proving compliance at co-located sites.

APPENDIX 1
NOT USED

APPENDIX 2

USER SELF CERTIFICATION OF COMPLIANCE (Interim/Final)

Power Station/ HVDC Equipment Station	[Name of Connection Site/site of connection]	**User:**	[Full User name]	**Maximum Capacity (MW) of Plant:**	

This **User Self Certification of Compliance** records the compliance by the **EU Code User** in respect of [NAME] **Power Station/HVDC Equipment Station** with the **Grid Code** and the requirements of the **Bilateral Agreement** and **Construction Agreement** dated [ ] with reference number [ ]. It is completed by the **Power Station/HVDC System Owner** in the case of **Plant** and/or **Apparatus** connected to the **National Electricity Transmission System** and for **Embedded Plant**.

We have recorded our compliance against each requirement of the **Grid Code** which applies to the **Power Station/HVDC Equipment Station**, together with references to supporting evidence and a commentary where this is appropriate, and have provided this to **The Company**. A copy of the **Compliance Statement** is attached.

Supporting evidence, in the form of simulation results, test results, manufacturer's data and other documentation, is attached in the **User Data File Structure**.

The **EU Code User** hereby certifies that, to the best of its knowledge and acting in accordance with **Good Industry Practice**, the **Power Station** is compliant with the **Grid Code** and the **Bilateral Agreement** in all aspects [with the following **Unresolved Issues***] [with the following derogation(s)**]:

Connection Condition	**Requirement**	**Ref:**	**Issue**

Compliance certified by:	Name: [PERSON] Signature: [PERSON] Date:	Title: [PERSON DESIGNATION] Of [User details]

***** Include for Interim **User Self Certification of Compliance** ahead of **Interim Operational Notification**.
****** Include for final **User Self Certification of Compliance** ahead of **Final Operational Notification** where derogation(s) have been granted. If no derogation(s) required delete wording and Table.

APPENDIX 3

SIMULATION STUDIES

ECP.A.3.1 SCOPE

ECP.A.3.1.1 This Appendix sets out the simulation studies required to be submitted to **The Company** to demonstrate compliance with the **European Connection Conditions** unless otherwise agreed with **The Company**. This Appendix should be read in conjunction with ECP.6 with regard to the submission of the reports to **The Company**. Where there is any inconsistency in the technical requirements in respect of which compliance is being demonstrated by simulation in this Appendix and ECC.6.3 and the **Bilateral Agreement**, the provisions of the **Bilateral Agreement** and ECC.6.3 prevail. The studies specified in this Appendix will normally be sufficient to demonstrate compliance. However, **The Company** may agree an alternative set of studies proposed by the **Generator** or **HVDC System Owner** provided **The Company** deem the alternative set of studies sufficient to demonstrate compliance with the **Grid Code** and the **Bilateral Agreement**.

ECP.A.3.1.2 The **Generator** or **HVDC System Owner** shall submit simulation studies in the form of a report to demonstrate compliance. In all cases the simulation studies must utilise models applicable to the **Synchronous Power Generating Module**, **HVDC Equipment** or **Power Park Module** with proposed or actual parameter settings. Reports should be submitted in English with all diagrams and graphs plotted clearly with legible axes and scaling provided to ensure any variations in plotted values is clear. In all cases, the simulation studies must be presented over a sufficient time period to demonstrate compliance with all applicable requirements.

ECP.A.3.1.3 In the case of an **Offshore Power Station** where **OTSDUW Arrangements** apply simulation studies, the **Generator** should include the action of any relevant **OTSUA** where applicable to demonstrate compliance with the **Grid Code** and the **Bilateral Agreement** at the **Interface Point**.

ECP.A.3.1.4 **The Company** will permit relaxation from the requirement ECP.A.3.2 to ECP.A.3.8 where an **Equipment Certificate** for the **Power Generating Module** or **HVDC Equipment** has been provided which details the characteristics from appropriate simulations on a representative installation with the same equipment and settings and the performance of the **Power Generating Module** or **HVDC Equipment** can, in **The Company's** opinion, reasonably represent that of the installed **Power Generating Module** or **HVDC Equipment**.

ECP.A.3.1.5 For **Type B, Type C** and **Type D Power Generating Modules** the relevant **Equipment Certificate** must be supplied in the **Power Generating Module Document** or **Users Data File structure** as applicable. For **HVDC Equipment** the relevant **Equipment Certificates** must be supplied in the **Users Data File structure**.

ECP.A.3.1.6 In the case of a co-located site, for example **Electricity Storage Modules** or **Grid Forming Plant** connected within a new or existing **Power Station**, **The Company** will accept simulation studies to demonstrate compliance at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) through a combination of the capabilities of the **Power Generating Modules** (which could include **Grid Forming Plant**) and **Electricity Storage Modules** or **Electricity Storage Modules** (which could include **Grid Forming Plant**) and **Generating Units** or **Power Park Modules**. **Generators** should however be aware that for the purposes of simulations, full Grid Code compliance should be demonstrated when, for example, the **Electricity Storage Module** or **Grid**

Forming Plant is out of service and the remaining **Power Generating Module** is in service or the **Electricity Storage Module** or **Grid Forming Plant** is in service and the **Power Generating Module** is out of service.

ECP.A.3.2 Power System Stabiliser Tuning

ECP.A.3.2.1 In the case of a **Synchronous Power Generating Module** with an **Excitation System Power System Stabiliser** the **Power System Stabiliser** tuning simulation study report required by ECC.A.6.2.5.6 or required by the **Bilateral Agreement** shall contain:

(i) the **Excitation System** model including the **Power System Stabiliser** with settings as required under the **Planning Code** (PC.A.5.3.2(c)).

(ii) open circuit time series simulation study of the response of the **Excitation System** to a +10% step change from 90% to 100% terminal voltage.

(iii) on load time series dynamic simulation studies of the response of the **Excitation System** with and without the **Power System Stabiliser** to 2% and 10% steps in the reference voltage and a three phase short circuit fault applied to the higher voltage side of the **Synchronous Power Generating Module** transformer for 100ms. The simulation studies should be carried out with the **Synchronous Power Generating Module** operating at full **Active Power** and maximum leading **Reactive Power** import with the fault level at the **Supergrid** HV connection point at minimum or as otherwise agreed with **The Company**. The results should show the **Synchronous Power Generating Module** field voltage, terminal voltage, **Power System Stabiliser** output, **Active Power** and **Reactive Power** output.

(iv) gain and phase Bode diagrams for the open loop frequency domain response of the **Synchronous Power Generating Module Excitation System** with and without the **Power System Stabiliser**. These should be in a suitable format to allow assessment of the phase contribution of the **Power System Stabiliser** and the gain and phase margin of the **Excitation System** with and without the **Power System Stabiliser** in service.

(v) an eigenvalue plot to demonstrate that all modes remain stable when the **Power System Stabiliser** gain is increased by at least a factor of 3 from the designed operating value.

(vi) gain Bode diagram for the closed loop on load frequency domain response of the **Synchronous Power Generating Module Excitation System** with and without the **Power System Stabiliser**. The **Synchronous Power Generating Module** operating at full load and at unity power factor. These diagrams should be in a suitable format to allow comparison of the **Active Power** damping across the frequency range specified in ECC.A.6.2.6.3 with and without the **Power System Stabiliser** in service.

In the case of **a Synchronous Power Generating Module** that may operate as **Demand** (e.g. **Pump Storage**) the on-load simulations (ii) to (vi) should also carried out in both modes of operation.

ECP.A.3.2.2 In the case of **Onshore Non-Synchronous Power Generating Modules**, **Onshore HVDC Equipment** and **Onshore Power Park Modules** and

OTSDUW Plant and **Apparatus** at the **Interface Point** the **Power System Stabiliser** tuning simulation study report required by ECC.A.7.2.4.1 or ECC.A.8.2.4 or required by the **Bilateral Agreement** shall contain:

(i) the **Voltage Control System** model including the **Power System Stabiliser** with settings as required under the **Planning Code** (PC.A.5.4) and **Bilateral Agreement**.

(ii) on load time series dynamic simulation studies of the response of the **Voltage Control System** with and without the **Power System Stabiliser** to 2% and 10% steps in the reference voltage and a three phase short circuit fault applied to the **Grid Entry Point** or the **Interface Point** in the case of **OTSDUW Plant** and **Apparatus** for 100ms. The simulation studies should be carried out operating at full **Active Power** and maximum leading **Reactive Power** import condition with the fault level at the **Supergrid** HV connection point at minimum or as otherwise agreed with **The Company**. The results should show appropriate signals to demonstrate the expected damping performance of the **Power System Stabiliser**.

(iii) any other simulation as specified in the **Bilateral Agreement** or agreed between the **Generator** or **HVDC System Owner** or **Offshore Transmission Licensee** and **The Company**.

ECP.A.3.3 Reactive Capability across the Voltage Range

ECP.A.3.3.1 (a) For a **Synchronous Power Generating Module**, the **Generator** shall supply simulation studies to demonstrate the capability to meet ECC.6.3.2 by submission of a report containing load flow simulation study results to demonstrate:

(i) the maximum lagging **Reactive Power** capability at **Maximum Capacity** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in the case of **OTSUA**) voltage is at 105% of nominal.

(ii) the maximum leading **Reactive Power** capability at **Maximum Capacity** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in the case of **OTSUA**) voltage is at 95% of nominal.

(iii) the maximum lagging **Reactive Power** capability at the **Minimum Stable Operating Level** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in the case of **OTSUA**) voltage is at 105% of nominal.

(iv) the maximum leading **Reactive Power** capability at the **Minimum Stable Operating Level** when the **Grid Entry Point** or **User System Entry Point** if **Embedded** or **Interface Point** (in the case of **OTSUA**) voltage is at 95% of nominal.

(b) For an **OSTUA** with an **Interface Point** above 33kV or **Power Park Modules** with a **Grid Entry Point** or **User System Entry Point** above 33kV, the **Generator** shall demonstrate the capability to meet ECC.6.3.2 by submission of a report containing load flow simulation study results to demonstrate operation at points A, B, E and F in accordance with Figure ECC.A.7.2.2(b) or Figure ECC.A.8.2.2(b). The studies should be run with both the **OTSUA** and **Power Park Module** operating at **Maximum Capacity** and at the **Minimum Stable Operating Level**.

(c) For an **OSTUA** with an **Interface Point** at or below 33kV or **Power Park Modules** with a **Grid Entry Point** or **User System Entry Point** at or below 33kV, a load flow simulation study results to demonstrate operation at points A, B, E and F in accordance with Figure ECC.A.7.2.2(c) or Figure ECC.A.8.2.2(b). The studies should be run with both the **OTSUA** and **Power Park Module** operating at **Maximum Capacity** and at the **Minimum Stable Operating Level**.

(d) For an **HVDC system**, the **HVDC System Owner** shall supply simulation studies to demonstrate the capability to meet ECC.6.3.2 by submission of a report containing load flow simulation study results to demonstrate operation at points A, B, E and F in accordance with Figure ECC.A.7.2.2(b). The studies should be run with both the **HVDC System** operating at the **Maximum HVDC Active Power Transmission Capacity** and **Minimum HVDC Active Power Transmission Capacity**.:

ECP.A.3.3.2 In the case of a **Synchronous Power Generating Module** the terminal voltage in the simulation should be the nominal voltage for the machine.

ECP.A.3.3.3 In the case of a **Power Park Module** where the load flow simulation studies show that the individual **Power Park Units** deviate from nominal voltage to meet the **Reactive Power** requirements then evidence must be provided from factory (e.g. in a **Manufacturer's Data & Performance Report**) or site testing that the **Power Park Unit** is capable of operating continuously at the operating points determined in the load flow simulation studies.

ECP.A.3.4 Voltage Control and Reactive Power Stability

ECP.A.3.4.1 This section applies to **HVDC Equipment**; and **Type C & Type D Power Park Modules** to demonstrate the voltage control capability and **Type B Power Park Modules** to demonstrate the voltage control capability if specified by **The Company**.

In the case of a **Power Station** containing **Power Park Modules** and/or **OTSUA**, the **Generator** shall provide a report to demonstrate the dynamic capability and control stability of the **Power Park Module**. The report shall contain:

(i) a dynamic time series simulation study result of a sufficiently large negative step in **System** voltage to cause a change in **Reactive Power** from zero to the maximum lagging value at **Rated MW**.

(ii) a dynamic time series simulation study result of a sufficiently large positive step in **System** voltage to cause a change in **Reactive Power** from zero to the maximum leading value at **Rated MW**.

(iii) a dynamic time series simulation study result to demonstrate control stability at the lagging **Reactive Power** limit by application of a -2% voltage step while operating within 5% of the lagging **Reactive Power** limit.

(iv) a dynamic time series simulation study result to demonstrate control stability at the leading **Reactive Power** limit by application of a +2% voltage step while operating within 5% of the leading **Reactive Power** limit.

(v) a dynamic time series simulation study result of a sufficiently large negative step in **System** voltage to cause a change in **Reactive Power** from the maximum leading value to the maximum lagging value at **Rated MW**.

The **Generator** should also provide the voltage control study specified in ECP.A.3.7.4.

ECP.A.3.4.2 All the above studies should be completed with a network operating at the voltage applicable for zero **Reactive Power** transfer at the **Grid Entry Point** or **User System Entry Point** if **Embedded** or, in the case of **OTSUA**, **Interface Point** unless stated otherwise. The fault level at the HV connection point should be set at the minimum level as agreed with **The Company**.

ECP.A.3.5 Fault Ride Through and Fast Fault Current Injection

ECP.A.3.5.1 This section applies to **Type B**, **Type C** and **Type D Power Generating Modules** and **HVDC Equipment** to demonstrate the modules **Fault Ride Through** and **Fast Fault Current** injection capability.

The **Generator** or **HVDC System Owner** shall supply time series simulation study results to demonstrate the capability of **Synchronous Power Generating Module**, **HVDC Equipment,** and **Power Park Modules** and **OTSUA** to meet ECC.6.3.15 and ECC.6.3.16 by submission of a report containing:

(i) a time series simulation study of a 140ms three phase short circuit fault with a retained voltage as detailed in table A.3.5.1 below applied at the **Grid Entry Point** or (**User System Entry Point** if **Embedded**) of the **Power Generating Module** or **HVDC Equipment** or **OTSUA**.

(ii) a time series simulation study of 140ms unbalanced short circuit faults with a retained voltage as detailed in table A.3.5.1 on the faulted phase(s) applied at the **Grid Entry Point** or (**User System Entry Point** if **Embedded**) of the **Power Generating Module** or **HVDC Equipment** or **OTSUA.** The unbalanced faults to be simulated are:

1. a phase to phase fault
2. a two phase to earth fault
3. a single phase to earth fault.

Power Generating Module	Retained Voltage
Synchronous Power Generating Module	
Type B	30%
Type C or **Type D** with Grid connection point voltage <110kV	10%
Type D with connection point voltage >110kV	0%
Power Park Module	
Type B or **Type C** or **Type D** with connection point voltage < 110kV	10%
Type D with connection point voltage >110kV	0%
HVDC Equipment	0%

Table A.3.5.1

For a **Power Generating Module** or **HVDC Equipment** or **OTSUA** the simulation study should be completed with the **Power Generating Module** or **HVDC Equipment** or **OTSUA** operating at full **Active Power** and maximum leading **Reactive Power** and the fault level at

the **Supergrid** HV connection point at minimum or as otherwise agreed with **The Company** as detailed in ECC.6.3.15.8.

(iii) time series simulation studies of balanced **Supergrid** voltage dips applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **Synchronous Power Generating Module** or **OTSUA**. The simulation studies should include:

1. 50% retained voltage lasting 0.45 s
2. 70% retained voltage lasting 0.81 s
3. 80% retained voltage lasting 1.00 s
4. 85% retained voltage lasting 180 s.

For a **Synchronous Power Generating Module** or **OTSUA,** the simulation study should be completed with the **Synchronous Power Generating Module** or **OTSUA** operating at full **Active Power** and zero **Reactive Power** output and the fault level at the **Supergrid** HV connection point at minimum or as otherwise agreed with **The Company**. Where the **Synchronous Power Generating Module** is **Embedded**, the minimum **Network Operator's System** impedance to the **Supergrid HV Connection Point** shall be used which may be calculated from the maximum fault level at the **User System Entry Point**.

(iv) time series simulation studies of balanced **Supergrid** voltage dips applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **HVDC Equipment** or **Power Park Module**. The simulation studies should include:

1. 30% retained voltage lasting 0.384 s
2. 50% retained voltage lasting 0.71 s
3. 80% retained voltage lasting 2.5 s
4. 85% retained voltage lasting 180 s.

For **Power Park Modules** the simulation study should be completed with the **HVDC Equipment** or **Power Park Module** operating at full **Active Power** and zero **Reactive Power** output and the fault level at the **Supergrid HV Connection Point** at minimum or as otherwise agreed with **The Company**. Where the **Power Park Module** is **Embedded** the minimum **Network Operator's System** impedance to the **Supergrid HV Connection Point** shall be used which may be calculated from the maximum fault level at the **User System Entry Point**.

(v) time series simulation studies of balanced **Supergrid** voltage dips applied on the nearest point of the **National Electricity Transmission System** operating at **Supergrid** voltage to the **HVDC Equipment**. The simulation studies should include:

1. 30% retained voltage
2. 50% retained voltage
3. 80% retained voltage
4. 85% retained voltage

For **HVDC Equipment** the simulation study should be completed with the **HVDC Equipment** operating at full **Active Power** transfer and zero **Reactive Power** output and the fault level at the **Supergrid HV** connection point at minimum or as otherwise agreed with **The Company**. Where the **HVDC Equipment** is **Embedded** the minimum **Network Operator's System** impedance to the **Supergrid HV**

connection point shall be used which may be calculated from the maximum fault level at the **User System Entry Point**.

For **HVDC Equipment** the duration of each voltage dip 1 to 4 above should demonstrate the requirements of the **Bilateral Agreement**.

ECP.A.3.5.2 Not Used.

ECP.A.3.5.3 In the case of a **Power Park Module** the studies detailed in ECP.A.3.5.1 should be repeated to demonstrate compliance during foreseeable running arrangements resulting from outages of major **Plant** and **Apparatus** (for example outage of the main export cable in the case of **OTSDUW** or module step up transformer where alternative export connections are possible). For these conditions, the **Power Park Module Active Power** output may be reduced to levels appropriate to the planned operating regime proposed by the **Generator**. The **Generator** shall consult **The Company** on alternative running arrangements and agree with **The Company** the running arrangements that will be studied prior to the **Generator** undertaking the studies. For the avoidance of doubt, compliance of a **Power Park Module** with **Fault Ride Through** requirements remains the responsibility of the **Generator** under all operating conditions.

ECP.A.3.5.4 In the case of a **Power Park Module** with a **Registered Capacity** greater or equal to 100MW, the studies detailed in ECP.A.3.5.1 should be repeated with 50% of the **Power Park Units Synchronised** to the **Total System**. In the case of a **Power Station** containing multiple **Power Park Modules** or multiple **Offshore Power Park Modules** connected to an **Offshore Transmission System** or **OTSDUW** the study should include all **Power Park Modules** with 50% of the **Power Park Units Synchronised** to the **Total System**.

ECP.A.3.5.5 In the case of **HVDC Equipment** the studies detailed in ECP.A.3.5.1 should be repeated to demonstrate compliance during foreseeable running arrangements resulting from outages of major **Plant** and **Apparatus** (for example outage of an HVDC cable or convertor. For these conditions, the **HVDC Equipment Active Power** transfer may be reduced to levels appropriate to the planned operating regime. The **Generator** or **HVDC System Owner** shall consult **The Company** on alternative running arrangements and agree with **The Company** the running arrangements that will be studied prior to the **Generator** or **HVDC System Owner** undertaking the studies. For the avoidance of doubt, compliance of **HVDC Equipment** with **Fault Ride Through** requirements remains the responsibility of the **Generator** or **HVDC System Owner** under all operating conditions.

ECP.A.3.6 **Limited Frequency Sensitive Mode** – Over Frequency (**LFSM-O**)

ECP.A.3.6.1 This section applies to **Type B**, **Type C and Type D Power Generating Modules**, **HVDC Equipment** to demonstrate the capability to modulate **Active Power** at high frequency as required by ECC6.3.7.3.5(ii).

ECP.A.3.6.2 The simulation study should comprise of a **Power Generating Module** or **HVDC Equipment** connected to the total **System** with a local load shown as "X" in figure ECP.A.3.6.1. The load "X" is in addition to any auxiliary load of the **Power Station** connected directly to the **Power Generating Module** or **HVDC Equipment** and represents a small portion of the **System** to which the **Power Generating Module** or **HVDC Equipment** is attached. The value of "X" should be the minimum for which the **Power Generating Module** or **HVDC Equipment** can control the power island **Frequency** to less than 52 Hz

consistent with ECC.6.3.7.3.5(ii). Where transient excursions above 52 Hz occur the **Generator** or **HVDC Equipment Owner** should ensure that the duration above 52 Hz is less than any high **Frequency** protection system applied to the **Power Generating Module** or **HVDC Equipment.**

ECP.A.3.6.3 For **HVDC Equipment** and **Power Park Modules** consisting of units connected wholly by power electronic devices the simulation methodology may be modified by the addition of a **Synchronous Power Generating Module** (G2) connected as indicated in Figure ECP.A.3.6.2. This additional **Synchronous Power Generating Module** should have an inertia constant of 3.5 MWs/MVA, be initially operating at rated power output and unity **Power Factor**. The mechanical power of the **Synchronous Power Generating Module** (G2) should remain constant throughout the simulation.

ECP.A.3.6.4 At the start of the simulation study the **Power Generating Module** or **HVDC Equipment** will be operating maximum **Active Power** output. The **Power Generating Module** or **HVDC Equipment** will then be islanded from the **Total System** but still supplying load "X" by the opening of a breaker, which is not the **Power Generating Module** or **HVDC Equipment** connection circuit breaker (the governor should therefore, not receive any signals that the breaker has opened other than the reduction in load and subsequent increase in speed). A schematic arrangement of the simulation study is illustrated by Figure ECP.A.3.6.1.

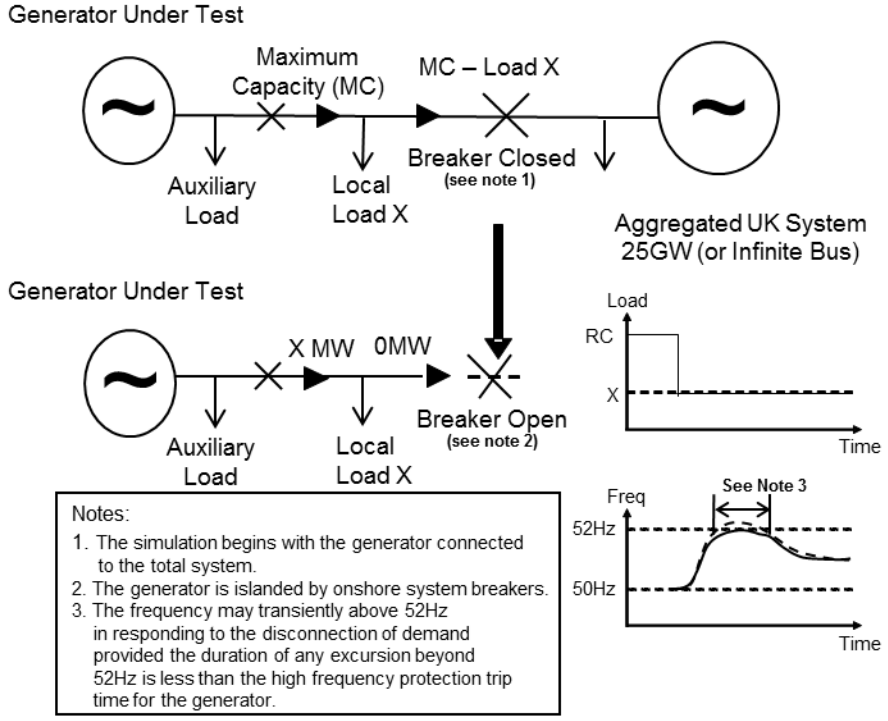

Figure ECP.A.3.6.1 – Diagram of Load Rejection Study

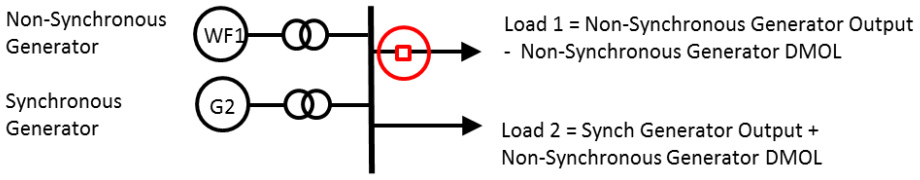

Figure ECP.A.3.6.2 – Addition of Generator G2 if applicable

ECP.A.3.6.5 A simulation study shall be performed for **Type B**, **C** & **D Power Generating Modules** in **Limited Frequency Sensitive Mode** (LFSM) and **Frequency Sensitive Mode** (FSM) for **Type C** & **D Power Generating Modules**. The simulation study results should indicate **Active Power** and **Frequency**.

ECP.A.3.6.6 To allow validation of the model used to simulate load rejection in accordance with ECC.6.3.7.3.5 as described, a further simulation study is required to represent the largest positive **Frequency** injection step or fast ramp (BC1 and BC3 of Figure 2) that will be applied as a test as described in ECP.A.5.8 and ECP.A.6.6.

ECP.A.3.6.7 The above suite of simulation studies equally apply for **Electricity Storage Modules** when in an export mode of operation and should also demonstrate transition to an import mode of operation in line with the stated **Droop** characteristics of the **Electricity Storage Module** when in an import mode of operation. Three simulation studies need to be carried out:

i) The **Electricity Storage Module** should initially be operating at zero **Active Power** output and have sufficient capability so that it is possible to operate the **Electricity Storage Module** at **Maximum Capacity** and **Maximum Import Power**. The above suite of simulation studies as detailed in ECP.A.3.6.1 – ECP.A.3.6.6 should then be conducted to ensure the **Electricity Storage Modules Active Power** output achieves its **Maximum Import Power** in line with the **Droop** and response time settings as declared by the **Generator**.

ii) The **Electricity Storage Module** should be operating at 50% of its **Maximum Import Power** and have sufficient capability so that it is possible to operate the **Electricity Storage Module** at **Maximum Capacity** and **Maximum Import Power**. The above suite of simulation studies should then be conducted to ensure the **Electricity Storage Modules Active Power** output achieves its **Maximum Import Power** in line with the **Droop** and response time settings as declared by the **Generator**.

iii) The **Electricity Storage Module** should be operating at its **Maximum Import Power**. The above suite of simulation studies should then be conducted to ensure the **Electricity Storage Modules Active Power** remains at its **Maximum Import Power**, unless it is in **Frequency Sensitive Mode** and the tested **Frequency** falls below 50.5 Hz.

Limited Frequency Sensitive Mode – Under Frequency (**LFSM-U**)

ECP.A.3.6.7 This section applies to:
Synchronous Power Generating Modules, **Type C & D;** or,
HVDC Equipment; or,
Power Park Modules, **Type C & D** to demonstrate the modules capability to modulate Active Power at low frequency.

ECP.A.3.6.8 To demonstrate the **LFSM-U** low **Frequency** control when operating in **Limited Frequency Sensitive Mode** the **Generator** or **HVDC System Owner** shall submit a simulation study representing the response of the **Power Generating Module** or **HVDC Equipment** operating at 80% of **Maximum Capacity**. The simulation study event shall be equivalent to:

(i) a sufficiently large reduction in the measured **System Frequency** ramped over 10 s to cause an increase in **Active Power** output to the **Maximum Capacity** followed by

(ii) 60 s of steady state with the measured **System Frequency** depressed to the same level as in ECP.A.3.6.8.1 (i) as illustrated in Figure ECP.A.3.6.1 below.

(iii) then increase of the measured **System Frequency** ramped over 10 s to cause a reduction in **Active Power** output back to the original **Active Power** level followed by at least 60 s of steady output.

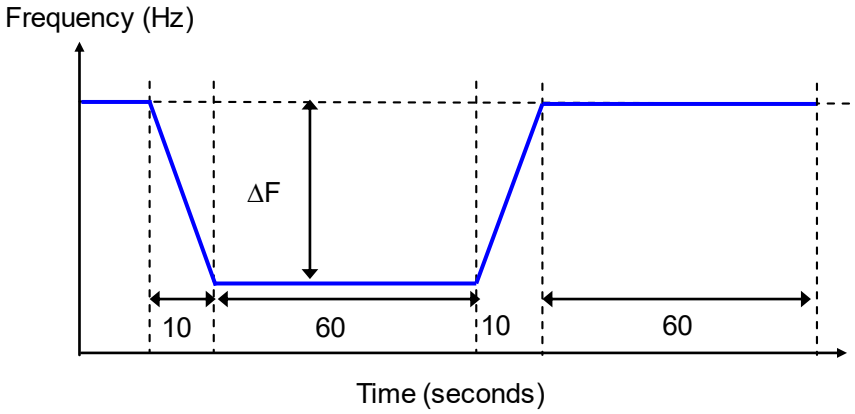

Figure ECP.A.3.6.1

Operation of **Electricity Storage Modules** in an import mode of operation during low **System Frequencies**

ECP.A.3.6.9 For **Generators** in respect of **Electricity Storage Modules** who are unable to deload from an import mode of operation to an export mode of operation during low **System Frequencies** as defined in ECC.6.3.7.2.3 and have agreed with **The Company** that they can comply with the requirements of OC6.6.6 as provided for in ECC.6.3.7.2.3.1, the simulation studies as detailed in ECP.A.3.6.10 shall apply.

For **Generators** in respect of **Electricity Storage Modules** who can satisfy the requirements of ECC.6.3.7.2.3 (except ECC.6.3.7.2.3.1 to which OC6.6.6 refers) the simulation studies as detailed in ECP.A.3.6.11 shall apply.

ECP.A.3.6.10 The **Generator** shall submit a simulation study representing the response of the **Electricity Storage Module** operating at **Maximum Import Power** followed by a simulated fall in **System Frequency**. The simulation study shall demonstrate that:-

(i) For a sufficiently large reduction in the simulated **System Frequency** ramped over 10 s over the **Frequency** range 49.5 Hz to 48.85 Hz, the simulation shall be sufficient to demonstrate the tripping of each **Demand** block (as specified in the **Bilateral Agreement**).

(ii) The simulation study shall demonstrate the tripping of each **Demand** block at the specified **Frequency** and time of disconnection following the **Frequency** excursion at the specified setting. The simulation study results shall be assessed against the settings in the **Bilateral Agreement**.

ECP.A.3.6.11 For **Generators** in respect of **Electricity Storage Modules** who can satisfy the **Droop** requirements of ECC.6.3.7.2.3, the **Generator** shall submit simulation studies representing the response of the **Electricity Storage Module**. The simulation studies shall comprise:-

(i) Initial conditions where the **Electricity Storage Module** shall be operating at its **Maximum Import Power** with the **Electricity Storage Module** in **Limited Frequency Sensitive Mode**.

(ii) A simulation signal shall be applied which ramps the **System Frequency** from 50 Hz to 49.0 Hz at a rate of $2Hzs^{-1}$. The **System Frequency** shall be held at 49.0 Hz for 60 s and the then ramped back to 50 Hz in 10 s as shown in Figure ECP.3.6.4.

(iii) The simulated results should show a reduction in **Active Power** in accordance with the requirement of ECC.6.3.7.2.3.1. When the test injection signal is held at 49.0 Hz, the **Active Power** output of the **Electricity Storage Module** should achieve a steady state operating point in no more than 10 s and this should be maintained whilst the test frequency signal is held at 49.0 Hz.

(iv) The above simulation described (i) – (iii) above shall be repeated but the minimum test frequency applied shall be to 48.8 Hz as shown in Figure ECP.3.6.5.

(v) The above tests shall be repeated when the **Electricity Storage Module** is operating at 40% of its **Maximum Import Power**.

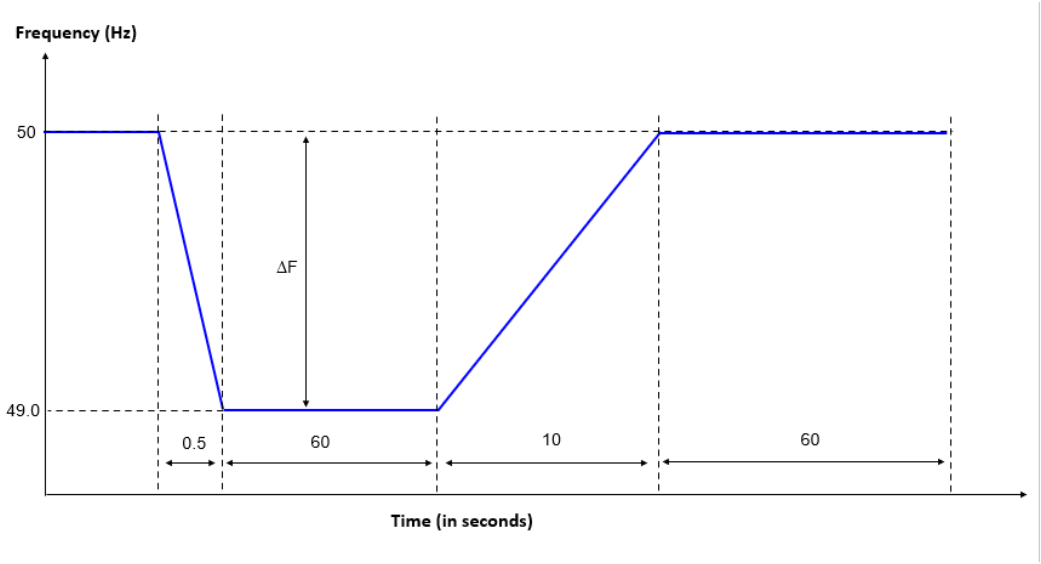

Figure ECP.A.3.6.4

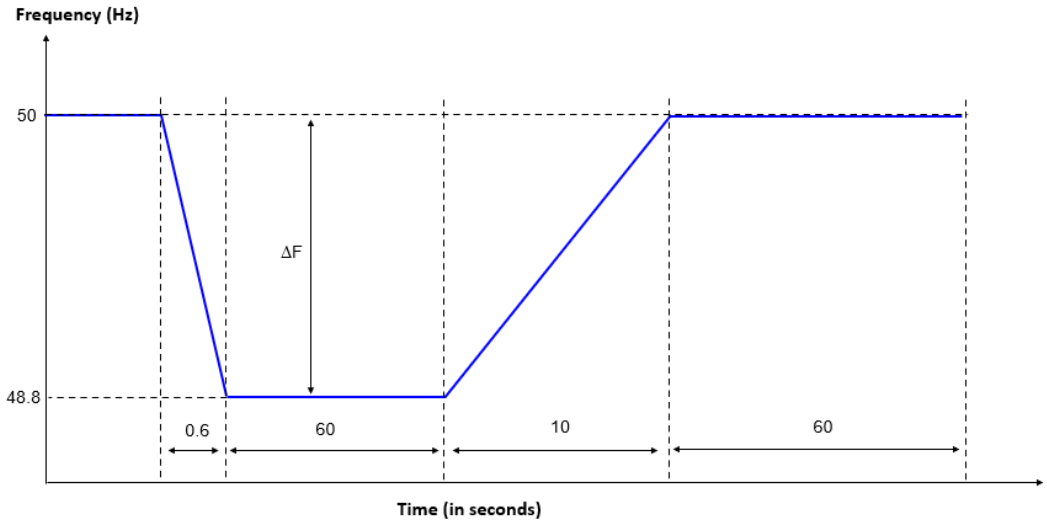

Figure ECP.A.3.6.5

ECP.A.3.6.12 In addition to the requirements of ECP.A.3.6.11 a set of simulation studies shall be submitted to demonstrate the performance of the **Electricity Storage Module** during extreme **Frequency** conditions. The simulated studies shall comprise:-

(i) Initial conditions where the **Electricity Storage Module** shall be operating at its **Maximum Import Power** with the **Electricity Storage Module** in **Limited Frequency Sensitive Mode**.

(ii) A simulation signal which ramps the **System Frequency** from 50 Hz to 48.3 Hz over 20 s. The **System Frequency** shall be held at 48.3 Hz for 60 s and the then ramped back to 50 Hz in 20 s as shown in Figure ECP.3.6.6.

(iii) The simulation shall demonstrate the ability of the **Electricity Storage Module** to reach its **Maximum Capacity** (or otherwise) in accordance with the requirements of ECC.6.3.7.2.3. When the test injection signal is held at 48.3 Hz, the **Active Power** output of the **Electricity Storage Module** should achieve a steady state operating point in no more than 10 s and this should be maintained whilst the test frequency signal is held at 48.3 Hz.

(iv) An applied simulated signal which ramps from 48.3 Hz to 50 Hz over a 20 s period. The **Electricity Storage Module** should return back to its **Maximum Import Power** at 49.5 Hz in line with the performance requirements of ECC.6.3.7.2.3.

The above test shall be repeated with the **Electricity Storage Module** is operating at 50% of its **Maximum Import Power**.

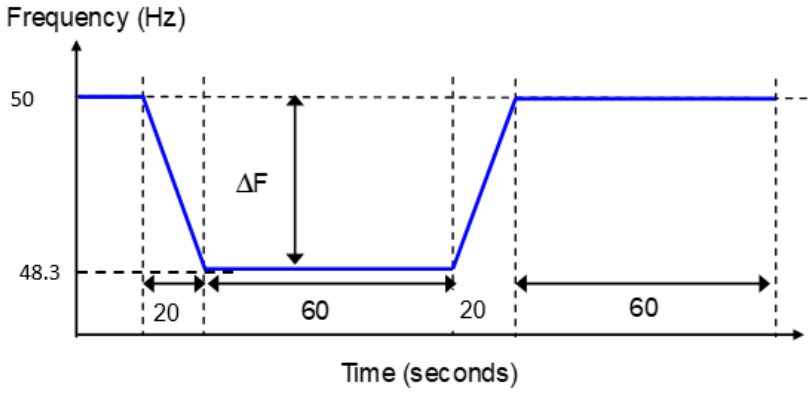

Figure ECP.A.3.6.6

ECP.A.3.7 Voltage and **Frequency** Controller Model Verification and Validation

ECP.A.3.7.1 For **Type C** and **Type D Synchronous Power Generating Modules**, **HVDC Equipment**, **OTSDUW Plant and Apparatus** or **Power Park Modules**, the **Generator** (including those undertaking **OTSDUW**) or **HVDC System Owner** shall provide simulation studies to verify that the proposed controller models supplied to **The Company** under the **Planning Code** are fit for purpose. These simulation study results shall be provided in the timescales stated in the **Planning Code**.

ECP.A.3.7.2 To demonstrate the **Frequency** control or governor/load controller/plant model the **Generator** or **HVDC System Owner** shall submit a simulation study representing the response of the **Synchronous Power Generating Module**, **HVDC Equipment** or **Power Park Module** operating at 80% of **Maximum Capacity**. The simulation study event shall be equivalent to:

(i) a ramped reduction in the measured **System Frequency** of 0.5 Hz in 10 s followed by
(ii) 20 s of steady state with the measured **System Frequency** depressed by 0.5 Hz followed by
(iii) a ramped increase in measured **System Frequency** of 0.3 Hz over 30 s followed by
(iv) 60 s of steady state with the measured **System Frequency** depressed by 0.2 Hz as illustrated in Figure ECP.A.3.7.2 below.

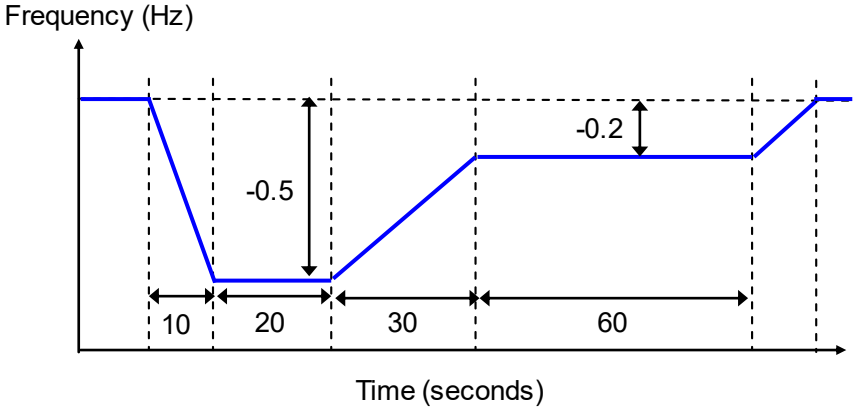

Figure ECP.A.3.7.2

The simulation study shall show **Active Power** output (MW) and the equivalent of **Frequency** injected.

ECP.A.3.7.3 To demonstrate the **Excitation System** model the **Generator** shall submit simulation studies representing the response of the **Synchronous Power Generating Module** as follows:

(i) operating open circuit at rated terminal voltage and subjected to a 10% step increase in terminal voltage reference from 90% to 100%.
(ii) operating at **Rated MW**, nominal terminal voltage and unity **Power Factor** subjected to a 2% step increase in the voltage reference. Where a **Power System Stabiliser** is included within the **Excitation System** this shall be in service.

The simulation study shall show the **Synchronous Power Generating Module** terminal voltage, field voltage, **Active Power**, **Reactive Power** and **Power System Stabiliser** output signal as appropriate.

ECP.A.3.7.4 To demonstrate the Voltage Controller model the **Generator** (including those undertaking **OTSDUW**) or **HVDC System Owner** shall submit a simulation study representing the response of the **HVDC Equipment**, **OTSDUW Plant and Apparatus** or **Power Park Module** operating at **Rated MW** and unity **Power Factor** at the connection point to a 2% step increase in the voltage reference. The simulation study shall show the terminal voltage, **Active Power**, **Reactive Power** and **Power System Stabiliser** output signal as appropriate.

ECP.A.3.7.5 To validate that the excitation and voltage control models submitted under the **Planning Code** are a reasonable representation of the dynamic behaviour of the **Synchronous Power Generating Module**, **OTSDUW Plant and Apparatus**, **HVDC Equipment** or **Power Park Module** as built, the **Generator** or **HVDC System Owner** shall repeat the simulation studies outlined above but using the operating conditions of the equivalent tests. The simulation study results shall be displayed overlaid on the actual test results.

ECP.A.3.7.6 For **Type C** and **Type D Synchronous Power Generating Modules** or **HVDC Equipment** to validate that the governor/load controller/plant or **Frequency** control models submitted under the **Planning Code** is a reasonable representation of the dynamic behaviour of the **Synchronous Power Generating Module** or **HVDC Equipment Station** as built, the **Generator** or **HVDC System Owner** shall repeat the simulation studies outlined above but using the operating conditions of the equivalent tests. The simulation study results shall be displayed overlaid on the actual test results.

ECP.A.3.8 Sub-synchronous Resonance control and Power Oscillation Damping control for **HVDC System.**

ECP.A.3.8.1 To demonstrate the compliance of the sub-synchronous control capability with ECC.6.3.17.1) and the terms of the **Bilateral Agreement**, the **HVDC System Owner** shall submit a simulation study report.

ECP.A.3.8.2 Where power oscillation damping control function is specified on a **HVDC Equipment** the **HVDC System Owner** shall submit a simulation study report to demonstrate the compliance with ECC.6.3.17.2 and the terms of the **Bilateral Agreement**.

ECP.A.3.8.3 The simulation studies should utilise the **HVDC Equipment** control system models including the settings as required under the **Planning Code**

(PC.A.5.3.2). The network conditions for the above simulation studies should be discussed with **The Company** prior to commencing any simulation studies.

ECP.A.3.9 **Grid Forming Plant** verification and validation

ECP.A.3.9.1 This section applies to **Users** and **Non-CUSC Parties** who own and operate **GBGF-I Plant** to demonstrate the ability of their **Grid Forming Plant** to satisfy the requirements of ECC.6.3.19. For the avoidance of doubt these requirements are not necessary from owner and operators of **GBGF-S Plant**.

ECP.A.3.9.2 For initial approval **Users** and **Non-CUSC Parties** are required to submit the following data of their **Grid Forming Plant** to **The Company**: -

a) The representation of their **Grid Forming Plant** in a format either the same as Figure PC.A.5.8.1 of PC.A.5.8.1 or in an equivalent format.

b) The data associated with their **Grid Forming Plant** as required in PC.A.5.8.1

c) A linearised model and parameters of the **Grid Forming Plant** in the frequency domain in the same format as required in PC.A.5.8.1 or equivalent.

d) A **Network Frequency Perturbation Plot** with a **Nichols Chart** demonstrating the equivalent **Damping Factor**.

e) For the items a) to d) the **User** or **Non-CUSC Party** can submit the data in any equivalent format as agreed with **The Company**.

ECP.A.3.9.3 For **GBGF-I**, the **User** or **Non-CUSC Party** may be required to supply other versions of the **Network Frequency Perturbation Plot** for different input and output signals as defined by **The Company**.

ECP.A.3.9.4 For final approval, **Users** and **Non-CUSC Parties** are required to demonstrate that the **GBGF_I** model is capable of supplying **Active ROCOF Response Power**, and **Active Phase Jump Power**, and submit a full 3 phase simulation study in the time domain representing the response of the **Grid Forming Plant** over a range of operating conditions. The simulation study shall comprise of the following stages.

i) A simulation study to the equivalent shown in Figure ECP.A.3.9.4.

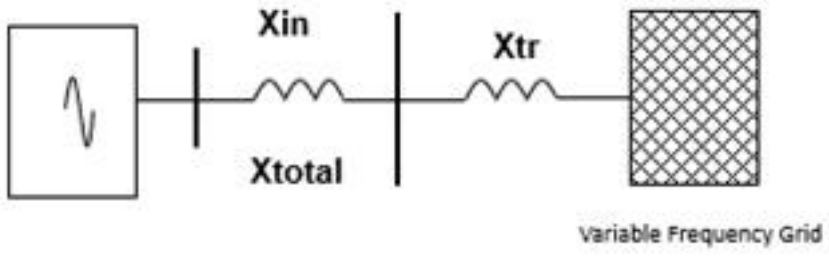

Figure ECP.A.3.9.4

ii) The first simulation test is to demonstrate that the **GBGF-I** model is capable of supplying **Active ROCOF Response Power** to the **Total System** as a result of a **System Frequency** change. In this simulation, with the **Grid Forming Plant** initially running at **Registered Capacity** or **Maximum Capacity**, the Grid **System Frequency** is increased from 50 Hz to 51 Hz at a rate of 1 Hzs^{-1} with measurements

of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in (ms). The simulation is required to assess correct operation of the **Grid Forming Plant** without saturating. Repeat for 50 Hz to 49 Hz at 1Hzs^{-1}.

iii) The second simulation test is to demonstrate the **GBGF-I's** ability to supply **Active ROCOF Response Power** and asses its withstand capability under extreme **System Frequencies**. The Grid **System Frequency** is increased from 50 Hz to 52 Hz at a rate of 1 Hzs^{-1} with measurements of the **Active ROCOF Response Power**, **System Frequency** and time in (ms). This is repeated when the Grid **System Frequency** is increased from 50 Hz to 52 Hz at a rate of 2 Hzs^{-1} with measurements of the **Active ROCOF Response Power**, **System Frequency** and time in (ms). Repeat for 50 Hz to 48 Hz at 1 Hzs^{-1} and 50 Hz to 48 Hz at 2 Hzs^{-1}.

iv) The third simulation is to demonstrate the **Grid Forming Plant's** ability to supply **Active ROCOF Response Power** over the full **System Frequency** range.

(a) With the **System Frequency** set to 50 Hz, the **Grid Forming Plant** should be initially running at 75% **Maximum Capacity** or 75% **Registered Capacity**, zero MVAr output and both **Limited Frequency Sensitive Mode** and **Frequency Sensitive Mode** disabled.

(b) The **System Frequency** is then increased from 50 Hz to 52 Hz at a rate of 1 Hzs^{-1} over a 2 s period. Allow conditions to stabilise for 5 s and then decrease the **System Frequency** from 52 Hz to 47 Hz at a rate of 1 Hzs^{-1} over a 5 s period. Allow conditions to stabilise.

(c) Record results of phase based **Active ROCOF Response Power**, **Reactive Power**, voltage and **System Frequency**.

(d) The simulation now needs to be re-run in the opposite direction. The same initial conditions should be applied as per ECP.A.3.9.2iv) (a).

(e) The **System Frequency** is then decreased from 50 Hz to 47 Hz at a rate of 1 Hzs^{-1} over a 3 s period. Allow conditions to stabilise for 5 s and then increase the **System Frequency** from 47 Hz to 52 Hz at a rate of 1Hzs^{-1} over a 5 s period. Allow conditions to stabilise.

(f) Record results of **Active ROCOF Response Power**, **Reactive Power**, voltage and **System Frequency**.

(g) The simulation is required to ensure the **Grid Forming Plant** can deliver **Active ROCOF Response Power** without going into saturation and that a behaviour that is equivalent to pole slipping does not occur.

v) The fourth simulation is to demonstrate the **Grid Forming Plant's** ability to supply **Active Phase Jump Power** under normal operation.

(a) With the **System Frequency** set to 50 Hz, the **Grid Forming Plant** should initially be running at **Maximum Capacity** or **Registered Capacity** or a suitable loading point to demonstrate **Grid Forming Capability** as agreed with **The Company**, zero MVAr output and all control actions (e.g. **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) disabled.

(b) Apply a positive phase jump of the **Phase Jump Angle Limit** value at the **Grid Entry Point** or **User System Entry Point**.

(c) Record traces of **Active Power**, **Reactive Power**, voltage, current and **System Frequency** for a period of 10 s after the step change in phase has been applied. Repeat with a negative phase jump.

vi) The fifth simulation is to demonstrate the **Grid Forming Plant's** ability to supply **Active Phase Jump Power** under extreme conditions.

(a) With the **System Frequency** set to 50 Hz, the **Grid Forming Plant** should be initially running at its **Minimum Stable Operating Level** or **Minimum Stable Generation**, zero MVAr output and all control actions (e.g. **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) disabled.

(b) Apply a phase jump equivalent to the positive **Phase Jump Angle Withstand** value at the **Grid**.

(c) Record traces of **Active Power**, **Reactive Power**, voltage, current and **System Frequency** for a period of 10 s after the step change in phase has been applied. Repeat with a negative phase jump.

(d) Repeat steps (a), (b) and (c) of ECP.A.3.9.4(vi) but on this occasion apply a phase jump equivalent to the positive **Phase Jump Angle Limit** at the Grid.

vii) The sixth simulation is to demonstrate the **Grid Forming Plant's** ability to supply **Fault Ride Through** and **GBGF Fast Fault Current Injection** during a faulted condition

(a) With the **System Frequency** set to 50 Hz, the **Grid Forming Plant** should be initially running at its **Maximum Capacity** or **Registered Capacity**, zero MVAr output and all control actions (e.g., **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode**, **GBGF Fast Fault Current Injection**, **Fault Ride Through** and voltage control other than current limiters) disabled.

(b) Apply a solid three phase short circuit fault at the **Grid Entry Point** or **User System Entry Point** for 140 ms.

(c) Record traces of **Active Power**, **Reactive Power**, voltage, current and **System Frequency** for a period of 10 s after the fault has been applied. The **GBGF-I's** current limit should be observed to operate.

(d) Repeat steps (a) to (c) but on this occasion with **Fault Ride Through**, **GBGF Fast Fault Current Injection**, **Limited Frequency Sensitive Mode** and voltage control switched into service.

(e) Record traces of **Active Power**, **Reactive Power**, voltage, current and **System Frequency** for a period of 10 s after the fault has been applied and confirm correct operation.

ECP.A.3.9.5 To demonstrate the **GBGF-I** model is capable of supplying **Active ROCOF Response Power** and **Active Phase Jump Power**, under extreme conditions the **Grid Forming Plant Owner** shall submit a simulation study representing the response of the **Grid Forming Plant**. To demonstrate the performance of the **Grid Forming Plant** under these conditions, the simulation study shall represent the following scenario.

i) The **User** or **Non-CUSC Party** in respect of **GBGF-I** should supply a simulation study to **The Company** equivalent to Figure ECP.A.3.9.5.

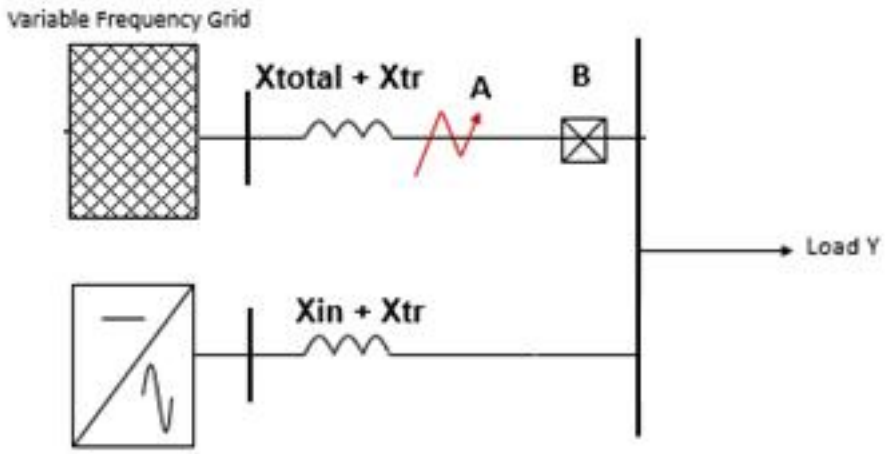

Figure ECP.A.3.9.5

ii) In this simulation (as shown in Figure ECP.A.3.9.5) the parameters of the variable frequency Grid shall be supplied by **The Company**. The Load Y is also defined by **The Company.**

iii) With the system running in steady state the **GBGF-I** and the variable frequency AC Grid should each be running at load Y/2 with the **System Frequency** of the test network being 50 Hz. All control actions (e.g., **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) should be disabled.

iv) With the system in steady state, apply a solid (zero impedance) three phase short circuit fault at point A of Figure ECP.A.3.9.3 and then open circuit breaker B, 140 ms after the fault has been applied.

v) Record traces of **Active Power**, **Reactive Power**, voltage and **System Frequency** and record for a period of time after fault inception after allowing conditions to stabilise.

ECP.A.3.9.6 To demonstrate the **Grid Forming Plant** model is capable of contributing to **Active Damping Power**, the **GBGF-I** owner is required to supply a simulation study by injecting a **Test Signal** in the time domain into the model of the **GBGF-I**.

The **GBGF-I** model should take the equivalent form shown in either Figure ECP.A.3.9.6(a) or Figure ECP.A.3.9.6(b) as applicable. Each **User** or **Non-CUSC Party** can use their own design, that may be very different to Figures ECP.A.3.9.6(a) or ECP.A.3.9.6(b) but should contain all relevant functions. In either case the following tests should be completed, and results supplied to verify the following criteria:

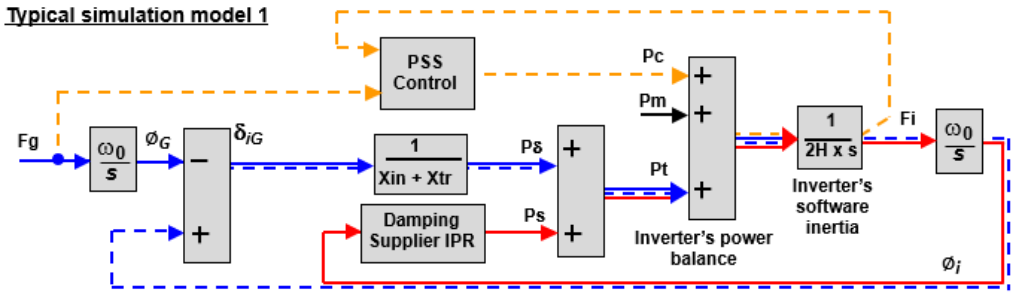

Figure ECP.A.3.9.6(a)

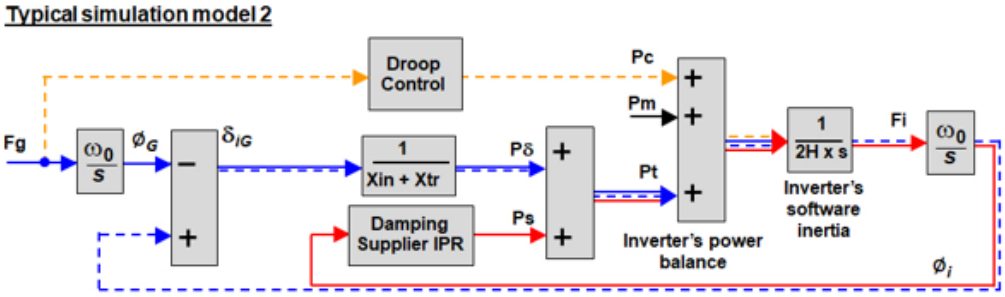

Figure ECP.A.3.9.6(b)

i) Demonstration of **Damping** by injecting a **Test Signal** in the time domain at the **Grid Oscillation Value** and frequency into the model of the **GBGF-I** . An acceptable performance will be judged when the result matches the **NFP Plot** declared by the **Grid Forming Plant Owner** as submitted in PC.A.5.8.1(i).

ii) Test i) is repeated with variations in the frequency of the **Test Signal**. An acceptable performance will be judged when the result matches the **NFP Plot** declared by the **Grid Forming Plant Owner** as submitted in PC.A.5.8.1(i).

iii) Demonstration of phase based **Active Control Output Power** (or Pc) by injecting a **Test Signal** into the **Grid Forming Plant** controller to demonstrate that the **Active Control Based Power** output is supplied below the 5 Hz bandwidth limit. An acceptable performance will be judged where the overshoot and decay matches the **Damping Factor** declared by the **Grid Forming Plant Owner** as submitted in PC.A.5.8.1 in addition to assessment against the requirements of CC.A.6.2.6.1 or ECC.A.6.2.6.1 or CC.A.7.2.2.5 or ECC.A.7.2.5.2 as applicable.

APPENDIX 4

ONSITE SIGNAL PROVISION FOR WITNESSING TESTS

ECP.A.4.1 During any tests witnessed on-site by **The Company**, the following signals shall be provided to **The Company** by the **EU Generator**, **EU Generator** undertaking **OTSDUW** or **HVDC System Owner** in accordance with ECC.6.6.3.

ECP.A.4.2 **Synchronous Power Generating Modules**

ECP.A.4.2(a) All Tests	• MW - **Active Power** at **Synchronous Generating Unit** terminals
ECP.A.4.2(b) Reactive & **Excitation System**	• MVAr - **Reactive Power** at terminals • Vt - **Synchronous Generating Unit** terminal voltage • Efd- **Synchronous Generating Unit** field voltage and/or main exciter field voltage • Ifd – **Synchronous Generating Unit** Field current (where possible) • **Power System Stabiliser** output, where applicable. • Noise – Injected noise signal (where applicable and possible)
ECP.A.4.2(c) Governor System & **Frequency Response**	• Fsys - **System Frequency** • Finj - Injected Speed Setpoint • Logic - Stop / Start Logic Signal
	For Gas Turbines: • GT Fuel Demand • GT Fuel Valve Position • GT Inlet Guide Vane Position • GT Exhaust Gas Temperature
	For Steam Turbines at >= 1 Hz: • Pressure before Turbine Governor Valves • Turbine Governor Valve Positions • Governor Oil Pressure* • Boiler Pressure Set Point * • Superheater Outlet Pressure * • Pressure after Turbine Governor Valves* • Boiler Firing Demand* *Where applicable (typically not in **CCGT module**)
	For Hydro Plant: • Speed Governor Demand Signal • Actuator Output Signal • Guide Vane / Needle Valve Position
ECP.A.4.2(d) Compliance with ECC.6.3.3	• Fsys - **System Frequency** • Finj - Injected Speed Setpoint • Appropriate control system parameters as agreed with **The Company** (See ECP.A.5.9)
ECP.A.4.2(e) Real Time on site or Down-loadable	• MW - **Synchronous Power Generating Module Active Power** at the **Grid Entry Point** or (**User System Entry Point** if **Embedded**). • MVAr - **Synchronous Power Generating Module Reactive Power** at the **Grid Entry Point** or (**User System Entry Point** if

	Embedded). • Line-line Voltage (kV) at the **Grid Entry Point** or (**User System Entry Point** if **Embedded**).

ECP.A.4.3 **Power Park Modules, OTSDUA** and **HVDC Equipment**

	Each **Power Park Module** and **HVDC Equipment** at **Grid Entry Point** or **User System Entry Point**
ECP.A.4.3.1(a) Real Time on site.	• Total **Active Power** (MW) • Total **Reactive Power** (MVAr) • Line-line Voltage (kV) • **System Frequency** (Hz)
ECP.A.4.3.1(b) Real Time on site or Down-loadable	• Injected frequency signal (Hz) or test logic signal (Boolean) when appropriate • Injected voltage signal (per unit voltage) or test logic signal (Boolean) when appropriate • In the case of an **Onshore Power Park Module** the **Onshore Power Park Module** site voltage (MV) (kV) • **Power System Stabiliser** output, where appropriate • In the case of a **Power Park Module** or **HVDC Equipment** where the **Reactive Power** is provided by more than one **Reactive Power** source, the individual **Reactive Power** contributions from each source, as agreed with **The Company.** • In the case of **HVDC Equipment** appropriate control system parameters as agreed with **The Company** (See ECP.A.7) • In the case of an **Offshore Power Park Module** the Total **Active Power** (MW) and the Total **Reactive Power** (MVAr) at the offshore **Grid Entry Point**
ECP.A.4.3.1(c) Real Time on site or Down-loadable	• Available power for **Power Park Module** (MW) • Power source speed for **Power Park Module** (e.g. wind speed) (m/s) when appropriate • Power source direction for **Power Park Module** (degrees) when appropriate See ECP.A.4.3.2

ECP.A.4.3.2 **The Company** accept that the signals specified in ECP.A.4.3.1(c) may have lower effective sample rates than those required in ECC.6.6.3 although any signals supplied for connection to **The Company's** recording equipment which do not meet at least the sample rates detailed in ECC.6.6.3 should have the actual sample rates indicated to **The Company** before testing commences.

ECP.A.4.3.3 For all **The Company** witnessed testing either;

(i) the **Generator** or **HVDC System Owner** shall provide to **The Company** all signals outlined in ECP.A.4.3.1 direct from the **Power Park Module** control system without any attenuation, delay or filtering which would result in the inability to fully demonstrate the objectives of the test, or identify any potential safety or plant instability issues, and with a signal update rate corresponding to ECC.6.6.3.2; or

(ii) in the case of **Onshore Power Park Modules**, the **Generator** or **HVDC System Owner** shall provide signals ECP.A.4.3.1(a) direct from one or more transducer(s) connected to current and voltage transformers for monitoring in real time on site; or,

(iii) In the case of **Offshore Power Park Modules** and **OTSDUA** signals ECP.A.4.3.1(a) will be provided at the **Interface Point** by the **Offshore Transmission Licensee** pursuant to the **STC** or by the **Generator** when **OTSDUW Arrangements** apply.

ECP.A.4.3.4 Options ECP.A.4.3.3 (ii) and (iii) will only be available on condition that;

(a) all signals outlined in ECP.A.4.3.1 are recorded and made available to **The Company** by the **Generator** or **HVDC System Owner** from the **Power Park Module** or **OTSDUA** or **HVDC Equipment** control systems as a download once the testing has been completed; and

(b) the full test results are provided by the **Generator** or **HVDC System Owner** within 2 working days of the test date to **The Company** unless **The Company** agrees otherwise; and

(c) all data is provided with a sample rate in accordance with ECC.6.6.3.3 unless **The Company** agrees otherwise; and

(d) in **The Company's** reasonable opinion, the solution does not unreasonably add a significant delay between tests or impede the volume of testing which can take place on the day.

ECP.A.4.3.5 In the case of where transducers connected to current and voltage transformers are installed (ECP.A.4. 3.3(ii) and (iii)), the transducers shall meet the following specification

(a) The transducer(s) shall be permanently installed to easily allow safe testing at any point in the future, and to avoid a requirement for recalibration of the current transformers and voltage transformers.

(b) The transducer(s) should be directly connected to the metering quality current transformers and voltage transformers or similar.

(c) The transducers shall either have a response time no greater than 50ms to reach 90% of output, or no greater than 300ms to reach 99.5%.

ECP.A.4.3.6 In the case of a **GBGF-I** system, the following signals shall be supplied to **The Company** by the **Grid Forming Plant Owner** in accordance with ECC.6.6.3. For the avoidance of doubt, **User's** and **Non-CUSC Parties** will also be required to undertake the necessary testing of their **Plant** in accordance with the requirements of ECC.A.4 and OC5 as applicable.

	Each **Grid Forming Plant** at the **Grid Entry Point** or **User System Entry Point**
ECP.A.4.3.6(a) Real Time Downloadable	Signals required shall be agreed with **The Company** in accordance with ECC.6.6.3.2(iv) and ECC.6.6.3.2(v).

ECP.A.4.3.7 Testing not witnessed by **The Company** on-site

ECP.A.4.3.7.1.1 Where **The Company** has decided not to witness testing on-site, the results shall be submitted to **The Company** in spreadsheet format with the signal data in columns arranged as follows. Signal data denoted by "#" is not essential but if not provided the column should remain in place but without values entered. Where two signal names are given in a column these are alternatives related to the type of plant under test.

ECP.A.4.3.7.1.2 Where **The Company** has requested addition signals to be recorded prior to the testing these signals shall be placed in columns to the right of the spreadsheet.

ECP.A.4.3.7.2.1 Onshore Synchronous Generating Unit Excitation System and Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power	Terminal Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Field Voltage
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Field Current	PSS Output #	Noise Injection #					
# Columns may be left blank but the column must still be included in the files								

ECP.A.4.3.7.2.2 Onshore Synchronous Generating Unit Frequency Response and ECC.6.3.3

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power #	Terminal Voltage #	Speed /Frequency	Freq Injection	Logic / Test Start	Fuel Demand
2								Guide Vane Setpoint
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Inlet Guide Vane	Exhaust Gas Temp	ST Valve Pos	Fuel Valve Pos	HP Steam Valve Pos	IP Steam Valve Pos	LP Steam Valve Pos	
2	Guide Vane Position	Head						
# Columns may be left blank but must still be included in the files								

ECP.A.4.3.7.3.1 Onshore Power Park Modules Voltage Control & Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power	Connection Point Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Statcom or Windfarm Reactive Power #

	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed	Wind Direction	Voltage Setpoint				
2	State of Charge							
# Columns may be left blank but the column must still be included in the files								

ECP.A.4.3.7.3.2 Offshore Power Park Modules Voltage Control & Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Onshore Interface Point Active Power	Onshore Interface Point Reactive Power	Onshore Interface Point Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Statcom or Windfarm Reactive Power #
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed m/s	Wind Direction	Voltage Setpoint				
2	State of Charge							
# Columns may be left blank but the column must still be included in the files								

ECP.A.4.3.7.3.3 Power Park Module Frequency Control

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	GEP Active Power	GEP Reactive Power #	GEP Connection Voltage #	Speed /Frequency	Freq Injection	Logic / Test Start	Statcom or Windfarm Reactive Power #
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed m/s	Wind Direction					
2	State of Charge							
# Columns may be left blank but must still be included in the files								

ECP.A.4.3.8.1 Where test results are completed without the presence of **The Company** but are relied upon as evidence of the compliance they should be accompanied by a logsheet. This sheet should be legible, in English and detail the items as indicated below:

Time and Date of test;

Name of **Power Station** and **Power Generating Module** if applicable;

Name of Test engineer(s) and company name;

Name of **Users** representative(s) and company name;

Type of testing being undertake eg Voltage Control;

Ambient conditions eg. temperature, pressure, wind speed, wind direction; and

Controller settings, eg voltage **Slope**, **Frequency Droop**, voltage setpoint, UEL & OEL settings

ECP.A.4.3.8.2 For each test the following items should be recorded as relevant to the type of test being undertaken. Where there is uncertainty on the information to be recorded this should be discussed with **The Company** in advance of the test.

ECP.A.4.3.8.2.1 Voltage Control Tests

Start time of each test step;

Active Power;

Reactive Power;

Connection voltage;

Voltage Control Setpoint, if applicable or changed;

Voltage Control Slope, if applicable or changed;

Terminal Voltage if applicable;

Generator transformer tap position or grid transformer tap position, as applicable;

Number of **Power Park Units** in service in each **Power Park Module**, if applicable; and

For offshore connections **Offshore Grid Entry Point** voltage.

ECP.A.4.3.8.2.2 Reactive Power Capability Tests

Start time of test;

Active Power;

Reactive Power;

Connection Voltage;

Terminal Voltage if applicable;

Generating Unit transformer tap position or grid transformer tap position as applicable;

Number of **Power Park Units** in service in each **Power Park Module**, if applicable; and

For offshore connections **Offshore Grid Entry Point** voltage.

ECP.A.4.3.8.2.3 Frequency Response Capability Tests

Start time of test;

Active Power;

System Frequency;

For **CCGT Modules, Active Power** for the individual units (GT &ST);

For boiler plant, HP steam pressure;

Droop setting of controller if applicable;

Number of **Power Park Units** in service in each **Power Park Module**, if applicable; and

For offshore connections **Offshore Grid Entry Point Active Power** for each **Power Park Module**.

ECP.A.4.3.8.3 Material changes during the test period should be recorded e.g. **Generating Unit**s tripping / starting, changes to tapchange positions.

APPENDIX 5

COMPLIANCE TESTING OF SYNCHRONOUS POWER GENERATING MODULES

ECP.A.5.1 SCOPE

ECP.A.5.1.1 This Appendix sets out the tests contained therein to demonstrate compliance with the relevant clauses of the **European Connection Conditions** of the **Grid Code**. This Appendix shall be read in conjunction with the ECP with regard to the submission of the reports to **The Company**.

ECP.A.5.1.2 The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

(i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code** and **Bilateral Agreement**; and/or

(ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code** or **Bilateral Agreement**.

(iii) Agree a reduced set of tests for subsequent **Synchronous Power Generating Module** following successful completion of the first **Synchronous Power Generating Module** tests in the case of a **Power Station** comprised of two or more **Synchronous Power Generating Modules** which **The Company** reasonably considers to be identical.

If:

(a) the tests performed pursuant to ECP.A.5.1.2(iii) in respect of subsequent **Synchronous Power Generating Modules** do not replicate the full tests for the first **Synchronous Power Generating Module**, or

(b) any of the tests performed pursuant to ECP.A.5.1.2(iii) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**,

then notwithstanding the provisions above, the full testing requirements set out in this Appendix will be applied.

ECP.A.5.1.3 The **Generator** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **Generator** retains the responsibility for the safety of personnel and plant during the test. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **Generator** otherwise. Reactive Capability tests may be witnessed by **The Company** remotely from **The Company** control centre. For all on site, **The Company** witnessed tests the **Generator** should ensure suitable representatives from the **Generator** and manufacturer (if appropriate) are available on site for the entire testing period. In all cases the **Generator** shall provide suitable monitoring equipment to record all relevant test signals as outlined below in ECP.A.6.1.5.

ECP.A.5.1.4 The **Generator** shall submit a schedule of tests to **The Company** in accordance with CP.4.3.1.

ECP.A.5.1.5 Prior to the testing of a **Synchronous Power Generating Module** the

Generator shall complete the **Integral Equipment Test** procedure in accordance with OC.7.5.

ECP.A.5.1.6 Full **Synchronous Power Generating Module** testing as required by CP.7.2 is to be completed as defined in ECP.A.5.2 through to ECP.A.5.9.

ECP.A.5.1.7 **The Company** will permit relaxation from the requirement ECP.A.5.2 to ECP.A.5.9 where an **Equipment Certificate** for the **Synchronous Power Generating Module** has been provided which details the characteristics from tests on a representative machine with the same equipment and settings and the performance of the **Synchronous Power Generating Module** can, in **The Company's** opinion, reasonably represent that of the installed **Synchronous Power Generating Module** at that site. For **Type B**, **Type C** and **Type D Power Generating Modules** the relevant **Equipment Certificate** must be supplied in the **Power Generating Module Document** or **Users Data File structure** as applicable.

ECP.A.5.1.8 In the case of a co-located site, for example **Electricity Storage Modules** or **Grid Forming Plant** connected within a new or existing **Power Station**, **The Company** will accept test results to demonstrate compliance at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) through a combination of the capabilities of the **Power Generating Modules** (which could include **Grid Forming Plant**) and **Electricity Storage Modules** or **Electricity Storage Modules** (which could include a **Grid Forming Plant**) and **Generating Units** or **Power Park Modules**. **Generators** should however be aware that for the purposes of testing, full Grid Code compliance should be demonstrated when, for example, the **Electricity Storage Module** or **Grid Forming Plant** is out of service and the remaining **Power Generating Module** is in service or the **Electricity Storage Module** or **Grid Forming Plant** is in service and the **Power Generating Module** is out of service. In the case of a **Synchronous Electricity Storage Module**, **The Company** would expect the full set of tests to be completed as detailed in ECP.A.5.2 to ECP.A.5.9.

ECP.A.5.2 Excitation System Open Circuit Step Response Tests

ECP.A.5.2.1 The open circuit step response of the **Excitation System** will be tested by applying a voltage step change from 90% to 100% of the nominal **Synchronous Power Generating Module** terminal voltage, with the **Synchronous Power Generating Module** on open circuit and at rated speed.

ECP.A.5.2.2 The test shall be carried out prior to synchronisation in accordance with CP.6.4. This is not witnessed by **The Company** unless specifically requested by **The Company**. Where **The Company** is not witnessing the tests, the **Generator** shall supply the recordings of the following signals to **The Company** in an electronic spreadsheet format:

Vt - **Synchronous Generating Unit** terminal voltage
Efd - **Synchronous Generating Unit** field voltage or main exciter field voltage
Ifd- **Synchronous Generating Unit** field current (where possible)
Step injection signal

ECP.A.5.2.3 Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

ECP.A.5.3 Open & Short Circuit Saturation Characteristics

ECP.A.5.3.1 The test shall normally be carried out prior to synchronisation in accordance with ECP.6.2.4 or ECP.6.3.4 **Equipment Certificates** or **Manufacturer's Test Certificates** may be used where appropriate may be used if agreed by **The Company**.

ECP.A.5.3.2 This is not witnessed by **The Company**. Graphical and tabular representations of the results in an electronic spreadsheet format showing per unit open circuit terminal voltage and short circuit current versus per unit field current shall be submitted to **The Company**.

ECP.A.5.3.3 Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

ECP.A.5.4 **Excitation System** On-Load Tests

ECP.A.5.4.1 The time domain performance of the **Excitation System** shall be tested by application of voltage step changes corresponding to 1% and 2% of the nominal terminal voltage.

ECP.A.5.4.2 Where a **Power System Stabiliser** is present:

(i) The **PSS** must only be commissioned in accordance with BC2.11.2. When a **PSS** is switched on for the first time as part of on-load commissioning or if parameters have been adjusted the **Generator** should consider reducing the **PSS** output gain by at least 50% and should consider reducing the limits on **PSS** output by at least a factor of 5 to prevent unexpected PSS action affecting the stability of the **Synchronous Generating Unit** or the **National Electricity Transmission System**.

(ii) The time-domain performance of the **Excitation System** shall be tested by applying voltage step changes corresponding to 1% and 2% of the nominal terminal voltage, repeating with and without the **PSS** in service.

(iii) The frequency domain tuning of the **PSS** shall also be demonstrated by injecting a 0.2 Hz - 3 Hz band limited random noise signal into the **Automatic Voltage Regulator** setpoint with the **Synchronous Generating Unit** operating at points specified by **The Company** (up to rated MVA output).

(iv) The **PSS** gain margin shall be tested by increasing the **PSS** gain gradually to threefold and observing the **Synchronous Generating Unit** steady state **Active Power** output.

(v) The interaction of the **PSS** with changes in **Active Power** shall be tested by application of a +0.5 Hz frequency injection to the governor while the **Synchronous Generating Unit** is selected to **Frequency Sensitive Mode**.

(vi) If the **Synchronous Power Generating Module** is of the **Pumped Storage** type then the step tests shall be carried out, with and without the **PSS**, in the pumping mode in addition to the generating mode. In the case of a **Synchronous Electricity Storage Module** the tests shall be carried out with and without the **PSS** in both importing and exporting modes of operation.

(vii) Where the **Bilateral Agreement** requires that the **PSS** is in service, at a specified loading level, additional testing witnessed by **The Company** will be required during the commissioning process before the **Synchronous Power Generating Module** may exceed this output level.

(viii) Where the **Excitation System** includes a **PSS**, the **Generator** shall provide a suitable noise source to facilitate noise injection testing.

ECP.A.5.4.3 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for **The Company** witnessed **PSS** Tests.

Test	Injection	Notes
	Synchronous Generating Unit running at **Maximum Capacity**, unity pf, **PSS** Switched Off	
1	• Record steady state for 10 s • Inject +1% step to **AVR** voltage setpoint and hold for at least 10 s until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	
2	• Record steady state for 10 s • Inject +2% step to **AVR** voltage setpoint and hold for at least 10 s until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	
3	• Inject band limited (0.2 - 3 Hz) random noise signal into voltage setpoint and measure frequency spectrum of **Real Power** • Remove noise injection	
	• Switch On **Power System Stabiliser**	
4	• Record steady state for 10 s • Inject +1% step to **AVR** voltage setpoint and hold for at least 10 seconds until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	
5	• Record steady state for 10 s • Inject +2% step to **AVR** voltage setpoint and hold for at least 10 s until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	
6	• Increase PSS gain at 30 s intervals. i.e. x1 – x1.5 – x2 – x2.5 – x3 • Return **PSS** gain to initial setting	
7	• Inject band limited (0.2-3 Hz) random noise signal into voltage setpoint and measure frequency spectrum of **Active Power**. • Remove noise injection.	
8	• Select the governor to **Frequency Sensitive Mode** • Inject +0.5 Hz step into governor. • Hold until generator MW output is stabilised • Remove step	

ECP.A.5.5 **Under-excitation Limiter** Performance Test

ECP.A.5.5.1 Initially the performance of the **Under-excitation Limiter** should be checked by moving the limit line close to the operating point of the **Synchronous Generating Unit** when operating close to unity **Power Factor**. The operating point of the **Synchronous Generating Unit** is then stepped into the limit by applying a 2% decrease in **Automatic Voltage Regulator** Setpoint voltage.

ECP.A.5.5.2 The final performance of the **Under-excitation Limiter** shall be demonstrated by testing its response to a step change corresponding to a 2% decrease in **Automatic Voltage Regulator Setpoint** voltage when the **Synchronous Generating Unit** is operating just off the limit line, at the designed setting as indicated on the **Performance Chart** [P-Q Capability Diagram] submitted to **The Company** under OC2.

ECP.A.5.5.3 Where possible the **Under-excitation Limiter** should also be tested by operating the tap- changer when the **Synchronous Generating Unit** is

operating just off the limit line, as set up.

ECP.A.5.5.4 The **Under-excitation Limiter** will normally be tested at low active power output and at maximum **Active Power** output.

ECP.A.5.5.5 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for **The Company** witnessed **Under-excitation Limiter** Tests.

Test	Injection	Notes
	Synchronous Generating Unit running at **Maximum Capacity** and unity **Power Factor**. Under-excitation limit temporarily moved close to the operating point of the **Synchronous Generating Unit**.	
1	• **PSS** on. • Inject -2% voltage step into **AVR** voltage setpoint and hold at least for 10 s until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	
	Under-excitation limit moved to normal position. **Synchronous Generating Unit** running at **Maximum Capacity** and at leading **Reactive Power** close to Under-excitation limit	
2	• **PSS** on. • Inject -2% voltage step into **AVR** voltage setpoint and hold at least for 10 s until stabilised • Remove step returning **AVR** voltage setpoint to nominal and hold for at least 10 s	

ECP.A.5.6 Over-excitation Limiter Performance Test

ECP.A.5.6.1 The performance of the **Over-excitation Limiter**, where it exists, shall be demonstrated by testing its response to a step increase in the **Automatic Voltage Regulator Setpoint Voltage** that results in operation of the **Over-excitation Limiter**. Prior to application of the step the **Synchronous Generating Unit** shall be generating **Maximum Capacity** and operating within its continuous **Reactive Power** capability. The size of the step will be determined by the minimum value necessary to operate the **Over-excitation Limiter** and will be agreed by **The Company** and the **Generator**. The resulting operation beyond the **Over-excitation Limit** shall be controlled by the **Over-excitation Limiter** without the operation of any protection that could trip the **Synchronous Power Generating Module**. The step shall be removed immediately on completion of the test.

ECP.A.5.6.2 If the **Over-excitation Limiter** has multiple levels to account for heating effects, an explanation of this functionality will be necessary and if appropriate, a description of how this can be tested.

ECP.A.5.6.3 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for **The Company** witnessed **Under-excitation Limiter** Tests.

Test	Injection	Notes
	Synchronous Generating Unit running at **Maximum Capacity** and maximum lagging **Reactive Power**.	
	Over-excitation Limit temporarily set close to this operating point. **PSS** on.	
1	• Inject positive voltage step into **AVR** voltage setpoint and	

	hold • Wait until **Over-excitation Limiter** operates after sufficient time delay to bring back the excitation back to the limit. • Remove step returning **AVR** voltage setpoint to nominal.	
	Over-excitation Limit restored to its normal operating value. **PSS** on.	

ECP.A.5.7 Reactive Capability

ECP.A.5.7.1 The **Reactive Power** capability on each **Synchronous Power Generating Module** will normally be demonstrated by:

(a) operation of the **Synchronous Power Generating Module** at maximum lagging **Reactive Power** and **Maximum Capacity** for 1 hour

(b) operation of the **Synchronous Power Generating Module** at maximum leading **Reactive Power** and **Maximum Capacity** for 1 hour.

(c) operation of the **Synchronous Power Generating Module** at maximum lagging **Reactive Power** and **Minimum Stable Operating Level** for 1 hour

(d) operation of the **Synchronous Power Generating Module** at maximum leading **Reactive Power** and **Minimum Stable Operating Level** for 1 hour.

(e) operation of the **Synchronous Power Generating Module** at maximum lagging **Reactive Power** and a power output between **Maximum Capacity** and **Minimum Stable Operating Level**.

(f) operation of the **Synchronous Power Generating Module** at maximum leading **Reactive Power** and a power output between **Maximum Capacity** and **Minimum Stable Operating Level**.

In the case of a **Synchronous Electricity Storage Module**, **The Company** shall have discretion to reduce the durations of the tests set out in ECP.A.5.7.1 (a) – (f), depending upon the capacity of the energy store.

ECP.A.5.7.2 In the case of an **Embedded Synchronous Power Generating Module** where distribution network considerations restrict the **Synchronous Power Generating Module Reactive Power** output, **The Company** will only require demonstration within the acceptable limits of the **Network Operator's System**.

ECP.A.5.7.3 The test procedure, time and date will be agreed with **The Company** and will be to the instruction of **The Company** control centre and shall be monitored and recorded at both **The Company** control centre and by the **Generator**.

ECP.A.5.7.4 Where the **Generator** is recording the voltage, **Active Power** and **Reactive Power** at the HV connection point the voltage for these tests **Active Power** and **Reactive Power** at the **Synchronous Power Generating Module** terminals may also be included. The results shall be supplied in an electronic spreadsheet format. Where applicable the **Synchronous Power Generating Module** transformer tapchanger position should be noted throughout the test period.

ECP.A.5.8 Governor and Load Controller Response Performance

ECP.A.5.8.1 The governor and load controller response performance will be tested by injecting simulated frequency deviations into the governor and load controller systems. Such simulated frequency deviation signals must be injected simultaneously at both speed governor and load controller setpoints. For **CCGT modules**, simultaneous injection into all gas turbines, steam turbine governors and module controllers is required.

ECP.A.5.8.2 Prior to witnessing the governor tests set out in ECP.A.5.8.6, **The Company** requires the **Generator** to conduct the preliminary tests detailed in ECP.A.5.8.4 and send the results to **The Company** for assessment unless agreed otherwise by **The Company**. The results should be supplied in an electronic spreadsheet format. These tests shall be completed at least two weeks prior to the witnessed governor response tests.

ECP.A.5.8.3 Where a **CCGT Module** or **Synchronous Power Generating Module** is capable of operating on alternative fuels, tests will be required to demonstrate performance when operating on each fuel. **The Company** may agree a reduction from the tests listed in ECP.A.5.8.6 for demonstrating performance on the alternative fuel. This includes the case where a main fuel is supplemented by bio-fuel.

Preliminary Governor Frequency Response Testing

ECP.A.5.8.4 Prior to conducting the full set of tests as per ECP.A.5.8.6, **Generators** are required to conduct a preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. With the plant running at 80% of full load, the following frequency injections shall be applied.

Test No (Figure1)	Frequency Injection	Notes
8	• Inject -0.5Hz frequency fall over 10 s • Hold for a further 20 s • At 30 s from the start of the test, inject a +0.3 Hz frequency rise over 30 s. • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
13	• Inject -0.5Hz frequency fall over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
14	• Inject +0.5Hz frequency rise over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
H	• Inject -0.5 Hz frequency fall as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	
I	• Inject +0.5 Hz frequency rise as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	

ECP.A.5.8.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **Generator** shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by **The Company**

ECP.A.5.8.6 The tests are to be conducted at a number of different Module Load Points (MLP). The load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum Export Limit)	100% MEL
Module Load Point 5	95% MEL
Module Load Point 4 (Mid-point of Operating Range)	80% MEL
Module Load Point 3	70% MEL
Module Load Point 2 (Lower of MRL+10% or **Minimum Stable Operating Level**	MRL+10% or MSOL
Module Load Point 1 (**Minimum Regulating Level**)	MRL

ECP.A.5.8.7 The tests are divided into the following three types;

(i) Frequency response compliance and volume tests as per ECP.A.5.8. Figure 1. These tests consist of frequency profile and ramp tests and adjustments to the target frequency setpoint as per ECP.5.8 Figure 3.

(ii) System islanding and step response tests as shown by ECP.A.5.8. Figure 2.

(iii) Frequency response tests in **Limited Frequency Sensitive Mode (LFSM)** to demonstrate **LFSM-O** and **LFSM-U** capability as shown by ECP.A.5.8 Figure 2.

ECP.A.5.8.8 There should be sufficient time allowed between tests for control systems to reach steady state. Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **Synchronous Power Generating Module** or **CCGT Module** has stabilised. The frequency response capability test (see Figure 1) injection signal shall be returned to zero at the same rate at which it was applied. **The Company** may require repeat tests should the tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection, when not witnessed by **the Company** there must be sufficient time allowed between tests for the **Plant** to have reached a stable steady state operating condition.

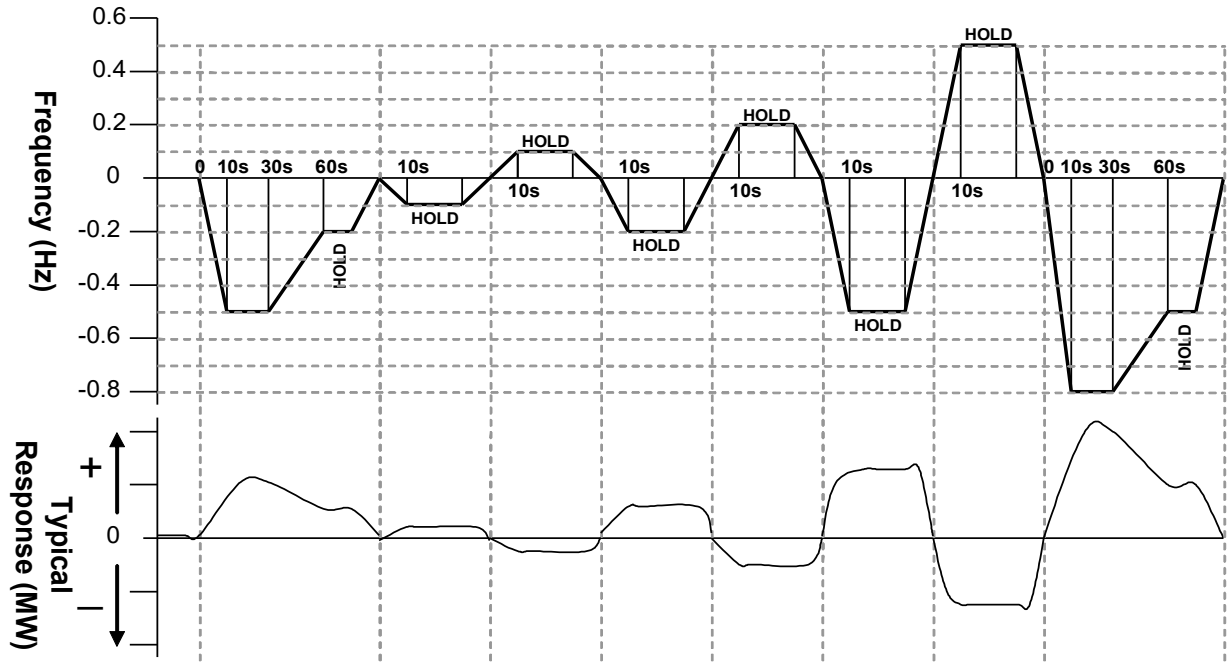

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5	5			6			7	
MLP4	8	9	10	11	12	13	14	
MLP3	15						16	17
MLP2	18			19	20	21		22
MLP1	23			24	25			26

Figure 1: Frequency Response Capability FSM Ramp Response Tests

Public

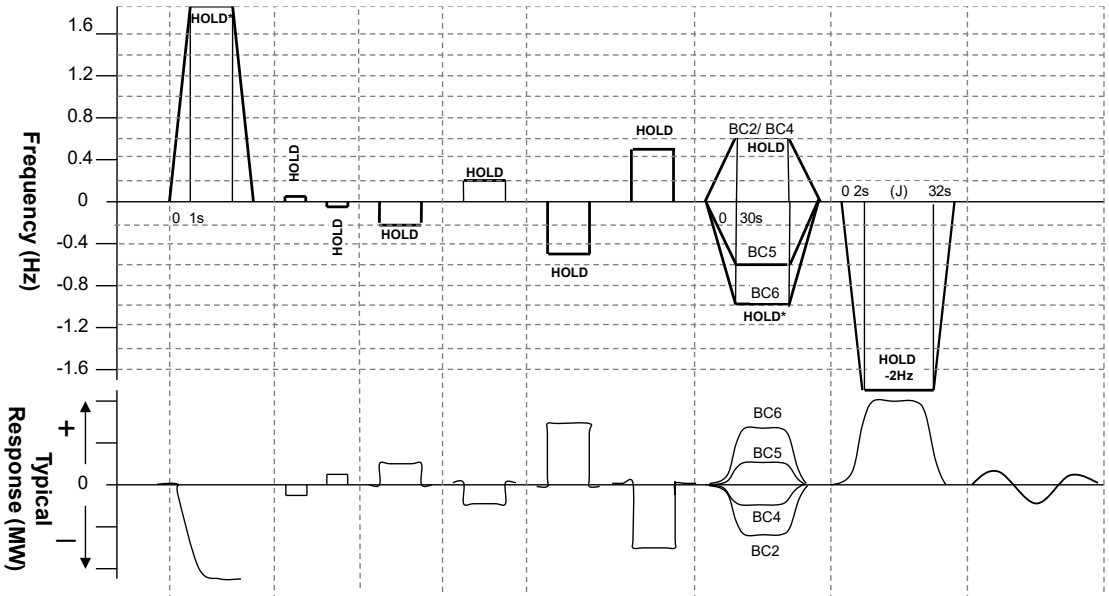

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+/-0.6 -1.0	-2.0	±0**
MLP6	BC1					O	BC2		L
MLP6 LFSM	BC3						BC4		
MLP5					A				
MLP4		D/E	F	G	H	I		J	M
MLP4 LFSM							BC5/6		N
MLP3									
MLP2					P	Q			
MLP1					K				

Figure 2: Frequency Response Capability LFSM-O, LFSM-U and FSM Step Response Tests

* This will generally be +2.0 Hz unless an injection of this size causes a reduction in plant output that takes the operating point below the **Minimum Regulating Level** in which case an appropriate injection should be calculated in accordance with the following:
For example, 0.9 Hz is needed to take an initial output 65% to a final output of 20%. If the initial output was not 65% and the **Minimum Regulating Level** is not 20% then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Minimum Regulating Level	20%
Frequency controller **Droop**	4%
Frequency to be injected = (0.65-0.20)x0.04x50 =	0.9 Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the system frequency signal. The tests will consist of monitoring the **Synchronous Power Generating Module and CCGT Module** in **Frequency Sensitive Mode** during normal system frequency variations without applying any injection. Test N in figure 2 shall be

conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

ECP.A.5.8.9 The **Target Frequency** adjustment facility should be demonstrated from the normal control point within the range of 49.9 Hz to 50.1 Hz by step changes to the **Target Frequency** setpoint as indicated in ECP.A.5.8 Figure 3 while operating at MLP4.

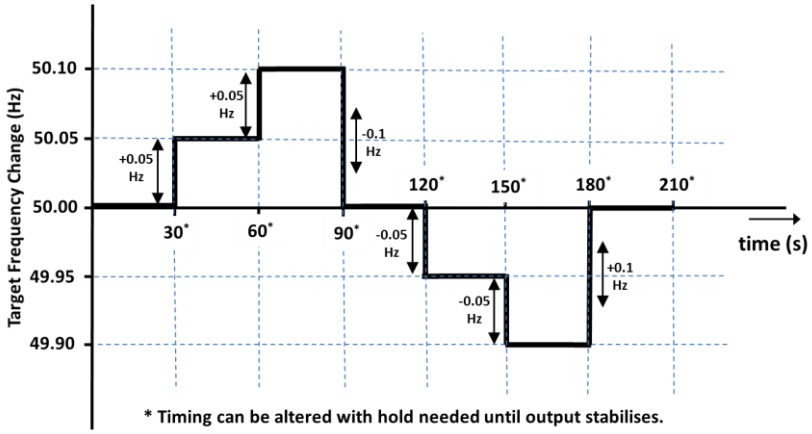

ECP.A.5.8 Figure 3 – **Target Frequency** setting changes

ECP.A.5.9 Compliance with ECC.6.3.3 Functionality Test

ECP.A.5.9.1 Where the plant design includes active control function or functions to deliver ECC.6.3.3 compliance, the **Generator** will propose and agree a test procedure with **The Company**, which will demonstrate how the **Synchronous Power Generating Module Active Power** output responds to changes in **System Frequency** and ambient conditions (e.g. by **Frequency** and temperature injection methods).

ECP.A.5.9.2 The **Generator** shall inform **The Company** if any load limiter control is additionally employed.

ECP.A.5.9.3 With the setpoint to the signals specified in ECP.A.4, **The Company** will agree with the **Generator** which additional control system parameters shall be monitored to demonstrate the functionality of ECC.6.3.3 compliance systems. Where **The Company** recording equipment is not used, results shall be supplied to **The Company** in an electronic spreadsheet format

ECP.A.5.10 Compliance of **Synchronous Electricity Storage Modules** during low **System Frequencies**

In order to assess the capability of the **Synchronous Electricity Storage Module** the following steps shall be undertaken:

(i) Prior to the test, the **Synchronous Electricity Storage Module** shall be operating at its **Maximum Import Power** with the **Synchronous Electricity Storage Module** in **Limited Frequency Sensitive Mode**.

(ii) A test signal shall be applied which ramps the **System Frequency** from 50 Hz to 49.0 Hz at a rate of $2Hzs^{-1}$. The **System Frequency** shall be held at 49.0 Hz for 60 s and the then ramped back to 50 Hz in 10 s as shown in Figure 4.

(iii) The test result shall demonstrate the ability of the **Electricity Storage Module** to meet the requirements of ECC.6.3.7.2.3. When the test injection signal is held at 49.0 Hz, the **Active Power** output of the **Synchronous Electricity Storage Module** should achieve a steady state operating point in no more than 10 s and this should be maintained whilst the test **Frequency** signal is held at 49.0 Hz.

(iv) The above tests described (i) – (iii) above shall be repeated but the minimum test frequency applied shall be to 48.8 Hz as shown in Figure 5.

(v) The above tests shall be repeated when the **Synchronous Electricity Storage Module** is operating at 40% of its **Maximum Import Power**.

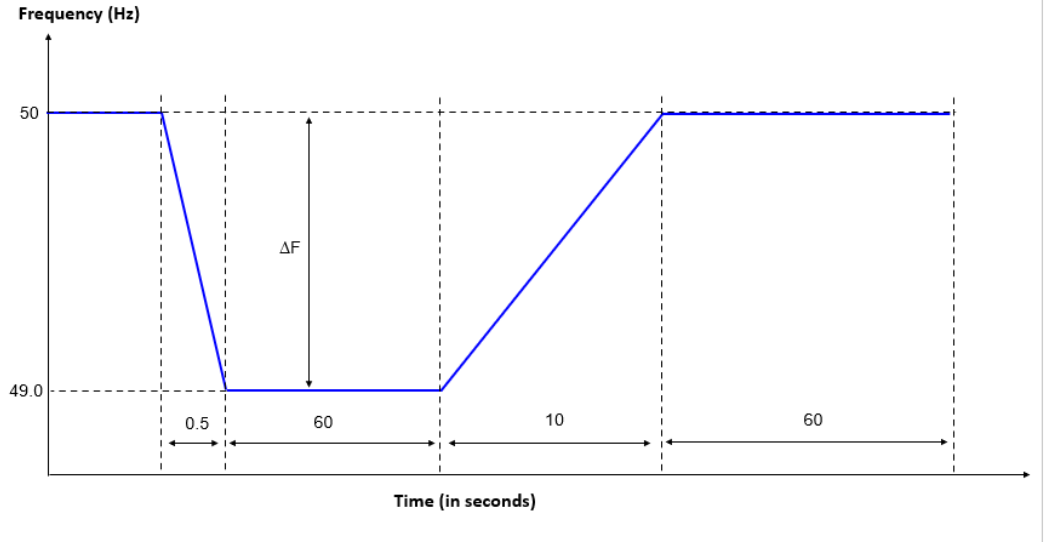

ECP.A.5.8 Figure 4

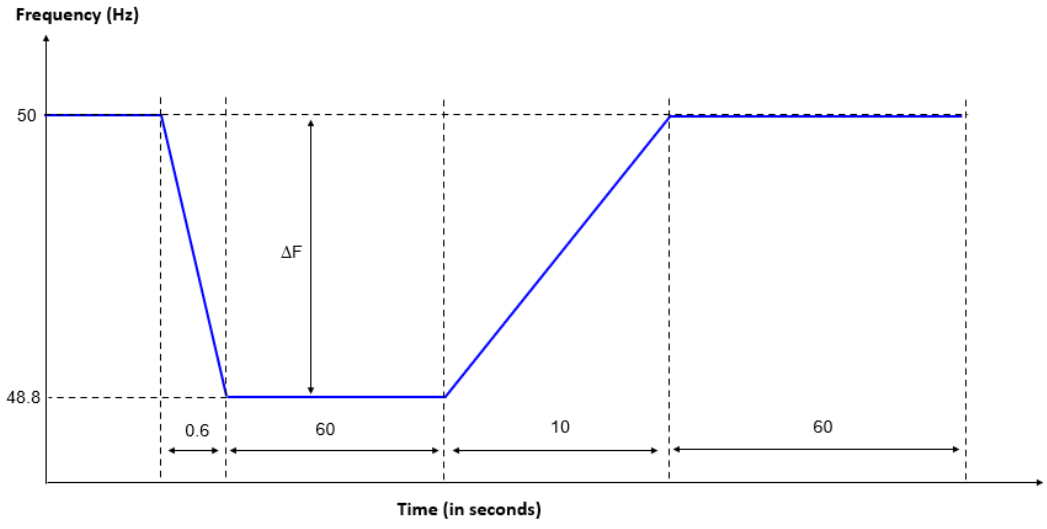

ECP.A.5.8 Figure 5

APPENDIX 6

COMPLIANCE TESTING OF POWER PARK MODULES

ECP.A.6.1 SCOPE

ECP.A.6.1.1 This Appendix outlines the general testing requirements for **Power Park Modules** and **OTSDUA** to demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**. The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**; and/or

ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code**, **Ancillary Services Agreement** or **Bilateral Agreement**; and/or

iii) require additional tests if a **Power System Stabiliser** is fitted; and/or

iv) agree a reduced set of tests if a relevant **Manufacturer's Data & Performance Report** has been submitted to and deemed to be appropriate by **The Company**; and/or

v) agree a reduced set of tests for subsequent **Power Park Modules** or **OTSDUA** following successful completion of the first **Power Park Module** or **OTSDUA** tests in the case of a **Power Station** comprised of two or more **Power Park Modules** or **OTSDUA** which **The Company** reasonably considers to be identical.

If:

(a) the tests performed pursuant to ECP.A.6.1.1(iv) do not replicate the results contained in the **Manufacturer's Data & Performance Report**, or

(b) the tests performed pursuant to ECP.A.6.1.1(v) in respect of subsequent **Power Park Modules** or **OTSDUA** do not replicate the full tests for the first **Power Park Module** or **OTSDUA**, or

(c) any of the tests performed pursuant to ECP.A.6.1.1(iv) or ECP.A.6.1.1(v) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**,

then notwithstanding the provisions above, the full testing requirements set out in this Appendix will be applied.

ECP.A.6.1.2 The **Generator** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **Generator** retains the responsibility for the safety of personnel and plant during the test. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **Generator** otherwise. Reactive Capability tests may be witnessed by **The Company** remotely from **The Company** control centre. For all on site **The Company** witnessed tests the **Generator**

must ensure suitable representatives from the **Generator** and / or **Power Park Module** manufacturer (if appropriate) and/or **OTSDUA** manufacturer (if appropriate) are available on site for the entire testing period. In all cases and in addition to any recording of signals conducted by **The Company**, the **Generator** shall record all relevant test signals as outlined in ECP.A.4.

ECP.A.6.1.3 In addition to the dynamic signals supplied in ECP.A.4 the **Generator** shall inform **The Company** of the following information prior to the commencement of the tests and any changes to the following, if any values change during the tests:

(i) All relevant transformer tap numbers; and

(ii) Number of **Power Park Units** in operation

ECP.A.6.1.4 The **Generator** shall submit a detailed schedule of tests to **The Company** in accordance with CP.6.3.1, and this Appendix.

ECP.A.6.1.5 Prior to the testing of a **Power Park Module** or **OTSDUA**, the **Generator** shall complete the **Integral Equipment Tests** procedure in accordance with OC.7.5.

ECP.A.6.1.6 Partial **Power Park Module** or **OTSDUA** testing as defined in ECP.A.6.2 and ECP.A.6.3 is to be completed at the appropriate stage in accordance with ECP.6, ECP6.4A, ECP6.4B.

ECP.A.6.1.7 Full **Power Park Module** or **OTSDUA** testing as required by CP.7.2 is to be completed as defined in ECP.A.6.4 through to ECP.A.6.7.

ECP.A.6.1.8 Where **OTSDUW Arrangements** apply and prior to the **OTSUA Transfer Time** any relevant **OTSDUW Plant and Apparatus** shall be considered within the scope of testing described in this Appendix. Performance shall be assessed against the relevant Grid Code requirements for **OTSDUW Plant and Apparatus** at the **Interface Point** and other **Generator Plant and Apparatus** at the **Offshore Grid Entry Point**. This Appendix should be read accordingly.

ECP.A.6.1.9 **The Company** will permit relaxation from the requirement ECP.A.6.2 to ECP.A.6.8 where an **Equipment Certificate** for the **Power Park Module** has been provided which details the characteristics from tests on a representative installation with the same equipment and settings and the performance of the **Power Park Module** can, in **The Company's** opinion, reasonably represent that of the installed **Power Park Module** at that site. For **Type B**, **Type C** and **Type D Power Park Modules**, the relevant **Equipment Certificate** must be supplied in the **Power Generating Module Document** or **Users Data File structure** as applicable.

ECP.A.6.1.10 In the case of a co-located site, for example **Electricity Storage Modules** or **Grid Forming Plant** connected within a new or existing **Power Station**, **The Company** will accept test results to demonstrate compliance at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**) through a combination of the capabilities of the **Power Generating Modules** (which could include a **Grid Forming Plant**) and **Electricity Storage Modules** or **Electricity Storage Modules** (which could include a **Grid Forming Plant**) and **Generating Units** or **Power Park Modules**. **Generators** should however be aware that for the purposes of testing, full Grid Code compliance should be demonstrated when, for example, the **Electricity Storage Module** or **Grid Forming Plant** is out of service and the remaining **Power Generating Module** is in service or the **Electricity Storage Module** or Grid Forming Plant is in service and the **Power Generating Module** is out of service. In the case of a **Non-Synchronous**

Electricity Storage Module, **The Company** would expect the full set of tests to be completed as detailed in ECP.A.6.2 to ECP.A.6.8.

ECP.A.6.2 Pre 20% (or <50MW) **Synchronised Power Park Module** Basic Voltage Control Tests

ECP.A.6.2.1 Before more than the number of **Power Park Units** making up 20% of the **Maximum Capacity** (or 50 MW if less) of the **Power Park Module** have been commissioned, unless otherwise agreed with **The Company**, either voltage control test ECP.A.6.5.6(i) or (ii) must be completed in accordance with ECP.6, to ensure the automatic voltage control facility is installed and operational. Where a **Power Park Module** has the full **Reactive Power** capability down to zero MW at its **Grid Entry Point**, (or **User System Entry Point** (if **Embedded**) or **Interface Point** in the case of **OTSDUW**), these tests shall be completed to demonstrate the voltage control performance in accordance with ECC.6.3.8.4 or ECC.6.3.8.5 as applicable and may be completed independently of the **Active Power** output of the **Power Park Module** (including any **Power Park Unit** thereof). For the avoidance of doubt, in the case where a **Generator** undertaking **OTSDUW** using other equipment such as a STATCOM, to provide the full reactive capability at the **Interface Point**, this test may be completed independently of the number of **Power Park Units** synchronised unless otherwise agreed. In the case of an **Offshore Power Park Module**, the test must be completed by the **Generator** undertaking **OTSDUW** or the **Offshore Transmission Licensee** under STCP19-5.

ECP.A.6.2.2 In the case of an **Offshore Power Park Module** which provides all or a portion of the **Reactive Power** capability as described in ECC.6.3.2.5.2 or ECC.6.3.2.6.3 and / or voltage control requirements as described in ECC.6.3.8.5 to enable an **Offshore Transmission Licensee** to meet the requirements of **STC** Section K**,** the **Generator** is required to cooperate with the **Offshore Transmission Licensee** to conduct the 20% voltage control test. The results in relation to the **Offshore Power Park Module** will be assessed against the requirements in the **Bilateral Agreement**.

ECP.A.6.3 **Power Park Modules** with **Maximum Capacity** ≥100MW Pre 70% **Power Park Module** Tests

ECP.A.6.3.1 Before 70% but with at least 50% of the **Power Park Module** commissioned the following **Limited Frequency Sensitive** tests as detailed in ECP.A.6.6.2 must be completed.

(a) BC3
(b) BC4

ECP.A.6.4 Reactive Capability Test

ECP.A.6.4.1 This section details the procedure for demonstrating the reactive capability of an **Onshore Power Park Module** or an **Offshore Power Park Module** or **OTSDUA** which provides all or a portion of the **Reactive Power** capability as described in ECC.6.3.2.4, ECC.6.3.2.5.2 or ECC.6.3.2.6.3 as applicable (for the avoidance of doubt, an **Offshore Power Park Module** which does not provide part of the **Offshore Transmission Licensee's Reactive Power** capability and instead fulfils the requirements in ECC.6.3.2.5.1, should complete the **Reactive Power** transfer / voltage control tests as per section ECP.A.6.8). These tests should be scheduled at a time where there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. There should be sufficient MW resource forecast in order to generate at least 85% of **Maximum Capacity** of the **Power Park Module** (such as a wind farm

or solar park). Tests on **Electricity Storage Modules** shall not be restricted due to MW resource forecasts as they do not fall under the definition of an **Intermittent Power Source**.

ECP.A.6.4.2 The tests shall be performed by modifying the voltage set-point of the voltage control scheme of the **Power Park Module** or **OTSDUA** by the amount necessary to demonstrate the required reactive range. This is to be conducted for the operating points and durations specified in ECP.A.6.4.5.

ECP.A.6.4.3 An **Embedded Generator** or **Embedded Generator** undertaking **OTSDUW** should liaise with the relevant **Network Operator** to ensure the following tests will not have an adverse impact upon the **Network Operator's System** as per OC.7.5. In situations where the tests have an adverse impact upon the **Network Operator's System**, **The Company** will only require demonstration within the acceptable limits of the **Network Operator**. For the avoidance of doubt, these tests do not negate the requirement to produce a complete **Power Park Module** or **OTSDUA** performance chart as specified in OC2.3.2.1.

ECP.A.6.4.4 In the case where the **Reactive Power** metering point is not at the same location as the **Reactive Power** capability requirement, then an equivalent **Reactive Power** capability for the metering point shall be agreed between the **Generator** and **The Company**.

ECP.A.6.4.5 The following tests shall be completed:

(i) Operation in excess of 60% **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 30 minutes. For the avoidance of doubt this test must start with **Active Power** output in excess of 85% of **Maximum Capacity** of the **Power Park Module** as ECP.A.6.4.1 and must not fall below 60% of **Maximum Capacity** of the **Power Park Module** during the 30 minutes.

(ii) Operation in excess of 60% **Maximum Capacity** and maximum continuous leading **Reactive Power** for 30 minutes. For the avoidance of doubt this test must start with **Active Power** output in excess of 85% of **Maximum Capacity** of the **Power Park Module** as ECP.A.6.4.1 and must not fall below 60% of **Maximum Capacity** of the **Power Park Module** during the 30 minutes.

(iii) Operation at 50% **Maximum Capacity** and maximum continuous leading **Reactive Power** for 30 minutes.

(iv) Operation at 50% **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 30 minutes.

(v) Operation at 20% **Maximum Capacity** and maximum continuous leading **Reactive Power** for 60 minutes.

(vi) Operation at 20% **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 60 minutes.

(vii) Operation at less than 20% **Maximum Capacity** and unity **Power Factor** for 5 minutes. This test only applies to systems which do not offer voltage control below 20% of **Maximum Capacity**.

(viii) Operation at the lower of the **Minimum Regulating Level** or 0% **Maximum Capacity** and maximum continuous leading **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

(ix) Operation at the lower of the **Minimum Regulating Level** or 0% **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

In the case of a **Non-Synchronous Electricity Storage Module**, **The Company** shall have discretion to reduce the duration of the tests required in ECP.A.6.4.5 (i) – (viii) depending upon the capability of the energy store.

ECP.A.6 Within this ECP, lagging **Reactive Power** is the export of **Reactive Power** from the **Power Park Module** to the **Total System** and leading **Reactive Power** is the import of **Reactive Power** from the **Total System** to the **Power Park Module** or **OTSDUA**.

ECP.A.6.5 Voltage Control Tests

ECP.A.6.5.1 This section details the procedure for conducting voltage control tests on **Onshore Power Park Modules** or **OTSDUA** or an **Offshore Power Park Module** which provides all or a portion of the voltage control capability as described in ECC.6.3.8.5 (for the avoidance of doubt, **Offshore Power Park Modules** which do not provide part of the **Offshore Transmission Licensee** voltage control capability as described in ECC6.3.8.5 should complete the **Reactive Power** transfer / voltage control tests as per section ECP.A.6.8). These tests should be scheduled at a time when there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. In the case of an **Offshore Power Park Module** (such as a wind farm or solar park), there should be sufficient MW resource forecast in order to generate at least 65% of **Maximum Capacity** of the **Onshore Power Park Module**. Tests on **Electricity Storage Modules** shall not be restricted due to MW resource forecasts as they do not fall under the definition of an **Intermittent Power Source**. An **Embedded Generator** or **Embedded Generators** undertaking **OTSDUW** should also liaise with the relevant **Network Operator** to ensure all requirements covered in this section will not have a detrimental effect on the **Network Operator's System**.

ECP.A.6.5.2 The voltage control system shall be perturbed with a series of step injections to the **Power Park Module** voltage setpoint, and where possible, multiple up-stream transformer taps. In the case of an **Offshore Power Park Module** providing part of the **Offshore Transmission Licensee** voltage control capability this may require a series of step injections to the voltage setpoint of the **Offshore Transmission Licensee** control system.

ECP.A.6.5.3 For steps initiated using network tap changers, the **Generator** will need to coordinate with **The Company** or the relevant **Network Operator** as appropriate. The time between transformer taps shall be at least 10 s as per ECP.A.6.5 Figure 1.

ECP.A.6.5.4 For a step injection into the **Power Park Module** or **OTSDUA** voltage setpoint, steps of ±1%, ±2% and ±4% (or larger if required by **The Company**) shall be applied to the voltage control system setpoint summing junction. The injection shall be maintained for a minimum of 10 s as per ECP.A.6.5 Figure 2.

ECP.A.6.5.5 Where the voltage control system comprises of discretely switched **Plant** and **Apparatus** (eg. mechanically switched shunt reactors or capacitors) additional tests will be required to demonstrate that overall performance of the voltage control system when switching these devices as part of the response is in accordance with **Grid Code** and **Bilateral Agreement** requirements.

ECP.A.6.5.6 Tests to be completed:

(i)

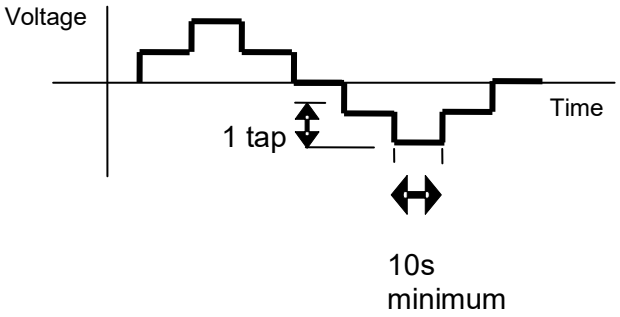

ECP.A.6.5 Figure 1 – Transformer tap sequence for voltage control tests

(ii)

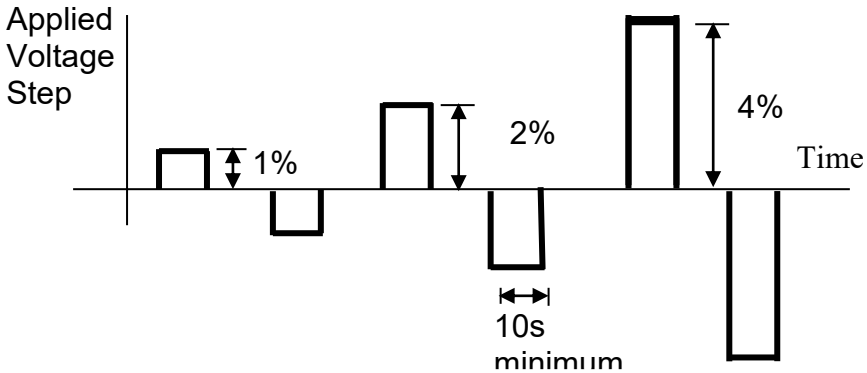

ECP.A.6.5 Figure 2 – Step injection sequence for voltage control tests

ECP.A.6.5.7 In the case of **OTSDUA**, where the **Bilateral Agreement** specifies additional damping facilities, additional testing to demonstrate these damping facilities may be required.

ECP.A.6.5.8 In the case of **Power Park Modules** that do not provide voltage control down to zero **Active Power** a test to demonstrate the smooth transition from voltage control mode to unity **Power Factor** shall be carried out. The **Power Park Module** voltage setpoint should be altered to produce lagging **Reactive Power** or absorbing leading **Reactive Power** at a low **Active Power** level where voltage control is provided. The **Power Park Module Active Power** should then be reduced to zero **Active Power** as a ramp over a short period (60 s is suggested).

ECP.A.6.6 Frequency Response Tests

ECP.A.6.6.1 This section describes the procedure for performing frequency response testing on a **Power Park Module**. These tests should be scheduled at a time where there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. There should be sufficient MW resource forecasted in order to generate at least 65% of **Maximum Capacity** of the **Power Park Module**.

ECP.A.6.6.2 The frequency controller shall be in **Frequency Sensitive Mode** or **Limited Frequency Sensitive Mode** as appropriate for each test. Simulated frequency deviation signals shall be injected into the frequency controller setpoint/feedback summing junction. If the injected frequency signal replaces rather than sums with the real **System Frequency** signal then the additional tests outlined in ECP.A.6.6.6 shall be performed with the **Power Park Module** or **Power Park Unit** in normal **Frequency Sensitive Mode** monitoring actual **System Frequency**, over a period of at least 10 minutes. The aim of this additional test is to verify that the control system correctly measures the real **System Frequency** for normal variations over a period of time.

ECP.A.6.6.3 In addition to the frequency response requirements it is necessary to demonstrate the **Power Park Module** ability to deliver a requested steady state power output which is not impacted by power source variation as per ECC.6.3.9. This test shall be conducted in **Limited Frequency Sensitive Mode** at a part-loaded output for a period of 10 minutes as per ECP.A.6.6.6.

Preliminary Frequency Response Testing

ECP.A.6.6.4 Prior to conducting the full set of tests as per ECP.A.6.6.6, **Generators** are required to conduct the preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. The test should be conducted when sufficient MW resource is forecast in order to generate at least 65% of **Maximum Capacity** of the **Power Park Module**. The following frequency injections shall be applied when operating at module load point 4.

Test No (Figure1)	Frequency Injection	Notes
8	• Inject -0.5 Hz frequency fall over 10 s • Hold for a further 20 s • At 30 s from the start of the test, inject a +0.3 Hz frequency rise over 30 s. • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
13	• Inject -0.5 Hz frequency fall over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
14	• Inject +0.5 Hz frequency rise over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
H	• Inject -0.5 Hz frequency fall as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	
I	• Inject +0.5 Hz frequency rise as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	

ECP.A.6.6.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **Generator** shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by **The Company.**

ECP.A.6.6.6 The tests are to be conducted at a number of different Module Load Points (MLP). In the case of a **Power Park Module** the module load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum Export Limit)	100% MEL
Module Load Point 5	90% MEL
Module Load Point 4	80% MEL
Module Load Point 3	MRL+0.6 x (MEL – MRL)
Module Load Point 2 Lower of MRL + 0.3 x (MEL – MRL) or **Minimum Stable Operating Level**	MRL+0.3 x (MEL – MRL) or MSOL
Module Load Point 1 (**Minimum Regulating Level**)	MRL

ECP.A.6.6.7 The tests are divided into the following two types;

(i) Frequency response compliance and volume tests as per ECP.A.6.6. Figure 1. These tests consist of frequency profile and ramp tests and adjustments to target frequency setpoint as per ECP.A.6.6 Figure 3.

(ii) System islanding and step response tests as shown by ECP.A.6.6. Figure 2.

(iii) Frequency response tests in **Limited Frequency Sensitive Mode (LFSM)** to demonstrate **LFSM-O** and **LFSM-U** capability as shown by ECP.A.6.6 Figure 2.

ECP.A.6.6.8 There should be sufficient time allowed between tests for control systems to reach steady state (depending on available power resource). Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **Power Park Module** has stabilised. All frequency response tests should be removed over the same timescale for which they were applied. **The Company** may require repeat tests should the response volume be affected by the available power, or if tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection, when not witnessed by **The Company** there must be sufficient time allowed between tests for the **Active Power** (MW) output of the **Power Park Module** to have stabilised.

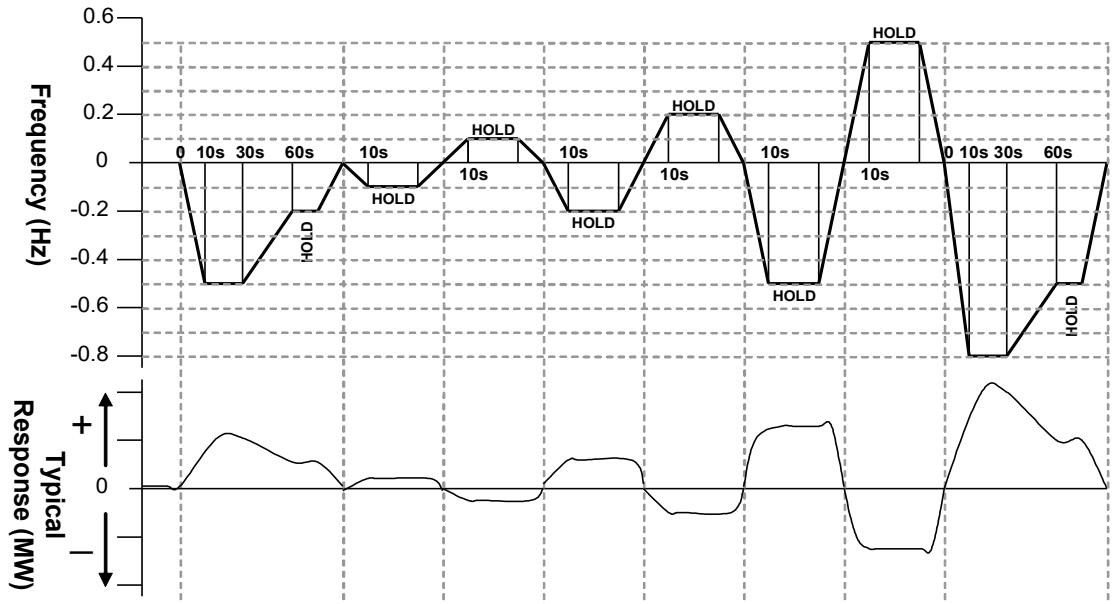

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5	5			6			7	
MLP4	8	9	10	11	12	13	14	
MLP3	15						16	17
MLP2	18			19	20	21		22
MLP1	23			24	25			26

ECP.A.6.6. Figure 1 – Frequency Response Capability FSM Ramp Response tests

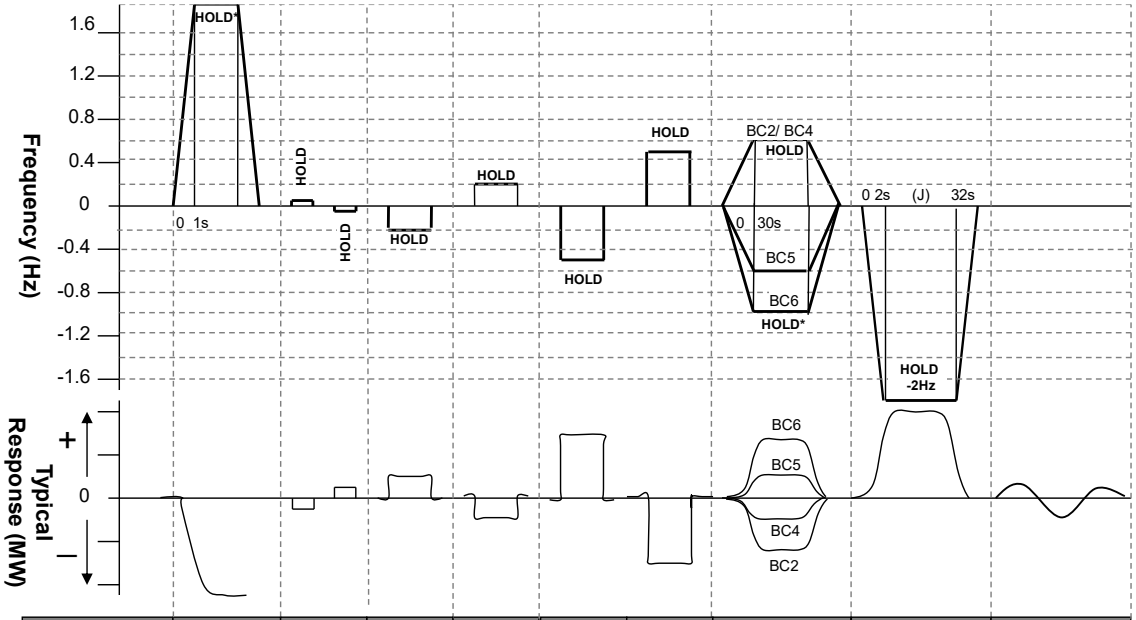

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+/-0.6 -1.0	-2.0	±0**
MLP6	BC1					O	BC2		L
MLP6 LFSM	BC3						BC4		
MLP5					A				
MLP4		D/E	F	G	H	I		J	M
MLP4 LFSM							BC5/6		N
MLP3									
MLP2					P	Q			
MLP1					K				

ECP.A.6.6. Figure 2 – Frequency Response Capability LFSM-O, LFSM-U, FSM Step Response tests

* This will generally be +2.0 Hz unless an injection of this size causes a reduction in plant output that takes the operating point below the **Minimum Regulating Level** in which case an appropriate injection should be calculated in accordance with the following:
For example 0.9 Hz is needed to take an initial output 65% to a final output of 20%. If the initial output was not 65% and the **Minimum Regulating Level** is not 20% then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Minimum Regulating Level	20%
Frequency Controller **Droop**	4%
Frequency to be injected = (0.65-0.20)x0.04x50 =	0.9 Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the system frequency signal. The tests will consist of monitoring the **Power Park Module** in **Frequency Sensitive Mode** during normal **System Frequency** variations without applying any injection. Test N in Figure 2 shall be conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

ECP.A.6.6.9 The **Target Frequency** adjustment facility should be demonstrated from the

normal control point within the range of 49.9 Hz to 50.1 Hz by step changes to the **Target Frequency** setpoint as indicated in ECP.A.6.6 Figure 3 while operating at MLP4.

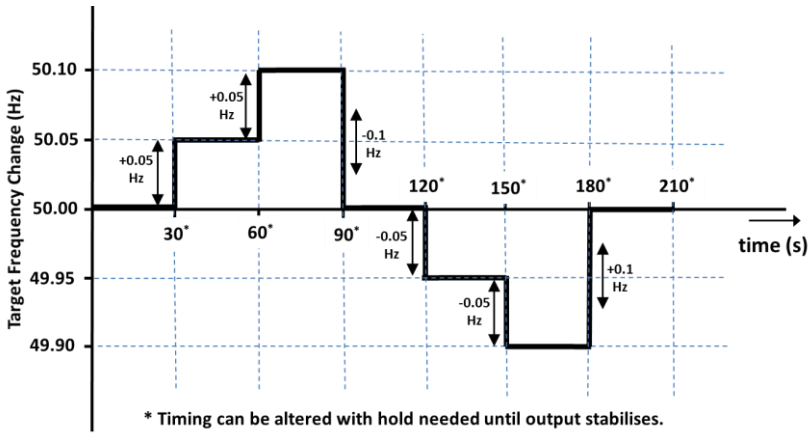

ECP.A.6.6. Figure 3 – **Target Frequency** setting changes

ECP.A.6.6.10 Compliance of **Non-Synchronous Electricity Storage Modules** during low **System Frequencies**

In order to assess the capability of the **Non-Synchronous Electricity Storage Module** the following steps shall be undertaken.

(i) Prior to the test, the **Non-Synchronous Electricity Storage Module** shall be operating at its **Maximum Import Power** with the **Non-Synchronous Electricity Storage Module** in **Limited Frequency Sensitive Mode**.

(ii) A test signal shall be applied which ramps the **System Frequency** from 50 Hz to 49.0 Hz at a rate of 2 Hzs^{-1}. The **System Frequency** shall be held at 49.0 Hz for 60 s and the then ramped back to 50 Hz in 10 s as shown in Figure 4.

(iii) The test result shall demonstrate the ability of the **Electricity Storage Module** to meet the requirements of ECC.6.3.7.2.3. When the test injection signal is held at 49.0 Hz, the **Active Power** output of the **Non-Synchronous Electricity Storage Module** should achieve a steady state operating point in no more than 10 s and this should be maintained whilst the test **Frequency** signal is held at 49.0 Hz.

(iv) The above tests described (i) – (iii) above shall be repeated but the minimum test frequency applied shall be to 48.8 Hz as shown in Figure 5.

(v) The above tests shall be repeated when the **Non-Synchronous Electricity Storage Module** is operating at 40% of its **Maximum Import Power**.

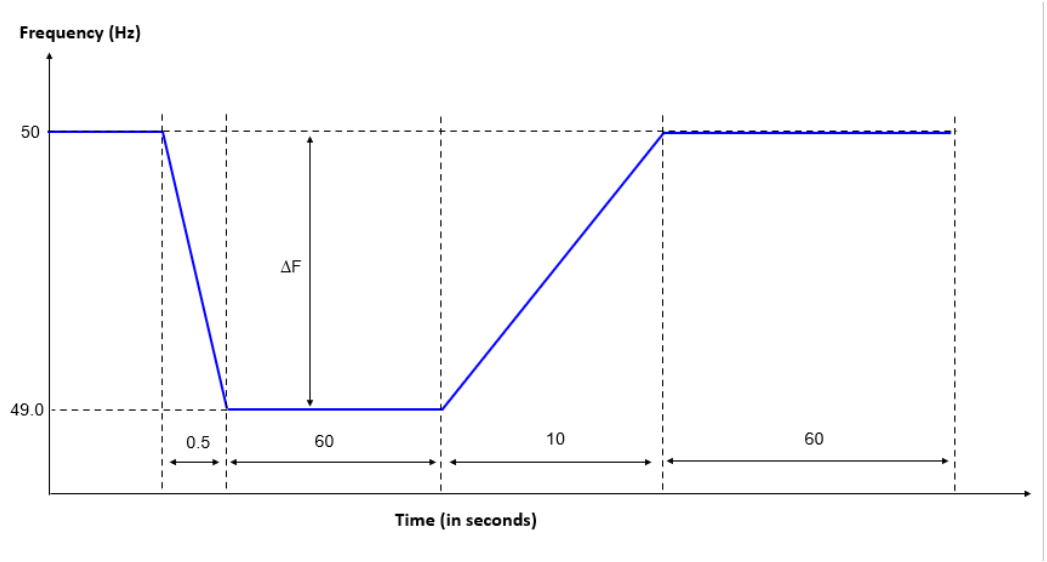

ECP.A.6.6 Figure 4

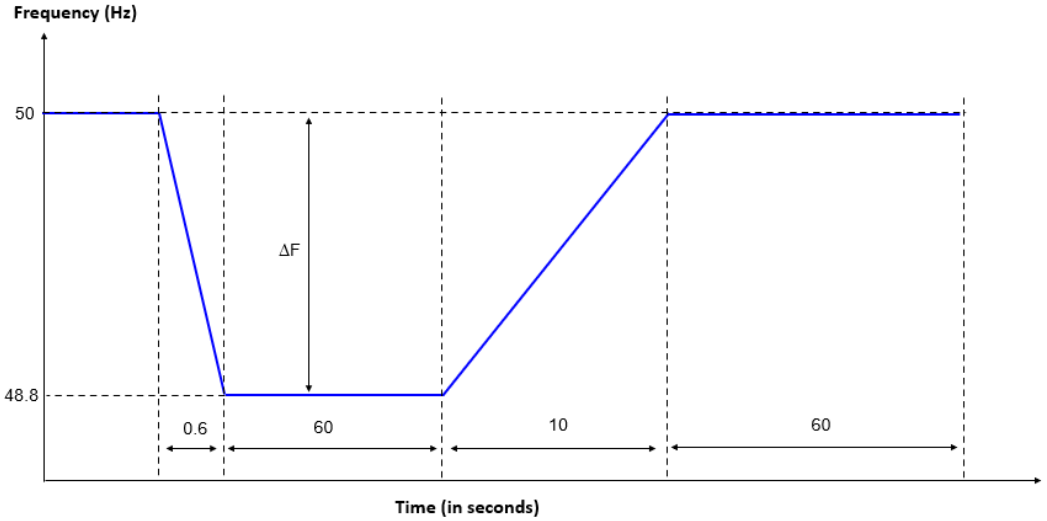

ECP.A.6.6 **Figure 5**

ECP.A.6.7 Fault Ride Through Testing

ECP.A.6.7.1 This section describes the procedure for conducting **Fault Ride Through** tests on a single **Power Park Unit** as required by ECP.7.2.2(d).

ECP.A.6.7.2 The test circuit will utilise the full **Power Park Unit** (e.g. in the case of a wind turbine it would include the full wind turbine nacelle structure, all inverters and converters along with step up transformer to medium voltage, all control systems including pitch control emulation) and shall be conducted with sufficient power input resource available to produce at least 95% of the **Maximum Capacity** of the **Power Park Unit**. The test will comprise of a number of controlled short circuits applied to a test network to which the **Power Park Unit** is connected, typically comprising of the **Power Park Unit** transformer and a test impedance or other decoupling equipment to shield the connected network from voltage dips at the **Power Park Unit** terminals.

ECP.A.6.7.3 In each case, the tests should demonstrate the minimum voltage at the **Power Park Unit** terminals or **High Voltage** side of the **Power Park Unit** transformer which the **Power Park Unit** can withstand for the length of time specified in ECP.A.6.7.5. Any test results provided to **The Company** should contain sufficient data pre and post fault in order to determine steady state values of all signals, and the power recovery timescales.

ECP.A.6.7.4 In addition to the signals outlined in ECP.A.4.2. the following signals from either the **Power Park Unit** terminals or **High Voltage** side of the **Power Park Unit** transformer should be provided for this test only:

(i) Phase voltages
(ii) Positive phase sequence and negative phase sequence voltages
(iii) Phase currents
(iv) Positive phase sequence and negative phase sequence currents
(v) Estimate of **Power Park Unit** negative phase sequence impedance
(vi) MW – **Active Power** at the **Power Generating Module**.
(vii) MVAr – **Reactive Power** at the **Power Generating Module**.
(viii) Mechanical Rotor Speed
(ix) Real / reactive, current / power Setpoint as appropriate
(x) **Fault Ride Through** protection operation (e.g. a crowbar in the case of a doubly fed induction generator)
(xi) Any other signals relevant to the control action of the **Fault Ride Through** control deemed applicable for model validation.

At a suitable frequency rate for fault ride through tests as agreed with **The Company**.

ECP.A.6.7.5 The tests should be conducted for the times and fault types indicated in ECC.6.3.15 as applicable.

ECP.A.6.8 Reactive Power Transfer / Voltage Control Tests for Offshore Power Park Modules

ECP.A.6.8.1 In the case of an **Offshore Power Park Module** which provides all or a portion of the **Reactive Power** capability as described in ECC.6.3.2.5.2 or ECC.6.3.2.6.3 and / or voltage control requirements as described in ECC.6.3.8.5 to enable an **Offshore Transmission Licensee** to meet the requirements of **STC** Section K**,** testing will comprise the entire control system responding to changes applied at the onshore **Interface Point**. The **Generator** shall cooperate with the relevant **Offshore Transmission Licensee** to facilitate these tests as required by **The Company**. The testing may be combined with testing of the corresponding **Offshore Transmission Licensee** requirements under the **STC**. The results in relation to the **Offshore Power Park Module** will be assessed against the requirements in the **Bilateral Agreement**. Where an **Offshore Generator** falls within the scope of ECP.A.6.8.1, **The Company** will advise the **Offshore Generator** of the tests required rather than those specified in ECP.A.6.8.2 to ECP.A.6.8.6 below. For the avoidance of doubt, in the case of an **Offshore Power Park Module** satisfying the requirements of ECC.6.3.2.5.1 (provision of zero transfer of **Reactive Power** at the **Offshore Grid Entry Point**), the requirements of ECP.A.6.8.2 to ECP.A.6.8.6 shall apply.

ECP.A.6.8.2 In the case of an **Offshore Power Park Module** which does not provide part of the **Offshore Transmission Licensee's Reactive Power** capability at the **Interface Point** the following procedure detailed in ECP.A.6.8.3 to ECP.A.6.8.6 shall apply for conducting **Reactive Power** transfer control tests on **Offshore Power Park Modules** and / or voltage control system as per ECC.6.3.2.5.1 and ECC.6.3.2.6.1. These tests shall also be consistent with the requirements of ECC.A.7.3 or ECC.A.8.3 as appropriate. These tests

should be carried out prior to 20% of the **Power Park Units** within the **Offshore Power Park Module** being synchronised, and again when at least 95% of the **Power Park Units** within the **Offshore Power Park Module** in service. There should be sufficient power resource forecast to generate at least 85% of the **Maximum Capacity** of the **Offshore Power Park Module**. For the avoidance of doubt, tests on **Electricity Storage Modules** would not be restricted due to MW resource forecasts as they do not fall under the definition of an **Intermittent Power Source**. Where an **Offshore Power Park Module** falls within the scope of ECP.A.6.8.1, **The Company** will advise the **Offshore Generator** of the tests required rather than those specified in ECP.A.6.8.2 to ECP.A.6.8.6 below.

ECP.A.6.8.3 The **Reactive Power** control system shall be perturbed by a series of system voltage changes and changes to the **Active Power** output of the **Offshore Power Park Module**.

ECP.A.6.8.4 **System** voltage changes should be created by a series of multiple upstream transformer taps. The **Generator** should coordinate with **The Company** or the relevant **Network Operator** in order to conduct the required tests. The time between transformer taps should be at least 10 s as per ECP.A.6.8 Figure 1.

ECP.A.6.8.5 The **Active Power** output of the **Offshore Power Park Module** should be varied by applying a sufficiently large step to the frequency controller setpoint/feedback summing junction to cause a 10% change in output of the **Maximum Capacity** of the **Offshore Power Park Module** in a time not exceeding 10 s. This test does not need to be conducted provided that the frequency response tests as outlined in ECP.A.6.6 are completed.

ECP.A.6.8.6 The following diagrams illustrate the tests to be completed:

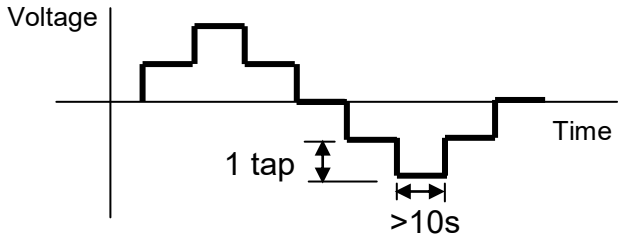

ECP.A.6.8 Figure 1 – Transformer tap sequence for reactive transfer tests

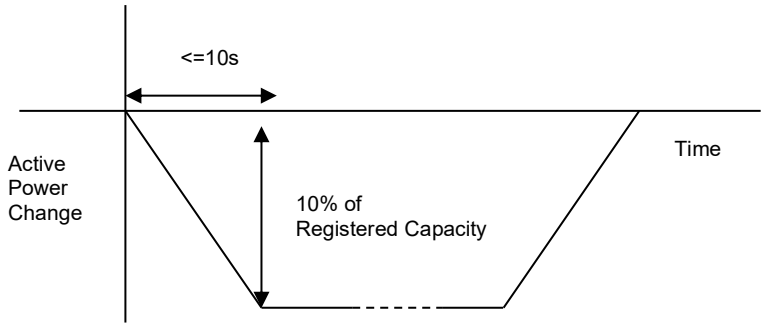

ECP.A.6.8 Figure 2 – **Active Power** ramp for reactive transfer tests

APPENDIX 7

COMPLIANCE TESTING FOR HVDC EQUIPMENT

ECP.A.7.1 SCOPE

ECP.A.7.1.1 This Appendix outlines the general testing requirements for **HVDC System Owner**s to demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**. The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**; and/or

ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code**, **Ancillary Services Agreement** or **Bilateral Agreement**; and/or

iii) require additional tests if control functions to improve damping of power system oscillations and/or sub-synchronous resonance torsional oscillations required by the **Bilateral Agreement** or included in the control scheme and active; and/or

iv) agree a reduced set of tests for subsequent **HVDC Equipment** following successful completion of the first **HVDC Equipment** tests in the case of an installation comprising of two or more **HVDC Systems** or **DC Connected Power Park Modules** which **The Company** reasonably considers to be identical; If:

(a) the tests performed pursuant to ECP.A.7.1.1(iv) in respect of subsequent **HVDC Systems** or **DC Connected Power Park Modules** do not replicate the full tests for the first **HVDC Equipment**, or

(b) any of the tests performed pursuant to ECP.A.7.1.1(iv) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**.

ECP.A.7.1.2 The **HVDC System Owner** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **HVDC System Owner** retains the responsibility for the safety of personnel and plant during the test. The **HVDC System Owner** is responsible for ensuring that suitable arrangements are in place with the **Externally Interconnected System Operator** to facilitate testing. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **HVDC System Owner** otherwise. Reactive Capability tests if required, may be witnessed by **The Company** remotely from **The Company** control centre. For all on site at **The Company** witnessed tests, the **HVDC System Owner** must ensure suitable representatives from the **HVDC System Owner** and / or **HVDC Equipment** manufacturer (if appropriate) are available on site for the entire testing period. In all cases and in addition to any recording of signals conducted by **The Company**, the **HVDC System Owner** shall record all relevant test signals as outlined in ECP.A.4.

ECP.A.7.1.3 In addition to the dynamic signals supplied in ECP.A.4 the **HVDC System Owner** shall inform **The Company** of the following information prior to the

commencement of the tests and any changes to the following, if any values change during the tests:

(i) All relevant transformer tap numbers.

ECP.A.7.1.4 The **HVDC System Owner** shall submit a detailed schedule of tests to **The Company** in accordance with CP.6.3.1, and this Appendix.

ECP.A.7.1.5 Prior to the testing of **HVDC Equipment**, the **HVDC System Owner** shall complete the **Integral Equipment Tests** procedure in accordance with OC.7.5.

ECP.A.7.1.6 Full **HVDC Equipment** testing as required by ECP.7.2 is to be completed as defined in ECP.A.7.2 through to ECP.A.7.5.

ECP.A.7.1.7 **The Company** will permit relaxation from the requirement ECP.A.7.2 to ECP.A.7.5 where an **Equipment Certificate** for **HVDC Equipment** has been provided which details the characteristics from tests on a representative installation with the same equipment and settings and the performance of the **HVDC Equipment** can, in **The Company's** opinion, reasonably represent that of the installed **HVDC Equipment** at that site. The relevant **Equipment Certificate** must be supplied in the **Users Data File structure**.

ECP.A.7.1.8 **The Company** may agree a reduction from the requirement ECP.A.7.2 to ECP.A.7.5 for on-site testing where suitable factory acceptance testing on a representative installation with the same equipment and settings of the **HVDC Equipment** that can, in **The Company's** opinion, reasonably represent the performance of the installed **HVDC Equipment** at that site. This is also conditional on **The Company** and the **DC Converter Station** owner agreeing sufficient on site testing of the fully commissioned **DC Converter Station** to demonstrate that the factory acceptance tests are valid. If in the reasonable opinion of **The Company**, the on-site testing does not demonstrate the factory acceptance tests are valid then the full set of on-site tests should be carried out.

ECP.A.7.2 Reactive Capability Test

ECP.A.7.2.1 This section details the procedure for demonstrating the reactive capability of **HVDC Equipment**. These tests should be scheduled at a time where there are sufficient MW resource forecasted in order to import and export full **Maximum Capacity** of the **HVDC Equipment**.

ECP.A.7.2.2 The tests shall be performed by modifying the voltage set-point of the voltage control scheme of the **HVDC Equipment** by the amount necessary to demonstrate the required reactive range. This is to be conducted for the operating points and durations specified in ECP.A.7.2.5.

ECP.A.7.2.3 **Embedded HVDC System Owners** should liaise with the relevant **Network Operator** to ensure the following tests will not have an adverse impact upon the **Network Operator's System** as per OC.7.5. In situations where the tests have an adverse impact upon the **Network Operator's System**, **The Company** will only require demonstration within the acceptable limits of the **Network Operator**. For the avoidance of doubt, these tests do not negate the requirement to produce a complete **HVDC Equipment** performance chart as specified in OC2.3.2.1

ECP.A.7.2.4 In the case where the **Reactive Power** metering point is not at the same location as the **Reactive Power** capability requirement, then an equivalent **Reactive Power** capability for the metering point shall be agreed between the

HVDC System Owner and **The Company**.

ECP.A.7.2.5 The following tests shall be completed for both importing and exporting of **Active Power** for a **DC Converter**:

(i) Operation at **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 60 minutes.

(ii) Operation at **Maximum Capacity** and maximum continuous leading **Reactive Power** for 60 minutes.

(iii) Operation at 50% **Maximum Capacity** and maximum continuous leading **Reactive Power** for 60 minutes.

(iv) Operation at 50% **Maximum Capacity** and maximum continuous lagging **Reactive Power** for 60 minutes.

(v) Operation at **Minimum Capacity** and maximum continuous leading Reactive Power for 60 minutes.

(vi) Operation at **Minimum Capacity** and maximum continuous lagging **Reactive Power** for 60 minutes.

ECP.A.7.2.6 For the avoidance of doubt, lagging **Reactive Power** is the export of **Reactive Power** from the **HVDC Equipment** to the **Total System** and leading **Reactive Power** is the import of **Reactive Power** from the **Total System** to the **HVDC Equipment**.

ECP.A.7.3 Not used

ECP.A.7.4 Voltage Control Tests

ECP.A.7.4.1 This section details the procedure for conducting voltage control tests on **HVDC Equipment**. These tests should be scheduled at a time where there is sufficient MW resource in order to import and export **Maximum Capacity** of the **HVDC Equipment**. An **Embedded HVDC System Owner** should also liaise with the relevant **Network Operator** to ensure all requirements covered in this section will not have a detrimental effect on the **Network Operator's System**.

ECP.A.7.4.2 The voltage control system shall be perturbed with a series of step injections to the **HVDC Equipment** voltage Setpoint, and where possible, multiple up-stream transformer taps.

ECP.A.7.4.3 For steps initiated using network tap changers the **HVDC System Owner** will need to coordinate with **The Company** or the relevant **Network Operator** as appropriate. The time between transformer taps shall be at least 10 s as per ECP.A.7.4 Figure 1.

ECP.A.7.4.4 For step injection into the **HVDC Equipment** voltage setpoint, steps of ±1%, ±2% and ±4% shall be applied to the voltage control system setpoint summing junction. The injection shall be maintained for 10 s as per ECP.A.7.4 Figure 2.

ECP.A.7.4.5 Where the voltage control system comprises of discretely switched plant and apparatus, additional tests will be required to demonstrate that its performance is in accordance with **Grid Code** and **Bilateral Agreement** requirements.

ECP.A.7.4.6 Tests to be completed:

(i)

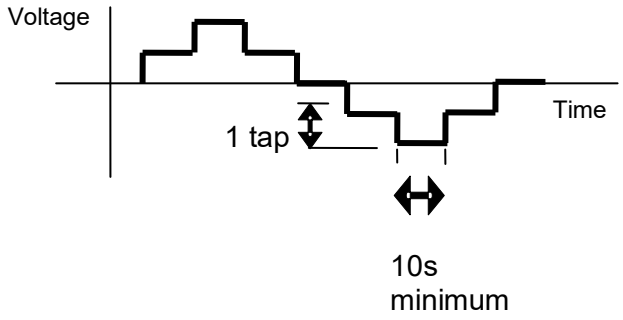

ECP.A.7.4 Figure 1 – Transformer tap sequence for voltage control tests

(ii)

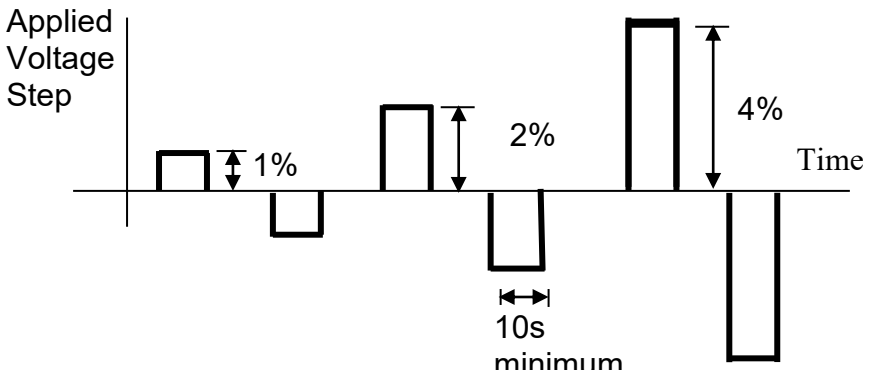

ECP.A.7.4 Figure 2 – Step injection sequence for voltage control tests

ECP.A.7.5 Frequency Response Tests

ECP.A.7.5.1 This section describes the procedure for performing frequency response testing on **HVDC Equipment**. These tests should be scheduled at a time where there is sufficient MW resource in order to import and export full **Maximum Capacity** of the **HVDC Equipment**. The **HVDC System Owner** is responsible for ensuring that suitable arrangements are in place with the **Externally Interconnected System Operator** to facilitate the **Active Power** changes required by these tests

ECP.A.7.5.2 The frequency controller shall be in **Frequency Sensitive Mode** or **Limited Frequency Sensitive Mode** as appropriate for each test. Simulated frequency deviation signals shall be injected into the frequency controller Setpoint/feedback summing junction. If the injected frequency signal replaces rather than sums with the real **System Frequency** signal, then the additional tests outlined in ECP.A.7.5.6 shall be performed with the **HVDC Equipment** in normal **Frequency Sensitive Mode** monitoring actual **System Frequency**, over a period of at least 10 minutes. The aim of this additional test is to verify that the control system correctly measures the real **System Frequency** for normal variations over a period of time.

ECP.A.7.5.3 In addition to the frequency response requirements, it is necessary to demonstrate the **HVDC Equipment** ability to deliver a requested steady state power output which is not impacted by power source variation as per ECC.6.3.9. This test shall be conducted in **Limited Frequency Sensitive Mode** at a part-loaded output for a period of 10 minutes as per ECP.A.7.5.6.

Preliminary Frequency Response Testing

ECP.A.7.5.4 Prior to conducting the full set of tests as per ECP.A.7.5.6, **HVDC System Owners** are required to conduct a preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. These tests should be scheduled at a time where there is sufficient MW resource in order to export full **Maximum Capacity** from the **HVDC Equipment**. The following frequency injections shall be applied when operating at module load point 4.

Test No	Frequency Injection	Notes

(Figure1)		
8	• Inject -0.5 Hz frequency fall over 10 s • Hold for a further 20 s • At 30 s from the start of the test, inject a +0.3 Hz frequency rise over 30 s. • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
13	• Inject -0.5 Hz frequency fall over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
14	• Inject +0.5 Hz frequency rise over 10 s • Hold until conditions stabilise • Remove the injected signal as a ramp over 10 s	
H	• Inject -0.5 Hz frequency fall as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	
I	• Inject +0. 5Hz frequency rise as a stepchange • Hold until conditions stabilise • Remove the injected signal as a stepchange	

ECP.A.7.5.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **HVDC System Owner** shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by **The Company**.

ECP.A.7.5.6 The tests are to be conducted at a number of different Module Load Points (MLP). In the case of **HVDC Equipment** the load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum **HVDC Active Power Transmission Capacity**)	100% MaxHAPTC
Module Load Point 5	90% MaxHAPTC
Module Load Point 4	80% MaxHAPTC
Module Load Point 3	MinHAPTC+0.6 x (80% MaxHAPTC–MinHAPTC)
Module Load Point 2	MinHAPTC+0.3 x (80% MaxHAPTC–MinHAPTC)
Module Load Point 1 (**Minimum HVDC Active Power Transmission Capacity**)	MinHAPTC

ECP.A.7.5.7 The tests are divided into the following two types;

(i) Frequency response compliance and volume tests as per ECP.A.7.5. Figure 1. These tests consist of frequency profile and ramp tests and adjustments to **Target Frequency** setpoint as per ECP.A.7.5 Figure 3.
(ii) System islanding and step response tests as shown by ECP.A.7.5 Figure 2

ECP.A.7.5. Fig 1 and 2 are shown for the Importing of **Active Power**, simulated frequency polarity should be reversed when exporting **Active Power**.

ECP.A.7.5.8 There should be sufficient time allowed between tests for control systems to reach steady state (depending on available power resource). Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **HVDC Equipment** has stabilised. All frequency response tests should be removed over the same timescale for which they were applied. **The Company** may require repeat tests should the response volume be affected by the available power, or if tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection, when not witnessed by **The Company** there must be sufficient time allowed between tests for the **Active Power** (MW) output of the **HVDC Equipment** to have stabilised.

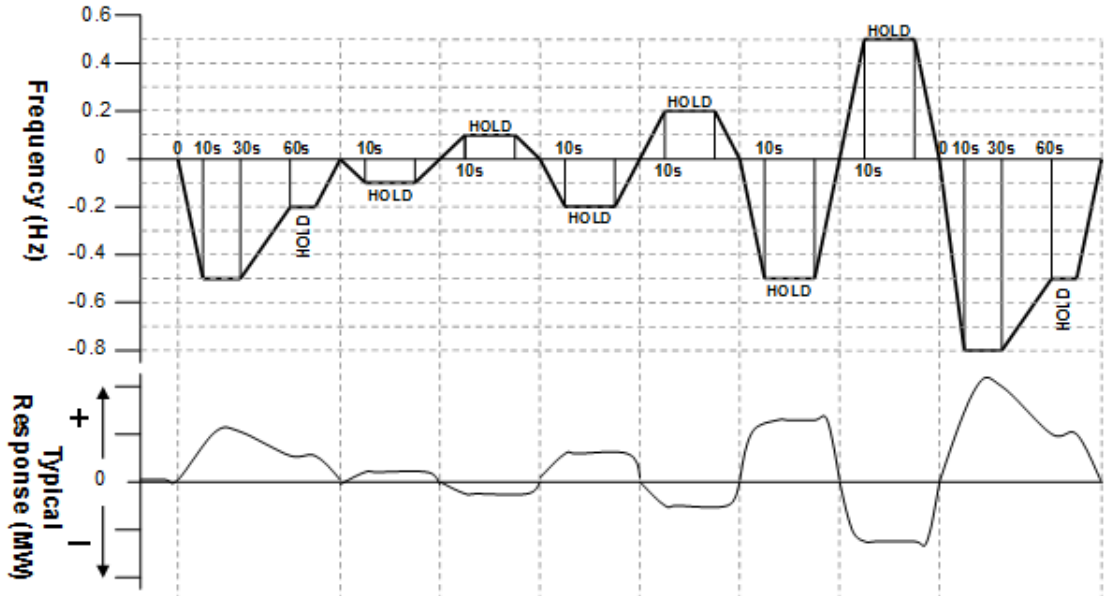

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5								
MLP4	8	9	10	11	12	13	14	17
MLP3								
MLP2								
MLP1	23			24	25			26

ECP.A.7.5. Figure 1 – Frequency Response Capability FSM Ramp Response tests

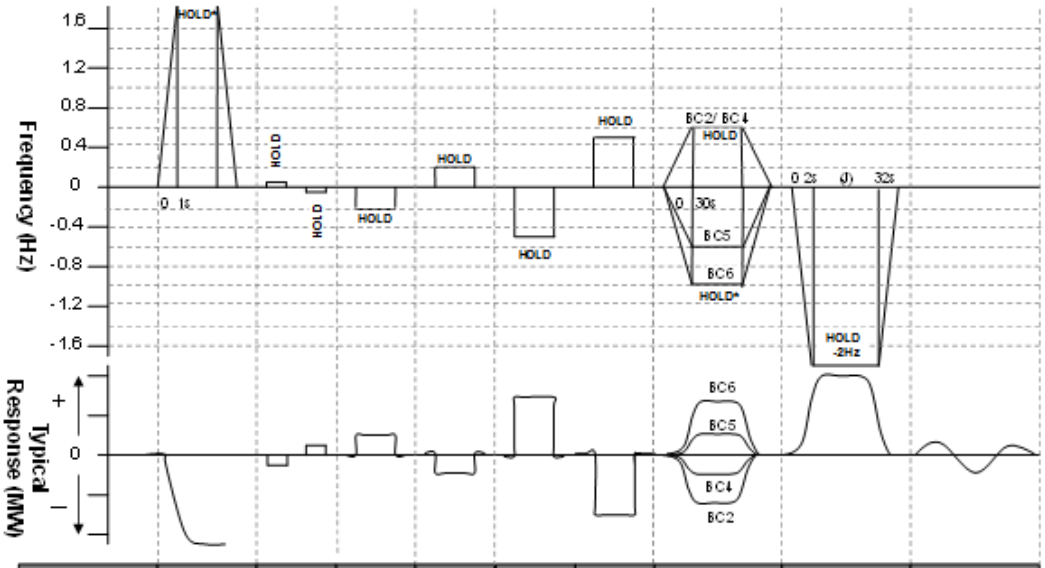

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+/-0.6 -1.0	-2.0	±0**
MLP6	BC1				A	O	BC2		L
MLP6 LFSM	BC3						BC4		
MLP5									
MLP4		D/E	F	G	H	I		J	M
MLP4 LFSM							BC5/6		N
MLP3									
MLP2									
MLP1					K	Q			

ECP.A.7.5. Figure 2 – Frequency Response Capability LFSM-O, LFSM-U, FSM Step Response tests

* This will generally be +2.0 Hz unless an injection of this size causes a reduction in plant output that takes the operating point below the **Minimum Regulating Level** in which case an appropriate injection should be calculated in accordance with the following:
For example 0.9 Hz is needed to take an initial output 65% to a final output of 20%. If the initial output was not 65% and the **Minimum Regulating Level** is not 20%, then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Minimum Regulating Level	20%
Frequency Controller **Droop**	4%
Frequency to be injected =	(0.65-0.20)x0.04x50 = 0.9 Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the **System Frequency** signal. The tests will consist of monitoring the **HVDC Equipment** in **Frequency Sensitive Mode** during normal **System Frequency** variations without applying any injection. Test N in Figure 2 shall be conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

ECP.A.7.5.9 The target frequency adjustment facility should be demonstrated from the normal control point within the range of 49.9 Hz to 50.1 Hz by step changes to

the **Target Frequency** setpoint as indicated in ECP.A.7.5 Figure 3 while operating at MLP4.

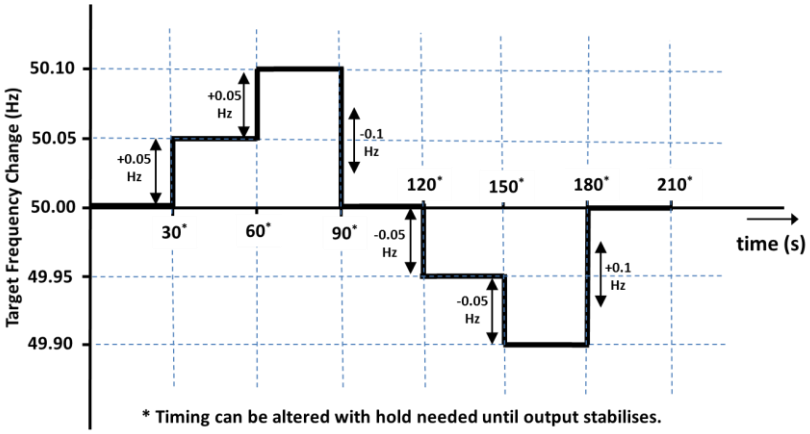

ECP.A.7.5. Figure 3 – Target Frequency setting changes

APPENDIX 8
SIMULATION STUDIES AND COMPLIANCE TESTING FOR NETWORK OPERATORS AND NON-EMBEDDED CUSTOMERS PLANT AND APPARATUS

ECP.A.8.1 Compliance testing for disconnection and reconnection of Network Operator's Plant and Apparatus

ECP.A.8.1.1 **Network Operators** shall comply with the following applicable requirements in respect of **EU Grid Supply Points**:

(i) Demand disconnection schemes;
(ii) Synchronising; and/or
(iii) low frequency demand disconnection;

ECP.A.8.1.2 The requirements for demand disconnection, other than low frequency demand disconnection, are pursuant to the requirements of the **Bilateral Agreement**. Any requirements for testing shall be agreed with the **User** where such requirements are applicable.

ECP.A.8.1.3 The requirements for synchronising (where applicable) shall be pursuant to the requirements of the **Bilateral Agreement** and ECC.6.2.3.10. Any requirements for testing (as applicable) shall be agreed with the **User** and carried out during the commissioning process.

ECP.A.8.1.4 **Network Operators** who are **EU Code Users** must demonstrate compliance with the low frequency demand disconnection requirements of ECC.6.4.3, ECC.A.5 and OC.6.6 for their entire distribution **System**.

ECP.A.8.1.5 An equipment certificate may be submitted to **The Company** instead of part of the tests provided for in ECP.A.8.1.1.

ECP.A.8.2 Compliance testing for operational metering at EU Grid Supply Points

ECP.A.8.2.1 The requirements for operational metering (where required) shall be pursuant to the requirements of the **Bilateral Agreement** and ECC.6.5.6. Any applicable requirements for testing shall be agreed with the **User** and carried out during the commissioning process. An **Equipment Certificate** may be used for this purpose where agreed with **The Company**.

ECP.A.8.3 Compliance testing for disconnection and reconnection of Non-Embedded Customers Plant and Apparatus

ECP.A.8.3.1 **Non-Embedded Customers** shall comply with the following requirements where applicable:

(i) Demand disconnection schemes;
(ii) Synchronising; and/or
(iii) low frequency demand disconnection;

ECP.A.8.3.2 The requirements for demand disconnection, other than low frequency demand disconnection, are pursuant to the requirements of the **Bilateral Agreement.** Any requirements for testing shall be agreed with the **User**.

ECP.A.8.3.3 The requirements for synchronising (where applicable) shall be pursuant to the requirements of the **Bilateral Agreement** and ECC.6.2.3.10. Any requirements for testing (as applicable) shall be agreed with the **User** and carried out during the commissioning process.

ECP.A.8.3.4 **Non-Embedded Customers** who are **EU Code Users** must demonstrate compliance with the low frequency demand disconnection requirements of ECC.6.4.3, ECC.A.5 and OC.6.6 of their **System**.

ECP.A.8.3.5 An equipment certificate may be submitted to **The Company** instead of part of the tests provided for in ECP.A.8.3.1.

ECP.A.8.4 Compliance testing for operational metering on Non-Embedded Customers Plant and Apparatus

ECP.A.8.4.1 The requirements for operational metering (where required)) shall be pursuant to the requirements of the **Bilateral Agreement** and ECC.6.5.6. Any applicable requirements for testing shall be agreed with the **User** and carried out during the commissioning process. An **Equipment Certificate** may be used for this purpose where agreed with **The Company**.

ECP.A.8.5 Common Provisions on Compliance Simulations

ECP.A.8.5.1 **Users** are required to provide simulation studies or equivalent information to the satisfaction of **The Company** in the following circumstances.

(i) a new connection to the **Transmission System** is required forming part of an **EU Grid Supply Point**;
(ii) a **Substantial Modification** takes place at an **EU Grid Supply Point**
(iii) **The Company** becomes aware of a potential non-compliance by the **Network Operator** or **Non-Embedded Customer** at an **EU Grid Supply Point**.

ECP.A.8.5.2 Notwithstanding the requirements of ECP.A.8.5.1, **The Company** shall be entitled to:-

(a) Allow the **Network Operator** or **Non-Embedded Customer** to carry out an alternative set of simulations (or equivalent information) provided that they demonstrate that the **Network Operators** or **Non-Embedded Customers Plant** and **Apparatus** is capable of satisfying the applicable requirements of the **Data Registration Code**.

(b) Require the **Network Operator** or **Non-Embedded Customer** to carry out additional or alternative simulations (or equivalent information) to those specified in ECP.A.8.5.1 where they would otherwise be insufficient to demonstrate compliance.

(c) **The Company** may check that the **Network Operator** or **Non-Embedded Customer** complies with the requirements of the **Grid Code** by carrying out its own compliance simulations based on the simulation reports, models and test measurements submitted under the **Data Registration Code**.

.

ECP.A.8.5.3 **The Company** will supply (under PC.A.8) upon request to the **Network Operator** or **Non-Embedded Customer**, data to enable the **Network Operator** or **Non-Embedded Customer** to carry out the required simulations or supply the equivalent information required under the **Data Registration Code**.

ECP.A.8.6 Compliance simulations for EU Grid Supply Points

ECP.A.8.6.1 **Networks Operators** who are also **EU Code Users**, are required to provide simulation studies (or make available equivalent information) at each **EU Grid Supply Point** to demonstrate compliance with the **Reactive Power** capability

requirements set out in ECC.6.4.5. The study or equivalent information provided shall include a steady state simulation model under both maximum and minimum demand conditions. In addition, the model or equivalent information provided shall include the conditions when the **Reactive Power** export is at an **Active Power** flow of less than 25% of the **Maximum Import Capability** as detailed under ECC.6.4.5.2. In all cases the models or equivalent information submitted shall be agreed and approved with **The Company**.

ECP.A.8.7 Compliance simulations for Non-Embedded Customers Plant and Apparatus

ECP.A.8.7.1 **None Embedded Customers** who are also **EU Code Users** are required at each **EU Grid Supply Point** to provide simulation studies (or equivalent information) to demonstrate compliance with the **Reactive Power** capability requirements set out in ECC.6.4.5. The study or equivalent information provided shall include a steady state simulation model under both maximum and minimum demand conditions and with and without on-site generation. In all cases the models or equivalent information submitted shall be agreed and approved with **The Company**.

ECP.A.8.8 Compliance monitoring at EU Grid Supply Points

ECP.A.8.8.1 To satisfy the requirements of ECC.6.4.5, **EU Code Users** who are either **Network Operators** or **Non-Embedded Customers** shall ensure their **Plant** and **Apparatus** is equipped (where applicable), with the necessary equipment to measure the **Active Power** and **Reactive Power**, at each **EU Grid Supply Point**. The requirement for and time frame for compliance monitoring shall be agreed between **The Company** and the **EU Code User** for each **EU Grid Supply Point**.

APPENDIX 9
COMPLIANCE TESTING FOR GRID FORMING PLANT

ECP.A.9.1 SCOPE

ECP.A.9.1.1 This Appendix outlines the general testing requirements for **Users** or **Non-CUSC Parties** to demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**. The tests specified in this Appendix will normally be sufficient to demonstrate compliance of a **GBGF-I**, however **The Company** may:

i) agree to an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**; and/or

ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code**, **Ancillary Services Agreement** or **Bilateral Agreement**; and/or

iii) require additional tests if control functions to improve damping of power system oscillations or additional functions to prove the capability of the **GBGF-I** is required by the **Bilateral Agreement** or included in the control scheme; and/or

iv) agree a reduced set of tests for the subsequent **GBGF-I** following successful completion of the first **Grid Forming** tests in the case of an installation comprising of two or more **GBGF-Is** which **The Company** reasonably considers to be identical if: -

(a) the tests performed pursuant to ECP.A.9.1.9 in respect of subsequent **GBGF-I Plants** do not replicate the full tests for the first **GBGF-I**; or
(b) any of the tests performed pursuant to ECP.A.9.1.9 do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**.

ECP.A.9.1.2 The **User or Non-CUSC Party** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **User** or **Non-CUSC Party** retains the responsibility for the safety of personnel and plant during the test. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **User** or **Non-CUSC Party** otherwise. For all on site at **The Company** witnessed tests, the **User** or **Non-CUSC Party** must ensure suitable representatives from the **Grid Forming Plant's** manufacturer (if appropriate) are available on site for the entire testing period. In all cases and in addition to any recording of signals conducted by **The Company**, the **User** or **Non-CUSC Party** shall record all relevant test signals as outlined in ECP.A.4.

ECP.A.9.1.3 In addition to the dynamic signals supplied in ECP.A.4, the **User** or **Non-CUSC Party** shall inform **The Company** of the following information prior to the commencement of the tests and any changes to the following, if any values change during the tests:

(i) All relevant transformer tap numbers, if used.
(ii) Number of **Grid Forming Units** in operation.

ECP.A.9.1.4 The **User** or **Non-CUSC Party** shall submit a detailed schedule of tests to **The Company** in accordance with ECP.6.3.1, and this Appendix.

ECP.A.9.1.5 Prior to the testing of the **GBGF-I** the **User** or **Non-CUSC Party** shall complete

the **Integral Equipment Tests** procedure in accordance with OC.7.5.

ECP.A.9.1.6 Full **GBGF-I** testing as required by ECP.7.2 is to be completed as defined in ECP.A.9.1.9.

ECP.A.9.1.7 **The Company** will permit relaxation from the requirements in ECP.A.9.1.9 where an **Equipment Certificate** for **GBGF-I** has been provided which details the characteristics from tests on a representative installation with the same equipment and settings and the performance of the **GBGF-I** can, in **The Company's** opinion, reasonably represent that of the installed **GBGF-I** at that site. The relevant **Equipment Certificate** must be supplied in the **Users Data File Structure**.

ECP.A.9.1.8 Prior to any **GBGF-I** tests taking place, the **User** or **Non-CUSC Party** shall have completed the relevant compliance tests on the **GBGF-I**, **Power Generating Module** or **Generating Unit** as required under ECP.A.5 or OC5. A.2 (as relevant) or **Power Park Module** as required under ECP.A.6 or OC5. A.3 (as applicable) or **HVDC Systems** or **DC Converters** as required under ECP.A.7 or OC5. A.4 (as applicable).

ECP.A.9.1.9 Demonstration of **Grid Forming Capability**

ECP.A.9.1.9.1 This section details the procedure for demonstrating **Active ROCOF Response Power**. Ideally if the test is being completed as part of a type test on an isolated network and it is possible to change the frequency of the isolated network then the tests should be completed using a variable network **Frequency**. **The Company** recognise that it is not possible in a large number of cases to adjust the network frequency of the network to which the **Grid Forming Plant** is connected. If a suitable test network is not available, performance of the **GBGF-I** will need to be demonstrated through online monitoring as detailed in CC.6.6 or ECC.6.6 and simulation studies as required under ECP.A.3.9.4 will be required during the **Interim Operational Notification Process** as provided for under CP.6 or ECP.6 (as applicable).

ECP.A.9.1.9.2 In this test, with the **Grid Forming Plant** initially running at full load, the test network frequency is ideally increased from 50 Hz to 51 Hz at a rate of 1 Hzs^{-1} with measurements of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in ms. The test is required to assess correct operation of the **Grid Forming Plant** without saturating. This test is then repeated for a 50 Hz to 49 Hz at a rate of 1 Hzs^{-1}.

ECP.A.9.1.9.3 These tests are required to assess the **Grid Forming Plant's** withstand capabilities under extreme **System Frequencies**.

(i) For **Grid Forming Plant** comprising a **GBGF-I** the frequency of the test network is increased from 50 Hz to 52 Hz at a rate of 2 Hzs^{-1} with measurements of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in ms.

(ii) For a **Grid Forming Plant** comprising a **GBGF-I** the frequency of the test network is increased from 50 Hz to 52 Hz at a rate of 1 Hzs^{-1} with measurements of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in ms.

(iii) For **Grid Forming Plant** comprising a **GBGF-I** the frequency of the test network is decreased from 50 Hz to 47 Hz at a rate of 2 Hzs^{-1} with measurements of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in ms.

(iv) For **Grid Forming Plant** comprising a **GBGF-I** the frequency of the test network is decreased from 50 Hz to 47 Hz at a rate of 1 Hzs^{-1} with

measurements of the **Grid Forming Plant's Active ROCOF Response Power**, **System Frequency** and time in ms.

ECP.A.9.1.9.4 This test is to demonstrate the **Grid Forming Plant's** ability to supply **Active ROCOF Response Power** over the full **System Frequency** range.

(a) With the frequency of the test network set to 50 Hz, the **GBGF-I** should be initially running at 75% **Maximum Capacity** or **Registered Capacity**, zero MVAr output and both **Limited Frequency Sensitive Mode** and **Frequency Sensitive Mode** disabled.

(b) The frequency is then increased from 50 Hz to 52 Hz at a rate of 1 Hzs^{-1} over a 2 s period. Allow conditions to stabilise for 5 s and then decrease the frequency from 52 Hz to 47 Hz at a rate of 1 Hzs^{-1} over a 5 s period. Allow conditions to stabilise.

(c) Record results of **Active ROCOF Response Power**, **Reactive Power**, voltage and frequency.

(d) The test now needs to be re-run in the opposite direction. The same initial conditions should be applied as per ECP.A.9.1.9.4(a).

(e) The frequency is then decreased from 50 Hz to 47 Hz at a rate of 1 Hzs^{-1} over a 3 s period. Allow conditions to stabilise for 5 s and then increase the frequency from 47 Hz to 52 Hz at a rate of 1 Hzs^{-1} over a 5 s period. Allow conditions to stabilise.

(f) Record results of **Active ROCOF Response Power**, **Reactive Power**, voltage and frequency.

ECP.A.9.1.9.5 This test is to demonstrate the **Grid Forming Plant's** ability to supply **Active Phase Jump Power** under normal operation.

(a) With the frequency of the test network set to 50 Hz, the **GBGF-I** should be initially running at **Maximum Capacity** or **Registered Capacity** or at its agreed deloaded point, zero MVAr output and all control actions (e.g. **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) disabled.

(b) Apply a positive phase jump of up to the **Phase Jump Angle Limit** at the **Grid Entry Point** or **User System Entry Point** (if **Embedded**).

(c) This test can then be repeated by injecting the same angle into the **Grid Forming Plant's** control system (as indicatively shown in Figure ECP.A.9.1.9.5). This specific test can be repeated on site as required for a routine performance evaluation test. It should be noted that Figure ECP.A.9.1.9.5 is a simplified representation. Each **Grid Forming Plant Owner** can use their own design, that may be very different to Figure ECP.A.9.1.9.5 but should contain all relevant functions that can include test points and other equivalent data and documentation. Any additional signals, measurements, parameters and tests shall be agreed between the **Grid Forming Plant Owner** and **The Company**.

(d) Repeat tests (b) and (c) with a negative injection up to the **Phase Jump Angle Limit**.

(e) Record traces of **Active Power**, **Reactive Power**, voltage, current and frequency for a period of 10 s after the step change in phase has been applied.

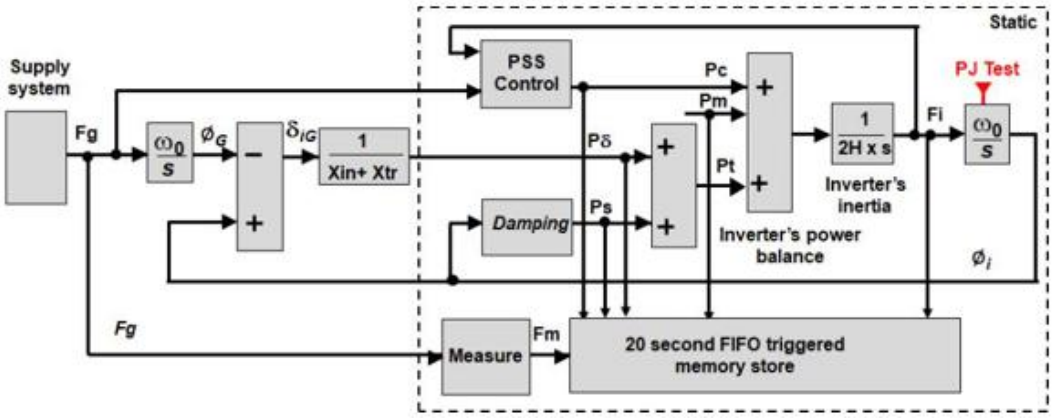

Figure ECP.A.9.1.9.5

As part of these tests, the corresponding **Active Power** change resulting from a phase shift will be a function of the local reactance and the location of where the phase shift is applied in addition to any additional upstream impedance between the **GBGF-I** and phase step location.

ECP.A.9.1.9.6 This test is to demonstrate the **Grid Forming Plant's** ability to supply **Active Phase Jump Power** under extreme conditions. Where it is not possible to undertake this test as part of a type test, **The Company** will accept demonstration through a combination of simulation studies as required under ECP.A.3.9.4(vi) and online monitoring as required under ECC.6.6.1.9.

(a) With the frequency of the test network set to 50 Hz, the **Grid Forming Plant** should be initially running at its **Minimum Stable Operating Level** or **Minimum Stable Generation**, zero MVAr output and all control actions (e.g., **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) disabled.

(b) Apply a phase jump of 60 degrees at the connection point of the **GBGF-I** or into the **Grid Forming Plant's** control system as shown in Figure ECP.A.9.1.9.5.

(c) Record traces of **Active Power**, **Reactive Power**, voltage, current and frequency for a period of 10 s after the step change in phase has been applied.

(d) Repeat steps (a), (b) and (c) of ECP.A.9.1.9.6 but on this occasion apply a phase jump equivalent to the positive **Phase Jump Angle Limit** at the Grid.

ECP.A.9.1.9.7 This test is to demonstrate the **GBGF-I's** ability to supply **Active Phase Jump Power**, **Fault Ride Through** and **GBGF Fast Fault Current Injection** during a faulted condition. Where it is not possible to undertake this test as part of a type test, **The Company** will accept demonstration through a combination of simulation studies as required under ECP.A.3.9.4(vii) and online monitoring as required under CC.6.6 and ECC.6.6.1.9.

(a) With the frequency set to 50 Hz, the **Grid Forming Plant** should be initially running at its **Maximum Capacity** or **Registered Capacity** or at an alternative loading point as agreed with **The Company**, zero MVAr output and all control actions (e.g., **Limited Frequency Sensitive Mode**, **Frequency Sensitive Mode** and voltage control) disabled.

(b) Apply a solid three phase short circuit fault at the connection point in the test network forming part of the type test for 140 ms or alternatively the equivalent of a zero retained voltage for 140 ms.

(c) Record traces of **Active Power**, **Reactive Power**, voltage, current and frequency for a period of 10 s after the fault has been applied.

(d) Repeat steps (a) to (c) but on this occasion with fault ride through, **GBGF Fast Fault Current Injection Limited Frequency Sensitive Mode** and voltage control switched into service.

(e) Record traces of **Active Power**, **Reactive Power**, voltage, current and frequency for a period of 10 s after the step change in phase has been applied and confirm correct operation.

ECP.A.9.1.9.8 The final test required is to demonstrate the **GBGF-I** is capable of contributing to **Active Damping Power**. The **Grid Forming Plant Owner** should configure their **Grid Forming Plant** in form or equivalent (as agreed with **The Company**) as shown in Figure ECP.A.3.9.6(a) or Figure ECP.A.3.9.6(b) as applicable. Each **Grid Forming Plant Owner** can use their own design, that may be very different to Figures ECP.A.3.9.6(a) or ECP.A.3.9.6(b) but should contain all relevant functions.

As part of this test, the **Grid Forming Plant Owner** is required to inject a signal into the **Grid Forming Plant** controller. The results supplied need to verify the following criteria:-

i) Inject a **Test Signal** into the **Grid Forming Plant** controller to demonstrate the **Active Control Based Power** output is supplied below the 5 Hz bandwidth limit An acceptable performance will be judged where the overshoot or decay matches the **Damping Factor** declared by the **Grid Forming Plant Owner** as submitted in PC.A.5.8.1 in addition to assessment against the requirements of CC.A.6.2.6.1 or ECC.A.6.2.6.1 or CC.A.7.2.2.5 or ECC.A.7.2.5.2 as applicable.

<END OF ECP>

OPERATING CODE NO. 1

(OC1)

DEMAND FORECASTS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC1.1 INTRODUCTION....2

OC1.2 OBJECTIVE....2

OC1.3 SCOPE....2

OC1.4 DATA REQUIRED BY THE COMPANY IN THE OPERATIONAL PLANNING PHASE....2

OC1.5 DATA REQUIRED BY THE COMPANY IN THE PROGRAMMING PHASE, CONTROL PHASE AND POST-CONTROL PHASE....3

OC1.6 THE COMPANY FORECASTS....5

OC1.7 SYSTEM RESTORATION…….. 5

OC1.1 INTRODUCTION

OC1.1.1 **Operating Code No.1** ("**OC1**") is concerned with **Demand** forecasting for operational purposes. In order to match generation output with **Demand** for electricity it is necessary to undertake **Demand** forecasting. It is also necessary to undertake **Demand** forecasting of **Reactive Power**.

OC1.1.2 In the **Operational Planning Phase**, **Demand** forecasting shall be conducted by **The Company** taking account of **Demand** forecasts furnished by **Network Operators**, who shall provide **The Company** with information in the form set out in this **OC1**. The data supplied under the **PC** is also taken into account.

OC1.1.3 In the **Programming Phase** and **Control Phase**, **The Company** will conduct its own **Demand** forecasting taking into account information to be furnished by **Suppliers** and **Network Operators** and the other factors referred to in OC1.6.1.

OC1.1.4 In this **OC1**, the point of connection of the **External Interconnection** to the **National Electricity Transmission System** shall be considered as a **Grid Supply Point**. **Reactive Power Demand** includes the series **Reactive** losses of the **User's System** but excludes any network susceptance and any **Reactive** compensation on the **User's System**. **The Company** will obtain the lumped network susceptance and details of **Reactive** compensation from the requirements to submit data under the **PC**.

OC1.1.5 Data relating to **Demand Control** should include details relating to MW.

OC1.1.6 **OC1** deals with the provision of data on **Demand Control** in the **Operational Planning Phase**, the **Programming Phase** and the **Post-Control Phase**, whereas **OC6** (amongst other things) deals with the provision of data on **Demand Control** following the **Programming Phase** and in the **Control Phase**.

OC1.1.7 In this **OC1**, Year 0 means the current **Financial Year** at any time, Year 1 means the next **Financial Year** at any time, Year 2 means the **Financial Year** after Year 1, etc.

OC1.1.8 References in **OC1** to data being supplied on a half hourly basis refer to it being supplied for each period of 30 minutes ending on the hour and half-hour in each hour.

OC1.2 OBJECTIVE

The objectives of **OC1** are to:

OC1.2.1 enable the provision of data to **The Company** by **Users** in the **Programming Phase**, **Control Phase** and **Post-Control Phase**; and

OC1.2.2 provide for the factors to be taken into account by **The Company** when **Demand** forecasting in the **Programming Phase** and **Control Phase**.

OC1.3 SCOPE

OC1 applies to **The Company** and to **Users** which in this **OC1** means:

(a) **Network Operators**, and

(b) **Suppliers**.

OC1.4 DATA REQUIRED BY THE COMPANY IN THE OPERATIONAL PLANNING PHASE

OC1.4.1 (a) Each **User**, as specified in (b) below, shall provide **The Company** with the data requested in OC1.4.2 below.

(b) The data will need to be supplied by each **Network Operator** directly connected to the **National Electricity Transmission System** in relation to **Demand Control** and in relation each **Generator** with respect to the output of **Embedded Medium Power Stations** within its **System**.

OC1.4.2 (a) Data

By calendar week 28 each year each **Network Operator** will provide to **The Company** in writing the forecast information listed in (c) below for the current **Financial Year** and each of the succeeding five **Financial Years**.

(b) Data Providers

In circumstances when the busbar arrangement at a **Grid Supply Point** is expected to be operated in separate sections, separate sets of forecast information for each section will be provided to **The Company**.

(c) Embedded Medium Power Station Output and Demand Control

For the specified time of the annual peak half hour **National Electricity Transmission System Demand**, as specified by **The Company** under PC.A.5.2.2, the output of **Embedded Medium Power Stations** and forecasts of **Demand** to be relieved by **Demand Control** on a **Grid Supply Point** basis giving details of the amount and duration of the **Demand Control**.

OC1.5 DATA REQUIRED BY THE COMPANY IN THE PROGRAMMING PHASE, CONTROL PHASE AND POST-CONTROL PHASE

OC1.5.1 Programming Phase

For the period of 2 to 8 weeks ahead the following will be supplied to **The Company** in writing by 1000 hours each Monday:

(a) Demand Control

Each **Network Operator** will supply MW profiles of the amount and duration of their proposed use of **Demand Control** which may result in a **Demand** change equal to or greater than the **Demand Control Notification Level** (averaged over any half hour on any **Grid Supply Point**) on a half hourly and **Grid Supply Point** basis;

(b) Medium Power Station Operation

Each **Network Operator** will, if reasonably required by **The Company**, supply MW schedules for the operation of **Embedded Medium Power Stations** within its **System** on a half hourly and **Grid Supply Point** basis.

OC1.5.2 For the period 2 to 12 days ahead the following will be supplied to **The Company** in writing by 1200 hours each Wednesday:

(a) Demand Control

Each **Network Operator** will supply MW profiles of the amount and duration of their proposed use of **Demand Control** which may result in a **Demand** change equal to or greater than the **Demand Control Notification Level** (averaged over any half hour on any **Grid Supply Point**) on a half hourly and **Grid Supply Point** basis;

(b) Medium Power Station Operation

Each **Network Operator** will, if reasonably required by **The Company**, supply MW schedules for the operation of **Embedded Medium Power Stations** within its **System** on a half hourly and **Grid Supply Point** basis.

OC1.5.3 Medium Power Station Output

Each **Network Operator** will, if reasonably required by **The Company**, supply **The Company** with MW schedules for the operation of **Embedded Medium Power Stations** within its **System** on a half hourly and **Grid Supply Point** basis in writing by 1000 hours each day (or such other time specified by **The Company** from time to time) for the next day (except that it will be for the next 3 days on Fridays and 2 days on Saturdays and may be longer (as specified by **The Company** at least one week in advance) to cover holiday periods);

OC1.5.4 Other Codes

Under **OC6** each **Network Operator** will notify **The Company** of their proposed use of **Demand Control** (which may result in a **Demand** change equal to or greater than the **Demand Control Notification Level**), and under **BC1**, each **Supplier** will notify **The Company** of their proposed use of **Customer Demand Management** (which may result in a **Demand** change equal to or greater than the **Customer Demand Management Notification Level**) in this timescale.

OC1.5.5 Control Phase

OC1.5.5.1 Demand Control

Under **OC6**, each **Network Operator** will notify **The Company** of any **Demand Control** proposed by itself which may result in a **Demand** change equal to or greater than the **Demand Control Notification Level** averaged over any half hour on any **Grid Supply Point** which is planned after 1000 hours, and of any changes to the planned **Demand Control** notified to **The Company** prior to 1000 hours as soon as possible after the formulation of the new plans;

OC1.5.5.2 Customer Demand Management

(a) Each **Supplier** will notify **The Company** of any **Customer Demand Management** proposed by itself which may result in a **Demand** change equal to or greater than the **Customer Demand Management Notification Level** averaged over any half hour on any **Grid Supply Point** which is planned to occur at any time in the **Control Phase** and of any changes to the planned **Customer Demand Management** already notified to **The Company** as soon as possible after the formulation of the new plans.

(b) The following information is required on a **Grid Supply Point** and half-hourly basis:

(i) the proposed date, time and duration of implementation of **Customer Demand Management**; and

(ii) the proposed reduction in **Demand** by use of **Customer Demand Management**.

OC1.5.5.3 Load Management Blocks

In Scotland, by 11:00 each day, each **Supplier** who controls a **Load Management Block** of **Demand** with a capacity of 5MW or more shall submit to **The Company** a schedule of its proposed switching times and profiles in respect of each block for the next day.

OC1.5.6 Post-Control Phase

The following will be supplied to **The Company** in writing by 0600 hours each day in respect of **Active Power** data and by 1000 hours each day in respect of **Reactive Power** data:

(a) Demand Control

Each **Network Operator** will supply MW profiles for the previous calendar day of the amount and duration of **Demand** reduction achieved by itself from the use of **Demand Control** equal to or greater than the **Demand Control Notification Level** (averaged over any half hour on any **Grid Supply Point**), on a half hourly and **Grid Supply Point** basis.

(b) Customer Demand Management

Each **Supplier** will supply MW profiles of the amount and duration of **Demand** reduction achieved by itself from the use of **Customer Demand Management** equal to or greater than the **Customer Demand Management Notification Level** (averaged over any half hour on any **Grid Supply Point**) on a half hourly and **Grid Supply Point** basis during the previous calendar day.

OC1.6 THE COMPANY FORECASTS

OC1.6.1 The following factors will be taken into account by **The Company** when conducting **National Electricity Transmission System Demand** forecasting in the **Programming Phase** and **Control Phase**:

(a) Historic **Demand** data (this includes **National Electricity Transmission System Losses**).

(b) Weather forecasts and the current and historic weather conditions.

(c) The incidence of major events or activities which are known to **The Company** in advance.

(d) Anticipated interconnection flows across **External Interconnections**.

(e) **Demand Control** equal to or greater than the **Demand Control Notification Level** (averaged over any half hour at any **Grid Supply Point**) proposed to be exercised by **Network Operators** and of which **The Company** has been informed.

(f) **Customer Demand Management** equal to or greater than the **Customer Demand Management Notification Level** (averaged over any half hour at any **Grid Supply point**) proposed to be exercised by **Suppliers** and of which **The Company** has been informed.

(g) Other information supplied by **Users**.

(h) Anticipated **Pumped Storage Unit** demand.

(i) the sensitivity of **Demand** to anticipated market prices for electricity.

(j) **BM Unit Data** submitted by **BM Participants** to **The Company** in accordance with the provisions of **BC1** and **BC2**.

(k) **Demand** taken by **Station Transformers**

(l) Anticipated **Electricity Storage Module** demand

OC1.6.2 Taking into account the factors specified in OC1.6.1 **The Company** uses **Demand** forecast methodology to produce forecasts of **National Electricity Transmission System Demand**. A written record of the use of the methodology must be kept by **The Company** for a period of at least 12 months.

OC1.6.3 The methodology will be based upon factors (a), (b) and (c) above to produce, by statistical means, unbiased forecasts of **National Demand**. **National Electricity Transmission System Demand** will be calculated from these forecasts but will also take into account factors (d), (e), (f), (g), (h), (i) and (j) above. No other factors are taken into account by **The Company**, and it will base its **National Electricity Transmission System Demand** forecasts on those factors only.

OC1.7 SYSTEM RESTORATION

OC1.7.1 From 31 December 2026 and during normal system operation, **The Company** shall publish on a daily basis, 60% and 100% of the peak **National Demand**, under pre **System** shutdown conditions for the following day, based on the latests forecast that would feed into the **System Restoration Regional** targets by means of messages inputted by **The Company** to the **Balancing Mechanism Reporting Service** (**BMRS**).

OC1.7.2 From 31 December 2026 and during **System Restoration**, **The Company** shall publish for each **System Restoration Region**, the **Demand** that is used to calculate the **National Demand** on an hourly basis on a reasonable endeavours basis by means of messages inputted by **The Company** to the **Balancing Mechanism Reporting Service** (**BMRS**).

< END OF OPERATING CODE NO. 1 >

OPERATING CODE NO.2

(OC2)

OPERATIONAL PLANNING AND DATA PROVISION

CONTENTS

(This contents page does not form part of the Grid Code)

OPERATIONAL PLANNING AND DATA PROVISION 1
CONTENTS 1
OC2.1 INTRODUCTION 2
OC2.2 SCOPE 3
OC2.3 PROCEDURE 3
OC2.3.1 Co-ordination of Outages 3
OC2.3.2 Data Requirements 17
OC2.3.3 Negative Reserve Active Power Margins 20
OC2.3.4 Frequency Sensitive Operation 22
OC2.4 SPACE WEATHER EVENTS 26
OC2 APPENDIX 1– GENERATION PLANNING PARAMETERS 29
OC2 APPENDIX 2 – PLANNING MATRIX FOR GENERATING UNITS 30
OC2 APPENDIX 3 – POWER PARK MODULE PLANNING MATRIX 31

OC2.1 INTRODUCTION

OC2.1.1 The objectives of OC2 are:

(a) To facilitate the co-ordination of **Planned Outages** of the **NETS** and **Users' Plant** and **Apparatus**.

(b) To enable **The Company** to:

i. publish the **NETS Surplus**;

ii. establish the level of **System Negative Reserve Active Power Margin (NRAPM)**;

iii. plan the deployment of **Frequency Sensitive Mode**;

iv. establish **Operating Margin** parameters; and

v. agree for release of **Existing Gas Cooled Reactor Plant** for outages in certain circumstances.

(c) To enable the co-ordination of outages on **Plant** and **Apparatus** necessary for the operation of the **System Restoration Plan**.

OC2.1.2 **Operational Planning** considers matching generation output with forecast **NETS Demand** and **Interconnector** flows in order to maintain a reserve of generation output to provide margin, taking into account outages on the **NETS** together with outages of **Users' Plant** and **Apparatus** over various timescales as described below, in addition to the ability to restore the **Total System**, in accordance with the requirements of the **Electricity System Restoration Standard**, following a **Total Shutdown** or **Partial Shutdown**.

OC2.1.3 **Restoration Contractors** should separately identify data which shall be provided in respect of **Plant** and **Apparatus** for which they have **Restoration Contracts**. **Restoration Contractors** with **Embedded Plant** and **Apparatus** need only provide data to the relevant **Network Operator** should they be required to do so by the **Distribution Code**, i.e., there is no need to provide identical data to **The Company**.

OC2.1.4 **Generators** and **Interconnector Owners** who have a **CUSC Contract** and who are also **Restoration Contractors**, need only submit the data once in respect of their **Plant** and **Apparatus**. **Generators** and **Interconnector Owners** who are **Restoration Contractors** are required to state for which **Plant** they have a **Restoration Contract**.

OC2.1.5 References in OC2 to a **Generator's**, **Interconnector Owner's** and **Restoration Contractor's** best estimate shall mean that **Generator's**, **Interconnector Owner's** or **Restoration Contractor's** best estimate acting as a reasonable and prudent **Generator** or **Interconnector Owner**.

OC2.1.6 In Scotland, it may be possible, with the agreement of **The Company**, to reduce the administrative burden for **Users** in producing planning information where either the active power output from a **Power Station** is small or the **import** of a demand **User** is small.

OC2.1.7 Where in OC2 there is a requirement to submit data or provide information on a particular day that falls on a non-**Business Day**, that data or information must be submitted by the next **Business Day** unless otherwise agreed in advance with **The Company**.

OC2.1.8 In OC2, for the purpose of **Generator, Interconnector Owner** and **Restoration Contractor** outage co-ordination, Year 0 means the current calendar year at any time, Year 1 means the next calendar year at any time, Year 2 means the calendar year after Year 1, etc. For the purpose of **Transmission** outage planning, Year 0 means the current **Financial Year** at any time, Year 1 means the next **Financial Year** at any time, Year 2 means the **Financial Year** after Year 1, etc. References to 'weeks' in **OC2** are to calendar weeks as defined in ISO 8601.

OC2.1.9 **Network Operators** who have a **Distribution Restoration Zone Plan** in place shall

notify **The Company** whenever an outage of **Restoration Contractor's Plant** or **Apparatus** which contributes to a **Distribution Restoration Zone Plan** is unavailable or a circuit forming part of that **Distribution Restoration Zone Plan** is unavailable, making the operation of that **Distribution Restoration Zone Plan** unviable.

OC2.2 SCOPE

OC2.2.1 OC2 applies to **The Company** and to the following **Users**:

(a) **Generators** in respect of their generating **Plant** which is directly connected to the **NETS** and to any generating **Plant** in **Embedded Large Power Stations**;

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **HVDC System Owners** and **DC Converter Station** owners;

(e) **Interconnector Owners** in respect of their **External Interconnections**; and

(f) **Restoration Contractors** who are party to a **Local Joint Restoration Zone Plan** and who have a **CUSC Contract** where such data has not already been provided under their **User** role in OC2.2.1(a), (c), (d) or (e).

The Company may provide to the **Relevant Transmission Licensees** any data which has been submitted to **The Company** by any **User**s in respect of **Relevant Units** pursuant to the following paragraphs of OC2: OC2.3.1.2, OC2.3.1.3.2 (a), OC2.3.1.3.2 (b), OC2.3.1.3, OC2.3.2.1 (a).

OC2.3 PROCEDURE

OC2.3.1 Co-ordination of Outages

OC2.3.1.1 OC2 makes provision for information exchange between the following parties:

(a) Each **Generator** and each **Interconnector Owner** and **The Company**	In respect of outages of generating **Plant**, **External Interconnection Circuits**, and/or **Apparatus** directly connected to the **NETS**;
(b) The **Company** and each **Generator** and each **Interconnector Owner**	In respect of **NETS** outages relevant to the **Generator** and/or **Interconnector Owner**;
(c) **The Company** and each **Network Operator**	In respect of outages of all **Embedded Large Power Stations** and related **Plant** and **Apparatus**;
(d) The **Company** and each **Network Operator** and **each Non-Embedded Customer**	In respect of **NETS** outages relevant to that **Network Operator** or **Non-Embedded Customer**;
(e) Each **Network Operator** and each **Non-Embedded Customer** and **The Company**	In respect of outages on the **User's System** relevant to **The Company**. For **Network Operators** only, outages of the **Network Operator's System** that may have an impact on: • an **Offshore Transmission System** connected to that **Network Operator's System**. • that **Network Operator's** ability to operate a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**.

OC2.3.1.2 Provision of **Output Usable** data of generating **Plant** and **External Interconnection Circuits**, and the publication of **Surplus**.

OC2.3.1.2.1 If a **Generator**, **Interconnector Owner**, **or Restoration Contractor** referred to in OC2.2.1 (f) where applicable:

(a) experiences any unplanned change to the availability of generating **Plant**, or an **External Interconnection Circuit** and which is expected to last one **Settlement Period** or longer and up to three years ahead, the **Generator** and/or **Interconnector Owner** shall provide **The Company** with the best estimate of the revised **Output Usable**;

(b) makes a plan which would affect the availability of generating **Plant** or an **External Interconnection Circuit** and which is expected to last one **Settlement Period** or longer and up to three years ahead, resulting in a change of level in the **Output Usable** of that generating **Plant** or **External Interconnection Circuit** to a level below or above its previously notified availability, the **Generator** and/or **Interconnector Owner** shall provide **The Company** with the best estimate of the revised **Output Usable**;

(c) experiences any unplanned change to the availability of generating **Plant** or **External Interconnection Circuits** or makes a future plan which would affect the availability of that generating **Plant** or **External Interconnection Circuits**, to contribute to a **Local Joint Restoration Plan** for which the **Generator** and/or **Interconnector Owner** is a **Restoration Contractor**, the **Generator** and/or **Interconnector Owner** shall provide **The Company** with the best estimate of the revised **Output Usable**.

OC2.3.1.2.2 **Generators**, **Interconnector Owners** and/or **Restoration Contractors** shall provide the revised data within 24 hours of the unplanned unavailability occurring, or of the change in planned availability. For multi-shaft generating **Plant** the individual shaft availability must also be provided at the same time. For those **Generators**, **Interconnector Owners** and/or **Restoration Contractors** subject to **Assimilated Law** the revised data must be provided within 1 hour of planning the availability change.

OC2.3.1.2.3 In the case of an **External Interconnection Circuit**, the details of the individual pole-capacity levels that have been summed to produce the **Output Usable** should also be defined within 24 hours.

OC2.3.1.2.4 **Restoration Contractors** referred to in OC2.2.1 (f) which have **Plant** and **Apparatus** subject to either a planned or an unplanned change in availability, shall provide the data within 1 hour of planning the availability change, or of the unplanned change in availability.

OC2.3.1.2.5 **The Company** may, as appropriate, contact each **Generator**, each **Interconnector Owner** and each **Restoration Contractor** referred to in OC2.2.1 (f) who has supplied information to seek clarification on their **Output Usable** submissions.

OC2.3.1.2.6 At a regular time interval, at least once per day (by 1600 hours) up to every hour

The Company will:

(a) having taken into account the information notified to it by **Generators**, **Interconnector Owners** and **Restoration Contractors** as provided for in OC2.2.1(f) via the process defined in OC2.3.1.2.1 and taking into account:

i. **Demand** forecasts and details of proposed use of **Demand Control** received under **OC1**, and an **Operational Planning Margin** requirement set by **The Company**;

ii. **NETS** constraints and outages;

iii. **Network Operator System** constraints and outages, known to **The Company** and;

iv. the **Output Usable** required, in its view, to meet daily total MW requirements;

provide each **Generator,** each **Interconnector Owner** and each **Restoration Contractor** as provided for in OC2.2.1 (f) (where required by **The Company**) in writing with any suggested amendments to the provisional **Output Usable** supplied by the **Generator, Interconnector Owner** and **Restoration Contractor** as provided for in OC2.2.1 (f) which **The Company** believes necessary, and shall advise **Generators** with **Large Power Stations** of the **Surpluses** for the **National Electricity Transmission System** and potential export limitations, which would occur without such amendments;

(b) calculate and submit to **BMRA**:

i. total generating **Output Usable** from **Generating Units** assumed to be available to the **Total System** (National **Output Usable**);

ii. generating **Output Usable** by fuel type from **Generating Units** assumed to be available to the **Total System** (**Output Usable** by fuel type);

iii. generating **Output Usable** by individual **Generating Units** assumed to be available to the **Total System** (**Output Useable** by **Generating Unit**);

iv. total **Generating Plant Demand Margin** assumed to be available to the **Total System** (This is sometimes referred to as the National Margin);

v. total generating **Surplus** assumed to be available to the **Total System** (this is sometimes referred to as the National Surplus);

with daily resolution, for at least the peak **Demand** of each day for 2 day-ahead to 14 day-ahead time scope, and

with weekly resolution, for at least peak **Demand** of each week for 2 week-ahead up to 3 year-ahead time scope.

Information from the calculations referred to in OC2.3.1.2.6 (b) shall effectively define the envelope of opportunity for outages of **Power Generating Modules** (including **DC Connected Power Park Modules**), **Synchronous Generating Units** and **Power Park Modules** covering both **Embedded** and directly connected **Large Power Stations**.

The Company may, as appropriate, contact each **Generator,** each **Interconnector Owner** and **Restoration Contractor** (as provided for in OC2.2.1 (f)) who has supplied information to seek clarification on outages and suggest amendments.

(c) Where a **Generator**, **Interconnector Owner**, **Network Operator** or **Restoration Contractor** (as provided for in OC2.2.1 (f)) has concerns with the suggested amendments to its provisional outage programme (in the case of a **Generator, Interconnector Owner** or a **Restoration Contractor** as provided for in OC2.2.1 (f)) or such potential outages (in the case of a **Network Operator**) it may contact **The Company** to explain its concerns and **The Company** and that **Generator**, **Interconnector Owner**, **Restoration Contractor** (as provided for in OC2.2.1 (f)) or **Network Operator** shall then discuss the problem and seek to resolve it;

(d) The possible resolution of the problem may require **The Company** or a **User** to contact other **Generators**, **Interconnector Owners**, **Restoration Contractors** (as provided for in OC2.2.1 (f)) or **Network Operators**, and joint meetings of all parties may, if any **User** feels it would be helpful, be convened by **The Company**. The need for further discussions shall be determined at the time;

Each **Generator** shall provide **The Company** with updated **Output Usable** as per OC2.3.1 resulting from the above for **Generating Unit**, **Power Generating Module**, and **Power Park Module** outage programme covering both **Embedded** and non-**Embedded Large Power Stations**;

The Company shall then consider the updated **Output Usable** and take this into account in the next calculation and submission to **BMRA**.

OC2.3.1.2.7 **The Company** retains the right to contact **Generators** with **Large Power Stations**, **Interconnector Owners** and **Network Operators** in reference to planned outages of their assets in timescales beyond the European Requirements (3 years) up to the 5 year ahead period to assist in the operational planning of **NETS** outages.

OC2.3.1.2.8 Where **The Company** has issued a **Space Weather Prepare Notification** or a **Space Weather Imminent Notification**, the **Generator**, **Interconnector Owner**, or **Restoration Contractor** shall follow OC2.4 Space Weather Events.

OC2.3.1.3 Planning of **NETS** Outages

The outage planning process is undertaken annually for each of Years 0-5 with each iteration making the plan more certain. **The Company** shall take into account **NETS** outages required for maintenance, construction or refurbishment works.

OC2.3.1.3.1 Operational Planning Phase - Planning for Years 2 to 5 inclusive ahead

The Company shall take into account **NETS** outages required for construction or refurbishment works. Maintenance is taken into account in Years 0-1 outage planning.

The Company shall plan the **NETS** outage programme on the basis of the previous year's **Final Generation Outage Programme**. If a **Generator'**s, **Interconnector Owner's** or **Network Operator's** planned outages differ from those contained in the **Final Generation Outage Programme**, or in the case of **Network Operators**, they differ from those known to **The Company**, or in any way conflict with the **NETS** outage programme, **The Company** is not obliged to alter the **NETS** outage programme. **Users** should bear this in mind.

OC2.3.1.3.2 The timescales within which a **User** shall provide the required information to **The Company** is tabulated below. **Users** may identify their obligations in the relevant clauses using the tables in figures 1, 3, 7, 9, 13, and 15 below. These figures are intended for guidance and to assist **Users** to identify their requirements easily; however, the obligations as described in the text prevail.

<table>
<tr><td></td><td colspan="5">By the end of week</td></tr>
<tr><td>Party</td><td>8</td><td colspan="2">13</td><td>28</td><td>30</td><td>34</td></tr>
<tr><td>Generator and/or Interconnector Owner</td><td>Do nothing</td><td>Provides info</td><td>Receives info</td><td colspan="2">Do nothing</td><td>Receives info</td></tr>
<tr><td>The Company</td><td colspan="2">Receives info</td><td colspan="4">Provides info</td></tr>
<tr><td>Non-Embedded Customer</td><td colspan="6">Do nothing</td></tr>
<tr><td>Network Operator</td><td>Provides info</td><td colspan="5">Receives info</td></tr>
<tr><td>Restoration Contractor as provided for in OC2.2.1(f)</td><td colspan="6">Same as Generator and/or Interconnector Owner obligations</td></tr>
</table>

Figure 1: Overview of Information Exchange by Party – **NETS** Outage Planning Process from Week 8 to Week 34.

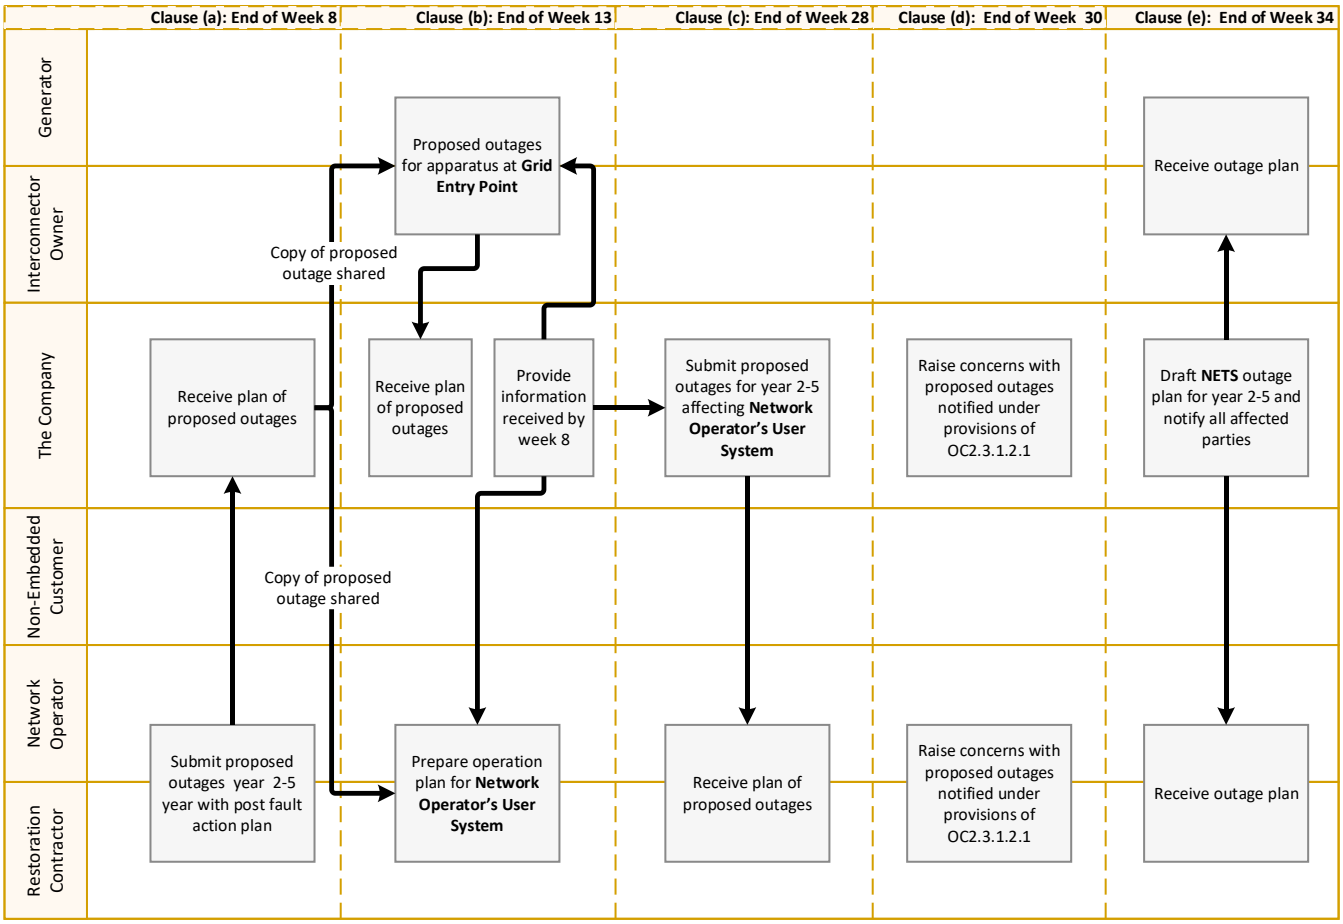

Figure 2: Overview of the **NETS** Outage Planning Process from Week 8 to Week 34.

In each calendar year:

(a) By the end of week 8

Where the items i, ii and iii below may affect the performance of the **Total System** (which includes, but not limited to, outages of **User System Apparatus** at **Grid Supply Points**) each **Network Operator** shall provide to **The Company**:

i. all proposed outages in Years 2-5 in its **User System** which may affect the performance of the **Total System** (which includes but is not limited to outages of **User System Apparatus** at **Grid Supply Points** and outages which constrain the output of **Power Generating Modules** (including **DC Connected Power Park Modules**) and/or **Synchronous Generating Units** and/or **Power Park Modules Embedded** within that **User System**);

ii. in relation to **Offshore Transmission Systems** all proposed outages in Years 2-5 in its **User System** which may affect the declared values of **Maximum Export Capacity** and/or **Maximum Import Capacity** for each **Interface Point** together with the **Network Operator's** revised best estimate of the **Maximum Export Capacity** and/or **Maximum Import Capacity** during such outages and any automatic and/or manual post fault actions that it intends to use or plans to use during such outages;

iii. any outages of its **Apparatus** that may affect the ability to activate and/or operate a **Distributed Restoration Zone Plan**;

(b) By the end of week 13

i. Each **Generator** shall inform **The Company** of proposed outages of **Generator**-owned **Apparatus** (e.g., substation **Apparatus** not generating **Plant**) in Years 2

-5, at each **Grid Entry Point**;

ii. **The Company** shall provide each **Network Operator**, **Generator**, and **Interconnector Owner** a copy of the information given to **The Company** under paragraph a) above (other than the information given by that **Network Operator**). In relation to a **Network Operator**, the data must only be used by that **User** in planning and operating that **Network Operator's User System** and must not be used for any other purpose or passed on to, or used by, any other business of that **User** or to, or by, any person within any other such business or elsewhere;

(c) By the end of week 28

The Company shall provide each **Network Operator** with details of proposed outages in Years 2 - 5 which may affect the performance of that **Network Operator's User System**;

(d) By the end of week 30

Where **The Company** or a **Network Operator** has concerns with the proposed outages notified to it under (a), (b) or (c) above, the affected party should discuss their concerns with the notifying party; in this event the provisions set out in OC2.3.1.2.6 (c) and (d) shall apply;

(e) By the end of week 34

The **Company** shall draw up a draft **NETS** outage plan for Years 2-5 and notify each **User** of those aspects of the plan which may affect that **User**. **The Company** shall also indicate where a need may exist to issue other relevant operational instructions or notifications (including but not limited to the requirement for the arming of an **Operational Intertripping** scheme) or **Emergency Instructions** to **Users** in accordance with BC2 to retain the necessary security of the **NETS**.

OC2.3.1.4 Operational Planning Phase - Planning for Year 1 Ahead

Each calendar year, **The Company** shall update the draft **NETS** outage plan prepared under OC2.3.1.3 taking into account outages required for maintenance work.

<table>
<tr><th colspan="9">By the end of Week</th></tr>
<tr><th>Party</th><th>13</th><th>28</th><th>32</th><th></th><th>34</th><th>36</th><th></th><th>49</th></tr>
<tr><td>Generator and /or Interconnector Owner</td><td>Provides info</td><td colspan="3">Do nothing</td><td>Receives info</td><td>Provides info</td><td>Do nothing</td><td>Receives info</td></tr>
<tr><td>The Company</td><td>Receives info</td><td>Provides info</td><td>Receives info</td><td colspan="2">Provides info</td><td>Receives info</td><td colspan="2">Provides info</td></tr>
<tr><td>Non-Embedded Customer</td><td>Provides info</td><td rowspan="2">Receives info</td><td colspan="5">Do nothing</td><td rowspan="2">Receives info</td></tr>
<tr><td>Network Operator</td><td>Do nothing</td><td>Provides info</td><td>Do nothing</td><td>Receives info</td><td>Provides info</td><td>Do nothing</td></tr>
<tr><td>Restoration Contractor as provided for in OC2.2.1(f)</td><td colspan="8">Same as Generator and/or Interconnector Owner obligations</td></tr>
</table>

Figure 3: Overview of Operational Planning Phase – Planning for Financial Year 1 Ahead.

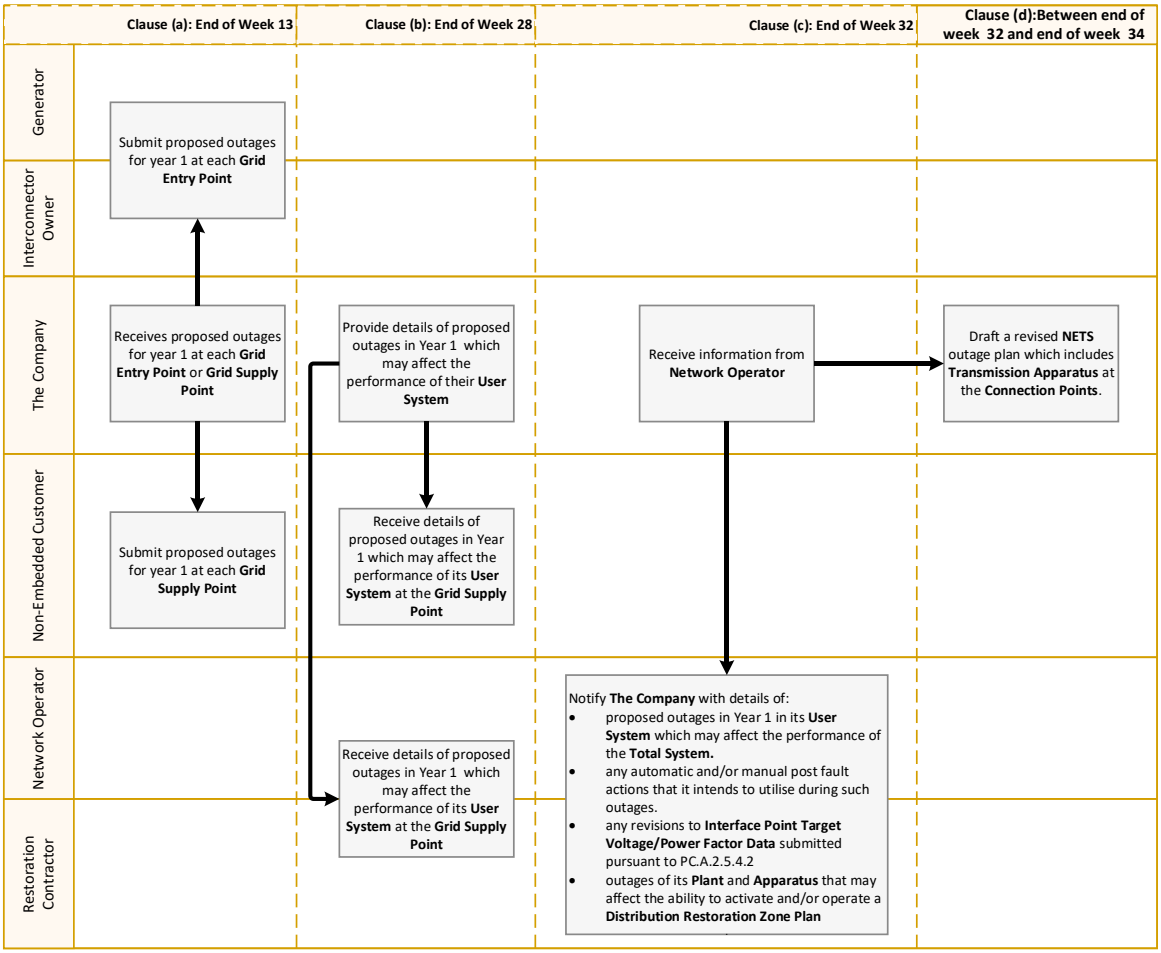

Figure 4: Overview of the Operational Planning Phase from end of Week 13 to end of Week 34.

In each calendar year:

(a) By the end of week 13

Each **Generator** shall inform **The Company** of proposed outages for Year 1 of **Generator**-owned **Apparatus** (e.g., busbar selectors) at each **Grid Entry Point**. Each **Non-Embedded Customer** shall inform **The Company** of proposed outages for Year 1 of **Non-Embedded Customer** owned **Apparatus**, at each **Grid Supply Point**;

(b) By the end of week 28

The Company shall provide each **Network Operator** and each **Non-Embedded Customer** with details of proposed outages in Year 1 which might affect the performance of their **User System** at the **Grid Supply Point**;

(c) By the end of week 32

Each **Network Operator** shall notify **The Company** of:

i. proposed outages in Year 1 in its **System** which may affect the performance of the **Total System** (which includes but is not limited to outages of **User System Apparatus** at **Grid Supply Points** and outages which constrain the output of **Power Generating Modules** (including **DC Connected Power Park Modules**) and/or **Synchronous Generating Units** and/or **Power Park Modules Embedded** within that **User System**);

ii. in relation to **Offshore Transmission Systems**, proposed outages in Year 1 in its **System** which may affect the declared values of **Maximum Export Capacity** and/or **Maximum Import Capacity** for each **Interface Point** within its **System**

together with the **Network Operator's** revised best estimate of the **Maximum Export Capacity** and/or **Maximum Import Capacity** during such outages and any automatic and/or manual post fault actions that it intends to use or plans to use during such outages;

iii. any revisions to **Interface Point Target Voltage/Power Factor** data submitted pursuant to PC.A.2.5.4.2;

iv. any outages of its **Plant** and **Apparatus** that may affect the ability to activate and/or operate a **Distributed Restoration Zone Plan**;

(d) Between the end of week 32 and the end of week 34

The Company shall draw up a revised **NETS** outage plan, which will include **Transmission Apparatus** at **Connection Points**;

(e) By the end of week 34

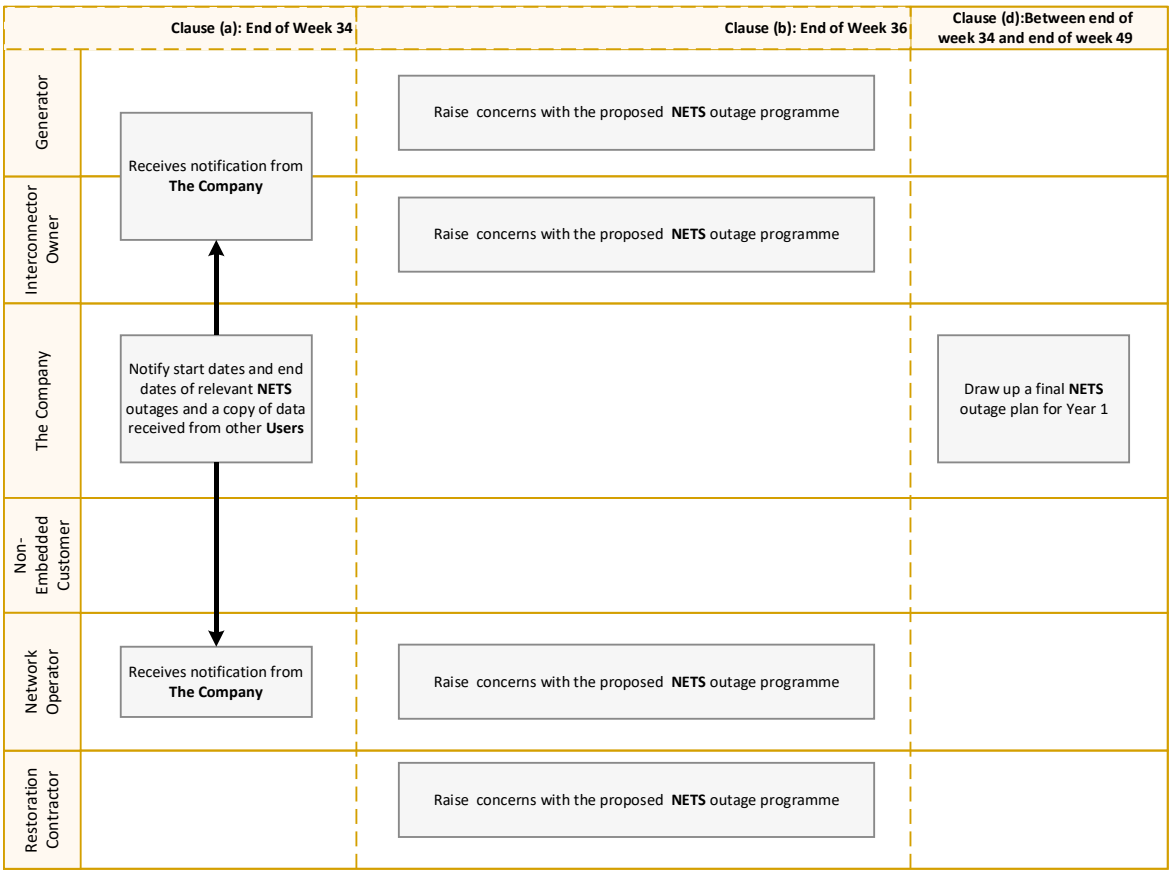

Figure 5: Overview of Obligations in Operational Planning Phase from end of Week 34 to end of Week 49.

The Company shall:

i. notify each **Generator**, **Interconnector Owner**, **Restoration Contractor** (as provided for in OC2.2.1(f) and **Network Operator** of those aspects of the **NETS** outage programme which may operationally affect them and in particular, proposed start dates and end dates of relevant **NETS** outages;

ii. provide each **User** with a copy of the information given to **The Company** under paragraph (c) above (other than the information given by that **Network Operator**). In relation to a **Network Operator**, the data must only be used by that **User** in planning and operating that **Network Operator's User System** and must not be used for any other purpose or passed on to, or used by, any other business of that **User** or to, or by, any person within any other such business or elsewhere;

(f) By the end of week 36

Where a **User** has concerns with the proposed aspects notified to it under (e) above, equivalent provisions to those set out in OC2.3.1.2.6 (c) and (d) shall apply;

(g) Between the end of week 34 and the end of week 49

The Company shall draw up a final **NETS** outage plan covering Year 1;

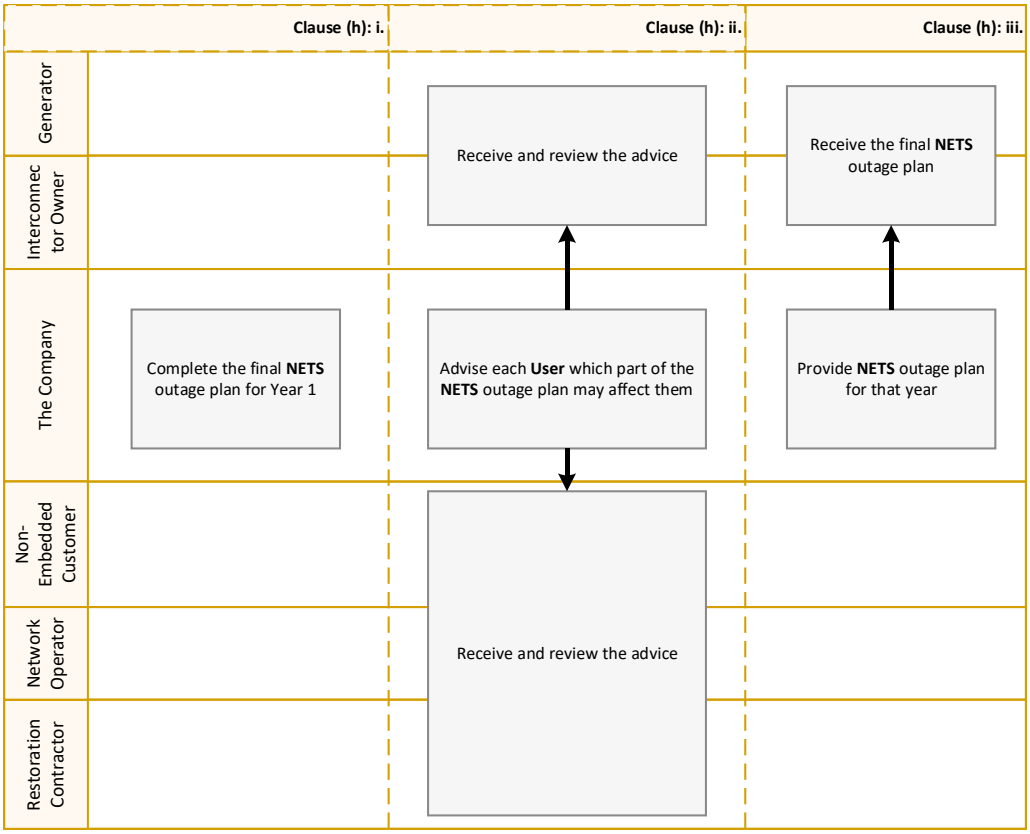

Figure 6: Overview of Obligations in Operational Planning Phase by the end of Week 49.

(h) By the end of week 49

i. **The Company** shall complete the final **NETS** outage plan for Year 1. The plan for Year 1 becomes the final plan for Year 0 when by the passage of time Year 1 becomes Year 0;

ii. **The Company** shall notify each **User** of those aspects of the plan:

1. which may operationally affect such **Generator**, **Interconnector Owner**, **Restoration Contractor** (as provided for in OC2.2.1(f)) and **Network Operator** including proposed start dates and end dates of relevant **NETS** outages;

2. where a need may exist to issue other operational instructions or notifications (including but not limited to the requirement for the arming of an **Operational Intertripping** scheme) or **Emergency Instructions** to **Users** in accordance with BC2 to retain the necessary security of the **NETS**;

iii. In addition, **The Company** shall provide to each **Generator** and each **Interconnector Owner** a copy of the final **NETS** outage plan for that year. OC2.3.2.1.5 contains provisions whereby updates of the final **NETS** outage plan are provided. Note that the final **NETS** outage plan for Year 1 and any updates will not give a complete understanding of how the **NETS** will operate in real time, as the **NETS** operation may be affected by other factors which may not be known at the

time of the plan and the updates. Therefore, **Users** should be advised that unforeseen **System** conditions in real time may have an impact on the plan;

(i) Information Release or Exchange

This paragraph i) contains requirements on **The Company**, paragraph (z) being an alternative to a combination of paragraphs (x) and (y). Paragraph (z) shall only apply in relation to a particular **User** if **The Company** and that **User** agree that paragraph (z) rather that paragraphs (x) and (y) apply. Without any such agreement **The Company** shall only be required to comply with paragraphs (x) and (y) in the section below.

Information Provision to Each Network Operator and Non-Embedded Customer

Between the end of week 34 and the end of week 49 **The Company** shall upon written request:

(x) for radial **Systems**, provide each **Network Operator** and **Non-Embedded Customer** with data to allow the calculation by the **Network Operator**, and each **Non-Embedded Customer**, of symmetrical and asymmetrical fault levels; and

(y) for interconnected **Systems**, provide to each **Network Operator** an equivalent network, sufficient to allow the identification of symmetrical and asymmetrical fault levels, and power flows across interconnecting **User Systems** directly connected to the **NETS**; or

(z) as part of a process to facilitate understanding of the operation of the **Total System**:

1. **The Company** shall make available to each **Network Operator**, the **NETS Study Network Data File**s covering Year 1 which are of relevance to that **User's System**;

2. where **The Company** and a **User** have agreed to the use of data links between them, the **User** may take a copy of the **NETS Study Network Data File**s once during that period. The access shall be in a manner agreed by **The Company** and may be subject to separate agreement. In the absence of agreement, the copy of the **NETS Study Network Data File**s shall be given to the **User** in hard copy or by other appropriate means;

3. the data contained in the **NETS Study Network Data Files** represents **The Company's** view of operating conditions although the actual conditions may be different. **Data Files** received by each **Network Operator** must only be used by that **User** in planning and operating that **Network Operator's User System** and must not be used for any other purpose or passed on to, or used by, any other business of that **User** or to, or by, any person within any other such business or elsewhere.

4. **The Company** shall notify each **Network Operator**, as soon as reasonably practicable after it has updated the **NETS Study Network Data Files** covering Year 1 that it has done so, when this update falls before the next annual update under this OC2.3.1.4 (i). **The Company** shall then make available to each **Network Operator** who has received an earlier version, the updated **NETS Study Network Files** covering the balance of Years 1 and 2 which remain given the passage of time, and which are of relevance to that **User's System**. The provisions of paragraphs 2. and 3. above shall apply to the making available of these updates.

OC2.3.1.5 Operational Planning Phase - Planning in Year 0 down to the Programming Phase (and in the Case of Load Transfer Capability, also during the Programming Phase)

	Year 0		
Party	**Anytime but not less than 8 weeks from requested change**	**14 days from date of request**	**Where necessary 8-52 weeks ahead**
Generator and/or **Interconnector Owner**	Provides info	Receives info	
The Company	Receives info		Provides info
Non-Embedded Customer	Provides info	Receives info	
Network Operator		Do nothing	Receives info
Restoration Contractor as provided for in OC2.2.1(f)	Same as **Generator** and/or **Interconnector Owner** obligations		

Figure 7: Overview of Operational Planning Phase - Planning in Year 0 down to the NETS Programming Phase.

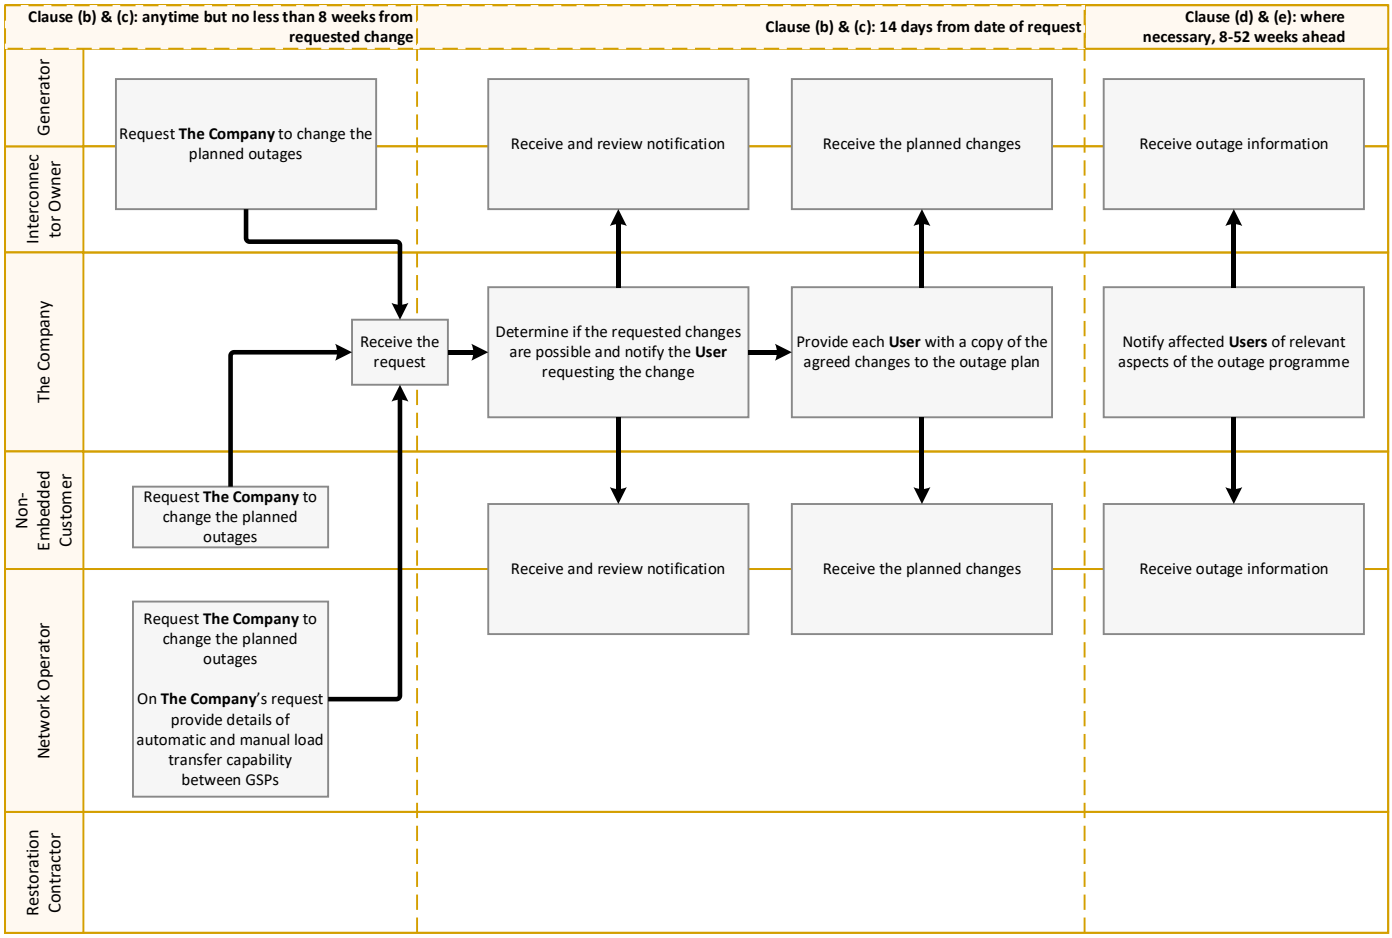

Figure 8: Overview of Obligations in Operational Planning Phase Year 0.

(a) The **NETS** outage plan for Year 1 issued under OC2 3.1.4 shall become the plan for Year 0 when by the passage of time Year 1 becomes Year 0;

(b) Each **User** may, at any time during Year 0, request **The Company** for changes to the outages requested by them under OC2.3.1.4 In relation to that part of Year 0, excluding

the period 1-7 weeks from the date of request, **The Company** shall determine whether the changes are possible and shall notify the **User** in question whether this is the case as soon as possible, and in any event within 14 days of the date of receipt by **The Company** of the request.

Where **The Company** determines that the requested change is possible and notifies the relevant **User** accordingly, **The Company** shall provide to each **User** a copy of the request to which **The Company** has agreed which relates to outages on Network **Operator's User System**;

(c) During Year 0 (including the **Programming Phase**) each **Network Operator** shall at **The Company's** request make available to **The Company**, such details of automatic and manual load transfer capability of:

i. 12MW or more (averaged over any half hour) for England and Wales;

ii. 10MW or more (averaged over any half hour) for Scotland;

between **Grid Supply Points**.

During Year 0 (including the **Programming Phase**) each **Network Operator** shall notify **The Company** of any revisions to the information provided pursuant to OC2.3.1.4 (c) for **Grid Supply Points** as soon as reasonably practicable after the **Network Operator** becomes aware of the need to make such revisions;

(d) When necessary, during Year 0, **The Company** shall notify each **User**, in writing of those aspects of the **NETS** outage programme in the period from the 8th week ahead to the 52nd week ahead, which may, in **The Company's** reasonable opinion, operationally affect that **User** including the proposed start dates and end dates of relevant **NETS** outages.

The Company shall also notify changes to information supplied by **The Company** pursuant to OC2.3.2.1.4 (i) (x) and (y) except where in relation to a **User** information was supplied pursuant to OC2.3.1.4. (i). (z). In this latter case: -

i. **The Company** shall, by way of update of the information supplied by it pursuant to OC2.3.1.4 (i). (z), make available at the first time in Year 0 that it updates the **NETS Study Network Data Files** in respect of Year 0 to each **Network Operator** who has received an earlier version of the of the **NETS Study Network Data Files** covering Year 0 which are of relevance to that **Network Operator's System**;

ii. **The Company** shall notify each relevant **Network Operator**, as soon as reasonably practicable after it has updated the **NETS Study Network Data Files** covering Year 0, that it has done so. **The Company** shall then make available the updated **NETS Study Network Data Files** covering the remaining balance of Year 0;

iii. the provisions of OC2.3.1.4. (i) (z) 2., 3. and 4., shall also apply to the provision of data under this part of OC2.3.1.5 (d).

The Company shall also indicate where a need may exist to issue other operational instructions or notifications (for example the requirement for the arming of an **Operational Intertripping** scheme) or **Emergency Instructions** to **Users** in accordance with **BC2** to allow the necessary security of the **NETS** to be maintained except in the case of a **Total Shutdown** or **Partial Shutdown** as provided for in OC9 4.3;

(e) In addition, by the end of each month during Year 0, **The Company** shall provide to each **Generator**, **Interconnector Owner** and each **Restoration Contractor** (as provided for in OC2.2.1 (f)) a notice containing any revisions to the final **NETS** outage plan for Year 1;

OC2.3.1.6 Programming Phase

	Programming Phase
Party	**By 1600 hours each Thursday**
Generator and/ or **Interconnector Owner**	Receives info
The Company	Provides info
Non-embedded Customer	Receives info
Network Operator	Receives info
Restoration Contractor	Do nothing

Figure 9: Overview of Programming Phase

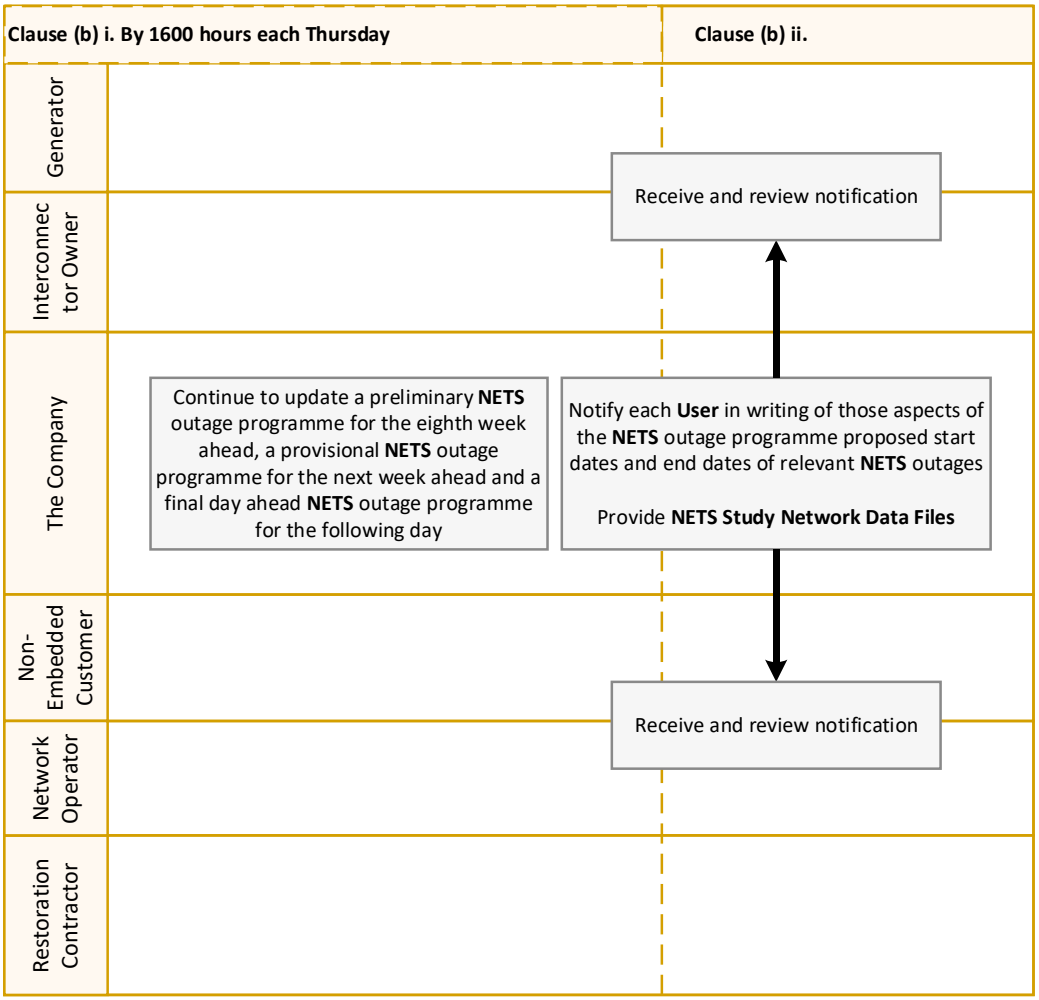

Figure 10: Overview of obligations in the Programming Phase by 1600 hours each Thursday

(a) 1600 hours each Monday, Tuesday, Wednesday and Thursday

i. **The Company** shall prepare a final **NETS** outage programme for the following day;

ii. **The Company** shall notify each **User** of the factors set out in (b) ii. Below;

(b) By 1600 hours each Thursday

i. **The Company** shall continue to update a preliminary **NETS** outage programme for the eighth week ahead, a provisional **NETS** outage programme for the next week ahead;

ii. **The Company** shall notify each **User**, in writing of those aspects of the preliminary **NETS** outage programme which may operationally affect each **User** including the proposed start dates and end dates of relevant **NETS** outages;

The Company shall also notify changes to information supplied by **The Company** pursuant to OC2.3.1.4 (i) (x) and (y) except where in relation to a **User** information was supplied pursuant to OC2.3.1.4 (i) (z). In that latter case:

1. **The Company** shall, by way of update of the information supplied by it pursuant to OC2.3.1.4 (i) (z), make available the **NETS Study Network Data Files** for the next week ahead;
2. **The Company** shall notify each relevant **Network Operator**, as soon as reasonably practicable after it has updated the **NETS Study Network Data Files** covering the next week ahead that it has done so, and;
3. the provisions of OC2.3.1.4 (c) i., ii. and iv. shall apply to the provision of data under this part of OC2.3.1.6. (a) ii. as if set out in full.

The Company may make available, the **NETS Study Network Data Files** for the next week ahead where **The Company** and a particular **User** agree.

The Company shall also indicate where a need may exist an **Operational Intertripping** scheme, emergency switching, emergency **Demand** management or other measures including the issuing of other operational instructions or notifications (for example the requirement for the arming of an **Operational Intertripping** scheme) or **Emergency Instructions** to **Users** in accordance with **BC2** to allow the necessary security of the **NETS** to be maintained.

(c) By 1000 hours each Friday

Users shall discuss with **The Company** and confirm to **The Company** acceptance or otherwise of the requirements detailed under OC2.3.1.6

Network Operators shall confirm for the following week:

i. the details of any outages of its **User System** that will restrict the **Maximum Export Capacity** and/or **Maximum Import Capacity** at any **Interface Points** within its **System** for the following week; and

ii. any changes to the previously declared values of the **Interface Point Target Voltage/Power Factor**;

(d) By 1600 hours each Friday

i. **The Company** shall finalise the preliminary **NETS** outage programme up to the seventh week ahead. **The Company** shall give as much notice as possible to a **Generator** with nuclear **Large Power Stations** which may be operationally affected by an outage which is to be included in such programme;

ii. **The Company** shall finalise the provisional **NETS** outage programme for the next week ahead;

iii. **The Company** shall finalise the **NETS** outage programme for the weekend through to the next normal working day;

iv. In each case, **The Company** shall indicate the factors set out in (b) ii. above to the relevant **Users**;

v. Where a **Generator** with nuclear **Large Power Stations** which may be operationally affected by the preliminary **NETS** outage programme referred to in i. above is concerned on safety grounds about the effect which an outage within such outage programme might have on one or more of its nuclear **Large Power Stations**, it may contact **The Company** to explain its concerns and discuss whether there is an alternative way of taking that outage. If there is such an alternative way, but **The Company** refuses to adopt that alternative way in taking that outage, that **Generator** may involve the **Disputes Resolution Procedure** to decide on the way

the outage should be taken. If there is no such alternative way, then **The Company** may take the outage despite that **Generator's** concerns.

OC2.3.2 Data Requirements

OC2.3.2.1 When a **Statement of Readiness** under the **Bilateral Agreement** and/or **Construction Agreement** is submitted, and thereafter in calendar week 24 in each calendar year:

(a) each **Generator** shall (subject to OC2.3.2.1 (j)) in respect of each of its **Gensets** submit to **The Company** in writing the **Generation Planning Parameters** and the **Generator Performance Charts** as required;

(b) the **Generation Planning Parameters** and the **Generator Performance Chart(s)** shall reasonably reflect the true operating characteristics of the **Genset** and shall demonstrate that the **Generating Unit** meets the **Reactive Power Plant** performance requirements of CC.6.3.2 or ECC.6.3.2 (as applicable);

(c) the **Generation Planning Parameters** and the **Generator Performance Chart**(s) shall be applied (unless revised under this **OC2** or (in the case of the **Generator Performance Chart** only) **BC1** in relation to **Other Relevant Data**) from the **Completion Date**, in the case of the ones submitted with the **Statement of Readiness**, and in the case of the ones submitted in calendar week 24, from the beginning of week 25 onwards;

(d) **Generator Performance Chart**(s) shall be in the format indicated in the **Planning Code** Appendix G and the **Generation Planning Parameters** shall be as set out in Appendix G of the Planning Code;

(e) any changes to the **Generator Performance Chart** or **Generation Planning Parameters** should be notified to **The Company** as soon as the **Generator** becomes aware of the issue and are able to notify **The Company** through the necessary communication channels;

(f) **Generators** should note that amendments to the composition of the **Power Generating Module**, **CCGT Module** or **Power Park Module** at **Large Power Stations** may only be made in accordance with the principles set out in PC.A.3.2.3 or PC.A.3.2.4 as applicable. If in accordance with PC.A.3.2.3 or PC.A.3.2.4 an amendment is made, any consequential changes to the **Generation Planning Parameters** should be notified to **The Company** promptly;

(g) **The Generator Performance Chart** must be as described below and demonstrate the limitation on reactive capability of the **System** voltage at 3% above nominal. It must also include any limitations on output due to the prime mover (both maximum and minimum), **Generating Unit** step up transformer or **User System**;

i. for a **Synchronous Generating Unit** on a **Generating Unit** specific basis at the **Generating Unit** stator terminals. It must include details of the **Generating Unit** transformer parameters;

ii. for a **Non-Synchronous Generating Unit** (excluding a **Power Park Unit**) on a **Generating Unit** specific basis at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**);

iii. for a **Power Park Module**, on a **Power Park Module** specific basis at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**;

iv. for a **DC Converter** on a **DC Converter** specific basis at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**);

v. for a **Synchronous Generating Unit** within a **Synchronous Power Generating Module**, both the **Power-Generating Module Performance Chart** and

Synchronous Generating Unit Performance Chart should be provided;

(h) For each **Generating Unit** whose performance varies significantly with ambient temperature, the **Generator Performance Chart** (including the **Synchronous Generating Unit Performance Chart** in the case of **Synchronous Power Generating Modules**) shall show curves for at least two values of ambient temperature so that **The Company** can assess the variation in performance over all likely ambient temperatures by a process of linear interpolation or extrapolation. One of these curves shall be for the ambient temperature at which the **Generating Unit**'s output, or **CCGT Module** or **Power-Generating Module** at a **Large Power Station** output or **Power Park Module**'s output, as appropriate, equals its **Registered Capacity**;

(i) The **Generation Planning Parameters** supplied under OC2.3.2.1 shall be used by **The Company** for operational planning purposes only and not in connection with the operation of the **Balancing Mechanism** (subject as otherwise permitted in the **BC**);

(j) Each **Generator** shall in respect of each of its **Synchronous Power Generating Modules** or **CCGT Modules** at **Large Power Stations** submit to **The Company** in writing a **Synchronous Power-Generating Module Planning Matrix** and/or a **CCGT Module Planning Matrix**. It shall be prepared on a best estimate basis relating to how it is anticipated the **Power-Generating Module** or **CCGT Module** will be running and shall reasonably reflect the true operating characteristics of the **Power-Generating Module** or **CCGT Module**. It shall be applied (unless revised under this OC2) from the **Completion Date**, in the case of the one submitted with the **Statement of Readiness**, and in the case of the one submitted in calendar week 24, from the beginning of week 31 onwards. It must show the combination of **CCGT Units** or **Synchronous Power Generating Units** which would be running in relation to any given MW output in the format indicated in **Appendix G** of the **Planning Code**;

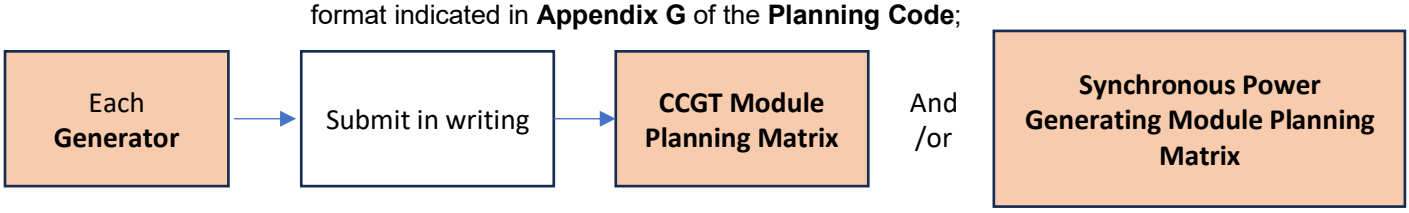

Figure 9: Types of Planning Matrices to be Submitted by each Generator to The Company

The **CCGT Module Planning Matrix** or **Synchronous Power-Generating Module Planning Matrix** shall be used by **The Company** for operational planning purposes only and not in connection with the operation of the **Balancing Mechanism**;

(k) Each **Generator** shall in respect of each of its **Cascade Hydro Schemes** also submit the **Generation Planning Parameters** detailed at OC2.A.2.6 to OC2.A.2.10 for each **Cascade Hydro Scheme**. Such parameters need not also be submitted for the individual **Gensets** within such **Cascade Hydro Scheme**;

(l) Each **Generator** shall in respect of each of its **Power Park Modules** at **Large Power Stations** submit to **The Company** in writing a **Power Park Module Planning Matrix**.

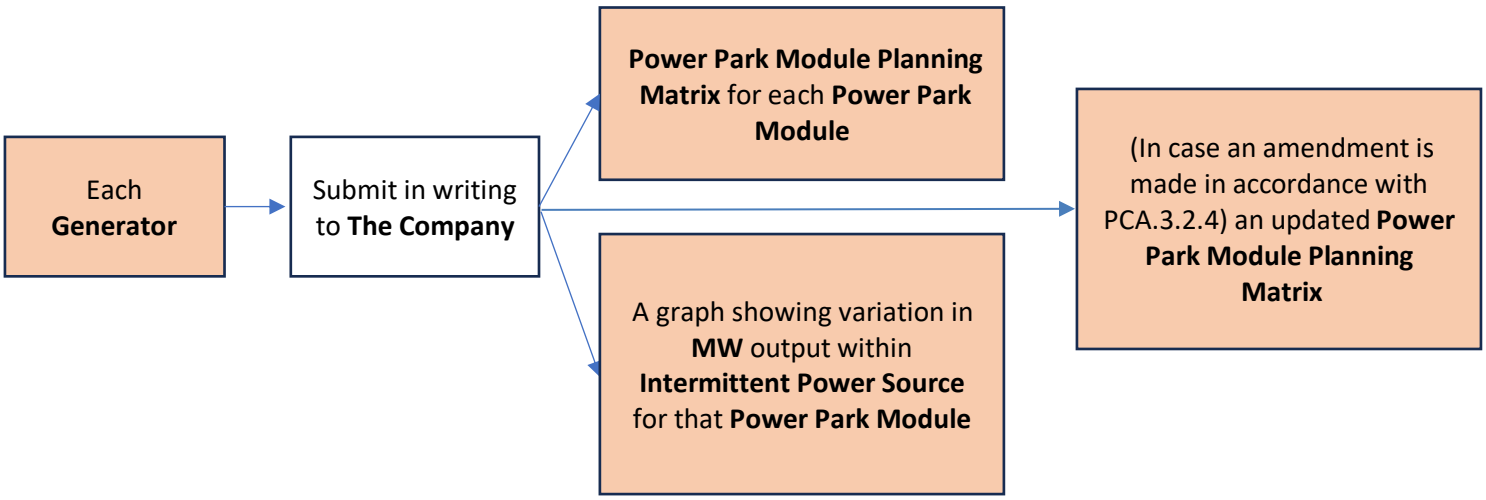

Figure 10: Types of Planning Matrices and Graph to be Submitted by each Generator to The Company.

Each **Generator** submission shall;

i. be prepared on a best estimate basis relating to how it is anticipated the **Power Park Module** will be running and which shall reasonably reflect the operating characteristics of the **Power Park Module** and the **Balancing Mechanism Unit** of which it forms part;

ii. be applied (unless revised under this OC2) from the **Completion Date**, in the case of the one submitted with the **Statement of Readiness**, and in the case of the one submitted in calendar week 24, from the beginning of week 31 onwards;

iii. show the number of each type of **Power Park Unit** in the **Power Park Module** typically expected to be available to generate and the **BM Unit** of which it forms part, in the format indicated in Appendix 3 of OC2. The **Power Park Module Planning Matrix** shall be accompanied by a graph showing the variation in MW output with **Intermittent Power Source** (e.g. MW vs wind speed) for the **Power Park Module**. The graph shall indicate the typical value of the **Intermittent Power Source** for the **Power Park Module**;

iv. be prompt (in case of any changes) and should note that amendments to the composition of the **Power Park Module** at **Large Power Stations** may only be made in accordance with the principles set out in PC.A.3.2.4;

v. be used by **The Company** for operational planning purposes only and not in connection with the operation of the **Balancing Mechanism**;

(m) For each **Synchronous Generating Unit** where the **Generator** intends to adjust the **Generating Unit** terminal voltage in response to a MVAr output instruction or a target voltage level instruction in accordance with BC2.A.2.6 the **Generator Performance Chart** including the **Synchronous Generating Unit Performance Chart** shall show curves corresponding to the **Generating Unit** terminal voltage being controlled to its rated value and to its maximum value;

In the case of **Restoration Contractors** (as provided for in OC2.2.1(f)) who are **Generators**, it would be expected that the above data to be submitted in accordance with OC2.3.2.1 (a) – (m) would apply.

OC2.3.2.2 Each **Network Operator** shall by 1000 hours on the day falling seven days before each **Operational Day** inform **The Company** in writing of any changes to the circuit details called for in PC.A.2.2.1 which it is anticipated will apply on that **Operational Day** (under **BC1** revisions can be made to this data). This requirement shall also apply to circuits

associated with a **Distributed Restoration Zone Plan**.

OC2.3.2.3 Under **Assimilated Law**, **Users** are required to submit certain data to the **Data Publisher** for publication. **The Company** is required to facilitate the collection, verification and processing of data from **Users** for onward transmission to the **Data Publisher**.

Each **Generator** and **Restoration Contractor** (as provided for in OC2.2.1 (f)) and each **Non-Embedded Customer** connected to or using the **NETS** shall provide **The Company** with such information as required by and set out in **DRC** Schedule 6 (**Users**' outage data **EU Transparency Availability Data**) in the timescales detailed therein.

OC2.3.3 Negative Reserve Active Power Margins

OC2.3.3.1 At a regular time interval, at least once each day (by 1600 hours) and no more frequently than every hour **The Company** shall, taking into account the **Generation Outage Programme** and forecast of **Output Useable** supplied by each **Generator** a defined in OC2.3.1.2.1 and forecast **Demand** for the minimum **Demand** period, calculate and publish:

(a) the level of the **System NRAPM** each day within the period 2 to 14 days ahead (inclusive) and for each week the level of risk of **System NRAPM** within the 2-52 week ahead period; and

(b) the level of the **Localised NRAPM** (currently for the main constraint between England and Scotland only) for each day within the period 2 to 14 days ahead (inclusive) having taken into account the appropriate limit on transfers to and from the **System Constraint Group** and for each week the level of risk of **Localised NRAPM** within the 2-52 week ahead period.

OC2.3.3.2 Outages Adjustments

(a) Where necessary **The Company** shall contact **Generators** and **Interconnector Owners** to discuss outages as set out in the following paragraphs of this OC2.3.3.2;

(b) **The Company** shall contact all **Generators** and **Interconnector Owners** in the case of low **System NRAPM** or low **Localised NRAPM**. **The Company** shall raise with each **Generator** and **Interconnector Owner** the problems it is anticipating due to the low **System NRAPM** or **Localised NRAPM** and shall discuss;

i. whether any change is possible to the estimate of generating **Plant** inflexibility; and

ii. whether generating **Plant** or **External Interconnection** outages can be taken to coincide with the periods of low **System NRAPM** or **Localised NRAPM**.

In relation to **Generators** with nuclear **Large Power Stations** the discussions on outages can include the issue of whether outages can be taken for re-fuelling purposes to coincide with the relevant low **System NRAPM** and/or **Localised NRAPM** periods.

(c) If agreement is reached with a **Generator** or an **Interconnector Owner**, then the **Generator** or **Interconnector Owner** may take such outage, as agreed with **The Company**, and the **Generator** or **Interconnector Owner** shall update its **Output Useable** via the data provision process defined in OC2.3.1.2.1. **The Company** shall process the updated data which will then be included in the next published update of the **System NRAPM** and/or **Localised NRAPM**;

(d) If on the day prior to an **Operational Day**, it is apparent from the **BM Unit Data** submitted by **Users** under **BC1** that **System NRAPM** and/or **Localised NRAPM**, is too low, then in accordance with the procedures and requirements set out in BC1.5.5 **The Company** may contact **Users** to discuss whether changes to **Physical Notifications** are possible, and if they are, shall reflect those in the operational plans for the next following **Operational Day** or shall, in accordance with BC2.9.4 instruct **Generators** to **De-Synchronise** specific generating **Plant** for such period. In determining which generating **Plant** to instruct, **BC2** provides that **The Company** shall not other than as

provided for below instruct to **De- Synchronise** any generating **Plant** within an **Existing Gas Cooled Reactor Plant**;

BC2 further provides that: -

i. **The Company** is permitted to instruct to **De-Synchronise** any generating **Plant** within an **Existing AGR Plant** if that generating **Plant** within an **Existing AGR Plant** has failed to offer to be flexible for the relevant instance at the request of **The Company** provided the request is within the **Existing AGR Plant Flexibility Limit**;

ii. **The Company** shall only instruct any generating **Plant** within an **Existing Magnox Reactor Plant** or within an **Existing AGR Plant** (other than under i. above) to **De-Synchronise** if the level of **System NRAPM** (taken together with **System** constraints) and/or **Localised NRAPM** is such that it is not possible to avoid **De-Synchronising** such generating **Plant**, and provided the power flow across each **External Interconnection** is either at zero or results in an export of power from the **Total System**. This provision applies in all cases in the case of **System NRAPM**, only when the power flow would have a relevant effect.

OC2.3.4 Frequency Sensitive Operation

Party	By 1600 hours each Wednesday
Generator	Receives info
The Company	Provides info
Non-Embedded Customer	Do nothing
Network Operator	Do nothing

Figure 11: Overview of Obligations during Frequency Sensitive Operation

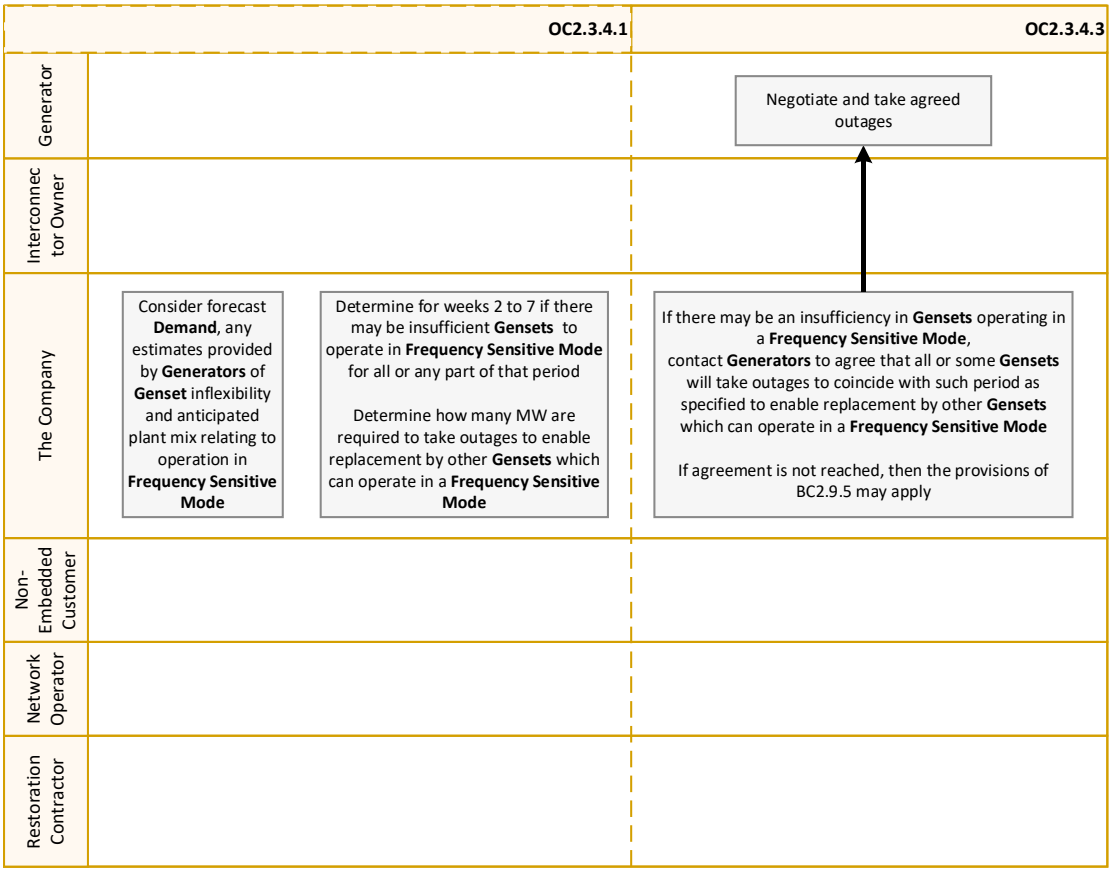

Figure 12: Overview of Obligations during Frequency Sensitive Operation by 1600 hours each Wednesday

By 1600 hours each Wednesday

OC2.3.4.1 Using such information as **The Company** shall consider relevant including forecast **Demand**, any estimates provided by **Generators** of generating **Plant** inflexibility and anticipated plant mix relating to operation in **Frequency Sensitive Mode**, **The Company** shall determine for the period 2 to 7 weeks ahead (inclusive) whether it is possible that there will be insufficient generating **Plant** to operate in **Frequency Sensitive Mode** (other than that generating **Plant** within **Existing Gas Cooled Reactor Plant** which is permitted to operate in **Limited Frequency Sensitive Mode** at all times under BC3.5.3) to operate in **Frequency Sensitive Mode** for all or any part of that period.

OC2.3.4.2 BC3.5.3 explains that **The Company** permits **Existing Gas Cooled Reactor Plant** other than **Frequency Sensitive AGR Units** to operate in a **Limited Frequency Sensitive Mode** at all times.

OC2.3.4.3 If **The Company** foresees that there will be an insufficiency in generating **Plant** operating in a **Frequency Sensitive Mode**, it shall contact **Generators** in order to seek to agree (as soon as reasonably practicable) that all or some of the generating **Plant** (the MW amount being determined by **The Company** but the specific generating **Plant** involved being determined by the **Generator**) shall take outages to coincide with such period as **The Company** shall specify to enable replacement by other generating **Plant** which can operate in a **Frequency Sensitive Mode**. If agreement is reached (which unlike the remainder of **OC2** will constitute a binding agreement) then the **Generator** shall take such outage as agreed with **The Company**. If agreement is not reached, then the provisions of BC2.9.5 May apply.

OC2.3.5 Operating Margin Data Requirements

Party	By 1600 hours each Wednesday	Between 1600 hours each Wednesday and 1200 hours each Friday		By 1500hours each Friday	
Generator	Do nothing	Receives info	Provides info	Receives info	Provides info
Interconnector Owner	Do nothing				
The Company	Provides info		Receives info	Provides info	Receives info
Non-Embedded Customer	Do nothing				
Network Operator					
Restoration Contractor					

Figure 13: Overview of obligations under Operating Margin Data Requirements

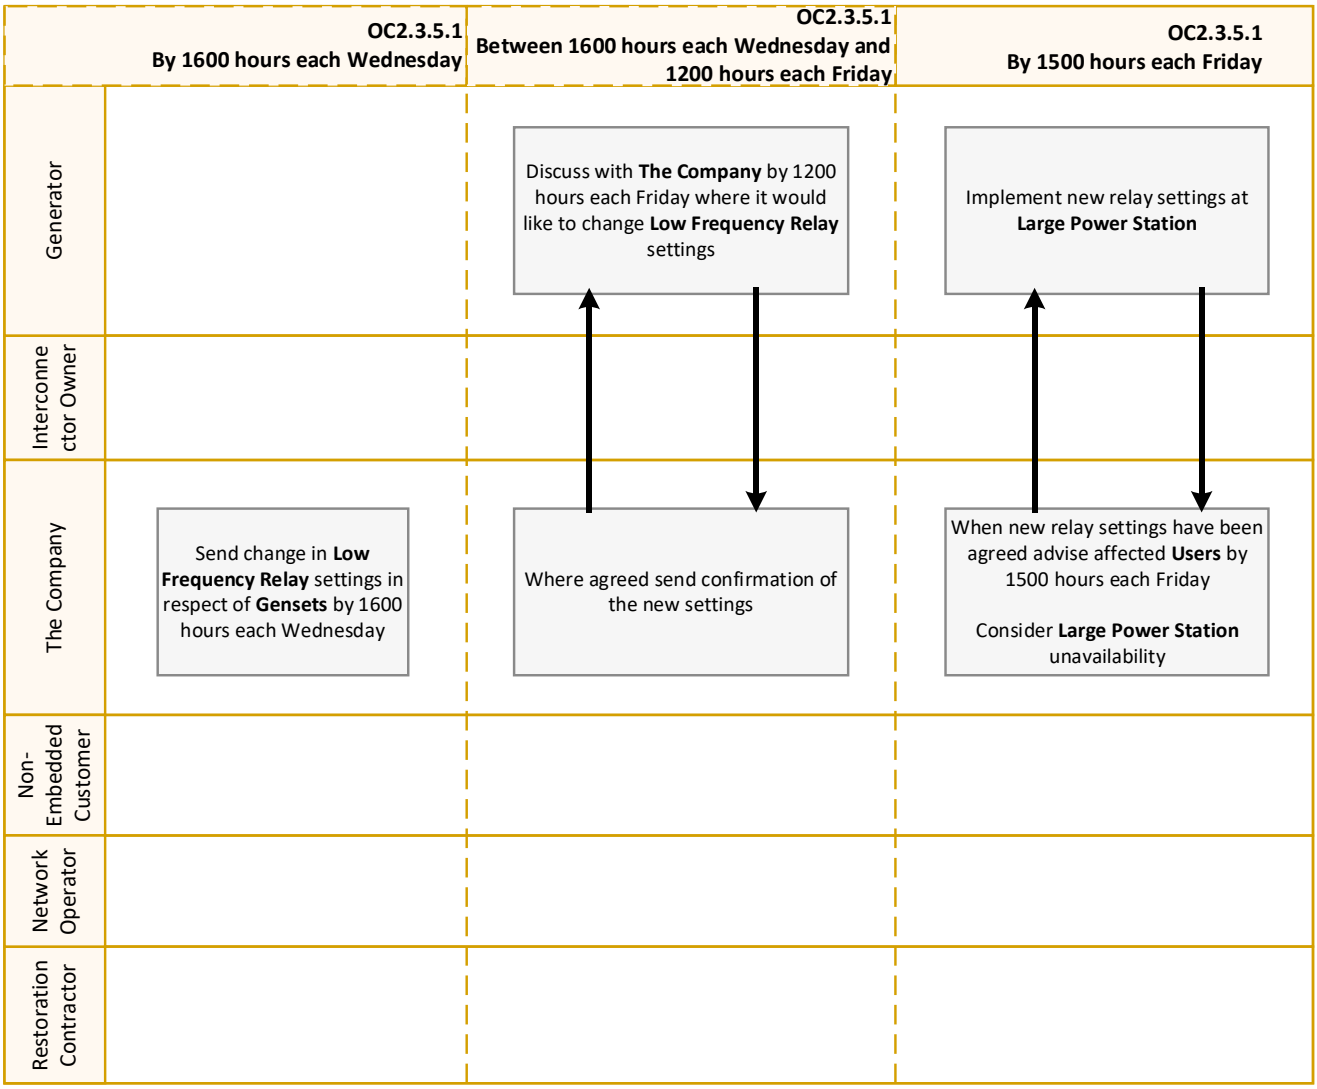

Figure 14: Overview of obligations under Operating Margin Data Requirements

OC2.3.5.1 Modifications to Low Frequency Relay settings for Fast Start from standby

'Relay settings' in this OC2.3.5.1 refers to the settings of **Low Frequency Relays** in respect of generating **Plant** that is available for start from standby by **Low Frequency Relay** initiation with **Fast Start Capability** agreed in the relevant **Bilateral Agreement**.

By 1600 hours each Wednesday

A change in relay settings shall be sent by **The Company** no later than 1600 hours on a Wednesday to apply from 1000 hours on the Monday following. The settings allocated to particular **Large Power Stations** may be interchanged between 49.70Hz and 49.60Hz (or such other **System Frequencies** as **The Company** may have specified) provided the overall capacity at each setting and **System** requirements can, in **The Company's** view, be met.

Between 1600 hours each Wednesday and 1200 hours each Friday

If a **Generator** wishes to discuss or interchange settings it should contact **The Company** by 1200 hours on the Friday prior to the Monday on which it would like to institute the changes to seek **The Company's** agreement. If **The Company** agrees, **The Company** shall then send confirmation of the agreed new settings.

By 1500 hours each Friday

If any alterations to relay settings have been agreed, then the updated version of the current relay settings shall be sent to affected **Users** by 1500 hours on the Friday prior to the Monday on which the changes shall take effect. Once accepted, each **Generator** (if that **Large Power Station** is not subject to forced outage or **Planned Outage**) shall abide by the terms of its latest relay settings.

In addition, **The Company** shall take account of any **Large Power Station** unavailability (as notified under OC2.4.1.2 submissions) in its total **Operating Reserve** policy.

The Company may from time to time, for confirmation purposes only, issue the latest version of the current relay settings to each affected **Generator**.

OC2.3.5.2 Operational Planning Margin Requirements

At a regular time interval, at least once each day (by 1600 hours) and no more frequently than every hour

The Company shall provide its best estimate of the level of **Operating Reserve** to be utilised by **The Company** in connection with the operation of the **Balancing Mechanism** covering a 2-14 day ahead period (with a daily peak demand resolution) and the 2–52-week resolution (with a weekly resolution focusing on the peak demand of the week). This level shall be purely indicative.

This **Operational Planning Margin** requirements indication shall also note the possible level of **High Frequency Response** to be utilised by **The Company** in connection with the operation of the **Balancing Mechanism** in the week beginning with the **Operational Day** commencing during the subsequent Monday, which level shall be purely indicative.

OC2.3.6 In the event that:

(a) a **Non-Embedded Customer** experiences the planned unavailability of its **Apparatus** resulting in the reduction of **Demand** of 100MW or more, or a change to the planned unavailability of its **Apparatus** resulting in a change in **Demand** of 100MW or more, for one **Settlement Period** or longer; or

(b) a **Non-Embedded Customer** experiences a change in the actual availability of its **Apparatus** resulting in a change in **Demand** of 100MW or greater; or

(c) a **Generator** experiences a planned unavailability of a **Generating Unit** resulting in a change of 100MW or more in the **Output Useable** of the associated **Power-Generating Module** below its previously notified availability, which is expected to last one **Settlement Period** or longer and up to three years ahead; or

(d) a **Generator** experiences a change of 100MW or more in the **Maximum Export Limit** of any generating **Plant** which is expected to last one **Settlement Period** or longer; or

(e) a **Generator** experiences a planned unavailability resulting in a change of 100MW or more in its aggregated **Output Useable** below its previously notified availability for a **Power Station** with a **Registered Capacity** of 200MW or more and which is expected to last one **Settlement Period** or longer and up to three years ahead, save where data has been provided pursuant to OC.2.3.6 (c) above; or

(f) a **Generator** experiences a change of 100MW or more in the aggregated **Maximum Export Limit** of a **Power Station** with a **Registered Capacity** of 200MW or more, which is expected to last one **Settlement Period** or longer, save where data has been provided pursuant to OC.2.3.6 (d) above

such **Non-Embedded Customer** or **Generator** shall provide **The Company** with the **EU Transparency Availability Data** in accordance with **DRC** Schedule 6 (Users' Outage Data) using either **MODIS** or with prior agreement with **The Company** directly into the Elexon Portal and, with reference to **Assimilated Law** Chapter III, Article 8(1) of retained REMIT Implementing Regulation 1348/2014.

OC2.3.7 **The Company** shall for each day publish the actual largest secured loss of generation (ie, the loss of generation against which, as a requirement of the **Licence Standards**, the **NETS** must be secured) or loss of import from **External Interconnections** for each settlement period on **The Company's** website.

OC2.4 Space Weather Events

OC2.4.1

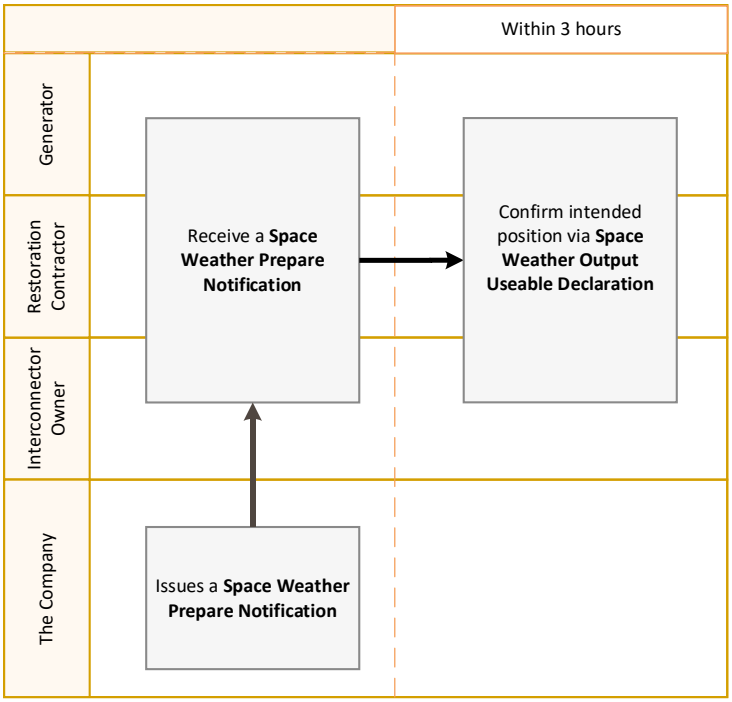

Figure 17: Overview of Space Weather Event timeline for Prepare Notification

In addition to the requirements of OC2.3, where **The Company** issues a **Space Weather Prepare Notification** in accordance with OC7.4.9, **Generators, Interconnector Owners** and **Restoration Contractors** shall;

(a) within 3 hours of **The Company** issuing a **Space Weather Prepare Notification** submit a **Space Weather Output Usable Declaration** to **The Company** (for the avoidance of doubt where no **Space Weather Output Usable Declaration** is submitted, **The Company** shall assume there to have been a declaration stating no impact to availability due to space weather). In the case of **Interconnector Owners**, they may take such steps that they consider appropriate to inform any relevant parties (such as, but not limited to, any other TSO (as defined in **Assimilated Law**) and market participants) as they consider to be appropriate. For the avoidance of doubt, **The Company** shall be able to inform any relevant parties of any space weather related notifications it has issued in accordance with the Grid Code; and

(b) where a **Space Weather Imminent Notification** is issued by **The Company** in accordance with OC7.4.9, comply with their submitted **Space Weather Output Usable Declaration**, unless an **Event** prevents them from doing so.

OC2.4.2

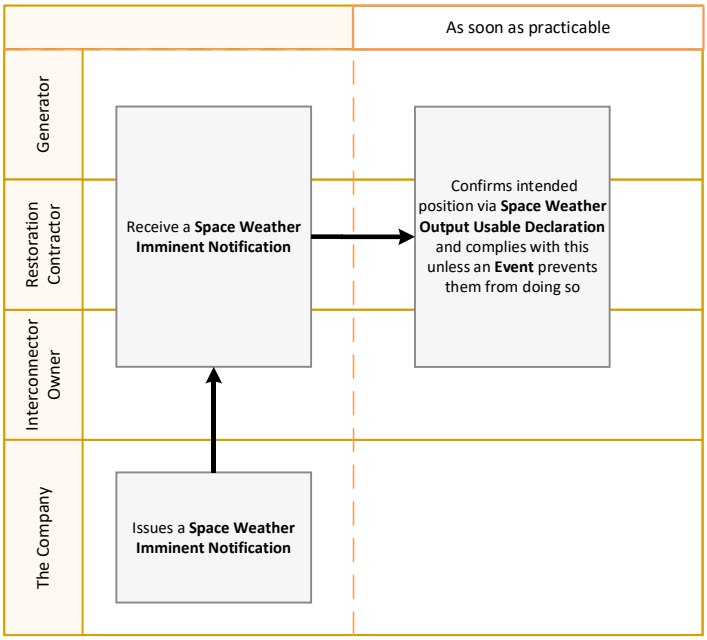

Figure 18: Overview of Space Weather Event timeline for Imminent Notification

Where **The Company** issues a **Space Weather Imminent Notification** without first issuing a **Space Weather Prepare Notification**, **Generators**, **Interconnector Owners** and **Restoration Contractors** shall;

(a) as soon as practicable submit a **Space Weather Output Usable Declaration** to **The Company**; and

(b) as soon as practicable comply with their **Space Weather Output Usable Declaration** as submitted in accordance with OC2.4.2(a), unless an **Event** prevents them from doing so.

OC2.4.3 Where a **Space Weather Experienced Notification** is issued by **The Company** then the **User** where relevant shall submit a **Space Weather Outcome Statement** as soon as reasonably practicable.

OC2.4.4 Where a **Space Weather Outcome Statement** has been submitted to **The Company**, this may be shared by **The Company** with the Met Office, the **Authority** and the **Secretary of State** (or such other person or team nominated by them to act on their behalf with respect to receiving **Space Weather Outcome Statements**). Where any other **User(s)** has neighbouring **Plant** and **Apparatus** (being in close electrical proximity to the asset(s) to which the **Space Weather Outcome Statement** relates) which might also be affected, **The Company** will seek the agreement of the **User** to share that information with the neighbouring **User(s)**. Such agreement shall not be unreasonably withheld.

OC2.4.5 Where **The Company** issues a **Space Weather Cessation Notification** in accordance with OC7.4.9 following the issuing of a **Space Weather Imminent Notification** or a **Space Weather Experienced Notification** this will revert to a **Space Weather Prepare Notification** level. **Generators, Interconnector Owners** and **Restoration Contractors** shall, within 3 hours of the issuing of a **Space Weather Cessation Notification,** submit any revision to their **Space Weather Output Usable Declaration** to **The Company** (for the avoidance of doubt where such notification is not provided to **The Company**, then the **Space Weather Output Usable Declaration** as submitted under OC2.4.1(a) or OC2.4.2(a) will prevail).

OC2.4.6 Where **The Company** issues a **Space Weather Cancellation Notification** in accordance with OC7.4.9 following the issuing of a **Space Weather Prepare Notification**, **Space Weather Imminent Notification** or a **Space Weather Experienced Notification**, then the **Space Weather Output Usable Declarations** as submitted under OC2.4.1 or OC2.4.2 shall cease to have effect and **User's Plant** and **Apparatus** availability shall return to normal service in the timescales set out in the **Space Weather Output Usable Declaration** previously submitted.

OC2 APPENDIX 1 - GENERATION PLANNING PARAMETERS

OC2.A.2 Generation Planning Parameters

The following parameters are required in respect of each **Genset**.

OC2.A.2.1 Regime Unavailability

Where applicable the following information must be recorded for each **Genset**.

(a) Earliest synchronising time:
Monday

Tuesday to Friday
Saturday to Sunday

(b) Latest de-synchronising time:
Monday to Thursday

Friday

Saturday to Sunday

OC2. A.2.2 Synchronising Intervals

(a) The synchronising interval between **Generating Units** in a **Synchronising Group** assuming all **Generating Units** have been **Shutdown** for 48 hours;

(b) The **Synchronising Group** within the **Power Station** to which each **Generating Units** should be allocated.

OC2.A.2.3 De-Synchronising Interval

A fixed value **De-Synchronising** interval between **Gensets** within a **Synchronising Group**.

OC2.A.2.4 Synchronising Generation

The amount of MW produced at the moment of **Synchronising** assuming the **Generating Unit** has been **Shutdown** for 48 hours.

OC2.A.2.5 Minimum Non-zero time (MNZT)

The minimum period on-load between **Synchronising** and **De-Synchronising** assuming the **Generating Unit** has been **Shutdown** for 48 hours.

OC2.A.2.6 Run-Up rates

A run-up characteristic consisting of up to three stages from **Synchronising Generation** to **Output Useable** with up to two intervening break points assuming the **Generating Unit** has been **Shutdown** for 48 hours.

OC2.A.2.7 Run-down rates

A run-down characteristic consisting of up to three stages from **Output Useable** to **De-Synchronising** with breakpoints at up to two intermediate load levels.

OC2.A.2.8 Notice to Deviate from Zero (NDZ)

The period of time normally required to **Synchronise** a **Generating Unit** following instruction from **The Company** assuming the **Generating Unit** has been **Shutdown** for 48 hours.

OC2.A.2.9 Minimum Zero time (MZT)

The minimum interval between **De-Synchronising** and **Synchronising** a **Generating Unit**.

OC2.A.2.10 Gas Turbine Units loading parameters

(a) Loading rate for fast starting

(b) Loading rate for slow starting

OC2 APPENDIX 2 – PLANNING MATRIX FOR CCGT MODULES and SYNCHRONOUS GENERATING UNITS

Planning Matrix Example Form

Power Generating MODULE	**GENERATING UNITS AVAILABLE**								
	1st GT	2nd GT	3rd GT	4th GT	5th GT	6th GT	1st ST	2nd ST	3rd ST
OUTPUT USEABLE	**OUTPUT USEABLE**								
MW									
0MW to 150MW									
151MW to 250MW									
251MW to 300MW									
301MW to 400MW									
401MW to 450MW									
451MW to 550MW									

OC2 APPENDIX 3 – POWER PARK MODULE PLANNING MATRIX

Power Park Module Planning Matrix Example Form

BM Unit Name				
Power Park Module [unique identifier]				
POWER PARK UNIT AVAILABILITY	**POWER PARK UNITS**			
	Type A	**Type B**	**Type C**	**Type D**
Description (Make/Model)				
Number of units				
Power Park Module [unique identifier]				
POWER PARK UNIT AVAILABILITY	**POWER PARK UNITS**			
	Type A	**Type B**	**Type C**	**Type D**
Description (Make/Model)				
Number of units				

The **Power Park Module Planning Matrix** may have as many columns as are required to provide information on the different make and model for each type of **Power Park Unit** in a **Power Park Module** and as many rows as are required to provide information on the **Power Park Modules** within each **BM Unit**. The description is required to assist identification of the **Power Park Units** within the **Power Park Module** and correlation with data provided under the **Planning Code**.

< END OF OPERATING CODE NO. 2 >

OPERATING CODE NO. 3
(OC3)

SYSTEM INCIDENTS REPORT

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title		Page Number
OC3.1	INTRODUCTION	2
OC3.2	OBJECTIVE	2
OC3.3	SCOPE	2
OC3.4	SYSTEM INCIDENTS REPORT	2
OC3.5	REPORTING ON FAULT EVENTS	3
OC3.6	REPORTING ON LEARNING	3

OC3.1 INTRODUCTION

OC3.1.1 **Operating Code No.3** ("**OC3**") is concerned with the monthly publication by **The Company** of an incident report and **Frequency** data for the **National Electricity Transmission System**.

OC3.2 OBJECTIVE

OC3.2.1 The objective of **OC3** is for **The Company** to produce a monthly report of incidents and frequency data. The report and data are important to industry and the **Grid Code Review Panel** as they help monitor the effectiveness of the technical requirements in the **Grid Code** and **Distribution Code**.

OC3.3 SCOPE

OC3 applies to **The Company**.

OC3.4 SYSTEM INCIDENTS REPORT

OC3.4.1 The **Company** shall prepare and submit to the **Grid Code Review Panel** monthly a report titled the **System Incidents Report**, which shall contain:

(a) a record of each and all of any of the following **Events**, defined as **Significant Events**, on the **National Electricity Transmission System**:

(i) a loss of infeed or exfeed (import or export including generation, **Demand** and interconnection) of =>250MW;

(ii) a **Frequency** excursion outside the limits 49.7-50.3Hz;

(iii) a fault on the National **Electricity Transmission System** which:

A. could be linked to the known or reported tripping of 250MW or more as reported in (i) above; and/or

B. (as detailed in section CC6.1.4) is linked to a change in the **Transmission System** voltage of

I. 300kV or greater: > +/-5% for >15min; or

II. 132kV up to 300kV: > +/- 10% for >15min;

(iv) any known demand disconnected >=50MW from the **National Electricity Transmission System** or other lesser demand if notified to **The Company**; and

(v) any **Demand Control** action taken;

(b) a report of each such **Significant Event** including the following data in relation to each **Significant Event** as appropriate and available:

(i) the time(s) in hh.mm.ss of the **Significant Event** and any potentially related occurrences;

(ii) any known or reported loss of **Embedded Power Station(s)** with locations and ratings where available;

(iii) the **Frequency** record (in table and graphical format) at <=1 second intervals for 1 minute before and 1 minute after the **Significant Event**;

(iv) the **Frequency** (to 2 decimal places) immediately before the **Significant Event**;

(v) the **Frequency** (to 2 decimal places) immediately after the **Significant Event**;

(vi) the maximum rate of change of **Frequency** recorded during the **Significant Event** over a specified time period of 500ms;

(vii) where known, the MW of all individual losses or trips related to the **Significant Event**;

(viii) where known, the identity of the **Users** and **Network Operator** of all demand losses or trips related to the **Significant Event**;

(ix) the location of any reported **Transmission** fault on the network diagram and geographically;

(x) the extent of any voltage dip associated with the **Significant Event**;

(xi) an estimate of system inertia in MWs at the time of the **Significant Event** along with how it has been calculated; and

(xii) any other data available that is of value to gain a clearer understanding of the Significant Event and its potential implications; and

(c) an outline of progress towards reporting events and associated data on the **National Electricity Transmission System** including:

(i) three phase faults;

(ii) three phase to earth faults;

(iii) phase to phase faults;

(iv) phase to earth faults;

(v) the associated voltage dips – durations and spreads;

(vi) over-voltages;

(vii) under-voltages;

(viii) voltage dips of >50%; and

(ix) lightning strikes.

OC3.4.2 To obtain, manage, present, communicate and report the data in OC3.4.1 **The Company** shall:

(a) present the System Incidents Report and provide, in an annex, associated data in spreadsheet format;

(b) maintain an area of the **Website** with a list of all historic **System Incidents Reports** and information on any process required for legitimate parties to obtain the reports (if reports are not available to download); and

(c) notify all **Electricity Distribution Licence** holders and **Network Operators** of every **Significant Event** and request information to fulfil its duties in OC3.4.1.

OC3.4.3 **The Company** shall prepare and publish the **System Incidents Report** monthly in accordance with the following timescales:

(a) a data cut-off date of the end of each month for that reporting month;

(b) data is collated, reviewed and processed in the subsequent two months for a reporting month;

(c) **System Incidents Report** to be published at latest on the last working day of the second month after each reporting month (in other words the report for January would be published on the last working day of March, and so on) and submitted to the next regular **Grid Code Review Panel**. For the avoidance of doubt, if there are no incidents arising under OC3.4.1 (a)- (c) a **System Incidents Report** would, nevertheless, still be published stating that 'No System Incident occurred in month [X]'.

OC3.4.4 **The Company** shall prepare and publish monthly on the **Website**, in a spreadsheet form, **System Frequency** data at a maximum of one second intervals for the whole month (**Historic Frequency Data)** in accordance with the following timescales:

(a) a data cut-off date of the end of each month for that reporting month;
(b) data is collated, reviewed and processed in the subsequent ten working days after the end of the reporting month;
(c) **Historic Frequency Data** to be published on the eleventh working day after each reporting month (in other words the report for January would be published on the eleventh working day of February, and so on).

OC3.4.5 **The Company** will use best endeavours to provide a report or reports (based on either the historic reporting methodology, or on the **Significant Incidents Reports** methodology, or a mix of the two), on events for the period from 1 November 2017 until the first **System Incidents Report** pursuant to this **Operating Code**, such a report or reports to be made available within 4 months of implementation date of the modification.

OC3.5 REPORTING ON FAULT EVENTS

OC.3.5.1 **The Company** shall prepare and publish on their website a report giving date, time and location of actual three phase, three phase to earth, phase to phase and phase to earth fault events on the **National Electricity Transmission System**. Information shall be published as soon as reasonably practicable following such an event. For faults in which a fault ride through issue was found, where available, appropriate waveform information will be provided.

OC3.6 REPORTING ON LEARNING

OC3.6.1 Where the analysis of events occurring on the **National Electricity Transmission System** as set out in OC3.5.1 gives rise to learning points which **The Company** believes are relevant to the industry, **The Company** will publish a report explaining the events, the analysis and information gained as applicable. The contents of the report will be anonymised to avoid identification of **Users**, connection sites and manufacturers of **Plant** and **Apparatus** except in circumstances where OC3.6.2 applies. Where information sourced from **Users** or manufacturers is included, permission will be sought before publication.

OC3.6.2 Where **The Company** believes that it is appropriate to identify a particular **User**, connection site or **Plant** and **Apparatus**, **The Company** shall in the first instance consult the relevant **User** and/or manufacturer as applicable to seek agreement for publication.

OC3.6.3 If permission for publication is not granted by the **User** and/or manufacturer and **The Company** believes that it is appropriate to identify a particular **User**, connection site or **Plant** and **Apparatus**, **The Company** may ask the **Authority** for guidance regarding publication.

< END OF OPERATING CODE NO. 3 >

OPERATING CODE NO. 4
(OC4)

NOT USED

< END OF OPERATING CODE NO. 4 >

OPERATING CODE NO. 5
(OC5)

TESTING AND MONITORING

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC5.1 INTRODUCTION 2
OC5.2 OBJECTIVE....2
OC5.3 SCOPE....3
OC5.4 MONITORING 3
OC5.4.1 Parameters To Be Monitored 3
OC5.4.2 Procedure for Monitoring....3
OC5.5 PROCEDURE FOR TESTING....4
OC5.5.1 The Company's Instruction for Testing 4
OC5.5.2 User Request for Testing 5
OC5.5.3 Conduct of Test 6
OC5.5.4 Test and Monitoring Assessment 6
OC5.5.5 Test Failure / Re-test 10
OC5.5.6 Dispute Following Re-test 10
OC5.6 DISPUTE RESOLUTION 10
OC5.7 SYSTEM RESTORATION TESTING....11
OC5.7.1 General 11
OC5.7.2 Procedures for Restoration Service Tests 12
OC5.7.2.1 Anchor Generating Unit Tests....12
OC5.7.2.2 Anchor Power Station Test 13
OC5.7.2.3 Anchor HVDC Test or Anchor DC Converter Test 14
OC5.7.2.4 Top up Restoration Plant Tests....15
OC5.7.2.5 Quick Re-synchronisation Unit Test 16
OC5.7.2.6 Distribution Restoration Zone Control System Tests 16
OC5.7.3 Failure of Restoration Service Tests....16
OC5.8 PROCEDURES APPLYING TO EMBEDDED MEDIUM POWER STATION NOT SUBJECT TO A BILATERAL AGREEMENT AND EMBEDDED DC CONVERTER STATIONS NOT SUBJECT TO A BILATERAL AGREEMENT 18
APPENDIX 1 - ONSITE SIGNAL PROVISION FOR WITNESSING TESTS 21
APPENDIX 2 - COMPLIANCE TESTING OF SYNCHRONOUS PLANT 27
APPENDIX 3 - COMPLIANCE TESTING OF POWER PARK MODULES (AND OTSUA)....38
APPENDIX 4 - COMPLIANCE TESTING FOR DC CONVERTERS AT A DC CONVERTER STATION 49

OC5.1 INTRODUCTION

Operating Code No. 5 ("**OC5**") specifies the procedures to be followed by **The Company** in carrying out:

(a) monitoring

(i) of **BM Units** against their expected input or output;

(ii) of compliance by **Users** with the **CC** or **ECC** as applicable and in the case of response to **Frequency**, **BC3**; and

(iii) of the provision by **Users** of **Ancillary Services** which they are required or have agreed to provide; and

(b) the following tests (which are subject to **System** conditions prevailing on the day):

(i) tests on **Gensets**, **CCGT Modules**, **Power Generating Modules**, **Power Park Modules**, **DC Converters, HVDC Equipment**, **OTSUA** (prior to the **OTSUA Transfer Time**) and **Generating Units** (excluding **Power Park Units**) to test that they have the capability to comply with the **CC** and **ECC**, and in the case of response to **Frequency**, **BC3** and to provide the **Ancillary Services** that they are either required or have agreed to provide;

(ii) tests on **BM Units**, to ensure that the **BM Units** are available in accordance with their submitted **Export and Import Limits** and **Dynamic Parameters**.

The tests specified in OC5.7 include the procedures relating to **System Restoration Tests**.

OC5 also specifies in OC5.8 the procedures which apply to the monitoring and testing of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** and **Embedded DC Converter Stations** (or **Embedded HVDC Equipment**) not subject to a **Bilateral Agreement**.

In respect of a **Cascade Hydro Scheme** the provisions of **OC5** shall be applied as follows:

(a) in respect of the **BM Unit** for the **Cascade Hydro Scheme** the parameters referred to at OC5.4.1 (a) and (c) in respect of **Commercial Ancillary Services** will be monitored and tested;

(b) in respect of each **Genset** forming part of the **Cascade Hydro Scheme** the parameters referred to at OC5.4.1 (a), (b) and (c) will be tested and monitored. In respect of OC5.4.1 (a) the performance of the **Gensets** will be tested and monitored against their expected input or output derived from the data submitted under BC1.4.2(a)(2). Where necessary to give effect to the requirements for **Cascade Hydro Schemes** in the following provisions of **OC5**, the term **Genset** will be read and construed in the place of **BM Unit**.

In respect of **Embedded Exemptable Large Power Stations** the provisions of **OC5** shall be applied as follows:

(a) where there is a **BM Unit** registered in the **BSC** in respect of **Generating Units** the provisions of **OC5** shall apply as written;

(b) in all other cases, in respect of each **Power Generating Module**, and/or **Generating Unit** and **HVDC Equipment** the parameters referred to at OC5.4.1(a), (b) and (c) will be tested and monitored. In respect of OC5.4.1(a) the performance of the **Power Generating Module** and/or **Generating Unit** and **HVDC Equipment** will be tested and monitored against their expected input or output derived from the data submitted under BC1.4.2(a)(2). Where necessary to give effect to the requirements for such **Embedded Exemptable Large Power Stations** in the provisions of **OC5**, the term **Generating Unit** will be read and construed in place of **BM Unit**.

OC5.2 OBJECTIVE

The objectives of **OC5** are to establish:

(a) that **Users** comply with the **CC** or **ECC** as applicable (including in the case of **OTSUA** prior to the **OTSUA Transfer Time**);

(b) whether **BM Units** operate in accordance with their expected input or output derived from their **Final Physical Notification Data** and agreed **Bid-Offer Acceptances** issued under **BC2**;

(c) whether each **BM Unit** is available as declared in accordance with its submitted **Export and Import Limits** and **Dynamic Parameters**; and

(d) whether **Generators**, **DC Converter Station** owners, **HVDC Equipment Owners** and **Suppliers** can provide those **Ancillary Services** which they are either required or have agreed to provide.

In certain limited circumstances as specified in this **OC5**, the output of **CCGT Units** may be verified, namely the monitoring of the provision of **Ancillary Services** and the testing of **Reactive Power** and automatic **Frequency Sensitive Operation**.

OC5.3 SCOPE

OC5 applies to **The Company** and to **Users**, which in **OC5** means:

(a) **Generators** (including those undertaking **OTSDUW**);

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **Suppliers**; and

(e) **DC Converter Station** owners or **HVDC Equipment Owners**.

OC5.4 MONITORING

OC5.4.1 Parameters to be monitored

The Company will monitor the performance of:

(a) **BM Units** against their expected input or output derived from their **Final Physical Notification Data** and agreed **Bid-Offer Acceptances** issued under **BC2**;

(b) compliance by **Users** with the **CC** or **ECC** as applicable; and

(c) the provision by **Users** of **Ancillary Services** which they are required or have agreed to provide.

OC5.4.2 Procedure for Monitoring

OC5.4.2.1 In the event that a **BM Unit** fails persistently, in **The Company's** reasonable view, to follow, in any material respect, its expected input or output or a **User** fails persistently to comply with the **CC** or **ECC** as applicable, or fails to comply in the case of CC.6.3.15 or ECC 6.3.15 as applicable, and in the case of response to **Frequency**, **BC3** or to provide the **Ancillary Services** it is required, or has agreed, to provide, **The Company** shall notify the relevant **User** giving details of the failure and of the monitoring that **The Company** has carried out.

OC5.4.2.2 The relevant **User** will, as soon as possible, and in the case of a failure to comply with the requirements of CC.6.3.15 or ECC.6.3.15 as applicable, within 2 hours in respect of a notification to this effect under OC10 or a longer time period only where agreed by **The Company**, provide **The Company** with an explanation of the reasons for the failure and details of the action that it proposes to take to:

(a) enable the **BM Unit** to meet its expected input or output or to provide the **Ancillary Services** it is required or has agreed to provide, within a reasonable period, or

(b) in the case of a **Power Generating Module**, **Generating Unit** (excluding a **Power Park Unit**), **CCGT Module**, **Power Park Module**, **OTSUA** (prior to the **OTSUA Transfer Time**), **HVDC Equipment** or **DC Converter** to comply with the **CC** or **ECC** as applicable and in the case of response to **Frequency**, **BC3** or to provide the **Ancillary Services** it is required or has agreed to provide, within a reasonable period.

(c) in the case of a **Power Generating Module**, **Generating Unit** (excluding a **Power Park Unit**), **CCGT Module**, **Power Park Module**, **OTSUA** (prior to the **OTSUA Transfer Time**), **HVDC Equipment** or **DC Converter** which has tripped off or de-loaded coincident with a fault as described in CC.6.3.15 or ECC.6.3.15, resolve any non-compliance, within a reasonable period.

For the avoidance of doubt in the case of CC.6.3.15 or ECC.6.3.15 as applicable, the explanation may indicate that the **User** has complied with CC.6.3.15 or ECC.6.3.15 on the basis that:

(i) the **User** had complied with CC.6.3.15 or ECC.6.3.15 as applicable on the basis that the **User** has provided recordings to show the voltage waveform during the fault was beyond the conditions specified in CC.6.3.15 or ECC.6.3.15 as applicable; or

(ii) the **User**'s **Connection Point** had been de-energised by receipt of an intertrip signal from the **National Electricity Transmission System;** or

(iii) that other information has been shared between the **User** and **The Company** enabling agreement between them that compliance with CC.6.3.15 or ECC.6.3.15 as applicable has been confirmed.

Data relating to a fault on the **Transmission System** that **The Company** believes has led to **Users** to co-incidentally trip or de-load is to be provided by **The Company**, where available, in a file structure as agreed with the **User**. Where waveform data is available, this will be obtained from the recorder electrically closest to the **User**'s **Connection Point**.

OC5.4.2.3 In the event of a **User** being notified under OC5.4.2.1 by **The Company** of a potential failure to comply with CC6.3.15 or ECC6.3.15 as applicable and where the **User** is required to provide an explanation as described in OC5.4.2.2(c), the **User** shall take action to restrict the output of their **Power Generating Module, Generating Unit** (excluding a **Power Park Unit**), **CCGT Module, Power Park Module, OTSUA** (prior to the **OTSUA Transfer Time**), **HVDC Equipment** or **DC Converter** to a level and for a period as agreed with **The Company** or until an explanation has been provided by the **User** and agreed between the **User** and **The Company** as set out under OC5.4.2.2(c).

OC5.4.2.4 **The Company** and the **User** will discuss any action the **User** proposes to take and will endeavour to reach agreement as to:

(a) any short term operational measures necessary to protect other **Users**; and

(b) the parameters which are to be submitted for the **BM Unit** and the effective time(s) and date(s) for the application of the agreed parameters. For the avoidance of doubt in the case of a failure to comply with CC.6.3.15 or ECC.6.3.15 as applicable which requires the **User** to provide an explanation as described in OC5.4.2.2(c), this may be to zero MW or another value if agreed between the **User** and **The Company**.

OC5.4.2.5 In the event that agreement cannot be reached within 10 days of notification of the failure by **The Company** to the **User**, **The Company** or the **User** shall be entitled to require a test, as set out in OC5.5 and OC5.6, to be carried out, except in respect of CC.6.3.15 or ECC.6.3.15, as applicable, where testing is impractical and OC.5.4.2.6 shall apply instead.

OC5.4.2.6 In the case of a **Power Generating Module**, **Generating Unit** (excluding a **Power Park Unit**), **CCGT Module**, **Power Park Module**, **OTSUA** (prior to the **OTSUA Transfer Time**), **HVDC Equipment** or **DC Converter** identifying their non-compliance with CC.6.3.15 or ECC.6.3.15 as applicable by completion of their report into this as set out in **OC10, The Company** will as soon as reasonably practicable, issue a **Limited Operational Notification** or amend any **Interim Operational Notification**.

OC5.4.2.7 The requirements of OC5.4.2.1 – OC5.4.2.6 shall not apply during **System Restoration**, unless **The Company** expressly notifies the **User**.

OC5.5 PROCEDURE FOR TESTING

OC5.5.1 The Company's Instruction for Testing

OC5.5.1.1 **The Company** may at any time (although not normally more than twice in any calendar year in respect of any particular **BM Unit**) issue an instruction requiring a **User** to carry out a test, provided **The Company** has reasonable grounds of justification based upon:

(a) a failure to agree arising from the process in CP.8.1 or ECP.8.1; or

(b) monitoring carried out in accordance with OC5.4.2.

OC5.5.1.2 The test, referred to in OC5.5.1.1 and carried out at a time no sooner than 48 hours from the time that the instruction was issued, on any one or more of the **User's BM Units** should only be to demonstrate that the relevant **BM Unit**:

(a) if active in the **Balancing Mechanism**, meets the ability to operate in accordance with its submitted **Export and Import Limits** and **Dynamic Parameters** and achieve its expected input or output which has been monitored under OC5.4; and

(b) meets the requirements of the paragraphs in the **CC** and **ECC** which are applicable to such **BM Units**; and

in the case of a **BM Unit** comprising a **Generating Unit**, a **CCGT Module**, a **Power Park Module**, a **Power Generating Module**, **HVDC System** or a **DC Converter** meets,

(c) the requirements for operation in **Frequency Sensitive Mode** and compliance with the requirements for operation in **Limited Frequency Sensitive Mode** in accordance with CC.6.3.3, ECC.6.3.3, CC.6.3.7, ECC.6.3.7, BC3.5.2, BC.3.7.1 and BC3.7.2; or

(d) the terms of the applicable **Bilateral Agreement** agreed with the **Generator** to have a **Fast Start Capability**; or

(e) the **Reactive Power** capability registered with **The Company** under **OC2** which shall meet the requirements set out in CC.6.3.2 or ECC.6.3.2 as applicable. In the case of a test on a **Generating Unit** within a **CCGT Module** the instruction need not identify the particular **CCGT Unit** within the **CCGT Module** which is to be tested, but instead may specify that a test is to be carried out on one of the **CCGT Units** within the **CCGT Module**.

OC5.5.1.3 (a) The instruction referred to in OC5.5.1.1 may only be issued if the relevant **User** has submitted **Export and Import Limits** which notify that the relevant **BM Unit** is available in respect of the **Operational Day** current at the time at which the instruction is issued. The relevant **User** shall then be obliged to submit **Export and Import Limits** with a magnitude greater than zero for that **BM Unit** in respect of the time and the duration that the test is instructed to be carried out, unless that **BM Unit** would not then be available by reason of forced outage or **Planned Outage** expected prior to this instruction.

(b) In the case of a **CCGT Module** the **Export and Import Limits** data must relate to the same **CCGT Units** which were included in respect of the **Operational Day** current at the time at which the instruction referred to in OC5.5.1.1 is issued and must include, in relation to each of the **CCGT Units** within the **CCGT Module**, details of the various data set out in BC1.A.1.3 and BC1.A.1.5, which parameters **The Company** will utilise in instructing in accordance with this **OC5** in issuing **Bid-Offer Acceptances**. The parameters shall reasonably reflect the true operating characteristics of each **CCGT Unit**.

(c) The test referred to in OC5.5.1.1 will be initiated by the issue of instructions, which may be accompanied by a **Bid-Offer Acceptance**, under **BC2** (in accordance with the **Export and Import Limits** and **Dynamic Parameters** which have been submitted for the day on which the test was called, or in the case of a **CCGT Unit**, in accordance with the parameters submitted under OC5.5.1.3(b)). The instructions in respect of a **CCGT Unit** within a **CCGT Module** will be in respect of the **CCGT Unit**, as provided in BC2.

OC5.5.2 User Request for Testing

OC5.5.2.1 Where a **GB Code User** undertakes a test to demonstrate compliance with the **Grid Code** and **Bilateral Agreement** in accordance with CP.6 or CP.7 or CP.8 (other than a failure between **The Company** and a **GB Code User** to agree in CP.8.1 where OC5.5.1.1 applies) the **GB Code User** shall request permission to test using the process laid out in OC7.5.

OC5.5.2.2 Where an **EU Code User** undertakes a test to demonstrate compliance with the **Grid Code** and **Bilateral Agreement** in accordance with ECP.6.1, ECP.6.2, ECP.6.3 or ECP.7 or ECP.8 (other than a failure between **The Company** and a **EU Code User** to agree in ECP.8.1 where OC5.5.1.1 applies) the **EU Code User** shall request permission to test using the process laid out in OC7.5.

OC5.5.3 Conduct of Test

OC5.5.3.1 The performance of the **BM Unit** will be recorded at **Transmission Control Centres** notified by **The Company** with monitoring at site when necessary, from voltage and current signals provided by the **User** for each **BM Unit** under CC.6.6.1 or ECC.6.6.1 as applicable.

OC5.5.3.2 If monitoring at site is undertaken, the performance of the **BM Unit** will be recorded on a suitable recorder (with measurements, in the case of a **Synchronous Generating Unit** (which could be part of a **Synchronous Power Generating Module**), taken on the **Generating Unit** stator terminals / on the **LV** side of the generator transformer) or in the case of a **Non-Synchronous Generating Unit** (excluding **Power Park Units**), **Power Generating Module**, **Power Park Module** or **HVDC Equipment** or **DC Converter** at the point of connection (including where the **OTSUA** is operational prior to the **OTSUA Transfer Time**, the **Transmission Interface Point**) in the relevant **User's Control Room**, in the presence of a reasonable number of representatives appointed and authorised by **The Company**. If **The Company** or the **User** requests, monitoring at site will include measurement of the parameters set out in OC5.A.1.2 or OC5.A.1.3 or ECP.A4.2 or ECP.A.4.3 as appropriate.

OC5.5.3.3 The **User** is responsible for carrying out the test on their **Plant** and retains the responsibility for the safety of personnel and their **Plant** during the test.

OC5.5.4 Test and Monitoring Assessment

The criteria must be read in conjunction with the full text under the Grid Code reference. The **BM Unit**, **Power Generating Module**, **CCGT Module**, **Power Park Module** or **Generating Unit** (excluding **Power Park Units**), **HVDC Equipment** and **DC Converters** and **OTSUA** will pass the test the criteria below are met:

Capability to be Tested		Criteria against which the test results will be assessed by The Company.
Voltage Quality	Harmonic Content	CC.6.1.5(a) or ECC.6.1.5(a) Measured harmonic emissions do not exceed the limits specified in the **Bilateral Agreement** or where no such limits are specified, the relevant planning level specified in **Engineering Recommendation G5**.
	Phase Unbalance	CC.6.1.5(b) or ECC.6.1.5(b), The measured maximum **Phase (Voltage) Unbalance** on the **National Electricity Transmission System** should remain, in England and Wales, below 1% and, in Scotland, below 2% and **Offshore** will be defined in relevant **Bilateral Agreement**. CC.6.1.6 or ECC.6.1.6 In England and Wales, measured infrequent short duration peaks in **Phase (Voltage) Unbalance** should not exceed the maximum value stated in the **Bilateral Agreement**.
	Rapid Voltage Change	CC.6.1.7(a) or ECC.6.1.7(a) The measured Rapid Voltage Change at the **Point of Common Coupling** shall not exceed the Planning Levels specified in CC.6.1.7(a) or ECC 6.1.7.(i)
	Flicker Severity	CC.6.1.7(j) or ECC.6.1.7(j) The measured Flicker Severity at the **Point of Common Coupling** shall not exceed the limits specified in the table of CC.6.1.7(j) or ECC 6.1.7(j).
	Voltage Fluctuation	CC.6.1.8 or ECC.6.1.8 **Offshore**, measured voltage fluctuations at the **Point of Common Coupling** shall not exceed the limits set out in the **Bilateral Agreement**.
Fault Clearance	Fault Clearance Times	CC.6.2.2.2.2(a), CC.6.2.3.1.1(a), ECC.6.2.2.2.2(a), ECC.6.2.3.1.1(a), **Bilateral Agreement**
	Back Up Protection	CC.6.2.2.2.2(b), CC.6.2.3.1.1(b), ECC.6.2.2.2.2(a), ECC.6.2.3.1.1(a), **Bilateral Agreement**
	Circuit Breaker Fail **Protection**	CC.6.2.2.2.2(c), CC.6.2.3.1.1(c), ECC.6.2.2.2.2(c), ECC.6.2.3.1.1(c)

Capability to be Tested		Criteria against which the test results will be assessed by The Company.
	Reactive Capability	CC.6.3.2 or ECC.6.3.2 (and in the case of CC.6.3.2(e)(iii) and ECC.6.3.2.5 and ECC.6.3.2.6, the **Bilateral Agreement**), CC.6.3.4, **Ancillary Services Agreement**. For a test initiated under OC.5.5.1.1 the **Power Generating Module**, **Generating Unit**, **HVDC Equipment**, **DC Converter** or **Power Park Module** or (prior to the **OTSUA Transfer Time**) **OTSUA** will pass the test if it is within ±5% of the reactive capability registered with **The Company** under **OC2**. The duration of the test will be for a period of up to 60 minutes during which period the **System** voltage at the **Grid Entry Point** for the relevant **Power Generating Module**, **Generating Unit**, **HVDC Equipment**, **DC Converter** or **Power Park Module** or **Interface Point** in the case of **OTSUA** will be maintained by the **Generator** or **HVDC System Owner**, **DC Converter Station** owner at the voltage specified pursuant to BC2.8 by adjustment of **Reactive Power** on the remaining **Power Generating Module**, **Generating Unit**, **HVDC Equipment**, **DC Converter** or **Power Park Modules** or **OTSUA**, if necessary. Any test performed in respect of an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or, an **Embedded DC Converter Station** or **Embedded HVDC System** not subject to a **Bilateral Agreement** shall be as confirmed pursuant to OC5.8.3. Measurements of the **Reactive Power** output under steady state conditions should be consistent with Grid Code requirements i.e. fully available within the voltage range ±5% at all voltages.
Governor / Frequency Control	Primary Secondary and High **Frequency** Response	**Ancillary Services Agreement**, CC.6.3.7 and where applicable CC.A.3 or ECC.6.3.7 and where applicable ECC.A.3. For a test initiated under OC.5.5.1.1 the measured response in MW/Hz is within ±5% of the level of response specified in the **Ancillary Services Agreement** for that **Genset**.
	Stability with Voltage	CC.6.3.4 or ECC.6.3.4
	Governor / Load / **Frequency** Controller **System** Compliance	CC.6.3.6(a), CC.6.3.7, CC.6.3.9, CC8.1, where applicable CC.A.3, BC3.5, BC3.6, BC3.7 or ECC.6.3.6, ECC.6.3.7, ECC.6.3.9, ECC8.1, where applicable ECC.A.3, BC3.5, BC3.6, BC3.7
	Output at Reduced **System Frequency**	CC.6.3.3 or ECC.6.3.3 - For variations in **System Frequency** exceeding 0.1Hz within a period of less than 10 seconds, the **Active Power** output is within ±0.2% of the requirements of CC.6.3.3 or ECC.6.3.3 when monitored at prevailing external air temperatures of up to 25ºC., BC3.5.1

Capability to be Tested		Criteria against which the test results will be assessed by The Company.
	Fast Start	**Ancillary Services Agreement** requirements
	System Restoration	OC5.7
	Excitation/Voltage **Control System**	CC.6.3.6(b), CC.6.3.8, CC.A.6 or CC.A.7 as applicable, BC2.11.2, and the **Bilateral Agreement** or ECC.6.3.6, ECC.6.3.8, ECC.A.6 or ECC.A.7 or ECC.A.8 and the **Bilateral Agreement** as applicable
	Fault Ride Through and Fast Fault Current Injection	CC.6.3.15, CC.A.4.A or CC.A.4.B as applicable or ECC.6.3.15, ECC.6.3.16, ECC.A.4 as applicable
Dynamic Parameters	**Export and Import Limits** and **Dynamic Parameters**	BC2 The **Export and Import Limits** and **Dynamic Parameters** under test are within 2½% of the declared value being tested.
	Synchronisation time	BC2.5.2.3 **Synchronisation** takes place within ±5 minutes of the time it should have achieved **Synchronisation**.
	Run-up rates	BC2 Achieves the instructed output and, where applicable, the first and/or second intermediate breakpoints, each within ±3 minutes of the time it should have reached such output and breakpoints from **Synchronisation** (or break point, as the case may be), calculated from the run-up rates in its **Dynamic Parameters**.
	Run-down rates	BC2 Achieves the instructed output and, where applicable, the first and/or second intermediate breakpoints, each within ±5 minutes of the time it should have reached such output and breakpoints from **Synchronisation** (or break point, as the case may be), calculated from the run-up rates in its **Dynamic Parameters**.
	Demand Response	DRSC.11.7 **Non-Embedded Customers** and **BM Participants** who are also **Demand Response Providers** shall execute a demand modification test when requested as per DRSC.11.7 to ensure the requirements of the **Ancillary Services** agreement and **Demand Response Services Code** are satisfied.

OC5.5.4.1 The duration of the **Dynamic Parameter** tests in the above table will be consistent with and sufficient to measure the relevant expected input or output derived from the **Final Physical Notification Data** and **Bid-Offer Acceptances** issued under **BC2** which are still in dispute following the procedure in OC5.4.2.

OC5.5.4.2 Due account will be taken of any conditions on the **System** which may affect the results of the test. The relevant **User** must, if requested, demonstrate, to **The Company's** reasonable satisfaction, the reliability of the suitable recorders, disclosing calibration records to the extent appropriate.

OC5.5.5 Test Failure / Re-test

OC5.5.5.1 If the **BM Unit**, **Power Generating Module**, **CCGT Module**, **Power Park Module**, **OTSUA**, or **Generating Unit** (excluding **Power Park Units**), **HVDC Equipment** or **DC Converter Station** concerned fails to pass the test instructed by **The Company** under OC5.5.1.1, the **User** must provide **The Company** with a written report specifying in reasonable detail the reasons for any failure of the test so far as they are then known to the **User** after due and careful enquiry. This must be provided within five **Business Days** of the test.

OC5.5.5.2 If in **The Company's** reasonable opinion, the failure to pass the test relates to compliance with the **CC** or **ECC** as applicable, then **The Company** may invoke the process detailed in CP.8.2 to CP.9, or ECP.8.2 to ECP.9

OC5.5.5.3 If a dispute arises relating to the failure, **The Company** and the relevant **User** shall seek to resolve the dispute by discussion, and, if they fail to reach agreement, the **User** may by notice require **The Company** to carry out a re-test on 48 hours' notice which shall be carried out following the procedure set out in OC5.5.3 and OC5.5.4 and subject as provided in OC5.5.1.3, as if **The Company** had issued an instruction at the time of notice from the **User**.

OC5.5.6 Dispute Following Re-Test

If the **BM Unit**, **Power Generating Module**, **CCGT Module**, **Power Park Module**, **OTSUA**, or **Generating Unit** (excluding **Power Park Units**), **HVDC Equipment** or **DC Converter** in **The Company's** view fails to pass the re-test and a dispute arises on that re-test, either party may use the **Disputes Resolution Procedure** for a ruling in relation to the dispute, which ruling shall be binding.

OC5.6 DISPUTE RESOLUTION

OC5.6.1 If following the procedure set out in OC5.5 it is accepted that the **BM Unit**, **Power Generating Module, CCGT Module**, **Power Park Module**, **OTSUA** (prior to the **OTSUA Transfer Time**) or **Generating Unit** (excluding **Power Park Units**)), **HVDC Equipment** or **DC Converter** has failed the test or re-test (as applicable), the **User** shall within 14 days, or such longer period as **The Company** may reasonably agree, following such failure, submit in writing to **The Company** for approval the date and time by which the **User** shall have brought the **BM Unit** concerned to a condition where it complies with the relevant requirement. **The Company** will not unreasonably withhold or delay its approval of the **User's** proposed date and time submitted. Should **The Company** not approve the **User's** proposed date or time (or any revised proposal), the **User** should amend such proposal having regard to any comments **The Company** may have made and re-submit it for approval.

OC5.6.2 If a **BM Unit** fails the test, the **User** shall submit revised **Export and Import Limits** and/or **Dynamic Parameters**, or in the case of a **BM Unit** comprising a **Generating Unit**, **Power Generating Module, CCGT Module**, **HVDC Equipment**, **DC Converter**, **OTSUA** (prior to the **OTSUA Transfer Time**) or **Power Park Module**, the **User** may amend, with **The Company's** approval, the relevant registered parameters of that **Generating Unit**, **Power Generating Module**, **CCGT Module**, **HVDC Equipment**, **DC Converter**, **OTSUA** (prior to the **OTSUA Transfer Time**) or **Power Park Module**, as the case may be, relating to the criteria, for the period of time until the **BM Unit** can achieve the parameters previously registered, as demonstrated in a re-test.

OC5.6.3 Once the **User** has indicated to **The Company** the date and time that the **BM Unit**, **Power Generating Module**, **CCGT Module**, **Power Park Module**, **Generating Unit** (excluding **Power Park Units**) or **OTSUA** (prior to the **OTSUA Transfer Time**), **HVDC Equipment** or **DC Converter Station** can achieve the parameters previously registered or submitted, **The Company** shall either accept this information or require the **User** to demonstrate the restoration of the capability by means of a repetition of the test referred to in OC5.5.3 by an instruction requiring the **User** on 48 hours notice to carry out such a test. The provisions of this OC5.6 will apply to such further test.

OC5.7 SYSTEM RESTORATION TESTING

OC5.7.1 General

As provided for in OC9.1.1 there are two ways in which the **Total System** (or disconnected part of the **Total System** in the case of a **Partial Shutdown**) can be re-established. These being a top-down approach using **Local Joint Restoration Plans** or a bottom-up approach using **Distribution Restoration Zone Plans** which are necessary in order to satisfy the requirements of the **Electricity System Restoration Standard**.

To help achieve this objective, it is essential that **Restoration Contractors** test their **Plant** and **Apparatus** at regular intervals to demonstrate that there is a high level of confidence that they will be able to satisfy the requirements of the Grid Code and their **Anchor Restoration Contracts** or **Top Up Restoration Contracts**.

(a) **The Company** and/or relevant **Network Operator** shall require a **Restoration Contractor** to carry out testing in order to demonstrate that its **Plant** and **Apparatus** has the appropriate capability.

(i) In the case of an **Anchor Generating Unit**, **The Company** and/or relevant **Network Operator** shall require the **Restoration Contractor** to carry out a test (either a **Anchor Generating Unit Test** or a **Anchor Power Station Test**) in order to demonstrate that an **Anchor Plant** has **Anchor Plant Capability**.

(ii) In the case of either an **Anchor HVDC System** or **Anchor DC Converter**, **The Company** or relevant **Network Operator** shall require the **Restoration Contractor** to carry out a test (an **Anchor HVDC System Test** or **Anchor DC Converter Test**), in order to demonstrate that an **Anchor HVDC System** or **Anchor DC Converter** has **Anchor Plant Capability**.

(iii) In the case of an **EU Generator** with an **Anchor Plant Capability** who is also a **Restoration Contractor**, **The Company** and/or relevant **Network Operator** may also require the **Restoration Contractor** to carry out a test (a **Quick Resynchronisation Unit Test**) in order to demonstrate that its **Anchor Power Station** has **Quick Re-Synchronisation Capability**.

(iv) In the case of a **Top Up Restoration Plant**, **The Company** and/or relevant **Network Operator** shall require the **Top Up Restoration Contractor** to demonstrate that the requirements of their **Top Up Restoration Contract** can be fulfilled.

(b) Where **The Company** and/or relevant **Network Operator** requires a **Restoration Contractor** to undertake testing, the following requirements shall apply:-

(i) Each **Anchor Generating Unit** within an **Anchor Power Station** shall be required to undertake an **Anchor Generating Unit Test** at least once every three years. **The Company** and/or relevant **Network Operator** shall not require the **Anchor Generating Unit Test** to be carried out on more than one **Generating Unit** at that **Anchor Power Station** at the same time, and would not, in the absence of exceptional circumstances, expect any of the other **Generating Units** at the **Anchor Power Station** to be directly affected by the **Anchor Generating Unit Test**.

(ii) **The Company** and/or relevant **Network Operator** may occasionally require the **Anchor Generator** to carry out an **Anchor Power StationTest** at any time (but will not require a **Anchor Power Station Test** to be carried out more than once in every three calendar years in respect of any particular **Generating Unit** unless it can justify on reasonable grounds the necessity for further tests or unless the further test is a re-test). If successful, this **Anchor Power Station Test** shall count as a successful **Anchor Generating Unit Test** for the **Generating Unit** used in the test.

(iii) **The Company** and/or relevant **Network Operator** shall require the **Anchor HVDC System Owner** or **Anchor DC Converter Owner** to carry out an **Anchor HVDC System Test** at least once every three years which could be at any time (but such a test will not be required to be carried out more than once in every three calendar years unless it can justify on reasonable grounds the necessity for further tests or unless the further test is a re-test).

(iv) The **Company** and/or relevant **Network Operator** may require the **EU Generator** to carry out a **Quick Re-Synchronisation Test** at any time, but this will generally only be required where the **EU Generator** has made a change to its **Plant** and **Apparatus** which has an impact on its **Houseload Operation** or after two unsuccessful tripping **Events** in the operational environment. The timing of the test shall be agreed by the relevant parties.

(v) **The Company** and/or relevant **Network Operator** shall require the **Restoration Contractor** to carry out testing on its **Top Up Restoration Plant** at least once every three years which could be at any time (but such a test will not be required to be carried out more than once in every three calendar years unless it can justify on reasonable grounds the necessity for further tests or unless the further test is a retest).

The above tests will be deemed a success where starting from **Shutdown** is achieved within a time frame specified by **The Company** and/or relevant **Network Operator** and which will be agreed in the **Restoration Contract**.

(c) When **The Company** and/or relevant **Network Operator** wishes a **Restoration Contractor** to carry out either an **Anchor Generating Unit Test**, an **Anchor Power Station Test**, an **Anchor System HVDC Test**, **Quick Re-Synchronisation Test** or **Top Up Restoration Test**, it shall notify the relevant **Restoration Contractor** at least 7 days prior to the time of the test with details of the proposed test.

OC5.7.2 Procedures for Restoration Service Tests

OC5.7.2.1 Anchor Generating Unit Tests

(a) The relevant **Generating Unit** shall be **Synchronised** and **Loaded**.

(b) All the **Auxiliary Energy Supplies** in the **Anchor Power Station** in which that **Generating Unit** is situated, shall be **Shutdown**.

(c) The **Generating Unit** shall be **De-Loaded** and **De-Synchronised** and all alternating current electrical supplies to its **Auxiliaries** shall be disconnected.

(d) The **Auxiliary Energy Supplies** to the relevant **Generating Unit** shall be started, and shall re-energise the **Unit Board** of the relevant **Generating Unit**.

(e) The **Auxiliaries** of the relevant **Generating Unit** shall be fed by the **Auxiliary Energy Supplies**, via the **Unit Board**, to enable the relevant **Generating Unit** to return to **Synchronous Speed**.

(f) The relevant **Generating Unit** shall be **Synchronised** to the **System** but not **Loaded**, unless a subsequent instruction is issued by **The Company** or relevant **Network Operator** under **BC2**.

(g) Where required by **The Company** and/or relevant **Network Operator** and technically feasible, the test may be arranged such that the relevant **Generating Unit** shall energise the dead sections of the **System** as required in the relevant **Restoration Plan**. As part of these tests, **The Company** (in the case of an **Local Joint Restoration Plan**) or **Network Operator** (in the case of a **Distribution Restoration Zone Plan**) may require the **Anchor Generator** to undertake a:

a) A dead line charge test only; or
b) A dead line charge and a remote synchronisation test.

A dead line charge test would require the steps detailed in (i) and (ii) below to be undertaken. A remote synchronisation test would require the steps detailed in (i) – (iii) below to be undertaken.

i) **Start-Up** of one or more of the **Generating Units** at the **Anchor Power Station** under normal operational conditions;

ii) Re-energisation of a dead test section of the **Total System** as defined in the **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan** as appropriate; and

iii) Demonstration of the ability to synchronise to a section of the **Total System** at a location remote from the **Anchor Power Station's Grid Entry Point** or **User System Entry Point** (as the case may be).

A dead line charge test is to demonstrate the **Anchor Generating Unit's** ability to charge a pre-defined dead part of the **Total System** and its ability to control the voltage on that part of the **Total System**.

A remote synchronisation test is used to demonstrate the successful operation of a **Transmission Licensee's** or **Network Operator's** system synchronising facilities across individual circuit breakers which are either i) a necessary part of a **Local Joint Restoration Plan** or ii) defined in a **Distribution Restoration Zone Plan**.

When planning a dead line charge test, consideration shall be given to the effect the test will have on **Customers** supplied from the part of the **Total System** that needs to be de-energised, including whether their supplies would need to be interrupted to undertake the test. Where possible, tests should be conducted to avoid interruption to **Customer** supplies however where this is not possible, alternative tests or computer simulation exercises can be agreed between **The Company**, **Relevant Transmission Licensee** (as applicable), the **Network Operator** (as applicable) and the **Restoration Contractor**. Where it is identified that routine testing cannot be undertaken which is critical to restoration of the **Total System**, from a strategic perspective, as a result of interruption to **Customer** supplies, consideration should be given to **System** reconfiguration where such a change is technically and economically viable which would be agreed between **The Company**, **Relevant Transmission Licensee** and **Network Operator** (as appropriate).

(h) In respect of **EU Generators**, the above tests defined in OC5.7.2.1(a) – (g) shall be assessed against the requirements of ECC.6.3.5.3.

(i) **The Company** and/or **Network Operator** shall agree with **Anchor Restoration Contractor** when the above tests have been completed.

OC5.7.2.2 Anchor Power Station Test

(a) All **Generating Units** at the **Anchor Power Station**, other than the **Generating Unit** on which the **Anchor Plant Test** is to be carried out, and all the **Auxiliary Energy Supplies** at the **Anchor Power Station**, shall be **Shutdown**.

(b) The relevant **Generating Unit** shall be **Synchronised** and **Loaded**.

(c) The relevant **Generating Unit** shall be **De-Loaded** and **De-Synchronised**.

(d) All external alternating current electrical supplies to the **Unit Board** of the relevant **Generating Unit**, and to the **Station Board** of the relevant **Anchor Power Station**, shall be disconnected.

(e) **Auxiliary Energy Supplies** at the **Anchor Power Station** shall be started, and shall re-energise either directly, or via the **Station Board** or the **Unit Board** of the relevant **Generating Unit**.

(f) The provisions of OC5.7.2.1 (e) to (i) in respect of the **Generating Units** in the **Anchor Power Station** shall thereafter be followed.

(g) In respect of **EU Generators**, the above tests defined in OC5.7.2.2(a) – (f) shall be assessed against the requirements of ECC.6.3.5.3.

OC5.7.2.3 Anchor HVDC Test or Anchor DC Converter Test

a) The **HVDC System** or **DC Converter** shall demonstrate its technical capability to energise the busbar of the disconnected AC substation to which it is connected, within the **GB Synchronous Area** within a timeframe specified by **The Company** and/or relevant **Network Operator** in the **Anchor Restoration Contract** or **Top Up Restoration Contract**. In the case of **HVDC Systems** this shall be in accordance with the requirements of ECC.6.3.5.4. As part of this test, all **Auxiliaries** are required to be derived from within the **HVDC System** or **DC Converter Station**;

b) The test shall be carried out while the **HVDC System** or **DC Converter Station** starts from **Shutdown**;

c) The test shall be deemed to have been successfully completed when the following conditions are cumulatively fulfilled:

i) The **HVDC System Owner** has demonstrated its **HVDC System** or **DC Converter Station** is able to energise the busbar of the isolated AC-substation to which it is connected within the **GB Synchronous Area**.

ii) The **HVDC System** or **DC Converter Station** can achieve a stable operating point at an agreed capacity as agreed with **The Company** and/or relevant **Network Operator**. The relevant **HVDC System** or **DC Converter Station** can be connected to the **Total System** but not **Loaded**, unless appropriate instructions are given by **The Company** under **BC2** which would also be in accordance with the requirements of the **Anchor Restoration Contract**.

iii) In respect of **HVDC Systems** and **Remote End HVDC Converter Stations**, the above tests defined in OC5.7.2.3(a) – (c) shall be assessed against the requirements of ECC.6.1.2, ECC.6.1.4, ECC.6.2.2.9.4 and ECC.6.3.5.4.

iv) In respect of **DC Converter Stations**, the above tests defined in OC5.7.2.3(a) – (c) shall be assessed against the requirements of, CC.6.1.2, CC.6.1.3 and CC.6.1.4.

(d) As part of these tests, **The Company** (in the case of an **Local Joint Restoration Plan**) or **Network Operator** (in the case of a **Distribution Restoration Zone Plan**) may require the **Anchor HVDC System Owner** or **Anchor DC Converter Owner** to undertake a:

a) A dead line charge test only; or
b) A dead line charge and a remote synchronisation test.

A dead line charge test would require the steps detailed in OC5.7.2.3(d) (i) and (ii) to be undertaken. A remote synchronisation test would require the steps detailed in OC5.7.2.3(d) (i) – (iii) to be undertaken.

i) **Start-Up** of the **HVDC System** or **DC Converter Station** under normal operational conditions.

ii) Re-energisation of a dead test section of the **Total System** as defined in the **Local Joint Restoration Plan** or **Distribution Restoraion Zone Plan** as appropriate.

iii) Demonstration of the ability to synchronise to a section of the **Total System** at a location remote from the **HVDC System** or **DC Converter Station Grid Entry Point** or **User System Entry Point** (as the case may be).

A dead line charge test is to demonstrate the **HVDC System** or **DC Converter Stations** ability to charge a pre-defined dead part of the **Total System** and its ability to control the voltage on that part.

A remote synchronisation test is used to demonstrate the successful operation of a **Transmission Licensee's** or **Network Operator's** system synchronising facilities across individual circuit breakers which are either necessary part of a **Local Joint Restoration Plan** or defined in a **Distribution Restoration Zone Plan**.

When planning a dead line charge test, consideration shall be given to the effect the test will have on **Customers** supplied from the part of the **Total System** that needs to be de-energised, including whether their supplies would need to be interrupted to undertake the test. Where possible, tests should be conducted to avoid interruption to **Customer** supplies however where this is not possible, alternative tests or computer simulation exercises can be agreed between **The Company**, **Relevant Transmission Licensee** (as applicable), **Network Operator** (as applicable) and **Restoration Contractor**. Where it is identified that routine testing cannot be undertaken which is critical to restoration of the **Total System**, from a strategic perspective, as a result of interruption to **Customer** supplies, consideration should be given to **System** reconfiguration where such a change is technically and economically viable which would be agreed between the **The Company**, **Relevant Transmission Licensee** and **Network Operator** (as appropriate).

OC5.7.2.4 Top Up Restoration Plant Tests

Top Up Restoration Contractors have contracts with **The Company** and where appropriate **Network Operators**, to provide a service in respect of their **Top Up Plant** to contribute to a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**. As provided for in OC9.4.7.7.4 and OC9.4.7.8.4, **Top Up Restoration Contractors** will generally be instructed to prepare their **Top Up Restoration Plant** immediately after instructions are issued to **Restoration Contractors** in respect of their **Anchor Plant** such that a **Top Up Restoration Contractor** can deliver the service they have agreed to provide, without delay, upon restoration of external site supplies. The purpose of these tests is to demonstrate that **Top Up Restoration Plant** has the capability in accordance with the requirements of the **Top Up Restoration Contract**.

(a) Prior to the test, the relevant **Transmission Licensee** and/or **Network Operator** shall reconfigure its **System** as necessary to enable the test of the relevant **Plant** and **Apparatus** to be completed whilst having due regard for the safety of **Plant** and **Apparatus** and personnel on or adjacent to its **System**, and for the public.

(b) The relevant **Plant** and/or **Apparatus** shall be operating normally, i.e. in the operational state it is anticipated to be in if a **Shutdown** were to occur.

(c) All the **Auxiliary Energy Supplies** which relate to the relevant **Plant** and/or **Apparatus** shall be **Shutdown**.

(d) The **Plant** and/or **Apparatus** shall be de-loaded, **De-Synchronised** and **Shutdown** as appropriate and all alternating current electrical supplies to its **Auxiliaries** shall be disconnected.

(e) **Auxiliary Energy Supplies** at the **Top Up Plant** shall be started, and shall re-energise either directly, or via the **Station Board** or the **Unit Board** of the relevant **Plant**.

(f) With the **Auxiliaries** available the relevant **Plant** and/or **Apparatus** should be in a position to return to a condition when it is ready to be reconnected and/or **Synchronised** to the **System**.

(g) Relevant **Top Up Restoration Plant** shall be **Synchronised** to the **System** and shall be **Loaded** with **Active Power** and/or **Reactive Power** as agreed with **The Company** and/or the **Network Operator**, unless an overriding instruction has been given directly by **The Company** or from **The Company** to the **Network Operator** under **BC2**.

(h) **The Company** and/or **Network Operator** shall agree with the **Top Up Restoration Contractor** when the test has been completed.

OC5.7.2.5 Quick Re-synchronisation Unit Test

(a) The relevant **Generating Unit** shall be **Synchronised** and **Loaded**;

(b) All the **Auxiliary Energy Supplies** in the **Anchor Power Station** in which that **Generating Unit** is situated, shall be **Shutdown**;

(c) The **Generating Unit** shall tripped to house load;

(d) The relevant **Generating Unit** shall be **Synchronised** to the **System** but not **Loaded**, unless the appropriate instruction has been given by **The Company** and/or **relevant Network Operator** under **BC2** which would also be in accordance with the requirements of the **Anchor Restoration Contract**;

In respect of **EU Generators**, the above tests defined in OC5.7.2.5(a) – (c) shall be assessed against the requirements of ECC.6.3.5.6.

OC5.7.2.6 Distribution Restoration Zone Control System Tests

Where a **Network Operator** uses a **Distribution Restoration Zone Control System** as part of the implementation of a **Distribution Restoration Zone Plan**, the **Network Operator** shall undertake tests or otherwise demonstrate the correct functioning of the **Distribution Restoration Zone Control System**. The tests shall be in accordance with the applicable electrical standard as listed in the annex to the **General Conditions**.

OC5.7.2.7 General Testing Arrangements

All the above tests listed in OC5.7.2.1 to OC5.7.2.6, shall be carried out at the time agreed by **The Company** and/or relevant **Network Operator** in the notice given under OC5.7.1 and shall be undertaken in the presence of a reasonable number of representatives appointed and authorised by **The Company** and/or relevant **Network Operator**, who shall be given access to all information relevant to the **Test**. In the case of a **Restoration Contractor** who wishes to undertake their own tests independently of a test requested by **The Company** and/or **Relevant Network Operator**, then they shall be undertaken in accordance with OC7.5.

OC5.7.3. Failure of Restoration Service Tests

OC5.7.3.1 An **Anchor Restoration Contractor** shall fail an **Anchor Plant Test** if it fails to enerigse parts of the **System** and to provide the **Active Power** or **Reactive Power** output in accordance with that specified in the **Anchor Restoration Contract**.

OC5.7.3.2 A **Top Up Restoration Contractor** shall fail a **Top Up Restoration Plant Test** if it fails to be **Synchronised** to the **System** and to provide the **Active Power** or **Reactive Power** output in accordance with that specified in the **Top Up Restoration Contract**.

OC5.7.3.4 If a **Restoration Contractor's Plant** fails to pass a **Restoration Service Test** the **Restoration Contractor** must provide **The Company** and/or relevant **Network Operator** with a written report specifying in reasonable detail the reasons for any failure of the test so far as they are then known to the **Restoration Contractor** after due and careful enquiry. This must be provided within five **Business Days** of the test. If a dispute arises relating to the failure, **The Company** and/or relevant **Network Operator** and the relevant **Restoration Contractor** shall seek to resolve the dispute by discussion. To aid resolution of the dispute the **Restoration Contractor** may request **The Company** and/or relevant **Network Operator** to help facilitate a further **Restoration Service Test** with 48 hours notice which shall be carried out following the applicable procedure set out in OC5.7.2.1 to OC5.7.2.7 as the case may be.

OC5.7.3.5 If the **Restoration Contractor's Plant** and **Apparatus** concerned fails to pass the re-test and a dispute arises on that re-test, the parties may use the **Disputes Resolution Procedure** for a ruling in relation to the dispute, which shall be binding.

OC5.7.3.6 If, following the procedure in OC5.7.3.4 and OC5.7.3.5, it is accepted that the **Restoration Contractor** has failed the **Restoration Service Test** (or a re-test carried out under OC5.7.2.7), within 14 days, or such longer period as **The Company** and/or relevant **Network Operator** may reasonably agree, following such failure, the relevant **Restoration Contractor** shall submit to **The Company** and/or relevant **Network Operator** in writing for approval, the date and time by which that **Restoration Contractor** shall have brought the relevant **Plant** and/or **Apparatus** back to a suitable state that it would pass a **Restoration Service Test**, and **The Company** and/or relevant **Network Operator** will not unreasonably withhold or delay its approval of the **Restoration Contractor's** proposed date and time submitted. Should **The Company** and/or relevant **Network Operator** not approve the **Restoration Contractor's** proposed date and time (or any revised proposal) the **Restoration Contractor** shall revise such proposal, having regard to any comments **The Company** and/or relevant **Network Operators** may have made, and resubmit it for approval.

OC5.7.3.7 Once the **Restoration Contractor** has indicated to **The Company** and/or relevant **Network Operator** that the **Restoration Contractor's Plant** and/or **Apparatus** has been restored to a suitlable state, **The Company** and/or relevant **Network Operator** shall either accept this information or require the **Restoration Contractor** to demonstrate that the relevant **Plant** and/or **Apparatus** has its capability restored, by means of a repetition of the **Restoration Service Test** referred to in OC5.7.1 following the same procedure as for the initial **Restoration Service Test**. The provisions of this OC5.7.2 will apply to such test.

OC5.7.4 System Restoration Assurance, Awareness and Training

OC5.7.4.1 **The Company** will coordinate with **Users** and **Restoration Contractors** for undertaking regular exercises with **Users** and **Restoration Contractors** to ensure **System Restoration** plans are capable of meeting the **Electricity System Restoration Standard**.

OC5.7.4.2 **The Company** in coordination with **Users** and **Restoration Contractors**, from 31st December 2026, will undertake desk top and computer exercises and tests at the specified frequencies defined in Part III of **DRC** Schedule 16 to confirm:-

i) That **The Company's** plans for **System Restoration** are robust and sufficiently able to satisfy the requirements of the **Electricity System Restoration Standard**.

ii) There is a high level of confidence that **Restoration Contractors** will be able to deliver the service they have contracted to provide.

iii) There is a high level of confidence that **User's Critical Tools and Facilites** will be able to satisfy the requirements of CC7.10 and/or ECC.7.10 in addition to the requirements of CC7.11 and/or ECC.7.11.

iv) There is a high level of assurance that **Local Joint Restoration Plans** and **Distribution Restoration Zone Plans** will be capable of contributing to the restoration of those sections of the **System** they have been designed to re-establish.

v) That **Restoration Contractors** and **Users** have arrangements in place in order for them to receive and act upon instructions issued by **The Company** or relevant **Transmission Licensee** in Scotland or relevant **Network Operator** for a period of upto 72 hours following the loss of site supplies.

vi) All communications systems used satisfy the minimum requirements of CC6.5.1 – CC.6.5.5 and/or ECC.6.5.1 – ECC.6.5.5.

vii) **Network Operators** can satisfy the requirements of CC.6.4.5 and/or ECC.6.4.6.

viii) **The Company** in coordination with **Network Operators** involved in planning the wider **System Restoration** process shall work collaboratively to ensure the balance of generation and demand, and minimise the risk of actions which could have a destabilising effect on the **Total System**.

ix) Demonstrate their control systems will remain functional and can handle incidents when the **Total System** is in a de-energised state including client applications and server architecture.

x) Demonstrate the cyber-security of their voice and control systems in accordance with CC.7.10.6 or ECC.7.10.6.

xi) Report the service level agreement compliance of their telephony systems including infrastructure and service provision as provided for CC.6.5.4 or ECC.6.5.4.

xii) The resilience of voice systems including power supplies by its ability to withstand a minimum of 72 hours during **System Restoration**.

As part of these exercises, **Restoration Contractors** and **Users** are required to inform **The Company** of any assumptions they make and any reasons why they would be unable to fufil their obligations.

In addition, from 1st January 2024 until 31st December 2026 desk top and computer exercises and tests in relation to items i) to xii) may be carried out by agreement with **The Company**, **Users** and **Restoration Contractors**.

OC.5.7.4.3 In addition to the above requirements, from 31 December 2026 onwards, **Restoration Contractors** and **Users**, other than **Network Operators**, are also required to provide an annual statement confirming that their **Plant** and **Apparatus** has the capability to satisfy the requirements of OC.5.7 through their Week 24 data submission. In the case of **Network Operators** prior to the **PSM Implementation Date**, this confirmation shall be provided in their Week 24 data submission; after the **PSM Implementation Date** this confirmation shall be provided in their Week 28 data submission.

OC5.7.5 In addition to the requirements of OC5.7.4.2 the following assurance tests shall be undertaken at least once every three years.

i) **Users**, **BM Participants** and **Restoration Contractors** shall undertake tests or otherwise demonstrate their **Critical Tools and Facilities** satisfy the requirements of CC.6.5.4.4, CC.6.5.5.1, CC.7.10 and CC.7.11 or ECC.6.5.4.4, ECC.6.5.5.1, ECC.7.10 and ECC.7.11 as applicable.

ii) **User's**, **BM Participants** and **Restoration Contractors** shall undertake tests or otherwise demonstrate that their **Critical Tools and Faciliaties** are sufficiently robust and reliable enough to manage the high volumes of data and alarms that are expected to be generated during **System Restoration** in accordance with the requirements of CC.7.10.7 and/or ECC.7.10.7.

OC5.7.6 **The Company**, as part of its regular **System Restoration** assurance activities, will ensure **Users** and **Restoration Contractors** are capable of satisfying the applicable requirements of OC5.7.

OC5.8 PROCEDURES APPLYING TO EMBEDDED MEDIUM POWER STATIONS NOT SUBJECT TO A BILATERAL AGREEMENT AND EMBEDDED DC CONVERTER STATIONS NOT SUBJECT TO A BILATERAL AGREEMENT

OC5.8.1 Compliance Statement

Each **Network Operator** shall ensure that each **Embedded Person** provides to the **Network Operator** upon **The Company's** request:

(a) written confirmation that each such **Power Generating Module**, **Generating Unit**, **Power Park Module**, **HVDC Equipment**, or **DC Converter** complies with the requirements of the **CC** and **ECC**; and

(b) evidence, where requested, reasonably satisfactory to **The Company**, of such compliance. Such a request shall not normally be made by **The Company** more than twice in any calendar year in respect of any **Generator's Power Generating Module**, **Generating Unit** or **Power Park Module** or **HVDC System Owner's HVDC System**, or **DC Converter** owner's **DC Converter**.

The **Network Operator** shall provide the evidence or written confirmation required under OC5.8.1 (a) and (b) forthwith upon receipt to **The Company**.

OC5.8.2 Network Operator's Obligations To Facilitate Tests

If:

(a) the **Network Operator** fails to procure the confirmation referred to at OC5.8.1(a); or

(b) the evidence of compliance is not to **The Company's** reasonable satisfaction,

then, **The Company** shall be entitled to require the **Network Operator** to procure access upon terms reasonably satisfactory to **The Company** to enable **The Company** to witness the **Embedded Person** carrying out the tests referred to in OC5.8.3 in respect of the relevant **Embedded Medium Power Station** or **Embedded DC Converter Station** or **Embedded HVDC System**.

OC5.8.3 Testing Of Embedded Medium Power Stations Not Subject To A Bilateral Agreement Or Embedded DC Converter Stations Not Subject To A Bilateral Agreement or Embedded HVDC Equipment Not Subject To A Bilateral Agreement

The Company may, in accordance with the provisions of OC5.8.2, at any time (although not normally more than twice in any calendar year in respect of any particular **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** or **Embedded HVDC Equipment** not subject to a **Bilateral Agreement**) issue an instruction requiring the **Network Operator** within whose **System** the relevant **Medium Power Station** not subject to a **Bilateral Agreement** or **DC Converter Station** or **HVDC Equipment** not subject to a **Bilateral Agreement** is **Embedded**, to require the **Embedded Person** to carry out a test.

Such test shall be carried out at a time no sooner than 48 hours from the time that the instruction was issued, on any one or more of the **Generating Units**, **Power Generating Modules, Power Park Modules** or **DC Converters** or **HVDC Equipment** comprising part of the relevant **Embedded Medium Power Station** or **Embedded DC Converter Station** or **HVDC System** and should only be to demonstrate that:

(a) the relevant **Generating Unit**, **Power Generating Module, Power Park Module** or **DC Converter** or **HVDC Equipment** meets the requirements of the paragraphs in the **CC** or **ECC** which are applicable to such **Generating Units**, **Power Generating Modules**, **Power Park Module** or **DC Converter** or **HVDC Equipment**;

(b) the **Reactive Power** capability registered with **The Company** under **OC2** meets the requirements set out in CC.6.3.2 or ECC.6.3.2 as applicable.

The instruction may only be issued where, following consultation with the relevant **Network Operator**, **The Company** has:

(c) confirmed to the relevant **Network Operator** the manner in which the test will be conducted, which shall be consistent with the principles established in OC5.5.3; and

(d) received confirmation from the relevant **Network Operator** that the relevant **Generating Unit**, **Power Generating Module**, **Power Park Module** or **DC Converter** or **HVDC Equipment** would not then be unavailable by reason of forced outage or **Planned Outage** expected prior to the instruction.

The relevant **Network Operator** is responsible for ensuring the performance of any test so required by **The Company** and the **Network Operator** shall ensure that the **Embedded Person** retains the responsibility for ensuring the safety of personnel and plant during the test.

OC5.8.4 Test Failures/Re-Tests and Disputes

The relevant **Network Operator** shall:

(a) ensure that provisions equivalent to OC5.5.5, OC5.5.6 and OC5.6 apply to **Embedded Medium Power Stations** not the subject of a **Bilateral Agreement, Embedded DC Converter Stations** not the subject of a **Bilateral Agreement** or **Embedded HVDC Equipment** not the subject of a **Bilateral Agreement** within its **System** in respect of test failures, re-tests and disputes as to test failures and re-tests;

(b) ensure that the provisions equivalent to OC5.5.5, OC5.5.6 and OC5.6 referred to in OC5.8.4(a) are effective so that **The Company** may require, if it so wishes, the provision to it of any reports or other information equivalent to those or that to which **The Company** would be entitled in relation to test failures, re-tests and disputes as to test failures and re-tests under the provisions of OC5.5.5, OC5.5.6 and OC5.6; and

(c) the provisions equivalent to OC5.5.5, OC5.5.6 and OC5.6 referred to in OC5.8.4(a) are effective to permit **The Company** to conduct itself and take decisions in such a manner in relation to test failures, re-tests and disputes as to test failures and re-tests in respect of **Embedded Medium Power Stations** not the subject of a **Bilateral Agreement**, **Embedded DC Converter Stations** not the subject of a **Bilateral Agreement** or **Embedded HVDC Equipment** not the subject of a **Bilateral Agreement** as it is able to conduct itself and take decisions in relation to test failures, re-tests and disputes as to test failures and re-tests under OC5.5.5, OC5.5.6 and OC5.6.

APPENDIX 1 - ONSITE SIGNAL PROVISION FOR WITNESSING TESTS

OC5.A.1.1 During tests witnessed on-site by **The Company**, the following signals shall be provided to **The Company** by the **GB Generator**, **GB Generator** undertaking **OTSDUW** or **DC Converter Station** owner in accordance with CC.6.6.2:

OC5.A.1.2 Synchronous Generating Units

(a) All Tests

- MW - **Active Power** at **Generating Unit** terminals

(b) Reactive & Excitation System

- MVAr - **Reactive Power** at **Generating Unit** terminals
- Vt - **Generating Unit** terminal voltage
- Efd- **Generating Unit** field voltage and/or main exciter field voltage
- Ifd – **Generating Unit** field current (where possible)
- **Power System Stabiliser** output, where applicable.
- Noise – Injected noise signal (where applicable and possible)

(c) Governor System & **Frequency** Response

- Fsys - **System Frequency**
- Finj - Injected Speed Reference
- Logic - Stop / Start Logic Signal

For Gas Turbines:

- GT Fuel Demand
- GT Fuel Valve Position
- GT Inlet Guide Vane Position
- GT Exhaust Gas Temperature

For Steam Turbines at >= 1Hz:

- Pressure before Turbine Governor Valves
- Turbine Governor Valve Positions
- Governor Oil Pressure*
- Boiler Pressure Set Point *
- Superheater Outlet Pressure *
- Pressure after Turbine Governor Valves*
- Boiler Firing Demand*

*Where applicable (typically not in **CCGT Module**)

For Hydro Plant:

- Speed Governor Demand Signal
- Actuator Output Signal
- Guide Vane / Needle Valve Position

(d) Compliance with CC.6.3.3	• Fsys - **System Frequency** • Finj - Injected Speed Reference • Appropriate control system parameters as agreed with **The Company** (See OC5.A.2.9)

OC5.A.1.3 Power Park Modules, OTSUA and DC Converters

	Each **Power Park Module** and **DC Converter** at a **Grid Entry Point** or **User System Entry Point**
(a) Real Time on site.	• Total **Active Power** (MW) • Total **Reactive Power** (MVAr) • Line-line Voltage (kV) • **System Frequency** (Hz)
(b) Real Time on site or Downloadable	• Injected frequency signal (Hz) or test logic signal (Boolean) when appropriate • Injected voltage signal (per unit voltage) or test logic signal (Boolean) when appropriate • In the case of an **Onshore Power Park Module** the **Onshore Power Park Module** site voltage (MV) (kV) • **Power System Stabiliser** output, where appropriate • In the case of a **Power Park Module** or **DC Converter** where the **Reactive Power** is provided from more than one **Reactive Power** source, the individual **Reactive Power** contributions from each source, as agreed with **The Company**. • In the case of **DC Converters** appropriate control system parameters as agreed with **The Company** (See OC5.A.4) • In the case of an **Offshore Power Park Module** the total **Active Power** (MW) and the total **Reactive Power** (MVAr) at the **Offshore Grid Entry Point**
(c) Real Time on site or Downloadable	• Available power for **Power Park Module** (MW) • Power source speed for **Power Park Module** (e.g. wind speed) (m/s) when appropriate • Power source direction for **Power Park Module** (degrees) when appropriate
	See OC5.A.1.3.1

OC5.A.1.3.1 **The Company** accept that the signals specified in OC5.A.1.3(c) may have lower effective sample rates than those required in CC.6.6.2 although any signals supplied for connection to **The Company's** recording equipment which do not meet at least the sample rates detailed in CC.6.6.2 should have the actual sample rates indicated to **The Company** before testing commences.

OC5.A.1.3.2 For all **The Company** witnessed testing either;

(i) the **Generator** or **DC Converter Station** owner shall provide to **The Company** all signals outlined in OC5.A.1.3 direct from the **Power Park Module** control system without any attenuation, delay or filtering which would result in the inability to fully demonstrate the objectives of the test, or identify any potential safety or plant instability issues, and with a signal update rate corresponding to CC.6.6.2.1; or

(ii) in the case of **Onshore Power Park Modules**, the **Generator** or **DC Converter Station** owner shall provide signals OC5.A.1.3(a) direct from one or more transducer(s) connected to current and voltage transformers for monitoring in real time on site; or,

(iii) In the case of **Offshore Power Park Modules** and **OTSUA** signals OC5.A.1.3(a) will be provided at the **Interface Point** by the **Offshore Transmission Licensee** pursuant to the **STC** or by the **Generator** when **OTSDUW Arrangements** apply.

OC5.A.1.3.3 Options OC5.A.1.3.2 (ii) and (iii) will only be available on condition that;

(a) all signals outlined in OC5.A.1.3 are recorded and made available to **The Company** by the **Generator** or **DC Converter Station** owner from the **Power Park Module** or **OTSUA** or **DC Converter** control systems as a download once the testing has been completed; and

(b) the full test results are provided by the **Generator** or **DC Converter Station** owner within 2 working days of the test date to **The Company** unless **The Company** agrees otherwise; and

(c) all data is provided with a sample rate in accordance with CC.6.6.2.2 or ECC.6.6.3.3 unless **The Company** agrees otherwise; and

(d) in **The Company's** reasonable opinion the solution does not unreasonably add a significant delay between tests or impede the volume of testing which can take place on the day.

OC5.A.1.3.4 In the case of where transducers connected to current and voltage transformers are installed (OC5.A.1.3.3 (ii) and (iii)), the transducers shall meet the following specification

(a) The transducer(s) shall be permanently installed to easily allow safe testing at any point in the future, and to avoid a requirement for recalibration of the current transformers and voltage transformers.

(b) The transducer(s) should be directly connected to the metering quality current transformers and voltage transformers or similar.

(c) The transducers shall either have a response time no greater than 50ms to reach 90% of output, or no greater than 300ms to reach 99.5%.

OC5.A.1.4 Testing not witnessed by **The Company** on-site

OC5.A.1.4.1.1 Where **The Company** has decided not to witness testing on-site, the results shall be submitted to **The Company** in spreadsheet format with the signal data in columns arranged as follows. Signal data denoted by "#" is not essential but if not provided the column should remain in place but without values entered. Where two signal names are given in a column these are alternatives related to the type of plant under test.

OC5.A.1.4.1.2. Where **The Company** has requested addition signals to be recorded prior to the testing these signals shall be placed in columns to the right of the spreadsheet.

OC5.A.1.4.2.1 Onshore Synchronous Generating Unit Excitation System and Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power	Terminal Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Field Voltage
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Field Current	PSS Output #	Noise Injection #					
# Columns may be left blank but the column must still be included in the files								

OC5.A.1.4.2.2 Onshore Synchronous Generating Unit Frequency Response and CC.6.3.3

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power #	Terminal Voltage #	Speed /Frequency	Freq Injection	Logic / Test Start	Fuel Demand
2								Guide Vane Setpoint
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Inlet Guide Vane	Exhaust Gas Temp	ST Valve Pos	Fuel Valve Pos	HP Steam Valve Pos	IP Steam Valve Pos	LP Steam Valve Pos	
2	Guide Vane Position	Head						
# Columns may be left blank but must still be included in the files								

OC5.A.1.4.3.1 Onshore Power Park Modules Voltage Control & Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Active Power	Reactive Power	Connection Point Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Statcom or Windfarm Reactive Power #
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed	Wind Direction	Voltage Setpoint				
2	State of Charge							
# Columns may be left blank but the column must still be included in the files								

OC5.A.1.4.3.2 Offshore Power Park Modules Voltage Control & Reactive Capability

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	Onshore Interface Point Active Power	Onshore Interface Point Reactive Power	Onshore Interface Point Voltage	Speed /Frequency #	Freq Injection #	Logic / Test Start #	Statcom or Windfarm Reactive Power #
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed m/s	Wind Direction	Voltage Setpoint				
2	State of Charge							
# Columns may be left blank but the column must still be included in the files								

OC5.A.1.4.3.3 Power Park Modules Frequency Control

	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8
1	Time	GEP Active Power	GEP Reactive Power #	GEP Connection Voltage #	Speed /Frequency	Freq Injection	Logic / Test Start	Statcom or Windfarm Output

								#
	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14	Col 15	Col 16
1	Power Available	Wind Speed m/s	Wind Direction					
2	State of Charge							
# Columns may be left blank but must still be included in the files								

OC5.A.1.5.1 Where test results are completed without any prescence of **The Company** but are relied upon as evidence of the compliance they should be accompanied by a logsheet. This sheet should be legible, in English and detail the items as indicated below:

- Time and date of test;
- Name of **Power Station** and module if applicable;
- Name of test engineer(s) and company name;
- Name of **User** representative(s) and company name;
- Type of testing being undertake eg voltage control;
- Ambient conditions eg. temperature, pressure, wind speed, wind direction; and
- Controller settings, eg voltage slope, frequency droop, voltage setpoint, UEL & OEL settings.

OC5.A.1.5.2 For each test the following items should be recorded as relevant to the type of test being undertaken. Where there is uncertainty on the information to be recorded this should be discussed with **The Company** in advance of the test.

OC5.A.1.5.2 .1 Voltage Control Tests

- Start time of each test step;
- **Active Power**;
- **Reactive Power**;
- Connection voltage;
- Voltage vontrol setpoint, if applicable or changed;
- Voltage control slope, if applicable or changed;
- Terminal voltage if applicable;
- **Generating Unit** transformer tap position or grid transformer tap position, as applicable;
- Number of **Power Park Units** in service in each **Power Park Module**, if applicable; and
- For Offshore Connections, **Offshore Grid Entry Point** voltage.

OC5.A.1.5.2.2 Reactive Power Capability Tests

- Start time of test;
- **Active Power**;
- **Reactive Power**;
- Connection voltage;
- Terminal voltage if applicable;

- **Generating Unit** transformer tap position or grid transformer tap position as applicable;
    - Number of **Power Park Units** in service in each **Power Park Module**, if applicable and
    - For Offshore Connections, **Offshore Grid Entry Point** voltage.

OC5.A.1.5.2.3 Frequency Response Capability Tests

- Start time of test;
- **Active Power**;
- **System Frequency**;
- For **CCGT Modules, Active Power** for the individual units (GT &ST);
- For boiler plant, HP steam pressure;
- Droop setting of controller if applicable;
- Number of **Power Park Units** in service in each **Power Park Module**, if applicable.; and
- For Offshore Connections, **Offshore Grid Entry Point Active Power** for each Power Park Module.

OC5.A.1.5.3 Material changes during the test period should be recorded e.g. **Generating Unit**s tripping / starting, changes to tapchange positions.

APPENDIX 2 - COMPLIANCE TESTING OF SYNCHRONOUS PLANT

OC5.A.2.1 Scope

OC5.A.2.1.1 This Appendix sets out the tests contained therein to demonstrate compliance with the relevant clauses of the **Connection Conditions** of the Grid Code and apply only to **GB Generators**. This Appendix shall be read in conjunction with the **CP** with regard to the submission of the reports to **The Company**. The testing requirements applicable to **EU Generators** are specified in ECP.A.5.

OC5.A.2.1.2 The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

(i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code** and **Bilateral Agreement**; and/or

(ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code** or **Bilateral Agreement**.

(iii) Agree a reduced set of tests for subsequent **Generating Units** following successful completion of the first **Generating Unit** tests in the case of a **Power Station** comprised of two or more **Generating Units** which **The Company** reasonably considers to be identical.

If:

(a) the tests performed pursuant to OC5.A.2.1.2(iii) in respect of subsequent **Generating Units** do not replicate the full tests for the first **Generating Unit**, or

(b) any of the tests performed pursuant to OC5.A.2.1.2(iii) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**,

then notwithstanding the provisions above, the full testing requirements set out in this Appendix will be applied.

OC5.A.2.1.3 The **Generator** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **Generator** retains the responsibility for the safety of personnel and plant during the test. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **Generator** otherwise. Reactive Capability tests may be witnessed by **The Company** remotely from the **The Company** control centre. During **The Company** witnessed tests, the **Generator** should ensure suitable representatives from the **Generator** and manufacturer (if appropriate) are available on site for the entire testing period. In all cases the **Generator** shall provide suitable monitoring equipment to record all relevant test signals as outlined below in OC5.A.3.1.5.

OC5.A.2.1.4 The **Generator** shall submit a schedule of tests to **The Company** in accordance with CP.4.3.1

OC5.A.2.1.5 Prior to the testing of a **Generating Unit**, the **Generator** shall complete the **Integral Equipment Test** procedure in accordance with OC.7.5

OC5.A.2.1.6 Full **Generating Unit** testing as required by CP.7.2 is to be completed as defined in OC5.A.2.2 through to OC5.A.2.9

OC5.A.2.2 Excitation System Open Circuit Step Response Tests

OC5.A.2.2.1 The open circuit step response of the **Excitation System** will be tested by applying a voltage step change from 90% to 100% of the nominal **Generating Unit** terminal voltage, with the **Generating Unit** on open circuit and at rated speed.

OC5.A.2.2.2 The test shall be carried out prior to synchronisation in accordance with CP.6.4. This is not witnessed by **The Company** unless specifically requested by **The Company**. Where **The Company** is not witnessing the tests, the **Generator** shall supply the recordings of the following signals to **The Company** in an electronic spreadsheet format:

Vt - **Generating Unit** terminal voltage

Efd - **Generating Unit** field voltage or main exciter field voltage

Ifd- **Generating Unit** field current (where possible)

Step injection signal

OC5.A.2.2.3 Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

OC5.A.2.3 Open & Short Circuit Saturation Characteristics

OC5.A.2.3.1 The test shall normally be carried out prior to synchronisation in accordance with CP.6.4. Manufacturer factory test results may be used where appropriate or manufacturers factory type test results may be used if agreed by **The Company**.

OC5.A.2.3.2 This is not witnessed by **The Company**. Graphical and tabular representations of the results in an electronic spreadsheet format showing per unit open circuit terminal voltage and short circuit current versus per unit field current shall be submitted to **The Company**.

OC5.A.2.3.3 Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

OC5.A.2.4 Excitation System On-Load Tests

OC5.A.2.4.1 The time domain performance of the **Excitation System** shall be tested by application of voltage step changes corresponding to 1% and 2% of the nominal terminal voltage.

OC5.A.2.4.2 Where a **Power System Stabiliser** is present:

(i) The **PSS** must only be commissioned in accordance with BC2.11.2. When a **PSS** is switched on for the first time as part of on-load commissioning or if parameters have been adjusted, the **Generator** should consider reducing the **PSS** output gain by at least 50% and should consider reducing the limits on the **PSS** output by at least a factor of 5 to prevent unexpected PSS action affecting the stability of the **Generating Unit** or the **National Electricity Transmission System**.

(ii) The time domain performance of the **Excitation System** shall be tested by application of voltage step changes corresponding to 1% and 2% of the nominal terminal voltage, repeating with and without the **PSS** in service.

(iii) The frequency domain tuning of the **PSS** shall also be demonstrated by injecting a 0.2Hz-3Hz band limited random noise signal into the **Automatic Voltage Regulator** reference with the **Generating Unit** operating at points specified by **The Company** (up to rated MVA output).

(iv) The **PSS** gain margin shall be tested by increasing the **PSS** gain gradually to threefold and observing the **Generating Unit** steady state **Active Power** output.

(v) The interaction of the **PSS** with changes in **Active Power** shall be tested by application of a +0.5Hz frequency injection to the governor while the **Generating Unit** is selected to **Frequency Sensitive Mode**.

(vi) If the **Generating Unit** is of the pump storage type, then the step tests shall be carried out, with and without the **PSS**, in the pumping mode in addition to the generating mode.

(vii) Where the **Bilateral Agreement** requires that the **PSS** is in service at a specified loading level, additional testing witnessed by **The Company** will be required during the commissioning process before the **Generating Unit** or **CCGT Module** may exceed this output level.

(viii) Where the **Excitation System** includes a **PSS**, the **Generator** shall provide a suitable noise source to facilitate noise injection testing.

OC5.A.2.4.3 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for the **The Company** witnessed **PSS** Tests.

Test	Injection	Notes
	Synchronous Generator running rated MW, unity pf, PSS Switched Off	
1	• Record steady state for 10 seconds • Inject +1% step to **AVR** Voltage Reference and hold for at least 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	
2	• Record steady state for 10 seconds • Inject +2% step to **AVR** Voltage Reference and hold for at least 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	
3	• Inject band limited (0.2-3Hz) random noise signal into voltage reference and measure frequency spectrum of Real Power. • Remove noise injection.	
	Switch On **Power System Stabiliser**	
4	• Record steady state for 10 seconds • Inject +1% step to **AVR** Voltage Reference and hold for at least 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	
5	• Record steady state for 10 seconds • Inject +2% step to **AVR** Voltage Reference and hold for at least 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	
6	• Increase **PSS** gain at 30 second intervals. i.e. x1 – x1.5 – x2 – x2.5 – x3 • Return **PSS** gain to initial setting	
7	• Inject band limited (0.2-3Hz) random noise signal into voltage reference and measure frequency spectrum of Real Power. • Remove noise injection.	

8	• Select the governor to **Frequency Senstive Mode** (FSM) • Inject +0.5 Hz step into governor. • Hold until generator MW output is stabilised • Remove step	

OC5.A.2.5 Under-excitation Limiter Performance Test

OC5.A.2.5.1 Initially the performance of the **Under-excitation Limiter** should be checked by moving the limit line close to the operating point of the **Generating Unit** when operating close to unity power factor. The operating point of the **Generating Unit** is then stepped into the limit by applying a 2% decrease in **Automatic Voltage Regulator** reference voltage.

OC5.A.2.5.2 The final performance of the **Under-excitation Limiter** shall be demonstrated by testing its response to a step change corresponding to a 2% decrease in **Automatic Voltage Regulator** reference voltage when the **Generating Unit** is operating just off the limit line, at the designed setting as indicated on the **Performance Chart** submitted to **The Company** under OC2.

OC5.A.2.5.3 Where possible, the **Under-excitation Limiter** should also be tested by operating the tap-changer when the **Generating Unit** is operating just off the limit line, as set up.

OC5.A.2.5.4 The **Under-excitation Limiter** will normally be tested at low **Active Power** output and at maximum **Active Power** output (**Registered Capacity**).

OC5.A.2.5.5 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for the **The Company** witnessed **Under-excitation Limiter** Tests.

Test	Injection	Notes
	Synchronous generator running rated MW at unity **Power Factor**. Under-excitation limit temporarily moved close to the operating point of the generator.	
1	• **PSS** on. • Inject -2% voltage step into **AVR** voltage reference and hold at least for 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	
	Under-excitation limit moved to normal position. Synchronous generator running at rated MW and at leading MVArs close to Under-excitation limit.	
2	• **PSS** on. • Inject -2% voltage step into **AVR** voltage reference and hold at least for 10 seconds until stabilised • Remove step returning **AVR** Voltage Reference to nominal and hold for at least 10 seconds	

OC5.A.2.6 Over-excitation Limiter Performance Test

Description & Purpose of Test

OC5.A.2.6.1 The performance of the **Over-excitation Limiter**, where it exists, shall be demonstrated by testing its response to a step increase in the **Automatic Voltage Regulator** reference voltage that results in operation of the **Over-excitation Limiter**. Prior to application of the step the **Generating Unit** shall be generating **Rated Active Power** and operating within its continuous **Reactive Power** capability. The size of the step will be determined by the minimum value necessary to operate the **Over-excitation Limiter** and will be agreed by **The Company** and the **Generator**. The resulting operation beyond the **Over-excitation Limit** shall be controlled by the **Over-excitation Limiter** without the operation of any protection that could trip the **Generating Unit**. The step shall be removed immediately on completion of the test.

OC5.A.2.6.2 If the **Over-excitation Limiter** has multiple levels to account for heating effects, an explanation of this functionality will be necessary and if appropriate, a description of how this can be tested.

OC5.A.2.6.3 The following typical procedure is provided to assist **Generators** in drawing up their own site specific procedures for the **The Company** witnessed **Under-excitation Limiter** Tests.

Test	Injection	Notes
	Synchronous Generator running **Rated MW** and maximum lagging MVAr.	
	Over-excitation Limit temporarily set close to this operating point. **PSS** on.	
1	• Inject positive voltage step into **AVR** voltage reference and hold • Wait till **Over-excitation Limiter** operates after sufficient time delay to bring back the excitation back to the limit. • Remove step returning **AVR** Voltage Reference to nominal.	
	Over-excitation Limit restored to its normal operating value. **PSS** on.	

OC5.A.2.7 Reactive Capability

OC5.A.2.7.1 The leading and lagging **Reactive Power** capability on each **Generating Unit** will normally be demonstrated by operation of the **Generating Unit** at 0.85 power factor lagging for 1 hour and 0.95 power factor leading for 1 hour.

OC5.A.2.7.2 In the case of an **Embedded Generating Unit** where distribution network considerations restrict the **Generating Unit Reactive Power** output then the maximum leading and lagging capability will be demonstrated without breaching the host network operators limits.

OC5.A.2.7.3 The test procedure, time and date will be agreed with **The Company** and will be to the instruction of **The Company** control centre and shall be monitored and recorded at both the **The Company** control centre and by the **Generator**.

OC5.A.2.7.4 Where the **Generator** is recording the voltage and **Reactive Power** at the **Generating Unit** terminals, the results shall be supplied in an electronic spreadsheet format.

OC5.A.2.7.5 The ability of the **Generating Unit** to comply with the operational requirements specified in BC2.A.2.6 and CC.6.1.7 will normally be demonstrated by changing the tap position and, where agreed in the **Bilateral Agreement**, the **Generating Unit** terminal voltage.

OC5.A.2.8 Governor and Load Controller Response Performance

OC5.A.2.8.1 The governor and load controller response performance will be tested by injecting simulated frequency deviations into the governor and load controller systems. Such simulated frequency deviation signals must be injected simultaneously at both speed governor and load controller references. For **CCGT modules**, simultaneous injection into all gas turbines, steam turbine governors and module controllers is required.

OC5.A.2.8.2 Prior to witnessing the governor tests set out in OC5.A.2.8.6, **The Company** requires the **Generator** to conduct the preliminary tests detailed in OC5.A.2.8.4 and send the results to **The Company** for assessment unless agreed otherwise by **The Company**. The results should be supplied in an electronic spreadsheet format. These tests shall be completed at least two weeks prior to the witnessed governor response tests.

OC5.A.2.8.3 Where a **CCGT Module** or **Generating Unit** is capable of operating on alternative fuels, tests will be required to demonstrate performance when operating on each fuel. **The Company** may agree a reduction from the tests listed in OC5.A.2.8.6 for demonstrating performance on the alternative fuel. This includes the case where a main fuel is supplemented by bio-fuel.

Preliminary Governor Frequency Response Testing

OC5.A.2.8.4 Prior to conducting the full set of tests as per OC5.A.2.8.6, **Generators** are required to conduct a preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. With the plant running at 80% of full load, the following frequency injections shall be applied.

Test No (Figure 1)	Frequency Injection	Notes
8	• Inject - 0.5Hz frequency fall over 10 sec • Hold until conditions stabilise • Remove the injected signal	
14	• Inject +0.5Hz frequency rise over 10 sec • Hold until conditions stabilise • Remove the injected signal	
13	• Inject -0.5Hz frequency fall over 10 sec • Hold for a further 20 sec • At 30 sec from the start of the test, Inject a +0.3Hz frequency rise over 30 sec. • Hold until conditions stabilise • Remove the injected signal	

OC5.A.2.8.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **Generator** shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by The Company

OC5.A.2.8.6 The tests are to be conducted at a number of different Module Load Points (MLP). The load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum Export Limit)	100% MEL
Module Load Point 5	95% MEL
Module Load Point 4 (Mid point of Operating Range)	80% MEL
Module Load Point 3	70% MEL
Module Load Point 2 (**Minimum Generation**)	MG
Module Load Point 1 (**Design Minimum Operating Level**)	DMOL

OC5.A.2.8.7 The tests are divided into the following two types;

(i) **Frequency** response volume tests as per OC5.A.2.8. Figure 1. These tests consist of **Frequency** profile and ramp tests.

(ii) **System** islanding and step response tests as shown by OC5.A.2.8. Figure 2.

OC5.A.2.8.8 There should be sufficient time allowed between tests for control systems to reach steady state. Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **Generating Unit** or **CCGT Module** has stabilised or 90 seconds, which ever is the longer. The frequency response capability test (see Figure 1) injection signal shall be returned to zero at the same rate at which it was applied. **The Company** may require repeat tests should the tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection; when not witnessed by **The Company** there must be sufficient time allowed between tests for the **Plant** to have reached a stable steady state operating condition or 90 seconds, whichever is the longer.

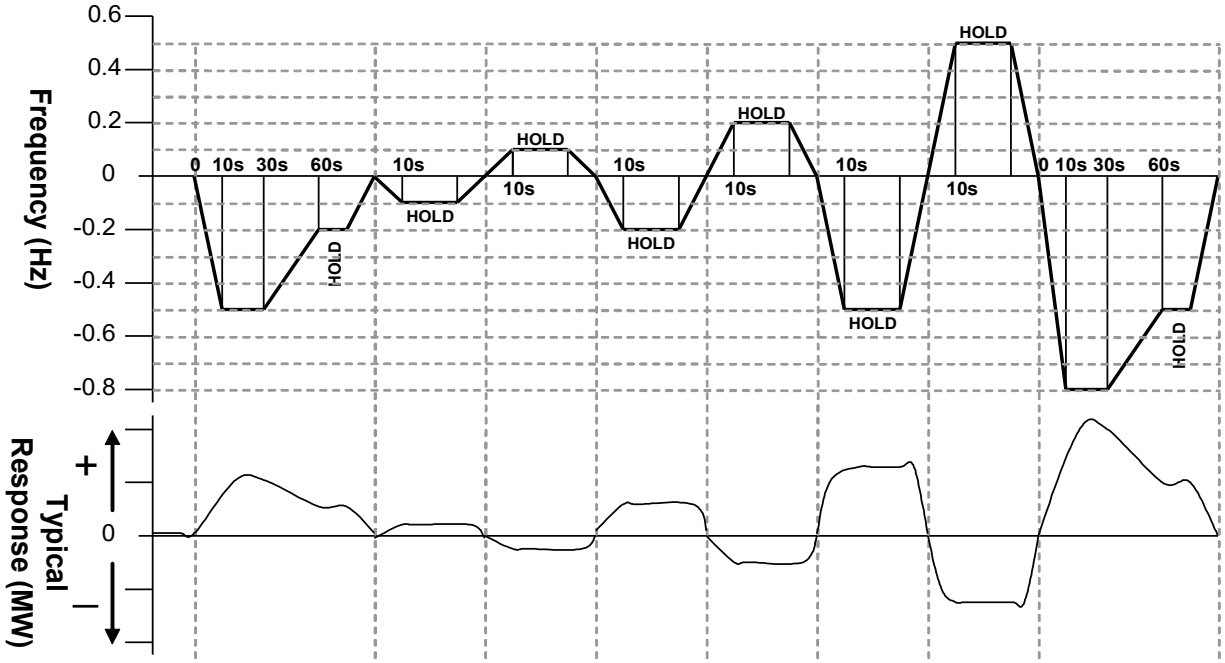

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5	5			6			7	
MLP4	8	9	10	11	12	13	14	
MLP3	15						16	17
MLP2	18			19	20	21		22
MLP1	23			24	25			26

Figure 1: Frequency Response Capability Tests

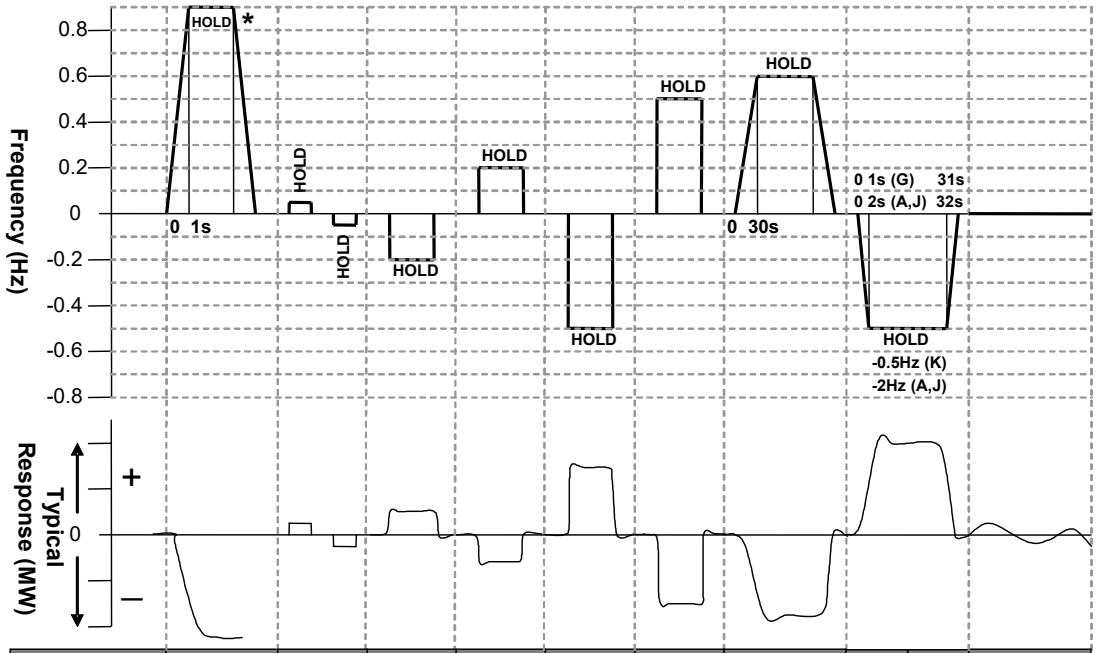

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+0.6	-0.5	-2.0	± 0**
MLP6	BC1						BC2			L
MLP6 LFSM	BC3						BC4			
MLP5								A		
MLP4		D/E	F	G	H	I		J		M
MLP4 LFSM										N
MLP3										
MLP2										
MLP1								K		

Figure 2: System islanding and step response tests

* This will generally be +2.0Hz unless an injection of this size causes a reduction in plant output that takes the operating point below **Designed Minimum Operating Level** in which case an appropriate injection should be calculated in accordance with the following:

For example, 0.9Hz is needed to take an initial output 65% to a final output of 20%. If the initial output was not 65% and the **Designed Minimum Operating Level** is not 20% then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Designed Minimum Operating Level	20%
Frequency Controller Droop	4%
Frequency to be injected =	(0.65 - 0.20) x 0.04 x 50 = 0.9Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the **System Frequency** signal. The tests will consist of monitoring the **Generating Unit** and **CCGT Module** in **Frequency Sensitive Mode** during normal **System Frequency** variations without applying any injection. Test N in figure 2 shall be conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

OC5.A.2.8.9 The target frequency adjustment facility should be demonstrated from the normal **Control Point** within the range of 49.9Hz to 50.1Hz by step changes to the target frequency setpoint as indicated in OC5.A.2.8 Figure 3.

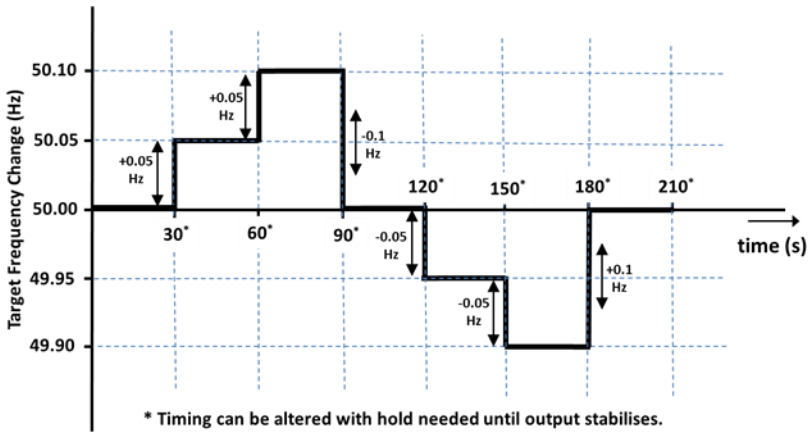

OC5.A.2.8.10 Figure 3 – Target Frequency setting changes

OC5.A.2.9 Compliance with CC.6.3.3 Functionality Test

OC5.A.2.9.1 Where the plant design includes active control function or functions to deliver CC.6.3.3 compliance, the **Generator** will propose and agree a test procedure with **The Company**, which will demonstrate how the **Generating Unit Active Power** output responds to changes in **System Frequency** and ambient conditions (e.g. by **Frequency** and temperature injection methods).

OC5.A.2.9.2 The **Generator** shall inform **The Company** if any load limiter control is additionally employed.

OC5.A.2.9.3 With reference to the signals specified in OC5.A.1, **The Company** will agree with the **Generator** which additional control system parameters shall be monitored to demonstrate the functionality of CC.6.3.3 compliance systems. Where **The Company** recording equipment is not used, results shall be supplied to **The Company** in an electronic spreadsheet format.

APPENDIX 3 - COMPLIANCE TESTING OF POWER PARK MODULES (AND OTSUA)

OC5.A.3.1 Scope

OC5.A.3.1.1 This Appendix outlines the general testing requirements for **Power Park Modules** and **OTSUA** to demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement** and apply only to **GB Generators**. The testing requirements applicable to **EU Generators** are specified in ECP.A.6. The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

(i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**; and/or

(ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code**, **Ancillary Services Agreement** or **Bilateral Agreement**; and/or

(ii) require additional tests if a **Power System Stabiliser** is fitted; and/or

(iv) agree a reduced set of tests if a relevant **Manufacturer's Data & Performance Report** has been submitted to and deemed to be appropriate by **The Company**; and/or

(v) agree a reduced set of tests for subsequent **Power Park Modules** or **OTSUA** following successful completion of the first **Power Park Module** or **OTSUA** tests in the case of a **Power Station** comprised of two or more **Power Park Modules** or **OTSUA** which **The Company** reasonably considers to be identical.

If:

(a) the tests performed pursuant to OC5.A.3.1.1(iv) do not replicate the results contained in the **Manufacturer's Data & Performance Report** or

(b) the tests performed pursuant to OC5.A.3.1.1(v) in respect of subsequent **Power Park Modules** or **OTSUA** do not replicate the full tests for the first **Power Park Module** or **OTSUA**, or

(c) any of the tests performed pursuant to OC5.A.3.1.1(iv) or OC5.A.3.1.1(v) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**,

then notwithstanding the provisions above, the full testing requirements set out in this Appendix will be applied.

OC5.A.3.1.2 The **Generator** is responsible for carrying out the tests set out in and in accordance with this Appendix and the **Generator** retains the responsibility for the safety of personnel and plant during the test. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **Generator** owner otherwise. Reactive Capability tests may be witnessed by **The Company** remotely from the **The Company** control centre. For all on site during **The Company** witnessed tests, the **Generator** must ensure suitable representatives from the **Generator** and / or **Power Park Module** manufacturer (if appropriate) and/or **OTSUA** manufacturer (if appropriate) are available on site for the entire testing period. In all cases and in addition to any recording of signals conducted by **The Company,** the **Generator** shall record all relevant test signals as outlined in OC5.A.1.

OC5.A.3.1.3 In addition to the dynamic signals supplied in OC5.A.1, the **Generator** shall inform **The Company** of the following information prior to the commencement of the tests and any changes to the following, if any values change during the tests:

(i) All relevant transformer tap numbers; and

(ii) Number of **Power Park Units** in operation

OC5.A.3.1.4 The **Generator** shall submit a detailed schedule of tests to **The Company** in accordance with CP.6.3.1, and this Appendix.

OC5.A.3.1.5 Prior to the testing of a **Power Park Module** or **OTSUA**, the **Generator** shall complete the **Integral Equipment Tests** procedure in accordance with OC.7.5.

OC5.A.3.1.6 Partial **Power Park Module** or **OTSUA** testing as defined in OC5.A.3.2 and OC5.A.3.3 is to be completed at the appropriate stage in accordance with CP.6.

OC5.A.3.1.7 Full **Power Park Module** or **OTSUA** testing as required by CP.7.2 is to be completed as defined in OC5.A.3.4 through to OC5.A.3.7.

OC5.A.3.1.8 Where **OTSDUW Arrangements** apply and prior to the **OTSUA Transfer Time**, any relevant **OTSDUW Plant and Apparatus** shall be considered within the scope of testing described in this Appendix. Performance shall be assessed against the relevant Grid Code requirements for **OTSDUW Plant and Apparatus** at the **Interface Point** and other **Generator Plant** and **Apparatus** at the **Offshore Grid Entry Point**. This Appendix should be read accordingly.

OC5.A.3.2 Pre 20% (or <50MW) **Synchronised Power Park Module** basic Voltage Control Tests

OC5.A.3.2.1 Before 20% of the **Power Park Module** (or 50MW if less) has commissioned, either voltage control test OC5.A.3.5.6(i) or (ii) must be completed in accordance with CP.6.

OC5.A.3.2.2 In the case of an **Offshore Power Park Module** which provides all or a portion of the **Reactive Power** capability as described in CC.6.3.2(e)(iii) and / or voltage control requirements as described in CC.6.3.8(b)(ii) to enable an **Offshore Transmission Licensee** to meet the requirements of **STC** Section K, the **Generator** is required to cooperate with the **Offshore Transmission Licensee** to conduct the 20% voltage control test. The results in relation to the **Offshore Power Park Module** will be assessed against the requirements in the **Bilateral Agreement**. In the case of **OTSUA** prior to the **OTSUA Transfer Time**, the **Generator** shall conduct the testing by reference to the entire control system responding to changes at the **Interface Point.**

OC5.A.3.3 Pre 70% **Power Park Module** Tests

OC5.A.3.3.1 For **Power Park Modules** with **Registered Capacity** ≥100MW only. Before 70% but with at least 50% of the **Power Park Module** commissioned, the following **Limited Frequency Sensitive** tests as detailed in OC5.A.3.6.2 must be completed.

(a) BC3

(b) BC4

OC5.A.3.4 Reactive Capability Test

OC5.A.3.4.1 This section details the procedure for demonstrating the reactive capability of an **Onshore Power Park Module** or an **Offshore Power Park Module** or **OTSUA** which provides all or a portion of the **Reactive Power** capability as described in CC.6.3.2(e)(iii) (for the avoidance of doubt, an **Offshore Power Park Module** which does not provide part of the **Offshore Transmission Licensee Reactive Power** capability as described in CC6.3.2(e)(i) and CC6.3.2(e)(ii) should complete the reactive power transfer / voltage control tests as per section OC5.A.3.8). These tests should be scheduled at a time where there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. There should be sufficient MW resource forecasted in order to generate at least 85% of **Registered Capacity** of the **Power Park Module**.

OC5.A.3.4.2 The tests shall be performed by modifying the voltage set-point of the voltage control scheme of the **Power Park Module** or **OTSUA** by the amount necessary to demonstrate the required reactive range. This is to be conducted for the operating points and durations specified in OC5.A.3.4.5.

OC5.A.3.4.3 **Embedded Generators** should liaise with the relevant **Network Operator** to ensure the following tests will not have an adverse impact upon the **Network Operator's System** as per OC.7.5. In situations where the tests have an adverse impact upon the **Network Operator's System**, **The Company** will only require demonstration within the acceptable limits of the **Network Operator**. For the avoidance of doubt, these tests do not negate the requirement to produce a complete **Power Park Module** performance chart as specified in OC2.3.2.1

OC5.A.3.4.4 In the case where the **Reactive Power** metering point is not at the same location as the **Reactive Power** capability requirement, then an equivalent **Reactive Power** capability for the metering point shall be agreed between the **Generator** and **The Company**.

OC5.A.3.4.5 The following tests shall be completed:

(i) Operation in excess of 50% **Rated MW** and maximum continuous lagging **Reactive Power** for 60 minutes. For the avoidance of doubt this test must start with **Active Power** output in excess of 85% of **Registered Capacity** of the **Power Park Module** as OC5.A.3.4.1 and must not fall below 50% of **Registered Capacity** of the **Power Park Module** during the 60 minutes.

(ii) Operation in excess of 50% **Rated MW** and maximum continuous leading **Reactive Power** for 60 minutes. For the avoidance of doubt this test must start with **Active Power** output in excess of 85% of **Registered Capacity** of the **Power Park Module** as OC5.A.3.4.1 and must not fall below 50% of **Registered Capacity** of the **Power Park Module** during the 60 minutes.

(iii) Operation at 50% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes.

(iv) Operation at 20% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes.

(v) Operation at 20% **Rated MW** and maximum continuous lagging **Reactive Power** for 5 minutes.

(vi) Operation at less than 20% **Rated MW** and unity **Power Factor** for 5 minutes. This test only applies to systems which do not offer voltage control below 20% of **Rated MW**.

(vii) Operation at 0% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

(viii) Operation at 0% **Rated MW** and maximum continuous lagging **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

OC5.A.3.4.6 Within this **OC5** lagging **Reactive Power** is the export of **Reactive Power** from the **Power Park Module** to the **Total System** and leading **Reactive Power** is the import of **Reactive Power** from the **Total System** to the **Power Park Module** or **OTSUA**.

OC5.A.3.5 Voltage Control Tests

OC5.A.3.5.1 This section details the procedure for conducting voltage control tests on **Onshore Power Park Modules** or **OTSUA** or an **Offshore Power Park Module** which provides all or a portion of the voltage control capability as described in CC.6.3.8(b)(ii) (for the avoidance of doubt, **Offshore Power Park Modules** which do not provide part of the **Offshore Transmission Licensee** voltage control capability as described in CC6.3.8(b)(i) should complete the reactive power transfer / voltage control tests as per section OC5.A.3.8). These tests should be scheduled at a time when there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. There should be sufficient MW resource forecasted in order to generate at least 65% of **Registered Capacity** of the **Onshore Power Park Module**. An **Embedded Generator** should also liaise with the relevant **Network Operator** to ensure all requirements covered in this section will not have a detrimental effect on the **Network Operator's System**.

OC5.A.3.5.2 The voltage control system shall be perturbed with a series of step injections to the **Power Park Module** voltage reference, and where possible, multiple up-stream transformer taps. In the case of an **Offshore Power Park Module** providing part of the **Offshore Transmission Licensee** voltage control capability, this may require a series of step injections to the voltage reference of the **Offshore Transmission Licensee** control system.

OC5.A.3.5.3 For steps initiated using network tap changers, the **Generator** will need to coordinate with **The Company** or the relevant **Network Operator** as appropriate. The time between transformer taps shall be at least 10 seconds as per OC5.A.3.5 Figure 1.

OC5.A.3.5.4 For step injections into the **Power Park Module** or **OTSUA** voltage reference, steps of ±1%, ±2% and ±4% shall be applied to the voltage control system reference summing junction. The injection shall be maintained for a minimum of 10 seconds as per OC5.A.3.5 Figure 2.

OC5.A.3.5.5 Where the voltage control system comprises of discretely switched **Plant** and **Apparatus** (eg. mechanically switched shunt reactors or capacitors) additional tests will be required to demonstrate that the overall performance of the voltage control system when switching these devices as part of the response is in accordance with Grid Code and **Bilateral Agreement** requirements.

OC5.A.3.5.6 Tests to be completed:

(i)

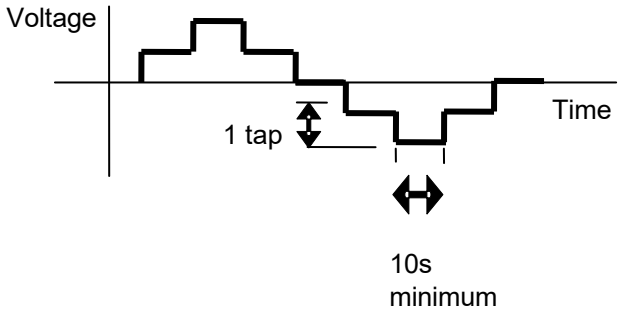

OC5.A.3.5 Figure 1 – Transformer tap sequence for voltage control tests

(ii)

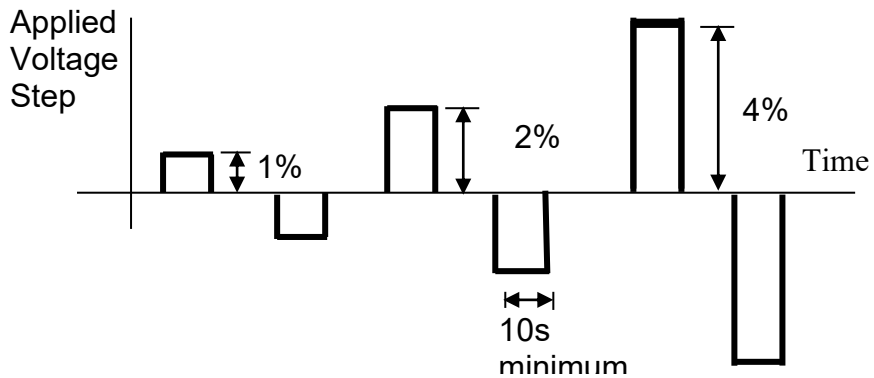

OC5.A.3.5 Figure 2 – Step injection sequence for voltage control tests

OC5.A.3.5.7 In the case of **OTSUA** where the **Bilateral Agreement** specifies additional damping facilities, additional testing to demonstrate these damping facilities may be required.

OC.A.3.5.8 In the case of **Power Park Modules** that do not provide voltage control down to zero **Active Power** a test to demonstrate the smooth transition from voltage control mode to unity **Power Factor** shall be carried out. The **Power Park Module** voltage setpoint should be altered to produce lagging **Reactive Power** or absorbing leading **Reactive Power** at a low **Active Power** level where voltage control is provided. The **Power Park Module Active Power** should

then be reduced to zero **Active Power** as a ramp over a short period (60 seconds is suggested).

OC5.A.3.6 Frequency Response Tests

OC5.A.3.6.1 This section describes the procedure for performing frequency response testing on a **Power Park Module**. These tests should be scheduled at a time where there are at least 95% of the **Power Park Units** within the **Power Park Module** in service. There should be sufficient MW resource forecasted in order to generate at least 65% of **Registered Capacity** of the **Power Park Module**.

OC5.A.3.6.2 The frequency controller shall be in **Frequency Sensitive Mode** or **Limited Frequency Sensitive Mode** as appropriate for each test. Simulated frequency deviation signals shall be injected into the frequency controller reference/feedback summing junction. If the injected frequency signal replaces rather than sums with the real **System Frequency** signal then the additional tests outlined in OC5.A.3.6.6 shall be performed with the **Power Park Module** or **Power Park Unit** in normal **Frequency Sensitive Mode** monitoring actual **System Frequency**, over a period of at least 10 minutes. The aim of this additional test is to verify that the control system correctly measures the real **System Frequency** for normal variations over a period of time.

OC5.A.3.6.3 In addition to the frequency response requirements, it is necessary to demonstrate the **Power Park Module** ability to deliver a requested steady state power output which is not impacted by power source variation as per CC.6.3.9 or ECC.6.3.9. This test shall be conducted in **Limited Frequency Sensitive Mode** at a part-loaded output for a period of 10 minutes as per OC5.A.3.6.6.

Preliminary Frequency Response Testing

OC5.A.3.6.4 Prior to conducting the full set of tests as per OC5.A.3.6.6, **Generators** are required to conduct the preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. The test should be conducted when sufficient MW resource is forecasted in order to generate at least 65% of **Registered Capacity** of the **Power Park Module**. The following frequency injections shall be applied when operating at module load point 4.

Test No (Figure 1)	Frequency Injection	Notes
8	• Inject - 0.5Hz frequency fall over 10 sec • Hold until conditions stabilise • Remove the injected signal	
14	• Inject +0.5Hz frequency rise over 10 sec • Hold until conditions stabilise • Remove the injected signal	
13	• Inject -0.5Hz frequency fall over 10 sec • Hold for a further 20 sec • At 30 sec from the start of the test, Inject a +0.3Hz frequency rise over 30 sec. • Hold until conditions stabilise • Remove the injected signal	

OC5.A.3.6.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **Generator** shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by The Company

OC5.A.3.6.6 The tests are to be conducted at a number of different Module Load Points (MLP). In the case of a **Power Park Module** the module load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum Export Limit)	100% MEL
Module Load Point 5	90% MEL
Module Load Point 4 (Mid point of Operating Range)	80% MEL
Module Load Point 3	DMOL + 0.6 x (80% MEL – DMOL)
Module Load Point 2 (**Minimum Generation**)	DMOL + 0.3 x (80% MEL – DMOL)
Module Load Point 1 (**Designed Minimum Operating**	DMOL

Level)	

OC5.A.3.6.7 The tests are divided into the following two types;

(i) Frequency response volume tests as per OC5.A.3.6. Figure 1. These tests consist of frequency profile and ramp tests.

(ii) **System** islanding and step response tests as shown by OC5.A.3.6 Figure 2

OC5.A.3.6.8 There should be sufficient time allowed between tests for control systems to reach steady state (depending on available power resource). Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **Power Park Module** has stabilised or 90 seconds, which ever is the longer. All frequency response tests should be removed over the same timescale for which they were applied. **The Company** may require repeat tests should the response volume be affected by the available power, or if tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection; when not witnessed by **The Company** there must be sufficient time allowed between tests for the **Active Power** (MW) output of the **Power Park Module** to have stabilised or 90 seconds, whichever is the longer.

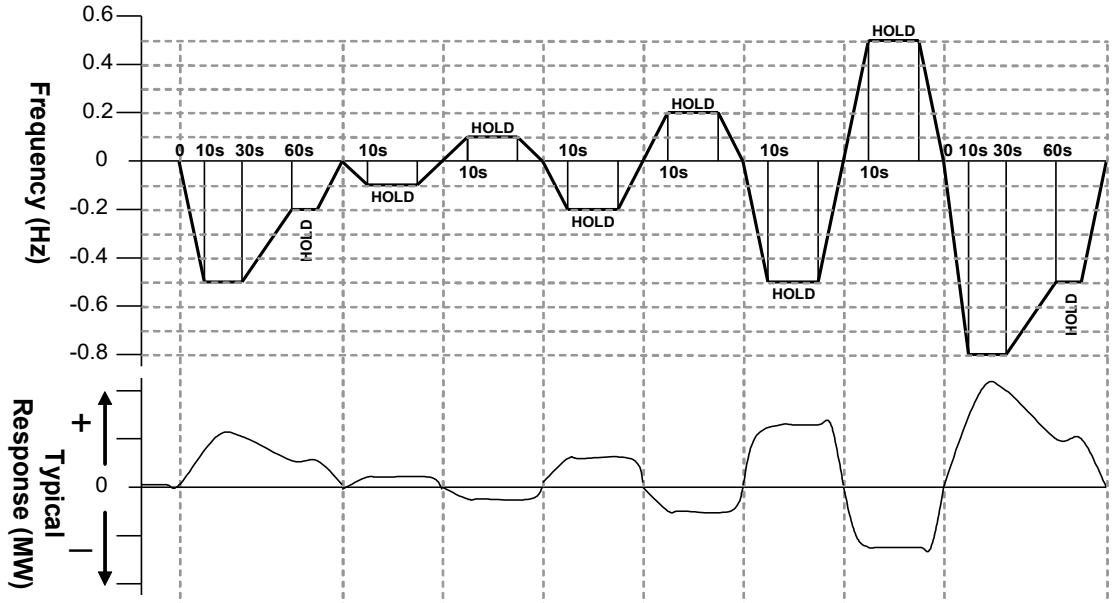

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5	5			6			7	
MLP4	8	9	10	11	12	13	14	
MLP3	15						16	17
MLP2	18			19	20	21		22
MLP1	23			24	25			26

OC5.A.3.6. Figure 1 – Frequency response volume tests

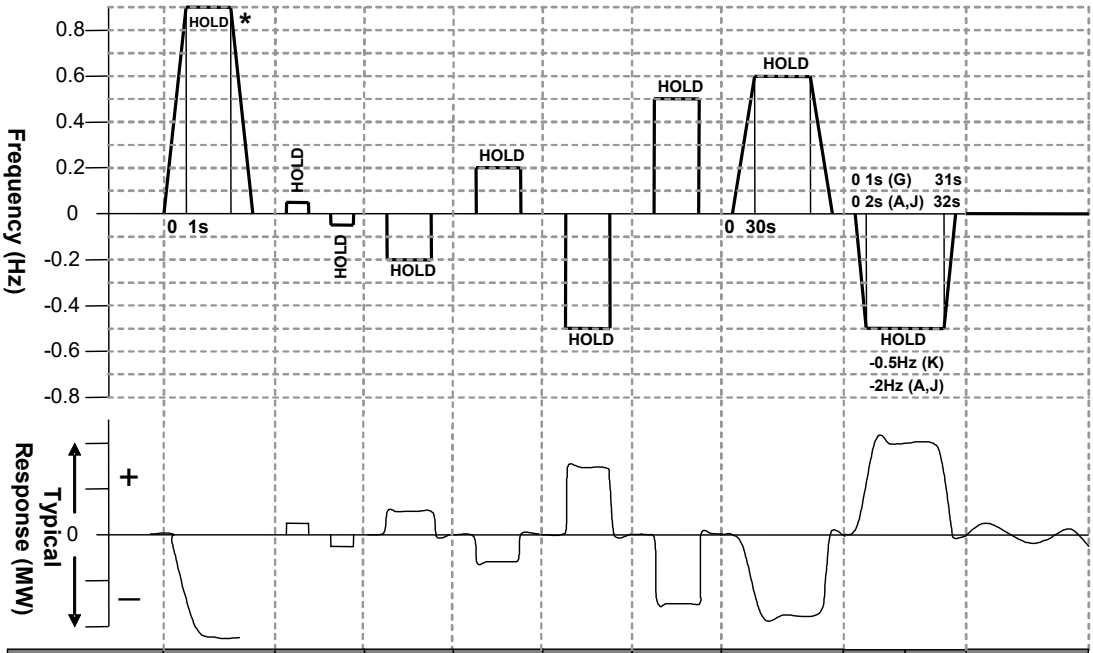

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+0.6	-0.5	-2.0	± 0**
MLP6	BC1						BC2			L
MLP6 LFSM	BC3						BC4			
MLP5								A		
MLP4		D/E	F	G	H	I		J		M
MLP4 LFSM										N
MLP3										
MLP2										
MLP1								K		

OC5.A.3.6. Figure 2 – System islanding and step response tests

* This will generally be +2.0Hz unless an injection of this size causes a reduction in plant output that takes the operating point below **Designed Minimum Operating Level** in which case an appropriate injection should be calculated in accordance with the following:

For example 0.9Hz is needed to take an initial output 65% to a final output of 20%. If the initial output was not 65% and the **Designed Minimum Operating Level** is not 20% then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Designed Minimum Operating Level	20%
Frequency Controller Droop	4%
Frequency to be injected =	(0.65 - 0.20) x 0.04 x 50 = 0.9Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the **System Frequency** signal. The tests will consist of monitoring the **Power Park Module** in **Frequency Sensitive Mode** during normal **System Frequency** variations without applying any injection. Test N in Figure 2 shall be conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

OC5.A.3.6.9 The **Target Frequency** adjustment facility should be demonstrated from the normal control point within the range of 49.9Hz to 50.1Hz by step changes to the **Target Frequency** setpoint

as indicated in OC5.A.3.6 Figure 3.

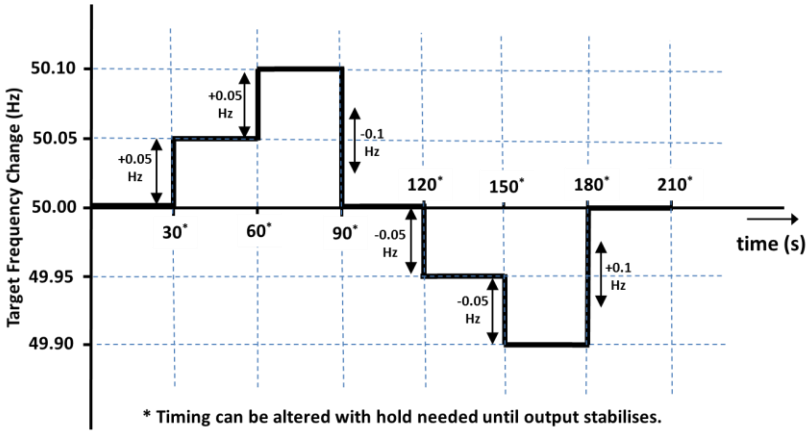

OC5.A.3.6. Figure 3 – Target Frequency setting changes

OC5.A.3.7 Fault Ride Through Testing

OC5.A.3.7.1 This section describes the procedure for conducting fault ride through tests on a single **Power Park Unit**.

OC5.A.3.7.2 The test circuit will utilise the full **Power Park Unit** (e.g. in the case of a wind turbine it would include the full wind turbine nacelle structure, all inverters and converters along with step up transformer to medium voltage, all control systems including pitch control emulation) and shall be conducted with sufficient power input resource available to produce at least 95% of the **Registered Capacity** of the **Power Park Unit**. The test will comprise of a number of controlled short circuits applied to a test network to which the **Power Park Unit** is connected, typically comprising of the **Power Park Unit** transformer and a test impedance or other decoupling equipment to shield the connected network from voltage dips at the **Power Park Unit** terminals.

OC5.A.3.7.3 In each case, the tests should demonstrate the minimum voltage at the **Power Park Unit** terminals or **High Voltage** side of the **Power Park Unit** transformer which the **Power Park Unit** can withstand for the length of time specified in OC5.A.3.7.5. Any test results provided to **The Company** should contain sufficient data pre and post fault in order to determine steady state values of all signals, and the power recovery timescales.

OC5.A.3.7.4 In addition to the signals outlined in OC5.A.1.2. the following signals from either the **Power Park Unit** terminals or **High Voltage** side of the **Power Park Unit** transformer should be provided for this test only:

(i) Phase voltages

(ii) Positive phase sequence and negative phase sequence voltages

(iii) Phase currents

(iv) Positive phase sequence and negative phase sequence currents

(v) Estimate of **Power Park Unit** negative phase sequence impedance

(vi) MW – **Active Power** at the generating unit.

(vii) MVAr – **Reactive Power** at the generating unit.

(viii) Mechanical Rotor Speed

(ix) Real / reactive, current / power reference as appropriate

(x) Fault ride through protection operation (e.g. a crowbar in the case of a doubly fed induction generator)

(xi) Any other signals relevant to the control action of the fault ride through control deemed applicable for model validation.

At a suitable frequency rate for fault ride through tests as agreed with **The Company**.

OC5.A.3.7.5 The tests should be conducted for the times and fault types indicated in OC5.A.3.7 Table 1.

3 Phase	Phase to Phase	2 Phase to Earth	1 Phase to Earth	Grid Code Ref
0.14s	0.14s	0.14s	0.14s	CC.6.3.15a
0.384s				CC.6.3.15b
0.710s				
2.5s				
180.0s				

OC5.A.3.7 Table 1 – Types of fault for fault ride through **testing**

OC5.A.3.8 Reactive Power Transfer / Voltage Control Tests for Offshore Power Park Modules

OC5.A.3.8.1 In the case of an **Offshore Power Park Module** which provides all or a portion of the **Reactive Power** capability as described in CC.6.3.2(e)(iii) and / or voltage control requirements as described in CC.6.3.8(b)(ii) to enable an **Offshore Transmission Licensee** to meet the requirements of **STC** Section K, the testing, will comprise of the entire control system responding to changes at the onshore **Interface Point**. Therefore the tests in this section OC5.A.3.8 will not apply. The **Generator** shall cooperate with the relevant **Offshore Transmission Licensee** to facilitate these tests as required by **The Company**. The testing may be combined with testing of the corresponding **Offshore Transmission Licensee** requirements under the **STC**. The results in relation to the **Offshore Power Park Module** will be assessed against the requirements in the **Bilateral Agreement**.

OC5.A.3.8.2 In the case of an **Offshore Power Park Module** which does not provide part of the **Offshore Transmission Licensee Reactive Power** capability the following procedure for conducting reactive power transfer control tests on **Offshore Power Park Modules** and / or voltage control system as per CC6.3.2(e)(i) and CC6.3.2(e)(ii) apply. These tests should be carried out prior to 20% of the **Power Park Units** within the **Offshore Power Park Module** being synchronised, and again when at least 95% of the **Power Park Units** within the **Offshore Power Park Module** in service. There should be sufficient power resource forecast to generate at least 85% of the **Registered Capacity** of the **Offshore Power Park Module**.

OC5.A.3.8.3 The **Reactive Power** control system shall be perturbed by a series of system voltage changes and changes to the **Active Power** output of the **Offshore Power Park Module**.

OC5.A.3.8.4 **System** voltage changes should be created by a series of multiple upstream transformer taps. The **Generator** should coordinate with **The Company** or the relevant **Network Operator** in order to conduct the required tests. The time between transformer taps should be at least 10 seconds as per OC5.A.3.8 Figure 1.

OC5.A.3.8.5 The **Active Power** output of the **Offshore Power Park Module** should be varied by applying a sufficiently large step to the frequency controller reference/feedback summing junction to cause a 10% change in output of the **Registered Capacity** of the **Offshore Power Park Module** in a time not exceeding 10 seconds. This test does not need to be conducted provided that the frequency response tests as outlined in OC5.A.3.6 are completed.

OC5.A.3.8.6 The following diagrams illustrate the tests to be completed:

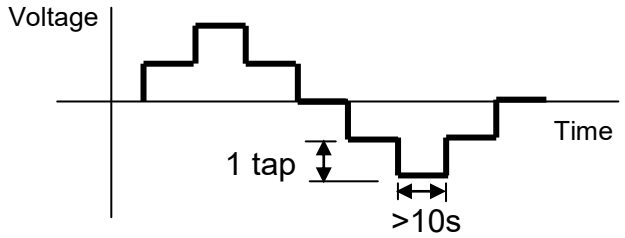

OC5.A.3.8 Figure 1 – Transformer tap sequence for reactive transfer tests

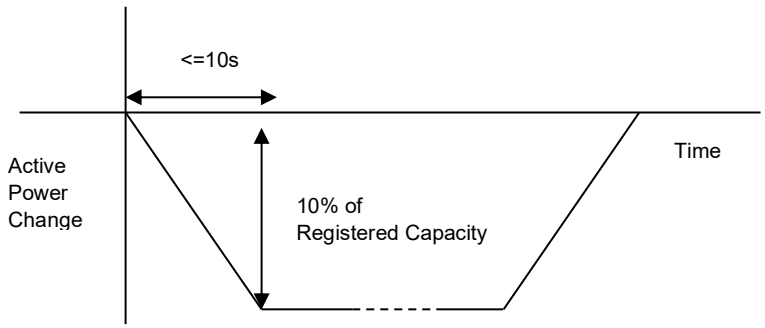

OC5.A.3.8 Figure 2 – Active Power ramp for reactive transfer tests

APPENDIX 4 - COMPLIANCE TESTING FOR DC CONVERTERS AT A DC CONVERTER STATION

OC5.A.4.1 Scope

OC5.A.4.1.1 This Appendix outlines the general testing requirements for **DC Converter Station** owners to demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement** and apply only to **DC Converter Station** owners. The testing requirements applicable to **HVDC System Owners** are specified in ECP.A.7. The tests specified in this Appendix will normally be sufficient to demonstrate compliance however **The Company** may:

(i) agree an alternative set of tests provided **The Company** deem the alternative set of tests sufficient to demonstrate compliance with the **Grid Code**, **Ancillary Services Agreement** and **Bilateral Agreement**; and/or

(ii) require additional or alternative tests if information supplied to **The Company** during the compliance process suggests that the tests in this Appendix will not fully demonstrate compliance with the relevant section of the **Grid Code**, **Ancillary Services Agreement** or **Bilateral Agreement**; and/or

(iii) require additional tests if control functions to improve damping of power system oscillations and/or subsynchronous resonance torsional oscillations required by the **Bilateral Agreement** or included in the control scheme and active; and/or

(iv) agree a reduced set of tests for subsequent **DC Converters** following successful completion of the first **DC Converter** tests in the case of a **Power Station** comprised of two or more **DC Converters** which **The Company** reasonably considers to be identical.

If:

(a) the tests performed pursuant to OC5.A.4.1.1(iv) in respect of subsequent **DC Converters** do not replicate the full tests for the first **DC Converter**, or

(b) any of the tests performed pursuant to OC5.A.4.1.1(iv) do not fully demonstrate compliance with the relevant aspects of the **Grid Code**, **Ancillary Services Agreement** and / or **Bilateral Agreement**,

then notwithstanding the provisions above, the full testing requirements set out in this Appendix will be applied.

OC5.A.4.1.2 The **DC Converter Station** owner is responsible for carrying out the tests set out in and in accordance with this Appendix and the **DC Converter Station** owner retains the responsibility for the safety of personnel and plant during the test. The **DC Converter Station** owner is responsible for ensuring that suitable arrangements are in place with the **Externally Interconnected System Operator** to facilitate testing. **The Company** will witness all of the tests outlined or agreed in relation to this Appendix unless **The Company** decides and notifies the **DC Converter Station** owner otherwise. Reactive Capability tests if required, may be witnessed by **The Company** remotely from the **The Company** control centre. For all on site **The Company** witnessed tests the **DC Converter Station** owner must ensure suitable representatives from the **DC Converter Station** owner and / or **DC Converter** manufacturer (if appropriate) are available on site for the entire testing period. In all cases and in addition to any recording of signals conducted by **The Company** the **DC Converter Station** owner shall record all relevant test signals as outlined in OC5.A.1.

OC5.A.4.1.3 In addition to the dynamic signals supplied in OC5.A.1 the **DC Converter Station** owner shall inform **The Company** of the following information prior to the commencement of the tests and any changes to the following, if any values change during the tests:

(i) All relevant transformer tap numbers.

OC5.A.4.1.4 The **DC Converter Station** owner shall submit a detailed schedule of tests to **The Company** in accordance with CP.6.3.1, and this Appendix.

OC5.A.4.1.5 Prior to the testing of a **DC Converter** the **DC Converter Station** owner shall complete the **Integral Equipment Tests** procedure in accordance with OC.7.5

OC5.A.4.1.6 Full **DC Converter** testing as required by CP.7.2 is to be completed as defined in OC5.A.4.2 through to OC5.A.4.5

OC5.A.4.1.7 **The Company** may agree a reduction from the requirements set out in CP.A.7.2 to CP.A.7.5 for on-site testing where suitable factory acceptance testing on a representative installation with the same equipment and settings of the **HVDC Equipment** that can, in **The Company's** opinion, reasonably represent the performance of the installed **HVDC Equipment** at that site. This is also conditional on **The Company** and the **DC Converter Station** owner agreeing sufficient on site testing of the fully commissioned **DC Converter Station** to demonstrate that the factory acceptance tests are valid. If in the reasonable opinion of **The Company**, the on-site testing does not demonstrate the factory acceptance tests are valid then the full set of on-site tests should be carried out.

OC5.A.4.2 Reactive Capability Test

OC5.A.4.2.1 This section details the procedure for demonstrating the reactive capability of an **Onshore DC Converter**. These tests should be scheduled at a time where there are sufficient MW resource forecasted in order to import and export full **Registered Capacity** of the **DC Converter**.

OC5.A.4.2.2 The tests shall be performed by modifying the voltage set-point of the voltage control scheme of the **DC Converter** by the amount necessary to demonstrate the required reactive range. This is to be conducted for the operating points and durations specified in OC5.A.4.2.5.

OC5.A.4.2.3 **Embedded DC Converter Station** owner should liaise with the relevant **Network Operator** to ensure the following tests will not have an adverse impact upon the **Network Operator's System** as per OC.7.5. In situations where the tests have an adverse impact upon the **Network Operator's System**, **The Company** will only require demonstration within the acceptable limits of the **Network Operator**. For the avoidance of doubt, these tests do not negate the requirement to produce a complete **DC Converter** performance chart as specified in OC2.4.2.1.

OC5.A.4.2.4 In the case where the **Reactive Power** metering point is not at the same location as the **Reactive Power** capability requirement, then an equivalent **Reactive Power** capability for the metering point shall be agreed between the **DC Converter Station** owner and **The Company**.

OC5.A.4.2.5 The following tests shall be completed for both importing and exporting of **Active Power** for a **DC Converter** (excluding current source technology):

(i) Operation at **Rated MW** and maximum continuous lagging **Reactive Power** for 60 minutes.

(ii) Operation at **Rated MW** and maximum continuous leading **Reactive Power** for 60 minutes.

(iii) Operation at 50% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes.

(iv) Operation at 20% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes.

(v) Operation at 20% **Rated MW** and maximum continuous lagging **Reactive Power** for 5 minutes.

(vi) Operation at less than 20% **Rated MW** and unity **Power Factor** for 5 minutes. This test only applies to systems which do not offer voltage control below 20% of **Rated MW**.

(vii) Operation at 0% **Rated MW** and maximum continuous leading **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

(viii) Operation at 0% **Rated MW** and maximum continuous lagging **Reactive Power** for 5 minutes. This test only applies to systems which offer voltage control below 20% and hence establishes actual capability rather than required capability.

OC5.A.4.2.6 For the avoidance of doubt, lagging **Reactive Power** is the export of **Reactive Power** from the **DC Converter** to the **Total System** and leading **Reactive Power** is the import of **Reactive Power** from the **Total System** to the **DC Converter**.

OC5.A.4.3 Reactive Control Testing For DC Converters (Current Source Technology)

OC5.A.4.3.1 The Reactive control testing for **DC Converters** employing current source technology shall be for both importing and exporting of **Active Power** and shall demonstrate that the **Reactive Power** transfer limits specified in the **Bilateral Agreement** are not exceeded. The **Reactive Power** control system shall be perturbed by a series of system voltage changes to the **Active Power** output of the **DC Converter** and changes of system voltage where possible. The **DC Converter Station** owner is responsible for ensuring that suitable arrangements are in place with the **Externally Interconnected System Operator** to facilitate the **Active Power** changes required by these tests

OC5.A.4.3.2 The **Active Power** output of the **DC Converter** should be varied by applying a sufficiently large step to the frequency controller reference/feedback summing junction to cause at least a 10% change in output of the **Registered Capacity** of the **DC Converter** in a time not exceeding 10 seconds. This test does not need to be conducted provided that the frequency response tests as outlined in OC5.A.4.3 are completed.

OC5.A.4.3.3 Where possible, **System** voltage changes should be created by a series of multiple upstream transformer taps. The **DC Converter station** owner should coordinate with **The Company** or the relevant **Network Operator** in order to conduct the required tests. The time between transformer taps should be at least 10 seconds as per OC5.A.4.3 Figure 1.

OC5.A.4.3.4 The following diagrams illustrate the tests to be completed:

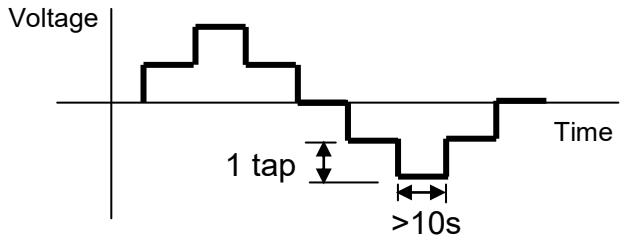

OC5.A.4.3 Figure 1 – Transformer tap sequence for reactive transfer tests

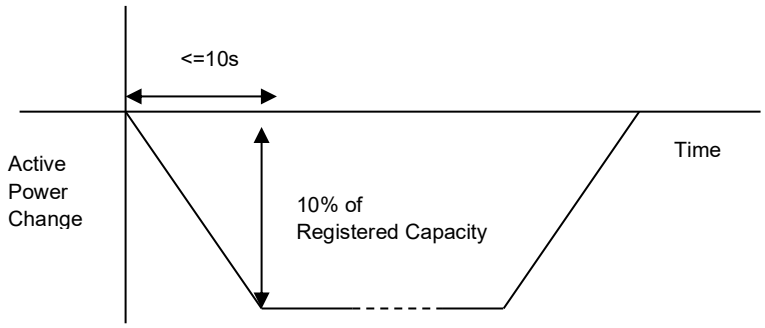

OC5.A.4.3 Figure 2 – Active Power ramp for reactive transfer tests

OC5.A.4.4 Voltage Control Tests

OC5.A.4.4.1 This section details the procedure for conducting voltage control tests on **DC Converters** (excluding current source technology). These tests should be scheduled at a time where there is sufficient MW resource in order to import and export full **Registered Capacity** of the **DC Converter**. An **Embedded DC Converter Station** owner should also liaise with the relevant **Network Operator** to ensure all requirements covered in this section will not have a detrimental effect on the **Network Operator's System**.

OC5.A.4.4.2 The voltage control system shall be perturbed with a series of step injections to the **DC Converter** voltage reference, and where possible, multiple up-stream transformer taps.

OC5.A.4.4.3 For steps initiated using network tap changers, the **DC Converter Station** owner will need to coordinate with **The Company** or the relevant **Network Operator** as appropriate. The time between transformer taps shall be at least 10 seconds as per OC5.A.4.4 Figure 1.

OC5.A.4.4.4 For step injections into the **DC Converter** voltage reference, steps of ±1%, ±2% and ±4% shall be applied to the voltage control system reference summing junction. The injection shall be maintained for 10 seconds as per OC5.A.4.4 Figure 2.

OC5.A.4.4.5 Where the voltage control system comprises of discretely switched **Plant** and **Apparatus**, additional tests will be required to demonstrate that its performance is in accordance with **Grid Code** and **Bilateral Agreement** requirements.

OC5.A.4.4.6 Tests to be completed:

(i)

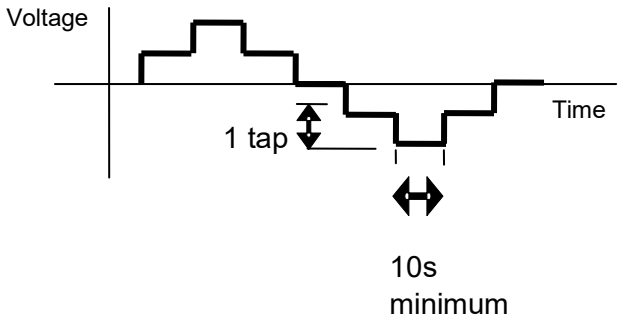

OC5.A.4.4 Figure 1 – Transformer tap sequence for voltage control tests

(ii)

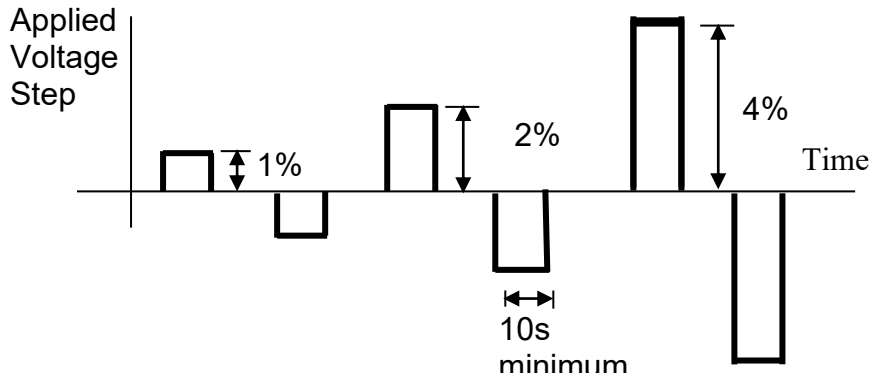

OC5.A.4.4 Figure 2 – Step injection sequence for voltage control tests

OC5.A.4.5 Frequency Response Tests

OC5.A.4.5.1 This section describes the procedure for performing frequency response testing on a **DC Converter**. These tests should be scheduled at a time where there is sufficient MW resource in order to import and export full **Registered Capacity** of the **DC Converter**. The **DC Converter Station** owner is responsible for ensuring that suitable arrangements are in place with the **Externally Interconnected System Operator** to facilitate the **Active Power** changes required by these tests

OC5.A.4.5.2 The frequency controller shall be in **Frequency Sensitive Mode** or **Limited Frequency Sensitive Mode** as appropriate for each test. Simulated frequency deviation signals shall be injected into the frequency controller reference/feedback summing junction. If the injected frequency signal replaces rather than sums with the real **System Frequency** signal then the additional tests outlined in OC5.A.4.5.6 shall be performed with the **DC Converter** in normal **Frequency Sensitive Mode** monitoring actual system frequency, over a period of at least 10 minutes. The aim of this additional test is to verify that the control system correctly measures the real **System Frequency** for normal variations over a period of time.

OC5.A.4.5.3 In addition to the frequency response requirements it is necessary to demonstrate the **DC Converter** ability to deliver a requested steady state power output which is not impacted by power source variation as per CC.6.3.9. This test shall be conducted in **Limited Frequency Sensitive Mode** at a part-loaded output for a period of 10 minutes as per OC5.A.4.5.6.

Preliminary Frequency Response Testing

OC5.A.4.5.4 Prior to conducting the full set of tests as per OC5.A.4.5.6, **DC Converter Station** owners are required to conduct a preliminary set of tests below to confirm the frequency injection method is correct and the plant control performance is within expectation. The test numbers refer to Figure 1 below. These tests should be scheduled at a time where there is sufficient MW resource in order to export full **Registered Capacity** from the **DC Converter**. The following frequency injections shall be applied when operating at module load point 4.

Test No (Figure 1)	Frequency Injection	Notes
8	• Inject - 0.5Hz frequency fall over 10 sec • Hold until conditions stabilise • Remove the injected signal	
14	• Inject +0.5Hz frequency rise over 10 sec • Hold until conditions stabilise • Remove the injected signal	
13	• Inject -0.5Hz frequency fall over 10 sec • Hold for a further 20 sec • At 30 sec from the start of the test, Inject a +0.3Hz frequency rise over 30 sec. • Hold until conditions stabilise • Remove the injected signal	

OC5.A.4.5.5 The recorded results (e.g. Finj, MW and control signals) should be sampled at a minimum rate of 1 Hz to allow **The Company** to assess the plant performance from the initial transients (seconds) to the final steady state conditions (5-15 minutes depending on the plant design). This is not witnessed by **The Company**. The **DC Converter Station** owner shall supply the recordings including data to **The Company** in an electronic spreadsheet format. Results shall be legible, identifiable by labelling, and shall have appropriate scaling.

Full Frequency Response Testing Schedule Witnessed by **The Company**

OC5.A.4.5.6 The tests are to be conducted at a number of different Module Load Points (MLP). In the case of a **DC Converter** the module load points are conducted as shown below unless agreed otherwise by **The Company**.

Module Load Point 6 (Maximum Export Limit)	100% MEL
Module Load Point 5	90% MEL
Module Load Point 4	80% MEL
Module Load Point 3	DMOL + 0.6 x (80% MEL – DMOL)
Module Load Point 2 (**Minimum Generation**)	DMOL + 0.3 x (80% MEL – DMOL)
Module Load Point 1 (**Designed Minimum Operating Level**)	DMOL

OC5.A.4.5.7 The tests are divided into the following two types;

(i) **Frequency** response volume tests as per OC5.A.4.5. Figure 1. These tests consist of frequency profile and ramp tests.

(ii) **System** islanding and step response tests as shown by OC5.A.4.5 Figure 2

OC5.A.4.5.8 There should be sufficient time allowed between tests for control systems to reach steady state (depending on available power resource). Where the diagram states 'HOLD' the current injection should be maintained until the **Active Power** (MW) output of the **DC Converter** has stabilised or 90 seconds whichever is the longer. All frequency response tests should be removed over the same timescale for which they were applied. **The Company** may require repeat tests should the response volume be affected by the available power, or if tests give unexpected results. When witnessed by **The Company** each test should be carried out as a separate injection, when not witnessed by **The Company** there must be sufficient time allowed between tests for the **Active Power** (MW) output of the **HVDC Equipment** to have stabilised or 90 seconds, whichever is the longer.

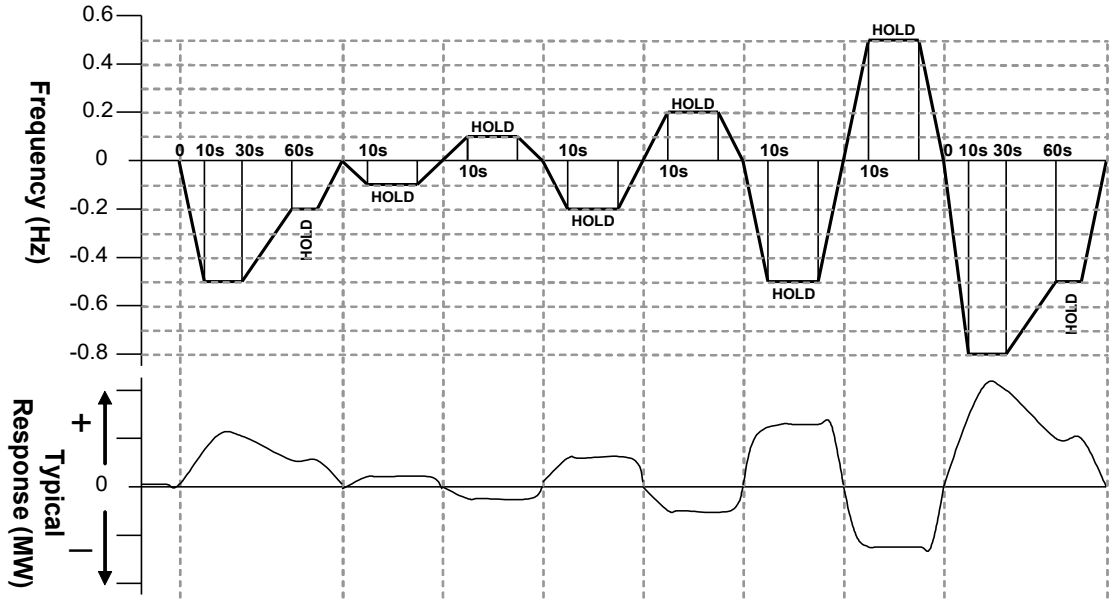

Load Point	LF Event Profile 1	LF Ramp -0.1Hz	HF Ramp +0.1Hz	LF Ramp -0.2Hz	HF Ramp +0.2Hz	LF Ramp -0.5Hz	HF Ramp +0.5Hz	LF Event Profile 2
MLP6			1	2	3		4	
MLP5	5			6			7	
MLP4	8	9	10	11	12	13	14	
MLP3	15						16	17
MLP2	18			19	20	21		22
MLP1	23			24	25			26

OC5.A.4.5. Figure 1 – Frequency response volume tests

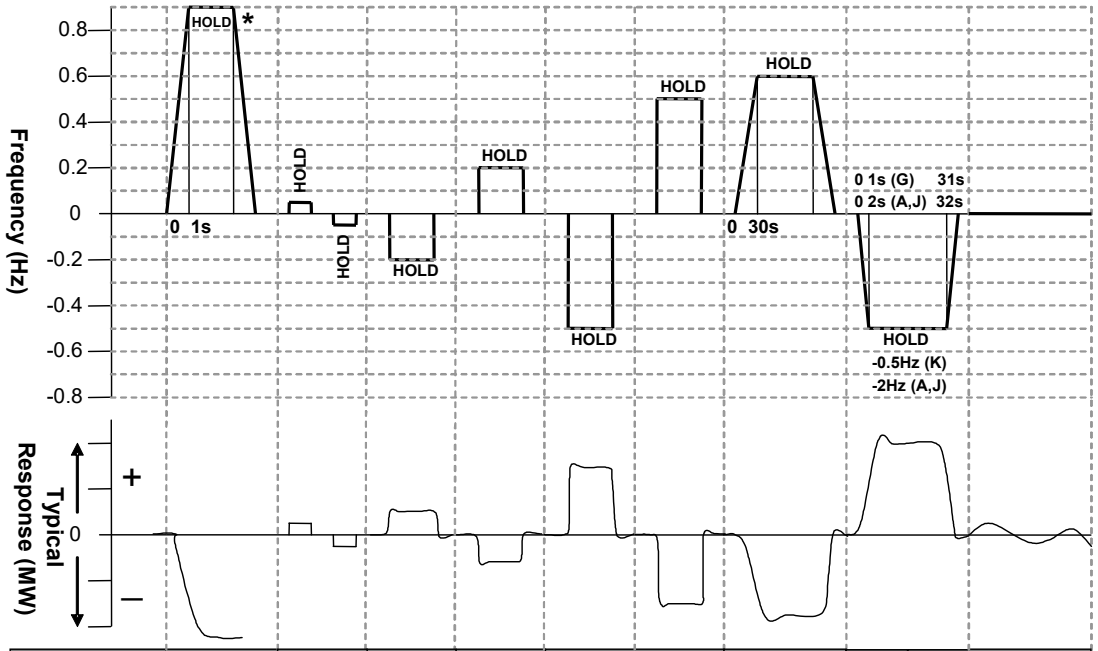

Load Point	+2.0*	±0.02	-0.2	+0.2	-0.5	+0.5	+0.6	-0.5	-2.0	± 0**
MLP6	BC1						BC2			L
MLP6 LFSM	BC3						BC4			
MLP5								A		
MLP4		D/E	F	G	H	I		J		M
MLP4 LFSM										N
MLP3										
MLP2										
MLP1								K		

OC5.A.4.5. Figure 2 – System islanding and step response tests

* This will generally be +2.0Hz unless an injection of this size causes a reduction in plant output that takes the operating point below the **Designed Minimum Operating Level** in which case an appropriate injection should be calculated in accordance with the following:

For example 0.9Hz is needed to take an initial output of 65% to a final output of 20%. If the initial output was not 65% and the **Designed Minimum Operating Level** is not 20% then the injected step should be adjusted accordingly as shown in the example given below

Initial Output	65%
Designed Minimum Operating Level	20%
Frequency Controller Droop	4%
Frequency to be injected =	(0.65 - 0.20) x 0.04 x 50 = 0.9Hz

** Tests L and M in Figure 2 shall be conducted if in this range of tests the **System Frequency** feedback signal is replaced by the injection signal rather than the injection signal being added to the **System Frequency** signal. The tests will consist of monitoring the **DC Converter** in **Frequency Sensitive Mode** during normal **System Frequency** variations without applying any injection. Test N in Figure 2 shall be conducted in all cases. All three tests should be conducted for a period of at least 10 minutes.

OC5.A.4.6.9 The **Target Frequency** adjustment facility should be demonstrated from the normal **Control Point** within the range of 49.9Hz to 50.1Hz by step changes to the **Target Frequency** setpoint

as indicated in OC5.A.4.6 Figure 3.

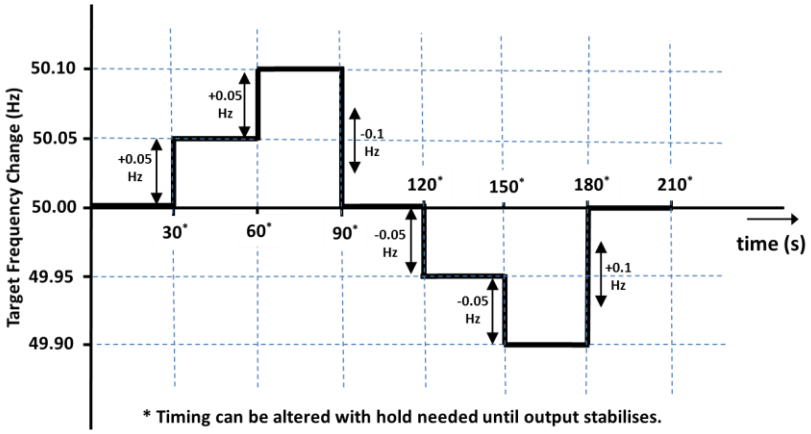

OC5.A.4.6. Figure 3 – Target Frequency setting changes

< END OF OPERATING CODE NO. 5 >

Public

OPERATING CODE NO. 6
(OC6)

DEMAND CONTROL

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC6.1 INTRODUCTION 2

OC6.2 OBJECTIVE 3

OC6.3 SCOPE 3

OC6.4 PROCEDURE FOR THE NOTIFICATION OF DEMAND CONTROL INITIATED BY NETWORK OPERATORS 4

OC6.5 PROCEDURE FOR THE IMPLEMENTATION OF DEMAND CONTROL ON THE INSTRUCTIONS OF THE COMPANY 5

OC6.6 AUTOMATIC LOW FREQUENCY DEMAND DISCONNECTION 7

OC6.7 EMERGENCY MANUAL DISCONNECTION 9

OC6.8 OPERATION OF THE BALANCING MECHANISM DURING DEMAND CONTROL 9

OC6.9 DEMAND CONTROL ROTATION PROTOCOL 9

APPENDIX 1 - EMERGENCY MANUAL DEMAND REDUCTION/DISCONNECTION SUMMARY SHEET 12

APPENDIX 2 – DEMAND CONTROL ROTATION PROTOCOL TIMELINE 13

OC6.1 INTRODUCTION

OC6.1.1 **Operating Code No.6** ("**OC6**") is concerned with the provisions to be made by **Network Operators**, and in relation to **Non-Embedded Customers** by **The Company**, to permit the reduction of **Demand** in the event of insufficient **Active Power** generation being available to meet **Demand**, or in the event of breakdown or operating problems (such as in respect of **System Frequency**, **System** voltage levels or **System** thermal overloads) on any part of the **National Electricity Transmission System**.

OC6.1.2 **OC6** deals with the following:

(a) **Customer** voltage reduction initiated by **Network Operators** (other than following the instruction of **The Company**);

(b) **Customer Demand** reduction by **Disconnection** initiated by **Network Operators** (other than following the instruction of **The Company**);

(c) **Demand** reduction instructed by **The Company**;

(d) automatic low **Frequency Demand Disconnection**; and

(e) emergency manual **Demand Disconnection**.

The term "**Demand Control**" is used to describe any or all of these methods of achieving a **Demand** reduction.

OC6.1.3 The procedure set out in **OC6** includes a system of warnings and notices to give advance notice of **Demand Control** that may be required by **The Company** under this **OC6**.

OC6.1.4 Data relating to **Demand Control** should include details relating to MW.

OC6.1.5 The Electricity Supply Emergency Code as reviewed and published from time to time by the appropriate government department for energy emergencies provides that in certain circumstances consumers are given a certain degree of "protection" when rota disconnections are implemented pursuant to a direction under the Energy Act 1976. No such protection can be given in relation to **Demand Control** instructed by **The Company** under the **Grid Code**, except:

(a) in relation to those **Load Blocks** referred to in the procedure for implementation of **Demand Control** on the instructions of **The Company** via **Disconnection** of **Load Blocks** referred to in OC6.5 and where it is technically feasible to provide such protection to pre-designated protected sites; and

(b) in relation to the **Demand Control Rotation Protocol** arrangements in OC6.9 and where it is technically feasible to provide such protection to pre-designated protected sites,

although, even in these situations, protection cannot be guaranteed.

To invoke the Electricity Supply Emergency Code the Secretary of State will issue direction(s) to all **Network Operators** affected, exercising emergency powers under the Electricity Act 1989 or by virtue of an Order in Council under the Energy Act 1976. Following the issuance of such direction, **The Company** will act to coordinate the implementation of an agreed schedule of rota disconnections across all affected **Network Operators'** licence area(s) and to disseminate any information as necessary throughout the period of the emergency in accordance with the instructions **The Company** receives from the Secretary of State or those authorised on their behalf for this purpose.

The list of pre-designated protected sites is compiled and kept up to date by **Network Operators** in accordance with the terms set out in the Electricity Supply Emergency Code.

OC6.1.6 Connections between **Large Power Stations** and the **National Electricity Transmission System** and between such **Power Stations** and a **User System** will not, as far as possible, be disconnected by **The Company** pursuant to the provisions of **OC6** insofar as that would interrupt supplies

(a) for the purposes of operation of the **Power Station** (including **Start-Up** and shutting down);

(b) for the purposes of keeping the **Power Station** in a state such that it could be Started-up when it is off-**Load** for ordinary operational reasons; or

(c) for the purposes of compliance with the requirements of a Nuclear Site Licence.

Demand Control pursuant to this **OC6** therefore applies subject to this exception.

OC6.2 OBJECTIVE

OC6.2.1 The overall objective of **OC6** is to require the provision of facilities to enable **The Company** to achieve reduction in **Demand** that will either avoid or relieve operating problems on the **National Electricity Transmission System**, in whole or in part, and thereby to enable **The Company** to instruct **Demand Control** in a manner that does not unduly discriminate against, or unduly prefer, any one or any group of **Suppliers** or **Network Operators** or **Non-Embedded Customers**. It is also to ensure that **The Company** is notified of any **Demand Control** utilised by **Users** other than following an instruction from **The Company**.

OC6.2.2 For certain **Grid Supply Points** in Scotland it is recognised that it may not be possible to meet the requirements in OC6.4.5(b), (in respect of **Demand Disconnection** only), OC6.6.2 (c) and OC6.7.2 (b). In these circumstances **The Company** and the relevant **Network Operator(s)** will agree equivalent requirements covering a number of **Grid Supply Points**. If **The Company** and the relevant **Network Operator** fail to agree equivalent requirements covering a number of **Grid Supply Points**, then the relevant **Network Operator** will apply the provisions of OC6.4.5(b), (in respect of **Demand Disconnection** only), OC6.6.2(c) and OC6.7.2(b) as evenly as reasonably practicable over the relevant **Network Operator's** entire **System**.

OC6.3 SCOPE

OC6.3.1 **OC6** applies to **The Company** and to **Users** which in **OC6** means:

(a) **Generators**; and

(b) **Network Operators**.

It also applies to **The Company** in relation to **Non-Embedded Customers**.

OC6.3.2 Explanation

OC6.3.2.1 (a) Although OC6 does not apply to **Suppliers**, the implementation of **Demand Control** may affect their **Customers**.

(b) In all situations envisaged in **OC6**, **Demand Control** is exercisable:

(i) by reference to a **Network Operator's System**; or

(ii) by **The Company** in relation to **Non-Embedded Customers**.

(c) **Demand Control** in all situations relates to the physical organisation of the **Total System**, and not to any contractual arrangements that may exist.

OC6.3.2.2 (a) Accordingly, **Demand Control** will be exercisable with reference to, for example, five per cent (or such other figure as may be utilised under OC6.5) tranches of **Demand** by a **Network Operator**.

(b) For a **Supplier**, whose **Customers** may be spread throughout a number of **User Systems** (and the **National Electricity Transmission System**), to split its **Customers** into five per cent (or such other figure as may be utilised under OC6.5) tranches of **Demand** would not result in **Demand Control** being implemented effectively on the **Total System**.

(c) Where **Demand Control** is needed in a particular area, **The Company** would not know which **Supplier** to contact and (even if it were to) the resulting **Demand Control** implemented, because of the diversity of contracts, may well not produce the required result.

OC6.3.2.3 (a) **Suppliers** should note, however, that, although implementation of **Demand Control** in respect of their **Customers** is not exercisable by them, their **Customers** may be affected by **Demand Control**.

(b) This will be implemented by **Network Operators** where the **Customers** are within **User Systems** directly connected to the **National Electricity Transmission System**, or where the **Customers** are supplied from an embedded system, and by **The Company** where they are **Non-Embedded Customers**.

(c) The contractual arrangements relating to **Customers** being supplied by **Suppliers** will, accordingly, need to reflect this.

(d) The existence of a commercial arrangement for the provision of **Customer Demand Management** or **Commercial Ancillary Services** does not relieve a **Network Operator** from the **Demand Control** provisions of OC6.5, OC6.6, OC6.7 and OC6.9, which may be exercised from time to time.

OC6.4 PROCEDURE FOR THE NOTIFICATION OF DEMAND CONTROL INITIATED BY NETWORK OPERATORS (OTHER THAN FOLLOWING THE INSTRUCTION OF THE COMPANY)

OC6.4.1 Pursuant to the provisions of **OC1**, in respect of the time periods prior to 1100 hours each day, each **Network Operator** will notify **The Company** of all **Customer** voltage reductions and/or restorations and **Demand Disconnection** or reconnection, on a **Grid Supply Point** and half-hourly basis, which will or may, either alone or when aggregated with any other **Demand Control** planned by that **Network Operator**, result in a **Demand** change equal to or greater than the **Demand Control Notification Level** averaged over any half hour on any **Grid Supply Point**, which is planned to be instructed by the **Network Operator** other than following an instruction from **The Company** relating to **Demand** reduction.

OC6.4.2 Under **OC6**, each **Network Operator** will notify **The Company** in writing by 1100 hours each day (or such other time specified by **The Company** from time to time) for the next day (except that it will be for the next 3 days on Fridays and 2 days on Saturdays and may be longer (as specified by **The Company** at least one week in advance) to cover holiday periods) of **Customer** voltage reduction or **Demand Disconnection** which will or may result in a **Demand** change equal to or greater than the **Demand Control Notification Level** averaged over any half hour on any **Grid Supply Point**, (or which when aggregated with any other **Demand Control** planned by that **Network Operator** is equal to or greater than the **Demand Control Notification Level**), planned to take place during the next **Operational Day**.

OC6.4.3 When the **Customer** voltage reduction or **Demand Disconnection** which may result in a **Demand** change equal to or greater than the **Demand Control Notification Level** averaged over any half hour on any **Grid Supply Point** (or which when aggregated with any other **Demand Control** planned or implemented by that **Network Operator** is equal to or greater than the **Demand Control Notification Level**) is planned after 1100 hours, each **Network Operator** must notify **The Company** as soon as possible after the decision to implement has been made. If the **Customer** voltage reduction or **Demand Disconnection** is implemented immediately after the decision to implement is made, each **Network Operator** must notify **The Company** within five minutes of implementation.

OC6.4.4 Where, after **The Company** has been notified, whether pursuant to **OC1**, OC6.4.2 or OC6.4.3, the planned **Customer** voltage reduction or **Demand Disconnection** is changed, the **Network Operator** will notify **The Company** as soon as possible of the new plans, or if the **Customer** voltage reduction or **Demand Disconnection** implemented is different to that notified, the **Network Operator** will notify **The Company** of what took place within five minutes of implementation.

OC6.4.5 Any notification under OC6.4.2, OC6.4.3 or OC6.4.4 will contain the following information on a **Grid Supply Point** and half hourly basis:

(a) the proposed (in the case of prior notification) and actual (in the case of subsequent notification) date, time and duration of implementation of the **Customer** voltage reduction or **Demand Disconnection**; and

(b) the proposed reduction in **Demand** by use of the **Customer** voltage reduction or **Demand Disconnection**.

OC6.4.6 Pursuant to the provisions of OC1.5.6, each **Network Operator** will supply to **The Company** details of the amount of **Demand** reduction actually achieved by use of the **Customer** voltage reduction or **Demand Disconnection**.

OC6.5 PROCEDURE FOR THE IMPLEMENTATION OF DEMAND CONTROL ON THE INSTRUCTIONS OF THE COMPANY

OC6.5.1 **Demand Disconnection** as part of **Demand Control** addresses anticipated short-term forecasted shortages in electricity supply to meet **Demand** on the **National Electricity Transmission System**. **Demand Disconnection** as part of **Demand Control** aims to prevent unplanned **Demand Disconnections**, or at the extreme, the **Partial Shutdown** or **Total Shutdown** of the **National Electricity Transmission System**. **Demand Disconnection** can be enacted with a shorter lead time than other **Demand Control** methods, such as those contained in the Electricity Supply Emergency Code and in the **Demand Control Rotation Protocol**.

OC6.5.2 A **National Electricity Transmission System Warning - High Risk of Demand Reduction** will, where possible, be issued by **The Company**, as set out in OC6.5.4, OC7.4.8 and BC1.5.4 when **The Company** anticipates that it will or may instruct a **Network Operator** to implement **Demand** reduction. It will, as provided for in OC6.5.12 and OC7.4.8.2, also be issued to **Non-Embedded Customers**.

OC6.5.3 Where **The Company** expects to instruct **Demand** reduction within the following 30 minutes, **The Company** will where possible, issue a **National Electricity Transmission System Warning - Demand Control Imminent** in accordance with OC7.4.8.2(c) and OC7.4.8.6.

OC6.5.4 Whether a **National Electricity Transmission System Warning - High Risk of Demand Reduction** or **National Electricity Transmission System Warning - Demand Control Imminent** has been issued or not; if the **Demand Control** instruction relates to less than 20 per cent of its total **Demand**, the **Network Operator** shall:

(a) if the **Demand Control** instruction relates to **Demand Disconnection**, disconnect up to four **Fast Load Blocks**:

(i) **The Company** shall specify which **Fast Load Block(s)** should be disconnected;

(ii) Each **Network Operator** shall abide by the instructions of **The Company** with regard to **Demand** reduction under OC6.5 by disconnecting **Fast Load Block(s)**;

(iii) **Demand Disconnection** shall be initiated as soon as possible but no longer than 2 minutes from the instruction being received from **The Company**, and shall be completed within five minutes of the instruction being received from **The Company**; and

(iv) The **Demand** reduction shall be achieved as uniformly as possible within the **Network Operator's User System** unless otherwise agreed by **The Company** and the **Network Operator**. Such agreement shall be documented in the **National Electricity Transmission System Warning - High Risk of Demand Reduction** and/or in the **Demand Control** instruction.

(b) if the **Demand Control** instruction relates to voltage reduction, and where the **Network Operator** has confirmed via their Week 24 submission that they are able to offer voltage reduction services, provide up to two voltage reduction stages of between 2 and 4 per cent voltage reduction, each of which can reasonably be expected to deliver around 1.5 per cent **Demand** reduction provided always that:

(i) **The Company** shall specify the number of voltage reduction stages that the **Network Operator** should implement;

(ii) Each **Network Operator** shall abide by the instructions of **The Company** with regard to **Demand** reduction under OC6.5 by implementing voltage reduction; and

(iii) **Demand Control** initiated by voltage reduction shall be initiated as soon as possible but in any event no longer than 2 minutes from the instruction being received by the from **The Company** and completed within 10 minutes of the instruction being received from **The Company**.

(c) Each **Network Operator** must notify **The Company** in writing by calendar week 24 each year, for the succeeding **Financial Year**, whether they are able to offer a voltage reduction service.

(d) Thereafter, any changes must be notified in writing to **The Company** at least 10 **Business Days** prior to the change coming into effect.

OC6.5.5 Where **The Company** wishes to instruct a **Demand** reduction of more than 20 per cent of a **Network Operator's** total **Demand**, and where **The Company** has sufficient time, **The Company** will initiate the **DCRP** in accordance with OC6.9.

OC6.5.6 (a) Where **The Company** wishes to instruct a **Demand** reduction of more than 20 per cent of the **Network Operator's** total **Demand** and where **The Company** does not have sufficient time to initiate the **DCRP** in accordance with OC6.9, **The Company** shall liaise with the **Network Operator** to agree how many **Load Blocks** can be made available within the required timescales.

(b) Where a single **Demand Control** instruction relates to more than 20 per cent of its total **Demand** each **Network Operator** will:

(i) implement that part of the instruction relating to, up to and including, 20 per cent of **Demand** reduction in accordance with OC6.5.4; and

(ii) once the instructions have been implemented by the **Network Operator** in accordance with OC6.5.6 (b) (i), any further **Demand Disconnection** above those implemented in OC6.5.6(b)(i) shall be implemented on a best endeavours basis.

(c) Where **The Company** issues a **Network Operator** with consecutive instructions to reduce **Demand**, the **Network Operator** will complete instructions in the order they were issued by **The Company** and will not start to execute any instruction until any preceding instruction has been completed, unless otherwise agreed with **The Company**.

OC6.5.7 Once a **Demand** reduction has been implemented by a **Network Operator** at the instruction of **The Company**, the **Network Operator** may interchange the **Load Blocks** disconnected, where practicable, in consultation with **The Company**.

OC6.5.8 Each **Network Operator** will abide by the instructions of **The Company** with regard to the restoration of **Demand** under OC6.5 without delay. It shall not restore **Demand** until it has received such instruction. The restoration of **Demand** must be achieved as soon as possible and the process of restoration must begin within 2 minutes of the instruction being given by **The Company**.

OC6.5.9 The **Network Operator** will notify **The Company** in writing that it has complied with **The Company's** instruction under OC6.5, within 5 minutes of so doing, together with an estimation of the **Demand** reduction or restoration achieved, as the case may be.

OC6.5.10 In circumstances of protracted shortage of generation or where a statutory instruction has been given (eg. a fuel security period) and when a reduction in **Demand** is envisaged by **The Company** to be prolonged, **The Company** will notify the **Network Operator** of the expected duration and if other measures (e.g. **DCRP** implementation) are required..

OC6.5.11 Pursuant to the provisions of OC1.5.6, the **Network Operator** will supply to **The Company** details of the amount of **Demand** reduction or restoration actually achieved..

OC6.5.12 **The Company** may itself implement **Demand** reduction and subsequent restoration of **Non-Embedded Customers** as part of a **Demand Control** requirement and it will organise the **National Electricity Transmission System** so that it will be able to reduce **Demand** by **Disconnection** of, or **Customer** voltage reduction to, all or any **Non-Embedded Customers**. Equivalent provisions to those in OC6.5.2 shall apply to issuing a **National Electricity Transmission System Warning - High Risk of Demand Reduction** to **Non-Embedded Customers**, as envisaged in OC7.4.8.

OC6.6 AUTOMATIC LOW FREQUENCY DEMAND DISCONNECTION

OC6.6.1 Each **Network Operator** will make arrangements that will enable automatic low **Frequency Disconnection** of at least:

(a) 60 per cent of its total **Demand** (based on **Annual ACS Conditions**) at the time of forecast **National Electricity Transmission System** peak **Demand** where such **Network Operator's System** is connected to the **National Electricity Transmission System** in **NGET's Transmission Area**

(b) 40 per cent of its total **Demand** (based on **Annual ACS Conditions**) at the time of forecast **National Electricity Transmission System** peak where such **Network Operator's System** is connected to the **National Electricity Transmission System** in either **SPT's** or **SHETL's Transmission Area**

in order to seek to limit the consequences of a major loss of generation or an **Event** on the **Total System** which leaves part of the **Total System** with a generation deficit. Where a **Network Operator's System** is connected to the **National Electricity Transmission System** in more than one **Transmission Area**, the figure above for the **Transmission Area** in which the majority of the **Network Operator's Demand** is connected shall apply.

OC6.6.2 (a) The **Demand** of each **Network Operator** which is subject to automatic low **Frequency Disconnection** will be split into discrete MW blocks.

(b) The number, size (% **Demand**) and the associated low **Frequency** settings of these blocks, will be as specified in Table CC.A.5.5.1a and Table ECC.A.5.5.1a. **The Company** will keep the settings under review.

(c) The distribution of the blocks will be such as to give a reasonably uniform **Disconnection** within the **Network Operator's System**, as the case may be, across all **Grid Supply Points**.

(d) Each **Network Operator** will notify **The Company** in writing by calendar week 28 each year of the details of the automatic low **Frequency Demand Disconnection** on its **User System**. The information provided should identify, for each **Grid Supply Point** at the date and time of the annual peak of the **National Electricity Transmission System Demand** at **Annual ACS Conditions** (as notified pursuant to OC1.4.2), the frequency settings at which **Demand Disconnection** will be initiated and the amount of **Demand** disconnected at each such setting.

OC6.6.3 Where conditions are such that, following automatic low **Frequency Demand Disconnection**, and the subsequent **Frequency** recovery, it is not possible to restore a large proportion of the total **Demand** so disconnected within a reasonable period of time, **The Company** may instruct a **Network Operator** to implement additional **Demand Disconnection** manually, and restore an equivalent amount of the **Demand** that had been disconnected automatically. The purpose of such action is to ensure that a subsequent fall in **Frequency** will again be contained by the operation of automatic low **Frequency Demand Disconnection**.

OC6.6.4 Once an automatic low **Frequency Demand Disconnection** has taken place, the **Network Operator** on whose **User System** it has occurred, will not reconnect until **The Company** instructs that **Network Operator** to do so in accordance with **OC6**.

OC6.6.5 Once the **Frequency** has recovered, each **Network Operator** will abide by the instructions of **The Company** with regard to reconnection under OC6.6 without delay. Reconnection must be achieved as soon as possible and the process of reconnection must begin within 2 minutes of the instruction being given by **The Company**.

OC6.6.6 (a) **Non-Embedded Customers** and **Pumped Storage Generators**, must provide automatic low **Frequency** disconnection, which shall be split into discrete blocks.

(b) The number and size of blocks and the associated low **Frequency** settings shall be as specified by **The Company** by week 24 each calendar year following discussion with the **Non-Embedded Customer** and **Pumped Storage Generator** in accordance with the relevant **Bilateral Agreement**.

(c) **Generators**, **Defence Service Providers**, **Restoration Service Providers** or **Non-Embedded Customers** in respect of **Electricity Storage Modules** who have agreed with **The Company** to satisfy the requirements of OC6.6.6 as provided for in ECC.6.3.7.2.3.1 must provide automatic low **Frequency** disconnection, which shall be split into discrete blocks. The number and size of blocks and the associated low **Frequency** settings will be specified by **The Company** by week 24 each calendar year following discussion with the relevant parties in accordance with the relevant **Bilateral Agreement** or other relevant **Ancillary Services** agreement.

OC6.6.7 (a) In addition, **Generators** may wish to disconnect **Power Generating Modules** and/or **Generating Units** from the **System**, either manually or automatically, should they be subject to **Frequency** levels which could result in **Power Generating Module** and/or **Generating Unit** damage.

(b) This **Disconnection** facility on such a **Power Generating Module** and/or **Generating Unit** directly connected to the **National Electricity Transmission System**, will be agreed with **The Company** in accordance with the **Bilateral Agreement**.

(c) Any **Embedded Power Stations** will need to agree this **Disconnection** facility with the relevant **User** to whose **System** that **Power Station** is connected, which will then need to notify **The Company** of this.

OC6.6.8 The **Network Operator** or **Non-Embedded Customer**, as the case may be, will notify **The Company** with an estimation of the **Demand** reduction which has occurred under automatic low **Frequency Demand Disconnection** and similarly notify the restoration, as the case may be, in each case within five minutes of the **Disconnection** or restoration.

OC6.6.9 Pursuant to the provisions of OC1.5.6 the **Network Operator** and **Non-Embedded Customer** will supply to **The Company** details of the amount of **Demand** reduction or restoration actually achieved.

OC6.6.10 (a) In the case of a **User**, it is not necessary for it to provide automatic low **Frequency** disconnection under OC6.6 only to the extent that it is providing, at the time it would be so needed, low **Frequency** disconnection at a higher level of **Frequency** as an **Ancillary Service**, namely if the amount provided as an **Ancillary Service** is less than that required under OC6.6 then the **User** must provide the balance required under OC6.6 at the time it is so needed.

(b) The provisions of OC7.4.8 relating to the use of **Demand Control** should be borne in mind by **Users**.

OC6.7 EMERGENCY MANUAL DISCONNECTION

OC6.7.1 Each **Network Operator** will make arrangements that will enable it, following an instruction from **The Company**, to disconnect **Customers** on its **User System** under emergency conditions irrespective of **Frequency** within 30 minutes. It must be possible to apply the **Demand Disconnections** to individual or specific groups of **Grid Supply Points**, as determined by **The Company**.

OC6.7.2 Each **Network Operator** shall provide **The Company** in writing by week 28 in each calendar year, in respect of the next following year beginning week 28, on a **Grid Supply Point** basis, with the following information (which is set out in a tabular format in the Appendix):

(a) its total peak **Demand** (based on **Annual ACS Conditions**); and

(b) the percentage value of the total peak **Demand** that can be disconnected (and must include that which can also be reduced by voltage reduction, where applicable) within timescales of 5/10/15/20/25/30 minutes.

OC6.7.3 Each **Network Operator** will abide by the instructions of **The Company** with regard to **Disconnection** under OC6.7 without delay, and the **Disconnection** must be achieved as soon as possible after the instruction being given by **The Company**, and in any case, within the timescale registered in OC6.7. The instruction may relate to an individual **Grid Supply Point** and/or groups of **Grid Supply Points**.

OC6.7.4 **The Company** will notify a **Network Operator** who has been instructed under OC6.7, of what has happened on the **National Electricity Transmission System** to necessitate the instruction, in accordance with the provisions of **OC7** and, if relevant, **OC10**.

OC6.7.5 Once a **Disconnection** has been applied by a **Network Operator** at the instruction of **The Company**, that **Network Operator** will not reconnect until **The Company** instructs it to do so in accordance with **OC6**.

OC6.7.6 Each **Network Operator** will abide by the instructions of **The Company** with regard to reconnection under OC6.7 without delay, and shall not reconnect until it has received such instruction and reconnection must be achieved as soon as possible and the process of reconnection must begin within 2 minutes of the instruction being given by **The Company**.

OC6.7.7 **The Company** may itself disconnect manually and reconnect **Non-Embedded Customers** as part of a **Demand Control** requirement under emergency conditions.

OC6.7.8 If **The Company** determines that emergency manual **Disconnection** referred to in OC6.7 is inadequate, **The Company** may disconnect **Network Operators** and/or **Non-Embedded Customers** at **Grid Supply Points**, to preserve the security of the **National Electricity Transmission System**.

OC6.7.9 Pursuant to the provisions of OC1.5.6 the **Network Operator** will supply to **The Company** details of the amount of **Demand** reduction or restoration actually achieved.

OC6.8 OPERATION OF THE BALANCING MECHANISM DURING DEMAND CONTROL

Demand Control will constitute an **Emergency Instruction** in accordance with BC2.9 and it may be necessary to depart from normal **Balancing Mechanism** operation in accordance with BC2 in issuing **Bid-Offer Acceptances**. **The Company** will inform affected **BM Participants** in accordance with the provisions of **OC7**.

OC6.9 DEMAND CONTROL ROTATION PROTOCOL

OC6.9.1 The **Demand Control Rotation Protocol** is owned and managed by **The Company**. The **DCRP** addresses anticipated short-term forecasted shortages in electricity supply to meet **Demand** on the **National Electricity Transmission System**. The **DCRP** aims to prevent unplanned **Demand Disconnections**, or at the extreme, the **Partial Shutdown** or **Total Shutdown** of the **National Electricity Transmission System**. The **DCRP** describes how **Demand Control** shall be delivered whilst ensuring the protection of protected sites (as defined in the Electricity Supply Emergency Code) where it is technically feasible to provide such protection. A timeline for how the **DCRP** will be delivered, is included in Appendix 2 of OC6.

OC6.9.2 **The Company** shall undertake a review, at least every five years, in consultation with **Network Operators** and make such amendments to the **DCRP** as agreed. **The Company** shall be responsible for ensuring the finalisation and circulation of the **DCRP** to the **Network Operators** after each review. **The Company** shall liaise with the **Network Operators** and agree any transitional arrangements required to implement any changes to the **DCRP**. Until the new version of the **DCRP** is endorsed by **The Company**, **Network Operators**, and the **Authority,** the existing version will remain in use.

Each **Network Operator** shall have in place such systems and processes that will enable it, following receipt of an instruction from **The Company**, to enact the arrangements described in the **DCRP**.

OC6.9.3 **The Company** shall issue a **National Electricity Transmission System Notice – DCRP Actuation** to **Network Operators**, and shall publish it to market participants and the **Authority**, as soon as reasonably practicable after the **Emergency Response Team** meeting, as set out in the **DCRP**. **The Company** shall issue such a notice at least eight hours in advance of **Demand** reduction being needed, unless agreed otherwise between **The Company** and the relevant **Network Operator(s)**.

OC6.9.4 On receipt of a **National Electricity Transmission System Notice – DCRP Actuation**, **Network Operators** shall:

(a) make eight **Load Blocks** ready for **Demand Disconnection** available within eight hours; and

(b) make a total of 14 **Load Blocks** ready for **Demand Disconnection** within 24 hours, or as soon as reasonably practicable.

Fast Load Blocks shall be reserved for delivering obligations under OC6.5.4.

OC6.9.5 **The Company** shall issue a **National Electricity Transmission System Notice – DCRP Implementation** to **Network Operators**, and shall publish it to market participants and the **Authority**, at least one hour before disconnections are required. This notice shall be issued the first time **Demand Disconnections** are required and will be the formal instruction to **Network Operators** from **The Company**. Once implemented, **Network Operators** shall rotate **Demand** (by disconnecting and reconnecting **Load Blocks**) by implementing the **Activation Schedules** issued by **The Company**, as explained in the **DCRP**. The **Activation Schedules** will be issued by **The Company** at least one hour before **Demand Disconnections** are required to take place, in accordance with the **DCRP**. Subsequent **Activation Schedules** will be issued each time a **Network Operator** is required to disconnect or reconnect **Load Blocks**.

OC6.9.6 At the end of the **Demand Control Rotation Period**, **The Company** shall issue a **National Electricity Transmission System Notice – DCRP Stand Down** to **Network Operators** and shall publish it to market participants and the **Authority** in accordance with the timelines stated in the **DCRP**. The **National Electricity Transmission System Notice – DCRP Stand Down** shall either:

(a) instruct **Network Operators** to securely revert back to normal network configuration and operation, without **Demand Disconnection**, as soon as reasonably practicable; or

(b) inform **Network Operators** that the **Demand Control Rotation Period** will be transitioning to the arrangements set out in the Electricity Supply Emergency Code.

OC6.9.7 Aspects of the **DCRP** arrangements shall be tested periodically by **The Company** and the **Network Operators** to ensure the protocol and obligations remain fit for purpose.

APPENDIX 1 - EMERGENCY MANUAL DEMAND REDUCTION/DISCONNECTION SUMMARY SHEET

(As set out in OC6.7)

NETWORK OPERATOR: _____ [YEAR] PEAK: _____

GRID SUPPLY POINT (Name)	PEAK MW	% OF GROUP DEMAND DISCONNECTION (AND/OR REDUCTION IN THE CASE OF THE FIRST 5 MINUTES) (CUMULATIVE)						REMARKS
		TIME (MINS)						
		5	10	15	20	25	30	

Notes:

1. Data to be provided annually by week 28 to cover the following year.

APPENDIX 2 – DEMAND CONTROL ROTATION PROTOCOL TIMELINE

A timeline of how **DCRP** will be delivered (as outlined in OC6.9).

	Time/Trigger	**Event/Action**
01	More than 8 hours prior to **DCRP** implementation.	**Emergency Response Team** meet to determine if **DCRP** is required.
02	8 hours prior to **DCRP** implementation.	**National Electricity Transmission System Notice – DCRP Actuation** issued.
03	**National Electricity Transmission System Notice – DCRP Actuation** issued.	**Network Operators** have 8 hours to make 8 **Load Blocks** available.
04	At least 1 hour prior to **DCRP** implementation	**National Electricity Transmission System Notice – DCRP Implementation** issued.
		First set of **Activation Schedules** issued to **Network Operators**.
05	At least 1 hour prior to each round of **Disconnections / Reconnections**	Further **Activation Schedules** issued to **Network Operators**.
06	Within 24 hours of **National Electricity Transmission System Notice – DCRP Implementation** being issued.	**Network Operators** to have all 14 **Load Blocks** available for rotation.
07	When **DCRP** implementation is no longer required.	**National Electricity Transmission System Notice – DCRP Stand Down** issued.
08	As soon as reasonably practicable after **National Electricity Transmission System Notice – DCRP Stand Down** being issued.	**Network Operators** to return network back to normal configuration and operation or revert to arrangements set out in the Electricity Supply Emergency Code.

< END OF OPERATING CODE NO. 6 >

Public

CODE NO. 6B
(OC6B)

EMBEDDED GENERATION CONTROL

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC6B.1 INTRODUCTION 2

OC6B.2 OBJECTIVE 2

OC6B.3 SCOPE 2

OC6B.4 PROCEDURE FOR THE IMPLEMENTATION OF EMBEDDED GENERATION CONTROL ON THE INSTRUCTIONS OF THE COMPANY 4

OC6B.5 PRIORITIES FOR IMPLEMENTATION OF EMBEDDED GENERATION CONTROL INSTRUCTIONS 4

OC6B.6 OPERATION OF THE BALANCING MECHANISM DURING EMBEDDED GENERATION CONTROL 5

Public

OC6B.1 INTRODUCTION

OC6B.1.1 **Operating Code No.6B** ("**OC6B**") is concerned with the provisions to be made by **Network Operators** to reduce the **Active Power** output from **Embedded Power Stations;**

a) at times when there is a large amount of **Active Power** on the **System** from generation plant that has low (or no) inertia, to secure against the largest loss of **Load**, as determined under BC1.5.5; and

b) in emergency circumstances including in the event of breakdown or operating problems (such as in respect of **System Frequency**, **System** voltage levels or **System** thermal overloads) on any part of the **National Electricity Transmission System**.

OC6B.1.2 **OC6B** deals with **Embedded Generation Control** instructed by **The Company**.

The term **"Embedded Generation Control**" is used to describe a reduction in the **Active Power** output of **Embedded Power Stations**. **Embedded Power Stations** that may be subject to **Embedded Generation Control** include **Embedded Power Stations** connected to a **Network Operator's System** and whose owners or operators are not **BM Participants**.

OC6B.1.3 The procedure set out in **OC6B** includes a system of warnings to give advance notice, where possible, of **Embedded Generation Control** that may be required by **The Company** under this **OC6B**.

OC6B.1.4 Data relating to **Embedded Generation Control** should include details relating to **Active Power** measured in Megawatts (MW).

OC6B.1.5 The Electricity Supply Emergency Code, as reviewed and published from time to time by the appropriate government department for energy emergencies, provides that in certain circumstances consumers are given a certain degree of "protection" when rota disconnections are implemented pursuant to a direction under the Energy Act 1976. Where relevant in terms of the incidental disconnection of demand as part of **Embedded Generation Control**, no such protection can be given in relation to **Embedded Generation Control** under the **Grid Code**.

OC6B.2 OBJECTIVE

OC6B.2.1 The overall objective of **OC6B** is concerned with the provisions to be made by **Network Operators** to reduce the **Active Power** output from **Embedded Power Stations** that will either avoid or relieve operational issues, in whole or in part, and thereby to enable **The Company** to instruct **Embedded Generation Control** in a manner that does not unduly discriminate against, or unduly prefer, any one or any group of **Generators** or **Suppliers** or **Network Operators**.

OC6B.3 SCOPE

OC6B.3.1 **OC6B** applies to **The Company** and to **Users** which in **OC6B** means:

(a) **Generators**; and

(b) **Network Operators**.

OC6B.3.2 Explanation

PublicOC6B.3.2.1

(a) In all situations envisaged in **OC6B**, **Embedded Generation Control** will be implemented by one or more **Network Operators**; and

(b) **Embedded Generation Control** in all situations relates to the physical organisation of the **Total System**, and not to any contractual arrangements that may exist.

OC6B.3.2.2 Where **Embedded Generation Control** instructions are issued by **The Company** these may:

a) require the **Network Operator** to achieve a reduction in **Active Power** output at specified **Embedded Power Station(s)**;

b) be for the **Network Operator** to achieve a reduction in **Active Power** output of **Embedded Power Stations**, supplied via one or more specified **Grid Supply Point(s)**, of a specified value; or

c) be for the **Network Operator** to achieve a reduction in **Active Power** output of **Embedded Power Stations**, supplied via one or more specified **Grid Supply Point(s)**, of a specified proportion of the aggregate **Active Power** output compared to the **Active Power** output before such an instruction was issued.

In any case, reasonable endeavours shall be employed by the **Network Operator** to ensure that the reduction in **Active Power** output specified in the instruction is achieved, considering also the principles relating to prioritisation set out in OC6B.5.1 where appropriate. Even when instructed to do so by **The Company**, the **Network Operator** will not be required to reduce the **Active Power** output from one or more **Embedded Power Stations** by more than the **Active Power** output from those **Embedded Power Stations** supplied via the specified **Grid Supply Point(s**).

OC6B.3.2.3 **Network Operators** may where necessary (for example where timescales do not allow otherwise) implement **Embedded Generation Control** instructions by **Embedded Generation De-energisation** based on **Registered Capacity** so long as reasonable endeavours are employed by the **Network Operator** to ensure that the reduction in **Active Power** output specified in the instruction from **The Company** is achieved.

OC6B.3.2.4 An instruction from **The Company** to the **Network Operator** will be given to allow the **Network Operator** to arrange with **Embedded Power Stations** subject to **Embedded Generation Control** to resume normal operation. Such arrangements shall not commence until such an instruction has been received.

OC6B.3.2.5 The existence of any other arrangements for the management of **Embedded Power Stations** by a **Network Operator** will not relieve a **Network Operator** from the **Embedded Generation Control** provisions of this **OC6B**.

OC6B.4 PROCEDURE FOR THE IMPLEMENTATION OF EMBEDDED GENERATION CONTROL ON THE INSTRUCTIONS OF THE COMPANY

OC6B.4.1 A **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction** will, where possible, be issued by **The Company**, as more particularly set out in OC7.4.8 and BC1.5.5 when **The Company** anticipates that it will or may issue **Embedded Generation Control** instruction(s).

OC6B.4.2 When **The Company** anticipates that it will or may issue **Embedded Generation Control** instruction(s) within the following 30 minutes, **The Company** will, where possible, issue a **National Electricity Transmission System Warning - Embedded Generation Control Imminent** in accordance with OC7.4.8.2 and OC7.4.8.11.

OC6B.4.3 (a) Whether a **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction** or **National Electricity Transmission System Warning – Embedded Generation Control Imminent** has been issued or not, each **Network Operator** will abide by the instructions of **The Company** and will implement the instructions received in the timescales specified and without delay.

(b) Unless specified otherwise, **Embedded Generation Control** instructions shall be fulfilled within 30 minutes of an instruction being received from **The Company**.

OC6B.4.4 Once an **Embedded Generation Control** instruction has been implemented by a **Network Operator**, the **Network Operator** may interchange the **Embedded Generators** who have been subject to **Embedded Generation Control** provided that the percentage or volume of **Active Power** reduction achieved at all times within the **Network Operator's System** does not change.

OC6B.4.5 An instruction from **The Company** to the **Network Operator** will be given to allow the **Network Operator** to arrange with a **Generator** owning or operating an **Embedded Power Stations** subject to **Embedded Generation Control** to resume normal operation. Such arrangements shall not commence until such an instruction has been received.

OC6B.4.6 Where **Embedded Generation Control** to manage events within the scope of **OC6B** is envisaged by **The Company** to be a prolonged requirement, **The Company** will notify the **Network Operator** of the expected duration.

OC6B.4.7 Each **Network Operator** will notify **The Company** in writing that it has complied with **The Company's** instructions under **OC6B.5**, within five minutes of so doing, together with an estimation of the **Active Power** output reduction achieved, in MWs, by the **Embedded Generation Control**.

OC6B.4.8 Each **Network Operator** will supply to **The Company** a revised estimate of the **Active Power** output reduction achieved, in MW, by the use of **Embedded Generation Control** within 30 minutes of complying with the instruction.

OC6B.5 PRIORITIES FOR IMPLEMENTATION OF EMBEDDED GENERATION CONTROL INSTRUCTIONS

OC6B.5.1 The implementation of an **Embedded Generation Control** instruction is at the reasonable discretion of each **Network Operator** to whom an instruction is given by **The Company**. In implementing an instruction and determining the order in which **Embedded Power Stations** are affected by it, it is expected that a **Network Operator** would respect the priority order set out in the table below unless it could be reasonably expected to be aware of other issues that would influence the implementation order including:

a) whether the **Embedded Generation Control** has been issued following a **National Electricity Transmission System Warning** – **System NRAPM** or a **National Electricity Transmission System Warning** – **Localised NRAPM**, and therefore any specific local circumstances that it is a requirement to address;

b) the effectiveness of **Embedded Generation Control** actions to address the issues to be resolved;

c) Interactions with other network considerations such as the participation of **Embedded Power Stations** in Active Network Management (ANM) or other automatic switching schemes, or in the provision of other **Ancillary Services**; and

d) any other wider system issues and the potential consequences for **Users**, including environmental and safety concerns, and where applicable taking account of the incidence of such instructions.

All implementation decisions should be reasonable and based on the information available to the **Network Operator** at the time taking into account the leadtime available in the instruction issued by **The Company**

ORDER	CATEGORY OF GENERATION	COMMENT
1	Non-synchronous generation	Non-synchronous plant typically does not contribute towards system inertia hence is higher up the list due to the need to maintain system inertia, particularly in the scenario applicable to **Embedded Generation Control** where a very low demand situation coincides with high availability of non-synchronous generation. In the event that any alternatives to system inertia are available this should also be taken into account.
2	Synchronous generators without any associated demand	Lower down the list due to the need to maintain system inertia, particularly in a very low demand situation.
3	Generation with associated demand	For example, CHP installations, waste management facilities, and other industrial facilities with substantial on-site demand.
4	Generation associated with critical national infrastructure sites	Never envisaged to be selected.

OC6B.6 <u>OPERATION OF THE BALANCING MECHANISM DURING EMBEDDED GENERATION CONTROL</u>

Instructions issued by **The Company** to carry out **Embedded Generation Control** will constitute **Emergency Instructions** in accordance with BC2.9 and it may be necessary to depart from normal **Balancing Mechanism** operation in accordance with BC2 in issuing **Bid-Offer Acceptances**. **The Company** will inform affected **BM Participants** in accordance with the provisions of **OC7**.

OPERATING CODE NO. 7
(OC7)

OPERATIONAL LIAISON

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC7.1 INTRODUCTION 2

OC7.2 OBJECTIVE 2

OC7.3 SCOPE 3

OC7.4 PROCEDURE 3

OC7.4.5 Requirement To Notify Operations 3

OC7.4.6 Requirements To Notify Events 7

OC7.4.7 Significant Incidents 10

OC7.4.8 National Electricity Transmission System Warnings 10

OC7.5 PROCEDURE IN RELATION TO INTEGRAL EQUIPMENT TESTS 15

OC7.6 PROCEDURE IN RESPECT OF OPERATIONAL SWITCHING IN SCOTLAND AND OFFSHORE 17

APPENDIX 1 - National Electricity Transmission System Warnings and Notices Tables 20

APPENDIX 2 – Other System Alerts and Warnings per OC7.4.8.15 23

APPENDIX 3 – Space Weather Notifications per OC7.4.9 24

OC7.1 INTRODUCTION

OC7.1.1 **Operating Code No. 7** ("OC7") sets out the requirements for the exchange of information in relation to **Operations** and/or **Events** on the **Total System** which have had (or may have had) or will have (or may have) an **Operational Effect**:

(a) on the **National Electricity Transmission System** in the case of an **Operation** and/or **Event** occurring on the **System** of a **User** or **Users**; and

(b) on the **System** of a **User** or **Users** in the case of an **Operation** and/or **Event** occurring on the **National Electricity Transmission System**.

It also describes the types of **National Electricity Transmission System Warning** which may be issued by **The Company**.

OC7.1.2 The requirement to notify in **OC7** relates generally to notifying of what is expected to happen or what has happened and not the reasons why. However, as **OC7** provides, when an **Event** or **Operation** has occurred on the **National Electricity Transmission System** which itself has been caused by (or exacerbated by) an **Operation** or **Event** on a **User's System**, **The Company** in reporting the **Event** or **Operation** on the **National Electricity Transmission System** to another **User** can pass on what it has been told by the first **User** in relation to the **Operation** or **Event** on the first **User's System**.

OC7.1.3 Where an **Event** or **Operation** on the **National Electricity Transmission System** falls to be reported by **The Company** to an **Externally Interconnected System Operator** under an **Interconnection Agreement**, **OC7** provides that in the situation where that **Event** or **Operation** has been caused by (or exacerbated by) an **Operation** or **Event** on a **User's System**, **The Company** can pass on what it has been told by the **User** in relation to the **Operation** or **Event** on that **User's System**.

OC7.1.4 OC7 also deals with **Integral Equipment Tests**.

OC7.1.5 To reconfigure the **National Electricity Transmission System**, **The Company** may reasonably require the assistance of a **User** to reconfigure parts of the **User System**. To reconfigure its **User System** a **User** may reasonably require the reasonable assistance of **The Company** to direct the reconfiguration of parts of the **National Electricity Transmission System**.

OC7.1.6 OC7.6 sets down the arrangements for the exchange of information required when configuring **Connection Sites** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Sites**) and parts of the **National Electricity Transmission System** adjacent to those **Connection Sites** (or **Transmission Interface Sites**) in Scotland and **Offshore**. It also covers the setting up of a **Local Switching Procedure**. **The Company** shall procure that **Relevant Transmission Licensees** shall comply with section OC7.6 and any relevant **Local Switching Procedure** where and to the extent that such matters apply to them.

OC7.2 OBJECTIVE

The objectives of **OC7** are:

OC7.2.1 To provide for the exchange of information so that the implications of an **Operation** and/or **Event** can be considered, possible risks arising from it can be assessed and appropriate action taken by the relevant party in order to maintain the integrity of the **Total System**. **OC7** does not seek to deal with any actions arising from the exchange of information, but merely with that exchange.

OC7.2.2 To provide for types of **National Electricity Transmission System Warnings** which may be issued by **The Company**.

OC7.2.3 To provide the framework for the information flow and discussion between **The Company** and certain **Users** in relation to **Integral Equipment Tests**.

OC7.2.4 To provide the procedure to be followed in respect of **Operational Switching**

OC7.3 SCOPE

OC7.3.1 **OC7** applies to **The Company** and to **Users**, which in **OC7** means:

(a) **Generators** (other than those which only have **Embedded Small Power Stations** or **Embedded Medium Power Stations**) and including **Generators** undertaking **OTSDUW**;

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **Suppliers** (for the purposes of **National Electricity Transmission System Warnings**);

(e) **Externally Interconnected System Operators** (for the purposes of **National Electricity Transmission System Warnings**);

(f) **DC Converter Station** owners and **HVDC System Owners**;

(g) **Interconnector Owners** (for the notification of space weather events); and

(h) **Restoration Contractors** (for the notification of space weather events).

The procedure for operational liaison by **The Company** with **Externally Interconnected System Operators** is set out in the **Interconnection Agreement** with each **Externally Interconnected System Operator**.

OC7.6 also applies to **Relevant Transmission Licensees**.

OC7.4 PROCEDURE

OC7.4.1 The term "**Operation**" means a scheduled or planned action relating to the operation of a **System** (including an **Embedded Power Station**).

OC7.4.2 The term "**Event**" means an unscheduled or unplanned (although it may be anticipated) occurrence on, or relating to, a **System** (including an **Embedded Power Station**) including, without limiting that general description, faults, incidents and breakdowns and adverse weather conditions being experienced.

OC7.4.3 The term "**Operational Effect**" means any effect on the operation of the relevant other **System** which causes the **National Electricity Transmission System** or the **Systems** of the other **User** or **Users**, as the case may be, to operate (or be at a materially increased risk of operating) differently to the way in which they would or may have normally operated in the absence of that effect.

OC7.4.4 References in this **OC7** to a **System** of a **User** or **User's System** shall not include **Embedded Small Power Stations** or **Embedded Medium Power Stations**, unless otherwise stated.

OC7.4.5 Requirement To Notify Operations

OC7.4.5.1 Operation On The National Electricity Transmission System

In the case of an **Operation** on the **National Electricity Transmission System**, which will have (or may have) an **Operational Effect** on the **System(s)** of a **User** or **Users**, **The Company** will notify the **User** or **Users** whose **System(s)** will, or may, in the reasonable opinion of **The Company**, be affected, in accordance with **OC7**.

OC7.4.5.2 Operation On a User's System

In the case of an **Operation** on the **System** of a **User** which will have (or may have) an **Operational Effect** on the **National Electricity Transmission System** (including an equivalent to an **Operation** on the equivalent of a **System** of a **User** or other person connected to that **User's System** which, via that **User System**, will or may have an **Operational Effect** on the **National Electricity Transmission System**), the **User** will notify **The Company** in accordance with **OC7**. Following notification by the **User**, **The Company** will notify any other **User** or **Users** on whose **System(s)** the **Operation** will have, or may have, in the reasonable opinion of **The Company**, an **Operational Effect**, in accordance with **OC7** and will notify any **Externally Interconnected System Operator** on whose **System** the **Operation** will have, or may have, in the reasonable opinion of **The Company**, an **Operational Effect**, if it is required to do so by the relevant **Interconnection Agreement**.

OC7.4.5.3 Examples Of Situations Where Notification By **The Company** Or a **User** may be Required

Whilst in no way limiting the general requirement to notify in advance set out in OC7.4.5.1 and OC7.4.5.2, the following are examples of situations where notification in accordance with OC7.4.5 will be required if they will, or may, have an **Operational Effect**:

(a) the implementation of a planned outage of **Plant** and/or **Apparatus** which has been arranged pursuant to **OC2**;

(b) the operation (other than, in the case of a **User**, at the instruction of **The Company**) of any circuit breaker or isolator/disconnector or any sequence or combination of the two; or

(c) voltage control.

OC7.4.5.4 Operations Caused By Another Operation Or By An Event

An **Operation** may be caused by another **Operation** or an **Event** on another's **System** (including an **Embedded Power Station**) (or by the equivalent of an **Event** or **Operation** on the **System** of an **Externally Interconnected System Operator** or **Interconnector User**) and in that situation the information to be notified is different to that where the **Operation** arose independently of any other **Operation** or **Event**, as more particularly provided in OC7.4.5.6.

OC7.4.5.5 Form

A notification and any response to any questions asked under OC7.4.5, of an **Operation** which has arisen independently of any other **Operation** or of an **Event**, shall be of sufficient detail to describe the **Operation** (although it need not state the cause) and to enable the recipient of the notification reasonably to consider and assess the implications and risks arising (provided that, in the case of an **Operation** on a **User's System** which **The Company** is notifying to other **Users** under OC7.4.5.2, **The Company** will only pass on what it has been told by the **User** which has notified it) and will include the name of the individual reporting the **Operation** on behalf of **The Company** or the **User**, as the case may be. The recipient may ask questions to clarify the notification and the giver of the notification will, insofar as it is able, answer any questions raised, provided that, in the case of an **Operation** on a **User's System** which **The Company** is notifying to other **Users** under OC7.4.5.2, in answering any question, **The Company** will not pass on anything further than that which it has been told by the **User** which has notified it. **The Company** may pass on the information contained in the notification as provided in OC7.4.5.6.

OC7.4.5.6 (a) A notification by **The Company** of an **Operation** under OC7.4.5.1 which has been caused by another **Operation** (the "first **Operation**") or by an **Event** on a **User's System**, will describe the **Operation** and will contain the information which **The Company** has been given in relation to the first **Operation** or that **Event** by the **User**. The notification and any response to any questions asked (other than in relation to the information which **The Company** is merely passing on from a **User**) will be of sufficient detail to enable the recipient of the notification reasonably to consider and assess the implications and risks arising from the **Operation** on the **National Electricity Transmission System** and will include the name of the individual reporting the **Operation** on behalf of **The Company**. The recipient may ask questions to clarify the notification and **The Company** will, insofar as it is able, answer any questions raised, provided that in relation to the information which **The Company** is merely passing on from a **User**, in answering any question **The Company** will not pass on anything further than that which it has been told by the **User** which has notified it.

(b) Where a **User** is reporting an **Operation** or an **Event** which itself has been caused by an incident or scheduled or planned action affecting (but not on) its **System**, the notification to **The Company** will contain the information which the **User** has been given by the person connected to its **System** in relation to that incident or scheduled or planned action (which the **User** must require, contractually or otherwise, the person connected to its **System** to give to it) and **The Company** may pass on the information contained in the notification as provided in this OC7.4.5.6.

OC7.4.5.7 Where an **Operation** on the **National Electricity Transmission System** falls to be reported by **The Company** under an **Interconnection Agreement** and the **Operation** has been caused by another **Operation** (the "first **Operation**") or by an **Event** on a **User's System**, **The Company** will include in that report the information which **The Company** has been given in relation to the first **Operation** or that **Event** by the **User** (including any information relating to an incident or scheduled or planned action, as provided in OC7.4.5.6).

OC7.4.5.8 (a) A notification to a **User** by **The Company** of an **Operation** under OC7.4.5.1 which has been caused by the equivalent of an **Operation** or of an **Event** on the equivalent of a **System** of an **Externally Interconnected System Operator** or **Interconnector User**, will describe the **Operation** on the **National Electricity Transmission System** and will contain the information which **The Company** has been given, in relation to the equivalent of an **Operation** or of an **Event** on the equivalent of a **System** of an **Externally Interconnected System Operator** or **Interconnector User**, by that **Externally Interconnected System Operator** or **Interconnector User**.

(b) The notification and any response to any question asked (other than in relation to the information which **The Company** is merely passing on from that **Externally Interconnected System Operator** or **Interconnector User**) will be of sufficient detail to enable the recipient of the notification reasonably to consider and assess the implications and risks arising from the **Operation** on the **National Electricity Transmission System** and will include the name of the individual reporting the **Operation** on behalf of **The Company**. The recipient may ask questions to clarify the notification and **The Company** will, insofar as it is able, answer any questions raised, provided that, in relation to the information which **The Company** is merely passing on from an **Externally Interconnected System Operator** or **Interconnector User**, in answering any question **The Company** will not pass on anything further than that which it has been told by the **Externally Interconnected System Operator** or **Interconnector User** which has notified it.

OC7.4.5.9 (a) A **Network Operator** may pass on the information contained in a notification to it from **The Company** under OC7.4.5.1, to a **Generator** with a **Power Generating Module** (including a **DC Connected Power Park Module**), **Generating Unit** or a **Power Park Module** connected to its **System**, or to a **DC Converter Station** owner with a **DC Converter** or to a **HVDC System Owner** with a **HVDC System** connected to its **System**, or to the operator of another **User System** connected to its **System** (which, for the avoidance of doubt, could be another **Network Operator**), in connection with reporting the equivalent of an **Operation** under the **Distribution Code** (or the contract pursuant to which that **Power Generating Module** (including a **DC Connecting Power Generating Module**), and/or **Generating Unit** and/or **Power Park Module** or other **User System**, or to a **DC Converter Station** or to an **HVDC System** is connected to the **System** of that **Network Operator**) (if the **Operation** on the **National Electricity Transmission System** caused it).

(b) A **Generator** may pass on the information contained in a notification to it from **The Company** under OC7.4.5.1, to another **Generator** with a **Power Generating Module** (including a **DC Connected Power Park Module**) and/or a **Generating Unit** or a **Power Park Module** connected to its **System**, or to the operator of a **User System** connected to its **System** (which, for the avoidance of doubt, could be a **Network Operator**), if it is required (by a contract pursuant to which that **Power Generating Module** (including a **DC Connected Power Park Module**) and/or **Generating Unit** and/or that **Power Park Module** or that **User System** is connected to its **System**) to do so in connection with the equivalent of an **Operation** on its **System** (if the **Operation** on the **National Electricity Transmission System** caused it).

OC7.4.5.10 (a) Other than as provided in OC7.4.5.9, a **Network Operator** or a **Generator** may not pass on any information contained in a notification to it from **The Company** under OC7.4.5.1 (and an operator of a **User System** or **Generator** receiving information which was contained in a notification to a **Generator** or a **Network Operator**, as the case may be, from **The Company** under OC7.4.5.1, as envisaged in OC7.4.5.9 may not pass on this information) to any other person, but may inform persons connected to its **System** (or in the case of a **Generator** which is also a **Supplier**, inform persons to which it supplies electricity which may be affected) that there has been an incident on the **Total System**, the general nature of the incident (but not the cause of the incident) and (if known and if power supplies have been affected) an estimated time of return to service.

(b) In the case of a **Generator** which has an **Affiliate** which is a **Supplier**, the **Generator** may inform it that there has been an incident on the **Total System**, the general nature of the incident (but not the cause of the incident) and (if known and if power supplies have been affected in a particular area) an estimated time of return to service in that area, and that **Supplier** may pass this on to persons to which it supplies electricity which may be affected).

(c) Each **Network Operator** and **Generator** shall use its reasonable endeavours to procure that any **Generator** or operator of a **User System** receiving information which was contained in a notification to a **Generator** or **Network Operator**, as the case may be, from **The Company** under OC7.4.5.1, which is not bound by the **Grid Code**, does not pass on any information other than as provided above.

OC7.4.5.11 The notification will, if either party requests, be recorded by the sender and dictated to the recipient, who shall record and repeat each phrase as it is received and on completion of the dictation shall repeat back the notification in full to the sender who shall confirm that it has been accurately recorded.

OC7.4.5.12 Timing

A notification under OC7.4.5 will be given as far in advance as possible and in any event shall be given in sufficient time as will reasonably allow the recipient to consider and assess the implications and risks arising.

OC7.4.6 Requirements To Notify Events

OC7.4.6.1 Events On The National Electricity Transmission System

In the case of an **Event** on the **National Electricity Transmission System** which has had (or may have had) an **Operational Effect** on the **System(s)** of a **User** or **Users**, **The Company** will notify the **User** or **Users** whose **System(s)** have been, or may have been, in the reasonable opinion of **The Company**, affected, in accordance with **OC7**.

OC7.4.6.2 Events On A User's System

In the case of an **Event** on the **System** of a **User** which has had (or may have had) an **Operational Effect** on the **National Electricity Transmission System**, the **User** will notify **The Company** in accordance with **OC7**.

OC7.4.6.3 Events Caused By Another Event Or By An Operation

An **Event** may be caused (or exacerbated by) another **Event** or by an **Operation** on another's **System** (including on an **Embedded Power Station**) (or by the equivalent of an **Event** or **Operation** on the equivalent of a **System** of an **Externally Interconnected System Operator** or **Interconnector User**) and in that situation the information to be notified is different to that where the **Event** arose independently of any other **Event** or **Operation**, as more particularly provided in OC7.4.6.7.

OC7.4.6.4 **The Company** or a **User**, as the case may be, may enquire of the other whether an **Event** has occurred on the other's **System**. If it has, and the party on whose **System** the **Event** has occurred is of the opinion that it may have had an **Operational Effect** on the **System** of the party making the enquiry, it shall notify the enquirer in accordance with **OC7**.

OC7.4.6.5 Examples Of Situations Where Notification By The Company or a User may be Required

Whilst in no way limiting the general requirement to notify set out in OC7.4.6.1, OC7.4.6.2 and OC7.4.6.3, the following are examples of situations where notification in accordance with OC7.4.6 will be required if they have an **Operational Effect**:

(a) where **Plant** and/or **Apparatus** is being operated in excess of its capability or may present a hazard to personnel;

(b) the activation of any alarm or indication of any abnormal operating condition;

(c) adverse weather conditions being experienced;

(d) breakdown of, or faults on, or temporary changes in the capabilities of, **Plant** and/or **Apparatus**;

(e) breakdown of, or faults on, control, communication and metering equipment; or

(f) increased risk of inadvertent protection operation.

Form

OC7.4.6.6 A notification and any response to any questions asked under OC7.4.6.1 and OC7.4.6.2 of an **Event** which has arisen independently of any other **Event** or of an **Operation**, will describe the **Event**, although it need not state the cause of the **Event**, and, subject to that, will be of sufficient detail to enable the recipient of the notification reasonably to consider and assess the implications and risks arising and will include the name of the individual reporting the **Event** on behalf of **The Company** or the **User**, as the case may be. The recipient may ask questions to clarify the notification and the giver of the notification will, insofar as it is able (although it need not state the cause of the **Event**) answer any questions raised. **The Company** may pass on the information contained in the notification as provided in OC7.4.6.7.

OC7.4.6.7 (a) A notification (and any response to any questions asked under OC7.4.6.1) by **The Company** of (or relating to) an **Event** under OC7.4.6.1 which has been caused by (or exacerbated by) another **Event** (the "first **Event**") or by an **Operation** on a **User's System** will describe the **Event** and will contain the information which **The Company** has been given in relation to the first **Event** or that **Operation** by the **User** (but otherwise need not state the cause of the **Event**). The notification and any response to any questions asked (other than in relation to the information which **The Company** is merely passing on from a **User**) will be of sufficient detail to enable the recipient of the notification reasonably to consider and assess the implications and risks arising from the **Event** on the **National Electricity Transmission System** and will include the name of the individual reporting the **Event** on behalf of **The Company**. The recipient may ask questions to clarify the notification and **The Company** will, insofar as it is able, answer any questions raised, provided that in relation to the information which **The Company** is merely passing on from a **User**, in answering any question **The Company** will not pass on anything further than that which it has been told by the **User** which has notified it.

(b) Where a **User** is reporting an **Event** or an **Operation** which itself has been caused by (or exacerbated by) an incident or scheduled or planned action affecting (but not on) its **System** the notification to **The Company** will contain the information which the **User** has been given by the person connected to its **System** in relation to that incident or scheduled or planned action (which the **User** must require, contractually or otherwise, the person connected to its **System** to give to it) and **The Company** may pass on the information contained in the notification as provided in this OC7.4.6.7.

OC7.4.6.8 Where an **Event** on the **National Electricity Transmission System** falls to be reported by **The Company** under an **Interconnection Agreement** and the **Event** has been caused by (or exacerbated by) another **Event** (the "first **Event**") or by an **Operation** on a **User's System**, **The Company** will include in that report the information which **The Company** has been given in relation to the first **Event** or that **Operation** by the **User** (including any information relating to an incident or scheduled or planned action on that **User's System**, as provided in OC7.4.6.7).

OC7.4.6.9 (a) A notification to a **User** (and any response to any questions asked under OC7.4.6.1) by **The Company** of (or relating to) an **Event** under OC7.4.6.1 which has been caused by (or exacerbated by) the equivalent of an **Event** or of an **Operation** on the equivalent of a **System** of an **Externally Interconnected System Operator** or **Interconnector User**, will describe the **Event** on the **National Electricity Transmission System** and will contain the information which **The Company** has been given, in relation to the equivalent of an **Event** or of an **Operation** on the equivalent of a **System** of an **Externally Interconnected System Operator** or **Interconnector User**, by that **Externally Interconnected System Operator** or **Interconnector User** (but otherwise need not state the cause of the **Event**).

(b) The notification and any response to any questions asked (other than in relation to the information which **The Company** is merely passing on from that **Externally Interconnected System Operator** or **Interconnector User**) will be of sufficient detail to enable the recipient of the notification reasonably to consider and assess the implications and risks arising from the **Event** on the **National Electricity Transmission System** and will include the name of the individual reporting the **Event** on behalf of **The Company**. The recipient may ask questions to clarify the notification and **The Company** will, insofar as it is able (although it need not state the cause of the **Event**) answer any questions raised, provided that, in relation to the information which **The Company** is merely passing on from an **Externally Interconnected System Operator** or **Interconnector User**, in answering any question **The Company** will not pass on anything further than that which it has been told by the **Externally Interconnected System Operator** or **Interconnector User** which has notified it.

OC7.4.6.10 (a) A **Network Operator** may pass on the information contained in a notification to it from **The Company** under OC7.4.6.1, to a **Generator** with a **Power Generating Module** (including a **DC Connected Power Park Module**) and/or **Generating Unit** and/or a **Power Park Module** connected to its **System** or to a **DC Converter Station** owner with a **DC Converter** or to an **HVDC System Owner** with an **HVDC System** connected to its **System** or to the operator of another **User System** connected to its **System** (which, for the avoidance of doubt, could be a **Network Operator**), in connection with reporting the equivalent of an **Event** under the **Distribution Code** (or the contract pursuant to which that **Power Generating Module** and/or **Generating Unit** and/or **Power Park Module** or **DC Converter** or **HVDC System** or other **User System** is connected to the **System** of that **Network Operator**) (if the **Event** on the **National Electricity Transmission System** caused or exacerbated it).

(b) A **Generator** may pass on the information contained in a notification to it from **The Company** under OC7.4.6.1, to another **Generator** with a **Power Generating Module** and/or **Generating Unit** and/or a **Power Park Module** connected to its **System** or to the operator of a **User System** connected to its **System** (which, for the avoidance of doubt, could be a **Network Operator**), if it is required (by a contract pursuant to which that **Power Generating Module** (including a **DC Connected Power Park Module**) and/or **Generating Unit** and/or that **Power Park Module** or that **User System** is connected to its **System**) to do so in connection with the equivalent of an **Event** on its **System** (if the **Event** on the **National Electricity Transmission System** caused or exacerbated it).

OC7.4.6.11 (a) Other than as provided in OC7.4.6.10, a **Network Operator** or a **Generator**, may not pass on any information contained in a notification to it from **The Company** under OC7.4.6.1 (and an operator of a **User System** or **Generator** receiving information which was contained in a notification to a **Generator** or a **Network Operator**, as the case may be, from **The Company** under OC7.4.6.1, as envisaged in OC7.4.6.10 may not pass on this information) to any other person, but may inform persons connected to its **System** (or in the case of a **Generator** which is also a **Supplier**, inform persons to which it supplies electricity which may be affected) that there has been an incident on the **Total System**, the general nature of the incident (but not the cause of the incident) and (if known and if power supplies have been affected) an estimated time of return to service.

(b) In the case of a **Generator** which has an **Affiliate** which is a **Supplier**, the **Generator** may inform it that there has been an incident on the **Total System**, the general nature of the incident (but not the cause of the incident) and (if known and if power supplies have been affected in a particular area) an estimated time of return to service in that area, and that **Supplier** may pass this on to persons to which it supplies electricity which may be affected).

(c) Each **Network Operator** and **Generator** shall use its reasonable endeavours to procure that any **Generator** or operator of a **User System** receiving information which was contained in a notification to a **Generator** or **Network Operator**, as the case may be, from **The Company** under OC7.4.6.1, which is not bound by the **Grid Code**, does not pass on any information other than as provided above.

OC7.4.6.12 When an **Event** relating to a **Power Generating Module** and/or **Generating Unit** and/or a **Power Park Module** or a **DC Converter** or an **HVDC System** (or **OTSUA** operational prior to the **OTSUA Transfer Time**), has been reported to **The Company** by a **Generator** or **DC Converter Station** owner or **HVDC System Owner** under OC7.4.6 and it is necessary in order for the **Generator** or **DC Converter Station** owner or **HVDC System Owner** to assess the implications of the **Event** on its **System** more accurately, the **Generator** or **DC Converter Station** owner or **HVDC System Owner** may ask **The Company** for details of the fault levels from the **National Electricity Transmission System** to that **Power Generating Module** and/or **Generating Unit** and/or **Power Park Module** or **DC Converter** or **HVDC System** (or **OTSUA** operational prior to the **OTSUA Transfer Time**) at the time of the **Event**, and **The Company** will, as soon as reasonably practicable, give the **Generator** or **DC Converter Station** owner or **HVDC System Owner** that information provided that **The Company** has that information.

OC7.4.6.13 Except in an emergency situation the notification of an **Event** will, if either party requests, be recorded by the sender and dictated to the recipient, who shall record and repeat each phrase as it is received and on completion of the dictation shall repeat the notification in full to the sender who shall confirm that it has been accurately recorded.

Timing

OC7.4.6.14 A notification under OC7.4.6 shall be given as soon as possible after the occurrence of the **Event**, or time that the **Event** is known of or anticipated by the giver of the notification under **OC7**, and in any event within 15 minutes of such time.

OC7.4.7 Significant Incidents

OC7.4.7.1 Where a **User** notifies **The Company** of an **Event** under **OC7** which **The Company** considers has had or may have had a significant effect on the **National Electricity Transmission System**, **The Company** will require the **User** to report that **Event** in writing in accordance with the provisions of **OC10** and will notify that **User** accordingly.

OC7.4.7.2 Where **The Company** notifies a **User** of an **Event** under **OC7** which the **User** considers has had or may have had a significant effect on that **User's System**, that **User** will require **The Company** to report that **Event** in writing in accordance with the provisions of **OC10** and will notify **The Company** accordingly.

OC7.4.7.3 **Events** which **The Company** requires a **User** to report in writing pursuant to OC7.4.7.1, and **Events** which a **User** requires **The Company** to report in writing pursuant to OC7.4.7.2, are known as "**Significant Incidents**".

OC7.4.7.4 Without limiting the general description set out in OC7.4.7.1 and OC7.4.7.2, a **Significant Incident** will include **Events** having an **Operational Effect** which result in, or may result in, the following:

(a) operation of **Plant** and/or **Apparatus** either manually or automatically;

(b) voltage outside statutory limits;

(c) **Frequency** outside statutory limits; or

(d) **System** instability.

OC 7.4.8 National Electricity Transmission System Warnings

OC7.4.8.1 Role Of National Electricity Transmission System Warnings

National Electricity Transmission System Warnings as described below provide information relating to **System** conditions or **Events** and are intended to:

(i) alert **Users** to possible or actual **Plant** shortage, **System** problems and/or **Demand** or generation **Active Power** reductions;

(ii) inform of the applicable period;

(iii) indicate intended consequences for **Users**; and

(iv) enable specified **Users** to be in a state of readiness to react properly to instructions received from **The Company**.

A table of **National Electricity Transmission System Warnings**, set out in Appendix 1 to **OC7**, summarises the warnings and their usage. In the case of a conflict between the table and the provisions of the written text of **OC7**, the written text will prevail.

OC7.4.8.2 Recipients of National Electricity Transmission System Warnings and National Electricity Transmission System Notices

(a) Where **National Electricity Transmission System Warnings** and **National Electricity Transmission System Notices**, (except those relating to **Demand Control Imminent** and **Embedded Generation Control Imminent**), are applicable to **System** conditions or **Events** which have widespread effect, **The Company** will notify all **Users** under **OC7**.

(b) Where in **The Company's** judgement **System** conditions or **Events** may only have a limited effect, the **National Electricity Transmission System Warning** or **National Electricity System Notices** will as a minimum only be issued to those **Users** who are or may in **The Company's** judgement be affected.

(c) Where a **National Electricity Transmission System Warning** - **Demand Control Imminent** is issued it will as a minimum only be sent to those **Users** who are likely to receive **Demand Control** instructions from **The Company**.

(d) Where a **National Electricity Transmission System Warning Embedded Generation Control Imminent** is issued it will as a minimum only be sent to those **Network Operators** who are likely to receive **Embedded Generation Control** instructions.

OC7.4.8.3 Preparatory Action

(a) Where possible, and if required, recipients of the warnings should take such preparatory action as they deem necessary taking into account the information contained in the **National Electricity Transmission System Warning**. All warnings will be of a form determined by **The Company** and will remain in force from the stated time of commencement until the cancellation, amendment or re-issue, as the case may be, is notified by **The Company**.

(b) Where a **National Electricity Transmission System Warning** has been issued to a **Network Operator** and is current, **Demand Control** should not (subject as provided below) be employed unless instructed by **The Company**. If **Demand Control** is, however, necessary to preserve the integrity of the **Network Operator's System**, then the impact upon the integrity of the **Total System** should be considered by the **Network Operator** and where practicable discussed with **The Company** prior to its implementation.

Where a **National Electricity Transmission System Warning** has been issued to a **Supplier**, further **Customer Demand Management** (in addition to that previously notified under **OC1 - Demand** Forecasts) must only be implemented following notification to **The Company**.

(c) **National Electricity Transmission System Warnings** will be issued by such data transmission facilities as have been agreed between **The Company** and **Users**. In the case of **Generators** with **Gensets** this will normally be at their **Trading Points** (if they have notified **The Company** that they have a **Trading Point**).

(d) **Users** may at times be informed by telephone of **National Electricity Transmission System Warnings** and in these circumstances confirmation will be sent to those **Users** so notified by such data transmission facilities as have been agreed between **The Company** and **Users**, as soon as possible.

OC7.4.8.4 Types of National Electricity Transmission System Warnings and National Electricity Transmission System Notices

National Electricity Transmission System Warnings consist of the following types:-

(i) **National Electricity Transmission System Warning - Electricity Margin Notice**

(ii) **National Electricity Transmission System Warning - High Risk of Demand Reduction**

(iii) **National Electricity Transmission System Warning - Demand Control Imminent**

(iv) **National Electricity Transmission System Warning – System NRAPM**

(v) **National Electricity Transmission System Warning – Localised NRAPM**

(vi) **National Electricity Transmission System Warning – High Risk of Embedded Generation Reduction**

(vii) **National Electricity Transmission System Warning - Embedded Generation Control Imminent**

(viii) **National Electricity Transmission System Warning - Risk of System Disturbance**

(b) **National Electricity Transmission System Notices** consist of the following types:-

(i) **National Electricity Transmission Notice – DCRP Actuation**

(ii) **National Electricity Transmission Notice – DCRP Implementation**

(iii) **National Electricity Transmission Notice – DCRP Stand Down**

OC7.4.8.5 National Electricity Transmission System Warning - Electricity Margin Notice

A **National Electricity Transmission System Warning - Electricity Margin Notice** may be issued to **Users** in accordance with OC7.4.8.2, at times when there is a reduced **System Margin**, as determined under BC1.5.4. It will contain the following information:

(i) the period for which the warning is applicable; and

(ii) the availability shortfall in MW; and

(iii) intended consequences for **Users**, including notification that **Maximum Generation Service** may be instructed.

OC 7.4.8.6 National Electricity Transmission System Warning - High Risk of Demand Reduction

(a) A **National Electricity Transmission System Warning** - **High Risk of Demand Reduction** may be issued to **Users** in accordance with OC7.4.8.2 at times when there is a reduced **System Margin**, as determined under BC1.5.4 and in **The Company's** judgement there is increased risk of **Demand** reduction being implemented under OC6.5.1. It will contain the following information in addition to the required information in a **National Electricity Transmission System Warning - Electricity Margin Notice**:

(i) the possible percentage level of **Demand** reduction required; and

(ii) Specify those **Network Operators** and **Non-Embedded Customers** who may subsequently receive instructions under OC6.5.1.

(b) A **National Electricity Transmission System Warning - High Risk of Demand Reduction** may also be issued by **The Company** to those **Network Operators** and **Non-Embedded Customers** who may subsequently receive instructions under OC6.5.1 relating to a **Demand** reduction in circumstances not related to **System Margin** (for example **Demand** reduction required to manage **System** overloading).

The **National Electricity Transmission System Warning - High Risk of Demand Reduction** will specify the period during which **Demand** reduction may be required and the part of the **Total System** to which it applies and any other matters specified in OC6.5.

OC7.4.8.6.1 Protracted Periods Of Generation Shortage

(a) Whenever **The Company** anticipates that a protracted period of generation shortage may exist a **National Electricity Transmission System Warning - Electricity Margin Notice** or **High Risk of Demand Reduction** may be issued, to give as much notice as possible to those **Network Operators** and **Non-Embedded Customers** who may subsequently receive instructions under OC6.5.

(b) A **National Electricity Transmission System Warning** - **High Risk of Demand Reduction** will in these instances include an estimate of the percentage of **Demand** reduction that may be required and the anticipated duration of the **Demand** reduction. It may also include information relating to estimates of any further percentage of **Demand** reduction that may be required.

(c) The issue of the **National Electricity Transmission System Warning - Electricity Margin Notice** or **High Risk of Demand Reduction** is intended to enable recipients to plan ahead on the various aspects of **Demand** reduction.

OC7.4.8.7 National Electricity Transmission System Warning - Demand Control Imminent

(a) A **National Electricity Transmission System Warning** - **Demand Control Imminent**, relating to a **Demand** reduction under OC6.5, will be issued by **The Company** to **Users** in accordance with OC7.4.8.2. It will specify those **Network Operators** who may subsequently receive instructions under OC6.5.

(b) A **National Electricity Transmission System Warning** - **Demand Control Imminent**, need not be preceded by any other **National Electricity Transmission System Warning** and will be issued when a **Demand** reduction is expected within the following 30 minutes, but will not cease to have effect after 30 minutes from its issue. However, **The Company** will either reissue the **National Electricity Transmission System Warning** - **Demand Control Imminent** or cancel the **National Electricity Transmission System Warning** - **Demand Control Imminent** no later than 2 hours from first issue, or from re-issue, as the case may be.

OC.7.4.8.8 **National Electricity Transmission System Warning** – **System NRAPM**

(a) Procedures for maintaining **System NRAPM** are defined in BC1.5.5 but where this is, in the view of **The Company** and as set out in BC1.5.5, deemed likely to be insufficient this will be communicated to all **Users** and will be treated as a **System Warning**.

(b) Such a **System Warning** will where possible include information on the likely reduction in **Active Power** that will be required and the timing and duration of this.

(c) A **System NRAPM** refers to the margin of **Active Power** across the whole **System**.

OC.7.4.8.9 **National Electricity Transmission System Warning** – **Localised NRAPM**

(a) Procedures for maintaining **Localised NRAPM** are defined in BC1.5.5 but where this is, in the view of **The Company** and as set out in BC1.5.5, deemed likely to be insufficient this will be communicated to all **Users** and will be treated as a **System Warning**.

(b) Such a **System Warning** will where possible include information on the likely reduction in **Active Power** that will be required and the timing and duration of this.

(c) A **Localised NRAPM** refers to the management of transfers to and from a **System Constraint Group**.

OC 7.4.8.10 **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction**

(a) A **National Electricity Transmission System Warning** - **High Risk of Embedded Generation Reduction** may be issued to **Users** in accordance with OC7.4.8.2 at times when in **The Company's** judgement there is increased risk of **Embedded Generation Control** being required as defined in OC6B.5.1.

(b) In addition to any information communicated through a **System NRAPM** or **Localised NRAPM**, the **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction** will specify the period during which **Embedded Generation Control** may be required and the part of the **Total System** to which it applies and any other matters specified in OC6B.5.

(c) The issue of the **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction** is intended to enable recipients to plan ahead on the various aspects of **Embedded Generation Control**.

OC7.4.8.11 **National Electricity Transmission System Warning – Embedded Generation Control Imminent**

(a) A **National Electricity Transmission System Warning** – **Embedded Generation Control Imminent** will be issued by **The Company** to **Users** in accordance with OC7.4.8.2. It will specify those **Network Operators** who may subsequently receive instructions under OC6B.5.

(b) A **National Electricity Transmission System Warning** – **Embedded Generation Control Imminent**, need not be preceded by any other **National Electricity Transmission System Warning** and will be issued when an **Embedded Generation Control** instruction is expected within the following 30 minutes, but will not cease to have effect after 30 minutes from its issue. However, **The Company** will either reissue the **National Electricity Transmission System Warning** – **Embedded Generation Control Imminent** or cancel the **National Electricity Transmission System Warning** – **Embedded Generation Control Imminent** no later than 2 hours from first issue, or from re-issue, as the case may be.

OC7.4.8.12 National Electricity Transmission System Warning - Risk of System Disturbance

(a) A **National Electricity Transmission System Warning - Risk of System Disturbance** will be issued by **The Company** to **Users** who may be affected when **The Company** knows there is a risk of widespread and serious disturbance to the whole or part of, the **National Electricity Transmission System**;

(b) The **National Electricity Transmission System Warning** - **Risk of System Disturbance** will contain such information as **The Company** deems appropriate;

(c) For the duration of the **National Electricity Transmission System Warning - Risk of System Disturbance**, each **User** in receipt of the **National Electricity Transmission System Warning - Risk of System Disturbance** shall take the necessary steps to warn its operational staff and to maintain its **Plant** and/or **Apparatus** in the condition in which it is best able to withstand the anticipated disturbance;

(d) During the period that the **National Electricity Transmission System Warning - Risk of System Disturbance** is in effect, **The Company** may issue **Emergency Instructions** in accordance with **BC2** and it may be necessary to depart from normal **Balancing Mechanism** operation in accordance with **BC2** in issuing **Bid-Offer Acceptances**.

OC7.4.8.13 Cancellation of National Electricity Transmission System Warning

(a) **The Company** will give notification of a **Cancellation of National Electricity Transmission System Warning** to all **Users** issued with the **National Electricity Transmission System Warning** when in **The Company's** judgement **System** conditions have returned to normal.

(b) A **Cancellation of National Electricity Transmission System Warning** will identify the type of **National Electricity Transmission System Warning** being cancelled and the period for which it was issued. The **Cancellation of National Electricity Transmission System Warning** will also identify any **National Electricity Transmission System Warnings** that are still in force.

OC7.4.8.14 **National Electricity Transmission Notice – DCRP Actuation**

A **National Electricity Transmission Notice – DCRP Actuation** will be issued by **The Company** to **Network Operators** in accordance with OC7.4.8.2. It will specify the instructions required in accordance with OC6.9.3.

OC7.4.8.15 **National Electricity Transmission Notice – DCRP Implementation**

A **National Electricity Transmission Notice – DCRP Implementation** will be issued by **The Company** to **Network Operators** in accordance with OC7.4.8.2. It will specify the instructions required in accordance with OC6.9.5.

OC7.4.8.16 **National Electricity Transmission Notice – DCRP Stand Down**

A **National Electricity Transmission Notice – DCRP Stand Down** will be issued by **The Company** to **Network Operators** in accordance with OC7.4.8.2. It will specify the instructions required in accordance with OC6.9.6

OC7.4.8.17 General Management of National Electricity Transmission System Warnings

(a) **National Electricity Transmission System Warnings** remain in force for the period specified unless superseded or cancelled by **The Company**.

(b) A **National Electricity Transmission System Warning** issued for a particular period may be superseded by further related warnings. This will include **National Electricity Transmission System Warning - Electricity Margin Notice** being superseded by **National Electricity Transmission System Warning - High Risk of Demand Reduction** and vice-versa, and **National Electricity Transmission System Warning – System NRAPM** being superseded by **National Electricity Transmission System Warning - High Risk of Embedded Generation Reduction**.

(c) In circumstances where it is necessary for the period of a **National Electricity Transmission System Warning** to be changed:

(i) the period applicable may be extended by the issue of a **National Electricity Transmission System Warning** with a period which follows on from the original period, or

(ii) revised or updated **National Electricity Transmission System Warnings** will be issued where there is an overlap with the period specified in an existing **National Electricity Transmission System Warning**, but only if the revised period also includes the full period of the existing **National Electricity Transmission System Warning**.

In any other case the existing **National Electricity Transmission System Warning** will be cancelled and a new one issued.

(c) A **National Electricity Transmission System Warning** is no longer applicable once the period has passed and to confirm this **The Company** will issue a **Cancellation of National Electricity Transmission System Warning**.

OC7.4.8.18 Publication of Other System Alerts and Warnings

(a) All instructions, warnings, alerts and notifications upon being received or issued by **The Company** (whether activating or deactivating an action) as per Appendix 2 of OC7 will be published on the **BMRS**. Should the **BMRS** be unavailable, for example due to communications or systems failures, other appropriate channels including email will be utilised until the **BMRS** can be restored.

(b) **The Company** will employ reasonable endeavours to publish such information within 15 minutes of issue or receipt, or if not possible within as short a time as is reasonably practicable.

OC7.4.9 Notification of Space Weather Events

(a) All space weather notifications issued by **The Company** (whether activating or deactivating an action) as per Appendix 3 of OC7 will be published on the **BMRS**. Should the **BMRS** be unavailable, for example due to communications or systems failures, other appropriate channels, which could include email, will be utilised until the **BMRS** can be restored.

(b) Any **Space Weather Prepare Notifications**, **Space Weather Imminent Notifications**, **Space Weather Experienced Notifications**, **Space Weather Cessation Notifications**, **Space Weather Cancellation Notifications**, or **Space Weather Advisory Statements** shall be issued by **The Company** to **Control Centres**.

(c) **The Company** will employ reasonable endeavours to publish such information arising under (a) and (b) above as soon as is reasonably practicable in accordance with OC2.4.

OC7.5 PROCEDURE IN RELATION TO INTEGRAL EQUIPMENT TESTS

OC7.5.1 This section of the **Grid Code** deals with **Integral Equipment Tests**. It is designed to provide a framework for the exchange of relevant information and for discussion between **The Company** and certain **Users** in relation to **Integral Equipment Tests**.

OC7.5.2 An **Integral Equipment Test**:

(a) is carried out in accordance with the provisions of this OC7.5 at:

(i) a **User Site**,

(ii) a **Transmission Site**,

(iii) an **Embedded Large Power Station**, or,

(iv) an **Embedded DC Converter Station**; or

(v) an **Embedded HVDC System**

(b) will normally be undertaken during commissioning or re-commissioning of **Plant** and/or **Apparatus**;

(c) may, in the reasonable judgement of the person wishing to perform the test, cause, or have the potential to cause, an **Operational Effect** on a part or parts of the **Total System** but which with prior notice is unlikely to have a materially adverse effect on any part of the **Total System**; and

(d) may form part of an agreed programme of work.

In the case of **OTSUA** operation prior to the **OTSUA Transfer Time,** a **User's Site** or **Transmission Site** shall, for the purposes of this **OC7**, include a site at which there is an **Interface Point** until the **OTSUA Transfer Time** and the provisions of this OC7.5 and references to **OTSUA** shall be construed and applied accordingly until the **OTSUA Transfer Time**.

OC7.5.3 A set of guidance notes is available from **The Company** on request, which provide further details on suggested procedures, information flows and responsibilities.

Notification Of An IET

OC7.5.4 In order to undertake an **Integral Equipment Test** (and subject to OC7.5.8 below), the **User** or **The Company**, as the case may be, (the proposer) must notify the other (the recipient) of a proposed **IET**. Reasonable advance notification must be given, taking into account the nature of the test and the circumstances which make the test necessary. This will allow recipients time to adequately assess the impact of the **IET** on their **System**.

OC7.5.5 The notification of the **IET** must normally include the following information:-

(a) the proposed date and time of the **IET**;

(b) the name of the individual and the organisation proposing the **IET**;

(c) a proposed programme of testing; and

(d) such further detail as the proposer reasonably believes the recipient needs in order to assess the effect the **IET** may have on relevant **Plant** and/or **Apparatus**.

OC7.5.6 In the case of an **IET** in connection with commissioning or re-commissioning, the test should be incorporated as part of any overall commissioning programme agreed between **The Company** and the **User**.

Response To Notification of an IET

OC7.5.7 The recipient of notification of an **IET** must respond within a reasonable timescale prior to the start time of the **IET** and will not unreasonably withhold or delay acceptance of the **IET** proposal.

OC7.5.8 (a) Where **The Company** receives notification of a proposed **IET** from a **User**, **The Company** will consult those other **Users** whom it reasonably believes may be affected by the proposed **IET** to seek their views. Information relating to the proposed **IET** may be passed on by **The Company** with the prior agreement of the proposer. However it is not necessary for **The Company** to obtain the agreement of any such **User** as **IETs** should not involve the application of irregular, unusual or extreme conditions. **The Company** may however consider any comments received when deciding whether or not to agree to an **IET**.

(b) In the case of an **Embedded Large Power Station** or **Embedded DC Converter Station**, or **Embedded HVDC System**, the **Generator** or **DC Converter Station** owner or **HVDC System Owner** as the case may be, must liaise with both **The Company** and the relevant **Network Operator**. **The Company** will not agree to an **IET** relating to such **Plant** until the **Generator** or **DC Converter Station** owner or **HVDC System Owner** has shown that it has the agreement of the relevant **Network Operator**.

(c) A **Network Operator** will liaise with **The Company** as necessary in those instances where it is aware of an **Embedded Small Power Station** or an **Embedded Medium Power Station** which intends to perform tests which in the reasonable judgement of the **Network Operator** may cause an **Operational Effect** on the **National Electricity Transmission System**.

OC7.5.9 The response from the recipient, following notification of an **IET** must be one of the following:

(a) to accept the **IET** proposal;

(b) to accept the **IET** proposal conditionally subject to minor modifications such as date and time;

(c) not to agree the **IET**, but to suggest alterations to the detail and timing of the **IET** that are necessary to make the **IET** acceptable.

Final Confirmation Of an IET

OC7.5.10 The date and time of an **IET** will be confirmed between **The Company** and the **User**, together with any limitations and restrictions on operation of **Plant** and/or **Apparatus**.

OC7.5.11 The **IET** may subsequently be amended following discussion and agreement between **The Company** and the **User**.

Carrying Out an IET

OC7.5.12 **IETs** may only take place when agreement has been reached and must be carried out in accordance with the agreed programme of testing.

OC7.5.13 The implementation of an **IET** will be notified in accordance with OC7.4.5.

OC7.5.14 Where elements of the programme of testing change during the **IET**, there must be discussion between the appropriate parties to identify whether the **IET** should continue.

OC7.6 PROCEDURE IN RESPECT OF OPERATIONAL SWITCHING

OC7.6.1 This section OC7.6 of the **Grid Code** sets out the procedure to be followed for **Operational Switching**. Its provisions are supplementary to the provisions of the rest of this **OC7**.

It is designed to set down the arrangements for **The Company**, **Users** and the **Relevant Transmission Licensees** in respect of the **Operational Switching** of **Plant** and **Apparatus** at a **Connection Site** and parts of the **National Electricity Transmission System** adjacent to that **Connection Site**.

OC7.6.2 In general:

(i) **The Company** is responsible for directing the configuration of the **National Electricity Transmission System**

(ii) Each **Relevant Transmission Licensee** is responsible for the instruction and operation of its **Plant** and **Apparatus** on its **Transmission System**.

(iii) Each **User** is responsible for the configuration, instruction and operation of its **Plant** and **Apparatus**.

Definitive schedules of these responsibilities for each **Connection Site** are contained in the relevant **Site Responsibility Schedules**.

For the avoidance of doubt, where a **User** operates **Transmission Plant** and **Apparatus** on behalf of a **Relevant Transmission Licensee**, **The Company** cannot instruct the **User** to operate that **Plant** and **Apparatus**.

Planned Operational Switching

OC7.6.3 Following the notification of an **Operation** under OC7.4.5, **The Company** and the **User** shall discuss the **Operational Switching** required. **The Company** will then discuss and agree the details of the **Operational Switching** with the **Relevant Transmission Licensee**. The **Relevant Transmission Licensee** shall then make contact with the **User** to initiate the **Operational Switching**. For the avoidance of doubt, from the time that the **Relevant Transmission Licensee** makes contact with the **User**, the **Relevant Transmission Licensee** shall then become the primary point of operational contact with the **User** in relation to **OC7** for matters which would or could affect, or would or could be affected by the **Operational Switching**.

OC7.6.4 The **User** shall be advised by the **Relevant Transmission Licensee** on the completion of the **Operational Switching**, that **The Company** shall again become the primary point of operational contact for the **User** in relation to **OC7**.

OC7.6.5 During **Operational Switching**, either the **Relevant Transmission Licensee** or the **User** may need to unexpectedly terminate the **Operational Switching**. **The Company** may also need to terminate the **Operational Switching** during the **Operational Switching**. In the event of unexpected termination of the **Operational Switching**, **The Company** shall become the primary point of operational contact for the **User** in relation to **OC7**. Following the termination of the **Operational Switching**, it will not be permitted to restart that **Operational Switching** without the parties again following the process described in OC7.6.3.

Emergencies

OC7.6.6 For **Operations** and/or **Events** that present an immediate hazard to the safety of personnel, **Plant** or **Apparatus**, the **Relevant Transmission Licensee** may:

(i) as permitted by the **STC**, carry out **Operational Switching** of **Plant** and **Apparatus** on its **Transmission System** without reference to **The Company** and the **User**, and

(ii) request a **User** to carry out **Operational Switching** without the **User** first receiving notification from **The Company**.

In such emergency circumstances, communication between the **Relevant Transmission Licensee** and the **User** shall normally be by telephone and will include an exchange of names. The **User** shall use all reasonable endeavours to carry out **Operational Switching** on its **Plant** and **Apparatus** without delay. Following completion of the requested **Operational Switching**, the **Relevant Transmission Licensee** shall notify **The Company** of the **Operational Switching** which has taken place. In such emergency circumstances, the **User** may only refuse to carry out **Operational Switching** on safety grounds (relating to personnel or plant) and this must be notified to the **Relevant Transmission Licensee** immediately by telephone.

OC7.6.7 For **Operations** and/or **Events** that present an immediate hazard to the safety of personnel, **Plant** or **Apparatus**, and which require **Operational Switching** of **Plant** or **Apparatus** on a **Transmission System** in order to remove the hazard, the **User** should contact the **Relevant Transmission Licensee** directly to request **Operational Switching** of **Plant** or **Apparatus** on its **Transmission System**.

In such emergency circumstances, communication between the **Relevant Transmission Licensee** and the **User** shall normally be by telephone and will include an exchange of names. The **Relevant Transmission Licensee** shall use all reasonable endeavours to carry out **Operational Switching** on its **Plant** and **Apparatus** without delay. Following completion of the requested **Operational Switching**, the **User** shall notify **The Company** of the **Operational Switching** which has taken place. In such emergency circumstances, the **Relevant Transmission Licensee** may only refuse to carry out **Operational Switching** on safety grounds (relating to personnel or plant) and this must be notified to the **User** immediately by telephone.

OC7.6.8 Establishment Of A Local Switching Procedure

(a) **The Company**, a **User** or a **Relevant Transmission Licensee** may reasonably require a **Local Switching Procedure** to be established.

(b) Where the need for a **Local Switching Procedure** arises the following provisions shall apply:

(i) **The Company**, **User(s)** and the **Relevant Transmission Licensee** will discuss and agree the detail of the **Local Switching Procedure** as soon as the requirement for a **Local Switching Procedure** is identified. **The Company** will notify the **Relevant Transmission Licensee** and the affected **User(s)** and will initiate these discussions.

(ii) Each **Local Switching Procedure** shall be in relation to either one or more **Connection Sites** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Sites**) and parts of the **National Electricity Transmission System** adjacent to the **Connection Site(s)** (or in the case of **OTSUA** operational prior to the **OTSUA Transfer Time**, **Transmission Interface Sites**)

(iii) A draft **Local Switching Procedure** shall be prepared by the **Relevant Transmission Licensee** to reflect the agreement reached and shall be sent to **The Company**.

(iv) When a **Local Switching Procedure** has been prepared, it shall be sent by **The Company** to the **Relevant Transmission Licensee** and **User(s)** for confirmation of its accuracy.

(v) The **Local Switching Procedure** shall then be signed on behalf of **The Company** and on behalf of each **User** and **Relevant Transmission Licensee** by way of written confirmation of its accuracy.

(vi) Once agreed under this OC7.6.8, the procedure will become a **Local Switching Procedure** under the **Grid Code**, and (subject to any change pursuant to this **OC7**) will apply between **The Company**, **Relevant Transmission Licensee** and the relevant **User(s)** as if it were part of the **Grid Code**.

(vii) Once signed, **The Company** will send a copy of the **Local Switching Procedure** to the **Relevant Transmission Licensee** and the **User(s)**.

(viii) An agreed **Local Switching Procedure** should be referenced by relevant **Site Responsibility Schedules**.

(ix) **The Company**, the **User(s)** and the **Relevant Transmission Licensee** must make the **Local Switching Procedure** readily available to the relevant operational staff.

(x) If the **Relevant Transmission Licensee** or the **User(s)** become aware that a change is needed to a **Local Switching Procedure**, they must inform **The Company** immediately. Where **The Company** has been informed of a need for a change, or **The Company** proposes a change, **The Company** shall notify both the affected **User** and the **Relevant Transmission Licensee** and will initiate discussions to agree a change to the **Local Switching Procedure**. The principles applying to the establishment of a new **Local Switching Procedure** shall then apply to the discussion and agreement of any changes.

APPENDIX 1 - National Electricity Transmission System Warnings and Notices Tables

WARNING TYPE	GRID CODE	FORMAT	TO: FOR ACTION	TO: FOR INFORMATION	TIMESCALE	WARNING OF/OR CONSEQUENCE	RESPONSE FROM RECIPIENTS
NATIONAL ELECTRICITY TRANSMISSION SYSTEM WARNING – ELECTRICITY MARGIN NOTICE	OC7.4.8.5	**Designated Information Exchange System** or other electronic means	**Generators**, **Suppliers**, **Externally Interconnected System Operators**, **DC Converter Station** owners and **HVDC System Owners**	**Network Operators**, **Non-Embedded Customers**	All timescales when at the time there is not a high risk of **Demand** reduction. Primarily 120 hours onwards for a future period.	Insufficient generation available to meet forecast **Demand** plus **Operating Margin**. Notification that if not improved **Demand** reduction may be instructed. (Normal initial warning of insufficient **System Margin**)	Offers of increased availability from **Generators** or **DC Converter Station** owners. **HVDC System Owners** and **Interconnector Users**. **Suppliers** notify **The Company** of any additional **Customer Demand Management** that they will initiate.
NATIONAL ELECTRICITY TRANSMISSION SYSTEM WARNING – High risk of Demand Reduction	OC7.4.8.6	**Designated Information Exchange System** or other electronic means	**Generators**, **Suppliers**, **Network Operators**, **Non-Embedded Customers**, **Externally Interconnected System Operators**, **DC Converter Station** owners, **HVDC System Owners**		All timescales where there is a high risk of **Demand** reduction. Primarily 120 hours onwards for a future period	Insufficient generation available to meet forecast **Demand** plus **Operating Margin** and/or a high risk of **Demand** reduction being instructed. (May be issued locally as **Demand** reduction risk only for circuit overloads)	Offers of increased availability from **Generators** or **DC Converter Station** owners or **HVDC System Owners** and **Interconnector Users**. **Suppliers** notify **The Company** of any additional **Customer Demand Management** that they will initiate. Specified **Network Operators** and **Non-Embedded Customers** to prepare their **Demand** reduction arrangements and take actions as necessary to enable compliance with **The Company** instructions that may follow. (Percentages of **Demand** reduction above 20% may not be achieved if **The Company** has not issued the warning by 16:00 hours the previous day.)
NATIONAL ELECTRICITY TRANSMISSION SYSTEM WARNING – Demand Control Imminent	OC7.4.8.7	**Designated Information Exchange System**/ Telephone or other electronic means	Specified **Users** only: (to whom an instruction is to be given) **Network Operators**, **Non-Embedded Customers**	None	Within 30 minutes of anticipated instruction	Possibility of **Demand** reduction within 30 minutes	**Network Operators** specified to prepare to take action as necessary to enable them to comply with any subsequent **The Company** instruction for **Demand** reduction.

WARNING TYPE	GRID CODE	FORMAT	TO: FOR ACTION	TO: FOR INFORMATION	TIMESCALE	WARNING OF/OR CONSEQUENCE	RESPONSE FROM RECIPIENTS
National Electricity Transmission System Warning – System NRAPM	OC7.4.8.8	Issued via data transmission facilities and, in some cases, by telephone.	**Network Operators**	All **Users**	All timescales when at the time there is not a high risk of **Embedded Generation** reduction.	Insufficient margin of **Active Power** available to allow the largest loss of **Load** at any time. Notification that if not improved **Embedded Generation Control** may be instructed.	Offers of reduced **Active Power** infeed from **Generators** or **DC Converter Station** owners, **HVDC System Owners** and **Interconnector Users**. **Generators** notify **The Company** of any reduction in **Active Power** output that they will initiate.
National Electricity Transmission System Warning – Localised NRAPM	OC7.4.8.9	Issued via data transmission facilities and, in some cases, by telephone.	**Network Operators**	All **Users**	All timescales when at the time there is not a high risk of **Embedded Generation** reduction.	Insufficient **Active Power** available to allow transfers to and from a **System Constraint Group**. Notification that if not improved **Embedded Generation Control** may be instructed.	Offers of reduced **Active Power** infeed in impacted **System Constraint Group** from **Generators** or **DC Convertor Station** owners, **HVDC System Owners** and **Interconnector Users**. **Generators** notify **The Company** of any reduction in **Active Power** output that they will initiate.
National Electricity Transmission System Warning – High Risk of Embedded Generation Reduction	OC7.4.8.10	Issued via data transmission facilities and, in some cases, by telephone.	**Network Operators**	All **Users**	All timescales when at the time there is not a high risk of **Embedded Generation** reduction.	Insufficient **System NRAPM** available and/or a high risk of **Embedded Generation Control** being instructed.	Offers of reduced **Active Power** infeed from **Generators** or **DC Converter Station** owners, **HVDC System Owners** and **Interconnector Users**. **Generators** notify **The Company** of any reduction in **Active Power** output that they will initiate. Specified **Network Operators** to prepare for **Embedded Generation Control** actions as directed by **The Company**.
National Electricity Transmission System Warning – Embedded Generation Control Imminent	OC7.4.8.11	Issued via data transmission facilities and, in some cases, by telephone.	**Network Operators**	All **Users**	Within 30 minutes of anticipated instruction.	Possibility of **Embedded Generation Control** within 30 minutes	**Network Operators** specified to prepare to take action as necessary to enable them to comply with any subsequent instruction from **The Company** for **Embedded Generation Control**.
NATIONAL ELECTRICITY TRANSMISSION SYSTEM WARNING – Risk of System Disturbance	OC7.4.8.12	**Designated Information Exchange System**/ Telephone or other electronic means	**Generators**, **DC Converter Station** owners, **HVDC System Owners**, **Network Operators**, **Non-Embedded Customers**, **Externally Interconnected System Operators** who may be affected.	**Suppliers**	Control room time scales	Risk of, widespread system disturbance to whole or part of the **National Electricity Transmission System**	Recipients take steps to warn operational staff and maintain plant or apparatus such that they are best able to withstand the disturbance.

NOTICE TYPE	GRID CODE	FORMAT	TO: FOR ACTION	TO: FOR INFORMATION	TIMESCALE	WARNING OF/OR CONSEQUENCE	RESPONSE FROM RECIPIENTS
National Electricity Transmission System Notice – DCRP Actuation	OC7.4.8.14	**Designated Information Exchange System** or other electronic means.	Specified **Users** only: (to whom an instruction is given) **Network Operators**.	Summary of Notice to market participants and the **Authority**.	Within eight hours of notice being issued.	**DCRP** to be actuated within the timeframe specified.	**Network Operators** specified to take action to prepare the network for **DCRP** activation.
National Electricity Transmission System Notice – DCRP Implementation	OC7.4.8.15	**Designated Information Exchange System** or other electronic means.	Specified **Users** only: (to whom an instruction is given) **Network Operators**.	Summary of Notice to market participants and the **Authority**.	Within one hour of notice being issued.	**Activation Schedules** need to be followed to implement **DCRP**.	**Network Operators** specified to take action to ensure the **Activation Schedules** are implemented.
National Electricity Transmission System Notice – DCRP Stand Down	OC7.4.8.16	**Designated Information Exchange System** or other electronic means.	Specified **Users** only: (to whom an instruction is given) **Network Operators**.	Summary of Notice to market participants and the **Authority**.	As soon as reasonably practicable after notice being issued.	**DCRP** is no longer required, and the Specified **Users** will securely revert their **System** back to normal network configuration and operation without **Demand Disconnection** or transition to the Electricity Supply Emergency Code arrangements.	**Network Operators** specified to take action to return the system to conditions before **DCRP** actuation or to transition to arrangements under the Electricity Supply Emergency Code.

APPENDIX 2 – Other System Alerts and Warnings per OC7.4.8.15

Alert, Instruction, Notification or Warning Type	Reference	Warning of/or Consequence
Demand Control by Demand Disconnection instructed by The Company	Grid Code OC6.5	Demand Disconnection applied
Demand Control by voltage reduction instructed by The Company	Grid Code OC6.5	Demand Reduction Applied
Automatic Low Frequency Demand Disconnection	Grid Code OC6.6	Automatic Demand Disconnection Applied
Demand Control (including voltage reduction and demand disconnection) – Network Operator activated	Grid Code OC6.4 and DOC6.6	Network Operator Demand Control Activated
Grid Code Emergency Instruction (to Network Operator)	Grid Code BC2.9.1.4	Emergency Instruction(s) issued.
Grid Code Emergency Instruction (to Generators & Demand – BCA, BEGA, & BELLA)	Grid Code BC2.9.1.3	May require departure from normal Balancing Market Operation in accordance with BC2
Grid Code Emergency Instruction (to Interconnectors)	Grid Code BC2.9.1.4	May require departure from normal Balancing Market Operation in accordance with BC2
System NRAPM	Grid Code BC1.5.5	Inadequate Negative Reserve Active Power Margin (nationally)
Localised NRAPM	Grid Code BC1.5.5	Inadequate Negative Reserve Active Power Margin (locally)
Cancellation of National Electricity System Warning	Grid Code OC7.4.8.9	Noted warning no longer applicable.
STC Emergency Instruction to Transmission Owner[1]	STC Section C Part Two (7)	Discontinue Outage within Emergency Return to Service Time
ESEC Implementation	Grid Code OC6.1.5	Commencing rota disconnection across affected Network Operators licence areas.
EMR Capacity Market Notifications	Capacity Market Rules 8.4.6	Demand Reduction Instruction/Emergency Manual Disconnection Instruction issued to Network Operator(s), or Inadequate System Margin anticipated, or Automatic Low Frequency Demand Disconnection occurred per Capacity Market Rules 8.4.6 .
Emergency Assistance Requests	Grid Code BC2.9.6	Request to increase Active Energy transferred into the NETS, or reduce Active Energy transferred into its External System

[1]Identification of the specific equipment affected is not required to be included within the published alert

APPENDIX 3 – Space Weather Notifications per OC7.4.9

Notifications	Reference	Warning of/or Consequence
Space Weather Prepare Notification	Grid Code OC7.4.9	Submission of **Space Weather Output Usable Declaration**
Space Weather Imminent Notification	Grid Code OC7.4.9	Compliance with **Space Weather Output Usable Declaration**
Space Weather Experienced Notification	Grid Code OC7.4.9	Submission of **Space Weather Outcome Statement**
Space Weather Cessation Notifications	Grid Code OC7.4.9	Resubmission of **Space Weather Output Usable Declaration**
Space Weather Cancellation Notifications	Grid Code OC7.4.9	**Space Weather Output Usable Declarations** cease to have effect
Space Weather Advisory Statement	Grid Code OC7.4.9	No consequence, for awareness only.

< END OF OPERATING CODE NO. 7 >

OPERATING CODE NO. 8
(OC8)

SAFETY CO-ORDINATION

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC8.1 INTRODUCTION 2

OC8.2 OBJECTIVE 2

OC8.3 SCOPE 2

OC8.4 PROCEDURE 2

OC8.4.1 Safety Co-Ordination In Respect Of The E&W Transmission Systems Or The Systems Of E&W Users 2

OC8.4.2 Safety Co-Ordination In Respect Of The Scottish Transmission Systems Or The Systems Of Scottish Users 3

OC8.1 INTRODUCTION

OC8.1.1 OC8 specifies the standard procedures to be used for the co-ordination, establishment and maintenance of necessary **Safety Precautions** when work is to be carried out on or near the **National Electricity Transmission System** or the **System** of a **User** and when there is a need for **Safety Precautions** on **HV Apparatus** on the other **System** for this work to be carried out safely. OC8 Appendix 1 applies when work is to be carried out on or near to **E&W Transmission Systems** or the **Systems** of **E&W Users** and OC8 Appendix 2 applies when work is to be carried out on or near to **Scottish Transmission Systems** or the **Systems** of **Scottish Users**.

OC8.1.2 OC8 also covers the co-ordination, establishment and maintenance of necessary safety precautions on the **Implementing Safety Co-ordinator's System** when work is to be carried out at a **User's Site** or a **Transmission Site** (as the case may be) on equipment of the **User** or a **Relevant Transmission Licensee** as the case may be where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**.

OC8.2 OBJECTIVE

OC8.2.1 The objective of OC8 is to achieve:

(i) **Safety From The System** when work on or near a **System** necessitates the provision of **Safety Precautions** on another **System** on **HV Apparatus** up to a **Connection Point**; and

(ii) **Safety From The System** when work is to be carried out at a **User's Site** or a **Transmission Site** (as the case may be) on equipment of the **User** or a **Relevant Transmission Licensee** (as the case may be) where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**.

OC8.3 SCOPE

OC8.3.1 OC8 applies to **The Company** and to **Users**, which in OC8 means:

(a) **Generators** (including where undertaking **OTSDUW**);

(b) **Network Operators**; and

(c) **Non-Embedded Customers**.

OC8 also applies to **Relevant Transmission Licensees**.

The procedures for the establishment of safety co-ordination by **The Company** in relation to **External Interconnections** are set out in **Interconnection Agreements** with relevant persons for the **External Interconnections**.

OC8.4 PROCEDURE

OC8.4.1 Safety Co-Ordination In Respect Of The E&W Transmission Systems Or The Systems Of E&W Users

OC8.4.1.1 OC8 Appendix 1, OC8A, applies when work is to be carried out on or near to the **E&W Transmission System** or the **Systems** of **E&W Users** or when **Safety Precautions** are required to be established on the **E&W Transmission System** or the **Systems** of **E&W Users** when work is to be carried out on or near to the **Scottish Transmission System** or the **Systems** of **Scottish Users**.

OC8.4.2 Safety Co-Ordination In Respect Of The Scottish Transmission Systems Or The Systems Of Scottish Users

OC8.4.2.1 OC8 Appendix 2, OC8B, applies when work is to be carried out on or near to the **Scottish Transmission System** or the **Systems** of **Scottish Users** or when **Safety Precautions** are required to be established on the **Scottish Transmission System** or the **Systems** of **Scottish Users** when work is to be carried out on or near to the **E&W Transmission System** or the **Systems** of **E&W Users**.

OC8.4.3 Safety Co-ordination Offshore

OC8.4.3.1 For the purposes of OC8 Appendix 1, OC8A, OC8 Appendix 2 and OC8B, when work is to be carried out on or near to **Offshore Transmission Systems Safety Precautions** shall be established by the **Offshore Transmission Licensee** and the **Offshore User**.

< END OF OPERATING CODE NO. 8 >

OPERATING CODE NO. 8 APPENDIX 1

(OC8A)

SAFETY CO-ORDINATION IN RESPECT OF THE E&W TRANSMISSION SYSTEMS OR THE SYSTEMS OF E&W USERS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC8A.1 INTRODUCTION 2
OC8A.2 OBJECTIVE 3
OC8A.3 SCOPE 4
OC8A.4 PROCEDURE 4
OC8A.4.1 Approval Of Local Safety Instructions 4
OC8A.4.2 Safety Co-ordinators 5
OC8A.4.3 RISSP 5
OC8A.5 SAFETY PRECAUTIONS ON HV APPARATUS 6
OC8A.5.1 Agreement Of Safety Precautions 6
OC8A.5.2 Implementation Of Isolation 6
OC8A.5.3 Implementation Of Earthing 7
OC8A.5.4 RISSP Issue Procedure 8
OC8A.5.5 RISSP Cancellation Procedure 10
OC8A.5.6 RISSP Change Control 10
OC8A.6 TESTING AFFECTING ANOTHER SAFETY CO-ORDINATOR'S SYSTEM 10
OC8A.7 EMERGENCY SITUATIONS 11
OC8A.8 SAFETY PRECAUTIONS RELATING TO WORKING ON EQUIPMENT NEAR TO THE HV SYSTEM 12
OC8A.8.1 Agreement of Safety Precautions 12
OC8A.8.2 Implementation of Isolation and Earthing 12
OC8A.8.3 Permit For Work For Proximity Work Issue Procedure 13
OC8A.8.4 Permit For Work For Proximity Work Cancellation Procedure 13
OC8A.9 LOSS OF INTEGRITY OF SAFETY PRECAUTIONS 13
OC8A.10 SAFETY LOG 13
APPENDIX A - RISSP-R 14
APPENDIX B - RISSP-I 16
APPENDIX C- FLOWCHARTS 18
APPENDIX C1 - RISSP ISSUE PROCESS 18
APPENDIX C2 - TESTING PROCESS 19
APPENDIX C3 - RISSP CANCELLATION PROCESS 20
APPENDIX C4 - PROCESS FOR WORKING NEAR TO SYSTEM EQUIPMENT 21
APPENDIX D - NATIONAL GRID SAFETY CIRCULAR 22
APPENDIX E - FORM OF NGET'S PERMIT TO WORK 23

OC8A.1 INTRODUCTION

OC8A.1.1 OC8A specifies the standard procedures to be used by the **Relevant E&W Transmission Licensee**, **The Company** and **E&W Users** for the co-ordination, establishment and maintenance of necessary **Safety Precautions** when work is to be carried out on or near the **E&W Transmission System** or the **System** of an **E&W User** and when there is a need for **Safety Precautions** on **HV Apparatus** on the other's **System** for this work to be carried out safely. OC8A applies to **Relevant E&W Transmission Licensees** and **E&W Users** only. Where work is to be carried out on or near equipment on the **Scottish Transmission System** or **Systems** of **Scottish Users**, but such work requires **Safety Precautions** to be established on the **E&W Transmission System** or the **Systems** of **E&W Users**, OC8A should be followed by the **Relevant E&W Transmission Licensee** and **E&W Users** to establish the required **Safety Precautions**.

OC8B specifies the procedures to be used by the **Relevant Scottish Transmission Licensees** and **Scottish Users**.

The Company shall procure that the **Relevant E&W Transmission Licensees** shall comply with OC8A where and to the extent that such section applies to them.

In this OC8A the term “work” includes testing, other than **System Tests** which are covered by **OC12**.

OC8A.1.2 OC8A also covers the co-ordination, establishment and maintenance of necessary safety precautions on the **Implementing Safety Co-ordinator’s System** when work is to be carried out at an **E&W User’s Site** or a **Transmission Site** (as the case may be) on equipment of the **E&W User** or the **Relevant E&W Transmission Licensee** as the case may be where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator’s System**. In the case of **OTSUA**, an **E&W User’s Site** or **Transmission Site** shall, for the purposes of this OC8A, include a site at which there is a **Transmission Interface Point** until the **OTSUA Transfer Time** and the provisions of this OC8A and references to **OTSUA** shall be construed and applied accordingly until the **OTSUA Transfer Time** at which time arrangements in respect of the **Transmission Interface Site** will have been put in place between the **Relevant E&W Transmission Licensee** and the **Offshore Transmission Licensee**.

OC8A.1.3 OC8A does not apply to the situation where **Safety Precautions** need to be agreed solely between **E&W Users**. OC8A does not apply to the situation where **Safety Precautions** need to be agreed solely between **Transmission Licensees**.

OC8A.1.4 OC8A does not seek to impose a particular set of **Safety Rules** on the **Relevant E&W Transmission Licensee** and **E&W Users**; the **Safety Rules** to be adopted and used by the **Relevant E&W Transmission Licensee** and each **E&W User** shall be those chosen by each.

OC8A.1.5 **Site Responsibility Schedules** document the control responsibility for each item of **Plant** and **Apparatus** for each site.

OC8A.1.6 Defined Terms

OC8A.1.6.1 **E&W Users** should bear in mind that in **OC8** only, in order that **OC8** reads more easily with the terminology used in certain **Safety Rules**, the term "**HV Apparatus**" is defined more restrictively and is used accordingly in OC8A. **E&W Users** should, therefore, exercise caution in relation to this term when reading and using OC8A.

OC8A.1.6.2 In OC8A only the following terms shall have the following meanings:

(1) "**HV Apparatus**" means **High Voltage** electrical circuits forming part of a **System**, on which **Safety From The System** may be required or on which **Safety Precautions** may be applied to allow work to be carried out on a **System**.

(2) "**Isolation**" means the disconnection of **Apparatus** from the remainder of the **System** in which that **Apparatus** is situated by either of the following:

(a) an **Isolating Device** maintained in an isolating position. The isolating position must

either be:

(i) maintained by immobilising and **Locking** the **Isolating Device** in the isolating position and affixing a **Caution Notice** to it. Where the **Isolating Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be, where reasonably practicable, given to the authorised site representative of the **Requesting Safety Co-ordinator** and is to be retained in safe custody. Where not reasonably practicable the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety** Co-ordinator in safe custody; or

(ii) maintained and/or secured by such other method which must be in accordance with the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or that **E&W User**, as the case may be; or

(b) an adequate physical separation which must be in accordance with, and maintained by, the method set out in the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or that **E&W User**, as the case may be, and, if it is a part of that method, a **Caution Notice** must be placed at the point of separation;

or

(c) in the case where the relevant **HV Apparatus** of the **Implementing Safety Co-ordinator** is being either constructed or modified, an adequate physical separation as a result of a **No System Connection**.

(3) **"No System Connection"** means an adequate physical separation (which must be in accordance with, and maintained by, the method set out in the **Local Safety Instructions** of the **Implementing Safety Co-ordinator**) of the **Implementing Safety Co-ordinator's HV Apparatus** from the rest of the **Implementing Safety Co-ordinator's System** where such **HV Apparatus** has no installed means of being connected to, and will not for the duration of the **Safety Precaution** be connected to, a source of electrical energy or to any other part of the **Implementing Safety Co-ordinators System**.

(4) "**Earthing**" means a way of providing a connection between conductors and earth by an **Earthing Device** which is either:

(i) immobilised and **Locked** in the earthing position. Where the **Earthing Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be, where reasonably practicable, given to the authorised site representative of the **Requesting Safety Co-ordinator** and is to be retained in safe custody. Where not reasonably practicable the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured in position by such other method which must be in accordance with the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or that **E&W User** as the case may be.

OC8A.1.6.3 For the purpose of the co-ordination of safety relating to **HV Apparatus** the term **"Safety Precautions"** means **Isolation** and/or **Earthing**.

OC8A.2 OBJECTIVE

OC8A.2.1 The objective of OC8A is to achieve:-

(i) **Safety From The System** when work on or near a **System** necessitates the provision of **Safety Precautions** on another **System** on **HV Apparatus** up to a **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**); and

(ii) **Safety From The System** when work is to be carried out at an **E&W User's Site** or a **Transmission Site** (as the case may be) on equipment of the **User** or the **Relevant E&W Transmission Licensee** (as the case may be) where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**.

OC8A.2.2 A flow chart, set out in OC8A **Appendix C**, illustrates the process utilised in OC8A to achieve the objective set out in OC8A.2.1. In the case of a conflict between the flow chart and the provisions of the written text of OC8A, the written text will prevail.

OC8A.3 SCOPE

OC8A.3.1 OC8A applies to the **Relevant E&W Transmission Licensee** and to **E&W Users**, which in OC8A means:

(a) **Generators** (including where undertaking **OTSDUW**);

(b) **Network Operators**; and

(c) **Non-Embedded Customers**.

The procedures for the establishment of safety co-ordination by **The Company** in relation to **External Interconnections** are set out in **Interconnection Agreements** with relevant persons for the **External Interconnections**.

OC8A.4 PROCEDURE

OC8A.4.1 Approval of Local Safety Instructions

OC8A.4.1.1 (a) In accordance with the timing requirements of its **Bilateral Agreement**, each **E&W User** will supply to the **Relevant E&W Transmission Licensee** a copy of its **Local Safety Instructions** relating to its side of the **Connection Point** at each **Connection Site**, or in the case of **OTSUA** a copy of its **Local Safety Instructions** relating to its side of the **Transmission Interface Point** at each **Transmission Interface Site**.

(b) In accordance with the timing requirements of each **Bilateral Agreement**, the **Relevant E&W Transmission Licensee** will supply to each **E&W User** a copy of its **Local Safety Instructions** relating to the **Transmission** side of the **Connection Point** at each **Connection Site**, or in the case of **OTSUA** a copy of its **Local Safety Instructions** relating to the **Transmission** side of the **Transmission Interface Point** at each **Transmission Interface Site**.

(c) Prior to connection, the **Relevant E&W Transmission Licensee** and the **E&W User** must have approved each other's relevant **Local Safety Instructions** in relation to **Isolation** and **Earthing**.

OC8A.4.1.2 Either party may require that the **Isolation** and/or **Earthing** provisions in the other party's **Local Safety Instructions** affecting the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**) should be made more stringent in order that approval of the other party's **Local Safety Instructions** can be given. Provided these requirements are not unreasonable, the other party will make such changes as soon as reasonably practicable. These changes may need to cover the application of **Isolation** and/or **Earthing** at a place remote from the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**), depending upon the **System** layout. Approval may not be withheld because the party required to approve reasonably believes the provisions relating to **Isolation** and/or **Earthing** are too stringent.

OC8A.4.1.3 If, following approval, a party wishes to change the provisions in its **Local Safety Instructions** relating to **Isolation** and/or **Earthing**, it must inform the other party. If the change is to make the provisions more stringent, then the other party merely has to note the changes. If the change is to make the provisions less stringent, then the other party needs to approve the new provisions and the procedures referred to in OC8A.4.1.2 apply.

OC8A.4.2 Safety Co-ordinators

OC8A.4.2.1 For each **Connection Point**, (or, in the case of **OTSUA**, **Transmission Interface Point**), the **Relevant E&W Transmission Licensee** and each **E&W User** will at all times have nominated an available a person or persons ("**Safety Co-ordinator(s)**") to be responsible for the co-ordination of **Safety Precautions** when work is to be carried out on a **System** which necessitates the provision of **Safety Precautions** on **HV Apparatus** pursuant to OC8A. A **Safety Co-ordinator** may be responsible for the co-ordination of safety on **HV Apparatus** at more than one **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8A.4.2.2 Each **Safety Co-ordinator** shall be authorised by the **Relevant E&W Transmission Licensee** or an **E&W User**, as the case may be, as competent to carry out the functions set out in OC8A to achieve **Safety From The System**. Confirmation from the **Relevant E&W Transmission Licensee** or an **E&W User**, as the case may be, that its **Safety Co-ordinator(s)** as a group are so authorised is dealt with in CC.5.2 or in ECC.5.2. and for the **Relevant E&W Transmission Licensees** in the **STC**. Only persons with such authorisation will carry out the provisions of OC8A.

OC8A.4.2.3 Contact between **Safety Co-ordinators** will be made via normal operational channels, and accordingly separate telephone numbers for **Safety Co-ordinators** need not be provided. At the time of making contact, each party will confirm that they are authorised to act as a **Safety Co-ordinator**, pursuant to OC8A.

OC8A.4.2.4 If work is to be carried out on a **System**, or on equipment of the **Relevant E&W Transmission Licensee** or an **E&W User** near to a **System**, as provided in this OC8A, which necessitates the provision of **Safety Precautions** on **HV Apparatus** in accordance with the provisions of OC8A, the **Requesting Safety Co-ordinator** who requires the **Safety Precautions** to be provided shall contact the relevant **Implementing Safety Co-ordinator** to co-ordinate the establishment of the **Safety Precautions**.

OC8A.4.3 RISSP

OC8A.4.3.1 OC8A sets out the procedures for utilising the **RISSP**, which will be used except where dealing with equipment in proximity to the other's **System** as provided in OC8A.8. Sections OC8A.4 to OC8A.7 inclusive should be read accordingly.

OC8A.4.3.2 The **Relevant E&W Transmission Licensee** will use the format of the **RISSP** forms set out in Appendix A and Appendix B to OC8A. That set out in OC8A Appendix A and designated as "RISSP-R", shall be used when the **Relevant E&W Transmission Licensee** is the **Requesting Safety Co-ordinator**, and that in OC8A Appendix B and designated as "RISSP-I", shall be used when the **Relevant E&W Transmission Licensee** is the **Implementing Safety Co-ordinator**. Proformas of RISSP-R and RISSP-I will be provided for use by the **Relevant E&W Transmission Licensee** staff.

OC8A.4.3.3 (a) **E&W Users** may either adopt the format referred to in OC8A.4.3.2, or use an equivalent format, provided that it includes sections requiring insertion of the same information and has the same numbering of sections as RISSP-R and RISSP-I as set out in Appendices A and B respectively.

(b) Whether **E&W Users** adopt the format referred to in OC8A.4.3.2, or use the equivalent format as above, the format may be produced and held in, and retrieved from an electronic form by the **E&W User**.

(c) Whichever method **E&W Users** choose, each must provide proformas (whether in tangible or electronic form) for use by its staff.

OC8A.4.3.4 All references to RISSP-R and RISSP-I shall be taken as referring to the corresponding parts of the alternative forms or other tangible written or electronic records used by each **E&W User**.

OC8A.4.3.5 RISSP-R will have an identifying number written or printed on it, comprising a prefix which identifies the location at which it is issued, and a unique (for each **E&W User** or the **Relevant E&W Transmission Licensee**, as the case may be) serial number which both together uses up to eight characters (including letters and numbers) and the suffix "R".

OC8A.4.3.6 (a) In accordance with the timing requirements set out in CC.5.2 or in ECC.5.2 each **E&W User** shall apply in writing to the **Relevant E&W Transmission Licensee** for the **Relevant E&W Transmission Licensee's** approval of its proposed prefix.

(b) The **Relevant E&W Transmission Licensee** shall consider the proposed prefix to see if it is the same as (or confusingly similar to) a prefix used by the **Relevant E&W Transmission Licensee** or another **User** and shall, as soon as possible (and in any event within ten days), respond in writing to the **E&W User** with its approval or disapproval.

(c) If the **Relevant E&W Transmission Licensee** disapproves, it shall explain in its response why it has disapproved and will suggest an alternative prefix.

(d) If the **Relevant E&W Transmission Licensee** has disapproved, then the **E&W User** shall either notify the **Relevant E&W Transmission Licensee** in writing of its acceptance of the suggested alternative prefix or it shall apply in writing to the **Relevant E&W Transmission Licensee** with revised proposals and the above procedure shall apply to that application.

OC8A.4.3.7 The prefix allocation will be periodically circulated by **NGET** to all **E&W Users**, for information purposes, using a National Grid Safety Circular in the form set out in OC8A Appendix D.

OC8A.5 SAFETY PRECAUTIONS ON HV APPARATUS

OC8A.5.1 Agreement Of Safety Precautions

OC8A.5.1.1 The **Requesting Safety Co-ordinator** who requires **Safety Precautions** on another **System(s)** will contact the relevant **Implementing Safety Co-ordinator(s)** to agree the **Location** of the **Safety Precautions** to be established. This agreement will be recorded in the respective **Safety Logs**.

OC8A.5.1.2 It is the responsibility of the **Implementing Safety Co-ordinator** to ensure that adequate **Safety Precautions** are established and maintained, on their and/or another **System** connected to their **System**, to enable **Safety From The System** to be achieved on the **HV Apparatus**, specified by the **Requesting Safety Co-ordinator** which is to be identified in Part 1.1 of the **RISSP**. Reference to another **System** in this OC8A.5.1.2 shall not include the **Requesting Safety Co-ordinator's System** which is dealt with in OC8A.5.1.3.

OC8A.5.1.3 When the **Implementing Safety Co-ordinator** is of the reasonable opinion that it is necessary for **Safety Precautions** on the **System** of the **Requesting Safety Co-ordinator**, other than on the **HV Apparatus** specified by the **Requesting Safety Co-ordinator**, which is to be identified in Part 1.1 of the **RISSP**, they shall contact the **Requesting Safety Co-ordinator** and the details shall be recorded in part 1.1 of the **RISSP** forms. In these circumstances it is the responsibility of the **Requesting Safety Co-ordinator** to establish and maintain such **Safety Precautions**.

OC8A.5.1.4 In The Event Of Disagreement

In any case where the **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** are unable to agree the **Location** of the **Isolation** and (if requested) **Earthing**, both shall be at the closest available points on the infeeds to the **HV Apparatus** on which **Safety From The System** is to be achieved as indicated on the **Operation Diagram**.

OC8A.5.2 Implementation Of Isolation

OC8A.5.2.1 Following the agreement of the **Safety Precautions** in accordance with OC8A.5.1 the **Implementing Safety Co-ordinator** shall then establish the agreed **Isolation**.

OC8A.5.2.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Isolation** has been established, and identify the **Requesting Safety Co-ordinator's HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), for which the **Isolation** has been provided. The confirmation shall specify:

(a) for each **Location**, the identity (by means of **HV Apparatus** name, nomenclature and numbering or position, as applicable) of each point of **Isolation**;

(b) whether **Isolation** has been achieved by an **Isolating Device** in the isolating position, by an adequate physical separation or as a result of a **No System Connection**;

(c) where an **Isolating Device** has been used whether the isolating position is either:

(i) maintained by immobilising and **Locking** the **Isolating Device** in the isolating position and affixing a **Caution Notice** to it. Where the **Isolating Device** has been **Locked** with a **Safety Key**, the confirmation shall specify that the **Safety Key** has been secured in a **Key Safe** and the **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable (including where **Earthing** has been requested in OC8A.5.1), the confirmation shall specify that the **Key Safe Key** will be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured by such other method which must be in accordance with the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or that **E&W User**, as the case may be; and

(d) where an adequate physical separation has been used that it will be in accordance with, and maintained by, the method set out in the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or that **E&W User**, as the case may be, and, if it is a part of that method, that a **Caution Notice** has been placed at the point of separation;

(e) where a **No System Connection** has been used, the physical position of the **No System Connection** shall be defined and shall not be varied for the duration of **Safety Precaution** and the **Implementing Safety Co-ordinator's** relevant **HV Apparatus** will not, for the duration of the **Safety Precaution** be connected to a source of electrical energy or to any other part of the **Implementing Safety Co-ordinator's System**.

The confirmation of **Isolation** shall be recorded in the respective **Safety Logs**.

OC8A.5.2.3 Following the confirmation of **Isolation** being established by the **Implementing Safety Co-ordinator** and the necessary establishment of relevant **Isolation** on the **Requesting Safety Co-ordinators System**, the **Requesting Safety Co-ordinator** will then request the implementation of **Earthing** by the **Implementing Safety Co-ordinator**, if agreed in section OC8A.5.1. If the implementation of **Earthing** has been agreed, then the authorised site representative of the **Implementing Safety Co-ordinator** shall retain any **Key Safe Key** in safe custody until any **Safety Key** used for **Earthing** has been secured in the **Key Safe**.

OC8A.5.3 Implementation Of Earthing

OC8A.5.3.1 The **Implementing Safety Co-ordinator** shall then establish the agreed **Earthing**.

OC8A.5.3.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Earthing** has been established, and identify the **Requesting Safety Co-ordinator's HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), for which the **Earthing** has been provided. The confirmation shall specify:

(a) for each **Location**, the identity (by means of **HV Apparatus** name, nomenclature and numbering or position, as is applicable) of each point of **Earthing**; and

(b) in respect of the **Earthing Device** used, whether it is:

(i) immobilised and **Locked** in the earthing position. Where the **Earthing Device** has

been **Locked** with a **Safety Key**, that the **Safety Key** has been secured in a **Key Safe** and the **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable, that the **Key Safe Key** will be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured in position by such other method which is in accordance with the **Local Safety Instructions** of the **Relevant E&W Transmission Licensee** or the **Relevant Transmission Licensee** or that **E&W User**, as the case may be.

The confirmation of **Earthing** shall be recorded in the respective **Safety Logs**.

OC8A.5.3.3. The **Implementing Safety Co-ordinator** shall ensure that the established **Safety Precautions** are maintained until requested to be removed by the relevant **Requesting Safety Co-ordinator**.

OC8A.5.3.4 Certain designs of gas insulated switchgear three position isolator and earth switches specifically provide a combined **Isolation** and **Earthing** function within a single mechanism contained within a single integral unit. Where **Safety Precautions** are required across control boundaries and subject to the requirements of OC8A.5.1, it is permissible to earth before **Points of Isolation** have been established provided that all interconnected circuits are fully disconnected from live **HV Apparatus**.

OC8A.5.4 RISSP Issue Procedure

OC8A.5.4.1 Where **Safety Precautions** on another **System(s)** are being provided to enable work on the **Requesting Safety Co-ordinator's System**, before any work commences they must be recorded by a **RISSP** being issued. The **RISSP** is applicable to **HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) identified in section 1.1 of the RISSP-R and RISSP-I forms.

OC8A.5.4.2 Where **Safety Precautions** are being provided to enable work to be carried out on both sides of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) a **RISSP** will need to be issued for each side of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) with the **Relevant E&W Transmission Licensee** and the respective **User** each enacting the role of **Requesting Safety Co-ordinator**. This will result in a RISSP-R and a RISSP-I form being completed by each of the **Relevant E&W Transmission Licensee** and the **E&W User**, with each **Requesting Safety Co-ordinator** issuing a separate **RISSP** number.

OC8A.5.4.3 Once the **Safety Precautions** have been established (in accordance with OC8A.5.2 and OC8A.5.3), the **Implementing Safety Co-ordinator** shall complete parts 1.1 and 1.2 of a RISSP-I form recording the details specified in OC8A.5.1.3, OC8A.5.2.2 and OC8A.5.3.2. Where **Earthing** has not been requested, Part 1.2(b) will be completed with the words "not applicable" or "N/A". They shall then contact the **Requesting Safety Co-ordinator** to pass on these details.

OC8A.5.4.4 The **Requesting Safety Co-ordinator** shall complete Parts 1.1 and 1.2 of the RISSP-R, making a precise copy of the details received. On completion, the **Requesting Safety Co-ordinator** shall read the entries made back to the sender and check that an accurate copy has been made.

OC8A.5.4.5 The **Requesting Safety Co-ordinator** shall then issue the number of the **RISSP**, taken from the RISSP-R, to the **Implementing Safety Co-ordinator** who will ensure that the number, including the prefix and suffix, is accurately recorded in the designated space on the RISSP-I form.

OC8A.5.4.6 The **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** shall complete and sign Part 1.3 of the RISSP-R and RISSP-I respectively and then enter the time and date. When signed, no alteration to the **RISSP** is permitted; the **RISSP** may only be cancelled.

OC8A.5.4.7 The **Requesting Safety Co-ordinator** is then free to authorise work (including a test that does not affect the **Implementing Safety Co-ordinator's System**) in accordance with the requirements of the relevant internal safety procedures which apply to the **Requesting Safety Co-ordinator's System**. This is likely to involve the issue of safety documents or other relevant internal authorisations. Where testing is to be carried out which affects the **Implementing Safety Co-ordinator's System**, the procedure set out below in OC8A.6 shall be implemented.

OC8A.5.5 RISSP Cancellation Procedure

OC8A.5.5.1 When the **Requesting Safety Co-ordinator** decides that **Safety Precautions** are no longer required, they will contact the relevant **Implementing Safety Co-ordinator** to effect cancellation of the associated **RISSP**.

OC8A.5.5.2 The **Requesting Safety Co-ordinator** will inform the relevant **Implementing Safety Co-ordinator** of the **RISSP** identifying number (including the prefix and suffix), and agree it is the **RISSP** to be cancelled.

OC8A.5.5.3 The **Requesting Safety Co-ordinator** and the relevant **Implementing Safety Co-ordinator** shall then respectively complete Part 2.1 of their respective RISSP-R and RISSP-I forms and shall then exchange details. The details being exchanged shall include their respective names and time and date. On completion of the exchange of details, the respective **RISSP** is cancelled. The removal of **Safety Precautions** is as set out in OC8A.5.5.4 and OC8A.5.5.5.

OC8A.5.5.4 Neither **Safety Co-ordinator** shall instruct the removal of any **Isolation** forming part of the **Safety Precautions** as part of the returning of the **HV Apparatus** to service until it is confirmed to each by each other that every earth on each side of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), within the points of isolation identified on the **RISSP**, has been removed or disconnected by the provision of additional **Points of Isolation**.

OC8A.5.5.5 Subject to the provisions in OC8A.5.5.4, the **Implementing Safety Co-ordinator** is then free to arrange the removal of the **Safety Precautions**, the procedure to achieve that being entirely an internal matter for the party the **Implementing Safety Co-ordinator** is representing. Where a **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator**, the **Key Safe Key** must be returned to the authorised site representative of the **Implementing Safety Co-ordinator**. The only situation in which any **Safety Precautions** may be removed without first cancelling the **RISSP** in accordance with OC8A.5.5 or OC8A.5.6 is when **Earthing** is removed in the situation envisaged in OC8A.6.2(b).

OC8A.5.6 RISSP Change Control

Nothing in this OC8A prevents the **Relevant E&W Transmission Licensee** and **E&W Users** agreeing to a simultaneous cancellation and issue of a new **RISSP**, if both agree. It should be noted, however, that the effect of that under the relevant **Safety Rules** is not a matter with which the Grid Code deals.

OC8A.6 TESTING AFFECTING ANOTHER SAFETY CO-ORDINATOR'S SYSTEM

OC8A.6.1 The carrying out of the test may affect **Safety Precautions** on **RISSPs** or work being carried out which does not require a **RISSP**. Testing can, for example, include the application of an independent test voltage. Accordingly, where the **Requesting Safety Co-ordinator** wishes to authorise the carrying out of such a test to which the procedures in OC8A.6 apply they may not do so and the test will not take place unless and until the steps in (a)-(c) below have been followed and confirmation of completion has been recorded in the respective **Safety Logs**:

(a) confirmation must be obtained from the **Implementing Safety Co-ordinator** that:

(i) no person is working on, or testing, or has been authorised to work on, or test, any part of its **System** or another **System(s)** (other than the **System** of the **Requesting Safety Co-ordinator**) within the points of **Isolation** identified on the **RISSP** form relating to the test which is proposed to be undertaken, and

(ii) no person will be so authorised until the proposed test has been completed (or cancelled) and the **Requesting Safety Co-ordinator** has notified the **Implementing Safety Co-ordinator** of its completion (or cancellation);

(b) any other current **RISSPs** which relate to the parts of the **System** in which the testing is to take place must have been cancelled in accordance with procedures set out in OC8A.5.5;

(c) the **Implementing Safety Co-ordinator** must agree with the **Requesting Safety Co-ordinator** to permit the testing on that part of the **System** between the points of **Isolation** identified in the **RISSP** associated with the test and the points of **Isolation** on the **Requesting Safety Co-ordinator's System**.

OC8A.6.2 (a) The **Requesting Safety Co-ordinator** will inform the **Implementing Safety Co-ordinator** as soon as the test has been completed or cancelled and the confirmation shall be recorded in the respective **Safety Logs**.

(b) When the test gives rise to the removal of **Earthing** which it is not intended to re-apply, the relevant **RISSP** associated with the test shall be cancelled at the completion or cancellation of the test in accordance with the procedure set out in either OC8A.5.5 or OC8A.5.6. Where the **Earthing** is re-applied following the completion or cancellation of the test, there is no requirement to cancel the relevant **RISSP** associated with the test pursuant to this OC8A.6.2.

OC8A.7 EMERGENCY SITUATIONS

OC8A.7.1 There may be circumstances where **Safety Precautions** need to be established in relation to an unintended electrical connection or situations where there is an unintended risk of electrical connection between the **National Electricity Transmission System** and an **E&W User's System**, for example resulting from an incident where one line becomes attached or unacceptably close to another.

OC8A.7.2 In those circumstances, if both the **Relevant E&W Transmission Licensee** and the respective **E&W User** agree, the relevant provisions of OC8A.5 will apply as if the electrical connections or potential connections were, solely for the purposes of this OC8A, a **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8A.7.3 (a) The relevant **Safety Co-ordinator** shall be that for the electrically closest existing **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) to that **E&W User's System** or such other local **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) as may be agreed between the **Relevant E&W Transmission Licensee** and the **E&W User**, with discussions taking place between the relevant local **Safety Co-ordinators**. The **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) to be used shall be known in this OC8A.7.3 as the "relevant **Connection Point**" (or, in the case of **OTSUA**, "relevant **Transmission Interface Point**").

(b) The **Local Safety Instructions** shall be those which apply to the relevant **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

(c) The prefix for the **RISSP** will be that which applies for the relevant **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8A.8 SAFETY PRECAUTIONS RELATING TO WORKING ON EQUIPMENT NEAR TO THE HV SYSTEM

OC8A.8 applies to the situation where work is to be carried out at an **E&W User's Site** or a **Transmission Site** (as the case may be) on equipment of the **User** or the **Relevant E&W Transmission Licensee** as the case may be, where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**. It does not apply to other situations to which **OC8A** applies. In this part of **OC8A**, a **Permit for Work for proximity work** is to be used, rather than the usual **RISSP** procedure, given the nature and effect of the work, all as further provided in the OC8A.8.

OC8A.8.1 Agreement Of Safety Precautions

OC8A.8.1.1 The **Requesting Safety Co-ordinator** who requires **Safety Precautions** on another **System(s)** when work is to be carried out at an **E&W User's Site** or a **Transmission Site** (as the case may be) on equipment of the **User** or the **Relevant E&W Transmission Licensee**, as the case may be, where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System** will contact the relevant **Implementing Safety Co-ordinator(s)** to agree the location of the **Safety Precautions** to be established, having as part of this process informed the **Implementing Safety Co-ordinator** of the equipment and the work to be undertaken. The respective **Safety Co-ordinators** will ensure that they discuss the request with their authorised site representative and that the respective authorised site representatives discuss the request at the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**). This agreement will be recorded in the respective **Safety Logs**.

OC8A.8.1.2 It is the responsibility of the **Implementing Safety Co-ordinator**, working with their authorised site representative as appropriate, to ensure that adequate **Safety Precautions** are established and maintained, on their and/or another **System** connected to their **System**, to enable **Safety From The System** to be achieved for work to be carried out at an **E&W User's Site** or a **Transmission Site** (as the case may be) on equipment and in relation to work which is to be identified in the relevant part of the **Permit for Work for proximity work** where the work or equipment is near to **HV Apparatus** of the **Implementing Safety Co-ordinator's System** specified by the **Requesting Safety Co-ordinator**. Reference to another **System** in this OC8A.8.1.2 shall not include the **Requesting Safety Co-ordinator's System**.

OC8A.8.1.3 In The Event Of Disagreement

In any case, where the **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** are unable to agree the **Location** of the **Isolation** and (if requested) **Earthing**, both shall be at the closest available points on the infeeds to the **HV Apparatus** near to which the work is to be carried out as indicated on the **Operation Diagram**.

OC8A.8.2 Implementation Of Isolation And Earthing

OC8A.8.2.1 Following the agreement of the **Safety Precautions** in accordance with OC8A.8.1 the **Implementing Safety Co-ordinator** shall then establish the agreed **Isolation** and (if required) **Earthing**.

OC8A.8.2.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Isolation** and (if required) **Earthing** has been established.

OC8A.8.2.3 The **Implementing Safety Co-ordinator** shall ensure that the established **Safety Precautions** are maintained until requested to be removed by the relevant **Requesting Safety Co-ordinator**.

OC8A.8.3 Permit For Work For Proximity Work Issue Procedure

OC8A.8.3.1 Where **Safety Precautions** on another **System(s)** are being provided to enable work to be carried out at an **E&W User's Site** or **Transmission Site** (as the case may be) on equipment where the work or equipment is in proximity to **HV Apparatus** of the **Implementing Safety Co-ordinator**, before any work commences they must be recorded by a **Permit for Work for proximity work** being issued. The **Permit for Work for proximity work** shall identify the **Implementing Safety Co-ordinator's HV Apparatus** in proximity to the required work.

OC8A.8.3.2 Once the **Safety Precautions** have been established (in accordance with OC8A.8.2), the **Implementing Safety Co-ordinator** shall agree to the issue of the **Permit for Work for proximity work** with the appropriately authorised site representative of the **Requesting Safety Co-ordinator's Site**. The **Implementing Safety Co-ordinator** will inform the **Requesting Safety Co-ordinator** of the **Permit for Work for proximity work** identifying number.

OC8A.8.3.3 The appropriately authorised site representative of the **Implementing Safety Co-ordinator** shall then issue the **Permit for Work for proximity work** to the appropriately authorised site representative of the **Requesting Safety Co-ordinator**. The **Permit for Work for proximity work** will in the section dealing with the work to be carried out, be completed to identify that the work is near the **Implementing Safety Co-ordinator's HV Apparatus**. No further details of the **Requesting Safety Co-ordinator's** work will be recorded, as that is a matter for the **Requesting Safety Co-ordinator** in relation to their work.

OC8A.8.3.4 The **Requesting Safety Co-ordinator** is then free to authorise work in accordance with the requirements of the relevant internal safety procedures which apply to the **Requesting Safety Co-ordinator's Site**. This is likely to involve the issue of safety documents or other relevant internal authorisations.

OC8A.8.4 Permit For Work For Proximity Work Cancellation Procedure

OC8A.8.4.1 When the **Requesting Safety Co-ordinator** decides that **Safety Precautions** are no longer required, they will contact the relevant **Implementing Safety Co-ordinator** to effect cancellation of the associated **Permit for Work for proximity work**.

OC8A.8.4.2 The **Requesting Safety Co-ordinator** will inform the relevant **Implementing Safety Co-ordinator** of the **Permit for Work for proximity work** identifying number, and agree that the **Permit for Work for proximity work** can be cancelled. The cancellation is then effected by the appropriately authorised site representative of the **Requesting Safety Co-ordinator** returning the **Permit for Work for proximity work** to the appropriately authorised site representative of the **Implementing Safety Co-ordinator**.

OC8A.8.4.3 The **Implementing Safety Co-ordinator** is then free to arrange the removal of the **Safety Precautions**, the procedure to achieve that being entirely an internal matter for the party the **Implementing Safety Co-ordinator** is representing.

OC8A.9 LOSS OF INTEGRITY OF SAFETY PRECAUTIONS

OC8A.9.1 In any instance when any **Safety Precautions** may be ineffective for any reason the relevant **Safety Co-ordinator** shall inform the other **Safety Co-ordinator(s)** without delay of that being the case and, if requested, of the reasons why.

OC8A.10 SAFETY LOG

OC8A.10.1 The **Relevant E&W Transmission Licensee** and **E&W Users** shall maintain **Safety Logs** which shall be a chronological record of all messages relating to safety co-ordination under OC8A sent and received by the **Safety Co-ordinator(s)**. The **Safety Logs** must be retained for a period of not less than one year.

APPENDIX A - RISSP-R

[**the Relevant E&W Transmission Licensee**] [_____ **CONTROL CENTRE/SITE**]

RECORD OF INTER-SYSTEM **SAFETY PRECAUTIONS** (RISSP-R)
(**Requesting Safety Co-ordinator's** Record)

RISSP NUMBER

PART 1

1.1 **HV APPARATUS** IDENTIFICATION

Safety Precautions have been established by the **Implementing Safety Co-ordinator** (or by another **User** on that **User's System** connected to the **Implementing Safety Co-ordinator's System**) to achieve (in so far as it is possible from that side of the **Connection Point/Transmission Interface Point**) **Safety From The System** on the following **HV Apparatus** on the **Requesting Safety Co-ordinator's System**: [State identity - name(s) and, where applicable, identification of the **HV** circuit(s) up to the **Connection Point/Transmission Interface Point**]:

_____

_____

Further **Safety precautions** required on the **Requesting Safety Co-ordinator's System** as notified by the **Implementing Safety Co-ordinator**.

_____

1.2 **SAFETY PRECAUTIONS** ESTABLISHED

(a) **ISOLATION**

[State the **Location(s)** at which **Isolation** has been established (whether on the **Implementing Safety Co-ordinator's System** or on the **System** of another **User** connected to the **Implementing Safety Co-ordinator's System**). For each **Location**, identify each point of **Isolation**. For each point of **Isolation**, state the means by which the **Isolation** has been achieved, and whether, immobilised and **Locked**, **Caution Notice** affixed, other safety procedures applied, as appropriate.]

_____

_____

_____

(b) **EARTHING**

[State the **Location(s)** at which **Earthing** has been established (whether on the **Implementing Safety Co-ordinator's System** or on the **System** of another **User** connected to the **Implementing Safety Co-ordinator's System**). For each **Location**, identify each point of **Earthing**. For each point of **Earthing**, state the means by which **Earthing** has been achieved, and whether, immobilised and **Locked**, other safety procedures applied, as appropriate].

_____

_____

_____

1.3 ISSUE

I have received confirmation from _____ (name of **Implementing Safety Co-ordinator**) at _____ (location) that the **Safety Precautions** identified in paragraph 1.2 have been established and that instructions will not be issued at their location for their removal until this **RISSP** is cancelled.

Signed .....(**Requesting Safety Co-ordinator**)

at .....(time) on ..... (Date)

PART 2

2.1 CANCELLATION

I have confirmed to _____ (name of the **Implementing Safety Co-ordinator**) at _____ (location) that the **Safety Precautions** set out in paragraph 1.2 are no longer required and accordingly the **RISSP** is cancelled.

Signed .....(**Requesting Safety Co-ordinator**)

at .....(time) on ..... (Date)

APPENDIX B - RISSP-I

[**the Relevant E&W Transmission Licensee**] [_____ **CONTROL CENTRE/SITE**]

RECORD OF INTER-SYSTEM **SAFETY PRECAUTIONS** (RISSP-I)
(**Implementing Safety Co-ordinator**'s Record)

PART 1 **RISSP** NUMBER

1.1 **HV APPARATUS** IDENTIFICATION

Safety Precautions have been established by the **Implementing Safety Co-ordinator** (or by another **User** on that **User's System** connected to the **Implementing Safety Co-ordinator's System**) to achieve (in so far as it is possible from that side of the **Connection Point/Transmission Interface Point**) **Safety From The System** on the following **HV Apparatus** on the **Requesting Safety Co-ordinator's System**: [State identity - name(s) and, where applicable, identification of the **HV** circuit(s) up to the **Connection Point/Transmission Interface Point**]:

_____

_____

Recording of notification given to the **Requesting Safety Co-ordinator** concerning further **Safety Precautions** required on the **Requesting Safety Co-ordinator's System**.

1.2 **SAFETY PRECAUTIONS** ESTABLISHED

(a) **ISOLATION**

[State the **Location(s)** at which **Isolation** has been established (whether on the **Implementing Safety Co-ordinator's System** or on the **System** of another **User** connected to the **Implementing Safety Co-ordinator's System**). For each **Location**, identify each point of **Isolation**. For each point of **Isolation**, state the means by which the **Isolation** has been achieved, and whether, immobilised and **Locked**, **Caution Notice** affixed, other safety procedures applied, as appropriate.]

_____

_____

_____

(b) **EARTHING**

[State the **Location(s)** at which **Earthing** has been established (whether on the **Implementing Safety Co-ordinator's System** or on the **System** of another **User** connected to the **Implementing Safety Co-ordinator's System**). For each **Location**, identify each point of **Earthing**. For each point of **Earthing**, state the means by which **Earthing** has been achieved, and whether, immobilised and **Locked**, other safety procedures applied, as appropriate].

_____

_____

_____

1.3 ISSUE

I have confirmed to _____ (name of **Requesting Safety Co-ordinator**) at _____ (location) that the **Safety Precautions** identified in paragraph 1.2 have been established and that instructions will not be issued at my location for their removal until this **RISSP** is cancelled.

Signed .....(**Implementing Safety Co-ordinator**)

at .....(time) on ..... (Date)

PART 2

2.1 CANCELLATION

I have received confirmation from _____ (name of the **Requesting Safety Co-ordinator**) at _____ (location) that the **Safety Precautions** set out in paragraph 1.2 are no longer required and accordingly the **RISSP** is cancelled.

Signed .....(**Implementing Safety Co-ordinator**)

at .....(time) on ..... (Date)

(Note: This form to be of a different colour from RISSP-R)

APPENDIX C - FLOWCHARTS

APPENDIX C1 - RISSP ISSUE PROCESS

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

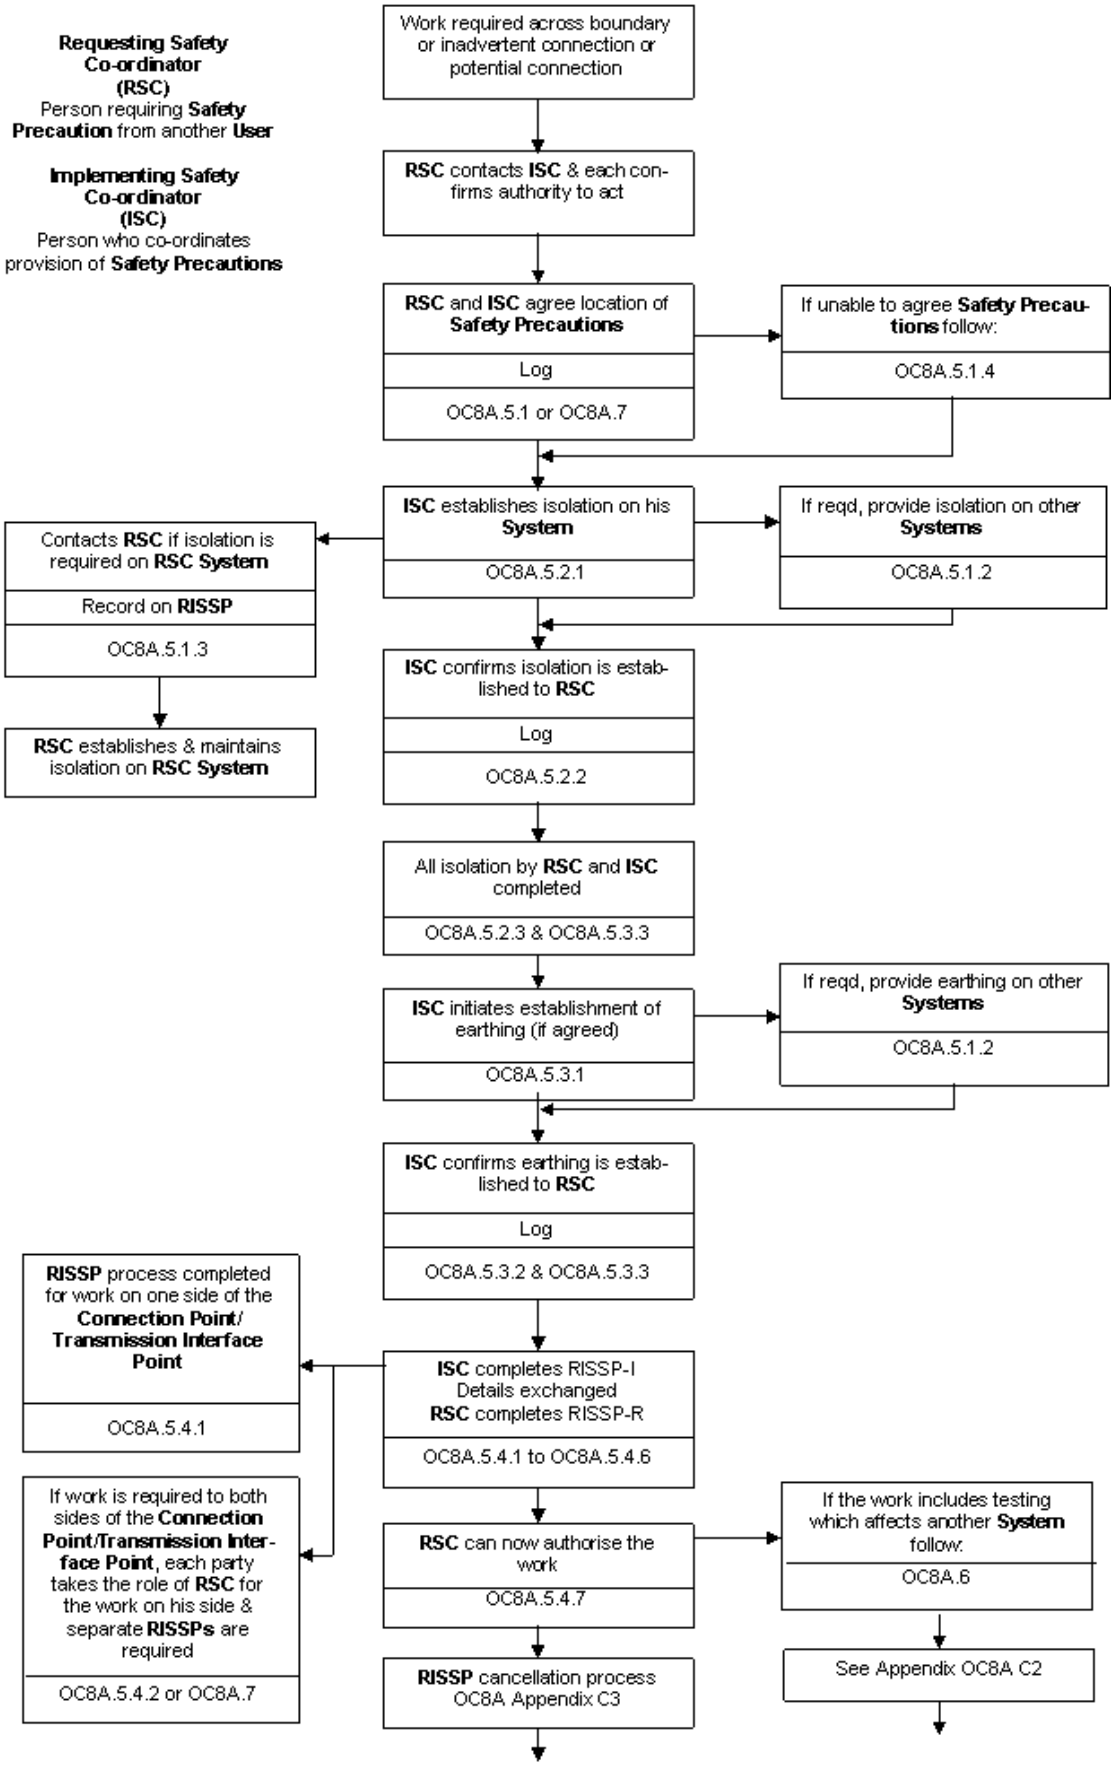

APPENDIX C2 - TESTING PROCESS

Where testing affects another Safety Co-ordinator's System

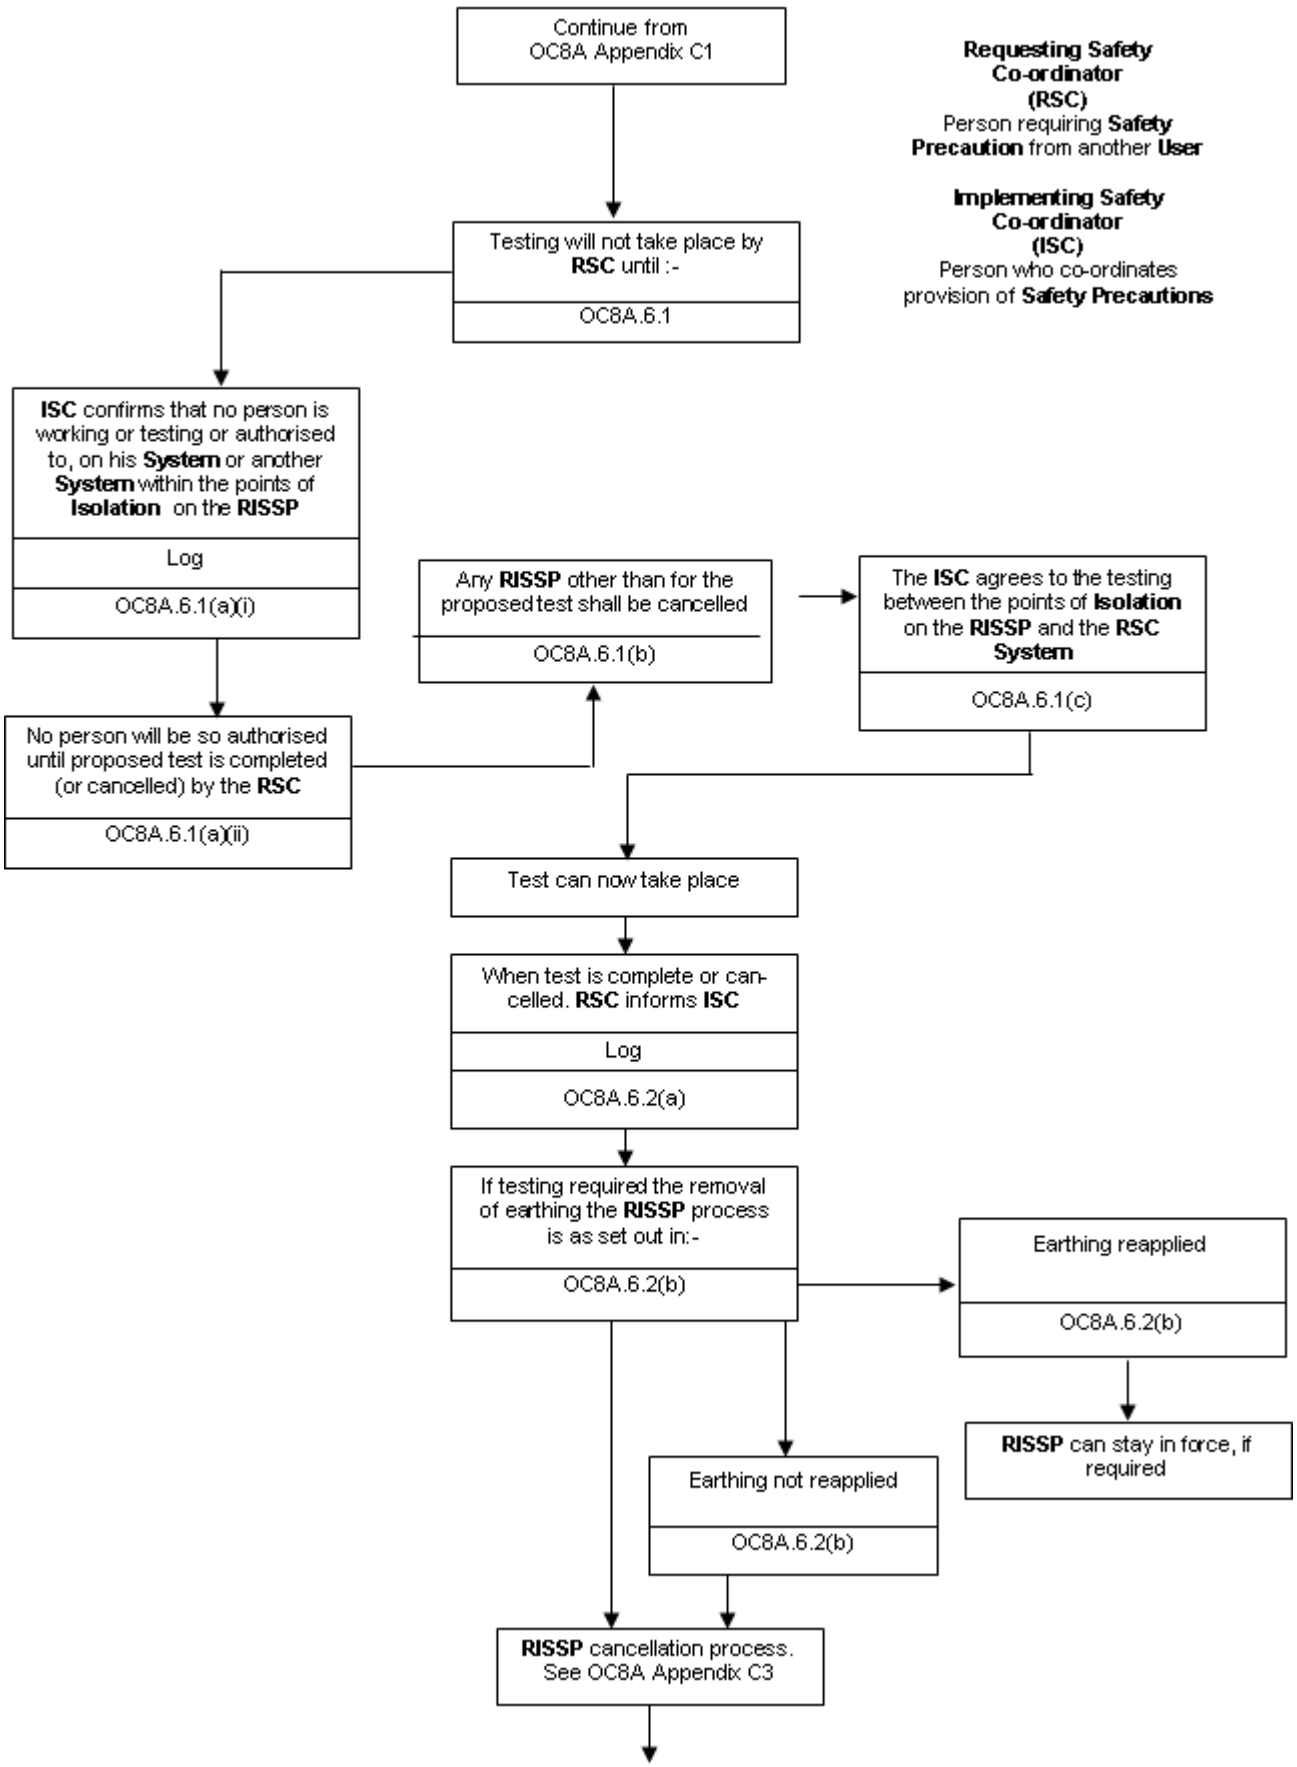

APPENDIX C3 - RISSP CANCELLATION PROCESS

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

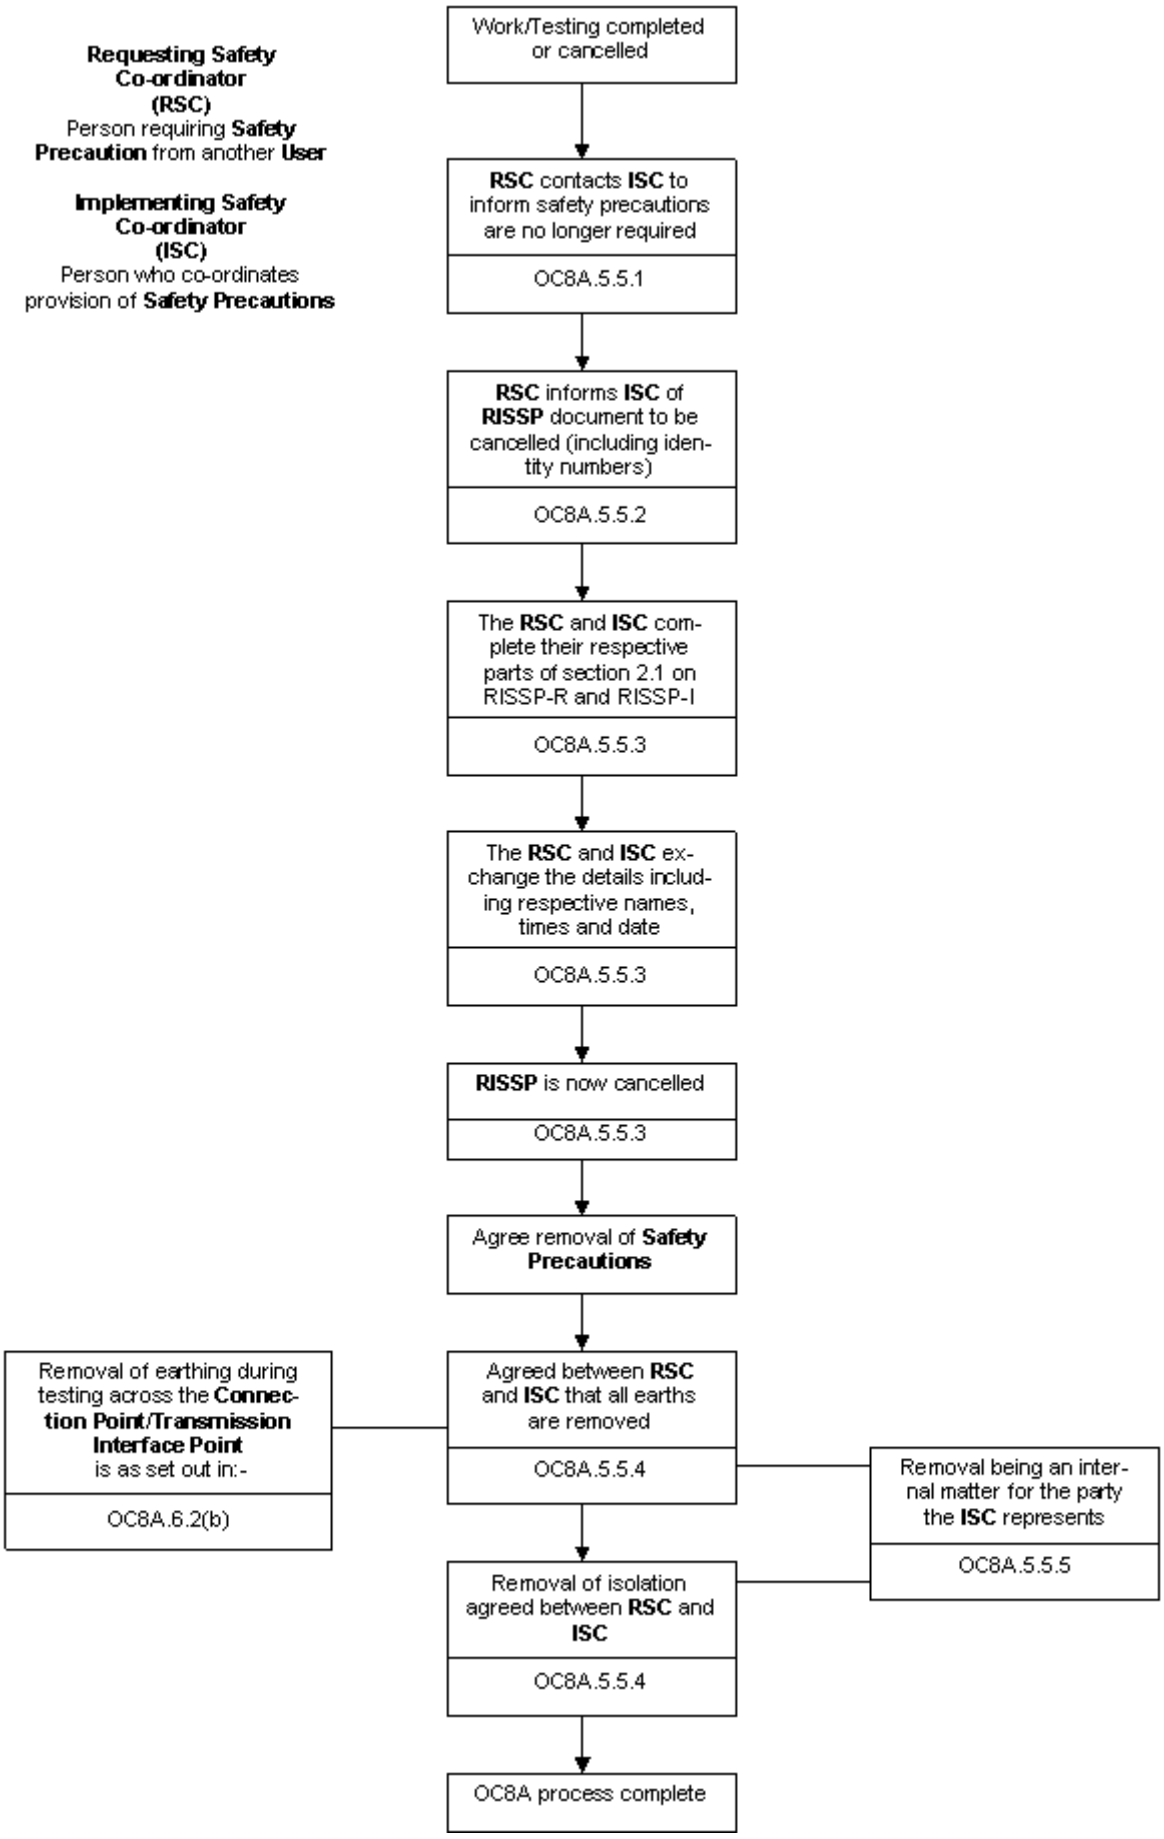

APPENDIX C4 - PROCESS FOR WORKING NEAR TO SYSTEM EQUIPMENT

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

Proximity
Nearness or Closeness to **HV** Equipment

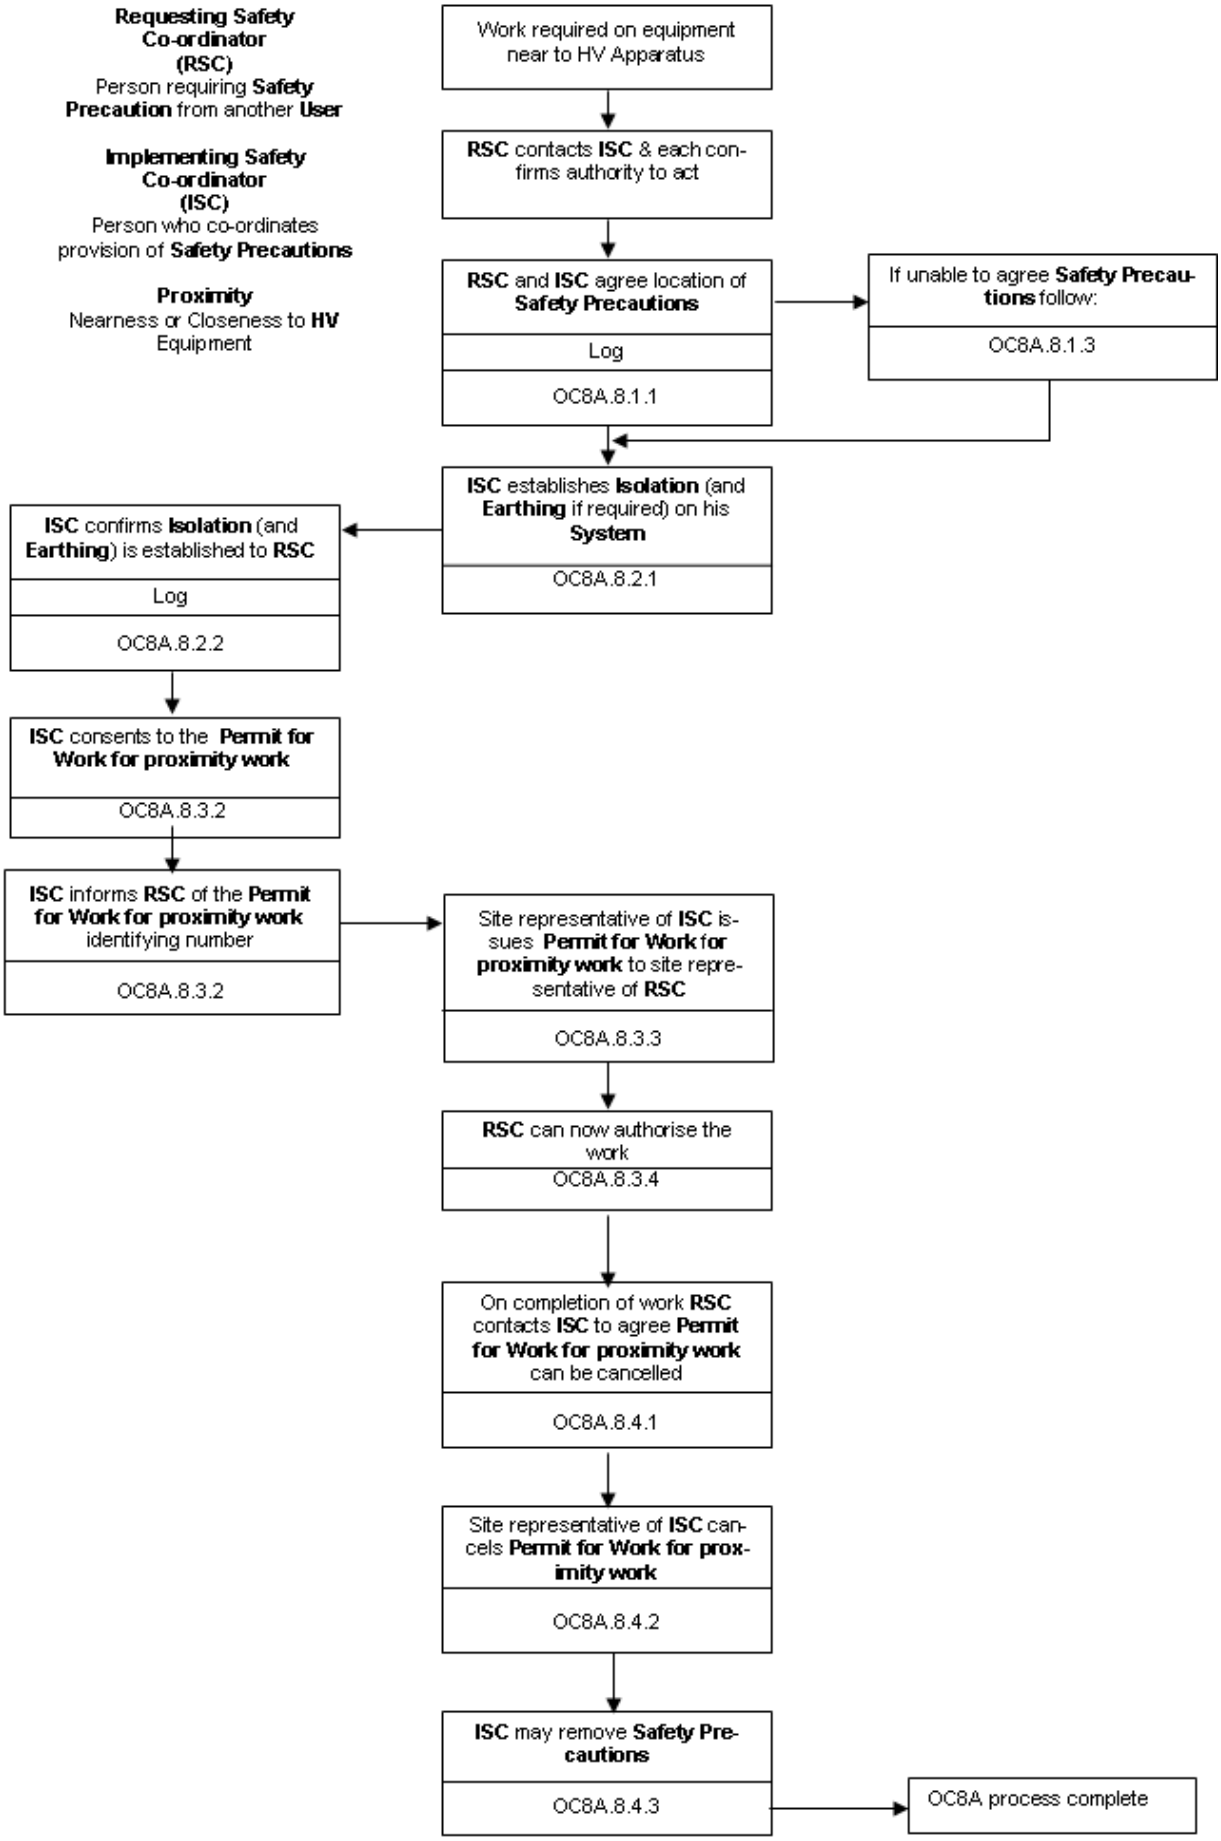

APPENDIX D - NATIONAL GRID SAFETY CIRCULAR

NGET Safety Circular (NGSC)	**NGSC Number:** **.....**
RISSP prefixes - Issue x	**Date:** **Issued By:**
Example	

Pursuant to the objectives of The Grid Code, Operating Code 8A1 - Safety Co-ordination, this circular will be used in relation to all cross boundary safety management issues with the **Relevant E&W Transmission Licensee** customers. Of particular note will be the agreed prefixes for the **Record of Inter System Safety Precautions** (**RISSP**) documents.

APPENDIX E - FORM OF NGET'S PERMIT TO WORK

[Form of the Relevant E&W Transmission Licensee Permit for Work]

No.	

PERMIT FOR WORK

1. **Location**……

Equipment Identification……

……

Work to be done

……

……

2. Precautions taken to achieve Safety from the System
Points of Isolation

……

……

Primary Earths

……

……

……

……

Actions taken to avoid **Danger** by draining, venting, purging and containment or dissipation of stored energy*

……

……

Further precautions to be taken during the course of the work to avoid **System** derived hazards*

……

……

3. Precautions that may be varied*

……

……

……

……

4. Preparation
Control Person(s) (Safety) giving Consent _____ **Key Safe** number* _____

State whether this **Permit for Work** must be personally retained yes ☐ no ☐

Signed _____ Time _____ Date _____

Senior Authorised Person

5. Issue & Receipt

Key Safe Number*		**Safety Keys** (No. off)*	
Earthing Schedule Number*		Portable **Drain earths** (No. off)*	
Recommendations for **General Safety** Report Number*		**Approved** (ROMP)#/**Card Safe**#/ Procedure Number*	
Circuit Identification – Colours/ Symbols*		Flags (No. off)*	Wristlets (No. off)*

Issued (Signed) _____

Senior Authorised Person

Received (Signed) _____ Time _____ Date _____

Competent Person

Name (Block letters) _____ Company _____

delete as appropriate *write N/A if not applicable

February 1995

< END OF OPERATING CODE NO. 8 APPENDIX 1>

OPERATING CODE NO. 8 APPENDIX 2
(OC8B)

SAFETY CO-ORDINATION IN RESPECT OF THE SCOTTISH TRANSMISSION SYSTEMS OR THE SYSTEMS OF SCOTTISH USERS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC8B.1 INTRODUCTION 3
OC8B.2 OBJECTIVE 5
OC8B.3 SCOPE 6
OC8B.4 PROCEDURE 6
OC8B.4.1 Approval Of Safety Rules 6
OC8B.4.2 Safety Co-ordinators 6
OC8B.4.3 RISSP 7
OC8B.5 SAFETY PRECAUTIONS ON HV APPARATUS 8
OC8B.5.1 Agreement Of Safety Precautions 8
OC8B.5.2 Implementation Of Isolation 8
OC8B.5.3 Implementation of Earthing 9
OC8B.5.4 RISSP Issue Procedure 10
OC8B.5.5 RISSP Cancellation Procedure 11
OC8B.5.6 RISSP Change Control 12
OC8B.6 TESTING 12
OC8B.7 EMERGENCY SITUATIONS 12
OC8B.8 SAFETY PRECAUTIONS RELATING TO WORKING ON EQUIPMENT NEAR TO THE HV SYSTEM 13
OC8B.8.1 Agreement Of Safety Precautions 13
OC8B.8.2 Implementation Of Isolation And Earthing 13
OC8B.8.3 Permit For Work For Proximity Work Issue Procedure 14
OC8B.8.4 Permit For Work For Proximity Work 14
OC8B.9 LOSS OF INTEGRITY OF SAFETY PRECAUTIONS 15
OC8B.10 SAFETY LOG 15
APPENDIX A - RISSP-R 16
APPENDIX B - RISSP-I 18
APPENDIX C- FLOWCHARTS 20
APPENDIX C1 - RISSP ISSUE PROCESS 20
APPENDIX C2 - TESTING PROCESS 22
APPENDIX C3 - RISSP CANCELLATION PROCESS 24
APPENDIX C4 - PROCESS FOR WORKING NEAR TO SYSTEM EQUIPMENT 26

APPENDIX D - NOT USED 28
APPENDIX E - FORM OF PERMIT TO WORK 29

OC8B.1 INTRODUCTION

OC8B.1.1 OC8B specifies the standard procedures to be used by **The Company**, the **Relevant Scottish Transmission Licensees** and **Scottish Users** for the co-ordination, establishment and maintenance of necessary **Safety Precautions** when work is to be carried out on or near the **Scottish Transmission System** or the **System** of a **Scottish User** and when there is a need for **Safety Precautions** on **HV Apparatus** on the other's **System** for this work to be carried out safely. OC8B applies to **Relevant Scottish Transmission Licensees** and **Scottish Users**. Where work is to be carried out on or near equipment on an **E&W Transmission System** or the **Systems** of **E&W Users**, but such work requires **Safety Precautions** to be established on a **Scottish Transmission System** or the **Systems** of **Scottish Users**, OC8B should be followed by the **Relevant Scottish Transmission Licensee** and **Scottish Users** to establish the required **Safety Precautions**.

OC8A specifies the procedures to be used by **the Relevant E&W Transmission Licensee** and **E&W Users**.

The Company shall procure that **Relevant Scottish Transmission Licensees** shall comply with OC8B where and to the extent that such section applies to them.

In this OC8B, the term “work” includes testing, other than **System Tests** which are covered by **OC12**.

OC8B.1.2 OC8B also covers the co-ordination, establishment and maintenance of necessary safety precautions on the **Implementing Safety Co-ordinator’s System** when work is to be carried out at a **Scottish User’s Site** or a **Transmission Site** (as the case may be) on equipment of the **Scottish User** or the **Relevant Scottish Transmission Licensee** as the case may be where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator’s System**. In the case of **OTSUA**, a **Scottish User’s Site** or **Transmission Site** shall, for the purposes of this OC8B, include a site at which there is a **Transmission Interface Point** until the **OTSUA Transfer Time** and the provisions of this OC8B and references to **OTSUA** shall be construed and applied accordingly until the **OTSUA Transfer Time** at which time arrangements in respect of the **Transmission Interface Site** will have been put in place between the **Relevant Scottish Transmission Licensee** and the **Offshore Transmission Licensee**.

OC8B.1.3 OC8B does not apply to the situation where **Safety Precautions** need to be agreed solely between **Scottish Users**. OC8B does not apply to the situation where **Safety Precautions** need to be agreed solely between **Transmission Licensees**.

OC8B.1.4 OC8B does not seek to impose a particular set of **Safety Rules** on **Relevant Scottish Transmission Licensees** and **Scottish Users**. The **Safety Rules** to be adopted and used by the **Relevant Scottish Transmission Licensee** and each **Scottish User** shall be those chosen by each.

OC8B.1.5 **Site Responsibility Schedules** document the control responsibility for each item of **Plant** and **Apparatus** for each site.

OC8B.1.6 (a) The **Relevant Scottish Transmission Licensee** may agree alternative site-specific operational procedures with **Scottish Users** for the co-ordination, establishment and maintenance of **Safety Precautions** instead of the **Record of Inter-System Safety Precautions (“RISSP”)** procedure detailed in this OC8B. Such operational procedures shall satisfy the requirements of paragraphs OC8B.1.7, OC8B.2.1, OC8B.4.1, OC8B.4.2, OC8B.9, OC8B.10. These alternative site-specific operational procedures for the co-ordination, establishment and maintenance of **Safety Precautions** will be referenced in the relevant **Site Responsibility Schedule**.

(b) The **Relevant Scottish Transmission Licensee** may agree with **Scottish Users** site-specific procedures for the application of **Safety Precautions** across the interface between the **Relevant Scottish Transmission Licensee** and **Scottish User** in addition to and consistent with either the **RISSP** procedure or the alternative site-specific operational procedures described in OC8B.1.6 (a). These site-specific procedures will be referenced in the relevant **Site Responsibility Schedule**.

(c) The **Relevant Scottish Transmission Licensee** and the **Scottish User** shall comply with the procedures agreed pursuant to OC8B.1.6 (a) and OC8B.1.6 (b).

OC8B.1.7 Defined Terms

OC8B.1.7.1 **Scottish Users** should bear in mind that in **OC8** only, in order that **OC8** reads more easily with the terminology used in certain **Safety Rules**, the term "**HV Apparatus**" is defined more restrictively and is used accordingly in OC8B. **Scottish Users** should, therefore, exercise caution in relation to this term when reading and using OC8B.

OC8B.1.7.2 In **OC8** only the following terms shall have the following meanings:

(1) "**HV Apparatus**" means **High Voltage** electrical circuits forming part of a **System**, on which **Safety From The System** may be required or on which **Safety Precautions** may be applied to allow work to be carried out on a **System**.

(2) "**Isolation**" means the disconnection of **Apparatus** from the remainder of the **System** in which that **Apparatus** is situated by either of the following:

(a) an **Isolating Device** maintained in an isolating position. The isolating position must either be:

(i) maintained by immobilising and **Locking** the **Isolating Device** in the isolating position and affixing a **Caution Notice** to it. Where the **Isolating Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable, the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured by such other method which must be in accordance with the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User**, as the case may be; or

(b) an adequate physical separation which must be in accordance with, and maintained by, the method set out in the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User**, as the case may be, and, if it is a part of that method, a **Caution Notice** must be placed at the point of separation; or

(c) in the case where the relevant **HV Apparatus** of the **Implementing Safety Co-ordinator** is being either constructed or modified, an adequate physical separation as a result of a **No System Connection**.

(3) **"No System Connection"** means an adequate physical separation (which must be in accordance with, and maintained by, the method set out in the **Safety Rules** of the **Implementing Safety Co-ordinator**) of the **Implementing Safety Co-ordinator's HV Apparatus** from the rest of the **Implementing Safety Co-ordinator's System** where such **HV Apparatus** has no installed means of being connected to, and will not for the duration of the **Safety Precaution** be connected to, a source of electrical energy or to any other part of the **Implementing Safety Co-ordinator's System**.

(4) "**Earthing**" means a way of providing a connection between conductors and earth by an **Earthing Device** which is either:

(i) immobilised and **Locked** in the earthing position. Where the **Earthing Device** is **Locked** with a **Safety Key**, the **Safety Key** must be secured in a **Key Safe** and the **Key Safe Key** must be given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable, the **Key Safe Key** must be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured in position by such other method which must be in accordance with the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User** as the case may be.

OC8B.1.7.3 For the purpose of the co-ordination of safety relating to **HV Apparatus** the term **"Safety Precautions"** means **Isolation** and/or **Earthing**.

OC8B.2 OBJECTIVE

OC8B.2.1 The objective of OC8B is to achieve:-

(i) **Safety From The System** when work on or near a **System** necessitates the provision of **Safety Precautions** on another **System** on **HV Apparatus** up to a **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**); and

(ii) **Safety From The System** when work is to be carried out at a **Scottish User's Site** or a **Transmission Site** (as the case may be) on equipment of the **Scottish User** or the **Relevant Scottish Transmission Licensee** (as the case may be) where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**.

OC8B.2.2 A flow chart, set out in OC8B Appendix C, illustrates the process utilised in OC8B to achieve the objective set out in OC8B.2.1. In the case of a conflict between the flow chart and the provisions of the written text of OC8B, the written text will prevail.

OC8B.3 SCOPE

OC8B.3.1 OC8B applies to **The Company**, **Relevant Scottish Transmission Licensees** and to **Scottish Users**, which in **OC8** means:-

(a) **Generators** (including where undertaking **OTSDUW**);

(b) **Network Operators**; and

(c) **Non-Embedded Customers**.

The procedures for the establishment of safety co-ordination by **The Company** in relation to **External Interconnections** are set out in **Interconnection Agreements** with relevant persons for the **External Interconnections**.

OC8B.4 PROCEDURE

OC8B.4.1 Approval Of Safety Rules

OC8B.4.1.1 (a) In accordance with the timing requirements of its **Bilateral Agreement**, each **Scottish User** will supply to the **Relevant Scottish Transmission Licensee** a copy of its **Safety Rules** relating to its side of the **Connection Point** at each **Connection Site** or in the case of **OTSUA** a copy of its **Local Safety Instructions** relating to its side of the **Transmission Interface Point** at each **Transmission Interface Site**.

(b) In accordance with the timing requirements of each **Bilateral Agreement**, the **Relevant Scottish Transmission Licensee** will supply to each **Scottish User** a copy of its **Safety Rules** relating to the **Transmission** side of the **Connection Point** at each **Connection Site** or in the case of **OTSUA** a copy of its **Local Safety Instructions** relating to the **Transmission** side of the **Transmission Interface Point** at each **Transmission Interface Site**.

(c) Prior to connection the **Relevant Scottish Transmission Licensee** and the **Scottish User** must have approved each other's relevant **Safety Rules** in relation to **Isolation** and **Earthing**.

OC8B.4.1.2 Either party may require that the **Isolation** and/or **Earthing** provisions in the other party's **Safety Rules** affecting the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**) should be made more stringent in order that approval of the other party's **Safety Rules** can be given. Provided these requirements are not unreasonable, the other party will make such changes as soon as reasonably practicable. These changes may need to cover the application of **Isolation** and/or **Earthing** at a place remote from the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**), depending upon the **System** layout. Approval may not be withheld because the party required to approve reasonably believes the provisions relating to **Isolation** and/or **Earthing** are too stringent.

OC8B.4.1.3 If, following approval, a party wishes to change the provisions in its **Safety Rules** relating to **Isolation** and/or **Earthing**, it must inform the other party. If the change is to make the provisions more stringent, then the other party merely has to note the changes. If the change is to make the provisions less stringent, then the other party needs to approve the new provisions and the procedures referred to in OC8B.4.1.2 apply.

OC8B.4.2 Safety Co-ordinators

OC8B.4.2.1 For each **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), the **Relevant Scottish Transmission Licensee** and each **Scottish User** will have nominated to be available, to a timescale agreed in the **Bilateral Agreement**, a person or persons ("**Safety Co-ordinator(s)**") to be responsible for the co-ordination of **Safety Precautions** when work is to be carried out on a **System** which necessitates the provision of **Safety Precautions** on **HV Apparatus** pursuant to OC8B. A **Safety Co-ordinator** may be responsible for the co-ordination of safety on **HV Apparatus** at more than one **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8B.4.2.2 Each **Safety Co-ordinator** shall be authorised by the **Relevant Scottish Transmission Licensee** or a **Scottish User**, as the case may be, as competent to carry out the functions set out in OC8B to achieve **Safety From The System**. Confirmation from the **Relevant Scottish Transmission Licensee** or a **Scottish User**, as the case may be, that its **Safety Co-ordinator(s)** as a group are so authorised is dealt with, for **Scottish Users**, in CC.5.2 or in ECC.5.2 and for **Relevant Scottish Transmission Licensees** in the **STC**. Only persons with such authorisation will carry out the provisions of OC8B. Each **User** shall, prior to being connected to the **National Electricity Transmission System**, give notice in writing to the **Relevant Scottish Transmission Licensee** of its **Safety Co-ordinator(s)** and will update the written notice yearly and whenever there is a change to the identity of its **Safety Co-ordinators** or to the **Connection Points** (or, in the case of **OTSUA**, **Transmission Interface Points**). The **Relevant Scottish Transmission Licensee** will, at the time of a **Scottish User** being connected to the **National Electricity Transmission System** give notice in writing to that **Scottish User** of the identity of its **Safety Co-ordinator(s)** and will update the written notice whenever there is a change to the **Connection Points** (or, in the case of **OTSUA**, **Transmission Interface Points**) or **Safety Co-ordinators**.

OC8B.4.2.3 Contact between **Safety Co-ordinators** will be made via normal operational channels, and accordingly separate telephone numbers for **Safety Co-ordinators** need not be provided.

OC8B.4.2.4 If work is to be carried out on a **System**, or on equipment of the **Relevant Scottish Transmission Licensee** or a **Scottish User** near to a **System**, as provided in this OC8B, which necessitates the provision of **Safety Precautions** on **HV Apparatus** in accordance with the provisions of OC8B, the **Requesting Safety Co-ordinator** who requires the **Safety Precautions** to be provided shall contact the relevant **Implementing Safety Co-ordinator** to co-ordinate the establishment of the **Safety Precautions**.

OC8B.4.3 RISSP

OC8B.4.3.1 OC8B sets out the procedures for utilising the **RISSP**, which will be used except where dealing with equipment in proximity to the other's **System** as provided in OC8B**.8**. Sections OC8B.4 to OC8B.7 inclusive should be read accordingly.

OC8B.4.3.2 The **Relevant Transmission Licensee** will use the format of the **RISSP** forms set out in Appendix A and Appendix B to OC8B, or any other format which may be agreed between the **Relevant Scottish Transmission Licensee** and each **User**. That set out in OC8B Appendix A and designated as "RISSP-R", shall be used when the **Relevant Scottish Transmission Licensee** is the **Requesting Safety Co-ordinator**, and that in OC8B Appendix B and designated as "RISSP-I", shall be used when the **Relevant Transmission Licensee** is the **Implementing Safety Co-ordinator**. Proformas of RISSP-R and RISSP-I will be provided for use by **Relevant Scottish Transmission Licensees** staff.

OC8B.4.3.3 **Scottish Users** may either adopt the format referred to in OC8B.4.3.2 or any other format which may be agreed between the **Relevant Scottish Transmission Licensee** and the **Scottish User** from time to time.

OC8B.4.3.4 All references to RISSP-R and RISSP-I shall be taken as referring to the corresponding parts of the alternative forms or other tangible written or electronic records used by each **Scottish User** or **Relevant Scottish Transmission Licensee**.

OC8B.4.3.5 RISSP-R will have an identifying number written or printed on it, comprising a prefix which identifies the location at which it is issued, and a unique (for each **Scottish User** or **Relevant Scottish Transmission Licensee**, as the case may be) serial number which both together uses up to eight characters (including letters and numbers) and the suffix "R".

OC8B.4.3.6 (a) In accordance with the timing requirements set out in the **Bilateral Agreement** each **Scottish User** shall apply in writing to the **Relevant Scottish Transmission Licensee** for the **Relevant Scottish Transmission Licensee's** approval of its proposed prefix.

(b) The **Relevant Scottish Transmission Licensee** shall consider the proposed prefix to see if it is the same as (or confusingly similar to) a prefix used by the **Relevant Scottish Transmission Licensee** or another **User** and shall, as soon as possible (and in any event within ten days), respond in writing to the **Scottish User** with its approval or disapproval.

(c) If the **Relevant Scottish Transmission Licensee** disapproves, it shall explain in its response why it has disapproved and will suggest an alternative prefix.

(d) If the **Relevant Scottish Transmission Licensee** has disapproved, then the **Scottish User** shall either notify the **Relevant Scottish Transmission Licensee** in writing of its acceptance of the suggested alternative prefix or it shall apply in writing to the **Relevant Scottish Transmission Licensee** with revised proposals and the above procedure shall apply to that application.

OC8B.5 SAFETY PRECAUTIONS ON HV APPARATUS

OC8B.5.1 Agreement Of Safety Precautions

OC8B.5.1.1 The **Requesting Safety Co-ordinator** who requires **Safety Precautions** on another **System(s)** will contact the relevant **Implementing Safety Co-ordinator(s)** to agree the **Location** of the **Safety Precautions** to be established. This agreement will be recorded in the respective **Safety Logs**.

OC8B.5.1.2 It is the responsibility of the **Implementing Safety Co-ordinator** to ensure that adequate **Safety Precautions** are established and maintained, on their and/or another **System** connected to their **System**, to enable **Safety From The System** to be achieved on the **HV Apparatus**, specified by the **Requesting Safety Co-ordinator** which is to be identified in Part 1.1 of the **RISSP**. Reference to another **System** in this OC8B.5.1.2 shall not include the **Requesting Safety Co-ordinator's System** which is dealt with in OC8B.5.1.3.

OC8B.5.1.3 When the **Implementing Safety Co-ordinator** is of the reasonable opinion that it is necessary for **Safety Precautions** on the **System** of the **Requesting Safety Co-ordinator**, other than on the **HV Apparatus** specified by the **Requesting Safety Co-ordinator**, which is to be identified in Part 1.1 of the **RISSP**, they shall contact the **Requesting Safety Co-ordinator** and the details shall be recorded in part 1.1 of the **RISSP** forms. In these circumstances it is the responsibility of the **Requesting Safety Co-ordinator** to establish and maintain such **Safety Precautions**.

OC8B.5.1.4 The location of the **Safety Precautions** should be indicated on each **Scottish User's** operational diagram and labelled as per the local instructions of each **Scottish User**.

OC8B.5.1.5 In The Event Of Disagreement

In any case where the **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** are unable to agree the **Location** of the **Isolation** and (if requested) **Earthing**, both shall be at the closest available points on the infeeds to the **HV Apparatus** on which **Safety From The System** is to be achieved as indicated on the **Operation Diagram**.

OC8B.5.2 Implementation Of Isolation

OC8B.5.2.1 Following the agreement of the **Safety Precautions** in accordance with OC8B.5.1 the **Implementing Safety Co-ordinator** shall then establish the agreed **Isolation**.

OC8B.5.2.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Isolation** has been established, and identify the **Requesting Safety Co-ordinator's HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), for which the **Isolation** has been provided. The confirmation shall specify:

(a) for each **Location**, the identity (by means of **HV Apparatus** name, nomenclature and numbering or position, as applicable) of each point of **Isolation**;

(b) whether **Isolation** has been achieved by an **Isolating Device** in the isolating position, by an adequate physical separation or as a result of a **No System Connection**;

(c) where an **Isolating Device** has been used whether the isolating position is either :

(i) maintained by immobilising and **Locking** the **Isolating Device** in the isolating position and affixing a **Caution Notice** to it. Where the **Isolating Device** has been **Locked** with a **Safety Key**, the confirmation shall specify that the **Safety Key** has been secured in a **Key Safe** and the **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable (including where **Earthing** has been requested in OC8B.5.1), the confirmation shall specify that the **Key Safe Key** will be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured by such other method which must be in accordance with the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User**, as the case may be; and

(d) where an adequate physical separation has been used that it will be in accordance with, and maintained by, the method set out in the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User**, as the case may be, and, if it is a part of that method, that a **Caution Notice** has been placed at the point of separation;

(e) where a **No System Connection** has been used, the physical position of the **No System Connection** shall be defined and shall not be varied for the duration of the **Safety Precaution** and the **Implementing Safety Co-ordinator's** relevant **HV Apparatus** will not, for the duration of the **Safety Precaution** be connected to a source of electrical energy or to any other part of the **Implementing Safety Co-ordinator's System**.

The confirmation of **Isolation** shall be recorded in the respective **Safety Logs**.

OC8B.5.2.3 Following the confirmation of **Isolation** being established by the **Implementing Safety Co-ordinator** and the necessary establishment of relevant **Isolation** on the **Requesting Safety Co-ordinators System**, the **Requesting Safety Co-ordinator** will then request the implementation of **Earthing** by the **Implementing Safety Co-ordinator**, if agreed in section OC8B.5.1. If the implementation of **Earthing** has been agreed, then the authorised site representative of the **Implementing Safety Co-ordinator** shall retain any **Key Safe Key** in safe custody until any **Safety Key** used for **Earthing** has been secured in the **Key Safe**.

OC8B.5.3 Implementation Of Earthing

OC8B.5.3.1 The **Implementing Safety Co-ordinator** shall then establish the agreed **Earthing**.

OC8B.5.3.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Earthing** has been established, and identify the **Requesting Safety Co-ordinator's HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), for which the **Earthing** has been provided. The confirmation shall specify:

(a) for each **Location**, the identity (by means of **HV Apparatus** name, nomenclature and numbering or position, as is applicable) of each point of **Earthing**; and

(b) in respect of the **Earthing Device** used, whether it is:

(i) immobilised and **Locked** in the earthing position. Where the **Earthing Device** has been **Locked** with a **Safety Key**, that the **Safety Key** has been secured in a **Key Safe** and the **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator** where reasonably practicable and is to be retained in safe custody. Where not reasonably practicable, that the **Key Safe Key**

will be retained by the authorised site representative of the **Implementing Safety Co-ordinator** in safe custody; or

(ii) maintained and/or secured in position by such other method which is in accordance with the **Safety Rules** of the **Relevant Scottish Transmission Licensee** or that **Scottish User**, as the case may be.

The confirmation of **Earthing** shall be recorded in the respective **Safety Logs**.

OC8B.5.3.3 The **Implementing Safety Co-ordinator** shall ensure that the established **Safety Precautions** are maintained until requested to be removed by the relevant **Requesting Safety Co-ordinator**.

OC8B.5.3.4 Certain designs of gas insulated switchgear three position isolator and earth switches specifically provide a combined **Isolation** and **Earthing** function within a single mechanism contained within a single integral unit. Where **Safety Precautions** are required across control boundaries and subject to the requirements of OC8B.5.1, it is permissible to earth before **Points of Isolation** have been established provided that all interconnected circuits are fully disconnected from live **HV Apparatus**.

OC8B.5.4 RISSP Issue Procedure

OC8B.5.4.1 Where **Safety Precautions** on another **System(s)** are being provided to enable work on the **Requesting Safety Co-ordinator's System**, before any work commences they must be recorded by a **RISSP** being issued. The **RISSP** is applicable to **HV Apparatus** up to the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) identified in section 1.1 of the RISSP-R and RISSP-I forms.

OC8B.5.4.2 Where **Safety Precautions** are being provided to enable work to be carried out on both sides of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) a **RISSP** will need to be issued for each side of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) with **Relevant Scottish Transmission Licensee** and the respective **User** each enacting the role of **Requesting Safety Co-ordinator**. This will result in a RISSP-R and a RISSP-I form being completed by each of the **Relevant Scottish Transmission Licensee** and the **Scottish User**, with each **Requesting Safety Co-ordinator** issuing a separate **RISSP** number.

OC8B.5.4.3 Once the **Safety Precautions** have been established (in accordance with OC8B.5.2 and OC8B.5.3), the **Implementing Safety Co-ordinator** shall complete parts 1.1 and 1.2 of a RISSP-I form recording the details specified in OC8B.5.1.3, OC8B.5.2.2 and OC8B.5.3.2. Where **Earthing** has not been requested, Part 1.2(b) will be completed with the words "not applicable" or "N/A". They shall then contact the **Requesting Safety Co-ordinator** to pass on these details.

OC8B.5.4.4 The **Requesting Safety Co-ordinator** shall complete Parts 1.1 and 1.2 of the RISSP-R, making a precise copy of the details received. On completion, the **Requesting Safety Co-ordinator** shall read the entries made back to the sender and check that an accurate copy has been made.

OC8B.5.4.5 The **Requesting Safety Co-ordinator** shall then issue the number of the **RISSP**, taken from the RISSP-R, to the **Implementing Safety Co-ordinator** who will ensure that the number, including the prefix and suffix (where applicable), is accurately recorded in the designated space on the RISSP-I form.

OC8B.5.4.6 The **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** shall complete and sign Part 1.3 of the RISSP-R and RISSP-I respectively and then enter the time and date. When signed no alteration to the **RISSP** is permitted; the **RISSP** may only be cancelled.

OC8B.5.4.7 The **Requesting Safety Co-ordinator** is then free to authorise work, but not testing, in accordance with the requirements of the relevant internal safety procedures which apply to the **Requesting Safety Co-ordinator's System**. This is likely to involve the issue of safety documents or other relevant internal authorisations. Where testing is to be carried out, the procedure set out below in OC8B.6 shall be implemented.

OC8B.5.5 RISSP Cancellation Procedure

OC8B.5.5.1 When the **Requesting Safety Co-ordinator** decides that **Safety Precautions** are no longer required, they will contact the relevant **Implementing Safety Co-ordinator** to effect cancellation of the associated **RISSP**.

OC8B.5.5.2 The **Requesting Safety Co-ordinator** will inform the relevant **Implementing Safety Co-ordinator** of the **RISSP** identifying number, including the prefix and suffix (where applicable), and agree it is the **RISSP** to be cancelled.

OC8B.5.5.3 The **Requesting Safety Co-ordinator** and the relevant **Implementing Safety Co-ordinator** shall then respectively complete Part 2.1 of their respective RISSP-R and RISSP-I forms and shall then exchange details. The details being exchanged shall include their respective names and time and date. On completion of the exchange of details the respective **RISSP** is cancelled. The removal of **Safety Precautions** is as set out in OC8B.5.5.4 and OC8B.5.5.5.

OC8B.5.5.4 Neither **Safety Co-ordinator** shall instruct the removal of any **Isolation** forming part of the **Safety Precautions** as part of the returning of the **HV Apparatus** to service until it is confirmed to each by each other that every earth on each side of the **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**), within the points of isolation identified on the **RISSP**, has been removed or disconnected by the provision of additional **Points of Isolation**.

OC8B.5.5.5 Subject to the provisions in OC8B.5.5.4, the **Implementing Safety Co-ordinator** is then free to arrange the removal of the **Safety Precautions**, the procedure to achieve that being entirely an internal matter for the party the **Implementing Safety Co-ordinator** is representing. Where a **Key Safe Key** has been given to the authorised site representative of the **Requesting Safety Co-ordinator**, the **Key Safe Key** must be returned to the authorised site representative of the **Implementing Safety Co-ordinator**. The only situation in which any **Safety Precautions** may be removed without first cancelling the **RISSP** in accordance with OC8B.5.5 or OC8B.5.6 is when **Earthing** is removed in the situation envisaged in OC8B.6.2(b).

OC8B.5.6 RISSP Change Control

Nothing in this OC8B prevents **Relevant Scottish Transmission Licensees** and **Scottish Users** agreeing to a simultaneous cancellation and issue of a new **RISSP**, if both agree. It should be noted, however, that the effect of that under the relevant **Safety Rules** is not a matter with which the **Grid Code** deals.

OC8B.6 TESTING

OC8B.6.1 The carrying out of the test may affect **Safety Precautions** on **RISSPs** or work being carried out which does not require a **RISSP**. Testing can, for example, include the application of an independent test voltage. Accordingly, where the **Requesting Safety Co-ordinator** wishes to authorise the carrying out of such a test to which the procedures in OC8B.6 apply, they may not do so and the test will not take place unless and until the steps in (a)-(c) below have been followed and confirmation of completion has been recorded in the respective **Safety Logs**:

(a) confirmation must be obtained from the **Implementing Safety Co-ordinator** that:

(i) no person is working on, or testing, or has been authorised to work on, or test, any part of its **System** or another **System(s)** (other than the **System** of the **Requesting Safety Co-ordinator**) within the points of **Isolation** identified on the **RISSP** form relating to the test which is proposed to be undertaken, and

(ii) no person will be so authorised until the proposed test has been completed (or cancelled) and the **Requesting Safety Co-ordinator** has notified the **Implementing Safety Co-ordinator** of its completion (or cancellation);

(b) any other current **RISSPs** which relate to the parts of the **System** in which the testing is to take place must have been cancelled in accordance with procedures set out in OC8B.5.5;

(c) the **Implementing Safety Co-ordinator** must agree with the **Requesting Safety Co-ordinator** to permit the testing on that part of the **System** between the points of **Isolation** identified in the **RISSP** associated with the test and the points of **Isolation** on the **Requesting Safety Co-ordinator's System**.

OC8B.6.2 (a) The **Requesting Safety Co-ordinator** will inform the **Implementing Safety Co-ordinator** as soon as the test has been completed or cancelled and the confirmation shall be recorded in the respective **Safety Logs**.

(b) When the test gives rise to the removal of **Earthing** which it is not intended to re-apply, the relevant **RISSP** associated with the test shall be cancelled at the completion or cancellation of the test in accordance with the procedure set out in either OC8B.5.5 or OC8B.5.6. Where the **Earthing** is re-applied following the completion or cancellation of the test, there is no requirement to cancel the relevant **RISSP** associated with the test pursuant to this OC8B.6.2.

OC8B.7 EMERGENCY SITUATIONS

OC8B.7.1 There may be circumstances where **Safety Precautions** need to be established in relation to an unintended electrical connection or situations where there is an unintended risk of electrical connection between the **National Electricity Transmission System** and a **Scottish User's System**, for example resulting from an incident where one line becomes attached or unacceptably close to another.

OC8B.7.2 In those circumstances, if both the **Relevant Scottish Transmission Licensee** and the **Scottish User** agree, the relevant provisions of OC8B.5 will apply as if the electrical connections or potential connections were, solely for the purposes of this OC8B, a **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8B.7.3 (a) The relevant **Safety Co-ordinator** shall be that for the electrically closest existing **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) to that **Scottish User's System** or such other local **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) as may be agreed between the **Relevant Scottish Transmission Licensee** and the **Scottish User**, with discussions taking place between the relevant local **Safety Co-ordinators**. The **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**) to be used shall be known in this OC8B.7.3 as the "relevant **Connection Point**" (or, in the case of **OTSUA**, relevant "**Transmission Interface Point**").

(b) The **Safety Rules** shall be those which apply to the relevant **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

(c) The prefix for the **RISSP** (where applicable) will be that which applies for the relevant **Connection Point** (or, in the case of **OTSUA**, **Transmission Interface Point**).

OC8B.8 SAFETY PRECAUTIONS RELATING TO WORKING ON EQUIPMENT NEAR TO THE HV SYSTEM

OC8B.8 applies to the situation where work is to be carried out at a **Scottish User's Site** or a **Transmission Site** (as the case may be) on equipment of the **Scottish User** or a **Relevant Scottish Transmission Licensee** as the case may be, where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System**. It does not apply to other situations to which OC8B applies. In this part of OC8B, a **Permit for Work for proximity work** is to be used, rather than the usual **RISSP** procedure, given the nature and effect of the work, all as further provided in the OC8B.8.

OC8B.8.1 Agreement Of Safety Precautions

OC8B.8.1.1 The **Requesting Safety Co-ordinator** who requires **Safety Precautions** on another **System(s)** when work is to be carried out at a **Scottish User's Site** or a **Transmission Site** (as the case may be) on equipment of the **Scottish User** or a **Relevant Scottish Transmission Licensee**, as the case may be, where the work or equipment is near to **HV Apparatus** on the **Implementing Safety Co-ordinator's System** will contact the relevant **Implementing Safety Co-ordinator(s)** to agree the Location of the **Safety Precautions** to be established, having as part of this process informed the **Implementing Safety Co-ordinator** of the equipment and the work to be undertaken. The respective **Safety Co-ordinators** will ensure that they discuss the request with their authorised site representative and that the respective authorised site representatives discuss the request at the **Connection Site** (or, in the case of **OTSUA**, **Transmission Interface Site**). This agreement will be recorded in the respective **Safety Logs**.

OC8B.8.1.2 It is the responsibility of the **Implementing Safety Co-ordinator**, working with their authorised site representative as appropriate, to ensure that adequate **Safety Precautions** are established and maintained, on their and/or another **System** connected to their **System**, to enable **Safety From The System** to be achieved for work to be carried out at a **Scottish User's Site** or a **Transmission Site** (as the case may be) on equipment and in relation to work which is to be identified in the relevant part of the **Permit for Work for proximity work** where the work or equipment is near to **HV Apparatus** of the **Implementing Safety Co-ordinator's System** specified by the **Requesting Safety Co-ordinator**. Reference to another **System** in this OC8B.8.1.2 shall not include the **Requesting Safety Co-ordinator's System**.

OC8B.8.1.3 In The Event Of Disagreement

In any case where the **Requesting Safety Co-ordinator** and the **Implementing Safety Co-ordinator** are unable to agree the **Location** of the **Isolation** and (if requested) **Earthing**, both shall be at the closest available points on the infeeds to the **HV Apparatus** near to which the work is to be carried out as indicated on the **Operation Diagram**.

OC8B.8.2 Implementation Of Isolation And Earthing

OC8B.8.2.1 Following the agreement of the **Safety Precautions** in accordance with OC8B.8.1, the **Implementing Safety Co-ordinator** shall then establish the agreed **Isolation** and (if required) **Earthing**.

OC8B.8.2.2 The **Implementing Safety Co-ordinator** shall confirm to the **Requesting Safety Co-ordinator** that the agreed **Isolation** and (if required) **Earthing** has been established.

OC8B.8.2.3 The **Implementing Safety Co-ordinator** shall ensure that the established **Safety Precautions** are maintained until requested to be removed by the relevant **Requesting Safety Co-ordinator**.

OC8B.8.3 Permit For Work For Proximity Work Issue Procedure

OC8B.8.3.1 Where **Safety Precautions** on another **System(s)** are being provided to enable work to be carried out at a **Scottish User's Site** or **Transmission Site** (as the case may be) on equipment where the work or equipment is in proximity to **HV Apparatus** of the **Implementing Safety Co-ordinator**, before any work commences they must be recorded by a **Permit for Work for proximity work** being issued. The **Permit for Work for proximity work** shall identify the **Implementing Safety Co-ordinator's HV Apparatus** in proximity to the required work

OC8B.8.3.2 Once the **Safety Precautions** have been established (in accordance with OC8B.8.2), the **Implementing Safety Co-ordinator** shall agree to the issue of the **Permit for Work for proximity work** with the appropriately authorised site representative of the **Requesting Safety Co-ordinator's Site**. The **Implementing Safety Co-ordinator** will inform the **Requesting Safety Co-ordinator** of the **Permit for Work for proximity work** identifying number.

OC8B.8.3.3 The appropriately authorised site representative of the **Implementing Safety Co-ordinator** shall then issue the **Permit for Work for proximity work** to the appropriately authorised site representative of the **Requesting Safety Co-ordinator**. The **Permit for Work for proximity work** will in the section dealing with the work to be carried out, be completed to identify that the work is near the **Implementing Safety Co-ordinator's HV Apparatus**. No further details of the **Requesting Safety Co-ordinator's** work will be recorded, as that is a matter for the **Requesting Safety Co-ordinator** in relation to their work.

OC8B.8.3.4 The **Requesting Safety Co-ordinator** is then free to authorise work in accordance with the requirements of the relevant internal safety procedures which apply to the **Requesting Safety Co-ordinator's Site**. This is likely to involve the issue of safety documents or other relevant internal authorisations.

OC8B.8.4 Permit For Work For Proximity Work Cancellation Procedure

OC8B.8.4.1 When the **Requesting Safety Co-ordinator** decides that **Safety Precautions** are no longer required, they will contact the relevant **Implementing Safety Co-ordinator** to effect cancellation of the associated **Permit for Work for proximity work**.

OC8B.8.4.2 The **Requesting Safety Co-ordinator** will inform the relevant **Implementing Safety Co-ordinator** of the **Permit for Work for proximity work** identifying number, and agree that the **Permit for Work for proximity work** can be cancelled. The cancellation is then effected by the appropriately authorised site representative of the **Requesting Safety Co-ordinator** returning the **Permit for Work for proximity work** to the appropriately authorised site representative of the **Implementing Safety Co-ordinator**.

OC8B.8.4.3 The **Implementing Safety Co-ordinator** is then free to arrange the removal of the **Safety Precautions**, the procedure to achieve that being entirely an internal matter for the party the **Implementing Safety Co-ordinator** is representing.

OC8B.9 LOSS OF INTEGRITY OF SAFETY PRECAUTIONS

OC8B.9.1 In any instance when any **Safety Precautions** may be ineffective for any reason, the relevant **Safety Co-ordinator** shall inform the other **Safety Co-ordinator(s)** without delay of that being the case and, if requested, of the reasons why.

OC8B.10 SAFETY LOG

OC8B.10.1 **Relevant Scottish Transmission Licensees** and **Scottish Users** shall maintain **Safety Logs** which shall be a chronological record of all messages relating to safety co-ordination under **OC8** sent and received by the **Safety Co-ordinator(s)**. The **Safety Logs** must be retained for a period of not less than six years.

APPENDIX A - RISSP-R

RECORD OF INTER-SYSTEM SAFETY PRECAUTIONS (RISSP-R)
(Requesting Safety Co-ordinator's Record)

RISSP NUMBER _____

Part 1

1.1 CIRCUIT IDENTIFICATION

Safety Precautions have been established by the Implementing Safety Co-ordinator to achieve Safety From The System on the following HV Apparatus:

_____

_____

_____

_____

_____

_____

1.2 SAFETY PRECAUTIONS ESTABLISHED

(a) ISOLATION

State the Locations(s) at which Isolation has been established on the Implementing Safety Co-ordinator's System. For each Location, identify each point of Isolation. For each point of Isolation state, the means by which the Isolation has been achieved, and whether, immobilised and Locked, Caution Notice affixed, other Safety Precautions applied, as appropriate.

_____

_____

_____

_____

_____

_____

(b) EARTHING

State the Locations(s) at which Earthing has been established on the Implementing Safety Co-ordinator's System. For each Location, identify each point of Earthing. For each point of Earthing state, the means by which the Earthing has been achieved, and whether, immobilised and Locked, other Safety Precautions applied, as appropriate.

_____

_____

_____

_____

_____

_____

1.3 ISSUE

I have received confirmation from _____ (name of Implementing Safety Co-ordinator) at _____ (Location) that the Safety Precautions identified in paragraph 1.2 have been established and that instructions will not be issued at their Location for their removal until this RISSP is cancelled.

Signed ..... (Requesting Safety Co-ordinator)

at ..... (time) on ..... (date)

PART 2

2.1 CANCELLATION

I have confirmed to _____ (name of the Implementing Safety Co-ordinator) at _____ (Location) that the Safety Precautions set out in paragraph 1.2 are no longer required and accordingly the RISSP is cancelled.

Signed ..... (Requesting Safety Co-ordinator)

at ..... (time) on ..... (date).....

APPENDIX B - RISSP-I

RECORD OF INTER-SYSTEM SAFETY PRECAUTIONS (RISSP-I)
(Implementing Safety Co-ordinator's Record)

RISSP NUMBER _____

PART 1

1.1 CIRCUIT IDENTIFICATION

Safety Precautions have been established by the Implementing Safety Co-ordinator to achieve Safety From The System on the following HV Apparatus:

_____

_____

_____

_____

_____

_____

1.2 SAFETY PRECAUTIONS ESTABLISHED

(a) ISOLATION

State the Location(s) at which isolation has been established on the Implementing Safety Co-ordinator's System. For each Location, identify each point of Isolation. For each point of Isolation state, the means by which the Isolation has been achieved, and whether, immobilised and Locked, Caution Notice affixed, other Safety Precautions applied, as appropriate.

_____

_____

_____

_____

_____

_____

(b) EARTHING

State the Location(s) at which Earthing has been established on the Implementing Safety Co-ordinator's System. For each Location, identify each point of Earthing. For each point of Earthing state, the means by which the Earthing has been achieved, and whether, immobilised and Locked, other Safety Precautions applied, as appropriate.

_____

_____

_____

_____

_____

_____

1.3 ISSUE

I confirmed to _____ (name of Requesting Safety Co-ordinator) at _____ (Location) that the Safety Precautions identified in paragraph 1.2 have been established and that instructions will not be issued at my Location for their removal until this RISSP is cancelled.

Signed ..... (Implementing Safety Co-ordinator)

at ..... (time) on ..... (date)

PART 2

2.1 CANCELLATION

I have received confirmation from _____ (name of the Requesting Safety Co-ordinator) at _____ (Location) that the Safety Precautions set out in paragraph 1.2 are no longer required and accordingly the RISSP is cancelled.

Signed ..... (Implementing Safety Co-ordinator)

at ..... (time) on ..... (date)

(Note: This form to be of a different colour from RISSP-R.)

APPENDIX C - FLOWCHARTS

APPENDIX C1 - RISSP ISSUE PROCESS

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

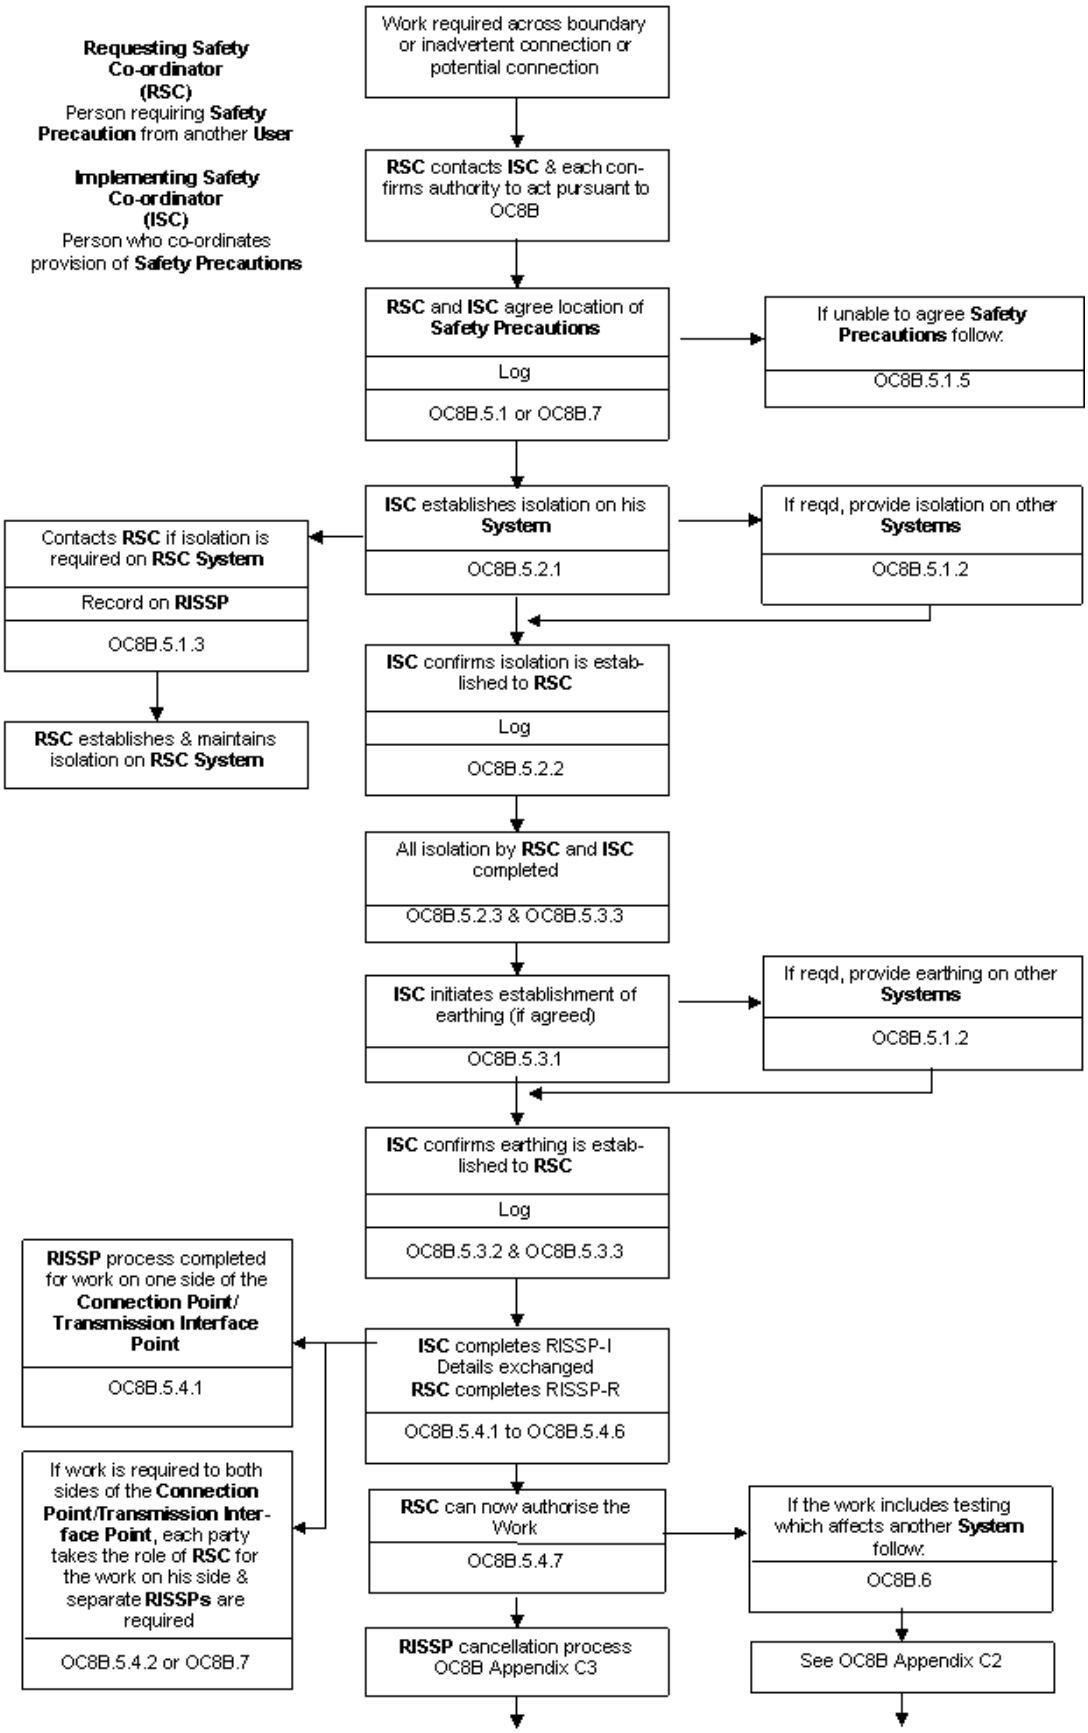

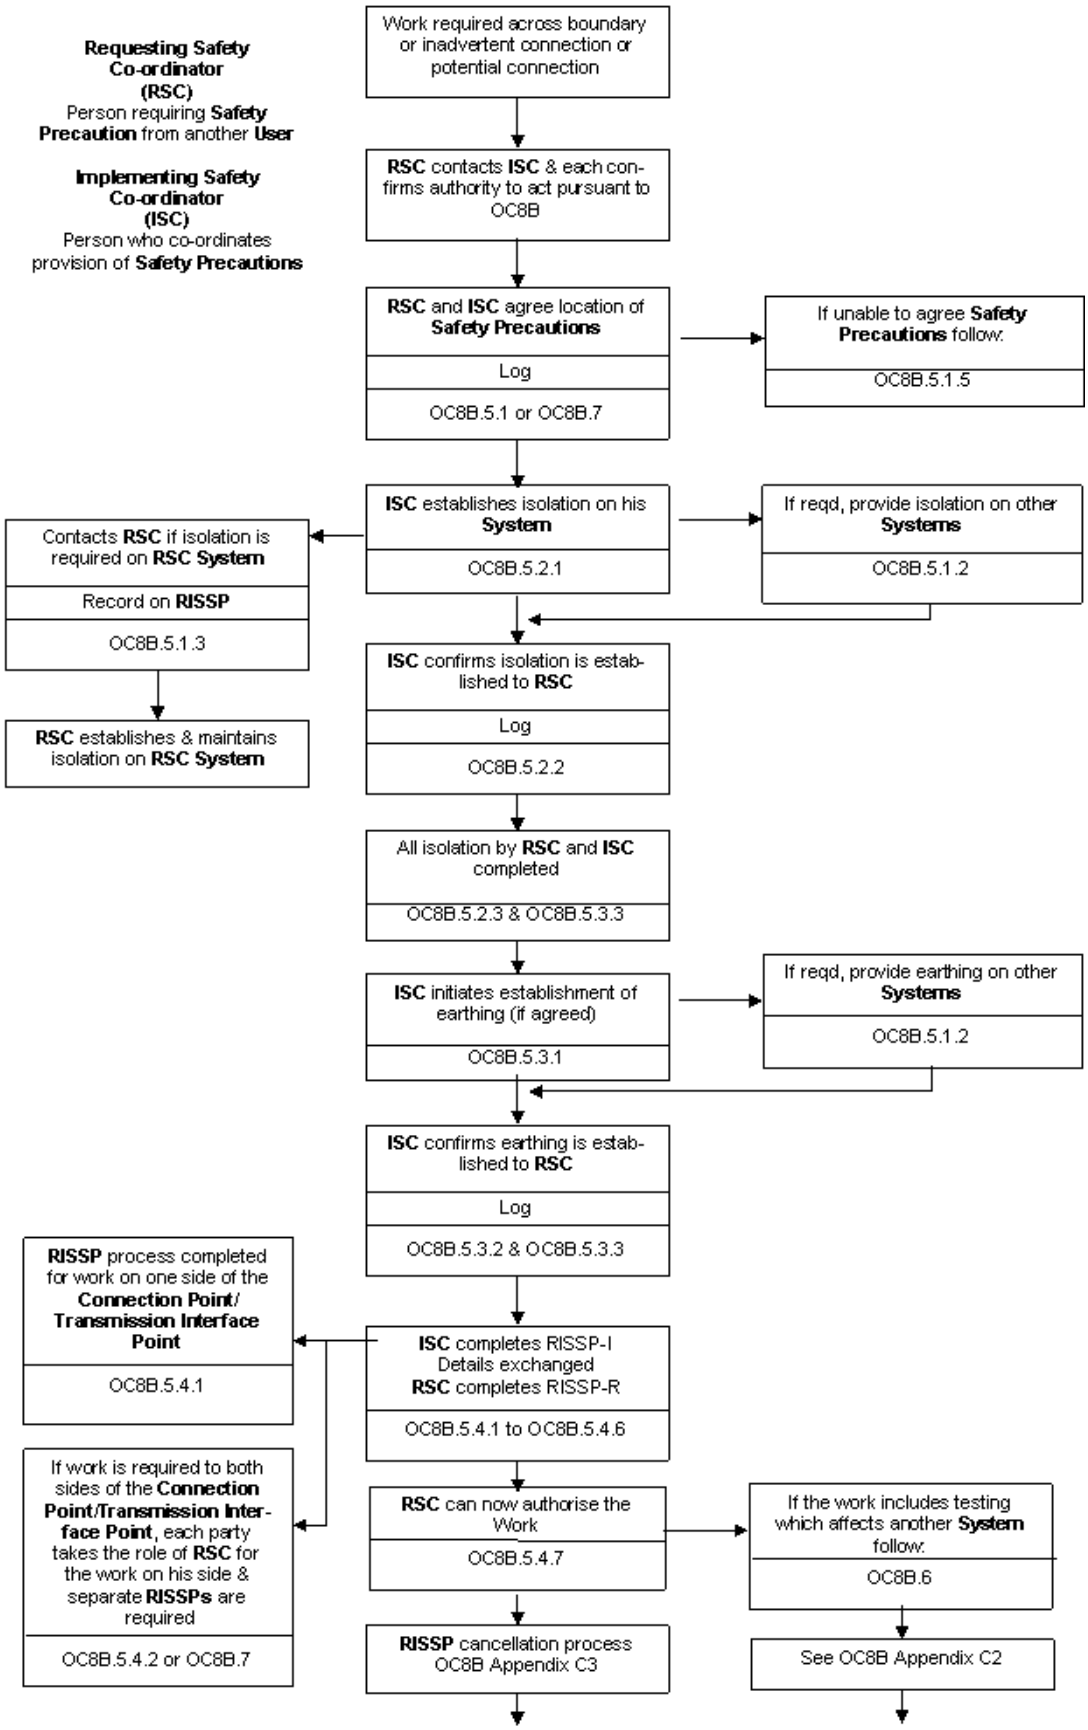
Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**
Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**
Work required across boundary or inadvertent connection or potential connection
RSC contacts **ISC** & each confirms authority to act pursuant to OC8B
RSC and **ISC** agree location of **Safety Precautions**
Log
OC8B.5.1 or OC8B.7
If unable to agree **Safety Precautions** follow:
OC8B.5.1.5
ISC establishes isolation on his **System**
OC8B.5.2.1
If reqd, provide isolation on other **Systems**
OC8B.5.1.2
Contacts **RSC** if isolation is required on **RSC System**
Record on **RISSP**
OC8B.5.1.3
RSC establishes & maintains isolation on **RSC System**
ISC confirms isolation is established to **RSC**
Log
OC8B.5.2.2
All isolation by **RSC** and **ISC** completed
OC8B.5.2.3 & OC8B.5.3.3
ISC initiates establishment of earthing (if agreed)
OC8B.5.3.1
If reqd, provide earthing on other **Systems**
OC8B.5.1.2
ISC confirms earthing is established to **RSC**
Log
OC8B.5.3.2 & OC8B.5.3.3
RISSP process completed for work on one side of the **Connection Point/ Transmission Interface Point**
OC8B.5.4.1
ISC completes RISSP-I
Details exchanged
RSC completes RISSP-R
OC8B.5.4.1 to OC8B.5.4.6
If work is required to both sides of the **Connection Point/Transmission Interface Point**, each party takes the role of **RSC** for the work on his side & separate **RISSPs** are required
OC8B.5.4.2 or OC8B.7
RSC can now authorise the Work
OC8B.5.4.7
If the work includes testing which affects another **System** follow:
OC8B.6
RISSP cancellation process OC8B Appendix C3
See OC8B Appendix C2

APPENDIX C2 - TESTING PROCESS

Where testing affects another Safety Co-ordinator's System

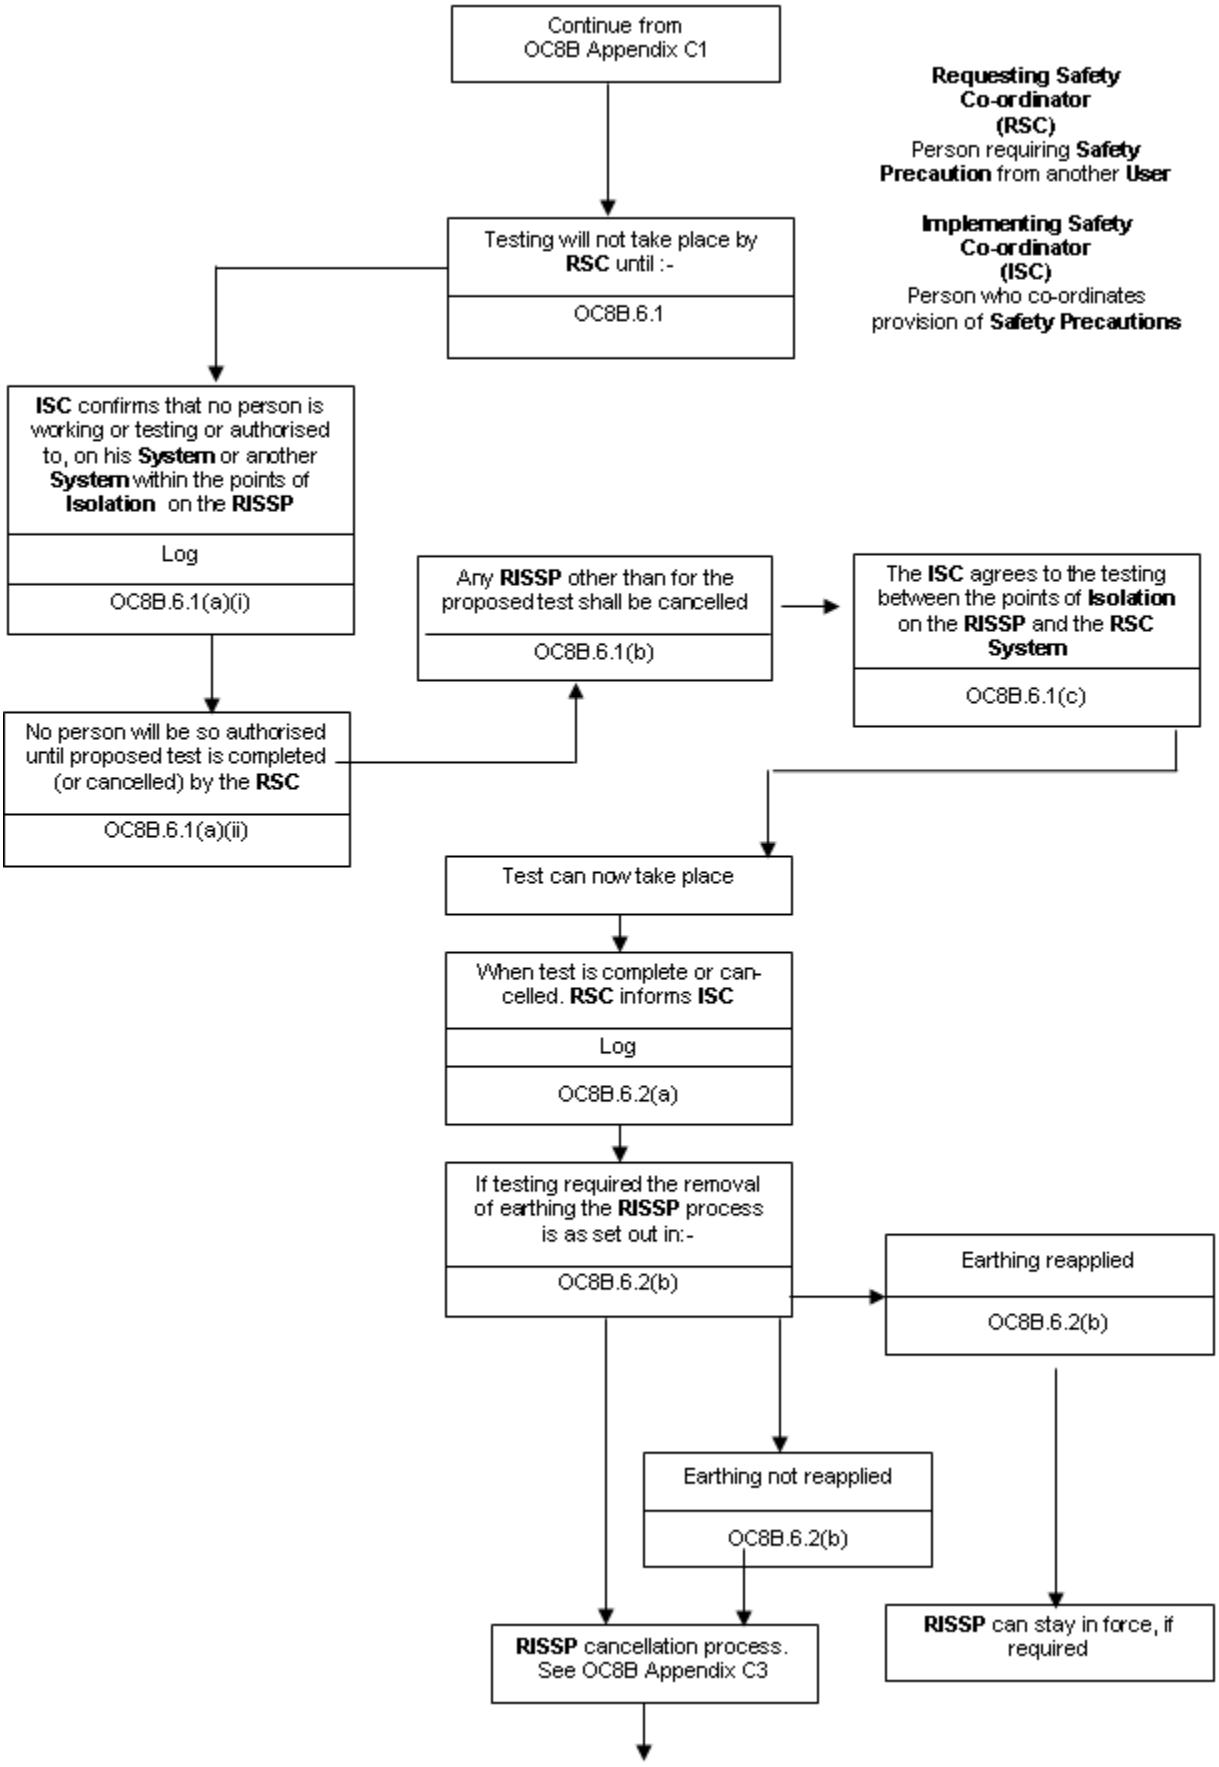

Where testing affects another Safety Co-ordinator's System

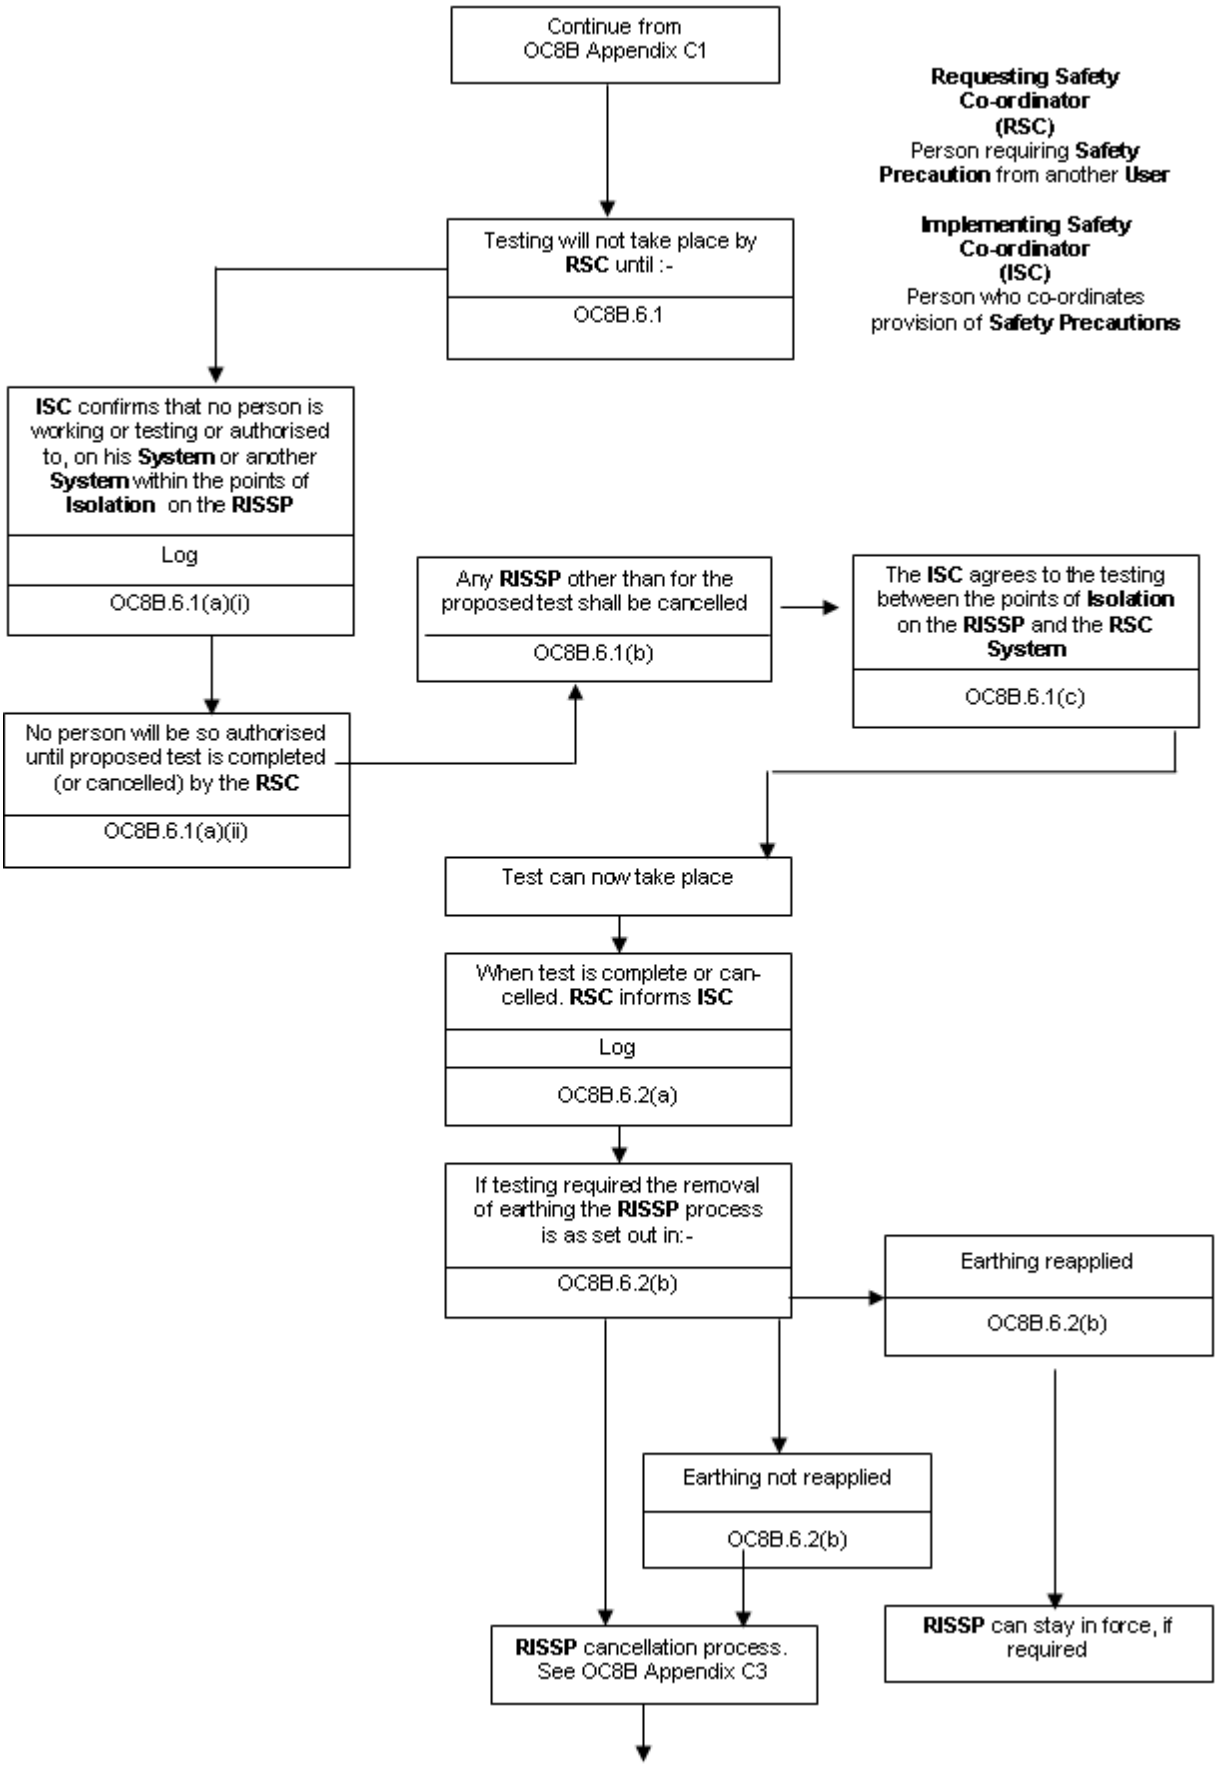

APPENDIX C3 - RISSP CANCELLATION PROCESS

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

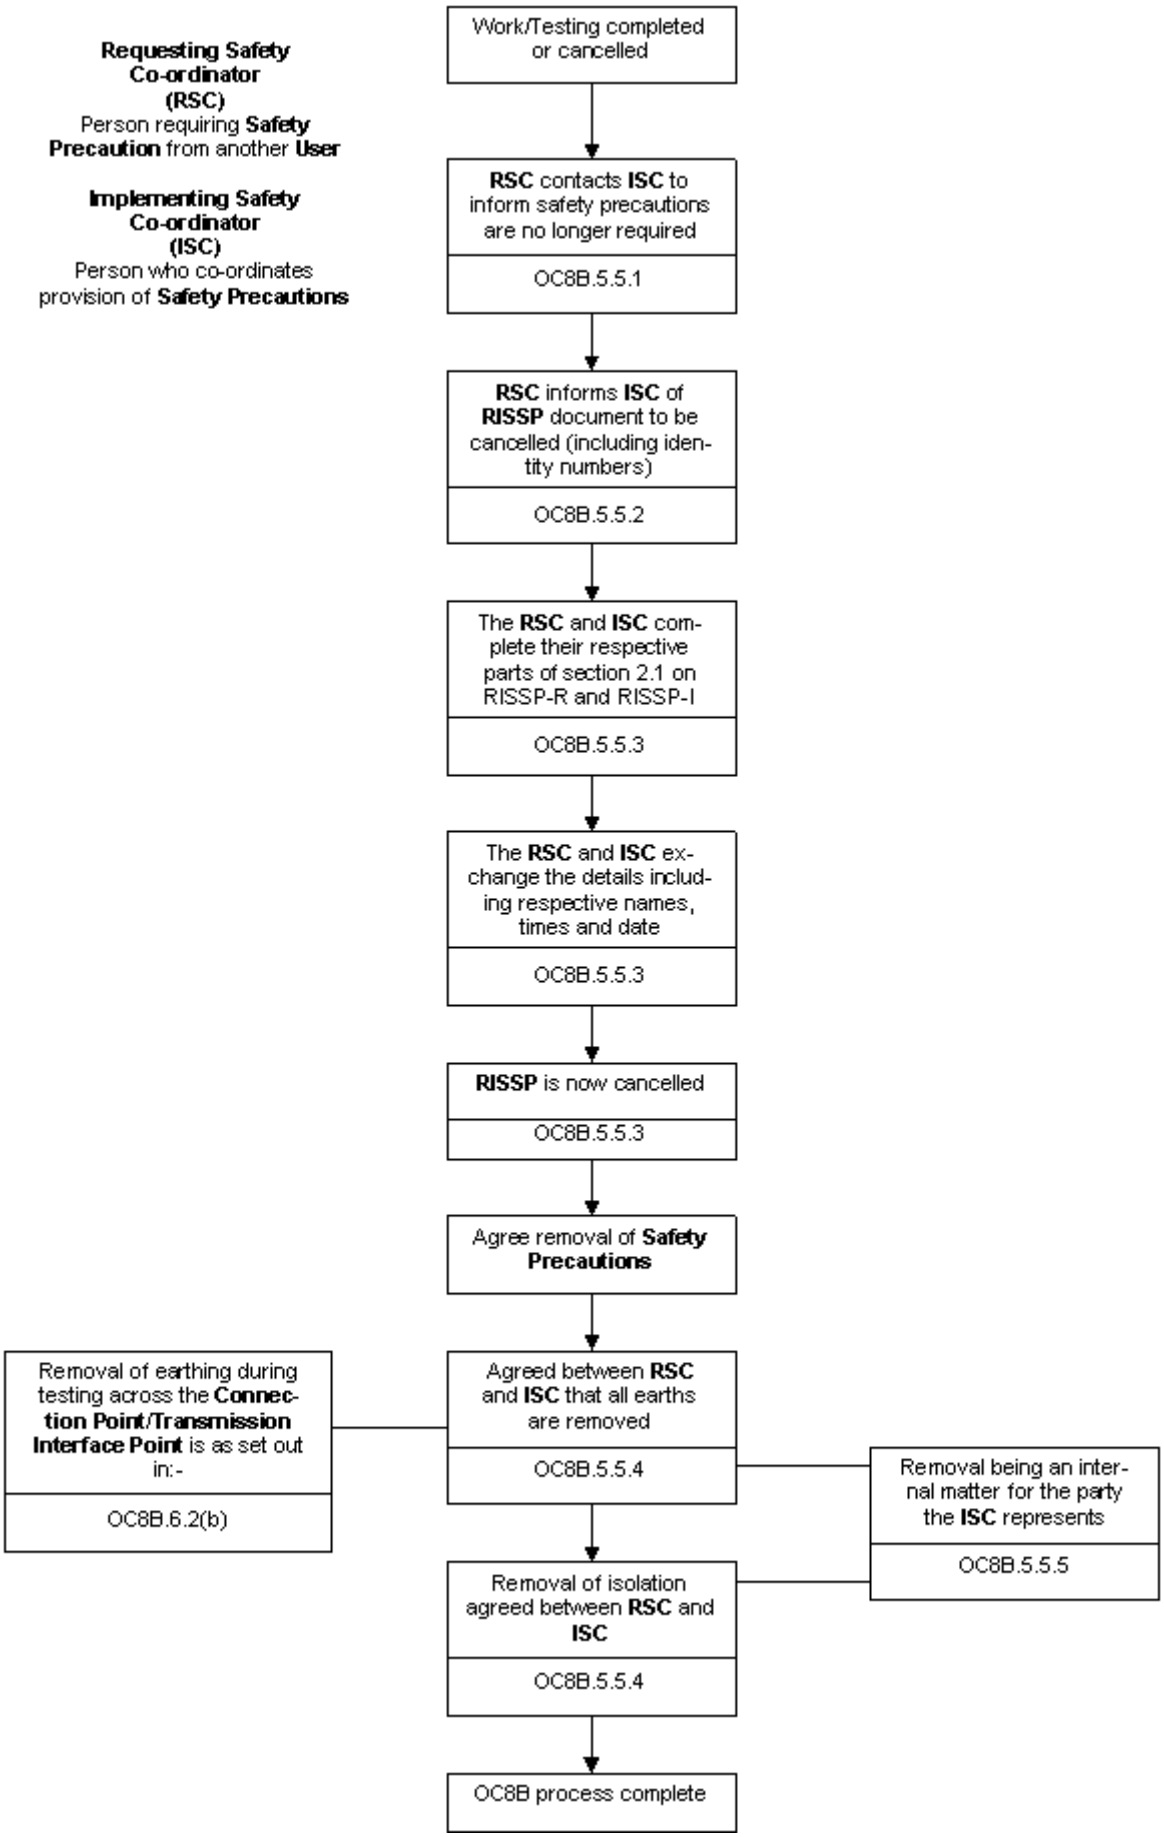

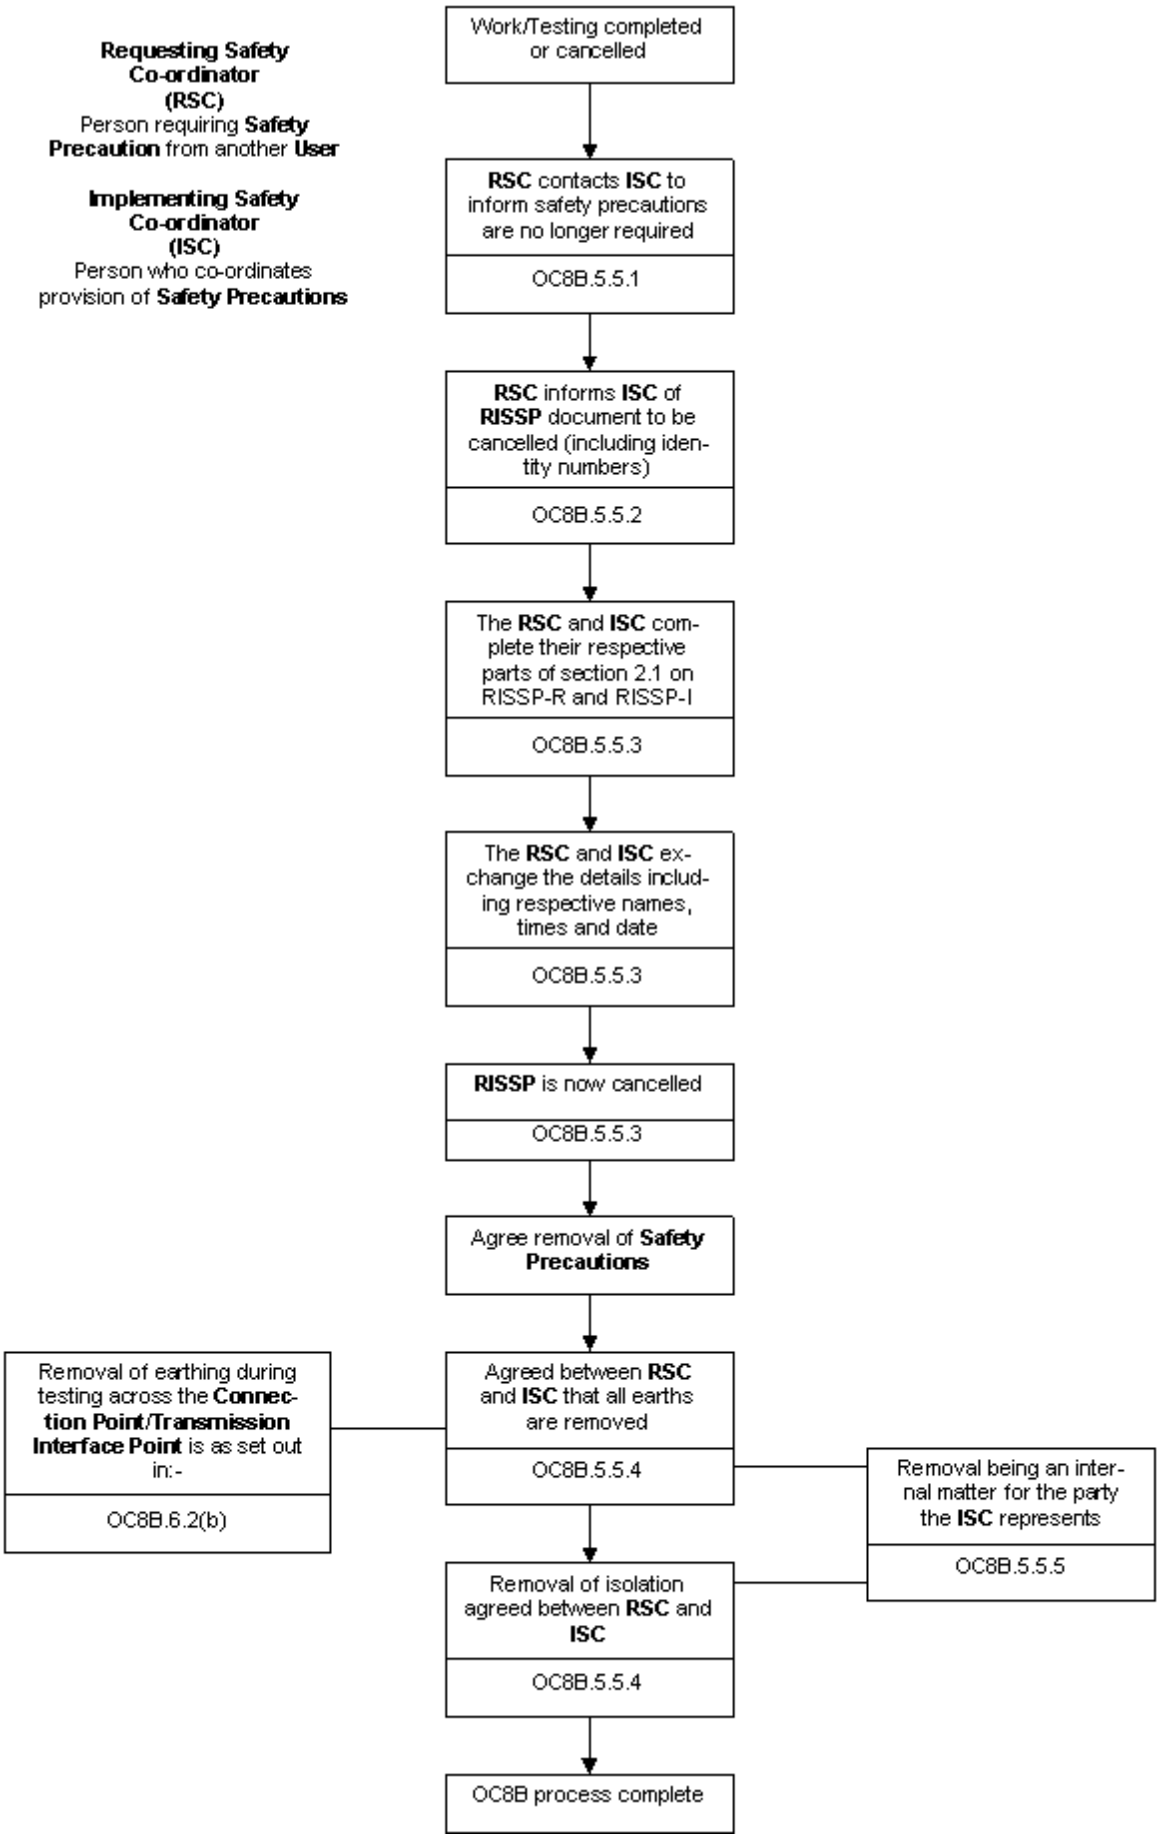
Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**
Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**
Work/Testing completed or cancelled
RSC contacts **ISC** to inform safety precautions are no longer required
OC8B.5.5.1
RSC informs **ISC** of **RISSP** document to be cancelled (including identity numbers)
OC8B.5.5.2
The **RSC** and **ISC** complete their respective parts of section 2.1 on RISSP-R and RISSP-I
OC8B.5.5.3
The **RSC** and **ISC** exchange the details including respective names, times and date
OC8B.5.5.3
RISSP is now cancelled
OC8B.5.5.3
Agree removal of **Safety Precautions**
Agreed between **RSC** and **ISC** that all earths are removed
OC8B.5.5.4
Removal of earthing during testing across the **Connection Point/Transmission Interface Point** is as set out in:-
OC8B.6.2(b)
Removal being an internal matter for the party the **ISC** represents
OC8B.5.5.5
Removal of isolation agreed between **RSC** and **ISC**
OC8B.5.5.4
OC8B process complete

APPENDIX C4 - PROCESS FOR WORKING NEAR TO SYSTEM EQUIPMENT

Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**

Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**

Proximity
Nearness or Closeness to **HV** Equipment

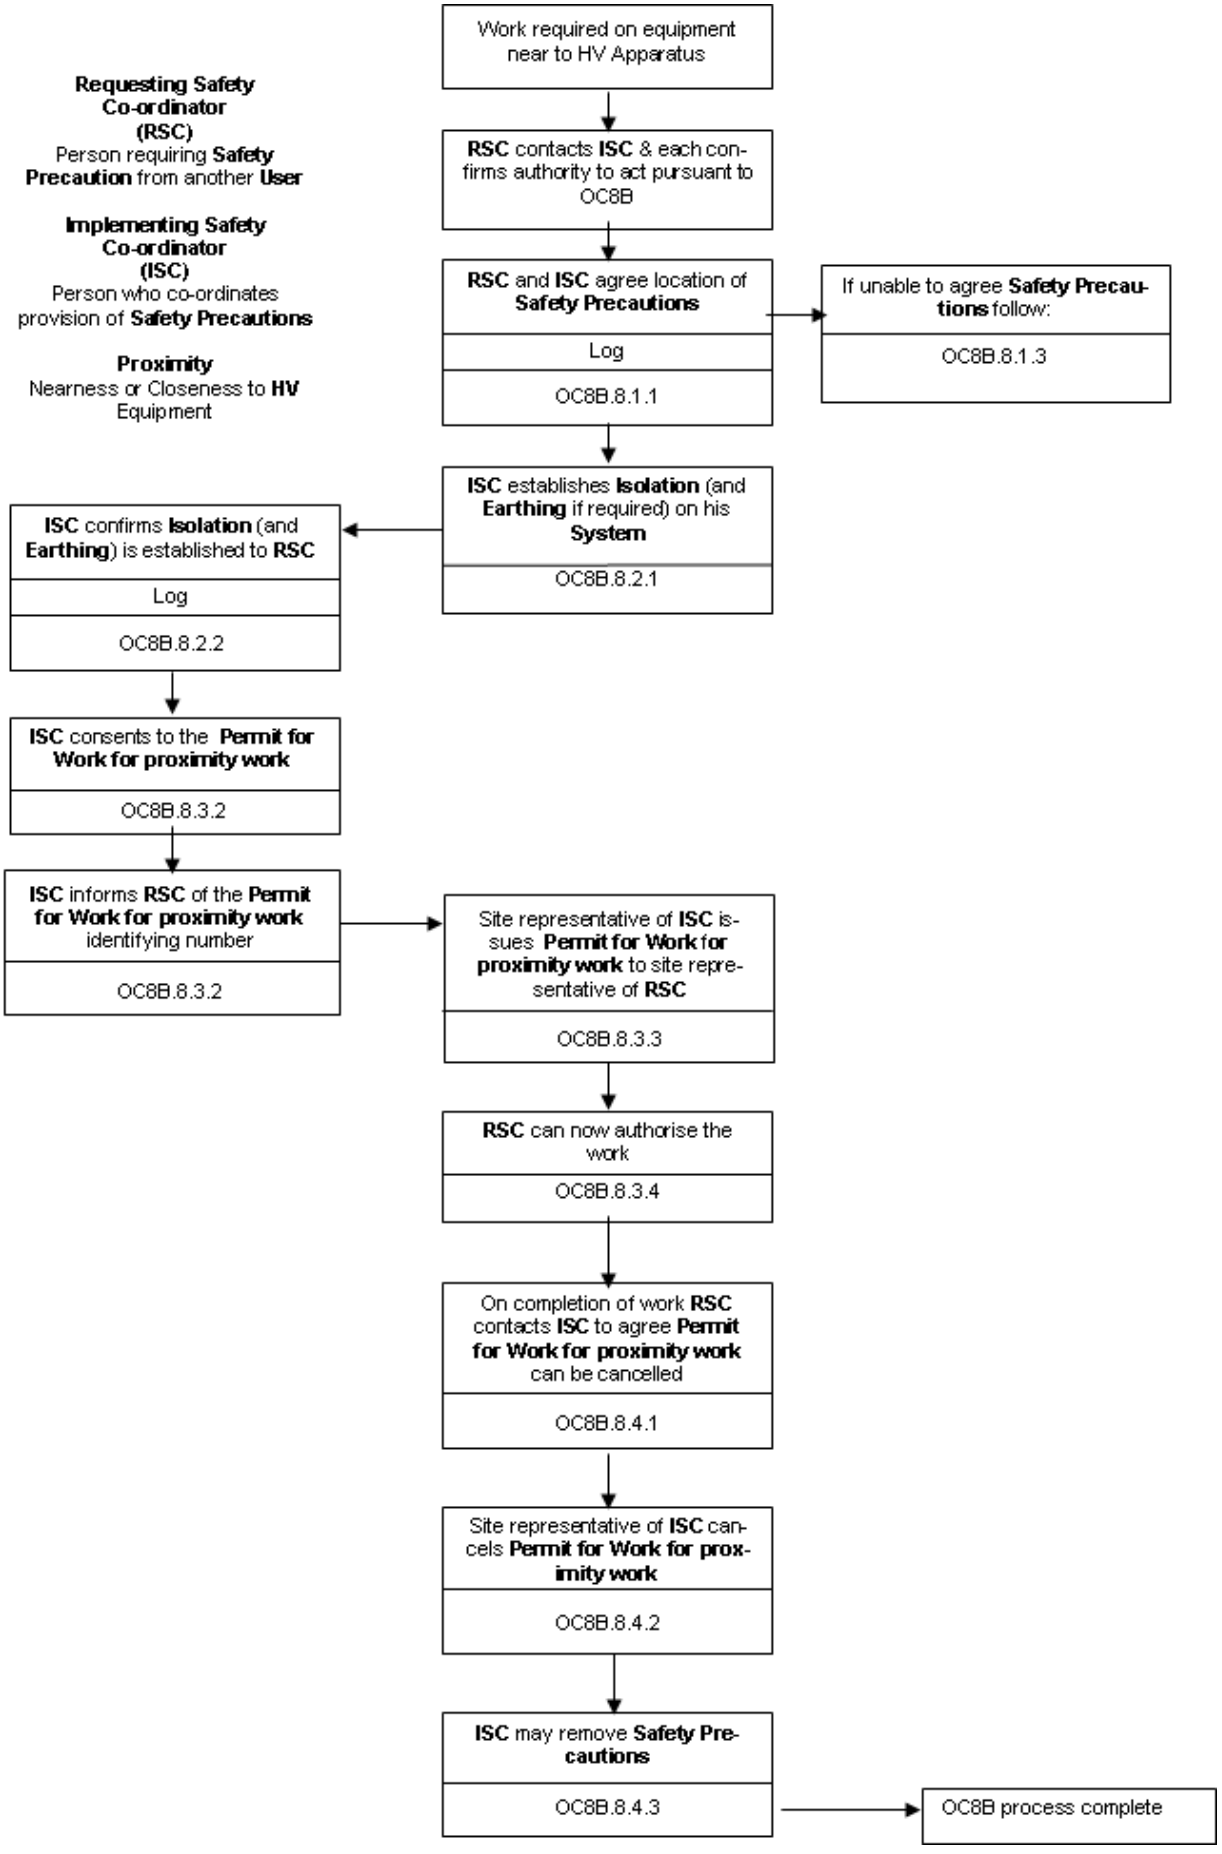

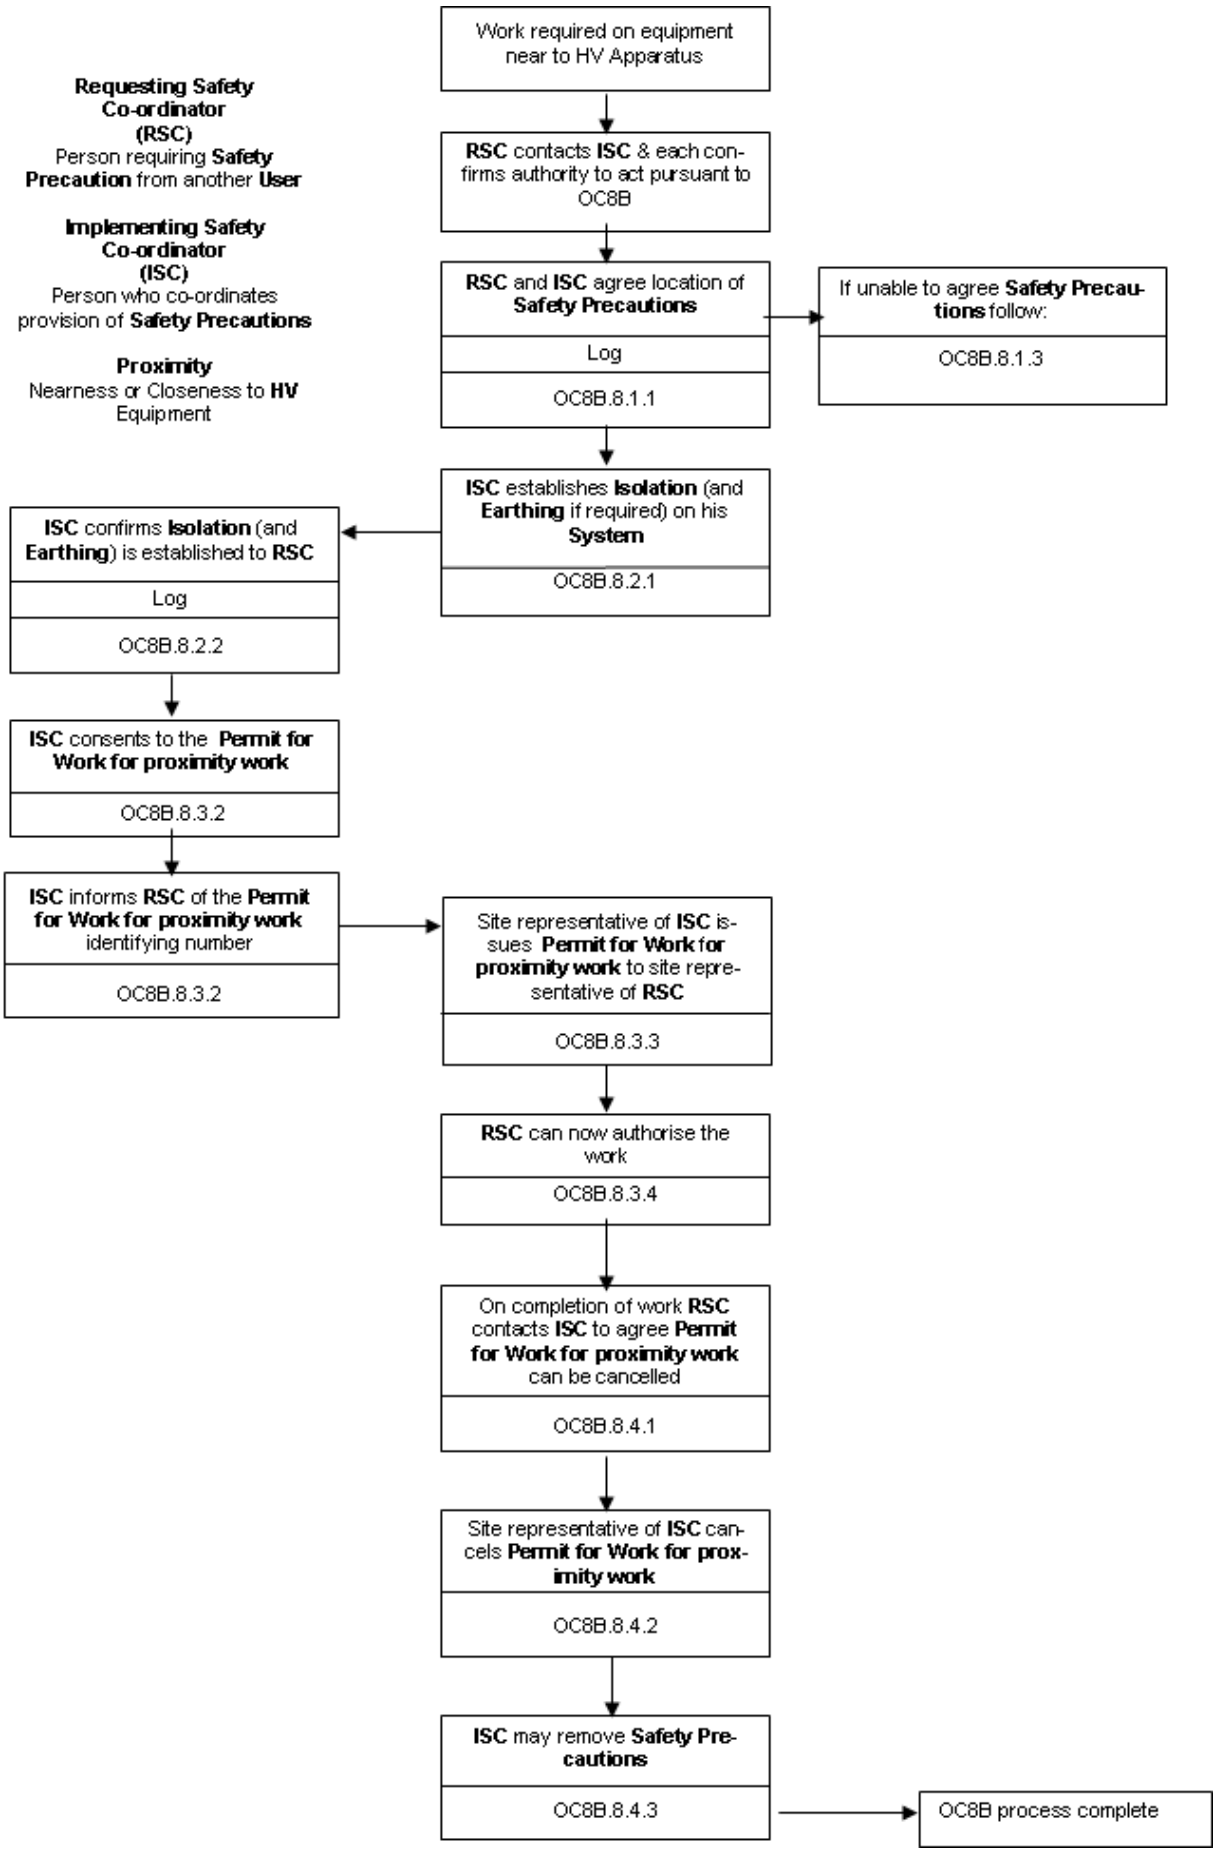
Requesting Safety Co-ordinator (RSC)
Person requiring **Safety Precaution** from another **User**
Implementing Safety Co-ordinator (ISC)
Person who co-ordinates provision of **Safety Precautions**
Proximity
Nearness or Closeness to **HV** Equipment
Work required on equipment near to HV Apparatus
RSC contacts **ISC** & each confirms authority to act pursuant to OC8B
RSC and **ISC** agree location of **Safety Precautions**
Log
OC8B.8.1.1
If unable to agree **Safety Precautions** follow:
OC8B.8.1.3
ISC establishes **Isolation** (and **Earthing** if required) on his **System**
OC8B.8.2.1
ISC confirms **Isolation** (and **Earthing**) is established to **RSC**
Log
OC8B.8.2.2
ISC consents to the **Permit for Work for proximity work**
OC8B.8.3.2
ISC informs **RSC** of the **Permit for Work for proximity work** identifying number
OC8B.8.3.2
Site representative of **ISC** issues **Permit for Work for proximity work** to site representative of **RSC**
OC8B.8.3.3
RSC can now authorise the work
OC8B.8.3.4
On completion of work **RSC** contacts **ISC** to agree **Permit for Work for proximity work** can be cancelled
OC8B.8.4.1
Site representative of **ISC** cancels **Permit for Work for proximity work**
OC8B.8.4.2
ISC may remove **Safety Precautions**
OC8B.8.4.3
OC8B process complete

APPENDIX D - NOT USED

Not Used

APPENDIX E - FORM OF PERMIT TO WORK

Scottish & Southern Energy plc

PERMIT-TO-WORK No. …….

---

1. ISSUE

To ……..……..……..……..

The following High Voltage Apparatus has been made safe in accordance with the Operational Safety Rules for the work detailed on this Permit-to-Work to proceed:

……..…..

……..…..

……..…..

TREAT ALL OTHER APPARATUS AS LIVE

Circuit Main Earths are applied at: ……..……..……..……..

……..…..

……..…..

……..…..

Other precautions (see Operational Safety Rules 3.2.1(b), 4.6.2(c) and 5.5.3), and any special instructions:

……..…..

……..…..

……..…..

The following work is to be carried out: ……..……..……..……..

……..…..

……..…..

……..…..

Circuit Identification Issued: Colour …..…….. No. of wristlets ……..… No. of step bolts ……..……

Name: (print): ……..…..….. Signature: ……..…..…… Time: ……..…….. Date: ……..……

---

2. RECEIPT

I accept responsibility for carrying out the work on the Apparatus detailed on this Permit-to-Work, applying additional earths as necessary. No attempt will be made by me, or by the persons under my charge, to work on any other Apparatus.

Name: (print): ……..…..….. Signature: ……..…..…… Time: ……..…….. Date: ……..……

Circuit Identification Equipment Checked as above (Initials): ……

---

3. CLEARANCE

All persons under my control have been withdrawn and warned that it is no longer safe to work on the Apparatus detailed on this Permit-to Work.

All gear, tools and additional earths have/have not* been removed. The works is/is not* complete.

All circuit identification equipment issued as above has been returned

Name: (print): ……..…..….. Signature: ……..…..…… Time: ……..…….. Date: ……..……

** Delete where not applicable*

---

4. CANCELLATION

This Permit-to-Work is cancelled.

Name: (print): ……..…..….. Signature: ……..…..…… Time: ……..…….. Date: ……..……

Scottish Power

PERMIT FOR WORK

	No.
KEY SAFE	No.

1. (i) LOCATION ……

……

(ii) PLANT/APPARATUS IDENTIFICATION ……

……

(iii) WORK TO BE DONE ……

……

……

……

---

2. (i) PRECAUTIONS TAKEN TO ACHIEVE SAFETY FROM THE SYSTEM: State points at which **Plant/Apparatus** has been Isolated and specify position(s) of **Earthing Devices** applied. State actions taken to avoid **Danger** by draining, venting, purging and containment or dissipation of stored energy.

……

……

……

……

……

……

……

……

……

Caution Notices have been affixed to all points of isolation

(ii) FURTHER PRECAUTIONS TO BE TAKEN DURING THE COURSE OF WORK TO AVOID SYSTEM DERIVED HAZARDS

……

……

……

……

……

I have confirmed with the **Control Person(s)*** …… that precautions in Section 2(i) have been carried out and that the **Control Person(s)** will maintain these until this **Permit for Work** is cancelled. I certify that the precautions in Section 2(i) together with the precautions in Section 2(ii) are adequate to provide **Safety from the System** in respect of the work in Section 1.

This **Permit for Work** must only be transferred under the **Personal Supervision** of a **Senior Authorised Person*** ……..

Signed …… being a **Senior Authorised Person**. Time: …….. Date: …….

---

3. ISSUE

(i) **Key Safe Key** (No.)* …..…. (ii) **Earthing Schedule*** ……... (iii) **Portable Drain Earths** (No. off)* ……

(iv) **Selected Person's** Report (No.)* …….. (v) **Circuit Identification** Flags (No. off)* ……

(vi) **Circuit Identification** Wristlets (No. off)* and Colours/Symbols ……

Signed …….. being the **Senior Authorised Person** responsible

for the issue of this **Permit for Work** Time: …… Date: ……

---

4. RECEIPT

I understand and accept my responsibilities under the ScottishPower Safety Rules as recipient of this **Permit for Work** and acknowledge receipt of the items in Section 3.

Signed …….. Name (Block Letters) ……..

being a **Competent Person** in the employ of Firm/Dept …… Time ……. Date ……

TRANSFER RECORD

PART 1		**PART 2**	**PART 3**			
Person surrendering Document	Time Date	**Senior Authorised Person** receiving suspended Document *	†**Person** receiving reissued Document		**Senior Authorised Person** reissuing document	Time Date
			Signature	Name (Block Letters)		

†Signature of **Person** receiving re-issued Document in accordance with conditions detailed in Section 4.

---

5. CLEARANCE: I certify that all persons working under this **Permit for Work** have been withdrawn from, and warned not to work on, the **Plant/Apparatus** in Section 1. All gears, tools, **Drain Earths** and loose material have been removed and guards and access doors have been replaced, except for:

……

……

……

Signed ……being the **Competent Person** responsible for

clearing this **Permit for Work** Time …… Date ……..

---

6. CANCELLATION: I certify that all items issued under Section 3 have been accounted for and the **Control Person(s)*** …… informed of the cancellation and of any restrictions on returning the **Plant/Apparatus** to service.

Signed …… being the **Senior Authorised Person** responsible for

cancelling this **Permit for Work**. Time …… Date …….

---

*N/A if Not Applicable

< END OF OPERATING CODE NO. 8 APPENDIX 2 >

OPERATING CODE NO. 9
(OC9)

CONTINGENCY PLANNING

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC9.1 INTRODUCTION 2

OC9.2 OBJECTIVE 3

OC9.3 SCOPE 3

OC9.4 SYSTEM RESTORATION 4

OC9.4.1 - OC9.4.4 Total Shutdown And Partial Shutdown 4

OC9.4.5 Contribution to System Restoration 4

OC9.5 RE-SYNCHRONISATION OF POWER ISLANDS 16

OC9.5.2 Island loading and generation data management 16

OC9.5.3 Choice Of Option 18

OC9.5.4 Agreeing Procedures 19

OC9.6 JOINT SYSTEM INCIDENT PROCEDURE 21

APPENDIX 1 – SYSTEM RESTORATION REGIONS 23

OC9.1 INTRODUCTION

Operating Code No.9 ("**OC9**") covers the processes and procedures by which **The Company** in coordination and liaison with **Users**, will restore the **Total System** or parts of the **System** following a **Total Shutdown** or **Partial Shutdown**.

OC9.1.1 Approach to System Restoration

The Company is obliged through its Licence to achieve **System Restoration** within the parameters of the **Electricity System Restoration Standard**.

Electricity **System Demand** in the context of the "**Electricity System Restoration Standard**", is considered by **The Company** to be the forecast peak **National Demand** which would have occurred within the 24 hour period following the start of the **Total Shutdown** or **Partial Shutdown** had the **Total Shutdown** or **Partial Shutdown** not occurred. Under the **Electricity System Restoration Standard**, 60% of peak **National Demand** is to be restored across all **System Restoration Regions** in 24 hours and 100% peak **National Demand** is to be restored across **System Restoration Regions** in 5 days.

Following a **Total Shutdown** or **Partial Shutdown**, there are two ways in which the **Total System** (or the disconnected part of the **System** in the case of a **Partial Shutdown**) can be re-established. These being a top-down approach using **Local Joint Restoration Plans** or a bottom-up approach using **Distribution Restoration Zone Plans**.

Any **Local Joint Restoration Plan** and/or **Distribution Restoration Zone Plan** comprising common **Transmission Licensees's**, **Network Operator's** or **Restoration Contractor's** assets cannot be activated at the same time. However, this would not preclude a **Local Joint Restoration Plan** or **Distributed Restoration Zone Plan** from being activated at the same site(s) where there is segregation between them.

OC9.1.2 Re-Synchronisation of Power Islands

Following the establishment of **Power Islands** (either through the implementation of **Local Joint Restoration Plans** or **Distribution Restoration Zone Plans**), **The Company** will then co-ordinate the **Re-Synchronisation** of parts of the **Total System** which have become **Out of Synchronism** with each other irrespective of whether or not a **Total Shutdown** or **Partial Shutdown** has occurred.

OC9.1.3 Joint System Incident Procedure

A **Joint System Incident** procedure requires the establishment of communication routes and arrangements between senior management representatives of **The Company** and **Users** involved in, or who may be involved in, an actual or potential serious or widespread disruption to the **Total System** or a part of the **Total System**, which requires, or may require, urgent managerial response, day or night, but which does not fall within the provisions of OC9.1.5.

OC9.1.4 **Relevant Transmission Licensees** shall comply with OC9.4 and OC9.5 as provided for in STCP 06-1 and any relevant **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan** or OC9 **De-Synchronised Island Procedure** where and to the extent that such matters apply to them.

OC9.1.5 Directions Issued by the Secretary of State

It should be noted that under section 96 of the **Act**, the **Secretary of State** may give directions to **The Company** and/or any **Generator** and/or any **Supplier**, for the purpose of "mitigating the effects of any civil emergency which may occur" (ie. for the purposes of planning for a civil emergency); a civil emergency is defined in the **Act** as "any natural disaster or other emergency which, in the opinion of the **Secretary of State**, is or may be likely to disrupt electricity supplies". Under the Energy Act 1976, the **Secretary of State** has powers to make orders and give directions controlling the production, supply, acquisition or use of electricity, where an Order in Council under section 3 is in force declaring that there is an actual or imminent emergency affecting electricity supplies. In the event that any such directions are given, or orders made under the **Energy Act 1976**, the provisions of the **Grid Code** will be suspended in so far as they are inconsistent with them.

OC9.2 OBJECTIVE

The overall objectives of **OC9** are:

OC9.2.1 To achieve the requirements of the **Electricity System Restoration Standard**, taking into account the capability of **Restoration Contractor's Plant** and **Apparatus** as well as other **Users' Plant** and **Apparatus** capabilities, including **Embedded Generating Units** and **External Interconnections** and the operational constraints of the **Total System**.

OC9.2.2 To initiate the restoration process through the activation of **Local Joint Restoration Plans** and/or **Distribution Restoration Zone Plans** followed by the subsequent **Re-Synchronisation** and expansion of **Power Islands**.

OC9.2.3 To achieve the **Re-Synchronisation** of parts of the **Total System** which have become **Out of Synchronism** with each other.

OC9.2.4 To ensure that communication routes and arrangements are available to enable senior management representatives of **The Company** and **Users**, who are authorised to make binding decisions on behalf of **The Company** or the relevant **User**, as the case may be, to communicate with each other in the situation described in OC9.1.3.

OC9.2.5 To describe the role that **The Company**, **Relevant Transmission Licensees**, **Network Operators** and **Restoration Contractors** may have in the restoration processes as detailed in the relevant **OC9 De-Synchronised Island Procedures**, **Local Joint Restoration Plans** and **Distribution Restoration Zone Plans**.

OC9.2.6 To identify and address as far as possible the events and processes necessary to enable the restoration of the **Total System**, after a **Total Shutdown** or **Partial Shutdown**. This is likely to require the following key processes to be implemented, typically, but not necessarily, in the order given below:

(i) Selectively implement **Local Joint Restoration Plans**

(ii) Selectively implement **Distribution Restoration Zone Plans** in conjunction with **Network Operators**

(iii) Expand **Power Islands** to supply **Power Stations**

(iv) Expand and merge **Power Islands** leading to **Total System** energisation

(v) Selectively reconnect **Demand**

(vi) Facilitate and co-ordinate returning the **Total System** back to normal operation

(vii) Resumption of the **Balancing Mechanism** if suspended in accordance with the provisions of the **BSC**.

OC9.3 SCOPE

OC9.3.1 **OC9** applies to **The Company** and to **Users**, which in **OC9** means:-

(a) **Generators**;

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **HVDC System Owners**;

(e) **DC Converter** owners including **DC Converter Station** owners

(f) **Restoration Contractors**; and

(h) **Relevant Transmission Licensees** as provided for in the **STC**.

OC9.3.2 The procedure for the establishment of emergency support/contingency planning between **The Company** and **Externally Interconnected System Operators** is set out in the **Interconnection Agreement** with each **Externally Interconnected System Operator**.

OC9.4 SYSTEM RESTORATION

Total Shutdown and Partial Shutdown

OC9.4.1 A "**Total Shutdown**" is the situation existing when all generation has ceased and there is no electricity supply from **External Interconnections**. Therefore, the **Total System** has shutdown with the result that it is not possible for the **Total System** to begin to function again without **The Company's** directions relating to **System Restoration**.

OC9.4.2 A "**Partial Shutdown**" is the same as a **Total Shutdown** except that all generation has ceased in a separate part of the **Total System** and there is no electricity supply from **External Interconnections** or other parts of the **Total System** to that part of the **Total System**. Therefore, that part of the **Total System** is shutdown with the result that it is not possible for that part of the **Total System** to begin to function again without **The Company's** directions relating to **System Restoration**.

OC9.4.3 During a **Total Shutdown** or **Partial Shutdown** and during the subsequent recovery, the **Licence Standards** may not apply and the **Total System** may be operated outside normal voltage and **Frequency** standards.

OC9.4.4 In a **Total Shutdown** and in a **Partial Shutdown** and during the subsequent recovery, it is likely to be necessary for **The Company** to issue **Emergency Instructions** in accordance with BC2.9.

OC9.4.5 Contribution to System Restoration

The Company will initially start to restore the **System** following a **Total Shutdown** or **Partial Shutdown** by issuing instructions directly to **Restoration Contractors** through one or more **Local Joint Restoration Plans** as provided for in OC9.4.5.1 and/or by instructing **Network Operators** to activate one or more **Distribution Restoration Zone Plans** as provided for in OC9.4.5.2.

OC9.4.5.1 Local Joint Restoration

OC9.4.5.1.1 **Local Joint Restoration Plans** are dependent upon **Anchor Restoration Contractors** who upon instruction from **The Company** (or **Relevant Transmission Licensee** in Scotland), shall **Start-Up** their **Anchor Plant** from **Shutdown** and energise a part of the **Total System**, within two hours, without an external electrical power supply. **Local Joint Restoration Plans** may also be dependent upon **Top Up Restoration Contractors**. A **Local Joint Restoration Plan** may include more than one **Restoration Contractor** whose **Plant** has an **Anchor Plant Capability** or **Top Up Capability**. When a **Local Joint Restoration Plan** is activated, only one **Restoration Contractor** will operate as the **Anchor Generator** with the other **Restoration Contractors** potentially taking roles as **Top-Up Restoration Contractors**. The **Local Joint Restoration Plan** will detail how these responsibilities will be allocated.

OC9.4.5.1.2 **Local Joint Restoration Plans** will be produced jointly by **The Company**, **Relevant Transmission Licensees**, relevant **Restoration Contractors** and relevant **Network Operators** in accordance with the provisions of OC9.4.7.6.1(a). The **Local Joint Restoration Plan** will detail the agreed method and procedure by which **Anchor Plant** will energise part of the **Total System** and in combination with **Top Up Restoration Plant** (where necessary) to meet complementary local **Demand** so as to form a **Power Island**.

OC9.4.5.2 Distribution Restoration Zones

OC9.4.5.2.1 **Distribution Restoration Zone Plans** are dependent upon **Anchor Restoration Contractors** who, upon instruction from relevant **Network Operators**, shall **Start-Up** their **Anchor Plant** from **Shutdown** and energise a part of a **Network Operator's System** within eight hours, without an external electrical power supply. A **Distribution Restoration Zone Plan** may also be dependent upon **Top Up Restoration Contractors**.

OC9.4.5.2.2 For each **Distribution Restoration Zone**, a **Distribution Restoration Zone Plan** will be produced jointly by the **Network Operator**, **The Company**, **Relevant Transmission Licensee**, and **Restoration Contractors** in accordance with the provisions of OC9.4.7.6.1(b). The **Distribution Restoration Zone Plan** will detail the agreed method and procedure by which an **Anchor Plant** will energise part of the **Total System** and in combination with **Top Up Restoration Plant** (where necessary) meet complementary local **Demand** so as to form a **Power Island**. A **Distribution Restoration Zone Plan** may include more than one **Restoration Contractor** whose **Plant** has an **Anchor Plant Capability** or **Top Up Restoration Capability**. When a **Distribution Restoration Zone Plan** is activated, only one **Restoration Contractor** will operate as the **Anchor Restoration Contractor** with the other **Restoration Contractors** potentially taking roles as **Top-Up Restoration Contractors**. The **Distribution Restoration Zone Plan** will detail how these responsibilities will be allocated.

OC9.4.6 Situations requiring System Restoration

In the event of a **Total Shutdown** or **Partial Shutdown**, **The Company** will, as soon as reasonably practical, inform **Users** (or, in the case of a **Partial Shutdown**, **Users** which in **The Company's** opinion need to be informed) and the **BSCCo** that a **Total Shutdown**, or, as the case may be, a **Partial Shutdown**, exists and that **The Company** intends to implement **System Restoration**. **The Company** shall (as soon as is practicable) determine, in its reasonable opinion, the time and date with effect from which the **Total Shutdown** or **Partial Shutdown** commenced and notify the **BSCCo** of that time and date.

In the event of a **Total Shutdown** and following such notification, in accordance with the provisions of the **BSC**, the **BSCCo** will determine the **Settlement Period** with effect from which the **Balancing Mechanism** is suspended.

In the event of a **Partial Shutdown** and following such notification, the **Balancing Mechanism** will not be suspended until such time and date that the **Market Suspension Threshold** has been met, or deemed to have been met, in accordance with the provisions of the **BSC**. **The Company** shall carry out the monitoring activities required by paragraph G3.1 of the **BSC**.

Following determination by **The Company** pursuant to its obligations under the **BSC** that the **Market Suspension Threshold** has been met, or deemed to have been met, **The Company** shall (as soon as practicable) inform the **BSCCo** of that time and date at which the **Market Suspension Threshold** was met, or deemed to have been met, and the **BSCCo** will determine the **Settlement Period** in accordance with the provisions of the **BSC** with effect from which the **Balancing Mechanism** will be suspended.

Should **The Company** determine that the **Total System** is capable of returning to normal operation without meeting the **Market Suspension Threshold**, **The Company** will follow the procedure given in OC9.4.7.11.

System Restoration will conclude with effect from the time and date determined in accordance with OC9.4.7.6.3(d).

In respect of **Scottish Transmission Systems**, in exceptional circumstances, as specified in the **Local Joint Restoration Plan**, **SPT** or **SHETL**, may invoke such **Local Joint Restoration Plan** for its own **Transmission System**, **Scottish Offshore Transmission Systems** and relevant Scottish **Competitively Appointed Transmission Licensee's Transmission Systems**. Under such circumstances, **SPT** or **SHETL** may instruct relevant **Network Operators** to activate one or more **Distribution Restoration Zone Plans**.

OC9.4.7 SYSTEM RESTORATION PROCEDURE

OC9.4.7.1 The procedure necessary for a recovery from a **Total Shutdown** or **Partial Shutdown** is known as a **System Restoration**. The procedure for a **Partial Shutdown** is the same as that for a **Total Shutdown** except that it applies only to a part of the **Total System**. It should be remembered that a **Partial Shutdown** may affect parts of the **Total System** which are not themselves shutdown.

OC9.4.7.2 The complexities and uncertainties of recovery from a **Total Shutdown** or **Partial Shutdown** require that **OC9** is sufficiently flexible in order to accommodate the full range of **User's Plant** and **Apparatus** and **Total System** characteristics and operational possibilities, and this precludes the setting out in the **Grid Code** itself of concise chronological sequences. The overall strategy will, in general, include the overlapping phases of the use of generating **Plant**, at an isolated **Power Station**, or isolated **HVDC System** or isolated **DC Converter Station**, together with complementary local **Demand**, termed **Power Islands**, step by step integration of these **Power Islands** into larger sub-systems which includes utilising the procedures in OC9.5 (**Re-Synchronisation** of **Power Islands**) and eventually re-establishment of the complete **Total System**.

The Company Instructions

OC9.4.7.3 **The Company** will determine and instruct relevant **Users** to start **System Restoration**. These instructions will normally recognise any applicable **Local Joint Restoration Plan** and/or **Distribution Restoration Zone Plan**. **User's** shall abide by **The Company's** instructions during **System Restoration**, even if these conflict with the general overall strategy outlined in OC9.4.7.6.3 or any applicable **Local Joint Restoration Plan** and/or **Distribution Restoration Zone Plan** although a **User** may still reject an **Emergency Instruction** but only on safety grounds (relating to personnel or plant) and this must be notified to **The Company** immediately by telephone in accordance with the requirements of BC2.9.2.1. **The Company's** and/or **Network Operator's** instructions may (although this list should not be regarded as exhaustive) be issued to;-

(a) **Restoration Contractors** relating to the start of supplying **Active Power** and subsequent pick up of **Demand**;
(b) **Network Operators** or **Non-Embedded Customers** relating to the restoration of **Demand**;
(c) **Generators** or **HVDC System Owners** or **DC Converter Station** owners relating to the preparations for starting to supply **Active Power** when an external power supply is made available to it;
(d) **Network Operators** to activate a **Distribution Restoration Zone Plan**.

Each of the above cases may include the requirement to undertake switching.

In respect of **Scottish Transmission Systems**, **SPT** and **SHETL** will act on **The Company's** behalf in accordance with its duties under the relevant **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**. **Restoration Contractors** and **Competitively Appointed Transmission Licensees** in Scotland shall abide by **SPT's** or **SHETL's** instructions given in accordance with the **Local Joint Restoration Plan** or **Network Operator's** instructions given in accordance with the **Distribution Restoration Zone Plan**.

OC9.4.7.4 (a) **System Restoration** following a **Total Shutdown** or where the **Balancing Mechanism** has been suspended following a **Partial Shutdown**

During **System Restoration** where the **Balancing Mechanism** has been suspended, all instructions by **The Company** to **Users** will be deemed to be **Emergency Instructions** under BC2.9.2.2 (iii). All such **Emergency Instructions** will recognise any differing operational capabilities (however termed) set out in the relevant **Ancillary Services Agreement** in preference to the declared operational capability as registered pursuant to **BC1** (or as amended from time to time in accordance with the **BC**).

Instructions issued to **Network Operators** in England and Wales to activate a **Distribution Restoration Zone Plan** will be issued by **The Company** as **Emergency Instructions**. **Network Operators** will then proceed in accordance with the provisions of the **Distribution Restoration Zone Plan**. Such instructions will be deemed to be **Emergency Instructions** under BC2.9.2.2 (iii). The **Network Operator** will be responsible for the operation of the **Distribution Restoration Zone** which will take into account the capabilities of **Restoration Contractors' Plant** and **Apparatus** and other **Plant** and **Apparatus** within the **Network Operator's System**. A **Restoration Contractor** may reject an **Emergency Instruction** but only on safety grounds (relating to personnel or plant) and this must be notified to **The Network Operator** immediately. Such instructions shall be pursuant to the terms of the **Distribution Restoration Zone Plan**.

In Scotland **SPT** and/or **SHETL** as relevant may issue instructions (which shall be deemed to be **Emergency Instructions**) to relevant Scottish **Network Operators** to activate one or more **Distribution Restoration Zone Plans**. **Network Operators** in Scotland will be responsible for the operation of the relevant **Distribution Restoration Zone** which will take into account the capabilities of **Restoration Contractors' Plant** and **Apparatus** and other **Plant** and **Apparatus** within the **Network Operator's System**. A **Restoration Contractor** may reject an **Emergency Instruction** but only on safety grounds (relating to personnel or plant) and this must be notified to the relevant Scottish **Network Operator** immediately. Such instructions shall be pursuant to the terms of the **Distribution Restoration Zone Plan**.

(b) **System Restoration** following a **Partial Shutdown** where the **Balancing Mechanism** has not been suspended

During a **Partial Shutdown** where the **Balancing Mechanism** has not been suspended, all instructions to **Users** connected to the **Power Island** will be deemed to be **Emergency Instructions** under BC2.9.2.2 (iv). All such **Emergency Instructions** will recognise any differing operational capabilities (however termed) set out in the relevant **Ancillary Services Agreement** in preference to the declared operational capability as registered pursuant to **BC1** (or as amended from time to time in accordance with the **BC**).

During **System Restoration** where the **Balancing Mechanism** has not been suspended, **The Company** may issue instructions to **Network Operators** in England and Wales to activate a **Distribution Restoration Zone Plan**. Such instructions will be deemed to be **Emergency Instructions** under BC2.9.2.2 (iv). The **Network Operator** will be responsible for the operation of the **Distribution Restoration Zone** which will take into account the capabilities of **Restoration Contractor's Plant** and other **Plant** and **Apparatus** within the **Network Operator's System**. Such instructions would be pursuant to the terms of the **Distribution Restoration Zone Plan**.

In Scotland, **SPT** and/or **SHETL** as relevant may issue instructions (which would be deemed to be **Emergency Instructions**) to Scottish **Network Operators**, to activate on one or more **Distribution Restoration Zone Plans**.

OC9.4.7.5 Requirements to inform **The Company** and/or **Network Operator** where a **Genset**, **HVDC System**, **DC Converter** or **Restoration Contractor's Plant** and **Apparatus** cannot operate within its safe operating limits during the **Demand** restoration process

OC9.4.7.5.1 If following the successful initiation and subsequent termination of a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan** and during the wider **System Restoration** process, any **Genset** or **HVDC System** or **DC Converter Station** or **Restoration Contractor's Plant** and **Apparatus** cannot, because of the **Demand** being experienced, keep within its safe operating parameters, the **Generator** or **HVDC System Owner** or **DC Converter Station** owner or **Restoration Contractor** shall, inform **The Company** and relevant **Network Operator**. **The Company** or relevant **Network Operator** (as appropriate) will, where possible, either instruct **Demand** to be altered or will re-configure the **Total System** or will instruct a **User** or **Restoration Contractors** to re-configure its **System** in order to alleviate the problem being experienced by the **Genset** or **HVDC System** or **DC Converter or Restoration Contractor's Plant** and **Apparatus**. If a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan** is in operation, then the arrangements set out therein shall apply. In both scenarios, **The Company** and/or **Network Operator** accepts that any decision to keep a **Genset** or **HVDC System** or **DC Converter Station** or **Restoration Contractor's Plant** and **Apparatus** operating, if outside its safe operating parameters, is one for the **User** or **Restoration Contractor** concerned alone and accepts that the **User** or **Restoration Contractor** may change output on that **Genset** or **HVDC System** or **DC Converter** or **Restoration Contractor's Plant** and **Apparatus** if it believes it is necessary for safety reasons (whether relating to personnel or **Plant** and/or **Apparatus**). If such a change is made without prior notice, then the **User** or **Restoration Contractor** shall inform **The Company** and/or **Network Operator** as soon as reasonably practical (unless a **Local Joint Restoration Plan** and/or **Distribution Restoration Zone Plan** is in operation in which case the arrangements set out therein shall apply). In the case of a **Distribution Restoration Zone**, where the **Network Operator** experiences situations where any **Restoration Contractor's Plant** and **Apparatus** is unable to keep within safe operating parameters and this is likely to affect the integrity and progression of the **Distribution Restoration Zone**, the **Network Operator** shall inform **The Company** without delay.

OC9.4.7.6 Local Joint Restoration Plan and Distribution Restoration Zone Plan Establishment, Testing and Provisions

OC9.4.7.6.1 Restoration Plan Establishment

The following process shall apply for the establishment of **Restoration Plans**:

a) For a **Local Joint Restoration Plan**, **The Company** will identify the need to introduce or modify a **Local Joint Restoration Plan** and coordinate with the relevant parties as required in this OC9.4.7.6.1.

b) For a **Distribution Restoration Zone Plan** where **The Company** and a relevant **Network Operator** agree that introducing or modifying a **Distribution Restoration Zone** may be beneficial, **The Company**, the **Relevant Transmission Licensee** (where appropriate) and the **Network Operator** shall explore the possibility of establishing a **Distribution Restoration Zone Plan** as required in this OC9.4.7.6.1.

c) The **Company**, the **Relevant Transmission Licensee** (where appropriate) and the **Network Operator** will discuss and agree the detail of a **Restoration Plan** as soon as reasonably practicable after the potential requirement for a **Restoration Plan** is identified. This may involve discussions between relevant potential **Restoration Contractors**, **The Company** and the **Network Operator**.

d) For a **Distribution Restoration Zone Plan** an initial feasibility assessment carried out jointly by **The Company** and **Network Operator** may result in **The Company** running a procurement / tender process. If after discussions or analysis, **The Company**, the **Relevant Transmission Licensee** (where appropriate) and **Network Operator** agree a **Distribution Restoration Zone Plan** is not viable, then no further work to develop the **Distribution Restoration Zone Plan** needs to be carried out.

e) Each **Restoration Plan** will be in relation to a specific **Anchor Plant** and may include one of more **Top Up Restoration Plants**.

f) The preparation of each **Restoration Plan** shall include a check whether any network assets cited in each **Restoration Plan** are included in any other **Restoration Plan**, and if so, all the **Local Joint Restoration Plans** or **Distribution Restoration Zone Plans** containing common assets shall include a specific step that prohibits more than one of any of these **Restoration Plans** from being activated at any one point in time.

g) The **Restoration Plan** will record which **Restoration Contractors** and which **Restoration Contractor's** sites are covered by the **Restoration Plan** and set out what is required from **The Company**, the **Network Operator**, each **Relevant Transmission Licensees** and each **Restoration Contractor** should a **System Restoration** situation arise.

h) **Restoration Plans** will allow for one of several **Restoration Contractors** to take the single role of **Anchor Generator** within the **Restoration Plan** and for others to provide **Top-Up Restoration Capabilities**. When the **Restoration Plan** is activated, one of the first tasks shall be the designation of the **Anchor Generator** and confirmation of which parties are acting as **Top Up Restoration Contractors**.

i) Each **Local Joint Restoration Plan** shall be prepared by **The Company**. Each **Distribution Restoration Zone Plan** shall be prepared by the relevant **Network Operator**. In both cases the **Restoration Plan** will be agreed between **Network Operator**, **The Company**, the **Relevant Transmission Licensee** and relevant **Restoration Contractors**.

j) Each page of the **Restoration Plan** shall bear a date of issue and the issue number.

k) When a **Restoration Plan** has been prepared, it shall be sent to all parties involved for confirmation of its accuracy.

l) The **Restoration Plan** shall then (if its accuracy has been confirmed) be signed on behalf of **The Company**, the **Network Operator**, each **Relevant Transmission Licensee** and each relevant **Restoration Contractor** by way of written confirmation of its accuracy.

m) Once agreed under this OC9.4.7.6.1, the procedure will become a **Restoration Plan** under the Grid Code and (subject to any change pursuant to this OC9) will apply to **The Company**, the **Network Operator**, the **Relevant Transmission Licensees** and the relevant **Restoration Contractors** as if it were part of the Grid Code.

n) A copy of each signed **Local Joint Restoration Plan** will be distributed by **The Company** to the **Network Operator**, each **Relevant Transmission Licensee** and to each **Restoration Contractor** accompanied by a note indicating the date of implementation.

o) A copy of each signed **Distribution Restoration Zone Plan** will be distributed by the **Network Operator** to **The Company**, each **Relevant Transmission Licensee** and to each **Restoration Contractor** accompanied by a note indicating the date of implementation.

p) **The Company**, **Network Operators**, the **Relevant Transmission Licensees** and **Restoration Contractors** must make the **Restoration Plan** readily available to the relevant operational staff.

q) Each **Restoration Plan** will include the test criteria to be satisfied by each **Restoration Contractor's Plant** and **Apparatus** when subject to the testing requirements of OC5.7.

r) If any party to a **Restoration Plan** becomes aware that a change is needed to that **Restoration Plan**, it shall, in the case of **Local Joint Restoration Plan**, contact **The Company** or in the case of a **Distribution Restoration Zone Plan**, the **Network Operator** to initiate a discussion between **The Company**, or the **Network Operator** and the relevant parties to seek to agree the relevant change. The principles applying to establishing or modifying a **Restoration Plan** under this OC9.4.7.6.1 shall apply to such discussions and to any consequent changes.

OC9.4.7.6.2 Restoration Plan Testing

The Company, **Relevant Transmission Licensees**, the **Network Operator** and the relevant **Restoration Contractors** shall conduct regular joint exercises of the **Restoration Plan** to which they are parties. The objectives of such exercises include:

- To test the effectiveness of the **Restoration Plan**;
- To provide for joint training of the parties in respect of the **Restoration Plan**;
- To maintain the parties' awareness and familiarity of the **Restoration Plan**;
- To promote understanding of each party's role under the **Restoration Plan**; and
- To identify any improvement areas which should be incorporated into the **Restoration Plan**.

The Company shall propose to the parties to a **Restoration Plan** a date for the exercise to take place. All the **Restoration Plan** parties will jointly share the task of planning, preparing, participating in, and facilitating the exercises, which will normally be in desktop format or as otherwise agreed. The precise timing of the exercise for each **Restoration Plan** will be agreed by all parties, but will not be less than once every 3 years. These exercises shall be run as part of the wider assurance activities as provided for under OC5.7.4

OC9.4.7.6.3 Restoration Plan Provisions

The following provisions in this OC9.4.7.6.3 apply in relation to **Restoration Plans**. For **Local Joint Restoration Plans**, **The Company** (or in Scotland the relevant **Transmission Licensee** as assigned by **The Company** under STCP 06-1) are designated as the lead operator; for **Distribution Restoration Zone Plan**s, the **Network Operator** is the lead operator.

(a) Where the lead operator, issues instructions which conflict with a **Restoration Plan** these instructions will take precedence over the requirements of the **Restoration Plan** (as set out in OC9.4.7.6.1).

i.) When issuing such instructions, the lead operator will state whether or not it wishes the remainder of the **Restoration Plan** to apply. Where the lead operator has stated that it wishes the remainder of the **Restoration Plan** to apply, the other parties to the plan may give notice that it is not possible to operate the **Restoration Plan** to the lead operator and the other parties to plan.

ii.) The lead operator shall immediately consult with all parties to the **Restoration Plan**. Unless all parties reach agreement as to how the **Restoration Plan** shall operate in those circumstances, operation in accordance with the **Restoration Plan** will terminate and parties will be relieved of their obligations under the **Restoration Plan** in accordance with OC9.4.7.6.3(d) below.

(b) The preparation of each **Restoration Plan** shall include a check whether any network assets cited in another **Local Joint Restoration Plan** or another **Distribution Restoration Zone Plan** are included in the plan, and if so, all the **Local Joint Restoration Plans** or **Distribution Restoration Zone Plans** containing common assets shall include a specific step that prohibits more than one of any of these plans from being activated at any one point in time.

(c) The lead operator will advise other relevant parties of the requirement to switch their **User Systems** to segregate their **Demand** and to carry out such other actions as set out in the **Restoration Plan**. The relevant party will then operate in accordance with the provisions of the **Restoration Plan**.

(d) Operation of the **Restoration Plan** shall be terminated by the lead operator either when:

i.) the **Restoration Plan** has been successfully implemented and the resulting **Power Island** has been synchronised to another **Power Island** following instruction from **The Company**. In this case, the arrangements for synchronising the **Power Island** to the **System** will be set out in the **Restoration Plan**; or

ii.) the **Restoration Plan** has not been / is not being successfully implemented. In this circumstance, provided for in OC9.4.7.6.3(a), if an agreement is not reached on whether or not to apply the remainder of the plan or if **The Company**, in coordination with the other parties, confirms that it does not wish the remainder of the **Restoration Plan** to apply, the **Restoration Plan** shall be terminated. In this case **The Company** and the **Network Operator** in conjunction with the **Restoration Contractors** shall agree and implement the most appropriate course of action which should aim to maintain supplies to as many customers as possible.

In both cases the lead operator shall notify all parties to the **Restoration Plan** accordingly.

OC9.4.7.7 Local Joint Restoration Plan Operation

Following a **Total Shutdown** or **Partial Shutdown** the following shall apply:

OC9.4.7.7.1 Where **The Company**, as part of **System Restoration**, has given an instruction to a **Restoration Contractor** to initiate **Start-Up**, the relevant **Restoration Contractor** will prepare to **Start-Up** their **Plant** in accordance with the **Local Joint Restoration Plan**.

OC9.4.7.7.2 **The Company** will advise the relevant **Network Operator** of the requirement to switch its **User System** so as to segregate its **Demand** and to carry out such other actions as set out in the **Local Joint Restoration Plan**. The relevant **Network Operator** will then operate in accordance with the provisions of the **Local Joint Restoration Plan**.

OC9.4.7.7.3 **The Company**, in coordination with **Relevant Transmission Licensees**, will ensure that switching carried out on the **National Electricity Transmission System** and other actions are as set out in the **Local Joint Restoration Plan**.

OC9.4.7.7.4 Following notification from the **Anchor Restoration Contractor** that their **Anchor Plant** is ready to accept load and, where provided for in the **Local Joint Restoration Plan**, **Top Up Restoration Contractors** are in a position to subsequently synchronise to the **Total System** as soon as external site supplies are restored, **The Company** will instruct the **Anchor Restoration Contractor** (as provided for in OC9.4.5.2.2) to energise part of the **Total System**. The **Anchor Restoration Contractor** and the relevant **Network Operator** will then, in accordance with the requirements of the **Local Joint Restoration Plan**, establish communication and agree the output of the relevant **Anchor Plant** and the connection of **Demand** so as to establish a **Power Island**. As part of establishing a **Power Island**, **The Company** may instruct one or more **Top Up Restoration Contractors** to subsequently synchronise their **Plant** and **Apparatus** to the **System** to facilitate supplying more **Demand** in the **Power Island** in accordance with the requirements of the **Local Joint Restoration Plan**. During this period, **Restoration Contractors** will be required to regulate the output of their relevant **Plant** to the **Demand** prevailing in the **Power Island** in which it is situated, on the basis that it will (where practicable) seek to maintain the **Target Frequency**. The **Restoration Contractor's Plant** and **Apparatus** will (where practical) also seek to follow the requirements relating to **Reactive Power** (which may include the requirement to maintain a target voltage) set out in the **Local Joint Restoration Plan**.

OC9.4.7.7.5 Operation in accordance with the **Local Joint Restoration Plan** will be terminated by **The Company** or **SPT** and/or **SHETL** in Scotland (by notifying the **Network Operator** and relevant **Restoration Contractors**) immediately after successfully connecting the **Power Island** to another **Power Island**, or to the **User System** of another **Network Operator**, or to the synchronising of **Gensets** at other **Power Stations** (which are not owned and operated by **Restoration Contractors**) or **HVDC Systems** or **DC Converter Stations**. Operation in accordance with the **Local Joint Restoration Plan** will also terminate in the circumstances provided for in OC9.4.7.6.3(d) if an agreement is not reached or if **The Company** states that it does not wish the remainder of the **Local Joint Restoration Plan** to apply. **Users** will then comply with the **Bid-Offer Acceptances** or **Emergency Instructions** of **The Company**.

OC9.4.7.8 Distribution Restoration Zone Operation

Following a **Total** or **Partial Shutdown** the following shall apply:

OC9.4.7.8.1 Where **The Company** wishes a **Network Operator** to activate a **Distribution Restoration Zone Plan**, **The Company** will issue an **Emergency Instruction** to that **Network Operator** for it to activate the relevant **Distribution Restoration Zone Plan** whilst also informing the **Relevant Transmission Licensee**. In Scotland the instruction to a Scottish **Network Operator** to activate a Scottish **Distribution Restoration Zone Plan** would be given by **SPT** and/or **SHETL** as relevant. For the avoidance of doubt, **The Company** will issue instructions to initiate **System Restoration** in Scotland via STCP 06-1 which includes arrangements for the activation of Scottish **Distribution Restoration Zone Plans**.

OC9.4.7.8.2 Upon receipt of an **Emergency Instruction** from **The Company** (or instruction from **SPT** and/or **SHETL** as relevant), the **Network Operator** will confirm and acknowledge receipt in accordance with the requirements of BC2.9.2 and activate a **Distribution Restoration Zone Plan** as provided for in OC9.4.7.6.1(b). All instructions to relevant **Restoration Contractors** party to the **Distribution Restoration Zone Plan** will be issued by the **Network Operator**.

OC9.4.7.8.3 The operation of the **Distribution Restoration Zone** will then continue in accordance with the **Distribution Restoration Zone Plan** until it is terminated in accordance with the requirements of OC9.4.7.6.3(d).

OC9.4.7.8.4 Where **The Company** issues an **Emergency Instruction** (or in Scotland where **SPT** and/or **SHETL** as relevant issues an instruction) to a **Network Operator** to activate a **Distribution Restoration Zone Plan**, the **Network Operator** will first issue instructions to the **Restoration Contractor** (as provided for in OC9.4.5.1.1) informing them of the requirement to prepare their **Anchor Plant** to re-energise a **Distribution Restoration Zone** (or part thereof) and will (if applicable) then consequently issue instructions to **Restoration Contractors** in respect of their **Top Up Restoration Plant** informing them of the requirement to prepare their **Top Up Restoration Plant** accordance with the **Distribution Restoration Zone Plan**. The **Network Operator** shall also liaise with the **Relevant Transmission Licensee** where they are party to the **Distribution Restoration Zone Plan** to ensure switching can take place in the appropriate timescales. The **Network Operator** in liaison with the **Restoration Contractor(s)** will discuss when their **Anchor Plant** and **Top Up Plant** are expected to be available. For the avoidance of doubt, the **Anchor Restoration Contractor** shall not start to re-energise the **Distribution Restoration Zone** until instructed by the **Network Operator** in accordance with OC9.4.7.8.10 and this instruction shall only be given once the **Network Operator** has configured its **System** and taken the necessary additional actions to prepare the **Distribution Restoration Zone** to be re-energised. This may include any automatic switching that takes place through the action of any **Distribution Restoration Zone Control System**. It is only then, that once external site supplies have been restored, and as appliable to the **Distribution Restoration Zone Plan**, that **Network Operators** will give instructions (by manual or automatic means) to **Restoration Contractors** in respect of **Top Up Restoration Plant** to synchronise to the **Network Operator's System** in accordance with OC9.4.7.8.10.

OC9.4.7.8.5 All relevant **Restoration Contractors** and where applicable **Relevant Transmission Licensees** will inform the **Network Operator** of the indicative time when their **Plant** and **Apparatus** will be ready to energise or synchronise to the **Distribution Restoration Zone**.

OC9.4.7.8.6 The **Network Operator** shall inform **The Company** (and the **Relevant Scottish Transmission Licensee** in the case of a Scottish **Distribution Restoration Zone**) and **Transmission Licensees** where they are party to the **Distribution Restoration Zone Plan** advising that it has contacted the appropriate **Restoration Contractors** in accordance with the **Distribution Restoration Zone Plan** and the expected time when the **Anchor Generator** will energise the **Distribution Restoration Zone**.

OC9.4.7.8.7 In addition to the requirements of OC9.4.7.8.4 to OC9.4.7.8.6, and in accordance with the **Distribution Restoration Zone Plan**, the **Network Operator** shall start to reconfigure its **System** (by manual or automatic means) such that it is ready to enable the **Anchor Restoration Contractor** to re-energise the **Distribution Restoration Zone** (or part thereof), and where provided for in the **Distribution Restoration Zone Plan**, the subsequent synchronisation of **Top Up Restoration Plant**. To enable this process to take place, the **Network Operator** may need to change the topology and status of its **System** which may include but shall not be limited to changing the status of circuit breakers in addition to switching between pre agreed control system and **Protection** settings. Reconfiguration of the **Network Operator's System** prior to re-energisation of the **Distribution Restoration Zone**, may be achieved by instructions carried out manually, switching carried out remotely from the **Network Operators Control Centre** or via fully automatic means which could include a **Distribution Restoration Zone Control System**. Where a **Transmission Licensee** is party to the **Distribution Restoration Zone Plan**, the **Network Operator** shall liaise with the **Relevant Transmission Licensee** as part of this process to ensure that parts of the **Transmission System** can be energised from the **Distribution Restoration Zone**.

OC9.4.7.8.8 Once the **Network Operator** (and where necessary in accordance with the **Relevant Transmission Licensee**) has reconfigured its **System** and associated **Plant** and **Apparatus** (including but not limited to **Protection** and control system settings) it will contact the **Anchor Restoration Contractor** (be it by manual or automatic means) and agree a time for the **Anchor Plant** to re-energise the **Distribution Restoration Zone** (or part thereof). Where the **Anchor Restoration Contractor** or **Network Operator** needs to change the agreed proposed re-energisation time as a result of an unforeseen event such as, but not limited to, a faulty item of **Plant** or **Apparatus**, safety issue or unavailability of personnel, the **Anchor Restoration Contractor** and/or **Network Operator** will agree a revised re-energisation time. The **Anchor Restoration Contractor** and the relevant **Network Operator** will in accordance with the requirements of the **Distribution Restoration Zone Plan**, establish communication and agree the planned output of the relevant **Anchor Plant** and the connection of **Demand** to plan the formation of the **Power Island**.

OC9.4.7.8.9 The **Network Operator** will inform **The Company** (or relevant **Scottish Transmission Licensee** in the case of a Scottish **Distribution Restoration Zone**) or **Relevant Transmission Licensee** where they are party to the **Distribution Restoration Zone Plan** of the time when the **Anchor Restoration Contractor** is estimated to re-energise a section of the **Network Operator's System**. Should this estimated time vary, the **Network Operator** will inform **The Company** (or relevant **Scottish Transmission Licensee** in the case of a Scottish **Distribution Restoration Zone**) to state the revised estimated re-energisation time and the reason for the change.

OC9.4.7.8.10 The **Restoration Contractor** shall contact the **Network Operator** once their **Anchor Plant** is ready to re-energise the network. The **Network Operator** shall then assess their network status, the estimated re-energisation time as detailed in OC9.4.7.8.8 and if conditions are suitable, the **Network Operator** will issue an instruction to the **Anchor Restoration Contractor** (by manual or automatic means) to re-energise the **Distribution Restoration Zone** (or part thereof). Following the issue of instructions to the **Anchor Restoration Contractor**, and successful re-energisation of the **Distribution Restoration Zone** (or part thereof) the **Network Operator** will instruct (by manual or automatic means) **Top Up Restoration Contractors** party to the **Distribution Restoration Zone Plan** to synchronise to the **Distribution Restoration Zone**. The **Network Operator** shall also inform the **Relevant Transmission Licensee** when an instruction has been issued to the **Restoration Contractor** where they are party to the **Distribution Restoration Zone Plan**.

OC9.4.7.8.11 Once the **Distribution Restoration Zone** (or part thereof) has been re-energised and feeding some local **Demand** or controllable **Demand** provided by a relevant **Restoration Contractor**, they will be required to follow instructions from the **Network Operator** (by manual or automatic means) in accordance with the **Distribution Restoration Zone Plan**. The **Network Operator** and/or **Distribution Restoration Zone Control System** shall issue instructions to **Restoration Contractors** as necessary to ensure the **Distribution Restoration Zone** continues to run in a stable manner. As part of this process, the **Network Operator**, in coordination with **Restoration Contractors**, shall ensure risks to the **Network Operator's System** or the **Restoration Contractor's Plant**, that could arise through disturbances in the **Distribution Restoration Zone**, are minimised as far as reasonably practicable. This may be assisted through a planned series of re-energisation steps within the **Distribution Restoration Zone**, taking account of the capability and performance of the **Restoration Contractor's Plant** at that time.

OC9.4.7.8.12 **Demand** within the **Distribution Restoration Zone** can be restored by manual or remote controlled switching, or automatically by a **Distribution Restoration Zone Control System**. If during the **Demand** restoration process, any relevant **Restoration Contractor's Plant** or **Apparatus** cannot keep within its safe operating parameters, because of the nature of the **Demand** being supplied, the relevant **Restoration Contractor** shall inform the **Network Operator** without undue delay who in turn shall inform **The Company**. In the case of a **Distribution Restoration Zone** in Scotland, the Scottish **Network Operator** shall inform the relevant **Scottish Transmission Licensee**.

In order to help alleviate issues the **Network Operator** or **Distribution Restoration Zone Control System** will, where possible:

i. Instruct relevant **Restoration Contractors** to alter their **Demand**; or

ii. re-configure the topology of the **Distribution Restoration Zone**; or

iii. will instruct the relevant **Restoration Contractor** forming part of the **Distribution Restoration Zone** to re-configure its **System**.

The Company and **Network Operator** (and **Relevant Transmission Licensee** in Scotland) accepts that any decision to keep a relevant **Restoration Contractor's Plant** or **Apparatus** operating, if outside its safe operating parameters, is one for the **Restoration Contractor** concerned alone. **The Company**, the **Network Operator**, and the **Relevant Scottish Transmission Licensee** (for **Distribution Restoration Zones** in Scotland) accepts that the relevant **Restoration Contractor's Plant** and **Apparatus** may have its operating point changed by the relevant **Restoration Contractor** if it believes it is necessary for safety reasons (whether relating to personnel or **Plant** and/or **Apparatus**). If such a change is made without prior notice, then the relevant **Restoration Contractor** shall inform the **Network Operator** as soon as reasonably practical. A **Restoration Contractor** may also reject an instruction issued by a **Network Operator** but only on safety grounds (relating to personnel or plant) and this must be notified to **Network Operator** immediately.

OC9.4.7.8.13 To stabilise the voltage and **Frequency** of the **Network Operator's System** and increase the **Demand** supplied within the **Distribution Restoration Zone**, the **Network Operator** may need to instruct (by manual or automatic means) additional relevant **Restoration Contractors** to **Synchronise** their **Plant** to the **Distribution Restoration Zone** which would be part of the **Distribution Restoration Zone Plan**. The **Network Operator** and/or the **Distribution Restoration Zone Control System** shall ensure **Restoration Contractors** are able (where applicable) to contribute to voltage and **Frequency** control and ensure that adequate positive and negative headroom is maintained on **Restoration Contractor's Plant** and **Apparatus** to enable the management of **Power Island** contingences. For the avoidance of doubt, **The Company** may require **Transmission Licensees** in Scotland to manage the **Frequency** and voltage of **Power Islands** in Scotland as provided for in STCP 06-1 or **Network Operators** to manage the **Frequency** and voltage of **Distribution Restoration Zones** whilst recognising **The Company** has overall responsibility to the wider restoration process in the **GB Synchronous Area**.

OC9.4.7.8.14 As the **Distribution Restoration Zone** supports increasing **Demand**, and as implementation of the **Distribution Restoration Zone Plan** progresses, the **Network Operator** may need to switch between predefined control and **Protection** settings as the need arises.

OC9.4.7.8.15 Expansion of a **Distribution Restoration Zone** to an unenergised **Transmission** busbar and to wider parts of the unenergised **Transmission System** could be part of the **Distribution Restoration Zone Plan** in addition to the requirements of OC9.5.

OC9.4.7.8.16 Operation in accordance with the **Distribution Restoration Zone Plan** will be terminated by the **Network Operator** in accordance OC9.4.7.6.3(d).

OC9.4.7.9 Expansion of Power Islands

The Company will instruct relevant **Users** to expand **Power Islands** to achieve larger **Power Islands** following the successful termination of **Local Joint Restoration Plans** and **Distribution Restoration Zone Plans**.

OC9.4.7.10 Interconnection of Power Islands

The Company will subsequently interconnect the expanded **Power Islands** detailed in OC9.4.7.9 to form larger **Power Islands** which will then be connected to form an integrated system as detailed in OC9.5 which is a fundamental component of the **Electricity System Restoration Standard**. This should eventually achieve the re-establishment of the **Total System** or that part of the **Total System** subject to the **Partial Shutdown**, as the case may be. The interconnection of **Power Islands** will utilise the provisions of all or part of OC9.5 (**Re-Synchronisation** of **De-synchronised Power Islands**) and in such a situation such provisions will be part of the **System Restoration**.

Return the Total System Back to Normal Operation

OC9.4.7.11 **The Company** shall, as soon as reasonably practical, inform **Users** and the **BSCCo** when the **Total System** could return to normal operation. Any such determination by **The Company** does not mean that the provisions of Section G paragraph 3 (**System Restoration**) of the **BSC** shall cease to apply.

In making the determination that the **Total System** could return to normal operation, **The Company**, would consider, amongst other things, the following areas:

(a) the extent to which the **National Electricity Transmission System** is contiguous and energised;

(b) the integrity and stability of the **National Electricity Transmission System** and its ability to operate in accordance with the **Licence Standards**;

(c) the impact that returning to normal may have on transmission constraints and the corresponding ability to maximise the **Demand** connected; and

(d) the volume of generation, **Electricity Storage** or **Demand** not connected to the **National Electricity Transmission System**; and

(e) the functionality of normal communication systems (ie electronic data communication facilities, **Control Telephony**, etc).

In the event that the **Balancing Mechanism** has been suspended, it will not resume until the start of the **Settlement Period** determined by the **BSC Panel** in accordance with paragraph G3.1.2(d)(i) of the **BSC**.

For the avoidance of doubt, until resumption of the **Balancing Mechanism, The Company** is likely to continue to issue **Emergency Instructions** in accordance with BC2.9.

Users shall use reasonable endeavours to submit **Physical notifications** ten hours prior to the start of the **Settlement Period** determined by the **BSC Panel** in accordance with paragraph G3.1.2(d)(i) of the BSC and as notified by **The Company** to **Users**, in preparation for a return to normal operations.

In the event that the **Balancing Mechanism** has not been suspended and **The Company** has

determined that the **Total System** has returned to normal operation, **The Company** shall inform **Users** and the **BSCCo** as soon as possible of the time and date at which (in **The Company's** determination) the **Total System** returned to normal operation.

Conclusion of System Restoration

OC9.4.7.12 The provisions of this **OC9** shall cease to apply with effect from either:

(a) Where the **Balancing Mechanism** was suspended, the start of the **Settlement Period** that the **Balancing Mechanism** resumed normal operation, as determined by the **BSC Panel** and notified by the **BSCCo** in accordance with the provisions of the **BSC**; or

(b) Where the **Balancing Mechanism** was not suspended, the end of the **Settlement Period** determined and notified by the **BSCCo** (in accordance with the provisions of the **BSC**) and corresponding to the time and date that **The Company** determined that the **Total System** had returned to normal operation.

Externally Interconnected System Operators

OC9.4.7.13 Unless an **Interconnector** has an **Anchor Restoration Contract**, **The Company** will, pursuant to the **Interconnection Agreement** with **Externally Interconnected System Operators**, agree with **Externally Interconnected System Operators** when their transmission systems can be **Re-Synchronised**, if they have become separated.

OC9.5 RE-SYNCHRONISATION OF POWER ISLANDS

The provisions in this OC9.5 do not apply to the parts of the **Total System** that normally operate **Out of Synchronism** with the rest of the **National Electricity Transmission System**.

Further requirements, including the provision of information, applying to **Re-synchronisation** of a **Power Island** following any **Total Shutdown** or **Partial Shutdown** are detailed in OC9.5.6.

OC9.5.1 (a) Where parts of the **Total System** are **Out of Synchronism** with each other (each such part being termed a **Power Island**), but where there has been no **Total Shutdown** or **Partial Shutdown**, **The Company** will instruct **Users** to regulate generation or **Demand**, as the case may be, to enable the **Power Islands** to be **Re-Synchronised** and **The Company** will inform those **Users** when **Re-Synchronisation** has taken place.

(b) As part of that process, there may be a need to deal specifically with **Embedded** generation or storage in those **Power Islands**. This OC9.5 provides for how such **Embedded** generation or storage should be dealt with. In Scotland, this OC9.5 also provides for how **Transmission** connected generation in **Power Islands** should be dealt with.

(c) In accordance with the provisions of the **BC**, **The Company** may decide that, to enable **Re-Synchronisation**, it will issue **Emergency Instructions** in accordance with BC2.9 and it may be necessary to depart from normal **Balancing Mechanism** operation in accordance with **BC2** in issuing **Bid-Offer Acceptances**.

(d) The provisions of this OC9.5 shall also apply during **System Restoration** to the **Re-Synchronising** of parts of the **System** following a **Total** or **Partial Shutdown**, as indicated in OC9.4. In such cases, the provisions of OC9.5 shall apply when the relevant **Restoration Plan(s)** referred to in OC9.4.7.6.3(d) are terminated.

OC9.5.2 Island loading and generation data management

Generation in those **Power Islands** may be dealt with as described in OC.9.5.2.1 and OC9.5.2.2. The method deployed will vary in relation to any particular incident:-

OC9.5.2.1 Data Submission between Generators and Network Operators via The Company

(a) In this section, OC9.5.2.1, relevant loading and other operational parameters are exchanged indirectly between **Generators** and/or **HVDC System Owners** and **DC Converter Station Owners** and **Network Operators** via **The Company**.

(b) **The Company**, each **Generator**, **HVDC Owner** and/or **DC Converter Station** owner with **Synchronised** (or connected and available to generate although not **Synchronised**) **Genset(s)** in the **Power Island** and the **Network Operator** whose **User System** forms all or part of the **Power Island** shall exchange information as set out in this OC9.5.2.1 to enable **The Company** to issue a **Bid-Offer Acceptance** or an **Emergency Instruction** to that **Generator** and/or **HVDC System Owner** and/or **DC Converter Station Owner** in relation to its **Genset(s)** in the **Power Island** until **Re-Synchronisation** takes place, on the basis that it will (where practicable) seek to maintain the **Target Frequency**.

(c) The information to **The Company** from the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner will cover its relevant operational parameters as outlined in the **Balancing Codes** (**BC**) and from **The Company** to the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner will cover data on **Demand** and changes in **Demand** in the **Power Island**.

(d) The information from the **Network Operator** to **The Company** will comprise data on **Demand** in the **Power Island**, including data on any constraints within the **Power Island**.

(e) **The Company** will keep the **Network Operator** informed of the **Bid-Offer Acceptances** or **Emergency Instructions** it is issuing to **Embedded Genset(s)** within the **Network Operator's User System** forming part of the **Power Island**.

OC9.5.2.2 Direct Data Submission between Generators, HVDC System Owners, DC Converter Station Owners and Network Operators

(a) In this section, OC9.5.2.2, relevant loading and other operational parameters are exchanged directly between **Generators**, and/or **HVDC System Owners** and **DC Converter Station Owners** and **Network Operators**.

(b) **The Company** will issue an **Emergency Instruction** and/or a **Bid-Offer Acceptance**, to the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station Owner** to "float" local **Demand** and maintain **Frequency** at **Target Frequency**. In this situation, the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner will be required to regulate the output of its **Genset(s)** at the **Power Station** in question to the **Demand** prevailing in the **Power Island** in which it is situated, until **Re-Synchronisation** takes place, on the basis that it will (where practicable) seek to maintain the **Target Frequency**.

(c) The **Network Operator** is required to be in contact with the **Generator** and/or **HVDC System Operator** and/or **DC Converter Station** owner so that the **Network Operator** can supply data to the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner on **Demand** changes within the **Power Island**.

(d) If more than one **Generating Unit** and/or **HVDC System** and**/**or **DC Converter** is **Synchronised** to the **Power Island**, or is connected to the **Power Island** and available to generate although not **Synchronised**, the **Network Operator** will need to liaise with **The Company** to agree which **Generating Units** and/or **HVDC Systems** and/or **DC Converter** stations will be utilised to accommodate changes in **Demand** in the **Power Island**. The **Network Operator** will then maintain contact with the relevant **Generator**(s) and/or **HVDC System Owner(s)** and/or **DC Converter Station Owner**(s) in relation to that **Plant**.

(e) The **Generator** at the **Power Station** and/or **HVDC System Owner** and/or **DC Converter Station** owner must contact the **Network Operator** if the level of **Demand** which it has been asked to meet as a result of the **Emergency Instruction** and/or **Bid-Offer Acceptance** to "float" and the detail on **Demand** passed on by the **Network Operator**, is likely to cause problems for safety reasons (whether relating to personnel or **Plant** and/or **Apparatus**) in the operation of its **Generating Unit(s)** or **HVDC System(s)** or **DC Converter Station(s)**, in order that the **Network Operator** can alter the level of **Demand** which that **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner needs to meet. Any decision to operate outside any relevant parameters is one entirely for the **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner.

OC9.5.2.3 Control Features

(a) A system may be established in relation to a part of the **National Electricity Transmission System** and a **Network Operator's User System**, if agreed between **The Company** and the **Network Operator** and any relevant **Generator(s)**, **HVDC System Owner** or **DC Converter Station** owner, whereby upon a defined fault(s) occurring, manual or automatic control features will operate to protect the **National Electricity Transmission System** and relevant **Network Operator's User System** and **Generator(s)**, **HVDC System Owner(s)** or **DC Converter Station Owner(s) Plant** and simplify the restoration of **Demand** in the **Power Island**.

(b) In agreeing the establishment of such a system of control features, **The Company** will need to consider its impact on the operation of the **National Electricity Transmission System**.

(c) **The Company** will work with **Network Operators** involved in the wider **System Restoration** process to help balance generation and **Demand**, and help ensure that it does not have a destabilising effect on the **Total System**.

OC9.5.2.4 Absence of Control Features System

If a system of control features under OC9.5.2.3 has not been agreed as part of an **OC9 De-Synchronised Island Procedure** under OC9.5.4 below, **The Company** may choose to utilise the procedures set out in OC9.5.2.1 or OC9.5.2.2, or may instruct the **Generators** or **HVDC System Owner** or **DC Converter Station** owners (or some of them in respect of the **Plant** they own or operate) in the **Power Island** to **De-Synchronise**.

OC9.5.3 Choice of Option

In relation to each of the methods set out in OC9.5.2, where a **Power Island** has come into existence and where an **OC9 De-Synchronised Island Procedure** under OC9.5.4 has been agreed, **The Company**, the **Network Operator** and the relevant **Generator(s)**, **HVDC System Owners** or **DC Converter Station** owners will operate in accordance with that **OC9 De-Synchronised Island Procedure** unless **The Company** considers that the nature of the **De-Synchronised Island** situation is such that either:-

(i) the **OC9 De-Synchronised Island Procedure** does not cover the situation; or

(ii) the provisions of the **OC9 De-Synchronised Island Procedure** are not appropriate,

in which case **The Company** will instruct the relevant **Users** and the **Users** will comply with **The Company's** instructions (which in the case of **Generators** and/or **HVDC System Owners** and/or **DC Converter Station** owners will relate to **Active Power** supplied to the **Power Island** and in the case of **Network Operators** will relate to **Demand**).

OC9.5.4 Agreeing Procedures

In relation to each relevant part of the **Total System**, **The Company**, the **Network Operator** and the relevant **Generator** and/or **HVDC System Owner** and/or **DC Converter Station** owner will discuss and may agree a local procedure (an "**OC9 De-Synchronised Island Procedure**").

Where the need for an **OC9 De-Synchronised Island Procedure** arises for the first time, the following provisions shall apply:

(a) **The Company**, the **Network Operator(s)** and the relevant **Generator(s)** and/or **HVDC System Owners** or **DC Converter Station** owners will discuss the need for, and the detail of, the **OC9 De-Synchronised Island Procedure**. As soon as the need for an **OC9 De-Synchronised Island Procedure** is identified by **The Company** or a **User**, and the party which identifies such a need will notify all affected **Users** (and **The Company**, if that party is a **User**), and **The Company** will initiate these discussions.

(b) Each **OC9 De-Synchronised Island Procedure** will be in relation to a specific **Grid Supply Point**, but if there is more than one **Grid Supply Point** involved, then the **OC9 De-Synchronised Island Procedure** may cover all relevant **Grid Supply Points**. In Scotland, the **OC9 De-Synchronised Island Procedure** may also cover parts of the **National Electricity Transmission System** connected to the **User's System(s)** and **Power Stations** and **HVDC Systems** and **DC Converter Station** owners directly connected to the **National Electricity Transmission System** which are also likely to form part of the **Power Island**.

(c) The **OC9 De-Synchronised Island Procedure** will:

(i) record which **Users** and which **User Sites** are covered by the **OC9 De-Synchronised Island Procedure**;

(ii) record which of the methods set out in OC9.5 shall apply, with any conditions as to applicability being set out as well;

(iii) set out what is required from **The Company** and each **User** should a **Power Island** arise;

(iv) set out what action should be taken if the **OC9 De-Synchronised Island Procedure** does not cover a particular set of circumstances and will reflect that in the absence of any specified action, the provisions of OC9.5.3 will apply;

(v) in respect of **Scottish Transmission Systems**, the **OC9 De-Synchronised Island** procedure may be produced with and include obligations on the **Relevant Scottish Transmission Licensee(s)**; and

(vi) in respect of **Scottish Transmission Systems**, where the **OC9 De-Synchronised Island Procedure** includes the establishment of a **Power Island**, describe the route for establishment of the **Power Island**.

(d) Each **OC9 De-Synchronised Island Procedure** shall be prepared by **The Company** to reflect the above discussions.

(e) Each page of the **OC9 De-Synchronised Island Procedure** shall bear a date of issue and the issue number.

(f) When an **OC9 De-Synchronised Island Procedure** is prepared, it shall be sent by **The Company** to the **Users** involved for confirmation of its accuracy.

(g) The **OC9 De-Synchronised Island Procedure** shall then be signed on behalf of **The Company** and on behalf of each relevant **User** by way of written confirmation of its accuracy.

(h) Once agreed under this OC9.5.4, the procedure will become an **OC9 De-Synchronised Island Procedure** under the **Grid Code** and (subject to any change pursuant to this OC9) will apply between **The Company**, **Relevant Transmission Licensee** and the relevant **Users** as if it were part of the **Grid Code**.

(i) Once signed, a copy will be distributed by **The Company** to each **User** which is a party accompanied by a note indicating the issue number and the date of implementation.

(j) **The Company** and **Users** must make the **OC9 De-Synchronised Island Procedure** readily available to the relevant operational staff.

(k) If a new **User** connects to the **Total System** and needs to be included with an existing **OC9 De-Synchronised Island Procedure**, **The Company** will initiate a discussion with that **User** and the **Users** which are parties to the relevant **OC9 De-Synchronised Island Procedure**. The principles applying to a new **OC9 De-Synchronised Island Procedure** under this OC9.5.4 shall apply to such discussions and to any consequent changes.

(l) If **The Company**, or any **User** which is a party to an **OC9 De-Synchronised Island Procedure**, becomes aware that a change is needed to that **OC9 De-Synchronised Island Procedure**, it shall (in the case of **The Company**) initiate a discussion between **The Company** and the relevant **Users** to seek to agree the relevant change. The principles applying to establishing a new **OC9 De-Synchronised Island Procedure** under this OC9.5.4 shall apply to such discussions and to any consequent changes. If a **User** becomes so aware, it shall contact **The Company** who will then initiate such discussions.

(m) If in relation to any discussions, agreement cannot be reached between **The Company** and the relevant **Users**, **The Company** will operate the **System** on the basis that it will discuss which of the methods set out in OC9.5.2.1 or OC9.5.2.2 would be most appropriate at the time, if practicable. The complexities and uncertainties of recovery from a **Power Island** means that **The Company** will decide, having discussed the situation with the relevant **Users** and taking into account the fact that the three methods may not cover the situation or be appropriate, the approach which is to be followed. **The Company** will instruct the relevant **Users** and the **Users** will comply with **The Company's** instructions as provided in OC9.5.3.

OC9.5.5 Where the **National Electricity Transmission System** is **Out of Synchronism** with the **Transmission System** of an **Externally Interconnected System Operator**, **The Company** will, pursuant to the **Interconnection Agreement** with that **Externally Interconnected System Operator**, agree with that **Externally Interconnected System Operator** when its **Transmission System** can be **Re-Synchronised** to the **National Electricity Transmission System**.

OC9.5.6 Further requirements regarding **Re-synchronisation** of **De-synchronised Islands** following any **Total Shutdown** or **Partial Shutdown**

Following any **Total Shutdown** or **Partial Shutdown**, **The Company** expects that it will be necessary to interconnect **Power Islands** utilising the provisions of OC9.5. The complexities and uncertainties of recovery from a **Total Shutdown** or **Partial Shutdown** requires the provisions of OC9.5 to be flexible, however, the strategies which **The Company** will, where practicable, be seeking to follow when **Re-synchronising Power Islands** following any **Total Shutdown** or **Partial Shutdown**, include the following:

(a) the provision of supplies to appropriate **Power Stations** to facilitate their synchronisation as soon as practicable;

(b) energisation of a skeletal **National Electricity Transmission System**;

(c) the strategic restoration of **Demand** in co-ordination with relevant **Network Operators**.

As highlighted in OC9.4.3, during a **Total Shutdown** or **Partial Shutdown** and during the subsequent recovery, which includes any period during which the procedures in this OC9.5 apply, the **Licence Standards** may not apply and the **Total System** may be operated outside normal voltage and **Frequency** standards.

OC9.5.7 To manage effectively and co-ordinate the restoration strategies of the **Total System** (any **Re-Synchronisation** of **Power Islands**) following any **Total Shutdown** or **Partial Shutdown**, requires **The Company** and relevant **Users** to undertake certain planning activities as set out below:

(a) **The Company** and **Network Operators** shall review on a regular basis the processes by which each **Power Island** will be interconnected. This is likely to cover an exchange of information regarding the typical size, location and timing requirements for **Demand** to be reconnected and also include details (ability to change/disable) of the low frequency trip relay settings of the **Demand** identified.

(b) Each **Generator** shall provide to **The Company** information to assist **The Company** in the formulation of the restoration strategies of **Power Island** expansion. This information shall be provided in accordance with PC.A.5.7.

OC9.6 JOINT SYSTEM INCIDENT PROCEDURE

OC9.6.1 A "**Joint System Incident**" is

(a) an **Event**, wherever occurring (other than on an **Embedded Small Power Station** or **Embedded Medium Power Station**), which, in the opinion of **The Company** or a **User**, has or may have a serious and/or widespread effect.

(b) In the case of an **Event** on a **User(s) System(s)** (other than on an **Embedded Small Power Station** or **Embedded Medium Power Station**), the effect must be on the **National Electricity Transmission System**, and in the case of an **Event** on the **National Electricity Transmission System**, the effect must be on a **User(s) System(s)** (other than on an **Embedded Small Power Station** or **Embedded Medium Power Station**).

Where an **Event** on a **User(s) System(s)** has or may have no effect on the **National Electricity Transmission System**, then such an **Event** does not fall within **OC9** and accordingly **OC9** shall not apply to it.

OC9.6.2 (a) (i) Each **User** (other than **Generators** which only have **Embedded Small Power Stations** and/or **Embedded Medium Power Stations**) will provide in writing to **The Company**, and

(ii) **The Company** will provide in writing to each **User** (other than **Generators** which only have **Embedded Small Power Stations** and/or **Embedded Medium Power Stations**), a telephone number or numbers at which, or through which, senior management representatives nominated for this purpose and who are fully authorised to make binding decisions on behalf of **The Company** or the relevant **User**, as the case may be, can be contacted day or night when there is a **Joint System Incident**.

(b) The lists of telephone numbers will be provided in accordance with the timing requirements of the **Bilateral Agreement** and/or **Construction Agreement** with that **User**, prior to the time that a **User** connects to the **National Electricity Transmission System** and must be up-dated (in writing) as often as the information contained in them changes.

OC9.6.3 Following notification of an **Event** under **OC7**, **The Company** or a **User**, as the case may be, will, if it considers necessary, telephone the **User** or **The Company**, as the case may be, on the telephone number referred to in OC9.6.2, to obtain such additional information as it requires.

OC9.6.4 Following notification of an **Event** under **OC7**, and/or the receipt of any additional information requested pursuant to OC9.6.3, **The Company** or a **User**, as the case may be, will determine whether or not the **Event** is a **Joint System Incident**, and, if so, **The Company** and/or the **User** may set up an **Incident Centre** in order to avoid overloading the existing, operational/control arrangements be they **The Company's** or **User's**.

OC9.6.5 Where **The Company** has determined that an **Event** is a **Joint System Incident**, **The Company** shall, as soon as possible, notify all relevant **Users** that a **Joint System Incident** has occurred and, if appropriate, that it has established an **Incident Centre** and the telephone number(s) of its **Incident Centre** if different from those already supplied pursuant to OC9.6.2.

OC9.6.6 If a **User** establishes an **Incident Centre** it shall, as soon as possible, notify **The Company** that it has been established and the telephone number(s) of the **Incident Centre** if different from those already supplied pursuant to OC9.6.2.

OC9.6.7 **The Company's Incident Centre** and/or the **User's Incident Centre** will not assume any responsibility for the operation of the **National Electricity Transmission System** or **User's System**, as the case may be, but will be the focal point in **The Company** or the **User**, as the case may be, for:

(a) the communication and dissemination of information between **The Company** and the senior management representatives of **User(s)**; or

(b) between the **User** and the senior management representatives of **The Company**, as the case may be,

relating to the **Joint System Incident**. The term "**Incident Centre**" does not imply a specially built centre for dealing with **Joint System Incidents**, but is a communications focal point. During a **Joint System Incident**, the normal communication channels, for operational/control communication between **The Company** and **Users** will continue to be used.

OC9.6.8 All communications between the senior management representatives of the relevant parties with regard to **The Company's** role in the **Joint System Incident** shall be made via **The Company's Incident Centre** if it has been established.

OC9.6.9 All communications between the senior management representatives of **The Company** and a **User** with regard to that **User's** role in the **Joint System Incident** shall be made via that **User's Incident Centre** if it has been established.

OC9.6.10 **The Company** will decide when conditions no longer justify the need to use its **Incident Centre** and will inform all relevant **Users** of this decision.

OC9.6.11 Each **User** which has established an **Incident Centre** will decide when conditions no longer justify the need to use that **Incident Centre** and will inform **The Company** of this decision.

APPENDIX 1 – SYSTEM RESTORATION REGIONS

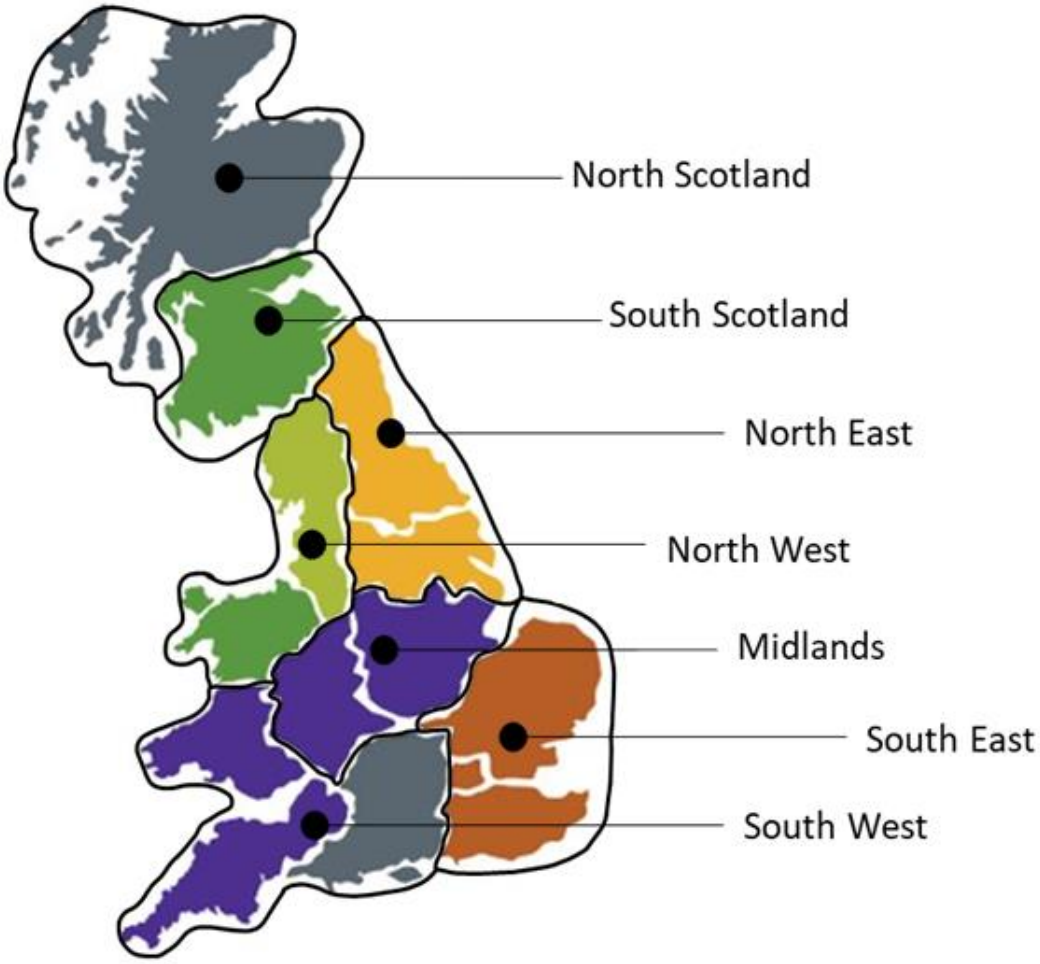

< END OF OPERATING CODE NO. 9 >

OPERATING CODE NO. 10

(OC10)

EVENT INFORMATION SUPPLY

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title	Page Number
OC10.1 INTRODUCTION	2
OC10.2 OBJECTIVE	2
OC10.3 SCOPE	2
OC10.4 PROCEDURE	2
OC10.4.1 Reporting	2
OC10.4.2 Joint Investigations	3
APPENDIX 1 - MATTERS TO BE INCLUDED IN A WRITTEN REPORT	5

OC10.1 INTRODUCTION

OC10.1.1. **Operating Code No.10** ("**OC10**") sets out:

OC10.1.1.1 the requirements for the reporting in writing and, where appropriate, more fully, those **Significant Incidents** which were initially reported to **The Company** or a **User** orally under **OC7**; and

OC10.1.1.2 the mechanism for the joint investigation of a **Significant Incident** or a series of **Significant Incidents** if **The Company** and the relevant **Users** agree.

OC10.2 OBJECTIVE

The objective of **OC10** is to facilitate the provision of more detailed information, in writing, of **Significant Incidents** which were initially orally reported under **OC7** and to enable joint investigations to take place if **The Company** and the relevant **Users** agree.

OC10.3 SCOPE

OC10.3.1 **OC10** applies to **The Company** and to **Users**, which in **OC10** means:-

(a) **Generators** (other than those which only have **Embedded Small Power Stations** and/or **Embedded Medium Power Stations**);

(b) **Network Operators**;

(c) **Non-Embedded Customers**;

(d) **DC Converter Station** owners; and

(e) **HVDC System Owners**.

The procedure for **Event** information supply between **The Company** and **Externally Interconnected System Operators** is set out in the **Interconnection Agreement** with each **Externally Interconnected System Operator**.

OC10.4 PROCEDURE

OC10.4.1 Reporting

OC10.4.1.1 Written Reporting Of Events By Users To The Company

In the case of an **Event** which was initially reported by a **User** to **The Company** orally and subsequently determined by **The Company** to be a **Significant Incident**, and accordingly notified by **The Company** to a **User** pursuant to **OC7**, the **User** will give a written report to **The Company**, in accordance with **OC10**. **The Company** will not pass on this report to other affected **Users** but may use the information contained therein in preparing a report under **OC10** to another **User** (or in a report which **The Company** is required to submit under an **Interconnection Agreement**) in relation to a **Significant Incident** (or its equivalent under an **Interconnection Agreement** or STC) on the **National Electricity Transmission System** which has been caused by (or exacerbated by) the **Significant Incident** on the **User's System**.

OC10.4.1.2 Written Reporting Of Events By The Company To Users

In the case of an **Event** which was initially reported by **The Company** to a **User** orally and subsequently determined by the **User** to be a **Significant Incident**, and accordingly notified by the **User** to **The Company** pursuant to **OC7**, **The Company** will give a written report to the **User**, in accordance with **OC10**. The **User** will not pass on the report to other affected **Users** but:

(a) a **Network Operator** may use the information contained therein in preparing a written report to a **Generator** with a **Power Generating Module** and/or **Generating Unit** and/or a **Power Park Module** connected to its **System** or to a **DC Converter Station** owner with a **DC Converter** connected to its **System** or to an **HVDC System Owner** with a **HVDC System** connected to its **System** or to another operator of a **User System** connected to its **System** in connection with reporting the equivalent of a **Significant Incident** under the **Distribution Code** (or other contract pursuant to which that **Power Generating Module** and/or **Generating Unit** and/or that **Power Park Module** or that **DC Converter** or that **HVDC System** or **User System** is connected to its **System**) (if the **Significant Incident** on the **National Electricity Transmission System** caused or exacerbated it); and

(b) a **Generator** may use the information contained therein in preparing a written report to another **Generator** with a **Power Generating Module**, **Generating Unit** or a **Power Park Module** connected to its **System** or to the operator of a **User System** connected to its **System** if it is required (by a contract pursuant to which that **Power Generating Module** and/or **Generating Unit** and/or a **Power Park Module** or that is connected to its **System**) to do so in connection with the equivalent of a **Significant Incident** on its **System** (if the **Significant Incident** on the **National Electricity Transmission System** caused or exacerbated it).

OC10.4.1.3 Form

A report under OC10.4.1 shall be sent to **The Company** or to a **User**, as the case may be, and will contain a confirmation of the oral notification given under **OC7** together with more details relating to the **Significant Incident** although it (and any response to any question asked) need not state the cause of the **Event** save to the extent permitted under OC7.4.6.7 and OC7.4.6.9, and such further information which has become known relating to the **Significant Incident** since the oral notification under **OC7**. The report should, as a minimum, contain those matters specified in the Appendix to **OC10**. The Appendix is not intended to be exhaustive. **The Company** or the **User**, as the case may be, may raise questions to clarify the notification and the giver of the notification will, in so far as it is able, answer any questions raised.

OC10.4.1.4 Timing

A full written report under OC10.4.1 must, if possible, be received by **The Company** or the **User**, as the case may be, within 2 hours of **The Company** or the **User**, as the case may be, receiving oral notification under **OC7**. If this is not possible, the **User** or **The Company**, as the case may be, shall, within this period, submit a preliminary report setting out, as a minimum, those matters specified in the Appendix to **OC10**. As soon as reasonably practical thereafter, the **User** or **The Company**, as the case may be, shall submit a full written report containing the information set out in OC10.4.1.3.

OC10.4.2 Joint Investigations

OC10.4.2.1 Where a **Significant Incident** (or series of **Significant Incidents**) has been declared and a report (or reports) under **OC10** submitted, **The Company** or a **User** which has either given or received a written report under **OC10** may request that a joint investigation of a **Significant Incident** should take place.

OC10.4.2.2 Where there has been a series of **Significant Incidents** (that is to say, where a **Significant Incident** has caused or exacerbated another **Significant Incident**) the party requesting a joint investigation or the recipient of such a request, may request that the joint investigation should include an investigation into that other **Significant Incident** (or **Significant Incidents**).

OC10.4.2.3 **The Company** or a **User** may also request that:

(i) an **Externally Interconnected System Operator** and/or

(ii) **Interconnector User** or

(iii) (in the case of a **Network Operator**) a **Generator** with a **Power Generating Module** and/or a **Generating Unit** and/or a **Power Park Module** or a **DC Converter Station** owner with **DC Converter** connected to its **System** or an **HVDC System Owner** with a **HVDC System** connected to its **System** or another **User System** connected to its **System** or

(iv) (in the case of a **Generator**) another **Generator** with a **Power Generating Module** and/or a **Generating Unit** and/or a **Power Park Module** connected to its **System** or a **User System** connected to its **System**.

be included in the joint investigation.

OC10.4.2.4 A joint investigation will only take place if **The Company** and the **User** or **Users** involved agree to it (including agreement on the involvement of other parties referred to in OC10.4.2.3). The form and rules of, the procedure for, and all matters (including, if thought appropriate, provisions for costs and for a party to withdraw from the joint investigation once it has begun) relating to the joint investigation will be agreed at the time of a joint investigation and in the absence of agreement the joint investigation will not take place.

OC10.4.2.5 Requests relating to a proposed joint investigation will be in writing.

OC10.4.2.6 Any joint investigation under **OC10** is separate to any investigation under the **Disputes Resolution Procedure**.

APPENDIX 1 - MATTERS TO BE INCLUDED IN A WRITTEN REPORT

MATTERS, IF APPLICABLE TO THE SIGNIFICANT INCIDENT AND TO THE RELEVANT USER (OR THE COMPANY, AS THE CASE MAY BE) TO BE INCLUDED IN A WRITTEN REPORT GIVEN IN ACCORDANCE WITH OC10.4.1 AND OC10.4.2

1. Time and date of **Significant Incident**.

2. Location.

3. **Plant** and/or **Apparatus** directly involved (and not merely affected by the **Event**).

4. Description of **Significant Incident**.

5. **Demand** (in MW) and/or generation (in MW) interrupted and duration of interruption.

6. **Power Generating Module, Generating Unit**, **Power Park Module**, **HVDC System** or **DC Converter** - **Frequency** response (MW correction achieved subsequent to the **Significant Incident**).

7. **Power Generating Module**, **Generating Unit**, **Power Park Module**, **HVDC System** or **DC Converter** - MVAr performance (change in output subsequent to the **Significant Incident**).

8. Estimated time and date of return to service.

< END OF OPERATING CODE NO. 10 >

OPERATING CODE NO. 11

(OC11)

NUMBERING AND NOMENCLATURE OF HIGH VOLTAGE APPARATUS AT CERTAIN SITES

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title	Page Number
OC11.1 INTRODUCTION	2
OC11.2 OBJECTIVE	2
OC11.3 SCOPE	2
OC11.4 PROCEDURE	2
OC11.4.2 Transmission HV Apparatus Or OTSDUW HV Apparatus On Users' Sites	3
OC11.4.3 User HV Apparatus Or OTSDUW HV Apparatus On Transmission Sites	3
OC11.4.4 Changes	3

OC11.1 INTRODUCTION

OC11.1.1 **Operating Code No.11** ("**OC11**") sets out the requirement that:

(a) **Transmission HV Apparatus** on **Users' Sites**; and

(b) **User HV Apparatus** on **Transmission Sites**; and

(c) **OTSDUW HV Apparatus** on both **Users' Sites** and the **Transmission Sites**;

shall have numbering and nomenclature in accordance with the system used from time to time by **The Company**.

OC11.1.2 The numbering and nomenclature (if required under the system of numbering and nomenclature used from time to time by **The Company**) of each item of **HV Apparatus** shall be included in the **Operation Diagram** prepared for each **Transmission Site** or **User Site**, as the case may be. Further provisions on **Operation Diagrams** are contained in the **Connection Conditions** or **European Connection Conditions** and in each **Bilateral Agreement**.

OC11.1.3 In **OC11**, the term "**HV Apparatus**" includes any **SF_6 Gas Zones** associated with any **HV Apparatus**.

OC11.1.4 In **OC11** the term "**OTSDUW HV Apparatus**" applies to any **HV Apparatus** installed by a **User** as **OTSDUW** until it is accepted on to the **National Electricity Transmission System** at which time for the purposes of **OC11** it will be termed **Transmission HV Apparatus**.

OC11.2 OBJECTIVE

OC11.2.1 The overall objective of **OC11** is to ensure, so far as possible, the safe and effective operation of the **Total System** and to reduce the risk of human error faults by requiring, in certain circumstances, that the numbering and nomenclature of **Users' HV Apparatus** and **OTSDUW HV Apparatus** shall be in accordance with the system used from time to time by **The Company**.

OC11.3 SCOPE

OC11.3.1 **OC11** applies to **The Company** and to **Users**, which in **OC11** means:-

(a) **Generators**;

(b) **Generators** undertaking **OTSDUW**;

(c) **Network Operators**;

(d) **Non-Embedded Customers**;

(e) **DC Converter Station** owners; and

(f) **HVDC System Owners**

OC11.4 PROCEDURE

OC11.4.1.1 The term "**User Site**" means a site owned (or occupied pursuant to a lease, licence or other agreement) by a **User** in which there is a **Connection Point** (and in the case of **OTSDUW**, where there is a **Connection Point** or an **Interface Point**). For the avoidance of doubt, where a site is owned by a **Relevant Transmission Licensee** but occupied by a **User** (as aforesaid), the site is a **User Site**.

OC11.4.1.2 The term "**Transmission Site**" means a site owned (or occupied pursuant to a lease, licence or other agreement) by a **Relevant Transmission Licensee** in which there is a **Connection Point** (or in the case of **OTSDUW**, an **Interface Point**). For the avoidance of doubt, where a site is owned by a **User** but occupied by a **Relevant Transmission Licensee** (as aforesaid), the site is an **Transmission Site**.

OC11.4.2 Transmission HV Apparatus Or OTSDUW HV Apparatus On Users' Sites

(a) **Transmission HV Apparatus** or **OTSDUW HV Apparatus** on **Users' Sites** shall have numbering and nomenclature in accordance with the system used from time to time by **The Company**;

(b) when the **Relevant Transmission Licensee** is to install its **HV Apparatus** on a **User's Site**, **The Company** shall (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) notify the relevant **User** of the numbering and nomenclature to be adopted for that **HV Apparatus** at least eight months prior to proposed installation. When **OTSDUW HV Apparatus** is to be installed on a **User's Site**, **The Company** shall notify the relevant **User** of the numbering and nomenclature to be adopted for that **OTSDUW HV Apparatus** at least eight months prior to proposed installation;

(c) in the case of **HV Apparatus**, the notification will be made in writing to the relevant **User** and will consist of both a proposed **Operation Diagram** incorporating the proposed new **Transmission HV Apparatus** to be installed, its proposed numbering and nomenclature, and the date of its proposed installation. In the case of **OTSDUW HV Apparatus**, the notification will be provided as part of the **OTSDUW Network Data and Information**;

(d) the relevant **User** will respond in writing to **The Company** within one month of the receipt of the notification, confirming receipt and confirming either that any other **HV Apparatus** of the relevant **User** on such **User Site** does not have numbering and/or nomenclature which could be confused with that proposed by **The Company**, or, to the extent that it does, that the relevant other numbering and/or nomenclature will be changed before installation of the **Transmission HV Apparatus** or **OTSDUW HV Apparatus**;

(e) the relevant **User** will not install, or permit the installation of, any **HV Apparatus**, including **OTSDUW HV Apparatus** on such **User Site** which has numbering and/or nomenclature which could be confused with **Transmission HV Apparatus** which is either already on that **User Site** or which **The Company** has notified that **User** will be installed on that **User Site**.

OC11.4.3 User HV Apparatus Or OTSDUW HV Apparatus On Transmission Sites

(a) **User HV Apparatus** and any **OTSDUW HV Apparatus** on **Transmission Sites** shall have numbering and nomenclature in accordance with the system used from time to time by **The Company**;

(b) when a **User** is to install its **HV Apparatus** on an **Transmission Site**, or it wishes to replace existing **HV Apparatus** on a **Transmission Site** and it wishes to adopt new numbering and nomenclature for such **HV Apparatus**, the **User** shall (unless it gives rise to a **Modification** under the **CUSC** in which case the provisions of the **CUSC** as to the timing apply) notify **The Company** of the details of the **HV Apparatus** and the proposed numbering and nomenclature to be adopted for that **HV Apparatus**, at least eight months prior to proposed installation;

(c) the notification will be made in writing to **The Company** and shall consist of both a proposed **Operation Diagram** incorporating the proposed new **HV Apparatus** of the **User** to be installed, its proposed numbering and nomenclature, and the date of its proposed installation;

(d) **The Company** will respond in writing to the **User** within one month of the receipt of the notification stating whether or not **The Company** accepts the **User's** proposed numbering and nomenclature and, if they are not acceptable, it shall give details of the numbering and nomenclature which the **User** shall adopt for that **HV Apparatus**;

(e) when **a User** is to install **OTSDUW HV Apparatus** on a **Transmission Site**, **The Company** shall notify the relevant **User** of the numbering and nomenclature to be adopted for that **HV Apparatus** at least eight months prior to proposed installation. This notification will be provided as part of the **OTSDUW Network Data and Information**.

OC11.4.4 Changes

Where **The Company** in its reasonable opinion has decided that it needs to change the existing numbering or nomenclature of **Transmission HV Apparatus** on a **User's Site** or of **Users' HV Apparatus** on a **Transmission Site**:

(a) the provisions of paragraph OC11.4.2 shall apply to such change of numbering or nomenclature of **Transmission HV Apparatus** with any necessary amendments to those provisions to reflect that only a change is being made; and

(b) in the case of a change in the numbering or nomenclature of **Users' HV Apparatus** on an **Transmission Site**, **The Company** will (unless it gives rise to a **Modification** under the **CUSC**, in which case the provisions of the **CUSC** as to the timing apply) notify the **User** of the numbering and/or nomenclature the **User** shall adopt for that **HV Apparatus** (the notification to be in a form similar to that envisaged under OC11.4.2) at least eight months prior to the change being needed and the **User** will respond in writing to **The Company** within one month of the receipt of the notification, confirming receipt.

In either case the notification shall indicate the reason for the proposed change.

OC11.4.5 **Users** will be provided upon request with details of **The Company's** then current numbering and nomenclature system in order to assist them in planning the numbering and nomenclature for their **HV Apparatus** or **OTSDUW HV Apparatus** on **Transmission Sites** and **OTSDUW HV Apparatus** on **Users' Sites**.

OC11.4.6 When a **User** installs **HV Apparatus** or **OTSDUW HV Apparatus** which is the subject of **OC11**, the **User** shall be responsible for the provision and erection of clear and unambiguous labelling showing the numbering and nomenclature. Where a **User** is required by **OC11** to change the numbering and/or nomenclature of **HV Apparatus** which is the subject of **OC11**, the **User** will be responsible for the provision and erection of clear and unambiguous labelling by the required date.

When a **Relevant Transmission Licensee** installs **HV Apparatus** which is the subject of **OC11**, **The Company** shall be responsible for the provision and erection of a clear and unambiguous labelling showing the numbering and nomenclature. Where **The Company** in coordination with the **Relevant Transmission Licensee** changes the numbering and /or nomenclature of **HV Apparatus** which is the subject of **OC11**, **The Company** in coordination with the **Relevant Transmission Licensee** will be responsible for the provision and erection of clear and unambiguous labelling showing the numbering and nomenclature by the required date.

OC11.4.7 For sites in England and Wales, **The Company** will not change its system of numbering and nomenclature in use immediately prior to the **Transfer Date** (which is embodied in OM5 (Operation Memorandum No.5 - Numbering and Nomenclature of HV Apparatus on the CEGB Grid System Issue 3 June 1987)), other than to reflect new or newly adopted technology or **HV Apparatus**. For the avoidance of doubt, this OC11.4.7 refers to the system of numbering and nomenclature, and does not preclude changes to the numbering and/or nomenclature of **HV Apparatus** which are necessary to reflect newly installed **HV Apparatus**, or re-configuration of **HV Apparatus** installed, and similar changes being made in accordance with that system of numbering and nomenclature.

< END OF OPERATING CODE NO. 11 >

OPERATING CODE NO. 12
(OC12)

SYSTEM TESTS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

OC12.1 INTRODUCTION....2

OC12.2 OBJECTIVE....2

OC12.3 SCOPE....2

OC12.4 PROCEDURE....3

OC12.4.1 Proposal Notice....3

OC12.4.2 Preliminary Notice And Establishment Of Test Panel....3

OC12.4.3 Test Panel....4

OC12.4.4 Proposal Report....5

OC12.4.5 Test Programme....6

OC12.4.6 Final Report....6

OC12.4.7 Timetable Reduction....6

OC12.1 INTRODUCTION

OC12.1.1 **Operating Code No.12** ("**OC12**") relates to **System Tests**, which are tests which involve simulating conditions or the controlled application of irregular, unusual or extreme conditions, on the **Total System** or any part of the **Total System**, but which do not include commissioning or recommissioning tests or any other tests of a minor nature.

OC12.1.2 **OC12** deals with the responsibilities and procedures for arranging and carrying out **System Tests** which have (or may have) an effect on the **Systems** of **The Company** and **Users** and/or on the **System** of any **Externally Interconnected System Operator**. Where a **System Test** proposed by a **User** will have no effect on the **National Electricity Transmission System**, then such a **System Test** does not fall within **OC12** and accordingly **OC12** shall not apply to it. A **System Test** proposed by **The Company** which will have an effect on the **System** of a **User** will always fall within **OC12**.

OC12.2 OBJECTIVE

The overall objectives of **OC12** are:

OC12.2.1 to ensure, so far as possible, that **System Tests** proposed to be carried out either by:

(a) a **User** (or certain persons in respect of **Systems Embedded** within a **Network Operator's System**) which may have an effect on the **Total System** or any part of the **Total System** (in addition to that **User's System**) including the **National Electricity Transmission System**; or

(b) by **The Company** which may have an effect on the **Total System** or any part of the **Total System** (in addition to the **National Electricity Transmission System**)

do not threaten the safety of either their personnel or the general public, cause minimum threat to the security of supplies and to the integrity of **Plant** and/or **Apparatus**, and cause minimum detriment to **The Company** and **Users**;

OC12.2.2 to set out the procedures to be followed for establishing and reporting **System Tests**.

OC12.3 SCOPE

OC12 applies to **The Company** and to **Users**, which in **OC12** means:-

(a) **Generators** other than in respect of **Embedded Medium Power Stations** and **Embedded Small Power Stations** (and the term **Generator** in OC12 shall be constructed accordingly);

(b) **Network Operators**;

(c) **Non-Embedded Customers**; and

(d) **DC Converter Station** owners other than in respect of **Embedded DC Converter Stations**.

(e) **HVDC System Owners** other than in respect of **Embedded HVDC Systems**.

The procedure for the establishment of **System Tests** on the **National Electricity Transmission System**, with **Externally Interconnected System Operators** which do not affect any **User**, is set out in the **Interconnection Agreement** with each **Externally Interconnected System Operator**. The position of **Externally Interconnected System Operators** and **Interconnector Users** is also referred to in OC12.4.2.

OC12.3.2 Each **Network Operator** will liaise within **The Company** as necessary in those instances where an **Embedded Person** intends to perform a **System Test** which may have an effect on the **Total System** or any part of the **Total System** (in addition to that **Generator's** or other **User's System**) including the **National Electricity Transmission System**. **The Company** is not required to deal with such persons.

OC12.3.3 Each **Network Operator** shall be responsible for co-ordinating with the **Embedded Person** or such other person and assessing the effect of any **System** Tests upon:

(a) any **Embedded Medium Power Station**, **Embedded Small Power Stations**, **Embedded HVDC System** or **Embedded DC Converter Station** within the **Network Operator's System**; or

(b) any other **User** connected to or within the **Network Operator's System**.

The Company is not required to deal with such persons.

OC12.4 PROCEDURE

OC12.4.1 Proposal Notice

OC12.4.1.1 Where a **User** (or in the case of a **Network Operator**, a person in respect of **Systems Embedded** within its **System**, as the case may be) has decided that it would like to undertake a **System Test** it shall submit a notice (a "**Proposal Notice**") to **The Company** at least twelve months in advance of the date it would like to undertake the proposed **System Test**.

OC12.4.1.2 The **Proposal Notice** shall be in writing and shall contain details of the nature and purpose of the proposed **System Test** and shall indicate the extent and situation of the **Plant** and/or **Apparatus** involved.

OC12.4.1.3 If **The Company** is of the view that the information set out in the **Proposal Notice** is insufficient, it will contact the person who submitted the **Proposal Notice** (the "**Test Proposer**") as soon as reasonably practicable, with a written request for further information. **The Company** will not be required to do anything under **OC12** until it is satisfied with the details supplied in the **Proposal Notice** or pursuant to a request for further information.

OC12.4.1.4 If **The Company** wishes to undertake a **System Test**, **The Company** shall be deemed to have received a **Proposal Notice** on that **System Test**

OC12.4.1.5 Where, under **OC12**, **The Company** is obliged to notify or contact the **Test Proposer**, **The Company** will not be so obliged where it is **The Company** that has proposed the **System Test**. **Users** and the **Test Panel**, where they are obliged under **OC12** to notify, send reports to or otherwise contact both **The Company** and the **Test Proposer**, need only do so once where **The Company** is the proposer of the **System Test**.

OC12.4.2 Preliminary Notice And Establishment Of Test Panel

OC12.4.2.1 Using the information supplied to it under OC12.4.1 **The Company** will determine, in its reasonable estimation, which **Users**, other than the **Test Proposer**, may be affected by the proposed **System Test**. If **The Company** determines, in its reasonable estimation, that an **Externally Interconnected System Operator** and/or **Interconnector User** (or **Externally Interconnected System Operators** and/or **Interconnector Users**) may be affected by the proposed **System Test**, then (provided that the **Externally Interconnected System Operator** and/or **Interconnector User** (or each **Externally Interconnected System Operator** and/or **Interconnector User** where there is more than one affected) undertakes to all the parties to the Grid Code to be bound by the provisions of the Grid Code for the purposes of the **System Test**) for the purposes of the remaining provisions of this **OC12**, that **Externally Interconnected System Operator** and/or **Interconnector User** (or each of those **Externally Interconnected System Operators** and/or **Interconnector Users**) will be deemed to be a **User** and references to the **Total System** or to the **Plant** and/or **Apparatus** of a **User** will be deemed to include a reference to the **Transmission** or distribution **System** and **Plant** and/or **Apparatus** of that **Externally Interconnected System Operator** and/or **Interconnector User** or (as the case may be) those **Externally Interconnected System Operators** and/or **Interconnector Users**. In the event that the **Externally Interconnected System Operator** and/or **Interconnector User** (or any of the **Externally Interconnected System Operators** and/or **Interconnector Users** where there is more than one affected) refuses to so undertake, then the **System Test** will not take place.

OC12.4.2.2 **The Company** will appoint a person to co-ordinate the **System Test** (a "**Test Co-ordinator**") as soon as reasonably practicable after it has, or is deemed to have, received a **Proposal Notice** and in any event prior to the distribution of the **Preliminary Notice** referred to below. The **Test Co-ordinator** shall act as Chairperson of the **Test Panel** and shall be an ex-officio member of the **Test Panel**.

(a) Where **The Company** decides, in its reasonable opinion, that the **National Electricity Transmission System** will or may be significantly affected by the proposed **System Test**, then the **Test Co-ordinator** will be a suitably qualified person nominated by **The Company** after consultation with the **Test Proposer** and the **Users** identified under OC12.4.2.1.

(b) Where **The Company** decides, in its reasonable opinion, that the **National Electricity Transmission System** will not be significantly affected by the proposed **System Test**, then the **Test Co-ordinator** will be a suitably qualified person nominated by the **Test Proposer** after consultation with **The Company**.

(c) **The Company** will, as soon as reasonably practicable after it has received, or is deemed to have received, a **Proposal Notice**, contact the **Test Proposer** where the **Test Co-ordinator** is to be a person nominated by the **Test Proposer** and invite it to nominate a person as **Test Co-ordinator**. If the **Test Proposer** is unable or unwilling to nominate a person within seven days of being contacted by **The Company** then the proposed **System Test** will not take place.

OC12.4.2.3 **The Company** will notify all **Users** identified by it under OC12.4.2.1 of the proposed **System Test** by a notice in writing (a "**Preliminary Notice**") and will send a **Preliminary Notice** to the **Test Proposer**. The **Preliminary Notice** will contain:

(a) the details of the nature and purpose of the proposed **System Test**, the extent and situation of the **Plant** and/or **Apparatus** involved and the identity of the **Users** identified by **The Company** under OC12.4.2.1 and the identity of the **Test Proposer**;

(b) an invitation to nominate within one month a suitably qualified representative (or representatives, if the **Test Co-ordinator** informs **The Company** that it is appropriate for a particular **User** including the **Test Proposer**) to be a member of the **Test Panel** for the proposed **System Test**;

(c) the name of the **The Company** representative (or representatives) on the **Test Panel** for the proposed **System Test**; and

(d) the name of the **Test Co-ordinator** and whether they were nominated by the **Test Proposer** or by **The Company**.

OC12.4.2.4 The **Preliminary Notice** will be sent within one month of the later of either the receipt by **The Company** of the **Proposal Notice**, or of the receipt of any further information requested by **The Company** under OC12.4.1.3. Where **The Company** is the proposer of the **System Test**, the **Preliminary Notice** will be sent within one month of the proposed **System Test** being formulated.

OC12.4.2.5 Replies to the invitation in the **Preliminary Notice** to nominate a representative to be a member of the **Test Panel** must be received by **The Company** within one month of the date on which the **Preliminary Notice** was sent to the **User** by **The Company**. Any **User** which has not replied within that period will not be entitled to be represented on the **Test Panel**. If the **Test Proposer** does not reply within that period, the proposed **System Test** will not take place and **The Company** will notify all **Users** identified by it under OC12.4.2.1 accordingly.

OC12.4.2.6 **The Company** will, as soon as possible after the expiry of that one month period, appoint the nominated persons to the **Test Panel** and notify all **Users** identified by it under OC12.4.2.1 and the **Test Proposer**, of the composition of the **Test Panel**.

OC12.4.3 Test Panel

OC12.4.3.1 A meeting of the **Test Panel** will take place as soon as possible after **The Company** has notified all **Users** identified by it under OC12.4.2.1 and the **Test Proposer** of the composition of the **Test Panel**, and in any event within one month of the appointment of the **Test Panel**.

OC12.4.3.2 The **Test Panel** shall consider:

(a) the details of the nature and purpose of the proposed **System Test** and other matters set out in the **Proposal Notice** (together with any further information requested by **The Company** under OC12.4.1.3);

(b) the economic, operational and risk implications of the proposed **System Test**;

(c) the possibility of combining the proposed **System Test** with any other tests and with **Plant** and/or **Apparatus** outages which arise pursuant to the **Operational Planning** requirements of **The Company** and **Users**; and

(d) implications of the proposed **System Test** on the operation of the **Balancing Mechanism**, in so far as it is able to do so.

OC12.4.3.3 **Users** identified by **The Company** under OC12.4.2.1, the **Test Proposer** and **The Company** (whether or not they are represented on the **Test Panel**) shall be obliged to supply that **Test Panel**, upon written request, with such details as the **Test Panel** reasonably requires in order to consider the proposed **System Test**.

OC12.4.3.4 The **Test Panel** shall be convened by the **Test Co-ordinator** as often as they deem necessary to conduct its business.

OC12.4.4 Proposal Report

OC12.4.4.1 Within two months of first meeting, the **Test Panel** will submit a report (a "**Proposal Report**"), which will contain:

(a) proposals for carrying out the **System Test** (including the manner in which the **System Test** is to be monitored);

(b) an allocation of costs (including un-anticipated costs) between the affected parties (the general principle being that the **Test Proposer** will bear the costs); and

(c) such other matters as the **Test Panel** considers appropriate.

The **Proposal Report** may include requirements for indemnities (including an indemnity from the relevant **Network Operator** to **The Company** and other **Users** in relation to its **Embedded Persons**) to be given in respect of claims and losses arising from the **System Test**. All **System Test** procedures must comply with all applicable legislation.

OC12.4.4.2 If the **Test Panel** is unable to agree unanimously on any decision in preparing its **Proposal Report**, the proposed **System Test** will not take place and the **Test Panel** will be dissolved.

OC12.4.4.3 The **Proposal Report** will be submitted to **The Company**, the **Test Proposer** and to each **User** identified by **The Company** under OC12.4.2.1.

OC12.4.4.4 Each recipient will respond to the **Test Co-ordinator** with its approval of the **Proposal Report** or its reason for non-approval within fourteen days of receipt of the **Proposal Report**. If any recipient does not respond, the **System Test** will not take place and the **Test Panel** will be dissolved.

OC12.4.4.5 In the event of non-approval by one or more recipients, the **Test Panel** will meet as soon as practicable in order to determine whether the proposed **System Test** can be modified to meet the objection or objections.

OC12.4.4.6 If the proposed **System Test** cannot be so modified, the **System Test** will not take place and the **Test Panel** will be dissolved.

OC12.4.4.7 If the proposed **System Test** can be so modified, the **Test Panel** will, as soon as practicable, and in any event within one month of meeting to discuss the responses to the **Proposal Report**, submit a revised **Proposal Report** and the provisions of OC12.4.4.3 and OC12.4.4.4 will apply to that submission.

OC12.4.4.8 In the event of non-approval of the revised **Proposal Report** by one or more recipients, the **System Test** will not take place and the **Test Panel** will be dissolved.

OC12.4.5 Test Programme

OC12.4.5.1 If the **Proposal Report** (or, as the case may be, the revised **Proposal Report**) is approved by all recipients, the proposed **System Test** can proceed and at least one month prior to the date of the proposed **System Test**, the **Test Panel** will submit to **The Company**, the **Test Proposer** and each **User** identified by **The Company** under OC12.4.2.1, a programme (the "**Test Programme**") stating the switching sequence and proposed timings of the switching sequence, a list of those staff involved in carrying out the **System Test** (including those responsible for site safety) and such other matters as the **Test Panel** deems appropriate.

OC12.4.5.2 The **Test Programme** will, subject to OC12.4.5.3, bind all recipients to act in accordance with the provisions of the **Test Programme** in relation to the proposed **System Test**.

OC12.4.5.3 Any problems with the proposed **System Test** which arise or are anticipated after the issue of the **Test Programme** and prior to the day of the proposed **System Test**, must be notified to the **Test Co-ordinator** as soon as possible in writing. If the **Test Co-ordinator** decides that these anticipated problems merit an amendment to, or postponement of, the **System Test**, they shall notify the **Test Proposer** (if the **Test Co-ordinator** was not appointed by the **Test Proposer**), **The Company** and each **User** identified by **The Company** under OC12.4.2.1 accordingly.

OC12.4.5.4 If on the day of the proposed **System Test**, operating conditions on the **Total System** are such that any party involved in the proposed **System Test** wishes to delay or cancel the start or continuance of the **System Test**, they shall immediately inform the **Test Co-ordinator** of this decision and the reasons for it. The **Test Co-ordinator** shall then postpone or cancel, as the case may be, the **System Test** and shall, if possible, agree with the **Test Proposer** (if the **Test Co-ordinator** was not appointed by the **Test Proposer**), **The Company** and all **Users** identified by **The Company** under OC12.4.2.1 another suitable time and date. If they cannot reach such agreement, the **Test Co-ordinator** shall reconvene the **Test Panel** as soon as practicable, which will endeavour to arrange another suitable time and date for the **System Test**, in which case the relevant provisions of **OC12** shall apply.

OC12.4.6 Final Report

OC12.4.6.1 At the conclusion of the **System Test**, the **Test Proposer** shall be responsible for preparing a written report on the **System Test** (the "**Final Report**") for submission to **The Company** and other members of the **Test Panel**. The **Final Report** shall be submitted within three months of the conclusion of the **System Test** unless a different period has been agreed by the **Test Panel** prior to the **System Test** taking place.

OC12.4.6.2 The **Final Report** shall not be submitted to any person who is not a member of the **Test Panel** unless the **Test Panel**, having considered the confidentiality issues arising, shall have unanimously approved such submission.

OC12.4.6.3 The **Final Report** shall include a description of the **Plant** and/or **Apparatus** tested and a description of the **System Test** carried out, together with the results, conclusions and recommendations.

OC12.4.6.4 When the **Final Report** has been prepared and submitted in accordance with OC12.4.6.1, the **Test Panel** will be dissolved.

OC12.4.7 Timetable Reduction

OC12.4.7.1 In certain cases a **System Test** may be needed on giving less than twelve months notice. In that case, after consultation with the **Test Proposer** and **User(s)** identified by **The Company** under OC12.4.2.1, **The Company** shall draw up a timetable for the proposed **System Test** and the procedure set out in OC12.4.2 to OC12.4.6 shall be followed in accordance with that timetable.

< END OF OPERATING CODE NO. 12 >

BALANCING CODE NO. 1

(BC1)

PRE GATE CLOSURE PROCESS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

BC1.1 INTRODUCTION 3
BC1.2 OBJECTIVE 3
BC1.3 SCOPE 3
BC1.4 SUBMISSION OF DATA 3
BC1.4.1 Communication With Users 3
BC1.4.2 Day Ahead Submissions 4
BC1.4.3 Data Revisions 7
BC1.4.4 Receipt Of BM Unit Data Prior To Gate Closure 7
BC1.4.5 BM Unit Defaulting, Validity And Consistency Checking 7
BC1.4.6 Special Provisions Relating To Interconnector Users 8
BC1.5 INFORMATION PROVIDED BY COMPANY 8
BC1.5.1 Demand Estimates 9
BC1.5.2 Indicated Margin And Indicated Imbalance 9
BC1.5.3 Provision Of Updated Information 9
BC1.5.4 Reserve And System Margin 9
BC1.5.5 System And Localised NRAPM (Negative Reserve Active Power Margin) 10
BC1.6 SPECIAL PROVISIONS RELATING TO NETWORK OPERATORS 11
BC1.6.1 User System Data From Network Operators 11
BC1.6.2 Notification Times To Network Operators 12
BC1.7 SPECIAL ACTIONS 12
BC1.8 PROVISION OF REACTIVE POWER CAPABILITY 13
APPENDIX 1 - BM UNIT DATA 15
BC1.A.1.1 Physical Notifications 15
BC1.A.1.3 Export And Import Limits 16
BC1.A.1.4 Bid Offer Data 17
BC1.A.1.5 Dynamic Parameters 18
BC1.A.1.6 CCGT Module Matrix 19
BC1.A.1.7 Cascade Hydro Scheme Matrix 21
BC1.A.1.8 Power Park Module Availability Matrix 21
BC1.A.1.9 Synchronous Power Generating Module Matrix 22
BC1.A.1.10 Aggregator Impact Matrix 24

APPENDIX 2 - DATA TO BE MADE AVAILABLE BY THE COMPANY 25
BC1.A.2.1 Initial Day Ahead Demand Forecast 25
BC1.A.2.2 Initial Day Ahead Market Information. 25
BC1.A.2.3 Current Day & Day Ahead Updated Market Information 25
APPENDIX 3 – EXTERNAL INTERCONNECTOR DATA 27
BC1.A.3 Reference Programme 27

BC1.1 INTRODUCTION

Balancing Code No1 (BC1) sets out the procedure for:

(a) the submission of **BM Unit Data** and/or **Generating Unit Data** (which could be part of a **Power Generating Module**) by each **BM Participant**;

(b) the submission of **Interconnector** data by each **Interconnector Owner**;

(c) the submission of certain **System** data by each **Network Operator**; and

(d) the provision of data by **The Company**,

in the period leading up to **Gate Closure**.

BC1.2 OBJECTIVE

The procedure for the submission of **BM Unit Data** and/or **Generating Unit Data** is intended to enable **The Company** to assess which **BM Units** and **Generating Units** (which could be part of a **Power Generating Module**) are expected to be operating in order that **The Company** can ensure (so far as possible) the integrity of the **National Electricity Transmission System**, and the security and quality of supply.

Where reference is made in this **BC1** to **Generating Units** and/or **Power Generating Modules** (unless otherwise stated) it only applies:

(a) to each **Generating Unit** which forms part of the **BM Unit** of a **Cascade Hydro Scheme**; and

(b) at an **Embedded Exemptable Large Power Station** where the relevant **Bilateral Agreement** specifies that compliance with **BC1** is required:

(i) to each **Generating Unit** which could be part of a **Synchronous Power Generating Module**, or

(ii) to each **Power Park Module** where the **Power Station** comprises **Power Park Modules**.

BC1.3 SCOPE

BC1 applies to **The Company** and to **Users**, which in this **BC1** means:-

(a) **BM Participants**;

(b) **Externally Interconnected System Operators**; and

(c) **Network Operators**.

BC1.4 SUBMISSION OF DATA

In the case of **Additional BM Units** or **Secondary BM Units** any data submitted by **Users** under this **BC1** must represent the value of the data at the relevant **GSP Group**.

In the case of all other **BM Units** or **Generating Units Embedded** in a **User System**, any data submitted by **Users** under this **BC1** must represent the value of the data at the relevant **Grid Supply Point**.

BC1.4.1 Communication With Users

(a) Submission of **BM Unit Data** and **Generating Unit Data** by **Users** to **The Company** specified in BC1.4.2 to BC1.4.4 (with the exception of BC1.4.2(f)) is to be by use of electronic data communications facilities, as provided for in CC.6.5.8 or ECC.6.5.8 (as applicable). However, data specified in BC1.4.2(c) and BC1.4.2(e) only, may be submitted by telephone or via the **Designated Information Exchange System**.

(b) Submission of **Interconnector** data by **Interconnector Owners** to **The Company** is to be by use of electronic data communications facilities, as provided for in CC.6.5.8 or ECC.6.5.8 (as applicable).

(c) In the event of a failure of the electronic data communication facilities, the data to apply in relation to a pre-**Gate Closure** period will be determined in accordance with the **Data Validation**, **Consistency and Defaulting Rules**, based on the most recent data received and acknowledged by **The Company**.

(d) **Planned Maintenance Outages** will normally be arranged to take place during periods of low data transfer activity.

(e) Upon any **Planned Maintenance Outage**, or following an unplanned outage described in BC1.4.1(b) (where it is termed a "failure") in relation to a pre-**Gate Closure** period:

(i) **BM Participants** should continue to act in relation to any period of time in accordance with the **Physical Notifications** current at the time of the start of the **Planned Maintenance Outage** or the computer system failure in relation to each such period of time subject to the provisions of BC2.5.1. Depending on when in relation to **Gate Closure** the planned or unplanned maintenance outage arises such operation will either be operation in preparation for the relevant output in real time, or will be operation in real time. No further submissions of **BM Unit Data** and/or **Generating Unit Data** (other than data specified in BC1.4.2(c) and BC1.4.2(e)) should be attempted. Plant failure or similar problems causing significant deviation from **Physical Notification** should be notified to **The Company** by the submission of a revision to **Export and Import Limits** in relation to the **BM Unit** and /or **Generating Unit** so affected;

(ii) **Interconnector Owners** should derive an **Interconnector Reference Programme** (as specified in BC1.A.3) based on the latest **Physical Notifications** notified by the **Interconnector Users** at the start of the **Planned Maintenance Outage**, or following an unplanned outage. The **Interconnector Owners** should communicate such latest **Interconnector Reference Programme** to **The Company** and continue to act in accordance with such latest **Interconnector Reference Programme**. No further submissions of **Interconnector Reference Programme** should be attempted until the end of the outage is declared.

(iii) during the outage, revisions to the data specified in BC1.4.2(c) and BC1.4.2(e) may be submitted. Communication between **Users Control Points** and **The Company** during the outage will be conducted by telephone; and

(iv) no data will be transferred from **The Company** to the **BMRA** until the communication facilities are re-established.

BC1.4.2 Day Ahead Submissions

Data for any **Operational Day** may be submitted to **The Company** up to several days in advance of the day to which it applies, as provided in the **Data Validation, Consistency and Defaulting Rules**. However, **Interconnector Users** must submit **Physical Notifications**, and any associated data as necessary, each day by 11:00 hours in respect of the next following **Operational Day** in order that the information used in relation to the capability of the respective **External Interconnection** is expressly provided. **The Company** shall not by the inclusion of this provision be prevented from utilising the provisions of BC1.4.5 if necessary.

The data may be modified by further data submissions at any time prior to **Gate Closure**, in accordance with the other provisions of **BC1**. The data to be used by **The Company** for operational planning will be determined from the most recent data that has been received by **The Company** by 11:00 hours on the day before the **Operational Day** to which the data applies, or from the data that has been defaulted at 11:00 hours on that day in accordance with BC1.4.5. Any subsequent revisions received by **The Company** under the Grid Code will also be utilised by **The Company**. In the case of all data items listed below, with the exception of item (e), **Dynamic Parameters** (Day Ahead), the latest submitted or defaulted data, as modified by any subsequent revisions, will be carried forward into operational timescales. The individual data items are listed below:

(a) Physical Notifications

Physical Notifications, being the data listed in **BC1** Appendix 1 under that heading, are required by **The Company** at 11:00 hours each day for each **Settlement Period** of the next following **Operational Day**, in respect of;

(1) **BM Units**:

(i) with a **Demand Capacity** with a magnitude of 50MW or more in **NGET's Transmission Area** or 10MW or more in **SHETL's Transmission Area** or 30MW or more in **SPT's Transmission Area**; or

(ii) comprising **Generating Units** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or **Power Generating Modules** and/or **CCGT Modules** and/or **Power Park Modules** in each case at **Large Power Stations**, **Medium Power Stations** and **Small Power Stations** where such **Small Power Stations** are directly connected to the **Transmission System**; or

(iii) where the **BM Participant** chooses to submit **Bid-Offer Data** in accordance with BC1.4.2(d) for **BM Units** not falling within (i) or (ii) above,

and

(2) each **Generating Unit** where applicable under BC1.2.

Physical Notifications may be submitted to **The Company** by **BM Participants**, for the **BM Units**, and **Generating Units**, specified in this BC1.4.2(a) at an earlier time, or **BM Participants** may rely upon the provisions of BC1.4.5 to create the **Physical Notifications** by data defaulting pursuant to the **Grid Code** utilising the rules referred to in that paragraph at 11:00 hours in any day.

Physical Notifications (which must comply with the limits on maximum rates of change listed in **BC1** Appendix 1) must, subject to the following operating limits, represent the **User's** best estimate of expected input or output of **Active Power**, except where a **BM Unit** is affected by a Stage 2 or higher **Network Gas Supply Emergency** load shedding event. **Physical Notifications** shall be prepared in accordance with **Good Industry Practice**. **Physical Notifications** for any **BM Unit**, and any **Generating Units**, should normally be consistent with the **Dynamic Parameters** and **Export and Import Limits** and must not reflect any **BM Unit** or any **Generating Units**, proposing to operate outside the limits of its **Demand Capacity** and (and in the case of **BM Units**) **Generation Capacity** and, in the case of a **BM Unit** comprising a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or **Power Generating Module** and/or **CCGT Module** and/or **Power Park Module**, its **Registered Capacity**.

These **Physical Notifications** provide, amongst other things, indicative **Synchronising** and **De-Synchronising** times to **The Company** in respect of any **BM Unit** comprising a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or **Power Generating Module** and/or **CCGT Module** and/or **Power Park Module**, and for any **Generating Units**, and provide an indication of significant **Demand** changes in respect of other **BM Units**.

In the case where a **BM Unit** is affected by a **Network Gas Supply Emergency** load shedding event, once Stage 2 or higher has been declared, then their **Physical Notifications** shall represent the **User's** best estimate of the contracted power position of the affected **BM Unit** at the time of the event, taking into account any mitigating actions to reduce the difference between the contracted power position and the volume to be shed.

(b) Not Used.

(c) Export and Import Limits

Each **BM Participant** may, in respect of each of its **BM Units** and its **Generating Units** submit to **The Company** for any part or for the whole of the next following **Operational Day** the data listed in **BC1** Appendix 1 under the heading of "**Export and Import Limits**" to amend the data already held by **The Company** in relation to **Export and Import Limits**, which would otherwise apply for those **Settlement Periods**.

Export and Import Limits respectively represent the maximum export to or import from the **National Electricity Transmission System** for a **BM Unit** and a **Generating Unit** and are the maximum levels that the **BM Participant** wishes to make available and must be prepared in accordance with **Good Industry Practice**.

(d) Bid-Offer Data

Each **BM Participant** may, in respect of each of its **BM Units**, but must not in respect of its **Generating Units** submit to **The Company** for any **Settlement Period** of the next following **Operational Day** the data listed in **BC1** Appendix 1 under the heading of "**Bid-Offer Data**" to amend the data already held by **The Company** in relation to **Bid-Offer Data**, which would otherwise apply to those **Settlement Periods**. The submitted **Bid-Offer Data** will be utilised by **The Company** in the preparation and analysis of its operational plans for the next following **Operational Day**. **Bid-Offer Data** may not be submitted unless an automatic logging device has been installed at the **Control Point** for the **BM Unit** in accordance with CC.6.5.8(b) or ECC.6.5.8(b) (as applicable).

(e) Dynamic Parameters (Day Ahead)

Each **BM Participant** may, in respect of each of its **BM Units**, but must not in respect of its **Generating Units** submit to **The Company** for the next following **Operational Day** the data listed in **BC1** Appendix 1 under the heading of "**Dynamic Parameters**" to amend that data already held by **The Company**.

These **Dynamic Parameters** shall reasonably reflect the expected true operating characteristics of the **BM Unit** and shall be prepared in accordance with **Good Industry Practice**.

The **Dynamic Parameters** applicable to the next following **Operational Day** will be utilised by **The Company** in the preparation and analysis of its operational plans for the next following **Operational Day** and may be used to instruct certain **Ancillary Services**. For the avoidance of doubt, the **Dynamic Parameters** to be used in the current **Operational Day** will be those submitted in accordance with BC2.5.3.1.

(f) Other Relevant Data

By 11:00 hours each day, each **BM Participant**, in respect of each of its **BM Units** and **Generating Units** for which **Physical Notifications** are being submitted, shall, if it has not already done so, submit to **The Company** (save in respect of item (vi) and (vii) where the item shall be submitted only when reasonably required by **The Company**), in respect of the next following **Operational Day** the following:

(i) in the case of a **CCGT Module** and/or a **Synchronous Power Generating Module**, a **CCGT Module Matrix** and/or a **Synchronous Power Generating Module Matrix**

as described in **BC1** Appendix 1;

(ii) details of any special factors which in the reasonable opinion of the **BM Participant** may have a material effect or present an enhanced risk of a material effect on the likely output (or consumption) of such **BM Unit(s)**. Such factors may include risks, or potential interruptions, to **BM Unit** fuel supplies, or developing plant problems, details of tripping tests, etc. This information will normally only be used to assist in determining the appropriate level of **Operating Margin** that is required under OC2.3.5;

(iii) in the case of **Generators**, any temporary changes, and their possible duration, to the **Registered Data** of such **BM Unit**;

(iv) in the case of **Suppliers**, details of **Customer Demand Management** taken into account in the preparation of its **BM Unit Data**;

(v) details of any other factors which **The Company** may take account of when issuing **Bid-Offer Acceptances** for a **BM Unit** (e.g., **Synchronising** or **De-Synchronising** Intervals);

(vi) in the case of a **Cascade Hydro Scheme**, the **Cascade Hydro Scheme Matrix** as described in **BC1** Appendix 1;

(vii) in the case of a **Power Park Module**, a **Power Park Module Availability Matrix** as described in **BC1** Appendix 1;

(viii) in the case of an **Additional BM Unit** or a **Secondary BM Unit** an **Aggregator Impact Matrix** as described in **BC1** Appendix 1.

BC1.4.3 Data Revisions

The **BM Unit Data**, and **Generating Unit Data**, derived at 1100 hours each day under BC1.4.2 above may need to be revised by the **BM Participant** for a number of reasons, including for example, changes to expected output or input arising from revised contractual positions, plant breakdowns, changes to expected **Synchronising** or **De-Synchronising** times, etc, occurring before **Gate Closure**. **BM Participants** should use reasonable endeavours to ensure that the data held by **The Company** in relation to its **BM Units** and **Generating Units**, is accurate at all times. Revisions to **BM Unit Data**, and **Generating Unit Data** for any period of time up to **Gate Closure** should be submitted to **The Company** as soon as reasonably practicable after a change becomes apparent to the **BM Participant**. **The Company** will use reasonable endeavours to utilise the most recent data received from **Users**, subject to the application of the provisions of BC1.4.5, for its preparation and analysis of operational plans.

BC1.4.4 Receipt Of BM Unit Data Prior To Gate Closure

BM Participants submitting **Bid-Offer Data**, in respect of any **BM Unit** for use in the **Balancing Mechanism** for any particular **Settlement Period** in accordance with the **BSC**, must ensure that **Physical Notifications** and **Bid-Offer Data** for such **BM Units** are received in their entirety and logged into **The Company's** computer systems by the time of **Gate Closure** for that **Settlement Period**. In all cases the data received will be subject to the application under the **Grid Code** of the provisions of BC1.4.5.

For the avoidance of doubt, no changes to the **Physical Notification** or **Bid-Offer Data** for any **Settlement Period** may be submitted to **The Company** after **Gate Closure** for that **Settlement Period**.

BC1.4.5 BM Unit Data Defaulting, Validity And Consistency Checking

In the event that no submission of any or all of the **BM Unit Data** and **Generating Unit Data** in accordance with BC1.4.2 in respect of an **Operational Day**, is received by **The Company** by 11:00 hours on the day before that **Operational Day**, **The Company** will apply the **Data Validation**, **Consistency and Defaulting Rules**, with the default rules applicable to **Physical Notifications** and **Export and Import Limits** data selected as follows:

(a) for an **Interconnector Users BM Unit**, the defaulting rules will set some or all of the data for that **Operational Day** to zero, unless the relevant Interconnector arrangements, as agreed with **The Company**, state otherwise (in which case (b) applies); and

(b) for all other **BM Units** or **Generating Units**, the defaulting rules will set some or all of the data for that **Operational Day** to the values prevailing in the current **Operational Day**.

A subsequent submission by a **User** of a data item which has been so defaulted under the **Grid Code** will operate as an amendment to that defaulted data and thereby replace it. Any such subsequent submission is itself subject to the application under the **Grid Code** of the **Data Validation**, **Consistency and Defaulting Rules**.

BM Unit Data and **Generating Unit Data** submitted in accordance with the provisions of BC1.4.2 to BC1.4.4 will be checked under the **Grid Code** for validity and consistency in accordance with the **Data Validation**, **Consistency and Defaulting Rules**. If any **BM Unit Data** and **Generating Unit Data** so submitted fails the data validity and consistency checking, this will result in the rejection of all data submitted for that **BM Unit** or **Generating Unit** included in the electronic data file containing that data item and that **BM Unit's** or **Generating Unit's** data items will be defaulted under the **Grid Code** in accordance with the **Data Validation**, **Consistency and Defaulting Rules**. Data for other **BM Units** and **Generating Units** included in the same electronic data file will not be affected by such rejection and will continue to be validated and checked for consistency prior to acceptance. In the event that rejection of any **BM Unit Data** and **Generating Unit Data** occurs, details will be made available to the relevant **BM Participant** via the electronic data communication facilities. In the event of a difference between the **BM Unit Data** for the **Cascade Hydro Scheme** and sum of the data submitted for the **Generating Units** forming part of such **Cascade Hydro Scheme**, the **BM Unit Data** shall take precedence.

BC1.4.6 Special Provisions Relating To Interconnector Users

(a) The total of the relevant **Physical Notifications** submitted by **Interconnector Users** in respect of any period of time should not exceed the capability (in MW) of the respective **External Interconnection** for that period of time. In the event that it does, then **The Company** shall advise the **Externally Interconnected System Operator** accordingly. In the period between such advice and **Gate Closure**, one or more of the relevant **Interconnector Users** would be expected to submit revised **Physical Notifications** to **The Company** to eliminate any such over-provision.

(b) In any case where, as a result of a reduction in the capability (in MW) of the **External Interconnection** in any period during an **Operational Day** which is agreed between **The Company** and an **Externally Interconnected System Operator** after 0900 hours on the day before the beginning of such **Operational Day**, the total of the **Physical Notifications** in the relevant period using that **External Interconnection**, as stated in the **BM Unit Data** exceeds the reduced capability (in MW) of the respective **External Interconnection** in that period then **The Company** shall notify the **Externally Interconnected System Operator** accordingly.

BC1.5 INFORMATION PROVIDED BY THE COMPANY

The Company shall provide data to the **Balancing Mechanism Reporting Agent** or **BSCCo** each day in accordance with the requirements of the **BSC** in order that the data may be made available to **Users** via the **Balancing Mechanism Reporting Service** (or by such other means) in each case as provided in the **BSC**. Where **The Company** provides such information associated with the secure operation of the **System** to the **Balancing Mechanism Reporting Agent**, the provision of that information is additionally provided for in the following sections of this BC1.5. **The Company** shall be taken to have fulfilled its obligations to provide data under BC1.5.1, BC1.5.2, and BC1.5.3 by so providing such data to the **Balancing Mechanism Reporting Agent**.

BC1.5.1 Demand Estimates

Normally by 0900 hours each day, **The Company** will make available to **Users** a forecast of **National Demand** and the **Demand** for a number of pre-determined constraint groups (which may be updated from time to time, as agreed between **The Company** and **BSCCo**) for each **Settlement Period** of the next following **Operational Day**. Normally by 1200 hours each day, **The Company** will make available to **Users** a forecast of **National Electricity Transmission System Demand** for each **Settlement Period** of the next **Operational Day**. Further details are provided in Appendix 2.

BC1.5.2 Indicated Margin And Indicated Imbalance

Normally by 1200 hours each day, **The Company** will make available to **Users** an **Indicated Margin** and an **Indicated Imbalance** for each **Settlement Period** of the next following **Operational Day**. **The Company** will use reasonable endeavours to utilise the most recent data received from **Users** in preparing for this release of data. Further details are provided in Appendix 2.

BC1.5.3 Provision Of Updated Information

The Company will provide updated information on **Demand** and other information at various times throughout each day, as detailed in Appendix 2. **The Company** will use reasonable endeavours to utilise the most recent data received from **Users** in preparing for this release of data.

BC1.5.4 Reserve And System Margin

Contingency Reserve

(a) The amount of **Contingency Reserve** required at the day ahead stage and in subsequent timescales will be decided by **The Company** on the basis of historical trends in the reduction in availability of **Large Power Stations** and increases in forecast **Demand** up to real time operation. Where **Contingency Reserve** is to be allocated to thermal **Gensets**, **The Company** will instruct through a combination of **Ancillary Services** instructions and **Bid-Offer Acceptances**, the time at which such **Gensets** are required to synchronise, such instructions to be consistent with **Dynamic Parameters** and other contractual arrangements.

Operating Reserve

(b) The amount of **Operating Reserve** required at any time will be determined by **The Company** having regard to the **Demand** levels, **Large Power Station** availability shortfalls and the greater of the largest secured loss of generation (ie, the loss of generation against which, as a requirement of the **Licence Standards**, the **National Electricity Transmission System** must be secured) or loss of import from or sudden export to **External Interconnections**. **The Company** will allocate **Operating Reserve** to the appropriate **BM Units** and **Generating Units** so as to fulfil its requirements according to the **Ancillary Services** available to it and as provided in the **BC**.

System Margin

(c) In the period following 1200 hours each day and in relation to the following **Operational Day**, **The Company** will monitor the total of the Maximum Export Limit component of the **Export and Import Limits** received against forecast **National Electricity Transmission System Demand** and the **Operating Margin** and will take account of **Dynamic Parameters** to see whether the anticipated level of the **System Margin** for any period is insufficient.

(d) Where the level of the **System Margin** for any period is, in **The Company's** reasonable opinion, anticipated to be insufficient, **The Company** will send (by such data transmission facilities as have been agreed) a **National Electricity Transmission System Warning** - **Electricity Margin Notice** in accordance with OC7.4.8 to each **Generator**, **Supplier**, **Externally Interconnected System Operator**, **Network Operator** and **Non-Embedded Customer**.

(e) Where, in **The Company's** judgement the **System Margin** at any time during the current **Operational Day** is such that there is a high risk of **Demand** reduction being instructed, a **National Electricity Transmission System Warning** - **High Risk of Demand Reduction** will be issued, in accordance with OC7.4.8.

(f) The monitoring will be conducted on a regular basis and a revised **National Electricity Transmission System Warning** - **Electricity Margin Notice** or **High Risk of Demand Reduction** may be sent out from time to time, including within the post **Gate Closure** phase. This will reflect any changes in **Physical Notifications** and **Export and Import Limits** which have been notified to **The Company**, and will reflect any **Demand Control** which has also been so notified. This will also reflect generally any changes in the forecast **Demand** and the relevant **Operating Margin**.

(g) To reflect changing conditions, a **National Electricity Transmission System Warning - Electricity Margin Notice** may be superseded by a **National Electricity Transmission System Warning - High Risk of Demand Reduction** and vice-versa.

(h) If the continuing monitoring identifies that the **System Margin** is anticipated, in **The Company's** reasonable opinion, to be sufficient for the period for which previously a **National Electricity Transmission System Warning** had been issued, **The Company** will send (by such data transmission facilities as have been agreed) a **Cancellation of National Electricity Transmission System Warning** to each **User** who had received a **National Electricity Transmission System Warning - Electricity Margin Notice** or **High Risk of Demand Reduction** for that period. The issue of a **Cancellation of National Electricity Transmission System Warning** is not an assurance by **The Company** that in the event, the **System Margin** will be adequate, but reflects **The Company's** reasonable opinion that the insufficiency is no longer anticipated.

(i) If continued monitoring indicates the **System Margin** becoming reduced **The Company** may issue further **National Electricity Transmission System Warnings - Electricity Margin Notice** or **High Risk of Demand Reduction**.

(j) **The Company** may issue a **National Electricity Transmission System Warning - Electricity Margin Notice** or **High Risk of Demand Reduction** for any period, not necessarily relating to the following **Operational Day**, where it has reason to believe there will be a reduced **System Margin** over a period (for example in periods of protracted **Plant** shortage, the provisions of OC7.4.8.6 apply).

BC1.5.5 System And Localised NRAPM (Negative Reserve Active Power Margin)

(a) (i) System Negative Reserve Active Power Margin

Synchronised Gensets must at all times be capable of reducing output such that the total reduction in output of all **Synchronised Gensets** is sufficient to offset the loss of the largest secured demand on the **System** and must be capable of sustaining this response;

(ii) Localised Negative Reserve Active Power Margin

Synchronised Gensets must at all times be capable of reducing output to allow transfers to and from the **System Constraint Group** (as the case may be) to be contained within such reasonable limit as **The Company** may determine and must be capable of sustaining this response.

(b) **The Company** will monitor the total of **Physical Notifications** of exporting **BM Units** and **Generating Units** (where appropriate) received against forecast **Demand** and, where relevant, the appropriate limit on transfers to and from a **System Constraint Group** and will take account of **Dynamic Parameters** and **Export and Import Limits** received to see whether the level of **System NRAPM** or **Localised NRAPM** for any period is likely to be insufficient. In addition, **The Company** may increase the required margin of **System NRAPM** or **Localised NRAPM** to allow for variations in forecast **Demand**. In the case of **System NRAPM**, this may be by an amount (in **The Company's** reasonable discretion) not exceeding five per cent of forecast **Demand** for the period in question. In the case of **Localised NRAPM**, this may be by an amount (in **The Company's** reasonable discretion) not exceeding ten per cent of the forecast **Demand** for the period in question;

(c) Where the level of **System NRAPM** or **Localised NRAPM** for any period is, in **The Company's** reasonable opinion, likely to be insufficient, then this will be treated as a **National Electricity Transmission System Warning** as defined in OC7.4.8. **The Company** may contact all **Generators** in the case of low **System NRAPM** and may contact **Generators** in relation to relevant **Gensets** in the case of low **Localised NRAPM**. **The Company** will raise with each **Generator** the problems it is anticipating due to low **System NRAPM** or **Localised NRAPM** and will discuss whether, in advance of **Gate Closure**:-

(i) any change is possible in the **Physical Notification** of a **BM Unit** which has been notified to **The Company**; or

(ii) any change is possible to the **Physical Notification** of a **BM Unit** within an **Existing AGR Plant** within the **Existing AGR Plant Flexibility Limit**;

in relation to periods of low **System NRAPM** or (as the case may be) low **Localised NRAPM**. **The Company** will also notify each **Externally Interconnected System Operator** of the anticipated low **System NRAPM** or **Localised NRAPM** and request assistance in obtaining changes to **Physical Notifications** from **BM Units** in that **External System**.

(d) Following **Gate Closure**, the procedure of BC2.9.4 will apply. In this case **The Company** will also endeavor, where time allows, to issue a **National Electricity Transmission System Warning – High Risk of Embedded Generation Reduction** and/or a **National Electricity Transmission System Warning Embedded Generation Control Imminent** as applicable.

BC1.6 SPECIAL PROVISIONS RELATING TO NETWORK OPERATORS

BC1.6.1 User System Data From Network Operators

(a) By 1000 hours each day each **Network Operator** will submit to **The Company** in writing, confirmation or notification of the following in respect of the next **Operational Day**:

(i) constraints on its **User System** which **The Company** may need to take into account in operating the **National Electricity Transmission System**. In this BC1.6.1 the term "constraints" shall include restrictions on the operation of **Embedded Power Generating Modules**, and/or **Embedded CCGT Units**, and/or **Embedded Power Park Modules** as a result of the **User System** to which the **Power Generating Module** and/or **CCGT Unit** and/or **Power Park Module** is connected at the **User System Entry Point** being operated or switched in a particular way, for example, splitting the relevant busbar. It is a matter for the **Network Operator** and the

Generator to arrange the operation or switching, and to deal with any resulting consequences. The **Generator**, after consultation with the **Network Operator**, is responsible for ensuring that no **BM Unit Data** submitted to **The Company** can result in the violation of any such constraint on the **User System**.

(ii) the requirements of voltage control and MVAr reserves which **The Company** may need to take into account for **System** security reasons.

(iii) where applicable, updated best estimates of **Maximum Export Capacity** and **Maximum Import Capacity** and **Interface Point Target Voltage/Power Factor** for any **Interface Point** connected to its **User System** including any requirement for post-fault actions to be implemented on the relevant **Offshore Transmission System** by **The Company**.

(iv) constraints on its **User System** which **The Company** may need to take into account when issuing **Bid-Offer Acceptances** to **Additional BM units** or **Secondary BM units**.

(b) The form of the submission will be:

(i) that of a **BM Unit** output or consumption (for MW and for MVAr, in each case a fixed value or an operating range, on the **User System** at the **User System Entry Point**, namely in the case of a **BM Unit** comprising a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC1.2) on the higher voltage side of the generator step-up transformer, and/or in the case of a **Power Generating Module**, at the point of connection and/or in the case of a **Power Park Module**, at the point of connection) required for particular **BM Units** (identified in the submission) connected to that **User System** for each **Settlement Period** of the next **Operational Day**;

(ii) adjusted in each case for MW by the conversion factors applicable for those **BM Units** to provide output or consumption at the relevant **Grid Supply Points**.

(c) At any time and from time to time, between 1000 hours each day and the expiry of the next **Operational Day**, each **Network Operator** must submit to **The Company** in writing any revisions to the information submitted under this BC1.6.1.

BC1.6.2 Notification Of Times To Network Operators

The Company will make available indicative **Synchronising** and **De-Synchronising** times to each **Network Operator**, but only relating to **BM Units** comprising a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC1.2) or a **Power Park Module** or a **CCGT Module** and/or a **Power Generating Module**, **Embedded** within that **Network Operator's User System** and those **Gensets** directly connected to the **National Electricity Transmission System** which **The Company** has identified under **OC2** as being those which may, in the reasonable opinion of **The Company**, affect the integrity of that **User System**. If in preparing for the operation of the **Balancing Mechanism**, **The Company** becomes aware that a **BM Unit** directly connected to the **National Electricity Transmission System** may, in its reasonable opinion, affect the integrity of that other **User System** which, in the case of a **BM Unit** comprising a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or a **Power Generating Module** and/or a **CCGT Module** and/or a **Power Park Module**, it had not so identified under **OC2**, then **The Company** may make available details of its indicative **Synchronising** and **De-Synchronising** times to that other **User** and shall inform the relevant **BM Participant** that it has done so, identifying the **BM Unit** concerned.

BC1.7 SPECIAL ACTIONS

BC1.7.1 **The Company** may need to identify special actions (either pre- or post-fault) that need to be taken by specific **Users** in order to maintain the integrity of the **National Electricity Transmission System** in accordance with the **Licence Standards** and **The Company Operational Strategy**.

(a) For a **Generator** special actions will generally involve a **Load** change or a change of required Notice to Deviate from Zero NDZ, in a specific timescale on individual or groups of **Gensets**.

(b) For **Network Operators** these special actions will generally involve **Load** transfers between **Grid Supply Points** or arrangements for **Demand** reduction by manual or automatic means.

(c) For **Externally Interconnected System Operators** (in their co-ordinating role for **Interconnector Users** using their **External System**) these special actions will generally involve an increase or decrease of net power flows across an **External Interconnection** by either manual or automatic means.

BC1.7.2 These special actions will be discussed and agreed with the relevant **User** as appropriate. The actual implementation of these special actions may be part of an "emergency circumstances" procedure described under **BC2**. If not agreed, generation or **Demand** may be restricted or may be at risk.

BC1.7.3 **The Company** will normally issue the list of special actions to the relevant **Users** by 1700 hours on the day prior to the day to which they are to apply.

BC1.7.4 Where **The Company** has issued a **Space Weather Prepare Notification** or a **Space Weather Imminent Notification** to **Generators**, **Interconnector Owners**, and **Restoration Contractors**, OC2.4 Space Weather Events shall be followed.

BC1.8 PROVISION OF REACTIVE POWER CAPABILITY

BC1.8.1 Under certain operating conditions **The Company** may identify through its **Operational Planning** that an area of the **National Electricity Transmission System** may have insufficient **Reactive Power** capability available to ensure that the operating voltage can be maintained in accordance with **The Company's Licence Standards**.

In respect of **Onshore Synchronous Generating Unit(s)** belonging to **GB Code Users**

(i) that have a **Connection Entry Capacity** in excess of **Rated MW** (or the **Connection Entry Capacity** of the **CCGT Module** exceeds the sum of **Rated MW** of the **Generating Units** comprising the **CCGT Module**); and

(ii) that are not capable of continuous operation at any point between the limits 0.85 **Power Factor** lagging and 0.95 **Power Factor** leading at the **Onshore Synchronous Generating Unit** terminals at **Active Power** output levels higher than **Rated MW**; and

(iii) that have either a **Completion Date** on or after 1st May 2009, or where its **Connection Entry Capacity** has been increased above **Rated MW** (or the **Connection Entry Capacity** of the **CCGT Module** has increased above the sum of **Rated MW** of the **Generating Units** comprising the **CCGT Module**) such increase takes effect on or after 1st May 2009 but only in respect of **GB Generators** that are classified as **GB Code Users** ; and

(iv) that are in an area of potentially insufficient **Reactive Power** capability as described in this clause BC1.8.1,

The Company may instruct the **Onshore Synchronous Generating Unit(s)** to limit its submitted **Physical Notifications** to no higher than **Rated MW** (or the **Active Power** output at which it can operate continuously between the limits 0.85 **Power Factor** lagging to 0.95 **Power Factor** leading at its terminals if this is higher) for a period specified by **The Company**. Such an instruction must be made at least 1 hour prior to **Gate Closure**, although **The Company** will endeavour to give as much notice as possible. The instruction may require that a **Physical Notification** is re-submitted. The period covered by the instruction will not exceed the expected period for which the potential deficiency has been identified. Compliance with the instruction will not incur costs to **The Company** in the **Balancing Mechanism**. The detailed provisions relating to such instructions will normally be set out in the relevant **Bilateral Agreement**.

BC1.8.2 BC1.8.1 shall not apply to **EU Code Users** where the obligations under CC.6.3.2(a) apply only to **GB Generators**. For the avoidance of doubt, **EU Code User's** are only required to satisfy the requirements of the **ECC's** and not the **CC's**.

APPENDIX 1 - BM UNIT DATA

BC1.A.1 More detail about valid values required under the **Grid Code** for **BM Unit Data** and **Generating Unit Data** may be identified by referring to the **Data Validation**, **Consistency and Defaulting Rules**. In the case of **Embedded BM Units** and **Generating Units** the **BM Unit Data** and the **Generating Unit Data** shall represent the value at the relevant **Grid Supply Point**. Where data is submitted on a **Generating Unit** basis, the provisions of this Appendix 1 shall in respect of such data submission apply as if references to **BM Unit** were replaced with **Generating Unit**. Where **The Company** and the relevant **User** agree, submission on a **Generating Unit** basis (in whole or in part) may be otherwise than in accordance with the provisions of the Appendix 1.

BC1.A.1.1 Physical Notifications

For each **BM Unit**, the **Physical Notification** is a series of MW figures and associated times, making up a profile of intended input or output of **Active Power** at the **Grid Entry Point** or **Grid Supply Point**, as appropriate, except where a **BM Unit** is affected by a Stage 2 or higher **Network Gas Supply Emergency** load shedding event. For each **Settlement Period**, the first "from time" should be at the start of the **Settlement Period** and the last "to time" should be at the end of the **Settlement Period**.

The input or output reflected in the **Physical Notification** for a single **BM Unit** (or the aggregate **Physical Notifications** for a collection of **BM Units** at a **Grid Entry Point** or **Grid Supply Point** or to be transferred across an **External Interconnection**, owned or controlled by a single **BM Participant**) must comply with the following limits regarding maximum rates of change, either for a single change or a series of related changes :

- for a change of up to 300MW — no limit;
- for a change greater than 300MW and less than 1000MW — 50MW per minute;
- for a change of 1000MW or more — 40MW per minute,

unless prior arrangements have been discussed and agreed with **The Company**. This limitation is not intended to limit the Run-Up or Run-Down Rates provided as **Dynamic Parameters**.

In the case where a **BM Unit** is affected by a **Network Gas Supply Emergency** load shedding event, once Stage 2 or higher has been declared, then their **Physical Notifications** shall represent the **User's** best estimate of the contracted power position of the affected **BM Unit** at the time of the event, taking into account any mitigating actions to reduce the difference between the contracted power position and the volume to be shed.

An example of the format of **Physical Notification** is shown below. The convention to be applied is that where it is proposed that the **BM Unit** will be importing, the **Physical Notification** is negative.

Data Name	BMU name	Time From	From level (MW)	Time To	To Level MW)
PN	TAGENT	BMUNIT01	2001-11-03 06:30	77	2001-11-03 07:00	100
PN	TAGENT	BMUNIT01	2001-11-03 07:00	100	2001-11-03 07:12	150
PN	TAGENT	BMUNIT01	2001-11-03 07:12	150	2001-11-03 07:30	175

A linear interpolation will be assumed between the **Physical Notification** From and To

levels specified for the **BM Unit** by the **BM Participant**.

BC1.A.1.2 Not Used.

BC1.A.1.3 Export And Import Limits

BC1.A.1.3.1 Maximum Export Limit (MEL)

A series of MW figures and associated times, making up a profile of the maximum level at which the **BM Unit** may be exporting (in MW) to the **National Electricity Transmission System** at the **Grid Entry Point** or **Grid Supply Point** or **GSP Group**, as appropriate.

For a **Power Park Module,** the Maximum Export Limit should reflect the maximum possible **Active Power** output from each **Power Park Module** consistent with the data submitted within the **Power Park Module Availability Matrix** as defined under BC.1.A.1.8. For the avoidance of doubt, in the case of a **Power Park Module** this would equate to the **Registered Capacity** less the unavailable **Power Park Units** within the **Power Park Module** and not include weather corrected MW output from each **Power Park Unit**.

BC1.A.1.3.2 Maximum Import Limit (MIL)

A series of MW figures and associated times, making up a profile of the maximum level at which the **BM Unit** may be importing (in MW) from the **National Electricity Transmission System** at the **Grid Entry Point** or **Grid Supply Point** or **GSP Group**, as appropriate.

An example format of data is shown below. MEL must be positive or zero, and MIL must be negative or zero.

Data Name	BMU name	Time From	From level (MW)	Time To	To level (MW)
MEL	TAGENT	BMUNIT01	2001-11-03 05:00	410	2001-11-03 09:35	410
MEL	TAGENT	BMUNIT01	2001-11-03 09:35	450	2001-11-03 12:45	450
MIL	TAGENT	BMUNIT04	2001-11-03 06:30	-200	2001-11-03 07:00	-220

BC1.A.1.4 Bid-Offer Data

For each **BM Unit** for each **Settlement Period**: Up to 10 Bid-Offer Pairs as defined in the **BSC**.

An example of the format of data is shown below.

Data	Name	BMU name	Time from	Time to	Pair ID	From Level (MW)	To Level (MW)	Offer (£/MWh)	Bid (£/MWh)
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	4	30	30	40	35
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	3	20	20	35	30
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	2	40	40	32	27
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	1	50	50	30	25
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	-1	-40	-40	25	20
BOD	TAGENT	BMUNIT01	2000-10-28 12:00	2000-10-28 13:30	-2	-30	-30	23	17

This example of Bid-Offer data is illustrated graphically below:

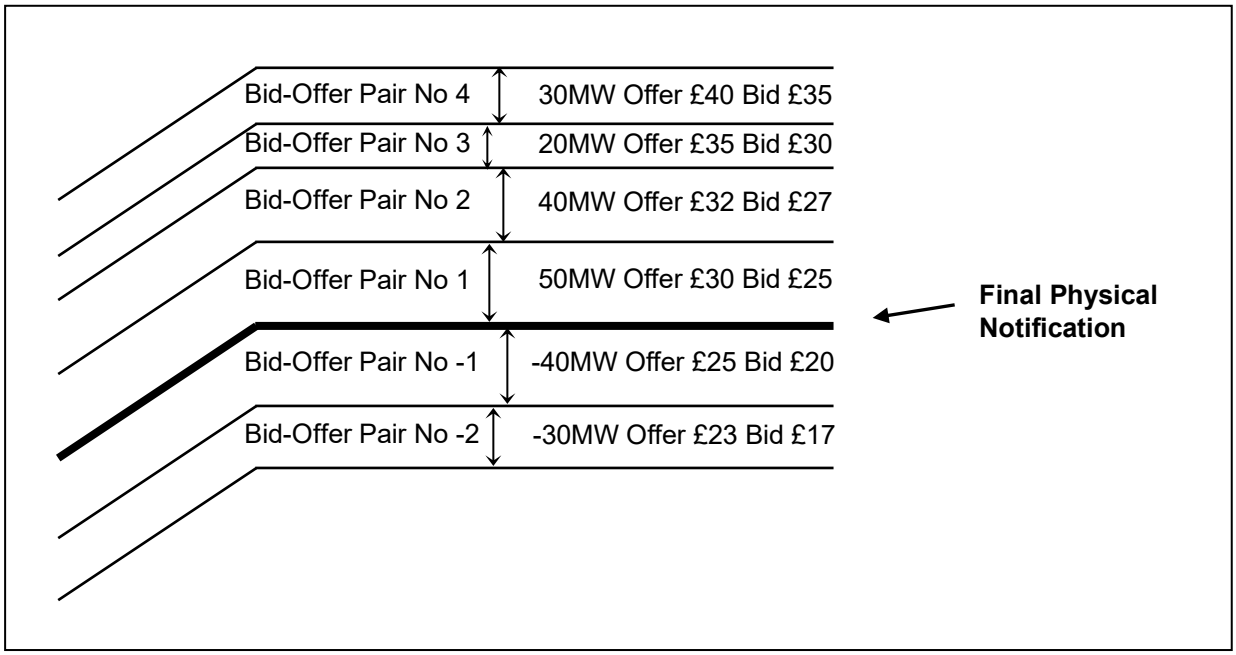

BC1.A.1.5 Dynamic Parameters

The **Dynamic Parameters** comprise:

- Up to three Run-Up Rate(s) and up to three Run-Down Rate(s), expressed in MW/minute and associated Run-Up Elbow(s) and Run-Down Elbow(s), expressed in MW for output and the same for input. It should be noted that Run-Up Rate(s) are applicable to a MW figure becoming more positive;
- Notice to Deviate from Zero (NDZ) output or input, being the notification time required for a **BM Unit** to start importing or exporting energy, from a zero **Physical Notification** level as a result of a **Bid-Offer Acceptance**, expressed in minutes;
- Notice to Deliver Offers (NTO) and Notice to Deliver Bids (NTB), expressed in minutes, indicating the notification time required for a **BM Unit** to start delivering Offers and Bids respectively from the time that the **Bid-Offer Acceptance** is issued. In the case of a **BM Unit** comprising a **Genset**, NTO and NTB will be set to a maximum period of two minutes;
- Minimum Zero Time (MZT), being either the minimum time that a **BM Unit** which has been exporting must operate at zero or be importing, before returning to exporting or the minimum time that a **BM Unit** which has been importing must operate at zero or be exporting before returning to importing, as a result of a **Bid-Offer Acceptance**, expressed in minutes;
- Minimum Non-Zero Time (MNZT), expressed in minutes, being the minimum time that a **BM Unit** can operate at a non-zero level as a result of a **Bid-Offer Acceptance**;
- Stable Export Limit (SEL) expressed in MW at the **Grid Entry Point** or **Grid Supply Point** or **GSP Group**, as appropriate, being the minimum value at which the **BM Unit** can, under stable conditions, export to the **National Electricity Transmission System**;
- Stable Import Limit (SIL) expressed in MW at the **Grid Entry Point** or **Grid Supply Point** or **GSP Group**, as appropriate, being the minimum value at which the **BM Unit** can, under stable conditions, import from the **National Electricity Transmission System**;
- Last Time to Cancel Synchronisation, expressed in minutes with an upper limit of 60 minutes, being the notification time required to cancel a **BM Unit's** transition from operation at zero. This parameter is only applicable where the transition arises either from a **Physical Notification** or, in the case where the **Physical Notification** is zero, a **Bid-Offer Acceptance**. There can be up to three Last Time to Cancel Synchronisation(s) each applicable for a range of values of Notice to Deviate from Zero.
- **Maximum Delivery Offer** (**MDO**), being a series of MWh figures and associated times making up the profile of the maximum volume of **Offer Acceptances** by a **BM Unit** which can be instructed by **The Company** through **Bid-Offer Acceptances** (**BOA**) via a **BM Participant** with respect to one or more of their **BM Units**, such that within the current **Balancing Mechanism Window Period**, the **BM Unit**'s **Committed Level** can be adhered to, and contracted **Ancillary Services** can be delivered.
- **Maximum Delivery Bid** (**MDB**), being a series of MWh figures and associated times making up the profile of the maximum volume of **Bid Acceptances** by a **BM Unit** which can be instructed by **The Company** through **Bid-Offer Acceptances** (**BOA**) via a **BM Participant** with respect to one or more of their **BM Units**, such that within the current **Balancing Mechanism Window Period**, the **BM Unit**'s **Committed Level** can be adhered to, and contracted **Ancillary Services** can be delivered.

BC1.A.1.6 CCGT Module Matrix

BC1.A.1.6.1 **CCGT Module Matrix** showing the combination of **CCGT Units** running in relation to any given MW output, in the form of the diagram illustrated below. The **CCGT Module Matrix** is designed to achieve certainty in knowing the number of **CCGT Units** synchronised to meet the **Physical Notification** and to achieve a **Bid-Offer Acceptance**.

BC1.A.1.6.2 In the case of a **Range CCGT Module**, and if the **Generator** so wishes, a request for the single **Grid Entry Point** at which power is provided from the **Range CCGT Module** to be changed in accordance with the provisions of BC1.A.1.6.4 below:

CCGT Module Matrix example form

CCGT MODULE ACTIVE POWER	**CCGT GENERATING UNITS*** AVAILABLE								
	1st GT	2nd GT	3rd GT	4th GT	5th GT	6th GT	1st ST	2nd ST	3rd ST
MW	**ACTIVE POWER OUTPUT**								
	150	150	150				100		
0MW to 150MW	/								
151MW to 250MW	/						/		
251MW to 300MW	/	/							
301MW to 400MW	/	/					/		
401MW to 450MW	/	/	/						
451MW to 550MW	/	/	/				/		

* as defined in the Glossary and Definitions and not limited by BC1.2

BC1.A.1.6.3 In the absence of the correct submission of a **CCGT Module Matrix** the last submitted (or deemed submitted) **CCGT Module Matrix** shall be taken to be the **CCGT Module Matrix** submitted hereunder.

BC1.A.1.6.4 The data may also include in the case of a **Range CCGT Module**, a request for the **Grid Entry Point** at which the power is provided from the **Range CCGT Module** to be changed with effect from the beginning of the following **Operational Day** to another specified single **Grid Entry Point** (there can be only one) to that being used for the current **Operational Day**. **The Company** will respond to this request by 1600 hours on the day of receipt of the request. If **The Company** agrees to the request (such agreement not to be unreasonably withheld), the **Generator** will operate the **Range CCGT Module** in accordance with the request. If **The Company** does not agree, the **Generator** will, if it produces power from that **Range CCGT Module**, continue to provide power from the **Range CCGT Module** to the **Grid Entry Point** being used at the time of the request. The request can only be made up to 1100 hours in respect of the following **Operational Day**. No subsequent request to change can be made after 1100 hours in respect of the following **Operational Day**. Nothing in this paragraph shall prevent the busbar at the **Grid Entry Point** being operated in separate sections.

BC1.A.1.6.5 The principles set out in PC.A.3.2.3 apply to the submission of a **CCGT Module Matrix** and accordingly the **CCGT Module Matrix** can only be amended as follows:

(a) Normal CCGT Module

if the **CCGT Module** is a **Normal CCGT Module**, the **CCGT Units** within that **CCGT Module** can only be amended such that the **CCGT Module** comprises different **CCGT Units** if **The Company** gives its prior consent in writing. Notice of the wish to amend the **CCGT Units** within such a **CCGT Module** must be given at least 6 months before it is wished for the amendment to take effect;

(b) Range CCGT Module

if the **CCGT Module** is a **Range CCGT Module**, the **CCGT Units** within that **CCGT Module** can only be amended such that the **CCGT Module** comprises different **CCGT Units** for a particular **Operational Day** if the relevant notification is given by 1100 hours on the day prior to the **Operational Day** in which the amendment is to take effect. No subsequent amendment may be made to the **CCGT Units** comprising the **CCGT Module** in respect of that particular **Operational Day**.

BC1.A.1.6.6 In the case of a **CCGT Module Matrix** submitted (or deemed to be submitted) as part of the other data for **CCGT Modules**, the output of the **CCGT Module** at any given instructed MW output must reflect the details given in the **CCGT Module Matrix**. It is accepted that in cases of change in MW in response to instructions issued by **The Company** there may be a transitional variance to the conditions reflected in the **CCGT Module Matrix**. In achieving an instruction the range of number of **CCGT Units** envisaged in moving from one MW output level to the other must not be departed from. Each **Generator** shall notify **The Company** as soon as practicable after the event of any such variance. It should be noted that there is a provision above for the **Generator** to revise the **CCGT Module Matrix**, subject always to the other provisions of this **BC1**;

BC1.A.1.6.7 Subject as provided above, **The Company** will rely on the **CCGT Units** specified in such **CCGT Module Matrix** running as indicated in the **CCGT Module Matrix** when it issues an instruction in respect of the **CCGT Module**;

BC1.A.1.6.8 Subject as provided in BC1.A.1.6.5 above, any changes to the **CCGT Module Matrix** must be notified immediately to **The Company** in accordance with the relevant provisions of **BC1**.

BC1.A.1.7 Cascade Hydro Scheme Matrix

BC1.A.1.7.1 A **Cascade Hydro Scheme Matrix** showing the performance of individual **Generating Units** forming part of a **Cascade Hydro Scheme** in response to **Bid-Offer Acceptance**. An example table is shown below:

Cascade Hydro Scheme Matrix example form

Plant	Synchronises when offer is greater than……..
Generating Unit 1	.....MW
Generating Unit 2	.....MW
Generating Unit 3	.....MW
Generating Unit 4	.....MW
Generating Unit 5	.....MW

BC1.A.1.8 Power Park Module Availability Matrix

BC1.A.1.8.1 **Power Park Module Availability Matrix** showing the number of each type of **Power Park Units** expected to be available is illustrated in the example form below. The **Power Park Module Availability Matrix** is designed to achieve certainty in knowing the number of **Power Park Units Synchronised** to meet the **Physical Notification** and to achieve a **Bid-Offer Acceptance** by specifying which **BM Unit** each **Power Park Module** forms part of. The **Power Park Module Availability Matrix** may have as many columns as are required to provide information on the different make and model for each type of **Power Park Unit** in a **Power Park Module** and as many rows as are required to provide information on the **Power Park Modules** within each **BM Unit**. The description is required to assist identification of the **Power Park Units** within the **Power Park Module** and correlation with data provided under the **Planning Code**.

Power Park Module Availability Matrix example form

BM Unit Name				
Power Park Module [unique identifier]				
POWER PARK UNIT AVAILABILITY	**POWER PARK UNITS**			
	Type A	Type B	Type C	Type D
Description (Make/Model)				
Number of units				
Power Park Module [unique identifier]				
POWER PARK UNIT AVAILABILITY	**POWER PARK UNITS**			
	Type A	Type B	Type C	Type D
Description (Make/Model)				
Number of units				

BC1.A.1.8.2 In the absence of the correct submission of a **Power Park Module Availability Matrix** the last submitted (or deemed submitted) **Power Park Module Availability Matrix** shall be taken to be the **Power Park Module Availability Matrix** submitted hereunder.

BC1.A.1.8.3 **The Company** will rely on the **Power Park Units**, **Power Park Modules** and **BM Units** specified in such **Power Park Module Availability Matrix** running as indicated in the **Power Park Module Availability Matrix** when it issues an instruction in respect of the **BM Unit**.

BC1.A.1.8.4 Subject as provided in PC.A.3.2.4 any changes to **Power Park Module** or **BM Unit** configuration, or availability of **Power Park Units** which affects the information set out in the **Power Park Module Availability Matrix** must be notified immediately to **The Company** in accordance with the relevant provisions of **BC1**. Initial notification may be by telephone. In some circumstances, such as a significant re-configuration of a **Power Park Module** due to an unplanned outage, a revised **Power Park Module Availability Matrix** must be supplied on **The Company's** request.

BC1.A.1.9 **Synchronous Power Generating Module Matrix**

BC1.A.1.9.1 **Synchronous Power Generating Module Matrix** showing the combination of **Synchronous Power Generating Units** running in relation to any given MW output, in the form of the table illustrated below. The **Synchronous Power Generating Module Matrix** is designed to achieve certainty in knowing the number of **Synchronous Power Generating Units** synchronised to meet the **Physical Notification** and to achieve a **Bid-Offer Acceptance**.

BC1.A.1.9.2 This data need not be provided where a submission has been made in respect of BC1.A.1.6, BC1.A.1.7 or BC1.A.1.8.

Synchronous Power Generating Module Matrix example form

SYNCHRONOUS POWER GENERATING MODULE MATRIX	**SYNCHRONOUS POWER GENERATING UNITS*** AVAILABLE								
	1st GT	2nd GT	3rd GT	4th GT	5th GT	6th GT	1st ST	2nd ST	3rd ST
MW	**ACTIVE POWER OUTPUT**								
	150	150	150				100		
0MW to 150MW	/								
151MW to 250MW	/						/		
251MW to 300MW	/	/							
301MW to 400MW	/	/					/		
401MW to 450MW	/	/	/						
451MW to 550MW	/	/	/				/		

* as defined in the Glossary and Definitions and not limited by BC1.2

BC1.A.1.9.3 In the absence of the correct submission of a **Synchronous Power Generating Module Matrix** the last submitted (or deemed submitted) **Synchronous Power Generating Module Matrix** shall be taken to be the **Synchronous Power Generating Module Matrix** submitted hereunder.

BC1.A.1.9.4 The principles set out in PC.A.3.2.5 apply to the submission of a **Synchronous Power Generating Module Matrix** and accordingly the **Synchronous Power Generating Module Matrix** can only be amended as if the **Synchronous Power Generating Units** within that **Synchronous Power Generating Module** can only be amended such that the **Synchronous Power Generating Module** comprises different **Synchronous Power Generating Units** if **The Company** gives its prior consent in writing. Notice of the wish to amend the **Synchronous Power Generating Units** within such a **Synchronous Power Generating Module** must be given at least 6 months before it is wished for the amendment to take effect.

BC1.A.1.9.5 In the case of a **Synchronous Power Generating Module Matrix** submitted (or deemed to be submitted) as part of the other data for **Synchronous Power Generating Modules**, the output of the **Synchronous Power Generating Module** at any given instructed MW output must reflect the details given in the **Synchronous Power Generating Module Matrix**. It is accepted that in cases of change in MW in response to instructions issued by **The Company** there may be a transitional variance to the conditions reflected in the **Synchronous Power Generating Module Matrix**. In achieving an instruction the range of number of **Synchronous Power Generating Units** envisaged in moving from one MW output level to the other must not be departed from. Each **Generator** shall notify **The Company** as soon as practicable after the event of any such variance. It should be noted that there is a provision above for the **Generator** to revise the **Synchronous Power Generating Module Matrix**, subject always to the other provisions of this **BC1**.

BC1.A.1.9.6 Subject as provided above, **The Company** will rely on the **Synchronous Power Generating Units** specified in such **Synchronous Power Generating Module Matrix** running as indicated in the **Synchronous Power Generating Module Matrix** when it issues an instruction in respect of the **Synchronous Power Generating Module**.

BC1.A.1.9.7 Subject as provided in BC1.A.1.9.4 above, any changes to the **Synchronous Power Generating Module Matrix** must be notified immediately to **The Company** in accordance with the relevant provisions of **BC1**.

BC1.A.1.10 Aggregator Impact Matrix

BC1.A.1.10.1 For each **Additional BM Unit** and **Secondary BM Unit** the relevant **BM Participant** will submit data relating to the effect of a Bid-Off Acceptance on each **Grid Supply Point** within the **GSP Group** over which the **Additional BM Unit** or **Secondary BM Unit** was defined.

BC1.A.1.10.2 For each **Additional BM Unit** and **Secondary BM Unit** the relevant **BM Participant** will also provide the post-codes and MSIDs that make up the **Additional BM Unit** or **Secondary BM Unit**.

Aggregator Impact Matrix example form

BMU Name			
Operational Day from which values apply			
Grid Supply Point	% Impact	Grid Supply Point	% Impact

BC1.A.1.11 **Electricity Storage Module Future State of Energy** (**FSoE**) Modelling

BC1.A.1.11.1 **BM Participants** who own and/or operate **Electricity Storage Modules** must provide asset specific relevant data when requested by **The Company** based on bilateral discussions to allow for modelling by **The Company** of **Future State of Energy** (**FSoE**) and the limits of operation that an **Electricity Storage Module** must obey.

BC1.A.1.11.2 These models will be used for planning purposes beyond the end of the **Balancing Mechanism Window Period** to the end of the time when interim data is available to **The Company**. **The Company** may use such models to simulate the effect of **Bid-Offer Acceptance** and a **Physical Notification** on the **Future State of Energy** (**FSoE**). The requirements for **System Ancillary Services** and/or **Commercial Ancillary Services** within the model will be derived by **The Company** from auction data.

APPENDIX 2 - DATA TO BE MADE AVAILABLE BY THE COMPANY

BC1.A.2.1 Initial Day Ahead Demand Forecast

Normally by 09:00 hours each day, values (in MW) for each **Settlement Period** of the next following **Operational Day** of the following data items:-

(i) Initial forecast of **National Demand**;

(II) Initial forecast of **Demand** for a number of predetermined constraint groups.

BC1.A.2.2 Initial Day Ahead Market Information

Normally by 12:00 hours each day, values (in MW) for each **Settlement Period** of the next following **Operational Day** of the following data items:-

(i) Initial National **Indicated Margin**

This is the difference between the sum of **BM Unit** MELs and the forecast of **National Electricity Transmission System Demand**.

(ii) Initial National **Indicated Imbalance**

This is the difference between the sum of **Physical Notifications** for **BM Units** comprising **Generating Units** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or **Power Generating Modules** and/or **CCGT Modules** and/or **Power Park Modules** and the forecast of **National Electricity Transmission System Demand**.

(iii) Forecast of **National Electricity Transmission System Demand**.

BC1.A.2.3 Current Day And Day Ahead Updated Market Information

Data will normally be made available by the times shown below for the associated periods of time:

Target Data Release Time	Period Start Time	Period End Time
02:00	02:00 D0	05:00 D+1
10:00	10:00 D0	05:00 D+1
16:00	05:00 D+1	05:00 D+2
16:30	16:30 D0	05:00 D+1
22:00	22:00 D0	05:00 D+2

In this table, D0 refers to the current day, D+1 refers to the next day and D+2 refers to the day following D+1.

In all cases, data will be ½ hourly average MW values calculated by **The Company**. Information to be released includes:

National Information

(i) National **Indicated Margin**;

(ii) National **Indicated Imbalance**;

(iii) Updated forecast of **National Electricity Transmission System Demand**.

Constraint Boundary Information (For Each Constraint Boundary)

(i) **Indicated Constraint Boundary Margin**;

This is the difference between the Constraint Boundary Transfer limit and the difference between the sum of **BM Unit** MELs and the forecast of local **Demand** within the constraint boundary.

(ii) Local **Indicated Imbalance**;

This is the difference between the sum of **Physical Notifications** for **BM Units** comprising **Generating Units** (as defined in the Glossary and Definitions and not limited by BC1.2) and/or **Power Generating Modules** and/or **CCGT Modules** and/or **Power Park Modules** and the forecast of local **Demand** within the constraint boundary.

(iii) Updated forecast of the local **Demand** within the constraint boundary.

APPENDIX 3 - EXTERNAL INTERCONNECTION DATA

BC1.A.3 Reference Programme

For each **Interconnector**, the **Interconnector Reference Programme** is a series of MW figures and associated times, making up a profile of intended input or output of **Active Power** at the **Grid Entry Point** or **User System Entry Point**, as appropriate.

The **Interconnector Reference Programme** is derived by the **Interconnector Owner** as the addition of all the **Interconnector User's Physical Notifications**.

Unless otherwise agreed with **The Company**, the input or output reflected in each **Interconnector Reference Programme** for the **Interconnector** must comply with the following limits regarding maximum rate of change, either for a single change or a series of related changes:

- Maximum operational rate of change 100MW/minute. This maximum rate of change can only be exceeded if prior arrangements have been agreed with **The Company**, for example, services contractually agreed between the **Interconnector Owner** and **The Company** relating to an **Externally Interconnected System Operator** or when required to return one of the connected **External Systems** to normal state.

An example format of MW figures supplied within the **Interconnector Reference Programme** is shown below, where *Export* is an input of **Active Power** to the GB **System** and *Import* is an output of **Active Power** from the GB **System**.

Start Date & Time *(dd/mm/yyyy hh:mm:ss)*	**Start of Ramp Direction** *(Export/ Import)*	**Start of Ramp Flow** *(MW)*	**Ramp Rate** *(MW/min)*	**End Date & Time** *(dd/mm/yyyy hh:mm:ss)*	**End of Ramp Direction** *(Export/ Import)*	**End of Ramp Flow** *(MW)*
23/08/2021 23:00:00	Export	100	0	24/08/2021 12:30:01	Export	100
24/08/2021 12:30:01	Export	100	50	24/08/2021 12:32:01	Export	0
24/08/2021 12:32:01	Import	0	50	24/08/2021 12:34:01	Import	100
24/08/2021 12:34:01	Import	100	0	24/08/2021 22:59:59	Import	100

< END OF BALANCING CODE NO. 1 >

BALANCING CODE NO. 2
(BC2)

POST GATE CLOSURE PROCESS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

BC2.1 INTRODUCTION 3

BC2.2 OBJECTIVE 3

BC2.3 SCOPE 3

BC2.4 INFORMATION USED 3

BC2.5 PHYSICAL OPERATION OF BM UNITS 4

BC2.5.1 Accuracy Of Physical Notifications 4

BC2.5.2 Synchronising And De-Synchronising Times 5

BC2.5.3 Revisions To BM Unit Data 6

BC2.5.4 Operation In The Absence Of Instructions From The Company 7

BC2.5.5 Commencement Or Termination Of Participation In The Balancing Mechanism 9

BC2.6 COMMUNICATIONS 10

BC2.6.1 Normal Communications With Control Points 10

BC2.6.2 Communication With Control Points In Emergency Circumstances 10

BC2.6.3 Communication With Network Operators In Emergency Circumstances 11

BC2.6.4 Communication With Externally Interconnected System Operators In Emergency Circumstances 11

BC2.6.5 Communications during Planned Outages Of Electronic Data Communication Facilities 11

BC2.7 BID-OFFER ACCEPTANCES 11

BC2.7.1 Acceptance of Bids and Offers by The Company 11

BC2.7.2 Consistency With Export And Import Limits And Dynamic Parameters 12

BC2.7.3 Confirmation and Rejection of Acceptances 12

BC2.7.4 Action Required From BM Participants 13

BC2.7.5 Additional Action required when responding to Bid-Offer Acceptances 13

BC2.8 ANCILLARY SERVICES 13

BC2.8.1 Call-Off of Ancillary Services by The Company 13

BC2.8.2 Consistency with Export and Import Limits and Dynamic Parameters 14

BC2.8.3 Rejection Of Ancillary Service Instructions 14

BC2.8.4 Action Required From BM Units 14

BC2.8.5 Reactive Despatch Network Restrictions 14

BC2.9 EMERGENCY CIRCUMSTANCES 15

BC2.9.1 Emergency Actions 15
BC2.9.2 Implementation of Emergency Instructions 15
BC2.9.3 Examples of Emergency Instructions 16
BC2.9.4 Maintaining Adequate System And Localised NRAPM (Negative Reserve Active Power Margin) 17
BC2.9.5 Maintaining an adequate level of Frequency Sensitive Generation 18
BC2.9.6 Emergency Assistance to And from External Systems 19
BC2.9.7 Unplanned Outages of Electronic Communication and Computing Facilities 19
BC2.10 OTHER OPERATIONAL INSTRUCTIONS AND NOTIFICATIONS 21
BC2.11 LIAISON WITH GENERATORS FOR RISK OF TRIP AND AVR TESTING 21
BC2.12 LIAISON WITH EXTERNALLY INTERCONNECTED SYSTEM OPERATORS 22
BC2.13 LIAISON WITH INTERCONNECTOR OWNERS 22
APPENDIX 1 - FORM OF BID-OFFER ACCEPTANCES 23
APPENDIX 2 - TYPE AND FORM OF ANCILLARY SERVICE INSTRUCTIONS 25
APPENDIX 3 - SUBMISSION OF REVISED MVAr CAPABILITY 31
APPENDIX 3 ANNEXURE 1 32
APPENDIX 3 ANNEXURE 2 33
APPENDIX 3 ANNEXURE 3 34
APPENDIX 4 - SUBMISSION OF AVAILABILITY OF FREQUENCY SENSITIVE MODE 35
APPENDIX 4 ANNEXURE 1 36

BC2.1 INTRODUCTION

Balancing Code No 2 (**BC2**) sets out the procedure for:

(a) the physical operation of **BM Units** and **Generating Units** (which could be part of a **Power Generating Module**) in the absence of any instructions from **The Company**;

(b) the submission of **Interconnector** data by each **Interconnector Owner**;

(c) the acceptance by **The Company** of **Balancing Mechanism** Bids and Offers,

(d) the calling off by **The Company** of **Ancillary Services**;

(e) the issuing and implementation of **Emergency Instructions**; and

(f) the issuing by **The Company** of other operational instructions and notifications.

In addition, **BC2** deals with any information exchange between **The Company** and **BM Participants** or specific **Users** that takes place after **Gate Closure**.

In this **BC2**, "consistent" shall be construed as meaning to the nearest integer MW level.

In this **BC2**, references to "a **BM Unit** returning to its **Physical Notification**" shall take account of any **Bid-Offer Acceptances** already issued to the **BM Unit** in accordance with BC2.7 and any **Emergency Instructions** already issued to the **BM Unit** or **Generating Unit** (which could be part of a **Power Generating Module**) in accordance with BC2.9.

BC2.2 OBJECTIVE

The procedure covering the operation of the **Balancing Mechanism** and the issuing of instructions to **Users** is intended to enable **The Company** as far as possible to maintain the integrity of the **National Electricity Transmission System** together with the security and quality of supply.

Where reference is made in this **BC2** to **Power Generating Modules** or **Generating Units** (unless otherwise stated) it only applies:

(a) to each **Generating Unit** which forms part of the **BM Unit** of a **Cascade Hydro Scheme**; and

(b) at an **Embedded Exemptable Large Power Station** where the relevant **Bilateral Agreement** specifies that compliance with **BC2** is required:

(i) to each **Generating Unit** which could be part of a **Synchronous Power Generating Module**, or

(ii) to each **Power Park Module** where the **Power Station** comprises **Power Park Modules**.

BC2.3 SCOPE

BC2 applies to **The Company** and to **Users**, which in this **BC2** means:-

(a) **BM Participants**;

(b) **Externally Interconnected System Operators**, and

(c) **Network Operators**.

BC2.4 INFORMATION USED

BC2.4.1 The information which **The Company** shall use, together with the other information available to it, in assessing:

(a) which bids and offers to accept;

(b) which **BM Units** and/or **Generating Units** to instruct to provide **Ancillary Services**;

(c) the need for and formulation of **Emergency Instructions**; and

(d) other operational instructions and notifications which **The Company** may need to issue

will be:

(a) the **Physical Notification** and **Bid-Offer Data** submitted under **BC1**;

(b) **Export and Import Limits** in respect of that **BM Unit** and/or **Generating Unit** supplied under **BC1** (and any revisions under **BC1** and **BC2** to the data); and

(c) **Interconnector** data submitted by each **Interconnector Owner** under **BC1**; and

(d) **Dynamic Parameters** submitted or revised under this **BC2**.

BC2.4.2 As provided for in BC1.5.4, **The Company** will monitor the total of the Maximum Export Limit component of the **Export and Import Limits** against forecast **Demand** and the **Operating Margin** and will take account of **Dynamic Parameters** to see whether the anticipated level of **System Margin** is insufficient. This will reflect any changes in **Export and Import Limits** which have been notified to **The Company**, and will reflect any **Demand Control** which has also been so notified. **The Company** may issue new or revised **National Electricity Transmission System Warnings – Electricity Margin Notice** or **High Risk of Demand Reduction** in accordance with BC1.5.4.

BC2.5 PHYSICAL OPERATION OF BM UNITS

BC2.5.1 Accuracy Of Physical Notifications

As described in BC1.4.2(a), **Physical Notifications** must represent the **BM Participant's** best estimate of expected input or output of **Active Power**, except where a **BM Unit** is affected by a Stage 2 or higher **Network Gas Supply Emergency** load shedding event. **Physical Notifications** shall be prepared in accordance with **Good Industry Practice**.

In the case where a **BM Unit** is affected by a **Network Gas Supply Emergency** load shedding event, once Stage 2 or higher has been declared, then their **Physical Notifications** shall represent the **User**'s best estimate of the contracted power position of the affected **BM Unit** at the time of the event, taking into account any mitigating actions to reduce the difference between the contracted power position and the volume to be shed.

Each **BM Participant** must, applying **Good Industry Practice**, ensure that each of its **BM Units** follows the **Physical Notification** in respect of that **BM Unit**, except where the generation output of a **BM Unit** for an affected site only is reduced as a result of a Stage 2 or higher **Network Gas Supply Emergency** load shedding event , (and each of its **Generating Units** follows the **Physical Notification** in the case of **Physical Notifications** supplied under BC1.4.2(a)(2)) that is prevailing at **Gate Closure** (the data in which will be utilised in producing the **Final Physical Notification Data** in accordance with the **BSC**) subject to variations arising from:

(a) the issue of **Bid-Offer Acceptances** which have been confirmed by the **BM Participant**; or

(b) instructions by **The Company** in relation to that **BM Unit** (or a **Generating Unit**) which require, or compliance with which would result in, a variation in output or input of that **BM Unit** (or a **Generating Unit**); or

(c) compliance with provisions of **BC1**, **BC2** or **BC3** which provide to the contrary.

Except where variations from the **Physical Notification** arise from matters referred to at (a), (b) or (c) above, in respect only of **BM Units** (or **Generating Units**) powered by an **Intermittent Power Source**, where there is a change in the level of the **Intermittent Power Source** from that forecast and used to derive the **Physical Notification**, variations from the **Physical Notification** prevailing at **Gate Closure** may, subject to remaining within the **Registered Capacity**, occur providing that the **Physical Notification** prevailing at **Gate Closure** was prepared in accordance with **Good Industry Practice**.

If variations and/or instructions as described in (a),(b) or (c) apply in any instance to **BM Units** (or **Generating Units**) powered by an **Intermittent Power Source** (e.g. a **Bid Offer Acceptance** is issued in respect of such a **BM Unit** and confirmed by the **BM Participant**) then such provisions will take priority over the third paragraph of BC2.5.1 above such that the **BM Participant** must ensure that the **Physical Notification** as varied in accordance with (a), (b) or (c) above applies and must be followed, subject to this not being prevented as a result of an unavoidance event as described below.

For the avoidance of doubt, this gives rise to an obligation on each **BM Participant** (applying **Good Industry Practice**) to ensure that each of its **BM Units** (and **Generating Units**), follows the **Physical Notifications** prevailing at **Gate Closure** as amended by such variations and/or instructions unless in relation to any such obligation it is prevented from so doing as a result of an unavoidable event (existing or anticipated) in relation to that **BM Unit** (or a **Generating Unit**) which requires a variation in output or input of that **BM Unit** (or a **Generating Unit**).

Examples (on a non-exhaustive basis) of such an unavoidable event are:

- plant breakdowns;
- events requiring a variation of input or output on safety grounds (relating to personnel or plant);
- events requiring a variation of input or output to maintain compliance with the relevant Statutory Water Management obligations; and
- uncontrollable variations in output of **Active Power**.

Any anticipated variations in input or output post **Gate Closure** from the **Physical Notification** for a **BM Unit** (or a **Generating Unit**) prevailing at **Gate Closure** (except for those arising from instructions as outlined in (a), (b) or (c) above) must be notified to **The Company** without delay by the relevant **BM Participant** (or the relevant person on its behalf). For the avoidance of doubt, where a change in the level of the **Intermittent Power Source** from that forecast and used to derive the **Physical Notification** results in the **Shutdown** or **Shutdown** of part of the **BM Unit** (or **Generating Unit**), the change must be notified to **The Company** without delay by the relevant **BM Participant** (or the relevant person on its behalf).

Implementation of this notification should normally be achieved by the submission of revisions to the **Export and Import Limits** in accordance with BC2.5.3 below.

BC2.5.2 Synchronising And De-Synchronising Times

BC2.5.2.1 The **Final Physical Notification Data** provides indicative **Synchronising** and **De-Synchronising** times to **The Company** in respect of any **BM Unit** which is **De-Synchronising** or is anticipated to be **Synchronising** post **Gate Closure**.

Any delay of greater than five minutes to the **Synchronising** or any advancement of greater than five minutes to the **De-Synchronising** of a **BM Unit** must be notified to **The Company** without delay by the submission of a revision of the **Export and Import Limits**.

BC2.5.2.2 Except in the circumstances provided for in BC2.5.2.3, BC2.5.2.4, BC2.5.5.1 or BC2.9, no **BM Unit** (nor a **Generating Unit**) is to be **Synchronised** or **De-Synchronised** unless:-

(a) a **Physical Notification** had been submitted to **The Company** prior to **Gate Closure** indicating that a **Synchronisation** or **De-Synchronisation** is to occur; or

(b) **The Company** has issued a **Bid-Offer Acceptance** requiring **Synchronisation** or **De-Synchronisation** of that **BM Unit** (or a **Generating Unit**).

BC2.5.2.3 **BM Participants** must only **Synchronise** or **De-Synchronise BM Units** (or a **Generating Unit**);

(a) at the times indicated to **The Company**, or

(b) at times consistent with variations in output or input arising from provisions described in BC2.5.1,

(within a tolerance of +/- 5 minutes) or unless that occurs automatically as a result of **Operational Intertripping** or **Low Frequency Relay** operations or an **Ancillary Service** pursuant to an **Ancillary Services Agreement**

BC2.5.2.4 **De-Synchronisation** may also take place without prior notification to **The Company** as a result of plant breakdowns or if it is done purely on safety grounds (relating to personnel or plant). If that happens, **The Company** must be informed immediately that it has taken place and a revision to **Export and Import Limits** must be submitted in accordance with BC2.5.3.3. Following any **De-Synchronisation** occurring as a result of plant failure, no **Synchronisation** of that **BM Unit** (or a **Generating Unit**) is to take place without **The Company's** agreement, such agreement not to be unreasonably withheld.

In the case of **Synchronisation**, following an unplanned **De-Synchronisation** within the preceding 15 minutes, a minimum of 5 minutes notice of its intention to **Synchronise** should normally be given to **The Company** (via a revision to **Export and Import Limits**). In the case of any other unplanned **De-Synchronisation** where the **User** plans to **Synchronise** before the expiry of the current **Balancing Mechanism** period, a minimum of 15 minutes notice of **Synchronisation** should normally be given to **The Company** (via a revision to **Export and Import Limits**). In addition, the rate at which the **BM Unit** is returned to its **Physical Notification** is not to exceed the limits specified in **BC1**, Appendix 1 without **The Company's** agreement.

The Company will either agree to the **Synchronisation** or issue a **Bid-Offer Acceptance** in accordance with BC2.7 to delay the **Synchronisation**. **The Company** may agree to an earlier **Synchronisation** if **System** conditions allow.

BC2.5.2.5 Notification Of Times To Network Operators

The Company will make changes to the **Synchronising** and **De-Synchronising** times available to each **Network Operator**, but only relating to **BM Units Embedded** within its **User System** and those **BM Units** directly connected to the **National Electricity Transmission System** which **The Company** has identified under **OC2** and/or **BC1** as being those which may, in the reasonable opinion of **The Company**, affect the integrity of that **User System** and shall inform the relevant **BM Participant** that it has done so, identifying the **BM Unit** concerned.

Each **Network Operator** must notify **The Company** of any changes to its **User System** data as soon as practicable in accordance with BC1.6.1(c).

BC2.5.3 Revisions To BM Unit Data

Following **Gate Closure** for any **Settlement Period**, no changes to the **Physical Notification** or to **Bid-Offer Data** for that **Settlement Period** may be submitted to **The Company**.

BC2.5.3.1 At any time, any **BM Participant** (or the relevant person on its behalf) may, in respect of any of its **BM Units**, submit to **The Company** the data listed in **BC1**, Appendix 1 under the heading of **Dynamic Parameters** from the **Control Point** of its **BM Unit** to amend the data already held by **The Company** (including that previously submitted under this BC2.5.3.1) for use in preparing for and operating the **Balancing Mechanism**. The change will take effect from the time that it is received by **The Company**. For the avoidance of doubt, the **Dynamic Parameters** submitted to **The Company** under BC1.4.2(e) are not used within the current **Operational Day**. The **Dynamic Parameters** submitted under this BC2.5.3.1 shall reasonably reflect the true current operating characteristics of the **BM Unit** and shall be prepared in accordance with **Good Industry Practice**.

Following the **Operational Intertripping** of a **System** to **Generating Unit** or a **System** to **CCGT Module** and/or a **System** to **Power Generating Module**, the **BM Participant** shall as soon as reasonably practicable re-declare its MEL to reflect more accurately its output capability.

BC2.5.3.2 Revisions to **Export and Import Limits** or **Other Relevant Data** supplied (or revised) under **BC1** must be notified to **The Company** without delay as soon as any change becomes apparent to the **BM Participant** (or the relevant person on its behalf) via the **Control Point** for the **BM Unit** (or a **Generating Unit**) to ensure that an accurate assessment of **BM Unit** (or a **Generating Unit**) capability is available to **The Company** at all times. These revisions should be prepared in accordance with **Good Industry Practice** and may be submitted by use of electronic data communication facilities or by telephone.

BC2.5.3.3 Revisions to **Export and Import Limits** must be made by a **BM Participant** (or the relevant person on its behalf) via the **Control Point** in the event of any **De-Synchronisation** of a **BM Unit** (or a **Generating Unit**) in the circumstances described in BC2.5.2.4 if the **BM Unit** (or a **Generating Unit**) is no longer available for any period of time. Revisions must also be submitted in the event of plant failures causing a reduction in input or output of a **BM Unit** (or a **Generating Unit**) even if that does not lead to **De-Synchronisation**. Following the correction of a plant failure, the **BM Participant** (or the relevant person on its behalf) must notify **The Company** via the **Control Point** of a revision to the **Export and Import Limits**, if appropriate, of the **BM Unit** (or a **Generating Unit**), using reasonable endeavours to give a minimum of 5 minutes notice of its intention to return to its **Physical Notification**. The rate at which the **BM Unit** (or a **Generating Unit**) is returned to its **Physical Notification** is not to exceed the limits specified in **BC1**, Appendix 1 without **The Company's** agreement.

BC2.5.3.4 Resubmissions to **Maximum Delivery Offer** (**MDO**) and **Maximum Delivery Bid** (**MDB**) for a **BM Unit** may only be made following **Gate Closure** for a **Settlement Period** in the event of:

a) The **BM Unit** no longer being able to achieve the previously stated value as a result of an unavoidable **Event**. Examples of such an **Event** include (but are not limited to) **Plant** breakdowns, or **Events** requiring a resubmission on safety grounds (relating to personnel or **Plant**); or

b) **The Company** issuing a **Bid-Offer Acceptance** (**BOA**) in respect of the **BM Unit**; or

c) The **BM Unit** fully utilising the energy reserved (or storage capacity for energy which was reserved) for delivery of **System Ancillary Services** or **Commercial Ancillary Services**; or

d) Submission of a change to a **Physical Notification** for the **BM Unit** under BC1.4.2(a) which covers the **Settlement Period** after the **Balancing Mechanism Window Period**.

For the purposes of clarity, if a **BM Participant** does not submit values by 11:00 each day for the next **Operational Day** they will default to the **MDO** and **MDB** values previously submitted until updated.

BC2.5.4 Operation in the Absence of Instructions from The Company

In the absence of any **Bid-Offer Acceptances**, **Ancillary Service** instructions issued pursuant to BC2.8 or **Emergency Instructions** issued pursuant to BC2.9:

(a) as provided for in BC3, each **Synchronised Genset** producing **Active Power** must operate at all times in **Limited Frequency Sensitive Mode** (unless instructed in accordance with BC3.5.4 to operate in **Frequency Sensitive Mode**);

(b) (i) in the absence of any MVAr **Ancillary Service** instructions, the MVAr output of each **Synchronised Genset** located **Onshore** should be 0 MVAr upon **Synchronisation** at the circuit-breaker where the **Genset** is **Synchronised**. For the avoidance of doubt, in the case of a **Genset** located **Onshore** comprising of **Non-Synchronous Generating Units**, **Power Park Modules**, **HVDC Systems** or **DC Converters**, the steady state tolerance allowed in CC.6.3.2(b) or ECC.6.3.2.4.4 may be applied;

(ii) In the absence of any MVAr **Ancillary Service** instructions, the MVAr output of each

Synchronised Genset comprising **Synchronous Generating Units** located **Offshore** (which could be part of a **Synchronous Power Generating Module**) should be 0MVAr at the **Grid Entry Point** upon **Synchronisation**. For the avoidance of doubt, in the case of a **Genset** located **Offshore** comprising of **Non-Synchronous Generating Units**, **Power Park Modules**, **HVDC Systems** or **DC Converters**, the steady state tolerance allowed in CC.6.3.2(e) or ECC.6.3.2.5.1 or ECC.6.3.2.5.2 or ECC.6.3.2.5.3 or ECC.6.3.2.6.1 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 (as applicable) may be applied;

(c) (i) subject to the provisions of 2.5.4(c) (ii) and 2.5.4 (c) (iii) below, the excitation system or the voltage control system of a **Genset** located **Offshore** which has agreed an alternative **Reactive Power** capability range under CC.6.3.2 (e) (iii) or ECC.6.3.2.5.2 or ECC.6.3.2.5.3 or ECC.6.3.2.6.1 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 (as applicable) or a **Genset** located **Onshore**, unless otherwise agreed with **The Company**, must be operated only in its constant terminal voltage mode of operation with VAR limiters in service, with any constant **Reactive Power** output control mode or constant **Power Factor** output control mode always disabled, unless agreed otherwise with **The Company**. In the event of any change in **System** voltage, a **Generator** must not take any action to override automatic MVAr response which is produced as a result of constant terminal voltage mode of operation of the automatic excitation control system unless instructed otherwise by **The Company** or unless immediate action is necessary to comply with **Stability Limits** or unless constrained by plant operational limits or safety grounds (relating to personnel or plant);

(ii) In the case of all **Gensets** comprising **Non-Synchronous Generating Units**, **DC Converters**, **HVDC Systems** and **Power Park Modules** that are located **Offshore** and which have agreed an alternative **Reactive Power** capability range under CC.6.3.2 (e) (iii), or ECC.6.3.2.5.2 or ECC.6.3.2.5.3 or ECC.6.3.2.6.1 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 (as applicable) or that are located **Onshore** only when operating below 20 % of the **Rated MW** output, the voltage control system shall maintain the **Reactive Power** transfer at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) to 0 MVAr. For the avoidance of doubt, the relevant steady state tolerance allowed for **GB Generators** in CC.6.3.2(b) or CC.6.3.2 (e) and for **EU Generators** in ECC.6.3.2.4.4, ECC.6.3.2.5.1, ECC.6.3.2.5.2, or ECC.6.3.2.5.3 or ECC.6.3.2.6.1, ECC.6.3.2.6.2 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 may be applied. In the case of any such **Gensets** owned or operated by **GB Code Users** comprising current source **DC Converter** technology or comprising **Power Park Modules** connected to the **Total System** by a current source **DC Converter** when operating at any power output, the voltage control system shall maintain the **Reactive Power** transfer at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) to 0 MVAr. For the avoidance of doubt, the relevant steady state tolerance allowed in CC.6.3.2(b) or CC.6.3.2 (c) (i) or CC.6.3.2(e) may be applied.

(iii) In the case of all **Gensets** located **Offshore** which are not subject to the requirements of BC2.5.4 (c) (i) or BC2.5.4 (c) (ii) the control system shall maintain the **Reactive Power** transfer at the **Offshore Grid Entry Point** at 0MVAr. For the avoidance of doubt the steady state tolerance allowed by CC.6.3.2 (e) or ECC.6.3.2.4.4, ECC.6.3.2.5.1, or ECC.6.3.2.5.2 or ECC.6.3.2.5.3, or ECC.6.3.2.6.1 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 may be applied.

(d) In the absence of any MVAr **Ancillary Service** instructions,

(i) the MVAr output of each **Genset** located **Onshore** should be 0 MVAr immediately prior to **De-Synchronisation** at the circuit-breaker where the **Genset** is **Synchronised**, other than in the case of a rapid unplanned **De-Synchronisation** or in the case of a **Genset** comprising of **Power Generating Modules** and/or **Non-Synchronous Generating Units** and/or **Power Park Modules** and/or **HVDC Converters** or **DC Converters** which is operating at less than 20% of its **Rated MW** output where the requirements of BC2.5.4 (c) part (ii) apply, or;

(ii) the MVAr output of each **Genset** located **Offshore** should be 0MVAr immediately prior to **De-Synchronisation** at the **Offshore Grid Entry Point**, other than in the case of a rapid unplanned **De-Synchronisation** or in the case of a **Genset** comprising of **Non-Synchronous Generating Units**, **Power Park Modules**, **HVDC Converters** or **DC Converters** which is operating at less than 20% of its **Rated MW** output and which has agreed an alternative **Reactive Power** capability range (for **GB Code Users**) under CC.6.3.2 (e) (iii) or ECC.6.3.2.4.4, ECC.6.3.2.5.1, ECC.6.3.2.5.2, or ECC.6.3.2.5.3, or ECC.6.3.2.6.1 or ECC.6.3.2.6.3 or ECC.6.3.2.6.4 (for **EU Code Users**) where the requirements of BC2.5.4 (c) (ii) apply.

(e) a **Generator** should at all times operate its **CCGT Units** in accordance with the applicable **CCGT Module Matrix**;

(f) in the case of a **Range CCGT Module**, a **Generator** must operate that **CCGT Module** so that power is provided at the single **Grid Entry Point** (or **User System Entry Point** if **Embedded**) identified in the data given pursuant to PC.A.3.2.1 or at the single **Grid Entry Point** to which **The Company** has agreed pursuant to BC1.4.2(f);

(g) in the event of the **System Frequency** being above 50.3Hz or below 49.7Hz, **BM Participants** must not commence any reasonably avoidable action to regulate the input or output of any **BM Unit** in a manner that could cause the **System Frequency** to deviate further from 50Hz without first using reasonable endeavours to discuss the proposed actions with **The Company**. **The Company** shall either agree to these changes in input or output or issue a **Bid-Offer Acceptance** in accordance with BC2.7 to delay the change.

(h) a **Generator** should at all times operate its **Power Park Units** in accordance with the applicable **Power Park Module Availability Matrix**.

BC2.5.5 Commencement or Termination of Participation in the Balancing Mechanism

BC2.5.5.1 In the event that a **BM Participant** in respect of a **BM Unit** with a **Demand Capacity** with a magnitude of less than 50MW in **NGET's Transmission Area** or less than 10MW in **SHETL's Transmission Area** or less than 30MW in **SPT's Transmission Area** or comprising **Generating Units** (as defined in the Glossary and Definitions and not limited by BC2.2) and/or **Power Generating Modules** and/or **CCGT Modules** and/or **Power Park Modules** at a **Small Power Station**, notifies **The Company** at least 30 days in advance that from a specified **Operational Day** it will:

(a) no longer submit **Bid-Offer Data** under BC1.4.2(d), then with effect from that **Operational Day**, that **BM Participant** no longer has to meet the requirements of BC2.5.1 nor the requirements of CC.6.5.8(b) or ECC.6.5.8(b) (as applicable) in relation to that **BM Unit**. Also, with effect from that **Operational Day**, any defaulted **Physical Notification** and defaulted **Bid-Offer Data** in relation to that **BM Unit** arising from the **Data Validation**, **Consistency and Defaulting Rules** will be disregarded and the provisions of BC2.5.2 will not apply;

(b) submit **Bid-Offer Data** under BC1.4.2(d), then with effect from that **Operational Day** that **BM Participant** will need to meet the requirements of BC2.5.1 and the requirements of CC.6.5.8(b) or ECC.6.5.8(b) (as applicable) in relation to that **BM Unit**.

BC2.5.5.2 In the event that a **BM Participant** in respect of a **BM Unit** with a **Demand Capacity** with a magnitude of 50MW or more in **NGET's Transmission Area** or 10MW or more in **SHETL's Transmission Area** or 30MW or more in **SPT's Transmission Area** or comprising **Generating Units** (as defined in the Glossary and Definitions and not limited by BC2.2) and/or **Power Generating Modules** and/or **CCGT Modules** and/or **Power Park Modules** at a **Medium Power Station** or **Large Power Station** notifies **The Company** at least 30 days in advance that from a specified **Operational Day** it will:

(a) no longer submit **Bid-Offer Data** under BC1.4.2(d), then with effect from that **Operational Day** that **BM Participant** no longer has to meet the requirements of CC.6.5.8(b) or ECC.6.5.8(b) (as applicable) in relation to that **BM Unit**; also, with effect from that **Operational Day**, any defaulted **Bid-Offer Data** in relation to that **BM Unit** arising from the **Data Validation**, **Consistency and Defaulting Rules** will be disregarded;

(b) submit **Bid-Offer Data** under BC1.4.2(d), then with effect from that **Operational Day** that **BM Participant** will need to meet the requirements of CC.6.5.8(b) or ECC.6.5.8(b) (as applicable) in relation to that **BM Unit**.

BC2.6 COMMUNICATIONS

Electronic communications are always conducted in GMT. However, the input of data and display of information to **Users** and **The Company** and all other communications are conducted in London time.

BC2.6.1 Normal Communication With Control Points

(a) With the exception of BC2.6.1(c) below, **Bid-Offer Acceptances** and, unless otherwise agreed with **The Company**, **Ancillary Service** instructions shall be given by automatic logging device and will be given to the **Control Point** for the **BM Unit**. For all **Planned Maintenance Outages** the provisions of BC2.6.5 will apply. For **Generating Units** (including **DC Connected Power Park Modules** (if relevant)) communications under **BC2** shall be by telephone unless otherwise agreed by **The Company** and the **User**.

(b) **Bid-Offer Acceptances** and **Ancillary Service** instructions must be formally acknowledged immediately by the **BM Participant** (or the relevant person on its behalf) via the **Control Point** for the **BM Unit** or **Generating Unit** in respect of that **BM Unit** or that **Generating Unit**. The acknowledgement and subsequent confirmation or rejection, within two minutes of receipt, is normally given electronically by automatic logging device. If no confirmation or rejection is received by **The Company** within two minutes of the issue of the **Bid-Offer Acceptance**, then **The Company** will contact the **Control Point** for the **BM Unit** by telephone to determine the reason for the lack of confirmation or rejection. Any rejection must be given in accordance with BC2.7.3 or BC2.8.3.

(c) In the event of a failure of the logging device or an outage of **The Company's** computer system, **Bid-Offer Acceptances** and instructions will be given, acknowledged, and confirmed or rejected by telephone. The provisions of BC2.9.7 are also applicable.

(d) In the event that in carrying out the **Bid-Offer Acceptances** or providing the **Ancillary Services**, or when operating at the level of the **Final Physical Notification Data** as provided in BC2.5.1, an unforeseen problem arises, caused on safety grounds (relating to personnel or plant), **The Company** must be notified without delay by telephone.

(e) The provisions of BC2.5.3 are also relevant.

(f) Submissions of revised MVAr capability may be made via the **Designated Information Exchange System**, using the format given in Appendix 3 to **BC2**.

(g) Communication will normally be by telephone for any purpose other than **Bid-Offer Acceptances**, in relation to **Ancillary Services** or for revisions of MVAr data.

(h) Submissions of revised availability of **Frequency Sensitive Mode** may be made via the **Designated Information Exchange System**, using the format given in Appendix 4 to **BC2**. This process should only be used for technical restrictions to the availability of **Frequency Sensitive Mode**.

BC2.6.2 Communication With Control Points In Emergency Circumstances

The Company will issue **Emergency Instructions** direct to the **Control Point** for each **BM Unit** [or **Generating Unit**] in **Great Britain**. **Emergency Instructions** to a **Control Point** will normally be given by telephone (and will include an exchange of operator names).

BC2.6.3 Communication With Network Operators In Emergency Circumstances

The Company will issue **Emergency Instructions** direct to the **Network Operator** at each **Control Centre** in relation to actions including special actions as set out in BC1.7, actions in the categories set out under BC2.9.3.3, **Embedded Generation Control** and **Demand Control actions**. **Emergency Instructions** to a **Network Operator** will normally be given by telephone (and will include an exchange of operator names). **OC6** contains further provisions relating to **Demand Control** instructions; OC6B contains further provisions relating to **Embedded Generation Control** instructions.

BC2.6.4 Communication with Externally Interconnected System Operators in Emergency Circumstances

The Company will issue **Emergency Instructions** directly to the **Externally Interconnected System Operator** at each **Control Centre**. **Emergency Instructions** to an **Externally Interconnected System Operator** will normally be given by telephone (and will include an exchange of operator names).

BC2.6.5 Communications during Planned Outages of Electronic Data Communication Facilities

Planned Maintenance Outages will normally be arranged to take place during periods of low data transfer activity. Upon any such **Planned Maintenance Outage** in relation to a post **Gate Closure** period:-

(a) **BM Participants** should operate in relation to any period of time in accordance with the **Physical Notification** prevailing at **Gate Closure** current at the time of the start of the **Planned Maintenance Outage** in relation to each such period of time. Such operation shall be subject to the provisions of BC2.5.1, which will apply as if set out in this BC2.6.5. No further submissions of **BM Unit Data** (other than data specified in BC1.4.2(c) and BC1.4.2(e)) should be attempted or **Generating Unit Data**. Plant failure or similar problems causing significant deviation from **Physical Notification** should be notified to **The Company** by the submission of a revision to **Export and Import Limits** in relation to the **BM Unit** or **Generating Unit** so affected;

(b) **Interconnector Owners** should operate in relation to any period of time in accordance with the **Interconnector Reference Programme** based on the latest **Physical Notifications** notified by the **Interconnector Users** at the start of the **Planned Maintenance Outage** in relation to each such period of time. The **Interconnector Owners** should communicate such latest **Interconnector Reference Programme** to **The Company** prior to the start of the **Planned Maintenance Outage** and continue to act in accordance with such latest **Interconnector Reference Programme**. No further submissions of **Interconnector Reference Programme** should be attempted until the end of the outage is declared.

(c) during the outage, revisions to the data specified in BC1.4.2(c) and BC1.4.2(e) may be submitted. Communication between **Users Control Points** and **The Company** during the outage will be conducted by telephone;

(d) **The Company** will issue **Bid-Offer Acceptances** by telephone; and

(e) no data will be transferred from **The Company** to the **BMRA** until the communication facilities are re-established.

(f) The provisions of BC2.9.7 may also be relevant.

BC2.7 BID-OFFER ACCEPTANCES

BC2.7.1 Acceptance of Bids and Offers by The Company

Bid-Offer Acceptances may be issued to the **Control Point** at any time following **Gate Closure**. Any **Bid-Offer Acceptance** will be consistent with the **Dynamic Parameters** and **Export and Import Limits** of the **BM Unit** in so far as the **Balancing Mechanism** timescales will allow (see BC2.7.2).

(a) **The Company** is entitled to assume that each **BM Unit** is available in accordance with the **BM Unit Data** submitted unless and until it is informed of any changes.

(b) **Bid-Offer Acceptances** sent to the **Control Point** will specify the data necessary to define a MW profile to be provided (ramp rate break-points are not normally explicitly sent to the **Control Point**) and to be achieved consistent with the respective **BM Unit's Export and Import Limits** provided or modified under **BC1** or **BC2**, and **Dynamic Parameters** given under BC2.5.3 or, if agreed with the relevant **User**, such rate within those **Dynamic Parameters** as is specified by **The Company** in the **Bid-Offer Acceptances**.

(c) All **Bid-Offer Acceptances** will be deemed to be at the current "**Target Frequency**", namely where a **Genset** is in **Frequency Sensitive Mode** they refer to target output at **Target Frequency**.

(d) The form of and terms to be used by **The Company** in issuing **Bid-Offer Acceptances** together with their meanings are set out in Appendix 1 in the form of a non-exhaustive list of examples.

BC2.7.2 Consistency With Export And Import Limits And Dynamic Parameters

(a) **Bid-Offer Acceptances** will be consistent with the **Export and Import Limits** provided or modified under **BC1** or **BC2** and the **Dynamic Parameters** provided or modified under **BC2**. **Bid-Offer Acceptances** may also recognise **Other Relevant Data** provided or modified under **BC1** or **BC2**

(b) In the case of consistency with **Dynamic Parameters** this will be limited to the time until the end of the **Settlement Period** for which **Gate Closure** has most recently occurred. If **The Company** intends to issue a **Bid-Offer Acceptance** covering a period after the end of the **Settlement Period** for which **Gate Closure** has most recently occurred, based upon the then submitted **Dynamic Parameters**, **Export and Import Limits** and **Bid-Offer Data** applicable to that period, **The Company** will indicate this to the **BM Participant** at the **Control Point** for the **BM Unit**. The intention will then be reflected in the issue of a **Bid-Offer Acceptance** to return the **BM Unit** to its previously notified **Physical Notification** after the relevant **Gate Closure**, provided the submitted data used to formulate this intention has not changed and subject to **System** conditions which may affect that intention. Subject to that, assumptions regarding **Bid-Offer Acceptances** may be made by **BM Participants** for **Settlement Periods** for which **Gate Closure** has not yet occurred when assessing consistency with **Dynamic Parameters** in **Settlement Periods** for which **Gate Closure** has occurred. If no such subsequent **Bid–Offer Acceptance** is issued, the original **Bid-Offer Acceptance** will include an instantaneous return to **Physical Notification** at the end of the **Balancing Mechanism** period.

BC2.7.3 Confirmation and Rejection of Acceptances

Bid-Offer Acceptances may only be rejected by a **BM Participant** :

(a) on safety grounds (relating to personnel or plant) as soon as reasonably possible and in any event within five minutes; or

(b) because they are not consistent with the **Export and Import Limits** or **Dynamic Parameters** applicable at the time of issue of the **Bid-Offer Acceptance**.

A reason must always be given for rejection by telephone.

Where a **Bid-Offer Acceptance** is not confirmed within two minutes or is rejected, **The Company** will seek to contact the **Control Point** for the **BM Unit**. **The Company** must then, within 15 minutes of issuing the **Bid-Offer Acceptance**, withdraw the **Bid-Offer Acceptance** or log the **Bid-Offer Acceptance** as confirmed. **The Company** will only log a rejected **Bid-Offer Acceptance** as confirmed following discussion and if the reason given is, in **The Company's** reasonable opinion, not acceptable, **The Company** will inform the **BM Participant** accordingly.

BC2.7.4 Action Required From BM Participants

(a) Each **BM Participant** in respect of its **BM Units** will comply in accordance with BC2.7.1 with all **Bid-Offer Acceptances** given by **The Company** with no more than the delay allowed for by the **Dynamic Parameters** unless the **BM Unit** has given notice to **The Company** under the provisions of BC2.7.3 regarding non-acceptance of a **Bid-Offer Acceptance**.

(b) Where a **BM Unit's** input or output changes in accordance with a **Bid-Offer Acceptance** issued under BC2.7.1, such variation does not need to be notified to **The Company** in accordance with BC2.5.1.

(c) In the event that while carrying out the **Bid-Offer Acceptance** an unforeseen problem arises caused by safety reasons (relating to personnel or plant), **The Company** must be notified immediately by telephone and this may lead to revision of **BM Unit Data** in accordance with BC2.5.3

BC2.7.5 Additional Action required when responding to Bid-Offer Acceptances

(a) When complying with **Bid-Offer Acceptances** for a **CCGT Module**, a **Generator** will operate its **CCGT Units** in accordance with the applicable **CCGT Module Matrix**.

(b) When complying with **Bid-Offer Acceptances** for a **CCGT Module** which is a **Range CCGT Module**, a **Generator** must operate that **CCGT Module** so that power is provided at the single **Grid Entry Point** identified in the data given pursuant to PC.A.3.2.1 or at the single **Grid Entry Point** to which **The Company** has agreed pursuant to BC1.4.2 (f).

(c) On receiving a new MW **Bid-Offer Acceptance**, no tap changing shall be carried out to change the MVAr output unless there is a new MVAr **Ancillary Service** instruction issued pursuant to BC2.8.

(d) When complying with **Bid-Offer Acceptances** for a **Power Park Module**, a **Generator** will operate its **Power Park Units** in accordance with the applicable **Power Park Module Availability Matrix**.

(e) When complying with **Bid-Offer Acceptances** for a **Synchronous Power Generating Module**, a **Generator** will operate its **Generating Units** in accordance with the applicable **Synchronous Power Generating Module Availability Matrix**.

(f) When complying with **Bid-Offer Acceptances** for an **Additional BM Unit** or **Secondary BM Unit** they will operate in accordance with the applicable **Aggregator Impact Matrix**.

BC2.8 ANCILLARY SERVICES

This section primarily covers the call-off of **System Ancillary Services**. The provisions relating to **Commercial Ancillary Services** will normally be covered in the relevant **Ancillary Services Agreement**.

BC2.8.1 Call-Off of Ancillary Services by The Company

(a) **Ancillary Service** instructions may be issued at any time.

(b) **The Company** is entitled to assume that each **BM Unit** (or **Generating Unit**) is available in accordance with the **BM Unit Data** (or the **Generating Unit Data**) and data contained in the **Ancillary Services Agreement** unless and until it is informed of any changes.

(c) **Frequency** control instructions may be issued in conjunction with, or separate from, a **Bid-Offer Acceptance**.

(d) The form of and terms to be used by **The Company** in issuing **Ancillary Service** instructions together with their meanings are set out in Appendix 2 in the form of a non-exhaustive list of examples including **Reactive Power** and associated instructions.

(e) In the case of **Generating Units** that do not form part of a **BM Unit** any change in **Active Power** as a result of, or required to enable, the provision of an **Ancillary Service** will be dealt with as part of that **Ancillary Service Agreement** and/or provisions under the **CUSC**.

(f) A **System to Generator Operational Intertripping Scheme** will be armed in accordance with BC2.10.2(a).

BC2.8.2 Consistency with Export and Import Limits and Dynamic Parameters

Ancillary Service instructions will be consistent with the **Export and Import Limits** provided or modified under **BC1** or **BC2** and the **Dynamic Parameters** provided or modified under **BC2**. **Ancillary Service** instructions may also recognise **Other Relevant Data** provided or modified under **BC**1 or **BC2**.

BC2.8.3 Rejection of Ancillary Service Instructions

(a) **Ancillary Service** instructions may only be rejected, by automatic logging device or by telephone, on safety grounds (relating to personnel or **Plant**) or because they are not consistent with the applicable **Export and Import Limits**, **Dynamic Parameters**, **Other Relevant Data** or data contained in the **Ancillary Services Agreement** and a reason must be given immediately for non-acceptance.

(b) The issue of **Ancillary Service** instructions for **Reactive Power** will be made with due regard to any resulting change in **Active Power** output. The instruction may be rejected if it conflicts with any **Bid-Offer Acceptance** issued in accordance with BC2.7 or with the **Physical Notification**.

(c) Where **Ancillary Service** instructions relating to **Active Power** and **Reactive Power** are given together, and to achieve the **Reactive Power** output would cause the **BM Unit** to operate outside **Dynamic Parameters** as a result of the **Active Power** instruction being met at the same time, then the timescale of implementation of the **Reactive Power** instruction may be extended to be no longer than the timescale for implementing the **Active Power** instruction but in any case to achieve the MVAr **Ancillary Service** instruction as soon as possible.

BC2.8.4 Action Required From BM Units

(a) Each **BM Unit** (or **Generating Unit**) will comply in accordance with BC2.8.1 with all **Ancillary Service** instructions relating to **Reactive Power** properly given by **The Company** within 2 minutes or such longer period as **The Company** may instruct, and all other **Ancillary Service** instructions without delay, unless the **BM Unit** or **Generating Unit** has given notice to **The Company** under the provisions of BC2.8.3 regarding non-acceptance of **Ancillary Service** instructions.

(b) Each **BM Unit** may deviate from the profile of its **Final Physical Notification Data**, as modified by any **Bid-Offer Acceptances** issued in accordance with BC2.7.1, only as a result of responding to **Frequency** deviations when operating in **Frequency Sensitive Mode** in accordance with the **Ancillary Services Agreement**.

(c) Each **Generating Unit** that does not form part of a **BM Unit** may deviate from the profile of its **Final Physical Notification Data** where agreed by **The Company** and the **User**, including but not limited to, as a result of providing an **Ancillary Service** in accordance with the **Ancillary Service Agreement**.

(d) In the event that while carrying out the **Ancillary Service** instructions an unforeseen problem arises caused by safety reasons (relating to personnel or plant), **The Company** must be notified immediately by telephone and this may lead to revision of **BM Unit Data** or **Generating Unit Data** in accordance with BC2.5.3.

BC2.8.5 Reactive Despatch Network Restrictions

Where **The Company** has received notification pursuant to the Grid Code that a **Reactive Despatch to Zero MVAr Network Restriction** is in place with respect to any **Embedded Power Generating Module** and/or **Embedded Generating Unit** and/or **Embedded Power Park Module** or **HVDC Converter** at an **Embedded HVDC Converter Station** or **DC Converter** at an **Embedded DC Converter Station**, then **The Company** will not issue any **Reactive Despatch Instruction** with respect to that **Power Generating Module** and/or **Generating Unit** and/or **Power Park Module** or **DC Converter** or **HVDC Converter** until such time as notification is given to **The Company** pursuant to the Grid Code that such **Reactive Despatch to Zero MVAr Network Restriction** is no longer affecting that **Power Generating Module** and/or **Generating Unit** and/or **Power Park Module** or **DC Converter** or **HVDC Converter**.

BC2.9 EMERGENCY CIRCUMSTANCES

BC2.9.1 Emergency Actions

BC2.9.1.1 In certain circumstances (as determined by **The Company** in its reasonable opinion) it will be necessary, in order to preserve the integrity of the **National Electricity Transmission System** and any synchronously connected **External System**, for **The Company** to issue **Emergency Instructions**. In such circumstances, it may be necessary to depart from normal **Balancing Mechanism** operation in accordance with BC2.7 in issuing **Bid-Offer Acceptances**. **BM Participants** must also comply with the requirements of **BC3**.

BC2.9.1.2 Examples of circumstances that may require the issue of **Emergency Instructions** include:-

(a) **Events** on the **National Electricity Transmission System** or the **System** of another **User**; or

(b) the need to maintain adequate **System** and **Localised NRAPM** in accordance with BC2.9.4 below; or

(c) the need to maintain adequate **Frequency** sensitive **Gensets** in accordance with BC2.9.5 below; or

(d) the need to implement **Demand Control** in accordance with OC6; or

(e) (i) the need to invoke the **System Restoration** process or the **Re-Synchronisation** of **Power Island** process in accordance with OC9; or

(ii) the need to request provision of a **Maximum Generation Service**; or

(iii) the need to issue an **Emergency Deenergisation Instruction** in circumstances where the condition or manner of operation of any **Transmission Plant** and/or **Apparatus** is such that it may cause damage or injury to any person or to the **National Electricity Transmission System**; or

(f) the need to implement **Embedded Generation Control** in accordance with OC6B.

BC2.9.1.3 In the case of **BM Units** and **Generating Units** in **Great Britain**, **Emergency Instructions** will be issued by **The Company** direct to the **User** at the **Control Point** for the **BM Unit** or **Generating Unit** and may require an action or response which is outside its **Other Relevant Data** or **Export and Import Limits** submitted under **BC1**, or revised under **BC1** or **BC2**, or **Dynamic Parameters** submitted or revised under **BC2**.

BC2.9.1.4 In the case of a **Network Operator** or an **Externally Interconnected System Operator**, **Emergency Instructions** will be issued to its **Control Centre**.

BC2.9.2 Implementation of Emergency Instructions

BC2.9.2.1 **Users** will respond to **Emergency Instructions** issued by **The Company** without delay and using all reasonable endeavours to so respond. **Emergency Instructions** may only be rejected by an **User** on safety grounds (relating to personnel or plant) and this must be notified to **The Company** immediately by telephone.

BC2.9.2.2 **Emergency Instructions** will always be prefixed with the words "This is an **Emergency Instruction**" except in the case of:

(i) **Maximum Generation Service** instructed by electronic data communication facilities where the instruction will be issued in accordance with the provisions of the **Maximum Generation Service Agreement**; and

(ii) an **Emergency Deenergisation Instruction**, where the **Emergency Deenergisation Instruction** will be pre-fixed with the words 'This is an **Emergency Deenergisation Instruction**'; and

(iii) during **System Restoration** situation where the **Balancing Mechanism** has been suspended, any instruction given by **The Company** will (unless **The Company** specifies otherwise) be deemed to be an **Emergency Instruction** and need not be pre-fixed with the words 'This is an **Emergency Instruction**'; and

(iv) during **System Restoration** where the **Balancing Mechanism** has not been suspended, any instruction issued to **Restoration Contractors** or to **Network Operators** which are part of an invoked **Local Joint Restoration Plan** will (unless **The Company** specifies otherwise) be deemed to be an **Emergency Instruction** and need not be prefixed with the words 'This is an **Emergency Instruction**'. Equally during a **System Restoration** where the **Balancing Mechanism** has not been suspended, any instruction to **Network Operators** which are part of an activated **Distribution Restoration Zone Plan** will (unless **The Company** specifies otherwise) be deemed to be an **Emergency Instruction** and need not be prefixed by the words "This is an **Emergency Instruction**".

In Scotland, any instruction from the **Relevant Transmission Licensee** to **Restoration Contractors** which are part of an invoked **Local Joint Restoration Plan** and are instructed in accordance with the provisions of that **Local Joint Restoration Plan,** will be deemed to be an **Emergency Instruction** and need not be prefixed with the words 'This is an **Emergency Instruction**'. Equally any instruction from the **Relevant Transmission Licensee** to **Network Operators** who are party to an activated **Distribution Restoration Zone Plan** and are instructed in accordance with the provisions of that **Distribution Restoration Zone Plan** will be deemed to be an **Emergency Instruction** and need not be prefixed with the words "This is an **Emergency Instruction**".

BC2.9.2.3 In all cases under this BC2.9, except BC2.9.1.2 (e) where **The Company** issues an **Emergency Instruction** to a **BM Participant** which is not rejected under BC2.9.2.1, the **Emergency Instruction** shall be treated as a **Bid-Offer Acceptance**. For the avoidance of doubt, any **Emergency Instruction** issued to a **Network Operator** or to an **Externally Interconnected System Operator** or in respect of a **Generating Unit** that does not form part of a **BM Unit**, will not be treated as a **Bid-Offer Acceptance**.

BC2.9.2.4 In the case of BC2.9.1.2 (e) (ii) where **The Company** issues an **Emergency Instruction** pursuant to a **Maximum Generation Service Agreement**, payment will be dealt with in accordance with the **CUSC** and the **Maximum Generation Service Agreement**.

BC2.9.2.5 In the case of BC2.9.1.2 (e) (iii) where **The Company** issues an **Emergency Deenergisation Instruction**, payment will be dealt with in accordance with the **CUSC**, Section 5.

BC2.9.2.6 In the case of BC2.9.1.2 (e) (i), upon receipt of an **Emergency Instruction** by a **Generator** during a **System Restoration**, the provisions of Section G of the **BSC** relating to compensation shall apply.

BC2.9.3 Examples of Emergency Instructions

BC2.9.3.1 In the case of a **BM Unit** or a **Generating Unit**, **Emergency Instructions** may include an instruction for the **BM Unit** or the **Generating Unit** to operate in a way that is not consistent with the **Dynamic Parameters** and/or **Export and Import Limits**.

BC2.9.3.2 In the case of a **Generator**, **Emergency Instructions** may include:

(a) an instruction to trip one or more **Gensets** (excluding **Operational Intertripping**); or

(b) an instruction to trip **Mills** or to **Part Load** a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2); or

(c) an instruction to **Part Load** a **Power Generating Module** and/or **CCGT Module** or **Power Park Module**; or

(d) an instruction for the operation of **CCGT Units** within a **CCGT Module** (on the basis of the information contained within the **CCGT Module Matrix**) when emergency circumstances prevail (as determined by **The Company** in **The Company's** reasonable opinion); or

(e) an instruction to generate outside normal parameters, as allowed for in 4.2 of the **CUSC**; or

(f) an instruction for the operation of **Generating Units** within a **Cascade Hydro Scheme** (on the basis of the additional information supplied in relation to individual **Generating Units**) when emergency circumstances prevail (as determined by **The Company** in **The Company's** reasonable opinion); or

(g) an instruction for the operation of a **Power Park Module** (on the basis of the information contained within the **Power Park Module Availability Matrix**) when emergency circumstances prevail (as determined by **The Company** in **The Company's** reasonable opinion).

BC2.9.3.3 Instructions to **Network Operators** relating to the **Operational Day** may include:

(a) a requirement for **Demand** reduction and disconnection or restoration pursuant to **OC6**;

(b) an instruction to effect a load transfer between **Grid Supply Points**;

(c) an instruction to switch in a **System to Demand Intertrip Scheme**;

(d) an instruction to split a network;

(e) an instruction to disconnect an item of **Plant** or **Apparatus** from the **System**;

(f) requirement for **Embedded Generation Control** or restoration pursuant to OC6B; or

(g) an instruction to activate a **Distribution Restoration Zone Plan** as provided for in OC9.4.7.8.1.

BC2.9.4 Maintaining Adequate System and Localised NRAPM (Negative Reserve Active Power Margin)

BC2.9.4.1 Where **The Company** is unable to satisfy the required **System NRAPM** or **Localised NRAPM** by following the process described in BC1.5.5, **The Company** will issue an **Emergency Instruction** to exporting **BM Units** for **De-Synchronising** on the basis of **Bid-Offer Data** submitted to **The Company** in accordance with BC1.4.2(d). If **The Company** is still unable to satisfy the required **System NRAPM** or **Localised NRAPM** then **The Company** may issue **Emergency Instructions** to **Network Operator(s)** as set out under OC6B to carry out **Embedded Generation Control**.

BC2.9.4.2 In the event that **The Company** is unable to differentiate between exporting **BM Units** according to **Bid-Offer Data**, **The Company** will instruct a **BM Participant** to **Shutdown** a specified exporting **BM Unit** for such period based upon the following factors:

(a) effect on power flows (resulting in the minimisation of transmission losses);

(b) reserve capability;

(c) **Reactive Power** worth;

(d) **Dynamic Parameters**;

(e) in the case of **Localised NRAPM**, effectiveness of output reduction in the management of the **System Constraint**.

BC2.9.4.3 Where **The Company** is still unable to differentiate between exporting **BM Units**, having considered all the foregoing, **The Company** will decide which exporting **BM Unit** to **Shutdown** by the application of a quota for each **BM Participant** in the ratio of each **BM Participant's Physical Notifications**.

BC2.9.4.4 Other than as provided in BC2.9.4.5 and BC2.9.4.6 below, in determining which exporting **BM Units** to **De-Synchronise** under this BC2.9.4, **The Company** shall not consider in such determination (and accordingly shall not instruct to **De-Synchronise**) any **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2) within an **Existing Gas Cooled Reactor Plant**.

BC2.9.4.5 **The Company** shall be permitted to instruct a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2) within an **Existing AGR Plant** to **De-Synchronise** if the relevant **Generating Unit** within the **Existing AGR Plant** has failed to offer to be flexible for the relevant instance at the request of **The Company** within the **Existing AGR Plant Flexibility Limit**.

BC2.9.4.6 Notwithstanding the provisions of BC2.9.4.5 above, if the level of **System NRAPM** (taken together with **System** constraints) or **Localised NRAPM** is such that it is not possible to avoid instructing a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2) within an **Existing Magnox Reactor Plant** and/or an **Existing AGR Plant** whether or not it has met requests within the **Existing AGR Flexibility Limit** to **De-Synchronise**, **The Company** may, provided the power flow across each **External Interconnection** is either at zero or results in an export of power from the **Total System**, so instruct a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2) within an **Existing Magnox Reactor Plant** and/or an **Existing AGR Plant** to **De-Synchronise** in the case of **System NRAPM**, in all cases and in the case of **Localised NRAPM**, when the power flow would have a relevant effect.

BC2.9.4.7 When instructing exporting **BM Units** which form part of an **On-Site Generator Site** to reduce generation or export under this BC2.9.4, **The Company** will not issue an instruction which would reduce generation or export below the reasonably anticipated **Demand** of the **On-Site Generator Site**. For the avoidance of doubt, it should be noted that the term "**On-Site Generator Site**" only relates to Trading Units which have fulfilled the Class 1 or Class 2 requirements.

BC2.9.5 Maintaining an adequate level of Frequency Sensitive Generation

BC2.9.5.1 If, post **Gate Closure**, **The Company** determines, in its reasonable opinion, from the information then available to it (including information relating to a **Generating Unit** (as defined in the Glossary and Definitions and not limited by BC2.2) breakdown) that the number of, and level of **Primary**, **Secondary** and **High Frequency Response** available from **Gensets** (other than those units within **Existing Gas Cooled Reactor Plant**, which are permitted to operate in **Limited Frequency Sensitive Mode** at all times under BC3.5.3) available to operate in **Frequency Sensitive Mode**, is such that it is not possible to avoid **De-Synchronising Existing Gas Cooled Reactor Plant** then provided that:

(a) there are (or, as the case may be, that **The Company** anticipates, in its reasonable opinion, that at the time that the instruction is to take effect there will be) no other **Gensets** generating and exporting on to the **Total System** which are not operating in **Frequency Sensitive Mode** (or which are operating with only a nominal amount in terms of level and duration) (unless, in **The Company's** reasonable opinion, necessary to assist the relief of **System** constraints or necessary as a result of other **System** conditions); and

(b) the power flow across each **External Interconnection** is (or, as the case may be, is anticipated to be at the time that the instruction is to take effect) either at zero or results in an export of power from the **Total System**,

then **The Company** may instruct such of the **Existing Gas Cooled Reactor Plant** to **De-Synchronise** as it is, in **The Company's** reasonable opinion, necessary to **De-Synchronise** and for the period for which the **De-Synchronising** is, in **The Company's** reasonable opinion, necessary.

BC2.9.5.2 If in **The Company's** reasonable opinion it is necessary for both the procedure in BC2.9.4 and that set out in BC2.9.5.1 to be followed in any given situation, the procedure in BC2.9.4 will be followed first, and then the procedure set out in BC2.9.5.1. For the avoidance of doubt, nothing in this sub-paragraph shall prevent either procedure from being followed separately and independently of the other.

BC2.9.6 Emergency Assistance to and from External Systems

(a) An **Externally Interconnected System Operator** (in its role as operator of the **External System**) may request that **The Company** takes any available action to increase the **Active Energy** transferred into its **External System**, or reduce the **Active Energy** transferred into the **National Electricity Transmission System** by way of emergency assistance if the alternative is to instruct a demand reduction on all or part of its **External System** (or on the system of an **Interconnector User** using its **External System**). Such request must be met by **The Company** providing this does not require a reduction of **Demand** on the **National Electricity Transmission System**, or lead to a reduction in security on the **National Electricity Transmission System**.

(b) **The Company** may request that an **Externally Interconnected System Operator** takes any available action to increase the **Active Energy** transferred into the **National Electricity Transmission System**, or reduce the **Active Energy** transferred into its **External System** by way of emergency assistance if the alternative is to instruct a **Demand** reduction on all or part of the **National Electricity Transmission System**. Such request must be met by the **Externally Interconnected System Operator** providing this does not require a reduction of **Demand** on its **External System** (or on the system of **Interconnector Users** using its **External System**), or lead to a reduction in security on such **External System** or system.

BC2.9.7 Unplanned Outages of Electronic Communication and Computing Facilities

BC2.9.7.1 In the event of an unplanned outage of the electronic data communication facilities or of **The Company's** associated computing facilities or in the event of a **Planned Maintenance Outage** lasting longer than the planned duration, in relation to a post-**Gate Closure** period **The Company** will, as soon as it is reasonably able to do so, issue a **The Company** Computing System Failure notification by telephone or such other means agreed between **Users** and **The Company** indicating the likely duration of the outage.

BC2.9.7.2 During the period of any such outage, the following provisions will apply:

(a) **The Company** will issue further **The Company** Computing System Failure notifications by telephone or such other means agreed between **Users** and **The Company** to all **BM Participants** to provide updates on the likely duration of the outage;

(b) (i) **BM Participants**, not subject to the provisions of BC2.9.7.2(b)(iii), should operate in relation to any period of time in accordance with the last **Physical Notification** prevailing at **Gate Closure** received prior to the computer system failure in relation to each such period of time. Such operation shall be subject to the provisions of BC2.5.1, which will apply as if set out in this BC2.9.7.2. No further submissions of **BM Unit Data** or **Generating Unit Data** (other than data specified in BC1.4.2(c) (**Export and Import Limits**) and BC1.4.2(e) (**Dynamic Parameters**) should be attempted. **Plant** failure or similar problems causing significant deviation from **Physical Notification** should be notified to **The Company** by telephone by the submission of a revision to **Export and Import Limits** in relation to the **BM Unit** or **Generating Unit Data** so affected;

(ii) **Interconnector Owners** should operate in relation to any period of time in accordance with the last **Interconnector Reference Programme** based on the last **Physical Notifications** notified by the **Interconnector Users** prior to the computer system failure in relation to each such period of time. The **Interconnector Owners** should continue to act in accordance with last **Interconnector Reference Programme**. No further submissions of **Interconnector Reference Programme** should be attempted until the end of the outage is declared.

(iii) **BM Participants**, who are not required to have **Control Telephony** or **System Telephony** staffed at all times as provided for in CC7.9 or ECC7.9, should during periods when their telephones are not staffed operate in relation to any period of time in accordance with the last **Physical Notification** prevailing at **Gate Closure** received at the prior of the computer system failure in relation to each such period of time. Such operation shall be subject to the provisions of BC2.5.1, which will apply as if set out in this BC2.9.7.2. If the **BM Participants** automatic equipment identifies there has been a computer system failure then no further submissions of **BM Unit Data** or **Generating Unit Data** (other than data specified in BC1.4.2(c) (**Export and Import Limits**) and BC1.4.2(e) (**Dynamic Parameters**) should be attempted. For the avoidance of doubt between 08:00 and 18:00 hours the provisions of BC2.9.7.2(b)(i) shall apply.

(c) Revisions to **Export and Import Limits** and to **Dynamic Parameters** should be notified to **The Company** by telephone and will be recorded for subsequent use;

(d) **The Company** will issue **Bid-Offer Acceptances** by telephone which will be recorded for subsequent use;

(e) No data will be transferred from **The Company** to the **BMRA** until the communication facilities are re-established.

BC2.9.7.3 **The Company** will advise **BM Participants** of the withdrawal of **The Company** Computing System Failure notification following the re-establishment of the communication facilities.

BC2.9.8 Market Suspension

BC2.9.8.1 Within the **GB Synchronous Area**, the **National Electricity Transmission System** shall be determined to be in an emergency state when operational security analysis indicates one or more of the following situations occurring:

a) A situation where there is (or could be) a violation of one or more operational criteria as defined under the **Security and Quality of Supply Standard (SQSS)**; or

b) A situation when Unacceptable Frequency Conditions as defined under the **System Security and Quality of Supply Standard (SQSS)** have occurred; or

c) At least one measure of the **System Defence Plan** is activated; or

d) There is a failure of the computing facilities used to control and operate the **National Electricity Transmission System** or unplanned outages of Electronic Communication and Computing Facilities as provided for in BC2.9.7 or the loss of communication, computing and data facilities with other **Transmission Licensees** as provided for in STCP 06-4.

BC2.9.8.2 While the **National Electricity Transmission System** is in an emergency state if, after issuing **National Electricity Transmission System Warnings** and **Emergency Instructions** in accordance with (but not limited to) the requirements under OC7.4 and BC2.9, the situation deteriorates to such an extent that it results in:-

a) a **Total Shutdown**, **The Company** will suspend the market in accordance with the provisions of OC9.4.6; or

b) a **Partial Shutdown**, **The Company** will suspend the market but only where the **Market Suspension Threshold** has been met in accordance with OC9.4.6.

BC2.10 OTHER OPERATIONAL INSTRUCTIONS AND NOTIFICATIONS

BC2.10.1 **The Company** may, from time to time, need to issue other instructions or notifications associated with the operation of the **National Electricity Transmission System**.

BC2.10.2 Such instructions or notifications may include:

Intertrips

(a) an instruction to arm or disarm an **Operational Intertripping** scheme;

Tap Positions

(b) a request for a **Genset** step-up transformer tap position (for security assessment);

Tests

(c) an instruction to carry out tests as required under **OC5**, which may include the issue of an instruction regarding the operation of **CCGT Units** within a **CCGT Module** at a **Large Power Station**;

Future BM Unit Requirements

(d) a reference to any implications for future **BM Unit** requirements and the security of the **National Electricity Transmission System**, including arrangements for a change in output to meet post fault security requirements;

Changes to Target Frequency

(e) a notification of a change in **Target Frequency**, which will normally only be 49.95, 50.00, or 50.05Hz but in exceptional circumstances as determined by **The Company** in its reasonable opinion, may be 49.90 or 50.10Hz.

BC2.10.3 Where an instruction or notification under BC2.10.2 (c) or (d) results in a change to the input or output level of the **BM Unit** then **The Company** shall issue a **Bid-Offer Acceptance** or **Emergency Instruction** as appropriate.

BC2.11 LIAISON WITH GENERATORS FOR RISK OF TRIP AND AVR TESTING

BC2.11.1 A **Generator** at the **Control Point** for any of its **Large Power Stations** may request **The Company's** agreement for one of the **Gensets** at that **Power Station** to be operated under a risk of trip. **The Company's** agreement will be dependent on the risk to the **National Electricity Transmission System** that a trip of the **Genset** would constitute.

BC2.11.2 (a) Each **Generator** at the **Control Point** for any of its **Large Power Stations** will operate its **Synchronised Gensets** (excluding **Power Park Modules**) with:

(i) **AVRs** in constant terminal voltage mode with VAR limiters in service at all times. **AVR** constant **Reactive Power** or **Power Factor** mode should, if installed, be disabled; and

(ii) its generator step-up transformer tap changer selected to manual mode,

unless released from this obligation in respect of a particular **Genset** by **The Company**.

(b) Each **Generator** at the **Control Point** for any of its **Large Power Stations** will operate its **Power Park Modules** with a **Completion Date** before 1st January 2006 at unity **Power Factor** at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**).

(c) Each **Generator** at the **Control Point** for any of its **Large Power Stations** will operate its **Power Park Modules** with a **Completion Date** on or after 1st January 2006 in voltage control mode at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**). Constant **Reactive Power** or **Power Factor** mode should, if installed, be disabled.

(d) Where a **Power System Stabiliser** is fitted as part of the excitation system or voltage control system of a **Genset**, it requires on-load commissioning which must be witnessed by **The Company**. Only when the performance of the **Power System Stabiliser** has been approved by **The Company**, shall it be switched into service by a **Generator** and then it will be kept in service at all times unless otherwise agreed with **The Company**. Further reference is made to this in CC.6.3.8 or ECC.6.3.8.

BC2.11.3 A **Generator** at the **Control Point** for any of its **Power Stations** may request **The Company's** agreement for one of its **Gensets** at that **Power Station** to be operated with the **AVR** in manual mode, or **Power System Stabiliser** switched out, or VAR limiter switched out. **The Company's** agreement will be dependent on the risk that would be imposed on the **National Electricity Transmission System** and any **User System**. Provided that in any event a **Generator** may take such action as is reasonably necessary on safety grounds (relating to personnel or plant) .

BC2.11.4 Each **Generator** shall operate its dynamically controlled **OTSDUW Plant and Apparatus** to ensure that the reactive capability and voltage control performance requirements as specified in CC.6.3.2, CC.6.3.8, CC.A.7 or ECC.6.3.2, ECC.6.3.8, ECC.A.7, ECC.A.8 and the **Bilateral Agreement** can be satisfied in response to the **Setpoint Voltage** and **Slope** as instructed by **The Company** at the **Transmission Interface Point**.

BC2.12 LIAISON WITH EXTERNALLY INTERCONNECTED SYSTEM OPERATORS

BC2.12.1 Co-Ordination Role Of Externally Interconnected System Operators

(a) The **Externally Interconnected System Operator** will act as the **Control Point** for **Bid-Offer Acceptances** on behalf of **Interconnector Users** and will co-ordinate instructions relating to **Ancillary Services** and **Emergency Instructions** on behalf of **Interconnector Users** using its **External System** in respect of each **Interconnector Users BM Units**.

(b) **The Company** will issue **Bid-Offer Acceptances** and instructions for **Ancillary Services** relating to **Interconnector Users BM Units** to each **Externally Interconnected System Operator** in respect of each **Interconnector User** using its **External System**.

(c) If, as a result of a reduction in the capability (in MW) of the **External Interconnection**, the total of the **Physical Notifications** and **Bid-Offer Acceptances** issued for the relevant period using that **External Interconnection**, as stated in the **BM Unit Data**, exceeds the reduced capability (in MW) of the respective **External Interconnection** in that period, then **The Company** shall notify the **Externally Interconnected System Operator** accordingly. The **Externally Interconnected System Operator** should seek a revision of **Export and Import Limits** from one or more of its **Interconnector Users** for the remainder of the **Balancing Mechanism** period during which **Physical Notifications** cannot be revised.

BC2.13 LIAISON WITH INTERCONNECTOR OWNERS

(a) Calculate the **Interconnector Reference Programme**

Interconnector Owners shall use best endeavours to deliver updated

i) **Interconnector Reference Programme** to **The Company** by 10 minutes after each Intraday Cross-Zonal Gate Closure Time.

ii) The updated **Interconnector Reference Programme** shall fully reflect the results of the Single Intraday Coupling.

Interconnector Owners must ensure that the updated

iii) **Interconnector Reference Programme** is received in its entirety and confirmation that it has been logged into **The Company's** computer systems by the time of 10 minutes after each Intraday Cross-zonal Gate Closure Time.

APPENDIX 1 - FORM OF BID-OFFER ACCEPTANCES

BC2.A.1.1 This Appendix describes the forms of **Bid-Offer Acceptances**. As described in BC2.6.1 **Bid-Offer Acceptances** are normally given by an automatic logging device, but in the event of failure of the logging device, **Bid-Offer Acceptances** will be given by telephone.

BC2.A.1.2 For each **BM Unit** the **Bid-Offer Acceptance** will consist of a series of MW figures and associated times.

BC2.A.1.3 The **Bid-Offer Acceptances** relating to **CCGT Modules** will assume that the **CCGT Units** within the **CCGT Module** will operate in accordance with the **CCGT Module Matrix**, as required by **BC1**. The **Bid-Offer Acceptances** relating to **Cascade Hydro Schemes** will assume that the **Generating Unit** forming part of the **Cascade Hydro Scheme** will operate, where submitted, in accordance with the **Cascade Hydro Scheme Matrix** submitted under **BC1**. The **Bid-Offer Acceptances** relating to **Synchronous Power Generating Modules** will assume that the **Synchronous Generating Units** within the **Synchronous Power Generating Module** will operate in accordance with the **Synchronous Power Generating Module Matrix**, as required by **BC1**.

BC2.A.1.4 Bid-Offer Acceptances Given By Automatic Logging Device

(a) The complete form of the **Bid-Offer Acceptance** is given in the EDL Message Interface Specification which can be made available to **Users** on request.

(b) **Bid-Offer Acceptances** will normally follow the form:

(i) **BM Unit** Name

(ii) Instruction Reference Number

(iii) Time of instruction

(iv) Type of instruction

(v) **BM Unit Bid-Offer Acceptance** number

(vi) Number of MW/Time points making up instruction (minimum 2, maximum 5)

(vii) MW value and Time value for each point identified in (vi)

The times required in the instruction are input and displayed in London time, but communicated electronically in GMT.

BC2.A.1.5 Bid-Offer Acceptances Given By Telephone

(a) All run-up/run-down rates will be assumed to be constant and consistent with **Dynamic Parameters**. Each **Bid-Offer Acceptance** will, wherever possible, be kept simple, drawing as necessary from the following forms and BC2.7

(b) **Bid-Offer Acceptances** given by telephone will normally follow the form:

(i) an exchange of operator names;

(ii) **BM Unit** Name;

(iii) Time of instruction;

(iv) Type of instruction;

(v) Number of MW/Time points making up instruction (minimum 2, maximum 5)

(vi) MW value and Time value for each point identified in (v)

The times required in the instruction are expressed in London time.

For example, for a **BM Unit** ABCD-1 acceptance logged with a start time at 1400 hours and with a FPN at 300MW:

"**BM Unit** ABCD-1 **Bid-Offer Acceptance** timed at 1400 hours. Acceptance consists of 4 MW/Time points as follows:

300MW at 1400 hours

400MW at 1415 hours

400MW at 1450 hours

300MW at 1500 hours"

BC2.A.1.6 Submission Of Bid-Offer Acceptance Data To The BMRA

The relevant information contained in **Bid-Offer Acceptances** issued by **The Company** will be converted into "from" and "to" MW levels and times before they are submitted to the **BMRA** by **The Company**.

APPENDIX 2 - TYPE AND FORM OF ANCILLARY SERVICE INSTRUCTIONS

BC2.A.2.1 This part of the Appendix consists of a non-exhaustive list of the forms and types of instruction for a **Genset** to provide **System Ancillary Services**. There may be other types of **Commercial Ancillary Services** and these will be covered in the relevant **Ancillary Services Agreement**. In respect of the provision of **Ancillary Services** by **Generating Units** the forms and types of instruction will be in the form of this Appendix 2 unless amended in the **Ancillary Services Agreement**.

As described in CC.8 or ECC.8, **System Ancillary Services** consist of Part 1 and Part 2 **System Ancillary Services**.

Part 1 System Ancillary Services Comprise:

(a) **Reactive Power** supplied other than by means of synchronous or static compensators. This is required to ensure that a satisfactory **System** voltage profile is maintained and that sufficient **Reactive Power** reserves are maintained under normal and fault conditions. **Ancillary Service** instructions in relation to **Reactive Power** may include:

(i) MVAr Output

(ii) Target Voltage Levels

(iii) Tap Changes

(iv) Maximum MVAr Output ('maximum excitation')

(v) Maximum MVAr Absorption ('minimum excitation')

(b) **Frequency** Control by means **of Frequency** sensitive generation. **Gensets** may be required to move to or from **Frequency Sensitive Mode** in the combinations agreed in the relevant **Ancillary Services Agreement**. They will be specifically requested to operate so as to provide **Primary Response** and/or **Secondary Response** and/or **High Frequency Response**.

Part 2 System Ancillary Services Comprise:

(c) **Frequency** Control by means of **Fast Start**.

(d) **Anchor Plant Capability** or **Top Up Restoration Capability**

(e) **System to Generator Operational Intertripping**

BC2.A.2.2 As **Ancillary Service** instructions are not part of **Bid-Offer Acceptances** they do not need to be closed instructions and can cover any period of time, not just limited to the period of the **Balancing Mechanism**.

BC2.A.2.3 As described in BC2.6.1, unless otherwise agreed with **The Company**, **Ancillary Service** instructions are normally given by automatic logging device, but in the absence of, or in the event of failure of the logging device, instructions will be given by telephone.

BC2.A.2.4 Instructions given by Automatic Logging Device

(a) The complete form of the **Ancillary Service** instruction is given in the EDL Message Interface Specification which is available to **Users** on request from **The Company**.

(b) **Ancillary Service** instructions for **Frequency** Control will normally follow the form:

(i) **BM Unit** Name

(ii) Instruction Reference Number

(iii) Time of instruction

(iv) Type of instruction

(v) Reason Code

(vi) Start Time

(c) **Ancillary Service** instructions for **Reactive Power** will normally follow the form:

(i) **BM Unit** Name

(ii) Instruction Reference Number

(iii) Time of instruction

(iv) Type of instruction (MVAr, VOLT or TAPP)

(v) Target Value

(vi) Target Time

The times required in the instruction are input and displayed in London time, but communicated electronically in GMT.

BC2.A.2.5 Instructions given by Telephone

(a) **Ancillary Service** instructions for **Frequency** Control will normally follow the form:

(i) an exchange of operator names;

(ii) **BM Unit** Name;

(iii) Time of instruction;

(iv) Type of instruction;

(v) Start Time.

The times required in the instruction are expressed in London time.

For example, for **BM Unit** ABCD-1 instructed at 1400 hours to provide **Primary** and **High Frequency** response starting at 1415 hours:

"**BM Unit** ABCD-1 message timed at 1400 hours. Unit to **Primary and High Frequency Response** at 1415 hours"

(b) **Ancillary Service** instructions for **Reactive Power** will normally follow the form:

(a) an exchange of operator names;

(b) **BM Unit** Name;

(c) Time of instruction;

(d) Type of instruction (MVAr, VOLT, SETPOINT, **SLOPE** or TAPP)

(e) Target Value

(f) Target Time.

The times required in the instruction are expressed as London time.

For example, for **BM Unit** ABCD-1 instructed at 1400 hours to provide 100MVAr by 1415 hours:

"**BM Unit** ABCD-1 message timed at 1400 hours. MVAr instruction. Unit to plus 100 MVAr target time 1415 hours."

BC2.A.2.6 Reactive Power

As described in BC2.A.2.4 and BC2.A.2.5 instructions for **Ancillary Services** relating to **Reactive Power** may consist of any of several specific types of instruction. The following table describes these instructions in more detail:

Instruction Name	Description	Type of Instruction
MVAr Output	The individual MVAr output from the **Genset** onto the **National Electricity Transmission System** at the **Grid Entry Point** (or onto the **User System** at the **User System Entry Point** in the case of **Embedded Power Stations**), namely on the higher voltage side of the generator step-up transformer or **Grid Entry Point** or **User System Entry Point** in the case of a **Power Generating Module**. In relation to each **Genset**, where there is no HV indication, **The Company** and the **Generator** will discuss and agree equivalent MVAr levels for the corresponding LV indication. Where a **Genset** is instructed to a specific MVAr output, the **Generator** must achieve that output within a tolerance of +/- 25 MVAr (for **Gensets** in England and Wales) or the lesser of +/-5% of rated output or 25MVAr (for **Gensets** in Scotland) (or such other figure as may be agreed with **The Company**) by tap changing on the generator step-up transformer, or adjusting the **Genset** terminal voltage, subject to compliance with CC.6.3.8 (a) (v), or ECC.6.3.8.3.3 (as applicable) to a value that is equal to or higher than 1.0p.u. of the rated terminal voltage, or a combination of both. Once this has been achieved, the **Generator** will not tap again and will not readjust the **Genset** terminal voltage without prior consultation with and the agreement of **The Company**, on the basis that MVAr output will be allowed to vary with **System** conditions.	MVAr

Instruction Name	Description	Type of Instruction
Target Voltage Levels	Target voltage levels to be achieved by the **Genset** on the **National Electricity Transmission System** at the **Grid Entry Point** (or on the **User System** at the **User System Entry Point** in the case of **Embedded Power Stations**, namely on the higher voltage side of the generator step-up transformer or **Grid Entry Point** or **User System Entry Point** in the case of a **Power Generating Module**. Where a **Genset** is instructed to a specific target voltage, the **Generator** must achieve that target within a tolerance of ±1 kV (or such other figure as may be agreed with **The Company**) by tap changing on the generator step-up transformer, or adjusting the **Genset** terminal voltage, subject to compliance with CC.6.3.8 (a) (v) or ECC.6.3.8.3.3 (as applicable), to a value that is equal to or higher than 1.0p.u. of the rated terminal voltage, or a combination of both. In relation to each **Genset**, where there is no HV indication, **The Company** and the **Generator** will discuss and agree equivalent voltage levels for the corresponding LV indication. Under normal operating conditions, once this target voltage level has been achieved the **Generator** will not tap again and will not readjust the **Genset** terminal voltage without prior consultation with, and with the agreement of, **The Company**. However, under certain circumstances, the **Generator** may be instructed to maintain a target voltage until otherwise instructed and this will be achieved by tap changing on the generator step-up transformer, or adjusting the **Genset** terminal voltage, subject to compliance with CC.6.3.8 (a) (v) or ECC.6.3.8.3.3 (as applicable), to a value that is equal to or higher than 1.0p.u. of the rated terminal voltage, or a combination of both without reference to **The Company**.	VOLT
Setpoint Voltage	Where a **Non-Synchronous Generating Unit**, **DC Converter** or **Power Park Module** or **HVDC Converter** is instructed to a specific **Setpoint Voltage**, the **Generator** must achieve that **Setpoint Voltage** within a tolerance of ±0.25% (or such other figure as may be agreed with **The Company**). The **Generator** must maintain the specified **Setpoint Voltage** target until an alternative target is received from **The Company**.	SETPOINT

Instruction Name	Description	Type of Instruction
Slope	Where a **Non-Synchronous Generating Unit**, **DC Converter** or **Power Park Module** or **HVDC Converter** is instructed to a specific **Slope**, the **Generator** must achieve that **Slope** within a tolerance of ±0.5% (or such other figure as may be agreed with **The Company**). The **Generator** must maintain the specified **Slope** target until an alternative target is received from **The Company**. The **Generator** will not be required to implement a new **Slope** setting in a time of less than 1 week from the time of the instruction.	SLOPE
Tap Changes	Details of the required generator step-up transformer tap changes in relation to a **Genset**. The instruction for tap changes may be a **Simultaneous Tap Change** instruction, whereby the tap change must be effected by the **Generator** in response to an instruction from **The Company** issued simultaneously to relevant **Power Stations**. The instruction, which is normally preceded by advance notice, must be effected as soon as possible, and in any event within one minute of receipt from **The Company** of the instruction. For a **Simultaneous Tap Change**, change **Genset** generator step-up transformer tap position by one [two] taps to raise or lower (as relevant) **System** voltage, to be executed at time of instruction.	TAPP
Maximum MVAr Output (“maximum excitation”)	Under certain conditions, such as low **System** voltage, an instruction to maximum MVAr output at instructed MW output ("maximum excitation") may be given, and a **Generator** should take appropriate actions to maximise MVAr output unless constrained by plant operational limits or safety grounds (relating to personnel or plant).	
Maximum MVAr Absorption ("minimum excitation")	Under certain conditions, such as high **System** voltage, an instruction to maximum MVAr absorption at instructed MW output ("minimum excitation") may be given, and a **Generator** should take appropriate actions to maximise MVAr absorption unless constrained by plant operational limits or safety grounds (relating to personnel or plant).	

BC2.A.2.7 In addition, the following provisions will apply to **Reactive Power** instructions:

(a) In circumstances where **The Company** issues new instructions in relation to more than one **BM Unit** at the same **Power Station** at the same time, tapping will be carried out by the **Generator** one tap at a time either alternately between (or in sequential order, if more than two), or at the same time on, each **BM Unit**.

(b) Where the instructions require more than two taps per **BM Unit** and that means that the instructions cannot be achieved within 2 minutes of the instruction time (or such longer period as **The Company** may have instructed), the instructions must each be achieved with the minimum of delay after the expiry of that period.

(c) It should be noted that should **System** conditions require, **The Company** may need to instruct maximum MVAr output to be achieved as soon as possible, but (subject to the provisions of paragraph (BC2.A.2.7(b) above) in any event no later than 2 minutes after the instruction is issued.

(d) An **Ancillary Service** instruction relating to **Reactive Power** may be given in respect of **CCGT Units** within a **CCGT Module** at a **Power Station** or **Generating Units** within a **Synchronous Power Generating Module** at a **Power Station** where running arrangements and/or **System** conditions require, in both cases where exceptional circumstances apply and connection arrangements permit.

(e) In relation to MVAr matters, MVAr generation/output is an export onto the **System** and is referred to as "lagging MVAr", and MVAr absorption is an import from the **System** and is referred to as "leading MVAr".

(f) It should be noted that the excitation control system constant **Reactive Power** output control mode or constant **Power Factor** output control mode will always be disabled, unless agreed otherwise with **The Company**.

APPENDIX 3 - SUBMISSION OF REVISED MVAr CAPABILITY

BC2.A.3.1 For the purpose of submitting revised MVAr data the following terms shall apply:

Full Output	In the case of a **Synchronous Generating Unit** (as defined in the Glossary and Definitions ((which could be part of a **Synchronous Power Generating Module**) and not limited by BC2.2) is the MW output measured at the generator stator terminals representing the LV equivalent of the **Registered Capacity** at the **Grid Entry Point**, and in the case of a **Non-Synchronous Generating Unit** (excluding **Power Park Units**), **HVDC Converter** or **DC Converter** or **Power Park Module** is the **Registered Capacity** at the **Grid Entry Point**.
Minimum Output	In the case of a **Synchronous Generating Unit** (as defined in the Glossary and Definitions ((which could be part of a **Synchronous Power Generating Module**) and not limited by BC2.2) is the MW output measured at the generator stator terminals representing the LV equivalent of the **Minimum Generation** or **Minimum Stable Operating Level** at the **Grid Entry Point**, and in the case of a **Non-Synchronous Generating Unit** (excluding **Power Park Units**), **HVDC Converter** or **DC Converter** or **Power Park Module** is the **Minimum Generation** or **Minimum Stable Operating Level** or **Minimum Active Power Transmission Capacity** at the **Grid Entry Point**.

BC2.A.3.2 The following provisions apply to submission of revised MVAr data submitted via the **Designated Information Exchange System**:

(a) The submission should be submitted to **The Company** (to the relevant location in accordance with GC6) via the **Designated Information Exchange System** and must contain all relevant information from Annexure 1 and from either Annexure 2 or 3 (as applicable) but with only the data changes set out. The "notification time" must be completed to refer to the time of submission to the **Designated Information Exchange System**, where the time is expressed as London time.

(b) Upon receipt of the submission **The Company** will acknowledge receipt via the **Designated Information Exchange System** back to the **User**. The acknowledgement will either state that the submission has been received and is legible or will state that it (or part of it) is not legible and will request resubmission of the whole (or part) of the submission.

(c) Upon receipt of the acknowledgement from **The Company** the **User** will, if requested, resubmit the whole or the relevant part of the submission.

(d) The provisions of paragraphs (b) and (c) then apply to that re-submitted submission.

APPENDIX 3 - ANNEXURE 1

Optional Logo

Company name REVISED REACTIVE POWER CAPABILITY DATA

TO: National Electricity Transmission System Control Centre

Fax telephone No.

Number of pages inc. header:.....

Sent By : .....

Return Acknowledgement Fax to .....

For Retransmission or Clarification ring.....

Acknowledged by **The Company**: (Signature)

.....

Acknowledgement time and date

.....

Legibility of FAX :

Acceptable		
Unacceptable (List pages if appropriate)		(Resend FAX)

APPENDIX 3 - ANNEXURE 2

To: National Electricity Transmission System Control Centre

From : [Company Name & Location]

REVISED REACTIVE POWER CAPABILITY DATA – GENERATING UNITS EXCLUDING POWER PARK MODULES AND DC CONVERTERS

Notification Time (HH:MM):	Notification Date (DD/MM/YY):
Start Time (HH:MM):	Start Date (DD/MM/YY):
Generating Unit*	

* For a **Synchronous Power Generating Module** and/or **CCGT Module** and/or a **Cascade Hydro Scheme**, the redeclaration is for a **Generating Unit** within a **Synchronous Power Generating Module** and/or **CCGT Module** and/or **Cascade Hydro Scheme**. For **BM Units**, quote **The Company BM Unit** id, for other units quote the **Generating Unit** id used for OC2.3.1.2 Outage Planning submissions. **Generating Unit** has the meaning given in the Glossary and Definitions and is not limited by BC2.2.

REVISION TO THE REACTIVE POWER CAPABILITY AT THE GENERATING UNIT STATOR TERMINALS (at rated terminal volts) **AS STATED IN THE RELEVANT ANCILLARY SERVICES AGREEMENT:**

	MW	MINIMUM (MVAr +ve for lag, -ve for lead)	MAXIUM (MVAr +ve for lag, -ve for lead)
AT **RATED MW**			
AT FULL OUTPUT (MW)			
AT MINIMUM OUTPUT (MW)			

COMMENTS *e.g. generator transformer tap restrictions, predicted end time if known*

_____

_____

Redeclaration made by (Signature)

_____

APPENDIX 3 - ANNEXURE 3

To: National Electricity Transmission System Control Centre

From : [Company Name & Location]

REVISED REACTIVE POWER CAPABILITY DATA – POWER PARK MODULES, HVDC CONVERTERS AND DC CONVERTERS

Notification Time (HH:MM):	Notification Date (DD/MM/YY):
Start Time (HH:MM):	Start Date (DD/MM/YY):
Power Park Module / DC Converter*	

* For BM Units quote **The Company BM Unit** id, for other units quote the id used for OC2.3.1.2 Outage Planning submissions

Start Time/Date (if not effective immediately)

REVISION TO THE REACTIVE POWER CAPABILITY AT THE COMMERCIAL BOUNDARY AS STATED IN THE RELEVANT ANCILLARY SERVICES AGREEMENT:

	MINIMUM (MVAr +ve for lag, -ve for lead)	MAXIMUM (MVAr +ve for lag, -ve for lead)
AT **RATED MW**		
AT 50% OF **RATED MW**		
AT 20% OF **RATED MW**		
BELOW 20% OF **RATED MW**		
AT 0% OF **RATED MW**		

COMMENTS *e.g. generator transformer tap restrictions, predicted end time if known*

_____

_____

Redeclaration made by (Signature)

APPENDIX 4 - SUBMISSION OF AVAILABILITY OF FREQUENCY SENSITIVE MODE

BC2.A.4.1 For the purpose of submitting availability of **Frequency Sensitive Mode**, this process only relates to the provision of response under the **Frequency Sensitive Mode** and does not cover the provision of response under the **Limited Frequency Sensitive Mode**.

BC2.A.4.2 The following provisions apply to the submission of the **Frequency Sensitive Mode** availability via the **Designated Information Exchange System:**;

(a) The submission should be submitted to **The Company** (to the relevant location in accordance with GC6) via the **Designated Information Exchange System** and must contain all the sections relevant to Appendix 4 - Annexure1 but with only the data changes set out. The “notification time” must be completed to refer to the time and date of submission, where the time is expressed in London time.

(b) Upon receipt of the submission, **The Company** will acknowledge receipt via the **Designated Information Exchange System**. This acknowledging submission should be in the format of Appendix 4 – Annexure 1. The acknowledgement will either state that the submission has been received and is legible or will state that it (or part of it) is not legible and will request resubmission of the whole (or part) of the submission.

(c) Upon receipt of the acknowledging submission, the **User** will, if requested re-submit the whole or the relevant part of the submission.

(d) The provisions of paragraph (b) and (c) then apply to the resubmitted submission.

BC2.A.4.3 The **User** shall ensure the availability of operating in **Frequency Sensitive Mode** is restored as soon as reasonably practicable and will notify **The Company** using the format of Appendix 4 – Annexure 1. In the event of a sustained unavailability of **Frequency Sensitive Mode**, **The Company** may seek to confirm compliance with the relevant requirements in the **CC** or **ECC** through the process in **OC5** or **ECP**.

APPENDIX 4 - ANNEXURE 1

To: National Electricity Transmission System Control Centre

From : [Company Name & Location]

Submission of availability of Frequency Sensitive Mode

Notification Time (HH:MM):	Notification Date (DD/MM/YY):
Start Time (HH:MM):	Start Date (DD/MM/YY):
Genset or DC Converter	

The availability of the above unit to operate in **Frequency Sensitive Mode** is as follows:

All contract modes: Available / Unavailable *[delete as applicable];* or

Change to the availability of individual contract modes:

Contract Mode e.g. *A*	**Availability for operation in Frequency Sensitive Mode** *[Y/N]*

COMMENTS *e.g. reason for submission, predicted end time if known*

_____

_____

Redeclaration made by (Signature)_____

Receipt Acknowledgement from **The Company**

Legible (tick box)		Illegible (tick box)	
Explanation:			
Time: Date: Signature:			

< END OF BALANCING CODE 2 >

BALANCING CODE NO. 3
(BC3)

FREQUENCY CONTROL PROCESS

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

BC3.1 INTRODUCTION 2
BC3.2 OBJECTIVE 2
BC3.3 SCOPE 2
BC3.4 MANAGING SYSTEM FREQUENCY 3
BC3.4.1 Statutory Requirements 3
BC3.4.2 Target Frequency 3
BC3.4.3 Electric Time 3
BC3.5 RESPONSE FROM GENSETS 3
BC3.5.1 Capability 3
BC3.5.2 Limited Frequency Sensitive Mode 3
BC3.5.3 Existing Gas Cooled Reactor Plant /Power Park Modules before 1 January 2006 4
BC3.5.4 Frequency Sensitive Mode 4
BC3.5.5 System Frequency Induced Change 4
BC3.6 RESPONSE TO LOW FREQUENCY 5
BC3.6.1 Low Frequency Relay Initiated Response From Gensets 5
BC3.6.2 Low Frequency Relay Initiated Response From Demand 5
BC3.7 RESPONSE TO HIGH FREQUENCY REQUIRED FROM SYNCHRONISED. GENSETS 6
BC3.7.1 Plant In Frequency Sensitive Mode Instructed To Provide High Frequency Response 7
BC3.7.2 Plant In Limited Frequency Sensitive Mode 7
BC3.7.3 Plant Operation To Below Minimum Generation 8
BC3.7.5 Information Update To The Company 8
BC3.7.6 Existing Gas Cooled Reactor Plant /Power Park Modules Before 1 January 2006 9
BC3.7.7 Externally Interconnected System Operators 9

BC3.1 INTRODUCTION

BC3.1.1 **BC3** sets out the procedure for **The Company** to use in relation to **EU Code Users** and **GB Code Users** to undertake **System Frequency** control. **System Frequency** will be controlled by response from **Gensets** (and **DC Converters** at **DC Converter Stations** and **HVDC Systems**) operating in **Limited Frequency Sensitive Mode** or **Frequency Sensitive Mode**, by the issuing of instructions to **Gensets** (and **DC Converters** at **DC Converter Stations** and **HVDC Systems**) and by control of **Demand**. The requirements for **Frequency** control are determined by the consequences and effectiveness of the **Balancing Mechanism**, and accordingly, **BC3** is complementary to **BC1** and **BC2**.

BC3.1.2 Inter-Relationship With Ancillary Services

The provision of response (other than by operation in **Limited Frequency Sensitive Mode** or in accordance with BC3.7.1(c)) in order to contribute towards **Frequency** control, as described in **BC3**, by **Generators** or **DC Converter Station** owners or **HVDC System Owners** will be an **Ancillary Service**. **Ancillary Services** are divided into three categories, **System Ancillary Services** Parts 1 and 2 and **Commercial Ancillary Services**. **System Ancillary Services**, Parts 1 and 2, are those **Ancillary Services** listed in CC.8.1 (as applicable to **GB Code Users**) or ECC8.1 (as applicable to **EU Code Users**); those in Part 1 of CC.8.1 or Part 1 of ECC.8.1 are those for which the **Connection Conditions** or **European Connection Conditions** (as applicable) require the capability as a condition of connection and those in Part 2 are those which may be agreed to be provided by **Users** and which can only be utilised by **The Company** if so agreed. **Commercial Ancillary Services** like those **System Ancillary Services** set out in Part 2 of CC.8.1 (as applicable to **GB Code Users**) or Part 2 of ECC.8.1 (as applicable to **EU Code Users**), may be agreed to be provided by **Users** and which can only be utilised by **The Company** if so agreed.

BC3.1.3 The provision of **Frequency** control services, if any, from an **External System** via a **DC Converter Station** or **HVDC System** will be provided for in the **Ancillary Services Agreement** and/or **Bilateral Agreement** with the **DC Converter Station** owner or **HVDC System Owner** and/or any other relevant agreements with the relevant **EISO**.

BC3.1.4 The provision of **Frequency** control services, if any, from an **Offshore Power Station** connected to an **Offshore Transmission System** that includes a **Transmission DC Converter** will be facilitated (where necessary) through appropriate data signals provided to the **Offshore Power Station** by the **Relevant Transmission Licensee** in accordance with the **STC**.

BC3.2 OBJECTIVE

The procedure for **The Company** to direct **System Frequency** control is intended to enable (as far as possible) **The Company** to meet the statutory requirements of **System Frequency** control.

BC3.3 SCOPE

BC3 applies to **The Company** and to **GB Code Users** and **EU Code Users**, which in this **BC3** means:

(a) **GB Generators** with regard to their **Large Power Stations** (except those **Large Power Stations** with a **Registered Capacity** less than 50MW comprising of **Power Park Modules**),

(b) **EU Generators** with regard to their **Large Power Stations**,

(c) **Network Operators**,

(d) **DC Converter Station** owners and **HVDC System Owners**,

(e) other providers of **Ancillary Services**,

(f) **Externally Interconnected System Operators**.

BC3.4 MANAGING SYSTEM FREQUENCY

BC3.4.1 Statutory Requirements

When **The Company** determines it is necessary (by having monitored the **System Frequency**), it will, as part of the procedure set out in **BC2**, issue instructions (including instructions for **Commercial Ancillary Services**) in order to seek to regulate **System Frequency** to meet the statutory requirements of **Frequency** control. **Gensets** (except those owned and/or operated by **GB Generators** comprising of a **Power Park Module** in a **Power Station** with a **Registered Capacity** less than 50MW and those owned and/or operated by **GB Generators** comprising of a **Power Park Module** in Scotland with a **Completion Date** before 1 July 2004) and **DC Converters** at **DC Converter Stations** or **HVDC Systems** when transferring **Active Power** to the **Total System**, operating in **Frequency Sensitive Mode** will be instructed by **The Company** to operate taking due account of the **Target Frequency** notified by **The Company**.

BC3.4.2 Target Frequency

The Company will give 15 minutes notice of variation in **Target Frequency**.

BC3.4.3 Electric Time

The Company will endeavour (in so far as it is able) to control electric clock time to within plus or minus 10 seconds by specifying changes to **Target Frequency**, by accepting bids and offers in the **Balancing Mechanism**. Errors greater than plus or minus 10 seconds may be temporarily accepted at **The Company's** reasonable discretion.

BC3.5 RESPONSE FROM GENSETS (AND DC CONVERTERS AT DC CONVERTER STATIONS AND HVDC SYSTEMS WHEN TRANSFERRING ACTIVE POWER TO THE TOTAL SYSTEM)

BC3.5.1 Capability

Each **Genset** (except those owned and/or operated by **GB Generators** and comprising of **Power Park Modules** in a **Power Station** with a **Registered Capacity** less than 50MW and those owned and/or operated by **GB Generators** and comprising of **Power Park Modules** in Scotland with a **Completion Date** before 1 July 2004), each **Type C** and **Type D Power Generating Module** within a **Power Station** owned and operated by an **EU Generator** with a **CUSC Contract** and each **DC Converter** at a **DC Converter Station** and **HVDC System** must at all times have the capability to operate automatically so as to provide response to changes in **Frequency** in accordance with the requirements of CC.6.3.7 or ECC.6.3.7 (as applicable) in order to contribute to containing and correcting the **System Frequency** within the statutory requirements of **Frequency** control. For **DC Converters** at **DC Converter Stations** and **HVDC Systems,** BC3.1.3 also applies. In addition, each **Genset** (and each **DC Converter** at a **DC Converter Station** and **HVDC System**) and **Power Generating Module** must at all times have the capability to operate in a **Limited Frequency Sensitive Mode**.

BC3.5.2 Limited Frequency Sensitive Mode

Each **Synchronised Genset** producing **Active Power** (and each **DC Converter** at a **DC Converter Station** and **HVDC System**) must operate at all times in a **Limited Frequency Sensitive Mode** (unless instructed in accordance with BC3.5.4 below to operate in **Frequency Sensitive Mode**). Operation in **Limited Frequency Sensitive Mode** must achieve the capability requirement described in CC.6.3.3 (in respect of **GB Code Users**) and ECC.6.3.3 (in respect of **EU Code Users**) and for **System Frequencies** up to 50.4Hz and shall be deemed not to be in contravention of CC.6.3.7 or ECC.6.3.7 (as applicable).

BC3.5.3 (a) Existing Gas Cooled Reactor Plant

The Company will permit **Existing Gas Cooled Reactor Plant** other than **Frequency Sensitive AGR Units** to operate in **Limited Frequency Sensitive Mode** at all times.

(b) Power Park Modules belonging to GB Generators In Operation Before 1 January 2006

The Company will permit **Power Park Modules** which were in operation before 1 January 2006 and owned and/or operated by **GB Generators** to operate in **Limited Frequency Sensitive Mode** at all times. For the avoidance of doubt, **Power Park Modules** owned and/or operated by **GB Generators** in England and Wales with a **Completion Date** on or after 1 January 2006 and **Power Park Modules** owned and/or operated by **GB Generators** in operation in Scotland after 1 January 2006 with a completion date after 1 July 2004 and in a **Power Station** with a **Registered Capacity** of 50MW or more, will be required to operate in both **Limited Frequency Sensitive Mode** and **Frequency Sensitive Mode** of operation depending on **System** conditions. For the avoidance of doubt, these requirements do not apply to **EU Generators**.

BC3.5.4 Frequency Sensitive Mode

(a) **The Company** may issue an instruction to a **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System** if agreed as described in BC3.1.3) to operate so as to provide **Primary Response** and/or **Secondary Response** and/or **High Frequency Response** (in the combinations agreed in the relevant **Ancillary Services Agreement**). When so instructed, the **Genset** or **DC Converter** at a **DC Converter Station** or **HVDC System** must operate in accordance with the instruction and will no longer be operating in **Limited Frequency Sensitive Mode**, but by being so instructed will be operating in **Frequency Sensitive Mode**.

(b) **Frequency Sensitive Mode** is the generic description for a **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System**) operating in accordance with an instruction to operate so as to provide **Primary Response** and/or **Secondary Response** and/or **High Frequency Response** (in the combinations agreed in the relevant **Ancillary Services Agreement**).

(c) The magnitude of the response in each of those categories instructed will be in accordance with the relevant **Ancillary Services Agreement** with the **Generator** or **DC Converter Station** owner or **HVDC System Owner**.

(d) Such instruction will continue until countermanded by **The Company** or until;

(i) the **Genset** is **De-Synchronised**; or

(ii) the **DC Converter** or **HVDC System** ceases to transfer **Active Power** to or from the **Total System** subject to the conditions of any relevant agreement relating to the operation of the **DC Converter Station** or **HVDC System**,

whichever is the first to occur.

(e) **The Company** will not so instruct **Generators** in respect of **Existing Gas Cooled Reactor Plant** other than **Frequency Sensitive AGR Units**.

(f) **The Company** will not so instruct **GB Generators** in respect of **Power Park Modules**:

(i) in Scotland in a **Power Station** with a **Completion Date** before 1 July 2004; or,

(ii) in a **Power Station** with a **Registered Capacity** of less than 50MW.

(iii) in England and Wales with a **Completion Date** before 1 January 2006.

BC3.5.5 System Frequency Induced Change

A **System Frequency** induced change in the **Active Power** output of a **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System**) which assists recovery to **Target Frequency** must not be countermanded by a **Generator** or **DC Converter Station** owner or **HVDC System Owner** except where it is done purely on safety grounds (relating to either personnel or plant) or, where necessary, to ensure the integrity of the **Power Station** or **DC Converter Station** or **HVDC System**.

BC3.6 RESPONSE TO LOW FREQUENCY

BC3.6.1 Low Frequency Relay initiated Response From Gensets and DC Converters at DC Converter Stations and HVDC Systems

(a) **The Company** may utilise **Gensets** (and **DC Converters** at **DC Converter Stations** and **HVDC Systems**) with the capability of **Low Frequency Relay** initiated response as:

(i) synchronisation and generation from standstill;

(ii) generation from zero generated output;

(iii) increase in generated output;

(iv) increase in **DC Converter** or **HVDC System** output to the **Total System** (if so agreed as described in BC3.1.3);

(v) decrease in **DC Converter** or **HVDC System** input from the **Total System** (if so agreed as described in BC3.1.3);

in establishing its requirements for **Operating Reserve**.

(b) (i) **The Company** will specify within the range agreed with **Generators** and/or **EISOs** and/or **DC Converter Station** owners or **HVDC System Owners** (if so agreed as described in BC3.1.3), **Low Frequency Relay** settings to be applied to **Gensets** or **DC Converters** at **DC Converter Stations** or **HVDC Systems** pursuant to BC3.6.1 (a) and instruct the **Low Frequency Relay** initiated response placed in and out of service.

(ii) **Generators** and/or **EISOs** and/or **DC Converter Station** owners or **HVDC System Owners** (if so agreed as described in BC3.1.3) will comply with **The Company** instructions for **Low Frequency Relay** settings and **Low Frequency Relay** initiated response to be placed in or out of service. **Generators** or **DC Converter Station** owners or **HVDC System Owners** or **EISOs** may not alter such **Low Frequency Relay** settings or take **Low Frequency Relay** initiated response out of service without **The Company's** agreement (such agreement not to be unreasonably withheld or delayed), except for safety reasons.

BC3.6.2 Low Frequency Relay Initiated Response from Demand and other Demand Modification arrangements (which may include a DC Converter Station or HVDC System when Importing Active Power from the Total System)

(a) **The Company** may, pursuant to an **Ancillary Services Agreement**, utilise **Demand** with the capability of **Low Frequency Relay** initiated **Demand** reduction in establishing its requirements for **Frequency Control**.

(b) (i) **The Company** will specify within the range agreed, the **Low Frequency Relay** settings to be applied pursuant to BC3.6.2 (a), the amount of **Demand** reduction to be available and will instruct the **Low Frequency Relay** initiated response to be placed in or out of service.

(ii) **Users** will comply with **The Company** instructions for **Low Frequency Relay** settings and **Low Frequency Relay** initiated **Demand** reduction to be placed in or out of service. **Users** may not alter such **Low Frequency Relay** settings or take **Low Frequency Relay** initiated response out of service without **The Company's** agreement, except for safety reasons.

(iii) In the case of any such **Demand** which is **Embedded**, **The Company** will notify the relevant **Network Operator** of the location of the **Demand**, the amount of **Demand** reduction to be available, and the **Low Frequency Relay** settings.

(c) **The Company** may also utilise other **Demand** modification arrangements pursuant to an agreement for **Ancillary Services**, in order to contribute towards **Operating Reserve**.

BC3.7 RESPONSE TO HIGH FREQUENCY REQUIRED FROM SYNCHRONISED GENSETS (AND DC CONVERTERS AT DC CONVERTER STATIONS AND HVDC SYSTEMS WHEN TRANSFERRING ACTIVE POWER TO THE TOTAL SYSTEM)

BC3.7.1 Plant in Frequency Sensitive Mode instructed to provide High Frequency Response

(a) Each **Synchronised Genset** (or each **DC Converter** at a **DC Converter Station** or **HVDC System**) in respect of which the **Generator** or **DC Converter Station** owner or **HVDC System Owner** and/or **EISO** has been instructed to operate so as to provide **High Frequency Response**, which is producing **Active Power** and which is operating above the **Designed Minimum Operating Level**, is required to reduce **Active Power** output in response to an increase in **System Frequency** above the **Target Frequency** (or such other level of **Frequency** as may have been agreed in an **Ancillary Services Agreement**). The **Target Frequency** is normally 50.00 Hz except where modified as specified under BC3.4.2.

(b) (i) The rate of change of **Active Power** output with respect to **Frequency** up to 50.5 Hz shall be in accordance with the provisions of the relevant **Ancillary Services Agreement** with each **Generator** or **DC Converter Station** owner or **HVDC System Owner**. If more than one rate is provided for in the **Ancillary Services Agreement**, **The Company** will instruct the rate when the instruction to operate to provide **High Frequency Response** is given.

(ii) The reduction in **Active Power** output by the amount provided for in the relevant **Ancillary Services Agreement** must be fully achieved within 10 seconds of the time of the **Frequency** increase and must be sustained at no lesser reduction thereafter.

(iii) It is accepted that the reduction in **Active Power** output may not be below the **Designed Minimum Operating Level**.

(c) In addition to the **High Frequency Response** provided, the **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System**) must continue to reduce **Active Power** output in response to an increase in **System Frequency** above 50.5 Hz at a minimum rate of 2 per cent of output per 0.1 Hz deviation of **System Frequency** above that level, such reduction to be achieved within five minutes of the rise to or above 50.5 Hz. For a **Power Station** with a **Completion Date** after 1st January 2009, this reduction in **Active Power** should be delivered in accordance with in (i) to (iv) below. For the avoidance of doubt, the provision of this reduction in **Active Power** output is not an **Ancillary Service**.

(i) The reduction in **Active Power** output must be continuously and linearly proportional as far as practical, to the excess of **Frequency** above 50.5 Hz and must be provided increasingly with time over the period specified in (iii) below.

(ii) As much as possible of the proportional reduction in **Active Power** output must result from the frequency control device (or speed governor) action and must be achieved within 10 seconds of the time of the **Frequency** increase above 50.5 Hz.

(iii) The residue of the proportional reduction in **Active Power** output which results from automatic action of the **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System**) output control devices other than the frequency control devices (or speed governors) must be achieved within 3 minutes from the time of the **Frequency** increase above 50.5 Hz.

(iv) Any further residue of the proportional reduction which results from non-automatic action initiated by the **Generator** or **DC Converter Station** owner or **HVDC System Owner** shall be initiated within 2 minutes, and achieved within 5 minutes, of the time of the **Frequency** increase above 50.5 Hz.

BC3.7.2 Plant In Limited Frequency Sensitive Mode

BC.3.7.2.1 Plant in Limited Frequency Sensitive Mode applicable to GB Code Users

The following requirements are applicable to **GB Code Users** in respect of **Plant** operating in **Limited Frequency Sensitive Mode**. For the avoidance of doubt, these requirements do not apply to **EU Generators** and **HVDC System Owners** for whom the requirements of BC.3.7.2.2 apply.

(a) Each **Synchronised Genset** (or **DC Converter** at a **DC Converter Station**) operating in a **Limited Frequency Sensitive Mode** which is producing **Active Power** is also required to reduce **Active Power** output in response to **System Frequency** when this rises above 50.4 Hz. In the case of **DC Converters** at **DC Converter Stations**, the provisions of BC3.7.7 are also applicable. For the avoidance of doubt, the provision of this reduction in **Active Power** output is not an **Ancillary Service**. Such provision is known as "**Limited High Frequency Response**".

(b) (i) The rate of change of **Active Power** output must be at a minimum rate of 2 per cent of output per 0.1 Hz deviation of **System Frequency** above 50.4 Hz.

(ii) The reduction in **Active Power** output must be continuously and linearly proportional, as far as is practicable, to the excess of **Frequency** above 50.4 Hz and must be provided increasingly with time over the period specified in (iii) below.

(iii) As much as possible of the proportional reduction in **Active Power** output must result from the frequency control device (or speed governor) action and must be achieved within 10 seconds of the time of the **Frequency** increase above 50.4 Hz.

(iv) The residue of the proportional reduction in **Active Power** output which results from automatic action of the **Genset** (or **DC Converter** at a **DC Converter Station**) output control devices other than the frequency control devices (or speed governors) must be achieved within 3 minutes from the time of the **Frequency** increase above 50.4 Hz.

(v) Any further residue of the proportional reduction which results from non-automatic action initiated by the **Generator** or **DC Converter Station** owner shall be initiated within 2 minutes, and achieved within 5 minutes, of the time of the **Frequency** increase above 50.4 Hz.

(c) Each **GB Code User** in respect of a **Genset** (or **DC Converter** at a **DC Converter Station**) which is providing **Limited High Frequency Response** in accordance with BC3.7.2 must continue to provide it until the **Frequency** has returned to or below 50.4 Hz or until otherwise instructed by **The Company**.

BC.3.7.2.2 Plant in Limited Frequency Sensitive Mode applicable to EU Code Users

EU Code Users in respect of **Gensets** and **HVDC Systems** are required to operate in **Limited Frequency Sensitive Mode** at all times unless instructed by **The Company** to operate in **Frequency Sensitive Mode**. Where **EU Code Users' Gensets** and **HVDC Systems** are required to operate in **Limited Frequency Sensitive Mode**, then the requirements of ECC.6.3.7.1 and ECC.6.3.7.2 shall apply. For the avoidance of doubt, the requirements defined in BC.3.7.2.1 do not apply to **EU Code Users** in respect of **Gensets** and **HVDC Systems**.

BC3.7.3 Plant Operation to below Minimum Generation or Minimum Stable Operating Level

(a) As stated in CC.A.3.2 and ECC.A.3.2, steady state operation below **Minimum Generation** or the **Minimum Stable Operating Level** or the **Minimum Active Power Transmission Capacity** is not expected but if **System** operating conditions cause operation below the **Minimum Generation** or **Minimum Stable Operating Level** or the **Minimum Active Power Transmission Capacity** which gives rise to operational difficulties for the **Genset** (or **DC Converter** at a **DC Converter Station** or **HVDC System**) then **The Company** should not, upon request, unreasonably withhold issuing a **Bid-Offer Acceptance** to return the **Power Generating Module** and/or **Generating Unit** and/or **CCGT Module** and/or **Power Park Module** or **DC Converter** or **HVDC System** to an output not less than the **Minimum Generation** or the **Minimum Stable Operating Level** or the **Minimum Active Power Transmission Capacity**. In the case of a **DC Converter** or **HVDC System** not participating in the **Balancing Mechanism**, then **The Company** will, upon request, attempt to return the **DC Converter** or **HVDC System** to an output not less than **Minimum Generation** or **Minimum Stable Operating Level** or the **Minimum Active Power Transmission Capacity** or to zero transfer or to reverse the transfer of **Active Power**.

(b) It is possible that a **Synchronised Genset** (or a **DC Converter** at a **DC Converter Station** or **HVDC System**) which responded as required under BC3.7.1 or BC3.7.2 to an excess of **System Frequency**, as therein described, will (if the output reduction is large or if the **Genset** (or a **DC Converter** at a **DC Converter Station** or **HVDC System**) output has reduced to below the **Designed Minimum Operating Level** or **Minimum Regulating Level** or the **Minimum Active Power Transmission Capacity** trip after a time.

(c) All reasonable efforts should in the event be made by the **Generator** or **DC Converter Station** owner or **HVDC System Owner** to avoid such tripping, provided that the **System Frequency** is below 52Hz.

(d) If the **System Frequency** is at or above 52Hz, the requirement to make all reasonable efforts to avoid tripping does not apply and the **Generator** or **DC Converter Station** owner or **HVDC System Owner** is required to take action to protect the **Power Generating Modules** and/or **Generating Units** and/or **Power Park Modules** or **DC Converters** or **HVDC Systems** as specified in CC.6.3.13 or ECC.6.3.13.1.

(e) In the event of the **System Frequency** becoming stable above 50.5Hz, after all **Genset** and **DC Converter** and **HVDC System** action as specified in BC3.7.1 and BC3.7.2 has taken place, **The Company** will issue appropriate **Bid-Offer Acceptances** and/or **Ancillary Service** instructions, which may include **Emergency Instructions** under **BC2** to trip **Gensets** (or, in the case of **DC Converters** at **DC Converter Stations** or **HVDC Systems**, to stop or reverse the transfer of **Active Power**) so that the **Frequency** returns to below 50.5Hz and ultimately to **Target Frequency**.

(f) If the **System Frequency** has become stable above 52Hz, after all **Genset** and **DC Converter** or **HVDC System** action as specified in BC3.7.1 and BC3.7.2 has taken place, **The Company** will issue **Emergency Instructions** under **BC2** to trip appropriate **Gensets** (or in the case of **DC Converters** at **DC Converter Stations** or **HVDC Systems** to stop or reverse the transfer of **Active Power**) to bring the **System Frequency** to below 52Hz and follow this with appropriate **Bid-Offer Acceptances** or **Ancillary Service** instructions or further **Emergency Instructions** under **BC2** to return the **System Frequency** to below 50.5 Hz and ultimately to **Target Frequency**.

BC3.7.4 The **Generator** or **DC Converter Station** owner or **HVDC System Owner** will not be in breach of any of the provisions of BC2 by following the provisions of BC3.7.1, BC3.7.2 or BC3.7.3.

BC3.7.5 Information update to The Company

In order that **The Company** can deal with emergency conditions effectively, it needs as much up to date information as possible and accordingly **The Company** must be informed of the action taken in accordance with BC3.7.1(c) and BC3.7.2 as soon as possible and in any event within 7 minutes of the rise in **System Frequency**, directly by telephone from the **Control Point** for the **Power Station** or **DC Converter Station** or **HVDC System**.

BC3.7.6 (a) Existing Gas Cooled Reactor Plant

For the avoidance of doubt, **Generating Units** within **Existing Gas Cooled Reactor Plant** are required to comply with the applicable provisions of this BC3.7 (which, for the avoidance of doubt, other than for **Frequency Sensitive AGR Units**, do not include BC3.7.1).

(b) Power Park Modules In Operation Before 1 January 2006.

For the avoidance of doubt, **GB Generators** who own and/or operate **Power Park Modules** which are in operation before 1 January 2006 (irrespective of their **Completion Date**) are required to comply with the applicable provisions of this BC3.7 (which, for the avoidance of doubt do not include BC3.7.1).

BC3.7.7 Externally Interconnected System Operators

The Company will use reasonable endeavours to ensure that, if **System Frequency** rises above 50.4Hz, and an **Externally Interconnected System Operator** (in its role as operator of the **External System**) is transferring power into the **National Electricity Transmission System** from its **External System**, the amount of power transferred in to the **National Electricity Transmission System** from the **System** of that **Externally Interconnected System Operator** is reduced at a rate equivalent to (or greater than) that which applies for **Synchronised Gensets** operating in **Limited Frequency Sensitive Mode** which are producing **Active Power**. This will be done either by utilising existing arrangements which are designed to achieve this, or by issuing **Emergency Instructions** under **BC2**.

< END OF BALANCING CODE 3 >

BALANCING CODE NO. 4
(BC4)

Not Used.

< End of BC4 >

BALANCING CODE NO. 5

(BC5)

PREQUALIFICATION PROCESSES

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

BC5.1 PREQUALIFICATION 2

BC5.1.1 Prequalification Timelines 3

BC5.2 FCR PREQUALIFICATION PROCESS 3

BC5.2.1 FCR Minimum Technical Requirements 3

BC5.3 FRR PREEQUALIFICATION PROCESS 5

BC5.3.1 FRR Minimum Technical Requirements 5

BC5.4 RR PREQUALIFICATION PROCESS 5

BC5.4.1 RR Minimum Technical Requirements 5

BC5.1 **PREQUALIFCATION**

The Company shall list the current status and dates of potential status changes of **Balancing Services** as **Frequency Containment Reserves (FCR**), **Frequency Restoration Reserves** (**FRR**) or **Replacement Reserves** (**RR**) or existing **GB**.

Where a **Balancing Service** has been approved as a **Standard Product** or **Specific Product** providing **FCR**, **FRR** or **RR**, **The Company** shall ensure that prequalification processes for that **Balancing Service** follows the processes as set out here. **The Company** shall ensure that each relevant **Balancing Service** requires a formal application from the **FCR**, **FRR** or **RR** provider to prequalify.

Where the **Connection Conditions** or **European Connection Conditions** require the capability as a condition of connection, the connection application may be understood to fulfil this formal application if so requested by the connecting party. For the avoidance of doubt, this does not compel a party to pre-qualify as part of their connection conditions.

BC5.1.1 Prequalification Timelines

BC5.1.1.1 The following minimum timescales shall be apply to the **FCR**, **FRR** and **RR** prequalification processes;

(a) Within 8 weeks of a formal application from the **FCR**, **FRR** or **RR** provider **The Company** shall confirm the application is complete or incomplete (from the perspective of information provision)

(b) If the application is incomplete the **FCR**, **FRR**, or **RR** provider shall submit the additional required information within 4 weeks of a request from **The Company** or it will be presumed that the application has been withdrawn.

(c) For units connected to distribution networks, **The Company** shall liaise with the relevant DNO(s) to identify potential limitations imposed on the proposed Balancing Services Provider by the distribution networks.

(d) Within 3 months of confirming that all information has been provided, **The Company** shall confirm if the potential **FCR**, **FRR** or **RR** provider meets the requirements in BC5.2.1, BC5.3.1 or BC5.4.1 respectively.

BC5.1.1.2 **The Company** shall re-assess the qualification of **FCR**, **FRR** or **RR** providing units or groups:

(a) at least once every 5 years;
(b) in case the technical or availability requirements or the equipment has changed; and
(c) in the case of **FCR** providing units or groups, in case of modernisation of the equipment related to **FCR** activation.

BC5.2 FCR PREQUALIFICATION PROCESS

The Company shall ensure that each relevant **Balancing Service** prequalification

process shall, as a minimum, require the **FCR** provider to submit a self-certification of the **FCR** Minimum Technical Requirements as defined in BC5.2.1.

A transitional period for the introduction of FCR Minimum Technical Requirements, as defined in BC5.2.1 and BC5.2.2, shall apply for those **FCR** providers who are not an **EU Code User**.

BC5.2.1 FCR Minimum Technical Requirements

Each **FCR** provider shall have the right to aggregate the respective data for more than one **FCR** providing unit if the maximum power of the aggregated units is below 1.5 MW and a clear verification of activation of **FCR** is possible.

Each **FCR** providing unit and each **FCR** providing group shall;

(a) activate the agreed **FCR** by means of a proportional governor or load controller reacting to **Frequency** deviations or alternatively based on a monotonic piecewise linear power-frequency characteristic in case of relay activated **FCR**.

(b) be capable of activating **FCR** within the **Frequency** ranges specified in the in CC.6.1.3 or ECC.6.1.2.1.2.

(c) and comply with the following properties

(i) Maximum combined effect of inherent **Frequency Response Insensitivity** and possible intentional **Frequency Response Deadband** of the governor or load controller of the **FCR** providing units or **FCR** providing groups of ±15 mHz

(ii) **FCR** full activation time of 10 s

(iii) **FCR** full activation **Frequency** deviation of ± 500 mHz

(d) Specify the limitations of the energy reservoir of its **FCR** providing units or **FCR**.

(e) Each **FCR** provider shall be capable of making available to **The Company**, for each of its **FCR** providing units and **FCR** providing groups, at least the following information:

(i) time-stamped status indicating if **FCR** is on or off;

(ii) time-stamped active power data needed to verify **FCR** activation, including time-stamped instantaneous **Active Power**; and

(iii) droop of the governor or load controller for **Type C Power Generating Modules** and **Type D Power Generating Modules** acting as **FCR** providing units, or its equivalent parameter for **FCR** providing groups consisting of **Type A Power-Generating Modules** and/or **Type B Power Generating Modules**, and/or **Demand Units** with **Demand Response Active Power**.

(f) An **FCR** provider shall guarantee the continuous availability of **FCR**, with the exception of a forced outage of a **FCR** providing unit, during the period of time in which it is obliged to provide **FCR**.

(g) Each **FCR** provider shall inform **The Company**, as soon as possible, about any changes in the actual availability of its **FCR** providing unit and/or its **FCR** providing group, in whole or in part, relevant for the results of this prequalification.

BC5.2.2 In addition to the requirements in BC5.2.1, where a relevant Balancing

Service is provided by reserve providing groups or units located in the distribution systems, **The Company** shall ensure that the prequalification process requires the following to be specified;

(a) voltage levels and connection points of the reserve providing units or groups;

(b) the DNO(s) who operate the distribution **systems** to which the reserve providing units or groups are connected;

(c) the type of **Active Power** reserves;

(d) the maximum reserve capacity provided by the reserve providing units or groups at each connection point; and

(e) the maximum rate of change of **Active Power** for the reserve providing units or groups.

The relevant DNOs will identify potential distribution network restrictions, based on technical reasons, on the provision of the proposed Balancing Service by the reserve providing groups or units.

BC 5.3 FRR PREQUALIFICATION PROCESS

The Company shall ensure that each relevant Balancing Service prequalification process shall, as a minimum, require the **FRR** provider to submit a self-certification of the **FRR** Minimum Technical Requirements as defined in BC5.3.1 and BC5.3.2.

BC5.3.1 FRR Minimum Technical Requirements

Each **FRR** providing unit and each **FRR** providing group shall;

(a) activate **FRR** in accordance with the setpoint received from **The Company**;

(b) ensure that the **FRR** activation of the **FRR** providing units within a reserve providing group can be monitored. For that purpose the **FRR** provider shall be capable of supplying to **The Company** real-time measurements of the connection point or another point of interaction agreed with **The Company** concerning:

(i) time-stamped scheduled **Active Power** output;

(ii) time-stamped instantaneous **Active Power** for:

— each **FRR** providing unit,

— each **FRR** providing group, and

— each **Power Generating Module** or **Demand** unit of a **FRR** providing group with a maximum **Active Power** output larger than or equal to 1.5 MW;

(c) a **FRR** providing unit or **FRR** providing group for automatic **FRR** shall have an automatic **FRR** activation delay not exceeding 30 seconds;

(d) be capable of activating its complete manual reserve capacity on **FRR** within the **FRR** full activation time;

(e) fulfil the **FRR** availability requirements;

(f) fulfil the ramping rate requirements

(g) inform **The Company** about a reduction of the actual availability of its **FRR** providing unit or its **FRR** providing group or a part of its **FRR** providing group as soon as possible.

BC5.3.2 In addition to the requirements in BC5.3.1, where a relevant **Balancing Service** is provided by reserve providing groups or units located in the distribution systems, **The Company** shall ensure that the prequalification process requires the following to be specified;

(a) voltage levels and connection points of the reserve providing units or groups;

(b) the DNO(s) who operate the distribution systems to which the reserve providing units or groups are connected;

(c) the type of **Active Power** reserves;

(d) themaximum reserve capacity provided by the reserve providing units or groups at each connection point; and

(e) the maximum rate of change of **Active Power** for the reserve providing units or group

The relevant DNOs will identify potential distribution network restrictions, based on technical reasons, on the provision of the proposed Balancing Service by the reserve providing groups or units.

BC5.4 RR PREQUALIFICATION PROCESS

The Company shall ensure that each relevant **Balancing Service** prequalification process shall, as a minimum, require the **RR** provider to submit a self-certification of the **RR** Minimum Technical Requirements as defined in BC5.4.1 and BC5.4.2.

BC5.4.1 RR Minimum Technical Requirements

Each **RR** providing unit and each **RR** providing group shall;

(a) activate **RR** in accordance with the setpoint received from **The Company**;

(b) ensure activation of complete reserve capacity on **RR** within the activation time defined by **The Company**;

(c) ensure de-activation of **RR** according to the setpoint received from **The Company**;

(d) ensure that the **RR** activation of the **RR** providing units within a reserve providing group can be monitored. For that purpose, the **RR** provider shall be capable of supplying to **The Company** real-time measurements of the connection point or another point of interaction agreed with **The Company**:

(i) the time-stamped scheduled a **Active Power** output, for each **RR** providing unit and group and for each **Power Generating Module** or **Demand** unit of a **RR** providing group with maximum **Active Power** output larger than or equal to 1.5 MW;

(ii) the time-stamped instantaneous **Active Power**, for each **RR** providing unit and group, and for each **Power Generating Module** or **Demand** unit of a **RR** providing group with a maximum **Active Power** output greater than or equal to 1.5 MW;

(e) ensure fulfilment of the **RR** availablity requirements

(f) inform **The Company** about a reduction of the actual availability or a forced outage of its **RR** providing unit or its **RR** providing group or a part of its **RR** providing group as soon as possible.

BC5.4.2 In addition to the requirements in BC5.4.1, where a relevant **Balancing Service** is provided by a reserve providing groups or units located in the distribution **system**s, **The Company** shall ensure that the prequalification process requires the following to be specified;

(a) voltage levels and connection points of the reserve providing units or groups;

(b) the DNO(s) who operate the distribution systems to which the reserve providing units or groups are connected;

(c) the type of **Active Power** reserves;

(d) the maximum reserve capacity provided by the reserve providing units or groups at each connection point; and

(e) the maximum rate of change of **Active Power** for the reserve providing units or groups.

The relevant DNOs will identify potential distribution network restrictions on the provision of the proposed Balancing Service by the reserve providing groups or units.

< END OF BALANCING CODE 5 >

Public

DATA REGISTRATION CODE
(DRC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title — Page Number

DRC.1 INTRODUCTION 3

DRC.2 OBJECTIVE 3

DRC.3 SCOPE 3

DRC.4 DATA CATEGORIES AND STAGES IN REGISTRATION 4

DRC.4.2 Standard Planning Data 4

DRC.4.3 Detailed Planning Data 4

DRC.4.4 Operational Data 4

DRC.5 PROCEDURES AND RESPONSIBILITIES 4

DRC.5.1 Responsibility For Submission And Updating Of Data 4

DRC.5.2 Methods Of Submitting Data 4

DRC.5.3 Changes To Users Data 5

DRC.5.4 Data Not Supplied 5

DRC.5.5 Substituted Data 5

DRC.6 DATA TO BE REGISTERED 5

SCHEDULE 1 - POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA 11

SCHEDULE 2 - GENERATION PLANNING PARAMETERS 37

SCHEDULE 3 - LARGE POWER STATION OUTAGE PROGRAMMES, OUTPUT USABLE AND INFLEXIBILITY INFORMATION 41

SCHEDULE 4 - LARGE POWER STATION DROOP AND RESPONSE DATA 42

SCHEDULE 5 - USERS SYSTEM DATA 43

SCHEDULE 6 - USERS OUTAGE INFORMATION 55

SCHEDULE 7 - LOAD CHARACTERISTICS AT GRID SUPPLY POINTS 60

SCHEDULE 8 - DATA SUPPLIED BY BM PARTICIPANTS 61

SCHEDULE 9 - DATA SUPPLIED BY THE COMPANY TO USERS 62

SCHEDULE 10 - DEMAND PROFILES AND ACTIVE ENERGY DATA 64

SCHEDULE 11 - CONNECTION POINT DATA 66

SCHEDULE 12 - DEMAND CONTROL 73

SCHEDULE 13 - FAULT INFEED DATA 77

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS) 79

SCHEDULE 15 - MOTHBALLED POWER GENERATING MODULE, MOTHBALLED GENERATING UNIT, MOTHBALLED POWER PARK MODULE (INCLUDING MOTHBALLED DC CONNECTED POWER PARK MODULES), MOTHBALLED HVDC SYSTEMS, MOTHBALLED HVDC CONVERTERS,

Public

MOTHBALLED DC CONVERTERS AT A DC CONVERTER STATION AND ALTERNATIVE FUEL DATA 85
SCHEDULE 16 - SYSTEM RESTORATION INFORMATION 88
SCHEDULE 17 - ACCESS PERIOD DATA 94
SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA 95
SCHEDULE 19 - USER DATA FILE STRUCTURE 122
SCHEDULE 20 - GRID FORMING PLANT CAPABILITY DATA 124
SCHEDULE 21 - GENERATION AND DEMAND OUTTURN AND FORECASTS 128
SCHEDULE 22 - DEMAND DATA 131
SCHEDULE 23 - NETWORK OPERATOR DEMAND PROFILES AND ACTIVE ENERGY DATA 132
SCHEDULE 24 - GENERATION LARGER THAN 1 MW 137
SCHEDULE 25 - NETWORK OPERATOR DEMAND CONTROL DATA 138
SCHEDULE 26 - DEMAND DATA 141
SCHEDULE 27 - NETWORK OPERATOR ACTIVE ENERGY DATA 143
SCHEDULE 28 - EMBEDDED POWER STATION FORECAST CAPACITY SCHEDULE 144
SCHEDULE 29 - EMBEDDED GENERATION SCHEDULE 145
SCHEDULE 30 - EMBEDDED GENERATION CONSTRAINTS SCHEDULE 147

DRC.1 INTRODUCTION

DRC.1.1 The **Data Registration Code** ("**DRC**") presents a unified listing of all data required by **The Company** from **Users** (including **Restoration Contractors** where they are not a **User**) and by **Users** (including **Restoration Contractors** where they are not a **User**) from **The Company**, from time to time under the **Grid Code**. The data which is specified in each section of the **Grid Code** is collated here in the **DRC**. Where there is any inconsistency in the data requirements under any particular section of the **Grid Code** and the **Data Registration Code** the provisions of the particular section of the **Grid Code** shall prevail.

DRC.1.2 The **DRC** identifies the section of the **Grid Code** under which each item of data is required.

DRC.1.3 The Code under which any item of data is required specifies procedures and timings for the supply of that data, for routine updating and for recording temporary or permanent changes to that data. All timetables for the provision of data are repeated in the **DRC**.

DRC.1.4 Various sections of the **Grid Code** also specify information which **Users** will receive from **The Company**. This information is summarised in a single schedule in the **DRC** (Schedule 9).

DRC.1.5 The categorisation of data into **DPD I** and **DPD II** is indicated in the **DRC** below.

DRC.1.6 For the purposes of this **DRC**, if a **User** is also a **Restoration Contractor**, they shall only need to submit the data once stating on their data submission they are also a **Restoration Contractor**. If a **Restoration Contractor** does not have a **CUSC Contract** then the data required to be submitted shall be pursuant to the terms of the **Anchor Plant Contract** or **Top Up Restoration Contract**.

DRC.2 OBJECTIVE

The objective of the **DRC** is to:

DRC.2.1 List and collate all the data to be provided by each category of **User** to **The Company** under the **Grid Code**.

DRC.2.2 List all the data to be provided by **The Company** to each category of **User** under the **Grid Code**.

DRC.3 SCOPE

DRC.3.1 The **DRC** applies to **The Company**, **Users** and **Restoration Contractors**, which in this **DRC** means:-

(a) **Generators** (including those undertaking **OTSDUW** and/or those who own and/or operate **DC Connected Power Park Modules**);

(b) **Network Operators**;

(c) **DC Converter Station** owners and **HVDC System Owners**;

(d) **Suppliers**;

(e) **Non-Embedded Customers**;

(f) **Externally Interconnected System Operators**;

(g) **Interconnector Users**;

(h) **BM Participants**; and

(i) **Pumped Storage Generators** and **Generators** in respect of Electricity **Storage Modules**.

(j) **Restoration Contractors** (which would be pursuant to the requirements of their **Anchor Restoration Contract** or **Top Up Restoration Contract**).

DRC.3.2 For the avoidance of doubt, the **DRC** applies to both **GB Code Users** and **EU Code Users**.

DRC.4 DATA CATEGORIES AND STAGES IN REGISTRATION

DRC.4.1.1 Within the **DRC** each data item is allocated to one of the following three categories:

(a) **Standard Planning Data** (**SPD**)

(b) **Detailed Planning Data** (**DPD**)

(c) **Operational Data**

DRC.4.2 Standard Planning Data (SPD)

DRC.4.2.1 The **Standard Planning Data** listed and collated in this **DRC** is that data listed in Part 1 of the Appendix to the **PC**.

DRC.4.2.2 **Standard Planning Data** will be provided to **The Company** in accordance with PC.4.4 and PC.A.1.2.

DRC.4.3 Detailed Planning Data (DPD)

DRC.4.3.1 The **Detailed Planning Data** listed and collated in this **DRC** is categorised as **DPD I** and **DPD II** and is that data listed in Part 2 of the Appendix to the **PC**.

DRC.4.3.2 **Detailed Planning Data** will be provided to **The Company** in accordance with PC.4.4, PC.4.5 and PC.A.1.2.

DRC.4.4 Operational Data

DRC.4.4.1 **Operational Data** is data which is required by the **Operating Codes** and the **Balancing Codes**. Within the **DRC**, **Operational Data** is sub-categorised according to the Code under which it is required, namely **OC1**, **OC2**, **BC1** or **BC2**.

DRC.4.4.2 **Operational Data** is to be supplied in accordance with timetables set down in the relevant **Operating Codes** and **Balancing Codes** and repeated in tabular form in the schedules to the **DRC**.

DRC.5 PROCEDURES AND RESPONSIBILITIES

DRC.5.1 Responsibility For Submission And Updating Of Data

In accordance with the provisions of the various sections of the **Grid Code**, each **User** must submit data as summarised in DRC.6 and listed and collated in the attached schedules.

DRC.5.2 Methods Of Submitting Data

DRC.5.2.1 Wherever possible, the data schedules to the **DRC** are structured to serve as standard formats for data submission and such format must be used for the written submission of data to **The Company**.

DRC.5.2.2 Data must be submitted to the **Transmission Control Centre** notified by **The Company**, or to such other department or address as **The Company** may from time to time advise. The name of the person at the **User Site** who is submitting each schedule of data must be included.

DRC.5.2.3 Where a computer data link exists between a **User** and **The Company**, data may be submitted via this link. **The Company** will, in this situation, provide computer files for completion by the **User** containing all the data in the corresponding **DRC** schedule.

Data submitted can be in an electronic format using a proforma to be supplied by **The Company** or other format to be agreed annually in advance with **The Company**. In all cases the data must be complete and relate to, and relate only to, what is required by the relevant section of the **Grid Code**.

DRC.5.2.4 Other modes of data transfer, such as magnetic tape, may be utilised if **The Company** gives its prior written consent.

DRC.5.2.5 **Generators**, **HVDC System Owners** and **DC Converter Station** owners submitting data for a **Power Generating Module**, **Generating Unit**, **DC Converter**, **HVDC System**, **Power Park Module** (including **DC Connected Power Park Modules**) or **CCGT Module** before the issue of a **Final Operational Notification** should submit the **DRC** data schedules and compliance information required under the **CP** electronically using the **User Data File Structure** unless otherwise agreed with **The Company**. Data required from **Restoration Contractors** where not provided would be pursuant to the the terms of their **Anchor Restoration Contract** or **Top Up Restoration Contract**.

DRC.5.3 Changes To User's Data

DRC.5.3.1 Whenever a **User** becomes aware of a change to an item of data which is registered with **The Company**, the **User** must notify **The Company** in accordance with each section of the Grid Code. The method and timing of the notification to **The Company** is set out in each section of the Grid Code. Data required from **Restoration Contractors** where not provided would be pursuant to the the terms of their **Anchor Restoration Contract** or **Top Up Restoration Contract**.

DRC.5.4 Data Not Supplied

DRC.5.4.1 **Users** and **The Company** are obliged to supply data as set out in the individual sections of the **Grid Code** and repeated in the **DRC**. If a **User** fails to supply data when required by any section of the **Grid Code**, **The Company** will estimate such data if and when, in **The Company's** view, it is necessary to do so. If **The Company** fails to supply data when required by any section of the **Grid Code**, the **User** to whom that data ought to have been supplied, will estimate such data if and when, in that **User's** view, it is necessary to do so. Such estimates will, in each case, be based upon data supplied previously for the same **Plant** or **Apparatus** or upon corresponding data for similar **Plant** or **Apparatus** or upon such other information as **The Company** or that **User**, as the case may be, deems appropriate.

DRC.5.4.2 **The Company** will advise a **User** in writing of any estimated data it intends to use pursuant to DRC.5.4.1 relating directly to that **User's Plant** or **Apparatus** in the event of data not being supplied.

DRC.5.4.3 A **User** will advise **The Company** in writing of any estimated data it intends to use pursuant to DRC.5.4.1 in the event of data not being supplied.

DRC.5.4.4 Data requirements defined in DRC5.4.1 – DRC5.4.3 as applicable to a **Restoration Contractor** where that **Restoration Contractor** is a not a **User**, would be pursuantto the the terms of the **Anchor Restoration Contract** or **Top Up Restoration Contract**.

DRC.5.5 Substituted Data

DRC.5.5.1 In the case of PC.A.4 only, if the data supplied by a **User** does not in **The Company's** reasonable opinion reflect the equivalent data recorded by **The Company**, **The Company** may estimate such data if and when, in the view of **The Company**, it is necessary to do so. Such estimates will, in each case, be based upon data supplied previously for the same **Plant** or **Apparatus** or upon corresponding data for similar **Plant** or **Apparatus** or upon such other information as **The Company** deems appropriate.

DRC.5.5.2 **The Company** will advise a **User** in writing of any estimated data it intends to use pursuant to DRC.5.5.1 relating directly to that **User's Plant** or **Apparatus** where it does not in **The Company's** reasonable opinion reflect the equivalent data recorded by **The Company**. Such estimated data will be used by **The Company** in place of the appropriate data submitted by the **User** pursuant to PC.A.4 and as such shall be deemed to accurately represent the **User's** submission until such time as the **User** provides data to **The Company's** reasonable satisfaction.

DRC.6 DATA TO BE REGISTERED

DRC.6.1 Schedules 1 to 20 attached cover the following data areas.

DRC.6.1.1 Schedule 1 – Power Generating Module, Generating Unit (or CCGT Module), Power Park Module (including DC Connected Power Park Module and Power Park Unit), HVDC System and DC Converter Technical Data.

Comprising **Power Generating Module**, **Generating Unit** (and **CCGT Module**), **Power Park Module** (including **DC Connected Power Park Module** and **Power Park Unit**) and **DC Converter** fixed electrical parameters. Any data required under **DRC** Schedule 1 from **Restoration Contractors** where not provided, would be pursuant to the terms of their **Anchor Restoration Contract** or **Top Up Restoration Contract**.

DRC.6.1.2 Schedule 2 - Generation Planning Parameters

Comprising **Genset** parameters and **Restoration Contractors** parameters required for **Operational Planning** studies.

DRC.6.1.3 Schedule 3 - Power Station Outage Programmes, Output Usable and Inflexibility Information.

Comprising generation and storage outage planning in respect of **Large Power Stations**, **Output Usable** and inflexibility information at timescales down to the daily **BM Unit Data** submission. In the case of **Restoration Contractors**, this data needs to only to be provided where such a **Resoration Contractor** has an **Anchor Restoration Contract** or **Top Up Restoration Contract** other than in respect of **Large Power Stations** where the data will already be required.

DRC.6.1.4 Schedule 4 - Large Power Station Droop and Response Data.

Comprising data on governor **Droop** settings and **Primary**, **Secondary** and **High Frequency Response** data for **Large Power Stations**.

DRC.6.1.5 Schedule 5 – User's System Data.

Comprising electrical parameters relating to **Plant** and **Apparatus** connected to the **National Electricity Transmission System**.

DRC.6.1.6 Schedule 6 – Users Outage and Restoration Service Provider Outage Information.

Comprising the information required by **The Company** for outages on the **User's System**, including outages at **Power Stations** other than outages of **Gensets**. Outages of **Plant** and **Apparatus** of **Restoration Contractors** and key **Plant** and **Apparatus** of a **Network Operator's System** associated with a **Distribution Restoration Zone Plan** also need to be co-ordinated with outages on the **National Electricity Transmission System**. The data submitted should therefore also include outages on **Restoration Contractors Plant** and **Apparatus** and **Network Operator's Plant** and **Apparatus** which would prevent the operation of a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**.

DRC.6.1.7 Schedule 7 - Load Characteristics.

Comprising the estimated parameters of load groups in respect of, for example, harmonic content and response to frequency.

DRC.6.1.8 Schedule 8 - BM Unit Data.

DRC.6.1.9 Schedule 9 - Data Supplied by The Company to Users.

DRC.6.1.10 Schedule 10 - Demand Profiles and Active Energy Data

Comprising information relating to the **Network Operators'** and **Non-Embedded Customers'** total **Demand** and **Active Energy** taken from the **National Electricity Transmission System**

DRC.6.1.11 Schedule 11 - Connection Point Data

Comprising information relating to **Demand**, demand transfer capability and the **Small Power Station**, **Medium Power Station** and **Customer** generation connected to the **Connection Point**

DRC.6.1.12 Schedule 12 - Demand Control Data

Comprising information related to **Demand Control**

DRC.6.1.13 Schedule 13 - Fault Infeed Data

Comprising information relating to the short circuit contribution to the **National Electricity Transmission System** from **Users** other than **Generators**, **HVDC System Owners** and **DC Converter Station** owners.

DRC.6.1.14 Schedule 14 - Fault Infeed Data (Generators Including Unit and Station Transformers)

Comprising information relating to the Short Circuit contribution to the **National Electricity Transmission System** from **Generators**, **HVDC System Owners** and **DC Converter Station** owners.

DRC.6.1.15 Schedule 15 – Mothballed Power Generating Module, Mothballed Generating Unit, Mothballed Power Park Module (including Mothballed DC Connected Power Park Modules), Mothballed HVDC Systems, Mothballed HVDC Converters, Mothballed DC Converters at a DC Converter Station and Alternative Fuel Data

Comprising information relating to estimated return to service times for **Mothballed Power Generating Modules**, **Mothballed Generating Units**, **Mothballed Power Park Modules** (including **Mothballed DC Connected Power Park Modules**), **Mothballed HVDC Systems**, **Mothballed HVDC Converters** and **Mothballed DC Converters at a DC Converter Station** and the capability of gas-fired **Generating Units** to operate using alternative fuels.

DRC.6.1.16 Schedule 16 – System Restoration Information

Comprising information relating to **System Restoration**.

DRC.6.1.17 Schedule 17 – Access Period Schedule

Comprising **Access Period** information for **Transmission Interface Circuits** within an **Access Group**.

DRC.6.1.18 Schedule 18 – Generators Undertaking OTSDUW Arrangements

Comprising electrical parameters relating to **OTSDUW Plant and Apparatus** between the **Offshore Grid Entry Point** and **Transmission Interface Point**.

DRC.6.1.19 Schedule 19 – User Data File Structure

Comprising information relating to the **User Data File Structure**.

DRC.6.1.20 Schedule 20 – Grid Forming Plant Data
Comprising information relating to **Grid Forming Plant**.

DRC.6.1.21 Schedule 21 – Generation and Demand Data (21A-C)
Comprising information relating to generation and demand at historic defined date/times plus forecast data.

DRC.6.1.22 Schedule 22 – Demand Data
Comprising information relating to **Measured Demand** at historic defined date/times plus forecast data.

DRC.6.1.23 Schedule 23 – Network Operator Demand Data (23A-C)
Comprising information relating to the **Network Operators'** demand and **Access Period** data.

DRC.6.1.24 Schedule 24 – Access Group Schedule
Comprising **Access Period** information for **Transmission Interface Circuits** within an **Access Group**.

DRC.6.1.25 Schedule 25 – Network Operator Demand Control Data (25A-C)

Comprising information related to **Demand Control** on a **Network Operator's System**.

DRC.6.1.26 Schedule 26 – Demand Data (26A-B)
Comprising information relating to **Measured Demand** at historic defined date/times plus forecast data.

DRC.6.1.27 Schedule 27 – Network Operator Active Energy Data
Comprising information relating to the **Network Operators' Active Energy**.

DRC.6.1.28 Schedule 28 – Embedded Power Station Forecast Capacity Schedule
Comprising information relating to embedded generation a **Network Operator** forecasts to connect to their system.

DRC.6.1.29 Schedule 29 – Embedded Generation Schedule (29A-B)
Comprising information relating to embedded generation connected to a **Network Operator's** system, split between those rated at greater than or equal to 1MW, and those rated below 1MW.

DRC.6.1.30 Schedule 30 – Embedded Generation Constraints Schedule
Comprising information relating to embedded generation connected to a **Network Operator's** system where a constraint is applied to the output of either a **Large Power Station** or an **Offshore Transmission System**.

DRC.6.2 The **Schedules** applicable to each class of **User** before the **PSM Implementation Date** are as follows:

User	Schedule
Generators with **Large Power Stations**	1, 2, 3, 4, 9, 14, 15, 16, 19
Generators with **Medium Power Stations** (see notes 2, 3, 4)	1, 2 (part), 9, 14, 15, 19
Generators with **Small Power Stations** directly connected to the **National Electricity Transmission System**	1, 6, 14, 15, 19
Generators undertaking **OTSDUW** (see note 5)	18, 19
All **Users** connected directly to the **National Electricity Transmission System**	5, 6, 9
All **Users** connected directly to the **National Electricity Transmission System** other than **Generators**	10,11,13,17
All **Users** connected directly to the **National Electricity Transmission System** with **Demand**	7, 9
A **Pumped Storage Generator**, a **Generator** in respect of one or more **Electricity Storage Modules** and an **Externally Interconnected System Operator** and **Interconnector Users**	12 (as marked)
All **Suppliers**	12
All **Network Operators**	12, 16
All **BM Participants**	8
All **DC Converter Station** owners	1, 4, 9, 14, 15, 19
Restoration Contractors	2, 3, 6, 16

DRC.6.2.1 The **Schedules** applicable to each class of **User** after the **PSM Implementation Date** are as follows:

User	Schedule
Generators with **Large Power Stations**	1, 2, 3, 4, 9, 14, 15, 16, 19
Generators with **Medium Power Stations** (see notes 2, 3, 4)	1, 2 (part), 9, 14, 15, 19
Generators with **Small Power Stations** directly connected to the **National Electricity Transmission System**	1, 6, 14, 15, 19
Generators undertaking **OTSDUW** (see note 5)	18, 19
All **Users** connected directly to the **National Electricity Transmission System**	6, 9
All **Users** connected directly to the **National Electricity Transmission System** other than **Generators** or **Network Operators**	10,11,13,17
All **Users** connected directly to the **National Electricity Transmission System** with **Demand**	7, 9
A **Pumped Storage Generator**, a **Generator** in respect of one or more **Electricity Storage Modules** and an **Externally Interconnected System Operator** and **Interconnector Users**	12 (as marked)
All **Suppliers**	12
All **Network Operators** after the **PSM Implementation Date** (see note 8, 9)	12,16, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30
All **BM Participants**	8
All **DC Converter Station** owners	1, 4, 9, 14, 15, 19
Restoration Contractors	2, 3, 6, 16

Notes:

(1) **Network Operators** must provide data relating to **Small Power Stations** and/or **Customer Generating Plant Embedded** in their **Systems** when such data is requested by **The Company** pursuant to PC.A.3.1.4 or PC.A.5.1.4. After the **PSM Implementation Date** this information shall be provided pursuant to PC.9.

(2) The data in schedules 1, 14 and 15 need not be supplied in relation to **Medium Power Stations** connected at a voltage level below the voltage level of the **Subtransmission System** except in connection with a **CUSC Contract** or unless specifically requested by **The Company**.

(3) Each **Network Operator** within whose **System** an **Embedded Medium Power Station** not subject to a **Bilateral Agreement** or **Embedded DC Converter Station** not subject to a **Bilateral Agreement** is situated shall provide the data to **The Company** in respect of each such **Embedded Medium Power Station** or **Embedded DC Converter Station** or **HVDC System**. After the **PSM Implementation Date** this information shall be provided pursuant to PC.9.

(4) In the case of Schedule 2, **Generators**, **HVDC System Owners**, **DC Converter Station** owners or **Network Operators** in the case of **Embedded Medium Power Stations** not subject to a **Bilateral Agreement** or **Embedded DC Converter Stations** not subject to a **Bilateral Agreement**, would only be expected to submit data in relation to **Standard Planning Data** as required by the **Planning Code**.

(5) In the case of **Generators** undertaking **OTSDUW**, the **Generator** will need to supply **User** data in accordance with the requirements of **Large** or **Small Power Stations** (as defined in DRC.6.2) up to the **Offshore Grid Entry Point**. In addition, the **User** will also need to submit **Offshore Transmission System** data in between the **Interface Point** and its **Connection Points** in accordance with the requirements of Schedule 18.

(6) In the case of **Restoration Contractors**, data only needs to be provided by a **Restoration Contractor** where such a **Restoration Contractor** is not a **CUSC Party** and the data has not been submitted. In this case the data to be submitted would be would be pursuant to the the terms of the **Anchor Restoration Contract** or **Top Up Restoration Contract**.

(7) The changes to the PC driving the enhanced data exchange between **Network Operators** and **The Company** described in PC.9, PC.10 and PC.G together with the relevant schedules will take effect after the **PSM Implementation Date**.

(8) Schedule 12 does not form part of the Excel template found on **The Company's Website** and is not part of the **Network Operator's** week 2/28 data submissions.

(9) In the case of Schedules 16, 21-30, **The Company** shall publish these Schedules as an Excel template on their **Website**. Where there are discrepancies between the DRC legal text and the **Website** version, the DRC legal text shall be followed. **Network Operators** should use the **Website** version of Schedules 16, 21-30 where possible.

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

ABBREVIATIONS:

SPD = **Standard Planning Data**	**DPD** = **Detailed Planning Data**
% on MVA = % on Rated MVA	**RC** = **Registered Capacity** **MC = Maximum Capacity**
% on 100 = % on 100 MVA	**OC1**, **BC1**, etc = Grid Code for which data is required

CUSC Contract =	**User** data which may be submitted to the **Relevant Transmission Licensees** by **The Company**, following the acceptance by a **User** of a **CUSC Contract**.	CUSC App. Form =	**User** data which may be submitted to the **Relevant Transmission Licensees** by **The Company**, following an application by a **User** for a **CUSC Contract**.

Note:

All parameters, where applicable, are to be measured at nominal **System Frequency**

\+ these **SPD** items should only be given in the data supplied with the application for a **CUSC Contract**.

* Asterisk items are not required for **Small Power Stations** and **Medium Power Stations**

Information is to be given on a **Unit** basis, unless otherwise stated. Where references to **CCGT Modules** are made, the columns "G1" etc should be amended to read "M1" etc, as appropriate

□ These data items may be submitted to the **Relevant Transmission Licensees** from **The Company** in respect of the **National Electricity Transmission System**. The data may be submitted to the **Relevant Transmission Licensees** in a summarised form e.g. network model; the data transferred will have been originally derived from data submitted by **Users** to **The Company**.

■ these data items may be submitted to the **Relevant Transmission Licensee** from **The Company** in respect to **Relevant Units** only. The data may be submitted to the **Relevant Transmission Licensee** in a summarised form e.g. network model; the data transferred will have been originally derived from data submitted by **Users** to **The Company**.

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

POWER STATION NAME: _____ DATE: _____

DATA DESCRIPTION	UNITS	DATA to **RTL** CUSC Contract	DATA to **RTL** CUSC App. Form	DATA CAT.	**GENERATING UNIT** OR STATION DATA F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6
GENERATING STATION DEMANDS: **Demand** associated with the **Power Station** supplied through the **National Electricity Transmission System** or the **Generator's User System** *(PC.A.5.2)*											
- The maximum **Demand** that could occur.	MW	□		**DPD I**							
	MVAr	□		**DPD I**							
- **Demand** at specified time of annual peak half hour of **National Electricity Transmission System Demand** at **Annual ACS Conditions**.	MW	□		**DPD II**							
	MVAr	□		**DPD II**							
- **Demand** at specified time of annual minimum half-hour of **National Electricity Transmission System Demand**.	MW			**DPD II**							
	MVAr	□		**DPD II**							
		□									
(Additional **Demand** supplied through the unit transformers to be provided below)											
INDIVIDUAL **GENERATING UNIT** (OR AS THE CASE MAY BE, **SYNCHRONOUS POWER GENERATING MODULE** OR **CCGT MODULE**) DATA					G1	G2	G3	G4	G5	G6	STN
Point of connection to the **National Electricity Transmission System** (or the **Total System** if embedded) of the **Generating Unit** or **Synchronous Power Generating Module** (other than a **CCGT Unit**) or the **CCGT Module**, as the case may be in terms of geographical and electrical location and system voltage *(PC.A.3.4.1)*	Text	□	■	**SPD**							
If the busbars at the **Connection Point** are normally run in separate sections identify the section to which the **Generating Unit** (other than a **CCGT Unit**) or **Synchronous Power Generating Module** or **CCGT Module**, as the case may be is connected *(PC.A.3.1.5)*	Section Number	□	■	**SPD**							

Type of **Unit** (steam, **Gas Turbine Combined Cycle Gas Turbine Unit**, tidal, wind, storage type etc.) *(PC.A.3.2.2 (h), PC.A.3.4.4)*		□											

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

INDIVIDUAL **SYNCHRONOUS POWER GENERATING MODULE GENERATING UNIT** (OR AS THE CASE MAY BE, **CCGT MODULE**) DATA					G1	G2	G3	G4	G5	G6	STN
A list of the Generating Units and **CCGT Units** within a **Synchronous Power Generating Module** or **CCGT Module**, identifying each **CCGT Unit**, and the **Power Generating Module** or **CCGT Module** of which it forms part, unambiguously. In the case of a **Range CCGT Module**, details of the possible configurations should also be submitted. *(PC.A.3.2.2 (g))*		□	■	**SPD**							

.

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** (OR CCGT MODULE, AS THE CASE MAY BE)						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Rated MVA *(PC.A.3.3.1)*	MVA	□	■	**SPD+**							
Rated MW *(PC.A.3.3.1)*	MW	□	■	**SPD+**							
Rated terminal voltage *(PC.A.5.3.2.(a) & PC.A.5.4.2 (b))*	kV	□		**DPD I**							
*Performance Chart at **Onshore Synchronous Generating Unit** stator terminals *(PC.A.3.2.2(f)(i))*				**SPD**	(see **OC2** for specification)						
* Performance Chart of the **Offshore Synchronous Generating Unit** at the **Offshore Grid Entry Point** *(PC.A.3.2.2(f)(ii))*											
* *Synchronous Generating Unit Performance Chart (PC.A.3.2.2(f))*											
* *Power Generating Module Performance Chart of the Synchronous Power Generating Module (PC.A.3.2.2(f))*											
* Maximum terminal voltage set point *(PC.A.5.3.2.(a) & PC.A.5.4.2 (b))*	kV	□		**DPD I**							
* Terminal voltage set point step resolution – if not continuous *(PC.A.5.3.2.(a) & PC.A.5.4.2 (b))*	kV	□		**DPD I**							
***Output Usable** (on a monthly basis) *(PC.A.3.2.2(b))*	MW			**SPD**	(except in relation to **CCGT Modules** when required on a unit basis under the **Grid Code**, this data item may be supplied under Schedule 3)						
Turbo-Generator inertia constant (for synchronous machines) *(PC.A.5.3.2(a))*	MW secs /MVA	□	■	**SPD+**							
Short circuit ratio (synchronous machines) *(PC.A.5.3.2(a))*		□	■	**SPD+**							
Normal auxiliary load supplied by the **Generating Unit** at rated MW output *(PC.A.5.2.1)*	MW MVAr	□ □		**DPD II** **DPD II**							
Rated field current at rated MW and MVAr output and at rated terminal voltage *(PC.A.5.3.2 (a))*	A	□		**DPD II**							
Field current open circuit saturation curve (as derived from appropriate manufacturers' test certificates): *(PC.A.5.3.2 (a))*											
120% rated terminal volts	A	□		**DPD II**							
110% rated terminal volts	A	□		**DPD II**							
100% rated terminal volts	A	□		**DPD II**							
90% rated terminal volts	A	□		**DPD II**							
80% rated terminal volts	A	□		**DPD II**							
70% rated terminal volts	A	□		**DPD II**							
60% rated terminal volts	A	□		**DPD II**							
50% rated terminal volts	A	□		**DPD II**							
IMPEDANCES: (Unsaturated)											
Direct axis synchronous reactance *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**							
Direct axis transient reactance *(PC.A.3.3.1(a)& PC.A.5.3.2(a)*	% on MVA	□	■	**SPD+**							
Direct axis sub-transient reactance *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**							
Quad axis synch reactance *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**							
Quad axis sub-transient reactance *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**							
Stator leakage reactance *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**							

Armature winding direct current resistance. *(PC.A.5.3.2(a))*	% on MVA	□		**DPD I**								
In Scotland, negative sequence resistance *(PC.A.2.5.6 (a) (iv)*	% on MVA	□		**DPD I**								

Note:- the above data item relating to armature winding direct-current resistance need only be provided by **Generators** in relation to **Generating Units** or **Synchronous Generating Units** within **Power Generating Modules** commissioned after 1st March 1996 and in cases where, for whatever reason, the **Generator** is aware of the value of the data item.

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
TIME CONSTANTS (Short-circuit and Unsaturated)											
Direct axis transient time constant *(PC.A.5.3.2(a))*	S	□		**DPD I**							
Direct axis sub-transient time constant *(PC.A.5.3.2(a))*	S	□		**DPD I**							
Quadrature axis sub-transient time constant *(PC.A.5.3.2(a))*	S	□		**DPD I**							
Stator time constant *(PC.A.5.3.2(a))*	S	□		**DPD I**							
MECHANICAL PARAMETERS *(PC.A.5.3.2(a))*											
The number of turbine generator masses		□		DPD II							
Diagram showing the Inertia and parameters for each turbine generator mass for the complete drive train	Kgm^2	□		DPD II DPD II							
Diagram showing Stiffness constants and parameters between each turbine generator mass for the complete drive train	Nm/rad	□		DPD II DPD II							
Number of poles		□		DPD II							
Relative power applied to different parts of the turbine	%	□		DPD II							
Torsional mode frequencies	Hz	□		DPD II							
Modal damping decrement factors for the different mechanical modes		□		DPD II							
GENERATING UNIT STEP-UP TRANSFORMER											
Rated MVA *(PC.A.3.3.1 & PC.A.5.3.2)*	MVA	□	■	**SPD+**							
Voltage Ratio *(PC.A.5.3.2)*	-	□		**DPD I**							
Positive sequence reactance: *(PC.A.5.3.2)*											
Max tap	% on MVA	□	■	**SPD+**							
Min tap	% on MVA	□	■	**SPD+**							
Nominal tap	% on MVA	□	■	**SPD+**							
Positive sequence resistance: *(PC.A.5.3.2)*											
Max tap	% on MVA	□		**DPD II**							
Min tap	% on MVA	□		**DPD II**							
Nominal tap	% on MVA	□		**DPD II**							
Zero phase sequence reactance *(PC.A.5.3.2)*	% on MVA	□		**DPD II**							
Tap change range *(PC.A.5.3.2)*	+% / -%	□		**DPD II**							
Tap change step size *(PC.A.5.3.2)*	%	□		**DPD II**							
Tap changer type: on-load or off-circuit *(PC.A.5.3.2)*	On/Off	□		**DPD II**							

Public

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL** CUSC Contract	DATA to **RTL** CUSC App. Form	DATA CAT.	**GENERATING UNIT** OR STATION DATA G1	G2	G3	G4	G5	G6	STN
EXCITATION:											
Note: The data items requested under Option 1 below may continue to be provided by **Generators** in relation to **Generating Units** on the **System** at 9 January 1995 (in this paragraph, the "relevant date") or they may provide the new data items set out under Option 2. **Generators** must supply the data as set out under Option 2 (and not those under Option 1) for **Generating Unit** and **Synchronous Power Generating Unit** excitation control systems commissioned after the relevant date, those **Generating Unit** or **Synchronous Power Generating Unit** excitation control systems recommissioned for any reason such as refurbishment after the relevant date and **Generating Unit** or **Synchronous Power Generating Unit** excitation control systems where, as a result of testing or other process, the **Generator** is aware of the data items listed under Option 2 in relation to that **Generating Unit** or **Synchronous Power Generating Unit**.											
Option 1											
DC gain of **Excitation Loop** *(PC.A.5.3.2(c))*		□		**DPD II**							
Max field voltage *(PC.A.5.3.2(c))*	V	□		**DPD II**							
Min field voltage *(PC.A.5.3.2(c))*	V	□		**DPD II**							
Rated field voltage *(PC.A.5.3.2(c))*	V	□		**DPD II**							
Max rate of change of field volts: *(PC.A.5.3.2(c))*											
Rising	V/Sec	□		**DPD II**							
Falling	V/Sec	□		**DPD II**							
Details of **Excitation Loop** *(PC.A.5.3.2(c))* Described in block diagram form showing transfer functions of individual elements	Diagram	□		**DPD II**	(please attach)						
Dynamic characteristics of over- excitation limiter *(PC.A.5.3.2(c))*		□		**DPD II**							
Dynamic characteristics of under-excitation limiter *(PC.A.5.3.2(c))*		□		**DPD II**							
Option 2											
Exciter category, e.g. **Rotating Exciter**, or **Static Exciter** etc *(PC.A.5.3.2(c))*	Text	□	■	**SPD**							
Excitation System Nominal Response V_E	Sec^{-1}	□		**DPD II**							
Rated Field Voltage *(PC.A.5.3.2(c))* U_{fN}	V	□		**DPD II**							
No-load Field Voltage *(PC.A.5.3.2(c))* U_{fO}	V	□		**DPD II**							
Excitation System On-Load *(PC.A.5.3.2(c))* **Positive Ceiling Voltage** U_{pL+}	V	□		**DPD II**							
Excitation System No-Load *(PC.A.5.3.2(c))* **Positive Ceiling Voltage** U_{pO+}	V	□		**DPD II**							
Excitation System No-Load *(PC.A.5.3.2(c))* **Negative Ceiling Voltage** U_{pO-}	V	□		**DPD II**							
Power System Stabiliser (PSS) fitted *(PC.A.3.4.2)*	Yes/No	□	■	**SPD**							
Stator Current Limit (PC.A.5.3.2(c))	A	□		**DPD II**							
Details of **Excitation System** *(PC.A.5.3.2(c))* (including **PSS** if fitted) described in block diagram form showing transfer functions of individual elements.	Diagram	□		**DPD II**							
Details of **Over-excitation Limiter** *(PC.A.5.3.2(c))* described in block diagram form showing transfer functions of individual elements.	Diagram	□		**DPD II**							
Details of **Under-excitation Limiter**		□									

Public

(PC.A.5.3.2(c)) described in block diagram form showing transfer functions of individual elements.	Diagram			**DPD II**							

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
GOVERNOR AND ASSOCIATED PRIME MOVER PARAMETERS											
Note: The data items requested under Option 1 below may continue to be provided by **Generators** in relation to **Generating Units** on the **System** at 9 January 1995 (in this paragraph, the "relevant date") or they may provide the new data items set out under Option 2. **Generators** must supply the data as set out under Option 2 (and not those under Option 1) for **Generating Unit** and **Synchronous Power Generating Unit** governor control systems commissioned after the relevant date, those **Generating Unit** and **Synchronous Power Generating Unit** governor control systems recommissioned for any reason such as refurbishment after the relevant date and **Generating Unit** and **Synchronous Power Generating Unit** governor control systems where, as a result of testing or other process, the **Generator** is aware of the data items listed under Option 2 in relation to that **Generating Unit** and **Synchronous Power Generating Unit**.											
Option 1											
GOVERNOR PARAMETERS (REHEAT UNITS) *(PC.A.5.3.2(d) – Option 1(i))*											
HP Governor average gain	MW/Hz	□		**DPD II**							
Speeder motor setting range	Hz	□		**DPD II**							
HP governor valve time constant	S	□		**DPD II**							
HP governor valve opening limits		□		**DPD II**							
HP governor valve rate limits		□		**DPD II**							
Re-heat time constant (stored **Active Energy** in reheater)	S	□		**DPD II**							
IP governor average gain	MW/Hz	□		**DPD II**							
IP governor setting range	Hz	□		**DPD II**							
IP governor time constant	S	□		**DPD II**							
IP governor valve opening limits		□		**DPD II**							
IP governor valve rate limits		□		**DPD II**							
Details of acceleration sensitive elements HP & IP in governor loop		□		**DPD II**	(please attach)						
Governor block diagram showing transfer functions of individual elements		□		**DPD II**	(please attach)						
GOVERNOR (Non-reheat steam and Gas Turbines) *(PC.A.5.3.2(d) – Option 1(ii))*											
Governor average gain	MW/Hz	□		**DPD II**							
Speeder motor setting range		□		**DPD II**							
Time constant of steam or fuel governor valve	S	□		**DPD II**							
Governor valve opening limits		□		**DPD II**							
Governor valve rate limits		□		**DPD II**							
Time constant of turbine	S	□		**DPD II**							
Governor block diagram		□		**DPD II**	(please attach)						

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
(PC.A.5.3.2(d) – Option 1(iii))											
BOILER & STEAM TURBINE DATA*											
Boiler time constant (Stored **Active Energy**)	S			**DPD II**							
HP turbine response ratio: (Proportion of **Primary Response** arising from HP turbine)	%			**DPD II**							
HP turbine response ratio: (Proportion of **High Frequency Response** arising from HP turbine)	%			**DPD II**							
		End of Option 1									
Option 2											
All **Generating Units** and **Synchronous Power Generating Units**											
Governor Block Diagram showing transfer function of individual elements including acceleration sensitive elements		□		**DPD II**							
Governor Time Constant *(PC.A.5.3.2(d) – Option 2(i))*	Sec	□		**DPD II**							
#Governor Deadband *(PC.A.5.3.2(d) – Option 2(i))*											
- Maximum Setting	±Hz			**DPD II**							
- Normal Setting	±Hz			**DPD II**							
- Minimum Setting	±Hz			**DPD II**							
Speeder Motor Setting Range *(PC.A.5.3.2(d) – Option 2(i))*	%	□		**DPD II**							
Average Gain *(PC.A.5.3.2(d) – Option 2(i))*	MW/Hz	□		**DPD II**							
Steam Units *(PC.A.5.3.2(d) – Option 2(ii))*											
HP Valve Time Constant	sec	□		**DPD II**							
HP Valve Opening Limits	%	□		**DPD II**							
HP Valve Opening Rate Limits	%/sec	□		**DPD II**							
HP Valve Closing Rate Limits	%/sec	□		**DPD II**							
HP Turbine Time Constant *(PC.A.5.3.2(d) – Option 2(ii))*	sec	□		**DPD II**							
IP Valve Time Constant	sec	□		**DPD II**							
IP Valve Opening Limits	%	□		**DPD II**							
IP Valve Opening Rate Limits	%/sec	□		**DPD II**							
IP Valve Closing Rate Limits	%/sec	□		**DPD II**							
IP Turbine Time Constant *(PC.A.5.3.2(d) – Option 2(ii))*	sec	□		**DPD II**							
LP Valve Time Constant	sec	□		**DPD II**							
LP Valve Opening Limits	%	□		**DPD II**							
LP Valve Opening Rate Limits	%/sec	□		**DPD II**							
LP Valve Closing Rate Limits	%/sec	□		**DPD II**							
LP Turbine Time Constant *(PC.A.5.3.2(d) – Option 2(ii))*	sec	□		**DPD II**							
Reheater Time Constant	sec			**DPD II**							
Boiler Time Constant	sec			**DPD II**							
HP Power Fraction	%			**DPD II**							
IP Power Fraction	%			**DPD II**							

Where the generating unit or synchronous power generating unit governor does not have a selectable deadband facility, then the actual value of the deadband need only be provided.

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Gas Turbine Units											
(PC.A.5.3.2(d) – Option 2(iii))											
Inlet Guide Vane Time Constant	sec	□		**DPD II**							
Inlet Guide Vane Opening Limits	%	□		**DPD II**							
Inlet Guide Vane Opening Rate Limits	%/sec	□		**DPD II**							
Inlet Guide Vane Closing Rate Limits	%/sec	□		**DPD II**							
(PC.A.5.3.2(d) – Option 2(iii))											
Fuel Valve Time Constant	sec	□		**DPD II**							
Fuel Valve Opening Limits	%	□		**DPD II**							
Fuel Valve Opening Rate Limits	%/sec	□		**DPD II**							
Fuel Valve Closing Rate Limits	%/sec	□		**DPD II**							
(PC.A.5.3.2(d) – Option 2(iii))											
Waste Heat Recovery Boiler Time Constant											
Hydro **Generating Units**											
(PC.A.5.3.2(d) – Option 2(iv))											
Guide Vane Actuator Time Constant	sec	□		**DPD II**							
Guide Vane Opening Limits	%	□		**DPD II**							
Guide Vane Opening Rate Limits	%/sec	□		**DPD II**							
Guide Vane Closing Rate Limits	%/sec	□		**DPD II**							
Water Time Constant	sec	□		**DPD II**							
Synchronous Electricity Storage Units and **Modules** (PC.A.5.3.2(d) – Option 2(v)											
Valve Actuator Time Constant	sec	□		DPD II							
Valve Opening Limits	%	□		DPD II							
Valve Opening Rate Limits	%/sec	□		DPD II							
Valve Closing Rate Limits	%/sec	□		DPD II							
For **Synchronous Electricity Storage Modules** which are derived from compressed air energy storage systems the above data should be provided. For other **Synchronous Electricity Storage Modules** data should be supplied as required by **The Company** in accordance with PC.A.7.											
		End of Option 2									
UNIT CONTROL OPTIONS*											
(PC.A.5.3.2(e)											
Maximum droop	%			**DPD II**							
Normal droop	%	□		**DPD II**							
Minimum droop	%			**DPD II**							
Maximum **Governor Deadband**				**DPD II**							
Normal **Governor Deadband**				**DPD II**							
Minimum **Governor Deadband**											
Maximum **Frequency Response Deadband**[1]	±Hz			**DPD II**							
Normal **Frequency Response Deadband**[1]	±Hz			**DPD II**							
Minimum **Frequency Response Deadband**[1]	±Hz			**DPD II**							
Maximum **Frequency Response Insensitivity**[1]	±Hz			**DPDII**							
Normal **Frequency Response Insensitivity**[1]	±Hz			**DPDII**							
Minimum **Frequency Response Insensitivity**[1]	±Hz			**DPDII**							

	±Hz ±Hz ±Hz										
Frequency settings between which Unit Load Controller droop applies:											
Maximum	Hz			**DPD II**							
Normal	Hz			**DPD II**							
Minimum	Hz			**DPD II**							
Sustained response normally selected	Yes/No			**DPD II**							
[1] Data required only in respect of **Large Power Stations** comprising **Type C** and **Type D Power Generating Modules** owned and operated by **EU Code Generators**.											

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

PAGE 10 OF 19

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**POWER PARK UNIT** (OR **POWER PARK MODULE**, AS THE CASE MAY BE)						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Power Park Module Rated MVA *(PC.A.3.3.1(a))*	MVA	□	■	**SPD+**							
Power Park Module Rated MW *(PC.A.3.3.1(a))*	MW	□	■	**SPD+**							
*Performance Chart of a **Power Park Module** at the connection point *(PC.A.3.2.2(f)(ii))*				**SPD**	(see **OC2** for specification)						
***Output Usable** (on a monthly basis) *(PC.A.3.2.2(b))*	MW			**SPD**	(except in relation to **CCGT Modules** when required on a unit basis under the **Grid Code**, this data item may be supplied under Schedule 3)						
Number & Type of **Power Park Units** within each **Power Park Module** *(PC.A.3.2.2(k))*		□		**SPD**							
Number & Type of **Offshore Power Park Units** within each **Offshore Power Park String** and the number of **Offshore Power Park Strings** and connection point within each **Offshore Power Park Module** *(PC.A.3.2.2.(k))*				**SPD**							
In the case where an appropriate **Manufacturer's Data & Performance Report** is registered with **The Company** then subject to **The Company's** agreement, the report reference may be given as an alternative to completion of the following sections of this Schedule 1 to the end of page 11 with the exception of the sections marked thus # below.	Reference the **Manufacturer's Data & Performance Report**			**SPD**							
Power Park Unit Model (including **Non Synchronous Electricity Storage Units**) - A validated mathematical model in accordance with PC.5.4.2 (a)	Transfer function block diagram and algebraic equations, simulation and measured test results	□		**DPD II**							

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**POWER PARK UNIT** (OR **POWER PARK MODULE**, AS THE CASE MAY BE)						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Power Park Unit Data (where applicable)											
Rated MVA *(PC.A.3.3.1(e))*	MVA	□	■	**SPD+**							
Rated MW *(PC.A.3.3.1(e))*	MW	□	■	**SPD+**							
Rated terminal voltage *(PC.A.3.3.1(e))*	V	□	■	**SPD+**							
Site minimum air density *(PC.A.5.4.2(b))*	kg/m^3	□	■	**DPD II**							
Site maximum air density	kg/m^3	□	■	**DPD II**							
Site average air density	kg/m^3	□	■	**DPD II**							
Year for which air density data is submitted		□	■	**DPD II**							
Number of pole pairs		□		**DPD II**							
Blade swept area	m^2	□		**DPD II**							
Gear Box Ratio		□		**DPD II**							
Stator Resistance *(PC.A.5.4.2(b))*	% on MVA	□	■	**SPD+**							
Stator Reactance *(PC.A.3.3.1(e))*	% on MVA	□	■	**SPD+**							
Magnetising Reactance *(PC.A.3.3.1(e))*	% on MVA	□	■	**SPD+**							
Rotor Resistance (at starting). *(PC.A.5.4.2(b))*	% on MVA	□		**DPD II**							
Rotor Resistance (at rated running) *(PC.A.3.3.1(e))*	% on MVA	□	■	**SPD+**							
Rotor Reactance (at starting). *(PC.A.5.4.2(b))*	% on MVA	□		**DPD II**							
Rotor Reactance (at rated running) *(PC.A.3.3.1(e))*	% on MVA	□	■	**SPD**							
Equivalent inertia constant of the first mass (e.g. wind turbine rotor and blades) at minimum speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent inertia constant of the first mass (e.g. wind turbine rotor and blades) at synchronous speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent inertia constant of the first mass (e.g. wind turbine rotor and blades) at rated speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent inertia constant of the second mass (e.g. generator rotor) at minimum speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent inertia constant of the second mass (e.g. generator rotor) at synchronous speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent inertia constant of the second mass (e.g. generator rotor) at rated speed *(PC.A.5.4.2(b))*	MW secs /MVA	□	■	**SPD+**							
Equivalent shaft stiffness between the two masses *(PC.A.5.4.2(b))*	Nm / electrical radian	□	■	**SPD+**							

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**POWER PARK UNIT** (OR **POWER PARK MODULE**, AS THE CASE MAY BE)						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Minimum generator rotor speed (Doubly Fed Induction Generators) *(PC.A.3.3.1(e))*	RPM	□	■	**SPD+**							
Maximum generator rotor speed (Doubly Fed Induction Generators) *(PC.A.3.3.1(e))*	RPM	□	■	**SPD+**							
The optimum generator rotor speed versus wind speed *(PC.A.5.4.2(b))*	tabular format	□		**DPD II**							
Power Converter Rating (Doubly Fed Induction Generators) *(PC.A.5.4.2(b))*	MVA	□	■	**DPD II**							
The rotor power coefficient (C_p) versus tip speed ratio (λ) curves for a range of blade angles (where applicable) *(PC.A.5.4.2(b))*	Diagram + tabular format	□		**DPD II**							
# The electrical power output versus generator rotor speed for a range of wind speeds over the entire operating range of the **Power Park Unit**. *(PC.A.5.4.2(b))*	Diagram + tabular format	□		**DPD II**							
The blade angle versus wind speed curve *(PC.A.5.4.2(b))*	Diagram + tabular format	□		**DPD II**							
The electrical power output versus wind speed over the entire operating range of **the Power Park Unit**. *(PC.A.5.4.2(b))*	Diagram + tabular format	□		**DPD II**							
Transfer function block diagram, parameters and description of the operation of the power electronic converter including fault ride though capability (where applicable). *(PC.A.5.4.2(b))*	Diagram	□		**DPD II**							
For a **Power Park Unit** consisting of a synchronous machine in combination with a back to back **DC Converter** or **HVDC Converter**, or for a **Power Park Unit** not driven by a wind turbine, the data to be supplied shall be agreed with **The Company** in accordance with PC.A.7. *(PC.A.5.4.2(b))*		□									

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**POWER PARK UNIT** (OR **POWER PARK MODULE**, AS THE CASE MAY BE)						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Torque / Speed and blade angle control systems and parameters *(PC.A.5.4.2(c))* For the **Power Park Unit**, details of the torque / speed controller and blade angle controller in the case of a wind turbine and power limitation functions (where applicable) described in block diagram form showing transfer functions and parameters of individual elements	Diagram	□		**DPD II**							
# Voltage/**Reactive Power**/**Power Factor** control system parameters *(PC.A.5.4.2(d))* # For the **Power Park Unit** and **Power Park Module** details of **Voltage/Reactive Power/Power Factor** controller (and **PSS** if fitted) described in block diagram form including parameters showing transfer functions of individual elements.	Diagram	□		**DPD II**							
# Frequency control system parameters *(PC.A.5.4.2(e))* # For the **Power Park Unit** and **Power Park Module** details of the **Frequency** controller described in block diagram form showing transfer functions and parameters of individual elements.	Diagram	□		**DPD II**							
As an alternative to PC.A.5.4.2 (a), (b), (c), (d), (e) and (f), is the submission of a single complete model that consists of the full information required under PC.A.5.4.2 (a), (b), (c), (d) (e) and (f) provided that all the information required under PC.A.5.4.2 (a), b), (c), (d), (e) and (f) individually is clearly identifiable. *(PC.A.5.4.2(g))*	Diagram	□		**DPD II**							
# Harmonic Assessment Information *(PC.A.5.4.2(h))* (as defined in IEC 61400-21 (2001)) for each **Power Park Unit**:-											
# Flicker coefficient for continuous operation		□		**DPD I**							
# Flicker step factor		□		**DPD I**							
# Number of switching operations in a 10 minute window		□		**DPD I**							
# Number of switching operations in a 2 hour window		□		**DPD I**							
# Voltage change factor		□		**DPD I**							
# Current Injection at each harmonic for each **Power Park Unit** and for each **Power Park Module**	Tabular format	□		**DPD I**							
Note:- **Generators** who own or operate **DC Connected Power Park Modules** shall supply all data for their **DC Connected Power Park Modules** as applicable to **Power Park Modules**.											

Public

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

HVDC SYSTEM AND DC CONVERTER STATION TECHNICAL DATA

HVDC SYSTEM OR DC CONVERTER STATION NAME DATE:_____

Data Description	Units	DATA to **RTL**		Data Category	**DC Converter Station** Data
(PC.A.4)		CUSC Contract	CUSC App. Form		
HVDC SYSTEM AND **DC CONVERTER STATION** DEMANDS:					
Demand supplied through **Station Transformers** associated with the **DC Converter Station** and **HVDC System [PC.A.4.1]**	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** with all **DC Converters** and **HVDC Converters** within and HVDc System operating at **Rated MW** import.	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** with all **DC Converters** and **HVDC Converters** within an HVDC System operating at **Rated MW** export.					
Additional **Demand** associated with the **DC Converter Station or HVDC System** supplied through the **National Electricity Transmission System**. **[PC.A.4.1]**	MW MVAr	□ □		**DPD II** **DPD II**	
- The maximum **Demand** that could occur.	MW MVAr	□ □ □ □		**DPD II** **DPD II**	
- **Demand** at specified time of annual peak half hour of **The Company Demand** at **Annual ACS Conditions**.	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** at specified time of annual minimum half-hour of **The Company Demand**.	Text	□	■	**SPD+**	
DC CONVERTER STATION AND **HVDC SYSTEM** DATA	Text	□	■	**SPD+**	
Number of poles, i.e. number of **DC Converters** or **HVDC Converters** within the **HVDC System**		□ □	■ ■ ■ ■ ■	**SPD+**	
Pole arrangement (e.g. monopole or bipole)		□	■		
Details of each viable operating configuration Configuration 1	Diagram Diagram Diagram	□ □	■	**SPD**	

Public

Configuration 2 Configuration 3 Configuration 4 Configuration 5 Configuration 6 Remote ac connection arrangement	Diagram Diagram Diagram Diagram	□ □ □ □ □			

SCHEDULE 1 – POWER PARK MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating Configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
DC CONVERTER STATION AND HVDC SYSTEM DATA *(PC.A.3.3.1d)*										
DC Converter or **HVDC Converter** Type (e.g. current or Voltage source)	Text	□	■	**SPD**						
Point of connection to the **National Electricity Transmission System** (or the **Total System** if **Embedded**) of the **DC Converter Station** or **HVDC System** configuration in terms of geographical and electrical location and system voltage	Text	□	■	**SPD**						
If the busbars at the **Connection Point** are normally run in separate sections identify the section to which the **DC Converter Station** or **HVDC System** configuration is connected	Section Number	□	■	**SPD**						
	MW			**SPD +**						
Rated MW import per pole **[PC.A.3.3.1]**	MW	□	■	**SPD +**						
Rated MW export per pole **[PC.A.3.3.1]**		□	■							

Public

Data Description	Units	DATA to **RTL**		Data Category	Operating Configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
ACTIVE POWER TRANSFER CAPABILITY (PC.A.3.2.2)										
Registered Capacity	MW	□	■	**SPD**						
Registered Import Capacity	MW	□	■							
Minimum Generation	MW	□	■	**SPD**						
Minimum Import Capacity	MW	□	■							
Maximum HVDC Active Power Transmission Capacity	MW	□		**SPD**						
Minimum Active Power Transmission Capacity	MW	□		**SPD**						
Import MW available in excess of **Registered Import Capacity** and **Maximum Active Power Transmission Capacity**	MW	□		**SPD**						
Time duration for which MW in excess of **Registered Import Capacity** is available	Min	□		**SPD**						
Export MW available in excess of **Registered Capacity** and **Maximum Active Power Transmission Capacity**.	MW	□		**SPD**						
Time duration for which MW in excess of **Registered Capacity** is available	Min	□		**SPD**						

Public

SCHEDULE 1 –POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating Configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
DC CONVERTER AND **HVDC CONVERTER** TRANSFORMER **[PC.A.5.4.3.1]**										
Rated MVA	MVA	□		**DPD II**						
Winding arrangement		□								
Nominal primary voltage	kV	□		**DPD II**						
Nominal secondary (converter-side) voltage(s)	kV			**DPD II**						
Positive sequence reactance										
Maximum tap	% on MVA	□		**DPD II**						
Nominal tap	% on MVA	□		**DPD II**						
Minimum tap	% on MVA	□		**DPD II**						
Positive sequence resistance										
Maximum tap	% on MVA	□		**DPD II**						
Nominal tap	% on MVA	□		**DPD II**						
Minimum tap	% on MVA	□		**DPD II**						
Zero phase sequence reactance	% on MVA	□		**DPD II**						
Tap change range	+% / -%	□		**DPD II**						
Number of steps				**DPD II**						

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), DC CONNECTED POWER PARK MODULE, HVDC SYSTEM, POWER PARK MODULE AND DC CONVERTER TECHNICAL DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
DC NETWORK [PC.A.5.4.3.1 (c)]										
Rated DC voltage per pole	kV	□		**DPD II**						
Rated DC current per pole	A	□		**DPD II**						
Details of the **DC Network** described in diagram form including resistance, inductance and capacitance of all DC cables and/or DC lines. Details of any line reactors (including line reactor resistance), line capacitors, DC filters, earthing electrodes and other conductors that form part of the **DC Network** should be shown.	Diagram	□		**DPD II**						
DC CONVERTER STATION AND **HVDC SYSTEM** AC HARMONIC FILTER AND REACTIVE COMPENSATION EQUIPMENT **[PC.A.5.4.3.1 (d)]**	Diagram									
For all switched reactive compensation equipment	Text	□		**DPD II**						
Total number of AC filter banks	Diagram		■	**DPD II**						
Diagram of filter connections	Text		■	**DPD II**						
Type of equipment (e.g. fixed or variable)	MVAr	□	■	**DPD II**						
Capacitive rating; or	MVAr	□		**DPD II**						
Inductive rating; or	MVAr	□		**DPD II**						
Operating range	Table	□		**DPD II**						
Reactive Power capability as a function of various MW transfer levels		□		**DPD II**						

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
CONTROL SYSTEMS **[PC.A.5.4.3.2]**										
Static V_{DC} – P_{DC} (DC voltage – DC power) or Static V_{DC} – I_{DC} (DC voltage – DC current) characteristic (as appropriate) when operating as –Rectifier –Inverter										
Details of rectifier mode control system, in block diagram form together with parameters showing transfer functions of individual elements.	Diagram Diagram	□ □		**DPD II** **DPD II**						
Details of inverter mode control system, in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Details of converter transformer tap changer control system in block diagram form showing transfer functions of individual elements including parameters. (Only required for **DC Converters** and **HVDC Systems** connected to the **National Electricity Transmission System**.)	Diagram	□		**DPD II**						
Details of AC filter and reactive compensation equipment control systems in block diagram form showing transfer functions of individual elements including parameters. (Only required for **DC Converters** and **HVDC Systems** connected to the **National Electricity Transmission System**.)	Diagram	□		**DPD II**						
Details of any frequency and/or load control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Details of any large or small signal modulating controls, such as power oscillation damping controls or sub-synchronous oscillation damping controls, that have not been submitted as part of the above control system data.	Diagram	□		**DPD II**						
Details of **HVDC Converter** unit models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram			**DPD II**						
Details of AC component models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram □ □			**DPD II**						
Details of DC Grid models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Details of Voltage and power controller and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Details of Special control features if applicable (e.g., power oscillation damping (POD) function, subsynchronous torsional interaction (SSTI) control and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram □ Diagram	□		**DPD II** **DPD II**						

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
Details of Multi terminal control, if applicable and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Details of **HVDC System** protection models as agreed between **The Company** the **HVDC System Owner** and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
Transfer block diagram representation of the reactive power control at converter ends for a voltage source converter		□								
Transfer block diagram representation of the reactive power control at converter ends for a voltage source converter.		□								
		□								
		□								
		□								
		□								
		□								

PAGE 18 OF 19

SCHEDULE 1 – POWER GENERATING MODULE, GENERATING UNIT (OR CCGT MODULE), POWER PARK MODULE, DC CONNECTED POWER PARK MODULE, HVDC SYSTEM AND DC CONVERTER TECHNICAL DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
LOADING PARAMETERS **[PC.A.5.4.3.3]**										
MW Export										
Nominal loading rate	MW/s			**DPD I**						
Maximum (emergency) loading rate	MW/s			**DPD I**						
MW Import										
Nominal loading rate	MW/s			**DPD I**						
Maximum (emergency) loading rate	MW/s			**DPD I**						
Maximum recovery time, to 90% of pre-fault loading, following an AC system fault or severe voltage depression.	s	□		**DPD II**						
Maximum recovery time, to 90% of pre-fault loading, following a transient DC Network fault.	s	□		**DPD II**						

NOTE: **Users** are referred to Schedules 5 & 14 which set down data required for all **Users** directly connected to the **National Electricity Transmission System**, including **Power Stations**. **Generators** undertaking **OTSDUW Arrangements** and are utilising an **OTSDUW DC Converter** are referred to Schedule 18.

Public

SCHEDULE 2 - GENERATION PLANNING PARAMETERS

This schedule contains the **Genset Generation Planning Parameters** required by **The Company** to facilitate studies in **Operational Planning** timescales.

For a **Generating Unit** including those within a **Power Generating Module** (other than a **Power Park Unit**) at a **Large Power Station**, the information is to be submitted on a unit basis and for a **CCGT Module** or **Power Park Module** at a **Large Power Station** the information is to be submitted on a module basis, unless otherwise stated.

Where references to **CCGT Modules** or **Power Park Modules** at a **Large Power Station** are made, the columns "G1" etc should be amended to read "M1" etc, as appropriate.

Restoration Contractors, data only needs to be provided by a **Restoration Contractor** where they are not a **CUSC Party** and the data has not been submitted. In this case the data to be submitted would be pursant to the the terms of the **Anchor Restoration Contract** or **Top Up Restoration Contract** if required.

Power Station: _____

Generation Planning Parameters

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENSET** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
OUTPUT CAPABILITY *(PC.A.3.2.2)*											
Registered Capacity on a station and unit basis (on a station and module basis in the case of a **CCGT Module** or **Power Park Module** at a **Large Power Station**)	MW	□	■	**SPD**							
Maximum Capacity on a **Power Generating Module basis** and **Synchronous Generating Unit** basis and **Registered Capacity** on a **Power Station** basis**)**	MW	□	■	**SPD**							
Minimum Generation (on a module basis in the case of a **CCGT Module** or **Power Park Module** at a **Large Power Station**)	MW	□	■	**SPD**							
Minimum Stable Operating Level (on a module basis in the case of a **Power Generating Module** at a **Large Power Station**	MW	□	■	**SPD**							
MW available from **Power Generating Modules** and **Generating Units** or **Power Park Modules** in excess of **Registered Capacity** or **Maximum Capacity**	MW	□	■	**SPD**							
REGIME UNAVAILABILITY											
These data blocks are provided to allow fixed periods of unavailability to be registered.											
Expected Running Regime. Is **Power Station** normally available for full output 24 hours per day, 7 days per week? If No please provide details of unavailability below. *(PC.A.3.2.2.)*		□	■	**SPD**							
Earliest **Synchronising** time: *OC2.3.2.1(a)*											
Monday	hr/min	■		**OC2**							-
Tuesday – Friday	hr/min	■		**OC2**							-
Saturday – Sunday	hr/min	■		**OC2**							-
Latest **De-Synchronising** time: *OC2.3.2.1(a)*											
Monday – Thursday	hr/min	■		**OC2**							-
Friday	hr/min	■		**OC2**							-
Saturday – Sunday	hr/min	■		**OC2**							-

Public

SYNCHRONISING PARAMETERS											
OC2.3.2.1(a) Notice to Deviate from Zero (NDZ) after 48 hour **Shutdown**	Mins	■		**OC2**							
Station **Synchronising** Intervals (SI) after 48 hour **Shutdown**	Mins	■			-	-	-	-	-	-	
Synchronising Group (if applicable)	1 to 4	■		**OC2**							-

Public

SCHEDULE 2 - GENERATION PLANNING PARAMETERS
PAGE 2 OF 3

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENSET** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
Synchronising Generation (SYG) after 48 hour **Shutdown** *PC.A.5.3.2(f) & OC2.3.2.1(a)*	MW	■		**DPD II & OC2**							-
De-Synchronising Intervals (Single value) *OC2.3.2.1(a)*	Mins	■		**OC2**	-	-	-	-	-	-	
RUNNING AND **SHUTDOWN** PERIOD LIMITATIONS:											
Minimum Non Zero time (MNZT) after 48 hour **Shutdown** *OC2.3.2.1(a)*	Mins	■		**OC2**							
Minimum Zero time (MZT) *OC2.3.2.1(a)*	Mins			**OC2**							
Existing AGR Plant Flexibility Limit (**Existing AGR Plant** only)	No.			**OC2**							
80% Reactor Thermal Power (expressed as Gross-Net MW) (**Existing AGR Plant** only)	MW			**OC2**							
Frequency Sensitive AGR Unit Limit (**Frequency Sensitive AGR Units** only)	No.			**OC2**							
RUN-UP PARAMETERS *PC.A.5.3.2(f) & OC2.3.2.1(a)*											
Run-up rates (RUR) after 48 hour **Shutdown**: (See note 2 page 3)	(Note that for DPD only a single value of run-up rate from Synch Gen to Registered Capacity is required)										
MW Level 1 (MWL1)	MW	■		**DPD II OC2**							-
MW Level 2 (MWL2)	MW	■		**DPD II OC2**							-
RUR from Synch. Gen to MWL1	MW/Mins	■		**DPD II OC2**							
RUR from MWL1 to MWL2	MW/Mins	■		**OC2**							
RUR from MWL2 to RC	MW/Mins	■		**OC2**							
Run-Down Rates (RDR):	(Note that for DPD only a single value of run-down rate from Registered Capacity to de-synch is required)										
MWL2	MW	■		**DPD II OC2**							
RDR from RC to MWL2	MW/Min	■		**DPD II OC2**							
MWL1	MW	■		**DPD II OC2**							
RDR from MWL2 to MWL1	MW/Min	■		**DPD II OC2**							
RDR from MWL1 to de-synch	MW/Min	■		**DPD II OC2**							

Public

SCHEDULE 2 - GENERATION PLANNING PARAMETERS

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENSET** OR STATION DATA						
		CUSC Contract	CUSC App. Form		G1	G2	G3	G4	G5	G6	STN
REGULATION PARAMETERS *OC2.3.2.1(a)*											
Regulating Range	MW	■		**DPD II**							
Load rejection capability while still **Synchronised** and able to supply **Load**.	MW	■		**DPD II**							
GAS TURBINE LOADING PARAMETERS: *OC2.3.2.1(a)*											
Fast loading	MW/Min	■		**OC2**							
Slow loading	MW/Min	■		**OC2**							
CCGT MODULE PLANNING MATRIX				**OC2**	(please attach)						
POWER PARK MODULE PLANNING MATRIX				**OC2**	(please attach)						
Power Park Module Active Power Output/ Intermittent Power Source Curve (e.g., MW output / Wind speed)				**OC2**	(please attach)						

NOTES:

(1) To allow for different groups of **Gensets** within a **Power Station** (e.g., **Gensets** with the same operator) each **Genset** may be allocated to one of up to four **Synchronising Groups**. Within each such **Synchronising Group** the single synchronising interval will apply but between **Synchronising Groups** a zero synchronising interval will be assumed.

(2) The run-up of a **Genset** from synchronising block load to **Registered Capacity** or **Maximum Capacity** is represented as a three stage characteristic in which the run-up rate changes at two intermediate loads, MWL1 and MWL2. The values MWL1 & MWL2 can be different for each **Genset**.

SCHEDULE 3 - LARGE POWER STATION OUTAGE PROGRAMMES, OUTPUT USABLE AND INFLEXIBILITY INFORMATION

PAGE 1 OF 1

(Also outline information on contracts involving **External Interconnections**)

For a **Generating Unit** at a **Large Power Station** the information is to be submitted on a unit basis and for a **CCGT Module** or **Power Park Module** at a **Large Power Station** the information is to be submitted on a module basis, unless otherwise stated.

In the case of **Restoration Contractors**, data only needs to be provided by a **Restoration Contractor** where such a **Resoration Contractor** is not a **CUSC Party** and the data has not been submitted previously. In this case, the data to be submitted would be would be pursant to the the terms of the **Anchor Restoration Contract** or **Top Up Restoration Contract**.

DATA DESCRIPTION	UNITS	TIME COVERED	UPDATE TIME	DATA CAT	DATA to **RTL**	
OUTPUT PROFILES						
					CUSC Contract	CUSC App. Form
In the case of **Large Power Stations** whose output may be expected to vary in a random manner (e.g., wind power) or to some other pattern (e.g., Tidal) sufficient information is required to enable an understanding of the possible profile	MW	F. yrs 1 - 7	Week 24	**SPD**		

Notes: 1. The week numbers quoted in the Update Time column refer to standard weeks in the current year.

Public

SCHEDULE 4 - LARGE POWER STATION DROOP AND RESPONSE DATA

GOVERNOR DROOP AND RESPONSE *(PC.A.5.5 ■ CUSC Contract)*

The Data in this Schedule 4 is to be supplied by **Generators** with respect to all **Large Power Stations**, **HVDC System Owners** and by **DC Converter Station** owners (where agreed), whether directly connected or **Embedded**

DATA DESCRIPTION	NORMAL VALUE	MW	DATA CAT	DROOP%			RESPONSE CAPABILITY		
				Unit 1	Unit 2	Unit 3	**Primary**	**Secondary**	**High Frequency**
MLP1	**Designed Minimum Operating Level** or **Minimum Regulating Level** (for a **CCGT Module** or **Power Park Module**, on a modular basis assuming all units are **Synchronised**)								
MLP2	**Minimum Generation** or **Minimum Stable Operating Level** (for a **CCGT Module or Power Park Module**, or **Power Generating Module** on a modular basis assuming all units are **Synchronised**)								
MLP3	70% of **Registered Capacity** or **Maximum Capacity**								
MLP4	80% of **Registered Capacity** or **Maximum Capacity**								
MLP5	95% of **Registered Capacity** or **Maximum Capacity**								
MLP6	**Registered Capacity** or **Maximum Capacity**								

Notes:

1. The data provided in this Schedule 4 is not intended to constrain any A**ncillary Services Agreement**.
2. **Registered Capacity** or **Maximum Capacity** should be identical to that provided in Schedule 2.
3. The Governor **Droop** should be provided for each **Generating Unit** (excluding **Power Park Units**), **Power Park Module**, **HVDC Converter** or **DC Converter**. The Response Capability should be provided for each **Genset** or **DC Converter**.
4. **Primary**, **Secondary** and **High Frequency Response** are defined in CC.A.3.2 or ECC.A.3.2 and are based on a frequency ramp of 0.5Hz over 10 seconds. **Primary Response** is the minimum value of response between 10s and 30s after the frequency ramp starts, **Secondary Response** between 30s and 30 minutes, and **High Frequency Response** is the minimum value after 10s on an indefinite basis.
5. For plants which have not yet **Synchronised**, the data values of MLP1 to MLP6 should be as described above. For plants which have already **Synchronised**, the values of MLP1 to MLP6 can take any value between **Designed Operating Minimum Level** or **Minimum Regulating Level** and **Registered Capacity** or **Maximum Capacity**. If MLP1 is not provided at the **Designed Minimum Operating Level**, the value of the **Designed Minimum Operating Level** should be separately stated.
6. For the avoidance of doubt **Transmission DC Converters** and **OTSDUW DC Converters** must be capable of providing a continuous signal indicating the real time frequency measured at the **Transmission Interface Point** to the **Offshore Grid Entry Point** (as detailed in CC.6.3.7(e)(vii) and CC.6.3.7(e)(viii) or ECC.6.3..3.1.1(f) to enable **Offshore Power Generating Modules, Offshore Generating Units**, **Offshore Power Park Modules** and/or **Offshore DC Converters** to satisfy the frequency response requirements of CC.6.3.7 or ECC.6.3.7.
7. Alternative governor settigs shall be supplied by **Generators**, **HVDC System Owners** and **DC Converter Owners** where operation is required as part of **System Restoration** - as required in CC.6.3.5 or ECC.6.3.5.2 and ECC.6.3.5.5(vii).

Public

SCHEDULE 5 - USERS SYSTEM DATA

The data in this Schedule 5 is required from **Users** who are connected to the **National Electricity Transmission System** via a **Connection Point** (or who are seeking such a connection). **Generators** undertaking **OTSDUW** should use **DRC** Schedule 18 although they should still supply data under Schedule 5 in relation to their **User's System** up to the **Offshore Grid Entry Point**.

Table 5 (a)

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CATEGORY
		CUSC Contract	CUSC App. Form	
USERS SYSTEM LAYOUT *(PC.A.2.2)*				
A **Single Line Diagram** showing all or part of the **User's System** is required. This diagram shall include:-				**SPD**
(a) all parts of the **User's System**, whether existing or proposed, operating at **Supergrid Voltage**, and in Scotland and **Offshore**, also all parts of the **User System** operating at 110kV and greater,		■	■	
(b) all parts of the **User's System** operating at a voltage of 50kV and greater, and in Scotland and **Offshore** greater than 30kV, or higher which can interconnect **Connection Points**, or split bus-bars at a single **Connection Point**,		■	■	
(c) all parts of the **User's System** between **Embedded Medium Power Stations** or **Large Power Stations** or **Offshore Transmission Systems** connected to the **User's Subtransmission System** and the relevant **Connection Point** or **Interface Point**,		■	■	
(d) all parts of the **User's System** at a **Transmission Site**.		■	■	
The **Single Line Diagram** may also include additional details of the **User's Subtransmission System**, and the transformers connecting the **User's Subtransmission System** to a lower voltage. With **The Company**'s agreement, it may also include details of the **User's System** at a voltage below the voltage of the **Subtransmission System**.		■	■	
This **Single Line Diagram** shall depict the arrangement(s) of all of the existing and proposed load current carrying **Apparatus** relating to both existing and proposed **Connection Points**, showing electrical circuitry (i.e., overhead lines, underground cables, power transformers and similar equipment), operating voltages. In addition, for equipment operating at a **Supergrid Voltage**, and in Scotland and **Offshore** also at 110kV and greater, circuit breakers and phasing arrangements shall be shown.		■	■	

Public

SCHEDULE 5 - USERS SYSTEM DATA

Table 5(b)

DATA DESCRIPTION	UNITS	DATA EXCH		DATA CATEGORY
		CUSC Contract	CUSC App. Form	
REACTIVE COMPENSATION *(PC.A.2.4)*				
For independently switched reactive compensation equipment not owned by a **Relevant Transmission Licensee** connected to the **User's System** at 132kV and above, and also in Scotland and **Offshore**, connected at 33kV and above, other than power factor correction equipment associated with a customer's **Plant** or **Apparatus**:				
Type of equipment (e.g., fixed or variable)	Text	▪	▪	**SPD**
Capacitive rating; or	MVAr	▪	▪	**SPD**
Inductive rating; or	MVAr	▪	▪	**SPD**
Operating range	MVAr	▪	▪	**SPD**
Details of automatic control logic to enable operating characteristics to be determined	text and/or diagrams	▪	▪	**SPD**
Point of connection to **User's System** (electrical location and system voltage)	Text	▪	▪	**SPD**
SUBSTATION INFRASTRUCTURE *(PC.A.2.2.6(b))*				
For the infrastructure associated with any **User's** equipment at a Substation owned by a **Relevant Transmission Licensee** or operated or managed by **The Company**:-				
Rated 3-phase rms short-circuit withstand current	kA	▪	▪	**SPD**
Rated 1-phase rms short-circuit withstand current	kA	▪	▪	**SPD**
Rated Duration of short-circuit withstand	s	▪	▪	**SPD**
Rated rms continuous current	A	▪	▪	**SPD**

Public

SCHEDULE 5 – USERS SYSTEM DATA

Table 5 (c)

DATA DESCRIPTION		UNITS	DATA EXCH		DATA CATEGORY
LUMPED SUSCEPTANCES *(PC.A.2.3)*			CUSC Contract	CUSC App. Form	
Equivalent Lumped Susceptance required for all parts of the **User's Subtransmission System** which are not included in the **Single Line Diagram**.			■	■	
This should not include:			■	■	
(a)	independently switched reactive compensation equipment identified above.		■	■	
(b)	any susceptance of the **User's System** inherent in the **Demand** (**Reactive Power**) data provided in Schedule 1 (**Generator** Data) or Schedule 11 (**Connection Point** data).		■	■	
Equivalent lumped shunt susceptance at nominal **Frequency**.		% on 100 MVA	■	■	**SPD**

SCHEDULE 5 – USERS SYSTEM DATA
PAGE 4 OF 11

USER'S SYSTEM DATA

Circuit Parameters *(PC.A.2.2.4) (■ CUSC Contract & ■ CUSC Application Form)*

The data below is all **Standard Planning Data**. Details are to be given for all circuits shown on the **Single Line Diagram**

Table 5 (d)

Years Valid	Node 1	Node 2	Rated Voltage kV	Operating Voltage kV	Positive Phase Sequence % on 100 MVA			Zero Phase Sequence (self) % on 100 MVA			Zero Phase Sequence (mutual) % on 100 MVA		
					R	X	B	R	X	B	R	X	B

Notes

1. Data should be supplied for the current, and each of the nine succeeding Financial Years. This should be done by showing for which years the data is valid in the first column of the Table.

SCHEDULE 5 – USERS SYSTEM DATA

USERS SYSTEM DATA

Transformer Data *(PC.A.2.2.5)* (■ *CUSC Contract* & ■ CUSC Application Form)

The data below is all **Standard Planning Data**, and details should be shown below of all transformers shown on the **Single Line Diagram**. Details of Winding Arrangement, Tap Changer and earthing details are only required for transformers connecting the **User's** higher voltage system with its Primary Voltage System.

Table 5 (e)

Years valid	Name of Node of Connection	Trans-former	Rating MVA	Voltage Ratio		Positive Phase Sequence Reactance % on Rating			Positive Phase Sequence Resistance % on Rating			Zero Sequence Reactance % on Rating	Winding Arr	Tap Changer			Earthing Details (delete as app)*
				HV	LV	Max Tap	Min Tap	Nom Tap	Max Tap	Min Tap	Nom Tap			Range +% to -%	Step size %	Type (delete)	
																ON/ OFF	Direct/ Res/ Rea
																ON/ OFF	Direct/ Res/ Rea
																ON/ OFF	Direct/ Res/ Rea
																ON/ OFF	Direct/ Res/ Rea
																ON/ OFF	Direct/ Res/ Rea
																ON/ OFF	Direct/ Res/ Rea

*If Resistance or Ractance please give impedance value

Notes

1. Data should be supplied for the current, and each of the nine succeeding Financial Years. This should be done by showing for which years the data is valid in the first column of the Table
2. For a transformer with two secondary windings, the positive and zero phase sequence leakage impedances between the HV and LV1, HV and LV2, and LV1 and LV2 windings are required.

Public

USER'S SYSTEM DATA

Switchgear Data *(PC.A.2.2.6(a))* (■ *CUSC Contract & CUSC Application Form* ■)

The data below is all **Standard Planning Data**, and should be provided for all switchgear (i.e., circuit breakers, load disconnectors and disconnectors) operating at a **Supergrid Voltage**, and also in Scotland and **Offshore**, operating at 132kV. In addition, data should be provided for all circuit breakers irrespective of voltage located at a **Connection Site** which is owned by a **Relevant Transmission Licensee** or operated or managed by **The Company**.

Table 5(f)

Years Valid	**Connection Point**	Switch No	Rated Voltage kV rms	Operating Votage kV rms	Rated short-circuit breaking current		Rated short-circuit peak making current		Rated rms continuous current (A)	DC time constant at testing of asymmetrical breaking ability (s)
					3 Phase kA rms	1 Phase kA rms	3 Phase kA	1 Phase kA		

Notes

1. Rated Voltage should be as defined by IEC 694.

Data should be supplied for the current, and each of the nine succeeding Financial Years. This should be done by showing for which years the data is valid in the first column of the Table

Public

Table 5(g)

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CATEGORY
		CUSC Contract	CUSC App. Form	
PROTECTION SYSTEMS *(PC.A.6.3)* The following information relates only to **Protection** equipment which can trip or inter-trip or close any **Connection Point** circuit breaker or any **Transmission** circuit breaker. The information need only be supplied once, in accordance with the timing requirements set out in PC.A.1.4 (b) and need not be supplied on a routine annual basis thereafter, although **The Company** should be notified if any of the information changes.				
(a) A full description, including estimated settings, for all relays and Protection systems installed or to be installed on the **User's System**;		▪		**DPD II**
(b) A full description of any auto-reclose facilities installed or to be installed on the **User's System**, including type and time delays;		▪		**DPD II**
(c) A full description, including estimated settings, for all relays and **Protection** systems installed or to be installed on the **Power Generating Module**, **Power Park Module** or **Generating Unit's** generator transformer, unit transformer, station transformer and their associated connections;		▪		**DPD II**
(d) For **Generating Units** (other than **Power Park Units**) having a circuit breaker at the generator terminal voltage clearance times for electrical faults within the **Generating Unit** zone must be declared.		▪		**DPD II**
(e) Fault Clearance Times: Most probable fault clearance time for electrical faults on any part of the **Users System** directly connected to the **National Electricity Transmission System**.	msec	▪		**DPD II**
(f) Alternative **Protection** data as submitted under (a) to (e) above in respect of **System Restoration**		▪		**DPD II**

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CATEGORY
		CUSC Contract	CUSC App. Form	
POWER PARK MODULE/UNIT PROTECTION SYSTEMS Details of settings for the **Power Park Module/Unit** protection relays (to include): *(PC.A.5.4.2(f))*				
(a) Under frequency,		▪		**DPD II**
(b) Over Frequency,		▪		**DPD II**
(c) Under Voltage, Over Voltage,		▪		**DPD II**
(d) Rotor Over current,		▪		**DPD II**
(e) Stator Over current,		▪		**DPD II**
(f) High Wind Speed Shut Down Level,		▪		**DPD II**
(g) Rotor Underspeed,		▪		**DPD II**

Public

(h)	Rotor Overspeed.		▪		**DPD II**

SCHEDULE 5 - USERS SYSTEM DATA
PAGE 8 OF 11

Information for Transient Overvoltage Assessment (**DPD I**) *(PC.A.6.2 ■ CUSC Contract)*

The information listed below may be requested by **The Company** from each **User** with respect to any **Connection Site** between that **User** and the **National Electricity Transmission System**. The impact of any third party **Embedded** within the **Users System** should be reflected.

(a) Busbar layout plan(s), including dimensions and geometry showing positioning of any current and voltage transformers, through bushings, support insulators, disconnectors, circuit breakers, surge arresters, etc. Electrical parameters of any associated current and voltage transformers, stray capacitances of wall bushings and support insulators, and grading capacitances of circuit breakers;

(b) Electrical parameters and physical construction details of lines and cables connected at that busbar. Electrical parameters of all plant e.g., transformers (including neutral earthing impedance or zig-zag transformers if any), series reactors and shunt compensation equipment connected at that busbar (or to the tertiary of a transformer) or by lines or cables to that busbar;

(c) Basic insulation levels (BIL) of all **Apparatus** connected directly, by lines or by cables to the busbar;

(d) Characteristics of overvoltage **Protection** devices at the busbar and at the termination points of all lines, and all cables connected to the busbar;

(e) Fault levels at the lower voltage terminals of each transformer connected directly or indirectly to the **National Electricity Transmission System** without intermediate transformation;

(f) The following data is required on all transformers operating at **Supergrid Voltage** throughout **Great Britain** and, in Scotland and **Offshore**, also at greater than 110kV: three or five limb cores or single phase units to be specified, and operating peak flux density at nominal voltage.

(g) An indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

Harmonic Studies (**DPD I**) (PC.A.6.4 ■ CUSC Contract)

The information given below, both current and forecast, where not already supplied in this Schedule 5 may be requested by **The Company** from each **User** if it is necessary for **The Company** to evaluate the production/magnification of harmonic distortion on the **National Electricity Transmission System** and **User's** systems. The impact of any third party **Embedded** within the **User's System** should be reflected:

(a) Overhead lines and underground cable circuits of the **User's Subtransmission System** must be differentiated and the following data provided separately for each type:

Positive phase sequence resistance

Positive phase sequence reactance

Positive phase sequence susceptance

(b) for all transformers connecting the **User's Subtransmission System** to a lower voltage:

Rated MVA

Voltage Ratio

Positive phase sequence resistance

Positive phase sequence reactance

(c) at the lower voltage points of those connecting transformers:

Equivalent positive phase sequence susceptance

Connection voltage and MVAr rating of any capacitor bank and component design parameters if configured as a filter

Equivalent positive phase sequence interconnection impedance with other lower voltage points

The minimum and maximum **Demand** (both MW and MVAr) that could occur

Harmonic current injection sources in Amps at the Connection voltage points

Details of traction loads, e.g., connection phase pairs, continuous variation with time, etc.

(d) an indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions

Voltage Assessment Studies (**DPD I**) *(PC.A.6.5 ■ CUSC Contract)*

The information listed below, where not already supplied in this Schedule 5, may be requested by **The Company** from each **User** with respect to any **Connection Site** if it is necessary for **The Company** to undertake detailed voltage assessment studies (e.g., to examine potential voltage instability, voltage control co-ordination or to calculate voltage step changes). The impact of any third party **Embedded** within the **Users System** should be reflected:

(a) For all circuits of the **User's Subtransmission System**:

Positive Phase Sequence Reactance

Positive Phase Sequence Resistance

Positive Phase Sequence Susceptance

MVAr rating of any reactive compensation equipment

(b) for all transformers connecting the **User's Subtransmission System** to a lower voltage:

Rated MVA

Voltage Ratio

Positive phase sequence resistance

Positive Phase sequence reactance

Tap-changer range

Number of tap steps

Tap-changer type: on-load or off-circuit

AVC/tap-changer time delay to first tap movement

AVC/tap-changer inter-tap time delay

(c) at the lower voltage points of those connecting transformers:-

Equivalent positive phase sequence susceptance

MVAr rating of any reactive compensation equipment

Equivalent positive phase sequence interconnection impedance with other lower voltage points

The maximum **Demand** (both MW and MVAr) that could occur

Estimate of voltage insensitive (constant power) load content in % of total load at both winter peak and 75% off-peak load conditions

Short Circuit Analyses:(**DPD I**) *(PC.A.6.6 ■ CUSC Contract)*

The information listed below, both current and forecast, and where not already supplied under this Schedule 5, may be requested by **The Company** from each **User** with respect to any **Connection Site** where prospective short-circuit currents on equipment owned by a **Relevant Transmission Licensee** or operated or managed by **The Company** are close to the equipment rating. The impact of any third party **Embedded** within the **User's System** should be reflected:-

(a) For all circuits of the **User's Subtransmission System**:

Positive phase sequence resistance

Positive phase sequence reactance

Positive phase sequence susceptance

Zero phase sequence resistance (both self and mutuals)

Zero phase sequence reactance (both self and mutuals)

Zero phase sequence susceptance (both self and mutuals)

(b) for all transformers connecting the **User's Subtransmission System** to a lower voltage:

Rated MVA

Voltage Ratio

Positive phase sequence resistance (at max, min and nominal tap)

Positive phase sequence reactance (at max, min and nominal tap)

Zero phase sequence reactance (at nominal tap)

Tap changer range

Earthing method: direct, resistance or reactance

Impedance if not directly earthed

(c) at the lower voltage points of those connecting transformers:-

The maximum **Demand** (in MW and MVAr) that could occur

Short-circuit infeed data in accordance with PC.A.2.5.6(a) unless the **User's** lower voltage network runs in parallel with the **Subtransmission System**, when to prevent double counting in each node infeed data, a π equivalent comprising the data items of PC.A.2.5.6(a) for each node together with the positive phase sequence interconnection impedance between the nodes shall be submitted.

SCHEDULE 5 – USERS SYSTEM DATA
PAGE 11 OF 11

Dynamic Models:(**DPD II**) *(PC.A.6.7 ■ CUSC Contract)*

The information listed below, both current and forecast, and where not already supplied under this Schedule 5, may be requested by **The Company** from each **EU Code User** or in respect of each **EU Grid Supply Point** with respect to any **Connection Site**

(a) Dynamic model structure and block diagrams including parameters, transfer functions and individual elements (as applicable)

(b) Power control functions and block diagrams including parameters, transfer functions and individual elements (as applicable)

(c) Voltage control functions and block diagrams including parameters, transfer functions and individual elements (as applicable)

(d) Converter control models and block diagrams including parameters, transfer functions and individual elements (as applicable)

Public

SCHEDULE 6 – USERS OUTAGE INFORMATION

DATA DESCRIPTION	UNITS	DATA to **RTL**		TIMESCALE COVERED	UPDATE TIME	DATA CAT.
		CUSC Contract	CUSC App. Form			
Details are required from **Network Operators** of proposed outages in their **User Systems** and from **Generators** with respect to their outages, which may affect the performance of the **Total System** (e.g., at a **Connection Point** or constraining **Embedded Large Power Stations** or constraints to the **Maximum Import Capacity** or **Maximum Export Capacity** at an **Interface Point**) *(OC2.3.1.3.2(a) & (b))*. Outages of **Plant** and **Apparatus** of **Restoration Contractors** and key **Plant** and **Apparatus** of a **Network Operator's System** associated with a **Distribution Restoration Zone Plan** also need to be co-ordinated with outages on the **National Electricity Transmission System**. This includes data from **Network Operators and Restoration Contractors** which would impact the ability to operate a **Local Joint Restoration Plan** or **Distribution Restoration Zone Plan**.		■		Years 2-5	Week 8 (**Network Operator** etc) Week 13 (Generators)	**OC2** **OC2** **PC.A.5.7.2**
(**The Company** advises **Network Operators** of **National Electricity Transmission System** outages affecting their **Systems**)				Years 2-5	Week 28)	
Network Operator informs **The Company** if unhappy with proposed outages)		■		"	Week 30	**OC2**
(**The Company** draws up revised **National Electricity Transmission System** (outage plan advises **Users** of operational effects)				"	Week 34)	
Generators and **Non-Embedded Customers** provide Details of **Apparatus** owned by them (other than **Gensets**) at each **Grid Supply Point** *(OC2.3.1.3.3)*		■		Year 1	Week 13	**OC2**
(**The Company** advises **Network Operators** of outages affecting their **Systems**) (OC2.3.1.3.3)				Year 1	Week 28)	
Network Operator details of relevant outages affecting the **Total System** *(OC2.3.1.3.3)*		■		Year 1	Week 32	**OC2**
Details of:- **Maximum Import Capacity** for each **Interface Point** **Maximum Export Capacity** for each **Interface Point** Changes to previously declared values of the **Interface Point Target Voltage/Power Factor** *(OC2.3.1.4(c))*.	 MVA / MW MVA / MW V (unless power factor control			Year 1	Week 32	**OC2**
(**The Company** informs **Users** of aspects that may affect their **Systems**) (OC2.3.1.4)				Year 1	Week 34)	
Users inform **The Company** if unhappy with aspects as notified *(OC2.3.1.4)*		■		Year 1	Week 36	**OC2**
(**The Company** issues final **National Electricity Transmission System** (outage plan with advice of operational) *(OC2.3.1.4)* (effects on **Users System**)		■		Year 1	Week 49	**OC2**
Generator, **Network Operator** and **Non-Embedded Customers** to inform **The Company** of changes to outages previously requested				Week 8 ahead to year end	As occurring	**OC2**
Details of load transfer capability of 12MW or more between **Grid Supply Points** in England and Wales and 10MW or more between **Grid Supply Points**				Within Yr 0	As **The Company** request	**OC2**

DATA DESCRIPTION	UNITS	DATA to **RTL**		TIMESCALE COVERED	UPDATE TIME	DATA CAT.
in Scotland.						
Details of:-	MVA / MW			Within Yr 0	As occurring	**OC2**
Maximum Import Capacity for each **Interface Point**	MVA / MW					
Maximum Export Capacity for each **Interface Point**	V (unless					
Changes to previously declared values of the **Interface Point Target Voltage/Power Factor**	power factor control					

Note: **Users** should refer to **OC2** for full details of the procedure summarised above and for the information which **The Company** will provide on the **Programming Phase**.

SCHEDULE 6 – USERS OUTAGE INFORMATION
PAGE 2 OF 3

The data below is to be provided to **The Company** as required for compliance with the applicable **Assimilated Law** (Chapter III, Article 8(1) of the retained REMIT Implementing Regulation 1348/2014).

ECR ARTICLE No.	DATA DESCRIPTION	USERS PROVIDING DATA	FREQUENCY OF SUBMISSION
7.1(a)	Planned unavailability of the **Apparatus** belonging to a **Non-Embedded Customer** where OC2.3.6 (a) applies - Unavailable demand capacity during the event (MW) - Estimated start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below: . Maintenance . Failure . Shutdown . Other	**Non-Embedded Customer**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after **a decision has been made by the Non-Embedded Customer** regarding the planned unavailability
7.1(b)	Changes in actual availability of the **Apparatus** belonging to a **Non-Embedded Customer** where OC2.3.6 (b) applies - Unavailable demand capacity during the event (MW) - Start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below : . Maintenance . Failure . Shutdown . Other	**Non-Embedded Customer**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after the change in actual availability
8.1	Year Ahead Forecast Margin information as provided in accordance with OC2.3.1.2.6 - **Output Usable**	**Generator**	In accordance with OC2.3.1.2.6
14.1(a)	**Registered Capacity** or **Maximum Capacity** for **Generating Units** or **Power Generating Modules** with greater than 1 MW **Registered Capacity** or **Maximum Capacity** provided in accordance with PC.4.3.1 and PC.A.3.4.3 or PC.A.3.1.4 - **Registered Capacity** or **Maximum Capacity** (MW) - Production type (from that listed under PC.A.3.4.3)	**Generator**	Week 24
14.1(b)	**Power Station Registered Capacity** for units with equal or greater than 100 MW **Registered Capacity** provided in accordance with PC.4.3.1 and PC.A.3.4.3 - **Power Station** name - Location of **Generating Unit** - Production type (from that listed under PC.A.3.4.3) - Voltage connection levels - **Registered Capacity** or **Maximum Capacity** (MW)	**Generator**	Week 24
14.1(c)	Estimated output of **Active Power** of a **BM Unit** or **Generating Unit** for each per **Settlement Period** of the next **Operational Day** provided in accordance with BC1.4.2 - **Physical Notification**	**Generator**	In accordance with BC1.4.2

15.1(a)	Planned unavailability of a **Generating Unit** where OC2.3.6(c) applies - **Power Station** name - **Generating Unit** and/or **Power Generating Module** name - Location of **Generating Unit and/or Power Generating Module** - **Generating Unit Registered Capacity** (MW) - Production type (from that listed under PC.A.3.4.3) - **Output Usable** (MW) during the event - Start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below: . Maintenance . Shutdown . Other	**Generator**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after a decision has been made by the **Generator** regarding the planned unavailability
15.1(b)	Changes in availability of a **Generating Unit** and/or **Power Generating Module** where OC2.3.6 (d) applies - **Power Station** name - **Generating Unit** and/or **Power Generating Module** name - Location of **Generating Unit and/or Power Generating Module** - **Generating Unit Registered Capacity** and **Power Generating Module Maximum Capacity** (MW) - Production type (from that listed under PC.A.3.4.3) - Maximum Export Limit (MW) during the event - Start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below: . Maintenance . Shutdown . Other	**Generator**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after the change in actual availability
15.1(c)	Planned unavailability of a **Power Station** where OC2.3.6(e) applies - **Power Station** name - Location of **Power Station** - **Power Station Registered Capacity** (MW) - Production type (from that listed under PC.A.3.4.3) - **Power Station** aggregated **Output Usable** (MW) during the event - Start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below: . Maintenance . Shutdown . Other	**Generator**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after a decision has been made by the **Generator** regarding the planned unavailability
15.1(d)	Changes in actual availability of a **Power Station** where OC2.3.6 (f) applies - **Power Station** name - Location of **Power Station** - **Power Station Registered Capacity** (MW) - Production type (from that listed under PC.A.3.4.3) - **Power Station** aggregated Maximum Export Limit (MW) during the event - Start date and time (dd.mm.yy hh:mm) - Estimated end date and time (dd.mm.yy hh:mm) - Reason for unavailability from the list below: . Maintenance . Shutdown . Other	**Generator**	To be received by **The Company** as soon as reasonably possible but in any case, to facilitate publication of data no later than 1 hour after the change in actual availability

15.1(e)	Outage data from a **Network Operator** relating to an outage on the **Network Operator's System** or an outage of a **Restoration Contractor's Plant** and **Apparatus** (not already supplied) which would prevent the operation of a **Restoration Plan**. Outages of **Plant** and **Apparatus** of **Restoration Contractors** and key **Plant** and **Apparatus** of a **Network Operator's System** associated with a **Distribution Restoration Zone Plan** also need to be co-ordinated with outages on the **National Electricity Transmission System**	**Network Operators and Restoration Service Contractors**	In accordance with the requirements of OC2

SCHEDULE 7 - LOAD CHARACTERISTICS AT GRID SUPPLY POINTS

PAGE 1 OF 1

All data in this schedule 7 is categorised as **Standard Planning Data** (**SPD**) and is required for existing and agreed future connections. This data is only required to be updated when requested by **The Company**.

				DATA FOR FUTURE YEARS						
DATA DESCRIPTION	UNITS	DATA to **RTL**		Yr 1	Yr 2	Yr 3	Yr 4	Yr 5	Yr 6	Yr 7
		CUSC Contract	CUSC App. Form							
FOR ALL TYPES OF **DEMAND** FOR EACH **GRID SUPPLY POINT**										
The following information is required infrequently and should only be supplied, wherever possible, when requested by **The Company** *(PC.A.4.7)*		□								
Details of individual loads which have Characteristics significantly different from the typical range of domestic or commercial and industrial load supplied: *(PC.A.4.7(a))*		□		(Please Attach)						
Sensitivity of demand to fluctuations in voltage And frequency on **National Electricity Transmission System** at time of peak **Connection Point Demand (Active Power)** *(PC.A.4.7(b))*		□								
Voltage Sensitivity *(PC.A.4.7(b))*	MW/kV MVAr/kV	□								
Frequency Sensitivity *(PC.A.4.7(b))*	MW/Hz MVAr/Hz	□								
Reactive Power sensitivity should relate to the **Power Factor** information given in Schedule 11 (or for **Generators**, Schedule 1) and note 6 on Schedule 11 relating to **Reactive Power** therefore applies: *(PC.A.4.7(b))*		□								
Phase unbalance imposed on the **National Electricity Transmission System** *(PC.A.4.7(d))*										
- maximum	%	□								
- average	%	□								
Maximum Harmonic Content imposed on **National Electricity Transmission System** *(PC.A.4.7(e))*	%	□								
Details of any loads which may cause **Demand** Fluctuations greater than those permitted under Engineering Recommendation P28, Stage 1 at the **Point of Common Coupling** including **Flicker Severity** (**Short Term**) and **Flicker Severity** (**Long Term**) *(PC.A.4.7(f))*		□								

SCHEDULE 8 - DATA SUPPLIED BY BM PARTICIPANTS

PAGE 1 OF 1

CODE	DESCRIPTION
BC1	**Physical Notifications**
BC1 & **BC2**	**Export and Import Limits**
BC1	**Bid-Offer Data**
BC1	**Dynamic Parameters** (Day Ahead)
BC2	**Dynamic Parameters** (For use in **Balancing Mechanism**)
BC1 & **BC2**	**Other Relevant Data**

- No information collated under this Schedule will be transferred to the **Relevant Transmission Licensees**

Public

SCHEDULE 9 - DATA SUPPLIED BY THE COMPANY TO USERS

(Example of data to be supplied)

CODE	DESCRIPTION
CC or **ECC**	Operation Diagram
CC or **ECC**	Site Responsibility Schedules
PC	Day of the peak **National Electricity Transmission System Demand** Day of the minimum **National Electricity Transmission System Demand**
OC1.7	From 31 December 2026 and during normal system operation, **The Company** shall publish on a daily basis, 60% and 100% of the peak **National Demand**, under pre **System** shutdown conditions for the following day, based on the latest forecast that would feed into the **System Restoration Regional** targets by means of messages inputted by **The Company** to the **Balancing Mechanism Reporting Service** (**BMRS**). From 31 December 2026 and during **System Restoration**, **The Company** shall publish for each **System Restoration Region**, the **Demand** that is used to calculate the **National Demand** on an hourly basis on a reasonable endeavours basis by means of messages inputted by **The Company** to the **Balancing Mechanism Reporting Service** (**BMRS**).
OC2	**Surpluses** and **Output Useable** (**OU**) requirements for each **Generator** over varying timescales Equivalent networks to **Users** for **Outage Planning** **Negative Reserve Active Power Margins** (when necessary) **Operating Reserve** information
BC1	**Demand** Estimates, **Indicated Margin** and **Indicated Imbalance**, indicative **Synchronising** and **Desynchronising** times of **Embedded Power Stations** to **Network Operators**, special actions.
BC2	**Bid-Offer Acceptances**, **Ancillary Services** instructions to relevant **Users**, **Emergency Instructions**
BC3	Location, amount, and **Low Frequency Relay** settings of any **Low Frequency Relay** initiated **Demand** reduction for **Demand** which is **Embedded**.

- No information collated under this Schedule will be transferred to the **Relevant Transmission Licensees**
- In respect of OC1, the data would also be supplied to **Restoration Contractors**

PURSUANT TO THE **ESO LICENCE**

1. The **ESO Licence** (condition C12: Production of information about the **National Electricity Transmission System**) requires **The Company** to publish annually an **Electricity Ten Year Statement** which is designed to provide **Users** and potential **Users** with information to enable them to identify opportunities for continued and further use of the **National Electricity Transmission System**.

   When a **User** is considering a development at a specific site, certain additional information may be required in relation to that site which is of such a level of detail that it is inappropriate to include it in the **Electricity Ten Year Statement**. In these circumstances, the **User** may contact **The Company** who will be pleased to arrange a discussion and the provision of such additional information relevant to the site under consideration as the **User** may reasonably require.

2. The **ESO Licence** also requires **The Company** to offer terms for an agreement for connection to and use of the **National Electricity Transmission System** and further information will be given by **The Company** to the potential **User** in the course of the discussions of the terms of such an agreement.

Public

SCHEDULE 10 - DEMAND PROFILES AND ACTIVE ENERGY DATA

The following information is required from each **Network Operator** and from each **Non-Embedded Customer**. The data should be provided in calendar week 24 each year (although **Network Operators** may delay the submission until calendar week 28).

DATA DESCRIPTION	F. Yr. 0	F. Yr. 1	F. Yr. 2	F. Yr. 3	F. Yr. 4	F. Yr. 5	F. Yr. 6	F. Yr. 7	UPDATE TIME	DATA CAT
Demand Profiles	*(PC.A.4.2) (■ – CUSC Contract & ■ CUSC Application Form)*									
Total User's system profile (please delete as applicable)	Day of **User's** annual Maximum demand at **Annual ACS Conditions** (MW) Day of annual peak of **National Electricity Transmission System Demand** at **Annual ACS Conditions** (MW) Day of annual minimum **National Electricity Transmission System Demand** at average conditions (MW)									
0000 : 0030									Wk.24	**SPD**
0030 : 0100									:	
0100 : 0130									:	
0130 : 0200									:	:
0200 : 0230									:	:
0230 : 0300									:	:
0300 : 0330									:	:
0330 : 0400									:	:
0400 : 0430									:	:
0430 : 0500									:	:
0500 : 0530									:	:
0530 : 0600									:	:
0600 : 0630									:	:
0630 : 0700									:	:
0700 : 0730									:	:
0730 : 0800									:	:
0800 : 0830									:	:
0830 : 0900									:	:
0900 : 0930									:	:
0930 : 1000									:	:
1000 : 1030									:	:
1030 : 1100									:	:
1100 : 1130									:	:
1130 : 1200									:	:
1200 : 1230									:	:
1230 : 1300									:	:
1300 : 1330									:	:
1330 : 1400									:	:
1400 : 1430									:	:
1430 : 1500									:	:
1500 : 1530									:	:
1530 : 1600									:	:
1600 : 1630									:	:
1630 : 1700									:	:
1700 : 1730									:	:
1730 : 1800									:	:
1800 : 1830									:	:
1830 : 1900									:	:
1900 : 1930									:	:
1930 : 2000									:	:
2000 : 2030									:	:
2030 : 2100									:	:
2100 : 2130									:	:
2130 : 2200									:	:
2200 : 2230									:	:
2230 : 2300									:	:
2300 : 2330									:	:
2330 : 0000									:	:

Public

SCHEDULE 10 - DEMAND PROFILES AND ACTIVE ENERGY DATA

DATA DESCRIPTION	Out-turn Actual	Out-turn Weather Corrected.	F.Yr. 0	Update Time	Data Cat	DATA to **RTL** CUSC Contract	DATA to **RTL** CUSC App. Form
(PC.A.4.3)							
Active Energy Data				Week 24	**SPD**	■	■
Total annual **Active Energy** requirements under average conditions of each **Network Operator** and each **Non-Embedded Customer** in the following categories of **Customer** Tariff:-						■	■
LV1						■	■
LV2						■	■
LV3						■	■
EHV						■	■
HV						■	■
Traction						■	■
Lighting						■	■
User System Losses						■	■
Active Energy from **Embedded Small Power Stations** and **Embedded Medium Power Stations**						■	■

NOTES:

1. 'F. yr.' means '**Financial Year**'

2. **Demand** and **Active Energy** Data (General)

   Demand and **Active Energy** data should relate to the point of connection to the **National Electricity Transmission System** and should be net of the output (as reasonably considered appropriate by the **User**) of all **Embedded Small Power Stations**, **Medium Power Stations** and **Customer Generating Plant**. Auxiliary demand of **Embedded Power Stations** should be included in the demand data submitted by the **User** at the **Connection Point**. **Users** should refer to the **PC** for a full definition of the **Demand** to be included.

3. **Demand** profiles and **Active Energy** data should be for the total **System** of the **Network Operator**, including all **Connection Points**, and for each **Non-Embedded Customer**. **Demand Profiles** should give the numerical maximum demand that in the **User**'s opinion could reasonably be imposed on the **National Electricity Transmission System**.

4. In addition the demand profile is to be supplied for such days as **The Company** may specify, but such a request is not to be made more than once per calendar year.

SCHEDULE 11 - CONNECTION POINT DATA

PAGE 1 OF 5

The following information is required from each **Network Operator** and from each **Non-Embedded Customer**. The data should be provided in calendar week 24 each year (although **Network Operators** may delay the submission until calendar week 28).

Public

Table 11(a)

Connection Point: _____

Connection Point Demand at the time of - (select each one in turn) (Provide data for each Access Period associated with the Connection Point)	a) maximum **Demand** b) peak **National Electricity Transmission System Demand** *(specified by **The Company**)* c) minimum **National Electricity Transmission System Demand** *(specified by **The Company**)* d) maximum **Demand** during **Access Period** e) specified by either **The Company** or a **User**	
Name of **Transmission Interface Circuit** out of service during **Access Period** *(if reqd)*.		**PC.A.4.1.4.2**

DATA DESCRIPTION *(CUSC Contract □ & CUSC Application Form ■)*	Outturn	Outturn Weather Corrected	F.Yr 1	F.Yr 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr 7	F.Yr 8	DATA CAT
Date of a), b), c), d) or e) as denoted above.											**PC.A.4.3.3**
Time of a), b), c), d) or e) as denoted above.											**PC.A.4.3.3**
Connection Point Demand (MW)											**PC.A.4.3.1**
Connection Point Demand (MVAr)											**PC.A.4.3.1**
Deduction made at **Connection Point** for **Small Power Stations**, **Medium Power Stations** and **Customer Generating Plant** (MW)											**PC.A.4.3.2(a)**
Reference to valid **Single Line Diagram**											**PC.A.4.3.5**
Reference to node and branch data.											**PC.A.2.2**

Note: The following data block can be repeated for each post fault network revision that may impact on the Transmission System.

Reference to post-fault revision of **Single Line Diagram**											**PC.A.4.5**
Reference to post-fault revision of the node and branch data associated with the **Single Line Diagram**											**PC.A.4.5**
Reference to the description of the actions and timescales involved in effecting the post-fault actions (e.g. auto-switching, manual, teleswitching, overload protection operation etc)											**PC.A.4.5**

Access Group:		

*Note: The following data block to be repeated for each **Connection Point** with the **Access Group**.*

Name of associated **Connection Point** within the same **Access Group:**											**PC.A.4.3.1**
Demand at associated **Connection Point** (MW)											**PC.A.4.3.1**
Demand at associated **Connection Point** (MVAr)											**PC.A.4.3.1**
Deduction made at associated **Connection Point** for **Small Power Stations**, **Medium Power Stations** and **Customer Generating Plant** (MW)											**PC.A.4.3.2(a)**

SCHEDULE 11 - CONNECTION POINT DATA

PAGE 2 OF 5

Table 11(b)

Embedded Generation Data											
Connection Point:											
DATA DESCRIPTION	Outturn	Outturn Weather Corrected	F.Yr 1	F.Yr 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr 7	F.Yr 8	DATA CAT
Small Power Station, Medium Power Station and **Customer** Generation Summary	For each **Connection Point** where there are **Embedded Small Power Stations**, **Medium Power Stations** or **Customer Generating Stations** the following information is required:										
No. of **Small Power Stations**, **Medium Power Stations** or **Customer Power Stations**											**PC.A.3.1 .4(a)**
Number of **Generating Units** within these stations											**PC.A.3.1 .4(a)**
Summated Capacity of all these **Generating Units**											**PC.A.3.1 .4(a)**
Where the **Network Operator's System** places a constraint on the capacity of an **Embedded Large Power Station**											
Station Name											**PC.A.3.2 .2(c)**
Generating Unit											**PC.A.3.2 .2(c)**
System Constrained Capacity											**PC.A.3.2 .2(c)(i)**
Reactive Despatch Network Restriction											**PC.A.3.2 .2(c)(ii)**

Where the **Network Operator's System** places a constraint on the capacity of an **Offshore Transmission System** at an **Interface Point**											
Offshore Transmission System Name											**PC.A.3.2.2(c)**
Interface Point Name											**PC.A.3.2.2(c)**
Maximum Export Capacity											**PC.A.3.2.2(c)**
Maximum Import Capacity											**PC.A.3.2.2(c)**

SCHEDULE 11 - CONNECTION POINT DATA
PAGE 3 OF 5

Table 11(c)

For each **Embedded Small Power Station** of 1MW and above, the following information is required, effective 2015 in line with the Week 24 data submissions.												
DATA DESCRIPTION	An **Embedded Small Power Station** reference unique to each **Network Operator**	Connection Date (**Financial Year** for generator connecting after week 24 2015	Generator unit Reference	Technology Type / Production type	CHP (Y/N)	Registered capacity in MW (as defined in the **Distribution Code**)	Lowest voltage node on the most up-to-date **Single Line Diagram** to which it connects or where it will export most of its power	Where it exports electricity from wind PV or storage, the geographical location of the primary or higher voltage substation to which it connects	Control mode	Control mode voltage target and reactive range or target pf (as appropriate)	Loss of mains protection type	Loss of mains protection settings
DATA CAT	PC.A.3.1.4 (a)		PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)	PC.A.3.1.4 (a)

Public

SCHEDULE 11 - CONNECTION POINT DATA

NOTES:

1. 'F.Yr.' means '**Financial Year**'. F.Yr. 1 refers to the current financial year.

2. All **Demand** data should be net of the output (as reasonably considered appropriate by the **User**) of all **Embedded Small Power Stations**, **Embedded Medium Power Stations** and **Customer Generating Plant**. Generation and / or Auxiliary demand of **Embedded Large Power Stations** should not be included in the demand data submitted by the **User**. **Users** should refer to the **PC** for a full definition of the **Demand** to be included.

3. Peak **Demand** should relate to each **Connection Point** individually and should give the maximum demand that in the **User's** opinion could reasonably be imposed on the **National Electricity Transmission System**. **Users** may submit the **Demand** data at each node on the **Single Line Diagram** instead of at a **Connection Point** as long as the **User** reasonably believes such data relates to the peak (or minimum) at the **Connection Point**.

   In deriving **Demand** any deduction made by the **User** (as detailed in note 2 above) to allow for **Embedded Small Power Stations**, **Embedded Medium Power Stations** and **Customer Generating Plant** is to be specifically stated as indicated on the Schedule.

4. **The Company** may at its discretion require details of any **Embedded Small Power Stations** or **Embedded Medium Power Stations** whose output can be expected to vary in a random manner (e.g. wind power) or according to some other pattern (e.g. tidal power)

5. Where more than 95% of the total **Demand** at a **Connection Point** is taken by synchronous motors, values of the **Power Factor** at maximum and minimum continuous excitation may be given instead. **Power Factor** data should allow for series reactive losses on the **User's System** but exclude reactive compensation network susceptance specified separately in Schedule 5.

6. Where a **Reactive Despatch Network Restriction** is in place which requires the generator to maintain a target voltage set point this should be stated as an alternative to the size of the **Reactive Despatch Network Restriction**.

Public

7.

SCHEDULE 11 - CONNECTION POINT DATA

Table 11 (d)

Embedded Small Power Stations <1MW

Network Operator	

Fuel Type	**Aggregate Registered Capacity** Total MW	**Number of PGMs**	**Comments**
Biomass			
Fossil brown coal/lignite			
Fossil coal-derived gas			
Fossil gas			
Fossil hard coal			
Fossil oil			
Fossil oil shale			
Fossil peat			
Geothermal			
Hydro pumped storage			
Hydro run-of-river and poundage			
Hydro water reservoir			
Marine			
Nuclear			
Other renewable			
Solar			
Waste			
Wind offshore			
Wind onshore			
Other			

SCHEDULE 12 - DEMAND CONTROL

PAGE 1 OF 2

The following information is required from each **Network Operator** and where indicated with an asterisk from **Externally Interconnected System Operators** and/or **Interconnector Users** and a **Pumped Storage Generator** and **Generators** in respect of **Electricity Storage Modules**. Where indicated with a double asterisk, the information is only required from **Suppliers**.
Where indicated by a hash symbol (#), the information should not be provided by **Network Operators** after the **PSM Implemtation Date**.

DATA DESCRIPTION	UNITS		UPDATE TIME	
Demand Control **Demand** met or to be relieved by **Demand Control** (averaging at the **Demand Control Notification Level** or more over a half hour) at each **Connection Point**. **Demand Control** at time of **National Electricity Transmission System** weekly peak demand Amount Duration	 MW Min	) F.yrs 0 to 5)	 Week 24 #	 **OC1**
For each half hour	MW	Wks 2-8 ahead	1000 Mon	**OC1**
For each half hour	MW	Days 2-12 ahead	1200 Wed	**OC1**
For each half hour	MW	Previous calendar day	0600 daily	**OC1**
****Customer Demand Management** (at the **Customer Demand Management Notification Level** or more at the **Connection Point**)				
For each half hour	MW	Any time in Control Phase		**OC1**
For each half hour	MW	Remainder of period	When changes occur to previous plan	**OC1**
For each half hour	MW	Previous calendar day	0600 daily	**OC1**
In Scotland, **Load Management Blocks For each block of 5MW or more, for each half hour	MW	For the next day	11:00	**OC1**

Public

SCHEDULE 12 - DEMAND CONTROL

DATA DESCRIPTION	UNITS	TIME COVERED	UPDATE TIME	DATA CAT.
*__**Demand Control** or Pump Tripping Offered as Reserve__				
Magnitude of **Demand** or pumping load or **Electricity Storage** charging load which is tripped	MW	Year ahead from week 24 #	Week 24 #	**DPD I**
System Frequency at which tripping is initiated	Hz	"	"	"
Time duration of **System Frequency** below trip setting for tripping to be initiated	S	"	"	"
Time delay from trip initiation to Tripping	S	"	"	"
Electricity Storage Module data				
Maximum Capacity	MW	"	"	"
		"	"	"
Maximum Import Power	MW	"	"	"
Registered Import Capability	MW	"	"	"
Charge Time	Min	"	"	"
		"	"	"
Discharge time	Min	"	"	"
Operating periods	Min	"	"	"
__Emergency Manual Load Disconnection__				
Method of achieving load disconnection	Text	Year ahead from week 24 #	Annual in week 24 #	OC6
Annual ACS Peak Demand (**Active Power**) at **Connection Point** (requested under Schedule 11 - repeated here for reference)	MW	"	"	"
Cumulative percentage of **Connection Point Demand** (**Active Power**) which can be disconnected by the following times from an instruction from **The Company**				
5 mins	%	"	"	"
10 mins	%	"	"	"
15 mins	%	"	"	"
20 mins	%	"	"	"
25 mins	%	"	"	"
30 mins	%	"	"	"

Notes:

1. **Network Operators** may delay the submission until calendar week 28.
2. No information collated under this Schedule will be transferred to the **Relevant Transmission Licensees** (or **Generators** undertaking **OTSDUW**).

SCHEDULE 12A - AUTOMATIC LOW FREQUENCY DEMAND DISCONNECTION

Time Covered: Year ahead from week 24 Data Category: OC6
Update Time: Annual in week 24

Grid Supply Point	GSP Demand MW	Low Frequency Demand Disconnection Blocks MW 1 48.8Hz	2 48.75Hz	3 48.7Hz	4 48.6Hz	5 48.5Hz	6 48.4Hz	7 48.2Hz	8 48.0Hz	9 47.8Hz	Residual demand MW
GSP1 GSP2 GSP3											
Total demand disconnected per block MW %											
Total demand disconnection MW (% of aggregate demand of MW)											

Note: All demand refers to that at the time of forecast **National Electricity Transmission System** peak demand.

Network Operators may delay the submission until calendar week 28

No information collated under this schedule will be transferred to the **Relevant Transmission Licensees** (or **Generators** undertaking **OTSDUW**).

Public

SCHEDULE 13 - FAULT INFEED DATA

PAGE 1 OF 2

The data in this Schedule 13 is all **Standard Planning Data**, and is required from all **Users** other than **Generators** who are connected to the **National Electricity Transmission System** via a **Connection Point** (or who are seeking such a connection). A data submission is to be made each year in Week 24 (although **Network Operators** may delay the submission until Week 28). A separate submission is required for each node included in the **Single Line Diagram** provided in Schedule 5.

DATA DESCRIPTION	UNITS	F.Yr 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
SHORT CIRCUIT INFEED TO THE **NATIONAL ELECTRICITY TRANSMISSION SYSTEM** FROM **USERS SYSTEM** AT A **CONNECTION POINT**										CUSC Contract	CUSC App. Form
(PC.A.2.5)											
Name of node or **Connection Point**										□	■
Symmetrical three phase short-circuit current infeed											
- at instant of fault	kA									□	■
- after subtransient fault current contribution has substantially decayed	Ka									□	■
Zero sequence source impedances as seen from the **Point of Connection** or node on the **Single Line Diagram** (as appropriate) consistent with the maximum infeed above:											
- Resistance	% on 100									□	■
- Reactance	% on 100									□	■
Positive sequence X/R ratio at instance of fault										□	■
Pre-Fault voltage magnitude at which the maximum fault currents were calculated	p.u.									□	■

Public

SCHEDULE 13 - FAULT INFEED DATA

PAGE 2 OF 2

DATA DESCRIPTION	UNITS	F.Yr 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
SHORT CIRCUIT INFEED TO THE **NATIONAL ELECTRICITY TRANSMISSION SYSTEM** FROM **USERS SYSTEM** AT A **CONNECTION POINT**										CUSC Contract	CUSC App. Form
Negative sequence impedances of **User's System** as seen from the **Point of Connection** or node on the **Single Line Diagram** (as appropriate). If no data is given, it will be assumed that they are equal to the positive sequence values.											
- Resistance	% on 100									□	■
- Reactance	% on 100									□	■

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS)

PAGE 1 OF 5

The data in this Schedule 14 is all **Standard Planning Data**, and is to be provided by **Generators**, with respect to all directly connected **Power Stations**, all **Embedded Large Power Stations** and all **Embedded Medium Power Stations** connected to the **Subtransmission System**. A data submission is to be made each year in Week 24.

Fault infeeds via **Unit Transformers**

A submission should be made for each **Generating Unit** (including those which are part of a **Synchronous Power Generating Module**) with an associated **Unit Transformer**. Where there is more than one **Unit Transformer** associated with a **Generating Unit**, a value for the total infeed through all **Unit Transformers** should be provided. The infeed through the **Unit Transformer(s)** should include contributions from all motors normally connected to the **Unit Board**, together with any generation (e.g. **Auxiliary Gas Turbines**) which would normally be connected to the **Unit Board**, and should be expressed as a fault current at the **Generating Unit** terminals for a fault at that location.

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
(PC.A.2.5)										CUSC Contract	CUSC App. Form
Name of **Power Station**										□	■
Number of **Unit Transformers**										□	■
Symmetrical three phase short-circuit current infeed through the **Unit Transformers**(s) for a fault at the **Generating Unit** terminals											
- at instant of fault	kA									□	■
- after subtransient fault current contribution has substantially decayed	kA									□	■
Positive sequence X/R ratio at instance of fault										□	■
Subtransient time constant (if significantly different from 40ms)	ms									□	■
Pre-fault voltage at fault point (if different from 1.0 p.u.)										□	■
The following data items need only be supplied if the **Generating Unit** Step-up Transformer can supply zero sequence current from the **Generating Unit** side to the **National Electricity Transmission System**											
Zero sequence source impedances as seen from the **Generating Unit** terminals consistent with the maximum infeed above:											
- Resistance	% on 100									□	■
- Reactance	% on 100									□	■

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS)

Fault infeeds via Station Transformers

A submission is required for each **Station Transformer** directly connected to the **National Electricity Transmission System**. The submission should represent normal operating conditions when the maximum number of **Gensets** are **Synchronised** to the **System**, and should include the fault current from all motors normally connected to the **Station Board**, together with any Generation (e.g. **Auxiliary Gas Turbines**) which would normally be connected to the **Station Board**. The fault infeed should be expressed as a fault current at the hv terminals of the **Station Transformer** for a fault at that location.

If the submission for normal operating conditions does not represent the worst case, then a separate submission representing the maximum fault infeed that could occur in practice should be made.

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
(PC.A.2.5)										CUSC Contract	CUSC App. Form
Name of **Power Station**										□	■
Number of **Station Transformers**										□	■
Symmetrical three phase short-circuit current infeed for a fault at the **Connection Point**											
- at instant of fault	kA									□	■
- after subtransient fault current contribution has substantially decayed	kA									□	■
Positive sequence X/R ratio At instance of fault										□	■
Subtransient time constant (if significantly different from 40ms)	ms									□	■
Pre-fault voltage (if different from 1.0 p.u.) at fault point (See note 1)										□	■
Zero sequence source Impedances as seen from the **Point of Connection** Consistent with the maximum Infeed above:											
- Resistance	% on 100									□	■
- Reactance	% on 100									□	■

Note 1. The pre-fault voltage provided above should represent the voltage within the range 0.95 to 1.05 that gives the highest fault current

Note 2. % on 100 is an abbreviation for % on 100 MVA

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS)

Fault infeeds from **Power Park Modules**

A submission is required for the whole **Power Park Module** and for each **Power Park Unit** type or equivalent. The submission shall represent operating conditions that result in the maximum fault infeed. The fault current from all motors normally connected to the **Power Park Unit's** electrical system shall be included. The fault infeed shall be expressed as a fault current at the terminals of the **Power Park Unit**, or the **Common Collection Busbar** if an equivalent **Single Line Diagram** and associated data as described in PC.A.2.2.2 is provided, and the **Grid Entry Point**, or **User System Entry Point** if **Embedded**, for a fault at the **Grid Entry Point**, or **User System Entry Point** if **Embedded**.

Should actual data in respect of fault infeeds be unavailable at the time of the application for a **CUSC Contract** or **Embedded Development Agreement**, a limited subset of the data, representing the maximum fault infeed that may result from all of the plant types being considered, shall be submitted. This data will, as a minimum, represent the root mean square of the positive, negative and zero sequence components of the fault current for both single phase and three phase solid faults at the **Grid Entry Point** (or **User System Entry Point** if **Embedded**) at the time of fault application and 50ms following fault application. Actual data in respect of fault infeeds shall be submitted to **The Company** as soon as it is available, in line with PC.A.1.2

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
(PC.A.2.5)										CUSC Contract	CUSC App. Form
Name of **Power Station**										□	■
Name of Power Park Module										□	■
Power Park Unit type										□	■
A submission shall be provided for the contribution of the entire **Power Park Module** and each type of **Power Park Unit** or equivalent to the positive, negative and zero sequence components of the short circuit current at the **Power Park Unit** terminals, or **Common Collection Busbar**, and **Grid Entry Point** or **User System Entry Point** if **Embedded** for											
(i) a solid symmetrical three phase short circuit										□	■
(ii) a solid single phase to earth short circuit										□	■
(iii) a solid phase to phase short circuit										□	■
(iv) a solid two phase to earth short circuit										□	■
at the **Grid Entry Point** or **User System Entry Point** if **Embedded**.										□	■
If protective controls are used and active for the above conditions, a submission shall be provided in the limiting case where the protective control is not active. This case may require application of a non-solid fault, resulting in a retained voltage at the fault point.										□	■

Public

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS)

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	DATA DESCRIPTION
										CUSC Contract	CUSC App. Form
- A continuous time trace and table showing the root mean square of the positive, negative and zero sequence components of the fault current from the time of fault inception to 140ms after fault inception at 10ms intervals	Graphical and tabular kA versus s									□	■
- A continuous time trace and table showing the positive, negative and zero sequence components of retained voltage at the terminals or **Common Collection Busbar**, if appropriate	pu versus s									□	■
- A continuous time trace and table showing the root mean square of the positive, negative and zero sequence components of retained voltage at the fault point, if appropriate	pu versus s									□	■

SCHEDULE 14 - FAULT INFEED DATA (GENERATORS INCLUDING UNIT TRANSFORMERS AND STATION TRANSFORMERS)

PAGE 5 OF 5

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	DATA DESCRIPTION
										CUSC Contract	CUSC App. Form
For **Power Park Units** that utilise a protective control, such as a crowbar circuit,											
- additional rotor resistance applied to the **Power Park Unit** under a fault situation	% on MVA									□	■
										□	■
- additional rotor reactance applied to the **Power Park Unit** under a fault situation.	% on MVA										
Positive sequence X/R ratio of the equivalent at time of fault at the **Common Collection Busbar**										□	■
Minimum zero sequence impedance of the equivalent at a **Common Collection Busbar**										□	■
Active Power generated pre-fault	MW									□	■
Number of **Power Park Units** in equivalent generator										□	■
Power Factor (lead or lag)										□	■
Pre-fault voltage (if different from 1.0 pu) at fault point (See note 1)	pu									□	■
Items of reactive compensation switched in pre-fault										□	■

Note 1. The pre-fault voltage provided above should represent the voltage within the range 0.95 pu to 1.05 pu that gives the highest fault current

SCHEDULE 15 – MOTHBALLED POWER GENERATING MODULE, MOTHBALLED GENERATING UNIT, MOTHBALLED POWER PARK MODULE (INCLUDING MOTHBALLED DC CONNECTED POWER PARK MODULES), MOTHBALLED HVDC SYSTEMS, MOTHBALLED HVDC CONVERTERS, MOTHBALLED DC CONVERTERS AT A DC CONVERTER STATION AND ALTERNATIVE FUEL DATA

MOTHBALLED POWER GENERATING MODULES, MOTHBALLED GENERATING UNIT, MOTHBALLED POWER PARK MODULE (INCLUDING **MOTHBALLED DC CONNECTED POWER PARK MODULES**), **MOTHBALLED HVDC** SYSTEMS, **MOTHBALLED HVDC CONVERTERS** OR **MOTHBALLED DC CONVERTER** AT A **DC CONVERTER STATION** AND ALTERNATIVE FUEL DATA

The following data items must be supplied with respect to each **Mothballed Power Generating Module**, **Mothballed Generating Unit**, **Mothballed Power Park Module** (including **Mothballed DC Connected Power Park Modules**), **Mothballed HVDC Systems**, **Mothballed HVDC Converters** or **Mothballed DC Converters at a DC Converter station**

Power Station_____ **Generating Unit, Power Park Module** or **DC Converter** Name (e.g. Unit 1) _____

DATA DESCRIPTION	UNITS	DATA CAT	**GENERATING UNIT** DATA						
			<1 month	1-2 months	2-3 months	3-6 months	6-12 months	>12 months	Total MW being returned
MW output that can be returned to service	MW	DPD II							

Notes

1. The time periods identified in the above table represent the estimated time it would take to return the **Mothballed Power Generating Module**, **Mothballed Generating Unit, Mothballed Power Park Module (Mothballed DC Connected Power Park Modules**), **Mothballed HVDC Systems**, **Mothballed HVDC Converters** or **Mothballed DC Converter** at a **DC Converter Station** to service once a decision to return has been made.
2. Where a **Mothballed Power Generating Module**, **Mothballed Generating Unit, Mothballed Power Park Module** (including a Mothballed **DC Connected Power Park Module**), **Mothballed HVDC System**, **Mothballed HVDC Converter** or **Mothballed DC Converter** at a **DC Converter Station** can be physically returned in stages covering more than one of the time periods identified in the above table then information should be provided for each applicable time period.
3. The estimated notice to physically return MW output to service should be determined in accordance with **Good Industry Practice** assuming normal working arrangements and normal plant procurement lead times.
4. The MW output values in each time period should be incremental MW values, e.g. if 150MW could be returned in 2 – 3 months and an additional 50MW in 3 – 6 months then the values in the columns should be Nil, Nil, 150, 50, Nil, Nil, 200 respectively.
5. Significant factors which may prevent the **Mothballed Power Generating Module**, **Mothballed Generating Unit**, **Mothballed Power Park Module (Mothballed DC Connected Power Park Module). Mothballed HVDC System, Mothballed HVDC Converter** or **Mothballed DC Converter** at a **DC Converter Station** achieving the estimated values provided in this table, excluding factors relating to **Transmission Entry Capacity**, should be appended separately.

SCHEDULE 15 – MOTHBALLED POWER GENERATING MODULES, MOTHBALLED GENERATING UNIT, MOTHBALLED POWER PARK MODULE (INCLUDING DC CONNECTED POWER PARK MODULES), MOTHBALLED HVDC SYSTEMS, MOTHBALLED HVDC CONVERTERS, MOTHBALLED DC CONVERTERS AT A DC CONVERTER STATION AND ALTERNATIVE FUEL DATA

PAGE 2 OF 3

ALTERNATIVE FUEL INFORMATION

The following data items for alternative fuels need only be supplied with respect to each **Generating Unit** whose primary fuel is gas including those which form part of a **Power Generating Module**.

Power Station _____ **Generating Unit Name (e.g. Unit 1)** _____

DATA DESCRIPTION	UNITS	DATA CAT	**GENERATING UNIT** DATA			
			1	2	3	4
Alternative Fuel Type (*please specify)	Text	DPD II	Oil distillate	Other gas*	Other*	Other*
CHANGEOVER TO ALTERNATIVE FUEL For off-line changeover:						
Time to carry out off-line fuel changeover	Minutes	DPD II				
Maximum output following off-line changeover	MW	DPD II				
For on-line changeover:						
Time to carry out on-line fuel changeover	Minutes	DPD II				
Maximum output during on-line fuel changeover	MW	DPD II				
Maximum output following on-line fuel changeover	MW	DPD II				
Maximum operating time at full load assuing:						
Typical stock levels	Hours	DPD II				
Maximum possible stock levels	Hours	DPD II				
Maximum rate of replacement of depleted stocks of alternative fuels on the basis of **Good Industry Practice**	MWh (electrical)/day	DPD II				
Is changeover to alternative fuel used in normal operating arrangements?	Text	DPD II				
Number of successful changeovers carried out in the last **Financial Year** (**delete as appropriate)	Text	DPD II	0 / 1-5 / 6-10 / 11-20 / >20 **	0 / 1-5 / 6-10 / 11-20 / >20 **	0 / 1-5 / 6-10 / 11-20 / >20 **	0 / 1-5 / 6-10 / 11-20 / >20 **

SCHEDULE 15 – MOTHBALLED POWER GENERATING MODULES, MOTHBALLED GENERATING UNIT, MOTHBALLED POWER PARK MODULE (INCLUDING MOTHBALLED DC CONNECTED POWER PARK MODULES), MOTHBALLED HVDC SYSTEMS, MOTHBALLED HVDC CONVERTERS MOTHBALLED DC CONVERTERS AT A DC CONVERTER STATION AND ALTERNATIVE FUEL DATA

PAGE 3 OF 3

DATA DESCRIPTION	UNITS	DATA CAT	**GENERATING UNIT** DATA			
			1	2	3	4
CHANGEOVER BACK TO MAIN FUEL For off-line changeover: Time to carry out off-line fuel changeover	Minutes					
For on-line changeover Time to carry out on-line fuel changeover	Minutes					
Maximum output during on-line fuel changeover	MW					

Notes

1. Where a **Generating Unit** has the facilities installed to generate using more than one alternative fuel type details of each alternative fuel should be given.
2. Significant factors and their effects which may prevent the use of alternative fuels achieving the estimated values provided in this table (e.g. emissions limits, distilled water stocks etc.) should be appended separately.

- No information collated under this Schedule will be transferred to the **Relevant Transmission Licensees**

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION

PAGE 1 OF 2

PART I

SYSTEM RESTORATION INFORMATION (EXCLUDING PARTIES PARTICIPATING IN **DISTRIBUTION RESTORATION ZONES**)

The following data/text items are required from each **Generator** for each **BM Unit** at a **Large Power Station** as detailed in PC.A.5.7. Data is not required for **Restoration Contractors Plant** and **Apparatus**. The data should be provided in accordance with PC.A.1.2 and also, where possible, upon request from **The Company** during a **System Restoration**. For **Restoration Contractors** who are party to a **Distribution Restoration Zone Plan**, the data submitted should be supplied as part of Schedule 16 Part III of this **Data Registration Code**.

Data Description *(PC.A.5.7.1) (■ CUSC Contract)*	Units	Data Category
Assuming all **BM Units** were running immediately prior to the **Total Shutdown** or **Partial Shutdown** and in the event of loss of all external power supplies, provide the following information:		
a) Expected time for the first and subsequent **BM Units** to be **Synchronised**, at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours from the restoration of external power supplies, assuming external power supplies are not available at the **User's Site**.	Tabular or Graphical	DPD II
b) Describe any likely issues that would have a significant impact on a **BM Unit's** time to be **Synchronised** arising as a direct consequence of the inherent design or operational practice of the **Power Station** and/or **BM Unit**, e.g. limited barring facilities, time from a **Total Shutdown** or **Partial Shutdown** at which batteries would be discharged or the availability of primary fuel supplies .	Text	DPD II
Block Loading Capability:		
c) Provide estimated **Block Loading Capability** from 0MW to **Registered Capacity** and the time between each incremental step of each **BM Unit** based on when the unit was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours after the **BM Unit** had been **Shutdown**. The **Block Loading Capability** should be valid for a frequency deviation of 49.5Hz – 50.5Hz. The data should identify any required 'hold' points.	Tabular or Graphical	DPD II

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION

PAGE 2 OF 2

PART I

SYSTEM RESTORATION INFORMATION (EXCLUDING PARTIES PARTICIPATING IN **DISTRIBUTION RESTORATION ZONES**) The following data/text items are required from each **HVDC System Owner** or **DC Converter Station Owner** for each **HVDC System** and **DC Converter** as detailed in PC.A.5.7. Data is not required for **Restoration Contractors Plant** and **Apparatus**. The data should be provided in accordance with PC.A.1.2 and also, where possible, upon request from **The Company** during a **System Restoration**.		
Data Description *(PC.A.5.7.1) (■ CUSC Contract)*	Units	Data Category
Assuming all **BM Units** were running immediately prior to the **Total Shutdown** or **Partial Shutdown** and in the event of loss of all external power supplies, provide the following information:		
a) Expected time for the first and subsequent **BM Units** to be **Synchronised**, at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours from the restoration of external power supplies, assuming external power supplies are not available at the **User's Site**.	Tabular or Graphical	DPD II
b) Describe any likely issues that would have a significant impact on a **BM Units** time to be **Synchronised** arising as a direct consequence of the inherent design or operational practice of the **HVDC System** or **DC Converter Station** and/or **BM Unit**, e.g. time from a **Total Shutdown** or **Partial Shutdown** at which batteries would be discharged.	Text	DPD II
Block Loading Capability:		
c) Provide estimated incremental **Active Power** steps, from no load to **Rated MW** and the time between each incremental step which an **HVDC System** or **DC Converter Station** can instantaneously supply without causing it to trip or go outside the **Frequency** range of 47.5Hz – 52Hz (or an otherwise agreed **Frequency** range). The time between each incremental step shall also be provided. In addition data shall be provided from 0MW to **Registered Capacity** for each **BM Unit** which was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours after the **BM Unit** had been **Shutdown**. The data supplied should be valid for a **Frequency** deviation of 49.5Hz – 50.5Hz and should identify any required 'hold' points.	Tabular or Graphical	DPD II
Governor Setting Information		
From 2025 onwards, **Generators**, **HVDC System Owners** and **DC Converter** owners, shall supply the governor setting information in accordance with the applicable requirements of CC.6.3.7 (h) or ECC.6.3.7.3.8.	Text	DPD II

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION

PAGE 1 OF 1

PART II

DISTRIBUTION RESTORATION ZONE INFORMATION *(PC.A.5.7.2 – DPD)* Where a **Network Operator** has a **Distribution Restoration Zone Plan** in place, the following data specified shall be submitted by **Network Operators** and **Restoration Contractors**, party to a **Distribution Restoration Zone Plan**. **Restoration Contractors** shall, where reasonably practicable, submit the relevant information to the **Network Operator** who shall then supply that information to **The Company**.		
Data Description *(PC.A.5.7.2)*	Units	Data Category
The expected time for each **Restoration Contractor's Plant** to connect to the **Network Operator's System** following a **Total Shutdown** or **Partial Shutdown**. The assessment should include the **Restoration Contractor's** ability to reconnect or re-synchronise all their **Plant**, to the **Total System** at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours from the restoration of external power supplies.	Tabular or Graphical	DPD II
Additionally, the data and supporting text should highlight any specific issues (eg those that would affect the time before which the **Restoration Contractor's Plant** could be energised) that may arise as time progresses from **Shutdown** without external supplies being restored or the availability of primary fuel supplies.	Tabular or Graphical	DPD II
Block Loading Capability		
Provide estimated **Block Loading Capability** from 0MW to **Registered Capacity** and the time between each incremental step of each **Restoration Contractor's Plant** and **Apparatus** based on when the **Restoration Contractor's Plant** and **Apparatus** was running immediately prior to the **Shutdown**) and at time intervals of 12 hours, 24 hours, 36 hours, 48 hours and 72 hours after the **Restoration Contractor's Plant** and **Apparatus** had been **Shutdown**. The **Block Loading Capability** should be valid for a frequency deviation of 49.5Hz – 50.5Hz. The data should identify any required 'hold' points.	Tabular or Graphical	DPD II
Governor Setting Information		
From 2025 onwards, **Restoration Contractors**, **Generators**, **HVDC System Owners** and **DC Converter** owners, shall supply the governor setting information in accordance with the applicable requirements of CC.6.3.7 (h) or ECC.6.3.7.3.8.	Tabular or Graphical	DPD II

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION

PAGE 1 OF 3

PART III

All **Users** and **Restoration Contractors** are required to confirm annually they comply with the applicable requirements of OC5.7. In the case of **Generators**, **HVDC System Owners**, **DC Converter** owners, and **Non-Embedded Customers**, this confirmation shall be provided in their week 24 submission. In the case of **Network Operators** prior to the **PSM Implementation Date**, this confirmation shall be provided in their week 24 submission; after the **PSM Implementation Date** this confirmation shall be provided in their week 28 submission.

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION PART III (3 Pages)						
Assurance Activity	**Grid Code Reference**	**Parties Involved**	**Frequency of Assurance Activity**	**The Company Witness required**	**Date of test result submission/visit**	**Annual Statement of Compliance (Y/N/Not applicable)**
System Restoration Power Island review	OC9.4.7.6 OC5.7.4.2(iv)	**Relevant Transmission Licensees**, **Network Operators** and **The Company**	Every 3 years	Not applicable		
System Restoration Power Island availability assessment	OC9.4.7.6 OC5.7.4.2(iv)	**Relevant Transmission Licensees**, **Network Operators** and **The Company**	Yearly	Not applicable		
Remote Synchronisation test - TO/DNO	OC5.7.2.1(g) OC5.7.2.3 (d)	**Relevant Transmission Licensees**, relevant **Network Operators**, **Restoration Contractors** and **The Company**	Every 3 years	No		
Low Frequency Demand Disconnection Relay test	CC.A.5.4.3 / ECC.A.5.4.3	**Relevant Transmission Licences**, relevant **Network Operators**, **Non-Embedded Customers** and **The Company**	Every 3 years although this may be extended to no more than every five years if considered to be required for operational purposes	No		
Anchor Restoration Contractor test	OC5.7.2.1 /OC5.7.2.2 / OC5.7.2.3	**Relevant Transmission Licensees, Network Operators**, **Anchor Restoration Contractors** and **The Company**	Every 3 years	Yes		
Top Up Restoration Contractor test	OC.5.7.2.4	**Relevant Transmission Licensees**, **Network Operators**, **Top Up Restoration Contractors** and **The Company**	Every 3 years	Yes		
Resilience to **Partial Shutdown** or **Total Shutdown** of **Restoration Contractor**	OC9.4.7.6.2 OC5.7.4.2(iii) CC/ECC.7.11	**Restoration Contractors** and **The Company**	Yearly	No		
Quick Resynchronisation	OC5.7.2.5	**EU Generators** in respect of **Type C**	Yearly	Yes		

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION PART III (3 Pages)						
Assurance Activity	**Grid Code Reference**	**Parties Involved**	**Frequency of Assurance Activity**	**The Company Witness required**	**Date of test result submission/visit**	**Annual Statement of Compliance (Y/N/Not applicable)**
Unit Test		and **Type D Power Generating Modules**, relevant **Network Operators** and **The Company**				
Distribution Restoration Zone Control System test	OC5.7.2.6	**Network Operators**, **Restoration Contractors** and **The Company**	Every 3 years	Yes		
Dead Line Charge test	OC5.7.2.1(g)(a) OC5.7.2.3(d)(a)	**Transmission Licensees**, relevant **Network Operators Anchor Restoration Contractors** and **The Company**	Every 3 years	Yes		
Remote Synchronisation test -**Restoration Contractor**	OC5.7.2.1(g)(b) OC5.7.2.3(d)(b)	**Relevant Transmission Licensees**, relevant **Network Operators**, **Restoration Contractors** and **The Company**	Every 3 years	Yes		
Assurance Visits	OC5.7.4 OC5.7.5	**The Company, Relevant Transmission Licensees**, relevant **Network Operators** to visit **Restoration Contractors**	Every 3 years	Yes		
Voice Systems Resilience test or equivalent	OC5.7.4.2(vi)	**CUSC Parties,** relevant **Network Operators, Relevant Transmission Licensees Restoration Contractors** and **The Company**	Yearly	No		
Critical Tools and Facilities control systems resilience demonstration –power resilience including power resilience demonstration & connectivity and alarm event handling	OC.5.7.4.2(iii) OC5.7.4.2(ix) OC5.7.4.3 CC.7.10.7 ECC.7.10.7	**CUSC Parties,** relevant **Network Operators, Relevant Transmission Licensees**, **Restoration Contractors** and **The Company**	Every 3 years	No		
Control systems resilience demonstration – diagram & topology	OC5.7.2.6	**CUSC Parties,** relevant **Network Operators, Relevant Transmission Licensees**, **Restoration Contractors** and **The Company**	Every 3 years (as set out in the DRZCS RES)'	No		
Cyber-Security	CC.7.10.6 ECC.7.10.6 OC.5.7.4.2(iii) OC5.7.4.2(x)	**CUSC Parties,** relevant **Network Operators**, **Relevant**	Yearly	No		

SCHEDULE 16 – SYSTEM RESTORATION INFORMATION PART III (3 Pages)						
Assurance Activity	**Grid Code Reference**	**Parties Involved**	**Frequency of Assurance Activity**	**The Company Witness required**	**Date of test result submission/visit**	**Annual Statement of Compliance (Y/N/Not applicable)**
		Transmission Licensees, **Restoration Contractors** and **The Company**				
Telephony services test as per CC/ECC.6.5.4.	CC.6.5.1 – CC.6.5.5 ECC.6.5.1 – ECC.6.5.5 OC.5.7.4.2(vi) OC5.7.4.2(xi) OC5.7.4.2(xii)	**CUSC Parties,** relevant **Network Operators,** relevant **Transmission Licensees**, **Restoration Contractors** and **The Company**	Yearly (or as in accordance with CC/ECC.6.5.4.)	No		
Resilience to **Partial Shutdown** or **Total Shutdown** of **CUSC Parties**	OC5.7.4 OC5.7.5	**CUSC Parties** and **The Company**	Yearly	No		
Restoration Procedure review	OC9.4.7.6.2 OC5.7.4.2(iv)	**The Company, Relevant Transmission Licensees**, relevant **Network Operators**, **CUSC Parties** and **Restoration Contractors**	Every 3 years	Not applicable		
LJRP & **DRZP** reviews	OC9.4.7.6 OC5.7.4.2(iv)	**The Company**, **Network Operators**, **Transmission Licensees** and **Restoration Plan** signatories	Every 3 years	Not applicable		
Awareness training for **Restoration Contractor** and **CUSC Parties**	OC9.4.7.6.2 OC5.7.4	**The Company,** relevant **Network Operators, Transmission Licensees**, **CUSC Parties** and **Restoration Contractors**	Every 3 years	Not applicable		
Cross industry training	OC9.4.7.6.2 OC5.7.4	**The Company**, **Network Operators**, **Transmission Licensees**, **CUSC Parties** and **Restoration Contractors**	Every 3 years	Not applicable		

SCHEDULE 17 - ACCESS PERIOD DATA

PAGE 1 OF 1

(PC.A.4 - CUSC Contract ■)

Submissions by **Users** using this Schedule 17 shall commence in 2011 and shall then continue in each year thereafter

Access Group	

Asset Identifier	Start Week	End Week	Maintenance Year (1, 2 or 3)	Duration	Potential Concurrent Outage (Y/N)

Comments

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

PAGE 1 OF 24

The data in this Schedule 18 is required from **Generators** who are undertaking **OTSDUW** and connecting to a **Transmission Interface Point**.

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CAT.	**GENERATING UNIT** OR STATION DATA						
		CUSC Contract	CUSC App. Form		F.Yr0	F.Yr1	F.Yr2	F.Yr3	F.Yr4	F.Yr5	F.Yr 6
INDIVIDUAL **OTSDUW** DATA											
Interface Point Capacity (PC.A.3.2.2 (a))	MW MVAr	□	■								
Performance Chart at the **Transmission Interface Point** for **OTSDUW Plant and Apparatus** (PC.A.3.2.2(f)(iv)		□	■								
OTSDUW DEMANDS											
Demand associated with the **OTSDUW Plant and Apparatus** (excluding **OTSDUW DC Converters** – see Note 1)) supplied at each **Interface Point**. The **User** should also provide the **Demand** supplied to each **Connection Point** on the **OTSDUW Plant and Apparatus**. *(PC.A.5.2.5)*											
- The maximum **Demand** that could occur.	MW MVAr	□ □		**DPD I** **DPD I**							
- **Demand** at specified time of annual peak half hour of **National Electricity Transmission System Demand** at **Annual ACS Conditions**.	MW MVAr	□ □		**DPD II** **DPD II**							
- **Demand** at specified time of annual minimum half-hour of **National Electricity Transmission System Demand**.	MW MVAr	□ □		**DPD II** **DPD II**							
(Note 1 – **Demand** required from **OTSDUW DC Converters** should be supplied under page 2 of Schedule 18).											

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

OTSDUW USERS SYSTEM DATA

DATA DESCRIPTION	UNITS	DATA to **RTL**		DATA CATEGORY
		CUSC Contract	CUSC App. Form	
OFFSHORE TRANSMISSION SYSTEM LAYOUT *(PC.A.2.2.1, PC.A.2.2.2 and P.C.A.2.2.3)*				
A **Single Line Diagram** showing connectivity of all of the **Offshore Transmission System** including all **Plant and Apparatus** between the **Interface Point** and all Connection **Points** is required.		■	■	**SPD**
This **Single Line Diagram** shall depict the arrangement(s) of all of the existing and proposed load current carrying **Apparatus** relating to both existing and proposed **Interface Points** and **Connection Points**, showing electrical circuitry (i.e. overhead lines, underground cables (including subsea cables), power transformers and similar equipment), operating voltages, circuit breakers and phasing arrangements		■	■	**SPD**
Operational Diagrams of all substations within the **OTSDUW Plant and Apparatus**		■	■	**SPD**
SUBSTATION INFRASTRUCTURE *(PC.A.2.2.6)*				
For the infrastructure associated with any **OTSDUW Plant and Apparatus**				
Rated 3-phase rms short-circuit withstand current	kA	■	■	**SPD**
Rated 1-phase rms short-circuit withstand current	kA	■	■	**SPD**
Rated Duration of short-circuit withstand	s	■	■	**SPD**
Rated rms continuous current	A	■	■	**SPD**
LUMPED SUSCEPTANCES *(PC.A.2.3)*				
Equivalent Lumped Susceptance required for all parts of the User's Subtransmission System (including OTSDUW Plant and Apparatus) which are not included in the Single Line Diagram.		■	■	
This should not include:		■	■	
(a) independently switched reactive compensation equipment identified above.		■	■	
(b) any susceptance of the **OTSDUW Plant and Apparatus** inherent in the **Demand** (**Reactive Power**) data provided on Page 1 and 2 of this Schedule 14.		■	■	
Equivalent lumped shunt susceptance at nominal **Frequency**.	% on 100 MVA	■	■	

Public

OFFSHORE TRANSMISSION SYSTEM DATA

Branch Data (PC.A.2.2.4)

Node 1	Node 2	Rated Voltage (kV)	Operating Voltage (kV)	Circuit	PPS PARAMETERS			ZPS PARAMETERS			Maximum Continuous Ratings			Length (km)
					R1 %100 MVA	X1 %100 MVA	B1 %100 MVA	R0 %100 MVA	X0 %100 MVA	B0 %100 MVA	Winter (MVA)	Spring Autumn (MVA)	Summer (MVA)	

Notes

1. For information equivalent STC Reference: STCP12-1m Part 3 – 2.1 Branch Data
2. In the case where an overhead line exists within the OTSDUW Plant and Apparatus the Mutual inductances should also be provided.

Public

OFFSHORE TRANSMISSION SYSTEM DATA

2 Winding Transformer Data (PC.A.2.2.5)

The data below is **Standard Planning Data**, and details should be shown below of all transformers shown on the **Single Line Diagram**

HV Node	HV (kV)	LV Node	LV (kV)	Rating (MVA)	Transformer	Positive Phase Sequence Reactance % on 100MVA			Positive Phase Sequence Resistance % on 100MVA			Tap Changer			Winding Arr	Earthing method (Direct/ Res/ Reac)	Earthing Impedance method
						Max Tap	Min Tap	Nom Tap	Max Tap	Min Tap	Nom Tap	Range +% to -%	Step size %	Type			

Notes

1 For information the corresponding STC Reference is STCP12-1: Part 3 – 2.4 Transformers

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

USERS SYSTEM DATA (OTSUA)

Auto Transformer Data 3-Winding (PC.A.2.2.5)

The data below is all **Standard Planning Data**, and details should be shown below of all transformers shown on the **Single Line Diagram**

HV NODE	V_H (kV)	LV NODE	V_L (kV)	PSS/E Circuit	Rating (MVA)	Trans-former	Positive Phase Sequence Reactance % on 100MVA			Positive Phase Sequence Resistance % on 100MVA			Taps			Wind-ing Arrange ment	Earth-ing Impe-dance method	EQUIVALENT ZPS PARAMETERS (FLIP)						The Com-pany Sheet	The Com-pany Code
																		ZOH		ZOL		ZOT Dflt X/R=20			
							Max Tap	Min Tap	Nom Tap	Max Tap	Min Tap	Nom Tap	Range +% to -%	Step size %	Type (Onload Offload)			R_{OH} % 100 MVA	X_{OH} % 100 MVA	R_{OL} % 100 MVA	X_{OL} % 100 MVA	R_{OT} % 100 MVA	X_{OT} % 100 MVA		

Notes

1.For information STC Reference: STCP12-1: Part 3 - 2.4 Transformers

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

OFFSHORE TRANSMISSION SYSTEM DATA

Circuit Breaker Data (PC.A.2.2.6(a))

The data below is all **Standard Planning Data**, and should be provided for all **OTSUA** switchgear (i.e. circuit breakers, load disconnectors and disconnectors)

	Circuit Breaker Data							Assumed Operating Times				3 Phase				1 Phase				DC time constant at testing of asymmetrical breaking ability (s)
Location	Name	Rated Voltage	Oper-ating Voltage	Make	Model	Type	Year Comm-issioed	Circuit Breaker (ms)	Minimum Protection & Trip Relay (ms)	Total Time (ms)	Conti-nuos Rating (A)	Fault Rating (RMS Symmetrical) (3 phase MVA)	Fault Break Rating (RMS Symmetrical) (3 phase) (kA)	Fault Break Rating (Peak Asymmetrical) (3 phase) (kA)	Fault Make Rating (Peak Asymmetrical) (3 phase) (kA)	Fault Rating (RMS Symmetrical) (1 phase MVA)	Fault Break Rating (RMS Symmetrical) (1 phase) (kA)	Fault Break Rating (Peak Asymmetrical) (1 phase) (kA)	Fault Make Rating (Peak Asymmetrical) (1 phase) (kA)	

Public

OFFSHORE TRANSMISSION SYSTEM DATA

REACTIVE COMPENSATION EQUIPMENT (PC.A.2.4(e))

Item	Node	kV	Device No.	Rating (MVAr)	P Loss (kW)	Tap range	Connection Arrangement

Notes:

1.For information STC Reference: STCP12-1: Part 3 - 2.5 Reactive Compensation Equipment

2. Data relating to continuously variable reactive compensation equipment (such as statcoms or SVCs) should be entered on the SVC Modelling table.

3. For the avoidance of doubt this includes any AC Reactive Compensation equipment included within the OTSDUW DC Converter other than harmonic filter data which is to be entered in the harmonic filter data table.

PC.A.2.4.1(e)	A mathematical representation in block diagram format to model the control of any dynamic compensation plant. The model should be suitable for RMS dynamic stability type studies in which the time constants used should not be less than 10ms.

Public

OFFSHORE TRANSMISSION SYSTEM DATA

REACTIVE COMPENSATION - SVC Modelling Data (PC.A.2.4.1(e)(iii))

HV Node	LV Node	Control Node	Nominal Voltage (kV)	Target Voltage (kV)	Max MVAr at HV	Min MVAr at HV	Slope %	Voltage Dependent Q Limit	Normal Running Mode	R1 PPS_R	X1 PPS_X	R0 ZPS_R	Z0 ZPS_X	Trasnf Winding Type	Connection (Direct/ Tertiary)

Notes:

1.For information the equivalent STC Reference is: STCP12-1: Part 3 - 2.7 SVC Modelling Data

Public

OFFSHORE TRANSMISSION SYSTEM DATA
Harmonic Filter Data (including **OTSDUW DC Converter** harmonic Filter Data)
(PC.A.5.4.3.1(d) and PC.A.6.4.2)

Site Name	SLD Reference	Point of Filter Connection		
Filter Description				
Manufacturer	Model	Filter Type	Filter connection type (Delta/Star, Grounded/ Ungrounded)	Notes
Bus Voltage	Rating	Q factor	Tuning Frequency	Notes
Component Parameters (as per SLD)				
	Parameter as applicable			
Filter Component (R, C or L)	Capacitance (micro-Farads)	Inductance (milli-Henrys)	Resistance (Ohms)	Notes
Filter frequency characteristics (graphs) detailing for frequency range up to 10kHz and higher				
1. Graph of impedance (ohm) against frequency (Hz) 2. Graph of angle (degree) against frequency (Hz) 3. Connection diagram of Filter & Elements				

Notes:
1. For information STC Reference: STCP12-1: Part 3 - 2.8 Harmonic Filter Data

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA
PAGE 10 OF 24

Information for Transient Overvoltage Assessment (**DPD I**) *(PC.A.6.2 ■ CUSC Contract)*

The information listed below may be requested by **The Company** from each **User** undertaking **OTSDUW** with respect to any **Interface Point** or **Connection Point** to enable **The Company** to assess transient overvoltage on the **National Electricity Transmission System**.

(a) Busbar layout plan(s), including dimensions and geometry showing positioning of any current and voltage transformers, through bushings, support insulators, disconnectors, circuit breakers, surge arresters, etc. Electrical parameters of any associated current and voltage transformers, stray capacitances of wall bushings and support insulators, and grading capacitances of circuit breakers;

(b) Electrical parameters and physical construction details of lines and cables connected at that busbar. Electrical parameters of all plant e.g., transformers (including neutral earthing impedance or zig-zag transformers if any), series reactors and shunt compensation equipment connected at that busbar (or to the tertiary of a transformer) or by lines or cables to that busbar;

(c) Basic insulation levels (BIL) of all **Apparatus** connected directly, by lines or by cables to the busbar;

(d) Characteristics of overvoltage **Protection** devices at the busbar and at the termination points of all lines, and all cables connected to the busbar;

(e) Fault levels at the lower voltage terminals of each transformer connected to each **Interface Point** or **Connection Point** without intermediate transformation;

(f) The following data is required on all transformers within the **OTSDUW Plant and Apparatus**.

(g) An indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions.

Harmonic Studies (**DPD I**) *(PC.A.6.4 ■ CUSC Contract)*

The information given below, both current and forecast, where not already supplied in this Schedule 14 may be requested by **The Company** from each **User** if it is necessary for **The Company** to evaluate the production/magnification of harmonic distortion on **National Electricity Transmission System**. The impact of any third party **Embedded** within the **User's System** should be reflected:-

(a) Overhead lines and underground cable circuits (including subsea cables) of the **User's OTSDUW Plant and Apparatus** must be differentiated and the following data provided separately for each type:-

Positive phase sequence resistance
Positive phase sequence reactance
Positive phase sequence susceptance

(b) for all transformers connecting the **OTSDUW Plant and Apparatus** to a lower voltage:-

Rated MVA
Voltage Ratio
Positive phase sequence resistance
Positive phase sequence reactance

(c) at the lower voltage points of those connecting transformers:-

Equivalent positive phase sequence susceptance
Connection voltage and MVAr rating of any capacitor bank and component design parameters if configured as a filter

Equivalent positive phase sequence interconnection impedance with other lower voltage points
The minimum and maximum **Demand** (both MW and MVAr) that could occur
Harmonic current injection sources in Amps at the Connection Points and Interface Points

(d) an indication of which items of equipment may be out of service simultaneously during **Planned Outage** conditions

Voltage Assessment Studies (**DPD I**) *(PC.A.6.5 ■ CUSC Contract)*

The information listed below, where not already supplied in this Schedule 14, may be requested by **The Company** from each **User** undertaking **OTSDUW** with respect to any **Connection Point** or **Interface Point** if it is necessary for **The Company** to undertake detailed voltage assessment studies (e.g. to examine potential voltage instability, voltage control co-ordination or to calculate voltage step changes on the **National Electricity Transmission System**).

(a) For all circuits of the **User's OTSDUW Plant and Apparatus**:-

Positive Phase Sequence Reactance
Positive Phase Sequence Resistance
Positive Phase Sequence Susceptance
MVAr rating of any reactive compensation equipment

(b) for all transformers connecting the **User's OTSDUW Plant and Apparatus** to a lower voltage:-

Rated MVA
Voltage Ratio
Positive phase sequence resistance
Positive Phase sequence reactance
Tap-changer range
Number of tap steps
Tap-changer type: on-load or off-circuit
AVC/tap-changer time delay to first tap movement
AVC/tap-changer inter-tap time delay

(c) at the lower voltage points of those connecting transformers

Equivalent positive phase sequence susceptance
MVAr rating of any reactive compensation equipment
Equivalent positive phase sequence interconnection impedance with other lower voltage points
The maximum **Demand** (both MW and MVAr) that could occur
Estimate of voltage insensitive (constant power) load content in % of total load at both winter peak and 75% off-peak load conditions

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA
PAGE 12 OF 24

Short Circuit Analyses:(**DPD I**) *(PC.A.6.6 ■ CUSC Contract)*

The information listed below, both current and forecast, and where not already supplied under this Schedule 14, may be requested by **The Company** from each **User** undertaking **OTSDUW** with respect to any **Connection Point** or **Interface Point** where prospective short-circuit currents on **Transmission** equipment are close to the equipment rating.

(a) For all circuits of the **User's OTSDUW Plant and Apparatus**:-
Positive phase sequence resistance
Positive phase sequence reactance
Positive phase sequence susceptance
Zero phase sequence resistance (both self and mutuals)
Zero phase sequence reactance (both self and mutuals)
Zero phase sequence susceptance (both self and mutuals)

(b) For all transformers connecting the **User's OTSDUW Plant and Apparatus** to a lower voltage:-
Rated MVA
Voltage Ratio
Positive phase sequence resistance (at max, min and nominal tap)
Positive Phase sequence reactance (at max, min and nominal tap)
Zero phase sequence reactance (at nominal tap)
Tap changer range
Earthing method: direct, resistance or reactance
Impedance if not directly earthed

(c) At the lower voltage points of those connecting transformers:-

The maximum **Demand** (in MW and MVAr) that could occur
Short-circuit infeed data in accordance with PC.A.2.5.6(a) unless the **User**'s **OTSDUW Plant and Apparatus** runs in parallel with the **Subtransmission System**, when to prevent double counting in each node infeed data, a π equivalent comprising the data items of PC.A.2.5.6(a) for each node together with the positive phase sequence interconnection impedance between the nodes shall be submitted**.**

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA
PAGE 13 OF 24

Fault infeed data to be submitted by **OTSDUW Plant and Apparatus** providing a fault infeed (including **OTSDUW DC Converters**) (PC.A.2.5.5)

A submission is required for **OTSDUW Plant and Apparatus** (including **OTSDUW DC Converters** at each **Transmission Interface Point** and **Connection Point**. The submission shall represent operating conditions that result in the maximum fault infeed. The fault current from all auxiliaries of the **OTSDUW Plant and Apparatus** at the **Transmission Interface Point** and **Connection Point** shall be included. The fault infeed shall be expressed as a fault current at the **Transmission Interface Point** and also at each **Connection Point**.

Should actual data in respect of fault infeeds be unavailable at the time of the application for a **CUSC Contract** or **Embedded Development Agreement**, a limited subset of the data, representing the maximum fault infeed that may result from the **OTSDUW Plant and Apparatus**, shall be submitted. This data will, as a minimum, represent the root mean square of the positive, negative and zero sequence components of the fault current for both single phase and three phase solid faults at each **Connection Point** and **Interface Point** at the time of fault application and 50ms following fault application. Actual data in respect of fault infeeds shall be submitted to **The Company** as soon as it is available, in line with PC.A.1.2.

DATA DESCRIPTION	UNITS	F.Yr. 0	F.Yr. 1	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	DATA to **RTL**	
(PC.A.2.5)										CUSC Contract	CUSC App. Form
Name of **OTSDUW Plant and Apparatus**											
OTSDUW DC Converter type (i.e. voltage or current source)											
A submission shall be provided for the contribution of each **OTSDUW** Plant and Apparatus to the positive, negative and zero sequence components of the short circuit current at the **Interface Point** and each **Connection Point** for (i) a solid symmetrical three phase short circuit (ii) a solid single phase to earth short circuit (iii) a solid phase to phase short circuit (iv) a solid two phase to earth short circuit										□	■
If protective controls are used and active for the above conditions, a submission shall be provided in the limiting case where the protective control is not active. This case may require application of a non-solid fault, resulting in a retained voltage at the fault point.										□ □ □ □	■ ■ ■ ■

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

PAGE 14 OF 24

DATA DESCRIPTION	UNITS	F. Yr. 0	F. Yr. 1	F. Yr. 2	F. Yr. 3	F. Yr. 4	F. Yr. 5	F. Yr. 6	F. Yr. 7	DATA to **RTL**	
										CUSC Contract	CUSC App. Form
- A continuous time trace and table showing the root mean square of the positive, negative and zero sequence components of the fault current from the time of fault inception to 140ms after fault inception at 10ms intervals	Graphical and tabular kA versus s									□	■
- A continuous time trace and table showing the positive, negative and zero sequence components of retained voltage at the **Interface Point** and each **Connection Point**, if appropriate	p.u. versus s									□	■
- A continuous time trace and table showing the root mean square of the positive, negative and zero sequence components of retained voltage at the fault point, if appropriate	p.u. versus s									□	■
Positive sequence X/R ratio of the equivalent at time of fault at the **Interface Point** and each **Connection Point**										□	■
Minimum zero sequence impedance of the equivalent at the **Interface Point** and each **Connection Point**										□	■
Active Power transfer at the Interface Point and each Connection Point pre-fault	MW									□	■
Power Factor (lead or lag)										□	■
Pre-fault voltage (if different from 1.0 p.u.) at fault point (See note 1)	p.u.									□	■
Items of reactive compensation switched in pre-fault										□	■

Note 1. The pre-fault voltage provided above should represent the voltage within the range 0.95 to 1.05 that gives the highest fault current

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

Thermal Ratings Data (PC.A.2.2.4)

CIRCUIT RATING SCHEDULE

Voltage	
132kV	

Offshore TO Name

	Issue Date

CIRCUIT *Name from Site A – Site B*

		Winter				Spring/Autumn				Summer			
OVERALL CCT RATINGS		%Nom	Limit	Amps	MVA	%Nom	Limit	Amps	MVA	%Nom	Limit	Amps	MVA
Pre-Fault Continuous		84%	Line	485	111	84%	Line	450	103	84%	Line	390	89
Post-Fault Continuous		100%	Line	580	132	100%	Line	540	123	100%	Line	465	106
Prefault load exceeds line prefault continuous rating	6hr	95%	Line	580	132	95%	Line	540	123	95%	Line	465	106
	20m		Line	580	132		Line	540	123		Line	465	106
	10m	mva	Line	580	132	mva	Line	540	123	mva	Line	465	106
	5m	125	Line	580	132	116	Line	540	123	100	Line	465	106
	3m		Line	580	132		Line	540	123		Line	465	106
Short Term Overloads	6hr	90%	Line	580	132	90%	Line	540	123	90%	Line	465	106
	20m		Line	580	132		Line	540	123		Line	465	106
	10m	mva	Line	580	132	mva	Line	540	123	mva	Line	465	106
	5m	118	Line	580	132	110	Line	540	123	95	Line	465	106
	3m		Line	580	132		Line	540	123		Line	465	106
Limiting Item and permitted overload values for different times and pre-fault loads	6hr	84%	Line	580	132	84%	Line	540	123	84%	Line	465	106
	20m		Line	590	135		Line	545	125		Line	470	108
	10m	mva	Line	630	144	mva	Line	580	133	mva	Line	495	113
	5m	110	Line	710	163	103	Line	655	149	89	Line	555	126
	3m		Line	810	185		Line	740	170		Line	625	143
	6hr	75%	Line	580	132	75%	Line	540	123	75%	Line	465	106
	20m		Line	595	136		Line	555	126		Line	475	109
	10m	mva	Line	650	149	mva	Line	600	137	mva	Line	510	116
	5m	99	Line	760	173	92	Line	695	159	79	Line	585	134
	3m		Line	885	203		Line	810	185		Line	685	156
	6hr	60%	Line	580	132	60%	Line	540	123	60%	Line	465	106
	20m		Line	605	138		Line	560	128		Line	480	110
	10m	mva	Line	675	155	mva	Line	620	142	mva	Line	530	121
	5m	79	Line	820	187	73	Line	750	172	63	Line	635	145
	3m		Line	985	226		Line	900	206		Line	755	173
	6hr	30%	Line	580	132	30%	Line	540	123	30%	Line	465	106
	20m		Line	615	141		Line	570	130		Line	490	112
	10m	mva	Line	710	163	mva	Line	655	150	mva	Line	555	127
	5m	39	Line	895	205	36	Line	820	187	31	Line	690	158
	3m		Line	1110	255		Line	1010	230		Line	845	193

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

	6hr 20m 10m 5m 3m												
	6hr 20m 10m 5m 3m												
Notes or Restrictions Detailed													

Notes:
1. For information the equivalent STC Reference: STCP12-1: Part 3 - 2.6 Thermal Ratings
2. The values shown in the above table is example data.

Public

Protection Policy *(PC.A.6.3)*

To include details of the protection policy

Protection Schedules*(PC.A.6.3)*

Data schedules for the protection systems associated with each primary plant item including:
Protection, Intertrip Signalling & operating times
Intertripping and protection unstabilisation initiation
Synchronising facilities
Delayed Auto Reclose sequence schedules

Automatic Switching Scheme Schedules *(PC.A.2.2.7)*

A diagram of the scheme and an explanation of how the system will operate and what plant will be affected by the scheme's operation.

Public

GENERATOR INTERTRIP SCHEMES (PC.A.2.2.7(b))

Substation: _____

Details of Generator Intertrip Schemes:

A diagram of the scheme and an explanation of how the system will operate and what plant will be effected by the schemes operation.

DEMAND INTERTRIP SCHEMES (PC.A.2.2.7(b))

Substation:_____

Details of Demand Intertrip Schemes:

A diagram of the scheme and an explanation of how the system will operate and what plant will be effected by the schemes operation

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

Specific Operating Requirements (CC.5.2.1 or ECC.5.2.1)

SUBSTATION OPERATIONAL GUIDE

Substation: _____

Location Details:

Postal Address:	Telephone Nos.	Map Ref.
Transmission Interface		
Generator Interface		

1. **Substation Type:**

2. **Voltage Control:** *(short description of voltage control system. To include mention of modes i.e. Voltage, manual etc. Plus control step increments i.e. 0.5% or 0.33kV)*

3. **Energisation Switching Information:** *(The standard energisation switching process from dead.)*

4. **Intertrip Systems:**

5. **Reactive Plant Outage:** *(A short explanation of any system re-configurations required to facilitate the outage of any reactive plant which form part of the OTSDUW Plant and Apparatus equipment. Also any generation restrictions required).*

6. **Harmonic Filter Outage:** *(An explanation as to any OTSDUW Plant and Apparatus reconfigurations required to facilitate the outage and maintain the system within specified Harmonic limits, also any generation restrictions required).*

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

OTSDUW DC CONVERTER TECHNICAL DATA

OTSDUW DC CONVERTER NAME DATE:_____

Data Description	Units	DATA to **RTL**		Data Category	**DC Converter Station** Data
(PC.A.4 and PC.A.5.2.5)		CUSC Contract	CUSC App. Form		
OTSDUW DC CONVERTER (**CONVERTER** DEMANDS):					
Demand supplied through **Station Transformers** associated with the **OTSDUW DC Converter** at each **Interface Point** and each **Offshore Connection Point Grid Entry Point [PC.A.4.1]**					
- **Demand** with all **OTSDUW DC Converters** operating at **Interface Point Capacity** .	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** with all **OTSDUW DC Converters** operating at maximum **Interface Point** flow from the **Interface Point** to each **Offshore Grid Entry Point** .	MW MVAr	□ □		**DPD II** **DPD II**	
- The maximum **Demand** that could occur.	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** at specified time of annual peak half hour of **The Company Demand** at **Annual ACS Conditions**.	MW MVAr	□ □		**DPD II** **DPD II**	
- **Demand** at specified time of annual minimum half-hour of **The Company Demand**.	MW MVAr	□ □		**DPD II**	
OTSDUW DC CONVERTER DATA	Text	□	■	**SPD+**	
Number of poles, i.e. number of **OTSDUW DC Converters**	Text	□	■	**SPD+**	
Pole arrangement (e.g. monopole or bipole)	Diagram	□			
Return path arrangement					
Details of each viable operating configuration			■		
Configuration 1	Diagram	□	■	**SPD+**	
Configuration 2	Diagram	□	■		
Configuration 3	Diagram	□	■		
Configuration 4	Diagram	□	■		
Configuration 5	Diagram	□	■		
Configuration 6	Diagram				

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating Configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
OTSDUW DC CONVERTER DATA *(PC.A.3.3.1(d))*										
OTSDUW DC Converter Type (e.g. current or Voltage source)	Text	□	■	**SPD**						
If the busbars at the **Interface Point** or Connection Point are normally run in separate sections identify the section to which the **OTSDUW DC Converter** configuration is connected	Section Number	□	■	**SPD**						
Rated MW import per pole (PC.A.3.3.1)	MW	□	■	**SPD+**						
Rated MW export per pole (PC.A.3.3.1)	MW	□	■	**SPD+**						
ACTIVE POWER TRANSFER CAPABILITY (PC.A.3.2.2)										
Interface Point Capacity	MW	□	■	**SPD**						
	MVAr	□	■	**SPD**						
OTSDUW DC CONVERTER TRANSFORMER (PC.A.5.4.3.1)										
Rated MVA	MVA	□		**DPD II**						
Winding arrangement		□		**DPD II**						
Nominal primary voltage	kV	□		**DPD II**						
Nominal secondary (converter-side) voltage(s)	kV									
Positive sequence reactance		□		**DPD II**						
Maximum tap	% on	□		**DPD II**						
Nominal tap	MVA	□		**DPD II**						
Minimum tap	% on			**DPD II**						
Positive sequence resistance	MVA									
Maximum tap		□		**DPD II**						
Nominal tap	% on	□		**DPD II**						
Minimum tap	MVA	□		**DPD II**						
Zero phase sequence reactance		□		**DPD II**						
Tap change range	% on	□		**DPD II**						
Number of steps	MVA	□		**DPD II**						
	% on									
	MVA									
	% on									
	MVA									
	+% / -%									

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
OTSDUW DC CONVERTER NETWORK DATA (PC.A.5.4.3.1 (c))										
Rated DC voltage per pole	kV	□		**DPD II**						
Rated DC current per pole	A	□		**DPD II**						
Details of the **OTSDUW DC Network** described in diagram form including resistance, inductance and capacitance of all DC cables and/or DC lines. Details of any line reactors (including line reactor resistance), line capacitors, DC filters, earthing electrodes and other conductors that form part of the **OTSDUW DC Network** should be shown.	Diagram	□		**DPD II**						

Public

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6

Public

OTSDUW DC CONVERTER CONTROL SYSTEMS (PC.A.5.4.3.2)											
Static V_{DC} – P_{DC} (DC voltage – DC power) or Static V_{DC} – I_{DC} (DC voltage – DC current) characteristic (as appropriate) when operating as –Rectifier –Inverter	Diagram Diagram Diagram	□ □ □		**DPD II** **DPD II** **DPD II**							
Details of rectifier mode control system, in block diagram form together with parameters showing transfer functions of individual elements.	Diagram	□		**DPD II**							
Details of inverter mode control system, in block diagram form showing transfer functions of individual elements including parameters (as applicable).	Diagram	□		**DPD II**							
Details of **OTSDUW DC Converter** transformer tap changer control system in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**							
Details of AC filter control systems in block diagram form showing transfer functions of individual elements including parameters	Diagram	□		**DPD II**							
Details of any frequency and/or load control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**							
Details of any large or small signal modulating controls, such as power oscillation damping controls or sub-synchronous oscillation damping controls, that have not been submitted as part of the above control system data.	Diagram	□		**DPD II**							
Transfer block diagram representation of the reactive power control at converter ends for a voltage source converter.	Diagram	□		**DPD II**							
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of **OTSDUW DC Converter** unit models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**							
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of AC component models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□ □		**DPD II**							
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of DC Grid models and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**							
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of Voltage and power controller and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**							
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of Special control	Diagram	□		**DPD II**							

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
features if applicable (e.g. power oscillation damping (POD) function, subsynchronous torsional interaction (SSTI) control and/or control systems in block diagram form showing transfer functions of individual elements including parameters.										
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of Multi terminal control, if applicable and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						
For **Generators** in respect of **OTSDUW** who are also **EU Code Users** details of **OTSDUW DC Converter** protection models as agreed between **The Company** and the **Generator** (in respect of **OTSDW**) and/or control systems in block diagram form showing transfer functions of individual elements including parameters.	Diagram	□		**DPD II**						

Public

SCHEDULE 18 - OFFSHORE TRANSMISSION SYSTEM DATA

Data Description	Units	DATA to **RTL**		Data Category	Operating configuration					
		CUSC Contract	CUSC App. Form		1	2	3	4	5	6
LOADING PARAMETERS (PC.A.5.4.3.3)										
MW Export from the **Offshore Grid Entry Point** to the **Transmission Interface Point**	MW/s	□		**DPD I**						
Nominal loading rate	MW/s	□		**DPD I**						
Maximum (emergency) loading rate										
				DPD II						
Maximum recovery time, to 90% of pre-fault loading, following an AC system fault or severe voltage depression.	s	□								
Maximum recovery time, to 90% of pre-fault loading, following a transient DC Network fault.	s	□		**DPD II**						

SCHEDULE 19 – USER DATA FILE STRUCTURE

The structure of the **User Data File Structure** is given below.

i.d.	Folder name	Description of contents
Part A: Commercial & Legal		
A2	Commissioning	Commissioning & Test Programmes
A3	Statements	Statements of Readiness
A9	AS Monitoring	Ancillary Services Monitoring
A10	Self-Certification	User Self Certification of Compliance
A11	Compliance statements	Compliance Statement
Part 1: Safety & System Operation		
1.1	Interface Agreements	Interface Agreements
1.2	Safety Rules	Safety Rules
1.3	Switching Procedures	Local Switching Procedures
1.4	Earthing	Earthing
1.5	SRS	Site Responsibility Schedules
1.6	Diagrams	Operational and Gas Zone Diagrams
1.7	Drawings	Site Common Drawings
1.8	Telephony	Control Telephony
1.9	Safety Procedures	Local Safety Procedures
1.10	Co-ordinators	Safety Co-ordinators
1.11	RISSP	Record of Inter System Safety Precautions
1.12	Tel Numbers	Telephone Numbers for Joint System Incidents
1.13	Contact Details	Contact Details (fax, tel, email)
1.14	Restoration Plan	Local Joint Restoration Plan (incl. System Restoration if applicable)
1.15	Maintenance	Maintenance Standards
Part 2: Connection Technical Data		
2.1	DRC Schedule 5	DRC Schedule 5 – Users System Data
2.2	Protection Report	Protection Settings Reports
2.3	Special Automatic Facilities	Special Automatic Facilities e.g. intertrip
2.4	Operational Metering	Operational Metering
2.5	Tariff Metering	Tariff Metering
2.6	Operational Comms	Operational Communications
2.7	Monitoring	Performance Monitoring
2.8	Power Quality	Power Quality Test Results (if required)

SCHEDULE 19 – USER DATA FILE STRUCTURE

PAGE 2 OF 2

Part 3: Generator Technical Data		
3.1	DRC Schedule 1	DRC Schedule 1 - Generating Unit, Power Generating Module, HVDC System and DC Converter Technical Data
3.2	DRC Schedule 2	DRC Schedule 2 - Generation Planning Data
3.3	DRC Schedule 4	DRC Schedule 4 – Frequency Droop & Response
3.4	DRC Schedule 14	DRC Schedule 14 – Fault Infeed Data – Generators
3.5	Special Generator Protection	Special Generator Protection e.g. Pole slipping; islanding
3.6	Compliance Tests	Compliance Tests & Evidence
3.7	Compliance Studies	Compliance Simulation Studies
3.8	Site Specific	Bilateral Connections Agreement Technical Data & Compliance
3.9	DRC Schedule 20	DRC Schedule 20 - Grid Forming Plant Data
Part 4: General DRC Schedules		
4.1	DRC Schedule 3	DRC Schedule 3 – Large Power Station Outage Information
4.2	DRC Schedule 6	DRC Schedule 6 – Users Outage Information
4.3	DRC Schedule 7	DRC Schedule 7 – Load Characteristics
4.4	DRC Schedule 8	DRC Schedule 8 – BM Unit Data (if applicable)
4.5	DRC Schedule 10	DRC Schedule 10 –Demand Profiles
4.6	DRC Schedule 11	DRC Schedule 11 – Connection Point Data
Part 5: OTSDUW Data and Information (if applicable and prior to **OTSUA Transfer Time**)		
		Diagrams Circuits Plant and Apparatus Circuit Parameters Protection Operation and Autoswitching Automatic Control Systems
		Mathematical model of dynamic compensation plant

SCHEDULE 20 – GRID FORMING PLANT CAPABILITY DATA

The following data need only be supplied by **Users** (be they a **GB Code User** or **EU Code User**) or **Non-CUSC Parties** who wish to offer a **Grid Forming Capability** as provided for ECC.6.3.19.3. Where such a **Grid Forming Capability** is provided then the following data items and models are to be supplied in respect of each **Grid Forming Plant**.

DATA DESCRIPTION		GRID FORMING PLANT DATA		
		1	2	3
Submission of **Network Frequency Perturbation Plot** and **Nichols Chart** for each **GBGF-I** (PC.A.5.8.1)	Graphs			
High level equivalent architecture diagram of Grid Forming Plant (PC.A.5.8.1)	Diagram			
GBGF-I Grid Forming Plant Block Diagram (Laplace Operator) in the general form shown in Figure PC.A.5.8.1 or as agreed with **The Company**. When submitting either Figure PC.A.5.8.1 (a) or Figure PC.A.5.8.1 (b), each **User** or **Non-CUSC Party** can use their own design, that may be very different to Figures PC.A.5.8.1 (a) or PC.A.5.8.1 (b), but should contain all relevant functions that can include simulation models and other equivalent data and documentation	Block Diagram (Laplace Operator) Documentation			
Each **User** or **Non-CUSC Party** shall provide a model of their **Grid Forming Plant** which provides a true and accurate reflection of its **Grid Forming Capability**.	Model and documentation – format to be agreed with **The Company**			

In order to participate in the **Grid Forming Capability** market, **User's** and **Non-CUSC Parties** are required to provide data of their **GBGF-I** in accordance with Figures PC.A.5.8.1(a) and PC.A.5.8.1(b) **Users** and **Non-CUSC Parties** in respect of **Grid Forming Plants** should indicate if the data is submitted on a unit or aggregated basis. Table 1 below defines the notation used in Figure PC.5.8.1

Parameter	Symbol	Units
The primary reactance of the **Grid Forming Unit**, in pu.	Xin or Xts	pu on MVA **Rating of Grid Forming Unit**
The additional reactance, in pu, between the terminals of the **Grid Forming Unit** and the **Grid Entry Point** or **User System Entry Point** (if **Embedded**).	X_{tr}	pu on MVA **Rating of Grid Forming Unit**
The rated angle between the **Internal Voltage Source** and the input terminals of the **Grid Forming Unit**.		radians
The rated angle between the **Internal Voltage Source** and **Grid Entry Point** or **User System Entry Point** (if **Embedded**).		radians
The rated voltage and phase of the **Internal Voltage Source** of the **Grid Forming Unit**.		Voltage - pu Phase - radians
The rated electrical angle between current and voltage at the input to the Grid transformer.		radians

Table 1

In order to participate in a **Grid Forming Capability** market, **User's** and **Non-CUSC Parties** are also required to provide the data of their **GBGF-I** in accordance with the Table below to **The Company**. The details and arrangements for **Users** and **Non-CUSC Parties** participating in this market shall be published on **The Company's Website**.

Quantity	Units	Range (where Applicable)	User Defined Parameter
Type of Grid form **Plant** (eg **Generating Unit**, **Electricity Storage Module**, **Dynamic Reactive Compensation Equipment**	N/A		
Maximum Continuous Rating at **Registered Capacity** or **Maximum Capacity**	MVA		
Primary reactance Xin or Xts(see Table 1)	pu on MVA		

Additional reactance X_{tr} (See Table 1)	pu on MVA		
Maximum Capacity	MW		
Active ROCOF Response Power (MW) supplied or absorbed at 1Hz/s **System Frequency** change (which is the maximum frequency change for linear operation of the **Grid Forming Plant**)	MW		
Phase Jump Angle Withstand	degrees		60 degrees specified
Phase Jump Angle limit	degrees		5 degrees recommended
Phase Jump Power (MW) at the rated angle	MW		
Defined Active Damping Power for a **Grid Oscillation Value** of 0.05 Hz peak to peak at 1 Hz	MW		
The cumulative energy delivered for a 1Hz/s **System Frequency** fall from 52 Hz to 47 Hz This is the total **Active Power** transient output of the **Grid Forming Plant**	MWs or MJ		
Inertia Constant (**H**) using equation 1 or declared in accordance with the simulation results of ECP.A.3.9.4	MWs/MVA		
Inertia Constant (**He**) using equation 2 or declared in accordance with the simulation results of ECP.A.3.9.4	MWs/MVA		
Continuous Overload Capability	% on MVA		
Short Term duration Overload capability			
Duration of Short Term Overload Capability	s		
Peak Current Rating	pu		
Nominal **Grid Entry Point** or **User System Entry Point** voltage	kV		
Grid Entry Point or **User System Entry Point**	- Location		
Continuous or defined time duration MVA Rating	MVA		

Continuous or defined time duration MW Rating	MW		
For a **GBGF-I** the inverters maximum **Internal Voltage Source** (**IVS**) for the worst case condition – for example operation at maximum exporting **Reactive Power** at the maximum AC **System** voltage	pu		
Maximum Three Phase Short Circuit Infeed at **Grid Entry Point** or **User System Entry Point**	kA		
Maximum Single Phase Short Circuit Infeed at **Grid Entry Point** or **User System Entry Point**	kA		
Will the **Grid Forming Plant** contribute to any other form of commercial service – for example Dynamic Containment, Firm Frequency Response,	Details to be provided		
Equivalent Damping Factor.	ζ		0.2 to 5.0 allowed

Table 2

H = Installed MWs / Rated installed MVA

(equation 1)

He = (**Active ROCOF Response Power** at 1 Hz / s x **System Frequency**) / (Installed MVA x 2)

(equation 2)

SCHEDULE 21 – GENERATION AND DEMAND OUTTURN AND FORECASTS
PAGE 1 OF 3

(PC.9) Submissions by **Network Operators** using this Schedule 21 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 2 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Time of NETS Minimum Demand

DATA DESCRIPTION		**Aggregated Energy Source**	Outturn	**Weather Corrected** Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Date of **NETS** Minimum **Demand** (provided by **NESO**)															**PC.10.3.1.2**
Time of **NETS** Minimum **Demand** (provided by **NESO**)															**PC.10.3.1.2**
Connection Point Group Demand at time of **NETS** Minimum **Demand** (MW)															**PC.9.3.2.4**
Connection Point Group Demand at time of **NETS** Minimum **Demand** (MVAr)															**PC.9.3.2.4**
Embedded Power Station Export (Note 2 & 3)	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														**PC.9.3.2.4**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														**PC.9.3.2.4**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.2.4**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 1														**PC.9.3.2.4**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 2														**PC.9.3.2.4**
	Export from **Power Stations and** Customer Generating Plant **connected below the Subtransmission** voltage (MW) **Aggregated Energy Source** n														**PC.9.3.2.4**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)															**PC.9.3.2.4**
Import to **Embedded Electricity Storage Module(s)** connected below below the **Subtransmission** voltage (MW) (Note 3)															**PC.9.3.2.4**
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

	Provided by **NESO**
	Required data
	Optional data as this will be the demand data set included in the **Solved PSM**
	Not required

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 Export from **Power Stations** relates to observed values for outturn and estimates for **Financial Years** 1 to 10.
Note 3 The **Network Operator** should clarify their forecasting methodology regarding the import and/or export from all types of **Power Stations** on request (PC.9.3.1).
Note 4 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

SCHEDULE 21 – GENERATION AND DEMAND OUTTURN AND FORECASTS

WEEK 2 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Time of Connection Point Summer Minimum Group Demand

DATA DESCRIPTION		**Aggregated Energy Source**	Outturn	**Weather Corrected** Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Date of **Connection Point** Summer Minimum **Group Demand**															**PC.9.3.2.5**
Time of **Connection Point** Summer Minimum **Group Demand**															
Connection Point Summer Minimum **Group Demand** (MW)															**PC.9.3.2.5**
Connection Point Summer Minimum **Group Demand** (MVAr)															**PC.9.3.2.5**
Embedded Power Station Export	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.2.5**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 1														**PC.9.3.2.5**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 2														
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** n														**PC.9.3.2.5**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW)															**PC.9.3.2.5**
Import to **Embedded Electricity Storage Module(s)** connected below below the **Subtransmission** voltage (MW)															
Increase in the **Group Demand** associated with **Latent Demand** (Note 2)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Required data
Not required

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

SCHEDULE 21 – GENERATION AND DEMAND OUTTURN AND FORECASTS

WEEK 2 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Time of Connection Point Summer Daylight Minimum Group Demand

DATA DESCRIPTION		**Aggregated Energy Source**	Outturn	Weather Corrected Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Date of **Connection Point** Summer Daylight Minimum **Group Demand**															**PC.9.3.2.6**
Time of **Connection Point** Summer Daylight Minimum **Group Demand**															
Connection Point Summer Daylight Minimum **Group Demand** (MW)															**PC.9.3.2.6**
Connection Point Summer Daylight Minimum **Group Demand** (MVAr)															**PC.9.3.2.6**
Embedded Power Station Export	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														**PC.9.3.2.6**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														**PC.9.3.2.6**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.2.6**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 1														**PC.9.3.2.6**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** 2														**PC.9.3.2.6**
	Export from **Power Stations** and **Customer Generating Plant** connected below the **Subtransmission** voltage (MW) **Aggregated Energy Source** n														**PC.9.3.2.6**
Import to **Subtransmission** connected **Electricity Storage Plant** (MW)															**PC.9.3.2.6**
Import to **Electricity Storage Plant** connected below below the **Subtransmission** voltage (MW)															**PC.9.3.2.6**
Increase in the **Group Demand** associated with **Latent Demand** (Note 2)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Required data
Not required

Note 1 **Financial Year** 1 relates to the next Financial Year.
Note 2 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

(PC.9)

Submissions by **Network Operators** using this Schedule 22 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

Network Operator:		Week 2 Submission	Grid Code	PC.9.3.2.7

Profile of the Measured Demand for Day of NETS Minimum Demand

	Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10
Date of NETS Minimum											

Demand Period		Measured Demand (MW)									
From:	To:										
00:00	00:30										
00:30	01:00										
01:00	01:30										
01:30	02:00										
02:00	02:30										
02:30	03:00										
03:00	03:30										
03:30	04:00										
04:00	04:30										
04:30	05:00										
05:00	05:30	Min.									
05:30	06:00										
06:00	06:30										
06:30	07:00										
07:00	07:30										
07:30	08:00										
08:00	08:30										
08:30	09:00										
09:00	09:30										
09:30	10:00										
10:00	10:30										
10:30	11:00										
11:00	11:30										
11:30	12:00										
12:00	12:30										
12:30	13:00										
13:00	13:30										
13:30	14:00										
14:00	14:30										
14:30	15:00										
15:00	15:30										
15:30	16:00										
16:00	16:30										
16:30	17:00										
17:00	17:30										
17:30	18:00										
18:00	18:30										
18:30	19:00										
19:00	19:30										
19:30	20:00										
20:00	20:30										
20:30	21:00										
21:00	21:30										
21:30	22:00										
22:00	22:30										
22:30	23:00										
23:00	23:30										
23:30	00:00										

Export from all **Embedded Power Stations** at the half hour of **NETS** Minimum Demand										

Provided by **NESO**

Required data

Note 1 **Financial Year** 1 relates to the next **Financial Year**.

SCHEDULE 23 – NETWORK OPERATOR DEMAND PROFILES AND ACTIVE ENERGY DATA

(PC.9)

Submissions by **Network Operators** using this Schedule 23 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 28 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Time of National Electricity Transmission System (NETS) Peak Demand

DATA DESCRIPTION	Type of **Aggregated Energy Source**	Outturn	**Weather Corrected** Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Date of **NETS** Peak **Demand** (provided by **NESO**)														**PC.10.3.1.3**
Time of **NETS** Peak **Demand** (provided by **NESO**)														**PC.10.3.1.3**
Connection Point Group Demand at time of **NETS** Peak **Demand** (MW)														**PC.9.3.3.4**
Connection Point Group Demand at time of **NETS** Peak **Demand** (MVAr)														**PC.9.3.3.4**
Embedded Power Station Export (Note 2 & 3)	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1													**PC.9.3.3.4**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2													**PC.9.3.3.4**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n													**PC.9.3.3.4**
	Export from **Power Stations and Customer Generating Plant** connected below the **Subtransmission voltage** (MW) **Aggregated Energy Source** 1													**PC.9.3.3.4**
	Export from **Power Stations and Customer Generating Plant** connected below the **Subtransmission voltage** (MW) **Aggregated Energy Source** 2													**PC.9.3.3.4**
	Export from **Power Stations and Customer Generating Plant** connected below the **Subtransmission Voltage** (MW) **Aggregated Energy Source** n													**PC.9.3.3.4**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)														**PC.9.3.3.4**
Import to **Embedded Electricity Storage Module(s)** connected below below the **Subtransmission** voltage (MW) (Note 3)														**PC.9.3.3.4**
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)														

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Provided by **NESO**
Required data
Optional data as this will be the demand data set included in the **Solved PSM**
Not required

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 Export from **Power Stations** relates to observed values for outturn and estimates for **Financial Years** 1 to 10.
Note 3 The **Network Operator** should clarify their forecasting methodology regarding the import and/or export from all types of **Power Stations** on request (PC.9.3.1).
Note 4 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

WEEK 28 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Time of Connection Point Peak Group Demand

DATA DESCRIPTION		**Aggregated Energy Source**	Outturn	**Weather Corrected** Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Date of **Connection Point** Peak **Group Demand**															**PC.9.3.3.5**
Time of **Connection Point** Peak **Group Demand**															**PC.9.3.3.5**
Connection Point Peak **Group Demand** (MW)															**PC.9.3.3.5**
Connection Point Peak **Group Demand** (MVAr)															**PC.9.3.3.5**
Embedded Power Station Export (Note 2 & 3)	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.5**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.5**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the subtransmission voltage** (MW) **Aggregated Energy Source** n														**PC.9.3.3.5**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)															**PC.9.3.3.5**
Import to **Embedded Electricity Storage Module(s)** connected below below the **Subtransmission** voltage (MW) (Note 3)															**PC.9.3.3.5**
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Reference to post-fault operational configuration in the **PSM Scenario Document**															**PC.G.5.1.3.1**
Reference to Outage Running arrangements associated with the operational configuration in the **PSM Scenario Document**															**PC.G.5.1.3.1**
Reference to the description of the actions and timescales involved in effecting the post-fault actions (e.g. auto-switching, manual, teleswitching, overload protection operation etc) associated with the operational configuration in the **PSM Scenario Document**															**PC.G.5.1.3.1**

May be repeated if necessary to identify each post-fault action.

Public

Associated **Connection Point** within the same **Access Group:**															**PC.9.3.3.5**
Group Demand at associated **Connection Point** at time of 'parent' **Connection Point** Peak **Group Demand** (MW)															**PC.9.3.3.5**
Group Demand at associated **Connection Point** at time of 'parent' **Connection Point** Peak **Group Demand** (MVAr)															**PC.9.3.3.5**
Embedded Power Station Export (Note 2 & 3)	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.5**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.5**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.5**
	Export from **Power Stations and Customer Generating Plant connected below the subtransmission voltage** (MW) **Aggregated Energy Source** n														**PC.9.3.3.5**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)															**PC.9.3.3.5**
Import to **Embedded Electricity Storage Module(s)** connected below the **Subtransmission** voltage (MW) (Note 3)															**PC.9.3.3.5**
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Repeat for each **Connection Point** within the same **Access Group**

Required data
Not required
Detailed information shall be provided in the **PSM Scenario Document**. A summary may be provided here.

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 Export from **Power Stations** relates to observed values for outturn and estimates for **Financial Years** 1 to 10.
Note 3 The **Network Operator** should clarify their forecasting methodology regarding the import and/or export from all types of **Power Stations** on request (PC.9.3.1).
Note 4 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

WEEK 28 SUBMISSION

Network Operator:	
Connection Point:	
Access Group:	

Connection Point Access Period

DATA DESCRIPTION	Aggregated Energy Source	Outturn	Weather Corrected Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10	GC Ref:
Transmission Interface Circuit:														PC.9.3.3.6
Date of **Connection Point** Peak **Group Demand** during the **Access Period**														PC.9.3.3.6
Time of **Connection Point** Peak **Group Demand** during the **Access Period**														PC.9.3.3.6
Access Period Peak **Group Demand** at **Connection Point** (MW)														PC.9.3.3.6
Access Period Peak **Group Demand** at **Connection Point** (MVAr)														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 1														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 2														PC.9.3.3.6
Embedded Power Station Export (Note 2 & 3) — Export from **Power Stations and Customer Generating Plant connected below the subtransmission voltage** (MW) **Aggregated Energy Source** n														PC.9.3.3.6
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)														PC.9.3.3.6
Import to **Embedded Electricity Storage Module(s)** connected below the **Subtransmission** voltage (MW) (Note 3)														PC.9.3.3.6
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)														
Reference to post-fault operational configuration in the **PSM Scenario Document**														PC.G.5.1.3.1
Reference to Outage Running arrangements associated with the operational configuration in the **PSM Scenario Document**														PC.G.5.1.3.1
Reference to the description of the actions and timescales involved in effecting the post-fault actions (e.g. auto-switching, manual, teleswitching, overload protection operation etc) associated with the operational configuration in the **PSM Scenario Document**														PC.G.5.1.3.1

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

May be repeated if necessary to identify each post-fault action.

Transmission Interface Circuit at the **Connection Point**

Public

Associated **Connection Point** within the same **Access Group:**															**PC.9.3.3.6**
Group Demand at associated **Connection Point** (MW) at the data & time of **Connection Point** Peak **Group Demand** during the **Access Period**															**PC.9.3.3.6**
Group Demand at associated **Connection Point** (MVAr) at the data & time of **Connection Point** Peak **Group Demand** during the **Access Period**															**PC.9.3.3.6**
Embedded Power Station Export (Note 2 & 3)	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.6**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.6**
	Export from **Subtransmission** connected **Power Stations** and **Customer Generating Plant** (MW) **Aggregated Energy Source** n														**PC.9.3.3.6**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 1														**PC.9.3.3.6**
	Export from **Power Stations and Customer Generating Plant connected below the Subtransmission voltage** (MW) **Aggregated Energy Source** 2														**PC.9.3.3.6**
	Export from **Power Stations and Customer Generating Plant connected below the subtransmission voltage** (MW) **Aggregated Energy Source** n														**PC.9.3.3.6**
Import to **Embedded Electricity Storage Modules** connected at **Subtransmission System** (MW) (Note 3)															**PC.9.3.3.6**
Import to **Embedded Electricity Storage Module(s)** connected below the **Subtransmission** voltage (MW) (Note 3)															**PC.9.3.3.6**
Increase in the **Group Demand** associated with **Latent Demand** (Note 4)															

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Repeat for each **Connection Point** within the same **Access Group**

Repeat for each

Required data
Not required
Detailed information shall be provided in the **PSM Scenario Document**. A summary may be provided here.

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 Export from **Power Stations** relates to observed values for outturn and estimates for **Financial Years** 1 to 10.
Note 3 The **Network Operator** should clarify their forecasting methodology regarding the import and/or export from all types of **Power Stations** on request (PC.9.3.1).
Note 4 These values may be populated in due course following clarification of industry requirements. There is no currently no requirement forecast the effect of **Latent Demand**.

Public

SCHEDULE 24 – GENERATION LARGER THAN 1 MW

(PC.9)

Submissions by **Network Operators** using this Schedule 24 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 28 SUBMISSION

Grid Code: PC.9.3.3.7 PC.10.5.2

Network Operator:	
Access Group	

Access Period Schedule

| **Connection Point, Transmission Interface Circuit** | Start Week | End Week | Maintenance Year | Duration (Weeks) | Potential Concurrent Outages | Year 1 | | |

Public

SCHEDULE 25 – NETWORK OPERATOR DEMAND CONTROL DATA

(PC.9)

Submissions by **Network Operators** using this Schedule 25 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

Network Operator:		WEEK 28 SUBMISSION	GRID CODE:	OC6.6.2 PC.9.3.3.8

Automatic Low Frequency Demand Disconnection

Year:	

Connection Point	Notes	Peak (MW) (Note 1)	Auto Frequency Block (MW)									Residual Demand (MW)
			48.8Hz Block 1	48.75Hz Block 2	48.7Hz Block 3	48.6Hz Block 4	48.5Hz Block 5	48.4Hz Block 6	48.2Hz Block 7	48.0Hz Block 8	47.8Hz Block 9	
Demand disconnected	MW		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
per Block	%											

Total Demand Disconnected :	0.0	MW (0.00 % of aggregate peak demand of 0.0 MW)

Required data

Optional information

Note 1 The 'Peak MW' is the net **Demand** (MW) (**Measured Demand**) at the time of **NETS** peak **Demand**

Public

WEEK 28 SUBMISSION		GRID CODE:	OC 6.5.3 PC.9.3.3.8
Network Operator:		Year:	

HIGH RISK OF DEMAND REDUCTIONS

Tranche	Percentage Voltage Reduction (if VR) or Percentage Demand Reduction (if DD)	Voltage Reduction or Demand Disconnection (For Tranches 1 & 2 please delete "VR" or "DD" as applicable)
1		VR/DD
2		VR/DD
3		DD
4		DD
5		DD

Complete either Two voltage reduction stages each of 2-4% voltage reduction and up to three demand disconnection stages each of 4-6% demand reduction

or Four demand disconnection stages each of 4-6% demand reduction.

Required data

Public

Network Operator:		WEEK 28 SUBMISSION	GRID CODE:	OC6.7.2 PC.9.3.3.8
Year:				

Emergency Manual Demand Disconnection

Connection Point	Notes	Peak (MW) (Note 1)	Cumulative demand disconnection : % after					
			5 min	10 min	15 min	20 min	25 min	30 min

Required data

Optional information

Note 1 The 'Peak MW' is the net **Demand** (MW) (**Measured Demand**) at the time of **Connection Point** peak **Demand**

Public

SCHEDULE 26 – DEMAND DATA
PAGE 1 OF 2

(PC.9)

Submissions by **Network Operators** using this Schedule 26 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

Network Operator:		WEEK 28 SUBMISSION	Grid Code:	PC.9.3.3.9

Profile of the Measured Demand for Day of Network Operator's Peak Measured Demand

	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10
Date of Network Operator's Peak Measured Demand										

Demand Period		Active Power (MW) Under Annual ACS Conditions									
From:	To:										
00:00	00:30										
00:30	01:00										
01:00	01:30										
01:30	02:00										
02:00	02:30										
02:30	03:00										
03:00	03:30										
03:30	04:00										
04:00	04:30										
04:30	05:00										
05:00	05:30										
05:30	06:00										
06:00	06:30										
06:30	07:00										
07:00	07:30										
07:30	08:00										
08:00	08:30										
08:30	09:00										
09:00	09:30										
09:30	10:00										
10:00	10:30										
10:30	11:00										
11:00	11:30										
11:30	12:00										
12:00	12:30										
12:30	13:00										
13:00	13:30										
13:30	14:00										
14:00	14:30										
14:30	15:00										
15:00	15:30										
15:30	16:00										
16:00	16:30										
16:30	17:00										
17:00	17:30										
17:30	18:00										
18:00	18:30										
18:30	19:00										
19:00	19:30										
19:30	20:00										
20:00	20:30										
20:30	21:00										
21:00	21:30										
21:30	22:00										
22:00	22:30										
22:30	23:00										
23:00	23:30										
23:30	00:00										
Embedded Power Station Export in the half hour of **Network Operator's** peak **Measured Demand**											

Required data

Note 1 **Financial Year** 1 relates to the next **Financial Year**.

Public

Network Operator:		WEEK 28 SUBMISSION	Grid Code	PC.9.3.3.10

Profile of the Measured Demand for Day of the NETS Peak Demand

	Outturn	F.Yr. 1 (Note 1)	F.Yr. 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	F.Yr. 8	F.Yr. 9	F.Yr. 10
Date of NETS Peak Demand											

Demand Period		Actual Outturn	Annual ACS Conditions	Active Power (MW) Under Annual ACS Conditions									
From:	To:												
00:00	00:30												
00:30	01:00												
01:00	01:30												
01:30	02:00												
02:00	02:30												
02:30	03:00												
03:00	03:30												
03:30	04:00												
04:00	04:30												
04:30	05:00												
05:00	05:30												
05:30	06:00												
06:00	06:30												
06:30	07:00												
07:00	07:30												
07:30	08:00												
08:00	08:30												
08:30	09:00												
09:00	09:30												
09:30	10:00												
10:00	10:30												
10:30	11:00												
11:00	11:30												
11:30	12:00												
12:00	12:30												
12:30	13:00												
13:00	13:30												
13:30	14:00												
14:00	14:30												
14:30	15:00												
15:00	15:30												
15:30	16:00												
16:00	16:30												
16:30	17:00												
17:00	17:30	Note 2											
17:30	18:00												
18:00	18:30												
18:30	19:00												
19:00	19:30												
19:30	20:00												
20:00	20:30												
20:30	21:00												
21:00	21:30												
21:30	22:00												
22:00	22:30												
22:30	23:00												
23:00	23:30												
23:30	00:00												

Embedded Power Station Export in the half hour of **Network Operator**'s peak **Measured Demand**											

	Required data
	Not required
	Provided by **NESO**

Note 1 **Financial Year** 1 relates to the next **Financial Year**.
Note 2 The cells relating to the time period should be moved to reflect the actual half hour of the **NETS** peak **Demand**, as advised by **NESO**.

Public

SCHEDULE 27 – NETWORK OPERATOR ACTIVE ENERGY DATA

Submissions by **Network Operators** using this Schedule 27 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 28 SUBMISSION		Grid Code:	PC.9.3.3.11
Network Operator:		**Year:**	

User's Total System Active Energy

Customer Class	Outturn	**Weather Corrected** Outturn
LV1		
LV2		
LV3		
HV		
EHV		
Traction		
Public Lighting (inc in LV3)		
Total Customer **Active Energy**		
User System Losses		
Total **User Active Energy**		
Active Energy from **Embedded Power Stations**		

Required data

Public

SCHEDULE 28 – EMBEDDED POWER STATION FORECAST CAPACITY SCHEDULE

(PC.9)

Submissions by **Network Operators** using this Schedule 28 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 28 SUBMISSION

Network Operator:	
Connection Point:	

Access Group:	

Embedded Power Stations Forecasts

DATA DESCRIPTION	Aggregated Energy Source	F.Yr 1	F.Yr 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr. 6	F.Yr. 7	F.Yr 8	F.Yr 9	F.Yr 10	DATA CAT
Forecasted Customer Generation Summary												PC.9.3.3.12
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** 1												
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** 2												
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** 3												
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** 4												
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** 5												
Forecast aggregate **Registered Capacity** from **Power Stations** and **Customer Generating Plant** connected (MW) **Aggregated Energy Source** n												

Extra rows may need to be inserted if necessary to include each applicable **Aggregated Energy Source**

Note 1. Values provided should be represented as cumulative values across the financial years
Note 2. The F.Yr listed is the date by when the **Network Operator** wish to connect the generation that will be used to assess the impact on the **National Electricity Transmission System**
Note 3. **Network Operators** to add additional rows where a technology type forecast is to be provided.
Note 4. Information about **Power Stations** recorded in this table might also be recorded in schedule 23(21g) 24.
Note 5. **Network Operators** may include forecasts of **Power Stations** with a **Registered Capacity** of less than 1 MW.

Required data

Public

SCHEDULE 29 – EMBEDDED GENERATION SCHEDULE
PAGE 1 OF 2

(PC.9)

Submissions by **Network Operators** using this Schedule 29 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 2 & 28 SUBMISSION

Grid Code: PC.9.3.2.8 PC.9.3.3.8

Network Operator:	
Connection Point:	
Submission Year:	
Submission Week:	

Embedded Power Stations ≥ 1MW

				Location if wind or PV								If Control Mode = Voltage			If Control Mode = Power Factor				
Object Rdf Id (Note 1)	Connection Date (Financial Year for generator connecting after week 24 2015)	Name of connection point to the sub-transmission system	Individual or Aggregated Equivalent model	Latitude	Longitude	Grid Ref	Energy Source (PC.G.8)	Energy Conversion Technology (PC.G.8)	Part of CHP (Yes/No)	Registered Capacity MW	Control Mode	Voltage Set Point Per Unit	Min Reactive Capability MVAr	Max Reactive Capability MVAr	Target Power Factor MW	Loss of Mains Protection Type	Loss of Mains Protection Settings	Connected / Accepted-to-Connect	Comments
							Biofuel - Sewage gas												

Required data

Optional information

Note 1 The object Rdf Id is the unique identifier in the **Solved PSM** representing the MW capacity.

Public

WEEK 2 & 28 SUBMISSION	Grid Code:	PC.9.3.2.9 PC.9.3.3.13

Network Operator:

Connection Point:

Embedded Power Stations < 1MW

Object Rdf Id (Note 1)	Name of **Subtransmission** to lower voltage substation	**Aggregated Energy Source**	**Aggregated Registered Capacity (MW)**

Required data

Note 1 The object Rdf Id is the unique identifier in the **Solved PSM** representing the MW capacity.

Public

SCHEDULE 30 – EMBEDDED GENERATION CONSTRAINTS SCHEDULE

(PC.9)

Submissions by **Network Operators** using this Schedule 30 shall commence on the **PSM Implementation Date** and shall then continue in each year thereafter.

WEEK 2 & 28 SUBMISSION

Network Operator:	
Connection Point:	

Embedded Generation Constraints

DATA DESCRIPTION	Outurn	**Weather Corrected** Outturn	F.Yr 1 (Note 1)	F.Yr 2	F.Yr. 3	F.Yr. 4	F.Yr. 5	F.Yr 6	F.Yr 7	F.Yr 8	F.Yr 9	F.Yr 10	DATA CAT
Where the **Network Operator's System** places a constraint on the capacity of an **Embedded Large Power Station**													
Power Station Name													PC.9.3.2.9 PC.9.3.3.13
Generating Unit													
System Constrained Capacity													
Reactive Despach Network Restriction													
Where the **Network Operator's System** places a constraint on the capacity of an **Offshore Transmission System** at an **Interface Point**													
Offshore Transmission System Name													PC.9.3.2.9 PC.9.3.3.13
Interface Point Name													
Maximum Export Capacity													
Maximum Import Capacity													

Required data
Not required

Note 1 **Financial Year** 1 relates to the next **Financial Year**.

Public

<END OF DATA REGISTRATION CODE>

GENERAL CONDITIONS
(GC)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title	Page Number
GC.1 INTRODUCTION	2
GC.2 SCOPE	2
GC.3 UNFORESEEN CIRCUMSTANCES	2
GC.4 NOT USED	2
GC.5 COMMUNICATION BETWEEN THE COMPANY AND USERS	2
GC.6 MISCELLANEOUS	3
GC.7 OWNERSHIP OF PLANT AND/OR APPARATUS	3
GC.8 SYSTEM CONTROL	3
GC.9 EMERGENCY SITUATIONS	4
GC.10 MATTERS TO BE AGREED	4
GC.11 GOVERNANCE OF ELECTRICAL STANDARDS	4
GC.12 CONFIDENTIALITY	6
GC.13 RELEVANT TRANSMISSION LICENSEES	6
GC.14 BETTA TRANSITION ISSUES	6
GC.15 EMBEDDED EXEMPTABLE LARGE AND MEDIUM POWER STATIONS	6
GC.16 SYSTEM DEFENCE PLAN, SYSTEM RESTORATION AND TEST PLAN	6
GC.17 DIRECTIONS RELATED TO NATIONAL SECURITY	8
GC.18 ADVISORY AND INFORMATION REQUESTS	9
ANNEX TO THE GENERAL CONDITIONS	10
APPENDIX TO THE GENERAL CONDITIONS	13

GC.1 INTRODUCTION

GC.1.1 The **General Conditions** contain provisions which are of general application to all provisions of the Grid Code. Their objective is to ensure, to the extent possible, that the various sections of the Grid Code work together and work in practice for the benefit of all **Users**.

GC.2 SCOPE

GC.2.1 The **General Conditions** apply to all **Users** (including, for the avoidance of doubt, **The Company**).

GC.3 UNFORESEEN CIRCUMSTANCES

GC.3.1 If circumstances arise which the provisions of the Grid Code have not foreseen, **The Company** shall, to the extent reasonably practicable in the circumstances, consult promptly and in good faith all affected **Users** in an effort to reach agreement as to what should be done. If agreement between **The Company** and those **Users** as to what should be done cannot be reached in the time available, **The Company** shall determine what is to be done. Wherever **The Company** makes a determination, it shall do so having regard, wherever possible, to the views expressed by **Users** and, in any event, to what is reasonable in all the circumstances. Each **User** shall comply with all instructions given to it by **The Company** following such a determination provided that the instructions are consistent with the then current technical parameters of the particular **User's System** registered under the Grid Code. **The Company** shall promptly refer all such unforeseen circumstances and any such determination to the **Panel** for consideration in accordance with GC.4.2(e).

GC.4 NOT USED

GC.5 COMMUNICATION BETWEEN THE COMPANY AND USERS

GC.5.1 Unless otherwise specified in the Grid Code, all instructions given by **The Company** and communications (other than relating to the submission of data and notices) between a) **The Company** and **Network Operators**, and b) **The Company** and **Non-Embedded Customers**, shall take place between **The Company's Control Engineer** based at **The Company's Control Centre** notified by **The Company** to each **Network Operator** and **Non-Embedded Customer** prior to connection, and the relevant **User's Responsible Engineer/Operator**. In the case of a **Network Operator**, the **Responsible Engineer/Operator** shall be based at the **Control Centre** notified by the **Network Operator** to **The Company** prior to connection.

GC.5.2 Unless otherwise specified in the Grid Code, all instructions given by **The Company** and communications (other than relating to the submission of data and notices) between **The Company** and **Generators** or **DC Converter Station** owners or **HVDC System Owners** or **Suppliers** or **Interconnectors**, shall take place between:-

i) **The Company's Control Engineer** based at **The Company's Control Centre** to each **Generator's** or **DC Converter Station** owner's or **Interconnector's** or **HVDC System Owner's Control Point** or **Trading Point** (if one has been established) prior to connection, or:-

ii) **The Company's Control Engineer** based at **The Company's Control Centre** to the **Trading Point** or **Control Point** of each **Supplier** (if they have one) prior to submission of **BM Unit Data**.

Prior to connection or the submission of **BM Unit Data** as provided for in GC5.2(i) and (ii), **Generators**, **DC Converter Station** owners, **HVDC System Owners**, **Interconnectors** and **Suppliers**, shall notify **The Company** of contact details and communication routes in respect of their **Control Point** and **Trading Point** (as relevant) to permit the submission of operational data as specified in each relevant section of the Grid Code. In the absence of notification to the contrary, the **Control Point** of a **Generator's Power Station** will be deemed to be the **Power Station** at which the **Generating Units** or **Power Park Modules** are situated.

GC.5.3 Unless otherwise specified in the Grid Code, all instructions given by **The Company** and communications (other than relating to the submission of data and notices) between **The Company** and **Users** will be given by means of the **Control Telephony** referred to in CC.6.5.2 or ECC.6.5.2.

GC.5.4 Where location and contact arrangements of **The Company's Control Centre** changes or the location and contact arrangements of a **Network Operator's Control Centre** changes, whether due to an emergency or for any other reason, **The Company** shall notify the relevant **Network Operator** or the **Network Operator** shall notify **The Company**, as the case may be, of the new location and any changes to the **Control Telephony** or **System Telephony** necessitated by such move, as soon as practicable following the move.

GC.5.5 If any **Trading Point** notified to **The Company** by a **Generator** or **DC Converter Station** owner or **HVDC System Owner** or **Interconnector** prior to connection, or by a **Supplier** prior to submission of **BM Unit Data**, is moved to another location or is shut down, the **Generator**, **DC Converter Station** owner, **HVDC System Owner**, **Interconnector** or **Supplier** shall immediately notify **The Company**.

GC.5.6 The recording (by whatever means) of instructions or communications given by means of **Control Telephony** or **System Telephony** will be accepted by **The Company** and **Users** as evidence of those instructions or communications.

GC.6 MISCELLANEOUS

GC.6.1 Data and Notices

GC.6.1.1 Data and notices to be submitted either to **The Company** or to **Users** under the Grid Code (other than data which is the subject of a specific requirement of the Grid Code as to the manner of its delivery) shall be delivered in writing either by hand or sent by first-class pre-paid post, or by facsimile transfer or by electronic mail to a specified address or addresses previously supplied by **The Company** or the **User** (as the case may be) for the purposes of submitting that data or those notices.

GC.6.1.2 References in the Grid Code to "in writing" or "written" include typewriting, printing, lithography, and other modes of reproducing words in a legible and non-transitory form and in relation to submission of data and notices includes electronic communications.

GC.6.1.3 Data delivered pursuant to paragraph GC.6.1.1, in the case of data being submitted to **The Company**, shall be addressed to the **Transmission Control Centre** at the address notified by **The Company** to each **User** prior to connection, or to such other Department within **The Company** or address, as **The Company** may notify each **User** from time to time, and in the case of notices to be submitted to **Users**, shall be addressed to the chief executive of the addressee (or such other person as may be notified by the **User** in writing to **The Company** from time to time) at its address(es) notified by each **User** to **The Company** in writing from time to time for the submission of data and service of notices under the Grid Code (or failing which to the registered or principal office of the addressee).

GC.6.1.4 All data items, where applicable, will be referenced to nominal voltage and **Frequency** unless otherwise stated.

GC.7 OWNERSHIP OF PLANT AND/OR APPARATUS

References in the Grid Code to **Plant** and/or **Apparatus** of a **User** include **Plant** and/or **Apparatus** used by a **User** under any agreement with a third party.

GC.8 SYSTEM CONTROL

Where a **User's System** (or part thereof) is, by agreement, under the control of **The Company**, then for the purposes of communication and co-ordination in operational timescales **The Company** can (for those purposes only) treat that **User's System** (or part thereof) as part of the **National Electricity Transmission System**, but, as between **The Company** and **Users**, it shall remain to be treated as the **User's System** (or part thereof).

GC.9 EMERGENCY SITUATIONS

Users should note that the provisions of the Grid Code may be suspended, in whole or in part, during a Security Period, as more particularly provided in the **Fuel Security Code**, or pursuant to any directions given and/or orders made by the **Secretary of State** under section 96 of the **Act** or under the Energy Act 1976.

GC.10 MATTERS TO BE AGREED

Save where expressly stated in the Grid Code to the contrary where any matter is left to **The Company** and **Users** to agree and there is a failure so to agree the matter shall not without the consent of both **The Company** and **Users** be referred to arbitration pursuant to the rules of the **Electricity Supply Industry Arbitration Association**.

GC.11 GOVERNANCE OF ELECTRICAL STANDARDS

GC.11.1 In relation to the **Electrical Standards** the following provisions shall apply.

GC.11.2 (a) If a **User**, **The Company**, **NGET**, a **Relevant Scottish Transmission Licensee** or an **Offshore Transmisson Licensee** wishes to:

(i) raise a change to an **Electrical Standard**;

(ii) add a new standard to the list of **Electrical Standards**;

(iii) delete a standard from being an **Electrical Standard**,

it shall activate the **Electrical Standards** procedure.

The Company, **NGET**, **SPT**, **SHETL**, **Offshore Transmission Licensee** or a **User** may activate the **Electrical Standards** procedure in relation to the **Electrical Standards** in (b) in the annex to the **General Conditions**.

The Company, **NGET**, a relevant **Offshore Transmission Licensee** or a **User** may activate the **Electrical Standards** procedure in relation to the **Electrical Standards** in (a) in the annex to the **General Conditions**.

The Company, **SPT**, a relevant **Offshore Transmission Licensee** or a **User** may activate the **Electrical Standards** procedure in relation to the **Electrical Standards** in (c) in the annex to the **General Conditions**.

The Company, **SHETL**, a relevant **Offshore Transmission Licensee** or a **User** may activate the **Electrical Standards** procedure in relation to the **Electrical Standards** in (d) in the annex to the **General Conditions**.

(b) The **Electrical Standards** procedure is the notification to the secretary to the **Panel** of the wish to so change, add or delete an **Electrical Standard**. That notification must contain details of the proposal, including an explanation of why the proposal is being made.

GC.11.3 Ordinary Electrical Standards Procedure

(a) Unless it is identified as an urgent **Electrical Standards** proposal (in which case GC.11.4 applies) or unless the notifier requests that it be tabled at the next **Panel** meeting, as soon as reasonably practicable following receipt of the notification, the **Panel** secretary shall forward the proposal, with a covering paper, to **Panel Members**.

(b) If no objections are raised within 20 Business Days of the date of the proposal, then it shall be deemed approved pursuant to the **Electrical Standards** procedure, and **The Company** shall make the change to the relevant **Electrical Standard** or the list of **Electrical Standards** contained in the Annex to this GC.11.

(c) If there is an objection (or if the notifier had requested that it be tabled at the next **Panel** meeting rather than being dealt with in writing), then the proposal will be included in the agenda for the next following **Panel** meeting.

(d) If there is broad consensus at the **Panel** meeting in favour of the proposal, **The Company** will make the change to the **Electrical Standard** or the list of **Electrical Standards** contained in the Annex to this GC.11.

(e) If there is no such broad consensus, including where the **Panel** believes that further consultation is needed, **The Company** will establish a **Panel** working group if this was thought appropriate and in any event **The Company** shall undertake a consultation of **Authorised Electricity Operators** liable to be materially affected by the proposal.

(f) Following such consultation, **The Company** will report back to **Panel Members**, either in writing or at a **Panel** meeting. If there was broad consensus in the consultation, then **The Company** will make the change to the **Electrical Standard** or the list of **Electrical Standards** contained in the Annex to this GC.11.

(g) Where following such consultation there is no broad consensus, the matter will be referred to the **Authority** who will decide whether the proposal should be implemented and will notify **The Company** of its decision. If the decision is to so implement the change, **The Company** will make the change to the **Electrical Standard** or the list of **Electrical Standards** contained in the Annex to this GC.11.

(h) In all cases where a change is made to the list of **Electrical Standards**, **The Company** will publish and circulate a replacement page for the Annex to this GC covering that list and reflecting the change.

GC.11.4 Urgent Electrical Standards Procedure

(a) If the notification is marked as an urgent **Electrical Standards** proposal, the **Panel** secretary will contact **Panel Members** in writing to see whether a majority who are contactable agree that it is urgent and in that notification the secretary shall propose a timetable and procedure which shall be followed.

(b) If such members do so agree, then the secretary will initiate the procedure accordingly, having first obtained the approval of the **Authority**.

(c) If such members do not so agree, or if the **Authority** declines to approve the proposal being treated as an urgent one, the proposal will follow the ordinary **Electrical Standards** procedure as set out in GC.11.3 above.

(d) If a proposal is implemented using the urgent **Electrical Standards** procedure, **The Company** will contact all **Panel Members** after it is so implemented to check whether they wish to discuss further the implemented proposal to see whether an additional proposal should be considered to alter the implementation, such proposal following the ordinary **Electrical Standards** procedure.

GC.12 CONFIDENTIALITY

GC.12.1 **Users** should note that although the Grid Code contains in certain sections specific provisions which relate to confidentiality, the confidentiality provisions set out in the **CUSC** apply generally to information and other data supplied as a requirement of or otherwise under the Grid Code. To the extent required to facilitate the requirements of the **EMR Documents**, **Users** that are party to the Grid Code but are not party to the **CUSC Framework Agreement** agree that the confidentiality provisions of the **CUSC** are deemed to be imported into the Grid Code.

GC.12.2 **The Company** has obligations under the **STC** to inform **Relevant Transmission Licensees** of certain data. **The Company** may pass on **User** data to a **Relevant Transmission Licensee** where:

(a) **The Company** is required to do so under a provision of Schedule 3 of the **STC**; and/or

(b) permitted in accordance with PC.3.4, PC.3.5 and OC2.2.1.

GC.12.3 **The Company** has obligations under the **EMR Documents** to inform **EMR Administrative Parties** of certain data. **The Company** may pass on **User** data to an **EMR Administrative Party** where **The Company** is required to do so under an **EMR Document**.

GC.12.4 **The Company** may use **User** data for the purpose of carrying out its **EMR Functions**.

GC.13 RELEVANT TRANSMISSION LICENSEES

GC.13.1 It is recognised that the **Relevant Transmission Licensees** are not parties to the Grid Code. Accordingly, notwithstanding that Operating Code No. 8 Appendix 1 (“OC8A”) and Appendix 2 ("OC8B"), OC7.6, OC9.4 and OC9.5 refer to obligations which will in practice be performed by the **Relevant Transmission Licensees** in accordance with relevant obligations under the **STC**, for the avoidance of doubt all contractual rights and obligations arising under OC8A, OC8B, OC7.6, OC9.4 and OC9.5 shall exist between **The Company** and the relevant **User** and in relation to any enforcement of those rights and obligations OC8A, OC8B, OC7.6, OC9.4 and OC9.5 shall be so read and construed. The **Relevant Transmission Licensees** shall enjoy no enforceable rights under OC8A, OC8B, OC7.6, OC9.4 and OC9.5 nor shall they be liable (other than pursuant to the **STC**) for failing to discharge any obligations under OC8A, OC8B, OC7.6, OC9.4 and OC9.5.

GC.13.2 For the avoidance of doubt nothing in this Grid Code confers on any **Relevant Transmission Licensee** any rights, powers or benefits for the purpose of the Contracts (Rights of Third Parties) Act 1999.

GC.14 BETTA TRANSITION ISSUES

GC.14.1 NOT USED.

GC.15 EMBEDDED EXEMPTABLE LARGE AND MEDIUM POWER STATIONS

GC.15.1 NOT USED.

GC.16 SYSTEM DEFENCE PLAN, SYSTEM RESTORATION AND TEST PLAN

GC.16.1 In relation to the **System Defence Plan**, **System Restoration Plan** and **Test Plan** the following provisions shall apply.

GC.16.2 If a **User** or **The Company**, wishes to raise a change to the **System Defence Plan**, **System Restoration Plan** or **Test Plan**, they shall notify the **Panel Secretary** of the proposed change to the **System Defence Plan**, **System Restoration Plan** or **Test Plan**.

In respect of the **System Defence Plan** the proposal shall not change the characteristics of the service to be provided or the conditions for aggregation, as any such changes that relate to the terms and conditions for **Defence Service Providers**; as set out in Article 4 paragraph 4 of **Assimilated Law** (Commission Regulation (EU) 2017/2196), as amended by Statutory Instrument 533 (2019); is subject to a separate change procedure. That notification must contain details of the proposal, including an explanation of why the proposal is being made.

In respect of the **System Restoration Plan**, the proposal shall not change the characteristics of the service to be provided or conditions for aggregation or the target geographical distribution of power sources with **System Restoration** and island operation capabilities, as any such changes that relate to the terms and conditions for **Restoration Service Providers**; as set out in Article 4 paragraph 4 of **Assimilated Law** (Commission Regulation (EU) 2017/2196), as amended by Statutory Instrument 533 (2019); is subject to a separate change procedure. . That notification must contain details of the proposal, including an explanation of why the proposal is being made.

In respect of the **Test Plan**, the proposal shall include an explanation of why the proposal is being made.

Any such change proposals shall take into account the legitimate expectations, where necessary, of **User's**, **Defence Service Providers** or **Restoration Service Providers** based on the initially specified or agreed requirements or methodologies.

GC.16.3 Ordinary Procedure

(a) Unless it is identified as an urgent proposal (in which case GC.16.4 applies) or unless the notifier requests that it be tabled at the next **Panel** meeting, as soon as reasonably practicable following receipt of the notification, the **Panel Secretary** shall forward the proposal, with a covering paper, to **Panel Members** and a consultation of not less than one month shall be undertaken.

(b) For the **System Defence Plan** and the **System Restoration Plan** if no objections are raised following the consultation, then the modification shall be deemed approved, and **The Company** shall make the change to the **System Defence Plan** or the **System Restoration Plan**, and the **Panel Secretary** shall as soon as reasonably possible, publish it on **The Company's Website** and inform **Users** and other persons who may be interested.

(c) If there is an objection (or if the notifier had requested that it be tabled at the next **Panel** meeting rather than being dealt with in writing), then the proposal to change the **System Defence Plan** or **System Restoration Plan** or **Test Plan** will be included on the agenda for the next **Panel** meeting.

(d) For the **System Defence Plan** and the **System Restoration Plan** if there is a majority consensus at the **Panel** meeting in favour of the proposal, **The Company** will make the change to the **System Defence Plan** or the **System Restoration Plan** as soon as reasonably possible and the **Panel Secretary** shall publish it on **The Company's Website** and inform **Users** and other persons who may be interested.

(e) If there is no such majority consensus in respect of the **System Defence Plan** or the **System Restoration Plan** or the **Test Plan**, **The Company** will request guidance from the **Panel** on an appropriate way forward**.** If the **Panel** decides a working group is required then the procedure under GR15 shall apply unless otherwise directed by **The Authority**.

(f) In the case of a modification to the **Test Plan**, it shall be submitted to **The Authority** for approval. If approved **The Company** will make the change to the **Test Plan** as soon as reasonably possible and the **Panel Secretary** shall publish it on **The Company's Website** and inform **Users** and other persons who may be interested.

GC.16.4 Urgent Procedure

(a) If the notification to change the **System Defence Plan** or **System Restoration Plan** or **Test Plan** is marked as an urgent proposal, the **Panel Secretary** will contact **Panel Members** in writing to see whether a majority who are contactable agree that it is urgent and in that case the **Panel Secretary** shall propose a timetable and procedure which shall be followed. The **Panel Secretary** shall as soon as reasonably possible, publish the proposal on **The Company's Website** and inform **User's** and other persons who may be interested.

(b) If such **Panel Members** do so agree, then the **Panel Secretary** will initiate the procedure accordingly, having first obtained the approval of **The Authority** that urgency is warranted in accordance with the criteria set out in **The Authority's** published guidance.

(c) If such **Panel Members** do not so agree, or if **The Authority** declines to approve the proposal being treated as an urgent one, the proposal will follow the ordinary procedure as set out in GC.16.3.

(d) If a proposal to change the **System Defence Plan** or **System Restoration Plan** is developed using the urgent procedure, **The Company** will contact all **Panel Members** after it is agreed as being urgent to check whether they wish to discuss further the proposal to see whether an additional proposal should be considered to alter the implementation, such proposal following the ordinary procedure as provided for in GC.16.3 or, if agreed by **The Authority**, urgency as provided for in GC16.4.

GC.17 DIRECTIONS RELATED TO NATIONAL SECURITY

GC.17.1 The **Secretary of State** may issue a direction to **The Company** as referred to in condition B4 of the **ESO Licence** where in the opinion of the **Secretary of State** there is a risk relating to national security that may detrimentally impact the resilience, safety or security of the energy system, or the continuity of essential services, and it is in the interest of national security that a direction should be issued to **The Company.**

GC.17.2 **The Company** must comply with any such direction that has been issued by the **Secretary of State**. **Users** should note that **The Company** is not required to comply with any other obligation in the **ESO licence** where and to the extent that compliance with that obligation would be inconsistent with the requirement to comply with such a direction, for the period set out in the direction. This includes the requirement set out in condition E3 of **ESO licence** to comply with this **Grid Code**.

GC.17.3 **The Company** is required under condition B4 of its **ESO Licence** to inform the **Secretary of State** of any conflict with the obligations as identified in GC.17.2 as soon as reasonably practicable after the conflict is identified. **The Company** will include in such a notice, details of any identified impact or non-compliance that will be caused or will be likely to be caused to **Users,** and in such a case will also seek clarification of whether this can be shared with the affected **User**.

GC.17.4 Where reasonably practicable and subject to the agreement of the **Secretary of State** to share any such specific details, **The Company** will inform affected **Users** as identified in GC.17.3 of what actions **The Company** will take or has taken, or not taken, to comply with a direction or amended direction (including when such a direction is revoked) and what identified impact or non-compliance this will or is likely to cause to the **User**.

GC.17.5 **The Company's** obligations under this code shall be suspended without liability where and to the extent that compliance with any such obligation would be inconsistent with the requirement upon **The Company** to comply with a direction.

GC.17.6 **A User's** obligations under this code shall be suspended without liability where and to the extent that the **User** is unable to comply with any such obligation as a result of any action taken, or not taken, by **The Company** to comply with a direction.

GC.17.7 The **Secretary of State** may at any time amend or revoke any direction issued to **The Company** as referred to in condition B4 of the **ESO Licence**

GC.18 ADVISORY AND INFORMATION REQUESTS

GC.18.1 **The Company** is required to provide advice, analysis or information to the **Authority** or to a **Minister of the Crown** when requested in accordance with section 171 of the **Energy Act 2023** and condition D1 of the **ESO Licence** and **GSP Licence**.

GC.18.2 **The Company** may by notice request from **Users** such information as it reasonably requires in connection with the exercise of any of its functions, in accordance with section 172 of the **Energy Act 2023**. It will do so by the issue of an **Information Request Notice**. The purposes of this may include to assist in the fulfilment of a request for advice, analysis or information as set out in GC.18.1.

GC.18.3 **The Company** is required by condition D2 of the **ESO Licence** and **GSP Licence** to prepare, submit for approval by the **Authority** and publish on its website once approved an **Information Request Statement** that sets out further detail on the process **The Company** expects to follow when requesting information from other parties.

The **Information Request Statement** must include, but need not be limited to, the following matters as set out in condition D2.5 of the **ESO Licence** and **GSP Licence**:

(a) the process **The Company** expects to follow when issuing an **Information Request Notice**, including any further detail around the expected engagement between **The Company** and recipient of an **Information Request Notice**; and

(b) the details to be included in an **Information Request Notice** issued by **The Company**.

GC.18.4 A **User** to whom a request is made under GC.18.2 must, so far as reasonably practicable, provide the requested information within such reasonable period, and in such reasonable form and manner, as may be specified in the **Information Request Notice**.

GC.18.5 **The Company** must, unless the **Authority** otherwise consents, maintain for a period of 6 years and provide to the **Authority** where required a record of information requests as detailed in condition D2.12 of the **ESO Licence** and **GSP Licence** including

(a) a copy of the **Information Request Notice**;

(b) any subsequent variations to the original information requested;

(c) the recipient's response to the notice, including any refusal or challenges to the notice or requested information;

(d) the time taken for the recipient to provide the requested information;

(e) the manner and form the information was provided in; and

(f) the information provided in response to the notice, and whether such information complied, in **The Company**'s view, with the **Information Request Notice**

ANNEX TO THE GENERAL CONDITIONS

The **Electrical Standards** are as follows:

(a) **Electrical Standards** applicable for **NGET's Transmission System**

The Relevant Electrical Standards Document (RES)		Reference	Issue	Date
Parts 1 to 3			3.0	March 2018
Part 4 – Specific Requirements				
1	Back-Up Protection Grading across NGET's and other Network Operator Interfaces	PS(T)044(RES)	1.0	September 2014
2	Ratings and General Requirements for Plant, Equipment, Apparatus and Services for the National Grid System and Connections Points to it.	TS 1 (RES)	1.0	February 2018
3	Substations	TS 2.01 (RES)	1.0	February 2018
4	Switchgear	TS 2.02 (RES)	1.0	October 2014
5	Substation Auxiliary Supplies	TS 2.12 (RES)	1.0	October 2014
6	Ancillary Light Current Equipment	TS 2.19 (RES)	1.0	October 2014
7	Substation Interlocking Schemes	TS 3.01.01 (RES)	1.0	February 2018
8	Earthing Requirements	TS 3.01.02 (RES)	1.0	October 2014
9	Circuit Breakers	TS 3.02.01 (RES)	2.0	February 2018
10	Disconnectors and Earthing Switches	TS 3.02.02 (RES)	1.0	October 2014
11	Current Transformers for Protection and General Use on the 132kV, 275kV and 400kV Systems	TS 3.02.04 (RES)	1.0	October 2014
12	Voltage Transformers	TS 3.02.05 (RES)	1.0	September 2016
13	Bushings	TS 3.02.07 (RES)	1.0	October 2014
14	Solid Core Post Insulators for Substations	TS 3.02.09 (RES)	1.0	October 2014
15	Voltage Dividers	TS 3.02.12 (RES)	1.0	September 2016
16	Gas Insulated Switchgear	TS 3.02.14 (RES)	1.0	October 2014
17	Environmental and Test Requirements for Electronic Equipment	TS 3.24.15 (RES)	1.0	October 2014
18	Busbar Protection	TS 3.24.34 (RES)	1.0	October 2014
19	Circuit Breaker Fail Protection	TS 3.24.39 (RES)	1.0	October 2014
20	Synchronising And Voltage Selection	TS.3.24.60 (RES)	2.0	January 2018
21	System Monitor – Dynamic System Monitoring (DSM)	TS 3.24.70 (RES)	2.0	February 2018
22	System Monitoring – Fault Recording	TS 3.24.71 (RES)	1.0	February 2018
23	Protection & Control for HVDC Systems	TS 3.24.90 (RES)	1.0	October 2014
24	Ancillary Services Business Monitoring	TS 3.24.95 (RES)	2.0	February 2018

25	Operational Data Transmission	TS 3.24.100 (RES)	1.0	February 2018
26	Guidance for Working in Proximity to Live Conductors	TGN(E)186 (RES)	1.0	October 2018
Additional Requirements				

(b) Electronic data communications facilities and other requirements applicable in all **Transmission Areas**.

Communications Standards for Electronic Data Communication Facilities and Automatic Logging Devices	Version 9	8th April 2025
EDT Interface Specification	Issue 5	8th April 2025
EDT Submitter Guidance Note	Issue 1	21st Dec 2001
EDL Message Interface Specification	Issue 8	13th April 2026
EDL Instruction Interface Valid Reason Codes	Issue 11	27th July 2026
MODIS Interface Specification	Version 4	26th May 2015
Control Telephony Electrical Standard	Issue 4	8th April 2025
Distribution Restoration Zone Control System High Level Functional Requirements	1.0	8th June 2024
Electromagnetic Transient (EMT) Model Requirements and the Approach & Process for Retrospective Submission	Issue 1.0	8th October 2026

(c) Scottish **Electrical Standards** applicable for **SPT's Transmission System**.

RES-01-100	Relevant Electrical Standards for Plant, Equipment and Apparatus for connection to the SP Transmission System	Issue 1

(d) Scottish **Electrical Standards** applicable for **SHETL's Transmission System**.

1.	NGTS 1:	Rating and General Requirements for Plant, Equipment, Apparatus and Services for the National Grid System and Direct Connection to it. Issue 3 March 1999.
2.	NGTS 2.1:	Substations. Issue 2 May 1995
3.	NGTS 3.1.1:	Substation Interlocking Schemes. Issue 1 October 1993.
4.	NGTS 3.2.1:	Circuit Breakers and Switches. Issue 1 September 1992.
5.	NGTS 3.2.2:	Disconnectors and Earthing Switches. Issue 1 March 1994.
6.	NGTS 3.2.3:	Metal-Oxide surge arresters for use on 132, 275 and 400kV systems. Issue 2 May 1994.
7.	NGTS 3.2.4:	Current Transformers for protection and General use on the 132, 275 and 400kV systems. Issue 1 September 1992.
8.	NGTS 3.2.5:	Voltage Transformers for use on the 132, 275 and 400 kV systems. Issue 2 March 1994.
9.	NGTS 3.2.6:	Current and Voltage Measurement Transformers for Settlement Metering of 33, 66, 132, 275 and 400kV systems. Issue 1 September 1992.
10.	NGTS 3.2.7:	Bushings for the Grid Systems. Issue 1 September 1992.
11.	NGTS 3.2.9:	Post Insulators for Substations. Issue 1 May 1996.
12.	NGTS 2.6:	Protection Issue 2 June 1994.
13.	NGTS 3.11.1:	Capacitors and Capacitor Banks. Issued 1 March 1993.

APPENDIX TO THE GENERAL CONDITIONS

PART A

NOT USED

PART B

GC.B.1 Introduction

GC.B.1.1 This Appendix Part B to the **General Conditions** deals with issues arising out of the transition associated with the approval and implementation of **Grid Code Modification Proposal** GC0112 (Modifications relating to the separation of **System** operations and **Transmission Owner** roles) The process and amendments referred to in this Appendix Part B took place before the designation of **The Company** as the **ISOP** and shall be construed accordingly, including where relevant being based on those arrangements that were in place at the time.

GC.B.1.2 This Appendix Part B sets out the arrangements such that:

B.1.2.1 the **Post GC0112 Grid Code** reflects the **Transfer of the System Operator Role**;

B.1.2.2 certain amendments are made to **Grid Code Related Agreements/Documents** to reflect the **Transfer of the System Operator Role**,

B.1.2.2 arrangements can be put in place prior to the **SO Transfer Date** to enable the transition of the operations with **NGET** under the **Pre GC0112 Grid Code** to operations with **The Company** under the **Post GC0112 Grid Code**; and

B.1.2.3 each **User** co-operates in relation to the transition.

GC.B.1.3 The provisions of the **Post GC0112 Grid Code** shall be suspended until the **SO Transfer Date** except for this Appendix Part B (and any related definitions within it) which will take immediate effect on the **Implementation Date** for **GC0112**.

GC.B.1.4 In this (and solely for the purposes of this) Appendix Part B the following terms have the following meaning:

B.1.4.1 the term "**Grid Code Related Agreements/Documents**" shall mean each or any of those agreements or documents entered into under or envisaged by the **Pre GC0112 Grid Code** prior to the **SO Transfer Date** which continue on and after the **SO Transfer Date**;

B.1.4.2 the term "**GC0112**" shall mean **Grid Code Modification Proposal 0112** (Amendments relating to the transfer of the system operator functions from **NGET** to **NGESO**);

B.1.4.3 the term "**NGET**" shall mean National Grid Electricity Transmission plc;

B.1.4.4 the term "**NGESO**" shall mean National Grid Electricity System Operator Limited (No. 11014226), the company name previously given to **The Company.";**

B.1.4.5 the term "**Post GC0112 Grid Code**" means the version of the Grid Code as amended by **GC0112**;

B.1.4.6 the term "**Pre GC Grid Code**" means the version of the Grid Code prior to amendment by **GC0112**;

B.1.4.7 the term "**SO Transfer Date**" means the date on which **NGET's Transmission Licence** is transferred in part to **NGESO** to reflect the **Transfer of the System Operator Role**; and

B.1.4.8 the term "**Transfer of the System Operator Role**" means the the transfer, by means of the transfer in part of **NGET's Transmission Licence**, of the system operator role to **NGESO/The Company**.

GC.B.1.5 Without prejudice to any specific provision under this Appendix Part B as to the time within which or the manner in which any party should perform its obligations under this Appendix Part B, where a party is required to take any step or measure under this Appendix Part B, such requirement shall be construed as including any obligation to:

B.1.5.1 take such step or measure as quickly as reasonably practicable; and

B.1.5.2 do such associated or ancillary things as may be necessary to complete such step or measure as quickly as reasonably practicable.

GC.B.2 **GC0112:** Amendments to Existing Agreements and Documents

GC.B.2.1 Each **Grid Code Related Agreement/Document** in place or issued by a party in accordance with the terms of the **Pre GC0112 Grid Code** shall be read and construed, with effect from the **SO Transfer Date**, as if it (and any defined terms within it and the effect of it and those defined terms) recognise and reflect the **Transfer of the SO Functions** and as if any references in it to **NGET** in the context of its system operator role were references to **NGESO/The Company** as appropriate.

GC.B.2.2 In the context of any **Site Responsibility Schedule** in existence at the **SO Transfer Date** and which would require, following the **Transfer of the System Operator Role**, the signature of either **NGESO** instead of **NGET** or both the signature of **NGESO** and **NGET**, **NGESO** and **NGET** acknowledge and the **Users** agree that the signature of **NGET** on such **Site Responsibility Schedule** shall be considered to be the signature of **NGESO** and/or **NGET** as appropriate.

GC.B.3 **GC0112:** Transition

GC.B.3.1 Each party shall take such steps and do such things in relation to the Grid Code and the **Grid Code Related Agreements/Documentation** as are within its power and as are reasonably necessary or appropriate in order to give full and timely effect to the **Transfer of the SO Role** and the transition of the operations, systems, process and procedures and the rights and obligations relating to the **Transfer of the SO Role** under the Grid Code from **NGET** to **NGESO**.

GC. B.3.2 Each party agrees that (a) all things done by **NGET** pursuant to the Grid Code in its system operator role prior to the **SO Transfer Date** shall be deemed to have been done by **NGESO** and (b) all things received by **NGET** pursuant to the Grid Code in its system operator role (including but not limited to notices) shall be deemed to have been received by **NGESO** and (c) all things issued by **NGET** (including but not limited to notices) shall be deemed to have been issued by **NGESO**.

GC.B.3.3 In particular:

B.1.5.1 **Users** acknowledge and agree that **NGET** can exchange information and data submitted by **Users** under the Grid Code prior to the **SO Transfer Date** with **NGESO** to the extent necessary to enable the transition of the system operator role from **NGET** to **NGESO**;

B.1.5.2 **NGET** will identify and publish as soon as practicable and in any event prior to 31 January 2019 any specific requirements (such requirements being reasonable and recognising the timescale) on **Users** necessary to manage the transition of the operations, systems, process and procedures and the rights and obligations relating to the **Transfer of the SO Role** under the Grid Code from **NGET** to **NGESO**;

B.1.5.2 **Users** acknowledge that under the **Pre GC0112 Grid Code NGET** received certain data and information from **Users** which is no longer “live” data or information (“**Legacy Data**”) that if it was new data and information of that type would not be available to **NGET** as a **Relevant Transmisison Licence** from the **SO Transfer Date** consent to the retention of such **Legacy Data** by **NGET** where embedded in **NGET** systems or models.

< END OF GENERAL CONDITIONS >

Public

GOVERNANCE RULES
(GR)

CONTENTS

(This contents page does not form part of the Grid Code)

Paragraph No/Title	Page Number
PART A	2
GR.1 INTRODUCTION	2
PART B	2
GR.2 CODE ADMINISTRATOR	2
GR.3 THE GRID CODE REVIEW PANEL	2
GR.4 APPOINTMENT OF PANEL MEMBERS	4
GR.5 TERM OF OFFICE	5
GR.6 REMOVAL FROM OFFICE	5
GR.7 ALTERNATES	6
GR.8 MEETINGS	7
GR.9 PROCEEDINGS AT MEETINGS	9
GR.10 QUORUM	9
GR.11 VOTING	10
GR.12 PROTECTIONS FOR PANEL MEMBERS	10
PART C	11
GR.13 GRID CODE MODIFICATION REGISTER	11
GR.14 CHANGE CO-ORDINATION	11
GR.15 THE GRID CODE MODIFICATION PROPOSALS	12
GR.16 SIGNIFICANT CODE REVIEW	15
GR.17 AUTHORITY LED MODIFICATIONS	17
GR.18 THE GRID CODE PROPSAL EVALUATION	19
GR.19 PANEL PROCEEDINGS	19
GR.20 WORKGROUPS	21
GR.3 THE CODE ADMINISTRATOR CONSULTATION	26
GR.22 THE GRID CODE MODIFICATION REPORTS	27
GR.23 URGENT MODIFICATIONS	32
GR.24 SELF GOVERNANCE	34
GR.25 IMPLEMENTATION	36
GR.26 FAST TRACK	38
GR.27 REVIEW OF PRIORITISATION CATEGORY OF MODIFICATION PROPOSALS	39
ANNEX GR.A - ELECTION OF USERS' PANEL MEMBERS	40
ANNEX GR.B Regulated Sections	41

PART A

GR.1 INTRODUCTION

GR.1.1 This section of the Grid Code sets out how the Grid Code is to be amended and the procedures set out in this section, to the extent that they are dealt with in the Code Administration Code of Practice, are consistent with the principles contained in the Code Administration Code of Practice. Where inconsistencies or conflicts exist between the Grid Code and the Code Administration **Code of Practice**, the Grid Code shall take precedence.

GR.1.2 There is a need to bring proposed amendments to the attention of **Users** and others, to discuss such proposals and to report on them to the **Authority** and in furtherance of this, the **Governance Rules** set out the functions of a **Grid Code Review Panel** and **Workgroups** and for consultation by the **Code Administrator**.

GR.1.3 For the purpose of these **Governance Rules** the term "**User**" shall mean any person who is under any obligation or granted any rights under the Grid Code.

PART B

GR.2 CODE ADMINISTRATOR

GR.2.1 **The Company** shall establish and maintain a **Code Administrator** function, which shall carry out the roles referred to in GR.2.2 and GR.3.2. **The Company** shall ensure the functions are consistent with the **Code Administration Code of Practice.**

GR.2.2 The **Code Administrator** shall in conjunction with other code administrators, maintain, publish, review and (where appropriate) amend from time to time the **Code Administration Code of Practice** approved by the **Authority** provided that any amendments to the **Code Administration Code of Practice** proposed by the **Code Administrator** are approved by the **Grid Code Review Panel** prior to being raised by the **Code Administrator,** and any amendments to be made to the **Code Administration Code of Practice** are approved by the **Authority.**

GR.3 THE GRID CODE REVIEW PANEL

GR.3.1 Establishment and Composition

GR.3.1.1 The **Grid Code Review Panel** shall be the standing body to carry out the functions referred to in GR.3.2

GR.3.1.2 The **Grid Code Review Panel** shall comprise the following members:

(a) the person appointed as the chairperson of the **Grid Code Review Panel** (the **"Panel Chairperson")** in accordance with GR.4.1, who shall (subject to GR.11.4) be a voting member unless they are an employee of **The Company** in which case they will be a non-voting member;

(b) the following members, appointed in accordance with GR.4.2 (a), who shall be non-voting members:

(i) a representative of the **Code Administrator**;
(ii) a representative of the **Authority** appointed in accordance with GR.4.3;
(iii) a person representing the **BSC Panel** appointed in accordance with GR.4.2(d); and
(iv) the chairperson of the **GCDF**;

(c) the following members who shall be voting **Panel Members**:

(i) a representative of **The Company** appointed in accordance with GR.4.2(c);
(ii) two representatives of the **Network Operators**;
(iii) a representative of **Suppliers**;
(iv) a representative of the **Onshore Transmission Licensees**;
(v) a representative of the **Offshore Transmission Licensees**;
(vi) four representatives of the **Generators**;
(vii) the **Consumer Representative**, appointed in accordance with GR.4.2(b);
(viii) the person appointed (if the **Authority** so decides) by the Authority in accordance with GR.4.4;

(d) a secretary (the "**Panel Secretary"**), who shall be a person appointed and provided by the **Code Administrator** to assist the **Grid Code Review Panel** and who shall be responsible for the administration of the **Grid Code Review Panel** and **Grid Code Modification Proposals.** The **Panel Secretary** will be a non-voting member of the **Grid Code Review Panel**.

GR.3.2 Functions of the **Grid Code Review Panel** and the **Code Administrator's** Role

(a) The **Grid Code Review Panel** shall have the functions assigned to it in these **Governance Rules**.

(b) Without prejudice to GR.3.2(a) and to the further provisions of these **Governance Rules**, the **Grid Code Review Panel** shall endeavour at all times to operate:

(i) in an efficient, economical and expeditious manner, taking account of the **Prioritisation Criteria**, whether particular **Grid Code Modification Proposals** are **Urgent Modifications**, or if they are not **Urgent Modifications** or don't meet the **Fast Track Criteria**, the **Prioritisation Category** of particular **Grid Code Modification Proposals**; and
(ii) with a view to ensuring that the **Grid Code** facilitates achievement of the **Grid Code Objectives**.

(c) **The Company** shall be responsible for implementing or supervising the implementation of **Approved Modifications** and **Approved Grid Code Self Governance Proposals** and **Approved Grid Code Fast Track Proposals** in accordance with the provisions of the Grid Code which shall reflect the production of the revised Grid Code**.** The **Code Administrator** and **The Company** shall be responsible for implementing and supervising the implementation of any amendments to their respective systems and processes necessary for the implementation of the **Approved Modification** and the **Approved Grid Code Self-Governance Proposals** provided there is no successful appeal and the **Approved Grid Code Fast Track Proposals** provided no objections are received in accordance with GR.26. However, it will not include the implementation of **Users'** systems and processes. The **Code Administrator** will carry out its role in an efficient, economical and expeditious manner and (subject to any extension granted by the **Authority** where the **Code Administrator** has applied for one in accordance with GR.3.2(d) or (e) in accordance with the **Implementation Date**.

(d) Subject to notifying **Users,** the **Code Administrator** will, with the **Authority's** approval, apply to the **Authority** for a revision or revisions to the **Implementation Date** where the **Code Administrator** becomes aware of any circumstances which is likely to mean that the **Implementation Date** is unachievable, which shall include as a result of a **Legal Challenge**, at any point following the approval of the **Grid Code Modification Proposal**.

(e) In the event that the **Authority's** decision to approve or not to approve a **Grid Code Modification Proposal** is subject of **Legal Challenge** (and the party raising such **Legal Challenge** has received from the relevant authority the necessary permission to proceed) then the **Code Administrator** will, with the **Authority's** approval, apply to the **Authority** for a revision or revisions to the **Proposed Implementation Date** in the **Grid Code Modification Report** in respect of such **Grid Code Modification Proposal** as necessary such that if such **Grid Code Modification Proposal** were to be approved

following such **Legal Challenge** the **Proposed Implementation Date** would be achievable.

(f) Prior to making any request to the **Authority** for any revision pursuant to GR.3.2(d) (including where it is necessary as a result of a **Legal Challenge**) or GR.3.2(e) the **Code Administrator** shall consult on the revision with **Users** and such other person who may properly be considered to have an appropriate interest in it in accordance with GR.21.2 and GR.21.8. The request to the **Authority** shall contain copies of (and a summary of) all written representations or objections made by consultees during the consultation period.

GR.3.3 Duties of Panel Members

(a) A person appointed as a **Panel Member,** or an **Alternate Member,** by **Users** under GR.4.2 or GR.7.2, by the **Authority** under GR.4.3 and the person appointed as **Panel Chairperson** under GR.4.1, and each of their alternates when acting in that capacity:

(i) shall act impartially and in accordance with the requirements of the **Grid Code;** and
(ii) shall not be representative of, and shall act without undue regard to the particular interests of the persons or body of persons by whom they were appointed as **Panel Member** and any **Related Person** from time to time.

(b) Such a person shall not be appointed as a **Panel Member** or an **Alternate Member** (as the case may be) unless they shall have first:

(i) confirmed in writing to the **Code Administrator** for the benefit of all **Users** that they agree to act as a **Panel Member** or **Alternate Member** in accordance with the **Grid Code** and acknowledges the requirements of GR.3.3 (a) and GR.3.3(c);
(ii) where that person is employed, provided to the **Panel Secretary** a letter from their employer agreeing that they may act as **Panel Member** or **Alternate Member,** and that the requirement in GR.3.3(a)(ii) shall prevail over their duties as an employee.

(c) A **Panel Member** or **Alternate Member** shall, at the time of appointment and upon any change in such interests, disclose (in writing) to the **Panel Secretary** any such interests (in relation to the **Grid Code)** as are referred to in GR.3.3(a)(ii).

(d) Upon a change in employment of a **Panel Member** or **Alternate Member,** they shall so notify the **Panel Secretary** and shall endeavour to obtain from their new employer and provide to the **Panel Secretary** a letter in the terms required in GR.3.3(b)(ii); and they shall be removed from office if they do not do so within a period of sixty (60) days after such change in employment.

GR.4 APPOINTMENT OF PANEL MEMBERS

GR.4.1 Panel Chairperson

(a) The **Panel Chairperson** shall be a person appointed (or re-appointed) by **The Company,** having particular regard to the views of the **Grid Code Review Panel**, and shall act independently of **The Company**.

(b) A person shall be appointed or re-appointed as the **Panel Chairperson** where the **Authority** has approved such appointment or reappointment and **The Company** has given notice to the **Panel Secretary** of such appointment, with effect from the date of such notice or (if later) with effect from the date specified in such notice.

GR.4.2 Other Panel Members:

(a) the **Network Operators, Suppliers, Onshore Transmission Licensees, Offshore Transmission Licensees** and **Generators** may appoint **Panel Members** by election in accordance with Annex GR.A.

(b) The **Citizens Advice** or the **Citizens Advice Scotland** may appoint one person as a **Panel Member** representing customers by giving notice of such appointment to the **Panel Secretary**, and may remove and re-appoint by notice.

(c) **The Company** shall appoint the **The Company** representative referred to at GR.3.1.2(c)(i) and shall give notice of the identity of such person to the **Panel Secretary**, and may remove and re-appoint by notice to the **Panel Secretary**.

(d) The **BSC Panel** shall appoint a representative to be the member of the **Grid Code Review Panel** referred to at GR.3.1.2(c) (iii) and shall give notice of the identity of such person to the **Panel Secretary**, and may remove and re-appoint by notice to the **Panel Secretary**.

GR.4.3. The **Authority** shall from time to time notify the **Panel Secretary** of the identity of the **Authority** representative referred to at GR.3.1.2(b)(ii).

GR.4.4 Appointment of Further Member:

(a) If in the opinion of the **Authority** there is a class or category of person (whether or not a **User)** who have interests in respect of the **Grid Code** but whose interests:

(i) are not reflected in the composition of **Panel Members** for the time being appointed; but

(ii) would be so reflected if a particular person was appointed as an additional **Panel Member**, then the **Authority** may at any time appoint (or re-appoint) that person as a **Panel Member** by giving notice of such appointment to the **Panel Secretary** but in no event shall the **Authority** be able to appoint more than one person so that there could be more than one such **Panel Member**.

(b) A person appointed as a **Panel Member** pursuant to this GR.4.4 shall remain appointed, subject to GR.5 and GR.6, notwithstanding that the conditions by virtue of which they were appointed (for example that the interests they reflect are otherwise reflected) may cease to be satisfied.

GR.4.5 Natural Person

No person other than an individual shall be appointed a **Panel Member** or their alternate.

GR.5 TERM OF OFFICE

The term of office of a **Panel Member,** the **Panel Chairperson** and **Alternate Members** shall be a period expiring on 31 December every second year. A **Panel Member,** the **Panel Chairperson** and **Alternate Member** shall be eligible for reappointment on expiry of their term of office.

GR.6 REMOVAL FROM OFFICE

GR.6.1 A person shall cease to hold office as the **Panel Chairperson,** a **Panel Member** or an **Alternate Member**:

(a) upon expiry of their term of office unless re-appointed;
(b) if they:

(i) resign from office by notice delivered to the **Panel Secretary**;
(ii) become bankrupt or makes any arrangement or composition with their creditors generally;
(iii) are or may be suffering from a mental disorder and either are admitted to hospital in pursuance of an application under the Mental Health Act 1983 or the Mental Health (Scotland) Act 1960 or an order is made by a court having jurisdiction in matters

concerning mental disorder for their detention or for the appointment of a receiver, *curator bonis* or other person with respect to their property or affairs;

(iv) become prohibited by law from being a director of a company under the Companies Act 1985;

(v) die; or

(vi) are convicted on an indictable offence; or

(c) as provided for in GR.3.3(d);

(d) if the **Grid Code Review Panel** resolves (and the **Authority** does not veto such resolution by notice in writing to the **Panel Secretary** within fifteen (15) **Business Days)** that they should cease to hold office on grounds of their serious misconduct;

(e) if the **Grid Code Review Panel** resolves (and the **Authority** does not veto such resolution by notice in writing to the **Panel Secretary** within fifteen (15) **Business Days**) that they should cease to hold office due to a change in employer notwithstanding compliance with GR.3.3(d).

GR.6.2 A **Grid Code Review Panel** resolution under GR.6.1(d) or (e) shall, notwithstanding any other paragraph, require the vote in favour of at least all **Panel Members** less one (other than the **Panel Member** or **Alternate Member** who is the subject of such resolution) and for these purposes an abstention shall count as a vote cast in favour of the resolution. A copy of any such resolution shall forthwith be sent to the **Authority** by the **Panel Secretary**.

GR.6.3 A person shall not qualify for appointment as a **Panel Member** or **Alternate Member** if at the time of the proposed appointment they would be required by the above to cease to hold that office.

GR.6.4 The **Panel Secretary** shall give prompt notice to **The Company,** all **Panel Members,** all **Users** and the **Authority** of the appointment or re-appointment of any **Panel Member** or **Alternate Member** or of any **Panel Member** or **Alternate Member** ceasing to hold office and publication on the **Website** and (where relevant details are supplied to the **Panel Secretary)** despatch by electronic mail shall fulfil this obligation.

GR.7 ALTERNATES

GR.7.1 Alternate: Panel Chairperson

The **Panel Chairperson** shall preside at every meeting of the **Grid Code Review Panel** at which they are present. If they are unable to be present at a meeting, they may appoint an alternate (who shall be a senior employee of **The Company)** to act as the **Panel Chairperson,** who may or may not be a **Panel Member**. If neither the **Panel Chairperson** nor their alternate is present at the meeting within half an hour of the time appointed for holding the meeting, the **Panel Members** present may appoint one of their number to be the chairperson of the meeting.

GR.7.2 Alternate(s): other **Panel Members**

(a) At the same time that the parties entitled to vote in the relevant election appoint **Elected Panel Members** under GR.4.2(a), they shall appoint the following **Alternate Members**:

(i) one alternate representative of the **Suppliers**;

(ii) one alternate representative of the **Onshore Transmission Licensees**;

(iii) one alternate representative of the **Offshore Transmission Licensees**; and

(iv) two alternate representatives of the **Generators**.

In the event that the election process fails to appoint an **Alternate Member** for any of the **Elected Panel Members,** each **Elected Panel Member** shall be entitled (but not obligated) to each at their own discretion nominate their own **Alternate Member**.

(b) Any **Panel Member** that is not an **Elected Panel Member** shall be entitled (but not obligated) to each at their own discretion nominate their own **Alternate Member**.

(c) A **Panel Member** shall give notice to the **Panel Secretary** in the event it will be represented by an **Alternate Member** for any one **Grid Code Review Panel** meeting.

(d) Where a **Panel Member** has nominated an **Alternate Member** in accordance with GR.7.2(a) or (b), they may remove such **Alternate Member**, by giving notice of such removal, and any nomination of a different **Alternate Member**, to the **Panel Secretary**. A **Panel Member** may not choose as their **Alternate Member**: any party who is already acting as an **Alternate Member** for another **Panel Member**; or another **Panel Member**.

(e) All information to be sent by the **Panel Secretary** to **Panel Members** pursuant to these **Governance Rules** shall also be sent by the **Panel Secretary** to each **Alternate Member** by electronic mail (where relevant details shall have been provided by each **Alternate Member**).

GR.7.3 Alternates: General Provisions

(a) The appointment or removal by a **Panel Member** of an **Alternate Member** shall be effective from the time when such notice is given to the **Panel Secretary** or (if later) the time specified in such notice.

(b) The **Panel Secretary** shall promptly notify all **Panel Members** and **Users** of appointment or removal by any **Panel Member** of any alternate and publication on the **Website** and (where relevant details have been provided to the **Panel Secretary**) despatch by electronic mail shall fulfil this obligation.

GR.7.4 Alternates: Rights, Cessation and References

(a) Where the **Panel Chairperson** or a **Panel Member** has appointed an alternate:

(i) the alternate shall be entitled:
i. unless the appointing **Panel Member** shall otherwise notify the **Panel Secretary**, to receive notices of meetings of the **Grid Code Review Panel**;
ii. to attend, speak and vote at any meeting of the **Grid Code Review Panel** at which the **Panel Member** by whom they were appointed is not present, and at such meeting to exercise and discharge all of the functions, duties and powers of such **Panel Member**;

(ii) the **Alternate Member** shall have the same voting rights the **Panel Member** in whose place they are attending;

(iii) GR.8, GR.9, GR.10, GR.11 and GR.12 shall apply to the **Alternate Member** as if they were the appointing **Panel Member** and a reference to a **Panel Member** elsewhere in the **Grid Code** shall, unless the context otherwise requires, include their duly appointed **Alternate Member**.

(iv) for the avoidance of doubt, the appointing **Panel Member** shall not enjoy any of the rights transferred to the **Alternate Member** at any meeting at which, or in relation to any matter on which, the **Alternate Member** acts on their behalf.

(b) A person appointed as an **Alternate Member** shall automatically cease to be such **Alternate Member**:

(i) if the appointing **Panel Member** ceases to be a **Panel Member**;
(ii) if any of the circumstances in GR.6.1(b) applies in relation to such person, but, in the case of a person elected as an **Alternate Member**, they shall continue to be an **Alternate Member** available for appointment under GR.7.2.

GR.8 MEETINGS

GR.8.1 Meetings of the **Grid Code Review Panel** shall be held at regular intervals and at least every 2 months at such time and such place as the **Grid Code Review Panel** shall decide.

GR.8.2 A regular meeting of the **Grid Code Review Panel** may be cancelled if:

(a) the **Panel Chairperson** considers, having due regard to the lack of business in the agenda, that there is insufficient business for the **Grid Code Review Panel** to conduct and requests the **Panel Secretary** to cancel the meeting;

(b) the **Panel Secretary** notifies all **Panel Members**, not less than five (5) **Business Days** before the date for which the meeting is to be convened, of the proposal to cancel the meeting; and

(c) by the time three (3) **Business Days** before the date for which the meeting is or is to be convened, no **Panel Member** has notified the **Panel Secretary** that they object to such cancellation.

GR.8.3 If any **Panel Member** wishes, acting reasonably, to hold a special meeting (in addition to regular meetings under GR.8.1) of the **Grid Code Review Panel**:

(a) they shall request the **Panel Secretary** to convene such a meeting and inform the **Panel Secretary** of the matters to be discussed at the meeting;

(b) the **Panel Secretary** shall promptly convene the special meeting for a day as soon as practicable but not less than five (5) **Business Days** after such request.

GR.8.4 Any meeting of the **Grid Code Review Panel** shall be convened by the **Panel Secretary** by notice (which will be given by electronic mail if the relevant details are supplied to the **Panel Secretary**) to each **Panel Member** (and to the **Authority**):

(a) setting out the date, time and place of the meeting and (unless the **Grid Code Review Panel** has otherwise decided) given at least five (5) **Business Days** before the date of the meeting;

(b) accompanied by an agenda of the matters for consideration at the meeting and any supporting papers available to the **Panel Secretary** at the time the notice is given (and the **Panel Secretary** shall circulate to **Panel Members** any late papers as and when they are received by them).

GR.8.5 The **Panel Secretary** shall send a copy of the notice convening a meeting of the **Grid Code Review Panel,** and the agenda and papers accompanying the notice, to the **Panel Members and Alternate Members,** and publication on the **Website** and despatch by electronic mail (if the relevant details are supplied to the **Panel Secretary**) shall fulfil this obligation.

GR.8.6 Any **Panel Member** (or, at the **Panel Member's** request, the **Panel Secretary)** may notify matters for consideration at a meeting of the **Grid Code Review Panel** in addition to those notified by the **Panel Secretary** under GR.8.4 by notice to all **Panel Members** and persons entitled to receive notice under GR.8.5, not less than three (3) **Business Days** before the date of the meeting.

GR.8.7 The proceedings of a meeting of the **Grid Code Review Panel** shall not be invalidated by the accidental omission to give or send notice of the meeting or a copy thereof or any of the accompanying agenda or papers to, or failure to receive the same by, any person entitled to receive such notice, copy, agenda or paper.

GR.8.8 A meeting of the **Grid Code Review Panel** may consist of a conference between **Panel Members** who are not all in one place but who are able (by telephone or otherwise) to speak to each of the others and to be heard by each of the others simultaneously.

GR.8.9 With the consent of all **Panel Members** (whether obtained before, at or after any such meeting) the requirements of this GR.8 as to the manner in and notice on which a meeting of the **Grid Code Review Panel** is convened may be waived or modified provided that no meeting of the **Grid Code Review Panel** shall be held unless notice of the meeting and its agenda has been sent to the persons entitled to receive the same under GR.8.5 at least 24 hours before the time of the meeting.

GR.8.10 Subject to GR.8.11, no matter shall be resolved at a meeting of the **Grid Code Review Panel** unless such matter was contained in the agenda accompanying the **Panel Secretary's** notice under GR.8.4 or was notified in accordance with GR.8.6.

GR.8.11 Where:

(a) any matter (not contained in the agenda and not notified pursuant to GR.8.4 and GR.8.6) is put before a meeting of the **Grid Code Review Panel**, and

(b) in the opinion of the **Grid Code Review Panel** it is necessary (in view of the urgency of the matter) that the **Grid Code Review Panel** resolve upon such matter at the meeting, the **Grid Code Review Panel** may so resolve upon such matter, and the **Grid Code Review Panel** shall also determine at such meeting whether the decision of the **Grid Code Review Panel** in relation to such matter should stand until the following meeting of the **Grid Code Review Panel,** in which case (at such following meeting) the decision shall be reviewed and confirmed or (but not with effect earlier than that meeting, and only so far as the consequences of such revocation do not make implementation of the **Grid Code** or compliance by **Users** with it impracticable) revoked.

GR.9 PROCEEDINGS AT MEETINGS

GR.9.1 Subject as provided in the **Grid Code,** the **Grid Code Review Panel** may regulate the conduct of and adjourn and reconvene its meetings as it sees fit.

GR.9.2 Meetings of the **Grid Code Review Panel** shall be open to attendance by a representative of any **User** (including any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party**), the **Citizens Advice** or the **Citizens Advice Scotland** and any person invited by the **Panel Chairperson** and/or any other **Panel Member**.

GR.9.3 The **Panel Chairperson** and any other **Panel Member** may invite any person invited by them under GR.9.2, and/or any attending representative of a **User**, to speak at the meeting (but such person shall have no vote).

GR.9.4 As soon as practicable after each meeting of the **Grid Code Review Panel**, the **Panel Secretary** shall prepare and send (by electronic mail or otherwise) to **Panel Members** the minutes of such meeting, which shall be (subject to GR.9.5) approved (or amended and approved) at the next meeting of the **Grid Code Review Panel** after they were so sent, and when approved (excluding any matter which the **Grid Code Review Panel** decided was not appropriate for such publication) shall be placed on the **Website**.

GR.9.5 If, following the circulation of minutes (as referred to in GR.9.4), the meeting of the **Grid Code Review Panel** at which they were to be approved is cancelled pursuant to GR.8.2, such minutes (including any proposed changes thereto which have already been received) shall be recirculated with the notification of the cancellation of the meeting of the **Grid Code Review Panel. Panel Members** shall confirm their approval of such minutes to the **Panel Secretary** (by electronic mail) no later than five (5) **Business Days** following such minutes being re-circulated. If no suggested amendments are received within such five (5) **Business Days** period, the minutes will be deemed to have been approved. If the minutes are approved, or deemed to have been approved, (excluding any matter which the **Grid Code Review Panel** decided was not appropriate for such publication) they shall be placed on the **Website**. If suggested amendments are received within such five (5) **Business Days** period, the minutes shall remain unapproved and the process for approval (or amendment and approval) of such minutes at the next meeting of the **Grid Code Review Panel**, as described in GR.9.4, shall be followed.

GR.10 QUORUM

GR.10.1 No business shall be transacted at any meeting of the **Grid Code Review Panel** unless a quorum is present throughout the meeting.

GR.10.2 Subject to GR.10.4, a quorum shall be 6 **Panel Members** who have a vote present (subject to GR.8.8) in person or by their alternates, of whom at least one shall be appointed by **The Company**. Where a **Panel Member** is represented by an **Alternate Member**, that

Alternate Member cannot represent any other **Panel Member** at the same meeting.

GR.10.3 If within half an hour after the time for which the meeting of the **Grid Code Review Panel** has been convened a quorum is not present (and provided the **Panel Secretary** has not been notified by **Panel Members** that they have been delayed and are expected to arrive within a reasonable time):

(a) the meeting shall be adjourned to the same day in the following week (or, if that day is not a **Business Day** the next **Business Day** following such day) at the same time;
(b) the **Panel Secretary** shall give notice of the adjourned meeting as far as practicable in accordance with GR.8.

GR.10.4 If at the adjourned meeting there is not a quorum present within half an hour after the time for which the meeting was convened, those present shall be a quorum.

GR.11 VOTING

GR.11.1 At any meeting of the **Grid Code Review Panel** any matter to be decided which shall include the **Grid Code Review Panel Recommendation Vote** shall be put to a vote of those **Panel Members** entitled to vote in accordance with these **Governance Rules** upon the request of the **Panel Chairperson** or any **Panel Member**.

GR.11.2 Subject to GR.11.4, in deciding any matter at any meeting of the **Grid Code Review Panel** each **Panel Member** other than the **Panel Chairperson** shall cast one vote.

GR.11.3 Except as otherwise expressly provided in the Grid Code, and in particular GR.6.2, any matter to be decided at any meeting of the **Grid Code Review Panel** shall be decided by simple majority of the votes cast at the meeting (an abstention shall not be counted as a cast vote).

GR11.4 The **Panel Chairperson** shall not cast a vote as a **Panel Member** but shall have a casting vote on any matter where votes are otherwise cast equally in favour of and against the relevant motion. Where the vote is in respect of a **Grid Code Modification Proposal** the **Panel Chairperson** may only use such casting vote to vote against such **Grid Code Modification Proposal**. The **Panel Chairperson** will have a free vote in respect of any other vote. Where any person other than the actual **Panel Chairperson** is acting as chairperson they shall not have a casting vote.

GR.11.5 Any resolution in writing signed by or on behalf of all **Panel Members** shall be valid and effectual as if it had been passed at a duly convened and quorate meeting of the **Grid Code Review Panel.** Such a resolution may consist of several instruments in like form signed by or on behalf of one or more **Panel Members**.

GR.12 PROTECTIONS FOR PANEL MEMBERS

GR.12.1 Subject to GR.12.2 all **CUSC Parties** shall jointly and severally indemnify and keep indemnified each **Panel Member**, the **Panel Secretary** and each member of a **Workgroup** ("Indemnified Persons") in respect of all costs (including legal costs), expenses, damages and other liabilities properly incurred or suffered by such Indemnified Persons when acting in or in connection with their office under the **Grid Code**, or in what they in good faith believe to be the proper exercise and discharge of the powers, duties, functions and discretions of that office in accordance with the **Grid Code**, and all claims, demands and proceedings in connection therewith other than any such costs, expenses, damages or other liabilities incurred or suffered as a result of the wilful default or bad faith of such Indemnified Person.

GR.12.2 The indemnity provided in GR.12.1 shall not extend to costs and expenses incurred in the ordinary conduct of being a **Panel Member** or **Panel Secretary**, or member of a **Workgroup** including, without limitation, accommodation costs and travel costs or any remuneration for their services to the **Grid Code Review Panel** or **Workgroup**.

GR.12.3 The **Users** agree that no Indemnified Person shall be liable for anything done when acting

properly in or in connection with their office under the **Grid Code**, or anything done in what they in good faith believe to be the proper exercise and discharge of the powers, duties, functions and discretions of that office in accordance with the **Grid Code**. Each **CUSC Party** hereby irrevocably and unconditionally waives any such liability of any Indemnified Person and any rights, remedies and claims against any Indemnified Person in respect thereof.

GR.12.4 Without prejudice to GR.12.2, nothing in GR.12.3 shall exclude or limit the liability of an Indemnified Person for death or personal injury resulting from the negligence of such Indemnified Person.

PART C

GR.13 GRID CODE MODIFICATION REGISTER

GR.13.1 The **Code Administrator** shall establish and maintain a register ("**Grid Code Modification Register**") in a form as may be agreed with the **Authority** from time to time, which shall record the matters set out in GR.13.3.

GR.13.2 The purpose of the **Grid Code Modification Register** shall be to assist the **Grid Code Review Panel** and to enable the **Grid Code Review Panel, Users** and any other persons who may be interested to be reasonably informed of the progress of **Grid Code Modification Proposals** and **Approved Modifications** from time to time.

GR.13.3 The **Grid Code Modification Register** shall record in respect of current outstanding **Grid Code Review Panel** business:

(a) details of each **Grid Code Modification Proposal** (including the name of the **Proposer,** the date of the **Grid Code Modification Proposal** and a brief description of the **Grid Code Modification Proposal**);

(b) whether such **Grid Code Modification Proposal** is an **Urgent Modification**;

(c) the current status and progress of each **Grid Code Modification Proposal**, if appropriate the anticipated date for reporting to the **Authority** in respect thereof, and whether it has been withdrawn, rejected or implemented for a period of three (3) months after such withdrawal, rejection or implementation or such longer period as the **Authority** may determine;

(d) the current status and progress of each **Approved Modification,** each **Approved Grid Code Self-Governance Proposal,** and each **Approved Fast Track Proposal**; and

(e) such other matters as the **Grid Code Review Panel** may consider appropriate from time to time to achieve the purpose of GR.13.2;

(f) unless such **Grid Code Modification Proposal** has been determined to be an **Urgent Modification** or meets the **Fast Track Criteria**, the **Prioritisation Category** accorded to the **Grid Code Modification Proposal**, and details of the assessment of each **Grid Code Modification Proposal** against the **Prioritisation Criteria** carried out in GR18.10; and

(g) where the **Prioritisation Category** of a **Grid Code Modification Proposal** is changed, confirmation of the change alongside the reason for the change.

GR.13.4 The **Grid Code Modification Register** (as updated from time to time and indicating the revisions since the previous issue) shall be published on the **Website** or (in the absence, for whatever reason, of the **Website**) in such other manner and with such frequency (being not less than once per month) as the **Code Administrator** may decide in order to bring it to the attention of the **Grid Code Review Panel**, **Users** and other persons who may be interested.

GR.14 CHANGE CO-ORDINATION

GR.14.1 The **Code Administrator** shall establish (and, where appropriate, revise from time to time) joint working arrangements for change co-ordination with each **Core Industry Document Owner** and with the **STC Modification Panel** to facilitate the identification, co-ordination, making and implementation of change to **Core Industry Documents** and the **STC** consequent on a **Grid Code Modification Proposal**, including, but not limited to, changes that are appropriate in order to avoid conflict or inconsistency as between the **Grid Code** and any **Core Industry Document** and the **STC**, in a full and timely manner.

GR.14.2 The working arrangements referred to in GR.14.1 shall be such as to enable the consideration, development and evaluation of **Grid Code Modification Proposals,** and the implementation of **Approved Modifications,** to proceed in a full and timely manner and enable changes to **Core Industry Documents** and the **STC** consequent on an amendment to be made and given effect wherever possible (subject to any necessary consent of the **Authority)** at the same time as such **Grid Code Modification Proposal** is made and given effect.

GR.15 GRID CODE MODIFICATION PROPOSALS

GR.15.1 A proposal to modify the Grid Code may be made:

(a) by any **User**; any **Authorised Electricity Operator** liable to be materially affected by such a proposal; the **Citizens Advice** or the **Citizens Advice Scotland**;

(b) under GR.25.5, by the **Grid Code Review Panel**; or

(c) by the **Authority**:

(i) following publication of its **Significant Code Review** conclusions; or
(ii) under GR.17; or
(iii) in order to comply with or implement the **Electricity Regulation** and/or any relevant **Legally Binding Decisions of the European Commission and/or the Agency**.

GR.15.2 A **Standard Modification** shall follow the procedure set out in GR.18 to GR.22.

GR.15.3 A **Grid Code Modification Proposal** shall be submitted in writing to the **Panel Secretary** and, subject to the provisions of GR.15.4 below, shall contain the following information in relation to such proposal:

(a) the name of the **Proposer**;

(b) the name of the representative of the **Proposer** who shall represent the **Proposer** in person for the purposes of this GR.15;

(c) a description (in reasonable but not excessive detail) of the issue or defect which the proposed modification seeks to address;

(d) a description (in reasonable but not excessive detail) of the proposed modification and of its nature and purpose;

(e) where possible, an indication of those parts of the Grid Code which would require amendment in order to give effect to (and/or would otherwise be affected by) the proposed modification and an indication of the nature of those amendments or effects;

(f) the reasons why the **Proposer** believes that the proposed modification would better facilitate achievement of the **Grid Code Objectives** as compared with the current version of the Grid Code together with background information in support thereof;

(g) the reasoned opinion of the **Proposer** as to why the proposed modification should not fall within a current **Significant Code Review,** whether the proposed modification should be treated as a **Self-Governance Modification** or whether the proposed

modification fails to meet the **Self- Governance Criteria** and as a result should proceed along the **Standard Modification** route;

(h) the reasoned opinion of the **Proposer** as to whether that impact is likely to be material and if so an assessment of the quantifiable impact of the proposed modification on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time;

(i) where possible, an indication of the impact of the proposed modification on **Core Industry Documents** and the **STC**;

(j) where possible, an indication of the impact of the proposed modification on relevant computer systems and processes used by **Users**.

(k) whether or not (and to the extent) that in the proposer's view the **Grid Code Modification Proposal** constitutes an amendment to the **Regulated Sections** of the Grid Code; and

(l) an assessment by the **Proposer** of the **Grid Code Modification Proposal** against the **Prioritisation Criteria**.

GR.15.4 The **Proposer** of a **Grid Code Fast Track Proposal** is not required to provide the items referenced at GR.15.3 (f) – (j) inclusive, unless either:

(a) the **Grid Code Review Panel** has, pursuant to GR.26.5 or GR.26.6, not agreed unanimously that the **Grid Code Fast Track Proposal** meets the **Fast Track Criteria,** or has not unanimously approved the **Grid Code Fast Track Proposal**; or

(b) there has been an objection to the **Approved Fast Track Proposal** pursuant to GR.26.12, whereupon the **Proposer** shall be entitled to provide the additional information required pursuant to GR.15.3 for a **Grid Code Modification Proposal** within 28 days of the **Panel Secretary's** request. Where the **Proposer** fails to provide the additional information in accordance with such timescales, the **Panel Secretary** may reject such proposal in accordance with GR.15.5.

GR.15.5 If a proposal fails in any material respect to provide the information in GR.15.3 (excluding (e), (i) and (j) thereof), the **Panel Secretary** may reject such proposal provided that:

(a) the **Panel Secretary** shall furnish the **Proposer** with the reasons for such rejection;

(b) the **Panel Secretary** shall report such rejection to the **Grid Code Review Panel** at the next **Grid Code Review Panel** meeting, with details of the reasons;

(c) if the **Grid Code Review Panel** decides or the **Authority** directs to reverse the **Panel Secretary's** decision to refuse the submission, the **Panel Secretary** shall notify the **Proposer** accordingly and the proposal shall be dealt with in accordance with these **Governance Rules**;

(d) nothing in these **Governance Rules** shall prevent a **Proposer** from submitting a revised proposal in compliance with the requirements of GR.15.3 in respect of the same subject-matter.

GR.15.6 Without prejudice to the development of a **Workgroup Alternative Grid Code Modification(s)** pursuant to GR.20.13 and GR.20.18, the **Grid Code Review Panel** shall direct in the case of (a), and may direct in the case of (b), the **Panel Secretary** to reject a proposal pursuant to GR.15, other than a proposal submitted by **The Company** pursuant to a direction issued by the **Authority** following a **Significant Code Review** in accordance with GR.16.4, or an Authority Led modification, if and to the extent that such proposal has, in the opinion of the **Grid Code Review Panel**, substantially the same effect as:

(a) a **Pending Grid Code Modification Proposal**; or

(b) a **Rejected Grid Code Modification Proposal**, where such proposal is made at any time within two (2) months after the decision of the **Authority** not to direct **The Company** to modify the Grid Code pursuant to the **ESO Licence** in the manner set out in such **Grid Code Modification Proposal,** and the **Panel Secretary** shall notify the **Proposer** accordingly.

GR.15.7 Promptly upon receipt of a **Grid Code Modification Proposal**, the **Panel Secretary** shall:

(a) allocate a unique reference number to the **Grid Code Modification Proposal**;

(b) enter details of the **Grid Code Modification Proposal** on the **Grid Code Modification Register;**

(c) reserve the right to modify the title or summary of the **Grid Code Modification Proposal** to better reflect the content or intent of the proposal. If such changes are made these shall be agreed by the **Proposer**, or where this cannot be achieved by the **Grid Code Review Panel** at their next meeting; and

(d) note whether in the proposer's view the **Grid Code Modification Proposal** constitutes an amendment to the **Regulated Sections** of the Grid Code.

GR.15.8 Subject to GR.8.6 and GR.26, where the **Grid Code Modification Proposal** is received more than ten (10) **Business Days** prior to the next **Grid Code Review Panel** meeting, the **Panel Secretary** shall place the **Grid Code Modification Proposal** on the agenda of the next **Grid Code Review Panel** meeting and otherwise shall place it on the agenda of the next succeeding **Grid Code Review Panel** meeting.

GR.15.9 It shall be a condition to the right to make a proposal to modify the **Grid Code** under this GR.15 that the **Proposer**:

(a) grants a non-exclusive royalty free licence to all **Users** who request the same covering all present and future rights, **IPRs** and moral rights it may have in such proposal (as regards use or application in Great Britain); and

(b) warrants that, to the best of its knowledge, information and belief, no other person has asserted to the **Proposer** that such person has any **IPRs** or normal rights or rights of confidence in such proposal, and, in making a proposal, a **Proposer** which is a **Grid Code Party** shall be deemed to have granted the licence and given the warranty in (a) and (b) above.

(c) The provisions of this GR.15.9 shall apply to any **WG Consultation Alternative Request,** and also to a **Relevant Party** supporting a **Grid Code Modification Proposal** in place of the original **Proposer** in accordance with GR.15.10 (a) for these purposes the term **Proposer** shall include any such **Relevant Party** or a person making such a **WG Consultation Alternative Request**.

GR.15.10 Subject to GR.16.1, which deals with the withdrawal of a **Grid Code Modification Proposal** made pursuant to a direction following a **Significant Code Review,** a **Proposer** may withdraw their support for a **Standard Modification** by notice to the **Panel Secretary** at any time prior to the **Grid Code Review Panel Recommendation Vote** undertaken in relation to that **Standard Modification** pursuant to GR.22.4, and a **Proposer** may withdraw their support for a **Grid Code Modification Proposal** that meets the **Self-Governance Criteria** by notice to the **Panel Secretary** at any time prior to the **Grid Code Review Panel Self-Governance Vote** undertaken in relation to that **Grid Code Modification Proposal** pursuant to GR.24.9, and a **Proposer** may withdraw their support for a **Grid Code Fast Track Proposal** by notice to the **Panel Secretary** at any time prior to the **Panel's** vote on whether to approve the **Grid Code Fast Track Proposal** pursuant to GR.26 in which case the **Panel Secretary** shall forthwith:

(a) notify those parties specified in GR.15.1 as relevant in relation to the **Grid Code Modification Proposal** in question (a "Relevant **Party")** that they have been notified of the withdrawal of support by the **Proposer** by publication on the **Website** and (where relevant details are supplied) by electronic mail. A **Relevant Party** may within five (5) **Business Days** notify the **Panel Secretary** that it is prepared to support the **Grid Code Modification Proposal** in place of the original **Proposer.** If such notice is received, the name of such **Relevant Party** shall replace that of the original **Proposer** as the **Proposer**, and the **Grid Code Modification Proposal** shall continue. If more than one notice is received, the first received shall be utilised;

(b) if no notice of support is received under (a), the matter shall be discussed at the next **Grid Code Review Panel** meeting. If the **Grid Code Review Panel** so agrees, it may notify **Relevant Parties** that the **Grid Code Modification Proposal** is to be withdrawn, and a further period of five (5) **Business Days** shall be given for support to be indicated by way of notice;

(c) if no notice of support is received under (a) or (b), the **Grid Code Modification Proposal** shall be marked as withdrawn on the **Grid Code Modification Register**; **Code Administrator** as Critical Friend.

GR.15.11 The **Code Administrator** shall provide assistance insofar as is reasonably practicable and on reasonable request to parties with an interest in the **Grid Code Modification Proposal** process that request it in relation to the **Grid Code**, as provided for in the **Code Administration Code of Practice**, including, but not limited to, assistance with:

(a) Drafting a **Grid Code Modification Proposal**;

(b) Understanding the operation of the **Grid Code**;

(c) Their involvement in, and representation during, the **Grid Code Modification Proposal** process (including but not limited to **Grid Code Review Panel,** and/or **Workgroup** meetings) as required or as described in the **Code Administration Code of Practice**;

(d) Helping the **Proposer** and **Workgroup** by producing draft legal text once a clear solution has been developed to support the discussion and understanding of a **Grid Code Modification Proposal**; and

(e) accessing information relating to **Grid Code Modification Proposals** and/or **Approved Modifications**.

GR.16 SIGNIFICANT CODE REVIEW

GR.16.1 If any party specified under GR.15.1 (other than the **Authority**) makes a **Grid Code Modification Proposal** during a **Significant Code Review Phase,** unless exempted by the **Authority** or unless GR.16.4(b) applies, the **Grid Code Review Panel** shall assess whether the **Grid Code Modification Proposal** falls within the scope of a **Significant Code Review** and the applicability of the exceptions set out in GR.16.4 and shall notify the **Authority** of its assessment, its reasons for that assessment and any representations received in relation to it as soon as practicable.

GR.16.2 The **Grid Code Review Panel** shall proceed with the **Grid Code Modification Proposal** made during a **Significant Code Review Phase** in accordance with GR.18 (notwithstanding any consultation undertaken pursuant to GR.16.5 and its outcome), unless directed otherwise by the **Authority** pursuant to GR.16.3.

GR.16.3 Subject to GR.16.4, the **Authority** may at any time direct that a **Grid Code Modification Proposal** made during a **Significant Code Review Phase** falls within the scope of a **Significant Code Review** and must not be made during the **Significant Code Review Phase.** If so directed, the **Grid Code Review Panel** will not proceed with that **Grid Code Modification Proposal,** and the **Proposer** shall decide whether the **Grid Code Modification Proposal** shall be withdrawn or suspended until the end of the **Significant Code Review Phase.** If the **Proposer** fails to indicate its decision whether to withdraw or

suspend the **Grid Code Modification Proposal** within twenty-eight (28) days of the **Authority's** direction, it shall be deemed to be suspended. If the **Grid Code Modification Proposal** is suspended, it shall be open to the **Proposer** at the end of the **Significant Code Review Phase** to indicate to the **Grid Code Review Panel** that it wishes that **Grid Code Modification Proposal** to proceed, and it shall be considered and taken forward in the manner decided upon by the **Grid Code Review Panel** at the next meeting, and it is open to the **Grid Code Review Panel** to take into account any work previously undertaken in respect of that **Grid Code Modification Proposal.** If the **Proposer** makes no indication to the **Grid Code Review Panel** within twenty-eight (28) days of the end of the **Significant Code Review Phase** as to whether or not it wishes the **Grid Code Modification Proposal** to proceed, it shall be deemed to be withdrawn.

GR.16.4 A **Grid Code Modification Proposal** that falls within the scope of a **Significant Code Review** may be made where:

(a) the **Authority** so determines, having taken into account (among other things) the urgency of the subject matter of the **Grid Code Modification Proposal**; or

(b) the **Grid Code Modification Proposal** is made by **The Company** pursuant to a direction from the **Authority**; or

(c) it is raised by the **Authority** pursuant to GR15.1(c)(i) who reasonably considers the **Grid Code Modification Proposal** to be necessary to comply with or implement the **Electricity Regulation** and/or any relevant **Legally Binding Decisions of the European Commission and/or the Agency**;

(d) it is raised by the **Authority** and is in respect of a **Significant Code Review**.

GR.16.5 Where a direction under GR.16.3 has not been issued, GR.16.4 does not apply and the **Grid Code Review Panel** considers that a **Grid Code Modification Proposal** made during a **Significant Code Review Phase** falls within the scope of a **Significant Code Review,** the **Grid Code Review Panel** may consult on its suitability as part of the **Standard Modification** route set out in GR.19, GR.20, GR.21 and GR.22.

GR.16.6 If, within twenty eight (28) days after the **Authority** has published its **Significant Code Review** conclusions:

(a) the **Authority** issues directions to **The Company**, including directions to **The Company** to make a **Grid Code Modification Proposal, The Company** shall comply with those directions and **The Company** and all **Users** shall treat the **Significant Code Review Phase** as ended on the date on which **The Company** makes a **Grid Code Modification Proposal** in accordance with the **Authority's** directions;

(b) the **Authority** issues to the **The Company** a statement that no directions under sub-paragraph (a) will be issued in relation to a **Grid Code Modification Proposal, The Company** and all **Users** shall treat the **Significant Code Review Phase** as ended on the date of such statement;

(c) the **Authority** raises a **Grid Code Modification Proposal** in accordance with GR.15.1(c) or GR.17 **The Company** and all **Users** shall treat **the Significant Code Review Phase** as ended;

(d) the **Authority** issues a statement that it will continue work on the **Significant Code Review, The Company** and all **Users** shall treat the **Significant Code Review Phase** as continuing until it is brought to an end in accordance with GR.16.7;

(e) neither directions under sub-paragraph (a) nor a statement under sub-paragraphs (b) or (d) have been issued, nor a **Grid Code Modification Proposal** under sub-paragraph (c) has been made, the **Significant Code**

Review Phase will be deemed to have ended.The **Authority's** published conclusions and directions to **The Company** will not fetter any voting rights of the **Panel Members** or the procedures informing the **Grid Code Modification Report**.

GR.16.7 If the **Authority** issues a statement under GR.16.6(d) and/or a direction in accordance with GR.16.10, the **Significant Code Review Phase** will be deemed to have ended when:

(a) the **Authority** issues a statement that the **Significant Code Review Phase** has ended;

(b) one of the circumstances in sub-paragraphs GR.16.6(a) or (c) occurs (irrespective of whether such circumstance occurs within twenty-eight (28) days after the **Authority** has published its **Significant Code Review** conclusions); or

(c) the **Authority** makes a decision consenting, or otherwise, to an **Authority-Led Modification** following the **Grid Code Review Panel's** submission of its **Grid Code Modification Report**.

GR.16.8 Any **Grid Code Modification Proposal** in respect of a **Significant Code Review** that is not an **Authority-Led Modification** raised pursuant to GR.17 shall be treated as a **Standard Modification** and shall proceed through the process for **Standard Modifications** set out in GR.18, GR.19, GR.20, GR.21 and GR.22.

GR.16.9 **The Company** may not, without the prior consent of the **Authority,** withdraw a **Grid Code Modification Proposal** made pursuant to a direction issued by the **Authority** pursuant to GR.16.4(b)).

GR.16.10 Where a **Grid Code Modification Proposal** has been raised in accordance with GR.16.4(b) or GR.15.1(a), or by the **Authority** under GR.15.1(c) and it is in respect of a **Significant Code Review,** the **Authority** may issue a direction (a "backstop direction**"**), which requires such proposal(s) and any alternatives to be withdrawn and which causes the **Significant Code Review Phase** to recommence.

GR.17 AUTHORITY LED MODIFICATIONS

Power to develop a proposed modification

GR.17.1 The **Authority** may develop an **Authority-Led Modification** in respect of a **Significant Code Review**, in accordance with the procedures set out in this GR.17.

GR.17.2 An **Authority-led Modification** may be submitted where the **Significant Code Review Phase** is extended by a statement issued by the **Authority** as described in GR.16.6(d), or where a direction is issued under GR.16.10.

Authority-Led Modification Report

GR.17.3 The **Authority** may submit its proposed **Authority-Led Modification** to the **Code Administrator**, together with such supplemental information as the **Authority** considers appropriate.

GR.17.4 Upon receipt of the **Authority's** proposal under GR.17.3, the **Code Administrator** shall prepare a written report on the proposal (the "**Authority-Led Modification Report**"). Where the **Code Administrator** does not reasonably believe the information provided by the **Authority** under 17.3 to be sufficient for it to prepare an **Authority-Led Modification Report** the **Code Administrator** will notify the **Authority** as soon as reasonably practical. The **Authority-Led Modification Report** must be consistent with the information provided by the **Authority** under GR.17.3, and shall:

(a) be addressed and delivered to the **Grid Code Review Panel**;

(b) set out the legal text of the proposed **Authority-Led Modification**;

(c) include a description of the proposed **Authority-Led Modification**;

(d) include a summary of the views (including any recommendations) from parties consulted in respect of the proposed **Authority-Led Modification**;

(e) include an analysis of whether (and, if so, to what extent) the proposed **Authority-Led Modification** would better facilitate achievement of the **Grid Code Objective(s)** with a detailed explanation of the **Authority's** reasons for its assessment, including, where the impact is likely to be material, an assessment of the quantifiable impact of the proposed **Authority-Led Modification** on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time, and providing a detailed explanation of the **Authority's** reasons for that assessment;

(f) specify the proposed implementation timetable (including the **Proposed Implementation Date**);

(g) provide an assessment of:

(i) the impact of the proposed **Authority-Led Modification** on the **Core Industry Documents** and the **STC**;
(ii) the changes which would be required to the **Core Industry Documents** and the **STC** in order to give effect to the proposed **Authority-Led Modification**;
(iii) the mechanism and likely timescale for the making of the changes referred to in (ii);
(iv) the changes and/or developments which would be required to central computer systems and, if practicable, processes used in connection with the operation of arrangements established under the **Core Industry Documents** and the **STC**;
(v) the mechanism and likely timescale for the making of the changes referred to in (iv);
(vi) an estimate of the costs associated with making and delivering the changes referred to in (ii) and (iv), such costs are expected to relate to: for (ii) the costs of amending the **Core Industry Document(s)** and **STC** and for (iv) the costs of changes to computer systems and possibly processes which are established for the operation of the **Core Industry Documents** and the **STC**, together with an analysis and a summary of representations in relation to such matters, including any made by **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**;

(h) contain, to the extent such information is available to the **Code Administrator,** an assessment of the impact of the proposed **Authority-Led Modification** on **Users** in general (or classes of **Users**), including the changes which are likely to be required to their internal systems and processes and an estimate of the development, capital and operating costs associated with implementing the changes to the **Grid Code** and to **Core Industry Documents** and the **STC**;

(i) include copies of (and a summary of) all written representations or objections made by parties consulted by the **Authority** in respect of the proposed **Authority-Led Modification** and subsequently maintained; and

(j) have appended a copy of any impact assessment prepared by **Core Industry Document Owners** and the **STC** committee and the views and comments of the **Code Administrator** in respect thereof.

GR.17.5 Where the **Authority-Led Modification Report** is received more than ten (10) **Business Days** prior to the next **Grid Code Review Panel** meeting, the **Panel Secretary** shall place the proposed **Authority-Led Modification** on the agenda of the next **Grid Code Review Panel** meeting and otherwise shall place it on the agenda of the next succeeding **Grid**

Code Review Panel meeting.

Grid Code Review Panel Decision

GR.17.6 In the case of **Authority-Led Modifications** GR.22 shall apply, save for GR.22.1 and GR.22.2 and the **Authority-Led Modification Report** shall be used as the draft **Grid Code Modification Report**.

GR.17.7 Where an **Authority-Led Modification** has been approved in accordance with Section GR.22, GR.25 (Implementation) shall apply.

GR.18 GRID CODE MODIFICATION PROPOSAL EVALUATION

GR.18.1 This GR.18 is subject to the **Urgent Modification** procedures set out in GR.23 and the **Significant Code Review** procedures set out in GR.16.

GR.18.2 A **Grid Code Modification Proposal** shall, subject to GR.15.8, be discussed by the **Grid Code Review Panel** at the next following **Grid Code Review Panel** meeting convened.

GR.18.3 The **Proposer's** representative shall attend such **Grid Code Review Panel** meeting and the **Grid Code Review Panel** may invite the **Proposer's** representative to present their **Grid Code Modification Proposal** to the **Grid Code Review Panel**.

GR.18.4 The **Grid Code Review Panel** shall evaluate each **Grid Code Modification Proposal** against the **Self-Governance Criteria**.

GR.18.5 The **Grid Code Review Panel** shall follow the procedure set out in GR.24 in respect of any **Modification** that the **Grid Code Review Panel** considers meets the **Self-Governance Criteria** unless the **Authority** makes a direction in accordance with GR.24.2 and in such a case that **Modification** shall be a **Standard Modification** and shall follow the procedure set out in GR.19, GR.20, GR.21 and GR.22.

GR.18.6 Unless the **Authority** makes a direction in accordance with GR.24.4, a **Modification** that the **Grid Code Review Panel** considers does not meet the **Self-Governance Criteria** shall be a **Standard Modification** and shall follow the procedure set out in GR.19, GR.20, GR.21 and GR.22.

GR.18.7 The **Grid Code Review Panel** shall evaluate each **Grid Code Fast Track Proposal** against the **Fast Track Criteria**.

GR.18.8 The **Grid Code Review Panel** shall follow the procedure set out in GR.26 in respect of any **Grid Code Fast Track Proposal.** The provisions of GR.19 to GR.24 shall not apply to a **Grid Code Fast Track Proposal**.

GR.18.9 The **Grid Code Review Panel** shall evaluate each **Grid Code Modification Proposal** and determine whether the **Grid Code Modification Proposal** constitutes an amendment to the **Regulated Sections** of the Grid Code and, if a change to the areas set out in Table 1 of the GR.B annex which details the **Regulated Sections**, its expected impact on the objectives of **Assimilated Law** (Commission Regulation (EU) 2017/2195) (and in the event of disagreement **The Company's** view shall prevail).

GR.18.10 Unless such **Grid Code Modification Proposal** has been determined to be an **Urgent Modification** or meets the **Fast Track Criteria**, the **Grid Code Review Panel** shall undertake an assessment of such **Grid Code Modification Proposal** against the **Prioritisation Criteria** to determine its **Prioritisation Category**, as compared with other **Pending Grid Code Modification Proposals**, and, taking into account the **Proposer's** opinion provided pursuant to Clause GR.15.3 (l).

GR.19 PANEL PROCEEDINGS

GR.19.1

(a) The **Code Administrator** and the **Grid Code Review Panel** shall together establish a timetable to apply for the **Grid Code Modification Proposal** process. That timetable

must comply with any direction(s) issued by the **Authority** setting and/or amending a timetable in relation to a **Grid Code Modification Proposa**l that is in the respect of a **Significant Code Review**.

(b) The **Grid Code Review Panel** shall establish the part of the timetable for the consideration by the **Grid Code Review Panel** and by a **Workgroup** (if any) which shall be no longer than six months unless in any case the particular circumstances of the **Grid Code Modification Proposal** (taking due account of the **Prioritisation Criteria**, whether the **Grid Code Modification Proposal** is an **Urgent Modification**, or, if it is not an **Urgent Modification** or doesn't meet the **Fast Track Criteria**, the **Prioritisation Category** of the **Grid Code Modification Proposal**) justify an extension of such timetable, and provided the **Authority,** after receiving notice, does not object, taking into account all those issues.

(c) The **Code Administrator** shall establish the part of the timetable for the consultation to be undertaken by the **Code Administrator** under these **Governance Rules** and separately the preparation of a **Grid Code Modification Report** to the **Authority.** Where the particular circumstances of the **Grid Code Modification Proposal** (taking due account of the **Prioritisation Criteria**, and whether the **Grid Code Modification Proposal** is an **Urgent Modification**, or, if it is not an **Urgent Modification** or doesn't meet the **Fast Track Criteria**, the **Prioritisation Category** of the **Grid Code Modification Proposal**) justify an extension of such timescales and provided the **Authority**, after receiving notice, does not object, taking into account all those issues, the **Code Administrator** may revise such part of the timetable.

(d) In setting such a timetable, the **Grid Code Review Panel** and the **Code Administrator** shall exercise their respective discretions such that, in respect of each **Grid Code Modification Proposal,** a **Grid Code Modification Report** may be submitted to the **Authority** as soon after the **Grid Code Modification Proposal** is made as is consistent with the proper evaluation of such **Grid Code Modification Proposal,** taking due account of the **Prioritisation Criteria**, and whether the **Grid Code Modification Proposal** is an **Urgent Modification**, or, if it is not an **Urgent Modification** or doesn't meet the **Fast Track Criteria**, the **Prioritisation Category** of the **Grid Code Modification Proposal**.

(e) Unless **Grid Code Modification Proposals** have been determined to be **Urgent Modifications**, or meet the **Fast Track Criteria**, and having regard to the **Prioritisation Criteria** and the assessment provided by the **Proposer** in paragraph 15.3 (l), the **Grid Code Review Panel** may determine the **Prioritisation Category** of **Grid Code Modification Proposals**, as compared with other **Pending Grid Code Modification Proposals**, that also aren't **Urgent Modifications** or **Grid Code Fast Track Proposals** and may (subject to any objection from the **Authority** taking into account all those issues) adjust the **Prioritisation Category** of the relevant **Grid Code Modification Proposal** accordingly.

GR.19.2 In relation to each **Grid Code Modification Proposal,** the **Grid Code Review Panel** shall determine at any meeting of the **Grid Code Review Panel** whether to:

(a) amalgamate the **Grid Code Modification Proposal** with any other **Grid Code Modification Proposal**;

(b) invite the **Proposer** to further develop their **Grid Code Modification Proposal** before presenting it to a subsequent meeting of the **Grid Code Review Panel** or to withdraw their modification proposal;

(c) establish a **Workgroup** of the **Grid Code Review Panel,** to consider the **Grid Code Modification Proposal**;

(d) review the evaluation made pursuant to GR.18.4, taking into account any new information received; or

(e) proceed directly to wider consultation (in which case the **Proposer's** right to vary their **Grid Code Modification Proposal** shall lapse).

GR.19.3 The **Grid Code Review Panel** may decide to amalgamate a **Grid Code Modification Proposal** with one or more other **Grid Code Modification Proposals** where the subject-matter of such **Grid Code Modification Proposals** is sufficiently proximate to justify amalgamation on the grounds of efficiency and/or where such **Grid Code Modification Proposals** are logically dependent on each other. Such amalgamation may only occur with the consent of the **Proposers** of the respective **Grid Code Modification Proposals.** The **Authority** shall be entitled to direct that a **Grid Code Modification Proposal** is not amalgamated with one or more other **Grid Code Modification Proposals**.

GR.19.4 Without prejudice to each **Proposer's** right to withdraw their **Grid Code Modification Proposal** prior to the amalgamation of their **Grid Code Modification Proposal** where **Grid Code Modification Proposals** are amalgamated pursuant to GR.19.3:

(a) such **Grid Code Modification Proposals** shall be treated as a single **Grid Code Modification Proposal**;

(b) references in these **Governance Rules** to a **Grid Code Modification Proposal** shall include and apply to a group of two or more **Grid Code Modification Proposals** so amalgamated;

(c) the **Proposers** of each such **Grid Code Modification Proposal** shall cooperate in deciding which of them is to provide a representative for any **Workgroup** in respect of the amalgamated **Grid Code Modification Proposal** and, in default of agreement, the **Panel Chairperson** shall nominate one of the **Proposers** for that purpose; and

(d) where **Grid Code Modification Proposals** are amalgamated and the resultant amalgamated **Grid Code Modification Proposal** is not an **Urgent Modifications** or does not meet the **Fast Track Criteria,** the **Grid Code Review Panel** shall determine the amalgamated **Grid Code Modification Proposal** to have a single **Prioritisation Category**. When determining a **Prioritisation Category** for an amalgamated **Grid Code Modification Proposal**, the **Grid Code Review Panel** shall consider the **Prioritisation Categories**, and the relevant assessments undertaken in determining these **Prioritisation Categories**, accorded to the original **Grid Code Modification Proposals** that have been amalgamated.

GR.19.5 In respect of any **Grid Code Modification Proposal** that the **Grid Code Review Panel** determines to proceed directly to wider consultation in accordance with GR.19.2, the **Grid Code Review Panel,** may at any time prior to the **Grid Code Review Panel Recommendation Vote** having taken place decide to establish a **Workgroup** of the **Grid Code Review Panel** and the provisions of GR.20 shall apply. In such case the **Grid Code Review Panel** shall be entitled to adjust the timetable referred to at GR.19.1(b) and the **Code Administrator** shall be entitled to adjust the timetable referred to at GR.19.1(c), provided that the **Authority**, after receiving notice, does not object.

GR.19.6 Where the **Grid Code Review Panel** according to GR.19.2(b) invites the **Proposer** to further develop their **Grid Code Modification Proposal**, on presenting this to a subsequent meeting of the **Grid Code Review Panel**, the **Panel** will determine a way forward from the options in GR.19.2 (a), (c), (d) and (e) or invite the **Proposer** to withdraw their modification proposal.

GR.19.7 Where the **Grid Code Review Panel** according to GR.19.2(b) or GR.19.6 invites the **Proposer** to further develop or withdraw their modification and this is declined, the **Panel** will determine a way forward from the options in GR.19.2 (a), (c), (d) or (e).

GR.20 WORKGROUPS

GR.20.1 If the **Grid Code Review Panel** has decided not to proceed directly to wider consultation (or where the provisions of GR.19.5, GR.23.10 or GR.25.5 apply), a **Workgroup** will be established by the **Grid Code Review Panel** to assist the **Grid Code Review Panel** in evaluating whether a **Grid Code Modification Proposal** better facilitates achieving the **Grid Code Objectives** and whether a **Workgroup Alternative Grid Code Modification(s)**

would, as compared with the **Grid Code Modification Proposal,** better facilitate achieving the **Grid Code Objectives** in relation to the issue or defect identified in the **Grid Code Modification Proposal**.

GR.20.2 A single **Workgroup** may be responsible for the evaluation of more than one **Grid Code Modification Proposal** at the same time, but need not be so responsible.

GR.20.3 A **Workgroup** shall comprise at least five (5) persons (who may be **Panel Members)** selected by the **Grid Code Review Panel** from those nominated by **Users**, the **Citizens Advice** or the **Citizens Advice Scotland** for their relevant experience and/or expertise in the areas forming the subject-matter of the **Grid Code Modification Proposal(s)** to be considered by such **Workgroup** (and the **Grid Code Review Panel** shall ensure, as far as possible, that an appropriate cross-section of representation, experience and expertise is represented on such **Workgroup)** provided that there shall always be at least one member representing **The Company** and if, and only if, the **Grid Code Review Panel** is of the view that a **Grid Code Modification Proposal** is likely to have an impact on the **STC,** the **Grid Code Review Panel** may invite the **STC** committee to appoint a representative to become a member of the **Workgroup.** A representative of the **Authority** may attend any meeting of a **Workgroup** as an observer and may speak at such meeting.

GR.20.4 The **Code Administrator** shall in consultation with the **Grid Code Review Panel** appoint the chairperson of the **Workgroup** who shall act impartially and as an independent chairperson.

GR.20.5 No **Workgroup** or meeting of a **Workgroup** will be considered quorate with less than five (5) persons, not including the **Code Administrator** representative or the chairperson of the **Workgroup**. Where insufficient persons are nominated to a **Workgroup** for it to be quorate, the **Code Administrator** will report this to the next meeting of the **Grid Code Review Panel**. The **Panel** may:

(a) Request the **Code Administrator** to seek further nominations;

(b) Reconsider their decision on how to progress the **Grid Code Modification Proposal** as allowed under GR.19.2; or

(c) Request that those parties that have nominated themselves to a Workgroup which is less than quorate should proceed as a **Limited Membership Workgroup**, subject to the following additional checks and balances:

(i) A **Limited Membership Workgroup** shall always hold a **Workgroup Consultation** in addition to the mandatory **Code Administrator Consultation**.

(ii) Prior to the **Workgroup Consultation**, a draft of this shall be circulated to the **Grid Code Review Panel** for five (5) days or another timescale as agreed by the **Panel** for approval.

(iii) At the same time as the **Workgroup Consultation** is initiated, the **Code Administrator** shall again formally seek nominations and if quoracy is not established then again seek advice from the **Panel** on how to proceed from the options set out in GR.20.5.

Where a **Workgroup** remains non-quorate, and with the permission of the **Panel**, a **Limited Membership Workgroup** may continue following a **Workgroup Consultation** as if it were a standard **Workgroup**.

GR.20.6 A **Limited Membership Workgroup** may at any point be instructed by the **Authority** to either:

(a) Stop work; or

(b) To provide a report on progress to the next meeting of the **Grid Code Review Panel.**

The **Authority** may also at any point instruct the **Code Administrator** to seek further nominations for membership.

GR.20.7 Where a specific meeting of an otherwise quorate **Workgroup** is not quorate, or where member(s) of a **Limited Membership Workgroup** are unable to attend a meeting:

(a) A member of the **Workgroup** unable to attend will be invited by the **Code Administrator** to send an alternate;
(b) All members will be invited to participate by telephone, webinar or other equivalent if not able to attend in person;
(c) A meeting may proceed as a **Workgroup** meeting as long as none of the members either present or absent raise an objection to this, however no voting can take place unless the **Code Administrator** has obtained enough votes to be quorate from members not in attendance or from all members of a **Limited Membership Workgroup**. This shall include where there has not been an opportunity to check with all **Workgroup** members to see if they have an objection (typically where a change of plans or circumstances has occurred too late to achieve this);
(d) If any **Workgroup** member objects to the progressing of a **Workgroup** without them, they must communicate this to the **Code Administrator** at least 24 hours before the meeting indicating that they will not be present and do not wish the meeting to take place. The **Code Administrator** will then endeavour to rearrange the meeting to accommodate such a member's availability;
(e) Where a **Workgroup** member is repeatedly unavailable, as guidance on 3 consecutive occasions, and does not give permission for the **Workgroup** to proceed without them as in (d), under GR.20.7 the **Grid Code Review Panel** may choose to replace or remove them.

GR.20.8 The **Grid Code Review Panel** may add further members or the **Workgroup** chairperson may add or vary members to a **Workgroup**.

GR.20.9 The **Grid Code Review Panel** may (but shall not be obliged to) replace or remove any member or observer of a **Workgroup** appointed pursuant to GR.20.3 at any time if such member is unwilling or unable for whatever reason to fulfil that function and/or is deliberately and persistently disrupting or frustrating the work of the **Workgroup**.

GR.20.10 The **Grid Code Review Panel** shall determine the terms of reference of each **Workgroup** and may change those terms of reference from time to time as it sees fit.

GR.20.11 The terms of reference of a **Workgroup** must include provision in respect of the following matters:

(a) those areas of a **Workgroup's** powers or activities which require the prior approval of the **Grid Code Review Panel**;

(b) the seeking of instructions, clarification or guidance from the **Grid Code Review Panel,** including on the suspension of a **Workgroup Alternative Grid Code Modification(s)** during a **Significant Code Review Phase**;

(c) the timetable for the work to be done by the **Workgroup**, in accordance with the timetable established pursuant to GR.19.1 (save where GR.19.5 applies); and

(d) the length of any **Workgroup Consultation**.

In addition, prior to the taking of any steps which would result in the undertaking of a significant amount of work (including the production of draft legal text to modify the **Grid Code** in order to give effect to a **Grid Code Modification Proposal** and/or **Workgroup Alternative Grid Code Modification(s),** with the relevant terms of reference setting out what a significant amount of work would be in any given case), the **Workgroup** shall seek the views of the **Grid Code Review Panel** as to whether to proceed with such steps and, in giving its views, the **Grid Code Review Panel** may consult the **Authority** in respect thereof.

GR.20.12 Subject to the provisions of this GR.20.12 and unless otherwise determined by the **Grid Code Review Panel**, the **Workgroup** shall develop and adopt its own internal working procedures for the conduct of its business and shall provide a copy of such procedures to the **Panel Secretary** in respect of each **Grid Code Modification Proposal** for which it is responsible. Unless the **Grid Code Review Panel** otherwise determines, meetings of each **Workgroup** shall be open to attendance by a representative of any **User,** (including any **Authorised Electricity Operator; The Company** or a **Materially Affected Party),** the **Citizens Advice,** the **Citizens Advice Scotland,** the **Authority** and any person invited by the chairperson, and the chairperson of a **Workgroup** may invite any such person to speak at such meetings, other than the **Authority** who may speak at any time as per GR.20.3.

GR.20.13 After development by the **Workgroup** of the **Grid Code Modification Proposal,** and (if applicable) after development of any draft **Workgroup Alternative Grid Code Modification(s)**, the **Workgroup** may (subject to the provisions of GR.20.19) consult ("**Workgroup Consultation"**) on the **Grid Code Modification Proposal** and, if applicable, on any draft **Workgroup Alternative Grid Code Modification(s)** with:

(a) **Users**; and
(b) such other persons who may properly be considered to have an appropriate interest in it.

GR.20.14 The **Workgroup Consultation** will be undertaken by issuing a **Workgroup Consultation** paper (and its provision in electronic form on the **Website** and in electronic mails to **Users** and such other persons, who have supplied relevant details, shall meet this requirement).

Such **Workgroup Consultation** paper will include:

(a) Issues which arose in the **Workgroup** discussions;

(b) Details of any draft **Workgroup Alternative Grid Code Modification(s)**;

(c) The date proposed by the **Code Administrator** as the **Proposed Implementation Date**.

GR.20.15 **Workgroup Consultation** papers will be copied to **Core Industry Document Owners** and the secretary of the **STC** committee.

GR.20.16 Any **Authorised Electricity Operator**; the **Citizens Advice** or the **Citizens Advice Scotland, The Company** or a **Materially Affected Party** may (subject to GR.20.20) raise a **Workgroup Consultation Alternative Request** in response to the **Workgroup Consultation.** Such **Workgroup Consultation Alternative Request** must include:

(a) the information required by GR.15.3 (which shall be read and construed so that any references therein to "amendment proposal" or "proposal" shall be read as "request" and any reference to "Proposer" shall be read as "requester"); and

(b) sufficient detail to enable consideration of the request including details as to how the request better facilitates the **Grid Code Objectives** than the current version of the **Grid Code**, than the **Grid Code Modification Proposal** and than any draft **Workgroup Alternative Grid Code Modification(s)**.

GR.20.17 The **Workgroup** shall consider and analyse any comments made or any **Workgroup Consultation Alternative Request** made by any **User** (including any **Authorised Electricity Operator; The Company** or a **Materially Affected Party**), the **Citizens Advice** and the **Citizens Advice Scotland** in response to the **Workgroup Consultation**.

GR.20.18 If a majority of the members of the **Workgroup** or the chairperson of the **Workgroup** believe that the **Workgroup Consultation Alternative Request** may better facilitate the **Grid Code Objectives** than the Grid Code **Modification Proposal**, the **Workgroup** shall develop it as a **Workgroup Alternative Grid Code Modification(s)** or, where the chairperson of the **Workgroup** agrees, amalgamate it with one or more other draft **Workgroup Alternative Grid Code Modification(s)** or **Workgroup Consultation**

Alternative Request(s);

GR.20.19 Unless the **Grid Code Review Panel** directs the **Workgroup** otherwise pursuant to GR.20.20, and provided that a **Workgroup Consultation** has been undertaken in respect of the **Grid Code Modification Proposal,** no further **Workgroup Consultation** will be required in respect of any **Workgroup Alternative Grid Code Modification(s)** developed in respect of such **Grid Code Modification Proposal**.

GR.20.20 The **Grid Code Review Panel** may, at the request of the chairperson of the **Workgroup,** direct the **Workgroup** to undertake further **Workgroup Consultation(s).** At the same time as such direction the **Grid Code Review Panel** shall adjust the timetable referred to at GR.19.1(b) and the **Code Administrator** shall be entitled to adjust the timetable referred to at GR.19.1 (c), provided that the **Authority,** after receiving notice, does not object. No **Workgroup Consultation Alternative Request** may be raised by any **User** (including any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party),** the **Citizens Advice** and the **Citizens Advice Scotland** during any second or subsequent **Workgroup Consultation**.

GR.20. 21 The **Workgroup** shall finalise the **Workgroup Alternative Grid Code Modification(s)** for inclusion in the report to the **Grid Code Review Panel**.

(a) Each **Workgroup** chairperson shall prepare a report to the **Grid Code Review Panel** responding to the matters detailed in the terms of reference in accordance with the timetable set out in the terms of reference.

(b) If a **Workgroup** is unable to reach agreement on any such matter, the report must reflect the views of the members of the **Workgroup**.

(c) The report will be circulated in draft form to **Workgroup** members and a period of not less than five (5) **Business Days** or if all **Workgroup** members agree three (3) **Business Days** given for comments thereon. Any unresolved comments made shall be reflected in the final report.

GR.20.23 The chairperson or another member (nominated by the chairperson) of the **Workgroup** shall attend the next **Grid Code Review Panel** meeting following delivery of the report and may be invited to present the findings and/or answer the questions of **Panel Members** in respect thereof. Other members of the **Workgroup** may also attend such **Grid Code Review Panel** meeting.

GR.20.24 At the meeting referred to in GR.20.23 the **Grid Code Review Panel** shall consider the **Workgroup's** report and shall determine whether to:-

(a) refer the proposed **Grid Code Modification Proposal** back to the **Workgroup** for further analysis (in which case the **Grid Code Review Panel** shall determine the timetable and terms of reference to apply in relation to such further analysis); or

(b) proceed then to wider consultation as set out in GR.21; or

(c) decide on another suitable course of action.

GR.20.25 Subject to GR.16.4 if, at any time during the assessment process carried out by the **Workgroup** pursuant to this GR.20, the **Workgroup** considers that a **Grid Code Modification Proposal** or any **Workgroup Alternative Grid Code Modification(s)** falls within the scope of a **Significant Code Review,** it shall consult on this as part of the **Workgroup Consultation** and include its reasoned assessment in the report to the **Grid Code Review Panel** prepared pursuant to GR.20.22. If the **Grid Code Review Panel** considers that the **Grid Code Modification Proposal** or the **Workgroup Alternative Grid Code Modification(s)** falls within the scope of a **Significant Code Review,** it shall consult with the **Authority**. If the **Authority** directs that the **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** falls within the scope of the **Significant Code Review,** the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** shall be suspended or withdrawn during the **Significant Code Review Phase**, in accordance with GR.16.3.

GR.20.26 The **Proposer** may, at any time prior to the final evaluation by the **Workgroup** (in accordance with its terms of reference and working practices) of that **Grid Code Modification Proposal** against the **Grid Code Objectives**, vary their **Grid Code Modification Proposal** on notice (which may be given verbally) to the chairperson of the **Workgroup** provided that such varied **Grid Code Modification Proposal** shall address the same issue or defect originally identified by the **Proposer** in their **Grid Code Modification Proposal**.

GR.20.27 The **Grid Code Review Panel** may (but shall not be obliged to) require a **Grid Code Modification Proposal** to be withdrawn if, in the **Panel's** opinion, the **Proposer** of that **Grid Code Modification Proposal** is deliberately and persistently disrupting or frustrating the work of the **Workgroup** and that **Grid Code Modification Proposal** shall be deemed to have been so withdrawn. In the event that a **Grid Code Modification Proposal** is so withdrawn, the provisions of GR.15.10 shall apply in respect of that **Grid Code Modification Proposal**.

GR.21 THE CODE ADMINISTRATOR CONSULTATION

GR.21.1 In respect of any **Grid Code Modification Proposal** where a **Workgroup** has been established GR.21.2 to GR.21.6 shall apply.

GR.21.2 After consideration of any **Workgroup** report on the **Grid Code Modification Proposal** and if applicable any **Workgroup Alternative Grid Code Modification(s)** by the **Grid Code Review Panel** and a determination by the **Grid Code Review Panel** to proceed to wider consultation, the **Code Administrator** shall bring to the attention of and consult on the **Grid Code Modification Proposal** and if applicable any **Workgroup Alternative Grid Code Modification(s)** with:

(i) **Users;** and
(ii) such other persons who may properly be considered to have an appropriate interest in it, including **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**.

GR.21.3 The consultation will be undertaken by issuing a Consultation Paper (and its provision in electronic form on the **Website** and in electronic mails to **Users** and such other persons, who have supplied relevant details, shall meet this requirement). The consultation shall last for a minimum of one month unless it is deemed to be an **Urgent Modification**. For **Urgent Modifications** the **Grid Code Review Panel** shall confirm the proposed drafting for the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** do not include changes to **Regulated Sections**; provided there are no proposed changes to a **Regulated Section** then a shorter consultation duration can be applied if approved by the **Authority**, otherwise the standard one month consultation will apply.

GR.21.4 The Consultation Paper will contain:

(a) the proposed drafting for the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** (unless the **Authority** decides none is needed in the **Grid Code Modification Report** under GR.21.5) and will indicate the issues which arose in the **Workgroup** discussions, where there has been a **Workgroup** and will incorporate **The Company's** and the **Grid Code Review Panel's** initial views on the way forward; and

(b) the date proposed by the **Code Administrator** as the **Proposed Implementation Date** and, where the **Workgroup** terms of reference require and the dates proposed by the **Workgroup** are different from those proposed by the **Code Administrator,** those proposed by the **Workgroup.** In relation to a **Grid Code Modification Proposal** that meets the **Self-Governance Criteria,** the **Code Administrator** may not propose an implementation date earlier than the sixteenth (16) **Business Day** following the publication of the **Grid Code Review Panel's** decision to approve or reject the **Grid Code Modification Proposal.** Views will be invited on these dates.

GR.21.5 Where the **Grid Code Review Panel** is of the view that the proposed text to amend the Grid Code for a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** is not needed in the **Grid Code Modification Report,** the **Grid Code Review Panel** shall consult (giving its reasons as to why it is of this view) with the **Authority** as to whether the **Authority** would like the **Grid Code Modification Report** to include the proposed text to amend the **Grid Code**. If it does not, no text needs to be included. If it does, and no detailed text has yet been prepared, the **Code Administrator** shall prepare such text to modify the **Grid Code** in order to give effect to such **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** and shall seek the conclusions of the relevant **Workgroup** before consulting those identified in GR.21.2.

GR.21.6 Consultation Papers will be copied to **Core Industry Document Owners** and the secretary of the **STC** committee.

GR.21.7 In respect of any **Grid Code Modification Proposal** where a **Workgroup** has not been established GR.21.8 to GR.21.11 shall apply.

GR.21.8 After determination by the **Grid Code Review Panel** to proceed to wider consultation, such consultation shall be conducted by the **Code Administrator** on the **Grid Code Modification Proposal** with:

(i) **Users**; and
(ii) such other persons who may properly be considered to have an appropriate interest in it, including **Small Participants,** the **Citizens Advice** and the **Citizens Advice Scotland**.

GR.21.9 The consultation will be undertaken by issuing a Consultation Paper (and its provision in electronic form on the **Website** and in electronic mails to **Users** and such other persons, who have supplied relevant details, shall meet this requirement). The consultation shall last for a minimum of one month unless it is deemed to be an **Urgent Modification**. For **Urgent Modifications** the **Grid Code Review Panel** shall confirm the proposed drafting for the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** do not include changes to **Regulated Sections**; provided there are no proposed changes to a **Regulated Section** then a shorter consultation duration can be applied if approved by the **Authority**, otherwise the standard one month consultation will apply.

GR.21.10 The Consultation Paper will contain:

(a) the proposed drafting for the **Grid Code Modification Proposal** (unless the **Authority** decides none is needed in the **Grid Code Modification Report** under GR.21.11) and will incorporate **The Company's** and the **Grid Code Review Panel's** initial views on the way forward; and

(b) the date proposed by the **Code Administrator** as the **Proposed Implementation Date**. Views will be invited on this date.

GR.21.11 Where the **Grid Code Review Panel** is of the view that the proposed text to amend the **Grid Code** for a **Grid Code Modification Proposal** is not needed, **the Grid Code Review Panel** shall consult (giving its reasons to why it is of this view) with the **Authority** as to whether the **Authority** would like the **Grid Code Modification Report** to include the proposed text to amend the **Grid Code**. If it does not, no text needs to be included. If it does, and no detailed text has yet been prepared, the **Code Administrator** shall prepare such text to modify the **Grid Code** in order to give effect to such **Grid Code Modification Proposal** and consult those identified in GR.21.2.

GR.22 GRID CODE MODIFICATION REPORTS

GR.22.1 Subject to the **Code Administrator's** consultation having been completed, the **Grid Code Review Panel** shall prepare and submit to the **Authority** a report (the "**Grid Code Modification Report**") in accordance with this GR.22 for each **Grid Code Modification Proposal** which is not withdrawn.

GR.22.1A Where a **Grid Code Modification Proposal** or **any Workgroup Alternative Grid Code Modification** constitutes an amendment to the **Regulated Sections**, the **Panel** will consider any consultation responses received and any further work required to assess these as required under GR.18.9.

GR.22.2 The matters to be included in a **Grid Code Modification Report** shall be the following (in respect of the **Grid Code Modification Proposal**):

(a) A description of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s),** including the details of, and the rationale for, any variations made (or, as the case may be, omitted) by the **Proposer** together with the views of the **Workgroup**;

(b) the **Panel Members' Recommendation**;

(c) a summary (agreed by the **Grid Code Review Panel)** of the views (including any recommendations) from **Panel Members** in the **Grid Code Review Panel Recommendation Vote** and the conclusions of the **Workgroup** (if there is one) in respect of the **Grid Code Modification Proposal** and of any **Workgroup Alternative Grid Code Modification(s)**;

(d) an analysis of whether (and, if so, to what extent) the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** would better facilitate achievement of the **Grid Code Objective(s)** with a detailed explanation of the **Grid Code Review Panel's** reasons for its assessment, including, where the impact is likely to be material, an assessment of the quantifiable impact of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time, and providing a detailed explanation of the **Grid Code Review Panel's** reasons for that assessment;

(e) an analysis of whether (and, if so, to what extent) any **Workgroup Alternative Grid Code Modification(s)** would better facilitate achievement of the **Grid Code Objective(s)** as compared with the **Grid Code Modification Proposal** and any other **Workgroup Alternative Grid Code Modification(s)** and the current version of the **Grid Code,** with a detailed explanation of the **Grid Code Review Panel's** reasons for its assessment, including, where the impact is likely to be material, an assessment of the quantifiable impact of the **Workgroup Alternative Grid Code Modification(s)** on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time, and providing a detailed explanation of the **Grid Code Review Panel's** reasons for that assessment;

(f) the **Proposed Implementation Date** taking into account the views put forward during the process described at GR.21.4 (b) such date to be determined by the **Grid Code Review Panel** in the event of any disparity between such views and those of the **Code Administrator**;

(g) an assessment of:

(i) the impact of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** on the **Core Industry Documents** and the **STC**;
(ii) the changes which would be required to the **Core Industry Documents** and the **STC** in order to give effect to the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)**;
(iii) the mechanism and likely timescale for the making of the changes referred to in (ii);
(iv) the changes and/or developments which would be required to central computer systems and, if practicable, processes used in connection with the operation of arrangements established under the **Core Industry Documents** and the

STC;

(v) the mechanism and likely timescale for the making of the changes referred to in (iv);

(vi) an estimate of the costs associated with making and delivering the changes referred to in (ii) and (iv), such costs are expected to relate to: for (ii) the costs of amending the **Core Industry Document(s)** and **STC** and for (iv) the costs of changes to computer systems and possibly processes which are established for the operation of the **Core Industry Documents** and the **STC**, together with an analysis and a summary of representations in relation to such matters, including any made by **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**;

(vii) unless such **Grid Code Modification Proposal** has been determined to be an **Urgent Modification** or meets the **Fast Track Criteria**, the **Grid Code Modification Proposal** against the **Prioritisation Criteria**, to determine its **Prioritisation Category**, in accordance with paragraph GR18.10;

(h) to the extent such information is available to the **Code Administrator,** an assessment of the impact of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** on **Users** in general (or classes of **Users** in general), including the changes which are likely to be required to their internal systems and processes and an estimate of the development, capital and operating costs associated with implementing the changes to the **Grid Code** and to **Core Industry Documents** and the **STC**;

(i) copies of (and a summary of) all written representations or objections made by consultees during the consultation in respect of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** and subsequently maintained;

(j) a copy of any impact assessment prepared by **Core Industry Document Owners** and the **STC** committee and the views and comments of the **Code Administrator** in respect thereof;

(k) whether or not, in the opinion of **The Company,** the **Grid Code Modification Proposal** (or any **Workgroup Alternative Grid Code Modification(s))** should be made.

(l) **The Company's** justification for including or not including the views resulting from the relevant consultation in the **Grid Code Modification Report**.

(m) where a **Grid Code Modification Proposal** or any **Workgroup Alternative Grid Code Modification(s)** constitutes an amendment to the areas set out in table 1 of the GR.B annex which details the **Regulated Sections**, the expected impact on the objectives of **Assimilated Law** (Commission Regulation (EU) 2017/2195).

GR.22.3 A draft of the **Grid Code Modification Report** will be circulated by the **Code Administrator** to **Users**, **Panel Members** and such other persons who may properly be considered to have an appropriate interest in it (and its provision in electronic form on the **Website** and in electronic mails to **Users** and **Panel Members**, who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made thereon. Any unresolved comments made shall be reflected in the final **Grid Code Modification Report**.

GR.22.4 A draft of the **Grid Code Modification Report** shall be tabled at a meeting of the **Grid Code Review Panel** prior to submission of that **Grid Code Modification Report** to the **Authority** as set in accordance with the timetable established pursuant to GR.19.1, and at which the **Panel** may consider any minor changes to the legal drafting, which may include any issues identified through the **Code Administrator** consultation, and:

(i) if the change required is a typographical error the **Grid Code Review Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote**; or

(ii) if the change required is not considered to be a typographical error then the **Grid Code Review Panel** may direct the **Workgroup** to review the change. If the **Workgroup** unanimously agree that the change is minor the **Grid Code Review Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote,** otherwise for changes that are not considered to be minor the **Code Administrator** shall issue the **Grid Code Modification Proposal** for further **Code Administrator** consultation, after which the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote**; or

(iii) In the case of a modification that had been directed pursuant to GR.19.2(e) to proceed directly to wider consultation without the formation of a **Workgroup**, and if the change required is not considered to be a typographical error, then the **Grid Code Review Panel** may direct the **Code Administrator** in conjunction with the **Proposer** to review the change. If the **Grid Code Review Panel**, the **Code Administrator** and the **Proposer** agree that the change is minor the **Grid Code Review Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote**, otherwise for changes that are not considered to be minor the **Code Administrator** shall issue the **Grid Code Modification Proposal** for further **Code Administrator** consultation after which the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote**. In the case of a change that is not considered to be minor, the **Grid Code Review Panel** may also consider whether to establish a **Workgroup** of the **Grid Code Review Panel**, to further consider the **Grid Code Modification Proposal**, in which case the procedures set out within GR.20 will be followed as required; or

(iv) if a change is not required after consideration, the **Panel Chairperson** will undertake the **Grid Code Review Panel Recommendation Vote**.

GR.22.5 A draft of the **Grid Code Modification Report** following the **Grid Code Review Panel Recommendation Vote** will be circulated by the **Code Administrator** to **Panel Members** (and in electronic mails to **Panel Members**, who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made on whether the **Grid Code Modification Report** accurately reflects the views of the **Panel Members** as expressed at the **Grid Code Review Panel Recommendation Vote.** Any unresolved comments made shall be reflected in the final **Grid Code Modification Report**.

GR.22.6 Each **Grid Code Modification Report** shall be addressed and furnished to the **Authority** and none of the facts, opinions or statements contained in such may be relied upon by any other person.

GR.22.7 Subject to GR.22.9 to GR.22.12, in accordance with the **ESO Licence,** the **Authority** may approve the **Grid Code Modification Proposal** or a **Workgroup Alternative Grid Code Modification(s)** contained in the **Grid Code Modification Report** (which shall then be an "**Approved Modification**" until implemented).

GR.22.8 The **Code Administrator** shall copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **Grid Code Modification Report** to:

(i) each **Panel Member;** and
(ii) any person who may request a copy, and shall place a copy on the **Website**.

GR.22.9 Revised Fixed Proposed Implementation Date

GR.22.9.1 Where the **Proposed Implementation Date** included in a **Grid Code Modification Report** is a **Fixed Proposed Implementation Date** and the **Authority** considers that the **Fixed Proposed Implementation Date** is or may no longer be appropriate or might otherwise prevent the **Authority** from making such decision by reason of the effluxion of time the

Authority may direct the **Grid Code Review Panel** to recommend a revised **Proposed Implementation Date**.

GR.22.9.2 Such direction may:

(a) specify that the revised **Proposed Implementation Date** shall not be prior to a specified date;

(b) specify a reasonable period (taking into account a reasonable period for consultation) within which the **Grid Code Review Panel** shall be requested to submit its recommendation; and

(c) provide such reasons as the **Authority** deems appropriate for such request (and in respect of those matters referred to in GR.22.9.2 (a) and (b) above).

GR.22.9.3 Before making a recommendation to the **Authority**, the **Grid Code Review Panel** will consult on the revised **Proposed Implementation Date**, and may in addition consult on any matters relating to the **Grid Code Modification Report** which in the **Grid Code Review Panel's** opinion have materially changed since the **Grid Code Modification Report** was submitted to the **Authority** and where it does so the **Grid Code Review Panel** shall report on such matters as part of its recommendation under **Grid Code** GR.22.9.4, with:

(a) **Users**; and

(b) such other persons who may properly be considered to have an appropriate interest in it. Such consultation will be undertaken in accordance with GR.21.3 and GR.21.6.

GR.22.9.4 Following the completion of the consultation held pursuant to GR.22.9.3 the **Grid Code Review Panel** shall report to the **Authority** with copies of all the consultation responses and recommending a **Revised Proposed Implementation Date**.

GR.22.9.5 The **Authority** shall notify the **Grid Code Review Panel** as to whether or not it intends to accept the **Revised Proposed Implementation Date** and where the **Authority** notifies the **Grid Code Review Panel** that it intends to accept the **Revised Proposed Implementation Date**, the **Revised Proposed Implementation Date** shall be deemed to be the **Proposed Implementation Date** as specified in the **Grid Code Modification Report**.

GR.22.10 Authority Approval

If:

(a) the **Authority** has not given notice of its decision in respect of a **Grid Code Modification Report** within two (2) calendar months (in the case of an **Urgent Modification),** or four (4) calendar months (in the case of all other **Grid Code Modification Proposals)** from the date upon which the **Grid Code Modification Report** was submitted to it; or

(b) the **Grid Code Review Panel** is of the reasonable opinion that the circumstances relating to the **Grid Code Modification Proposal** and/or **Workgroup Alternative Grid Code Modification** which is the subject of a **Grid Code Modification Report** have materially changed, the **Grid Code Review Panel** may request the **Panel Secretary** to write to the **Authority** requesting the **Authority** to give an indication of the likely date by which the **Authority's** decision on the **Grid Code Modification Proposal** will be made.

GR.22.11 If the **Authority** determines that the **Grid Code Modification Report** is such that the **Authority** cannot properly form an opinion on the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)**, or where the **Grid Code Modification Proposal** and/or any **Workgroup Alternative Grid Code Modification(s)** constitutes an amendment to the **Regulated Sections** of the code, where the **Authority**

requires an amendment to the **Grid Code Modification Proposal** and/or any **Workgroup Alternative Grid Code Modification(s)** in order to approve it, it may issue a direction to the **Grid Code Review Panel:**

(a) specifying the additional steps (including drafting or amending existing drafting associated with the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)**, revision (including revision to the timetable), analysis or information that it requires in order to form such an opinion; and

(b) requiring the **Grid Code Modification Report** to be revised and to be resubmitted.

GR.22.12 If a **Grid Code Modification Report** is to be revised and re-submitted in accordance with a direction issued pursuant to GR.22.11, it shall be re-submitted as soon after the **Authority's** direction as is appropriate (and in the case of an amendment to the areas set out in table 1 of the GR.B annex which details the **Regulated Sections** of the code within 2 months), taking into account the **Prioritisation Criteria,** and whether the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** are **Urgent Modifications**, or, if they are not **Urgent Modifications** or don't meet the **Fast Track Criteria**, the **Prioritisation Category** of the **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)**. The **Grid Code Review Panel** shall decide on the level of analysis and consultation required in order to comply with the **Authority's** direction and shall agree an appropriate timetable for meeting its obligations. Once the **Grid Code Modification Report** is revised, the **Grid Code Review Panel** shall carry out its **Grid Code Review Panel Recommendation Vote** again in respect of the revised **Grid Code Modification Report** and re-submit it to the **Authority** in compliance with GR.22.4 to GR.22.6.

GR.23 URGENT MODIFICATIONS

GR.23.1 If a **Relevant Party** recommends to the **Panel Secretary** that a proposal should be treated as an **Urgent Modification** in accordance with this GR.23, the **Panel Secretary** shall notify the **Panel Chairperson** who shall then, in accordance with GR.23.2 (a) to (e) inclusive, and notwithstanding anything in the contrary in these **Governance Rules**, endeavour to obtain the views of the **Grid Code Review Panel** as to the matters set out in GR.23.3. If for any reason the **Panel Chairperson** is unable to do that, the **Panel Secretary** shall attempt to do so (and the measures to be undertaken by the **Panel Chairperson** in the following paragraphs shall in such case be undertaken by the **Panel Secretary**).

GR.23.2 (a) The **Panel Chairperson** shall determine the time by which, in their opinion, a decision of the **Grid Review Panel** is required in relation to such matters, having regard to the degree of urgency in all circumstances, and references in this GR.23.1 to the "time available" shall mean the time available, based on any such determination by the **Panel Chairperson**;

(b)The **Panel Secretary** shall, at the request of the **Panel Chairperson,** convene a meeting or meetings (including meetings by telephone conference call, where appropriate) of the **Grid Code Review Panel** in such manner and upon such notice as the **Panel Chairperson** considers appropriate, and such that, where practicable within the time available, as many **Panel Members** as possible may attend;

(c) Each **Panel Member** shall be deemed to have consented, for the purposes of GR.8.9. to the convening of such meeting or meetings in the manner and on the notice determined by the **Panel Chairperson.** GR.8.10 shall not apply to any such business.

(d) Where:

(i) it becomes apparent, in seeking to convene a meeting of the **Grid Code Review Panel** within the time available, that quorum will not be present; or

(ii) it transpires that the meeting of the **Grid Code Review Panel** is not quorate and it is not possible to rearrange such meeting within the time available, the **Panel Chairperson** shall endeavour to contact each **Panel Member** individually in order to ascertain such Panel Member's vote, and (subject to GR.23.2 (e)) any matter to be decided shall be decided by a majority of those

Panel Members who so cast a vote. Where, for whatever reason no decision is reached, the **Panel Chairperson** shall proceed to consult with the **Authority** in accordance with GR.23.5;

(e) Where the **Panel Chairperson** is unable to contact at least four **Panel Members** within the time available and where:

(i) It is only **The Company,** who has recommended that the proposal should be treated as an **Urgent Modification,** then those **Panel Members** contacted shall decide such matters, such decision may be a majority decision. Where in such cases no decision is made for whatever reason, the **Panel Chairperson** shall proceed to consult with the **Authority** in accordance with GR.23.5; or

(ii) any **User** (including any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party**), the **Citizens Advice** or the **Citizens Advice Scotland** has recommended that the proposal should be treated as an **Urgent Modification,** then the **Panel Chairperson** may decide the matter (in consultation with those **Panel Members** (if any) which they manage to contact) provided that the **Panel Chairperson** shall include details in the relevant **Grid Code Modification Report** of the steps which they took to contact other **Panel Members** first.

GR.23.3 The matters referred to in GR.23.1 are:

(a) whether such proposal should be treated as an **Urgent Modification** in accordance with this GR.23 and

(b) the procedure and timetable to be followed in respect of such **Urgent Modification**.

GR.23.4 The **Panel Chairperson** or, in their absence, the **Panel Secretary** shall forthwith provide the **Authority** with the recommendation (if any) ascertained in accordance with GR.23.2 (a) to (e) inclusive, of the **Grid Code Review Panel** as to the matters referred to in GR.23.2, and shall consult the **Authority** as to whether such **Grid Code Modification Proposal** is an **Urgent Modification** and, if so, as to the procedure and timetable which should apply in respect thereof.

GR.23.5 If the **Grid Code Review Panel** has been unable to make a recommendation in accordance with GR.23.2.(d) or GR.23.2(e) as to the matters referred to in GR.23.3 then the **Panel Chairperson** or, in their absence, the **Panel Secretary** may recommend whether they consider that such proposal should be treated as an **Urgent Modification** and shall forthwith consult the **Authority** as to whether such **Grid Code Modification Proposal** is an **Urgent Modification** and, if so, as to the procedure and timetable that should apply in respect thereof.

GR.23.6 The **Grid Code Review Panel** shall:

(a) not treat any **Grid Code Modification Proposal** as an **Urgent Modification** except with the prior consent of the **Authority**;

(b) comply with the procedure and timetable in respect of any **Urgent Modification** approved by the **Authority**; and

(c) comply with any direction of the **Authority** issued in respect of any of the matters on which the **Authority** is consulted pursuant to GR.23.4 or GR.23.5.

GR.23.7 For the purposes of this GR.23.7, the procedure and timetable in respect of an **Urgent Modification** may (with the approval of the **Authority** pursuant to GR.23.4 or GR.23.5) deviate from all or part of the **Grid Code Modification Procedures** or follow any other procedure or timetable approved by the **Authority** except for the duration of the **Code Administrator** consultation for modifications relating to **Regulated Sections** which shall be for one month. Where the procedure and timetable approved by the **Authority** in respect of an **Urgent Modification** do not provide for the establishment (or designation) of a

Workgroup the **Proposer's** right to vary the **Grid Code Modification Proposal** pursuant to GR.15.10 and GR.20.26 shall lapse from the time and date of such approval.

GR.23.8 The **Grid Code Modification Report** in respect of an **Urgent Modification** shall include:

(a) a statement as to why the **Proposer** believes that such **Grid Code Modification Proposal** should be treated as an **Urgent Modification**;

(b) any statement provided by the **Authority** as to why the **Authority** believes that such **Grid Code Modification Proposal** should be treated as an **Urgent Modification**;

(c) any recommendation of the **Grid Code Review Panel** (or any recommendation of the **Panel Chairperson)** provided in accordance with GR.23 in respect of whether any **Grid Code Modification Proposal** should be treated as an **Urgent Modification**; and

(d) the extent to which the procedure followed deviated from the process for **Standard Modifications** (other than the procedures in this GR.23).

GR.23.9 Each **Panel Member** shall take all reasonable steps to ensure that an **Urgent Modification** is considered, evaluated and (subject to the approval of the **Authority**) implemented as soon as reasonably practicable, having regard to the urgency of the matter and, for the avoidance of doubt, an **Urgent Modification** may (subject to the approval of the **Authority**) result in the **Grid Code** being amended on the day on which such proposal is submitted.

GR.23.10 Where an **Urgent Modification** results in an amendment being made in accordance with GR.25, the **Grid Code Review Panel** may or (where it appears to the **Grid Code Review Panel** that there is a reasonable level of support for a review amongst **Users**) shall following such amendment, establish a **Workgroup** on terms specified by the **Grid Code Review Panel** to consider and report as to whether any alternative amendment could, as compared with such amendment better facilitate achieving the **Grid Code Objectives** in respect of the subject matter of that **Urgent Modification**.

GR.23.11 For the avoidance of doubt, the **Grid Code Review Panel** shall not determine a **Prioritisation Category** for **Urgent Modifications** and accordingly no **Urgent Modification** shall have a **Prioritisation Category**.

GR.24 SELF-GOVERNANCE

GR.24.1 If the **Grid Code Review Panel,** having evaluated a **Grid Code Modification Proposal** against the **Self-Governance Criteria,** pursuant to GR.18.4, considers that the **Grid Code Modification Proposal** meets the **Self-Governance Criteria,** the **Grid Code Review Panel** shall submit to the **Authority** a **Self-Governance Statement** setting out its reasoning in reasonable detail.

GR.24.2 The **Authority** may, at any time prior to the **Grid Code Review Panel's** determination made pursuant to GR.24.9, give written notice that it disagrees with the **Self-Governance Statement** and may direct that the **Grid Code Modification Proposal** proceeds through the process for **Standard Modifications** set out in GR.19, GR.20, GR.21 and GR.22.

GR.24.3 Subject to GR.24.2, after submitting a **Self-Governance Statement**, the **Grid Code Review Panel** shall follow the procedure set out in GR.19, GR.20, GR.21 and GR.22.

GR.24.4 The **Authority** may issue a direction to the **Grid Code Review Panel** in relation to a **Modification** to follow the procedure set out for **Modifications** that meet the **Self-Governance Criteria,** notwithstanding that no **Self-Governance Statement** has been submitted or a **Self-Governance Statement** has been retracted.

GR.24.5 Subject to the **Code Administrator's** consultation having been completed pursuant to GR.21, the **Grid Code Review Panel** shall prepare a report (the "**Grid Code Modification Self-Governance Report"**).

GR.24.6 The matters to be included in a **Grid Code Modification Self-Governance Report** shall be the following (in respect of the **Grid Code Modification Proposal**):

(a) details of its analysis of the **Grid Code Modification Proposal** against the **Self-Governance Criteria**;

(b) copies of all consultation responses received;

(c) the date on which the **Grid Code Review Panel Self-Governance Vote** shall take place, which shall not be earlier than seven (7) days from the date on which the **Grid Code Modification Self- Governance Report** is furnished to the **Authority** in accordance with GR.24.8; and

(d) such other information that is considered relevant by the **Grid Code Review Panel**.

GR.24.7 A draft of the **Grid Code Modification Self-Governance Report** will be circulated by the **Code Administrator** to **Users** and **Panel Members** (and its provision in electronic form on the **Website** and in electronic mails to **Users** and **Panel Members,** who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made thereon. Any unresolved comments made shall be reflected in the final **Grid Code Modification Self-Governance Report**.

GR.24.8 Each **Grid Code Modification Self-Governance Report** shall be addressed and furnished to the **Authority** and none of the facts, opinions or statements contained in such **Grid Code Modification Self-Governance Report** may be relied upon by any other person.

GR.24.9 Subject to GR.24.11, if the **Authority** does not give written notice that its decision is required pursuant to GR.24.2, or if the **Authority** determines that the **Self-Governance Criteria** are satisfied in accordance with GR.24.4, then the **Grid Code Modification Self-Governance Report** shall be tabled at the **Panel Meeting** following submission of that **Grid Code Modification Self-Governance Report** to the **Authority** at which the **Panel Chairperson** will undertake the **Grid Code Review Panel Self-Governance Vote** and the **Code Administrator** shall give notice of the outcome of such vote to the **Authority** as soon as possible thereafter.

GR.24.10 If the **Grid Code Review Panel** vote to approve the **Grid Code Modification Proposal** pursuant to GR.24.9 (which shall then be an "**Approved Grid Code Self-Governance Proposal**") until implemented).

GR.24.11 The **Grid Code Review Panel** may at any time prior to the **Grid Code Review Panel's** determination retract a **Self-Governance Statement** subject to GR.24.4, or if the **Authority** notifies the **Grid Code Review Panel** that it has determined that a **Grid Code Modification Proposal** does not meet the **Self-Governance Criteria** the **Grid Code Review Panel** shall treat the **Grid Code Modification Proposal** as a **Standard Modification** and shall comply with GR.22, using the **Grid Code Modification Self-Governance Report** as a basis for its **Grid Code Modification Report**.

GR.24.12 The **Code Administrator** shall make available on the **Website** and copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **Grid Code Modification Self-Governance Report** prepared in accordance with GR.24 to:

(i) each **Panel Member;** and
(ii) any person who may request a copy, and shall place a copy on the **Website**.

GR.24.13 A **User** (including any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party**), the **Citizens Advice** or the **Citizens Advice Scotland** may appeal to the **Authority** the approval or rejection by the **Grid Code Review Panel** of a **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** in accordance with GR.24.9, provided that the **Panel Secretary** is also notified, and the appeal has been made up to and including fifteen (15) **Business Days** after the **Grid Code Review Panel Self-Governance Vote** has been undertaken pursuant to GR.24.9. If such

an appeal is made, implementation of the **Grid Code Modification Proposal** shall be suspended pending the outcome. The appealing **User** (including any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party**), the **Citizens Advice** or the **Citizens Advice Scotland** must notify the **Panel Secretary** of the appeal when the appeal is made.

GR.24.14 The **Authority** shall consider whether the appeal satisfies the following criteria:

(a) The appealing party is, or is likely to be, unfairly prejudiced by the implementation or non-implementation of that **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)**; or

(b) The appeal is on the grounds that, in the case of implementation, the **Grid Code Modification Proposal** or **Workgroup Alternative**; or

(c) **Grid Code Modification(s)** may not better facilitate the achievement of at least one of the **Grid Code Objectives**; or

(d) The appeal is on the grounds that, in the case of non-implementation, the **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** may better facilitate the achievement of at least one of the **Grid Code Objectives**; and

(e) It is not brought for reasons that are trivial, vexatious or have no reasonable prospect of success and if the **Authority** considers that the criteria are not satisfied, it shall dismiss the appeal.

GR.24.15 Following any appeal to the **Authority**, a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** shall be treated in accordance with any decision and/or direction of the **Authority** following that appeal.

GR.24.16 If the **Authority** quashes the **Grid Code Review Panel's** determination in respect of a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** made in accordance with GR.24.9 and takes the decision on the relevant **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** itself, following an appeal to the **Authority,** the **Grid Code Review Panel's** determination of that **Grid Code Modification Proposal** and any **Workgroup Alternative Grid Code Modification(s)** contained in the relevant **Grid Code Modification Self Governance Report** shall be treated as a **Grid Code Modification Report** submitted to the **Authority** pursuant to GR.22.6 (for the avoidance of doubt, subject to GR.22.8 to GR.22.12) and the **Grid Code Review Panel's** determination shall be treated as its recommendation pursuant to GR.22.4.

GR.24.17 If the **Authority** quashes the **Grid Code Review Panel's** determination in respect of a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** made in accordance with GR.24.9, the **Authority** may, following an appeal to the **Authority**, refer the **Grid Code Modification Proposal** back to the **Grid Code Review Panel** for further re-consideration and a further **Grid Code Review Panel Self-Governance Vote**.

GR.24.18 Following an appeal to the **Authority,** the **Authority** may confirm the **Grid Code Review Panel's** determination in respect of a **Grid Code Modification Proposal** or **Workgroup Alternative Grid Code Modification(s)** made in accordance with GR.24.9.

GR.25 IMPLEMENTATION

GR.25.1 The **Grid Code** shall be modified either in accordance with the terms of the direction by the **Authority** relating to, or other approval by the **Authority** of, the **Grid Code Modification Proposal** or any **Workgroup Alternative Grid Code Modification(s)** contained in the relevant **Grid Code Modification Report,** or in respect of **Grid Code Modification Proposals** or any **Workgroup Alternative Grid Code Modification(s)** that are subject to the determination of the **Grid Code Review Panel** pursuant to GR.24.9, in accordance with

the relevant **Grid Code Modification Self-Governance Report** subject to the appeal procedures set out in GR.24.13 to GR.24.18.

GR.25.2 The **Code Administrator** shall forthwith notify (by publication on the **Website** and, where relevant details are supplied by electronic mail):

(a) each **User**;
(b) each **Panel Member**;
(c) the **Authority**;
(d) each **Core Industry Document Owner**;
(e) the secretary of the **STC** committee;
(f) each **Materially Affected Party**; and
(g) the **Citizens Advice** and the **Citizens Advice Scotland** of the change so made and the effective date of the change.

GR.25.3 A modification of the **Grid Code** shall take effect from the time and date specified in the direction, or other approval, from the **Authority** referred to in GR.25.1 or, in the absence of any such time and date in the direction or approval, from 00:00 hours on the day falling ten (10) **Business Days** after the date of such direction, or other approval, from the **Authority.** A modification of the **Grid Code** pursuant to GR.24.9 shall take effect, subject to the appeal procedures set out in GR.24.13 to GR.24.18, from the time and date specified by the **Code Administrator** in its notice given pursuant to GR.25.2, which shall be given after the expiry of the fifteen (15) **Business Day** period set out in GR.24.13 to allow for appeals, or where an appeal is raised in accordance with GR.24.13, on conclusion of the appeal in accordance with GR.24.15 or GR.24.18 but where conclusion of the appeal is earlier than the fifteen (15) **Business Day** period set out in GR.24.13, notice shall be given after the expiry of this period. A modification of the **Grid Code** pursuant to GR.26 shall take effect from the date specified in the **Grid Code Modification Fast Track Report**.

GR.25.4 A modification made pursuant to and in accordance with GR.25.1 shall not be impaired or invalidated in any way by any inadvertent failure to comply with or give effect to this Section.

GR.25.5 If a modification is made to the Grid Code in accordance with the **ESO Licence** but other than pursuant to the other **Grid Code Modification Procedures** in these **Governance Rules,** the **Grid Code Review Panel** shall determine whether or not to submit the modification for review by a **Workgroup** established on terms specified by the **Grid Code Review Panel** to consider and report as to whether any alternative modification could, as compared with such modification better facilitate achieving the **Grid Code Objectives** in respect of the subject matter of the original modification. Where such a **Workgroup** is established the provisions of GR.20 shall apply as if such a modification were a **Grid Code Modification Proposal**.

Transitional Issues

GR.25.6 Notwithstanding the provisions of GR.25.3, Modification GC0132 changes the **Grid Code** process for **Grid Code Modification Proposals** and therefore may affect other **Grid Code Modification Proposals** which have not yet become **Approved Modifications**. Consequently, this GR.25.6 deals with issues arising out of the implementation of **Modification** GC0132. In particular this deals with which version of the **Grid Code** process for **Grid Code Modification Proposals** will apply to **Grid Code Modification Proposal(s)** which were already instigated prior to the implementation of **Modification** GC0132.

Any **Grid Code Modification Proposal** in respect of which a **Grid Code Modification Report** has been sent to the **Authority** prior to the date and time of implementation of **Modification** GC0132 is known as an "**Old Modification"**. Any **Grid Code Modification Proposal** in respect of which a **Grid Code Modification Report** has not been sent to the **Authority** as at the date and time of implementation of **Modification** GC0132 is known as a "**New Modification**". The **Grid Code** provisions which will apply to any **Old Modification(s)** are the provisions of the **Grid Code** in force immediately prior to the implementation of GC0132. The provisions of the **Grid Code** which will apply to any **New Modifications** are the provisions of the **Grid Code** in force and as amended from time to time.

GR.25.7 Notwithstanding the provisions of GR.25.3, **Modification GC0131** changes the **Grid Code** process for **Grid Code Modification Proposals** and therefore may affect other **Grid Code Modification Proposals** which have not yet become **Approved Modifications**. Consequently, this GR.25.7 deals with issues arising out of the implementation of **Modification GC0131**. In particular this deals with which version of the **Grid Code** process for **Grid Code Modification Proposals** will apply to **Grid Code Modification Proposal(s)** which were already instigated prior to the implementation of **Modification GC0131**.

Any **Grid Code Modification Proposal** in respect of which a **Grid Code Modification Report** has been sent to the **Authority** prior to the date and time of implementation of **Modification GC0131** is known as an "**Old GC0131 Modification"**. Any **Grid Code Modification Proposal** in respect of which a **Grid Code Modification Report** has not been sent to the **Authority** as at the date and time of implementation of **Modification GC0131** is known as a "**New GC0131 Modification"**. The **Grid Code** provisions which will apply to any **Old GC0131 Modification(s)** are the provisions of the **Grid Code** in force immediately prior to the implementation of **GC0131**. The provisions of the **Grid Code** which will apply to any **New GC0131 Modifications** are the provisions of the **Grid Code** in force from time to time.

GR.26 FAST TRACK

GR.26.1 Where a **Proposer** believes that a modification to the **Grid Code** which meets the **Fast Track Criteria** is required, a **Grid Code Fast Track Proposal** may be raised. In such case the **Proposer** is only required to provide the details listed in GR.15.3 (a), (b), (c), (d), (e) and (k).

GR.26.2 Provided that the **Panel Secretary** receives any modification to the **Grid Code** which the **Proposer** considers to be a **Grid Code Fast Track Proposal**, not less than ten (10) **Business Days** (or such shorter period as the **Panel Secretary** may agree, provided that the **Panel Secretary** shall not agree any period shorter than five (5) **Business Days**) prior to the next **Grid Code Review Panel** meeting, the **Panel Secretary** shall place the **Grid Code Fast Track Proposal** on the agenda of the next **Grid Code Review Panel** meeting, and otherwise, shall place it on the agenda of the next succeeding **Grid Code Review Panel** meeting.

GR.26.3 To facilitate the discussion at the **Grid Code Review Panel** meeting, the **Code Administrator** will circulate a draft of the **Grid Code Modification Fast Track Report** to **Users,** the **Authority** and **Panel Members** (and its provision in electronic form on the **Website** and in electronic mails to **Users**, the **Authority** and **Panel Members**, who must supply relevant details, shall meet this requirement) for comment not less than five (5) **Business Days** ahead of the **Grid Code Review Panel** meeting which will consider whether or not the **Fast Track Criteria** are met and whether or not to approve the **Grid Code Fast Track Proposal**.

GR.26.4 It is for the **Grid Code Review Panel** to decide whether or not a **Grid Code Fast Track Proposal** meets the **Fast Track Criteria** and if it does, to determine whether or not to approve the **Grid Code Fast Track Proposal**.

GR.26.5 The **Grid Code Review Panel's** decision that a **Grid Code Fast Track Proposal** meets the **Fast Track Criteria** pursuant to GR.26.4 must be unanimous.

GR.26.6 The **Grid Code Review Panel's** decision to approve the **Grid Code Fast Track Proposal** pursuant to GR.26.4 must be unanimous.

GR.26.7 If the **Grid Code Review Panel** vote unanimously that the **Grid Code Fast Track Proposal** meets the **Fast Track Criteria** and to approve the **Grid Code Fast Track Proposal** (which shall then be an "**Approved Fast Track Proposal**") until implemented, or until an objection is received pursuant to GR.26.12), then subject to the objection procedures set out in GR.26.12 the **Grid Code Fast Track Proposal** will be implemented by **The Company** without the **Authority's** approval. If the **Grid Code Review Panel** do not unanimously agree that the **Grid Code Modification Proposal** meets the **Fast Track Criteria** and/or do not unanimously agree that the **Grid Code Fast Track Proposal** should

be made, then the **Panel Secretary** shall, in accordance with GR.15.4(a) notify the **Proposer** that additional information is required if the **Proposer** wishes the **Grid Code Modification Proposal** to continue.

GR.26.8 Provided that the **Grid Code Review Panel** have unanimously agreed to treat a **Grid Code Modification Proposal** as a **Grid Code Fast Track Proposal** and unanimously approved that **Grid Code Fast Track Proposal**, the **Grid Code Review Panel** shall prepare and approve the **Grid Code Modification Fast Track Report** for issue in accordance with GR.26.11.

GR.26.9 The matters to be included in a **Grid Code Modification Fast Track Report** shall be the following (in respect of the **Grid Code Fast Track Proposal**):

(a) a description of the proposed modification and of its nature and purpose;

(b) details of the changes required to the Grid Code**,** including the proposed legal text to modify the Grid Code to implement the **Grid Code Fast Track Proposal**;

(c) details of the votes required pursuant to GR.26.5 and GR.26.6;

(d) the intended implementation date, from which the **Approved Fast Track Proposal** will take effect, which shall be no sooner than fifteen (15) **Business Days** after the date of notification of the **Grid Code Review Panel's** decision to approve; and

(e) details of how to object to the **Approved Fast Track Proposal** being made

GR.26.10 Upon approval by the **Grid Code Review Panel** of the **Grid Code Modification Fast Track Report**, the **Code Administrator** will issue the report in accordance with GR.26.11.

GR.26.11 The **Code Administrator** shall copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **Grid Code Modification Fast Track Report** prepared in accordance with GR.26 to:

(i) each **Panel Member**;
(ii) the **Authority**; and
(iii) any person who may request a copy, and shall place a copy on the **Website**.

GR.26.12 A **User**, any **Authorised Electricity Operator**; **The Company** or a **Materially Affected Party**, the **Citizens Advice**, the **Citizens Advice Scotland** or the **Authority** may object to the **Approved Fast Track Proposal** being implemented, and shall include with such objection the reasons for the objection. Any such objection must be made in writing (including by email) and be clearly stated to be an objection to the **Approved Fast Track Proposal** in accordance with this GR.26 of the Grid Code and be notified to the **Panel Secretary** by the date up to and including fifteen (15) **Business Days** after notification of the **Grid Code Review Panel's** decision to approve the **Grid Code Fast Track Proposal**. If such an objection is made the **Approved Fast Track Proposal** shall not be implemented. The **Panel Secretary** will notify each **Panel Member** and the **Authority** of the objection. The **Panel Secretary** shall notify the **Proposer**, in accordance with GR.15.4A that additional information is required if the **Proposer** wishes the **Grid Code Modification Proposal** to continue.

GR.26.13 For the avoidance of doubt, the **Grid Code Review Panel** shall not determine a **Prioritisation Category** for **Grid Code Modification Proposals** that meet the **Fast Track Criteria** and accordingly no **Grid Code Modification Proposal** that meets the **Fast Track Criteria** shall have a **Prioritisation Category**.

GR.27 REVIEW OF PRIORITISATION CATEGORY OF MODIFICATION PROPOSALS

GR.27.1 The **Grid Code Review Panel** shall review the **Prioritisation Category** of **Modification Proposals** on a bi-annual basis and adjust the relevant modification timetable for each **Modification Proposal** accordingly.

ANNEX GR.A - ELECTION OF USERS' PANEL MEMBERS

Grid Code Review Panel Election Process

1. The election process has two main elements: nomination and selection.
2. The process will be used to appoint **Panel Members** in the category of **Supplier**, **Generator**, **Offshore Transmission Owner** and **Onshore Transmission Owner**.
3. The **Code Administrator** will publish the Election timetable by [September] in the year preceding the start of each term of office of **Panel Members**.
4. Each step of the process set out below will be carried out in line with the published timetable.
5. The **Code Administrator** will establish an Electoral Roll from representatives of parties listed on CUSC Schedule 1 or designated by the **Authority** as a **Materially Affected Party** as at 31st August in the year preceding the start of each term of office of **Panel Members**.
6. The **Code Administrator** will keep the Electoral Roll up to date.

Nomination Process

7. Each party on the Electoral Roll may nominate a candidate to stand for election for the **Grid Code Review Panel**.
8. Parties may only nominate a candidate for their own category; a **Supplier** may nominate a candidate for the **Supplier Panel Member** seat and a **Generator** may nominate a candidate for the **Generator Panel Member** seats. If a party able to nominate a candidate is both a **Supplier** and a **Generator**, they may nominate a candidate in each category.
9. The nominating party must complete the nomination form which will be made available by the **Code Administrator** and return it to the **Code Administrator** by the stated deadline.
10. The **Code Administrator** will draw up a list of candidates for each category of election.
11. Where there are fewer candidates than seats available or the same number of candidates as seats available, no election will be required and the nominated candidate(s) will be elected. The **Code Administrator** will publish a list of the successful candidates on the Grid Code website and circulate the results by email to the Grid Code circulation list.

Selection Process

12. The **Code Administrator** will send a numbered voting paper to each party on the electoral roll for each of the elections in which they are eligible to vote. The voting paper will contain a list of candidates for each election and will be sent by email.
13. Each eligible party may vote for one [1] candidate for each of the **Supplier**, **Offshore Transmission Owner** and **Onshore Transmission Owner** seats and four [4] candidates for the **Generator** seats.
14. **Panel Members** will be elected using the First Past the Post method.
15. In the event of two or more candidates receiving the same number of votes, the **Code Administrator** will draw lots to decide who is elected.
16. The **Code Administrator** will publish the results of the election on the Grid Code website and circulate the results by email to the Grid Code circulation list.
17. The **Code Administrator** will send an Election Report to Ofgem after the election is complete.

ANNEX GR.B Regulated Sections

The Grid Code sections identified in Tables 1 and 2 are considered to be **Regulated Sections.**

Table 1 - Mapping of Electricity Balancing Regulation Article 18 Terms and Conditions for Balancing Service Providers and BalancingResponsible Parties to the Grid Code

Commission Regulation (EU) 2017/2195 Reference (Assimilated Law)	***Description***	***Grid Code Reference***
18.2	The terms and conditions pursuant to paragraph 1 shall also include the rules for suspension and restoration of market activities pursuant to Article 36 of Regulation (EU) 2017/2196 and rules for settlement in case of market suspension pursuant to Article 39 of Regulation (EU) 2017/2196 once approved in accordance with Article 4 of Regulation (EU) 2017/2196.	OC9.4
18.4.a	define reasonable and justified requirements for the provisions of balancing services;	BC1, BC2, BC3
18.4.b	allow the aggregation of demand facilities, energy storage facilities and power generating facilities in a scheduling area to offer balancing services subject to conditions referred to in paragraph 5 (c);	DRSC 4.2, BC1.4
18.5.a	the rules for the qualification process to become a balancing service provider pursuant to Article 16;	*BC5*
18.5.c	the rules and conditions for the aggregation of demand facilities, energy storage facilities and power generating facilities in a scheduling area to become a balancing service provider;	BC1.4, BC1.A.10
18.5.d	the requirements on data and information to be delivered to the connecting TSO and, where relevant, to the reserve connecting DSO during the prequalification process and operation of the balancing market;	DRC*, BC5, BC1.4*
18.5. f	the requirements on data and information to be delivered to the connecting TSO and, where relevant, to the reserve connecting DSO to evaluate the provisions of balancing services pursuant to Article 154(1), Article 154(8), Article 158(1)(e), Article 158(4)(b), Article 161(1)(f) and Article 161(4)(b) of Regulation (EU) 2017/1485;	BC1.4, BC1.A.10
18.5. g	the definition of a location for each standard product and each specific product taking into account paragraph 5 (c);	BC1.4

18.6. d	the requirements on data and information to be delivered to the connecting TSO to calculate the imbalances;	BC1.4.2,3,4, BC1 Appendix 1 BC2.5.1
18.6. e	the rules for balance responsible parties to change their schedules prior to and after the intraday energy gate closure time pursuant to paragraphs 3 and 4 of Article 17;	BC1.4.3,4

Table 2 - Mapping of Network Code on Emergency and Restoration (NCER) Article 4(4) Terms and Conditions for System Defence and System Restoration Service Providers to the Grid Code

Commission Regulation (EU) 2017/2196 Reference (Assimilated Law)	***Description***	***Grid Code Reference***
4(4)(a)	The terms and conditions to act as defence service provider and as restoration service provider shall be established either in the national legal framework or on a contractual basis. If established on a contractual basis, each TSO shall develop by 18 December 2018 a proposal for the relevant terms and conditions, which shall define at least: (a) the characteristics of the service to be provided	**Restoration services:** Re-energisation procedure- OC.9.2.6, OC.9.4.7 Re-synchronisation procedure- OC9.4.7, BC2.9.2.2(iii)) Frequency deviation management -BC3.4, BC.3.5, BC3.6, BC3.7 BC2.5.4
		Defence services: Frequency deviation management- BC3.4, BC.3.5, BC3.6, BC3.7 BC2.5.4, Fast Start- CC/ECC.6.3.14 Limited Frequency Sensitive Mode- ECC.6.3.7.1, ECC.6.3.7.2, BC3.7.2 Low Frequency Demand disconnection– CC/ECC.6.4.3, CC/ECC.A.5, OC6.5, OC6.6 Over Frequency control- ECC.6.3.7.1, ECC.6.3.7.3, BC.3.7.1, BC.3.7.2 Frequency deviation management- BC3.4, BC.3.5, BC3.6, BC3.7, CC/ECC.6.3.3, CC.6.3.7(a), ECC.6.3.7.3, CC.6.3.6(a)/ECC.6.3.6, CC/ECC.6.3.9, DRSC 5.1, DRSC 6.1, DRSC 7.1, BC.1.4.2, BC1. A.1.1, BC2.6.1, BC2.7, BC.2.9, OC7.4.5, OC6.7, OC6.5, OC.10, Voltage deviation management- CC/ECC.6.1.4, CC/ECC.6.3.2, CC.6.3.6(b), ECC.6.3.6.3, ECC.6.4.5, BC2.8, BC2. A.2, DRSC.5, Power flow management- CC.6.3.7(a), ECC.6.3.7.3.1, CC/ECC.6.3.9, BC.1.4.2, BC1.5.5, BC1.7, BC1. A.1.1, BC.2.6.1, BC2.7, BC2.9, OC7.4.5, OC6.7, OC10, DRSC 5.1, Assistance for active power- BC2.7, BC2.9. OC9.4, OC9.5, OC7.4.8 Manual Demand disconnection- OC6.5, OC6.7, OC6.9, BC2.9

4(4)(b)	(b) the possibility of and conditions for aggregation; and	DRSC1, DRSC2, DRSC4 ECC/CC 6.5 BC1.4 BC1. A.10 BC

< END OF GOVERNANCE RULES >

REVISIONS

(R)

(This section does not form part of the Grid Code)

R.1 **The ESO Licence** sets out the way in which changes to the Grid Code are to be made and reference is also made to **The Company's** obligations under the General Conditions.

R.2 All pages re-issued have the revision number on the lower left hand corner of the page and date of the revision on the lower right hand corner of the page.

R.3 The Grid Code was introduced in March 1990 and the first issue was revised 31 times. In March 2001 the New Electricity Trading Arrangements were introduced and Issue 2 of the Grid Code was introduced which was revised 16 times. At British Electricity Trading and Transmission Arrangements (BETTA) Go-Active Issue 3 of the Grid Code was introduced and subsequently revised 35 times. At Offshore Go-active Issue 4 of the Grid Code was introduced and has been revised 13 times since its original publication. Issue 5 of the Grid Code was published to accommodate the changes made by Grid Code Modification A/10 which has incorporated the **Generator** compliance process into the Grid Code, which was revised 47 times. Issue 6 was published to incorporate all the non-material amendments as a result of modification GC0136.

R.4 This Revisions section provides a summary of the sections of the Grid Code changed by each revision to Issue 6.

R.5 All enquiries in relation to revisions to the Grid Code, including revisions to Issues 1, 2, 3, 4 and 5 should be addressed to the Grid Code development team at the following email address:

Grid.Code@neso.energy

Revision	Section	Related Modification	Effective Date
0	Glossary & Definitions	GC0136	05 March 2021
0	Planning Code	GC0136	05 March 2021
0	Connection Conditions	GC0136	05 March 2021
0	European Connection Conditions	GC0136	05 March 2021
0	Demand Response Services	GC0136	05 March 2021
0	Compliance Processes	GC0136	05 March 2021
0	Europeans Compliance Processes	GC0136	05 March 2021
0	Operating Code 1	GC0136	05 March 2021
0	Operating Code 2	GC0136	05 March 2021
0	Operating Code 5	GC0136	05 March 2021
0	Operating Code 6	GC0136	05 March 2021
0	Operating Code 7	GC0136	05 March 2021
0	Operating Code 8	GC0136	05 March 2021
0	Operating Code 8A	GC0136	05 March 2021
0	Operating Code 8B	GC0136	05 March 2021
0	Operating Code 9	GC0136	05 March 2021
0	Operating Code 11	GC0136	05 March 2021
0	Operating Code 12	GC0136	05 March 2021
0	Balancing Code 2	GC0136	05 March 2021

Revision	Section	Related Modification	Effective Date
0	Balancing Code 3	GC0136	05 March 2021
0	Balancing Code 4	GC0136	05 March 2021
0	Balancing Code 5	GC0136	05 March 2021
0	Data Registration Code	GC0136	05 March 2021
0	General Conditions	GC0136	05 March 2021
0	Governance Rules	GC0136	05 March 2021
1	Glossary & Definitions	GC0130	18 March 2021
1	Operating Code 2	GC0130	18 March 2021
1	Data Registration Code	GC0130	18 March 2021
1	General Conditions	GC0130	18 March 2021
2	Glossary & Definitions	GC0147	17 May 2021
2	Operating Code 6B	GC0147	17 May 2021
2	Operating Code 7	GC0147	17 May 2021
2	Balancing Code 1	GC0147	17 May 2021
2	Balancing Code 2	GC0147	17 May 2021
3	Balancing Code 2	GC0144	26 May 2021
3	Balancing Code 4	GC0144	26 May 2021
4	Preface	GC0149	03 August 2021
4	Glossary & Definitions	GC0149	03 August 2021
4	Planning Code	GC0149	03 August 2021

Revision	Section	Related Modification	Effective Date
4	European Connection Conditions	GC0149	03 August 2021
4	European Compliance Processes	GC0149	03 August 2021
4	Demand Response Services Code	GC0149	03 August 2021
4	Operating Code 2	GC0149	03 August 2021
4	Balancing Code 4	GC0149	03 August 2021
4	Data Registration Code	GC0149	03 August 2021
4	Governance Rules	GC0149	03 August 2021
5	Operating Code 7	GC0109	23 August 2021
6	Connection Conditions	GC0134	01 September 2021
6	European Connection Conditions	GC0134	01 September 2021
6	Balancing Code 2	GC0134	01 September 2021
7	Operating Code 6B	GC0150	04 October 2021
8	Operating Code 2	GC0151	08 November 2021
8	Operating Code 3	GC0151	08 November 2021
8	Operating Code 5	GC0151	08 November 2021
9	Governance Rules	GC0152	29 December 2021
10	General Conditions	Electrical Standards - EDL Instruction Interface Valid Reason Codes	20 January 2022
11	Glossary & Definitions	GC0137	14 February 2022
11	Planning Code	GC0137	14 February 2022

Revision	Section	Related Modification	Effective Date
11	Connection Conditions	GC0137	14 February 2022
11	European Connection Conditions	GC0137	14 February 2022
11	European Compliance Processes	GC0137	14 February 2022
11	Data Registration Code	GC0137	14 February 2022
12	Glossary & Definitions	GC0153	09 March 2022
12	Connection Conditions	GC0153	09 March 2022
12	European Connection Conditions	GC0153	09 March 2022
12	Operating Code 6	GC0153	09 March 2022
12	Operating Code 8A	GC0153	09 March 2022
12	Operating Code 8B	GC0153	09 March 2022
12	Operating Code 12	GC0153	09 March 2022
12	Balancing Code 2	GC0153	09 March 2022
12	Governance Rules	GC0153	09 March 2022
13	Compliance Processes	GC0138	24 June 2022
13	European Compliance Processes	GC0138	24 June 2022
13	Operating Code 5	GC0138	24 June 2022
14	Glossary & Definitions	GC0157	06 October 2022
14	European Connection Conditions	GC0157	06 October 2022
14	Operating Code 2	GC0157	06 October 2022
14	Operating Code 5	GC0157	06 October 2022

Revision	Section	Related Modification	Effective Date
14	Data Registration Code	GC0157	06 October 2022
14	No changes to published Grid Code	GC0158	06 December 2022
15	Glossary & Definitions	GC0160	07 December 2022
15	Balancing Code 1	GC0160	07 December 2022
15	Balancing Code 2	GC0160	07 December 2022
16	Planning Code	GC0141	05 January 2023
16	Connection Conditions	GC0141	05 January 2023
16	European Connection Conditions	GC0141	05 January 2023
16	Compliance Processes	GC0141	05 January 2023
16	European Compliance Processes	GC0141	05 January 2023
17	Connection Conditions	GC0148	4 September 2023
17	European Compliance Processes	GC0148	4 September 2023
17	European Connection Conditions	GC0148	4 September 2023
17	General Conditions	GC0148	4 September 2023
17	Glossary & Definitions	GC0148	4 September 2023
17	Operating Code 5	GC0148	4 September 2023
17	Operating Code 6	GC0148	4 September 2023
17	Planning Code	GC0148	4 September 2023
18	Operating Code 6	GC0161	2 October 2023
19	European Connection Conditions	GC0165	4 December 2023

Revision	Section	Related Modification	Effective Date
19	Operating Code 12	GC0165	4 December 2023
19	Data Registration Code	GC0165	4 December 2023
19	Governance Rules	GC0165	4 December 2023
20	Operating Code 6	GC0162	15 December 2023
21	Glossary & Definitions	GC0156	4 March 2024
21	Planning Code	GC0156	4 March 2024
21	Connection Conditions	GC0156	4 March 2024
21	European Connection Conditions	GC0156	4 March 2024
21	Operating Code 1	GC0156	4 March 2024
21	Operating Code 2	GC0156	4 March 2024
21	Operating Code 5	GC0156	4 March 2024
21	Operating Code 9	GC0156	4 March 2024
21	Balancing Code 2	GC0156	4 March 2024
21	Balancing Code 4	GC0156	4 March 2024
21	Data Registration Code	GC0156	4 March 2024
21	General Conditions	GC0156	4 March 2024
22	Glossary & Definitions	GC0154	2 April 2024
22	Balancing Code 1	GC0154	2 April 2024
22	Balancing Code 2	GC0154	2 April 2024
23	Glossary & Definitions	GC0170	22 April 2024

Revision	Section	Related Modification	Effective Date
23	Planning Code	GC0170	22 April 2024
23	Connection Conditions	GC0170	22 April 2024
23	European Connection Conditions	GC0170	22 April 2024
23	Operating Code 2	GC0170	22 April 2024
23	Operating Code 5	GC0170	22 April 2024
23	Operating Code 9	GC0170	22 April 2024
23	Data Registration Code	GC0170	22 April 2024
23	General Conditions	GC0170	22 April 2024
24	General Conditions	Distribution Restoration Zone Control System Standard	4 June 2024
25	Glossary & Definitions	GC0163	5 July 2024
25	European Connection Conditions	GC0163	5 July 2024
26	Glossary & Definitions	GC0171	5 September 2024
26	Compliance Processes	GC0171	5 September 2024
26	European Compliance Processes	GC0171	5 September 2024
27	Glossary & Definitions	Establishing ISOP in industry codes 2024	1 October 2024
27	Planning Code	Establishing ISOP in industry codes 2024	1 October 2024
27	Connection Conditions	Establishing ISOP in industry codes 2024	1 October 2024
27	European Connection Conditions	Establishing ISOP in industry codes	1 October 2024

Revision	Section	Related Modification	Effective Date
		2024	
27	Demand Response Services	Establishing ISOP in industry codes 2024	1 October 2024
27	Compliance Processes	Establishing ISOP in industry codes 2024	1 October 2024
27	European Compliance Processes	Establishing ISOP in industry codes 2024	1 October 2024
27	Operating Code 2	Establishing ISOP in industry codes 2024	1 October 2024
27	Data Registration Code	Establishing ISOP in industry codes 2024	1 October 2024
27	General Conditions	Establishing ISOP in industry codes 2024	1 October 2024
27	Governance Rules	Establishing ISOP in industry codes 2024	1 October 2024
28	General Conditions	Electrical Standards - EDL Instruction Interface Valid Reason Codes	7 November 2024
29	Glossary & Definitions	GC0175	28 March 2025
29	Connection Conditions	GC0175	28 March 2025
29	European Connection Conditions	GC0175	28 March 2025
29	Operating Code 7	GC0175	28 March 2025
29	Balancing Code 1	GC0175	28 March 2025

Revision	Section	Related Modification	Effective Date
29	Balancing Code 2	GC0175	28 March 2025
29	General Conditions	GC0175	28 March 2025
30	Glossary & Definitions	GC0172	3 April 2025
30	General Conditions	GC0172	3 April 2025
31	Glossary & Definitions	GC0159	8 April 2025
31	Planning Code	GC0159	8 April 2025
31	Operating Code 9	GC0159	8 April 2025
31	General Conditions	Electrical Standards - Electronic Data Transfer (EDT) Interface Specification, Communications Standards, EDL Message Interface Specification, Control Telephony Standard	8 April 2025
32	Connection Conditions	GC0177	19 May 2025
32	European Connection Conditions	GC0177	19 May 2025
32	Compliance Processes	GC0177	19 May 2025
32	European Compliance Processes	GC0177	19 May 2025
33	European Connection Conditions	GC0180	11 June 2025
33	Operating Code 6B	GC0180	11 June 2025
33	Balancing Code 1	GC0180	11 June 2025
33	Balancing Code 2	GC0180	11 June 2025
34	Glossary & Definitions	GC0166	05 November 2025

Revision	Section	Related Modification	Effective Date
34	Balancing Code 1	GC0166	05 November 2025
34	Balancing Code 2	GC0166	05 November 2025
34	General Conditions	Electrical Standards - EDL Instruction Interface Valid Reason Codes	05 November 2025
35	Glossary & Definitions	GC0183	04 December 2025
35	Operating Code 2	GC0183	04 December 2025
35	Operating Code 7	GC0183	04 December 2025
35	Balancing Code 1	GC0183	04 December 2025
36	Operating Code 2	GC0174	12 December 2025
36	Data Registration Code	GC0174	12 December 2025
37	General Conditions	Electrical Standards - EDL Message Interface Specification	13 April 2026
38	Planning Code	GC0173	05 May 2026
38	Connection Conditions	GC0173	05 May 2026
38	European Connection Conditions	GC0173	05 May 2026
38	European Compliance Processes	GC0173	05 May 2026
38	Balancing Code 3	GC0173	05 May 2026
39	Glossary & Definitions	GC0169	07 May 2026
39	Balancing Code 3	GC0169	07 May 2026
39	General Conditions	GC0169	07 May 2026

40	Glossary & Definitions	Establishing a harmonised prioritisation process in the Industry Codes	29 May 2026
40	Governance Rules	Establishing a harmonised prioritisation process in the Industry Codes	29 May 2026
41	Glossary & Definitions	GC0187	05 June 2026
41	Connection Conditions	GC0187	05 June 2026
41	European Connection Conditions	GC0187	05 June 2026
41	Compliance Processes	GC0187	05 June 2026
41	European Compliance Processes	GC0187	05 June 2026
41	Operating Code 2	GC0187	05 June 2026
41	Operating Code 5	GC0187	05 June 2026
41	Operating Code 6B	GC0187	05 June 2026
41	Balancing Code 1	GC0187	05 June 2026
41	Balancing Code 2	GC0187	05 June 2026
41	Data Registration Code	GC0187	05 June 2026
41	General Conditions	GC0187	05 June 2026
41	Governance Rules	GC0187	05 June 2026
42	Glossary & Definitions	GC0164	09 July 2026
42	Planning Code	GC0164	09 July 2026
42	European Compliance Processes	GC0164	09 July 2026
42	Operating Code 2	GC0164	09 July 2026

42	Operating Code 5	GC0164	09 July 2026
42	Operating Code 7	GC0164	09 July 2026
42	Balancing Code 1	GC0164	09 July 2026
42	Balancing Code 2	GC0164	09 July 2026
42	Data Registration Code	GC0164	09 July 2026
42	General Conditions	GC0164	09 July 2026
43	General Conditions	Electrical Standards - EDL Instruction Interface Valid Reason Codes	27 July 2026
44	Glossary & Definitions	GC0139	10 August 2026
44	Planning Code	GC0139	10 August 2026
44	Operating Code 5	GC0139	10 August 2026
44	Operating Code 6	GC0139	10 August 2026
44	Data Registration Code	GC0139	10 August 2026
45	Glossary & Definitions	GC0176	13 August 2026
45	Operating Code 6	GC0176	13 August 2026
45	Operating Code 7	GC0176	13 August 2026
45	Governance Rules	GC0176	13 August 2026
46	General Conditions	Electrical Standards - Electromagnetic Transient (EMT) Model Requirements and the Approach & Process for Retrospective Submission	08 October 2026

47	Glossary & Definitions	GC0179	29 October 2026
47	Balancing Code 4	GC0179	29 October 2026
47	Governance Rules	GC0179	29 October 2026

< END OF REVISIONS >