

# Complete Connection and Use of System Code

## Contents

### Sections

|            |                                                     |
|------------|-----------------------------------------------------|
| Section 01 | Applicability of Sections and Related Agreements    |
| Section 02 | Connection                                          |
| Section 03 | Use of System                                       |
| Section 04 | Balancing Services                                  |
| Section 05 | Events of default, de-energisation, disconnection   |
| Section 06 | General Provisions                                  |
| Section 07 | CUSC Dispute Resolution                             |
| Section 08 | CUSC Modification                                   |
| Section 09 | Interconnectors                                     |
| Section 10 | Transition Issues                                   |
| Section 11 | Interpretation and Definitions                      |
| Section 12 | Not Used                                            |
| Section 13 | Enabling Works                                      |
| Section 14 | Charging Methodologies                              |
| Section 15 | User Commitment Methodologies                       |
| Section 16 | Queue Management Process                            |
| Section 17 | Application and Offer Process                       |
| Section 18 | Gates Process for Projects with Existing Agreements |

### Schedules

|                                    |                                                                     |
|------------------------------------|---------------------------------------------------------------------|
| Schedule 1                         | List of Users                                                       |
| Schedule 2 Exhibit 1               | Bilateral Connection Agreement                                      |
| Schedule 2 Exhibit 1A & Appendix G | Agreement to Vary the Bilateral Connection Substation               |
| Schedule 2 Exhibit 2               | Bilateral Embedded Generation Agreement                             |
| Schedule 2 Exhibit 3               | Construction Agreement                                              |
| Schedule 2 Exhibit 3A              | Offshore Construction Agreement                                     |
| Schedule 2 Exhibit 4               | Mandatory Services Agreement                                        |
| Schedule 2 Exhibit 5               | Bilateral Embedded Licence Exemptible Large Power Station Agreement |
| Schedule 2 Exhibit 6               | Transmission related Agreements regarding Bid Price                 |
| Schedule 2 Exhibit 7               | Virtual Lead Party Agreement                                        |
| Schedule 3                         | Balancing Services                                                  |

**Exhibits**

|                   |                                                                   |
|-------------------|-------------------------------------------------------------------|
| Exhibit A         | Accession Agreement                                               |
| Exhibit B         | Connection Application                                            |
| Exhibit C         | Connection Offer                                                  |
| Exhibit D         | BEGA Application                                                  |
| Exhibit E         | Use of System Offer                                               |
| Exhibit F         | Use of System Application                                         |
| Exhibit G         | Use of System Supply Offer<br>and Confirmation Notice             |
| Exhibit H         | Use of System Interconnector Offer and Confirmation Notice        |
| Exhibit I         | Modification Application                                          |
| Exhibit J         | Modification Offer                                                |
| Exhibit K         | Modification Notification                                         |
| Exhibit L         | Bi-Annual Estimate for Bilateral Agreement                        |
| Exhibit M         | Secured amount statement bilateral agreement                      |
| Exhibit MM1       | Cancellation Charge Statement                                     |
| Exhibit MM2       | Cancellation Charge secured amount                                |
| Exhibit MM3       | Notification of Fixed Attributable Works Cancellation Charge      |
| Exhibit N         | Notice of Drawing                                                 |
| Exhibit O Part 1B | Relevant Transmission Licensee Assets on User Land in<br>Scotland |
| Exhibit O Part 1C | Relevant Transmission Licensee Assets on Offshore Platform        |
| Exhibit O Part 2B | User Assets on Relevant Transmission Licensee Land                |
| Exhibit O Part 2C | User Assets on RTL Offshore Platform                              |
| Exhibit P         | Directly Connected Power Station                                  |
| Exhibit Q         | Bella Application Embedded Exemptable Power Station               |
| Exhibit R         | Connect to Manage/BELLA Offer                                     |
| Exhibit S         | LDTEC Request Form                                                |
| Exhibit T         | LDTEC Availability Notification                                   |
| Exhibit U         | Request for a Statement of Works                                  |
| Exhibit V         | Statement of Works                                                |
| Exhibit W         | Temporary Tec Exchange Rate Request Form                          |
| Exhibit X         | Temporary Tec Exchange Notification of Interest Form              |
| Exhibit Y         | EBGL A18 Mapping Table                                            |

## **CUSC - SECTION 1**

### **APPLICABILITY OF SECTIONS AND RELATED AGREEMENTS STRUCTURE**

#### **CONTENTS**

- 1.1 Introduction
- 1.2 Applicability
- 1.3 Bilateral Agreements, Construction Agreements and Mandatory Services Agreements
- 1.4 Connect and Manage Arrangements
- 1.5 OTSDUW arrangements
- 1.6 Categories of Use Without Bilateral Agreements
- 1.7 Bella Application
- 1.8 Authority's Right to Determine in Respect of a Bella

## **CUSC - SECTION 1**

### **APPLICABILITY OF SECTIONS AND RELATED AGREEMENTS STRUCTURE**

#### **1.1 INTRODUCTION**

- 1.1.1 **The Company** is obliged by the **ESO Licence** to maintain the **CUSC** and to enter into arrangements for connection and use of system with **Users** pursuant to its terms.
- 1.1.2 The **CUSC** is divided into different sections, including sections dealing specifically with **Connection** to and **Use of System**, the provision of **Balancing Services**, **Interconnectors** and other sections of more general application.
- 1.1.3 Compliance with the various sections by a **User** is dependent on the nature of that **User's** connection and/or use in any given instance. A **User** may be party to the **CUSC** in a number of different categories.
- 1.1.4 This Section also deals with the requirement for a **User** to enter into **Bilateral Agreements**, **Construction Agreements** and **Mandatory Services Agreements**.
- 1.1.5 The **CUSC** and the proforma **Bilateral Agreements** set out as Exhibits 1, 2 and 5 of Schedule 2 are drafted to reflect the standard terms in relation to **The Company's** charges (an indicative price agreement). Where a **User** chooses to have a different charging option, where provided for in the **Charging Statements** current at the time of application for the relevant **Bilateral Agreement**, that **Bilateral Agreement** will provide for the specific terms relating to the charging option and for the relevant paragraphs of Section 2 to apply (or be disapplied) subject to those specific terms. This may lead to the areas covered by the relevant **Bilateral Agreement** being wider in certain circumstances.

#### **1.2 APPLICABILITY**

- 1.2.1 Each **User** is required to comply with the various Sections of the **CUSC** as provided for in this Section 1. Each Section may contain further detail in relation to particular categories of connection and/or use.
- 1.2.2 The different categories of connection and/or use reflect the types of utilisation which can exist. For example a **User** could have a directly connected **Power Station** and also be acting as a **Supplier**. In that case that **User** will need to comply in relation to two categories of connection and/or use, and its obligations in relation to each will differ.



- 1.2.3 Section 1, Sections 5 to 8, 11 and 14 of the **CUSC** apply to all categories of connection and/or use, and therefore should be complied with by all **Users**, subject as specifically provided in those Sections. Section 4 of the **CUSC** applies to **Users** who provide **Balancing Services to The Company**, and contains its own provisions on applicability to such **Users**.
- 1.2.4 In relation to Sections 2, 3, 9, 15 and 16 the following table sets out the applicability of those Sections in addition to those Sections referred to in Paragraph 1.2.3:

|    | <b>Categories</b>                                                                                                                                                                    | <b>Applicable Sections</b>                                                                                                                                                                                                                                                                   |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | Power Station directly connected to the GB Transmission System (including in the case of OTSDUW Build, a Power Station connected prior to the OTSUA Transfer Time by means of OTSUA) | 2 and 3 and 15 and 16                                                                                                                                                                                                                                                                        |
| 2. | Non-Embedded Customer Site                                                                                                                                                           | 2 and 16                                                                                                                                                                                                                                                                                     |
| 3. | Distribution System directly connected to the GB Transmission System                                                                                                                 | 2 and (where a <b>Construction Agreement</b> is associated with <b>Distributed Generation</b> ) 15 and (except where a <b>Construction Agreement</b> is required because of a connection to that <b>Distribution System</b> and the <b>Distribution Queue Management Process</b> applies) 16 |
| 4. | Suppliers                                                                                                                                                                            | 3 only                                                                                                                                                                                                                                                                                       |
| 5. | Embedded Power Station except those which are the subject of a BELLA                                                                                                                 | 3 only and, where the subject of a BEGA, 15                                                                                                                                                                                                                                                  |
| 6. | Small Power Station Trading Parties                                                                                                                                                  | 3 only                                                                                                                                                                                                                                                                                       |
| 7. | Interconnector User                                                                                                                                                                  | 9 Part II only                                                                                                                                                                                                                                                                               |
| 8. | Interconnector Error Administrator                                                                                                                                                   | 9 Part II only                                                                                                                                                                                                                                                                               |

|     | <b>Categories</b>                                                                                                                                                                                                                          | <b>Applicable Sections</b>  |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| 9.  | Interconnector Owner                                                                                                                                                                                                                       | 9 Part I only and 15 and 16 |
| 10. | Distribution Interconnector Owner                                                                                                                                                                                                          | 3 Only                      |
| 11. | Embedded Exemptable Large Power Stations whose Boundary Point Metering System is either SMRS registered or is registered in CMRS by a User who is responsible for the Use of System Charges associated with the BM Unit registered in CMRS | None                        |
| 12  | Virtual Lead Party (VLP)                                                                                                                                                                                                                   | 3 only                      |

**Users**, when making a **Connection Application** or **Use of System Application** (in each case in the form of the relevant exhibit), should identify the category for which they are applying.

- 1.2.5 Each **Bilateral Agreement**, **Use of System Supply Confirmation Notice** or **Use of System Interconnector Confirmation Notice**, will set out the category of connection and/or use to which it relates.
- 1.2.6 Where a Paragraph states a category of connection and/or use, or type of **User**, to which that Paragraph (or part of that Paragraph) applies, the application of that Paragraph (or part of Paragraph) shall be limited to the **User** in relation to that category of connection and/or use, or type of **User**, described.
- 1.2.7 Where a Paragraph does not state a category of connection and/or use, or type of **User**, to which that Paragraph (or some part of that Paragraph) applies, that Paragraph (or part of the Paragraph) shall apply to all types of **Users** and categories of connection and/or use.
- 1.2.8 Where a Paragraph is stated “as between **The Company** and that **User**”, rights and obligations under that Paragraph shall arise only between **The Company** and each **User** individually to whom that Paragraph applies. Accordingly, no **User** shall enjoy any rights nor incur any obligations against any other **User** pursuant to the terms of any such Paragraph.
- 1.2.9 Notwithstanding any other provision of this **Code**, where a **User** owns or operates an **Exemptable Embedded Large Power Station** which is **Embedded** in part of a **Distribution System** or the **System** of any other **User** where and to the extent that such part of the system in which the **Exemptable Embedded Large Power Station** is

**Embedded** is not directly or indirectly connected to the **GB Transmission System**, that **User** need not comply with paragraphs 1.3, 1.7, 6.3.6 and 6.3.7 in respect of that **Exemptable Embedded Large Power Station**.

1.2.10 Section 17 applies to all **Gated Applications**.

### **1.3 BILATERAL AGREEMENTS, CONSTRUCTION AGREEMENTS AND MANDATORY SERVICES AGREEMENTS**

#### **1.3.1 Bilateral Agreements**

- (a) Each **User** in respect of each category of connection and/or use with a direct connection to the **National Electricity Transmission System** shall enter into and comply with a **Bilateral Connection Agreement** in relation to such connection and/or use as identified in Paragraph 1.3.1(e).
- (b) Each **User** in respect of each category of connection and/or use with an **Embedded Power Station** (except those which are the subject of a **BELLA**) and/or in relation to a **Small Power Station Trading Party** and/or a **Distribution Interconnector** shall enter into and comply with a **Bilateral Embedded Generation Agreement** in relation to such use as identified in Paragraph 1.3.1(e).
- (c) Each **User** in respect of its **Embedded Exemptable Large Power Station** whose **Boundary Point Metering System** is registered in **SMRS** or is registered in **CMRS** by another **User** who is responsible for the **Use of System Charges** associated with the **BM Unit** registered in **CMRS** shall enter into and comply with a **BELLA** as identified in Paragraph 1.3.1(e).
- (d) Each **User** with a **Secondary BM Unit** shall enter in to and comply with a **Virtual Lead Party Agreement** in respect of the **VLP Assets** as identified in Paragraph 1.3.1(e).
- (e) Exhibits 1, 2, 5 and 7 in Schedule 2 to the **CUSC** contain the forms of **Bilateral Agreements** contemplated to be entered into pursuant to this Paragraph 1.3, being:
  - (i) Exhibit 1 – **Bilateral Connection Agreement**: direct connection to the **National Electricity Transmission System** (**Power Station** directly connected

to the **NETS Distribution System** directly connected to the **NETS, Non-Embedded Customer Site** and/or **Interconnector**);

- (ii) Exhibit 2 – **Bilateral Embedded Generation Agreement**: embedded use of system (**Embedded Power Station** (except those which are the subject of a **BELLA**) and/or in relation to a **Small Power Station Trading Party** and/or **Distribution Interconnector**);
- (iii) Exhibit 5 – **BELLA**: provisions associated with such **Embedded Exemptable Large Power Stations** who have no rights and obligations under Section 3 of the **CUSC**.
- (iv) Exhibit 7 – **Virtual Lead Party Agreement**: embedded use of system in relation to **VLP Assets**

### 1.3.2 Construction Agreements

Each **User** who wishes to construct or modify a direct connection to the **GB Transmission System** or commence or modify use by his **Embedded Power Station** or **Distribution Interconnector**, or any **Distributor** who wishes to connect a **Relevant Embedded Power Station** to his system shall enter into and comply with a **Construction Agreement** in respect of any construction works required as a result of that connection or **Modification**, together with a **Bilateral Agreement** as identified in Paragraph 1.3.1 or, as appropriate, an agreement to vary such **Bilateral Agreement**. In any case under the **OTSDUW Arrangements**, paragraph 1.5 applies to such **Construction Agreement**.

### 1.3.3 Mandatory Services Agreements

- (a) **The Company** and each **User** if a **Generator** shall, as between **The Company** and that **User**, in respect of the **Generating Units, DC Converters** and **Power Park Modules** from which that **User** is required to provide the **Mandatory Ancillary Services** in accordance with the **Grid Code**, enter into and comply with a **Mandatory Services Agreement** where applicable in accordance with Paragraph 1.3.3(b) in a form to be agreed between

**The Company** and that **User** but based substantially on the form set out in Exhibit 4 in Schedule 2 (with necessary changes to enable the operation of those provisions, and those in Section 4 and Schedule 3 where the **Generating Units, DC Converters** or **Power Park Modules** (as the case may be) are not registered as **BM Unit(s)**).

- (b) Each **User** and **The Company** shall, as between **The Company** and that **User**, not later than 6 months (or such lesser time as may be agreed) prior to the expected **Commissioning Programme Commencement Date**, have entered into a **Mandatory Services Agreement** providing for payment for **Mandatory Ancillary Services** to be supplied by the **User** to **The Company**. In the event of a **Mandatory Services Agreement** not having been entered into by the said date, either party shall be entitled to initiate the procedure for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4 to settle the terms of the said **Mandatory Services Agreement**. **The Company** shall not **Energise the User's Equipment** or in the case of an **Embedded Power Station** issue an **Operational Notification** until the said **Mandatory Services Agreement** shall have been entered into by both parties.

#### 1.3.4 General Provisions

- (a) **Bilateral Agreements** and **Construction Agreements** which are entered into between **The Company** and **Users** shall be in or substantially in the relevant exhibited form of **Bilateral Agreement** and/or **Construction Agreement** unless the parties thereto agree otherwise.
- (b) Each and every **Bilateral Agreement, Mandatory Services Agreement** and **Construction Agreement** entered into by a **User** and in force from time to time shall constitute a separate agreement governed by the terms of the **CUSC** and will be read and construed accordingly. For the avoidance of doubt no **User** shall enjoy any rights nor incur any obligations against any other **User** pursuant to the terms of any **Bilateral Agreement, Mandatory Services Agreement** or **Construction Agreement**.

## 1.4 CONNECT AND MANAGE ARRANGEMENTS

1.4.1 Any **Offer** or **Modification Offer** made to an **Applicant** or **User** in the category of:

- (a) a **Power Station** directly connected to the **National Electricity Transmission System**; or
- (b) an **Embedded Power Station** which is the subject of a **Bilateral Embedded Generation Agreement** or a **Bilateral Embedded Licence Exemptable Large Power Station Agreement**; or
- (c) where such **Offer** or **Modification Offer** is associated with **Distributed Generation**, a **Distribution System** directly connected to the **National Electricity Transmission System**,

shall be offered on the basis of the **Connect and Manage Arrangements**.

### 1.4.2 Transitional Arrangements

The **Company** shall as soon as reasonably practical after the **Connect and Manage Implementation Date** and in any event by the end of the **Connect and Manage Transition** issue:

- (a) a revised **Offer** on the basis of the **Connect and Manage Arrangements** as regards any **Offer** issued but not accepted pursuant to the **Interim Connect and Management Arrangements**
- (b) an offer to vary each **Existing ICM Construction Agreement** such that it is in a form and on terms consistent with a **Construction Agreement** entered into on the basis of the **Connect and Manage Arrangements**; and/or
- (c) a **Modification Offer** as regards any **Bilateral Agreement** entered into on the basis of the **Interim Connect and Manage Arrangements** which would require amendments in order to comply with the **Connect and Management Arrangements**,

in each case on terms no less advantageous than those contained in offers made or agreements entered into **pursuant** to the **Interim Connect and Manage Arrangements**. The **Applicant** or **User** (as appropriate) shall be entitled to accept such a proposal or continue with its existing arrangements.

## **1.5 OTSDUW ARRANGEMENTS**

1.5.1 Any **Offer** or **Modification Offer** made to an **Applicant** in respect of a **New Connection Site** located in **Offshore Waters** shall, unless the **Applicant** indicates otherwise, be made on the assumption that the **User** (following agreement with **The Company**) will undertake **OTSDUW Build**. For the avoidance of doubt, this shall not prevent the **Applicant** and **The Company** from agreeing (prior to signing the **Construction Agreement**) that the scope of **OTSDUW** will be narrower than that set out in the **Offer** or that **OTSDUW** will not be undertaken by the **User**.

1.5.2 Provisions of the **CUSC** which apply in relation to **OTSDUW** and **OTSUA**, and/or a **Transmission Interface Site**, shall (in any particular case) apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply, without prejudice to the continuing application of provisions of the **CUSC** applying in relation to the relevant **Offshore Transmission System** and/or **Connection Site**.

### **1.5.3 OTSUA Completion Notice**

1.5.3.1 In the case of **OTSDUW Build**, **The Company** will issue the **OTSUA Completion Notice** to the **Authority** on the **OTSUA Completion Notice Trigger Date** and **The Company** shall also provide a copy of such **OTSUA Completion Notice** to the **User**.

1.5.3.2 In respect of any **OTSUA Operational at the OTSUA Commissioning Period Effective Date**, **The Company** will issue the **OTSUA Completion Notice** to the **Authority** as soon as practicable within 10 **Business Days** after the **OTSUA Commissioning Period Effective Date** and **The Company** shall also provide a copy of such **OTSUA Completion Notice** to the **User**. An **OTSUA Completion Notice** issued in accordance with this paragraph 1.5.3.2 for any **OTSUA Operational at the OTSUA Commissioning Period Effective Date**, shall be issued with effect from the same date for all **OTSUA Operational at the OTSUA Commissioning Period Effective Date**.

### **1.5.4 Implementation**

Each **Existing Offshore Agreement** shall be read and construed on and from the **OTSUA Commissioning Period Effective Date** such that:

- (a) the defined terms within it, and the effect of those defined terms, shall be deemed to have the

meanings they would have had if those agreements had been entered into after the **OTSUA Commissioning Period Effective Date**; and

- (b) the relevant Clauses within each **Existing Offshore Agreement** are amended and new Clauses introduced into each **Existing Offshore Agreement** so that each **Existing Offshore Agreement** is consistent in form and content with the changes introduced in **CUSC** Schedule 2 Exhibit 1 (Bilateral Connection Agreement) and Schedule 2 Exhibit 3A (Offshore Construction Agreement) on the **OTSUA Commissioning Period Effective Date**,

and **The Company** and the **User** shall as quickly and as reasonably practicable take any steps as may be necessary to enable the **Existing Offshore Agreements** to be construed as if those agreements had been entered into after the **OTSUA Commissioning Period Effective Date**.

## 1.6 CATEGORIES OF USE WITHOUT BILATERAL AGREEMENTS

- 1.6.1 Three categories of use of the **GB Transmission System** do not require a **Bilateral Agreement** to be entered into as all the relevant provisions are included in the **CUSC** itself. These relate to **Suppliers, Interconnector Users** and **Interconnector Error Administrators** who in those categories of connection and/or use have no physical presence on the system. Further provisions on this are contained in Section 3 and Section 9 Part II.

## 1.7 BELLA APPLICATION

- 1.7.1 A **User** in respect of its **Embedded Exemptable Large Power Station** whose **Boundary Point Metering System** is registered in **SMRS** (or who intends to so register) or in **CMRS** by a **User** who is responsible for the **Use of System Charges** associated with the **BM Unit** registered in **CMRS** (or who intends to so register), shall complete and submit to **The Company** a **BELLA Application** and comply with the terms thereof.
- 1.7.2 The **BELLA Application** and **BELLA Offer** shall be processed in accordance with the **Gated Application and Offer Process**. The **BELLA Offer** shall be in the form of a **BELLA**.
- 1.7.3 The **BELLA Offer** shall remain open for acceptance (subject to **CUSC** Paragraph 6.10.4.4) for 3 months from its receipt by that **User** unless either that **User** or **The Company** makes an application to the



**Authority** under Paragraph 1.7 of the **CUSC**, in which event the **BELLA Offer** shall remain open for acceptance until 14 days after any determination by the **Authority** pursuant to such application.

1.7.4 Upon acceptance of the **BELLA Offer** (as offered by **The Company** or determined by the **Authority**) by the **User** and execution by **The Company**, the **User's** rights and obligations pursuant thereto shall commence in accordance with its terms. Such rights and obligations shall continue until the **BELLA** is terminated.

1.7.5 A **User** who is required by this Paragraph 1.7 to submit a **BELLA Application** shall not energise or operate its **Embedded Exemptable Large Power Station** until it has entered into a **BELLA** with **The Company** and until **The Company** has issued the **User** with an **Operational Notification** in accordance with the terms of the **BELLA**.

## **1.8 AUTHORITY'S RIGHT TO DETERMINE IN RESPECT OF A BELLA**

1.8.1 If, after a period which appears to the **Authority** to be reasonable for the purpose, **The Company** or the **User** have failed to enter into a **BELLA** in respect of the **Embedded Exemptable Large Power Station** either **The Company** or the **User** may apply to the **Authority** for the **Authority** to settle any terms of the **BELLA Offer** in dispute.

1.8.2 Upon such application, the **Authority**, pursuant to section 7 (3) (c) of the **Act**, may settle any terms in dispute between **The Company** and the **User** in respect of such **BELLA** in such manner as appears to the **Authority** to be reasonable having (in so far as relevant) regard in particular to the following considerations:

- (a) that the performance by **The Company** of its obligations under the **BELLA** should not cause it to be in breach of those provisions referred to at condition E12.6 of the **ESO Licence**;
- (b) that any methods by which the **Relevant Transmission Licensee's** transmission system is connected to any other **System** for the transmission or distribution of electricity accord (insofar as applicable to **The Company**) with the **Grid Code**, the **STC** and the **Distribution Code**;
- (c) that the terms and conditions of the **BELLA** so settled by the **Authority** and of any other agreements entered into by **The Company** pursuant to Paragraph 1.7 should be in as similar a form as is practicable.

- 1.8.3 Where the **Authority** settles any terms in dispute, the **User** and **The Company** shall forthwith enter into the **BELLA** as settled.
- 1.8.4 If either the **User** or **The Company** proposes to vary the terms of the **BELLA** in a manner provided for under such agreement, the **Authority** may, at the request of **The Company** or the **User**, settle any dispute relating to such variation in such manner as appears to the **Authority** to be reasonable.

**END OF SECTION 1**

## **CUSC - SECTION 2**

### **CONNECTION**

### **CONTENTS**

#### 2.1 Introduction

#### PART I - GENERAL

#### 2.2 Being Operational, Connection and Energisation

#### 2.3 Export of Power from Connection Site

#### 2.4 Import of Power to Connection Site

#### 2.5 Maintenance of Assets

#### 2.6 Outages

#### 2.7 Special Automatic Facilities

#### 2.8 Protection and Control Relay Settings / Fault Clearance Times

#### 2.9 Other Site Specific Technical Conditions

#### 2.10 Safety Rules

#### 2.11 Interface Agreement

#### 2.12 Principles of Ownership

#### 2.13 New Connection Sites

#### PART II - CONNECTION CHARGES

#### 2.14 Connection Charges

#### 2.15 Revision of Charges

#### 2.16 Data Requirements

#### 2.17 Replacement of Transmission Connection Assets

#### 2.18 Termination Amounts - Re-Use

#### PART III - CREDIT REQUIREMENTS

- 2.19 Security for Termination Amounts
- 2.20 Provision of Security for Termination Amounts where User meets Credit Rating
- 2.21 Provision of Security for Termination Amounts where User does not meet Credit Rating
- 2.22 Types of Security

## **CUSC - SECTION 2**

### **CONNECTION**

#### **2.1 INTRODUCTION**

- 2.1.1 This Section deals with connection to the **National Electricity Transmission System** of **User's Equipment** at **Connection Sites** and certain related issues.
- 2.1.2 Part I of this Section 2 sets out general provisions relating to connection to the **National Electricity Transmission System**, Part II sets out provisions related to charging for connection and Part III sets out the credit requirements related to **Termination Amounts**. Section 3 which deals with **Use of System** will also be applicable in relation to a **Power Station** directly connected to the **National Electricity Transmission System**.
- 2.1.3 In the case of **OTSDUW Build**, if the **Transmission Interface Site** is **Operational** prior to the **OTSUA Transfer Time**, until the **OTSUA Transfer Time** the **User's Equipment** will be connected to the **National Electricity Transmission System** through the connection of the **OTSUA** to the **National Electricity Transmission System** at the **Transmission Interface Point**. In such case up to the **OTSUA Transfer Time** certain provisions of this Section 2 will be applied as provided for in the relevant **Bilateral Connection Agreement**. Further provisions relating to **OTSDUW Build** are dealt with in section 11.2.7.

### **PART I - GENERAL**

#### **2.2 BEING OPERATIONAL, CONNECTION AND ENERGISATION**

##### **2.2.1 Right to Remain Connected**

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement** and the **Grid Code**, each **User** as between **The Company** and that **User**, shall have the right for the **User's Equipment** at each of its **Connection Sites** to be and/or remain connected to the **National Electricity Transmission System** at the **Connection Site** once **Commissioned** and then for the duration of the relevant **Bilateral Connection Agreement** in relation to that **Connection Site**.

##### **2.2.2 Rights to remain Energised and Operational**

- (a) Subject to the other provisions of the **CUSC** and in particular Paragraphs 2.2.2(b) and 2.2.3, the relevant **Bilateral Connection Agreement** and the **Grid Code**, each **User** as between **The Company** and that **User**, shall have the right for the **User's Equipment** at each of its **Connection Sites** to

remain **Energised** and **Operational** once **Commissioned** for the duration of the relevant **Bilateral Connection Agreement** in relation to that **Connection Site**.

- (b) If the **User** becomes aware that the bank or insurance company issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, the **User** shall notify **The Company** in writing as soon as it becomes so aware. If **The Company** becomes aware that the bank or insurance company issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, **The Company** may notify the **User** to that effect in writing. Where the bank, insurance company or the company so ceases to be either a **Qualified Bank** or a **Qualified Company** (as the case may be) as a consequence of **The Company** having reasonable cause to doubt the continued rating of the said bank, insurance company or company, such notice shall be accompanied by a statement setting out **The Company's** reasons for having such doubt. The **User** shall within 21 days of the giving of such notice by **The Company** or the **User** whichever is the earlier provide a replacement **Performance Bond** and/or **Letter of Credit** from a **Qualified Bank** or **Qualified Company**, as the case may be, and/or provide a cash deposit in the required amount in a **Bank Account**. From the date the replacement **Performance Bond** or **Letter of Credit** or **Bank Account** cash deposit is effectively and unconditionally provided and **Valid**, **The Company** will consent in writing to the security which it replaces being released.

### 2.2.3 Obligation to Remain Connected

Without prejudice to its rights to make **Modifications** to the **User's Plant** (and/or **User's Equipment** as the case may be) pursuant to the **CUSC** and subject to the provisions of Paragraph 5.2.2 and the other provisions of the **CUSC**, and the **Grid Code**, each **User** as between **The Company** and that **User**, shall keep the **User's Equipment** at each of its **Connection Sites** connected to the **National Electricity Transmission System** until **Disconnection** is permitted pursuant to the **CUSC** and the relevant **Bilateral Connection Agreement** or as otherwise agreed between the Parties.

### 2.2.4 Connection Entry Capacity

With respect to a particular connection to the **National Electricity Transmission System**, each **User** acting in the category of a **Power Station** directly connected to the **National Electricity Transmission System**, as between **The Company** and that **User**, shall not operate

its **User's Equipment** such that any of it exceeds the **Connection Entry Capacity** specified for each **Generating Unit** or the **Connection Entry Capacity** to the **Connection Site** such figures being set out in Appendix C to the relevant **Bilateral Connection Agreement** save as expressly permitted or instructed pursuant to an **Emergency Instruction** under the **Grid Code** or save as expressly permitted or instructed pursuant to the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.

## 2.3 EXPORT OF POWER FROM CONNECTION SITE

- 2.3.1 Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement** and the **Grid Code**, **The Company** shall, as between **The Company** and that **User**, accept into the **National Electricity Transmission System** at each **Connection Site** of a **User** acting in the category of **Power Station** directly connected to the **National Electricity Transmission System**, power generated by such **User** up to the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** as set out in Appendix C of the relevant **Bilateral Connection Agreement** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints which could not be avoided by the exercise of **Good Industry Practice** by **The Company**.
- 2.3.2 Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement** and the **Grid Code** a **User** acting in the capacity of a **Power Station** directly connected to the **National Electricity Transmission System** shall not export on to the **National Electricity Transmission System** power generated by such **User** in excess of the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** as set out in Appendix C of the relevant **Bilateral Connection Agreement** save as expressly permitted or instructed pursuant to an **Emergency Instruction** under the **Grid Code** or save as expressly permitted or instructed pursuant to the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.

## 2.4 IMPORT OF POWER TO CONNECTION SITE

Subject to the other provisions of the **CUSC** and in particular Paragraph 2.2.2(b), the relevant **Bilateral Connection Agreement** and the **Grid Code**, **The Company** shall as between **The Company** and that **User**, transport a supply of power to each **Connection Site** of a **User** through the **National Electricity Transmission System** up to the **Connection Site Demand Capability** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints or by insufficiency of generation which, in either case, could not have been avoided by the exercise of **Good Industry Practice** by **The Company**.

## 2.5 MAINTENANCE OF ASSETS

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement**, and the **Grid Code**, **The Company** shall as between **The Company** and that **User** use all reasonable endeavours to maintain the **Transmission Connection Assets** at each **Connection Site** in the condition necessary to render the same fit for the purpose of passing power up to the value of **Connection Entry Capacity** and **Connection Site Demand Capability** as appropriate between the **User's Equipment** and the **National Electricity Transmission System**.

## 2.6 OUTAGES

Subject to the provisions of the **Grid Code** and the relevant **Bilateral Connection Agreement**, **The Company** and each **User** shall, as between **The Company** and that **User**, be entitled to plan and execute outages of parts of in the case of **The Company** the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** and in the case of the **User** its **System** or **Plant** or **Apparatus** at any time and from time to time.

## 2.7 SPECIAL AUTOMATIC FACILITIES

**The Company** and each **User** shall, as between **The Company** and that **User**, operate respectively the **National Electricity Transmission System** and the **User System** in accordance with the schemes set out in Appendix F3 to the relevant **Bilateral Connection Agreement**.

## 2.8 PROTECTION AND CONTROL RELAY SETTINGS/FAULT CLEARANCE TIMES

**The Company** and each **User** shall, as between **The Company** and that **User**, record the respective protection and control relay settings and fault clearance times to be operated by each of them in documents in the format set out in Appendix F4 to the relevant **Bilateral Connection Agreement** and shall operate them accordingly.

## 2.9 OTHER SITE SPECIFIC TECHNICAL CONDITIONS

2.9.1 Each **User** shall, as between **The Company** and that **User**, ensure that in the case of a **Connection Site Commissioned** prior to the **Transfer Date**, on the **Transfer Date**, and in the case of a **Connection Site Commissioned** after the **Transfer Date** on the **Completion Date(s)**, the **User's Equipment** complies with the site specific technical conditions set out in Appendix F5 to the relevant **Bilateral Connection Agreement**.

2.9.2 Each **User** shall, as between **The Company** and that **User**, use all reasonable endeavours to ensure during the period in which it is a party to a particular **Bilateral Connection Agreement** that the **User's**



**Equipment** which is subject to that **Bilateral Connection Agreement** shall continue to comply with the site-specific technical conditions set out in Appendix F5 to that **Bilateral Connection Agreement**.

2.9.3 If a **User** or **The Company** wishes to modify, alter or otherwise change the site specific technical conditions relating to a **Connection Site** or the manner of their operation:

- (a) under Appendix F4 to the relevant **Bilateral Connection Agreement** it may do so upon obtaining the agreement of the other party such agreement not to be unreasonably withheld;
- (b) under Appendices F1, F3 or F5 to the relevant **Bilateral Connection Agreement** it shall be deemed to be a **Modification** for the purposes of the **CUSC**.

2.9.4 Where, in the case of a **Connection Site Commissioned** in England and Wales prior to the **Transfer Date**, on or immediately prior to the **Transfer Date** a **User's Equipment** subject to a particular **Bilateral Connection Agreement** has any of the following technical attributes or facilities:

- (a) circuit breaker fail protection
- (b) pole slipping protection
- (c) fault disconnection facilities
- (d) automatic switching equipment
- (e) control arrangements
- (f) voltage and current signals for system monitoring
- (g) control telephony
- (h) operational metering,

the **User** shall, as between **The Company** and that **User**, use all reasonable endeavours to ensure that during the period of such **Bilateral Connection Agreement** the **User's Equipment** which is subject to that **Bilateral Connection Agreement** retains such technical attributes or facilities provided always that if the **User** wishes to modify alter or otherwise change the same or their operation it may do so by following the procedures relating to a **Modification** in accordance with the **CUSC**.

## 2.10 SAFETY RULES

### Safety Rules

- 2.10.1 In relation to a **Connection Site** **The Company** shall procure that the **Relevant Transmission Licensee** supplies to the **User** a copy of their **Safety Rules** current from time to time, including any site-specific **Safety Rules**, and also a copy of the **Local Safety Instructions** applicable at each **Connection Site** from time to time.
- 2.10.2 In relation to a **Connection Site** each **User** will supply to the **Relevant Transmission Licensee** a copy of their **Safety Rules** current from time to time, including any site-specific **Safety Rules**, and also a copy of the **Local Safety Instructions** applicable at each **Connection Site** from time to time.

## 2.11 INTERFACE AGREEMENT

- 2.11.1 In relation to **Connection Sites** and **New Connection Site(s)** **The Company** shall procure that the **Relevant Transmission Licensee** shall enter into an **Interface Agreement** with a **User** in either case in a form to be agreed between them but based substantially on the forms set out in Exhibit O to the **CUSC** as appropriate where such **Interface Agreement(s)** is/are required pursuant to the applicable **Bilateral Connection Agreement** or otherwise.
- 2.11.2 In relation to **Connection Sites** and **New Connection Site(s)** the **User** undertakes to enter into an **Interface Agreement** with the **Relevant Transmission Licensee** in a form to be agreed between them but based substantially on the forms set out in Exhibit O to the **CUSC** as appropriate where such **Interface Agreement(s)** is/are required pursuant to the applicable **Bilateral Connection Agreement** or otherwise.

## 2.12 PRINCIPLES OF OWNERSHIP

- 2.12.1 Subject to the **Transfer Scheme** or any contrary agreement in any **Bilateral Agreement** or any other agreement the division of ownership of **Plant** and **Apparatus** shall be at the electrical boundary, such boundary to be determined in accordance with the following principles:

In the case of air insulated switchgear:

- (a) in relation to **Plant** and **Apparatus** located between the **National Electricity Transmission System** and a **Power Station**, the electrical boundary is at the busbar clamp on the busbar side of the busbar isolators on **Generators** and **Power Station** transformer circuits;
- (b) save as specified in Paragraph 2.12.1(c) below, in relation to **Plant** and **Apparatus** located between the **National Electricity Transmission System** and a **Distribution System**, the electrical boundary is at the busbar clamp on the

busbar side of the **Distribution System** voltage busbar selector isolator(s) of the **National Electricity Transmission System** circuit or if a conventional busbar does not exist, an equivalent isolator. If no isolator exists an agreed bolted connection at or adjacent to the tee point shall be deemed to be an isolator for these purposes;

- (c) in relation to **Transmission Plant** and **Transmission Apparatus** located between the **National Electricity Transmission System** and a **Distribution System** but designed for a voltage of 132KV or below in England and Wales and below 132kV in Scotland, the electrical boundary is at the busbar clamp on the busbar side of the busbar selector isolator on the **Distribution System** circuit or, if a conventional busbar does not exist, an equivalent isolator. If no isolator exists, an agreed bolted connection at or adjacent to the tee point shall be deemed to be an isolator for these purposes;
- (d) in relation to **Plant** and **Apparatus** located between the **National Electricity Transmission System** and the system of a **Non-Embedded Customer**, the electrical boundary is at the clamp on the circuit breaker side of the cable disconnections at the **Non-Embedded Customer's** sub-station; and

In the case of metal enclosed switchgear, that is not **Gas Insulated Switchgear**:

- (e) the electrical boundary will be the equivalent of those specified in this Paragraph 2.12.1 save that for rack out switchgear, the electrical boundary will be at the busbar shutters.

In the case of **Gas Insulated Switchgear**:

- (f) the electrical boundary will be the equivalent of those specified in this Paragraph 2.12.1 save that the electrical boundary will be at:
  - (i) the first component on the outside of the **Gas Insulated Switchgear Circuit Breaker** gas zone on the **User's** side of that gas zone or, where a circuit disconnecter is fitted, the first component on the outside of the **Gas Insulated Switchgear** circuit disconnecter gas zone, on the **User's** side of that gas zone; or
  - (ii) the first gas zone separator on the busbar side of the busbar selection devices, and in such case the

busbar selection devices' gas zone may contain a single section of the busbar

as agreed between **The Company** and the **User** and a diagram showing these electrical boundaries is attached at Schedule 1 to this Section 2.

- 2.12.2 If a **User** wants to use transformers of specialised design for unusual load characteristics at the electrical boundary, these shall not be owned by the **User** and shall form part of the **National Electricity Transmission System** but the **User** shall pay **The Company** for the proper and reasonable additional cost thereof as identified by **The Company** in the **Offer** covering such transformers. In this Paragraph 2.12.2 "unusual load characteristics" means loads which have characteristics which are significantly different from those of the normal range of domestic, commercial and industrial loads (including loads which vary considerably in duration or magnitude).
- 2.12.3 For the avoidance of doubt nothing in this Paragraph 2.12 shall effect any transfer of ownership in any **Plant** or **Apparatus**.

## 2.13 NEW CONNECTION SITES

- 2.13.1 If a **User** wishes to connect a **New Connection Site** it shall complete and submit to **The Company** a **Connection Application** (and if a **Gated Application** in accordance with the **Gated Application and Offer Process**) and comply with the terms thereof. An application for a **New Connection Site** which is not a **Gated Application** or which is a **Gate 1 Application** shall include the provision of at least one **Letter of Authority** in the form of one of the templates provided in Section 2, Schedule 2 in the case of a **New Connection Site Onshore** or a **Letter of Acknowledgement** in the case of a **New Connection Site Offshore** or a **New Connection Site** for **Offshore Projects**.
- 2.13.2 The **Applicant** shall ensure that a **Letter of Authority** in the form of one of the templates provided in Section 2 Schedule 2 (or multiple such letters taken in combination) shall be for a minimum area of land pertaining to the **New Connection Site Onshore** set out in the **Connection Application**, by reference to the minimum values specified in the **Energy Density Table(s)**. The **Applicant** shall ensure that a **Letter of Acknowledgement** shall be for a minimum area of seabed pertaining to the **New Connection Site Offshore** or the **New Connection Site** for an **Offshore Project** (other than an **Interconnector**) set out in the **Connection Application** by reference to the offshore specific guidance in the **LoA Guidance**.
- 2.13.3 **Where the Connection Application:**

- 2.13.3.1 is not a **Gated Application** for the purposes of the **Gated Application and Offer Process**, without prejudice to condition E12 of the **ESO Licence**. The Company shall make a **Connection Offer** to that **User** as soon as practicable after receipt of the **Connection Application** and (save where the **Authority** consents to a longer period) in any event not more than 3 months after receipt by The Company of the **Connection Application**; and
- 2.13.3.2 is a **Gated Application** for the purposes of the **Gated Application and Offer Process**, The Company shall make a **Connection Offer** to that **User** in accordance with the **Gated Application and Offer Process**.
- 2.13.4 The **Connection Offer** and any offer to vary referred to in paragraph 2.13.10 shall remain open for acceptance (subject to **CUSC** Paragraph 6.10.4.4) for 3 months from its receipt by that **User** unless either that **User** or **The Company** makes an application to the **Authority** under condition E13 of the **ESO Licence**, in which event the **Connection Offer** shall remain open for acceptance until the date 14 days after any determination by the **Authority** pursuant to such application.
- 2.13.5 If the **Connection Offer** is accepted by that **User** the connection shall proceed according to the terms of the **CUSC** and the relevant **Bilateral Connection Agreement** and **Construction Agreement** entered into consequent upon acceptance of the **Offer**.
- 2.13.6 Prior to so proceeding a person who is not already a party to the **CUSC Framework Agreement** must become a party to the **CUSC Framework Agreement**.
- 2.13.7 Certain provisions relating to **New Connection Sites** and **Transmission Interface Sites** are dealt with in Section 6. This is due to their inter-relationship with the provisions on **Modifications**.
- 2.13.8 In the event that the **User** requests a **Connection Offer** in respect of a **Connection Site** located **Onshore** on the basis of a **Design Variation** then:
- (i) **The Company** shall only be obliged to provide such an offer in so far as such an offer satisfies the conditions detailed in Chapter 2 of the **NETS SQSS**; and
  - (ii) **The Company** shall be obliged, at the request of the **User** as part of the **Connection Offer**, to provide such information that the **User** may reasonably require in order to assess the probability of **Notification of Restrictions on Availability** being issued. For the avoidance of doubt, the information that

is provided by **The Company** under this clause shall be a best estimate only and is not legally binding.

- 2.13.9 In the case of **New Connection Sites** located in **Offshore Waters** the **Connection Offer** will identify the **Onshore Construction Works**. These will be based on assumptions about the **Offshore Construction Works** and these assumptions will be set out in the **Construction Agreement**. Where the **Connection Offer** is not made on the basis of the **OTSDUW Arrangements**, the **Offshore Construction Works** will not themselves be identified at that time. Where the **Connection Offer** is made on the basis of the **OTSDUW Arrangements**, the **Connection Offer** will identify initial **Offshore Transmission System Development User Works** as being the **OTSDUW Build** required to provide a connection between the **User's Equipment** and the **Onshore Transmission System** at the **Transmission Interface Point** as set out in the assumptions.
- 2.13.10 In the case of **New Connection Sites** located in **Offshore Waters**, where a **Connection Offer** is not made on the basis of the **OTSDUW Arrangements** the **Bilateral Connection Agreement** and **Construction Agreement** for such **New Connection Site** will contain provisions specifically allowing them to be varied to reflect both the **Offshore Construction Works** and any changes necessary to the **Onshore Construction Works** once they have been identified and changes to the **Construction Programme** consequent on any delay in the appointment of the **Offshore Transmission Owner** from the date assumed in the relevant **Construction Agreement**.
- 2.13.11 In the case of **New Connection Sites** located in **Offshore Waters**, where a **Construction Agreement** is entered into on the basis of the **OTSDUW Arrangements**, the **Construction Agreement** for such **New Connection Site** will reflect the extent and scope of the **Onshore Construction Works**, the **Offshore Construction Works** and the **Offshore Transmission System Development User Works** as agreed between **The Company** and the **User** reflecting any changes in the assumptions referred to in paragraph 2.13.9 as agreed between **The Company** and the **User** prior to acceptance of the **Connection Offer**. The **Construction Agreement** may contain continuing assumptions and provisions allowing for its variation upon changes in such continuing assumptions.
- 2.13.12 In the case of a **New Connection Site** located in **Offshore Waters**:
- (a) **The Company** will include **Offshore Restrictions on Availability** in any **Offer** made for **New Connection Sites** located in **Offshore Waters** which meet the **Offshore Standard Design or Design Variation** but not where the design is of a standard equivalent to or higher than the deterministic criteria detailed in Paragraphs 2.5 to 2.13 of the **NETS SQSS**. The **Bilateral Connection Agreement** will specify the circumstances of **Offshore Restrictions on**

**Availability** during which access to the **National Electricity Transmission System** will be restricted; and

- (b) In the event that the **User** requests a **Connection Offer** on the basis of a **Design Variation** then:
  - (i) **The Company** shall only be obliged to provide such an offer in so far as such an offer satisfies the conditions detailed in Chapter 7 of the **NETS SQSS**; and
  - (ii) **The Company** shall be obliged, at the request of the **User** as part of the **Connection Offer**, to provide such information that the **User** may reasonably require in order to assess the probability of **Notification of Restrictions on Availability** being issued. For the avoidance of doubt, the information that is provided by **The Company** under this clause shall be a best estimate only and is not legally binding.

2.13.13 In the case of a **New Connection Site** located in **Offshore Waters** and which is connected or to be connected to an **ET Offshore Transmission System**, **The Company** will include **ET Restrictions on Availability** in any **Offer** made and the **Bilateral Connection Agreement** will provide for access to the **National Electricity Transmission System** to be restricted during the **ET Restrictions on Availability**.

2.13.14 In the case where a **User** undertakes **OTSDUW Build** in respect of an **ET Offshore Transmission System**, the principles and intent of the **OTSUA Commissioning Period** will be applied to **OTSUA** connected to an **ET Offshore Transmission System** in a manner consistent with **OTSUA** connected at a **Transmission Interface Site**.

## **PART II - CONNECTION CHARGES**

### **2.14 CONNECTION CHARGES**

#### **2.14.1 Introduction**

Subject to the provisions of the **CUSC**, and the relevant **Bilateral Connection Agreement**, each **User** shall, as between **The Company** and that **User**, with effect from the relevant date set out in the relevant **Bilateral Connection Agreement**, be liable to pay to **The Company** the **Connection Charges** calculated and applied in accordance with the **Statement of the Connection Charging Methodology** and as set out in the relevant **Bilateral Connection Agreement**. The **User** shall make those payments in accordance with the provisions of the **CUSC**. **The Company** shall apply and calculate the **Connection Charges** in accordance with the **Statement of the Connection Charging Methodology**.

#### **2.14.2 Security**

The **User** shall provide **The Company** with **Security Cover** in respect of **Termination Amounts** in respect of the **Transmission Connection Assets** commissioned after the **Transfer Date** in accordance with the provisions of Part III of this Section 2.

#### **2.14.3 Connection Charges - Outturn Reconciliation**

- (a) The following provisions relate to the ability for invoices to be issued for **Connection Charges** based on an estimate of the cost of **Transmission Connection Asset Works**, and for a reconciliation once those costs are known.
- (b) **The Company** shall be entitled to invoice each **User** for **Connection Charges** payable in accordance with the **CUSC** in respect of any **Plant** and **Apparatus** installed as part of the **Transmission Connection Asset Works** on the basis set out in the **Statement of the Connection Charging Methodology**, until the final cost of carrying out the said **Transmission Connection Asset Works** shall have been determined.
- (c) As soon as practicable after the **Completion Date** and in any event within one year (or such later period as **The Company** and the relevant **User** shall agree) thereof. **The Company** shall, as between **The Company** and that **User**, provide to the **User** a written statement specifying the **Connection Charges** calculated in accordance with the **Charging Statements** based on the cost of carrying out the **Transmission Connection Asset Works** (the "**Cost Statement**"). **The Company** shall be entitled to revise



Appendix B to the relevant **Bilateral Connection Agreement** accordingly.

- (d) In the event that the **Connection Charges** specified in the **Cost Statement** are greater than the amount paid by the **User** based on **The Company's** estimate under Paragraph 2.14.3(b), the **User** shall pay to **The Company** the difference between the two amounts plus interest on a daily basis from the date of payment by the **User** of the amounts calculated on **The Company's** estimate to the date of payment by the **User** of the difference at the **Base Rate**. In the event that the **Connection Charges** specified in the **Cost Statement** are less than the amount paid by the **User** based on **The Company's** estimate, **The Company** shall pay to the **User** the difference between the two amounts plus interest on a daily basis from the date of payment by the **User** of the amounts calculated on **The Company's** estimate to the date of repayment by **The Company** at the **Base Rate**. Such payment of reconciliation shall be made by one party to the other within 28 (twenty eight) days of the **Cost Statement**.

#### 2.14.4 Connection Charges - One-off Charges

- (a) The following provisions relate to the payment for certain **One-off Works**, which arise in relation to the construction of a **Connection Site**.
- (b) Each **User** shall forthwith on the relevant date set out in the relevant **Bilateral Connection Agreement** be liable to pay to **The Company** the **One-off Charge** (if any) as set out in the relevant **Bilateral Connection Agreement**.
- (c) **The Company** shall invoice the **User** for an amount equal to **The Company's** estimate of the **One-off Charge** before, on or after the relevant date set out in the relevant **Bilateral Connection Agreement** and the **User** shall pay to **The Company** the amount stated in **The Company** invoice at the later of such relevant date or 28 (twenty eight) days after the date of the said invoice.
- (d) As soon as practicable thereafter **The Company** shall provide the **User** with a statement of the **One-off Charge**. In the event of the amount specified in the statement being more than the amount paid by the **User** to **The Company** in terms of Paragraph 2.14.4(c), the **User** shall pay to **The Company** the difference plus interest on a daily basis from the date of the invoice under Paragraph 2.14.4(c) to the date of invoice for the difference at the **Base Rate** from time to time within 28 days (twenty eight) days of the date of **The Company's** invoice. In the event of the amount specified in the statement being less than the amount paid by the **User** under the terms

of Paragraph 2.14.4(c), **The Company** shall forthwith pay to the **User** an amount equal to the difference plus interest calculated on a daily basis at the **Base Rate** from the date of payment by the **User** under Paragraph 2.14.4(c) to the date on which the difference is repaid by **The Company**.

**2.14.5 Connection Charges – Site Specific Maintenance Charge**

- (a) **The Company** shall be entitled to invoice each **User** for the indicative **Site Specific Maintenance Charge** in each **Financial Year** as set out in the **Statement of the Connection Charging Methodology**.
- (b) As soon as reasonably practicable and in any event by 31 July in each **Financial Year** **The Company** shall:
  - (i) in accordance with the **Statement of the Connection Charging Methodology** calculate the actual **Site Specific Maintenance Charge** that would have been payable by the **User** during the preceding **Financial Year** (the “**Actual Charge**”) and compare this with the indicative **Site specific Maintenance Charge** received from the **User** during the preceding **Financial Year** (the “**Notional Charge**”) and
  - (ii) prepare and send to the **User** a **Maintenance Reconciliation Statement** specifying the **Actual Charge** and the **Notional Charge** for the preceding **Financial Year**.
- (c) Two months after the date of issue of the **Maintenance Reconciliation Statement** and in any event by 30 September **The Company** shall issue a credit note in relation to any sums shown by the **Maintenance Reconciliation Statement** to be due to the **User** or an invoice in respect of sums due to **The Company** (such invoice to be payable within 30 days of the date of the invoice) and in each case interest thereon calculated pursuant to Paragraph 2.14.5(d) below.
- (d) Interest on all amounts due under this Paragraph 2.14.5 shall be payable by the paying **CUSC Party** to the other on such amounts from the date of payment applicable to the month concerned until the date of invoice for such amounts and such interest shall be calculated on a daily basis at a rate equal to the **Base Rate** during such period.

**2.14.6** The **Connection Charges** shall be paid as specified in paragraph 6.6.1(a) and shall be treated as a recurrent monthly payment.

**2.14.7** The **User** shall be liable to pay **The Company Termination Amounts** in the event of the termination of the **User's Bilateral Connection**

**Agreement** (or in the case of Paragraph 5.3.4 **Disconnection** of the **User's Equipment**) in accordance with Section 5 of the **CUSC**.

- 2.14.8 The **Connection Charges** in the **Financial Year** in which the relevant date for charging set out in the relevant **Bilateral Connection Agreement** occurs shall be apportioned as follows:-

For each complete calendar month from that date to the end of the **Financial Year** in which the date occurs the **User** shall be liable to pay one twelfth of the **Connection Charges** and for each part of a calendar month the **User** shall be liable to pay to **The Company** one twelfth of the **Connection Charges** prorated by a factor determined by the number of days for which the **User** is liable divided by the total number of days in such calendar month.

## 2.15 REVISION OF CHARGES

- 2.15.1 Pursuant to the **ESO Licence** and/or the **CUSC** and/or the **Charging Statements** and/or the **Bilateral Agreements**, **The Company** may revise its **Connection Charges** or the basis of their calculation including issuing revisions to Appendices A and B of the **Bilateral Connection Agreements**.
- 2.15.2 Subject to Paragraph 2.15.3 below, **The Company** shall give the **User** not less than 2 months prior written notice of any revised charges, including revisions to Appendices A and B of the **Bilateral Connection Agreements**, which notice shall specify the date upon which such revisions become effective (which may be at any time). The **User** shall pay any such revised charges and Appendix A and B shall be amended automatically (and a copy sent to the **User**) to reflect any changes to such Appendices with effect from the date specified in such notice.
- 2.15.3 Where in accordance with the **ESO Licence**, the **Authority** requires a shorter period than 2 months for the implementation of revised charges, the notice period will be determined by the **Authority**. Where **The Company** and the **User** agree a shorter period than 2 months for the implementation of revised charges, the notice period will be as agreed between the parties. The notice of revisions issued by **The Company** will specify when the new charges are effective and the **User** shall pay any such revised charges and Appendix A and B shall be amended automatically with effect from the date specified in such notice;
- 2.15.4 Subject to the provisions of Paragraph 2.17 (Replacement of Transmission Connection Assets) below, if in the reasonable opinion of **The Company** any development, replacement, renovation, alteration, construction or other work to the **National Electricity Transmission System** or termination of a **Bilateral Agreement** or use of the **National Electricity Transmission System** by another **User** or an alteration to the requirements of the **User** or any other

**User** means that to ensure that **The Company** is charging in accordance with the provisions of the **Charging Statements** pursuant to conditions E10 and E11 of the **ESO Licence** **The Company** needs to vary the **Connection Charges** payable by a **User** in relation to any of its **Connection Sites** then **The Company** shall have the right to vary such charges accordingly upon giving to the **User** not less than 2 months prior written notice. Following any such variation the provisions of Appendices A and B shall be amended automatically (and a copy sent to the **User**) to reflect such variation with effect from the date such variation comes into effect.

## 2.16 DATA REQUIREMENTS

- 2.16.1 On or before the end of the second week of December in each **Financial Year**, each **User** shall supply **The Company** with such data as **The Company** may from time to time reasonably request pursuant to the **Charging Statements** to enable **The Company** to calculate the **Connection Charges** due from the **User** to **The Company** in respect of the **Connection Site** including the data specified in the **Charging Statements**.
- 2.16.2 Where the relevant date for charging set out in the relevant **Bilateral Connection Agreement** in relation to **Connection** falls during a **Financial Year** the **User** shall on the date specified in writing by **The Company** to the **User** supply to **The Company** such data in respect of the **Financial Year** in which the charging date falls and the following **Financial Year** which it would otherwise have supplied and **The Company** would otherwise have requested in accordance with Paragraph 2.16.1, in accordance with the terms of the **Charging Statements**.

## 2.17 REPLACEMENT OF TRANSMISSION CONNECTION ASSETS

- 2.17.1 **The Company** will provide information to each **User** on an ongoing basis with regards to its long term intentions and any programme for the replacement of any **Transmission Connection Assets** at a **Connection Site**.
- 2.17.2 Where in **The Company's** reasonable opinion to enable **The Company** to comply with its statutory and licence duties and/or to enable any **Relevant Transmission Licensee** to comply with its statutory and licence duties it is necessary to replace a **Transmission Connection Asset** **The Company** shall give written notice of this (a "**Replacement Notice**") such notice to be given (subject to Paragraph 2.17.7) as soon as practicable.
- 2.17.3 Following the issue of the **Replacement Notice** **The Company** shall provide an explanation of the economic and engineering reasons to asset replace and the parties shall meet as soon as practicable to consider options, programme and costs associated with the replacement.

- 2.17.4 **The Company** shall make an offer to the **User(s)** (subject to Paragraph 2.17.7) no earlier than 6 months after the date of the **Replacement Notice** detailing the variations it proposes to make to Appendices A and B of and any other changes required to the **Bilateral Connection Agreement** and if appropriate enclosing a **Construction Agreement** in respect of the replacement of the **Transmission Connection Assets**.
- 2.17.5 If after a period of 3 months from receipt of the offer or such longer period as the parties might agree the **User(s)** and **The Company** have failed to reach agreement on the offer then either party may make an application to the **Authority** under condition E13 of the **ESO Licence** to settle any dispute about the replacement of the **Transmission Connection Assets**.
- 2.17.6 Subject to Paragraph 2.17.7, **The Company** shall not replace the **Transmission Connection Assets** until the offer has been accepted by the **User(s)** or until the determination of the **Authority** if an application to the **Authority** has been made.
- 2.17.7 **The Company** shall take all reasonable steps to avoid exercising its rights pursuant to this Paragraph but in the event that **The Company** has reasonable grounds to believe, given its licence and statutory duties or the statutory and licence duties of a **Relevant Transmission Licensee** that a **Transmission Connection Asset** should be replaced prior to or during the process outlined above then **The Company** shall consult with the **User(s)** as far as reasonably practicable and shall be entitled to replace such **Transmission Connection Asset** and shall advise the **User(s)** of this and as soon as practicable make an offer for such replacement which can be accepted or referred in accordance with Paragraph 2.17.5 above.
- 2.17.8 Subject to Paragraph 2.17.9 **Connection Charges** shall be payable in respect of such replaced **Transmission Connection Assets** in accordance with the **Statement of the Connection Charging Methodology** and **The Company** shall give the **User(s)** not less than 2 months prior written notice of such varied charges and specify the date upon which such charges become effective. **The Company** shall be entitled to invoice the **Connection Charges** based on an estimate of the cost and the provisions of Paragraphs 2.14.3 and 2.14.4 shall apply.
- 2.17.9 Where **Transmission Connection Assets** have been replaced pursuant to Paragraph 2.17.7 **The Company** shall not be entitled to vary the **Connection Charges** until the offer has been accepted or the matter has been determined by the **Authority** and until such time the **User(s)** shall continue to pay **Connection Charges** as if the **Transmission Connection Assets** had not been replaced. If the matter is determined in **The Company's** favour then **The Company** shall be entitled to issue a revised Appendices A and B and the **User(s)** shall pay to **The Company** the difference between the two

amounts plus interest at **Base Rate** on a daily basis from completion of the replacement to the date of payment by the **User(s)**. If the matter is not determined in **The Company's** favour **Connection Charges** shall be payable as directed by the **Authority**.

## 2.18 TERMINATION AMOUNTS - RE-USE

- 2.18.1 The obligation on the **User** to pay **Termination Amounts** is contained in Paragraph 2.14.7 and Section 5. Further provisions relating to **Termination Amounts**, including calculation of **Termination Amounts**, are dealt with in the **Statement of the Connection Charging Methodology**. The following parts of this Paragraph 2.18 deal with issues relating to re-use of **Transmission Connection Assets** in respect of which **Termination Amounts** have been paid.
- 2.18.2 **The Company** shall use its reasonable endeavours to re-use **Transmission Connection Assets** where **Termination Amounts** have been paid on the basis set in the **Statement of the Connection Charging Methodology**. Subject to Paragraph 2.18.4, in the event that a **Termination Amount** is paid in respect of **Transmission Connection Assets** and subsequently such **Transmission Connection Assets** in respect of which a payment has been made are re-used in the **National Electricity Transmission System** then **The Company** shall pay to the **User** a sum calculated in accordance with the **Statement of the Connection Charging Methodology**.
- 2.18.3 Re-use shall not occur where any **Transmission Connection Asset** remains connected for the purpose of providing a continuing connection for other **Users** connected to the **National Electricity Transmission System** at the **Connection Site** at the date of termination. However in the event of any **User** requiring a continued connection modifying its requirements or another **User** connecting at the **Connection Site** and the **Transmission Connection Assets** in respect of which a payment has been made are required for this modification this shall constitute re-use.
- 2.18.4 **The Company** shall be under no obligation to rebate any of the **Termination Amounts** relating to the re-use of assets as set out in the **Statement of the Connection Charging Methodology** except to the extent that **Connection** and/or **Transmission Network Use of System Charges** are subsequently received in respect of **Transmission Connection Assets** in relation to which such **Termination Amounts** have been paid to **The Company** during the **Financial Year** in which termination has occurred.
- 2.18.5 Upon request in writing, and at the cost of the **User**, **The Company** shall issue a certificate no more frequently than once each calendar year indicating whether or not such assets have or have not been re-used. If **The Company** at any time decides that it is not economic to retain any **Plant** and **Apparatus** constituting any **Transmission Connection Asset** in respect of which **Termination Amounts** have

been paid it may at its reasonable discretion dispose of the said **Plant** and **Apparatus** and pay the **User** any sums due in accordance with the **Statement of the Connection Charging Methodology**.

### **PART III - CREDIT REQUIREMENTS**

#### **2.19 SECURITY FOR TERMINATION AMOUNTS**

2.19.1 Where a **User** has a connection to the **National Electricity Transmission System** it shall provide security for **Termination Amounts** for **Transmission Connection Assets Commissioned** after the **Transfer Date** in accordance with this Paragraph 2.19. For the avoidance of doubt references to **Termination Amounts** in this Part III only relate to **Termination Amounts** payable in respect of such **Transmission Connection Assets**.

2.19.2 Each **User** which has a connection to the **National Electricity Transmission System** shall provide security in respect of each of its **Bilateral Connection Agreement(s)**:-

- (a) in the case of a **User** which meets **The Company Credit Rating** at the date of the **Bilateral Connection Agreement**, in accordance with Paragraph 2.20; and
- (b) in the case of a **User** which does not meet **The Company Credit Rating** at the date of the **Bilateral Connection Agreement** or thereafter ceases to meet it, in accordance with Paragraph 2.21.

#### **2.20 PROVISION OF SECURITY FOR TERMINATION AMOUNTS WHERE USER MEETS CREDIT RATING**

2.20.1 Each **User** shall, as soon as possible after entering into a **Bilateral Connection Agreement** and in any event no later than one (1) month after such date, confirm to **The Company** the position on whether it meets **The Company Credit Rating** of which it advised **The Company** at the time that the offer was made by **The Company**. Thereafter not less than 75 days before 1 April and 1 October in each year the **User** shall confirm its **The Company Credit Rating** position to **The Company** (which in the case of a long term private credit rating shall be confirmed by Standard and Poor's or Moody's within a period of 45 days prior to the date of confirmation). The **User** shall inform **The Company** in writing forthwith if it becomes aware of losing its **The Company Credit Rating** or if it is or is likely to be put on credit watch or any similar credit surveillance procedure which may give **The Company** reasonable cause to believe that the **User** may not be able to sustain its **The Company Credit Rating** for at least 6 months.

2.20.2 In the event that the **User** has elected to provide **The Company** with an indicative credit rating and **The Company** is of the reasonable

opinion that the **User** has ceased to comply with the requirements of Paragraph 2.20.1 then **The Company** may require the **User** forthwith:-

- (a) to apply to Standards and Poor's and/or Moody's for a further indicative long term private credit rating; or
- (b) to confirm to **The Company** that it shall provide the security referred to in Paragraph 2.20.4 hereof.

2.20.3 In the event of the **User**:-

- (a) not having an **The Company Credit Rating**; or
- (b) having a credit rating below **The Company Credit Rating**;  
or
- (c) not having obtained from Standard and Poor's or Moody's within 30 days of the written notification under Paragraph 2.20.2 above an indicative long term private credit rating,

or if **The Company** becomes aware that

- (i) the **User** ceases to have an **The Company Credit Rating**; or
- (ii) the **User** is put on credit watch or other similar credit surveillance procedure as specified above which may give **The Company** reasonable cause to believe that the **User** may not be able to maintain an **The Company Credit Rating** for at least 6 months; or
- (iii) the **User** has not obtained from Standard and Poor's or Moody's within 30 days of the written notification by **The Company** under Paragraph 2.20.2 above a further indicative long term private credit rating,

the **User** shall (where appropriate on receipt of written notification from **The Company**) comply with the terms of Paragraph 2.20.4.

2.20.4 The **User** shall within 21 days of the giving of a notice under Paragraph 2.20.3 or within 30 days of the **User** confirming to **The Company** under Paragraph 2.20.2 that it will provide the security specified in Paragraph 2.22.1 (whichever is the earlier), provide **The Company** with the security specified below to cover the **User's** payment obligations to **The Company** arising in the event of termination of the relevant **Bilateral Connection Agreement**. The security to be provided shall be in an amount not greater than such sums payable on termination and specified in writing by **The Company** to the **User** from time to time in accordance with the timescales specified in Paragraph 2.21.2. Such security shall be of a type set out in 2.22.1.



- 2.20.5 Until the facts or circumstances giving rise to the obligations of the **User** to provide the security have ceased then the provisions of Paragraphs 2.21.2 to 2.22.2 shall apply.
- 2.20.6 In the event of **The Company's** credit requirements being reviewed at any time **The Company** shall advise the **User** in writing of the new credit requirements and if acceptable to the **User** the security arrangements will be amended accordingly.
- 2.20.7 In the event that the facts or circumstances giving rise to the obligations of the **User** to provide the security have ceased, then **The Company** shall release the security.

## **2.21 PROVISION OF SECURITY FOR TERMINATION AMOUNTS WHERE USER DOES NOT MEET CREDIT RATING**

2.21.1 Each **User** hereby agrees that it shall at the date of the relevant **Bilateral Connection Agreement** provide to **The Company** or procure the provision to **The Company** of, and the **User** shall at all times thereafter (unless and until the **Bilateral Connection Agreement** shall be terminated and all sums due or which will or might fall due in respect of which security is to be provided shall have been paid) maintain or procure that there is maintained in full force and effect (including by renewal or replacement), a security arrangement of a type specified in Paragraph 2.22.1 from time to time and for the time being to provide security for the **User's** obligation to pay **The Company Termination Amounts** on termination of a **Bilateral Agreement**, in accordance with Paragraph 2.21.2.

### **2.21.2 Provision of Bi-annual Estimate and Secured Amount Statement**

- (a) **The Company** shall provide to each relevant **User** a **Bi-annual Estimate** showing the amounts of all payments required or which may be required to be made by the **User** to **The Company** in respect of **Termination Amounts** (inclusive of any applicable **Value Added Tax** that would be due) at the following times and in respect of the following periods:-
- (i) forthwith on and with effect from the date required in accordance with Paragraph 2.20.4 in respect of the period from and including such date until the next following 31st March or 30th September (whichever shall first occur); and
- (ii) not less than 75 (seventy five) days (or if such day is not a **Business Day** the next following **Business Day**) prior to each 31st March and 30th September thereafter in respect of the period of six calendar months commencing on the immediately following 1st April or 1st October (as the case may be), until the relevant **Bilateral Connection Agreement** shall be terminated

and all sums due or which will or might fall due in respect of which security is to be provided shall have been paid.

- (b) Such **Bi-annual Estimate** shall be accompanied by the **Secured Amount Statement** specifying the aggregate amount to be secured at the beginning of and throughout each such period.
- (c) If **The Company** shall not provide any subsequent **Bi-annual Estimate** and **Secured Amount Statement** by the requisite date, then the **User** shall at the date it is next required to have in full force and effect security and whether by renewal or replacement or otherwise in respect of the following six calendar month period nonetheless provide security in accordance with the provisions of this Paragraph 2.21 in the same amount as the amount then in force in respect of the then current six calendar month period. Notwithstanding the foregoing, if **The Company** shall provide the **User** with any **Bi-annual Estimate** and **Secured Amount Statement** later than the date specified in Paragraph 2.21.2(a) then the following shall apply. The **User** shall within 30 (thirty) days of receipt of the said **Secured Amount Statement** procure that to the extent that the amount in respect of which security has been or is to be provided pursuant to this Paragraph 2.21.2(c) in respect of the relevant period ("the **Secured Amount**") falls short of the amount stated in the **Secured Amount Statement** (the "**Required Amount**") the **Secured Amount** shall be adjusted to the **Required Amount**.
- (d) **Entitlement to Estimate**  
If **The Company** is (for whatever reason) unable on any relevant date to calculate precisely any sum due or which has accrued due or in respect of which the **User** has a liability to **The Company** for payment under any of the provisions of this **CUSC**, **The Company** shall be entitled to invoice the **User** for a sum equal to **The Company's** fair and reasonable estimate of the sums due or which may become due or in respect of which the **User** has a liability to **The Company** for payment. **The Company** shall also be entitled to send the **User** further invoices for such sums not covered in previous invoices. The **User** shall pay **The Company** all sums so invoiced by **The Company**.
- (e) **Demands not Affected by Disputes**  
It is hereby agreed between **The Company** and the **User** that if there shall be any dispute between the **User** and **The Company** as to:-

- (i) any amount certified by **The Company** in any **Secured Amount Statement** as requiring at any time and from time to time to be secured; or
- (ii) the fairness and reasonableness of **The Company's** estimate; or
- (iii) whether there has been an **Event of Default** as provided in Section 5; or
- (iv) the lawfulness or otherwise of any termination or purported termination of the relevant agreement,

such dispute shall not affect the ability of **The Company** to make demands pursuant to the security arrangement to be provided pursuant to Paragraph 2.21 and to recover the amount or amounts payable thereunder, it being acknowledged by the **User** that but for such being the case **The Company's** security would be illusory by reason of the period of validity of the relevant security being likely to expire or capable of expiring before the final resolution of such dispute. The **User** accordingly covenants with **The Company** that it will not take any action, whether by way of proceedings or otherwise, designed or calculated to prevent, restrict or interfere with the payment to **The Company** of any amount secured under the security arrangement nor seek nor permit nor assist others to do so.

- (f) If there shall be any dispute as mentioned in Paragraph 2.21.2(e) the same shall, whether **The Company** shall have terminated the relevant **Bilateral Connection Agreement** and recovered or sought to recover payment under the security arrangement or not, and without prejudice to **The Company's** right to recover or seek to recover such payment, be dealt with in the case of Paragraphs 2.21.2(e)(i) and 2.21.2(e)(ii) under Section 7 as a **Charging Dispute** and, in the case of Paragraphs 2.21.2(e)(iii) and 2.21.2(e)(iv) be dealt with under Section 7 as an **Other Dispute**.

## 2.22 TYPES OF SECURITY

### 2.22.1 Security can be provided by:

- (a) A **Performance Bond** or **Letter of Credit** from a **Qualified Bank** for the amount stated in the **Secured Amount Statement** as the estimated amount to be secured, such **Performance Bond** or **Letter of Credit** to be **Valid** for at least the period stated in such **Secured Amount Statement** and to be renewed periodically where applicable in the manner stated in Paragraph 2.22.2(c); or

- (b) A cash deposit in a **Bank Account** at least for the amount stated in the **Secured Amount Statement** as the estimated amount to be secured, such cash deposit to be increased or reduced periodically where applicable in the manner stated in Paragraph 2.22.2(d); or
- (c) A **Performance Bond** from a **Qualified Company** for the amount stated in the **Secured Amount Statement** as the estimated amount to be secured, such **Performance Bond** to be **Valid** for at least the period stated in such **Secured Amount Statement** and to be renewed periodically where applicable in the manner stated in Paragraph 2.22.2(c)

#### 2.22.2 General Provisions

- (a) Any **Notice of Drawing** to be delivered to Barclays Bank PLC or any other bank at which the **Bank Account** shall have been opened or a **Qualified Bank** or a **Qualified Company** may be delivered by hand, by post, or by other agreed communication method.
- (b) If the **User** becomes aware that the bank issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, the **User** shall notify **The Company** in writing as soon as it becomes so aware. If **The Company** becomes aware that the bank issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, **The Company** may notify the **User** to that effect in writing. Where the bank or the company so ceases to be either a **Qualified Bank** or a **Qualified Company** (as the case may be) as a consequence of **The Company** having reasonable cause to doubt the continued rating of the said bank or company, such notice shall be accompanied by a statement setting out **The Company's** reasons for having such doubt. The **User** shall within 21 days of the giving of such notice by **The Company** or the **User** whichever is the earlier provide a replacement **Performance Bond** and/or **Letter of Credit** from a **Qualified Bank** or **Qualified Company**, as the case may be, and/or provide a cash deposit in the required amount in a **Bank Account**. From the date the replacement **Performance Bond** or **Letter of Credit** or **Bank Account** cash deposit is effectively and unconditionally provided and **Valid**, **The Company** will consent in writing to the security which it replaces being released.
- (c) The following provisions shall govern the issuance, renewal and release of the **Performance Bond** or **Letter of Credit**:-

- (i) The **Performance Bond** or **Letter of Credit** shall be **Valid** initially from the date required in accordance with Paragraph 2.20.4 or 2.21.1 respectively at least to and including the following 31st March or 30th September whichever is the earlier date. Such **Performance Bond** or **Letter of Credit** shall be for an amount not less than that stated in the **Secured Amount Statement** to be secured during the period specified in the **Secured Amount Statement**.
  - (ii) On a date which is at least 45 days (or if such day is not a **Business Day** then on the immediately preceding **Business Day**) before the next following 31st March or 30th September whichever is the earlier date such **Performance Bond** or **Letter of Credit** shall be renewed so as to be **Valid** for not less than 6 months commencing from the immediately following 1st April or 1st October (as the case may be). Such renewed **Performance Bond** or **Letter of Credit** shall be for an amount not less than the amount stated in the **Secured Amount Statement** as the amount to be secured during the period that such renewed **Performance Bond** or **Letter of Credit** shall be **Valid**.
  - (iii) Thereafter, the renewed **Performance Bond** or **Letter of Credit** shall be further renewed in like manner every 6 months.
- (d) The following provisions shall govern the maintenance of cash deposits in the **Bank Account**:-
- (i) The amount of the User's cash deposit to be maintained in the **Bank Account** shall be maintained by the User from the date required in accordance with Paragraph 2.20.4 or 2.21.1 respectively at least to and including the following 31st March or 30th September, whichever is the earlier date. Such cash deposit shall be in an amount as stated in the **Secured Amount Statement** to be secured during the period stated in the **Secured Amount Statement**.
  - (ii) If the amount stated in the **Secured Amount Statement** as the amount to be secured from the following 1st April to 30th September or from the following 1st October to 31st March (as the case may be) is an amount greater than the amount then secured, the User's cash deposit in the **Bank Account** shall be increased by the User to such greater amount on a date which is 45 days before the following 31st March or 30th September (as the case


- may be) which immediately precedes the commencement of the relevant above mentioned period.
- (iii) If such amount stated in the **Secured Amount Statement** is smaller than the amount then secured, the User's cash deposit in the **Bank Account** shall not be reduced to the amount so stated until the expiry of 7 days after the next following 31st March or 30th September (as the case may be) (the "**Release Date**").
  - (iv) The sum equal to the amount of reduction in User's the cash deposit in the **Bank Account** shall be paid by **The Company** to the **User** from the **Bank Account** on the **Release Date**.
  - (v) Any interest accruing in respect of the User's cash deposit into the **Bank Account** shall be for the account of and belong to the **User** absolutely, and **The Company** agrees to take any steps required to be taken by it for the release from the **Bank Account** or such associated bank account in the name of **The Company** in which such interest is held and payment to the **User** of such interest as soon as the same shall have been credited to the **Bank Account** and **The Company** shall have received notice from the User requesting such payment.
  - (vi) For the avoidance of doubt, the **User's** cash deposit in the **Bank Account** shall remain the sole property and entitlement of the **User** until such time when (and to such extent as) the **Company** exercises its right of set off against the **User's** cash deposit in accordance with the terms of the **CUSC**, and the **User** shall have no right to have the cash deposit returned to it for so long as it is under any prospective or contingent liability to the **Company**.
- (e) Notwithstanding any provision aforesaid:-
- (i) The **User** may provide different securities to **The Company** at any one time, each securing a different amount, provided that the aggregate amount secured by such securities shall be not less than the aggregate amount required to be secured pursuant to the **Secured Amount Statement** for any period specified therein.
  - (ii) The **User** may upon the expiry of at least 14 days prior written notice to **The Company**, substitute one type

of security for another provided that unless **The Company** shall otherwise agree in writing such substituted security must be **Valid** from 1st April or 1st October (as the case may be) and committed at least 45 days before the immediately preceding 31st March or 30th September (as the case may be) in the following manner:-

- (aa) where a **Performance Bond** or a **Letter of Credit** is to substitute for other securities, it must be issued or given at least 45 days before such immediately preceding 31st March or 30th September (as the case may be).
- (bb) where a cash deposit in a **Bank Account** is to substitute for other securities, it must be deposited into the **Bank Account** at least 45 days before such immediately preceding 31st March or 30th September (as the case may be).
- (iii) Upon request by the **User** to **The Company**, securities substituted in the aforesaid manner shall, providing the substitute security shall be **Valid**, be released on the following 1st April or 1st October (as the case may be). However, where the amount required by the **Secured Amount Statement** to be secured for any period is less than the amount required to be secured in the preceding period, the substituted security shall not be released until 7 days after the then following 31st March or 30th September (as the case may be).

## SCHEDULE 1

### DIAGRAM SHOWING ELECTRICAL BOUNDARIES FOR GAS INSULATED SWITCHGEAR

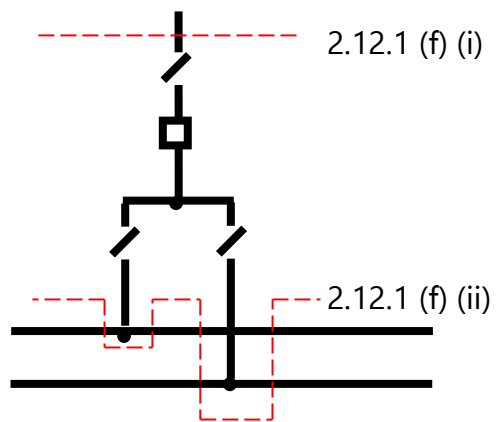



## SCHEDULE 2

Please read through 'TEMPLATE A' 'TEMPLATE B'. Customers should submit only 1 completed template below in line with the circumstances of their project.

***[TEMPLATE A: to be used by landowner where Connecting Customer is not the landowner of the site or is yet to obtain relevant rights to the site]***

*NB – Please note that the LOA must be signed and dated by the Landowner/Landowner representative no more than 12 months prior to the date of application.*

I am the :

Landowner ☐

Landowner Representative ☐

*If completing as Landowner Representative, please confirm if you are happy for the ESO to contact the landowner directly for verification purposes.*

Yes ☐

No ☐

By submitting this letter you confirm that you have been appointed by the Landowner to represent them in regards to this application.

Contact details for Landowner / Landowner's Representative (delete as appropriate)

ADDRESS LINE 1:

ADDRESS LINE2:

POSTCODE:

[LANDOWNER CONTACT DETAILS (Phone and email)]

Project details

[NAME OF LANDOWNER]

[NAME OF CONNECTING CUSTOMER]

[PROJECT NAME] (The "Project")

[SITE ADDRESS] (The "Property")Acreage:

Please confirm if land is registered with Land Registry: Yes/No

Land Registry Title number (s) (if applicable):

Contact details for User

ADDRESS LINE 1:

ADDRESS LINE2:

POSTCODE:

[User CONTACT DETAILS (Phone and email)]

Project Technology Type:

FAO National Energy System Operator Limited (NESO),

Contact details for User

ADDRESS LINE 1:

ADDRESS LINE2:

POSTCODE:

We/I, [NAME] of landowner] / [[Name of agent] of [company name] ([company number]), authorised by the landowner as their agent,] at [address] ]], hereby confirm we are the legal owner of the land situated at [Address of Property] as outlined in [Colour of line] on Plan 1 annexed to this letter ( "The Property").

Please take this letter as confirmation that we authorise [] (or their authorised agents or representatives whomsoever) to apply for a grid connection to the NESO on and in relation to the Property.

I confirm that I am happy for the NESO to contact me for the following purposes:

- To verify that this letter is genuine.
- To verify the contact details and address of the landowner and/or the landowner's agent.
- To verify that the landowner owns the land shown on the attached site plan and authorises the developer to include it in the application for connection of the Project mentioned above in this letter

Disclaimer: This letter is provided solely for the purpose of confirming support for this project's application to the NESO at this time and is not commercially or legally binding upon the landowner

Yours faithfully,

[SIGNATURE]

[NAME]

[DATE]

[Image of the sample plan showing the boundaries of the Site referred]

***[TEMPLATE B: to be used by the connecting customer where connecting customer is the landowner of the site OR has already obtained the required rights to the site]***

***NB – Please note that the LOA must be signed and dated by the Landowner/Landowner representative no more than 12 months prior to the date of application.***

[CONNECTING CUSTOMER ADDRESS LINE 1]

[CONNECTING CUSTOMER ADDRESS LINE2]

[CONNECTING CUSTOMER ADDRESS POSTCODE]

[DATE]

FAO National Energy System Operator Limited (NESO),

[PROJECT NAME] (The “Project”)

[SITE ADDRESS] (The “Property”)

[SITE ADDRESS] (The “Property”)Acreage:

Please confirm if land is registered with Land Registry: Yes/No

Land Registry Title number (if applicable):

Project Technology type:

I, [ AUTHORISED SIGNATORY/DIRECTOR OF [THE COMPANY], a company registered in [Scotland / England and Wales], with Company Number [xxxxx] ], as the applicant for the connection of the Project confirm that [THE COMPANY] [ [is the landowner of the Property] / [ has obtained the required rights for use of the Property for the purpose of constructing the Project] ] and that this Property is to be noted as part of our application to the Electricity System Operator for an electricity connection for the Project. I consent to the ESO contacting me where necessary.

The documents evidencing [THE COMPANY’s] [ownership of / rights to] the Property are attached.

Yours faithfully,

[SIGNATURE]

[NAME]

[Image of the sample plan showing the boundaries of the Site referred]

**END OF SECTION 2**

## **CUSC - SECTION 3**

### **USE OF SYSTEM**

#### **CONTENTS**

- 3.1 Introduction
  - PART IA - GENERAL - GENERATION
- 3.2 Rights to Use the National Electricity Transmission System
- 3.3 Other Site Specific Technical Conditions for Embedded Power Stations and Distribution Interconnectors
  - PART IB - GENERAL - SUPPLY
- 3.4 Rights to Use the National Electricity Transmission System
- 3.5 Supplier Customer Details
- 3.6 Suppliers of Non-Embedded Customers
- 3.7 Use of System Application
- 3.8 Termination Provisions
  - PART 1C – GENERAL – VIRTUAL LEAD PARTIES
  - PART II - USE OF SYSTEM CHARGES
  - PART IIA - GENERAL
- 3.9 Use of System Charges
  - PART IIB - TRANSMISSION NETWORK USE OF SYSTEM CHARGES
- 3.10 Data Requirements
- 3.11 Variation of Forecasts during the Financial Year
- 3.12 Validation of Demand Forecasts
- 3.13 Reconciliation Statements
- 3.14 Revision of Charges

3.15 Forecast of Transmission Network Use of System Charges

PART IIC - BALANCING SERVICES USE OF SYSTEM CHARGES

3.16 Introduction

3.17 Reconciliation

3.18 [No heading]

3.19 [No heading]

3.20 Reconciliation Payments

3.21 Revision of Charges

PART III - CREDIT REQUIREMENTS

3.22 BSUOS Charges and TNUOS Demand Charges: Provision of Security Cover

3.23 Credit Monitoring

3.24 Payment Default

3.25 Utilisation of Funds

3.26 User's Right to Withdraw Funds

3.27 User's Allowed Credit

3.28 Transitional Arrangements

Appendix 1 Credit Arrangements

## **CUSC - SECTION 3**

### **USE OF SYSTEM**

#### **3.1 INTRODUCTION**

This Section 3 deals with use of the **National Electricity Transmission System** and certain related issues. Part I of this Section sets out general provisions (split into Parts A and B dealing with generation, supply and VLP), Part II sets out charging related provisions and Part III sets out the credit requirements related to **Use of System**. Depending on the category of connection and/or use of a **User**, the Section dealing with **Connection** (Section 2) may also be applicable.

#### **PART IA - GENERAL - GENERATION**

This Part IA deals with rights and obligations relating to **Embedded Power Stations, Small Power Station Trading Parties** and to **Distribution Interconnectors**. References to “**User**” in this Part IA should be construed accordingly.

#### **3.2 RIGHTS TO USE THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM**

##### **3.2.1 Embedded Use of System**

Subject to the other provisions of the **CUSC**, the **Grid Code** and the relevant **Bilateral Embedded Generation Agreement**, and subject to there continuing to be a **Distribution Agreement** with the owner/operator of the **Distribution System**, each **User**, as between **The Company** and that **User**, may in relation to each of its **Embedded** generation sites and each of its **Distribution Interconnectors** transmit (or put, as the case may be) supplies of power on to and/or take supplies of power from the **National Electricity Transmission System** as the case may be.

##### **3.2.2 Embedded Power Station and Distribution Interconnector Conditions**

- (a) The rights and obligations of a **User**, and **The Company** in connection therewith, are subject to the following conditions precedent having been fulfilled before such rights and obligations arise:
  - (i) the **User** having provided (in a form reasonably satisfactory to **The Company**) proof of having entered into a **Distribution Agreement** with the owner/operator of the **Distribution System**; and

- (ii) in the case of an **Embedded Small Power Station The Company** having received satisfactory confirmation from the owner/operator of the **Distribution System** as to the running arrangements within the **Distribution System**;
  - (iii) in the case of an **Embedded Small, Medium and Large Power Station**, in relation to a **Small Power Station Trading Party** and in the case of a **Distribution Interconnector**, of the acceptance by the owner/operator of the **Distribution System** of any necessary **Modification Offer** relevant to the **Embedded Power Station or Distribution Interconnector** (as the case may be);
- (b) If the conditions precedent of 3.2.2(a)(i) to (iii) have not been fulfilled in the case of 3.2.2(a)(i) and 3.2.2(a)(ii) within 6 months of the date of the relevant **Bilateral Embedded Generation Agreement** or in the case of 3.2.2(a)(iii) within 3 months of the date of receipt by the owner/operator of the **Distribution System** of the **Modification Offer The Company** or the relevant **User** may rescind the relevant **Bilateral Embedded Generation Agreement** and any associated **Construction Agreement** by giving to the other notice to that effect in which event all rights and liabilities of the parties thereunder and under the **CUSC** in relation to relevant **Embedded Power Stations** or relevant **Distribution Interconnectors** shall cease.

### 3.2.3 Transmission Entry Capacity

- (a) Other than as provided in Paragraph 3.2.3(b), each **User**, as between **The Company** and that **User**, shall not operate its **User's Equipment** such that its export of power onto the **National Electricity Transmission System** exceeds the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** set out in Appendix C to the relevant **Bilateral Embedded Generation Agreement** save as expressly permitted and instructed pursuant to an **Emergency Instruction** under the **Grid Code** or save as expressly permitted and instructed pursuant to the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.
- (b) Each **User** in respect of an **Embedded Small Power Station** and a **Distribution Interconnector** and as a **Trading Party** responsible for **Embedded Small Power Stations**, as between **The Company** and that **User**, shall not operate its **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) such that its export of

power onto the **National Electricity Transmission System** exceeds the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** set out in Appendix C to the relevant **Bilateral Embedded Generation Agreement** save as expressly permitted and instructed pursuant to the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.

- 3.2.4 Subject to the other provisions of the **CUSC** and the **Grid Code** and any relevant **Bilateral Agreement**, **The Company** shall, as between **The Company** and that **User**, accept into the **National Electricity Transmission System** power generated by each **User** up to the **Transmission Entry Capacity** and (if any) **STTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** set out in Appendix C of the relevant **Bilateral Connection Agreement** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints which could not be avoided by the exercise of **Good Industry Practice** by **The Company**.

#### Outages

Subject to the provisions of the **Grid Code**, **The Company** and each **User** (with **Plant** and/or **Apparatus**) shall, as between **The Company** and that **User**, be entitled to plan and execute outages of parts of in the case of **The Company**, the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** and in the case of a **User**, its **System** or **Plant** or **Apparatus**, at any time and from time to time.

- 3.2.5 Commissioning

**The Company** agrees to assist the **User** (if requested by the **User**), with the commissioning and on-load testing of the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) and the **User** shall pay reasonable **The Company** Charges in connection therewith. The **User** must ensure the commissioning programme for the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at the site of connection agreed between the **User** and the owner/operator of the **Distribution System** contains adequate provisions in respect of the timing of commissioning to ensure that the **User** can be in receipt of an **Operational Notification** before or during (as appropriate) the said commissioning programme.

- 3.2.6 Operational Notification



Upon compliance by the **User** with the provisions of Paragraph 3.2.2(a) after the commissioning programme in Paragraph 3.2.6 and subject, if **The Company** so requires, to **Transmission Reinforcement Works** being carried out and/or notification by the **User** that the site of connection of the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) to the **Distribution System** is operational (any or all as appropriate) **The Company** shall forthwith notify ("**Operational Notification**") the **User** in writing that it has the right to use the **National Electricity Transmission System**. It is an express condition of the **CUSC** that in no circumstances will the **User** use or operate the **User's Equipment** or **Equipment** for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) without receiving this **Operational Notification**.

### 3.3 OTHER SITE SPECIFIC TECHNICAL CONDITIONS FOR EMBEDDED POWER STATIONS AND DISTRIBUTION INTERCONNECTORS

#### 3.3.1

- (a) **The Company** and each **User** shall, as between **The Company** and that **User**, operate respectively the **National Electricity Transmission System** and the **User System** with the special automatic facilities and schemes set out in Appendix F3 to the relevant **Bilateral Embedded Generation Agreement**.
- (b) Each **User** shall ensure the **User's Equipment** complies with the site specific technical conditions set out in Appendix F4 to the relevant **Bilateral Embedded Generation Agreement**.
- (c) Each **User** shall use all reasonable endeavours to ensure during the period of the relevant **Bilateral Embedded Generation Agreement** that the **User's Equipment** shall continue to comply with the site specific technical conditions set out in Appendix F5 to the relevant **Bilateral Embedded Generation Agreement**.

- 3.3.2 If a **User** or **The Company** wishes to modify, alter or otherwise change the site specific technical conditions or the manner of their operation under Appendices F1, F3, F4 or F5 to the relevant **Bilateral Embedded Generation Agreement** this shall be deemed to be a **Modification** for the purposes of the **CUSC**.

- 3.3.3 Where in the case of a site **Commissioned** in England and Wales prior to the **Transfer Date**, on or immediately prior to the **Transfer Date** a **User's Equipment** subject to a **Bilateral Embedded**

**Generation Agreement** has any of the following technical attributes or facilities:

- (a) control arrangements
- (b) voltage and current signals for system monitoring
- (c) control telephony
- (d) operational metering

the **User** shall, as between **The Company** and that **User**, use all reasonable endeavours to ensure that during the period of such **Bilateral Agreement** the **User's Equipment** which is subject to that **Bilateral Agreement** retains such technical attributes or facilities provided always that if the **User** wishes to modify, alter or otherwise change the same or their operation it may do so by following the procedures relating to a **Modification** in accordance with the **CUSC**.

## **PART IB - GENERAL - SUPPLY**

This Part IB deals with rights and obligations relating to **Suppliers** generally and, in relation to certain provisions, to **Suppliers** supplying **Non-Embedded Customers**. References to “**User**” in this Part IB should be construed accordingly.

### **3.4 RIGHTS TO USE THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM**

- 3.4.1 Subject to the other provisions of the **CUSC** and the **Grid Code**, each **User**, as between **The Company** and that **User**, may take supplies of power from the **National Electricity Transmission System**.
- 3.4.2 Subject to the provisions of the **CUSC** and the **Grid Code**, **The Company** shall, as between **The Company** and that **User**, transport a supply of power through the **National Electricity Transmission System** to the level forecast by the **User** from time to time pursuant to the **Data Requirements** set out in Part IIB of this Section 3 submitted by that **User** together with such margin as **The Company** shall in its reasonable opinion consider necessary having due regard to **The Company's** duties under the **ESO Licence** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints or by insufficiency of generation which, in either case, could not have been avoided by the exercise of **Good Industry Practice** by **The Company**.

- 3.4.3 Subject to the provisions of the **Grid Code**, **The Company** shall be entitled to plan and execute outages of parts of the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** at any time and from time to time.

### 3.5 SUPPLIER CUSTOMER DETAILS

- 3.5.1 Each **User** shall, as between **The Company** and that **User**, give written notice to **The Company** of the following details of all exit points from time to time in existence between any **Distribution System** and the **User's** customer:-

- (a) the electrical location and nomenclature of the **Energy Metering Equipment** installed in relation to each such customer;
- (b) the identity of the operator of the **Distribution System** to which such customers are connected;
- (c) the **Grid Supply Point** and **Transmission Network Use of System Demand Zone** meeting the **Demand (Active Power)** of each customer;
- (d) the loss factors applying to the **Energy Metering Equipment** installed in relation to each such customer, save where the **User's** customer is connected to a **Distribution System** owned by a **Public Distribution System Operator** in which case the **Public Distribution System Operator's** published statement of loss factors shall apply.

Such written notice shall be given to **The Company** no later than 28 days prior to the commencement or cessation of use of any such exit point. If the **Grid Supply Point** referred to in (c) changes the **User** shall notify **The Company** forthwith after being notified of such change by the **Public Distribution System Operator** in question. If **The Company's** basis of charging changes pursuant to the **Charging Statements** or, subject thereto, Parts II and III below at any time, **The Company** shall be entitled to ask for other information it reasonably requires for charging purposes under this Paragraph 3.5.

- 3.5.2 **CUSC Parties** agree that, insofar as **The Company** has alternative reasonable means of obtaining this information then Paragraph 3.5.1 shall not apply.

### 3.6 SUPPLIERS OF NON-EMBEDDED CUSTOMERS

- 3.6.1 This Paragraph 3.6 relates specifically to the position of a **Supplier** in respect of its supply of electricity to a **Non-Embedded Customer**. Insofar as the provisions of this Paragraph 3.6 conflict with any other provision of this Section 3 dealing with an equivalent

issue, the provisions of this Paragraph 3.6 shall prevail in relation to such a category.

3.6.2 In the case of such a **User**, subject to the provisions of the **CUSC** and the **Grid Code**, **The Company** shall transport a supply of power through the **National Electricity Transmission System** to the **Connection Site** of the **Non-Embedded Customer** to the level forecast by the **User** from time to time pursuant to the **Data Requirements** set out in Part IIB of this Section 3 submitted by that **User** together with such margin as **The Company** shall in its reasonable opinion consider necessary having due regard to **The Company's** duties under the **ESO Licence** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints or by insufficiency of generation which, in either case, could not have been avoided by the exercise of **Good Industry Practice** by **The Company**.

3.6.3 The right in 3.6.2 above is subject to:

- (a) the **User** being authorised by a current **Supply Licence** to supply electricity to the premises to be supplied with electricity through the **Connection Site**; and
- (b) there being a subsisting **Bilateral Connection Agreement** with the **Non-Embedded Customer** for the **Connection Site**.

3.6.4 Where **The Company** agrees, the **Supplier** of a **Non-Embedded Customer** may be liable for payment of **Connection Charges** in relation to the **Metering Equipment** of a **Non-Embedded Customer**. The existence of such an arrangement shall be reflected in the relevant **Bilateral Connection Agreement** with the **Non-Embedded Customer** and the **Use of System Supply Confirmation Notice**. Where such an arrangement exists, the provisions of Section 2 Part II in relation to such charges shall be deemed incorporated within this Paragraph 3.6.4 and the **Supplier** shall comply with those provisions in relation to such charges as if references to the **User** were references to the **Supplier**.

3.6.5 The **User** acknowledges that breach of the provisions of the **CUSC** by the **Non-Embedded Customer** may give rise to **Deenergisation** of the **Non-Embedded Customer's Connection Site** pursuant to Section 5.

3.6.6 The **User** acknowledges that site specific technical conditions as provided for in Paragraphs 2.7 to 2.9 of the **CUSC** may apply between **The Company** and a **Non-Embedded Customer** at a **Connection Site**.

3.6.7 **The Company** shall be entitled to **Deenergise** the **Non-Embedded Customer's Equipment** at any **Connection Site**

when instructed to do so by the **Non-Embedded Customer** in accordance with the terms of its **Bilateral Connection Agreement** or the **CUSC**.

- 3.6.8 Where the **Supplier** supplying the **Connection Site** has informed **The Company** that it has received an order or direction from the Secretary of State for Energy under the Energy Act 1976 or the **Act**, requiring it to cease supplying the **Non-Embedded Customer** with electricity and instructs **The Company** to **Deenergise** the **Non-Embedded Customer's User's Equipment** at the **Connection Site**, **The Company** shall as soon as reasonably practicable **Deenergise** the **Non-Embedded Customer's User's Equipment** at the **Connection Site** (unless **The Company** considers that it is not reasonably practicable, whether on technical grounds or otherwise, to effect such **Deenergisation**) and if it does **Deenergise**, shall promptly notify the **User** of the date and time at which such **Deenergisation** was effected. The **User** shall reimburse **The Company** any expense incurred in relation to such **Deenergisation**, if any, and shall indemnify **The Company** against any costs, liability, loss or damage suffered by **The Company** as a result of such **Deenergisation**.

### 3.6.9 SUPPLIER DEENERGISATION OF NON-EMBEDDED CUSTOMERS

- (a) **The Company** shall, to the extent that it may lawfully do so, at the request of the **Supplier**, when the **Supplier** is entitled to have the **Deenergisation** of a **Non-Embedded Customer, Connection Site(s)**, carried out, carry out such **Deenergisation** on behalf of and at the cost of the **Supplier** within a reasonable time or, in circumstances of urgency, as soon as is reasonably practicable.
- (b) **The Company** shall if requested by the **Supplier**, inform the **Supplier** of its reasonable requirements for the details of the **Non-Embedded Customer's Connection Site(s)** to be **De-energised**.
- (c) **The Company** shall **Reenergise** the **User's Equipment** at the **Non-Embedded Customer's Connection Site** as soon as is reasonably practicable after the circumstances leading to **Deenergisation** under Paragraph 3.6.9.1 have ceased to exist.

#### Duty to Indemnify

- (d) Where **The Company** carries out a **Deenergisation** on behalf of a **Supplier** under Paragraph 3.6.9.1, **The Company** shall indemnify the **Supplier** against (a) all actions, proceedings, costs,

demands, claims, expenses, liability, loss or damage made against or incurred or suffered by the **Supplier** as a consequence of, physical damage to the property of the **Supplier**, its officers, employees or agents, (including any claim by another **User** connecting at the same substation) and (b) in respect of the liability of the **Supplier** to any other person for loss in respect of physical damage to the property of any person, in each case as a consequence of **The Company** acting contrary to an accurate and appropriate instruction from the **Supplier** to **Deenergise the Non-Embedded Customer's Connection Site**;

- (e) Save for any matters arising from or in connection with the negligent act or omission or default of **The Company**, its officers, employees or agents, the **Supplier** shall indemnify **The Company** against (a) all actions, proceedings, costs, demands, claims, expenses, liability, loss or damage arising from, or incurred by **The Company** as a consequence of, physical damage to the property of **The Company**, its officers, employees or agents, and (b) in respect of the liability of **The Company** to any other person for loss in respect of physical damage to the property of any person, in each case as a consequence of acting in reliance on any instructions given by the **Supplier** to **The Company** to **Deenergise the Non-Embedded Customer's Connection Site** which are materially inaccurate or misleading;

and

- (f) Where the **Supplier** requests **The Company** to **Deenergise** a single point of connection that is both a **Grid Supply Point** and a **Grid Entry Point**, the **Supplier** shall also indemnify **The Company** against all actions, proceedings, costs, demands, claims, expenses, liability, loss or damage made against or incurred or suffered by **The Company** and resulting directly from such **Deenergisation** howsoever arising (including any claim by another **User** connecting at the same substation) except insofar as such actions, proceedings, costs, demands, claims, expenses, liability, loss or damage arise from the negligent act or omission or default of **The Company**, its officers, employees or agents.

#### Downstream Parties

- (g) A **Non- Embedded Customer** shall provide its **Supplier** on request and as soon as is reasonably practicable with the details of any **Downstream Parties** including (but not limited to) contact names, addresses, email addresses, and telephone numbers.

- (h) Prior to a **Supplier** instructing **The Company** to **Deenergise** the **Non-Embedded Customer's Connection Site(s)** under Paragraph 3.6.9.1:
  - (i) (a) the **Supplier** shall request the **Non-Embedded Customer** to confirm within 48 hours of such request that the details supplied under Paragraph 3.6.9.7, remain correct and/or provide updated details for any **Downstream Parties**, and where such details had been supplied by the **Non-Embedded Customer** to the **Supplier** within the preceding **10 Business Days**, the **Supplier** may, whilst making this request, in parallel and without delay give notice to arrange the meeting described in (b), below;
  - (b) where there are **Downstream Parties** (other than **Downstream Parties** that are **Affiliates** of the **Non-Embedded Customer**), the **Supplier** shall, giving not less than 48 hours' notice, arrange a meeting between the **Supplier**, the **Non-Embedded Customer**, those **Downstream Parties** and **The Company** to discuss the impact of the **Deenergisation** and whether an agreement to avoid the **Deenergisation** and resulting impact on those **Downstream Parties** can be reached to the reasonable satisfaction of the **Supplier** (acting reasonably); and
  - (c) the **Supplier** shall not issue its **Deenergisation** instruction to **The Company** within 72 hours (or such longer period, determined by the **Supplier** from time to time, at their sole discretion, and notified to the attendees of any meeting held under (b)) from the commencement of any meeting held under (b).

### 3.7 USE OF SYSTEM APPLICATION

- 3.7.1 If a **User** wishes to use the **National Electricity Transmission System** in a category of use which does not include connection to the **National Electricity Transmission System**, it shall complete and submit to **The Company** a **Use of System Application** and comply with the terms thereof.
- 3.7.2 Where the **Use of System Application**:

- 3.7.2.1 is not a **Gated Application** for the purposes of the **Gated Application and Offer Process**, without prejudice to Condition E12 of the **ESO Licence** **The Company** shall make a **Use of System Offer** to that **User** as soon as practicable after receipt of the **Use of System Application** and (save where the **Authority** consents to a longer period) in any event not more than 28 days after receipt by **The Company** of the **Use of System Application**.
- 3.7.2.2 is a **Gated Application** for the purposes of the **Gated Application and Offer Process**, the **Use of System Application** and **Use of System Offer** shall be processed in accordance with the **Gated Application and Offer Process**.
- 3.7.3 The **Use of System Offer** shall in the case of an application relating to an **Embedded Power Station** or to a **Small Power Station Trading Party** or to a **Distribution Interconnector** be in the form of a **Bilateral Embedded Generation Agreement** together with any **Construction Agreement** relating thereto. In the case of a **Virtual Lead Party**, it shall be in the form of a **Virtual Lead Party Agreement**. In the case of a **Supplier**, it shall be in the form of a **Use Of System Supply Offer Notice**. The provisions of Standard Condition C8 shall apply to an application by a **Supplier** as if the **Use of System Supply Offer** and **Confirmation Notice** was an agreement for the purposes of that condition.
- 3.7.4 The **Use of System Offer** shall remain open for acceptance (subject to **CUSC** Paragraph 6.10.4.4) for 3 months from its receipt by that **User** unless either that **User** or **The Company** makes an application to the **Authority** under Condition E13 of the **ESO Licence**, in which event the **Use of System Offer** shall remain open for acceptance until the date 14 days after any determination by the **Authority** pursuant to such application.
- 3.7.5 Upon acceptance of the **Use of System Offer** (as offered by **The Company** or determined by the **Authority**) by the **User** and execution by **The Company** of the **Bilateral Embedded Generation Agreement** or **Virtual Lead Party Agreement** or the issuing by **The Company** of a **Use of System Supply Confirmation Notice**, as the case may be, the **User** shall have the right to use the **National Electricity Transmission System**. Such right shall continue until the **Bilateral Embedded Generation Agreement** or **Virtual Lead Party Agreement** is terminated or a **Use of System Termination Notice** is submitted pursuant to Paragraph 3.8.



- 3.7.6 Such rights shall be conditional upon the **Applicant**, if it is not already a party to the **CUSC Framework Agreement**, becoming a party to the **CUSC Framework Agreement**.
- 3.7.7 In the event that the **User** requests a **Use of System Offer** in the form of a **Bilateral Embedded Generation Agreement** on the basis of a **Design Variation** then:
- (i) **The Company** shall only be obliged to provide such an offer in so far as such an offer satisfies the conditions detailed in Chapter 3 of the **NETS SQSS**; and
  - (ii) **The Company** shall be obliged, at the request of the **User** as part of the **Use of System Offer**, to provide such information that the **User** may reasonably require in order to assess the probability of **Notification of Restrictions on Availability** being issued. For the avoidance of doubt, the information that is provided by **The Company** under this clause shall be a best estimate only and is not legally binding.

### 3.8 TERMINATION PROVISIONS

- 3.8.1 Provisions relating to **Disconnection** relating to **Users** who have **Bilateral Embedded Generation Agreements** are dealt with in Section 5.
- 3.8.1(A) Provisions relating to **Users** who have **Virtual Lead Party Agreements** are dealt with in Section 5.
- 
- 3.8.2 In addition to the provisions in Section 5, this paragraph deals with termination of the right to use the system in respect of a **Supplier** who in that category of connection and/or use has no physical presence on the **System** and with a specific additional provision for the **Supplier** of a **Non-Embedded Customer**.
- 3.8.3
- (a) A **Supplier** may terminate its use of the **National Electricity Transmission System** by giving **The Company** a **Use of System Termination Notice** not less than 28 days prior to such termination of use.
  - (b) If a **Use of System Termination Notice** is given under this Section 3, the right to use the **National Electricity Transmission System** shall cease upon the termination date in the **Use of System Termination Notice**.
  - (c) Prior to cessation of use by a **User** under this Paragraph, the **User** shall pay **The Company** all **Use of System Charges** payable by it under Section 3 in respect of the **Financial Year** in which the cessation takes place.

- 3.8.4 In addition, in the case of a **User** in its category of connection and/or use as a **Supplier** of a **Non-Embedded Customer** the use of the **National Electricity Transmission System** in respect of the **Connection Site** shall cease upon either **Disconnection** of the **User's Equipment** of the **Non-Embedded Customer** or termination of the **Bilateral Connection Agreement** in respect of that **Connection Site**.

## PART IC – GENERAL – VIRTUAL LEAD PARTIES

This Part IC deals with rights and obligations relating to **Virtual Lead Parties**. References to “**User**” in this Part IC should be construed accordingly.

### 3.8A RIGHTS TO USE THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM

#### 3.8A.1 Virtual Lead Party

Subject to the other provisions of the **CUSC**, the **Grid Code** and the relevant **Virtual Lead Party Agreement**, and subject to there continuing to be a **Distribution Agreement** with the owner/operator of the **Distribution System** in respect of the **VLP Assets**, each **User**, as between **The Company** and that **User**, may in relation to each of its **VLP Assets** transmit (or put, as the case may be) supplies of power on to and/or take supplies of power from the **National Electricity Transmission System** as the case may be.

#### 3.8A.2 Virtual Lead Party Conditions

(a) The rights and obligations of a **User**, and **The Company** in connection therewith, are subject to the following conditions precedent having been fulfilled before such rights and obligations arise:

(i) the **User** having provided (in a form reasonably satisfactory to **The Company**) proof of having entered into a **Distribution Agreement** with the owner/operator of the **Distribution System** in respect of the **VLP Assets**; and

(ii) **The Company** having received satisfactory confirmation from the owner/operator of the **Distribution System** as to the running arrangements within the **Distribution System**;

(iii) **The User** having successfully registered a **Secondary BMU**.

(b) If the conditions precedent of 3.8A.2(a)(i) to (iii) have not been fulfilled within 6 months of the date of the relevant **Virtual Lead Party Agreement**, **The Company** or the relevant **User** may rescind the relevant **Virtual Lead Party Agreement** by giving to the other notice to that effect in which event all rights and liabilities of the parties thereunder and under the **CUSC** in relation to the **VLP Assets** shall cease.

#### 3.8A.3 Outages and Constraints

(a) Subject to the other provisions of the **CUSC** and the **Grid Code** and any relevant **Virtual Lead Party Agreement**, **The Company** shall, as between **The Company** and that **User**, accept into the **National Electricity Transmission System** power from each **User** except to the extent (if any) that **The Company**

is prevented from doing so by transmission constraints which could not be avoided by the exercise of **Good Industry Practice** by **The Company**.

#### **3.8A.4 TECHNICAL CONDITIONS FOR VIRTUAL LEAD PARTIES**

3.8A.4.1 Each **User** shall use all reasonable endeavours to ensure during the period of the relevant **Virtual Lead Party Agreement** that the **VLP Assets** shall comply with the technical conditions set out in Appendix F5 to the relevant **Virtual Lead Party Agreement**.

3.8A.4.2 If a **User** or **The Company** wishes to modify, alter or otherwise change the technical conditions or the manner of their operation under Appendix F5 to the relevant **Virtual Lead Party Agreement** this shall be deemed to be a **Modification** for the purposes of the **CUSC**.

### **PART II - USE OF SYSTEM CHARGES**

#### **PART IIA - GENERAL**

#### **3.9 USE OF SYSTEM CHARGES**

- 3.9.1 Subject to the provisions of the **CUSC**, and any relevant **Bilateral Agreement**, together with the relevant **Charging Statements**, each **User** shall with effect from the relevant date set out in the relevant **Bilateral Agreement** (or in the **Use of System Supply Confirmation Notice**) be liable to pay to **The Company** the **Use of System Charges** in accordance with the **CUSC** calculated in accordance with the **Statement of Use of System Charges** and the **Statement of the Use of System Charging Methodology**. **The Company** shall apply and calculate the **Use of System Charges** in accordance with the **Statement of Use of System Charges** and the **Statement of the Use of System Charging Methodology**.
- 3.9.2 Each **User** shall, as between **The Company** and that **User**, in accordance with this Part II and Paragraph 6.6, be liable to pay to **The Company** (or **The Company** shall be so liable to pay to the **User**) the **Transmission Network Use of System Charges** and (if appropriate) the **STTEC** and **LDTEC Charge** in respect of its use of the **National Electricity Transmission System** applied and calculated in accordance with the **Statement of Use of System Charges** and **Statement of the Use of System Charging Methodology**.
- 3.9.3 Except in respect of **Distribution Interconnector Owners** each **User** shall, as between **The Company** and that **User**, in accordance with this Part II and Paragraph 6.6, be liable to pay to **The Company** in respect of each **Settlement Day** the **Balancing Services Use of System Charges** calculated in accordance with the **Statement of the Use of System Charging Methodology**.

- 3.9.4 Each **User** shall, as between **The Company** and that **User**, provide **The Company** with **Security Cover** in respect of **Transmission Network Use of System Demand Reconciliation Charges, Transmission Services Use of System Charges and Balancing Services Use of System Charges** in accordance with Part III below.
- 3.9.5 The charges payable in relation to use of the **National Electricity Transmission System** may also include **One-off Charges** where those are to be payable by the relevant **User** as provided in the relevant **Bilateral Embedded Generation Agreement**. In that case, the relevant provisions of Section 2 will apply to that **User** in relation to the **One-off Charges**.
- 3.9.6 Where a **User's** connection to the **National Electricity Transmission System** involves the connection of an **Offshore Transmission System** to a **Distribution System**, the **ET Use of System Charges** shall be payable by the **User** in an amount, manner and timing that reflects **The Company's** obligation to the **ET Interface Operator** for the charges for connection to and use of that **Distribution System**. These will be specified, to the extent practicable, in the **User's Bilateral Connection Agreement**.

## **PART IIB – TRANSMISSION NETWORK USE OF SYSTEM CHARGES**

### **3.10 DEMAND FORECAST DATA REQUIREMENTS**

- 3.10.1 On or before the end of the second week of December in each **Financial Year**, each **User** shall supply **The Company** with such data as described under Section 3.10 as **The Company** may from time to time reasonably request to enable **The Company** to calculate the tariffs for the **Transmission Network Use of System Charges** pursuant to the **Charging Statements** for the **Financial Year** to which the data relates.
- 3.10.2 On or before the 10<sup>th</sup> day of March in each **Financial Year**, each **User** shall supply **The Company** on **The Company's** reasonable request with its **Demand Forecast** for the following **Financial Year** pursuant to the **Charging Statements** to enable **The Company** to use such **Demand Forecast** as the basis for calculation of the **Transmission Network Use of System Charges** for the **Financial Year** to which the **Demand Forecast** relates.
- 3.10.3 In the event that a **User** fails to provide a **Demand Forecast** in accordance with Paragraph 3.10.2 above the **User** shall be deemed to have submitted as its **Demand Forecast** the last **Demand Forecast** supplied under Paragraph 3.11.1.
- 3.10.4 Where a **Use of System Supply Confirmation Notice** is completed during a **Financial Year**, the **User** shall supply **The**

**Company**, with its **Demand Forecast** for that **Financial Year** on or before the 10<sup>th</sup> day of the month following completion of the **Use of System Supply Confirmation Notice**.

- 3.10.5 On or before the end of the second week in December in each **Financial Year**, each **User** that is liable for generation **Use of System Charges** in accordance with 3.9 shall supply **The Company** with a forecast maximum TEC for the following year, to inform **The Company** of the forecast generation to be used for the purposes of setting TNUoS Tariffs.
- 3.10.6 Where a **User's** connection to the **National Electricity Transmission System** involves the connection of an **Offshore Transmission System** to a **Distribution System**, each such **User** shall supply **The Company** with such data as **The Company** may from time to time reasonably request to enable the calculation of the **ET Use of System Charges**.

### 3.11 VARIATION OF FORECASTS DURING THE FINANCIAL YEAR

- 3.11.1 Each **User** shall notify **The Company** of any revision to its **Demand Forecast** at least quarterly or at such intervals as may be agreed between **The Company** and the **User** from time to time.
- 3.11.2 Subject to Paragraph 3.12, **The Company** shall revise the **Transmission Network Use of System Charges** payable by a **User** to take account of any revised **Demand Forecast** and shall commence charging the revised **Transmission Network Use of System Charges** from the first day of the month following the month in which such revised **Demand Forecast** was received provided always that such **Demand Forecast** is provided before the 10<sup>th</sup> day of such month.

### 3.12 VALIDATION OF DEMAND FORECASTS

- 3.12.1 The **Demand Forecast** shall represent a **User's** reasonable estimate of its **Demand**.
- 3.12.1a **The Company** shall use the latest available data of actual **FDSC** and **Unmetered Supply Volume** as the basis of its **FDSC Forecast** and **Unmetered Supply Volume Forecast**.
- 3.12.2 **The Company** shall notify the **User** in the event that the **Transmission Network Use of System Charges** due from the **User** to **The Company** or from **The Company** to the **User** (as the case may be) calculated by **The Company** using the **Demand Forecast**, **FDSC Forecast** and **Unmetered Supply Volume Forecast** differ by more than 20% from that calculated by **The Company** using **The Company's** forecast **Demand**, **FDSC Forecast** and **Unmetered Supply Volume Forecast** as provided for in the **Charging Statements**.

- 3.12.3 In the event that **The Company** does not receive a satisfactory explanation for the difference between the **Demand Forecast** and **The Company's** forecast of **Demand** or a satisfactory revised **Demand Forecast** from the **User** within 5 **Business Days** of such notice then **The Company** shall be entitled to invoice a **User** for **Transmission Network Use of System Charges** calculated on the basis of **The Company** forecast **Demand**.
- 3.12.4 Any dispute regarding a **Demand Forecast**, or **FDSC Forecast** or **Unmetered Supply Volume Forecast** or the resulting **Transmission Network Use of System Charges** shall be a **Charging Dispute**.

### 3.13 RECONCILIATION STATEMENTS

#### Calculation of Initial Reconciliation

- 3.13.1 On or before 30 June in each **Financial Year**, **The Company** shall promptly calculate in accordance with the **Statement of the Use of System Charging Methodology** and the **Statement of Use of System Charges** the **Demand** related, **FDSC** related, **Unmetered Supply Volume** related or generation related **Transmission Network Use of System Charges** (as the case may be) that would have been payable by the **User** during each month during the preceding **Financial Year (Actual Amount)**. **The Company** shall then compare the **Actual Amount** with the amount of **Demand** related, **FDSC** related, **Unmetered Supply Volume** related or generation related **Transmission Network Use of System Charges** (as the case may be) paid each month during the preceding **Financial Year** by the **User** (the "**Notional Amount**").

#### Generation Reconciliation

- 3.13.2 As soon as reasonably practicable and in any event by 30 April in each **Financial Year** **The Company** shall prepare a generation reconciliation statement (the "**Generation Reconciliation Statement**") in respect of generation related **Transmission Network Use of System Charges** and send it to the **User**. Such statement shall specify the **Actual Amount** and the **Notional Amount** of generation related **Transmission Network Use of System Charges** for each month during the relevant **Financial Year** and, in reasonable detail, the information from which such amounts were derived and the manner in which they were calculated.
- 3.13.3 Together with the **Generation Reconciliation Statement**, **The Company** shall issue a credit note in relation to any sums shown by the **Generation Reconciliation Statement** to be due to the

**User** or an invoice in respect of sums due to **The Company** and in each case interest thereon calculated pursuant to Paragraph 3.13.6 below.

Initial Demand Reconciliation Statement

3.13.4 As soon as reasonably practicable and in any event by 30 June in each **Financial Year** **The Company** shall then prepare an initial **Demand** reconciliation statement (the “**Initial Demand Reconciliation Statement**”) in respect of **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** and send it to the **User**. Such statement shall specify the **Actual Amount** and the **Notional Amount** of **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** for each month during the relevant **Financial Year** and, in reasonable detail, the information from which such amounts were derived and the manner in which they were calculated.

3.13.5 Together with the **Initial Demand Reconciliation Statement** **The Company** shall issue a credit note in relation to any sum shown by the **Initial Demand Reconciliation Statement** to be due to the **User** or an invoice in respect of sums due to **The Company** and in each case interest thereon calculated pursuant to Paragraph 3.13.6.

3.13.6 General Provisions

- (a) Invoices issued under paragraphs 3.13.3 and 3.13.5 above and 3.13.8 (b) below shall be payable within 30 days of the date of the invoice.
- (b) Interest on all amounts due under this Paragraph 3.13 shall be payable by the paying **CUSC Party** to the other on such amounts from the date of payment applicable to the month concerned until the date of actual payment of such amounts and such interest shall be calculated on a daily basis at a rate equal to the **Base Rate** during such period.

3.13.7 Final Reconciliation Statement

- (a) **The Company** shall as soon as reasonably practicable following receipt by it of the **Final Reconciliation Settlement Run** or **Final Reconciliation Volume Allocation Run** as appropriate in respect of the last **Settlement Day** in each **Financial Year** issue a further **Demand** and **FDSC** and **Unmetered Supply Volume** reconciliation statement (the “**Final Demand Reconciliation Statement**”) in respect of **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** payable in respect of each month of that **Financial Year** showing:-

- (i) any change in the **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** from those specified in the **Initial Demand Reconciliation Statement** provided in accordance with Paragraph 3.13.4;
  - (ii) whether the change represents a reconciliation payment owing by **The Company** to a **User** or by a **User** to **The Company**;
  - (iii) the amount of interest determined in accordance with Paragraph 3.13.6 above; and
  - (iv) the information from which the amounts in (i) above are derived and the manner of their calculation.
- (b) Together with the **Final Demand Reconciliation Statement** **The Company** shall issue a credit note in relation to any sum shown in the **Final Demand Reconciliation Statement** to be due to the **User** or an invoice in respect of sums due to **The Company** and in each case interest thereon calculated pursuant to Paragraph 3.13.6.
- (c) Payment of any invoice issued pursuant to Paragraph 3.13.7(b) above or the application of any credit note issued pursuant to that paragraph against any liability of the **User** to **The Company** for **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** will be in full and final settlement of all **Demand** and **FDSC** and **Unmetered Supply Volume** related **Transmission Network Use of System Charges** for the **Financial Year** to which the invoice or credit note relates provided that nothing in this Paragraph 3.13.8(c) shall affect the rights of the parties under the provisions of Paragraph 7.3.5.

3.13.8 The right to submit **Generation Reconciliation Statements**, **Initial Demand Reconciliation Statements** and **Final Demand Reconciliation Statements** and the consequential invoices and/or credit notes shall survive the termination of the **User's** rights under the **CUSC** and the parties agree that the provisions contained in Paragraphs 3.13 and 3.14 shall continue to bind them after such termination (the version in existence at the date of termination being the applicable version in the case of any amendments).

### 3.14 REVISION OF CHARGES

3.14.1 Pursuant to the **ESO Licence** and/or the **CUSC** and/or the



**Charging Statements** and/or the **Bilateral Agreements** **The Company** may revise its **Transmission Network Use of System Charges** or the basis of their calculation. Where **The Company** proposes a change to the **Transmission Network Use of System Charges** then it shall notify the **User** as soon as practicable after the proposal is made to the **Authority** pursuant to the **ESO Licence**.

- 3.14.2 The **User** acknowledges that due to the timescales associated with the replacement of the **Pooling and Settlement Agreement** with the **Balancing and Settlement Code**, **The Company** was prevented from providing the **User** with notice pursuant to Clause 2.1 of Part 1 of Appendix E (as in force on the day prior to the **NETA Go-live Date**) of the basis of calculation of **Transmission Network Use of System Charges** from the **NETA Go-live Date** until the end of the **Financial Year** in which the **NETA Go-live Date** occurred. However, the **User** further acknowledges that **The Company** consulted with the **User** prior to the **NETA Go-live Date** on **Transmission Network Use of System Charges** to apply from the **NETA Go-live Date** until the end of the **Financial Year** in which the **NETA Go-live Date** occurred. The **User** hereby agrees to pay **Transmission Network Use of System Charges** in respect of the **Financial Year** in which the **NETA Go-live Date** occurred in accordance with the principles notified by **The Company** prior to the **NETA Go-live Date**.
- 3.14.3 Subject to paragraph 3.14.4 below, **The Company** shall give the **User** not less than two months prior written notice of any revised **Transmission Network Use of System Charges**, which notice shall specify the date upon which such revisions become effective (which may be at any time) and will make reference to the new tariffs set out in the relevant **Charging Statements**. The **User** shall pay any such revised charges from the effective date.
- 3.14.4 Where in accordance with the **ESO Licence**, the **Authority** determines a shorter period than 2 months for the implementation of revised charges, the notice period will be determined by the **Authority**. The notice will specify when the new charges are effective and the **User** shall pay any such revised charges from the effective date.
- 3.14.5 Where a **User's** connection to the **National Electricity Transmission System** involves the connection of an **Offshore Transmission System** to a **Distribution System**, **The Company** shall notify the **User** as soon as practicable in the event that **The Company** receives notice from the **ET Interface Operator** of a change in the charges to **The Company** which would require a change in the **ET Use of System Charges**. **The Company** shall advise the **User** of the resultant revision to the **ET Use of System Charges** and the date upon which such revision shall become effective.

### 3.15 FORECAST OF TRANSMISSION NETWORK USE OF SYSTEM CHARGES

- 3.15.1 Each **Financial Year The Company** shall prepare and update its forecast of **Transmission Network Use of System Charges** in accordance with the **TNUos Tariff Forecast Timetable**.

### PART IIC - BALANCING SERVICES USE OF SYSTEM CHARGES

### 3.16 INTRODUCTION

- 3.16.1 Under the terms of the **CUSC** each **User** except in the case of **Distribution Interconnector Owners** is liable to pay **Balancing Services Use of System Charges**. The basis upon which **Balancing Services Use of System Charges** are levied and the calculation methodology and rules which will be used to quantify those charges are set out in the **Statement of the Use of System Charging Methodology**.

3.16.2 Balancing Services Use of System Charges

Notwithstanding the provisions of Paragraphs 6.6.1 and 6.6.2 the following provisions shall apply to the payment of the **Balancing Services Use of System Charges**.

- (a) **The Company** shall not later than 17.00 hours on the relevant **Notification Date** (and if this is not practicable as soon as possible thereafter as **The Company**, acting reasonably, considers is practicable) despatch an advice notice to the **User** in respect of the **Settlement Day** in relation to which the **Balancing Services Use of System Charges** are due on the relevant **Payment Date**.
- (b) The information on the advice notice in respect of each **Settlement Day** shall include the name of the **User** and the total amount payable to **The Company** in respect of **Balancing Services Use of System Charges** and in all cases together with any **Value Added Tax** thereon during each **Settlement Day**.
- (c) **The Company** shall, within a reasonable time thereafter provide a valid **Value Added Tax** invoice in respect of **Balancing Services Use of System Charges** identified on the advice note.
- (d) The **User** shall pay the **Balancing Services Use of System Charges** specified in the advice notice together with the **Value Added Tax** thereon to **The Company** no later than 12.30 hours on the **Payment Date** specified on

the advice note in respect of such **Settlement Date** as if they were payments made in the manner specified in Paragraph 6.6.3.

### 3.16.3 **Balancing Services Use of System Charges Information**

3.16.3.1 **The Company** shall use reasonable endeavours to publish no later than the last **Business Day** in each month the **Balancing Services Use of System (BSUoS) charges Forecast Information**

3.16.3.2 The **Balancing Services Use of System Charges Forecast Information** will include:

- (a) estimated **BSUoS** volumes
- (b) estimated external **BSUoS** costs
- (c) estimated internal **BSUoS** costs
- (d) estimated average **BSUoS** charges in £/MWh
- (e) incentive scheme performance where applicable

The Company will engage with industry participants to discuss assumptions and provide information to explain and support any changes to previously published **Balancing Services Use of System Charges Forecast Information**.

3.16.3.3 Each update shall be based on the latest information for items which **The Company** reasonably expects to make a material impact to the expected **Balancing Services Use of System Charges**.

## 3.17 **RECONCILIATION**

3.17.1 As soon as reasonably practicable after receipt by **The Company** of the **Final Reconciliation Volume Allocation Run** in respect of a **Settlement Day** **The Company** shall prepare and submit to each **User** a statement (which may form part of an invoice or other document) calculated in accordance with the data specified in the **Statement of the Use of System Charging Methodology** in respect of that **Settlement Day** ("**Balancing Services Use of System Reconciliation Statement**"), showing the new value (if any) of data (as specified in the **Statement of the Use of System Charging Methodology** in force on that **Settlement Day**) attributable to the **User** in respect of such **Settlement Day** and the amount of **Balancing Services Use of System Charges** payable by the **User** on the basis of the new value (the "**Reconciled Charge**").

## 3.17.2 In the event that:

- (a) the **Reconciled Charge** exceeds the **Balancing Services Use of System Charges** paid by the **User** in respect of that **Settlement Day** ("**Initial Charge**") **The Company** shall at its option either:
  - (i) send to the **User** as soon as reasonably practicable after issue of the **Balancing Services Use of System Reconciliation Statement** an invoice for the amount by which the **Reconciled Charge** exceeds the **Initial Charge** and interest thereon calculated in accordance with the provisions set out in Paragraph 3.17.3; or
  - (ii) include such amount in another invoice in respect of **Balancing Services Use of System Charges** to the **User**.
- (b) the **Reconciled Charge** is less than the **Initial Charge** **The Company** shall at its option either:-
  - (i) send to the **User** as soon as reasonably practicable after issue of the **Balancing Services Use of System Reconciliation Statement** a credit note for the amount by which the **Initial Charge** exceeds the **Reconciled Charge** and interest thereon calculated in accordance with the provisions set out in Paragraph 3.17.3; or
  - (ii) include such amount as a credit in an invoice in respect of **Balancing Services Use of System Charges** from **The Company** to the **User**.

3.17.3 Interest payable in respect of each reconciliation payment shall accrue from and including the relevant **Use of System Payment Date** up to but excluding the date upon which the amounts specified in the **Balancing Services Use of System Reconciliation Statement** are paid, and shall be at a rate equal to the **Base Rate** for the time being and from time to time. Interest shall accrue from day to day.

3.17.4 If **The Company** receives written notice from any **User** or from the relevant **BSC Agent** that an error has occurred in any data forming part of or used within the **Initial Volume Allocation Run** which affects the costs to **The Company** of offers and bids in the **Balancing Mechanism** accepted by **The Company** in respect of any **Settlement Day**, and that error has been ratified in accordance with the procedures for ratification set out in the **Balancing and Settlement Code** it shall use its reasonable endeavours to, as soon as reasonably practicable after receipt of such notice, issue a dispute reconciliation statement ("**Dispute**

**Statement**") to the **User** in respect of that **Settlement Day**.

3.17.5 Any **Dispute Statement** issued pursuant to Paragraph 3.17.4 above shall show the amount of **Balancing Services Use of System Charges** payable by the **User** on the basis of the ratified data.

3.17.6

(a) In the event that the amount shown in any **Dispute Statement** exceeds the aggregate amount paid by the **User** in respect of the **Settlement Day** to which the **Dispute Statement** relates under any invoices issued pursuant to Paragraph 3.16.2 and Paragraph 3.17.2 above (after taking into account any credit notes issued) **The Company** shall submit to the **User** a further invoice for such excess and interest thereon calculated in accordance with Paragraph 3.17.3;

(b) In the event that the amount shown in any **Dispute Statement** is less than the aggregate amount paid by the **User** in respect of the **Settlement Day** to which the **Dispute Statement** relates under any invoices issued pursuant to Paragraph 3.16.2 and Paragraph 3.17.2 above (after taking into account any credit notes issued) **The Company** shall submit to the **User** a credit note for the amount by which the amount paid exceeds the amount shown in the **Dispute Statement** together with interest thereon calculated in accordance with Paragraph 3.17.3.

3.17.7 If at any time prior to receipt by **The Company** of the **Final Reconciliation Volume Allocation Run** in respect of a **Settlement Day** **The Company** receives written notice from any **User** or the relevant **BSC Agent** of an error occurring in any data forming part of or used within the **Initial Volume Allocation Run** or the **Reconciliation Volume Allocation Run** which in either case affects the data (as specified in the **Statement of the Use of System Charging Methodology**) used in the calculation of **Balancing Services Use of System Charges** for that **Settlement Day**, which error:-

(a) is not taken into account in the **Final Reconciliation Volume Allocation Run**; and

(b) has been ratified in accordance with the procedures for ratification set out in the **Balancing and Settlement Code**,

then **The Company** shall use its reasonable endeavours to prepare the **Balancing Services Use of System Reconciliation Statement** on the basis of the ratified data.

- 3.18 The right to submit **Balancing Services Use of System Reconciliation Statements** and **Dispute Statements** and the consequential invoices and/or credit notes shall survive the termination of the **User's** rights under the **CUSC** and the parties agree that the provisions of this Part II shall remain in full force and effect and shall continue to bind them after such termination (the version in existence as at the date of termination being the applicable version, in the case of any amendments).
- 3.19 **The Company** and each **User** hereby agree and acknowledge that the provisions of Part IIC will apply to all **Balancing Services Use of System Charges** payable in respect of any **Settlement Day** on or after the **NETA Go-live Date**. The provisions of Paragraphs 1.1 to 1.6 inclusive of Part 2 of the form of Appendix E in force on the day prior to the **NETA Go-live Date** shall continue to apply *mutatis mutandis* to all **Transmission Services Use of System Charges** payable in respect of any **Settlement Day** up to the **NETA Go-live Date**.

### 3.20 RECONCILIATION PAYMENTS

Each **User**, or as the case may be, **The Company**, shall pay the amounts set out in any invoice or credit note issued pursuant to Paragraphs 3.16.2 or 3.15.6 respectively above, either in accordance with the applicable requirements for payment of other sums due under that invoice in the case of sums shown in an invoice also dealing with other payments, or in other cases within 5 **Business Days** of the date of the **Balancing Services Use of System Reconciliation Statement or Dispute Statement** as appropriate.

### 3.21 REVISION OF CHARGES

- 3.21.1 Subject to Paragraph 3.21.2 below, **The Company** shall give the **User** not less than 2 months prior written notice of any revision to the **Statement of the Use of System Charging Methodology** which will affect the application and calculation of the **Balancing Services Use of System Charges**, which notice shall specify the date upon which such revisions become effective (which may be at any time). The **User** shall pay any such revised charges with effect from the date specified in such notice.
- 3.21.2 Where in accordance with the **ESO Licence**, the **Authority** determines a shorter period than two months for the implementation of a revision to the charges which will affect the application and calculation of the **Balancing Services Use of System Charge**, the notice period will be determined by the **Authority**. The notice will specify when the revision is effective and the **User** shall pay any such revised charges with effect from the date specified in such notice.

## **PART III - CREDIT REQUIREMENTS**

### **3.22 BSUOS CHARGES AND TNUOS DEMAND CHARGES: PROVISION OF SECURITY COVER**

- 3.22.1 Each **User** required to pay **Use of System Charges** shall provide **Security Cover** for **Balancing Services Use of System Charges** and **Transmission Network Use of System Demand Charges** from time to time in accordance with this Part III.
- 3.22.2 Each such **User** shall not later than the date of its accession to the **CUSC Framework Agreement** deliver to **The Company** evidence reasonably satisfactory:-
- (a) to establish the **User's Allowed Credit**; and
  - (b) if required, that it has provided and is not in default under the **Security Cover** referred to in Paragraph 3.22.3 below.
- 3.22.3 The User shall be required to provide **Security Cover** where its **Security Requirement** exceeds its **User's Allowed Credit**. If such **User** is required to provide **Security Cover** it shall, not later than the date of:-
- (a) the date of its becoming a party to the **CUSC Framework Agreement**; or
  - (b) two **Business Days** after **The Company** notifies the **User** in writing that the **Security Cover** required exceeds the **Security Amount** provided; or
  - (c) where and to the extent that the amount of **Security Cover** required exceeds the **Security Amount** provided as a result of a **User's** revised forecast given in accordance with Paragraph 3.10 within one month of such revised forecast being provided to **The Company**:-
    - (i) deliver to **The Company** a **Qualifying Guarantee** in such amount as shall be notified by **The Company** to the **User** in accordance with Paragraph 3.23; and/or
    - (ii) deliver to **The Company** a **Letter of Credit** (available for an initial period of not less than 6 months) in such amount as shall be notified by **The Company** to the **User** in accordance with Paragraph 3.23; and/or
    - (iii) deliver to **The Company** cash for credit to the **Escrow Account** in such amount as shall be notified by **The Company** in accordance with Paragraph 3.23; and/or
    - (iv) deliver to **The Company** a **Bilateral Insurance Policy** in such an amount as shall be notified by **The**

**Company** to the **User** in accordance with Paragraph 3.23; and/or

- (v) deliver to **The Company** an **Insurance Performance Bond** in such an amount as shall be notified by **The Company** to the **User** in accordance with Paragraph 3.23; and/or
- (vi) delivery to **The Company** an **Independent Security Arrangement** in such an amount as shall be notified by **The Company** to the **User** in accordance with Paragraph 3.23.

3.22.4 The provisions of this Part III shall be in addition to any other requirements to provide security in respect of any other sums due under the terms of the **CUSC** or any **Bilateral Agreement** or **Construction Agreement**.

3.22.5 Maintenance of Security Cover

Where a **User** is required to provide **Security Cover** in accordance with the terms of this Paragraph 3.22 it shall at all times thereafter maintain a **Security Amount** equal to or more than the **Security Cover** applicable to it. Immediately upon any reduction occurring in the **Security Amount** provided by the **User** or any **Letter of Credit** or **Qualifying Guarantee** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** being for any reason drawn down or demanded respectively, the **User** will procure that new **Letters of Credit** or **Qualifying Guarantees** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** are issued or existing **Letters of Credit** or **Qualifying Guarantees** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** are reinstated (to the satisfaction of **The Company**) to their full value or cash is placed to the credit of the **Escrow Account** in an amount required to restore the **Security Amount** to an amount at least equal to the **Security Cover** applicable to the **User**, and in such proportions of **Letters of Credit**, **Qualifying Guarantees** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** and/or cash as the **User** may determine. Not later than 10 **Business Days** before any outstanding **Letter of Credit** and/or **Qualifying Guarantee** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** is due to expire, the **User** shall procure to the satisfaction of **The Company** that its required **Security Amount** will be available for a further period of not less than 6 months which may be done in one of the following ways:-



- (a) subject to the issuing bank continuing to have an **Approved Credit Rating** for an amount at least equal to the required **Security Amount** applicable to it (less the balance of deposits on the **Escrow Account** in respect of the **Security Amount**) provide **The Company** with confirmation from the issuing bank that the validity of the **Letter of Credit** has been extended for a period of not less than 6 months on the same terms and otherwise for such amount as is required by this Part III; or
- (b) provide **The Company** with a new **Letter of Credit** issued by an issuing bank with an **Approved Credit Rating** for an amount at least equal to the required **Security Amount** applicable to it (less the balance of deposits on the **Escrow Account** in respect of the **Security Amount**) which **Letter of Credit** shall be available for a period of not less than 6 months; or
- (c) subject to the entity issuing the **Qualifying Guarantee** continuing to have an **Approved Credit Rating** or **Credit Assessment Score** for an amount at least equal to the required **Security Amount** applicable to it (less the balance of deposits on the **Escrow Account** in respect of the **Security Amount**) provide **The Company** with confirmation from the issuing entity that the validity of the **Qualifying Guarantee** has been extended for a period of not less than 6 months on the same terms and otherwise for such amount as is required by this Part III; or
- (d) provide **The Company** with a new **Qualifying Guarantee** for an amount at least equal to the required **Security Amount** applicable to it (less the its balance of deposits on the **Escrow Account** in respect of the **Security Amount**) which **Qualifying Guarantee** shall be available for a period of not less than 6 months; or
- (e) procure such transfer to **The Company** for credit to the **Escrow Account** of an amount as shall ensure that the credit balance applicable to the **User** and standing to the credit of the **Escrow Account** shall be at least equal to the required **Security Amount**; or
- (f) subject to the entity issuing the **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** continuing to meet the **Requirements** provide **The Company** with confirmation from the issuing entity that the validity of the **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** has been extended for a period of not less than 6 months on the same terms

and otherwise for such amount as is required by this Part III; or

- (g) provide **The Company** with a new **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** for an amount at least equal to the required **Security Amount** applicable to it (less the balance of deposits on the **Escrow Account** in respect of the **Security Amount**) which **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** shall be available for a period of not less than 6 months.

#### 3.22.6 Failure to supply or maintain Security Cover

If the **User** fails at any time to provide or maintain **Security Cover** to the satisfaction of **The Company** in accordance with the provisions of this Part III, **The Company** may at any time while such default continues, and if at such time any **Letter of Credit** and/or **Qualifying Guarantee** and/or **Bilateral Insurance Policy** and/or **Insurance Performance Bond** and/or **Independent Security Arrangement** forming part of the **Security Amount** is due to expire within 9 **Business Days** immediately, and without notice to the **User**, demand payment of the entire amount of any outstanding **Letter of Credit** and/or **Qualifying Guarantee** and/or **Bilateral Insurance Policy** and/or **Insurance Performance Bond** and/or **Independent Security Arrangement** and shall credit the proceeds of the **Letter of Credit** and/or **Qualifying Guarantee** and/or **Bilateral Insurance Policy** and/or **Insurance Performance Bond** and/or **Independent Security Arrangement** to the **Escrow Account**.

#### 3.22.7 Substitute Letter of Credit or Qualifying Guarantee

- (a) If the bank issuing the **User's Letter of Credit** ceases to have the credit rating set out in the definition of **Letter of Credit** in this **CUSC** such **User** shall forthwith procure the issue of a substitute **Letter of Credit** by a bank that has such a credit rating or a **Qualifying Guarantee** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** or transfer to **The Company** cash to be credited to the **Escrow Account**.
- (b) If the entity providing the **User's Qualifying Guarantee** ceases to have an **Approved Credit Rating** or **Credit Assessment Score** for an amount at least equal to the required **Security Amount** (less the balance of the **User's** deposits on the **Escrow Account** in respect of the **Security Amount**) the **User** shall forthwith procure a replacement **Qualifying Guarantee** from an entity with such a credit

rating or a **Letter of Credit** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** or transfer to **The Company** cash to be credited to the **Escrow Account**.

- (c) If the entity providing the **User's Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** ceases to meet the **Requirements** the **User** shall forthwith procure a replacement of the same or a **Bilateral Insurance Policy**, **Insurance Performance Bond**, **Independent Security Arrangement**, **Letter of Credit**, **Qualifying Guarantee** or transfer to **The Company** cash to be credited to the **Escrow Account** in respect of the **Security Amount**.

### 3.23 CREDIT MONITORING

#### 3.23.1 Determination of Security Cover

The amount of **Security Cover** which the **User** shall be required to maintain shall be determined from time to time by **The Company** as the **User's Security Requirement** less the **User's Allowed Credit**.

#### 3.23.2 Determination of Security Requirement

The **Security Requirement** for each User shall be determined as:-

- (a) the **Balancing Services Use of System Charges** provided for in the **CUSC**, where the **User** is a **Supplier**, over a 32 day period or such period as **The Company** acting reasonably shall specify to the **User** in writing from time to time taking into account the requirements for **Security Cover** contained in the **Balancing and Settlement Code** and where **The Company** proposes to change such period **The Company** shall consult with **Users**; and
- (b) the **Balancing Services Use of System Charges** provided for in the **CUSC**, where the **User** is a **Generator**, over a 29 day period or such period as **The Company** acting reasonably shall specify to the **User** in writing from time to time taking into account the requirements for **Security Cover** contained in the **Balancing and Settlement Code** and where **The Company** proposes to change such period **The Company** shall consult with **Users**; and

- (c) in relation to **Transmission Network Use of System Demand Charges** calculated in the following manner for each **Security Period**:-
  - (aa) in the **Financial Year** in which such charges first become due the greater of zero and the **User's Base Value at Risk**; and
  - (bb) in the case of subsequent **Financial Years** the greater of zero and the sum of (i) the **User's Base Value at Risk** and (ii) the **User's Forecasting Performance Related VAR**.
- (d) interest on the amounts referred to in (a), (b) and (c) above calculated in accordance with the provisions of this **CUSC**.
- (e) any applicable **Value Added Tax** that would be due on the amounts referred to in this Paragraph 3.23.2

3.23.3 Calculation of **HH Base Value at Risk**

For each **Security Period**, the sum equal to the **HH Base Percentage** of the **User's Indicative Annual HH TNUoS Charge** calculated on the basis of the latest **Demand Forecast** received by **The Company**.

3.23.4 Calculation of **NHH Base Value at Risk**

For each **Security Period**, the sum equal to the **NHH Base Percentage** of the **User's Indicative Annual NHH TNUoS Charge** calculated on the basis of the latest **Demand Forecast** received by **The Company**.

3.23.4a Calculation of **FDSC Base Value at Risk**

For each **Security Period**, the sum equal to the **FDSC Base Percentage** of the **User's Indicative Annual FDSC TNUoS Charge** calculated by **The Company** on the basis of the latest **FDSC Forecast** produced by **The Company**.

3.23.4b Calculation of **UMS Base Value at Risk**

For each **Security Period**, the sum equal to the **UMS Base Percentage** of the **User's Indicative Annual UMS TNUoS Charge** calculated by **The Company** on the basis of the latest **Unmetered Supply Volume Forecast** produced by **The Company**.

3.23.5 Notification of **Deemed HH Forecasting Performance**

Following the issue of the **Initial Demand Reconciliation Statement** in respect of the previous **Financial Year**, **The Company** shall notify the **User**, of the **Deemed HH Forecasting Performance** to be used in the calculation of the **User's HH Performance Related Var**. Such notice shall be given at least two months prior to the first of the **Security Periods** to which it relates.

#### 3.23.6 Notification of Deemed NHH Forecasting Performance

Following the issue of the **Initial Demand Reconciliation Statement** in respect of the previous **Financial Year**, **The Company** shall notify the **User**, of the **Deemed NHH Forecasting Performance** to be used in the calculation of the **User's NHH Performance Related Var**. Such notice shall be given at least two months prior to the first of the **Security Periods** to which it relates.

#### 3.23.7 Revision of Deemed HH Forecasting Performance

If the **User** has experienced a significant increase in the amount of **Demand** taken by its **Customers** during the last five months of the previous **Financial Year** and believes that this has had a significant effect on their **Deemed HH Forecasting Performance**, then no later than one month from the date of the notification given to the **User** under paragraph 3.23.5, the **User** may request that **The Company** revises the **Deemed HH Forecasting Performance**. Upon raising such a request, the **User** must provide information to **The Company** relating to the size of the reported **Demand** increase and the **Reported Period(s) of Increase**. Where for any **Reported Period of Increase** the resulting increase in **Demand** equates to a level that is in excess of one percent of the **Actual Amount of HH Charges** in respect of the previous **Financial Year**, **The Company** shall, within one month of receiving such a request, recalculate the **Deemed HH Forecasting Performance** on the basis set out in Appendix 2 Paragraph 4. A **User** shall not be entitled to raise more than one request by reference to any period or part period covered in another **Reported Period of Increase** in respect of which a request has been raised under this Paragraph.

#### 3.23.8 Revision of Deemed NHH Forecasting Performance

If the **User** has experienced a significant increase in the amount of **Demand** taken by its **Customers** during the last five months of the previous **Financial Year** and believes that this has had a significant effect on their **Deemed NHH Forecasting Performance**, then no later than one month from the date of the

notification given to the **User** under paragraph 3.23.6, the **User** may request that **The Company** revises the **Deemed NHH Forecasting Performance**. Upon raising such a request, the **User** must provide information to **The Company** relating to the size of the reported **Demand** increase and the **Reported Period(s) of Increase**. Where for any **Reported Period of Increase** the resulting increase in **Demand** equates to a level that is in excess of one percent of the **Actual Amount** of **NHH Charges** in respect of the previous **Financial Year**, **The Company** shall within one month of receiving such a request, recalculate the **Deemed NHH Forecasting Performance** on the basis set out in Appendix 2 Paragraph 7. A **User** shall not be entitled to raise more than one request by reference to any period or part period covered in another **Reported Period of Increase** in respect of which a request has been raised under this Paragraph.

#### 3.23.9 Review of Security Cover

**The Company** shall keep under review the **Security Cover** relating to the **User** and shall promptly advise the **User** whenever the **Security Amount** maintained by the **User** is more or less than the amount required to be maintained pursuant to this Paragraph 3.23.

#### 3.23.10 Decrease of Security Cover

If **The Company** reasonably determines that the **User's** required **Security Cover** has decreased, it shall so notify the **User**. **The Company** shall consent to an appropriate reduction in the available amount of any outstanding **Qualifying Guarantee** or **Letter of Credit** or **Bilateral Insurance Policy** or **Insurance Performance Bond** or **Independent Security Arrangement** and/or shall repay to the **User** such part of the deposit held in the **Escrow Account** in respect of the **Security Cover** for the account of the **User** (together with all accrued interest on the part to be repaid) sufficient to reduce the **User's Security Amount** to the level of **Security Cover** applicable to it within 5 **Business Days** of the **User's** consent.

#### 3.23.11 Notification in respect of Security Cover

**The Company** shall notify each **User** promptly if:-

- (a) that **User** fails to provide, maintain, extend or renew a **Qualifying Guarantee** or a **Letter of Credit** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** which it is required to provide, maintain, extend or renew pursuant to Paragraphs 3.22 or 3.23 inclusive;

- (b) **The Company** shall make a demand under any such **Qualifying Guarantee** or a call under a **Letter of Credit** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement**; or
- (c) **The Company** becomes aware that that **User**:
  - (i) shall cease to have an **Approved Credit Rating** or shall cease to have an **Approved Credit Rating** for an amount at least equal to the **User's Security Requirement**, or
  - (ii) shall be placed on a credit watch by the relevant credit rating agency (or becomes subject to an equivalent procedure) which in any case casts doubt on the **User** retaining an **Approved Credit Rating** or an **Approved Credit Rating** for an amount at least equal to the **User's Security Requirement** or maintaining the **Credit Assessment Score** given by the **User's Independent Credit Assessment**, or
  - (iii) shall be in default under the additional or alternative security required to be provided pursuant to this Part III; or
- (f) **The Company** becomes aware that any bank that has issued a **Letter of Credit** in relation to that **User** which has not expired shall cease to have the credit rating required by this Section; or
- (g) **The Company** becomes aware that any entity providing a **Qualifying Guarantee** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** in relation to that **User** which has not expired shall cease to meet the **Requirements** in the case of a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** or in the case of a **Qualifying Guarantee** cease to have an **Approved Credit Rating** or **Credit Assessment Score** for an amount at least equal to the required **Security Amount** (less its balance of deposits on the **Escrow Account** in respect of the **Security Amount**); or
- (h) **The Company** becomes aware that the **User's Security Requirement** exceeds 85% of the **User's Allowed Credit**.

Provided always that the failure by **The Company** to notify the **User** pursuant to Paragraphs 3.23.9, 3.23.10 or 3.23.11 shall not

relieve the **User** of its obligations under and in accordance with the terms of this Section 3 and the **Charging Statements**.

### 3.23.12 Release from Security Cover Obligations

Upon a **User** becoming a **Dormant CUSC Party** or ceasing to be a **CUSC Party** and provided that all amounts owed by the **User** in respect of **Balancing Services Use of System Charges** and **Transmission Network Use of System Demand Charges** have been duly and finally paid and that it is not otherwise in default in any respect of any **Balancing Services Use of System Charges** or **Transmission Network Use of System Demand Charges** (including in each case interest) payable under the **CUSC**, the **User** shall be released from the obligation to maintain **Security Cover** and **The Company** shall consent to the revocation of any outstanding **Qualifying Guarantee** or **Letter of Credit** or a **Bilateral Insurance Policy** or an **Insurance Performance Bond** or an **Independent Security Arrangement** and shall repay to the **User** the balance of deposits standing to the credit of the **User** on the **Escrow Account** in respect of the **Security Amount** (including interest accruing thereto, whether held in the **Escrow Account** or any associated bank account in the name of **The Company**) at that date.

## 3.24 PAYMENT DEFAULT

If, by 12.30 hours on any **Use of System Payment Date**, **The Company** has been notified by a **User** or it otherwise has reason to believe that that **User** will not have remitted to it by close of banking business on the **Use of System Payment Date** all or any part ("the amount in default") of any amount which has been notified by **The Company** to the **User** as being payable by the **User** by way of either the **Balancing Services Use of System Charges** and/or **Transmission Network Use of System Demand Charges** on the relevant **Use of System Payment Date**, then **The Company** shall be entitled to act in accordance with the following provisions (or whichever of them shall apply) in the order in which they appear until **The Company** is satisfied that the **User** has discharged its obligations in respect of the **Balancing Services Use of System Charges** and/or **Transmission Network Use of System Demand Charges** (as appropriate) under the **CUSC** which are payable in respect of the relevant **Settlement Day** (in the case of **Balancing Services Use of System Charges**) or **Financial Year** (in the case of **Transmission Network Use of System Demand Charges**):-

- (a) **The Company** may to the extent that the **User** is entitled to receive payment from **The Company** pursuant to the **CUSC** (unless it reasonably believes that such set-off shall be unlawful) set off the amount of such entitlement against the amount in default;



- (b) **The Company** shall be entitled to set off the amount of funds then standing to the credit of the **Escrow Account** against **Balancing Services Use of System Charges** and/or **Transmission Network Use of System Demand Charges** (as appropriate) unpaid by the **User** and for that purpose **The Company** shall be entitled to transfer any such amount from the **Escrow Account** to any other account of **The Company** at its absolute discretion and shall notify the **User** accordingly;
- (c) **The Company** may demand payment under any outstanding **Letter of Credit** supplied by the **User** in a sum not exceeding the available amount of all such **Letters of Credit**;
- (d) **The Company** may demand payment under any outstanding **Qualifying Guarantee** provided for the benefit of the **User** pursuant to Paragraph 3.22.3(b);
- (e) **The Company** may demand payment under any outstanding **Bilateral Insurance Policy** provided for the benefit of the **User**;
- (f) **The Company** may demand payment under any outstanding **Insurance Performance Bond** provided for the benefit of the **User**;
- (i) **The Company** may demand payment under any outstanding **Independent Security Arrangement** provided for the benefit of the **User**.

### 3.25 UTILISATION OF FUNDS

In addition to the provisions of Paragraph 3.24 above if **The Company** serves a notice of default under the terms of Paragraph 5.5 or a notice of termination under Paragraph 5.7 then **The Company** shall be entitled to demand payment of any of the **Balancing Services Use of System Charges** and/or **Transmission Network Use of System Demand Charges** which are outstanding from the relevant **User** whether or not the **Use of System Payment Date** in respect of them shall have passed and:-

- (a) make demand under any outstanding **Qualifying Guarantee** or a call under any outstanding **Letter of Credit**, **Bilateral Insurance Policy**, **Insurance Performance Bond** or **Independent Security Arrangement** supplied by the **User**; and
- (b) to set off the funds in the **Escrow Account** against **Balancing Services Use of System Charges** and/or **Transmission Network Use of System Demand Charges** unpaid by the **User** and for that purpose **The Company** shall be entitled to transfer any such amount from the **Escrow Account** to any other account of **The Company** as it shall in its sole discretion think fit.

- 3.25A For the avoidance of doubt, the **User's** cash deposit in the **Escrow Account** shall remain the sole property and entitlement of the **User** until such time when (and to such extent as) the **Company** exercises its right of set off against the **User's** cash deposit in accordance with the terms of the **CUSC**, and the **User** shall have no right to have the cash deposit returned to it for so long as it is under any prospective or contingent liability to the **Company**.

### 3.26 **USER'S RIGHT TO WITHDRAW FUNDS**

If a **User** is not in default in respect of any amount owed to **The Company** in respect of the **Balancing Services Use of System Charges** or **Transmission Network Use of System Charges** under the terms of the **CUSC** and any **Bilateral Agreement** to which the **User** is a party:-

- (a) **The Company** shall transfer to the **User** quarterly interest accruing in respect of deposits of principal sums from the **User** in the **Escrow Account** (whether held in the **Escrow Account** or any associated bank account in the name of **The Company**); and
- (b) **The Company** shall transfer to such **User** within a reasonable time after such **User's** written request therefor any amount of cash provided by the **User** by way of **Security Cover** which exceeds the amount which such **User** is required to provide by way of security in accordance with this Part III.

### 3.27 **USER'S ALLOWED CREDIT**

3.27.1 Each **User** shall notify **The Company** promptly if:-

- (a) it gains an **Approved Credit Rating**; or
- (b) it ceases to have an **Approved Credit Rating**; or
- (c) where the **User** holds an **Approved Credit Rating**, its specific investment grading changes; or
- (d) it has reason to believe that its **Credit Assessment Score** is likely to have changed since the last **Independent Credit Assessment**.

3.27.2 The **User's Allowed Credit** extended by **The Company** at any time to **User** with an **Approved Credit Rating** shall be calculated in accordance with Paragraph 1 of Appendix 1 of this Section 3 subject to a maximum value of the **Unsecured Credit Cover**.

3.27.3 The **User's Allowed Credit** extended by **The Company** at any time to each **User** without an **Approved Credit Rating** shall be at the choice of the **User** the **Payment Record Sum** or the **Credit Assessment Sum**.

3.27.4 Unless the **User** has notified **The Company** that it wishes its **User's Allowed Credit** to be based on the **Credit Assessment Sum** then,

subject to Paragraph 3.27.5, for each successive month in which the **User** pays its **Use of System Charges** by the **Use of System Payment Date** then the **User's Allowed Credit** extended to such **User** at any time shall be calculated in accordance with Paragraph 2 of Appendix 1 of this Section 3.

- 3.27.5 Where a **User** fails to pay its **Use of System Charges** within 2 **Business Days** of the **Use of System Payment Date** its **Payment Record Sum** shall be reduced by 50% on the first such occasion within a twelve month period and shall be reduced to zero on the second occasion in such twelve month period. Upon any such failure to pay, the **User's Allowed Credit** (as adjusted following such failure in accordance with this clause) shall be calculated for successive months in accordance with Paragraph 3.27.4.
- 3.27.6 Where a **User** has notified **The Company** that it wishes its **User's Allowed Credit** to be based on its **Credit Assessment Sum**, the **Credit Assessment Sum** extended to a **User** at any time shall be calculated be reference to the **Credit Assessment Score** given by the **Independent Credit Assessment** in accordance with Paragraph 3 of Appendix 1 of this Section 3.
- 3.27.7 Where a **User** has notified **The Company** that its wishes its **User's Allowed Credit** to be based on the **Credit Assessment Sum** then the **User** will obtain an **Independent Credit Assessment** of that **User**. The first such **Independent Credit Assessment** will be at **The Company's** cost.
- 3.27.8 Where a **User's Allowed Credit** is based on the **Credit Assessment Sum** then where **The Company** has reason to believe that the **Independent Credit Assessment** last obtained is likely to have changed then **The Company** shall be entitled to request the **User** to obtain a further **independent Credit Assessment**. Such **Independent Credit Assessment** shall be at **The Company's** cost.
- 3.27.9 The **User** may obtain an **Independent Credit Assessment** at **The Company's** cost provided that **The Company** has not paid for an earlier **Independent Credit Assessment** for that **User** within the previous 12 months. The **User** may obtain further **Independent Credit Assessments** within such a 12 month period at the **User's** cost.

### 3.28 TRANSITIONAL ARRANGEMENTS

- 3.28.1 Recognising the changes to the **Security Cover** and **Security Requirements** introduced by the **Security Amendment** and the consequences for **The Company** and **Users** then notwithstanding the provisions of **CUSC** Section 3 Part III the following transitional provisions shall apply:
- (a) the obligation for **Users** whose **Security Requirement** will as a result of the **Security Amendment** increase at the **Security**

**Amendment Implementation Date** shall be to provide the difference between the **Existing Security Cover** and the **Security Cover** in full by no later than the **End Date** and by increasing the **Existing Security Cover** each month by equal monthly amounts of the difference between the **existing Security Cover** and the **Security Cover**; and

- (b) where a **User's Security Requirement** at the **Security Amendment Implementation Date** is less than the **Existing Security Cover** held for that **User** then **The Company** shall release the **existing Security Cover** by the appropriate amount as soon as practicable and in any event within one calendar month of the **Security Amendment Implementation Date**.

3.28.2 Recognising the changes to the **Security Cover** and **Security Requirements** introduced by the **Value At Risk Amendment** and the consequences for **The Company** and **Users** then notwithstanding the provisions of **CUSC** Section 3 Part III the following transitional provisions shall apply:

- (a) Until the **Initial Demand Reconciliation Statement** has been issued for the **Financial Year** ending at least six months following the **Value At Risk Amendment Implementation Date**, and **The Company** has calculated the **Forecasting Performance Related VAR** by reference to this, each **User's Forecasting Performance Related VAR** shall be substituted by such percentage of **User's Transmission Network Use of System Demand Charges** as reflects the percentage difference between the **Actual Amount** and the **Notional Amount** of the **User's Transmission Network Use of System Demand Charges** for the previous **Financial Year**, provided that where the **Notional Amount** exceeds the **Actual Amount**, the percentage shall be zero;
- (b) the obligation for **Users** whose **Security Requirement** will increase at the **Value At Risk Amendment Implementation Date** as a result of the **Value At Risk Amendment** shall be to provide the difference between the **Pre-Value At Risk Amendment Security Cover** and the **Security Cover** in full by no later than the **Value At Risk Amendment Implementation End Date** and by increasing the **Pre-Value At Risk Amendment Security Cover** each month by equal monthly amounts of the difference between the **Pre-Value At Risk Amendment Security Cover** and the **Security Cover**; and
- (c) where a **User's Security Requirement** at the **Value At Risk Amendment Implementation Date** is less than the **Pre-Value At Risk Amendment Security Cover** held for that **User** then **The Company** shall release the **Pre-Value At Risk Amendment Security Cover** by the appropriate amount as soon as

practicable and in any event within one calendar month of the  
**Value At Risk Amendment Implementation Date.**

## APPENDIX 1 CREDIT ARRANGEMENTS

- 1 Where the **User** meets the **Approved Credit Rating** that **User's Allowed Credit** at any given time shall be calculated as a percentage of **Unsecured Credit Cover** by reference to the specific investment grade within the **User's Approved Credit Rating** as follows:

| Approved Long Term Credit Rating |                          |                         | User's Allowed Credit as % of Unsecured Credit Cover |
|----------------------------------|--------------------------|-------------------------|------------------------------------------------------|
| Standard & Poor's                | Moody's                  | Fitch                   |                                                      |
| AAA<br>AA+<br>AA<br>AA-          | Aaa<br>Aa1<br>Aa2<br>Aa3 | AAA<br>AA+<br>AA<br>AA- | 100                                                  |
| A+<br>A<br>A-                    | A1<br>A2<br>A3           | A+<br>A<br>A-           | 40                                                   |
| BBB+                             | Baa1                     | BBB+                    | 20                                                   |
| BBB                              | Baa2                     | BBB                     | 19                                                   |
| BBB-                             | Baa3                     | BBB-                    | 18                                                   |
| BB+                              | Ba1                      | BB+                     | 17                                                   |
| BB                               | Ba2                      | BB                      | 16                                                   |
| BB-                              | Ba3                      | BB-                     | 15                                                   |

- 2 Where based on the **Payment Record Sum**, a **User's Allowed Credit** at any time shall be calculated on the basis of 0.4% per 12 month period (escalating on an evenly graduated basis each month) of the **Unsecured Credit Cover**, subject to a maximum of 2% after 60 months of successive payment by the **Use of System Payment Date**.
- 3 Where based on the **Credit Assessment Sum**, a **User's Allowed Credit** at any given time shall be calculated as a percentage of the **Unsecured Credit Cover** by reference to the **Credit Assessment Score** as follows:

| Credit Assessment Score | User's Allowed Credit as % of Unsecured Credit Cover |
|-------------------------|------------------------------------------------------|
| 10                      | 20                                                   |
| 9                       | 19                                                   |
| 8                       | 18                                                   |
| 7                       | 17                                                   |
| 6                       | 16                                                   |
| 5                       | 15                                                   |
| 4                       | 13.33                                                |
| 3                       | 10                                                   |
| 2                       | 6.67                                                 |
| 1                       | 3.33                                                 |
| 0                       | 0                                                    |

## APPENDIX 2

### Base Value At Risk

1. For each **Security Period**, the **HH Base Percentage** used in determining the **User's HH Base Value at Risk** shall be determined by reference to the following:

| <b>Security Period Start Date (inclusive)</b> | <b>Security Period End Date (inclusive)</b> | <b>HH Base Percentage</b> |
|-----------------------------------------------|---------------------------------------------|---------------------------|
| 1 <sup>st</sup> April                         | 30 <sup>th</sup> June                       | -8.4%                     |
| 1 <sup>st</sup> July                          | 30 <sup>th</sup> September                  | -33.4%                    |
| 1 <sup>st</sup> October                       | 31 <sup>st</sup> December                   | -49.1%                    |
| 1 <sup>st</sup> January                       | 31 <sup>st</sup> March                      | 7.0%                      |

2. For each **Security Period**, the **NHH Base Percentage** used in determining the **User's NHH Base Value at Risk** shall be determined by reference to the following:

| <b>Security Period Start Date (inclusive)</b> | <b>Security Period End Date (inclusive)</b> | <b>(a) NHH Base Percentage</b> |
|-----------------------------------------------|---------------------------------------------|--------------------------------|
| 1 <sup>st</sup> April                         | 30 <sup>th</sup> June                       | (b) 4.3%                       |
| 1 <sup>st</sup> July                          | 30 <sup>th</sup> September                  | (c) -1.5%                      |
| 1 <sup>st</sup> October                       | 31 <sup>st</sup> December                   | (d) -2.8%                      |
| 1 <sup>st</sup> January                       | 31 <sup>st</sup> March                      | (e) 3.7%                       |

- 2A. For each **Security Period**, the **FDSC Base Percentage** used in determining the **User's FDSC Base Value at Risk** shall be determined by reference to the following:

| <b>Security Period Start Date (inclusive)</b> | <b>Security Period End Date (inclusive)</b> | <b>FDSC Base Percentage</b> |
|-----------------------------------------------|---------------------------------------------|-----------------------------|
| 1 <sup>st</sup> April                         | 30 <sup>th</sup> June                       | 5.0%                        |
| 1 <sup>st</sup> July                          | 30 <sup>th</sup> September                  | 5.0%                        |
| 1 <sup>st</sup> October                       | 31 <sup>st</sup> December                   | 5.0%                        |
| 1 <sup>st</sup> January                       | 31 <sup>st</sup> March                      | 5.0%                        |

- 2B. For each **Security Period**, the **UMS Base Percentage** used in determining the **User's UMS Base Value at Risk** shall be determined by reference to the following:

| <b>Security Period Start Date (inclusive)</b> | <b>Security Period End Date (inclusive)</b> | <b>UMS Base Percentage</b> |
|-----------------------------------------------|---------------------------------------------|----------------------------|
| 1 <sup>st</sup> April                         | 30 <sup>th</sup> June                       | 4.3%                       |
| 1 <sup>st</sup> July                          | 30 <sup>th</sup> September                  | -1.5%                      |
| 1 <sup>st</sup> October                       | 31 <sup>st</sup> December                   | -2.8%                      |

|                         |                        |      |
|-------------------------|------------------------|------|
| 1 <sup>st</sup> January | 31 <sup>st</sup> March | 3.7% |
|-------------------------|------------------------|------|

### Deemed HH Forecasting Performance and Revision

3. **Deemed HH Forecasting Performance**,  $FPP_{HH}$ , shall be calculated as set out in the following formula:

$$FPP_{HH} = \max \left( 0, \frac{5}{1333} \sum_{m=8}^{12} \left( \frac{AA_{HH} - IA_{HH,m} * W_{HH,m}}{AA_{HH}} \right) - CA_{HH} \right)$$

Where:

$AA_{HH}$  is the **Actual Amount of User's HH Charges** for the previous **Financial Year**

$IA_{HH,m}$  is the **Indicative Annual HH TNUoS charge** calculated using the **Demand Forecast** used to determine **Transmission Network Use of System Demand Charges** made during month  $m$  of the previous **Financial Year**.

$W_{HH,m}$ , The forecast weighting to be applied for each month,  $m$  by reference to the following:

| $m$ | Invoice Month | Forecast weighting,<br>$W_{HH,m}$ |
|-----|---------------|-----------------------------------|
| 8   | November      | 33.3                              |
| 9   | December      | 33.3                              |
| 10  | January       | 33.3                              |
| 11  | February      | 66.7                              |
| 12  | March         | 100                               |

$CA_{HH}$ , is an allowance for extreme conditions equal to 0.06.

4. The revised **Deemed HH Forecasting Performance**, shall be calculated on the basis of Paragraph 3 above, substituting the **Indicative Annual HH TNUoS Charge** for each month,  $m$  prior to the



end of the **Reported Period of Increase** with the **Revised Indicative Annual HH TNUoS charge**,  $RIA_{HH,m}$

5. The **Revised Indicative Annual HH TNUoS charge**,  $RIA_{HH,m}$  shall be derived as follows:

$$RIA_{HH,m} = \min \left[ \left( 1 + \left[ \max \left( \frac{DUB_{HH,p}}{DUA_{HH,p}} - \frac{DSB_{HH,p}}{DSA_{HH,p}}, 0 \right) * RD_{HH,p} \right] \right) * IA_{HH,m}, IA_{HH,p} \right]$$

Where:

$DUA_{HH,p}$  is the average half-hourly metered demand taken by the **User's Customers** during the period 17:00 to 17:30 on the twenty **Business Days** prior to the **Reported Period of Increase**,  $p$ , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DUB_{HH,p}$  is the average half-hourly metered demand taken by the **User's Customers** during the period 17:00 to 17:30 on the twenty **Business Days** following the **Reported Period of Increase**,  $p$ , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DSA_{HH,p}$  is the average demand taken by **Total System Chargeable HH Demand** during the period 17:00 to 17:30 on the twenty **Business Days** prior to the **Reported Period of Increase**,  $p$ , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DSB_{HH,p}$  is the average demand taken by **Total System Chargeable HH Demand** during the period 17:00 to 17:30 on the twenty **Business Days** following the **Reported Period of Increase**,  $p$ , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$RD_{HH,p}$  is the forecast proportion of **HH Charges** remaining for the previous **Financial Year** from the first day of the month in which the **Reported Period of**

**Increase**,  $p$  commences by reference to the following:

| Month in which<br><b>Reported Period of Increase commences</b> | Remaining proportion<br>of HH Charges |
|----------------------------------------------------------------|---------------------------------------|
| October                                                        | 100%                                  |
| November                                                       | 100%                                  |
| December                                                       | 100%                                  |
| January                                                        | 66.7%                                 |
| February                                                       | 33.3%                                 |

$IA_{HH,m}$  is the **Indicative Annual HH TNUoS charge** calculated using the **Demand Forecast** used to determine **Transmission Network Use of System Demand Charges** made during month  $m$  of the previous **Financial Year**.

$IA_{HH,p}$  in the case that the the **Reported Period of Increase**,  $p$  ends prior to the 10<sup>th</sup> February of the previous **Financial Year**, is set equal to the **Indicative Annual HH TNUoS charge** calculated using the **Demand Forecast** used to determine **Transmission Network Use of System Demand Charges** made during the month immediately following **Reported Period of Increase** of the previous **Financial Year**, otherwise is set to infinity.

#### Deemed NHH Forecasting Performance and Revision

6. **Deemed NHH Forecasting Performance**,  $FPP_{NHH}$ , shall be calculated as set out in the following formula:

$$FPP_{NHH} = \max \left( 0, \frac{1}{300} \sum_{m=8}^{12} \left( \frac{AA_{NHH} - IA_{NHH,m}}{AA_{NHH}} * W_{NHH,m} \right) - CA_{NHH} \right)$$

Where:

$AA_{NHH}$  is the **Actual Amount of User's NHH Charges** for the previous **Financial Year**.

$IA_{NHH,m}$  is the **Indicative Annual NHH TNUoS charge** calculated using the **Demand Forecast** used to

determine **Transmission Network Use of System Demand Charges** made during month  $m$  of the previous **Financial Year**.

$W_{NHH,m}$ , The forecast weighting to be applied for each month,  $m$  by reference to the following:

| $m$ | Invoice Month | Forecast weighting,<br>$W_{NHH,m}$ |
|-----|---------------|------------------------------------|
| 8   | November      | 41                                 |
| 9   | December      | 49                                 |
| 10  | January       | 59                                 |
| 11  | February      | 70                                 |
| 12  | March         | 81                                 |

$CA_{NHH}$ , is an allowance for extreme conditions equal to 0.03.

7. The revised **Deemed NHH Forecasting Performance** shall be calculated on the basis of Paragraph 6 above, substituting the **Indicative Annual NHH TNUoS Charge** for each month,  $m$  prior to the end of the **Reported Period of Increase** with the **Revised Indicative Annual NHH TNUoS charge**,  $RIA_{NHH,m}$ .
8. The **Revised Indicative Annual NHH TNUoS charge**,  $RIA_{NHH,m}$  shall be derived as follows:

$$RIA_{NHH,m} = \min \left[ \left( 1 + \left[ \max \left( \frac{DUB_{NHH,p}}{DUA_{NHH,p}} - \frac{DSB_{NHH,p}}{DSA_{NHH,p}}, 0 \right) * RD_{NHH,p} \right] \right) * IA_{NHH,m}, IA_{NHH,p} \right]$$

Where:

$DUA_{NHH,p}$  is the average non-half-hourly metered demand taken by the **User's Customers** during the period 16:00 to 19:00 on the twenty **Business Days** prior to the **Reported Period of Increase**,  $p$ , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DUB_{NHH,p}$  is the average non-half-hourly metered demand taken by the **User's Customers** during the period 16:00 to 19:00 on the twenty **Business Days** following the **Reported Period of Increase,  $p$** , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DSA_{NHH,p}$  is the average demand taken by **Total System Chargeable NHH Demand** during the period 16:00 to 19:00 on the twenty **Business Days** prior to the **Reported Period of Increase,  $p$** , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$DSB_{NHH,p}$  is the average demand taken by **Total System Chargeable NHH Demand** during the period 16:00 to 19:00 on the twenty **Business Days** following the **Reported Period of Increase,  $p$** , that do not fall between the two week period commencing 22<sup>nd</sup> December.

$RD_{NHH,p}$  is the forecast proportion of **NHH Charges** remaining for the previous **Financial Year** from the first day of the month in which the **Reported Period of Increase,  $p$**  commences by reference to the following:

| Month in which<br><b>Reported Period of Increase commences</b> | Remaining proportion<br>of <b>NHH Charges</b> |
|----------------------------------------------------------------|-----------------------------------------------|
| October                                                        | 59%                                           |
| November                                                       | 51%                                           |
| December                                                       | 41%                                           |
| January                                                        | 30%                                           |
| February                                                       | 19%                                           |

$IA_{NHH,m}$  is the **Indicative Annual NHH TNUoS charge** calculated using the **Demand Forecast** used to determine **Transmission Network Use of System**

**Demand Charges** made during month  $m$  of the previous **Financial Year**.

$IA_{NHH,p}$

in the case that the the **Reported Period of Increase**,  $p$  ends prior to the 10<sup>th</sup> February of the previous **Financial Year**, is set equal to the **Indicative Annual NHH TNUoS charge** calculated using the **Demand Forecast** used to determine **Transmission Network Use of System Demand Charges** made during the month immediately following **Reported Period of Increase** of the previous **Financial Year**, otherwise is set to infinity.

**END OF SECTION 3**

**CUSC - SECTION 4**  
**BALANCING SERVICES**

**CONTENTS**

- 4.1 Mandatory Ancillary Services
- 4.2 Maximum Generation
  - 4.2A System to Generator Operational Intertripping
  - 4.2B Other Balancing Services
- 4.3 Payments for Balancing Services
- 4.4 Charging Principles
- 4.5 Indexation

## CUSC - SECTION 4

### BALANCING SERVICES

#### 4.1 MANDATORY ANCILLARY SERVICES

##### 4.1.1 Application

- 4.1.1.1 The provisions of this Paragraph 4.1 shall apply to **Users** which are **Generators** in respect of **Generating Units**, **DC Converters** and **Power Park Modules** from which they are required to provide the **Mandatory Ancillary Services** to **The Company** in accordance with the **Grid Code** (for the avoidance of doubt, as determined by any direction in force from time to time and issued by the **Authority** relieving any such **User** from the obligation under its **Licence** to comply with such part or parts of the **Grid Code** or any **Distribution Code** or, in the case of **The Company**, the **ESO Licence**, as may be specified in such direction).
- 4.1.1.2 In respect of **Generating Unit(s)**, **DC Converter(s)** and **Power Park Modules** which are required to provide **Mandatory Ancillary Services** to **The Company** in accordance with the **Grid Code** and which are not registered as **BM Unit(s)**, the **Mandatory Service Agreement** shall detail how the provisions of Section 4 and Schedule 3 of the **CUSC** which refer to **BM Unit(s)** shall (notwithstanding such **Generating Unit(s)**, **DC Converter(s)** and **Power Park Module(s)** are not registered as **BM Unit(s)**) apply.

##### 4.1.2 Reactive Power

- Schedule 3, Part I*
- 4.1.2.1 **The Company** and each **User** shall, as between **The Company** and that **User**, comply with the provisions regarding the **Obligatory Reactive Power Service** and any **Enhanced Reactive Power Service** contained in Schedule 3, Part I.
- Provision of Obligatory Reactive Power Service*
- 4.1.2.2 Subject as herein provided, each **User** hereby agrees, as between **The Company** and that **User**, to provide the **Obligatory Reactive Power Service** from each of the **BM Units** specified in a **Mandatory Services Agreement**.
- 4.1.2.3 In respect of **Generating Unit(s)** located **Offshore** where the **Obligatory Reactive Power Service** is provided to **The**

**Company** by an **Offshore Transmission Licensee** in accordance with the **STC**, the **Mandatory Ancillary Services Agreement** shall detail the payments that **The Company** shall make to the **User** (not withstanding that the **Obligatory Reactive Power Service** is provided to **The Company** by an **Offshore Transmission Licensee**).

*Redeclarations*

- 4.1.2.4 (a) For the avoidance of doubt, nothing in this Paragraph 4.1.2.4 or any **Mandatory Services Agreement** shall affect the provisions of **Grid Code OC 2** and/or **BC 1** concerning the redeclaration in relation to any **BM Unit** (or where applicable, any **CCGT Unit** or **Power Park Unit**) of a revised capability to provide **Leading** and/or **Lagging** Mvar, where applicable at the generator stator terminals.
- (b) All such redeclarations at the generator stator terminals submitted pursuant to **Grid Code OC2** and/or **BC 1** may include the revised capability (in the case of **CCGT Units** and **Power Park Units** of the relevant **BM Unit**) at **Rated MW** at the **Commercial Boundary**. Such capability shall be derived from the capability at the generator stator terminals by application of the applicable formulae set out in Parts 1, 2 or 3 of Appendix 8 to Schedule 3, Part I.
- (c) Where a redeclaration of capability to provide **Leading** and/or **Lagging** Mvars at **Rated MW** does not specify such revised capability at the **Commercial Boundary**, then **The Company** shall calculate the revised capability at **Rated MW** at the **Commercial Boundary** by application of the applicable formulae set out in Parts 1, 2 or 3 of Appendix 8 to Schedule 3, Part I.
- (d) Any revised capability of a **BM Unit** at **Rated MW** at the **Commercial Boundary** shall constitute the respective values of  $Q_{R_{lead}}$  and  $Q_{R_{lag}}$  as referred to in Section 2 of Appendix 3 of Schedule 3, Part I.
- (e) In order to calculate any payments which fall due in accordance with this Paragraph 4.1.2 and a **Mandatory Services Agreement**, following commencement of the relevant clause of the **Mandatory Services Agreement**, **The Company** shall calculate the values of  $Q_{R_{lead}}$  and  $Q_{R_{lag}}$  in accordance with the applicable formulae



contained in Parts 1, 2 or 3 of Appendix 8 to Schedule 3, Part I.

*Utilisation*

- 4.1.2.5 **The Company** shall have the right (but shall not be obliged) at any time to instruct a **User** by the issue of a **Reactive Despatch Instruction** to provide **Leading** and/or **Lagging** Mvars from some or all of the **BM Units** specified in a **Mandatory Services Agreement**.

*Monitoring*

- 4.1.2.6 In order to comply with its obligations contained in **Grid Code OC 5**, **The Company** may use **Operational Metering Equipment** owned by a **Relevant Transmission Licensee** in accordance with Paragraph 6.7.3 to ensure that, in respect of each **BM Unit**, a **User** is complying with its obligations to provide the **Obligatory Reactive Power Service** both in accordance with the **Grid Code** and in accordance with the terms of the **Mandatory Services Agreement**.

- 4.1.2.7 Each **User** acknowledges that **The Company** may wish to install additional monitoring equipment at a **Power Station** to monitor the ability of any or all of the **BM Units** of that **User** to provide the **Obligatory Reactive Power Service**, such monitoring equipment to be installed on terms to be agreed with that **User** (such agreement not to be unreasonably withheld or delayed). The cost of such additional monitoring equipment and its installation shall be borne by **The Company**.

*Reactive Testing*

- 4.1.2.8 Where, in accordance with **Grid Code OC 5.4.2.4**, **The Company** shall be entitled to require a **Reactive Test**, such test shall be in addition to, and shall not prejudice **The Company's** right to require, the two annual **Reactive Tests** referred to in **Grid Code OC 5.5.1.1**. If a **BM Unit** or a **CCGT Unit** (as the case may be) fails a **Reactive Test**, then **The Company** shall advise the **User** that the **BM Unit** or **CCGT Unit** (as appropriate) has so failed whereupon, subject always to resolution of any dispute in accordance with **Grid Code OC 5.5.4** and (where applicable) **OC 5.5.5**, the **User** shall immediately advise **The Company** of the revised capability of that **BM Unit** or **CCGT Unit** (as appropriate) to provide **Leading** and/or **Lagging** Mvars (as the case may be) in accordance with the terms of the **Mandatory Services Agreement**.

*Grid Code*

- 4.1.2.9 It is acknowledged by **The Company** and each **User** that the provision by that **User** of the **Obligatory Reactive Power Service** in accordance with the terms of the **CUSC** and the **Mandatory Services Agreement** shall not relieve it of any of its obligations set out in the **Grid Code** including without limitation its obligation set out in **Grid Code CC 8.1** to provide **Reactive Power** (supplied otherwise than by means of synchronous or static compensators) except in the case of a **Power Park Module** where synchronous or static compensation within the **Power Park Module** may be used to provide **Reactive Power**) in accordance with **Grid Code CC 6.3.2**.

*Disclosure and Use of Information*

- 4.1.2.10 Each **User** hereby consents to the disclosure and use by **The Company** of data and other information relating to the provision by that **User** of the **Obligatory Reactive Power Service** and the relevant provisions of the **Mandatory Services Agreement** relating thereto to the extent necessary to enable **The Company** to comply with its obligations set out in the **CUSC**. Each **User** hereby consents to the disclosure and use by **The Company** of data and other information from any year relating to the provision by that **User** of the **Balancing Service** to the extent necessary to enable **The Company** to carry out its **EMR Functions**.

*Hierarchy*

- 4.1.2.11 If any provision of the **Mandatory Services Agreement** to the extent relating to the **Obligatory Reactive Power Service** shall be inconsistent with the provisions of Schedule 3, Part I, the provisions of Schedule 3, Part I shall prevail to the extent of such inconsistency.

### 4.1.3 Frequency Response

*Introduction*

- 4.1.3.1 Each applicable **User** is obliged to provide (for the avoidance of doubt, as determined by any direction in force from time to time and issued by the **Authority** relieving that **User** from the obligation under its **Licence** to comply with such part or parts of the **Grid Code** or any **Distribution Code** or, in the case of **The Company**, the **ESO Licence**, as may be specified in such direction) the **Mandatory Ancillary Service of Frequency Response** referred to in **Grid Code CC 8.1** by

means of **Frequency** sensitive generation in accordance with the terms of this Paragraph 4.1.3 and a **Mandatory Services Agreement** but subject always to and in accordance with the relevant part or parts of the **Grid Code** applicable thereto.

#### *Definitions*

4.1.3.2 For the purposes of this Paragraph 4.1.3:

- (i) **“Frequency Response Service”** means the **Mandatory Ancillary Service** of **Frequency Response** and any **Commercial Ancillary Service** of **Frequency Response** as may be agreed to be provided by a **User** from time to time;
- (ii) the **Mandatory Ancillary Service** of **Frequency Response** shall constitute operation of a **BM Unit** in accordance with **Grid Code CC 6.3.7** and **BC 3.5** (with the exception of **BC 3.5.2**), including, without limitation, under normal operating conditions with the speed governor set so that it operates with an overall speed droop of between 3% and 5% so as to provide the applicable levels of **Response** referred to in Paragraph 4.1.3.7;
- (iii) the term "instruction" means a communication whether by telephone or automatic logging device or via the **Designated Information Exchange System** from **The Company** to the **User** instructing a **User** in accordance with **Grid Code BC 2.8** and this Paragraph 4.1.3 to provide any **Frequency Response Service**, and derivations of the term shall be construed accordingly;
- (iv) the amendment of an existing instruction shall be deemed to be a new instruction;
- (v) an instruction will prevail until either it is countermanded by **The Company** or until the **BM Unit** to which the instruction relates is **De-synchronised** (whichever is first to occur).

#### ***The Company’s Instructions to provide Mode A Frequency Response***

4.1.3.3 For the purposes of instructions and calculation of payments, the **Mandatory Ancillary Service** of **Frequency Response** as described in this Paragraph 4.1.3 shall be referred to as **“Mode A Frequency Response”**.

4.1.3.4 **The Company** may at any time instruct a **User** to operate any one or more **BM Unit(s)** so as to provide the following components of **Mode A Frequency Response**:-

- (a) **Primary Response**;
- (b) **Secondary Response**;
- (c) **High Frequency Response**,

in any of the permissible combinations set out in the relevant table in the **Mandatory Services Agreement**.

4.1.3.5 **The Company** shall not instruct a **User** to provide **Mode A Frequency Response** and any **Commercial Ancillary Service of Frequency Response** simultaneously.

4.1.3.6 In the event that any instruction to provide **Frequency Response** does not state whether the instruction is to provide **Mode A Frequency Response** or any **Commercial Ancillary Service of Frequency Response**, such instruction shall be deemed to be an instruction to provide **Mode A Frequency Response**.

***User's Obligation to Provide Response***

4.1.3.7 When a **User** is instructed in accordance with Paragraphs 4.1.3.4 and/or 4.1.3.6 to operate a **BM Unit** so as to provide any component(s) of **Mode A Frequency Response**, that **User** shall operate that **BM Unit** so as to provide, for any **Frequency Deviation** and at any level of **De-Load**, at least the amount of **Primary Response** and/or **Secondary Response** and/or **High Frequency Response** set out respectively in the relevant **Frequency Response Capability Data** tables in the **Mandatory Services Agreement** (as such tables are to be interpreted in accordance with Paragraph 4.1.3.11).

4.1.3.7A For the avoidance of doubt a **User** shall ensure that the **Transmission Entry Capacity**, and if relevant the **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC**, for the relevant **Connection Site** shall be sufficient to enable it to comply with its obligations under Paragraph 4.1.3.7 above at all times and in respect of all **BM Units**.

### Calculation of Payments

- 4.1.3.8 The payments to be made by **The Company** to a **User** hereunder in respect of the provision of any **Mode A Frequency Response** from a **BM Unit** shall be comprised of **Holding Payments** and **Response Energy Payments** and shall be determined in accordance with the formulae in, respectively, Paragraphs 4.1.3.9 and 4.1.3.9A and in accordance with Paragraphs 4.1.3.10 to 4.1.3.12 inclusive.

### *Payment Formulae - Holding Payments*

- 4.1.3.9 The **Holding Payments** for a **BM Unit** to be made by **The Company** to a **User** referred to in Paragraph 4.1.3.8 shall be calculated in accordance with the following formula:-

$$HP_M = P_M + H_M + S_M$$

Where:

$HP_M$  is the **Holding Payment** to be made to the **User** calculated in £ per minute.

$P_M$  is the payment per minute to be made by **The Company** to the **User** for the **Ancillary Service** of **Primary Response** provided by the **User** from the **BM Unit** concerned pursuant to an instruction from **The Company** to provide **Mode A Frequency Response**, and is calculated as follows:-

$$P_M = (P_{PR} \times P_{MW} (1 - SF_P)) \times K_T \times K_{GRC} \times \left[ \frac{1}{60} \right]$$

$H_M$  is the payment per minute to be made by **The Company** to the **User** for the **Ancillary Service** of **High Frequency Response** provided by the **User** from the **BM Unit** concerned pursuant to an instruction from **The Company** to provide **Mode A Frequency Response**, and is calculated as follows:-

$$H_M = (H_{PR} \times H_{MW} (1 - SF_H)) \times K_T \times K_{GRC} \times \left[ \frac{1}{60} \right]$$

$S_M$  is the payment per minute to be made by **The Company** to the **User** for the **Ancillary Service of Secondary Response** provided by the **User** from the **BM Unit** concerned pursuant to an instruction from **The Company** to provide **Mode A Frequency Response**, and is calculated as follows:-

$$S_M = (S_{PR} \times S_{MW} (1 - SF_S)) \times K_T \times K_{GRC} \times \left[ \frac{1}{60} \right]$$

In this Paragraph 4.1.3.9, the following terms shall have the following meanings:-

- $P_{PR}$  = the appropriate payment rate for **Primary Response** determined in accordance with Paragraph 4.1.3.13;
- $P_{MW}$  = the **Primary Response** capability (expressed in MW) for the level of **De-Load** of the **BM Unit** concerned at the end of the minute in which the service is provided. In the case of **Power Park Modules** this component will not exceed the value of the cap on the level of **Primary Response** capability ( $P_{CAP}$ ) as calculated in 4.1.3.9.1;
- $H_{PR}$  = the appropriate payment rate for **High Frequency Response** determined in accordance with Paragraph 4.1.3.13;
- $H_{MW}$  = the **High Frequency Response** capability (expressed in MW) for the level of **De-Load** of the **BM Unit** concerned at the end of the minute in which the service is provided. In the case of **Power Park Modules** this component will not exceed the value of the cap on the level of **High Frequency Response** capability ( $H_{CAP}$ ) as calculated in 4.1.3.9.2;
- $S_{PR}$  = the appropriate payment rate for **Secondary Response** determined in accordance with Paragraph 4.1.3.13;
- $S_{MW}$  = the **Secondary Response** capability (expressed in MW) for the level of **De-Load** of the **BM Unit** concerned at the end of the minute in which the service is provided. In the case of **Power Park Modules** this component will not exceed the value of the cap on the level of **Secondary Response** capability ( $S_{CAP}$ ) as calculated in 4.1.3.9.3;
- $K_T$  = the ambient temperature adjustment factor. **The Company** and each **User** acknowledge and agree, as between **The Company** and that **User**, that  $K_T$  shall be deemed to be 1 for the purposes of

calculating payments until such time as they agree upon an appropriate formula and a suitable method of measuring the ambient temperature on a minute by minute basis which shall be set out in the **Mandatory Services Agreement**. In the event that any agreed method of measuring the ambient temperature on a minute by minute basis should fail following its implementation, then **The Company** and each **User** acknowledge and agree, as between **The Company** and that **User**, that  $K_T$  shall be deemed to be 1 until the method of measuring the ambient temperature on a minute by minute basis is restored;

$K_{GRC}$  = where the **BM Unit** is a **CCGT Module**, the plant configuration adjustment factor set out in the relevant table in the **Mandatory Services Agreement** for the configuration of the **BM Unit** concerned at the time at which the capability to provide the service is carried, otherwise 1;

$SF_P$  = 0, subject to Paragraph 4.1.3.21 (e);

$SF_S$  = 0, subject to Paragraph 4.1.3.21 (e);

$SF_H$  = 0, subject to Paragraph 4.1.3.21 (e).

#### 4.1.3.9.1 Calculation of the **Primary Response** cap for **Power Park Modules**

A cap on the level of **Primary Response** capability for the purposes of the **Holding Payment** calculation is calculated as follows:

$$P_{CAP} = \frac{\text{Current MEL}}{\text{Registered Capacity}} \times \text{Response Capability}$$

Where in this Paragraph the following terms have the following meaning:

Current MEL is the **Maximum Export Limit** as submitted in respect of the **Power Park Module** by the relevant **Generator** to **The Company**.

**Registered Capacity** is that as declared by the **Generator** in respect of the **Power Park Module**.

Response Capability is that which is set out in the relevant **Frequency Response Capability Data** tables in the **Mandatory Services Agreement** for the applicable level of **De-load**.

#### 4.1.3.9.2 Calculation of the **High Frequency Response** cap for **Power Park Modules**

A cap on the level of **High Frequency Response** capability for the purposes of the **Holding Payment** calculation is calculated as follows:

$$H_{CAP} = \frac{\text{Current MEL}}{\text{Registered Capacity}} \times \text{Response Capability}$$

Where in this Paragraph the following terms have the following meaning:

Current MEL is the **Maximum Export Limit** as submitted in respect of the **Power Park Module** by the relevant **Generator to The Company**.

**Registered Capacity** is that as declared by the **Generator** in respect of the **Power Park Module**.

Response Capability is that which is set out in the relevant **Frequency Response Capability Data** tables in the **Mandatory Services Agreement** for the applicable level of **De-load**.

#### **4.1.3.9.3 Calculation of the Secondary Response cap for Power Park Modules**

A cap on the level of **Secondary Response** capability for the purposes of the **Holding Payment** calculation is calculated as follows:

$$S_{CAP} = \frac{\text{Current MEL}}{\text{Registered Capacity}} \times \text{Response Capability}$$

Where in this Paragraph the following terms have the following meaning:

Current MEL is the **Maximum Export Limit** as submitted in respect of the **Power Park Module** by the relevant **Generator to The Company**.

**Registered Capacity** is that as declared by the **Generator** in respect of the **Power Park Module**.

Response Capability is that which is set out in the relevant **Frequency Response Capability Data** tables in the **Mandatory Services Agreement** for the applicable level of **De-load**.

#### **Payment Formulae – Response Energy Payment**



- 4.1.3.9A (a) The **Response Energy Payments** for **BM Unit i** in **Settlement Period j** to be made by **The Company** to a **User** referred to in Paragraph 4.1.3.8 shall be calculated in accordance with the following formulae:-

$$REP_{ij} = RE_{ij} \times \text{Reference Price}$$

But so that where  $REP_{ij}$  is negative such amount shall be paid by the **User** to **The Company**.

Where:

$REP_{ij}$  is the **Response Energy Payment** to be made to or, as the case may be, by the User; and

$RE_{ij}$  is the expected response energy for **BM Unit i** in **Settlement Period j** calculated as follows:-

$$RE_{ij} = \int_0^{SPD} \left[ \max(FR_{ij}(t), 0) \times (1 - SF_{LF}) + \min(FR_{ij}(t), 0) \times (1 - SF_H) \right] \times K_T \times K_{GRC} dt$$

Where:

$\int_0^{SPD} dt$  is the integral at times  $t$ , over the **Settlement Period** duration.

$SF_{LF}$  is equal to  $SF_P$  in the case of a **BM Unit** being instructed to deliver **Primary Response** without **Secondary Response** or the mean of  $SF_P$  and  $SF_S$  in the case of a **BM Unit** being instructed to deliver **Primary Response** and **Secondary Response**.

$SF_P$ ,  $SF_S$ ,  $SF_H$ ,  $K_T$  and  $K_{GRC}$  have the meanings ascribed to them in Paragraph 4.1.3.9.

$FR_{ij}(t)$  is the expected change in **Active Power** output for **BM Unit i**, at time  $t$  (resolved to the nearest integer minute), expressed in MW derived from the relevant **Frequency Response Power Delivery Data** table in the **Mandatory Services Agreement** (as such table is interpreted in accordance with Paragraph 4.1.3.11) by

reference to the level of **De-Load** of the **BM Unit** concerned at the end of the minute and the mean **Frequency Deviation** over that minute when that **BM Unit** is providing **Mode A Frequency Response** and zero at all other times.

For this purpose:-

- (i) for a positive **Frequency Deviation** the expected change in **Active Power** output of **BM Unit i** shall be derived from the table entitled “**High Frequency Response Power Delivery – Mode A**” set out in the **Mandatory Services Agreement** and shall be signed negative; and
- (ii) for a negative **Frequency Deviation**, the expected change in **Active Power** output of **BM Unit i** shall be derived from:
  - A) the table entitled “Primary Response Power Delivery – Mode A” in the case of a **BM Unit** being instructed to deliver **Primary Response** without **Secondary Response**; or
  - B) the table entitled “Primary and Secondary Response Power Delivery – Mode A” in the case of a **BM Unit** being instructed to deliver **Primary Response** and **Secondary Response**,

in each case set out in the **Mandatory Services Agreement** and shall be signed positive.

A User with a “CfD BMU” (a BM Unit registered in respect of a Power Station whose operator is a party to an agreement with the CfD Counterparty) the User can elect, at the outset of the agreement with the CfD Counterparty, to set the Reference Price to Max for Response Energy Payments for that CfD BMU for the duration of that agreement. Until such election, which can only be made once by reference to that CfD agreement, the Reference Price shall be 0 by default.

Where:  $RE_{ij}$  is positive then:

Reference Price =  $\max (\sum_s \{ \mathbf{PXP}_{sj} \times \mathbf{QXP}_{sj} \} / \sum_s \{ \mathbf{QXP}_{sj} \} \times 1.25, 0 )$  except in the case of (a) a non-fuel cost **BM Unit** or (b) a BM Unit registered in respect of a Power Station whose operator is a party to an agreement with the CfD Counterparty still in effect during the relevant Settlement Period, where it = 0  
where  $\sum_s$  represents the sum over all **Market Index Data Providers**.

Where  $RE_{ij}$  is negative then:

Reference Price =  $\max (\sum_s \{ \mathbf{PXP}_{sj} \times \mathbf{QXP}_{sj} \} / \sum_s \{ \mathbf{QXP}_{sj} \} \times 0.75, 0 )$  except in the case of (a) a non-fuel cost **BM Unit** or (b) a BM Unit which relates to a Power Station whose operator is a party to an agreement with the CfD Counterparty, still in effect during the relevant Settlement Period, where it = 0

where  $\sum_s$  represents the sum over all **Market Index Data Providers**

Where for the purposes of this Paragraph:

a non-fuel cost **BM Unit** means a **BM Unit** [associated with] [registered in respect of] a non-fuel cost **Power Station**

a non-fuel cost **Power Station** means:

a **Power Station** of the following type which does not have the facility to store the energy produced)

Onshore wind  
Offshore wind  
Solar  
Tidal  
Wave

- (b) In this Paragraph 4.1.3.9A, the following terms shall have the meanings ascribed to them in the **Balancing and Settlement Code**:-

“ $\mathbf{PXP}_{sj}$ ”  
“ $\mathbf{QXP}_{sj}$ ”  
“SPD”

**“Market Index Data Provider“**

- 4.1.3.10 **The Company** and each **User** acknowledge and agree, as between **The Company** and that **User**, that no **Holding Payment** or **Response Energy Payment** shall be payable except in relation to periods in respect of which instructions have been issued by **The Company** pursuant to this Paragraph 4.1.3.

*Interpretation of Tables – Levels of **Response***

- 4.1.3.11 The figures for **Response** set out in the Frequency Response Capability Data tables and Frequency Response Power Delivery Data tables in the **Mandatory Services Agreements** shall be given in relation to specific **Frequency Deviations** and to specific levels of **De-Load** for a **BM Unit**. Such tables shall, for the purposes of Paragraphs 4.1.3.7 and 4.1.3.9A(a), be construed in accordance with this Paragraph 4.1.3.11. Subject to Paragraphs 4.1.3.11(d) and (e):-

- (a) for a **Frequency Deviation** at a given time differing from the figures given in a table, the level of **Response** shall be calculated by linear interpolation from the figures specified in the table in respect of **Frequency Deviations**;
  - (b) for a level of **De-Load** at a given time differing from the figures given in a table, the level of **Response** shall be calculated by linear interpolation from the figures specified in the table in respect of levels of **De-Load**. For the avoidance of doubt, **Frequency Sensitive Mode** shall not be instructed for any **De-Load** greater than the maximum level of **De-Load** given in the relevant Frequency Response Capability Data table;
  - (c) in respect of any time in relation to which both Paragraphs 4.1.3.11(a) and (b) apply, the level of **Response** shall be calculated by dual linear interpolation from the figures specified in the table in respect of **Frequency Deviations** and in respect of levels of **De-Load**;
- and
- (d) for any **Frequency Deviation** greater than the greatest **Frequency Deviation** given in a table (whether positive or negative), the level of **Response** shall be

calculated by reference to the greatest **Frequency Deviation** (positive or negative, as the case may be) given in that table; and

- (e) for the purposes of calculating levels of **Response** in respect of **Frequency Deviations** lower than those specified in a table, the relevant table(s) shall be deemed to specify a level of zero **Response** for a **Frequency Deviation** of zero.

*Interpretation of Tables – Levels of Holding Payment*

- 4.1.3.12 The Frequency Response Summary Data table in the **Mandatory Services Agreement** shall set out figures in respect of given levels of **De-Load** for the purposes of calculating payment in accordance with the formulae in Paragraph 4.1.3.9. Where the level of **De-Load** of the **BM Unit** is other than one of the levels given in such table, then, the figure for  $P_{MW}$ ,  $S_{MW}$  or  $H_{MW}$  as the case may be, shall be calculated by linear interpolation from the figures in such table in respect of levels of **De-Load**.

*User's submission of Holding Payment Rates*

- 4.1.3.13 The following terms shall apply to determine the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** used in the calculation of **Holding Payments** in accordance with Paragraph 4.1.3.9 which shall apply in respect of the provision of **Mode A Frequency Response** by the **User** to **The Company** from one or more **BM Units** in a calendar month (and, for the purposes thereof, all dates specified in this Paragraph 4.1.3.13 unless stated otherwise refer to the immediately preceding calendar month):-

- (a) By the fifth **Business Day** of the calendar month, **The Company** shall publish on its web-site information relating to **The Company's** requirement for **Mode A Frequency Response** (in MW) in the next following calendar month.
- (b) By the fifteenth **Business Day** of the calendar month, the **User** may in relation to any of its **BM Units** identified in a **Mandatory Services Agreement** to which the **User** is a party submit a single notification to **The Company** (in a form and by such method as shall be prescribed by **The Company** from time to time) specifying in respect of that **BM Unit** the payment rates to apply in

determining the **Holding Payments** for the provision of **Mode A Frequency Response** during the next following calendar month, each such notification to specify:-

- (i) the **BM Unit** in question;
  - (ii) the payment rate for **Primary Response**;
  - (iii) the payment rate for **High Frequency Response**; and
  - (iv) the payment rate for **Secondary Response**.
- (c) Payment rates submitted by the **User** in accordance with Paragraph 4.1.3.13(b) must be:-
- (i) quoted in pounds sterling to the nearest penny;
  - (ii) quoted in units of £/MW/h; and
  - (iii) no greater than £[9999.99].
- (d) Upon receipt of a notification from the **User** made in accordance with Paragraph 4.1.3.13(b), **The Company** shall publish details of such notification in a report issued in accordance with Paragraph 4.1.3.13(A)(a) and, subject always to rectification (if any) of payment rates pursuant to Paragraph 4.1.3.13(e), **The Company** shall apply published payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** in calculating the **Holding Payments** for the relevant **BM Unit** in the next following calendar month.
- (e) The **User** shall have the right, to be exercised within one **Business Day** of the publication of payment rates in respect of a **BM Unit** in accordance with Paragraph 4.1.3.13(d), to notify **The Company** (in a form and by such method as shall be prescribed by **The Company** from time to time) of any discrepancy between those payment rates and the actual payment rates submitted by the **User** in respect of that **BM Unit** in accordance with Paragraph 4.1.3.13(b). Upon receipt of any such notification, **The Company** shall rectify the report issued in accordance with Paragraph 4.1.3.13A(a) and shall

publish the rectified report in accordance with Paragraph 4.1.3.13A(b).

- (f) In the absence of a notification from a **User** in accordance with Paragraph 4.1.3.13(b) in respect of the provision by a **BM Unit of Mode A Frequency Response** in the next following calendar month, then the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** to apply in determining the **Holding Payments** for that **BM Unit** in respect of that calendar month shall be determined as follows:-
  - (i) where the **User** has never in respect of any previous calendar month submitted a notification in accordance with Paragraph 4.1.3.13(b) in respect of the provision by that **BM Unit of Mode A Frequency Response**, the payment rate to apply to the provision of each of **Primary Response**, **High Frequency Response** and **Secondary Response** from that **BM Unit** in that calendar month shall be deemed to be either:-
    - (aa) the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** prevailing immediately prior to the date of implementation of **Amendment Proposal CAP047**; or
    - (bb) where no payment rates as referred to in paragraph (aa) above subsisted at the date of implementation of **Amendment Proposal CAP047**, £00.00/MW/h; or
  - (ii) in all other cases, the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** which shall apply in respect of the provision by that **BM Unit of Mode A Frequency Response** in that calendar month shall be the payment rates most recently published in accordance with Paragraph 4.1.3.13A(a) or (b) (as the case may be) for that **BM Unit** in respect of a previous calendar month;

- (g) Paragraph 4.4.2.2 shall not apply to the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** determined in accordance with this Paragraph 4.1.3.13.

*Publication of **Holding Payment Rates** and other information*

- 4.1.3.13A (a) **The Company** shall use reasonable endeavours to publish on its web-site by the 16th **Business Day** of each calendar month, a report containing the following information in respect of each applicable **User's BM Unit(s)** to apply in respect of the next following calendar month:-
- (i) the payment rates for **Primary Response**, **High Frequency Response** and **Secondary Response** to apply in determining the **Holding Payments** for the next following calendar month as determined in accordance with Paragraph 4.1.3.13;
  - (ii) the available **Response** volume (in such form and manner as shall be prescribed by **The Company** from time to time).
- (b) Where any payment rates published in a report issued in accordance with Paragraph 4.1.3.13A(a) are rectified by **The Company** in accordance with Paragraph 4.1.3.13(e), **The Company** shall as soon as reasonably practicable thereafter publish the rectified report on its web-site.
- (c) In respect of each day in a calendar month, **The Company** shall use reasonable endeavours to publish on its web-site by the third **Business Day** of the calendar month following that calendar month, provisional data in respect of all **BM Units** details of instructions issued by **The Company** in accordance with Paragraph 4.1.3.4 for each of **Primary Response**, **High Frequency Response** and **Secondary Response** (in such form and manner as shall be prescribed by **The Company** from time to time). The **Users** recognise that the provisional data may differ from the data to be provided under Paragraph 4.1.3.13A (d) and therefore any reliance upon this provisional data is entirely at the **User's** risk.



- (d) In respect of each day in a calendar month, **The Company** shall, by the ninth **Business Day** of the calendar month following that calendar month, publish on its web-site in respect of all **BM Units** details of instructions issued by **The Company** in accordance with Paragraph 4.1.3.4 for each of **Primary Response**, **High Frequency Response** and **Secondary Response** (in such form and manner as shall be prescribed by **The Company** from time to time).
- (e) Each **User** consents to the disclosure by **The Company** of the information referred to in Paragraphs 4.1.3.13A(a) and (b) in so far as it relates the provision of **Mode A Frequency Response** from its **BM Unit(s)**, provided always that **The Company** shall not be bound to comply with the provisions of Paragraphs 4.1.3.13A(a) and (b) with regard to the provision of information to the extent that to do so would be likely to restrict, distort or prevent competition in the provision of **Mode A Frequency Response**.

*Requests to Amend Levels of Response*

- 4.1.3.14 Where either the **User** or **The Company** reasonably considers in light of operating experience that the levels of **Response** set out in the Frequency Response Capability Data tables and / or the Frequency Power Delivery Data tables in the **Mandatory Services Agreement** do not represent the true operating capabilities of a **BM Unit(s)**, the **User** or **The Company** (as the case may be) shall have the right not more than once every two months (or otherwise at any time with the specific agreement of the other party to the **Mandatory Services Agreement**) to request (provided always that such request be accompanied by a reasonable justification therefor) that the levels of **Response** set out in the relevant response table(s) in the **Mandatory Services Agreement** be reviewed and, if appropriate, amended by agreement with such other party, such agreement not to be unreasonably withheld or delayed.

*Procedure for Amendments to Levels of Response*

- 4.1.3.15 Any amendments agreed by **The Company** and a **User** pursuant to Paragraph 4.1.3.14 or determined by an arbitrator or panel of arbitrators under the **Dispute Resolution Procedure** in the circumstances referred to in Paragraph

4.1.3.16 shall not become effective until (in the case of agreed amendments) a date at least five **Business Days** after an amending agreement is entered into between **The Company** and the **User** in accordance with the **Mandatory Services Agreement** or, in the case of determined amendments, such other date as may be determined by an arbitrator or panel of arbitrators under the **Dispute Resolution Procedure** subject always to Paragraphs 4.1.3.17 and 4.1.3.18.

*Failure to Agree Amendments*

- 4.1.3.16 If **The Company** and a **User** are unable to agree any amendments requested pursuant to Paragraph 4.1.3.14 within 28 days of either of them serving on the other notice of its intention to invoke the **Dispute Resolution Procedure** then either party may initiate the procedure for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4.

*Dispute Resolution Procedure*

- 4.1.3.17 **The Company** and each **User** acknowledge and agree, as between **The Company** and that **User**, that the rules of the **London Court of International Arbitration** shall apply to any arbitration proceedings initiated pursuant to Paragraph 7.4 in the circumstances referred to in Paragraph 4.1.3.16, but that the changes determined by any arbitrator or panel of arbitrators shall not apply in respect of any period prior to the date on which the **Dispute Resolution Procedure** is invoked.

*Implementation of Determinations*

- 4.1.3.18 Any amendments to levels of **Response** determined by an arbitrator or panel of arbitrators under the **Dispute Resolution Procedure** in the circumstances referred to in Paragraph 4.1.3.16 shall take effect from the date five **Business Days** following the relevant determination.

*Implementation of Continuous Monitoring System*

- 4.1.3.19 To the extent the same shall be acceptable to **The Company** and a **User** on the basis of a cost benefit analysis, **The Company** and a **User** agree, as between **The Company** and that **User**, to the implementation of a continuous monitoring system as soon as is reasonably practicable. The continuous monitoring system shall be in accordance with the relevant principles set out in Paragraph 4.1.3.21 for the purposes of confirming performance of the **BM Units** and adjusting payments pursuant to this Paragraph 4.1.3.

*Incident Based Monitoring System*

- 4.1.3.20 Pending implementation of the continuous monitoring system, **The Company** and each **User** agree, as between **The Company** and that **User**, to implement an incident based monitoring scheme for the purpose of confirming the performance of the **BM Units** pursuant to this Paragraph 4.1.3. Such incident based monitoring scheme shall be in accordance with the relevant principles set out in Paragraph 4.1.3.21. Neither **The Company** nor the **User** shall unreasonably withhold or delay such agreement and/or implementation.

*Genset Response Monitoring*

*Introduction*

- 4.1.3.21 (a) This Paragraph 4.1.3.21 sets out the principles relating to:
- (i) the proposed continuous monitoring system to be implemented pursuant to Paragraph 4.1.3.19; and
  - (ii) the incident based monitoring system to apply until such time as implementation of the continuous monitoring system takes place.

Some elements of the continuous monitoring system are currently undergoing testing and development and it is accepted that if final testing of these elements proves unsatisfactory alternatives will need to be developed. Further, implementation of the continuous monitoring system shall be subject to its acceptability to **The Company** and **Users** on the basis of a cost benefit analysis.

Wherever possible the technical specification of both the incident based monitoring system and the continuous monitoring system will be designed so as to enable future development or enhancement.

*Aims of Project*

- (b) The aim of the monitoring project (which includes, without limitation, the development of the incident based monitoring system and the continuous monitoring system) is to develop a response monitoring system which will measure the response performance of generators against the levels of

**Frequency Response** required to be provided under **Mandatory Services Agreements**.

*Incident Based Monitoring Scheme*

- (c) Details of the incident based monitoring scheme (including without limitation the definitions of Shortfall Period and Incident, the calculation of service delivery and the determination of Incident start and end times) will be more particularly set out in a document entitled "Procedure for Incident Based Response Monitoring" ("the PIRM Document") to be produced by **The Company** and agreed by all relevant **Users** (such agreement not to be unreasonably withheld or delayed).

For the avoidance of doubt during the period during which the incident based monitoring scheme applies, and prior to the implementation of the continuous monitoring system, for the purposes of the formulae in Paragraphs 4.1.3.9 and 4.1.3.9A, the values of  $SF_P$ ,  $SF_S$  and  $SF_H$  shall be zero, such that no payment reduction shall apply during such period in respect of shortfall.

*Continuous Based Monitoring Scheme – Confirmation of Response Delivery*

- (d) The main objective of the continuous monitoring scheme is to provide a quantitative measure of **Frequency Response** delivery against which payment can be justifiably made and to reduce payments if delivery does not comply with the **CUSC** and the **Mandatory Services Agreement**. As the capability of a **BM Unit** to provide the level of **Response** required pursuant to this Paragraph 4.1.3 for any change in **System Frequency** occurring during the period of delivery of Response pursuant to a prior change in **System Frequency** will be affected by the level of **Response** then being delivered, relevant fluctuations in **System Frequency** should to this extent be taken into account by the continuous monitoring scheme for the purpose of calculating payment levels.

*Determination of Response Shortfall*

- (e) For the purposes of the continuous monitoring system, the **Response** shortfall may take three forms:-
- (i) average **Primary Response** under-delivery;
  - (ii) average **Secondary Response** under-delivery;
  - (iii) average **High Frequency Response** under-delivery,

in each case over a Shortfall Period (such term to be defined prior to implementation of the continuous monitoring system).

Upon the implementation of the continuous monitoring system, for the purposes of determining any such average under-delivery,  $SF_P$ ,  $SF_S$  and  $SF_H$  shall be the average under-delivery of **Primary Response**, **Secondary Response** and **High Frequency Response** respectively during the Shortfall Period in which the **Ancillary Service** was, or should have been, provided. For the purposes of the formulae in Paragraphs 4.1.3.9 and 4.1.3.9A, such average under-delivery will be determined using a continuous plant response assessment algorithm which is under development and which will be agreed with the **User** prior to its implementation and expressed in terms of  $0 \leq SF \leq 1$ .

#### *Measurement of System Variables*

- (f) In relation to the continuous monitoring system measurement of **System Frequency** and generator output power will be required local to the **BM Unit**. **Synchronised** time tagging of both power and **Frequency** will be required.

**Frequency** is required as the fundamental driving variable of the contract model software. Access to a voltage source to enable **Frequency** to be measured is not expected to cause any difficulty. The measurement of generator output power will also be required every second. Cost effective access to this measurement is, however, less straight forward. Covered below are two options describing how this will be achieved. It is expected that normally the FMS interface unit will be the method used; however, where

the **BM Unit** concerned has derogations from FMS, method two may be used.

*FMS Interface Unit*

- (g) The use of the Final Metering System (FMS) represents a logical method of measurement since it eliminates the high cost associated with running cables to access CTs and VTs.

The high accuracy integrated data from FMS will be used to re-generate a power profile and curve fitting techniques will be applied to improve accuracy. This instantaneous power curve will then be sampled every second to obtain the required values.

*Direct Measurement*

- (h) Where for the reasons detailed in Paragraph 4.1.3.21(f) it is not possible to use the FMS interface unit, the use of 'ISAT' type transducers will be employed to interface between the monitoring equipment and the measurement transformers' secondary circuit.

It is envisaged that generators seeking derogations from FMS will be supportive in establishing convenient VT and CT secondary connections for this purpose.

*Contract Model*

- (i) The contract model is the heart of the continuous monitoring system and it is crucial to the philosophy behind the system, namely that of modelling the **Mandatory Services Agreement** and not the **BM Unit** itself.

Given the difficulty in measuring **Frequency Response** directly on loaded plant, the need to compare changes in power delivery against expectation is evident. Comparison against this model output, which in turn is based on agreed and legally binding contracts, permits an identifiable quantity of non conformity to be measured and payments to be suitably reduced.

Therefore, since the **Mandatory Services Agreement** itself is the quantifying factor, there can be no redress due to assumptions regarding the technical attributes

of the **BM Unit** other than those taken into account in setting the levels of **Response**.

*Functional Objective*

- (j) In relation to the continuous monitoring system, the model will comprise software which uses system and instructed variables to access the contract look-up tables. The look-up tables used will precisely mimic the response tables set out in **Mandatory Services Agreements**. These variables in turn will be processed using an algorithm to determine the levels of **Response** expected at any instant in time.

It is intended that this process will be effective during both small and large **Frequency Deviations**. Indeed with regard to reduction in payment and estimated **Response** capability, response to small **Frequency Deviations** is extremely important.

*Input Data*

- (k) In relation to the continuous monitoring system, inputs to the contract model will include **Frequency**, all contract table data, target load, **Target Frequency**, the latest genset availability, the response instruction, LF setting (if electronically despatched) and any other information required which may be specified in the **Mandatory Services Agreement**.

*Comparator*

- (l) In relation to the continuous monitoring system, the comparator will determine the difference between the measured change in the level of **Output** from the **BM Unit** by way of **Frequency Response** and the change in **Output** level that is specified in the **Mandatory Services Agreement**.

- 4.1.3.22 If, at any time during the term of a **Mandatory Services Agreement**, there is a variation in the security standards with which **The Company** is obliged to comply and such variation would, in a **User's** reasonable opinion, materially affect the operation of the services to be provided under that **Mandatory Services Agreement**, **The Company** and that **User** shall negotiate in good faith with a view to agreeing and implementing appropriate amendments to any relevant **Mandatory Services Agreement**. If they are unable to reach agreement within 28 days of either of them serving on the other

notice of its intention to invoke the **Dispute Resolution Procedure**, either of them may initiate the procedure for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4.

- 4.1.3.23 Each **User** hereby consents to the disclosure and use by **The Company** of data and other information from any year relating to the provision by that **User** of the **Balancing Service** to the extent necessary to enable **The Company** to carry out its **EMR Functions**.

## 4.2 MAXIMUM GENERATION

### 4.2.1 Application

The provisions of this Paragraph 4.2 shall apply to **The Company** and a **User** in respect of the provision by that **User** to **The Company** of **Maximum Generation** where a **Maximum Generation Service Agreement** has been entered into and is in force between **The Company** and that **User**.

### 4.2.2 Provision of Maximum Generation

Each **User** hereby agrees, as between **The Company** and that **User**, to use reasonable endeavours to make available and provide **Maximum Generation** from each of the **Maximum Generation BM Unit(s)** in accordance with the terms of this Paragraph 4.2 in respect of each **Operational Day** during the term of the **Maximum Generation Service Agreement**.

### 4.2.3 Availability of Maximum Generation

- 4.2.3.1 By 15.00 hours on each Wednesday, the **User** may notify **The Company** via the **Designated Information Exchange System** in the form set out in Schedule 1 to this Section 4 (a “**Weekly Maximum Generation Declaration**”) of the availability of **Maximum Generation** in relation to each of the **Maximum Generation BM Unit(s)** in the following **Week**. Failure to submit a **Weekly Declaration** in accordance with this Paragraph 4.2.3 shall be deemed to be an indication of availability or unavailability (as the case may be) of **Maximum Generation** for each **Operational Day** in the following **Week** as notified by the **User** in the last **Weekly Maximum Generation Declaration** submitted in accordance with this Paragraph 4.2.3, if any, or if no previous **Weekly Maximum Generation Declaration** has been submitted, in the amount of the **Indicative Maximum Generation**



**Capability** specified in the **Maximum Generation Service Agreement** between **The Company** and that **User**.

- 4.2.3.2 The **User** may indicate in the **Weekly Maximum Generation Declaration** its best estimate of the amount of **Maximum Generation** available (the “**Indicative Maximum Generation Capability**”). If no such indication is given, the **User** shall be deemed to have notified **The Company** of the amount of **Indicative Maximum Generation Capability** set out in the **Maximum Generation Service Agreement** between **The Company** and that **User**.
- 4.2.3.3 If at any time the **User** becomes aware that, in respect of any **Maximum Generation BM Unit(s)**, there are changes to the availability of **Maximum Generation** and/or the **Indicative Maximum Generation Capability** for all or part of any **Operational Day** as specified in the relevant **Weekly Maximum Generation Declaration** of any **Maximum Generation Redeclaration** (as the case may be), it shall notify **The Company** forthwith via the **Designated Information Exchange System** in the form set out in Schedule 2 to this Section 4 (a “**Maximum Generation Redeclaration**”).
- 4.2.3.4 Each **Maximum Generation BM Unit** in respect of which **Maximum Generation** is (or is deemed to be) declared or redeclared to be available in all or part of an **Operational Day** in accordance with this Paragraph 4.2.3 is hereinafter referred to in respect of such **Operational Day** (or part thereof) as “an **Available BM Unit**”.
- 4.2.4 **Utilisation of Maximum Generation**
- 4.2.4.1 **The Company** may, as between **The Company** and that **User**, at any time instruct the **User** to provide **Maximum Generation** from an **Available BM Unit** (a “**Maximum Generation Instruction**”) and the **User** shall use reasonable endeavours to provide **Maximum Generation** from such **Available BM Unit**.
- 4.2.4.2 **The Company** shall only issue a **Maximum Generation Instruction** where an **Available BM Unit** has been instructed to generate or is already generating (in each case) at the prevailing **Maximum Export Limit** for that **Available BM Unit**.
- 4.2.4.3 If, following the issue by **The Company** of a **Maximum Generation Instruction** in respect of an **Available BM Unit**, the **User** submits to **The Company** (in accordance with **Grid Code BC 1**) a revised **Maximum Export Limit** for that **Available BM Unit**, that **Available BM Unit** shall be deemed to have ceased providing **Maximum Generation**

immediately upon receipt by **The Company** of such revised **Maximum Export Limit**.

4.2.4.4 Any **Maximum Generation Instruction** issued by **The Company** shall be an **Emergency Instruction**. The method of issuing any **Maximum Generation Instruction** shall be specified in the **Maximum Generation Service Agreement**.

4.2.4.5 **The Company** may instruct the **User** to cease the provision of **Maximum Generation** from the instructed **Available BM Unit** at any time.

4.2.4.6 On receipt of a **Maximum Generation Instruction** the **User** shall use reasonable endeavours to provide **Maximum Generation** from the **Available BM Unit** continuously until the earlier of:-

- (a) the expiry of a period of 120 minutes; and
- (b) the time of issue by **The Company** of an instruction to cease provision

4.2.4.7 The provision of **Maximum Generation** from an **Available BM Unit** shall not be achieved by the transfer of the **Station Demand** of the **Power Station** to the **Station Transformer(s)**.

#### 4.2.5 Payment for Maximum Generation

4.2.5.1 The **Maximum Generation Energy Payment** to be made by **The Company** to the **User** following the issue of a **Maximum Generation Instruction** by **The Company** for the provision of **Maximum Generation** in **Operational Days** in calendar month  $m$ , ( $UF_m$ ) shall be calculated in accordance with the following formula:-

$$UF_m = \sum_{i=1}^{Units} UF_{im}$$

Where;

$$UF_{im} = \sum_{j \in M_m} \text{Min} \left( \left( Q_{\max_{ij}} \times EP_{ij} \right), \left( X \times \frac{CEC}{2} \times EP_{ij} \right) \right)$$

In this Paragraph 4.2.5.1, the following terms shall have the following meanings:-

|                                                             |                                                                                                                                                                                                                                        |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\sum_{i=1}^{Units}$                                        | the summation over all <b>Available BM Units</b> /                                                                                                                                                                                     |
| $\sum_{j \in M_m}$                                          | the summation over all <b>Settlement Periods</b> $j$ , in the set $M_m$ of <b>Settlement Periods</b> in <b>Operational Days</b> in calendar month $m$                                                                                  |
| $Q_{max,ij}$                                                | <b>Max</b> $(Q_{M_{ij}} - (FPN_{ij} + \sum_n (QAO_{ij}^n + QAB_{ij}^n)), 0)$                                                                                                                                                           |
| $EP_{ij}$                                                   | the <b>Maximum Generation Energy Fee</b> (£/MWh), applicable in <b>Settlement Period</b> $j$ , for <b>Available BM Unit</b> $i$                                                                                                        |
| CEC                                                         | <b>Connection Entry Capacity</b> for the <b>Available BM Unit</b>                                                                                                                                                                      |
| X                                                           | 0.03 (or such other figure as may be either (i) set out in the <b>Maximum Generation Service Agreement</b> for the <b>Available BM Unit</b> or (ii) agreed or determined in accordance with Paragraphs 4.2.5.3 to 4.2.5.5 (inclusive)) |
| $QM_{ij}$ ,<br>$FPN_{ij}$ ,<br>$QAO_{ij}$ and<br>$QAB_{ij}$ | the meanings ascribed to them in the <b>Balancing and Settlement Code</b>                                                                                                                                                              |

4.2.5.2 Where an **Available BM Unit** is at the time of issue of a **Maximum Generation Instruction** generating at a level below **Connection Entry Capacity** but the amount of MW delivered as **Maximum Generation** by such **Available BM Unit** is greater than 3% (or such other figure as **The Company** and the **User** may agree in the **Maximum Generation Service Agreement**) of the **Connection Entry Capacity** of that **Available BM Unit**, the **User** shall have the right to raise a dispute in accordance with the provisions of Paragraph 4.2.5.3 as to the amount of MW (represented by the value of factor X) by reference to which payment for provision of **Maximum Generation** shall be determined.

4.2.5.3 Where the provisions of Paragraph 4.2.5.2 apply:-

- (a) the **User** may notify **The Company** in writing that it disagrees with the amount of MW (represented by the value of factor X) by reference to which **The Company** has determined the **Maximum Generation Energy Payment** set out in the **Provisional**

**Statement** and the **User** shall specify in such notification the value of factor X which it considers represents the amount of MW by reference to which payment for provision of **Maximum Generation** should be determined in accordance with Paragraph 4.2.5.1, provided always that any such notification shall be given within ten **Business Days** of receipt by the **User** of the **Provisional Monthly Statement**; and

- (b) this Paragraph 4.2.5.3 and Paragraphs 4.2.5.4 and 4.2.5.5 shall apply to such matter in the place of Paragraphs 4.3.2.3, 4.3.2.7 and 4.3.2.8, and Paragraph 4.3.2 shall be read and construed accordingly.

The parties shall discuss and endeavour to resolve the matter prior to **The Company** sending out the **Final Monthly Statement**. If **The Company** and the **User** reach agreement, **The Company** shall set out in the **Final Monthly Statement** the adjustments required but, if it cannot be resolved, the calculations set out in the **Provisional Statement** and in the **Provisional Adjustments Statement** shall be binding upon the parties until such time as they are reversed or revised by agreement between the parties or otherwise (in accordance with Paragraphs 4.2.5.4 and 4.2.5.5) pursuant to the **Dispute Resolution Procedure**.

- 4.2.5.4 If a **User** and **The Company** fail to reach an agreement within ten **Business Days** of receipt by **The Company** of the **User's** written notification in accordance with Paragraph 4.2.5.5, then either party may, within twenty **Business Days** of receipt by **The Company** of the **User's** written notification, refer the matter to the **Authority** for determination as a **Charging Dispute** in accordance with Paragraph 7.3.
- 4.2.5.5 Where a dispute is resolved by issuance of a decision of the **Authority** pursuant to the **Dispute Resolution Procedure** in accordance with Paragraph 4.2.5.4 above, **The Company** shall (where appropriate) adjust the account between itself and the **User** accordingly in the next **Provisional Adjustments Statement** required to be issued under Paragraph 4.3.2.1. If such decision of the **Authority** is subsequently reversed or modified following judicial review of the **Authority's** decision, **The Company** shall adjust the account between itself and the **User** accordingly in the next **Provisional Adjustments Statement** which it issues.
- 4.2.5.6 The **Maximum Generation Energy Fee** for each **Available BM Unit** of a **User** will be that detailed in the **Maximum Generation Service Agreement** between **The Company** and that **User**.

4.2.5.7 The **User** shall have the right to notify **The Company** of a revised **Maximum Generation Energy Fee**, as between **The Company** and that **User**, not more than once every month. Such notification must be in writing and must be received by **The Company** no later than the fifteenth day of the calendar month. The revised **Maximum Generation Energy Fee** shall apply, as between **The Company** and that **User**, with effect on and from the first **Operational Day** of the calendar month following such notification.

#### 4.2.6 **ABSVD Methodology Statement**

It is a condition of a **User** entering into a **Maximum Generation Service Agreement** that **Maximum Generation** is included in the determination of the **Applicable Balancing Services Volume Data** in respect of each **Contracted BM Unit** for the purposes of the **ABSVD Methodology Statement** and Section Q.6.4 of the **Balancing and Settlement Code**.

#### 4.2.7 **Maximum Generation Event of Default**

Any failure by the **User** during the term of the **Maximum Generation Service Agreement** to comply with its obligations pursuant to Paragraph 4.2.6 in respect of any **Available BM Unit** and any **Settlement Period** shall constitute an event of default to which the terms of Paragraph 4.2.8 shall apply.

#### 4.2.8 **Consequences of Maximum Generation Event of Default**

In respect of any event of default incurred by the **User** in respect of an **Available BM Unit** pursuant to Paragraph 4.2.7, **The Company** shall be entitled to withhold the **Maximum Generation Energy Payment** (if any) applicable to the relevant **Available BM Unit** and the **Settlement Period** in which such event of default occurred.

#### 4.2.9 **Grid Code**

The provision by the **User** of **Maximum Generation** shall not relieve it of any of its obligations (where applicable) set out in the **Grid Code**.

#### 4.2.10 **Safety**

Notwithstanding Paragraph 4.2.11, **The Company** accepts that any decision to keep an **Available BM Unit** operating above the prevailing **Maximum Export Limit** for that **Available BM Unit** is one for the **User** alone, and accepts that the **User** may change generation on the **Available BM Unit** if it believes it is necessary for safety reasons (whether relating to personnel or **Plant** or **Apparatus**). The responsibility for injury to personnel and damage to **Plant** and **Apparatus** owned

and/or operated by the **User** caused by operation of an **Available BM Unit** following the issue by **The Company** of **Maximum Generation Instruction** pursuant to Paragraph 4.2.4 therefore rests with the **User** and **The Company** shall have no liability whatsoever in connection therewith. The **User** shall indemnify and keep indemnified **The Company** in respect of liability for death or personal injury and/or damage to **Plant** and **Apparatus** owned and/or operated by **The Company** and arising out of or in connection with such operation of one or more **Available BM Unit(s)** above the prevailing **Maximum Export Limit** for such **Available BM Unit(s)** from time to time, save to the extent that:-

- 4.2.10.1 the **User** has operated the **Available BM Unit** in accordance with **Good Industry Practice**; and/or
- 4.2.10.2 such death or personal injury and/or damage to **Plant** and **Apparatus** is caused by **The Company's** negligent act or omission.

#### 4.2.11 Warranty

The **User** warrants to **The Company** that it believes that operation of each of its **Maximum Generation BM Unit(s)** above the prevailing **Maximum Export Limit** for such **Maximum Generation BM Unit(s)** will be within its safe operating parameters (whether relating to personnel or **Plant** or **Apparatus**).

#### 4.2.12. Publication of Maximum Generation Information

- 4.2.12.1 **The Company** shall use reasonable endeavours to publish on its web-site within five **Business Days** of signature of a **Maximum Generation Service Agreement**, or within five **Business Days** of receipt of any updated information in accordance with this Paragraph 4.2, details of the following information in respect of each **Maximum Generation BM Unit** specified in such **Maximum Generation Service Agreement**:-
  - (a) the **Maximum Generation Energy Fee**;
  - (b) the **Indicative Maximum Generation Capability**;
  - (c) the amount of factor X (as defined in Paragraph 4.2.5.1) if other than 0.03,
 in such form and manner as shall be prescribed by **The Company** from time to time.
- 4.2.12.2 In respect of each **Operational Day** in a calendar month, **The Company** shall, by the tenth **Business Day** of the calendar month following that calendar month, publish on its web-site in respect of each relevant **Maximum Generation BM Unit(s)** the following details of each **Maximum Generation Instruction** (if any) issued by **The Company** in accordance with Paragraph 4.2.4:-
  - (a) the **Maximum Generation Energy Fee**;
  - (b) the period(s) for which **Maximum Generation** has been provided;

(c) the MW level(s) delivered as **Maximum Generation**,

in such form and manner as shall be prescribed by **The Company** from time to time.

4.2.12.3 Each **User** consents to the disclosure by **The Company** of the information referred to at Paragraphs 4.2.12.1 and 4.2.12.2 above in so far as it relates the provision of **Maximum Generation** from its **Maximum Generation BM Unit(s)**, provided always that **The Company** shall not be bound to comply with the provisions of this Paragraph with regard to the provision of information to the extent that to do so would be likely to restrict, distort or prevent competition in the provision of **Maximum Generation**.

4.2.12.4 Each **User** hereby consents to the disclosure and use by **The Company** of data and other information from any year relating to the provision by that **User** of the **Balancing Service** to the extent necessary to enable **The Company** to carry out its **EMR Functions**.

#### **4.2A SYSTEM TO GENERATOR OPERATIONAL INTERTRIPPING**

##### **4.2A.1 Application**

The provisions of this Paragraph 4.2A shall apply to **The Company** and a **User** in respect of the provision by that **User** to **The Company** of **System to Generator Operational Intertripping** where details of a **System to Generator Operational Intertripping Scheme** are set out in Appendix F3 of the relevant **Bilateral Agreement**.

##### **4.2A.2 Provision of System to Generator Operational Intertripping**

4.2A.2.1 Each **User** hereby agrees, as between **The Company** and that **User**, to:-

- (a) (save where **Force Majeure** applies) make available its **System to Generator Operational Intertripping Scheme** for arming at all times when **Active Power** is being exported to the **National Electricity Transmission System** from the **Connection Site** at which such **System to Generator Operational Intertripping Scheme** is located;
- (b) arm, or permit the arming of, the **System to Generator Operational Intertripping Scheme** in accordance with the terms of the relevant **Bilateral Agreement** when instructed by **The Company** (in accordance with **Grid Code BC 2.8**) by telephone

(such instruction to be confirmed via the **Designated Information Exchange System** substantially in the form set out in Schedule 3, Part I to this Section 4);

- (c) (where an instruction from **The Company** has been confirmed via the **Designated Information Exchange System** in accordance with Paragraph 4.2A.2.1(b) above) following the tripping of the **Circuit Breaker(s)** upon receipt of a signal from the **System to Generator Operational Intertripping Scheme**:-
  - (i) restrict the export of **Active Power** from the **Connection Site** to the **National Electricity Transmission System** to the level of MW specified in such confirmation (or such increased level(s) as **The Company** may subsequently notify pursuant to Paragraph 4.2A.2.2(c)(i)) (“the **Restricted MW Export Level**”); and
  - (ii) maintain such restricted export until such time as the **User** is notified by **The Company** in accordance with Paragraph 4.2A.2.2(c)(ii) that the **Restricted MW Export Level** no longer applies, whereupon the **User** shall be permitted to increase the export of **Active Power** from the **Connection Site** above the **Restricted MW Export Level**;
- (d) comply with any special instructions given by **The Company** in the performance of its obligations under Paragraph 4.2A.2.1(c); and
- (e) disarm the **System to Generator Operational Intertripping Scheme** when instructed by **The Company** (in accordance with **Grid Code BC2.8**) by telephone (such instruction to be confirmed via the **Designated Information Exchange System** substantially in the form set out in Schedule 3, Part I to this Section 4).

4.2A.2.2 **The Company** hereby agrees to:-

- (a) notify the **User** as soon as reasonably practicable following **The Company** becoming aware of the requirement for arming of the **System to Generator Operational Intertripping Scheme**;
- (b) (where relevant) take any steps necessary to arm the **System to Generator Operational Intertripping Scheme** in accordance with the terms of the relevant **Bilateral Agreement**;



(c) following the tripping of the **Circuit Breaker(s)** upon receipt of a signal from the **System to Generator Operational Intertripping Scheme**, notify the **User**:-

- (i) as soon as the **Restricted MW Export Level**, whilst still applying, can be increased; and/or
- (ii) as soon as the **Restricted MW Export Level** (as may be increased from time to time pursuant to (i) above) no longer applies

each such notification to be in accordance with **Grid Code BC 2.8** and to be made by telephone (such notification to be confirmed via the **Designated Information Exchange System** substantially in the form set out in Schedule 3, Part II to this Section 4); and

(d) issue an instruction to disarm, referred to in Paragraph 4.2A.2.1(e), as soon as reasonably practicable following **The Company** becoming aware that the requirement for arming of the **System to Generator Operational Intertripping Scheme** has ceased (and such an instruction shall be deemed to have been issued for the purposes of this Paragraph 4.2A upon tripping of the **Circuit Breaker(s)** upon receipt of a signal from the **System to Generator Operational Intertripping Scheme**).

#### 4.2A.3 Intertrip Volume

Following the tripping of a **Circuit Breaker(s)** following receipt of a signal from a **System to Generator Operational Intertripping Scheme**, the resulting reduction in **Output** for each tripped **BM Unit i** or (where relevant) any tripped **Generating Unit(s)** comprised in a **BM Unit** shall be determined in accordance with the relevant formula set out in the **ABSVD Methodology Statement**, where such resulting reduction in **Output** is termed  $SE_{sj}$ .

#### 4.2A.4 Payments to the User

**The Company** shall make the following payments to the **User** in respect of **System to Generator Intertripping Schemes**:

(a) a **Capability Payment** shall be paid in respect of each **Category 2 Intertripping Scheme** and each **Category 4 Intertripping Scheme** as follows:-

- (i) **The Company** shall pay to the **User** an amount (“the **Capability Payment**”) in consideration of the installation of the **System to Generator Operational Intertripping Scheme** and the **User’s** obligations under Paragraphs 4.2A.2.1(a) and (b), being an amount per month determined by reference to the number of **Settlement Periods** during the month in question (and in respect of which the requirement for **System to Generator Operational Intertripping** is stated in Appendix F3 of the relevant **Bilateral Agreement**) and the payment rate (£/**Settlement Period**) specified in Schedule 4 to this Section 4; and
  - (ii) for the avoidance of doubt, where a **System to Generator Operational Intertripping Scheme** comprises both a **Category 2 Intertripping Scheme** and a **Category 4 Intertripping Scheme**, only one **Capability Payment** shall be payable by **The Company** to the **User** in respect thereof;
- (b) subject always to Paragraph 4.2A.5, a **Restricted Export Level Payment** shall be paid in respect of each **Category 2 Intertripping Scheme**, each **Category 3 Intertripping Scheme** and each **Category 4 Intertripping Scheme** as follows:-
  - (i) the payment shall only be made where, following the tripping of the **Circuit Breaker(s)** upon receipt of a signal from the **System to Generator Operational Intertripping Scheme**, restrictions on the export of **Active Power** from the **Connection Site** apply in accordance with the terms of Paragraph 4.2A.2.1(c) above at any time after the period of 24 hours has elapsed following such tripping; and
  - (ii) in such a case, **The Company** shall pay to the **User** upon request the **Restricted Export Level Payment**, by reference to the period from expiry of such 24 hour period until the time when **The Company** notifies the **User** in accordance with Paragraph 4.2A.2.2(c)(ii) that the **Restricted MW Export Level** no longer applies (“the **Restricted Export Level Period**”); and
- (c) subject always to Paragraph 4.2A.5, in respect of each **Category 2 Intertripping Scheme** and **Category 4 Intertripping Scheme**, where the **Circuit Breaker(s)** are tripped upon receipt of a signal from the **System to Generator Operational Intertripping Scheme**, **The Company** shall pay to the **User** an amount (“the

**Intertrip Payment**") being an amount (£/**Intertrip Contracted Unit**/trip) specified in Schedule 4 to this Section 4.

#### 4.2A.5 Withholding of payments

**The Company** shall not be obliged to make any **Restricted Export Level Payment** or **Intertrip Payment** pursuant to Paragraph 4.2A.4 where the tripping of **BM Unit(s)** or (where relevant) **Generating Unit(s)** comprised in a **BM Unit** occurs:-

- (a) during any period where the **System to Generator Operational Intertripping Scheme** is not instructed by **The Company** to be armed in accordance with Paragraphs 4.2A.2.2(a) and 4.2A.2.2(d); and/or
- (b) where the **User** has failed to arm, or permit the arming of, the **System to Generator Operational Intertripping Scheme** in accordance with the terms of Paragraph 4.2A.2.1(b); and/or
- (c) where the **User** has failed to exercise **Good Industry Practice** to restrict the export of **Active Power** from the **Connection Site** to the **Restricted MW Export Level** as required by Paragraph 4.2A.2.1(c) (ignoring any export above **Restricted MW Export Level** where pursuant to an instruction from **The Company** to provide any **Balancing Service(s)**); and/or
- (d) where no signal is received by the **Circuit Breaker(s)** from the **System to Generator Operational Intertripping Scheme**.

#### 4.2A.6 Revisions to Appendix F3 of the Bilateral Agreement

Where **The Company** requires **Routine Change(s)** (as defined below) to be made to Appendix F3 of the **Bilateral Agreement**, then the **User** shall not unreasonably withhold or delay providing to **The Company** written consent to any such **Routine Changes** and hereby authorises **The Company**, following receipt of such written consent, to make amendments on its behalf to Appendix F3 of the **Bilateral Agreement** to reflect such **Routine Change(s)** and undertakes not to withdraw qualify or revoke such authority or instruction at any time. For the purposes of this Paragraph 4.2A.6, "**Routine Change(s)**" shall mean changes to the nomenclature of transmission circuits associated with a **System to Generator Operational Intertripping Scheme** specified in

Appendix F3 of the relevant **Bilateral Agreement** which do not necessitate replacement, renovation, modification, alteration or construction to the **User's Plant** or **Apparatus**.

#### 4.2A.7 **No payments for Category 1 Intertripping Schemes**

For the avoidance of doubt, no payment shall be made by **The Company** hereunder in respect of a **Category 1 Intertripping Scheme**.

#### 4.2A.8 **Disclosure and Use of Information**

Each **User** hereby consents to the disclosure and use by **The Company** of data and other information from any year relating to the provision by that **User** of the **Balancing Service** to the extent necessary to enable **The Company** to carry out its **EMR Functions**.

### 4.2B **OTHER BALANCING SERVICES**

#### 4.2B.1 **Application**

The provisions of this Paragraph 4.2B shall apply to **The Company** and a **User** or other person in respect of the provision by that **User** or other person to **The Company** of **Balancing Services** other than **Mandatory Ancillary Services**, **Maximum Generation** and **System to Generator Operational Intertripping**.

#### 4.2B.2 **Form of Agreement**

Any agreement between **The Company** and a **User** or other person in respect of the provision by that **User** or other person to **The Company** of **Balancing Services** other than **Mandatory Ancillary Services**, **Maximum Generation** and **System to Generator Operational Intertripping** shall be in a form to be agreed between them (but, in respect of **Commercial Services Agreements**, subject always to Paragraph 4.2B.3 where applicable).

#### 4.2B.3 **Agreed Ancillary Services**

Each **User** and **The Company** shall enter into a **Commercial Services Agreement** providing for the payment for and provision of the **Agreed Ancillary Services** (other than **Maximum Generation**) and **System to Generator Operational Intertripping** (if any) set out in Appendix F1 of the relevant **Bilateral Agreement**. If, after a period which appears to **The Company** to be reasonable for the purpose, **The Company** has

failed to enter into a **Commercial Services Agreement** with such **User**, **The Company** shall be entitled to initiate the procedure for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4 to settle the terms of the said **Commercial Services Agreement**.

#### 4.2B.4 **Disclosure and Use of Information**

Each **User** or other person who provides **Balancing Services** to **The Company** hereby consents to the disclosure and use by **The Company** of data and other information from any year relating to the provision by that **User** or other person of the **Balancing Service** to the extent necessary to enable **The Company** to carry out its **EMR Functions**.

#### 4.2B.5 **EBR Article 18**

Where and to the extent that:-

- (a) contractual arrangements for the provision of and payment for **Balancing Services** which are not set out in **CUSC** contain **EBR Article 18 Terms and Conditions**; and
- (b) an **EBR Amendment** to such contractual arrangements is proposed which under the **Electricity Balancing Regulation** is subject to consultation and prior approval by the **Authority**, then, to the extent and from such date as is required by the **Electricity Balancing Regulation**, such **EBR Amendment** shall be effective only after appropriate consultation and prior approval by the **Authority**. Accordingly, **The Company** shall ensure that the amendment processes contained within such contractual arrangements provide for appropriate consultation and prior approval by the **Authority** before any **EBR Amendment** becomes effective.

## 4.3 PAYMENTS FOR BALANCING SERVICES

### 4.3.1 Application

The provisions of this Paragraph 4.3 shall apply to payments made by **The Company** to a **User** (and by a **User** to **The Company**) pursuant to:-

- 4.3.1.1 **Mandatory Services Agreements** in respect of the provision of **Mandatory Ancillary Services**; and/or
- 4.3.1.2 (save as provided in Paragraphs 4.2.5.3 to 4.2.5.5 (inclusive)) **Maximum Generation Service Agreements** in respect of the provision of **Maximum Generation**; and/or
- 4.3.1.3 Paragraph 4.2A.4 in respect of the provision of **System to Generator Operational Intertripping**,

and (if agreed between **The Company** and a **User**) may also be incorporated by reference into a **Balancing Services Agreement** as a term thereof so as to apply in respect of the provision of other **Balancing Services** (but for the avoidance of doubt not so as to thereby create any obligations on **The Company** and that **User** under the **CUSC** in respect thereof).

### 4.3.2 Payment Procedure

- 4.3.2.1 On the third **Business Day** following receipt from the **Settlement Administration Agent** of the **Interim Information Settlement Run** issued in respect of the final day of the previous calendar month **The Company** shall send to the **User** a statement ("**Provisional Monthly Statement**") consisting of:-
  - (a) a statement ("**Provisional Statement**") incorporating:-
    - (i) detailed daily technical reports of all **Balancing Services** supplied by the **User** pursuant to the relevant **Balancing Services Agreement** during the previous calendar month;
    - (ii) a summary of each **Balancing Service** so supplied; and
  - (b) if relevant a statement showing adjustments to be made (net of interest) in relation to disputes for **Balancing Services** concerning any month prior to the

previous month ("**Provisional Adjustments Statement**"),

in each case showing the payments due to or from the **User** as a result thereof.

- 4.3.2.2 If the **User** has failed to supply any **Balancing Service** in accordance with the **Grid Code** or any instructions validly and properly issued under the **Grid Code** or as required by the **CUSC** or any **Balancing Services Agreement**, **The Company** shall set out the times and dates upon which it considers such failure of supply to have occurred and the facts or evidence which it relies upon as constituting such failure in the **Provisional Monthly Statement** next following the date of such failure or next following the date when **The Company** first becomes aware of the facts which constitute such failure.
- 4.3.2.3 If the **User** disagrees with any dates, times, facts or calculations set out in the **Provisional Statement** and/or the **Provisional Adjustments Statement**, it shall state by notice in writing to **The Company** the reasons and facts which it relies upon in support of such disagreement. The parties shall discuss and endeavour to resolve the matter prior to **The Company** sending out the **Final Monthly Statement**. If they reach agreement **The Company** shall set out in the **Final Monthly Statement** the adjustments required but if it cannot be resolved the dates times facts and calculations set out in the **Provisional Statement** and in the **Provisional Adjustments Statement** shall be binding upon the parties until such time as they are reversed or revised by agreement between the parties or otherwise (in accordance with Paragraph 4.3.2.8) pursuant to the **Dispute Resolution Procedure**.
- 4.3.2.4 Notwithstanding the provisions of Paragraphs 4.3.2.2 and 4.3.2.3, if any fact or matter set out in the **Provisional Statement** and/or in the **Provisional Adjustments Statement** shall be inconsistent with any fact or matter set out in a final run (if any) of the settlement calculation issued by the **Settlement Administration Agent**, or any change to a previous final run (if any) of a settlement calculation, the facts and matters set out in the settlement calculation or which, following a dispute and subject to Paragraph 4.3.2.5, it is found or agreed should be set out therein shall be binding upon both parties.

- 4.3.2.5 If either **The Company** or the **User** intends to dispute any fact or matter contained in a final run (if any) of a settlement calculation which is inconsistent with any fact or matter contained in a **Provisional Statement** and/or a **Provisional Adjustments Statement** it shall serve notice in writing on the other party to that effect in order that the other party may make such representations as it wishes to the **Settlement Administration Agent** or exercise such rights as it may have under the **Balancing and Settlement Code** in relation to such fact or matter.
- 4.3.2.6 On the eighteenth **Business Day** of each calendar month, **The Company** shall send to the **User** a statement ("**Final Monthly Statement**") consisting of:-
- (a) a statement ("**Final Statement**") incorporating:-
    - (i) in the case of an undisputed **Provisional Statement** (or where any dispute has been resolved and no changes have been effected to the calculations contained in the **Provisional Statement**) a further monthly summary of the **Balancing Services** provided together with an invoice for the amount shown as being due to the **User** or **The Company** (as the case may be); or
    - (ii) in the case of a disputed **Provisional Statement** such that changes are required as a result thereof, a further copy of the detailed daily technical reports referred to at Paragraph 4.3.2.1(a)(i), a revised monthly summary of the **Balancing Services** provided and an invoice for the amount shown as being due to the **User** or **The Company** (as the case may be); and
  - (b) if a **Provisional Adjustments Statement** has been issued in accordance with Paragraph 4.3.2.1(b), a statement ("**Final Adjustments Statement**") showing adjustments to be made in relation to disputes for **Balancing Services** concerning any month prior to the previous month together with interest thereon up to and including the date of payment referred to in Paragraph 4.3.2.10. Such adjustments will be reflected in the invoice referred to at Paragraph 4.3.2.6(a)(i) above.



## 4.3.2.7 Where:-

- (a) either **The Company** or the **User** discovers that any previous **Provisional Monthly Statement** or **Final Monthly Statement** contains an arithmetic error or omission; or
- (b) any change is made to a previous final run (if any) of a settlement calculation which includes a change in any of the facts or matters upon which the final settlement run was based which facts or matters formed the basis upon which any previous **Provisional Monthly Statement** or **Final Monthly Statement** was prepared; or
- (c) either **The Company** or the **User** becomes aware of any facts concerning matters provided by this Paragraph 4.3 (other than facts falling within Paragraphs 4.3.2.7(a) and (b)) which show that the payment made by or to the **User** was incorrect; or
- (d) the **User** establishes to **The Company's** reasonable satisfaction that it was entitled to receive any additional payment;

then **The Company** and the **User** shall agree an adjustment to the account between **The Company** and the **User** which adjustment shall be reflected in the next **Provisional Adjustments Statement** which **The Company** issues, and the provisions of Paragraphs 4.3.2.3 to 4.3.2.5 shall apply mutatis mutandis to such adjustments. Failing agreement as to the amount of any such adjustment, **The Company** or the **User** may refer the matter to an expert for determination (if both of them agree) or otherwise may initiate the procedure for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4.

- 4.3.2.8 Where a dispute is resolved by issuance of a decision by an expert or an arbitrator or panel of arbitrators pursuant to the **Dispute Resolution Procedure**, **The Company** shall adjust the account between itself and the **User** accordingly in the next **Provisional Adjustments Statement** required to be issued under Paragraph 4.3.2.1. If such decision of an expert or an arbitrator or panel of arbitrators is subsequently reversed or modified by a final judicial decision after exhaustion of all appeals if this opportunity is taken, **The**

**Company** shall adjust the account between itself and the **User** accordingly in the next **Provisional Adjustments Statement** which it issues.

- 4.3.2.9 Subject to Paragraph 4.3.2.13, the due date of payment for the purposes of Paragraph 4.3.2.12 in respect of any disputed amount subsequently determined or agreed to be payable to the **User** or to **The Company** shall be the date for payment of the relevant **Provisional Statement** from which the dispute arises.
- 4.3.2.10 **The Company** shall pay to the **User** the amount shown as due from **The Company** in the **Final Monthly Statement** within three **Business Days** of the date on which such statement is or should be issued. The **User** shall pay to **The Company** the amount shown as due from the **User** in such statement within three **Business Days** of the date on which such statement is issued.
- 4.3.2.11 If either party ("**Defaulting Party**"), in good faith and/or with reasonable cause fails to pay under Paragraph 4.3.2.10 any amount properly due in respect of **Balancing Services** under the **CUSC** and the relevant **Balancing Services Agreement**, then such **Defaulting Party** shall pay to the other party interest on such overdue amount from and including the due date of such payment to (but excluding) the date of actual payment (as well after as before judgment or determination by an arbitrator or panel of arbitrators) at the **Base Rate**. Provided that should the **Defaulting Party** otherwise fail to pay any amount properly due under the **CUSC** and the relevant **Balancing Services Agreement** on the due date then the **Defaulting Party** shall pay to the other party interest on such overdue amount at the **Enhanced Rate** from the due date on which such payment was properly due to (but excluding) the date of actual payment. Any interest shall accrue from day to day.
- 4.3.2.12 If following a dispute or by virtue of Paragraphs 4.3.2.2, 4.3.2.3, 4.3.2.4, 4.3.2.7 or 4.3.2.8 it is determined or agreed that the **User** was entitled to a further payment from **The Company**, the **User** shall be entitled to interest at the **Base Rate** on the amount of such further payment from the due date calculated in accordance with Paragraph 4.3.2.9 until the date of payment.
- 4.3.2.13 If following a dispute or by virtue of the provisions of

Paragraphs 4.3.2.2, 4.3.2.3, 4.3.2.4, 4.3.2.7 or 4.3.2.8 it is determined or agreed that **The Company** or the **User** was not entitled to any payment it has received, the other party shall be entitled to interest at the **Base Rate** on the amount so paid from the date of payment until the date of repayment or the date when **The Company** makes a payment to the **User** which takes such payment into account.

- 4.3.2.14 Notwithstanding any other provision of the **CUSC** and any **Balancing Services Agreement**, **The Company** and a **User** shall not be limited in any way as to the evidence they may rely upon in any proceedings arising out of or in connection with payment for any **Balancing Service** under the **CUSC** and the relevant **Balancing Services Agreement** and the parties agree that in the event and to the extent that either party succeeds in proving in any such proceedings that any **Balancing Service** was or was not provided, the successful party shall (without prejudice to any liquidated damages provision of the **CUSC** and/or the relevant **Balancing Services Agreement**) be entitled to repayment of the sums already paid or payment of sums not paid as the case may be in respect of such **Balancing Service**.
- 4.3.2.15 Save as otherwise expressly provided in the **CUSC** or in any **Balancing Services Agreement**, sums payable by **The Company** or a **User** to the other in respect of **Balancing Services** pursuant to the **CUSC** or any **Balancing Services Agreement** whether by way of charges, interest or otherwise shall (except to the extent otherwise required by law) be paid in full, free and clear of and without deduction, set-off or deferment in respect of any disputes or claims whatsoever save for sums the subject of a final award or judgement (after exhaustion of all appeals if this opportunity is taken) or which by agreement between **The Company** and the relevant **User** may be so deducted or set off.
- 4.3.2.16 **The Company** represents and warrants to each relevant **User**, as between **The Company** and that **User**, that it enters into each **Balancing Services Agreement** as principal and not as agent for any other person.
- 4.3.2.17 All amounts specified hereunder shall be exclusive of any **Value Added Tax** or other similar tax and **The Company** shall pay to the **User Value Added Tax** at the rate for the time being and from time to time properly chargeable in respect of the making available and/or supply of **Balancing Services**

under the **CUSC**, the relevant **Balancing Services Agreement**, the **Grid Code**, or any **Bilateral Agreement**.

- 4.3.2.18 All payments by **The Company** to the **User** (or by the **User** to **The Company**) in respect of the provision of **Balancing Services** will be made by payment to the parties' bank accounts details of which may be set out in the relevant **Balancing Services Agreement** or otherwise notified by **The Company** to the **User** (or by the **User** to **The Company**) from time to time.
- 4.3.2.19 The submission of all **Provisional Monthly Statements** and all **Final Monthly Statements** and facts and other evidence in support thereof and any questions in connection therewith from **The Company** to the **User** and vice versa in accordance with this Paragraph 4.3.2 must be made, in the absence of agreement to the contrary between the parties, by 19.00 hours on the **Business Day** concerned.
- 4.3.2.20 For the purpose of the regulations of HM Revenue and Customs as regards self-billing of **Balancing Services** and the submission of **Value Added Tax** invoices, the **User** hereby consents to the operation of a self-billing system by **The Company** with regard to the payment for **Balancing Services** to be provided pursuant to the **CUSC** and the relevant **Balancing Services Agreement** and will at all times throughout the term of the relevant **Balancing Services Agreement** maintain such consent. The **User** hereby undertakes, as between **The Company** and that **User**, to do (at **The Company's** cost) all acts and things reasonably necessary to enable **The Company** to comply with the regulations of HM Customs and Excise as regards the self-billing of **Balancing Services**.
- 4.3.2.21 Payment of any sum or the submission of any **Provisional Monthly Statement** or **Final Monthly Statement** by **The Company** to a **User** under this Paragraph 4.3.2 shall not operate to impair or be construed as a waiver of any right, power, privilege or remedy **The Company** may have against the **User** under the **CUSC** and/or any **Balancing Services Agreement** and/or the **Grid Code** and/or any **Bilateral Agreement**.
- 4.3.2.22 For the avoidance of doubt, **The Company** shall issue a **Provisional Monthly Statement** to the **User** for the calendar month following the calendar month in which any **Balancing**

**Services Agreement** to which the **User** is a party shall expire or terminate, setting out details of the **Balancing Services** supplied by the **User** in respect thereof during that calendar month until expiry or termination, and in respect thereof the provisions of this Paragraph 4.3.2 shall continue to apply notwithstanding such expiry or termination.

## 4.4 CHARGING PRINCIPLES

### 4.4.1 Application

The provisions of this Paragraph 4.4 shall apply to payments made by **The Company** to a **User** pursuant to **Mandatory Services Agreements** in respect of the provision of the **Mandatory Ancillary Service of Frequency Response**, and (if agreed between **The Company** and a **User**) may also be incorporated by reference into any other **Ancillary Services Agreement** as a term thereof so as to apply in respect of payments made by **The Company** to that **User** in respect of the provision of other **Ancillary Services** (but for the avoidance of doubt not so as to thereby create any obligations on **The Company** and that **User** under the **CUSC** in respect thereof).

### 4.4.2 Charging Principles - General

- 4.4.2.1 These principles are to be used to establish the basic arrangements but are not intended to stifle innovation in the development of new services or the giving of appropriate economic signals.
- 4.4.2.2 Save where otherwise expressly provided in this Paragraph 4.4, the charges shall be "cost reflective" ie. based and founded upon the actual or estimated costs directly incurred or to be incurred by the **User** for the purpose of providing the service or capability concerned.
- 4.4.2.3 Where a capability to provide an **Ancillary Service** is required by the **Grid Code** from all **BM Units** or **CCGT Units** (as opposed to a capability made available by agreement between **The Company** and a **User** from some only of the **User's BM Units** or **CCGT Units**), no **Ancillary Service** capability payment shall be made.
- 4.4.2.4 The cost of "Grandfathering" **User's** Equipment (i.e. bringing equipment owned by the **User** on 30<sup>th</sup> March 1990 to a

condition of compliance with the **Grid Code**) shall not be included in **Ancillary Services** payments. Where a **Derogation** is withdrawn or reduced in scope then, except in relation to **Frequency Response**, the **User** shall be entitled to take the cost of meeting the withdrawal or reduction in the scope of the **Derogation** into account in its charges.

- 4.4.2.5 Subject to the other provisions of this Paragraph 4.4.2, the charges shall take due account of any change in or amendments to the **Grid Code** or any other statutory or regulatory obligation coming into force after 30<sup>th</sup> March 1990 affecting the provision of **Ancillary Services**.
- 4.4.2.6 If as a result of any changes to the **Balancing and Settlement Code** the **User** ceases to be entitled to receive payment under the **Balancing and Settlement Code** in respect of any elements of **Ancillary Services** provided by it which are expressed in this Paragraph 4.4 to be paid for under the **Balancing and Settlement Code**, the **User** shall be entitled to charge for such elements under an **Ancillary Services Agreement**. Where, however, such change entitles the **User** to be paid for any elements of **Ancillary Services** which are expressed in this Paragraph 4.4 to be paid for under an **Ancillary Services Agreement** the **User** shall cease to be entitled to charge for such elements under an **Ancillary Services Agreement**.

#### 4.4.3 Charging Principles – Frequency Response

**Holding Payments** shall be determined in accordance with Paragraph 4.1.3.13 and, as specified in Paragraph 4.1.3.13(g), therefore need not be cost reflective.

- 4.4.3.1 Part-loading of a **BM Unit** at a level other than that specified in a **Physical Notification** in order to provide **Frequency Response** will normally be achieved by the issue of a **Bid-Offer Acceptance**.
- 4.4.3.2 In recognition of the energy production costs likely to be incurred or avoided when providing **Frequency Response**, an additional amount based upon an expected delivery of **Frequency Response** energy shall be payable under Paragraph 4.1.3.9A.

## 4.5 INDEXATION

#### 4.5.1 Application

The provisions of this Paragraph 4.5 shall apply to payments made by **The Company** to a **User** pursuant to Paragraphs 4.2A.4(a) and (c) in respect of the provision of **System to Generator Operational Intertripping**, and (if agreed between **The Company** and a **User**) may be incorporated by reference into any other **Balancing Services Agreement** (other than a **Mandatory Services Agreement**) as a term thereof so as to apply in respect of payments made by **The Company** to that **User** in respect of the provision of other **Balancing Services** (other than **Mandatory Ancillary Services**) (but for the avoidance of doubt not so as to thereby create any obligations on **The Company** and that **User** under the **CUSC** in respect thereof).

#### 4.5.2 Indexation provisions

4.5.2.1 The rates and/or prices to be indexed shall be specified in the **Balancing Services Agreement** or (in the case of **System to Generator Operational Intertripping**) in Schedule 4 to this Section 4 as applicable for a 12 month period commencing 1<sup>st</sup> April (“the base year”), and these rates and/or prices will be adjusted annually to take account of general price inflation. The index used will be the Retail Prices Index (RPI) with 1987 = 100 base.

4.5.2.2 The source of the RPI index is to be the monthly Office for National Statistics “Business Monitor MM23.”

4.5.2.3 The rates and/or prices to be indexed shall be increased (or reduced as appropriate) for the subsequent 12 month period commencing 1<sup>st</sup> April by the following factor:-

$$\frac{RPI_2}{RPI_1}$$

Where

$RPI_2$  is the RPI for March immediately prior to commencement of that 12 month period

$RPI_1$  is the RPI for March immediately prior to commencement of the base year.

- 4.5.2.4 In subsequent years indexation will continue in accordance with the above, with always the numerator of the factor representing the RPI of the 12 month period in question and the denominator of the factor being the RPI for March immediately prior to the base year.
- 4.5.2.5 In the event that RPI ceases to be published or is not published in respect of any relevant month or it is not practicable to use RPI because of a change in the method of compilation or some other reason, indexation for the purposes of this Paragraph 4.5 shall be calculated by **The Company** using an index agreed between **The Company** and the relevant **User** with a view to determining the relevant price after indexation that would be closest to the relevant price after indexation if RPI had continued to be available. If **The Company** and a relevant **User** are unable to agree a suitable index, either of them may initiate the **Dispute Resolution Procedure** for resolution of the issue as an **Other Dispute** in accordance with Paragraph 7.4.
- 4.5.2.6 For the avoidance of doubt, the provisions of Paragraph 11.3 with regard to determination of an alternative index should the **Retail Prices Index** not be published or there is a material change to the basis of such index shall not apply with respect to the rates and/or prices the subject of this Paragraph 4.5.



**SCHEDULE 1****WEEKLY MAXIMUM GENERATION DECLARATION OF AVAILABILITY****[NAME OF GENERATOR]***Optional Logo*

Station .....Telephone:

Standby Tel:

Fax:

Standby Fax:

Maximum Generation shall be available for the week commencing [                      ] from  
 Maximum Generation BM Unit(s) as follows:-

| <b>Operational Day<br/>(dd/mm/yy)</b> | <b>Maximum<br/>Generation BM<br/>Unit</b> | <b>Indicative<br/>Maximum<br/>Generation<br/>Capability</b> | <b>Available?<br/>(YES/NO)</b> |
|---------------------------------------|-------------------------------------------|-------------------------------------------------------------|--------------------------------|
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |
|                                       |                                           |                                                             |                                |

**ADDITIONAL RELEVANT INFORMATION**

|  |
|--|
|  |
|--|

Fax Sent By (Print name):

Signature: .....

Date: .....

Time: .....

Acknowledged by **The Company**:

Signature: .....

Date: .....

Time: .....

**NESO**

**Fax:**

[   ]

**Standby Fax:**

[   ]

**SCHEDULE 2****MAXIMUM GENERATION REDECLARATION OF AVAILABILITY****[NAME OF GENERATOR]***Optional Logo*

Station .....Telephone:

Standby Tel:

Fax:

Standby Fax:

The availability of Maximum Generation is revised as follows:

| <b>OPERATIONAL<br/>DAY (dd/mm/yy)</b> | <b>Maximum<br/>Generation<br/>BM Unit</b> | <b>Indicative<br/>Maximum<br/>Generation<br/>Capability</b> | <b>Available<br/>(YES/NO)</b> |
|---------------------------------------|-------------------------------------------|-------------------------------------------------------------|-------------------------------|
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |
|                                       |                                           |                                                             |                               |

**ADDITIONAL RELEVANT INFORMATION**

|  |
|--|
|  |
|--|

Fax Sent By (Print name):

Signature: .....

Date: .....

Time: .....

---

Acknowledged by **The Company**:

Signature: .....

Date: .....

Time: .....

**NESO**

**Fax:**

[   ]

**Standby Fax:**

[   ]

**SCHEDULE 3****SYSTEM TO GENERATOR OPERATIONAL INTERTRIPPING - NOTIFICATION  
FORMS****Part I**

Instruction to arm and disarm System to Generator Operational Intertripping Scheme

*From: [   ]*

*To: [   ]*

*Time and date instruction issued: [   ]*

|                                                                                                     |  |
|-----------------------------------------------------------------------------------------------------|--|
| Category of Intertrip                                                                               |  |
| Connection Site                                                                                     |  |
| Time and date of arming                                                                             |  |
| Restricted MW Export Level (MW) post trip                                                           |  |
| Special instructions (if any)                                                                       |  |
| Reason(s) for arming                                                                                |  |
| Relevant fault(s)                                                                                   |  |
| Generating Unit(s)/BM Unit(s)/Intertrip<br>Contacted Unit(s) to be armed (delete as<br>appropriate) |  |

|                                |  |
|--------------------------------|--|
| Anticipated duration of arming |  |
|--------------------------------|--|

|                         |  |
|-------------------------|--|
| Category of Intertrip   |  |
| Connection Site         |  |
| Time and date of arming |  |

**Part II**

## Confirmation of Withdrawal of Restricted MW Export Level

*From : [    ]**To: [    ]**Time and date confirmation issued: [    ]*

|                                 |                           |
|---------------------------------|---------------------------|
| Connection Site                 |                           |
| Restricted MW Export Level (MW) |                           |
| No longer applies               | <i>Tick if applicable</i> |
| Has been increased to (MW)      |                           |

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Special instructions (if any) if Restricted MW Export Level has been increased |  |
|--------------------------------------------------------------------------------|--|

**SCHEDULE 4****SYSTEM TO GENERATOR OPERATIONAL INTERTRIPPING - PAYMENT RATES**

|                                                                 | <b>Category 1</b> | <b>Category 2</b> | <b>Category 3</b> | <b>Category 4</b> |
|-----------------------------------------------------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Capability Payment<br/>(£/Settlement Period)</b>             | N/A               | £ 1.72            | N/A               | £ 1.72            |
| <b>Intertrip Payment<br/>(£/Intertrip Contracted Unit/Trip)</b> | N/A               | £ 400,000         | N/A               | £ 400,000         |

All rates in this Schedule 4 are specified at April 2005 base and shall be subject to indexation in accordance with Paragraph 4.5 with effect from 1st April 2006.

END OF SECTION 4



**CUSC - SECTION 5**  
**EVENTS OF DEFAULT, DEENERGISATION,**  
**AND DISCONNECTION**

**CONTENTS**

- 5.1 Duration and Termination
- 5.2 Emergency Deenergisation
- 5.3 Generic Events of Default and Deenergisation
- 5.4 Site Specific Deenergisation and Disconnection
- 5.5 Balancing Services Use of System Charges: Events of Default
- 5.6 Notice to Disconnect
- 5.7 Disconnection
- 5.8 Not Used
- 5.9 Non-Embedded Customers
- 5.10 Relevant Interruptions

## **CUSC - Section 5**

### **Events of Default, Deenergisation, Disconnection and Decommissioning**

#### **5.1 DURATION AND TERMINATION**

##### **5.1.1 Licensed CUSC Parties**

Upon either:

- (a) termination of all **Bilateral Agreements, Mandatory Services Agreements and Construction Agreements** entered into by a **User** and cessation of any other right to use the **National Electricity Transmission System** pursuant to Paragraph 3.8 or Paragraph 9.23; or
- (b) a **User** having a **Licence** but not yet being connected to or otherwise using the **National Electricity Transmission System**, until such time as the **User** accepts an **Offer** to connect to or use the **National Electricity Transmission System**,

a **User** with a **Licence** shall be or continue to be a **CUSC Party** but shall not (except in the case of Paragraph 5.1.5) have any further rights and obligations for the period of such dormancy under the **CUSC** (and shall be a “**Dormant CUSC Party**”) until the execution (or other entering into) of a **Bilateral Agreement** or commencement / recommencement of its right to use the **National Electricity Transmission System** pursuant to the **CUSC**. Termination or expiry of a particular **Bilateral Agreement, Mandatory Services Agreement or Construction Agreement** shall not, of itself, cause the relevant **User** to become a **Dormant CUSC Party**.

- 5.1.2 A **Dormant CUSC Party** may once it ceases to have a **Licence** which requires it to be a party to the **CUSC Framework Agreement**, by prior notice to **The Company** cease to be a **CUSC Party** from the date specified in such notice, on which date it shall cease to be a party to the **CUSC Framework Agreement**.

##### **5.1.3 Non-Licensed CUSC Parties**

Upon termination of all **Bilateral Agreements, Mandatory Services Agreements and Construction Agreements** entered into by a **User** and cessation of any other right to use the **National Electricity Transmission System** pursuant to

Paragraph 3.8 or Paragraph 9.23, a **User** without a **Licence** shall cease to be a **CUSC Party** from the date of cessation of the last such agreement or right to use, and shall on that date cease to be a party to the **CUSC Framework Agreement**.

- 5.1.4 A person ceasing to be a **CUSC Party** or becoming a **Dormant CUSC Party** shall not affect any rights or obligations of any **CUSC Party** which may have accrued to the date of termination or dormancy under the **CUSC**, any **Bilateral Agreement** or **Mandatory Services Agreement** or **Construction Agreement** or the **Charging Statements** or otherwise and shall not affect any continuing obligations of any other **CUSC Party** under the **CUSC**.

- 5.1.5 **Embedded Exemptable Large Power Station and Virtual Lead Parties**

A **User** in respect of an **Embedded Exemptable Large Power Station** or **Virtual Lead Party** shall (unless **The Company** agrees otherwise in writing, such agreement not to be unreasonably withheld or delayed), once it has acceded to the **CUSC Framework Agreement** continue to remain a **CUSC Party** and shall not be treated as a **Dormant CUSC Party** notwithstanding the provisions of Paragraph 5.1.1.

## 5.2 EMERGENCY DEENERGISATION

- 5.2.1 Emergency Deenergisation by The Company

If, in the reasonable opinion of **The Company**, the condition or manner of operation of the **National Electricity Transmission System** or a **User's System** or an **Interconnector** poses an immediate threat of injury or material damage to any person or to the **Total System** or to any **User's System** or to the **National Electricity Transmission System**, **The Company** shall have the right to:

- (a) **Deenergise that User's Equipment**, or
- (b) request the owner of the **Distribution System** to which that **User's Equipment** or equipment for which that **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected to **Deenergise that User's Equipment** or equipment for which that **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**),

if it is necessary or expedient to do so to avoid the occurrence of such injury or damage.

#### 5.2.2 Emergency Deenergisation by a User

If, in the reasonable opinion of a **User**, the condition or manner of operation of the **National Electricity Transmission System**, the **Total System** or any other **User's System** poses an immediate threat of injury or material damage to any person or to its **User's System** or **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) that **User** shall have the right to **Deenergise** its **User's Equipment** or equipment for which that **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**), if it is necessary or expedient to do so to avoid the occurrence of such injury or damage.

#### 5.2.3 Post Emergency Reenergisation

**The Company** or, as the case may be, the **User** shall **Reenergise** the **User's Equipment** at the **Connection Site** (or, in the case of the **User** the site of connection) or **The Company** shall request the owner/operator of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected to **Reenergise** the **User's Equipment** at the site of connection, in each case as quickly as practicable after the circumstances leading to any **Deenergisation** under this Paragraph 5.2 have ceased to exist.

### 5.3 **GENERIC EVENTS OF DEFAULT AND DEENERGISATION**

#### 5.3.1 Generic Events of Default

It shall be an **Event of Default** if:-

- (a) a **User** shall fail to pay (other than by inadvertent error in funds transmission which is discovered by **The Company**, notified to that **User** and corrected within 2 **Business Days** thereafter) any amount properly due or owing from that **User** to **The Company** pursuant to the **CUSC** or any **Bilateral Agreement** and such failure continues unremedied for 7 **Business Days** after the due date for payment; or
- (b) in respect of a **User**:-
  - (i) an order of the High Court in England and Wales or an order of the Court of Session in Scotland is made or an effective resolution passed for its insolvent winding up or dissolution; or

(ii) a receiver (which expression shall include an administrative receiver within the meaning of section 251 Insolvency Act 1986) of the whole or any material part of its assets or undertaking is appointed; or

(iii) an administration order under section 8 of the Insolvency Act 1986 is made or if a voluntary arrangement is proposed under section 1 of that Act; or

(iv) a **User** enters into any scheme of arrangement (other than for the purpose of reconstruction or amalgamation upon terms and within such period as may previously have been approved in writing by the **Authority**); or

(v) any of the events referred to in (i) to (iv) above has occurred and is continuing and a **User** is unable to pay its debts (within the meaning of section 123(l) or (2) of the Insolvency Act 1986 save that such sections shall have effect as if for £750 there was inserted £250,000 and a **User** shall not be deemed to be unable to pay its debts if any demand for payment is being contested in good faith by that **User** with recourse to all appropriate measures and procedures),

and in any such case within 28 days of his appointment the liquidator, receiver, administrative receiver, administrator, nominee or other similar officer has not provided to **The Company** a guarantee of future performance by the **User** of the **CUSC** and all **Bilateral Agreements, Construction Agreements** and **Mandatory Services Agreements** to which the **User** is a party in such form and amount as **The Company** may reasonably require.

#### 5.3.2 Generic Deenergisation upon an Event of Default

Provided that at the time the failure specified in Paragraph 5.3.1(a) is still continuing or the circumstances referred to in Paragraph 5.3.1(b) still exist **The Company** may having given 48 hours notice of an **Event of Default Deenergise** all of the **User's Equipment** which is the subject of a **Bilateral Agreement** with that **User** or may as appropriate instruct the operator of a **Distribution System** to **Deenergise** such **User's Equipment** or in the case of an **Interconnector User** or **Interconnector Error Administrator** request the relevant **Interconnector Owner** to cease or procure the cessation of the transport of power across the **Interconnector** by or on behalf of that **User** provided that prior to **Deenergisation** the **User** may refer the matter to the **Dispute Resolution Procedure**.

#### 5.3.3 BSC Deenergisation

**The Company** shall **Deenergise** the **User's Equipment** if it is so instructed by the **BSC Panel** at any time in accordance with the provisions of the **Balancing and Settlement Code**.

#### 5.3.4 Generic Disconnection

If the **Event of Default** under Paragraph 5.3.2 or 5.3.3 is still continuing six months after the later of **Deenergisation** and the conclusion of the **Dispute Resolution Procedure** in favour of **The Company**, **The Company** may **Disconnect** all that **User's Equipment** at each **Connection Site** where that **User's Equipment** is connected and:-

- (a) the **User** shall remove any of the **User's Equipment**:
  - (i) in the case of **Connection Sites Onshore** on the **Relevant Transmission Licensee's** land within 6 months or such longer period as may be agreed between the **User** and the **Relevant Transmission Licensee**; or
  - (ii) in the case of **Connection Sites Offshore**, on or adjacent to the **Relevant Transmission Licensee's Offshore Platform** within a period agreed between the **User** and the **Relevant Transmission Licensee**.
- (b) in the case of
  - (i) **Connection Sites Onshore** **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the **User's** land within 6 months or such longer period as may be agreed between the **User** and the **Relevant Transmission Licensee**; or
  - (ii) **Connection Sites Offshore**, **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on or adjacent to the **User's Offshore Platform** within a period agreed between the **User** and the **Relevant Transmission Licensee**;
- (c) the **User** shall pay to **The Company** forthwith all **Termination Amounts** and, in the case of a **User** in the category of a **Power Station** directly connected to the **National Electricity Transmission System** or with a **Bilateral Embedded Generation Agreement** the **Cancellation Charge**;and
- (d) the **User** if unlicensed shall cease to be a **CUSC Party** or if licensed shall become a **Dormant CUSC Party**, as the case may be, and Paragraph 5.1 shall apply.

## 5.4 SITE SPECIFIC DEENERGISATION AND DISCONNECTION

### 5.4.1 Site Specific Breach by the User

If a **User** shall be in breach of any of the provisions of the relevant **Bilateral Agreement**, or the provision of the **CUSC** in relation to that particular connection to and/or use of the **National Electricity Transmission System**, or (other than in relation to a **Supplier**, a **Small Power Station Trading Party**, an **Interconnector User** or an **Interconnector Error Administrator**) of the provisions of the **CUSC** enforcing the provisions of the **Grid Code** (but subject always to Paragraphs 6.3.3 and 6.3.4), and such breach causes or can reasonably be expected to cause a material adverse effect on the business or condition of **The Company**, a **Relevant Transmission Licensee** or other **Users** or the **National Electricity Transmission System** or any **User Systems** then **The Company** may:-

(a) where the breach is capable of remedy, give written notice to the **User** specifying in reasonable detail the nature of the breach and requiring the **User** within 28 days after receipt of such notice, or within any longer period agreed between **The Company** and the **User** to remedy the breach, the agreement of **The Company** not to be unreasonably withheld or delayed; or

(b) where the breach is incapable of remedy, give written notice to the **User** specifying in reasonable detail the nature of the breach and the reasons why the breach is incapable of remedy and requiring the **User** within 5 **Business Days** after receipt of such notice to undertake to **The Company** not to repeat the breach.

### 5.4.2 Grid Code Procedures - Future Compliance

Whenever **The Company** serves a notice on a **User** pursuant to Paragraph 5.4.1, **The Company** and the **User** shall discuss in good faith and without delay the nature of the breach and each shall use all appropriate procedures available to it under the **Grid Code** (including testing rights and the procedures set out in **OC5** (Testing and Monitoring)) in an attempt to establish as quickly as reasonably practicable a mutually acceptable way of ensuring future compliance by the **User** with the relevant provision of the **Grid Code**.

### 5.4.3 Site Specific Deenergisation

(a) If:

(i) a **User** fails to comply with any valid notice served on it by **The Company** in accordance with

Paragraph 5.4.1(a) or is in breach of any undertaking given in accordance with Paragraph 5.4.1(b) and such breach causes or can be reasonably expected to cause a material adverse effect on the business or condition of **The Company, a Relevant Transmission Licensee** or other **Users** of the **National Electricity Transmission System** or any **User System**; or

(ii) five **Business Days** have elapsed since the date of any valid notice served on the **User** in accordance with Paragraph 5.4.1(b) and no undertaking is given by the **User** in accordance with Paragraph 5.4.1(b);

**The Company** may:

- (iii) provided **The Company** has first complied with **OC5** Monitoring and Testing if appropriate **Deenergise the User's Equipment**; or
- (iv) provided **The Company** has first complied with **OC5** Monitoring and Testing if appropriate request the owner/operator of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is or to which the **User's Customers** are connected to **Deenergise the User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at the relevant site of connection or such **User's Customers** (as the case may be); or
- (v) in the case of an **Interconnector User** or **Interconnector Error Administrator** request the relevant **Interconnector Owner** to cease or procure the cessation of the transport of power by or on behalf of that **User** across the **Interconnector**,

upon the expiry of at least 48 hours prior written notice to the **User**, provided that at the time of expiry of such notice the breach concerned remains unremedied and that neither party has referred the matter to the **Dispute Resolution Procedure**. In such event **The Company** may:

- (aa) **Deenergise the User's Equipment**, or
- (bb) request the owner of the **Distribution System** to which the **User's Equipment** or equipment for



which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is or to which the **User's Customers** are connected to **Deenergise** the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at the relevant site of connection or the **User's Customers** (as the case may be), or

- (cc) in the case of an **Interconnector User** or **Interconnector Error Administrator** request the relevant **Interconnector Owner** to cease or to procure the cessation of the transfer of power by or on behalf of that **User** across the **Interconnector**,

forthwith following completion of the **Dispute Resolution Procedure** and final determination of the dispute in **The Company's** favour, subject to **The Company** having given, in the case of **Deenergisation** of an **Embedded Small Power Station**, the relevant **User** not less than 24 hours prior written notice and at the expiry of such notice the breach concerned remaining unremedied.

- (b) If the **User** fails to comply with the **Grid Code** (but subject always to Paragraphs 6.3.3 and 6.3.4 of the **CUSC**) and the **Authority** makes a final order or a confirmed provisional order as set out in sections 25 and 26 of the **Act** against the **User** in respect of such non-compliance which order the **User** breaches **The Company** may in respect of the relevant **Connection Site(s)** or site(s) of connection:

- (i) **Deenergise** the **User's Equipment**, or

- (ii) request the owner of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected to **Deenergise** the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**),

upon the expiry of at least 48 hours prior written notice to the **User** provided that at the time of expiry of the notice the **User** continues to fail to comply with the order.

#### 5.4.4 Consequence on Transmission Licence and/or the ESO Licence

If a breach of the nature referred to in Paragraph 5.4.1 continues to the extent that it places or seriously threatens to place in the immediate future **The Company** in breach of the **ESO Licence** and/or places or seriously threatens to place in the immediate future any **Relevant Transmission Licensee** in breach of its transmission licence **The Company** may:

- (a) **Deenergise the User's Equipment**, at the relevant **Connection Site**,
- (b) request the owner of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is or to which the **User's Customers** are connected to **Deenergise the User's Equipment** or equipment for which **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at the relevant site of connection or such **User's Customer** (as the case may be), or
- (c) request the relevant **Interconnector Owner** to cease or procure the cessation of the transport of power by or on behalf of that **User** across the **Interconnector**,

upon the expiry of at least 12 hours, prior written notice to the **User**, provided that at the time of expiry of such notice the breach concerned remains unremedied.

#### 5.4.5 Generic and Site Specific Reenergisation Disputes

(a) If following any **Deenergisation** or cessation of use of an **Interconnector** pursuant to this Paragraph 5.4 or Paragraph 5.3.2 the relevant **User** applies to **The Company** for the **User's Equipment** to be **Reenergised** or for **The Company** to issue instructions that the **User's Customers** be **Re-energised** or for **The Company** to issue instructions to the owner/operator of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected that it be **Re-energised** or to the relevant **Interconnector Owner** that transport of power across the **Interconnector** can restart, **The Company** shall notify its consent to the **User's Equipment** being **Re-energised** or transport across the **Interconnector** restarting forthwith upon the breach of the **CUSC** or the relevant **Bilateral Agreement** which give rise to the **De-energisation** either:-

- (i) being remedied; or

- (ii) ceasing to be material; or
- (iii) in the case of a **De-energisation** under 5.4.3 ceasing to be of a nature which can reasonably be expected to cause a material adverse effect on the business or condition of **The Company, a Relevant Transmission Licensee** or other **Users** of the **National Electricity Transmission System**; or
- (iv) in the case of a **De-energisation** under Paragraph 5.4.4 ceasing in **The Company's** opinion to place or seriously threaten to place in the immediate future **The Company** in material breach of the **ESO Licence** and/or places or seriously threatens to place in the immediate future any **Relevant Transmission Licensee** in material breach of its transmission licence,

and shall forthwith **Re-energise** the **User's Equipment** or issue instructions.

(b) If **The Company** shall refuse to **Re-energise** the **Users Equipment** or to issue instructions that the **User's Customers** be **Reenergised** or to issue instructions to the owner/operator of the **Distribution System** to which the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected that it be **Reenergised**, or to the relevant **Interconnector Owner** that transport of power can restart, or if the **User** is offered terms by **The Company** which the **User** does not accept, this shall be recognised as a dispute over the terms for connection and use of system which may be referred by the **User** to the **Authority** for determination under condition E13 of the **ESO Licence**. If the **User** accepts any terms offered by **The Company** or determined by the **Authority** **The Company** shall **Reenergise** the **Users Equipment**, or request the owner of the **Distribution System** to which either the **User's Customers** or the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is/are connected to **Reenergise** the same or the relevant **Interconnector Owner** to restart that transport of power, forthwith after any request from the **User** for **The Company** to do so.

#### 5.4.6 Specific Events of Default

##### Events of Default

5.4.6.1 Any of the following events shall constitute an **Event of Default**:

(a) If the breach which led to any **Deenergisation** pursuant to this Paragraph 5.4 remains unremedied at the expiry of at least 6 months after the date of such **Deenergisation**, **The Company** may declare by notice in writing to the **User** that such breach has become an **Event of Default** provided that:

(i) all disputes arising out of the subject-matter of this Paragraph 5.4 which are referred to the **Dispute Resolution Procedure** have been finally determined in favour of **The Company**; and

(ii) any reference to the **Authority** pursuant to Paragraph 5.4.5(b) hereof has then been finally determined in favour of **The Company** or any terms settled pursuant to such procedure have not been accepted by the **User**.

(b) If any or all of the **Events of Default** in Paragraph 5.3.1 has or have occurred.

Security Event of Default - User Meets The Company Credit Rating

5.4.6.2 In the case where a **User** meets **The Company Credit Rating** on signing a **Bilateral Connection Agreement** any of the following events shall constitute an **Event of Default**:-

(a) If the **User** fails to provide or procure that there is provided to **The Company** within the requisite time any relevant security satisfactory to **The Company** pursuant to Part III of Section 2 or Paragraph 5.4.6.2(c) or Section 14 of the **CUSC**.

(b) If having provided security satisfactory to **The Company** pursuant to Part III of Section 2 and Paragraph 5.4.6.2(c) or Section 14 of the **CUSC**:

(i) the **User** or any shareholder (whether direct or indirect) of the **User** or any other party who may at any time be providing security to **The Company** pursuant to the requirements of the **CUSC** (or the relevant **Bilateral Connection Agreement**) takes any action whether by way of proceedings or

otherwise designed or calculated to prevent, restrict or interfere with the payment to **The Company** of any amount so secured whether or not there shall be a dispute between the parties;

(ii) any party who may at any time be providing security to **The Company** pursuant to the provisions of the **CUSC** (or the relevant **Bilateral Connection Agreement**) fails to pay to **The Company** any sum demanded pursuant thereto.

- (c) (i) There is a material adverse change in the financial condition of the **User** such as to give **The Company** reasonable grounds for concluding that there is a substantial probability that the **User** will default in the payment of any sums due or to become due to **The Company** within the next following period of 12 months, in terms of or on termination of the relevant **Bilateral Connection Agreements**; or
- (ii) an event of default has occurred under any banking arrangements (as may be more particularly described in the relevant **Bilateral Connection Agreement**) (an event of default being for these purposes anything defined as such in such banking arrangements) put in place by the **User** in connection with a project for which security under this **CUSC** is required by **The Company** and as a result the banks who are party to such banking arrangement have taken steps to declare the principal of the advances under such arrangement immediately due and payable; or
- (iii) any other indebtedness of the **User** for the repayment of borrowed money (in a principal outstanding amount of not less than £1,000,000 (pounds sterling one million) or such greater figure specified in any **Bilateral Connection Agreement**) has become due and payable prior to the stated date of maturity thereof by reason of any default

or breach on the part of the **User** and the amount in question has not been paid by the **User** or re-financed by the **User** within a period of 28 days following the date upon which it was so declared due and payable,

and in any of (i) or (ii) or (iii) the **User** fails, within a period of 7 (seven) days following the date on which **The Company** gives the **User** notice in writing of one or other of the above events occurring to provide **The Company** with such security as **The Company** shall require to cover the **User's** payment obligations to **The Company** arising in the event of or which have arisen prior to termination of the relevant **Bilateral Connection Agreement** and which arise under the **CUSC**. The security to be provided shall be in a form satisfactory to **The Company** in accordance with its then current policy and procedures and in such amount as **The Company** shall specify to the **User** in the aforesaid notice.

Provided that (in relation to Paragraphs (i) or (ii) or (iii) above) if at any time after the putting in place of security under this Paragraph the **User** shall produce to **The Company** evidence to **The Company's** reasonable satisfaction that there is not a substantial probability of the **User** not being able to make payment to **The Company** of such sums within the next following period of twelve (12) months, **The Company** shall not require the **User** to provide the aforesaid security and shall release any such security then in place. This waiver is without prejudice to **The Company's** right to require security at any time thereafter in the event of any of the circumstances set out in Paragraph (i) and/or (ii) and/or (iii) subsequently occurring.

Security Event of Default - User Does Not Meet The Company Credit Rating

5.4.6.3 In the case where a **User** does not meet **The Company Credit Rating** on signing a **Bilateral Connection Agreement** any of the following events shall constitute an **Event of Default**:-

- (a) (i) There is a material adverse change in the financial condition of the **User** such as to give **The Company** reasonable grounds for concluding that there is a substantial probability that the **User** will default in the payment of any unsecured sums due or to become due to **The**

**Company** within the next period of 12 months, in terms of or on termination of the relevant **Bilateral Connection Agreements**; or

- (ii) an event of default has occurred under any banking arrangements (as may be more particularly described in the relevant **Bilateral Connection Agreement**), (an event of default being for these purposes anything defined as such in such banking arrangements) put in place by the **User** in connection with a project for which security under this **CUSC** is required by **The Company** and as a result the banks who are party to such banking arrangement have taken steps to declare the principal of the advances under such arrangement immediately due and payable; or
- (iii) any other indebtedness of the **User** for the repayment of borrowed money (in a principal outstanding amount of not less than £1,000,000 (pounds sterling one million) or such greater amount specified in any **Bilateral Connection Agreement**) has become due and payable prior to the stated date of maturity thereof by reason of any default or breach on the part of the **User** and the amount in question has not been paid by the **User** or refinanced by the **User** within a period of 28 days following the date upon which it was so declared due and payable.

And in any one of (i) or (ii) or (iii) the **User** fails:-

- (aa) within a period of 14 (fourteen) days following the date on which **The Company** gives notice of such circumstances to provide to **The Company** a cash deposit in a **Bank Account**, a **Performance Bond** or a **Letter of Credit** in favour of **The Company** and **Valid** at least up to the last day of the **Financial Year** in which the event occurs for such amount representing **The Company's** reasonable estimate of all unsecured

sums to become due to **The Company** in the period up to the end of the **Financial Year** in which the event occurs such sum to be specified in the said notice; or

- (bb) to subsequently provide such cash deposit or renew such **Performance Bond** or **Letter of Credit** (or such renewed **Performance Bond** or **Letter of Credit** provided under this paragraph) not less than 45 days prior to its stated expiry date for such amount representing **The Company's** reasonable estimate of the unsecured sums to become due to **The Company** in the next following **Financial Year** valid at least up to the last day of the next following **Financial Year** and to continue the provision of cash deposit, a **Performance Bond** or **Letter of Credit** in a similar manner, to such estimate of unsecured sums.

Provided that regarding any one of (i) or (ii) or (iii) if at any time after the putting in place of security under this Paragraph 5.4.6.3(a) the **User** shall provide to **The Company** evidence to **The Company's** reasonable satisfaction that there is not a substantial probability of the **User** being unable to make payment to **The Company** of any unsecured sums within the next following period of twelve (12) months, **The Company** shall not require the **User** to provide the aforesaid security and shall release any such security then in place. This waiver is without prejudice to **The Company's** right to require security at any time thereafter in the event of any of the circumstances set out in paragraph (i) and/or (ii) and/or (iii) in this Paragraph 5.4.6.3(a) subsequently occurring.

- (b) If the **User** fails to provide or procure that there is provided to **The Company** or at any time fails to maintain or procure that there is maintained in full force and effect the relevant security arrangement required under Part III of Section 2 or Paragraph 5.4.6.3(a) or to renew or revise such security or to substitute any security with the required replacement security or to maintain or procure that there is maintained in full force



and effect any such renewed, revised or substituted security as so required or if the **User** is otherwise in breach of any of its obligations under Paragraph 2.22.

- (c) If the **User** or any shareholder (whether direct or indirect) of the **User** takes any action whether by way of proceedings or otherwise designed or calculated to prevent restrict or interfere with the payment to **The Company** of any amount so secured or seeks or permits or assists others to do so, whether or not there shall be a dispute between the parties.
- (d) If any party who may at any time be providing or holding security in favour of **The Company** pursuant to Part III of Section 2 or Paragraph 5.4.6.3(a) fails to pay **The Company** any sum demanded in any **Notice of Drawing** pursuant thereto.

#### 5.4.7 Specific Event of Default Disconnection

Once **The Company** has given a valid notice of an event of default pursuant to Paragraph 5.4.6 provided that the **Event of Default** is continuing **The Company** may give notice of termination to that **User** whereupon the relevant **Bilateral Agreement** or right to use the system shall terminate and:

- (a) **The Company** shall in relation to such an **Event of Default** of a **User** in relation to a **Connection Site**:
  - (i) **Disconnect** all the **User's Equipment** at the **Connection Site**; and
  - (ii) the **User** concerned shall remove any of the **User's Equipment**:
  - (aa) in the case of **Connection Sites Onshore** within six (6) months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the relevant **User**; or
  - (bb) in the case of **Connection Sites Offshore**, on or adjacent to the **Relevant Transmission Licensee's Offshore Platform** within a period agreed between the **User** and the **Relevant Transmission Licensee**; and

- (iii) in the case of **Connection Sites Onshore**, **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the land of the **User** concerned within 6 months or such longer period as may be agreed between the **User** and the **Relevant Transmission Licensee**; and,
- (iv) in the case of **Connection Sites Offshore**, **The Company** shall procure that the **Relevant Transmission Licensee** removes any of the **Transmission Connection Assets** on or adjacent to the **User's Offshore Platform** within a period agreed between the **User** and the **Relevant Transmission Licensee**.

Such **User** shall (notwithstanding any longer time for payment which but for such termination the **User** may have for payment pursuant to the **CUSC** or the relevant **Bilateral Agreement**) within 14 days from the date of termination pay to **The Company** all amounts due and owing on the date of such termination and be liable to pay to **The Company Termination Amounts** applicable to the **Connection Site** and, in the case of a **User** in the category of a **Power Station** directly connected to the **National Electricity Transmission System** the **Cancellation Charge**, such payments to be made within 14 days of the date of **The Company's** invoice(s) in respect thereof;

- (b)
  - (i) **The Company** shall request the owner of any **Distribution System** to which the **User** is connected to **Disconnect** all the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at the site of connection;
  - (ii) **The Company** shall in relation to such an event of default of a **User** acting as a **Supplier** request the owner of the **Distribution System** to which any of that **User's Customer's** are connected to **Disconnect** such **User's Customer's**;
  - (iii) **The Company** shall in relation to such an **Event of Default** of a **User** acting as an **Interconnector User** or **Interconnector Error Administrator** request the relevant **Interconnector Owner** to cease or procure the cessation of the transfer of power across the

**Interconnector** by or on behalf of that **Interconnector User**; and

the **User** shall be obliged to pay to **The Company** forthwith the **Use of System Charges** due under the **CUSC** or the relevant **Bilateral Agreement** up to the end of the **Financial Year** in which **Termination** occurs and, in the case of a User with **Bilateral Embedded Generation Agreement** the **Cancellation Charge**.

## **5.5 BALANCING SERVICES USE OF SYSTEM CHARGES: EVENTS OF DEFAULT**

### **5.5.1 Breaches**

Notwithstanding any other provisions of this Paragraph 5.5 and/or Paragraph 5.3 of the **CUSC**, in relation to the payment of the **Balancing Services Use of System Charges** the following shall constitute breaches under the **CUSC** and/or the relevant **Bilateral Agreement**:-

- (a) the **User** in question shall fail to provide or maintain or renew in accordance with Paragraph 3.21 or Paragraph 9.22.3 (as appropriate) the requisite amount of **Security Cover**; or
- (b) the **User** shall fail to pay any sum payable by the **User** in respect of **Balancing Services Use of System Charges** to **The Company** within 3 **Business Days** of its due date; or
- (c) an event of default under Paragraph 5.3.1(b) of the **CUSC** has occurred provided always that the final Paragraph of Paragraph 5.3.1(b) of the **CUSC** referring to the provision of guarantees shall not apply.

### **5.5.2 Events of Default**

Forthwith upon the occurrence of any of the breaches specified in Paragraph 5.5.1 then notwithstanding any other provisions of the **CUSC** or of any **Bilateral Agreement** to which the **User** is a party, and in addition to any rights it may have under the terms of the **CUSC**, **The Company** may upon reaching a bona fide conclusion that the reason for the failure by the **User** under Paragraph 5.5.1 is other than an administrative or banking error (having taken into account representations if any of the **User** made within 24 hours after the request therefor is made to the **User** by **The Company**, which request **The Company** shall be obliged to make) by notice to the **User** declare such breach an event of default.

### 5.5.3 Deenergisation by User

If **The Company** declares an **Event of Default** under Paragraph 5.5.2 the **User** shall forthwith and in compliance with the instructions of **The Company** or (in the case of any connection to a **User System**) the owner of the **User System** to which the **User's Customers** are connected, **Deenergise** itself and/or its **Customers** or in the case of a **User** acting as an **Interconnector User** or **Interconnector Error Administrator** cease or procure the cessation of the transport of power by or on behalf of that **User** across the **Interconnector** as the case may be.

### 5.5.4 Deenergisation by The Company/User System Owner

If the **User** shall fail to take such action as is referred to in Paragraph 5.5.3 within 48 hours after the date of any such notice referred to therein **The Company** shall be entitled to:-

- (a) request the owner of the **User System** to which the **User's Customers** and/or the **User** are connected, to **Deenergise** the **User's Customers** and/or the **User** (as the case may be) and to use all reasonable endeavours to effect or (as the case may be) give instructions to give effect to such **De-energisation** as quickly as practicable having regard to all the circumstances affecting such **De-energisation** (including any operational difficulties and relevant **Licence** duties); and/or
- (b) **Deenergise** the **User's Equipment** or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) at any **Connection Site(s)** which serves only the **User** or a customer of the **User**; and/or
- (c) where the **User** is an **Interconnector User** request the relevant **Interconnector Owner** to cease or procure the cessation of the transfer of power by or on behalf of the **User** across the **Interconnector**.

### 5.5.5 BSUoS Event of Default

5.5.5.1 **The Company** may terminate the relevant **Bilateral Agreement** and all others to which the **User** is a party and revoke the **Use of System Supply Confirmation Notice** and **Use of System Interconnector Confirmation Notice** forthwith by notice to the **User** if:-

- (a) **The Company** has given a valid notice of default pursuant to Paragraph 5.5.2; and
- (b) such event of default remains unremedied at the expiry of the later of:-

(i) the period of 6 months from the date of such notice; and

(ii) where the **User** disputes bona fide the event of default and has promptly brought and is actively pursuing proceedings against **The Company** to determine the dispute, the date on which the dispute is resolved or determined.

Upon termination pursuant to this Paragraph the **User** shall pay to **The Company** the **Termination Amounts** calculated in accordance with the **Charging Statements** and, in the case of a **User** in the category of a **Power Station** directly connected to the **National Electricity Transmission System** or with a **Bilateral Embedded Generation Agreement**, the **Cancellation Charge** and shall disconnect all the **User's Equipment** at the **Connection Site** and:

aa) the **User** concerned shall remove any of the **User's Equipment**:

(i) in the case of **Connection Sites Onshore** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; or

(ii) in the case of **Connection Sites Offshore**, on or adjacent to the **Relevant Transmission Licensee's Offshore Platform** within a period agreed between the **Relevant Transmission Licensee** and the **User**; and

bb) in the case of **Connection Sites Onshore**, **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the land of the **User** concerned within 6 months or such longer period as may be agreed between the **User** and the **Relevant Transmission Licensee**; and

cc) in the case of **Connection Sites Offshore**, **The Company** shall procure that the **Relevant Transmission Licensee** removes any of the **Transmission Connection Assets** on or adjacent to the **User's Offshore Platform** within a period agreed

between the **User** and the **Relevant Transmission Licensee**; and

dd) the provisions of Paragraph 5.4.7 shall apply *mutatis mutandis*.

5.5.5.2 The service of a notice under Paragraph 5.5.5.1 and/or the expiry of a notice given under Paragraph 5.6 shall not relieve the **User** of its obligation under Paragraph 3.9.3 or Paragraph 9.10 or any **Bilateral Agreement** to which the **User** is a party to pay any outstanding **Balancing Services Use of System Charges** in respect of any **Settlement Day** which fell prior to the issue or expiry of (as the case may be) such a notice but for which the **Payment Date** fell after the date of the termination of the relevant **Bilateral Agreement** (or use of system not subject to a **Bilateral Agreement**).

## 5.6 NOTICE TO DISCONNECT

Without prejudice to Paragraph 5.2.2, each **User** shall, as between **The Company** and that **User**, give to **The Company** not less than 6 months written notice of any intention of the **User** to **Disconnect** the **User's Equipment**. In the absence of any specific notice to the contrary, any notice of **Disconnection** shall also be treated as a notice under **CUSC** Paragraph 6.30.1 decreasing **Transmission Entry Capacity** to zero with effect from the expiry of the period specified in the notice of **Disconnection**

## 5.7 DISCONNECTION

5.7.1 If notice to **Disconnect** is given by the **User** under Paragraph 5.6 hereof the **User** may upon expiry of the period specified in such notice and not before **Disconnect** the **User's Equipment**. At the expiry of such period the relevant **Bilateral Agreement** shall terminate and the following provisions shall apply.

5.7.2 The **User** shall be liable forthwith on the date the relevant **Bilateral Agreement** so terminates to pay to **The Company**:-

(a) **Connection Charges** and/or **Use of System Charges** to the end of the **Financial Year** in which termination occurs all such charges becoming immediately due and payable upon the termination of the relevant **Bilateral Agreement**; and

(b) **Termination Amounts** applicable to the **Connection Site**; and

(c) where the **User** is in the category of a **Power Station** directly connected to the **National Electricity Transmission System** or with a **Bilateral Embedded Generation Agreement Cancellation Charge**,

such payments to be made within 28 (twenty eight) days of the date of **The Company 's** invoice in respect thereof.

5.7.3 Within 6 months of the date of such termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User** in the case of **Connection Sites Onshore**:

- (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land; and
- (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the land of the **User** concerned.

5.7.4 In the case of **Connection Sites Offshore** within a period agreed between the **Relevant Transmission Licensee** and the **User**:

- (a) the **User** shall remove any of the **User's Equipment** on or adjacent to the **Relevant Transmission Licensee's Offshore Platform**; and
- (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes any of the **Transmission Connection Assets** on or adjacent to the **User's Offshore Platform** .

## 5.8 Not Used

## 5.9 NON-EMBEDDED CUSTOMERS

5.9.1 This Paragraph 5.9 provides for additional **Deenergisation** provisions which only apply in relation to **Users** acting in their category of connection and/or use as **Non-Embedded Customers**.

5.9.2 If the following condition ceases to be satisfied in respect of the **Supplier** supplying the **Connection Site** **The Company** may give written notice of that fact to the **User** and unless within 5 days of receipt of such notice the **User** advises **The Company** that it has contracted with an alternative **Supplier**, **The Company** shall be entitled to **Deenergise** the **Non-Embedded Customer's User's Equipment**:-

“the **Supplier** being authorised by a current **Supply Licence** to supply electricity to the premises to be supplied with electricity through the **Connection Site**.”

5.9.3 If there ceases to be a subsisting right of **Use of System** by a **Supplier** at the **Connection Site** who is liable to **The Company** for **Use of System Charges** in respect of **Demand** attributable to the

**Connection Site, The Company** shall be entitled to **Deenergise** the **User's Equipment**.

5.9.4 Where:

(a) the **Supplier** is in breach of the **CUSC** relating to the supply to the **Connection Site** and accordingly **The Company** is permitted under the **CUSC** to **Deenergise** the **User's Equipment**; or

(b) an **Event of Default** under Paragraph 5.6 has occurred in relation to the **Supplier** with whom the **User** has a **Supply Agreement** and the relevant event is still continuing or the relevant circumstances still exist,

**The Company** may **Deenergise** the **User's Equipment** upon the expiry of at least 48 hours prior written notice to the **User** provided that at the time of expiry of such notice the breach concerned remains unremedied or (as the case may be) the reason permitting **Deenergisation** continues or the relevant **Event of Default** is still continuing and neither **The Company** nor the **Supplier** has referred the matter to the **Dispute Resolution Procedure**. In such event, **The Company** may **Deenergise** the **User's Equipment** forthwith following completion of the **Dispute Resolution Procedure** and final determination of the dispute in **The Company 's** favour.

5.9.5 If a breach of the nature referred to in Paragraph 5.9.4 continues to the extent that it places or seriously threatens to place in the immediate future **The Company** in breach of the **ESO Licence** and/or places or seriously threatens to place in the immediate future any **Relevant Transmission Licensee** in breach of its transmission licence, **The Company** may **Deenergise** the **Non-Embedded Customer's Equipment** at the **Connection Site** upon the expiry of at least five (5) **Business Days** prior written notice to the **User**, provided that at the time of expiry of such notice the breach concerned remains unremedied.

## 5.10 RELEVANT INTERRUPTIONS

5.10.1 In the event of a **Relevant Interruption**, unless 5.10.7 applies, where the **Affected User** has not otherwise received compensation under the **Balancing and Settlement Code** **The Company** shall be liable to pay the **Affected User** upon request the **Interruption Payment** for the **Interruption Period**.

5.10.2 The **Interruption Payment** shall be paid by **The Company** to the **Affected User** within 28 days of the date of agreement as to the amount of the **Interruption Payment**.



5.10.3 The **Affected User** will take all reasonable steps to minimise the effect (and therefore the amount of the **Interruption Payment** sought as a consequence) of the **Relevant Interruption** on the operation of its business.

5.10.4 Subject to 5.10.10, the **Affected User** must request an **Interruption Payment** for a **Relevant Interruption** within 30 days of the end of the **Relevant Interruption** by submitting to **The Company** a completed **Loss of Transmission Access Compensation Claim Form**. No **Interruption Payment** will be payable by **The Company** if the **Interruption Payment** request falls outside this period.

5.10.5 **The Company** shall as soon as reasonably practicable after the end of the **Interruption Period** notify the **Affected User** where the **Relevant Interruption** was in accordance with **Emergency Deenergisation Instruction**.

5.10.6 **The Company** shall confirm to the **Affected User** whether or not an **Interruption** is a **Relevant Interruption** and confirm the **Interruption Payment** value within 60 days of that **Affected User** requesting an **Interruption Payment**, or use reasonable endeavours to agree with the **Affected User** when it shall provide such confirmation.

5.10.7.1 No **Interruption Payment** will be payable by **The Company** if the total agreed value of a claim under this Section 5.10 is less than the **Interruption Payment Threshold** unless the **Interruption Payment** is for a **Relevant Interruption** arising as result of a **Planned Outage**

5.10.7.2 The “**Interruption Payment threshold**” shall be £1, or such amount up to a maximum of £5,000 as may be determined by the **CUSC Modification Panel** from time to time. In the event of the **CUSC Modification Panel** varying the **Interruption Payment Threshold** such revised threshold shall apply from 30 days after such variation being notified to all **Users**.

5.10.8 If an **Affected User** and **The Company** cannot reach agreement under Section 5.10.2 or 5.10.6 the **Dispute Resolution Procedure** shall apply.

5.10.9 **The Company** shall report to the **CUSC Modification Panel** in respect of the claims processed under this Section 5.10, such report to detail the number of claims received, under investigation, validated or rejected in the reporting period. The frequency of the reporting will be decided by the **CUSC Modification Panel** and may be varied from time to time.

5.10.10 In respect of any **Relevant Interruptions** occurring before the date and time of implementation of **CUSC Modification Proposal CMP212**, the **Affected User** must request an **Interruption Payment** for a **Relevant Interruption** within 30 days of the date and time of implementation of **CUSC Modification Proposal CMP212**.

**END OF SECTION 5**

**CUSC - SECTION 6**  
**GENERAL PROVISIONS**

**CONTENTS**

- 6.1 Introduction
- 6.2 The Company Obligations
- 6.3 Compliance with Grid Code / Distribution Code
- 6.4 Joint System Incidents
- 6.5 Obligations of Users Who Own or Operate Distribution Systems and Report on Distributed Generation
- 6.6 Payment
- 6.7 Metering
- 6.8 Balancing Mechanism Requirements
- 6.9 Modifications
- 6.10 General Provisions Concerning Modifications and New Connection Sites
- 6.11 Nuclear Installations
- 6.12 Limitation of Liability
- 6.13 Additional CUSC Parties
- 6.14 Transfer and Subcontracting
- 6.15 Confidentiality
- 6.16 Data
- 6.17 Provision of Data
- 6.18 Intellectual Property
- 6.19 Force Majeure

- 6.20 Waiver
- 6.21 Notices
- 6.22 Third Party Rights
- 6.23 Jurisdiction
- 6.24 Counterparts
- 6.25 Governing Law
- 6.26 Severance of Terms
- 6.27 Language
- 6.28 MCUSA
- 6.29 BSC
- 6.30 Revision of Transmission Entry Capacity
- 6.31 Short Term Transmission Entry Capacity
- 6.32 Limited Duration Transmission Entry Capacity
- 6.33 Change from “NGC” to “The Company”
- 6.34 Temporary TEC Exchanges
- 6.35 Embedded Works Register
- 6.36 Transmission Works Register
- 6.37 GC0156 Cost Recovery Claims
- 6.38 Directions related to national security
- 6.39 Advisory and Information Requests

Appendix 1 - Communications Plant

Appendix 2 - Operating Metering

## CUSC - SECTION 6

### GENERAL PROVISIONS

#### 6.1 INTRODUCTION

This General Provisions Section contains those provisions which are generic, but which do not relate directly to the specific areas dealt with in other sections.

#### 6.2 The Company OBLIGATIONS

**The Company** agrees with each **User** to (and in respect of licence obligations contained within Section D or Section E of a transmission licence, procure that a **Relevant Transmission Licensee** shall) make available, plan, develop, operate and maintain the **National Electricity Transmission System** in accordance with the **ESO Licence** and the **Transmission Licences** and with the **Grid Code** subject to any **Derogations** from time to time.

#### 6.3 COMPLIANCE WITH GRID CODE/DISTRIBUTION CODE

- 6.3.1 Subject to Paragraph 6.3.3 each **CUSC Party** agrees with each other **CUSC Party** to be bound by and to comply in all respects with the provisions of the **Grid Code** in so far as applicable to that **CUSC Party**.
- 6.3.2 Subject to Paragraph 6.3.3 each **CUSC Party** agrees with each other **CUSC Party** to be bound by and to comply in all respects with the provisions of the relevant **Distribution Code(s)** in so far as applicable to that **CUSC Party** except as may be otherwise provided in any agreement for connection to a **Distribution System**.
- 6.3.3 Neither **The Company** nor a **User** need comply with the **Grid Code** or any relevant **Distribution Code(s)** to the extent (if any) that:-
  - (i) either the **Authority** has issued directions relieving **The Company** or that **User** from the obligation under its respective licence to comply with the **Licence Standards**, the **Grid Code** or any relevant **Distribution Code(s)** in respect of such parts of the **Grid Code** or any relevant **Distribution Code(s)** respectively as may be specified in those directions or to the extent that **The Company** and a **User** which does not have a **Licence** under the **Act** can and have so agreed in any **Bilateral Agreement** or in relation to any **Connection Site** or **New Connection Site** or **Transmission Interface Site** and/or **Derogated Plant**; or

- (ii) in the case of a **User** the **Grid Code** relates to the provision by that **User** of any **Ancillary Services** unless there is an **Ancillary Services Agreement** in force between that **User** and **The Company** for the payment by **The Company** for such **Ancillary Services**.
- 6.3.4 Each **User** undertakes to **The Company** and **The Company** undertakes to each **User** to use all reasonable endeavours to carry out such works as are necessary to ensure that each item of **Derogated Plant** owned or operated by that **User** or **The Company** (as appropriate) is brought up to the **Required Standard** applicable to it no later than the **Back-Stop Date** applicable to it.
- 6.3.5 The terms and provisions of the **Fuel Security Code** shall prevail to the extent that they are inconsistent with the **Grid Code** or any **Distribution Code** and the **CUSC Parties'** obligations under the **CUSC** shall be construed accordingly.
- 6.3.6 Without prejudice to Paragraph 6.3.1, where a **User** who does not hold a **Licence**, so requests **The Company** in respect of an **Embedded Exemptable Large Power Station** that the **CUSC Party** owns or operates:
  - (i) **The Company** shall apply to the **Authority** for a direction under condition E3.24 of the **ESO Licence** relieving **The Company** from the obligation to implement or comply with the **Grid Code** in respect of that **Embedded Exemptable Large Power Station**; and
  - (ii) that **User** shall provide such information and assistance as **The Company** may reasonably request to enable **The Company** to make such an application to the **Authority**.
- 6.3.7 An application by **The Company** pursuant to paragraph 6.3.6(i) shall inter alia include any grounds which **The Company**, in its reasonable opinion, may have why the **Authority** should not issue a direction under condition E3.24 of the **ESO Licence** in respect of that **Embedded Exemptable Large Power Station**.

#### 6.4 JOINT SYSTEM INCIDENTS

This paragraph applies to all **Users** other than: -

- (a) **Users** acting as **Suppliers**; and
- (b) **Users** who are **Trading Parties** and are responsible (as defined in the **Balancing and Settlement Code**) for **Embedded Small Power Station(s)**;

Each such **User** confirms to **The Company** (and **The Company** confirms to each such **User**) that as between **The Company** and that **User** its Senior Management Representatives whose names are nominated and notified to the other pursuant to **OC9** of the **Grid Code** are fully authorised to make binding decisions on its behalf for the purposes of **OC9**.

## **6.5 OBLIGATIONS OF USERS WHO OWN OR OPERATE DISTRIBUTION SYSTEMS**

### **6.5.1**

- (a) Any **User** who owns or operates a **Distribution System** shall submit a request to **The Company** for an **Evaluation of Transmission Impact**:
  - i. in the case of a **Transmission Evaluation Application** under Paragraph 6.5.1 (e) i upon an application for or acceptance of (as agreed between **The Company** and the **User**) for a connection to and/or for the use of that **User's Distribution System** from a **Relevant Embedded Power Station**
  - ii. in the case of a **Modification Application** under Paragraph 6.5.1 (e) ii to establish the **Transmission Impact Assessment** process ('Appendix G') in the **Bilateral Connection Agreement**. For the avoidance of doubt this **Modification Application** does not go through the **Gated Application and Offer Process**.

For the purposes of this section 6.5, **Relevant Embedded Power Station** shall also include a group of **Embedded Power Stations** which collectively would be considered equivalent to a **Relevant Embedded Power Station**.

- (b) Should the **User** be uncertain as to whether an **Embedded Power Station** (either singularly or as part of a group) has a significant impact on the **NETS** and should be classed as a **Relevant Embedded Power Station**, the **User** shall submit a request to **The Company** for an **Evaluation of Transmission Impact** on behalf of the **Embedded Power Station** as per Paragraph 6.5.1(c). For avoidance of doubt, such significant impact will be deemed if the **Embedded Power Station** involves an **Active Power**, **Apparent Power**, **Reactive Power**, kiloamp or kilovolt value larger than as advised by **The Company** to the **User**.

- (c) Any **User** who owns or operates a **Distribution System** shall not **Energise** the connection between a **Relevant Embedded Power Station** or **Embedded Large Power Station** and its **Distribution System** nor permit the use of its **Distribution System** by the same until , in the case of a **Relevant Embedded Power Station** an **Evaluation of Transmission Impact** has concluded (as per paragraphs 6.5.5.6, 6.5.5.7, 6.5.8.5), and otherwise;
  - i. **The Company** has confirmed to the **User** that all **Transmission Reinforcement Works** associated with the **Relevant Embedded Power Station** or **Embedded Large Power Station** listed in the relevant **Construction Agreement** (if any were identified) have been completed, and
  - ii. in the case of a **Relevant Embedded Power Station**, **The Company** and the **User** have confirmed that the requirements of the **Evaluation of Transmission Impact** have been fulfilled, or
  - iii. in the case of a **Relevant Embedded Power Station** which is the subject of a **Bilateral Agreement**, **The Company** has confirmed to the **User** who owns or operates the relevant **Distribution System** that the person owning or operating the plant has, where required, completed the **Use of System Application (Generators)** for a **Gate 2 Offer** and has entered into a **Bilateral Agreement** in the appropriate form with **The Company**, or
  - iv. in the case of an **Embedded Large Power Station**, the **Embedded Large Power Station** has made a **Gate 2 Application** and entered into a **Bilateral Agreement** in the appropriate form with **The Company** and (if such person is not already a party to **CUSC**) has entered into an **Accession Agreement**.
- (d) Sub-paragraph (a) shall not apply to any **User** who owns or operates a **Distribution System** that is not directly or indirectly connected to the **National Electricity Transmission System**.
- (e) The **User** shall request that the **Evaluation of Transmission Impact** is undertaken by **The Company** using one of the following options;
  - i. **Transmission Evaluation Application** (as documented in paragraph 6.5.5)
  - ii. **Transmission Impact Assessment** (establishing



“Appendix G”) (as documented in paragraph 6.5.8)

- (f) In England and Wales, an **Embedded Small Power Station** which has an **Export Capacity** of 5MW or above or (if there is less than 1kA of fault level headroom as set out in the Appendix G for the relevant **Grid Supply Point** at the time of a request for a connection to and/or for the use of the **User’s Distribution System**) 1MW or above is a **Relevant Embedded Small Power Station** requiring the submission of an **Evaluation of Transmission Impact** to **The Company** in accordance with Paragraph 6.5.1(a) above. For the avoidance of doubt, an **Embedded Small Power Station** with an **Export Capacity** below the **Evaluation of Transmission Impact** threshold will not be required to undergo an **Evaluation of Transmission Impact**.
- 6.5.2 Any **User** who owns or operates a **Distribution System** shall not **Energise** the connection between any **Customer** of another **Authorised Electricity Operator** connected to such **Distribution System** if the **Authorised Electricity Operator** is responsible for **Demand (Active Power)** being supplied to such **Customer** pursuant to the **Balancing and Settlement Code** unless such **Authorised Electricity Operator** has first submitted a **Use of System Application**, has received a **Use of System Offer Notice** which has been accepted by the **User**, and (if the **Authorised Electricity Operator** is not already a party to the **CUSC Framework Agreement**) has become a party to the **CUSC Framework Agreement**.
- 6.5.3 **The Company** shall notify the relevant owner or operator of the **Distribution System** in writing as soon as the conditions set out in Paragraph 6.5.1 and Paragraph 6.5.2 have been satisfied in any particular case together with, if appropriate, a copy of any list provided under Paragraph 3.5. **The Company** undertakes to each **CUSC Party** that, for so long as it is the case, **The Company** shall from time to time forthwith upon receipt of any written request from that **CUSC Party** to do so, confirm in writing to any person specified in such request that that **CUSC Party** is a party to the **CUSC Framework Agreement** and any **Bilateral Agreement** specified in such request.
- 6.5.4 Each owner or operator of a **Distribution System** shall **De-energise** the connection equipment of any such **User** the subject of Paragraph 6.5.1 or **Customer** the subject of Paragraph 6.5.2 as soon as reasonably practicable following the instruction of **The Company** in accordance with the terms of the **CUSC**. **The Company** shall reimburse such owner or operator any expense incurred in relation to such act of **De-energisation**, if any, and shall indemnify such owner or operator against any

liability, loss or damage suffered by it as a result of such **De-energisation**. Details of any circumstances likely to lead to such a **De-energisation** shall be notified promptly by **The Company** to the said owner or operator. The owner or operator of a **Distribution System** shall promptly notify **The Company** when the connection equipment of any **User** or **Customer** the subject of Paragraph 6.5.1 or 6.5.2 is **De-energised** or **Disconnected** from its **Distribution System** or ceases to use its **Distribution System** as the case may be following the instruction of **The Company** in accordance with the terms of the **CUSC**.

- 6.5.4A If **The Company** receives a request to use the **NETS** which it believes could impact upon **The User**, **The Company** shall follow (unless it is a **Gated Application**) the **Interactivity Policy** adopted by **The Company** for the purposes of managing **Interactivity** and published on its website as it may be amended from time to time.

## 6.5.5 Transmission Evaluation Application

- 6.5.5.1 Any **User** who owns or operates a **Distribution System** shall in the timescales specified in the **Gated Application and Offer Process** after being notified by **Relevant Embedded Power Station(s)** that has an agreement for connection to and/or use of that **User's Distribution System** and wants the **User** to submit (and has met any requirements of the **User** in this respect) an **Evaluation of Transmission Impact** in the form of a **Transmission Evaluation Application**. Such a submission by a **User** who owns or operates a **Distribution System** of a **Transmission Evaluation Application** will be substantially in the form of Exhibit U.
- 6.5.5.2 The **Transmission Evaluation Application** must include the Technical Information in respect of such **Power Station(s)** and its proposed date of connection to and / or for the use of the **Distribution System**.
- 6.5.5.3 Not Used.
- 6.5.5.4 Not Used.
- 6.5.5.5 The **Transmission Evaluation Application** shall be deemed to be a **Modification Application** for the purposes of the **Charging Statements** and Paragraphs 1.3.2, 6.9.2, 6.9.4 and 6.10 of the **CUSC** which shall apply thereto.
- 6.5.5.6 Where **The Company** believes the **Power Station(s)** has no significant impact on the **National Electricity Transmission System** or **The Company's** assessment of the **Transmission Evaluation Application** indicates that no works are required nor any **Site Specific Requirements** are necessary, **The Company** shall notify the **User** in the form at Exhibit V as soon as reasonably practical and in any event prior to the end of the **Gated Design Process** and in such circumstances the **Transmission Evaluation Application** shall be concluded. For the purposes of Paragraph 6.5.1(c) the **User** who owns or operates a **Distribution System** may **Energise** the connection of the **Power Station(s)** or permit the use of its **Distribution System** by the **Power Station(s)**.
- 6.5.5.7 Except where **The Company** confirms otherwise under Paragraph 6.5.5.6, (or it is otherwise provided for under the **Transmission Impact Assessment** process in the **Bilateral Connection Agreement**) the **User** who owns or operates a **Distribution System** shall not energise the connection of nor permit the use of its **Distribution System** by the **Power**

**Station(s)** other than in accordance with the **Gate 2 Agreements**.

6.5.5.8 The **User** who owns or operates a **Distribution System** shall notify **The Company** in writing if the proposed date of connection or any other of the details included in or provided pursuant to the **Transmission Evaluation Application** for such **Relevant Embedded Power Station(s)**, changes and the **User** who owns or operates a **Distribution System** shall (except where **The Company** agrees in writing that a revised **Transmission Evaluation Application** is not reasonably required) submit a revised **Transmission Evaluation Application**.

6.5.5.9 Where pursuant to Paragraph 6.5.5.6, **The Company** has notified the **User** that **Site Specific Requirements** are necessary at the site of connection of the **Power Station(s)** any such **Site Specific Requirements** notified to the **User** shall be incorporated through an agreement to vary the **Bilateral Agreement** between **The Company** and the **User** for the appropriate **Grid Supply Point** of such **User**.

6.5.5.10 If **Site Specific Requirements** are necessary and a **Transmission Evaluation Application** has been submitted pursuant to Paragraph 6.5.5.1 and not concluded under Paragraph 6.5.5.6, then any such **Site Specific Requirements** shall be included in the **Modification Offer**.

## **6.5.6 Offshore Transmission Implementation**

6.5.6.1 Any **User** who owns or operates a **Distribution System** and has a **Relevant Offshore Agreement** with an **Existing Offshore Generator** shall cooperate with **The Company** to contribute to the full and timely completion of the **Offshore Transmission Implementation Plan**

6.5.6.2 Any **User** who owns or operates a **Distribution System** and has a **Relevant Offshore Agreement** with an **Existing Offshore Generator** shall provide **The Company** with information including:

- (a) The terms that have been agreed between the **User** who owns or operates a **Distribution System** and the **Existing Offshore Generator**;
- (b) Technical information about the connection arrangements that have been agreed between the **User** who owns or operates a **Distribution System** and the **Existing Offshore Generator**; and
- (c) Technical information about the **Existing Offshore Generator's Power Station** provided as part of the **Existing**

**Offshore Generator's** application to the **User** who owns or operates a **Distribution System**.

- 6.5.6.3 **The Company** shall treat the information provided by any **User** who owns or operates a **Distribution System** under Paragraph 6.5.6.2, as an application for connection and use of the **National Electricity Transmission System** from the **Existing Offshore Generator**, for the purposes of standard condition C8.

#### 6.5.7 Report on Distributed Generation

Within one month of the end of a **Financial Year**, each **User** who owns or operates a **Distribution System** shall send a written report [(in a format specified by The Company)] to **The Company** in respect of **Distributed Generation** which is yet to connect to its **Distribution System** or which has been **Energised** during that **Financial Year** detailing the following information by reference to each category of **Distributed Generation**:

- (a) number of **Distribution Agreements** terminated;
- (b) any reduction in, as appropriate, **Developer Capacity** or **Transmission Entry Capacity**;
- (c) whether such termination or reduction occurred prior to (and including) or after the **Key Consents in Place Date**

#### 6.5.8 Transmission Impact Assessment

- 6.5.8.1 A **User** who owns or operates a **Distribution System** can submit a **Modification Application** to **The Company** to establish a process for **Transmission Impact Assessment** ("Appendix G") into the **Bilateral Connection Agreement** for the purposes of then undertaking the **Evaluation of Transmission Impact** at a **Grid Supply Point**.
- 6.5.8.2 The **Modification Application** for the **Transmission Impact Assessment** must include the technical information in respect of each **Power Station** and its proposed date of connection to and/or for the use of the **Distribution System**.
- 6.5.8.3 **The Company** will provide a **Modification Offer** to the **User** who owns or operates a **Distribution System** in accordance with Paragraphs 6.9.2.2 and 6.9.2.3, this **Modification Offer** will be substantially in the form of Schedule 2 Exhibit 1A to introduce and which includes the process for administering the **Transmission Impact Assessment**.
- 6.5.8.4 Should the **User** not accept the **Modification Offer**, the **Evaluation of Transmission Impact** will not be concluded for the

purposes of Paragraph 6.5.1(c) and a new request under Paragraph 6.5.1(e) shall be required.

- 6.5.8.5 Should the **User** accept the **Modification Offer**, the **Evaluation of Transmission Impact** will be concluded for the purposes of Paragraph 6.5.1(c). Thereafter, the **User** will provide **The Company** with monthly updates (or a frequency of updates as agreed between **The Company** and the **User**) and follow the **Transmission Impact Assessment** obligations in accordance with the **Bilateral Connection Agreement**.
- 6.5.8.6 **The Company** will review the changes to the **Transmission Impact Assessment** and the requirements of Paragraph 6.5.1(c) in relation to a **Relevant Embedded Power Station** shall be deemed as completed unless **The Company** states otherwise as per the provisions of the **Bilateral Connection Agreement**. **The Company** shall notify the **User** of any changes **The Company** believe do not meet the criteria detailed in the **Bilateral Connection Agreement** (as amended by the **Modification Offer** described in Paragraph 6.5.8.5) within [5] business days.
- 6.5.8.7 Should the **Bilateral Connection Agreement** be subsequently modified to remove the **Transmission Impact Assessment**, any new requests to connect to and/or use the **User's Distribution System** by a **Power Station(s)** shall be required undertake a **Evaluation of Transmission Impact** as per Paragraph 6.5.1(e).

## 6.6 PAYMENT

- 6.6.1 **The Company** will invoice **Users** for **Connection Charges** and/or **Use of System Charges** due under the **CUSC** and/or each **Bilateral Agreement** and/or as notified to the **User** where there is no **Bilateral Agreement**, in accordance with the **CUSC** and/or the **Charging Statements** in the following manner:
- (a) in the case of recurrent monthly charges identified in the relevant **Charging Statements** **The Company** shall despatch an invoice on or before the 15<sup>th</sup> day of the month for the charges due in relation to that month;
  - (b) in the case of the **STTEC Charge** **The Company** shall invoice the **User** on or before the 15<sup>th</sup> day of the month for the full **STTEC Charge**;
  - (c) In the case of the **LDTEC Charge** **NGC** shall invoice the **User** on or before the 15<sup>th</sup> day of the month for the full **LDTEC Charge**;
  - (d) in the case of **ET Use of System Charges**, **The Company** shall invoice the **User** on the dates specified in the **Bilateral**

**Connection Agreement;**

- (e) unless otherwise specified in the **CUSC** where charges are payable other than monthly **The Company** shall despatch an invoice not less than 30 days prior to the due date for payment.
- 6.6.2 **Users** shall pay **Connection Charges** and/or **Use of System Charges** and the **STTEC Charge** and the **LDTEC Charge** and due to **The Company** under the **CUSC** and/or each **Bilateral Agreement** and/or as otherwise notified to the **User** where there is no **Bilateral Agreement**, in accordance with the **CUSC** and/or the **Charging Statements** in the following manner:
- (a) in the case of recurrent monthly charges and the **STTEC Charge** and the **LDTEC Charge** on the later of:
    - (i) 15th day of the month to which the invoiced charges relate; and
    - (ii) the 14<sup>th</sup> day following the day that **The Company's** invoice was despatched unless, in any such case, the said date is not a **Business Day** in which case payment shall be made on the next **Business Day**;
  - (b) in the case of **ET Use of System Charges**, by the date specified for payment in **The Company's** invoice therefor;
  - (c) unless otherwise specified in the **CUSC** where charges are payable other than monthly within 30 days of the date of **The Company's** invoice therefor.
- 6.6.3 All payments under this Paragraph 6.6 shall be made by the variable direct debit method or such other form of bankers automated payment as shall be approved by **The Company** to the account number, bank and branch as **The Company** or a **User** may from time to time notify in writing to the other.
- 6.6.4 All sums payable by one **CUSC Party** to the other pursuant to this **CUSC**, the **Bilateral Agreements** and/or the **Mandatory Services Agreements**, whether of charges, interest or otherwise shall (except to the extent otherwise required by law) be paid in full, free and clear of and without deduction set off or deferment in respect of sums the subject of any disputes or claims whatsoever save for sums the subject of a final award or judgement (after exhaustion of all appeals if this opportunity is taken) or which by agreement between **The Company** and those **CUSC Parties** may be so deducted or set-off.
- 6.6.5 Where a **User** wishes to pay its **Use of System Charges** payments in advance of the due date for such payment then **The**

**Company** will discuss and agree arrangements for this with the **User**.

- 6.6.6 Subject to Section 4, if any **CUSC Party** fails to pay on the due date any amount properly due under the **CUSC** or any **Bilateral Agreement** such **CUSC Party** shall pay to the **CUSC Party** to whom such amount is due interest on such overdue amount from and including the date of such failure to (but excluding) the date of actual payment (as well after as before judgement) at the **Prescribed Rate**. Interest shall accrue from day to day.
- 6.6.7 All amounts specified hereunder or under any **Bilateral Agreement** shall be exclusive of any **Value Added Tax** or other similar tax.

## 6.7 METERING

- 6.7.1 Each **User** consents to **The Company** having access to and copies of all meter readings taken from **Energy Metering Equipment** pursuant to the **Balancing and Settlement Code** in any **Financial Year** for the purposes of calculating **Connection Charges** and **Use of System Charges** due from **Users** or for the purpose of operating the **National Electricity Transmission System** or of carrying out its **EMR Functions**. Such access and copies shall be obtained from the relevant **BSC Agent** appointed under the **Balancing and Settlement Code** from time to time provided always that if the relevant **BSC Agent** fails to provide such access and copies at **The Company's** request the **User** shall supply any such meter readings in the possession of the **User** direct to **The Company**.
- 6.7.2 The relationship between the **CUSC Parties** with respect to **Energy Metering Equipment** shall be regulated by Section L of the **Balancing and Settlement Code**.
- 6.7.3 In respect of **Operational Metering Equipment** owned by one **CUSC Party** and in respect of which access and rights to deal with such **Operational Metering Equipment** are not set down in any other document the **CUSC Parties** shall grant each other such access and other rights as are reasonably necessary to enable them to perform their obligations under the **CUSC** and the **Grid Code** upon presentation of a suitable indemnity and the **CUSC Parties** shall take such action as may be necessary to regularise the position forthwith thereafter.
- 6.7.4 The voltage at which the tariff metering is connected and its location shall be referred by **The Company** to the **BSC Panel**. **The Company** shall inform the relevant **User** of the voltage requirements specified by the **BSC Panel** as soon as possible thereafter.



#### 6.7.5 Meter Operator Agent

Where a **Connection Site** is a **Grid Supply Point**, and the **User** is or will be **Registrant** in relation to the **Energy Metering Equipment** required by the **Balancing and Settlement Code** at the **Grid Supply Point** and/or at the bulk supply point(s) which are related to that **Grid Supply Point**, **The Company** shall install and be the **Meter Operator Agent** of all such **Energy Metering Equipment** from the date of the relevant **Construction Agreement** until the **FMS Date** and thereafter:-

- (a) **The Company** may resign as **Meter Operator Agent** of such **Energy Metering Equipment** on giving no less than 12 months' notice in writing; and
- (b) the **User** may remove **The Company** as **Meter Operator Agent** upon giving no less than 12 months' notice in writing,

Provided that where the **User** agrees to become owner of any such **Energy Metering Equipment** **The Company** may resign as **Meter Operator Agent** upon such transfer of ownership and shall agree such terms as shall be reasonably necessary to enable the **User** to perform its obligations as **Meter Operator Agent** of such **Energy Metering Equipment**.

#### 6.7.6 Charges

**The Company** shall recover its charges for acting as **Meter Operator Agent** of any **Energy Metering System**, which is a **Transmission Connection Asset** charged for under the **CUSC**, as part of such charges. Where **The Company** acts as **Meter Operator Agent** of any other **Energy Metering System** owned by **The Company** for which the **User** is **Registrant** **The Company** shall charge and the **User** shall pay such amount which is reasonable in all the circumstances.

#### 6.7.7 Interference

The **User** shall ensure that its employees, agents and invitees will not interfere with any **Energy Metering Equipment** in respect of which **The Company** is **Meter Operator Agent** or the connections to such **Energy Metering Equipment**, without the prior written consent of **The Company** (except to the extent that emergency action has to be taken to protect the health and safety of persons or to prevent serious damage to property proximate to the **Energy Metering Equipment** or to the extent that such action is authorised under the **CUSC** or any other agreement between **The Company** and the **User**.)

#### 6.7.8 Pulse Data

The **User** shall have the right to collect and record pulses from the meters comprised in the **Energy Metering System(s)** at the **Connection Site**. The **Company** shall procure that the **Relevant Transmission Licensee** shall give the **User** access in accordance with the **Interface Agreement** to collect and record such pulses and to install and maintain such lines and equipment as may be reasonably necessary.

- 6.7.9 Where a **User** is acting as a **Supplier** to a **Non-Embedded Customer** the **User** shall register the **Energy Metering System** at the **Connection Site** in accordance with the **Balancing and Settlement Code** and shall otherwise act as **Registrant**.

## 6.8 BALANCING MECHANISM REQUIREMENTS

- 6.8.1 If the **User** is a **BSC Trading Party**, then the following provision[s] must be met:

- 6.8.2 Trading Point Electronic Data Transfer (CC.6.5.8)

If required under **Grid Code** CC.6.5.8, the **User** must provide electronic data communication facilities approved by **The Company** to permit the submission of data required by the **Grid Code**, from the **User's Trading Point** (as defined in the **Grid Code**) to **The Company**. The **User** can elect to send data to two locations depending upon the level of diversity required by the **User**. **The Company** will provide the necessary "router" connection equipment at both Wokingham and Warwick House.

- 6.8.3 If the **User** chooses to participate in the **Balancing Mechanism** then the following provisions must be met:

- (a) Control Telephony (CC.6.5.2 to CC.6.5.5)

The requirements of Control Telephony are specified in Appendix 1 of this Section 6. This encompasses Additional Communication Requirements (CC.6.5.7 and CC.6.5.9).

- (b) Operational Metering (CC.6.5.6)

- (i) The Operational Metering requirements are contained in Appendix 2 to this Section 6. The Operational Metering Summator (OMS) is detailed in NGTS 3.9.11.
- (ii) **The Company** shall supply and install the OMS Front End (FE) unit in a position close to the high accuracy meters, to be agreed with the **User**, preferably within the high accuracy metering cubicle. The OMS FE links to the OMS

Processing End (PE) unit via a serial data link and this may need to be connected via **User** supplied cabling depending on the agreed positions of the two units.

- (iii) Where **User's Equipment** or equipment for which the **User** is responsible (as defined in the **Balancing and Settlement Code**) is located immediately adjacent to the Grid Entry Point (**Transmission Substation**), Telecoms Room accommodation shall be provided by the **User** for the **Transmission** Marshalling Cubicles, Telemetry, System Monitoring, Signalling and Telephone equipment required to collect and return the information required, and to provide voice communication. This will require space for between three and five 600mm square cubicles to contain equipment, supplies (e.g. 48-volt dc) and marshalling. The equipment will be provided and installed by **The Company**. The **User** will be responsible for providing the site connections and cabling to the plant/peripherals. The **User** should ensure that signals are wired out to the appropriate cubicle.
- (iv) Where **User's Equipment** or **Equipment** for which the **User** is responsible (as defined in the **Balancing and Settlement Code**) is located immediately adjacent to the Grid Entry Point (**Transmission Substation**), and the two sites have their earthing bonded together, the data required by **The Company** (from the OMS-FE and other plant) will be cabled directly between the two sites and **The Company** equipment located in the **User** bay in the **Transmission** substation.
- (v) The requirements as specified in Appendix 2 to this Section 6 must be met for all generating plant, including any plant specifically installed for Black Start, that is the subject of bids or offers to the **Balancing Mechanism**.
- (vi) The requirements as specified in Appendix 2 to this Section 6, to the extent that they are applicable, must be met where reasonably required by **The Company** for demand supplied by the **User** that is the subject of bids or offers to the **Balancing Mechanism**. **The Company** will not require the requirements of Appendix 2 to this Section 6 to be met where it is impracticable

or unreasonable to do so, for example where the demand is a disparate collection of small demands aggregated to form a **BM Unit**.

(c) Control Point Electronic Dispatch & Logging (CC.6.5.8)

Electronic data communication facilities approved by **The Company** to permit the submission of Bid Offer Acceptance data from **The Company** to the **User's** Control Point (as defined in the **Grid Code**) and to permit the submission data required by the **Grid Code**, from the **User's** Control Point to **The Company**. **The Company** will provide the necessary communication links and "router" connection equipment at the **User's** Control Point. The requirements for Control Point Electronic Dispatch & Logging are specified in Appendix 1 to this Section 6 (Communications Plant).

## 6.9 MODIFICATIONS

6.9.1 No **Modification** may be made by or on behalf of a **User** or **The Company** otherwise than in accordance with the provisions of this Paragraph 6.9.

### 6.9.2 Modifications Proposed by Users

6.9.2.1 If a **User** wishes to make a **Modification** it shall complete and submit to **The Company** a **Modification Application** (and if this is a **Gated Application**, in accordance with the **Gated Application and Offer Process**) comply with the terms thereof.

6.9.2.2 Where the **Modification Application**:

6.9.2.2.1 is not a **Gated Application**, **The Company** shall make the **Modification Offer** to that **User** as soon as practicable and (save where the **Authority** consents to a longer period) in any event not more than 3 months after receipt by **The Company** of the **Modification Application**.

6.9.2.2.2 is a **Gated Application**, **The Company** shall make the **Modification Offer** to the **User** in accordance with the **Gated Application and Offer Process**.

6.9.2.2.3 The **Modification Offer** shall include details of any variations **The Company**

proposes to make to the **Bilateral Agreement** or, where applicable, the **Construction Agreement** which applies to the **Connection Site** or **Transmission Interface Site** in question. During such period **The Company** and the **User** concerned shall discuss in good faith the implication of the proposed **Modifications**.

6.9.2.3 The **Modifications Offer** shall remain open for acceptance (subject to **CUSC** Paragraph 6.10.4.4) for 3 months from the date of its receipt by that **User** unless either that **User** or **The Company** makes an application to the **Authority** under condition E13 of the **ESO Licence**, in which event the **Modification Offer** shall remain open for acceptance by that **User** until the date 14 days after any determination by the **Authority** pursuant to such application.

6.9.2.4 If the **Modification Offer** is accepted by that **User** the **Bilateral Agreement** or **Construction Agreement** relating to the **Connection Site** or **Transmission Interface Site** in question shall be varied to reflect the terms of the **Modification Offer** and the **Modification** shall proceed according to the terms of the **Bilateral Agreement** or **Construction Agreement** as so varied.

### 6.9.3 Modifications Proposed by The Company

6.9.3.1 If **The Company** wishes to make a **Modification** to the **National Electricity Transmission System**, **The Company** shall complete and submit to each **User** a **Modification Notification** and shall advise each **User** of any works (including where applicable any **OTSDUW** or changes to **OTSDUW**) which **The Company** reasonably believes that **User** may have to carry out as a result.

6.9.3.2 Any **User** which considers that it shall be required to make a **Modification** as a result of the **Modification** proposed by **The Company** (a “**Modification Affected User**”) may as soon as practicable after receipt of the **Modification Notification** and (save where the **Authority** consents to a longer period) within the period stated therein (which shall be sufficient to enable the **User** to assess the implications of the proposed **Modification** and in any event shall not be less than 3 months) may make an application to

the **Authority** under condition E13 of the **ESO Licence**.

6.9.3.3 As soon as practicable after the receipt of the **Modification Notification** or, if an application to the **Authority** has been made, the determination by the **Authority**, and in any event within two months thereof, each **Modification Affected User** shall complete and submit a **Modification Application** to **The Company** and comply with the terms thereof. No fee shall be payable by any **User** to **The Company** in respect of any such **Modification Application**.

6.9.3.4 Once a **Modification Application** has been made by a **User** pursuant to Paragraph 6.9.3.2 the provisions of Paragraph 6.9.2.2, 6.9.2.3 and 6.9.2.4 shall thereafter apply.

**6.9.3.5 Modification Notification and Modification Applications relating to owners/operators of Distribution Systems triggered by Embedded Power Stations**

6.9.3.5.1 The provisions of this Paragraph 6.9 apply to **Modification Notification** and **Modification Applications** relating to owners/operators of **Distribution Systems** triggered by **Embedded Power Stations** but adapted as required on the following basis.

6.9.3.5.2 Where a **Modification Notification** is issued by **The Company** to the **User** under Paragraph 6.9.3 on receipt by **The Company** of a **Gate 1 Application** for a **BEGA** for a **Embedded Large Power Station** or **BELLA**, the notice is solely to inform the **User** of the **Gate 1 Application** and no details of the impact on the **National Electricity Transmission System** will be provided or **Modification Application** required from the **User** as provided for in that Paragraph.

6.9.3.5.3 Where a **Modification Notification** is issued by **The Company** to the **User** under Paragraph 6.9.3 on receipt by **The Company** of a **Gate 2 Application** by an **Embedded Power Station** for a **BEGA** or **BELLA**, the **Modification Application** by the **User** will be made in accordance with

the **Gated Application and Offer Process.**

6.9.4 Modifications Required for Offshore Transmission Implementation

6.9.4.1 **The Company** shall notify **Existing Offshore Generators** on or before go-active if **The Company** is required to make a **Modification** to a **Relevant Offshore Agreement** to meet the requirements of the **Offshore Transmission Implementation Plan**. Such notification by **The Company** shall be treated as a **Modification Application** from the **Existing Offshore Generator**.

6.9.4.2 Any **Existing Offshore Generator** that **The Company** has notified under Paragraph 6.9.4.1, shall cooperate with **The Company** to contribute to the full and timely completion of the **Offshore Transmission Implementation Plan**

6.9.4.3 Once a **Modification Application** has been made by a **User** pursuant to Paragraph 6.9.4.1 the provisions of Paragraph 6.9.2.2, 6.9.2.3 and 6.9.2.4 shall thereafter apply.

6.9.5 To the extent that the provisions of any **Nuclear Site Licence Provisions Agreement** relate to **Modifications** (either by a **User** or by **The Company**) as (and only as) between **User** and **The Company**, they shall prevail over the provisions of this Paragraph 6.9 to the extent that they are inconsistent.

6.9.6 **Modifications relating to OTSDUW**

Where a **Construction Agreement** has been entered into on the basis of **OTSDUW Arrangements**, then any actual or proposed replacement, renovation, modification, alteration, or construction by or on behalf of the **User** to the **OTSUA**, the scope of the **OTSDUW** or the manner of the operation of the **OTSUA** which may have a **Material Effect** on another **CUSC Party** at the particular **Connection Site** and/or **Transmission Interface Site** shall be deemed to be a **Modification** proposed by the **User** for the purposes of the **CUSC**.

**6.10 GENERAL PROVISIONS CONCERNING MODIFICATIONS AND NEWCONNECTION SITES**

6.10.1 Subject to the payment of its **Reasonable Charges**, if any, as provided for in this Paragraph 6.10 **The Company** undertakes to each **User** to provide all advice and assistance reasonably requested by that **User** to enable that **User** adequately to assess

the implications (including the feasibility) of making a **Modification** to the **User's Equipment**, the **User's System** or the **OTSUA** (whether such **Modification** is to be made at the request of **The Company** or of the **User**) or of constructing a **New Connection Site** or undertaking **Offshore Transmission System Development User Works** (including adequately assessing the feasibility of making any **Connection Application** or considering the terms of any **Connection Offer**). If the proposed **Modification** by the **User** is or may be required as a result of a **Modification** proposed by **The Company** then **The Company** shall provide such advice and assistance free of charge. If the proposed **Modification** is or may be proposed by the **User** or if the advice and assistance is in respect of a **New Connection Site** **The Company** may charge the **User** **Reasonable Charges** for such advice and assistance. The provision of such advice and assistance shall be subject to any confidentiality obligations binding on **The Company** and that **User**.

6.10.2 When giving such advice and assistance **The Company** shall comply with **Good Industry Practice**.

6.10.3 **The Company** shall have no obligation to compensate any **User** (the "**First User**") for the cost or expense of any **Modification** required to be made by any **User** as a result of any **The Company Modification** under Paragraph 6.9.3.1. Where such **The Company Modification** is made as a result of the construction of a **New Connection Site** or a **Modification** for another **User** (the "**Other User**"), the **Other User** shall compensate the **First User** for the reasonable and proper cost and expense of any **Modifications** required to be made by the **First User** as a result of that **The Company Modification**. Such compensation shall be paid to the **First User** by the **Other User** within thirty days of production to the **Other User** of a receipted invoice (together with a detailed breakdown of such reasonable costs and expenses) for the expenditure which has been incurred by the **First User**.

***Modification Offer and Connection Offer conditional upon other Modification and Connection Offers***

6.10.4 This Paragraph does not apply in the case of **Gated Offers** and references within it shall be construed accordingly. If at the time of making any **Offer** or **Modification Offer** or **Connection Offer** to a **User** (the "**Second Offer**") there is an outstanding **Modification Offer(s)** or **Connection Offer(s)** to another **User(s)** (the "**First Offer**") which if accepted would affect the terms of the **Second Offer** **The Company** shall at the time of making the **Second Offer**:



- 6.10.4.1 inform the recipient(s) of both the **First Offer(s)** and **Second Offer(s)** in writing that there is another **Offer** outstanding which might affect them; and
- 6.10.4.2 be entitled to make the **First Offer(s)** and **Second Offer(s)** conditional upon other outstanding **Offers** not having been or being accepted; and
- 6.10.4.3 be entitled to vary the terms of either **Offer** if the other **Offer** is accepted first on the same procedures as those set out in Paragraphs 6.9.2.2 to 6.9.2.4 or 2.13.3 to 2.13.5 inclusive as the case may be.
- 6.10.4.4 If **Interactivity** is confirmed in accordance with the **Interactivity Policy**, **The Company** shall be entitled to vary the **Offer Acceptance Period** as provided for in the **Interactivity Policy**

## 6.11 NUCLEAR INSTALLATIONS

6.11.1 Save as provided in Paragraph 6.11.2 below notwithstanding anything to the contrary contained in the **CUSC** (but subject to the following provision), in circumstances affecting a generator of nuclear electricity (a "**Nuclear Generator**") in which:

- (a) a breach of any of the matters specified in Paragraph 6.11.4 below may be reasonably anticipated; and
- (b) there is no defence (other than that provided for under this Paragraph) available to the **Nuclear Generator** in respect of the breach referred to in Paragraph (a);

the **Nuclear Generator** shall be entitled to take any action or refrain from taking any action which is reasonably necessary in order to avert the breach referred to in Paragraph 6.11.1(a) and each and every provision of the **CUSC** shall be read and construed subject to this Paragraph 6.11.1,

Provided that the **Nuclear Generator** shall:-

- (i) make reasonable efforts to verify the factors that it takes into account in its assessment of the circumstances and anticipated breach referred to above; and
- (ii) use its best endeavours to comply with the relevant provision in a manner which will not cause the **Nuclear Generator** to breach any of the matters specified in Paragraph 6.11.4 below.

6.11.2 Paragraphs 6.11.1 and 6.11.3 shall not apply in relation to the

provisions of the **Balancing Codes** which will apply with full force and effect notwithstanding the occurrence of the circumstances referred to in 6.11.1(a) (including those provisions specified in Paragraph 6.11.4 which relate to Safety of Personnel and **Plant**).

- 6.11.3 Save as provided in Paragraph 6.11.2 above notwithstanding anything in the **CUSC**, the **Nuclear Generator** shall be entitled upon giving reasonable notice to all affected **CUSC Parties** to require any **CUSC Party** to take any reasonable and proper action whatsoever to the extent necessary in order to comply with (or avert an anticipated breach of) any of the matters specified in Paragraph 6.11.4 below.
- 6.11.4 The matters referred to in Paragraphs 6.11.1 and 6.11.3 above are any covenant, agreement, restriction, stipulation, instruction, provision, condition or notice contained, or referred to, in a licence for the time being in force, granted in accordance with the Nuclear Installations Act 1965 (or legislation amending, replacing or modifying the same) or any consent, or approval issued, or to take effect from time to time under such licence, any emergency arrangements, operating rules or other matters from time to time under such licence, any emergency arrangements, operating rules or other matters from time to time approved by the relevant authority under, or pursuant to, any such agreements, restrictions, stipulations, instructions, provisions, conditions or notices.
- 6.11.5 The **Nuclear Generator** shall indemnify and keep indemnified any **CUSC Party** for any loss, damage, costs and expenses incurred by that **CUSC Party** as a consequence of any action of that **CUSC Party** pursuant to Paragraph 6.11.3 (to the extent that the action was not required by any licence or agreement binding on that **CUSC Party**).
- 6.11.6 Notwithstanding the fact that any action or inaction allowed by Paragraph 6.11.1 above does not constitute a breach of the **CUSC** or an **Event of Default** under Paragraph 5.3, the **Nuclear Generator** shall be liable to the other **CUSC Parties** to the **CUSC** for any loss, claims, costs, liabilities and expenses arising from such action or inaction to the extent only that such loss, claims, costs, liabilities and expenses (had it arisen as a result of a breach of the **CUSC**) would not have been limited or excluded under the provisions of Paragraph 6.12.

## 6.12 LIMITATION OF LIABILITY

- 6.12.1 Subject to Paragraphs 4.3, 5.10.1, 6.12.6, 6.5.4 and 6.11.5 and any liquidated damages provisions of any **Construction Agreement** or **Bilateral Agreement** or **Mandatory Services Agreement** and the payment adjustment provisions of the relevant **Mandatory Services Agreement** and save where any

provision of the **CUSC**, any **Bilateral Agreement** or any **Mandatory Services Agreement** provides for an indemnity each **CUSC Party** agrees and acknowledges that no **CUSC Party** (the "**Party Liable**") nor any of its officers, employees or agents shall be liable to any of the other **CUSC Parties** for loss arising from any breach of the **CUSC** and any such agreements other than for loss directly resulting from such breach and which at the date hereof was reasonably foreseeable as not unlikely to occur in the ordinary course of events from such breach in respect of:-

- 6.12.1.1 physical damage to the property of any of the other **CUSC Parties**, or its or their respective officers, employees or agents; and/or
- 6.12.1.2 the liability of any such other **CUSC Party** to any other person for loss in respect of physical damage to the property of any other person, subject, for the avoidance of doubt, to the requirement that the amount of such liability claimed by such other **CUSC Party** should be mitigated in accordance with general law.

provided that the liability of any **CUSC Party** in respect of all claims for such loss shall not exceed £5million per incident or series of related incidents and that in cases where an incident or series of related incidents occur on an **Onshore Distribution System** affects **Users** of an **ET Offshore Transmission System** or on an **ET Transmission System** affecting **Users** of an **Onshore Distribution System**, the liability of all **CUSC Parties** in respect of all claims for such loss shall not exceed £1million per incident or series of related incidents.

- 6.12.2 Nothing in the **CUSC** shall exclude or limit the liability of the **Party Liable** in respect of fraudulent misrepresentation or death or personal injury resulting from the negligence of the **Party Liable** or any of its officers, employees or agents and the **Party Liable** shall indemnify and keep indemnified each of the other **CUSC Parties**, its officers, employees or agents, from and against all such and any loss or liability which any such other **CUSC Party** may suffer or incur by reason of any claim on account of fraudulent misrepresentation, death or personal injury resulting from the negligence of the **Party Liable** or any of its officers, employees or agents.
- 6.12.3 In consideration of the rights conferred upon each **CUSC Party** (other than **The Company**) under the **CUSC**, the right of such **CUSC Party** (other than **The Company**) to claim in negligence, other tort, or otherwise howsoever against a **Relevant Transmission Licensee** in respect of any act or omission of such **Relevant Transmission Licensee** in relation to the subject matter of the **STC** is hereby excluded and each **CUSC Party**

(other than **The Company**) agrees not to pursue any such claim save that nothing in this paragraph 6.12.3 shall restrict the ability of such **CUSC Party** to claim in respect of fraudulent misrepresentation or death or personal injury resulting from the negligence of a **Relevant Transmission Licensee**.

6.12.4 Subject to Paragraphs 4.3, 5.10.1, 6.12.6, 6.5.4 and 6.11.5 and any liquidated damages provision of any **Construction Agreement** or **Bilateral Agreement** or **Mandatory Services Agreement** and save where any provision of the **CUSC**, any **Bilateral Agreement** or any **Mandatory Services Agreement** provides for an indemnity, neither the **Party Liable** nor any of its officers, employees or agents shall in any circumstances whatsoever be liable to any of the other **CUSC Parties** for:-

6.12.4.1 any loss of profit, loss of revenue, loss of use, loss of contract or loss of goodwill; or

6.12.4.2 any indirect or consequential loss; or

6.12.4.3 loss resulting from the liability of any other **CUSC Party** to any other person howsoever and whensoever arising save as provided in Sub Paragraphs 6.12.1.1 and 6.12.1.2.

6.12.5 The rights and remedies provided by the **CUSC** to the **CUSC Parties** are exclusive and not cumulative and exclude and are in place of all substantive (but not procedural) rights or remedies express or implied and provided by common law or statute in respect of the subject matter of the **CUSC**, including without limitation any rights any **CUSC Party** may possess in tort which shall include actions brought in negligence and/or nuisance. Accordingly, each of the **CUSC Parties** hereby waives to the fullest extent possible all such rights and remedies provided by common law or statute, and releases a **CUSC Party** which is liable to another (or others), its officers, employees and agents to the same extent from all duties, liabilities, responsibilities or obligations provided by common law or statute in respect of the matters dealt with in the **CUSC** and undertakes not to enforce any of the same except as expressly provided herein.

6.12.6 Save as otherwise expressly provided in the **CUSC**, this Paragraph 6.12 insofar as it excludes or limits liability shall override any other provision in the **CUSC** provided that nothing in this Paragraph 6.12 shall exclude or restrict or otherwise prejudice or affect any of:-

6.12.6.1 the rights, powers, duties and obligations of any **CUSC Party** which are conferred or created by the **Act**, the **Licence** or the **Regulations**; or

6.12.6.2 the rights, powers, duties and obligations of the **Authority** or the **Secretary of State** under the **Act**, any **Licence** or otherwise howsoever.

6.12.7 Each of the Paragraphs of this Paragraph 6.12 shall:-

6.12.7.1 be construed as a separate and severable contract term, and if one or more of such Paragraphs is held to be invalid, unlawful or otherwise unenforceable the other or others of such Paragraphs shall remain in full force and effect and shall continue to bind the **CUSC Parties**; and

6.12.7.2 survive termination of the **CUSC** and/or the **CUSC Framework Agreement**.

6.12.8 Each **CUSC Party** acknowledges and agrees that each of the other **CUSC Parties** holds the benefit of Paragraphs 6.12.1 and 6.12.2 and 6.12.3 above for itself and as trustee and agent for its officers, employees and agents.

6.12.9 Each **CUSC Party** acknowledges and agrees that the provisions of this Paragraph 6.12 have been the subject of discussion and negotiation and are fair and reasonable having regard to the circumstances as at the date hereof.

6.12.10 For the avoidance of doubt, nothing in this Paragraph 6.12 shall prevent or restrict any **CUSC Party** enforcing any obligation (including suing for a debt) owed to it under or pursuant to the **CUSC**.

## **6.13 ADDITIONAL CUSC PARTIES**

6.13.1 The **CUSC Parties** shall admit as an additional party to the **CUSC Framework Agreement** any person who accepts a **Connection Offer** or **Use of System Offer** from **The Company** (the '**New CUSC Party**') and who is not at the time a **CUSC Party**. Such admission shall take effect by way of an **Accession Agreement** prepared by **The Company** at the expense and cost of the **New CUSC Party** and to be executed by **The Company** for itself and on behalf of all other **CUSC Parties**. Upon execution of the **Accession Agreement** by **The Company**, subject to and in accordance with the terms and conditions of that **Accession Agreement**, the **New Party** shall become a **CUSC Party** for all purposes of the **CUSC Framework Agreement**.

6.13.2 Each **CUSC Party** hereby authorises and instructs **The Company** to sign any such **Accession Agreement** on its behalf and undertakes not to withdraw, qualify or remove any such authority or instruction at any time.

- 6.13.3 **The Company** shall promptly notify all **Users** that the **New CUSC Party** has become a **CUSC Party**. Such notification shall be by both publication on **The Company Website** and written notice (which may be sent electronically) of the name, registered address and capacities in which the new **CUSC Party** will, or intends to, be connected to or use the **National Electricity Transmission System**.

## 6.14 TRANSFER AND SUBCONTRACTING

- 6.14.1 The rights, powers, duties and obligations of a **User** under the **CUSC** or the **CUSC Framework Agreement** and/or any **Bilateral Agreement** (and associated **Construction Agreement**) or **Mandatory Services Agreement** are personal to that **User** and that **User** may not assign or transfer the benefit or burden of those documents save in the following circumstances:

- 6.14.1.1 upon the disposal by that **User** of the whole of its business or undertaking it shall have the right to transfer its rights and obligations under the **CUSC**, all **Bilateral Agreements** (and associated **Construction Agreements**) and all **Mandatory Services Agreements** to the purchaser thereof on condition that the purchaser if not already a **User** enters into an **Accession Agreement** with **The Company** pursuant to Paragraph 6.13 and confirms to **The Company** in writing either that all of the technical or related conditions, data, information, operational issues or other matters specified in or pursuant to the relevant **Bilateral Agreement** (and associated **Construction Agreement**) or **Grid Code** by the **User** seeking the transfer will remain unchanged or, (except in the case of a **Mandatory Services Agreement**) if any such matters are to be changed, the purchaser first notifies **The Company** in writing of such changes which **The Company** will consider promptly and in any event within 28 days of receiving notice of such change, and until such consideration is complete the transfer shall not be effective. If having considered such changes **The Company** in its reasonable opinion does not consider the proposed changes reasonably satisfactory to **The Company** it shall consult with the **User** seeking to undertake such transfer and pending the outcome thereof to **The Company's** reasonable satisfaction the transfer shall not be effective; provided always that the **User** may refer any dispute to the **Dispute Resolution Procedure**. Such transfer shall become effective once the changes are reasonably satisfactory to **The Company** or have

been determined to be so under the **Dispute Resolution Procedure**;

6.14.1.2 upon the disposal by a **User** of part of its business undertaking comprising **User's Equipment** at one or more **Connection Sites** that **User** shall have the right to transfer its rights and obligations under all relevant **Bilateral Agreements** (and associated **Construction Agreements**) and all relevant **Mandatory Services Agreements** to the purchaser thereof on condition that the purchaser (if not already a **User**) enters into an **Accession Agreement** with **The Company** under Paragraph 6.13 and confirms to **The Company** in writing either that all of the technical or related conditions, data, information, operational issues or other matters specified in or pursuant to the relevant **Bilateral Agreement** (and associated **Construction Agreement**) or **Grid Code** by the **User** seeking the transfer will remain unchanged or, (except in the case of a **Mandatory Services Agreement**) if any such matters are to be changed, the purchaser first notifies **The Company** in writing of such changes which **The Company** will consider promptly and in any event within 28 days of receiving notice of such change and until such consideration is complete the assignment shall not be effective. If having considered such changes **The Company** in its reasonable opinion does not consider the proposed changes reasonably satisfactory to **The Company** it shall consult with the **User** seeking to undertake such transfer and pending the outcome thereof to **The Company's** reasonable satisfaction the transfer shall not be effective provided always that the **User** may refer any dispute to the **Dispute Resolution Procedure**. Such transfer shall become effective once the changes are reasonably satisfactory to **The Company** or have been determined to be so under the **Dispute Resolution Procedure**;

6.14.1.3 a **User** may assign or charge its benefit under the **CUSC** and any **Bilateral Agreements** (and associated **Construction Agreement**) or any **Mandatory Services Agreements** in whole or in part by way of security.

Each **CUSC Party** shall have the right to sub-contract or delegate the performance of any of its obligations or duties arising under the **CUSC** or any **Bilateral Agreement**, associated **Construction Agreement** or **Mandatory Services Agreements** including activities envisaged by the **Grid Code** without the prior consent of any other **CUSC Party**. The sub-contracting by a

**CUSC Party** of the performance of any obligations or duties under the **CUSC** or any **Bilateral Agreement, Construction Agreements or Mandatory Services Agreements** or of any activities envisaged by the **Grid Code** shall not relieve that **CUSC Party** from liability for performance of such obligation or duty.

- 6.14.2 Nothing in Paragraph 6.14.1 shall prevent a transfer of **OTSUA** (and transfer or assignment of all associated property and rights) by the relevant **User** to an **Offshore Transmission Licensee**.

## 6.15 Confidentiality

- 6.15.1 Confidentiality for **The Company** and its subsidiaries

6.15.1.1 **The Company** and its subsidiaries in each of their capacities in the **CUSC** shall secure that **Protected Information** is not:

- (a) divulged by **Business Personnel** to any person unless that person is an **Authorised Recipient**;
- (b) used by **Business Personnel** for the purposes of obtaining for **The Company** or any of its subsidiaries or for any other person:
  - (i) any electricity licence; or
  - (ii) any right to purchase or otherwise acquire (including to enter into or acquire the benefit of a contract conferring rights or obligations, including rights or obligations by way of option, in relation to or by reference to the sale, purchase or delivery of electricity at any time or the price at which electricity is sold or purchased at any time), or to distribute electricity; or
  - (iii) any contract or arrangement for the supply of electricity to **Customers** or **Suppliers**; or
  - (iv) any contract for the use of any electrical lines or electrical plant belonging to or under the control of a **Public Distribution System Operator**, except and to the extent that **The Company** is required to do so pursuant to a request by a **User** in its application for



connection to the **National Electricity Transmission System** at a **Connection Site** located **Offshore**; or

- (v) control of any body corporate which, whether directly or indirectly, has the benefit of any such licence, contract or arrangement; and
- (c) used by **Business Personnel** for the purpose of carrying on any activities other than **Permitted Activities** except with the prior consent in writing of the **CUSC Party** to whose affairs such **Protected Information** relates.

6.15.1.2 Nothing in Paragraph 6.15.1.1 shall apply:

- (a) to any **Protected Information** which, before it is furnished to **Business Personnel**, is in the public domain; or
- (b) to any **Protected Information** which, after it is furnished to **Business Personnel**:
  - (i) is acquired by **The Company** or any subsidiary of **The Company** in circumstances in which Paragraph 6.15.1 does not apply; or
  - (ii) is acquired by **The Company** or any subsidiary of **The Company** in circumstances in which Paragraph 6.15.1.1 does apply and thereafter ceases to be subject to the restrictions imposed by such Paragraph; or
  - (iii) enters the public domain,

and in any such case otherwise than as a result of a breach by **The Company** or any subsidiary of **The Company** of its obligations in Paragraph 6.15.1.1, or a breach by the person who disclosed the **Protected Information** of that person's confidentiality obligation and **The Company** or any of its subsidiaries is aware of such breach; or

- (c) to the disclosure of any **Protected Information** to any person if **The Company** or any subsidiary of **The Company** is required or expressly permitted to make such disclosure to such person:

- (i) in compliance with the duties of **The Company** or any subsidiary under the **Act** or any other requirement of a **Competent Authority**; or
  - (ii) in compliance with the conditions of the **ESO Licence** or any document referred to in the **ESO Licence** with which **The Company** or any subsidiary of **The Company** is required by virtue of the **Act** or the **ESO Licence** to comply; or
  - (iii) in compliance with any other requirement of law; or
  - (iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Take-overs and Mergers; or
  - (v) pursuant to the rules for the **London Court of International Arbitration** or pursuant to any judicial or other arbitral process including where determination is by an expert or tribunal having jurisdiction in relation to **The Company** or any of its subsidiaries; or
  - (vi) in compliance with the requirements of section 35 of the **Act** and with the provisions of the **Fuel Security Code**; or
  - (vii) pursuant to an **EMR Document** and if an **EMR Document** requires the disclosure of data from previous years, **The Company** may disclose that data also; or
- (d) to any **Protected Information** to the extent that **The Company** or any of its subsidiaries is expressly permitted or required to disclose that information under the terms of any agreement or arrangement (including the **CUSC**, the **Grid Code**, the **Distribution Codes** and the **Fuel Security Code**) with the **CUSC Party** to whose affairs such **Protected Information** relates.

6.15.1.3 **The Company** and each of its subsidiaries may use all and any information or data supplied to or acquired by it, from or in relation to **Users** in performing

**Permitted Activities** including for the following purposes:

- (a) the operation and planning of the **National Electricity Transmission System**;
- (b) the calculation of charges and preparation of offers of terms for connection to or use of the **National Electricity Transmission System**;
- (c) the operation and planning in relation to the utilisation of **Balancing Services** and the calculation of charges therefor;
- (d) the provision of information under the **British Grid Systems Agreement** and **EdF Documents**,

and may pass the same to subsidiaries of **The Company** which carry out such activities and the **CUSC Parties** agree to provide all information to **The Company** and its subsidiaries for such purposes.

6.15.1.3A In addition, and without prejudice, to the provisions of paragraph 6.15.1.3, **The Company** and each of its subsidiaries may use all and any information or data supplied to or acquired by it in any year, from or in relation to **Users**, for the purpose of carrying out its **EMR Functions**

6.15.1.4 **The Company** undertakes to each of the other **CUSC Parties** that, having regard to the activities in which any **Business Person** is engaged and the nature and effective life of the **Protected Information** divulged to them by virtue of such activities, neither **The Company** nor any of its subsidiaries shall unreasonably continue (taking into account any industrial relations concerns reasonably held by it) to divulge **Protected Information** or permit **Protected Information** to be divulged by any subsidiary of **The Company** to any **Business Person** who has notified **The Company** or the relevant subsidiary of their intention to become engaged as an employee or agent of any other person (other than of **The Company** or any subsidiary thereof) who is:

- (a) authorised by licence or exemption to generate, transmit, distribute or supply electricity; or

- (b) an electricity broker or is known to be engaged in the writing of electricity purchase contracts (which shall include the entering into or acquiring the benefit of a contract conferring rights or obligations including rights and obligations by way of option, in relation to or by reference to the sale, purchase or delivery of electricity at any time or the price at which electricity is sold or purchased at any time); or
- (c) known to be retained as a consultant to any such person who is referred to in (i) or (ii) above.

6.15.2 Without prejudice to the other provisions of this Paragraph 6.15 **The Company** shall procure that any additional copies made of the **Protected Information** whether in hard copy or computerised form, will clearly identify the **Protected Information** as protected.

6.15.3 **The Company** undertakes to use all reasonable endeavours to procure that no employee is a **Corporate Functions Person** unless the same is necessary for the proper performance of their duties.

6.15.4 Without prejudice to Paragraph 6.15.1.3, **The Company** and each of its subsidiaries may use and pass to each other all and any period metered demand data supplied to or acquired by it and all and any information and data supplied to it pursuant to **OC6** of the **Grid Code** for the purposes of Demand Control (as defined in the **Grid Code**), but in each case only for the purposes of its estimation and calculation from time to time of the variable "system maximum ACS demand" (as defined in the **ESO Licence**).

6.15.5 Any information regarding, or data acquired by the relevant **BSC Agent** or its agent from **Energy Metering Equipment** at **Sites** which are a point of connection to a **Distribution System** shall and may be passed by the relevant **BSC Agent** or their agent to the operator of the relevant **Distribution System**. The said operator of the relevant **Distribution System** may only use the same for the purposes of the operation of such **Distribution System** and the calculation of charges for use of and connection to the **Distribution System**.

#### **Confidentiality other than for The Company and its subsidiaries**

6.15.6 Each **User** undertakes with each other **User** and with **The Company** and its subsidiaries that it shall preserve the confidentiality of, and not directly

or indirectly reveal, report, publish, disclose or transfer or use for its own purposes **Confidential Information** except in the circumstances set out in Paragraph 6.15.7 or to the extent otherwise expressly permitted by the **CUSC** or with the prior consent in writing of the **CUSC Party** to whose affairs such **Confidential Information** relates.

6.15.7 The circumstances referred to in Paragraph 6.15.6 are: (a) where the **Confidential Information**, before it is furnished to the **User**, is in the public domain; or

(b) where the **Confidential Information**, after it is furnished to the **User**:

(i) is acquired by the **User** in circumstances in which Paragraph 6.15.6 does not apply; or

(ii) is acquired by the **User** in circumstances in which Paragraph 6.15.6 does apply and thereafter ceases to be subject to the restrictions imposed by Paragraph 6.15.6; or

(iii) enters the public domain,

and in any such case otherwise than as a result of a breach by the **User** of its obligations in Paragraph 6.15.6 or a breach by the person who disclosed that **Confidential Information** of that person's confidentiality obligation and the **User** is aware of such breach; or

(c) if the **User** is required or permitted to make disclosure of the **Confidential Information** to any person:

(i) in compliance with the duties of the **User** under the **Act** or any other requirement of a **Competent Authority**; or

(ii) in compliance with the conditions of any **Licence** or any document referred to in any **Licence** with which the **User** is required to comply or

(iii) in compliance with any other requirement of law; or

(iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Take-overs and Mergers; or

(v) pursuant to the rules for the **London Court of International Arbitration** or pursuant to any judicial or other arbitral process (including where determination is by an expert) or tribunal having jurisdiction in relation to the **User**; or

- (vi) pursuant to an EMR Document; or
  - (d) where **Confidential Information** is furnished by the **User** to its **Affiliates** or **Related Undertakings** or to the employees, directors, agents, consultants and professional advisors of the **User** or those of its **Affiliates** or **Related Undertakings**, in each case on the basis set out in Paragraph 6.15.8.
- 6.15.8 With effect from the date of the **MCUSA** the **User** shall adopt procedures within its organisation for ensuring the confidentiality of all **Confidential Information** which it is obliged to preserve as confidential under Paragraph 6.15.6 These procedures are:
- 6.15.8.1 the **Confidential Information** will be disseminated within the **User** only on a "need to know" basis;
  - 6.15.8.2 employees, directors, agents, consultants and professional advisers of the **User** or those of its **Affiliates** or **Related Undertakings** in receipt of **Confidential Information** will be made fully aware of the **User's** obligations of confidence in relation thereto; and
  - 6.15.8.3 any copies of the **Confidential Information**, whether in hard copy or computerised form, will clearly identify the **Confidential Information** as confidential.
- 6.15.9 Each **User** shall procure that its **Affiliates**, **Related Undertakings**, consultants and professional advisers observe the restrictions set out in this Paragraph 6.15 (as if references to "**User**" were references to such **Affiliates**, **Related Undertakings**, consultants and professional advisers) and shall be responsible under the **CUSC** for any failure by such persons to observe such restrictions.
- 6.15.10 For the avoidance of doubt, data and other information which any **CUSC Party** is permitted or obliged to divulge or publish to any other **CUSC Party** pursuant to the **CUSC** shall not necessarily be regarded as being in the public domain by reason of being so divulged or published.
- 6.15.11 Notwithstanding any other provision of the **CUSC**, the provisions of this Paragraph 6.15 shall continue to bind a person after its cessation as a **CUSC Party** for whatever reason.
- 6.15.12 Where **The Company** and a **User** are parties to an **Interface Agreement** in relation to a connection under the **CUSC**, the confidentiality provision in that agreement shall be deemed to include the changes which have been made to this Paragraph 6.15 consequent to the introduction of the **EMR Documents**.

## 6.16 DATA

Data of a technical or operational nature collected recorded or otherwise generated pursuant to the **CUSC** or any relevant **Bilateral Agreement** shall be deemed data lodged pursuant to the **Grid Code** to the extent that the **Grid Code** makes provision therefore.

## 6.17 Not Used

## 6.18 INTELLECTUAL PROPERTY

Subject to Paragraph 8.15.7, all **Intellectual Property** relating to the subject matter of the **CUSC** or any **Bilateral Agreement** or **Mandatory Services Agreement** conceived, originated, devised, developed or created by a **CUSC Party**, its officers, employees, agents or consultants during the currency of the **CUSC** or any **Bilateral Agreement** or **Mandatory Services Agreement** shall vest in such **CUSC Party** as sole beneficial owner thereof save where the **CUSC Parties** agree in writing otherwise.

## 6.19 FORCE MAJEURE

If any **CUSC Party** (the "**Non-Performing Party**") shall be unable to carry out any of its obligations under the **CUSC**, the relevant **Bilateral Agreement** and/or **Mandatory Services Agreement** due to a circumstance of **Force Majeure** the **CUSC** and the relevant **Bilateral Agreements** or **Mandatory Services Agreements** shall remain in effect but:

6.19.1 the **Non-Performing Party's** relevant obligations;

6.19.2 the obligations of each of the other **CUSC Parties** owed to the **Non-Performing Party** under the **CUSC** and/or the relevant **Bilateral Agreements** or **Mandatory Services Agreements** as the case may be; and

6.19.3 any other obligations of such other **CUSC Parties** under the **CUSC** owed between themselves which the relevant **CUSC Party** is unable to carry out directly as a result of the suspension of the **Non-Performing Party's** obligations

shall be suspended for a period equal to the circumstance of **Force Majeure** provided that:

- (a) the suspension of performance is of no greater scope and of no longer duration than is required by the **Force Majeure**;
- (b) no obligations of any **CUSC Party** that arose before the **Force Majeure** causing the suspension of performance are excused as a result of the **Force Majeure**;

- (c) the **Non-Performing Party** gives the other **CUSC Parties** prompt notice describing the circumstance of **Force Majeure**, including the nature of the occurrence and its expected duration, and continues to furnish regular reports with respect thereto during the period of **Force Majeure**;
- (d) the **Non-Performing Party** uses all reasonable efforts to remedy its inability to perform; and
- (e) as soon as practicable after the event which constitutes **Force Majeure** the **CUSC Parties** shall discuss how best to continue their operations so far as possible in accordance with the **CUSC**, any **Bilateral Agreements** or **Mandatory Services Agreements** and the **Grid Code**.

## 6.20 WAIVER

No delay by or omission of a **CUSC Party** in exercising any right power, privilege or remedy under this **CUSC**, any **Bilateral Agreement** or any **Construction Agreement** or any **Mandatory Services Agreement** or the **Grid Code** shall operate to impair such right, power, privilege or remedy or be construed as a waiver thereof. Any single or partial exercise of any such right, power, privilege or remedy shall not preclude any other or future exercise thereof or the exercise of any other right, power, privilege or remedy.

## 6.21 NOTICES

6.21.1. Save to the extent otherwise expressly provided in the **CUSC**, any **Mandatory Services Agreement** or **Bilateral Agreement**, any notice or other communication to be given by one **CUSC Party** to another under, or in connection with the matters contemplated by, the **CUSC** shall be addressed to the recipient and sent to the address, or email address of such other **CUSC Party** as that **CUSC Party** may have notified the other for the purpose and marked for the attention of the company secretary or to such other address, and/or email address and/or marked for such other attention as such other **CUSC Party** may from time to time specify by notice given in accordance with this Paragraph 6.21 to the **CUSC Party** giving the relevant notice or other communication to it.

6.21.2. Save as otherwise expressly provided in the **CUSC**, any notice or other communication to be given by any **CUSC Party** to any other **CUSC Party** under, or in connection with the matters contemplated by, the **CUSC** shall be in writing and shall be given by letter delivered by hand or sent by first class prepaid post (airmail if overseas) or email, and shall be deemed to have been received:



- 6.21.2.1 in the case of delivery by hand, when delivered; or
  - 6.21.2.2 in the case of first class prepaid post, on the second day following the day of posting or (if sent airmail from overseas) on the fifth day following the day of posting; or
  - 6.21.2.3
  - 6.21.2.4 in the case of email, when delivered to the email address (where such delivery occurs before 17.00 hours on the day of delivery) and in any other case on the day of following the day of delivery.
- 6.21.3 Where CUSC expressly provides for notices or other communication to be by electronic means or a CUSC Party otherwise agrees this with another CUSC Party, the electronic communication shall be addressed and sent to the address provided for this purpose and shall, subject to Paragraph 6.21.4, be deemed to have been received one hour after it has been sent in the absence of an undeliverable return receipt received by the sender during that period.
- 6.21.4 If the time at which any notice or communication sent by e-mail is deemed to have been received falls after 17.00 hours on a day, the notice or communication shall be deemed to have been received at the start of the next Business Day.
- 6.21.5 Where a notice or communication is sent by e-mail, the CUSC Party giving the notice or communication shall (but without prejudice to Paragraph 6.21.3), if requested by the recipient CUSC Party resend, as soon as reasonably practicable, the notice or communication by e-mail
- 6.21.6 This Paragraph shall apply only to **Users** acting in their capacity as **Trading Parties** (as defined in the **Balancing and Settlement Code**) who are responsible for **Small Power Stations** which are **Embedded**. In addition to the other provisions of this Paragraph 6.21 of the **CUSC**, any notice or other communications to be served upon the **User** under the provisions of Paragraph 5.4 shall in each case be served by any one of the senior managers of **The Company** whose names, posts, locations, telephone and email addresses have been provided to the **User** by **The Company** for that purpose. In the case where an application, notice or other communication is to be made by the **User** to **The Company** under the provisions of Section 5 such application, notice or other communication shall be made by any one of the senior managers whose names, posts, location, telephone and email addresses have been provided to **The Company** by the **User** for that purpose. Both

parties shall be under an obligation to keep each other notified in writing of changes to the lists of senior managers exchanged between them.

## 6.22 THIRD PARTY RIGHTS

- 6.22.1 Subject to the remainder of this Paragraph 6.22, a **Relevant Transmission Licensee** may rely upon and enforce the terms of Paragraph 6.12.3, against a **CUSC Party** (other than **The Company**) as specified therein.
- 6.22.2 The third party rights referred to in Paragraph 6.22.1 (and any other terms of the **CUSC** which expressly provide that a third party may in their own right enforce a term of the **CUSC**) may only be enforced by the relevant third party subject to and in accordance with the provisions of the Contracts (Rights of Third Parties) Act 1999 and all other relevant terms of this **CUSC**.
- 6.22.3 Notwithstanding any other provisions of the **CUSC**, the **CUSC Parties** may (pursuant to section 8), amend the **CUSC** without recourse to the consent of a third party and accordingly, section 2(1) of the Contracts (Rights of Third Parties) Act 1999 shall not apply, save that, where and to the extent that any amendment to the **CUSC** would have an impact on the rights of third parties conferred under Paragraph 6.22.1, then **The Company** shall bring such impact to the attention of **CUSC Parties** and third persons to the extent that such impact is not already brought to their attention in an **Amendment Proposal** by the **Proposer**.
- 6.22.4 Except as provided in Paragraph 6.22.1 (or insofar as the **CUSC** otherwise expressly provides that a third party may in its own right enforce a term of the **CUSC**), a person who is not a **CUSC Party** has no right under the Contracts (Rights of Third Parties) Act 1999 to rely upon or enforce any term of the **CUSC** but this does not affect any right or remedy of a third party which exists or is available apart from that Act.

## 6.23 JURISDICTION

- 6.23.1 Subject and without prejudice to Section 7 and to Paragraph 6.23.4 below, all the **CUSC Parties** irrevocably agree that only the courts of England and Wales and the courts of Scotland are to have jurisdiction to settle any disputes which may arise out of or in connection with the **CUSC** including the **Grid Code** and any **Bilateral Agreement** or **Mandatory Services Agreement** and that accordingly any suit, action or proceeding (together in this Paragraph 6.23 referred to as "**Proceedings**") arising out of or in connection with the **CUSC** and any **Bilateral Agreement** or **Mandatory Services Agreement** may be brought in such courts.

6.23.2 Each **CUSC Party** irrevocably waives any objection which it may have now or hereafter to the laying of the venue of any **Proceedings** in any such court as is referred to in this Paragraph 6.23 and any claim that any such **Proceedings** have been brought in an inconvenient forum and further irrevocably agrees that judgement in any **Proceedings** brought in the courts of England and Wales or the courts of Scotland shall be conclusive and binding upon such **CUSC Party** and may be enforced in the courts of any other jurisdiction.

6.23.3 Each **CUSC Party** which is not incorporated in any part of **Great Britain** agrees that if it does not have, or shall cease to have, a place of business in **Great Britain** it will promptly appoint, and shall at all times maintain, a person in **Great Britain** irrevocably to accept service of process on its behalf in any **Proceedings** in **Great Britain**.

For the avoidance of doubt nothing contained in Paragraphs 6.23.1 to 6.23.3 above shall be taken as permitting a **CUSC Party** to commence **Proceedings** in the courts where the **CUSC** otherwise provides for **Proceedings** to be referred to arbitration or to the **Authority**.

## 6.24 COUNTERPARTS

Any **Bilateral Agreement** or **Mandatory Services Agreement** or **Accession Agreement** may be executed in any number of counterparts and by the different parties on separate counterparts, each of which when executed and delivered shall constitute an original, but all the counterparts shall together constitute one and the same instrument.

## 6.25 GOVERNING LAW

The **CUSC** and each **Bilateral Agreement** and **Mandatory Services Agreement** shall be governed by and construed in all respects in accordance with English law.

## 6.26 SEVERANCE OF TERMS

If any provision of the **CUSC** or any **Bilateral Agreement** or **Mandatory Services Agreement** is or becomes or is declared invalid, unenforceable or illegal by the courts of any competent jurisdiction to which it is subject or by order of any other **Competent Authority** such invalidity, unenforceability or illegality shall not prejudice or affect the remaining provisions of the **CUSC** or any **Bilateral Agreement** or **Mandatory Services Agreement** which shall continue in full force and effect notwithstanding such invalidity, unenforceability or illegality.

## 6.27 LANGUAGE

Each notice, instrument, certificate or other document to be given by one **CUSC Party** to another under the **CUSC** shall be in the English language.

## **6.28 MCUSA**

The **CUSC Parties** agree that for the purposes of cross references in documents existing as at the date of the introduction of the **CUSC**, the **CUSC**, **Bilateral Agreements**, **Construction Agreements** and **Agreements to Vary** shall be regarded as the **MCUSA** and the relevant **“Supplemental Agreements”** and any relevant **Agreements** for **Construction Works** and relevant **Agreements to Vary**.

## **6.29 BSC**

Each and every **User** connected to or using the **National Electricity Transmission System** shall be a **BSC Party** except for:

6.29.1 **Non-Embedded Customers** being supplied by a **Trading Party**;

6.29.2 A **User** acting in the category of **Exempt Power Station** where another party is responsible under the **BSC** for the export from such **Exempt Power Station**;

6.29.3 A **User** acting in the category of an **Embedded Exemptable Large Power Station** where another party is responsible under the **BSC** for the export from such **Embedded Exemptable Large Power Station**.

## **6.30 Transmission Entry Capacity**

### **6.30.1 Decrease in Transmission Entry Capacity**

6.30.1.1 Subject to payment of the **Cancellation Charge**, each **User** shall be entitled to decrease the **Transmission Entry Capacity** for the **Connection Site** or site of **Connection** once the **Power Station** to which it relates has been **Commissioned** upon giving **The Company** not less than five **Business Days** notice in writing.

6.30.1.2 **The Company** shall as soon as practicable after receipt of such notice issue a revised Appendix C for the purposes of the relevant **Bilateral Agreement** reflecting the decrease in the **Transmission Entry Capacity**.

6.30.1.3 The decrease in the **Transmission Entry Capacity** shall take effect on the first of April following the expiry of the notice period stated in the notice from the **User**.

6.30.1.4 In addition to its obligation to pay the **Use of System Charges** until the reduction in **Transmission Entry Capacity** takes effect, the **User** shall, depending on the length of notice given, pay to **The Company** the **Cancellation Charge**. **The Company** shall calculate any **Cancellation Charge** due from the **User** on receipt of the notice of reduction of **Transmission Entry Capacity** from the **User** and advise the **User** accordingly. Unless a **User** wishes to make alternative arrangements regarding earlier payment, **The Company** shall invoice the **User** for the **Cancellation Charge** by (but no earlier than) 28 days prior to the end of the **Financial Year** in which the decrease in **Transmission Entry Capacity** is to take effect. The **Cancellation Charge** shall be payable within 28 days of the date of **The Company's** invoice in respect thereof.

#### 6.30.2 Increase in **Transmission Entry Capacity**

Each **User** shall be entitled to request an increase in its **Transmission Entry Capacity** for a **Connection Site** up to a maximum of the **Connection Entry Capacity** for the **Connection Site** and such request shall be deemed to be a **Modification** for the purposes of the **CUSC** but with the words “as soon as practicable... not more than 3 months after” being read in the context of such **Modification** as being “within 28 days where practicable and in any event not more than 3 months (save where the **Authority** consents to a longer period) after”.

#### 6.30.3 Exchange Rate Requests

6.30.3.1 **The Company** shall establish and maintain a **TEC Register** published on **The Company Website** recording the details set out in 6.30.3.2.

6.30.3.2 The **TEC Register** shall set out the name of the **User**, the **Connection Site** (or in the case of an **Embedded Generator** site of connection), the **Transmission Entry Capacity**, the year of connection to (or in the case of an **Embedded Generator** the year of the use of) the **National Electricity Transmission System** in respect of any **Bilateral Agreements** (and whether they are **Gate 1 Agreements** or **Gate 2 Agreements**) or agreements to change a **User's Transmission Entry Capacity**.

6.30.3.3 The details of the **Bilateral Agreement** or agreements to change a **User's Transmission Entry Capacity** shall be recorded on the **TEC Register** within 5 **Business Days** of the completion of such

agreements.

**6.30.3.4** Subject to the payment of the fee as outlined in the **Charging Methodology Statements**, **The Company** shall, after receipt of an **Exchange Rate Request** calculate the **Exchange Rate** as soon as practicable but in any event not more than 3 months after such request is received.

**6.30.3.5** In the event that the parties which to proceed with a **TEC Trade** on the basis of the **Exchange Rate** then the **User** shall notify **The Company** and effective from the following 1 April, **The Company** shall revise the **Bilateral Agreements** (as appropriate) provided.

## **6.31 Short Term Transmission Entry Capacity**

### **6.31.1 Background**

A **User**, who is party to a **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** may make a **STTEC Request** to **The Company** in accordance with this Paragraph of the **CUSC**.

### **6.31.2 Form of STTEC Request**

**6.31.2.1** A **STTEC Request** must be received by **The Company** by the relevant date specified in Paragraph 6.31.6.5.

**6.31.2.2** A **STTEC Request** must be made by email and must attach the **STTEC Request Form** duly completed and signed on behalf of the **User**.

**6.31.2.3.** A **STTEC Request** shall not be deemed received by **The Company** until the non-refundable **STTEC Request Fee** has been paid to **The Company** and until the emailed copy of the **STTEC Request** is received in accordance with Paragraph 6.21.2.4 of the **CUSC**.

**6.31.2.4** The **STTEC Request** must specify whether it is a **Request for a STTEC Authorisation** or an **Application for a STTEC Offer**.

**6.31.2.5** Each **STTEC Request** must state one **STTEC Period** only.

**6.31.2.6.** A **STTEC Request** must be for a **STTEC Period** within a 12 month period of receipt by **The Company** of the **STTEC Request** and the **STTEC Period** must not

include any days within more than one **Financial Year**. The **STTEC Request** must include the minimum and maximum level of MW for the **STTEC Period**.

- 6.31.2.7 In respect of **Power Stations** directly connected to the **National Electricity Transmission System**, a **User's Transmission Entry Capacity** plus the maximum figure requested (plus any **STTEC** previously granted for any part of the **STTEC Period**) must not exceed its total station **Connection Entry Capacity**.

### 6.31.3 Assessment by The Company of STTEC Requests

- 6.31.3.1 **The Company** may reject any **STTEC Request** that is not made in accordance with the provisions of this Paragraph 6.31.
- 6.31.3.2 **The Company** will assess **STTEC Requests** and whether or not to grant **STTEC Requests** at its absolute discretion.
- 6.31.3.3 **The Company** will start assessing a **STTEC Request** no later than the relevant date specified in Paragraph 6.31.6.5.
- 6.31.3.4 If **The Company** has received more than one **STTEC Request** for a **STTEC Period** with the same start date, **The Company** will:
- (i) assess any **Requests for a STTEC Authorisation** before assessing any **Applications for a STTEC Offer**;
  - (ii) assess **Requests for a STTEC Authorisation** on a first come first served basis such that the **Request for a STTEC Authorisation** received earliest in time by **The Company** (as recorded by **The Company**) will be assessed first and then the **Request for a STTEC Authorisation** received next in time after that, and so on;
  - (iii) assess **Applications for a STTEC Offer** on a first come first served basis such that the **Application for a STTEC Offer** received earliest in time by **The Company** (as recorded by **The Company**) will be assessed first and then the **Application for a STTEC Offer** received next in time after that, and so on.
- 6.31.3.5. No priority will be given to any **Users** who have previously made successful **STTEC Requests** or **LDTEC Requests**.

#### **6.31.4 Notification by The Company**

- 6.31.4.1 Each **User** confirms and agrees that **The Company** shall have no liability to it for any **STTEC Request** which **The Company** does not grant in accordance with this Paragraph 6.31.
- 6.31.4.2 **The Company** is not obliged to grant any **STTEC Request** submitted.
- 6.31.4.3 A **STTEC Request** will only be granted at a level within the maximum and minimum range in MW submitted by the **User**.
- 6.31.4.4 **STTEC Requests** will be granted for a uniform amount of MW for the **STTEC Period**.
- 6.31.4.5 No **STTEC Request** will be granted if the maximum figure in the **STTEC Request** would together with the **User's Transmission Entry Capacity** (plus any **STTEC** previously granted for any part of the **STTEC Period**) exceeds the total station **Connection Entry Capacity**.
- 6.31.4.6 **The Company** shall notify a **User** who has made a **STTEC Request** by no later than the relevant date referred to at Paragraph 6.31.6.6, whether or not **The Company** grants the **User's STTEC Request**.

#### **6.31.5 Charging, Invoicing and Payment**

- 6.31.5.1 Each **User** must pay the **STTEC Charge** even if the **User** does not use the corresponding **STTEC**.
- 6.31.5.2 The provisions of Section 3 shall apply in respect of the **STTEC Charge**.
- 6.31.5.3 The provisions of Section 6.6 shall apply in respect of payment of the **STTEC Charge**.

#### **6.31.6 General**

- 6.31.6.1 Each **Request for a STTEC Authorisation** will constitute an unconditional and irrevocable offer by the **User to The Company** to buy **Short Term Capacity** (on a station basis) up to the quantity (in whole MW) stated in the **STTEC Request** for the **STTEC Period** and at the relevant price per MW set out in the **Statement of Use of System Charges** and upon the terms and conditions



of **CUSC**. A **Request for a STTEC Authorisation** is capable of being accepted by **The Company**. Notification by **The Company** that it has granted the **Request for a STTEC Authorisation** in accordance with Paragraph 6.31.4.6 constitutes acceptance by **The Company** of the **Request for a STTEC Authorisation**. The notification of **STTEC Authorisation** will:-

- (i) state the level in MW (within the maximum and minimum range requested by the **User**) granted for the **STTEC Period**;
- (ii) include a revised Appendix C to the relevant **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** (as appropriate) which will detail the **STTEC** and the **STTEC Period** for which this applies and **The Company** and the **User** agree that Appendix C to the relevant **Bilateral Agreement** will be deemed to be that notified in accordance with this Paragraph 6.31.6 for the **STTEC Period**, unless otherwise amended in accordance with such **Bilateral Agreement** or the **CUSC**. Upon expiry of the **STTEC Period** the provisions in Appendix C that relate to such **STTEC** for that **STTEC Period** shall cease to have effect;
- (iii) state the **STTEC Charge**.

6.31.6.2 Each **Application for a STTEC Offer** is an application for the right to buy **Short Term Capacity** (on a station basis) up to the quantity (in whole MW) stated in the **STTEC Request** for the **STTEC Period** at the relevant price per MW set out in the **Statement of Use System Charges** and upon the terms and conditions of **CUSC**. Once an **Application for a STTEC Offer** has been received by **The Company** it cannot be withdrawn without the written consent of **The Company**. Notification by **The Company** that it has granted the **Application for a STTEC Offer** in accordance with Paragraph 6.31.4.5 will constitute a **STTEC Offer**.

6.31.6.3 A **STTEC Offer** shall:

- (i) state the level in MW of **STTEC** (within the maximum and minimum range requested by the **User**) offered for the **STTEC Period**;
- (ii) include a revised Appendix C to the relevant **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** (as appropriate) which will

detail the **STTEC** and the **STTEC Period** for which this applies and **The Company** and the **User** agree that, if the **User** accepts the **STTEC Offer** in accordance with Paragraph 6.31.6.4, Appendix C to the relevant **Bilateral Agreement** will be deemed to be that notified in accordance with this Paragraph 6.31 for the **STTEC Period**, unless otherwise amended in accordance with such **Bilateral Agreement** or the **CUSC**. Upon expiry of the **STTEC Period** the provisions in Appendix C that relate to such **STTEC** for that **STTEC Period** shall cease to have effect;

- (iii) state the **STTEC Charge**.
- (iv) be open for acceptance by the **User** within 24 hours of receipt of the emailed copy of the **STTEC Offer**.

6.31.6.4 A **User** may accept a **STTEC Offer** within 24 hours of receipt of the emailed copy of the **STTEC Offer**. Acceptance of a **STTEC Offer** shall be made by the **User** executing and emailing back the Appendix C sent to the **User** as part of the **STTEC Offer**. A **STTEC Offer** lapses if not accepted within such period.

6.31.6.5 The dates referred to at Paragraphs 6.31.2.1 and 6.31.3.3 are:-

- (i) in the case of a **Request for a STTEC Authorisation**, six weeks before the start date for the **STTEC Period**; and
- (ii) in the case of an **Application for a STTEC Offer**, two weeks before the start date for the **STTEC Period**.

6.31.6.6 The date referred to at Paragraph 6.31.4.6 is:-

- (i) in the case of a **Request for a STTEC Authorisation**, four weeks before the start date for the **STTEC Period**;
- (ii) in the case of an **Application for a STTEC Offer**, seven days before the start date for the **STTEC Period**.

6.31.6.7 **The Company** may publish the following information in respect of **STTEC Authorisations**, and **STTEC Offers** which are accepted:-

1. details of the **STTEC Period**;
2. maximum and minimum amount in MW requested;

3. identity of the **User**;
4. the **Connection Site** or site of **Connection**,

in such form and manner as shall be prescribed by **The Company** from time to time.

6.31.6.8 **The Company** may publish the following information in respect of **Requests for a STTEC Authorisation** and **Applications for a STTEC Offer** which in either case are not granted and **STTEC Offers** which are not accepted:-

1. details of the **STTEC Period**;
2. maximum and minimum amount in MW requested,

in such form and manner as shall be prescribed by **The Company** from time to time.

6.31 The **User** consents to the publication by **The Company** of the information referred to above.

## **6.32 Limited Duration Transmission Entry Capacity**

### **6.32.1 Background**

A **User**, who is party to a **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** may make an **LDTEC Request** to **NGC** in accordance with this Paragraph of the **CUSC**.

### **6.32.2 Form of LDTEC Request**

6.32.2.1 An **LDTEC Request** must be received by **NGC** no later than:

- (i) in cases where the requested **LDTEC Period** is 9 months or exceeds 9 months, 7 weeks and one **Business Day** before the start date for the **LDTEC Period**;
- (ii) in cases where the requested **LDTEC Period** is 6 months or exceeds 6 months but is less than 9 months, 5 weeks and one **Business Day** before the start date for the **LDTEC Period**;
- (iii) in cases where the requested **LDTEC Period** is 3 months or exceeds 3 months but is less than 6 months, 4 weeks and one **Business Day** before the start date for the **LDTEC Period**;

- (iv) in cases where the requested **LDTEC Period** is less than 3 months, 3 weeks and one **Business Day** before the start date for the **LDTEC Period**.

6.32.2.2 An **LDTEC Request** must be made by email and must attach the **LDTEC Request Form** duly completed and signed on behalf of the **User**.

6.32.2.3. An **LDTEC Request** shall not be deemed received by **NGC** until the **LDTEC Request Fee** has been paid to **NGC** and until the emailed copy of the **LDTEC Request** is received in accordance with Paragraph 6.32.2.2 of the **CUSC**.

6.32.2.4 Each **LDTEC Request** must state whether it is for an **LDTEC Block Offer** only, an **LDTEC Indicative Block Offer** only or for both an **LDTEC Block Offer** and an **LDTEC Indicative Block Offer** and must specify one **LDTEC Period** only.

6.32.2.5. An **LDTEC Request** cannot be made prior to the start of the **Financial Year** to which it relates. The **LDTEC Request** must state the **LDTEC Period** and include the minimum and maximum level of MW for the **LDTEC Period** which, for the avoidance of doubt, must be the same for any **LDTEC Block Offer** and **LDTEC Indicative Block Offer** in the same **LDTEC Request**.

6.32.2.6 In respect of **Power Stations** directly connected to the **National Electricity Transmission System**, a **User's Transmission Entry Capacity** plus the maximum MW figure requested in any **LDTEC Request** (plus any **STTEC** or **LDTEC** previously granted for any part of the **LDTEC Period**) must not exceed its total station **Connection Entry Capacity**.

### 6.32.3 Assessment by NGC of LDTEC Requests

6.32.3.1 **NGC** may reject any **LDTEC Request** that is not made in accordance with the provisions of this Paragraph 6.32.

6.32.3.2 **NGC** will assess **LDTEC Requests** and whether or not to grant **LDTEC Requests** at its absolute discretion.

6.32.3.3 Subject to Paragraphs 6.32.3.4 and 6.32.3.5, **NGC** will start assessing an **LDTEC Request** no later than:

- (i) in cases where the requested **LDTEC Period** is 9 months or exceeds 9 months, 7 weeks and one **Business Day** before the start date for the **LDTEC Period**;
- (ii) in cases where the requested **LDTEC Period** is 6 months or exceeds 6 months but is less than 9 months, 5 weeks and one **Business Day** before the start date for the **LDTEC Period**;

- (iii) in cases where the requested **LDTEC Period** is 3 months or exceeds 3 months but is less than 6 months, 4 weeks and one **Business Day** before the start date for the **LDTEC Period**;
- (iv) in cases where the requested **LDTEC Period** is less than 3 months, 3 weeks and one **Business Day** before the start date for the **LDTEC Period**.

6.32.3.4 If **NGC** receives more than one **LDTEC Request** for an **LDTEC Period** or a **STTEC Request** or a **TEC Increase Request** which **NGC** believes will impact on each other, **NGC** will assess such requests and the capacity available on the **National Electricity Transmission System** on a first come first served basis such that the request received earliest in time by **NGC** (as recorded by **NGC**) will be considered first in terms of capacity available and then the request received next in time after that, and so on.

6.32.3.5 Where Paragraph 6.32.3.4 applies and the **TEC Increase Request** was received before the **LDTEC Request** **NGC** shall be entitled to suspend the assessment and making of the **LDTEC Offer** in respect of such **LDTEC Request** as necessary to enable it to make an offer in respect of the **TEC Increase Request**.

6.32.3.6 Where the circumstances in Paragraph 6.32.3.5 apply **NGC** shall as soon as practicable advise the **User** of such suspension giving an indication of the timescale for the **LDTEC Offer**. The **User** shall be entitled to withdraw its **LDTEC Request** in such circumstances.

6.32.3.7 No priority will be given to any **Users** who have previously made successful **STTEC Requests** or **LDTEC Requests**.

#### **6.32.4 Notification by NGC**

6.32.4.1 Each **User** confirms and agrees that **NGC** shall have no liability to it for any **LDTEC Request** which **NGC** does not grant in accordance with this Paragraph 6.32.

6.32.4.2 **NGC** is not obliged to grant any **LDTEC Request** submitted.

6.32.4.3 An **LDTEC Request** will only be granted within the maximum and minimum range in MW submitted by the **User**.

6.32.4.5 No **LDTEC Request** will be granted if the maximum MW figure in the **LDTEC Request** would together with the **User's Transmission Entry Capacity** (plus any **STTEC** or **LDTEC** previously granted for any part of the **LDTEC Period**) exceed the total station **Connection Entry Capacity**.

- 6.32.4.6 **NGC** shall no later than seven days and one **Business Day** before the start date for the **LDTEC Period**, either make an **LDTEC Offer** in response to the **User's LDTEC Request** or notify such **User** that it does not intend to grant an **LDTEC Request**.

**6.32.5 Charging, Invoicing and Payment**

- 6.32.5.1 Each **User** must pay the **LDTEC Charge** even if the **User** does not use the corresponding **LDTEC**.
- 6.32.5.2 The provisions of Section 3 shall apply in respect of the **LDTEC Charge**.
- 6.32.5.3 The provisions of Section 6.6 shall apply in respect of payment of the **LDTEC Charge**.

**6.32.6 LDTEC Offers**

- 6.32.6.1 An **LDTEC Block Offer** shall:
- (i) state the **LDTEC Profile** ;
  - (ii) include a revised Appendix C to the relevant **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** (as appropriate) which will detail the **LDTEC Profile** and the **LDTEC Period** for which this applies; and
  - (iv) be open for acceptance by the **User** within one **Business Day** of receipt of the emailed copy of the **LDTEC Offer**.
- 6.32.6.2 An **LDTEC Indicative Block Offer** shall:
- (i) state the **LDTEC Indicative Profile** ;
  - (ii) include a revised Appendix C to the relevant **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** (as appropriate) which will detail the **LDTEC Indicative Profile** and the **LDTEC Period** for which this applies;
  - (iii) state the **Available LDTEC** for the first seven **LDTEC Weeks** within the **LDTEC Indicative Profile**; and
  - (iv) and be open for acceptance by the **User** within one **Business Day** of receipt of the emailed copy of the **LDTEC Offer**.
- 6.32.6.3 Where the **LDTEC Offer** comprises both an **LDTEC Block Offer** and an **LDTEC Indicative Block Offer** a **User** may only accept one or the other but not both.

- 6.32.6.4 A **User** may accept an **LDTEC Block Offer** within one **Business Day** of receipt of the emailed copy of the **LDTEC Block Offer**. Acceptance of an **LDTEC Block Offer** shall be made by the **User** executing and emailing back the accepted **LDTEC Block Offer** in which the **User** shall have either confirmed acceptance of the **LDTEC Profile** in full or confirmed acceptance of the **LDTEC Profile** with a cap throughout the profile at a specific MW figure (not exceeding the maximum MW figure in the **LDTEC Profile**). An **LDTEC Block Offer** lapses if not accepted within such period.
- 6.32.6.5 A **User** may accept an **LDTEC Indicative Block Offer** within one **Business Day** of receipt of the emailed copy of the **LDTEC Indicative Block Offer**. Acceptance of an **LDTEC Indicative Block Offer** shall be made by the **User** accepting the **LDTEC Indicative Block Offer** in which the **User** shall have completed the **Requested LDTEC** figure in MW (which figure shall not exceed the maximum level of MW in the **LDTEC Request**). An **LDTEC Indicative Block Offer** lapses if not accepted within such period.

#### **Notification of weekly available LDTEC**

- 6.32.6.6 Where **NGC** has made an **LDTEC indicative Block Offer** to a **User** and this has been accepted in accordance with Paragraph 6.31.6.5 **NGC** will by 17.00 on the Friday prior to the eighth **LDTEC Week** and each subsequent Friday during the **LDTEC Period** send to the **User** by email an **LDTEC Availability Notification** which will state the **Available LDTEC** up to the **Requested LDTEC** for the **LDTEC Week** eight weeks ahead.
- 6.32.6.7 If the **User** accepts the **LDTEC Offer** made in accordance with Paragraph 6.32.6.4 or 6.32.6.5, for the **LDTEC Period** Appendix C to the relevant **Bilateral Agreement** will be that accepted by the **User** in accordance with Paragraph 6.32.6.4 or 6.32.6.5 as appropriate unless otherwise subsequently amended in accordance with such **Bilateral Agreement** or the **CUSC**. Upon expiry of the **LDTEC Period** such Appendix C as it relates to that **LDTEC** shall cease to have effect.

#### **6.32.7 LDTEC reporting provisions**

- 6.32.7.1 **NGC** may publish the following information in respect of **LDTEC Requests** which are accepted:-
1. details of the **LDTEC Period**;
  2. maximum and minimum amount in MW requested;
  3. identity of the **User**;
  4. the **Connection Site** or site of **Connection**,

in such form and manner as shall be prescribed by **NGC** from time to time.

6.32.7.2 **NGC** may publish the following information in respect of **LDTEC Requests** which in either case are not withdrawn and not granted and **LDTEC Offers** which are not accepted:-

1. details of the **LDTEC Period**;
2. maximum and minimum amount in MW requested,

in such form and manner as shall be prescribed by **NGC** from time to time.

6.32.7.3 The **User** consents to the publication by **NGC** of the information referred to above.

### **6.33 Change from “NGC” to “The Company”**

The **CUSC Parties** agree that references to “**NGC**” in any relevant document as at the time and date for implementation of the **Authority’s** direction under **CUSC** Paragraph 8.23.1 approving the **Proposed Amendment** in respect of the change from “**NGC**” to “**The Company**” shall be read as reference to “**The Company**”.

### **6.34 Temporary TEC Exchanges**

#### **6.34.1 Background**

Two **Users** that are party to a **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** may make a **Temporary TEC Exchange** in accordance with this Paragraph of the **CUSC**.

#### **6.34.2 Form of Temporary TEC Exchange Rate Request**

6.34.2.1 A **Temporary TEC Exchange Rate Request** must be received by **The Company** no later than:

- (i) in cases where the requested **Temporary TEC Exchange Period** is 9 months or more, 10 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;
- (ii) in cases where the requested **Temporary TEC Exchange Period** is 6 months or more but is less than 9 months, 7 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;



- (iii) in cases where the requested **Temporary TEC Exchange Period** is 3 months or more but is less than 6 months, 6 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;
  - (iv) in cases where the requested **Temporary TEC Exchange Period** is less than 3 months, 4 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**.
- 6.34.2.2 A **Temporary TEC Exchange Rate Request** must be made by email and must attach the **Temporary TEC Exchange Rate Request Form** duly completed and signed by the **Joint Temporary TEC Exchange Users**.
- 6.34.2.3 A **Temporary TEC Exchange Rate Request** shall not be deemed received by **The Company** until the **Temporary TEC Exchange Rate Request Fee** has been paid to **The Company** and until the emailed copy of the **Temporary TEC Exchange Rate Request** is received in accordance with Paragraph 6.34.2.2 of the **CUSC**.
- 6.34.2.4 Each **Temporary TEC Exchange Rate Request** must state one **Temporary TEC Exchange Period** only. Each **Temporary TEC Exchange Rate Request** must be by reference to whole MW only.
- 6.34.2.5 A **Temporary TEC Exchange Rate Request** cannot be made prior to the start of the **Financial Year** to which it relates.
- 6.34.2.6 A **Temporary TEC Exchange Rate Request** cannot be made unless **The Company** has published within that **Financial Year** a **Temporary TEC Exchange Notification of Interest Form** from the **Temporary TEC Exchange Donor User**.
- 6.34.2.7 In respect of **Power Stations** directly connected to the **National Electricity Transmission System**, a **User's Transmission Entry Capacity** plus any **Temporary Received TEC** plus any **STTEC** or **LDTEC** less any **Temporary Donated TEC** must not exceed its total station **Connection Entry Capacity**.
- 6.34.2.8 A **Temporary TEC Exchange Rate Request** can be withdrawn at any time upon written notice from the **Joint Temporary TEC Exchange Users**.
- 6.34.2.9 The **Temporary Donated TEC** stated in a **Temporary TEC Exchange Rate Request** shall not exceed the **Transmission Entry Capacity** of the **Temporary TEC Exchange Donor User**.
- 6.34.3 **Assessment by The Company of Temporary TEC Exchange Rate Requests**

- 6.34.3.1 **The Company** may reject any **Temporary TEC Exchange Rate Request** that is not made in accordance with the provisions of this Paragraph 6.34.
- 6.34.3.2 **The Company** will assess **Temporary TEC Exchange Rate Requests** and whether or not to grant **Temporary TEC Exchange Rate Requests** at its absolute discretion.
- 6.34.3.3 Subject to Paragraph 6.34.3.4 and 6.34.3.5 **The Company** will start assessing an **Temporary TEC Exchange Rate Request** no later than:
- (i) in cases where the requested **Temporary TEC Exchange Period** is 9 months or more, 10 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;
  - (ii) in cases where the requested **Temporary TEC Exchange Period** is 6 months or more but is less than 9 months, 7 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;
  - (iii) in cases where the requested **Temporary TEC Exchange Period** is 3 months or more but is less than 6 months, 6 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**;
  - (iv) in cases where the requested **Temporary TEC Exchange Period** is less than 3 months, 4 weeks and one **Business Day** before the start date for the **Temporary TEC Exchange Period**.
- 6.34.3.4 If **The Company** receives more than one **Temporary TEC Exchange Rate Request** for a **Temporary TEC Exchange Period** or a **STTEC Request** or an **LDTEC Request** or a **TEC Increase Request** which **The Company** believes will impact on each other, **The Company** will assess such requests and the capacity available on the **National Electricity Transmission System** on a first come first served basis such that the request received earliest in time by **The Company** (as recorded by **The Company**) will be considered first in terms of capacity available and then the request received next in time after that, and so on.
- 6.34.3.5 Where Paragraph 6.34.3.4 **The Company** shall be entitled to suspend the assessment and making of the **Temporary TEC Exchange Rate Offer** in respect of such **Temporary TEC Exchange Rate Request** or the **LDTEC Offer** in respect of such **LDTEC Request** or the **STTEC Offer** in respect of such **STTEC Request** or the **Offer** in respect of such **TEC Increase Request**.

6.34.3.6 Where the circumstances in Paragraph 6.34.3.5 apply **The Company** shall as soon as practicable advise the **Joint Temporary TEC Exchange Users** of such suspension giving an indication of the timescale for the **Temporary Exchange Rate Offer**. Where both **Joint Temporary TEC Exchange Users** agree, the **Temporary TEC Exchange Rate Request** can be withdrawn in such circumstances.

6.34.3.7 No priority will be given to any **Users** who have previously made successful **STTEC Requests** or **LDTEC Requests** or **Temporary TEC Exchange Rate Requests**.

#### **6.34.4 Notification by The Company**

6.34.4.1 Each **User** confirms and agrees that **The Company** shall have no liability to it for any **Temporary TEC Exchange Rate Request** which **The Company** does not grant in accordance with this Paragraph 6.34.

6.34.4.2 **The Company** is not obliged to grant any **Temporary TEC Exchange Rate Request** submitted.

6.34.4.3 Any **Temporary TEC Exchange Rate Request** will only be granted provided that during the **Temporary TEC Exchange Period** the **User's Transmission Entry Capacity** plus the **Temporary Received TEC** plus any **STTEC** or **LDTEC** less any **Temporary Donated TEC** does not exceed its total station **Connection Entry Capacity**.

6.34.4.4 **The Company** shall no later than seven days and one **Business Day** before the start date for the **Temporary TEC Exchange Period**, by 17:00 on a **Business Day** either make an **Temporary TEC Exchange Rate Offer** in response to the **Temporary TEC Exchange Rate Request** or notify the **Joint Temporary TEC Exchange Users** that it does not intend to grant a **Temporary TEC Exchange Rate Request**.

#### **6.34.5 Charging, Invoicing and Payment**

6.34.5.1 Each **Temporary TEC Exchange Recipient User** must pay the **LDTEC Charge** in respect of the **Temporary Received TEC** even if the **User** does not use the corresponding **Temporary Received TEC**.

#### **6.34.6 Temporary TEC Exchange Rate Offers**

6.34.6.1 A **Temporary TEC Exchange Rate Offer** shall:

- (i) be made to both the **Temporary TEC Exchange Donor User** and the **Temporary TEC Exchange Recipient User** and state the **Temporary Donated TEC** and **Temporary TEC Exchange Rate**;
- (ii) include in the offer sent to the **Temporary TEC Exchange Donor User** a revised Appendix C to the relevant **Bilateral**

**Connection Agreement or Bilateral Embedded Generation Agreement** (as appropriate) of the **Temporary TEC Exchange Donor User** which will detail the **Temporary Donated TEC** and the **Temporary TEC Exchange Period** for which this applies;

- (iii) include in the offer sent to the **Temporary TEC Exchange Recipient User** a revised Appendix C to the relevant **Bilateral Connection Agreement or Bilateral Embedded Generation Agreement** (as appropriate) of the **Temporary TEC Exchange Recipient User** which will detail the **Temporary Received TEC** and the **Temporary TEC Exchange Period** for which this applies; and
- (iv) be open for acceptance by receipt of the emailed copy of the **Temporary TEC Exchange Rate Offer** up to 17:00 the following **Business Day**.

6.34.6.2 A **Temporary TEC Exchange Rate Offer** must be accepted by both the **Joint Temporary TEC Exchange Users** within the timescales in Paragraph 6.34.6.2(iii). Acceptance of a **Temporary TEC Exchange Rate Offer** shall be made by executing and emailing back the accepted **Temporary TEC Exchange Rate Offer**. A **Temporary TEC Exchange Rate Offer** lapses if not accepted by both **Temporary TEC Exchange Users** within such period.

6.34.6.3 If the **Temporary TEC Exchange Rate Offer** is accepted in accordance with Paragraph 6.34.6.2, for the **Temporary TEC Exchange Period** Appendix C to the relevant **Bilateral Agreements** will be that accepted by the **Joint Temporary TEC Exchange Users**, unless otherwise subsequently amended in accordance with such **Bilateral Agreement** or the **CUSC**. Upon expiry of the **Temporary TEC Exchange Period** such Appendix C as it relates to that **Temporary TEC Exchange Period** shall cease to have effect.

#### 6.34.7 Temporary TEC Exchange reporting and information provisions

6.34.7.1 **The Company** may publish the following information in respect of **Temporary TEC Exchange Rate Offers** which are accepted:-

1. details of the **Temporary TEC Exchange Period**;
2. details of the **Temporary Donated TEC** and **Temporary Received TEC**;
3. the identity of the **Temporary TEC Exchange Donor User** and the **Temporary TEC Exchange Recipient User**;
4. the **Connection Site** or site of **Connection**,

in such form and manner as shall be prescribed by **The Company** from time to time.

6.34.7.2 **The Company** may publish the following information in respect of **Temporary TEC Exchange Rate Offers** which are made are not accepted:-

1. details of the **Temporary TEC Exchange Period**;
2. details of the **Temporary Donated TEC** and **Temporary Received TEC**;
3. the identity of the **Temporary TEC Exchange Donor User**;
4. the **Connection Site** or site of **Connection**,

in such form and manner as shall be prescribed by **The Company** from time to time.

6.34.7.3 **The Company** may publish the following information in respect of **Temporary TEC Exchange Rate Offers** not made:-

1. details of the **Temporary TEC Exchange Period**;
2. details of the **Temporary Donated TEC**;
3. the identity of the **Temporary TEC Exchange Donor User**;
4. the **Connection Site** or site of **Connection**,

in such form and manner as shall be prescribed by **The Company** from time to time.

6.34.7.4 The **Temporary TEC Exchange Donor User** and the **Temporary TEC Exchange Recipient User** consent to the publication by **The Company** of the information referred to above.

6.34.7.5 A **User** may also from time to time request that **The Company** advise other **Users** that such **User** is interested in making a **Temporary TEC Exchange**. Such request must be sent by email using the **Temporary TEC Exchange Notification of Interest Form**.

6.34.7.6 **The Company** shall publish such **Temporary TEC Exchange Notification of Interest Form** on its **TEC Register** within 10 **Business Days** of its receipt.

## **6.35 Embedded Generator MW Register**

6.35.1 **The Company** shall establish and maintain the **Embedded Generator MW Register** published on **The Company Website**

recording the details set out in 6.34.2.

6.35.2 The **Embedded Generator MW Register** shall set out:

- the name of **Embedded Generator's** who have a **BELLA** (and whether it is a **Gate 1 Agreement** or **Gate 2 Agreement**) or who are a **Relevant Embedded Power Station**,
- the site of connection to the **Distribution System** and the relevant **Grid Supply Point**,
- the proposed year of connection to the **Distribution System** and
- the maximum output of the **Embedded Generator's** in MW's as set out in the **BELLA** or provided by the **Authorised Electricity Operator** to whose **Distribution System** that **Embedded Generator** is to connect.

6.35.3 **The Company** shall record the details of any new **BELLA's** or any changes to existing **BELLA's** on the **Embedded Generator MW Register** within 5 **Business Days** of such agreements being entered into by The Company.

6.35.4 **The Company** shall record the details provided by the **Authorised Electricity Operator** in respect of a **Relevant Embedded Power Station** or any changes on the **Embedded Generator MW Register** within 5 **Business Days** of the relevant agreements being entered into relating to such Relevant Embedded Power Station between the Authorised Electricity Operator and The Company.

## 6.36 Transmission Works Register

6.36.1 **The Company** shall establish and maintain a **Transmission Works Register** in respect of **Transmission Works** set out in (where they are **Gate 2 Agreements**) **Generators'** and **Interconnector Owners' Construction Agreements** and/or set out in the relevant **Construction Agreement** with the owner/operator of the **Distribution System** in respect of an **Embedded Exemptable Large Power Station** which is the subject of a **BELLA** (until such **Transmission Works** are completed) which it shall publish on **The Company Website** recording the details set out in Paragraph 6.36.2.

6.36.2 The **Transmission Works Register** shall in respect of each such **Construction Agreement** set out the name of **the** Generator or **Interconnector Owner**, the **Connection Site** or, where applicable, the **Transmission Interface Site** (or in the case of an **Embedded Generator** the site of connection), the **Completion Date(s)**, and the **Transmission Works** which relate to such **Construction Agreement** (each as amended from time to time).

6.36.3 The details referred to a Paragraph 6.36.2 shall be recorded on the **Transmission Works Register** within 10 **Business Days** of the completion of such agreements or any changes to an existing agreement if such change affects any item in the **Transmission Works Register**.

### 6.37 GC0156 Cost Recovery Claims

- 6.37.1 All **CUSC Users** that are **Generators** that are not **Restoration Contractors** (as defined in the **Grid Code**) may submit claims during the annual claims submission month for the recovery of the cost of compliance with the new obligations imposed on them via **Grid Code** modification GC0156. Claims will be assessed by **The Company** as described in paragraph 6.37.5. All costs that are assessed as being payable shall be paid out as described in paragraph 6.37.7.
- 6.37.2 **Generators** that first sign a new **Bilateral Agreement** with **The Company** after the date of implementation of **Grid Code** GC0156, are not permitted to submit a claim
- 6.37.4 The claims submission month will initially be September in each year, save that claims shall not be possible in September 2023. However, in 2026, the claims submission month will be December 2026, and this will be the last ever claims window. From 31st December 2026, no more claims will be accepted.
- 6.37.5 The claims assessment process will involve a case-by-case assessment of claims for capital expenditure incurred in complying with the new obligations, with accompanying evidence to demonstrate that the costs incurred were necessary, reasonable, efficiently-incurred, and proportionate.
- 6.37.6 **The Company** will recover the costs of successful claims via **Balancing Services Use of System Charges**.
- 6.37.7 When a claim is approved, **The Company** will pay the claim over the following 12 month period that begins in April the year after the submission of the claim, in 12 equal monthly amounts. If a claim is approved after April in the calendar year after the submission of the claim, payment of the claim will be made in equal monthly amounts over the months remaining to the following March, inclusive.
- 6.37.8 Each claimant shall use reasonable endeavours, exercising **Good Industry Practice**, to identify if compliance with the GC0156 **Grid Code** requirements could be achieved at a materially lower cost by meeting a lesser technical requirement (such as by providing resilience at their asset for fewer than 72 hours) and if so, then they shall advise **The Company** accordingly and liaise with **The Company** about possible solutions associated with a request to **The Authority** for a derogation against the **Grid Code** to the lesser level of resilience. If appropriate, **The Company** shall seek a derogation from **The Authority** on that basis. If the derogation request has been denied, or has not been granted by 1st December 2026, then a claim can be submitted before 31st December 2026 for assessment by **The Company** as per this section

6.37.

### 6.38 Directions related to national security

- 6.38.1 The **Secretary of State** may issue a direction to **The Company** as referred to in condition B4 of **The Company's ESO Licence** where in the opinion of the **Secretary of State** there is a risk relating to national security that may detrimentally impact the resilience, safety or security of the energy system, or the continuity of essential services, and it is in the interest of national security that a direction should be issued to The Company.
- 6.38.2 **The Company** must comply with any such direction that has been issued by the **Secretary of State**. **Users** should note that **The Company** is not required to comply with any other obligation in the **ESO licence**, where and to the extent that compliance with that obligation would be inconsistent with the requirement to comply with such a direction, for the period set out in the direction. This includes the requirement set out in condition E3 of **The Company's ESO licence** to comply with this **Grid Code**.
- 6.38.3 **The Company** is required under condition B4 of its **ESO Licence** to inform the **Secretary of State** of any conflict with the obligations as identified in 6.38.2 as soon as reasonably practicable after the conflict is identified. **The Company** will include in such a notice, details of any identified impact or non-compliance that will be caused or will be likely to be caused to **Users**, and in such a case will also seek clarification of whether this can be shared with the affected **User**.
- 6.38.4 Where reasonably practicable and subject to the agreement of the **Secretary of State** to share any such specific details, **The Company** will inform affected **Users** as identified in 6.38.3 of what actions **The Company** will or has taken, or not taken, to comply with a direction or amended direction (including when such a direction is revoked) and what identified impact or non-compliance this will or is likely to cause to the **User**.
- 6.38.5 **The Company's** obligations under this code and any contracts made under this code shall be suspended without liability where and to the extent that compliance with any such obligation would be inconsistent with the requirement upon **The Company** to comply with a direction.
- 6.38.6 A **User's** obligations under this code and any contracts made under this code shall be suspended without liability where and to the extent that the User is unable to comply with any such obligation as a result of any action taken, or not taken, by **The Company** to comply with a direction.
- 6.38.7 The **Secretary of State** may at any time amend or revoke any direction issued to **The Company** as referred to in condition B4 of **The Company's ESO Licence**.



- 6.38.8 Each **Existing CUSC Contract** shall be read and construed, with effect from the date on which **The Company** was designated as the **ISOP**, as if the defined terms within it, and the effect of those defined terms, had been amended in accordance with the changes to its corresponding proforma exhibit to the **CUSC**. Each **User** acknowledges and agrees that the provisions of this paragraph shall apply notwithstanding the provisions in the **Existing CUSC Contract** as to variation of those agreements.
- 6.38.9 The term “**Existing CUSC Contract**” means any one or more, as applicable for a particular **User**, of those contracts made under the CUSC and including but not limited to a **Bilateral Connection Agreement, Bilateral Embedded Generation Agreement, Construction Agreement, Mandatory Services Agreement, Use of System Supply Confirmation Notice** and **Use of System Interconnector Confirmation Notice**.

### 6.39 Advisory and Information Requests

- 6.39.1 **The Company** is required to provide advice, analysis or information to the **Authority** or to a **Minister of the Crown** when requested in accordance with section 171 of the Energy Act 2023 and condition D1 of the **ESO Licence** and **GSP Licence**.
- 6.39.2 **The Company** may by notice request from **Users** such information as it reasonably requires in connection with the exercise of any of its functions, in accordance with section 172 of the Energy Act 2023. It will do so by the issue of an **Information Request Notice**. The purposes of this may include to assist in the fulfilment of a request for advice, analysis or information as set out in 6.39.1.
- 6.39.3 The Company is required by condition D2 of the **ESO Licence** and **GSP Licence** to prepare, submit for approval by the **Authority** and publish on its website once approved an **Information Request Statement** that sets out further detail on the process **The Company** expects to follow when requesting information from other parties.

The **Information Request Statement** must include, but need not be limited to, the following matters as set out in condition D2.5 of the **ESO Licence** and **GSP Licence**:

- (a) the process **The Company** expects to follow when issuing an **Information Request Notice**, including any further detail around the expected engagement between **The Company** and recipient of an **Information Request Notice**; and
  - (b) the details to be included in an **Information Request Notice** issued by **The Company**.
- 6.39.4 A **User** to whom a request is made under 6.39.2 must, so far as reasonably practicable, provide the requested information within such

reasonable period, and in such reasonable form and manner, as may be specified in the **Information Request Notice**.

6.39.5 **The Company** must, unless the **Authority** otherwise consents, maintain for a period of 6 years and provide to the **Authority** where required a record of information requests as detailed in condition D2.12 of the **ESO Licence** and **GSP Licence** including

- (a) a copy of the **Information Request Notice**;
- (b) any subsequent variations to the original information requested;
- (c) the recipient's response to the notice, including any refusal or challenges to the notice or requested information;
- (d) the time taken for the recipient to provide the requested information;
- (e) the manner and form the information was provided in; and
- (f) the information provided in response to the notice, and whether such information complied, in **The Company's** view, with the **Information Request Notice**.

## Communications Plant (CC.6.5) - Appendix 1

### Power Station Located Adjacent to the Transmission Substation

| Description                                                                               | Source                                    | Work                                                                                                                                                                                                          | Provided By                                                                       | Notes                                                                                   |
|-------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Control Telephone<br>(CC.6.5.2)                                                           | Transmission Substation Exchange.         | User to install free issue handset on dedicated communications circuit. User to install wiring from User control room to Transmission substation exchange.                                                    | Wiring to be provided by User.<br>The Company to provide handset only.            | Where the power station is located immediately adjacent to the Transmission substation. |
| Extension Bell<br>(CC.6.5.3)                                                              | Transmission Substation Exchange.         | User to install free issue extension bell on dedicated communications circuit (separate cores from the control telephone). User to install wiring from User control room to Transmission substation exchange. | Wiring to be provided by User.<br>The Company to provide bell only.               |                                                                                         |
| PSTN (or other off-site communications circuits) for Telephony.<br>(CC.6.5.2 to CC.6.5.5) | Public Telecommunications Operator (PTO). | The User shall provide their own off site communications paths. Data and speech required by The Company shall be cabled from the User site to the Transmission Substation Exchange.                           | Wiring to be provided by User.                                                    |                                                                                         |
| Telegraph Instructor<br>(CC.6.5.7)                                                        | Transmission Marshalling Cubicles.        | Wire out and install free issue display unit and driver (free issue) and communication connections to the Transmission Marshalling Cubicles. The Company to commission.                                       | Wiring to be provided by User.<br>The Company to provide display unit and driver. |                                                                                         |

|                                                                                           |              |                                                                                                                                |                                                                                                                                                                                                                                              |  |
|-------------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Electronic Data Communication Facilities<br>(Electronic Despatch & Logging)<br>(CC.6.5.8) | PTO.         | User to install EDL terminal for submission of MEL and dynamics re-declarations and for bid and offer acceptance instructions. | User to provide EDL terminal.<br><br>The Company to provide communications path to a site router associated with the EDL terminal in conjunction with the User.                                                                              |  |
| Facsimile Machine<br>(CC.6.5.9)                                                           | PTO.         | Install facsimile machine on dedicated communications circuit.                                                                 | User to provide facsimile machine and wiring to PTO.                                                                                                                                                                                         |  |
| Electronic Communication Platform<br>(CC.6.5.9)                                           | The Company. | Create an account to access the Electronic Communication Platform using the registration information provided by The Company.  | The Company will provide registration information for the User to access the Electronic Communications Platform. The User will provide a stable internet connection which will be required to access the Electronic Communications Platform. |  |

## Communications Plant (CC.6.5) - Appendix 1

### Power Station Not Located Adjacent to the Transmission Substation

| Description                                                                               | Source                                    | Work                                                                                                                                                                                                                          | Provided By                                                                                                                                                 | Notes                                                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Control Telephone<br>(CC.6.5.2)                                                           | Remote Telephone Equipment (RTE) unit.    | User to install free issue handset on dedicated communications circuit. User to install wiring from User control room to Transmission Marshalling Cubicles.                                                                   | Wiring to be provided by User.<br>The Company to provide handset only.                                                                                      | Where the Power Station is not located immediately adjacent to the Transmission substation. |
| Extension Bell<br>(CC.6.5.3)                                                              | RTE unit.                                 | User to install free issue extension bell on dedicated communications circuit (separate cores from the control telephone). User to install wiring from User control room to Transmission Marshalling Cubicles.                | Wiring to be provided by User.<br>The Company to provide bell only.                                                                                         |                                                                                             |
| PSTN (or other off-site communications circuits) for Telephony.<br>(CC.6.5.2 to CC.6.5.5) | Public Telecommunications Operator (PTO). | Duplicate offsite communications are preferred for security of data and speech transmission. If two outlet cables do not exist then the matter must be resolved on a site specific basis, to the satisfaction of The Company. | User to provide own outlet cables.                                                                                                                          |                                                                                             |
| Telegraph Instructor<br>(CC.6.5.7)                                                        | Transmission Marshalling Cubicles.        | Wire out and install free issue display unit and driver (free issue) and communication connections to the Transmission Marshalling Cubicles. The Company to commission.                                                       | Wiring to be provided by User.<br>The Company to provide display unit and driver.                                                                           |                                                                                             |
| Electronic Data Communication Facilities<br>(Electronic Despatch & Logging)<br>(CC.6.5.8) | PTO.                                      | User to install EDL terminal for submission of MEL and dynamics re-declarations and for bid and offer acceptance instructions.                                                                                                | User to provide EDL terminal.<br>The Company to provide communications path to a site router associated with the EDL terminal in conjunction with the User. |                                                                                             |
| Facsimile Machine<br>(CC.6.5.9)                                                           | PTO.                                      | Install facsimile machine on dedicated communications circuit.                                                                                                                                                                | User to provide facsimile machine and wiring to PTO.                                                                                                        |                                                                                             |

|                                              |              |                                                                                                                               |                                                                                                                                                                                                                                              |  |
|----------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Electronic Communication Platform (CC.6.5.9) | The Company. | Create an account to access the Electronic Communication Platform using the registration information provided by The Company. | The Company will provide registration information for the User to access the Electronic Communications Platform. The User will provide a stable internet connection which will be required to access the Electronic Communications Platform. |  |
|----------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

## Communications Plant (CC.6.5) - Appendix 1

### Demand

| Description                                                                               | Source                                    | Work                                                                                                                                                                                                                          | Provided By                                                                                                                                                 | Notes                                               |
|-------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Control Telephone<br>(CC.6.5.2)                                                           | Remote Telephone Equipment (RTE) unit.    | User to install free issue handset on dedicated communications circuit. User to install wiring from User control room to Transmission Marshalling Cubicles.                                                                   | Wiring to be provided by User.<br>The Company to provide handset only.                                                                                      | Demand Control Points (as defined in the Grid Code) |
| Extension Bell<br>(CC.6.5.3)                                                              | RTE unit.                                 | User to install free issue extension bell on dedicated communications circuit (separate cores from the control telephone). User to install wiring from User control room to Transmission Marshalling Cubicles.                | Wiring to be provided by User.<br>The Company to provide bell only.                                                                                         |                                                     |
| PSTN (or other off-site communications circuits) for Telephony.<br>(CC.6.5.2 to CC.6.5.5) | Public Telecommunications Operator (PTO). | Duplicate offsite communications are preferred for security of data and speech transmission. If two outlet cables do not exist then the matter must be resolved on a site specific basis, to the satisfaction of The Company. | User to provide own outlet cables.                                                                                                                          |                                                     |
| Telegraph Instructor<br>(If required by The Company)<br>(CC.6.5.7)                        | Transmission Marshalling Cubicles.        | Wire out and install free issue display unit and driver (free issue) and communication connections to the Transmission Marshalling Cubicles. The Company to commission.                                                       | Wiring to be provided by User.<br>The Company to provide display unit and driver.                                                                           |                                                     |
| Electronic Data Communication Facilities<br>(Electronic Despatch & Logging)<br>(CC.6.5.8) | PTO.                                      | User to install EDL terminal for submission of MEL and dynamics re-declarations and for bid and offer acceptance instructions.                                                                                                | User to provide EDL terminal.<br>The Company to provide communications path to a site router associated with the EDL terminal in conjunction with the User. |                                                     |
| Facsimile Machine<br>(CC.6.5.9)                                                           | PTO.                                      | Install facsimile machine on dedicated communications circuit.                                                                                                                                                                | User to provide facsimile machine and wiring to PTO.                                                                                                        |                                                     |

|                                              |              |                                                                                                                               |                                                                                                                                                                                                                                              |  |
|----------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Electronic Communication Platform (CC.6.5.9) | The Company. | Create an account to access the Electronic Communication Platform using the registration information provided by The Company. | The Company will provide registration information for the User to access the Electronic Communications Platform. The User will provide a stable internet connection which will be required to access the Electronic Communications Platform. |  |
|----------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|



## **Appendix 2**

### **Operating Metering (CC.6.5.6)**

| <b>Description</b>                                                      | <b>Source</b>                                                    | <b>Type</b>             | <b>Work</b>                                                                                                                                                                          | <b>Provided by</b>                | <b>Notes</b>                                                                                                                                                                |
|-------------------------------------------------------------------------|------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MW and MVar for Balancing Mechanism Unit.                               | Settlement Metering (FMS).                                       | Unit per Pulse          | Provide dedicated outputs from the FMS (Final Metering Scheme) 'check' meters. Supply and install wiring to the OMS-FE.                                                              | User.                             | Used for Despatch Instructions and Ancillary Services Monitoring (ASM). For information, FMS meters are required under the Balancing and Settlement Code. Refer to the BSC. |
| Individual alternator MW and MVar (applicable to multi-shaft machines). | Transducer or high accuracy output from User metering.           | Unit per Pulse          | Provide MW and MVar transducer or high accuracy outputs. Supply and install wiring to the OMS-FE / Transmission Marshalling Cubicles.                                                | User                              | Used for Network Modelling and ASM. If the User chooses to use transducers, the quality is to be agreed with The Company. LV monitoring is acceptable.                      |
| Individual unit transformer MW and MVar.                                | Transducer or high accuracy output from User metering.           | Unit per Pulse          | Provide MW and MVar transducer or high accuracy outputs. Supply and install wiring to the OMS-FE / Transmission Marshalling Cubicles.                                                | User.                             | Used for Network Modelling. If the User chooses to use transducers, the quality is to be agreed with The Company.                                                           |
| Voltage for each generator connection to the Transmission substation.   | Single Phase VT (usually a CVT)                                  | AC Waveform             | Provide VT secondary output (single phase). Supply and install transducer and wiring to the Transmission Marshalling Cubicles.                                                       | User.                             | For indication purposes. To feed Substation Voltage Selection Scheme. The Company to install Voltage Selection Scheme at Transmission substation as required.               |
| Frequency for each Balancing Mechanism Unit.                            | High accuracy VT output (single phase).                          | AC Waveform             | Provide high accuracy VT secondary output (single phase). Supply and install wiring to the Transmission Marshalling Cubicles.                                                        | User.                             | Used for ASM.                                                                                                                                                               |
| All generator circuit(s) LV circuit breaker(s) and disconnector(s)      | Double point off dedicated auxiliary contacts (1 n/o and 1 n/c). | Status Indication       | Wire out and cable between auxiliary contacts and Transmission Marshalling Cubicles.                                                                                                 | User, in switchgear.              | Dedicated auxiliary contacts are required. Repeat relays are not normally acceptable.                                                                                       |
| Unit transformer circuit breaker(s).                                    | Double point off dedicated auxiliary contacts (1 n/o and 1 n/c). | Status Indication       | Wire out and cable between auxiliary contacts and Transmission Marshalling Cubicles.                                                                                                 | User, in switchgear.              | Dedicated auxiliary contacts are required. Repeat relays are not normally acceptable.                                                                                       |
| All generator circuit(s) HV circuit breaker(s) and disconnector(s).     | Double point off dedicated auxiliary contacts (1 n/o and 1 n/c). | Status Indication       | Wire out and cable between auxiliary contacts and Transmission Marshalling Cubicles.                                                                                                 | User, in switchgear.              | Dedicated auxiliary contacts are required. Repeat relays are not normally acceptable.                                                                                       |
| Each generator transformer Tap Position Indication (TPI)                | Dedicated tap changer auxiliary contact arm.                     | Tap Position Indication | Provide >one out of (up to) 19' position indications or TPI transducer indication. Wire out and cable between dedicated auxiliary contact arm and Transmission Marshalling Cubicles. | User, in transformer tap-changer. | Used for Network Modelling and ASM.                                                                                                                                         |

**END OF SECTION 6**

## **CUSC - SECTION 7**

### **CUSC DISPUTE RESOLUTION**

#### **CONTENTS**

- 7.1 Introduction
- 7.2 Disputes
- 7.3 Charging Disputes
- 7.4 Other Disputes
- 7.5 Third Party Claims

## CUSC - SECTION 7

### CUSC DISPUTE RESOLUTION

#### 7.1 INTRODUCTION

- 7.1.1 This section of the **CUSC** sets out how disputes under the **CUSC**, **Bilateral Agreements**, **Mandatory Services Agreements** and **Construction Agreements** are to be dealt with.
- 7.1.2 Under the **ESO Licence**, and in accordance with the power within section 7(3)(c) of the **Act**, it is provided for such matters arising under the **CUSC** as may be specified in the **CUSC** to be referred to the **Authority** for determination. Determining such matters also reflects consideration of utilisation of the power the **Authority** has under section 25 of the **Act** to take enforcement action in respect of any contravention of a licence obligation which would include any contravention of the obligations in respect of **Connection Charges** and **Use of System Charges** contained in the **ESO Licence**. The **Charging Disputes** provisions of the **CUSC** reflect the role under section 7(3)(c) of the **Act** and provide for such issues to be so referred to the **Authority**.

#### 7.2 DISPUTES

Subject to any contrary provision of the **Act**, any **Licence** or the **Regulations**, or an **EMR Document**, or the rights, powers, duties and obligations of the **Authority** or the **Secretary of State** under the **Act**, any **Licence** or otherwise howsoever, any dispute or difference between **CUSC Parties** of whatever nature howsoever arising under, out of or in connection with:-

- 7.2.1 whether **Connection** and/or **Use of System Charges** have been applied and/or calculated in accordance with the **Charging Statements** (including in all cases whether the dispute or difference does arise under, out of or in connection with such issues and therefore falls within this Paragraph 7.2.1) utilising the **Authority's** role under section 7 of the **Act** (a "**Charging Dispute**") shall be resolved in accordance with Paragraph 7.3;
- 7.2.2 the **Construction Agreement** shall be resolved in accordance with the specific provisions in that **Construction Agreement**;
- 7.2.3 the **CUSC** and **Bilateral Agreements**, and **Mandatory Services Agreements** not being a dispute of a type described in Paragraph 7.2.1 or 7.2.2 above (an "**Other Dispute**") shall be resolved in accordance with Paragraph 7.4;
- 7.2.4 a matter which relates to issues where a **Customer** has raised a dispute which may involve another **CUSC Party** (a "**Third Party Dispute**") shall be resolved in accordance with Paragraph 7.5, and

insofar as **The Company** and a **User** are parties to an agreement related to the **CUSC** and that agreement contains any dispute resolution provision to which the procedure in this section 7 does not apply, **The Company** and that **User** agree that such provision shall be subject to any contrary provision of an **EMR Document**.

### 7.3 CHARGING DISPUTES:

#### 7.3.1 Initial Discussions

Where a **Charging Dispute** arises, a representative of **The Company** and each **User** concerned who has authority to resolve the dispute shall meet (including by agreement by telephone) within 10 **Business Days** of a request by either party (or within such longer period as may be agreed, acting reasonably) and seek to resolve it. If the parties to the dispute are unable to resolve it within 10 **Business Days** of the meeting (or within such longer period as they may agree within that initial 10 **Business Day** period, both parties acting reasonably as to the length of the period), then the parties' obligations under this paragraph to undertake such discussions shall no longer apply in relation to that **Charging Dispute**.

#### Reference to Authority

7.3.2 Subject to Paragraph 7.3.1, **Charging Disputes** shall be referred by either **CUSC Party** to the **Authority** for determination in accordance with Paragraph 7.2.1 above and shall not be capable of being referred to arbitration pursuant to the rules of the **London Court of International Arbitration** or otherwise, or to any court.

#### 7.3.3 Charging Disputes During Other Disputes

- (a) Where, in conducting an arbitration under this Section 7, an arbitrator or panel of arbitrators finds themselves or itself considering a **Charging Dispute** (whether or not forming part of an **Other Dispute**), they or it shall have no jurisdiction to determine such **Charging Dispute** (with any dispute on whether it is a **Charging Dispute** being determined by the **Authority** as soon as reasonably practicable in accordance with the definition of **Charging Dispute**) and the parties shall immediately refer such **Charging Dispute** to the **Authority** for determination pursuant to Paragraph 7.2.1 above.
- (b) In such circumstances, if there are issues (the "**Discrete Issues**") under the **Other Dispute** which are entirely discrete from and can be determined without reference to the issues in the **Charging Dispute**, then resolution of the **Discrete Issues** can continue in

accordance with the provisions of Paragraph 7.4; provided that if there is no **Discrete Issue** or issues under the **Other Dispute** the resolution of the **Other Dispute** shall be suspended until after the determination of the **Charging Dispute**.

#### Application of Determination

- 7.3.4 It is expected that in most circumstances the **Authority's** determination of a **Charging Dispute** will set out the effect of the determination in terms of the charges in dispute. Where such effect is not set out in detail (for example where a clear principle is stated which should be capable of clear application) then if there is a dispute as to the quantification of any amounts to be calculated by applying the determination that dispute shall be an **Other Dispute**. However, any dispute on the principles reflected in the determination shall be a **Charging Dispute**.
- 7.3.5 If the determination of the **Charging Dispute** is that there has been an over or under payment of a **Connection Charge** and/or **Use of System Charge**, **The Company** shall, subject to what the determination may state, pay to the relevant **User**, or the **User** shall pay to **The Company**, as the case may be, an amount equal to the over or under payment, together with interest thereon from the date the charges were paid until the date of payment of such interest. Such interest shall accrue from day to day at the rate specified in Paragraph 6.6.5.
- 7.3.6 The **Authority's** determination of a **Charging Dispute** shall (without prejudice to any ability to apply for judicial review of any determination) be final and binding on the parties to the dispute and shall be enforceable in the courts.

## 7.4 OTHER DISPUTES

#### Initial Discussions

- 7.4.1 Where an **Other Dispute** arises, a representative of **The Company** and each **User** concerned who has authority to resolve the dispute shall meet (including by agreement by telephone) within 10 **Business Days** of a request by either party (or within such longer period as may be agreed, acting reasonably) and seek to resolve it. If the parties to the dispute are unable to resolve it within 10 **Business Days** of the meeting (or within such longer period as they may agree within that initial 10 **Business Day** period, both parties acting reasonably as to the length of the period), then the parties' obligations under this paragraph to undertake such discussions shall no longer apply in relation to that **Other Dispute**. Either party may then refer the **Other Dispute** to arbitration pursuant to the

rules of the **London Court of International Arbitration** in force from time to time.

- 7.4.2 Whatever the nationality, residence or domicile of any **CUSC Party** and wherever the **Other Dispute** or any part of it arose, the law of England shall be the proper law of reference to arbitration under this paragraph and in particular (but not so as to derogate from the generality of the foregoing) the provisions of the Arbitration Act 1996 shall apply to any such arbitration wherever it or any part of it shall be conducted.
- 7.4.3 Any arbitrator or panel of arbitrators appointed under this Paragraph 7.4 shall determine such issues as are referred to them consistently with any determination by the **Authority** of a **Charging Dispute**, whether or not relating to the same or different facts.
- 7.4.4 Subject to paragraph 7.4.5 the **CUSC Parties** hereby consent to the President of the **London Court of International Arbitration** deciding, at their discretion and ensuring, so far as practicable, that the proceedings relating to such a decision are managed effectively, fairly and expeditiously:
- (a) following the same process as set out in the **London Court of International Arbitration** rules in respect of pending arbitrations, that two or more disputes referred to it for arbitration (whether pending or underway), be consolidated or otherwise heard together (whether or not such disputes are all **Other Disputes** or an **Other Dispute** and any dispute(s) referred under the **STC**), where **The Company** or a **CUSC Party** (or a party to a dispute under the **STC**) so requests in writing to the **London Court of International Arbitration** copied to each of **The Company** and/or the other **CUSC Parties** (as the case may be) and relevant **STC** parties setting out the reasons for such consolidation; or
  - (b) that a dispute referred to it (whether pending or underway and whether another dispute or a dispute referred to it under the **STC**) be stayed for a period not exceeding three months after the referral of such dispute to the **London Court of International Arbitration**, pending resolution of another dispute referred to it (whether pending or underway and whether an **Other Dispute** or a dispute referred under the **STC**).
- 7.4.5 The consent of the **CUSC Parties** under paragraph 7.4.4(a) shall be deemed not to have been given where a request for consolidation thereunder is received by the **London Court of International Arbitration** more than three months (or such other period as the **London Court of International**

**Arbitration** may at its discretion determine) after the referral of any **Other Dispute** or the **STC** dispute to the **London Court of International Arbitration** which is the subject of such request.

## **7.5 THIRD PARTY CLAIMS**

- 7.5.1 Subject to Paragraph 7.5.4, if any **Customer** brings any legal proceedings in any court against one or more persons, any of which is a **CUSC Party** ("**Defendant Party**") and the **Defendant Party** wishes to make a **Third Party Claim** (as defined in Paragraph 7.5.3 below) against any **CUSC Party** ("**Other Party**") which would but for this paragraph have been a dispute or difference referred to arbitration by virtue of Paragraph 7.4 above then, notwithstanding the provisions of Paragraph 7.4, which shall not apply and in lieu of arbitration, the court in which the legal proceedings have been commenced shall hear and completely determine and adjudicate upon the legal proceedings and the **Third Party Claim** not only between the **Customer** and the **Defendant Party**, but also between either or both of them and any **Other Party** whether by way of third party proceedings or otherwise as may be ordered by the court.
- 7.5.2 Where a **Defendant Party** makes a **Third Party Claim** against any **Other Party** and such **Other Party** wishes to make a **Third Party Claim** against a further **CUSC Party**, the provisions of Paragraph 7.5.1 shall apply mutatis mutandis as if such **CUSC Party** had been the **Defendant Party** and similarly in relation to any such further **CUSC Party**.
- 7.5.3 For the purpose of this Paragraph 7.5, "**Third Party Claim**" shall mean:
- (a) any claim by a **Defendant Party** against any **Other Party** (whether or not already a party to the legal proceedings) for any contribution or indemnity; or
  - (b) any claim by a **Defendant Party** against such an **Other Party** for any relief or remedy relating to or connected with the subject matter of the legal proceedings and substantially the same as some relief or remedy claimed by the **Customer**; or
  - (c) any requirement by a **Defendant Party** that any question or issue relating to or connected with the subject matter of the legal proceedings should be determined not only as between the **Customer** and the **Defendant Party**, but also as between either or both of them and an **Other Party** (whether or not already a party to the legal proceedings).

- 7.5.4 Paragraph 7.5.1 shall apply only if at the time the legal proceedings are commenced no arbitration under Paragraph 7.4 has been commenced between the **Defendant Party** and an **Other Party** raising or involving the same or substantially the same issues as would be raised by or involved in the **Third Party Claim**. The tribunal in any arbitration or the **Authority** in any determination which has commenced before the commencement of the legal proceedings shall determine the question, in the event of dispute, whether the issues raised or involved are the same or substantially the same.

**END OF SECTION 7**



## **CUSC - SECTION 8**

### **CUSC MODIFICATION**

#### **CONTENTS**

##### Part A

##### 8.1 Introduction

##### Part B

##### 8.2 Code Administrator

##### 8.3 The CUSC Modifications Panel

##### 8.4 Appointment of Panel Members

##### 8.5 Term of Office

##### 8.6 Removal from Office

##### 8.7 Alternates

##### 8.8 Meetings

##### 8.9 Proceedings at Meetings

##### 8.10 Quorum

##### 8.11 Voting

##### 8.12 Protections for Panel Members

##### Part C

##### 8.13 CUSC Modification Register

##### 8.14 Progress Report

##### 8.15 Change Co-ordination

##### 8.16 CUSC Modification Proposals

##### 8.17 Significant Code Review

##### 8.18 CUSC Modification Proposal Evaluation

- 8.19 Panel Proceedings
- 8.20 Workgroups
- 8.21 Standing Groups
- 8.22 The Code Administrator Consultation
- 8.23 CUSC Modification Report
- 8.24 Urgent CUSC Modification Proposals
- 8.25 Self-Governance
- 8.26 Transmission Charging Methodology Forum
- 8.27 Confidentiality
- 8.28 Implementation
- 8.29 Fast Track
- Annex 8A Election of Users' Panel Members

## **CUSC - SECTION 8**

### **CUSC MODIFICATION**

#### **8. Part A**

#### **8.1 INTRODUCTION**

8.1.1 This section of the **CUSC** sets out how the **CUSC** is to be amended and the procedures set out in this section, to the extent that they are dealt with in the **Code Administration Code of Practice**, are consistent with the principles contained in the **Code Administration Code of Practice**. Where inconsistencies or conflicts exist between the **CUSC** and the **Code Administration Code of Practice**, the **CUSC** shall take precedence. A modification to the **CUSC** may necessitate a modification to relevant **Bilateral Agreements** and/or to the **Mandatory Services Agreements** (and/or in certain circumstances the relevant **Construction Agreement**) and in those circumstances those agreements contain provisions for such alterations to be effected to those agreements.

8.1.2 There is a need to bring proposed amendments to the attention of **CUSC Parties** and others, to discuss such proposals and to report on them to the **Authority** and in furtherance of this, Section 8 provides for the establishment of a **CUSC Modifications Panel**, **Workgroups** and **Standing Groups** and for consultation by the **Code Administrator**.

#### **8.1.3 Change Routes**

- (a) A **CUSC Modification Proposal** may either proceed directly along the standard **CUSC Modification Process**, or it may be subject to additional process steps, if raised during a **Significant Code Review**.
- (b) If a **CUSC Modification Proposal** is deemed by the **CUSC Modifications Panel** to meet the **Self-Governance Criteria**, it will be subject to a slightly different process.
- (c) If a **CUSC Modification Fast Track Proposal** is determined by the **CUSC Modifications Panel** to meet the **Fast Track Criteria**, it will be subject to the process set out at Paragraph 8.29.
- (d) an **EBR Amendment** will always be a **Standard CUSC Modification Proposal** unless an **Urgent CUSC Modification Proposal** or where it meets the Fast Track Criteria.

#### **8.1.4 Significant Code Review**

- (a) A **Significant Code Review** is a code review process initiated and led by the **Authority**, on one of a number of potential triggers. The **Authority** will launch a **Significant Code Review** on publication of a notice setting out matters

such as the scope of the review, reasons for it and announcing the start date.

- (b) A **Significant Code Review Phase** begins on the start date set out in the **Authority's** notice, during which time **CUSC Modification Proposals** that relate to the subject matter of the review are restricted, to ensure the process is as efficient as possible. Once the **Authority** has published its **Significant Code Review** conclusions, the **Authority** may direct **The Company** to raise **CUSC Modification Proposals** to put into effect the results of the **Significant Code Review**.
- (c) A process is set out in this Section 8 for analysing and consulting on **CUSC Modification Proposals** with a view to referring to the **Authority** those that may be restricted during a **Significant Code Review**. Subject to Paragraph 8.1.5, those **CUSC Modification Proposals** that are not so restricted proceed along the standard **CUSC Modification Process** of consultation with the industry followed by approval or non-approval by the **Authority**.

#### 8.1.5 Self-Governance

In addition, **Self-Governance Criteria** are set out against which **CUSC Modification Proposals** must also be evaluated and consulted upon. If a proposal meets the criteria, it may proceed without **Authority** approval, and the **CUSC Modifications Panel** may consult on and determine itself whether to implement the **CUSC Modification Proposal**.

#### 8.1.6 Fast Track

If the **CUSC Modifications Panel** unanimously determine that a **CUSC Modification Fast Track Proposal** meets the **Fast Track Criteria**, it will proceed without **Authority** approval, and will be subject to the process set out at Paragraph 8.29.

- 8.1.7 Where a **CUSC Modification Proposal constitutes** an **EBR Amendment**, **The Company**, when undertaking its role in the **CUSC Panel** or **Working Groups** during the **CUSC Modification Process**, shall provide justification for including or not including the views of stakeholders resulting from the **Code Administrator** consultation.

## PART B

### 8.2 CODE ADMINISTRATOR

- 8.2.1 **The Company** shall establish and maintain a **Code Administrator** function, which shall carry out the roles referred to in Paragraph 8.2.2 and 8.3.3. **The Company** shall ensure the functions are consistent with the **Code Administration Code of Practice**.
- 8.2.2 The **Code Administrator** shall in conjunction with other code administrators, maintain, publish, review and (where appropriate) amend from time to time the **Code Administration Code of Practice** approved by the **Authority** provided that any amendments

to the **Code Administration Code of Practice** proposed by the **Code Administrator** are approved by the **CUSC Modifications Panel** prior to being raised by the **Code Administrator**, and any amendments to be made to the **Code Administration Code of Practice** are approved by the **Authority**.

#### 8.2.3 Market-wide Half-Hourly Settlement Implementation

**The Company** shall (and shall ensure that the **Code Administrator** shall) comply with the obligations expressed to apply to **The Company** (either specifically or generally as a category of participant) under section C12 (Market-wide Half Hourly Settlement Implementation) of the **Balancing and Settlement Code**.

### 8.3 THE CUSC MODIFICATIONS PANEL

#### 8.3.1 Establishment and Composition

- (a) The **CUSC Modifications Panel** shall be the standing body to carry out the functions referred to in Paragraph 8.3.3.
- (b) The **CUSC Modifications Panel** shall comprise the following members:
  - (i) the person appointed as the chairperson of the **CUSC Modifications Panel** (the “**Panel Chairperson**”) in accordance with Paragraph 8.4.1, who shall (subject to Paragraph 8.11.4) be a non-voting member;
  - (ii) not more than seven persons appointed by **Users** in accordance with Paragraph 8.4.2(a);
  - (iii) two persons appointed by **The Company** in accordance with Paragraph 8.4.2(c);
  - (iv) The **Consumer Representative**, appointed in accordance with Paragraph 8.4.2(b); and
  - (v) the person appointed (if the **Authority** so decides) by the Authority in accordance with Paragraph 8.4.3.
- (c) The **CUSC Modifications Panel** shall be assisted by a secretary (“**Panel Secretary**”), who shall be a person appointed and provided by the **Code Administrator** and who shall be responsible for the administration of the **CUSC Modifications Panel** and **CUSC Modification Proposals**.

#### 8.3.2 Authority’s Representative

A representative of the **Authority** shall be entitled to attend **CUSC Modifications Panel** meetings as an observer and may speak at any meeting. The **Authority** shall from time

to time notify the **Panel Secretary** of the identity of the observer.

8.3.3 Functions of the **CUSC Modifications Panel** and the **Code Administrator's Role**

- (a) The **CUSC Modifications Panel** shall have the functions assigned to it in this Section 8.
- (b) Without prejudice to Paragraph 8.3.3(a) and to the further provisions of this Section 8, the **CUSC Modifications Panel** shall endeavour at all times to operate:
  - (i) in an efficient, economical and expeditious manner, taking account of the complexity, importance and urgency of particular **CUSC Modification Proposals**; and
  - (ii) with a view to ensuring that the **CUSC** facilitates achievement of the **Applicable CUSC Objectives**.
- (c) **The Company** shall be responsible for implementing or supervising the implementation of **Approved CUSC Modifications** and **Approved CUSC Modification Self Governance Proposals** and **Approved CUSC Modification Fast Track Proposals** in accordance with the provisions of the **CUSC** which shall reflect the production of the revised **CUSC**. The **Code Administrator** and **The Company** shall be responsible for implementing and supervising the implementation of any amendments to their respective systems and processes necessary for the implementation of the **Approved CUSC Modification** and, the **Approved CUSC Modification Self-Governance Proposals** provided there is no successful appeal and, , the **Approved CUSC Modification Fast Track Proposals** provided no objections are received in accordance with Paragraph 8.29. However, it will not include the implementation of **Users'** systems and processes. The **Code Administrator** will carry out its role in an efficient, economical and expeditious manner and (subject to any extension granted by the **Authority** where the **Code Administrator** has applied for one in accordance with Paragraph 8.3.3(d) or (e) in accordance with the **Implementation Date**.
- (d) Subject to notifying **Users**, the **Code Administrator** will, with the **Authority's** approval, apply to the **Authority** for a revision or revisions to the **Implementation Date** where the **Code Administrator** becomes aware of any circumstances which is likely to mean that the **Implementation Date** is unachievable, which shall include as a result of a **Legal Challenge**, at any point following the approval of the **CUSC Modification Proposal**.
- (e) In the event that the Authority's decision to approve or not to approve a **CUSC Modification Proposal** is subject of **Legal Challenge** (and the party raising such **Legal**

**Challenge** has received from the relevant authority the necessary permission to proceed) then the **Code Administrator** will, with the **Authority's** approval, apply to the **Authority** for a revision or revisions to the **Proposed Implementation Date** in the **CUSC Modification Report** in respect of such **CUSC Modification Proposal** as necessary such that if such **CUSC Modification Proposal** were to be approved following such **Legal Challenge** the **Proposed Implementation Date** would be achievable.

- (f) Prior to making any request to the **Authority** for any revision pursuant to Paragraphs 8.3.3(d) (where it is necessary as a result of a **Legal Challenge**) or 8.3.3(e) the **Code Administrator** shall consult on the revision with **CUSC Parties** and such other person who may properly be considered to have an appropriate interest in it in accordance with Paragraphs 8.22.2 and 8.22.6. The request to the **Authority** shall contain copies of (and a summary of) all written representations or objections made by consultees during the consultation period.

#### 8.3.4 Duties of Panel Members

- (a) A person appointed as a **Panel Member**, or an **Alternate Member**, by **Users** under Paragraph 8.3.1 or 8.7.2, by the **Authority** under Paragraph 8.4.3 and the person appointed as **Panel Chairperson** under Paragraph 8.4.1, and each of their alternates when acting in that capacity:
  - (i) shall act impartially and in accordance with the requirements of the **CUSC**; and
  - (ii) shall not be representative of, and shall act without undue regard to the particular interests of the persons or body of persons by whom they were appointed as **Panel Member** and any **Related Person** from time to time.
- (b) Such a person shall not be appointed as a **Panel Member** or an **Alternate Member** (as the case may be) unless they shall have first:
  - (i) confirmed in writing to the **Code Administrator** for the benefit of all **CUSC Parties** that they agree to act as a **Panel Member** or **Alternate Member** in accordance with the **CUSC** and acknowledges the requirements of Paragraphs 8.3.4(a) and 8.3.4(c);
  - (ii) where that person is employed, provided to the **Panel Secretary** a letter from their employer agreeing that they may act as a **Panel Member** or **Alternate Member**, and that the requirement in Paragraph 8.3.4(a)(ii) shall prevail over their duties as an employee; and
  - (iii) declared in writing to the **Code Administrator** for publication for the benefit of all **CUSC Parties** any

interests (in relation to the **CUSC**) as are referred to in Paragraph 8.3.4(e).

- (c) A **Panel Member** or **Alternate Member** shall, upon any change in the interests referred to in Paragraph 8.3.4(b)(iii), disclose such changes (in writing) to the **Panel Secretary**.
- (d) Upon a change in employment of a **Panel Member** or **Alternate Member**, they shall so notify the **Panel Secretary** and shall endeavour to obtain from their new employer and provide to the **Panel Secretary** a letter in the terms required in Paragraph 8.3.4(b)(ii); and they shall be removed from office if they do not do so within a period of sixty (60) days after such change in employment.
- (e) The interests of any **Panel Member** or **Alternate Member** referred to in Paragraph 8.3.4(b)(iii) are:
  - (i) any interests (in relation to the **CUSC**) as are referred to in Paragraph 8.3.4(a)(ii); and
  - (ii) any shares owned or acquired in any **CUSC Party** or **CUSC Parties** at a total aggregate value of over £10,000.

## 8.4 APPOINTMENT OF PANEL MEMBERS

### 8.4.1 Panel Chairperson

- (a) The **Panel Chairperson** shall be an executive director (or other senior employee) of **The Company** until 30 September 2011. Thereafter the **Panel Chairperson** shall be a person appointed (or re-appointed) by **The Company**, having particular regard to the views of the **CUSC Modifications Panel**, and shall be independent of **The Company**.
- (b) A person shall be appointed or re-appointed as the **Panel Chairperson** where the **Authority** has approved such appointment or re-appointment and **The Company** has given notice to the **Panel Secretary** of such appointment, with effect from the date of such notice or (if later) with effect from the date specified in such notice.

### 8.4.2 Other Panel Members

- (a) **Users** may appoint **Panel Members** (and **Alternate Members**) by election in accordance with Annex 8A.
- (b) The **Citizens Advice** or the **Citizens Advice Scotland** may appoint one person as a **Panel Member** representing customers by giving notice of such appointment to the



**Panel Secretary**, and may remove and re-appoint by notice.

- (c) **The Company** may appoint two persons as **Panel Members** by giving notice of such appointment to the **Panel Secretary**, and may remove and re-appoint by notice.

#### 8.4.3 Appointment of Further Member

- (a) If in the opinion of the **Authority** there is a class or category of person (whether or not a **CUSC Party** or a **BSC Party**) who have interests in respect of the **CUSC** but whose interests:

- (i) are not reflected in the composition of **Panel Members** for the time being appointed; but
- (ii) would be so reflected if a particular person was appointed as an additional **Panel Member**,

then the **Authority** may at any time appoint (or re-appoint) that person as a **Panel Member** by giving notice of such appointment to the **Panel Secretary** but in no event shall the **Authority** be able to appoint more than one person so that there could be more than one such **Panel Member**.

- (b) A person appointed as a **Panel Member** pursuant to this Paragraph 8.4.3 shall remain appointed, subject to Paragraphs 8.5 and 8.6, notwithstanding that the conditions by virtue of which they were appointed (for example that the interests they reflect are otherwise reflected) may cease to be satisfied.

#### 8.4.4 Natural Person

No person other than an individual shall be appointed a **Panel Member** or their alternate.

### 8.5 **TERM OF OFFICE**

The term of office of a **Panel Member**, the **Panel Chairperson** and **Alternate Members** shall be a period expiring on 30 September every second year following the **CUSC Implementation Date**. A **Panel Member**, the **Panel Chairperson** and **Alternate Member** shall be eligible for reappointment on expiry of their term of office.

### 8.6 **REMOVAL FROM OFFICE**

- 8.6.1 A person shall cease to hold office as the **Panel Chairperson**, a **Panel Member** or an **Alternate Member**:

- (a) upon expiry of their term of office unless re-appointed;
- (b) if they:
  - (i) resign from office by notice delivered to the **Panel Secretary**;

- (ii) become bankrupt or make any arrangement or composition with their creditors generally;
  - (iii) are or may be suffering from mental disorder and either is admitted to hospital in pursuance of an application under the Mental Health Act 1983 or the Mental Health (Scotland) Act 1960 or an order is made by a court having jurisdiction in matters concerning mental disorder for their detention or for the appointment of a receiver, *curator bonis* or other person with respect to their property or affairs;
  - (iv) become prohibited by law from being a director of a company under the Companies Act 1985;
  - (v) die; or
  - (vi) are convicted on an indictable offence; or
- (c) as provided for in Paragraph 8.3.4(d);
- (d) if the **CUSC Modifications Panel** resolves (and the **Authority** does not veto such resolution by notice in writing to the **Panel Secretary** within fifteen (15) **Business Days**) that they should cease to hold office on grounds of their serious misconduct;
- (e) if the **CUSC Modifications Panel** resolves (and the **Authority** does not veto such resolution by notice in writing to the **Panel Secretary** within fifteen (15) **Business Days**) that they should cease to hold office due to a change in employer notwithstanding compliance with Paragraph 8.3.4(d).

8.6.2 A **CUSC Modifications Panel** resolution under Paragraph 8.6.1(d) or (e) shall, notwithstanding any other paragraph, require the vote in favour of at least all **Panel Members** less one (other than the **Panel Member** or **Alternate Member** who is the subject of such resolution) and for these purposes an abstention shall count as a vote cast in favour of the resolution. A copy of any such resolution shall forthwith be sent to the **Authority** by the **Panel Secretary**.

8.6.3 A person shall not qualify for appointment as a **Panel Member** or **Alternate Member** if at the time of the proposed appointment they would be required by the above paragraph to cease to hold that office.

8.6.4 The **Panel Secretary** shall give prompt notice to all **Panel Members**, all **CUSC Parties** and the **Authority** of the appointment or re-appointment of any **Panel Member** or **Alternate Member** or of any **Panel Member** or **Alternate Member** ceasing to hold office and publication on the **Website** and (where relevant details are supplied to the **Panel Secretary**) despatch by electronic mail shall fulfil this obligation.

## 8.7 ALTERNATES

### 8.7.1 Alternate: Panel Chairperson

The **Panel Chairperson** shall preside at every meeting of the **CUSC Modifications Panel** at which they are present. If they are unable to be present at a meeting, they may appoint an alternate (who shall be a senior employee of **The Company**) to act as the **Panel Chairperson**, who may or may not be a **Panel Member**. If neither the **Panel Chairperson** nor their alternate is present at the meeting within half an hour of the time appointed for holding the meeting, the **Panel Members** present may appoint one of their number to be the chairperson of the meeting.

### 8.7.2 Alternate(s): Users Panel Members

- (a) At the same time that **Users** appoint **Panel Members** under Paragraph 8.4.2(a), they shall appoint up to five (5) alternate members for **Panel Members** appointed pursuant to Paragraph 8.3.1(b)(ii) ("**Alternate Members**") by election in accordance with Annex 8A.
- (b) Such **Alternate Members** will form a group from which the **Panel Chairperson** shall select a person to act as an alternate in accordance with this Paragraph 8.7.
- (c) Where any **Panel Member** appointed pursuant to Paragraph 8.3.1(b)(ii) gives the notice referred to in Paragraph 8.8.12 the **Panel Chairperson** shall select through a rota system an **Alternate Member** to act as the absent **Panel Member** for the relevant—**CUSC Modifications Panel** meeting, and may remove a person so appointed as alternate, by giving notice of such appointment or removal to the **Panel Secretary**. If there are no **Alternate Members** left on the rota who have not already been selected to act as alternate for the relevant **CUSC Modifications Panel** meeting the **Panel Chairperson** shall select through a rota system a **Panel Member** or **Alternate Member** to act as alternate for the absent **Panel member**.
- (d) All information to be sent by the **Panel Secretary** to **Panel Members** pursuant to this Section 8 shall also be sent by the **Panel Secretary** to each **Alternate Member** (whether or not currently selected as an alternate for a **Panel Member**) by electronic mail (where relevant details shall have been provided by each **Alternate Member**).

### 8.7.3 Alternates: Other Panel Members

A **Panel Member** appointed pursuant to Paragraphs 8.3.1(b)(iii), 8.3.1(b)(iv) or 8.3.1(b)(v) may appoint a person (whether or not a **Panel Member**) to be their alternate, and may remove a person so

appointed as alternate, by giving notice of such appointment or removal to the **Panel Secretary**.

8.7.4 Alternates: General Provisions

- (a) The appointment or removal of an alternate shall be effective from the time when such notice is given to the **Panel Secretary** or (if later) the time specified in such notice.
- (b) The **Panel Secretary** shall promptly notify all **Panel Members** and **CUSC Parties** of appointment or removal by any **Panel Member** of any alternate and publication on the **Website** and (where relevant details have been provided to the **Panel Secretary**) despatch by electronic mail shall fulfil this obligation.
- (c) In accordance with Paragraph 8.7.2, an alternate may act as alternate for more than one **Panel Member**.

8.7.5 Alternates: Rights, Cessation and References

- (a) Where an alternate has been selected under this Paragraph 8.7:
  - (i) the alternate shall be entitled:
    - (aa) to receive notices of meetings of the **CUSC Modifications Panel**;
    - (bb) to attend, speak and vote at any meeting of the **CUSC Modifications Panel** at which the **Panel Member** for whom they are acting as an alternate is not present, and at such meeting to exercise and discharge all of the functions, duties and powers of such **Panel Member**;
  - (ii) the alternate shall cast one vote for each **Panel Member** for whom they are acting as alternate in addition (where they are a **Panel Member** themselves) to their own vote;
  - (iii) Paragraphs 8.8, 8.9, 8.10, 8.11 and 8.12 shall apply to the alternate as if they were the **Panel Member** for whom they are acting as an alternate and a reference to a **Panel Member** elsewhere in the **CUSC** shall, unless the context otherwise requires, include their duly appointed alternate.
  - (iv) for the avoidance of doubt, the **Panel Member** for whom an alternate has been selected shall not enjoy any of the rights transferred to the alternate at any meeting at which, or in relation to any matter on which, the alternate acts on their behalf.

- (b) A person appointed as an alternate under paragraph 8.7.3 shall automatically cease to act as such an alternate:
  - (i) if the **Panel Member** for whom they are acting as an alternate ceases to be a **Panel Member** provided that, where such person is an **Alternate Member**, they shall continue to be an **Alternate Member** available for appointment under paragraph 8.7.2; or
  - (ii) if any of the circumstances in Paragraph 8.6.1(b) applies in relation to such person.

## 8.8 MEETINGS

- 8.8.1 Meetings of the **CUSC Modifications Panel** shall be held at regular intervals and at least every month at such time and such place as the **CUSC Modifications Panel** shall decide.
- 8.8.2 A regular meeting of the **CUSC Modifications Panel** may be cancelled if:
  - (a) the **Panel Chairperson** considers, having due regard to the lack of business in the agenda, that there is insufficient business for the **CUSC Modifications Panel** to conduct and requests the **Panel Secretary** to cancel the meeting;
  - (b) the **Panel Secretary** notifies all **Panel Members**, not less than five (5) **Business Days** before the date for which the meeting is to be convened, of the proposal to cancel the meeting; and
  - (c) by the time three (3) **Business Days** before the date for which the meeting is or is to be convened, no **Panel Member** has notified the **Panel Secretary** that they object to such cancellation.
- 8.8.3 If any **Panel Member** wishes, acting reasonably, to hold a special meeting (in addition to regular meetings under Paragraph 8.8.1) of the **CUSC Modifications Panel**:
  - (a) they shall request the **Panel Secretary** to convene such a meeting and inform the **Panel Secretary** of the matters to be discussed at the meeting;
  - (b) the **Panel Secretary** shall promptly convene the special meeting for a day as soon as practicable but not less than five (5) **Business Days** after such request.
- 8.8.4 Any meeting of the **CUSC Modifications Panel** shall be convened by the **Panel Secretary** by notice (which will be given by electronic

mail if the relevant details are supplied to the **Panel Secretary**) to each **Panel Member** (and to the **Authority**):

- (a) setting out the date, time and place of the meeting and (unless the **CUSC Modifications Panel** has otherwise decided) given at least five (5) **Business Days** before the date of the meeting;
- (b) accompanied by an agenda of the matters for consideration at the meeting and any supporting papers available to the **Panel Secretary** at the time the notice is given (and the **Panel Secretary** shall circulate to **Panel Members** any late papers as and when they are received by them).

8.8.5 The **Panel Secretary** shall send a copy of the notice convening a meeting of the **CUSC Modifications Panel**, and the agenda and papers accompanying the notice, to each **CUSC Party** and each **BSC Party** at the same time at which notice is given to the **Panel Members**, and publication on the **Website** and despatch by electronic mail (if the relevant details are supplied to the **Panel Secretary**) shall fulfil this obligation.

8.8.6 Any **Panel Member** (or, at the **Panel Member's** request, the **Panel Secretary**) may notify matters for consideration at a meeting of the **CUSC Modifications Panel** in addition to those notified by the **Panel Secretary** under Paragraph 8.8.4 by notice to all **Panel Members** and persons entitled to receive notice under Paragraph 8.8.5, not less than three (3) **Business Days** before the date of the meeting.

8.8.7 The proceedings of a meeting of the **CUSC Modifications Panel** shall not be invalidated by the accidental omission to give or send notice of the meeting or a copy thereof or any of the accompanying agenda or papers to, or failure to receive the same by, any person entitled to receive such notice, copy, agenda or paper.

8.8.8 A meeting of the **CUSC Modifications Panel** may consist of a conference between **Panel Members** who are not all in one place (although at least one must be at the venue in the notice of meeting) but who are able (by telephone or otherwise) to speak to each of the others and to be heard by each of the others simultaneously.

8.8.9 With the consent of all **Panel Members** (whether obtained before, at or after any such meeting) the requirements of this Paragraph 8.8 as to the manner in and notice on which a meeting of the **CUSC Modifications Panel** is convened may be waived or modified provided that no meeting of the **CUSC Modifications Panel** shall be held unless notice of the meeting and its agenda has been sent to the persons entitled to receive the same under Paragraph 8.8.5 at least 24 hours before the time of the meeting.

8.8.10 Subject to Paragraph 8.8.11, no matter shall be resolved at a meeting of the **CUSC Modifications Panel** unless such matter was contained in the agenda accompanying the **Panel Secretary's** notice under Paragraph 8.8.4 or was notified in accordance with Paragraph 8.8.6.

8.8.11 Where:

- (a) any matter (not contained in the agenda and not notified pursuant to Paragraphs 8.8.4 and 8.8.6) is put before a meeting of the **CUSC Modifications Panel**, and
- (b) in the opinion of the **CUSC Modifications Panel** it is necessary (in view of the urgency of the matter) that the **CUSC Modifications Panel** resolve upon such matter at the meeting,

the **CUSC Modifications Panel** may so resolve upon such matter, and the **CUSC Modifications Panel** shall also determine at such meeting whether the decision of the **CUSC Modifications Panel** in relation to such matter should stand until the following meeting of the **CUSC Modifications Panel**, in which case (at such following meeting) the decision shall be reviewed and confirmed or (but not with effect earlier than that meeting, and only so far as the consequences of such revocation do not make implementation of the **CUSC** or compliance by **CUSC Parties** with it impracticable) revoked.

- 8.8.12 Where any **Panel Member** is unable to attend a **CUSC Modifications Panel** they shall use reasonable endeavours to give at least five (5) **Business Days**’ prior notice to the **Panel Secretary**. In the event such absence is unforeseen (such as through illness) then the **Panel Member** shall use reasonable endeavours to give notice to the **Panel Secretary** no later than 07:00 on the day of the planned meeting.

## 8.9 PROCEEDINGS AT MEETINGS

- 8.9.1 Subject as provided in the **CUSC**, the **CUSC Modifications Panel** may regulate the conduct of and adjourn and reconvene its meetings as it sees fit.
- 8.9.2 Meetings of the **CUSC Modifications Panel** shall be open to attendance by a representative of any **CUSC Party**, any **BSC Party**, the **Citizen Advice** or the **Citizens Advice Scotland** and any person invited by the **Panel Chairperson** and/or any other **Panel Member**.
- 8.9.3 The **Panel Chairperson** and any other **Panel Member** may invite any person invited by them under Paragraph 8.9.2, and/or any attending representative of a **CUSC Party**, to speak at the meeting (but such person shall have no vote).
- 8.9.4 As soon as practicable after each meeting of the **CUSC Modifications Panel**, the **Panel Secretary** shall prepare and send (by electronic mail or otherwise) to **Panel Members** the minutes of such meeting, which shall be (subject to Paragraph 8.9.5) approved (or amended and approved) at the next meeting of the **CUSC Modifications Panel** after they were so sent, and when approved (excluding any matter which the **CUSC Modifications Panel** decided was not appropriate for such publication) shall be placed on the **Website**.

- 8.9.5 If, following the circulation of minutes (as referred to in Paragraph 8.9.4), the meeting of the **CUSC Modifications Panel** at which they were to be approved is cancelled pursuant to Paragraph 8.8.2, such minutes (including any proposed changes thereto which have already been received) shall be re-circulated with the notification of the cancellation of the meeting of the **CUSC Modifications Panel**. **Panel Members** shall confirm their approval of such minutes to the **Panel Secretary** (by electronic mail) no later than five (5) **Business Days** following such minutes being re-circulated. If no suggested amendments are received within such five (5) **Business Days** period, the minutes will be deemed to have been approved. If the minutes are approved, or deemed to have been approved, (excluding any matter which the **CUSC Modifications Panel** decided was not appropriate for such publication) they shall be placed on the **Website**. If suggested amendments are received within such five (5) **Business Days** period, the minutes shall remain unapproved and the process for approval (or amendment and approval) of such minutes at the next meeting of the **CUSC Modifications Panel**, as described in Paragraph 8.8.4, shall be followed.

## 8.10 QUORUM

- 8.10.1 No business shall be transacted at any meeting of the **CUSC Modifications Panel** unless a quorum is present throughout the meeting.
- 8.10.2 Subject to Paragraph 8.10.4, a quorum shall be 6 **Panel Members** who have a vote present (subject to 8.8.8) in person or by their alternates, of whom at least one shall be appointed by **The Company**.
- 8.10.3 If within half an hour after the time for which the meeting of the **CUSC Modifications Panel** has been convened a quorum is not present (and provided the **Panel Secretary** has not been notified by **Panel Members** that they have been delayed and are expected to arrive within a reasonable time):
- (a) the meeting shall be adjourned to the same day in the following week (or, if that day is not a **Business Day** the next **Business Day** following such day) at the same time;
  - (b) the **Panel Secretary** shall give notice of the adjourned meeting as far as practicable in accordance with Paragraph 8.8.
- 8.10.4 If at the adjourned meeting there is not a quorum present within half an hour after the time for which the meeting was convened, those present shall be a quorum.

## 8.11 VOTING

- 8.11.1 At any meeting of the **CUSC Modifications Panel** any matter to be decided which shall include the **CUSC Modifications Panel Recommendation Vote** shall be put to a vote of **Panel Members** upon the request of the **Panel Chairperson** or any **Panel Member**.



- 8.11.2 Subject to Paragraphs 8.7.5, 8.11.4 and 8.11.5, in deciding any matter at any meeting of the **CUSC Modifications Panel** each **Panel Member** other than the **Panel Chairperson** shall cast one vote.
- 8.11.3 Except as otherwise expressly provided in the **CUSC**, and in particular Paragraph 8.6.2, any matter to be decided at any meeting of the **CUSC Modifications Panel** shall be decided by simple majority of the votes cast at the meeting (an abstention shall not be counted as a cast vote).
- 8.11.4 The **Panel Chairperson** shall not cast a vote as a **Panel Member** but shall have a casting vote on any matter (except in a **CUSC Modifications Panel Recommendation Vote**) where votes are otherwise cast equally in favour of and against the relevant motion including, for the avoidance of doubt, in the **CUSC Modifications Panel Self-Governance Vote**, where the **Panel Chairperson** is obliged to exercise their casting vote if votes are otherwise cast equally in favour of or against a **CUSC Modification Proposal**, but where any person other than the actual **Panel Chairperson** or their alternate is acting as chairperson they shall not have a casting vote.
- 8.11.5 The two **Panel Members** appointed by **The Company** pursuant to Paragraph 8.3.1(b)(iii) shall together have one vote in relation to each matter which shall be cast jointly by agreement between them or, where only one of **The Company Panel Members** is present at a meeting, by that **The Company Panel Member**.
- 8.11.6 Any resolution in writing signed by or on behalf of all **Panel Members** shall be valid and effectual as if it had been passed at a duly convened and quorate meeting of the **CUSC Modifications Panel**. Such a resolution may consist of several instruments in like form signed by or on behalf of one or more **Panel Members**.

## **8.12 PROTECTIONS FOR PANEL MEMBERS**

- 8.12.1 Subject to Paragraph 8.12.2 all **CUSC Parties** shall jointly and severally indemnify and keep indemnified each **Panel Member**, the **Panel Secretary** and each member of a **Workgroup** and **Standing Group** ("**Indemnified Persons**") in respect of all costs (including legal costs), expenses, damages and other liabilities properly incurred or suffered by such **Indemnified Persons** when acting in or in connection with their office under the **CUSC**, or in what they in good faith believe to be the proper exercise and discharge of the powers, duties, functions and discretions of that office in accordance with the **CUSC**, and all claims, demands and proceedings in connection therewith other than any such costs, expenses, damages or other liabilities incurred or suffered as a result of the wilful default or bad faith of such **Indemnified Person**.
- 8.12.2 The indemnity provided in Paragraph 8.12.1 shall not extend to costs and expenses incurred in the ordinary conduct of being a **Panel Member** or **Panel Secretary**, or member of a **Workgroup** or **Standing Group** including, without limitation, accommodation costs and travel costs or any remuneration for their services to the **CUSC Modifications Panel** or **Workgroup** or **Standing Group**.

- 8.12.3 The **CUSC Parties** agree that no **Indemnified Person** shall be liable for anything done when acting properly in or in connection with their office under the **CUSC**, or anything done in what they in good faith believe to be the proper exercise and discharge of the powers, duties, functions and discretions of that office in accordance with the **CUSC**. Each **CUSC Party** hereby irrevocably and unconditionally waives any such liability of any **Indemnified Person** and any rights, remedies and claims against any **Indemnified Person** in respect thereof.
- 8.12.4 Without prejudice to Paragraph 8.12.2, nothing in Paragraph 8.12.3 shall exclude or limit the liability of an **Indemnified Person** for death or personal injury resulting from the negligence of such **Indemnified Person**.

## **PART C**

### **8.13 CUSC MODIFICATION REGISTER**

- 8.13.1 The **Code Administrator** shall establish and maintain a register ("**CUSC Modification Register**") which shall record the matters set out in Paragraph 8.13.3.
- 8.13.2 The purpose of the **CUSC Modification Register** shall be to assist the **CUSC Modifications Panel** and to enable the **CUSC Modifications Panel**, **CUSC Parties** and any other persons who may be interested to be reasonably informed of the progress of **CUSC Modification Proposals** and **Approved CUSC Modifications** from time to time.
- 8.13.3 The **CUSC Modification Register** shall record in respect of current outstanding **CUSC Modifications Panel** business:
- (a) details of each **CUSC Modification Proposal** (including the name of the **Proposer**, the date of the **CUSC Modification Proposal** and a brief description of the **CUSC Modification Proposal**);
  - (b) whether such **CUSC Modification Proposal** is an **Urgent CUSC Modification Proposal**;
  - (c) the current status and progress of each **CUSC Modification Proposal**, if appropriate the anticipated date for reporting to the **Authority** in respect thereof, and whether it has been withdrawn, rejected or implemented for a period of three (3) months after such withdrawal, rejection or implementation or such longer period as the **Authority** may determine;
  - (d) the current status and progress of each **Approved CUSC Modification**, each **Approved CUSC Modification Self-Governance Proposal**, and each **Approved CUSC Modification Fast Track Proposal**; and

- (e) such other matters as the **CUSC Modifications Panel** may consider appropriate from time to time to achieve the purpose of Paragraph 8.13.2.

8.13.4 The **CUSC Modification Register** (as updated from time to time and indicating the revisions since the previous issue) shall be published on the **Website** or (in the absence, for whatever reason, of the **Website**) in such other manner and with such frequency (being not less than once per month) as the **Code Administrator** may decide in order to bring it to the attention of the **CUSC Modifications Panel**, **CUSC Parties** and other persons who may be interested.

## 8.14 PROGRESS REPORT

8.14.1 The **Code Administrator** shall prepare and submit to the **Authority** each month (or such less often period if there is no material matter arising to report) a progress report ("**Progress Report**") setting out the matters referred to in Paragraph 8.14.2 in respect of the preceding month and send a copy of the **Progress Report** to each **Panel Member**.

8.14.2 The **Progress Report** shall contain:

- (a) details of any proposal which has been refused pursuant to Paragraph ~~8.16.5~~ or Paragraph 8.16.6;
- (b) the current version of the **CUSC Modification Register**;
- (c) details of:
  - (i) the priority proposed to be accorded or that is accorded to each **CUSC Modification Proposal** in the **CUSC Modification Register** (in accordance with Paragraph 8.19.1);
  - (ii) the scheduling and timetable for consideration of each **CUSC Modification Proposal** and completion of the **CUSC Modification Report** in respect thereof in the context of all other current **CUSC Modification Proposals**;
  - (iii) the impact of the priority accorded to each **CUSC Modification Proposal** by reference to each other pending **CUSC Modification Proposal**;
- (d) details of any decision to amalgamate **CUSC Modification Proposals** in accordance with Paragraph 8.19.2;
- (e) details of any circumstances which lead **The Company** and/or the **CUSC Modifications Panel** to believe that the implementation date for an **Approved CUSC Modification** is unlikely to be met and, if so, why;
- (f) such other matters as the **Authority** may request to be included from time to time; and
- (g) the basis for each of the decisions referred to above.

8.14.3 If, following discussion with the **CUSC Modifications Panel**, the **Authority** issues a notice to the **Panel Secretary** requesting the **Code Administrator** and the **CUSC Modifications Panel** (in relation to developments and changes highlighted in the monthly **Progress Report**):

- (a) not to reject a **CUSC Modification Proposal** which does not satisfy Paragraph 8.16.4; and/or
- (b) not to amalgamate **CUSC Modification Proposals** as set out in the monthly **Progress Report**; and/or
- (c) to accord a different priority to particular **CUSC Modification Proposals** from that set out in the monthly **Progress Report**; and/or
- (d) to amend the timetable for a **CUSC Modification Proposal**,

the **Panel Secretary** shall send a copy of the notice to each **Panel Member** and **Alternate Member**. The **CUSC Modifications Panel** and the **Code Administrator** shall comply with such notice.

8.14.4 The **Panel Secretary** shall publish each **Progress Report** on the **Website** within seven (7) **Business Days** after it is sent to the **Authority**, provided that the **Panel Secretary** shall exclude there from any matters in respect of which the **Authority** issues a notice to the **Panel Secretary** for the purpose of this Paragraph 8.14.4. Copies shall be sent to those **Panel Members**, **Alternate Members** and **CUSC Parties** who have provided electronic mail addresses to the **Code Administrator**.

## 8.15 CHANGE CO-ORDINATION

8.15.1 The **Code Administrator** shall establish (and, where appropriate, revise from time to time) joint working arrangements for change co-ordination with each **Core Industry Document Owner**, with the **STC** committee, the **CM Administrative Parties** and with the **Secretary of State** to facilitate the identification, co-ordination, making and implementation of change to **Core Industry Documents** and the **STC**, and facilitate the identification of potential inconsistencies between **CUSC Modification Proposals** and the **Capacity Market Documents** and the **CFD Documents** respectively consequent on a **CUSC Modification**, including, but not limited to, changes that are appropriate in order to avoid conflict or inconsistency as between the **CUSC** and any **Core Industry Document** and the **STC**, in a full and timely manner.

8.15.2 The working arrangements referred to in Paragraph 8.15.1 shall be such as to enable the consideration, development and evaluation of **CUSC Modification Proposals**, and the implementation of **Approved CUSC Modifications**, to proceed in a full and timely manner and enable changes to **Core Industry Documents** and the **STC** and for potential inconsistencies between **CUSC Modification Proposals** and the **Capacity Market Documents** and/or the **Cfd Documents** to be raised with the **CM Administrative Parties** and the **Secretary of State** consequent on an amendment to be made and given effect wherever possible (subject to any necessary

consent of the **Authority**) at the same time as such **CUSC Modification** is made and given effect.

## 8.16 CUSC MODIFICATION PROPOSALS

### 8.16.1

- (a) A proposal to modify the **CUSC** (excluding the **Charging Methodologies**) may be made:
  - (i) by a **CUSC Party**, by the **Citizens Advice**, by the **Citizens Advice Scotland**, or by a **BSC Party**; or
  - (ii) under Paragraph 8.28.5, by the **CUSC Modifications Panel**; or
  - (iii) by a **Relevant Transmission Licensee** in relation to Exhibit O Part IB Exhibit O Part IIB, Exhibit O Part IC and Exhibit O Part IIC only; or
  - (iv) by the **Authority** or by **The Company** under the direction of the Authority, pursuant to Paragraph 8.17A.1.
- (b) A proposal to modify the **Charging Methodologies** may be made:
  - (i) by a **CUSC Party**, by the **Citizens Advice**, by the **Citizens Advice Scotland** or by a **BSC Party**; or
  - (ii) under Paragraph 8.28.5, by the **CUSC Modifications Panel**; or
  - (iii) by a **Relevant Transmission Licensee** in relation to Exhibit O Part IB, Exhibit O Part IIB, Exhibit O Part IC and Exhibit O Part IIC only; or
  - (iv) by a **Materially Affected Party**, unless otherwise permitted by the **Authority**.
  - (v) by the **Authority**, or by **The Company** under the direction of the **Authority**, pursuant to Paragraph 8.17A.1.
- (c) a proposal which constitutes an **EBR Amendment** may be made under (a) or (b) above even where not made by **The Company** and the **Authority** may make a proposal under (a) and (b) above to the extent that it constitutes an **EBR Amendment** .

8.16.2 A proposal to modify the **Charging Methodologies** must be made by means of a **CUSC Modification Proposal**, which may not contain any proposal to modify any other section of the **CUSC**, and must comply (as applicable) with condition E10.6 'Use of System charging and methodology' and conditions E11.4 and E11.10 Connection charging methodology of the **ESO Licence**. When making a **CUSC Modification Proposal** in respect of the **Charging Methodologies**,

the **Proposer** may make specific reference to any link with another **CUSC Modification Proposal**.

8.16.3 A **Standard CUSC Modification Proposal** shall follow the procedure set out in Paragraphs 8.18 to 8.23.

8.16.4 A **CUSC Modification Proposal** shall be submitted in writing to the **Panel Secretary** and, subject to the provisions of Paragraph 8.16.4A below, shall contain the following information in relation to such proposal:

- (a) the name of the **Proposer**;
- (b) the name of the representative of the **Proposer** (and their alternate) who shall represent the **Proposer** in person for the purposes of this Paragraph 8.16;
- (c) a description (in reasonable but not excessive detail) of the issue or defect which the proposed modification seeks to address;
- (d) a description (in reasonable but not excessive detail) of the proposed modification and of its nature and purpose;
- (e) where possible, an indication of those parts of the **CUSC** which would require amendment in order to give effect to (and/or would otherwise be affected by) the proposed modification and an indication of the nature of those amendments or effects;
- (f) the reasons why the **Proposer** believes that the proposed modification would better facilitate achievement of the **Applicable CUSC Objectives** as compared with the current version of the **CUSC** together with background information in support thereof;
- (g) the reasoned opinion of the **Proposer** as to why the proposed modification should not fall within a current **Significant Code Review**, whether the proposed modification meets the **Self-Governance Criteria** or whether the proposed modification should proceed along the **Standard CUSC Modification Proposal** route;
- (h) the reasoned opinion of the **Proposer** as to whether that impact is likely to be material and if so an assessment of the quantifiable impact of the proposed modification on greenhouse gas emissions, -to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time;
- (i) where possible, an indication of the impact of the proposed modification on **Core Industry Documents** and the **STC**, and an indication of potential inconsistencies between the **CUSC Modification Proposal** and the **Capacity Market Documents** and/or the **CfD Documents**;

- (j) where possible, an indication of the impact of the proposed modification on relevant computer systems and processes used by **CUSC Parties**;
- (k) a statement to the effect that the **Proposer** acknowledges that on acceptance of the proposal for consideration by the **CUSC Modifications Panel** a **Proposer** which is not a **CUSC Party** shall grant a licence in accordance with Paragraph 8.16.9; and
- (l) whether or not (and to the extent) that in the **Proposer's** view the **CUSC Modification Proposal** constitutes an **EBR Amendment**

8.16.4A The **Proposer** of a **CUSC Modification Fast Track Proposal**, is not required to provide the items referenced at Paragraph 8.16.4 (f) – (j) inclusive, unless either:

- (a) the **CUSC Modifications Panel** has, pursuant to Paragraphs 8.29.5 or 8.29.6, not agreed unanimously that the **CUSC Modification Fast Track Proposal** meets the **Fast Track Criteria**, or has not unanimously approved the **CUSC Modification Fast Track Proposal**; or
- (b) there has been an objection to the **Approved CUSC Modification Fast Track Proposal** pursuant to Paragraph 8.29.12,

whereupon the **Proposer** shall be entitled to provide the additional information required pursuant to Paragraph 8.16.4 for a **CUSC Modification Proposal** within 28 days of the **Panel Secretary's** request. Where the **Proposer** fails to provide the additional information in accordance with such timescales, the **Panel Secretary** may reject such proposal in accordance with Paragraph 8.16.5.

8.16.5 if a proposal fails in any material respect to provide the information in Paragraph 8.16.4 (excluding Paragraphs (e), (i) and (j) thereof), the **Panel Secretary** may, subject to Paragraphs 8.14.3(a) and 8.17A.8, reject such proposal provided that:

- (a) the **Panel Secretary** shall furnish the **Proposer** with the reasons for such rejection;
- (b) the **Panel Secretary** shall report such rejection to the **CUSC Modifications Panel** at the next **CUSC Modifications Panel** meeting, with details of the reasons;
- (c) if the **CUSC Modifications Panel** decides to reverse the **Panel Secretary's** decision to refuse the submission, the **Panel Secretary** shall notify the **Proposer** accordingly and the proposal shall be dealt with in accordance with this Section 8;
- (d) nothing in this Section 8 shall prevent a **Proposer** from submitting a revised proposal in compliance with the

requirements of Paragraph ~~8.16.4~~ in respect of the same subject-matter.

8.16.6 Subject to Paragraph 8.17A.8 and without prejudice to the development of a **Workgroup Alternative CUSC Modification(s)** pursuant to Paragraphs 8.20.13 and 8.20.18, the **CUSC Modifications Panel** shall direct in the case of (a), and may direct in the case of (b), the **Panel Secretary** to reject a proposal pursuant to Paragraph 8.16, other than a proposal submitted by **The Company** pursuant to a direction issued by the **Authority** following a **Significant Code Review** in accordance with Paragraph 8.17.6, if and to the extent that such proposal has, in the opinion of the **CUSC Modifications Panel**, substantially the same effect as:

- (a) a **Pending CUSC Modification Proposal**; or
- (b) a **Rejected CUSC Modification Proposal**, where such proposal is made at any time within two (2) months after the decision of the **Authority** not to direct **The Company** to modify the **CUSC** pursuant to the **ESO Licence** in the manner set out in such **CUSC Modification Proposal**,

and the **Panel Secretary** shall notify the **Proposer** accordingly.

8.16.7 Promptly upon receipt of a **CUSC Modification Proposal**, the **Panel Secretary** shall:

- (a) allocate a unique reference number to the **CUSC Modification Proposal**;
- (b) enter details of the **CUSC Modification Proposal** on the **CUSC Modification Register**;
- (c) reserve the right to modify the title or summary of the **CUSC Modification Proposal** to better reflect the content or intent of the proposal. If such changes are made these shall be agreed by the **Proposer**, or where this cannot be achieved by the **CUSC Modifications Panel** at their next meeting; and
- (d) note whether in the **Proposer's** view the **CUSC Modification Proposal** constitutes an **EBR Amendment**.

8.16.8 Subject to Paragraphs 8.8.6, 8.29 and 8.17B, where the **CUSC Modification Proposal** is received more than 10 (ten) **Business Days** prior to the next **CUSC Modifications Panel** meeting, the **Panel Secretary** shall place the **CUSC Modification Proposal** on the agenda of the next **CUSC Modifications Panel** meeting and otherwise shall place it on the agenda of the next succeeding **CUSC Modifications Panel** meeting.

8.16.9 It shall be a condition to the right to make a proposal to modify the **CUSC** under this Paragraph 8.16 that the **Proposer**:

- (a) grants a non-exclusive royalty free licence to all **CUSC Parties** who request the same covering all present and future rights, **IPRs** and moral rights it may have in such



proposal (as regards use or application in Great Britain);  
and

- (b) warrants that, to the best of its knowledge, information and belief, no other person has asserted to the **Proposer** that such person has any **IPRs** or normal rights or rights of confidence in such proposal,

and, in making a proposal, a **Proposer** which is a **CUSC Party** shall be deemed to have granted the licence and given the warranty in (a) and (b) above.

The provisions of this Paragraph 8.16.9 shall apply to any **WG Consultation Alternative Request**, and also to a **Relevant Party** supporting a **CUSC Modification Proposal** in place of the original Proposer in accordance with Paragraph 8.16.10 (a) for these purposes the term **Proposer** shall include any such **Relevant Party** or a person making such a **WG Consultation Alternative Request**.

8.16.10 Subject to Paragraph 8.17A.8 (which deals with rejection by the **Panel Secretary** of **CUSC Modification Proposals** which are necessary to comply with or implement the **Electricity Regulation** and/or any relevant **Legally Binding Decisions of the European Commission and/or The Agency**, Paragraph 8.17A.4 (which deals with withdrawal of an **CUSC Modification Proposal** in relation to a **Significant Code Review**) and Paragraph 8.17C.1 (which deals with the withdrawal of a **CUSC Modification Proposal** following a **Backstop Direction**) and Paragraph 8.17.7, (which deals with the withdrawal of a **CUSC Modification Proposal** made pursuant to a direction following a **Significant Code Review**), a **Proposer** may withdraw their support for a **Standard CUSC Modification Proposal** by notice to the **Panel Secretary** at any time prior to the **CUSC Modifications Panel Recommendation Vote** undertaken in relation to that **Standard CUSC Modification Proposal** pursuant to Paragraph 8.23.4, and a **Proposer** may withdraw their support for a **CUSC Modification Proposal** that meets the **Self-Governance Criteria** by notice to the **Panel Secretary** at any time prior to the **CUSC Modifications Panel Self-Governance Vote** undertaken in relation to that **CUSC Modification Proposal** pursuant to Paragraph 8.25.9, and a **Proposer** may withdraw their support for a **CUSC Modification Fast Track Proposal** by notice to the **Panel Secretary** at any time prior to the **Panel's** vote on whether to approve the **CUSC Modification Fast Track Proposal** pursuant to Paragraph 8.29 in which case the **Panel Secretary** shall forthwith:

- (a) notify those parties specified in Paragraph 8.16.1 as relevant in relation to the **CUSC Modification Proposal** in question (a "**Relevant Party**") that they have been notified of the withdrawal of support by the **Proposer** by publication on the **Website** and (where relevant details are supplied) by electronic mail. A **Relevant Party** may within five (5) **Business Days** notify the **Panel Secretary** that it is prepared to support the **CUSC Modification Proposal** in place of the original **Proposer**. If such notice is received, the name of such **Relevant Party** shall replace that of the original **Proposer** as the **Proposer**, and the **CUSC**

**Modification Proposal** shall continue. If more than one notice is received, the first received shall be utilised;

- (b) if no notice of support is received under (a), the matter shall be discussed at the next **CUSC Modifications Panel** meeting. If the **CUSC Modifications Panel** so agrees, it may notify **Relevant Parties** that the **CUSC Modification Proposal** is to be withdrawn, and a further period of five (5) **Business Days** shall be given for support to be indicated by way of notice;
- (c) if no notice of support is received under (a) or (b), the **CUSC Modification Proposal** shall be marked as withdrawn on the **CUSC Modification Register**;

#### Code Administrator as Critical Friend

8.16.11 The **Code Administrator** shall provide assistance insofar as is reasonably practicable and on reasonable request to parties with an interest in the **CUSC Modification Process** (including, in particular, **Small Participants** and consumer representatives, and, for the purposes of preparing modifications to the **Charging Methodologies** only, **Materially Affected Parties**) that request it in relation to the **CUSC**, as provided for in the **Code Administration Code of Practice**, including, but not limited to, assistance with:

- (a) Drafting a **CUSC Modification Proposal** including, in relation to **Materially Affected Parties**, drafting a **CUSC Modification Proposal** in respect of the **Charging Methodologies**;
- (b) Understanding the operation of the **CUSC**;
- (c) Their involvement in, and representation during, the **CUSC Modification Process** (including but not limited to **CUSC Modifications Panel**, and/or **Workgroup** meetings) as required or as described in the **Code Administration Code of Practice**; and
- (d) Assisting the **Proposer** and **Workgroup** by producing draft legal text once a clear solution has been developed to support the discussion and understanding of a **CUSC Modification Proposal**; and
- (e) Accessing information relating to the **Charging Statements** (subject to any charge made by **The Company** to cover its reasonable costs of providing the **Charging Statements** in accordance with Paragraph 8.16.12), and any amendment, revision or notice of proposed amendment to the **Charging Statements**, **CUSC Modification Proposals** and/or **CUSC Modifications Proposals** that have been implemented.

8.16.12 **The Company** may provide information in accordance with conditions E10.10 and E10.11 'Use of System Charging and methodology' and conditions E11.12 and E11.13 'Connection charging methodology' of the **ESO Licence**; and insofar as reasonably practicable, the provision by **The Company** of such other

information or assistance as a **Materially Affected Party** may reasonably request for the purposes of preparing a proposal to modify the **Charging methodologies**.

## 8.17 SIGNIFICANT CODE REVIEW

### Significant Code Review Phase

- 8.17.1 If any party specified under Paragraph 8.16.1 makes a **CUSC Modification Proposal** during a **Significant Code Review Phase**, unless exempted by the **Authority** or unless Paragraph 8.17.4(b) applies, the **CUSC Modifications Panel** shall assess whether the **CUSC Modification Proposal** falls within the scope of a **Significant Code Review** and the applicability of the exceptions set out in Paragraph 8.17.4 and shall notify the **Authority** of its assessment, its reasons for that assessment and any representations received in relation to it as soon as practicable.
- 8.17.2 The **CUSC Modifications Panel** shall proceed with the **CUSC Modification Proposal** made during a **Significant Code Review Phase** in accordance with Paragraph 8.18 (notwithstanding any consultation undertaken pursuant to Paragraph 8.17.5 and its outcome), unless directed otherwise by the **Authority** pursuant to Paragraph 8.17.3.
- 8.17.3 Subject to Paragraph 8.17.4, the **Authority** may at any time direct that a **CUSC Modification Proposal** made during a **Significant Code Review Phase** falls within the scope of a **Significant Code Review** and must not be made during the **Significant Code Review Phase**. If so directed, the **CUSC Modifications Panel** will not proceed with that **CUSC Modification Proposal**, and the **Proposer** shall decide whether the **CUSC Modification Proposal** shall be withdrawn or suspended until the end of the **Significant Code Review Phase**. If the **Proposer** fails to indicate its decision whether to withdraw or suspend the **CUSC Modification Proposal** within twenty-eight (28) days of the **Authority's** direction, it shall be deemed to be suspended. If the **CUSC Modification Proposal** is suspended, it shall be open to the **Proposer** at the end of the **Significant Code Review Phase** to indicate to the **CUSC Modifications Panel** that it wishes that **CUSC Modification Proposal** to proceed, and it shall be considered and taken forward in the manner decided upon by the **CUSC Modifications Panel** at the next meeting, and it is open to the **CUSC Modifications Panel** to take into account any work previously undertaken in respect of that **CUSC Modification Proposal**. If the **Proposer** makes no indication to the **CUSC Modifications Panel** within twenty-eight (28) days of the end of the **Significant Code Review Phase** as to whether or not it wishes the **CUSC Modification Proposal** to proceed, it shall be deemed to be withdrawn.
- 8.17.4 A **CUSC Modification Proposal** that falls within the scope of a **Significant Code Review** may be made where:
- (a) the **Authority** so determines, having taken into account (among other things) the urgency of the subject matter of the **CUSC Modification Proposal**; or

- (b) the **CUSC Modification Proposal** is made by **The Company** pursuant to Paragraph 8.17.6.

8.17.5 Where a direction under Paragraph 8.17.3 has not been issued, paragraph 8.17.4 does not apply and the **CUSC Modifications Panel** considers that a **CUSC Modification Proposal** made during a **Significant Code Review Phase** falls within the scope of a **Significant Code Review**, the **CUSC Modifications Panel** may consult on its suitability as part of the **Standard CUSC Modification Proposal** route set out in Paragraphs 8.19, 8.20, 8.22 and 8.23.

#### End of Significant Code Review Phase

8.17.6 Within twenty-eight (28) days after the **Authority** has published its **Significant Code Review** conclusions, the **Authority** may:

- (a) issue to **The Company** directions, including directions to **The Company** to make **CUSC Modification Proposals**; or

- (b) itself make a **CUSC Modification Proposal** arising from the relevant **Significant Code Review**

8.17.6A If the **Authority** issues a statement that it will continue work and/or issues a direction in accordance with Paragraph 8.17.C.1 then the **Significant Code Review Phase** will be deemed to have ended when:

- (a) the **Authority** issues a statement that the **Significant Code Review Phase** has ended;

- (b) one of the circumstances in Paragraphs 8.17.6(a) or 8.17.8 occurs (irrespective of whether such circumstance occurs within 28 days after the **Authority** has published its **Significant Code Review** conclusions); or

8.17.7 Where the **Authority** issues directions pursuant to Paragraph 8.17.6(a) **The Company** shall comply with those directions and the **Significant Code Review Phase** shall be deemed to have ended on the date on which **The Company** makes a **CUSC Modification Proposal** in accordance with the **Authority's** directions.

8.17.8 Where the **Authority** makes a **CUSC Modification Proposal** pursuant to 8.17.6(b), the **Significant Code Review Phase** shall be deemed to have ended on the date on which the **Authority** makes such **CUSC Modification Proposal**.

8.17.9 Where a **CUSC Modification Proposal** is raised pursuant to Paragraph 8.17.6, that **CUSC Modification Proposal** shall be treated as a **Standard CUSC Modification Proposal** and shall proceed through the process for **Standard CUSC Modification Proposals** set out in Paragraphs 8.18, 8.19, 8.20, 8.22 and 8.23. Such **Authority** conclusions and directions shall not fetter the voting rights of the **Panel Members** or any recommendation it makes in relation to any **CUSC Modification Proposal** or the recommendation procedures informing the **CUSC Modification Report**.

- 8.17.10 **The Company** may not, without the prior consent of the **Authority**, withdraw a **CUSC Modification Proposal** made pursuant to a direction issued by the **Authority** pursuant to Paragraph 8.17.6 (a).
- 8.17.11 If within twenty-eight (28) days after the **Authority** has published its **Significant Code Review** conclusions, the **Authority** issues to **The Company** a statement that no directions will be issued in relation to the **CUSC**, then the **Significant Code Review Phase** shall be deemed to have ended on the date of such statement.
- 8.17.12 Unless the **Authority** issues a statement in accordance with Paragraph 8.17.6A, if up to and including twenty-eight (28) days from the **Authority's** publication of its **Significant Code Review** conclusions, the **Authority** has issued to **The Company** neither directions pursuant to Paragraph 8.17.6(a) nor a statement pursuant to Paragraph 8.17.11, nor has the **Authority** made a **CUSC Modification Proposal** as described in Paragraph 8.17.6(b) then the **Significant Code Review Phase** will be deemed to have ended.

#### **8.17A AUTHORITY RAISED OR DIRECTED MODIFICATION**

- 8.17A.1 The **Authority** may:
- (a) itself; or
  - (b) direct **The Company** to raise a **CUSC Modification Proposal** where the **Authority** reasonably considers that such **CUSC Modification Proposal** is necessary to comply with or implement the **Electricity Regulation** and/or any relevant **Legally Binding Decisions of the European Commission and/or The Agency** or in respect of **Significant Code Review**.
- 8.17A.2 **The Company** shall comply with any directions from the **Authority** in relation to setting and/or amending a timetable for;
- (a) the raising of a **CUSC Modification Proposal** pursuant to Paragraph 8.17A.1(b); and/or
  - (b) where the **Authority** has approved a **CUSC Modification Proposal** raised pursuant to Paragraph 8.17A.1, implementation of such **CUSC Modification Proposal**.
- 8.17A.3 In respect of a **CUSC Modification Proposal** raised pursuant to Paragraph 8.17A.1, the **CUSC Modification Panel** shall comply with any timetable(s) directed by the **Authority** in relation to setting and/or amending a timetable for the completion of all relevant steps of the **CUSC Modification Process** or such other processes set out in this Section 8.
- 8.17A.4 Notwithstanding any other Paragraphs in this Section 8, a **CUSC Modification Proposal** raised pursuant to

Paragraph 8.17A.1:

(a) shall not be withdrawn by the **Transmission Company** and/or the **CUSC Modification Panel** without the prior consent of the **Authority**.

(b) shall not be amalgamated with any other **CUSC Modification Proposal** without the prior consent of the **Authority**.

- 8.17A.5 If, pursuant to paragraph 8.17A.4(a), the **Authority** consents to the withdrawal of a **CUSC Modification Proposal**, the provisions of Paragraph 8.16.10 shall apply to such **CUSC Modification Proposal**.
- 8.17A.6 In respect of any **CUSC Modification Proposal** which has been raised pursuant to Paragraph 8.17A.9, the views of the relevant **Workgroup**, the voting rights of the **CUSC Modifications Panel** or the recommendation of the **CUSC Modifications Panel** shall not be fettered or restricted notwithstanding that such **CUSC Modification Proposal** has been raised under Paragraph 8.17A.9.
- 8.17A.7 A **CUSC Modification Proposal** shall still be assessed against the **Self Governance Criteria** and **Fast Track Criteria** notwithstanding that it has been raised pursuant to Paragraph 8.17A.1.
- 8.17A.8 A **CUSC Modification Proposal** raised pursuant to Paragraph 8.17A.1 shall not be rejected by the **Panel Secretary** pursuant to Paragraphs 8.16.5 or 8.16.6.
- 8.17A.9 In relation to any **CUSC Modification Proposal** raised by **The Company** other than pursuant to Paragraph 8.17A.1, where the **Authority** reasonably considers such **CUSC Modification Proposal** to be necessary to comply with or implement the **Electricity Regulation** and/or any relevant **Legally Binding Decisions of the European Commission and/or The Agency**, the provisions of Paragraphs 8.17A.2 to 8.17A.8 shall apply.

## **8.17B AUTHORITY LED SCR MODIFICATION**

- 8.17B.1 Where the **Authority** has issued a statement in accordance with Paragraph 8.17.6A and/or a **Backstop Direction** in accordance with Paragraph 8.17C, the **Authority** may submit an **Authority Led CUSC Modification Proposal** for an **Authority Led CUSC Modification** directly to the **CUSC Panel**.
- 8.17B.2 In response to an **Authority Led CUSC Modification Proposal** the **CUSC Panel** shall prepare an **Authority Led CUSC Modification Report** which shall include all the items listed in 8.23.2 (a)-(k) and in particular, as identified in the Licence:

- (a) an evaluation of the proposed modification; and
  - (b) an assessment of the extent to which the proposed modification would better facilitate achievement of the applicable **CUSC** objective(s); and
  - (c) a detailed explanation of the **CUSC Panel's** reasons for that assessment (such assessment to include, where the impact is likely to be material, an assessment of the proposal on greenhouse gas emissions, to be conducted in accordance with such guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time); and
  - (d) a timetable for implementation of the proposed modification, including the date with effect from which such proposed modification could take effect.
- 8.17B.3 The **Authority Led CUSC Modification Report** shall be submitted to the **Authority** taking into account the complexity, importance and urgency of the proposed modification, and in accordance with the time periods specified in the CUSC, which shall not be extended unless approved by the Panel and not objected to by the Authority after receiving notice in accordance with the timetable set by the Authority in Paragraph 8.17B.6.
- 8.17B.4 The **Authority** can require the revision and re-submission of the **Authority Led CUSC Modification Report**, such resubmission to be made, if required by a direction issued by the **Authority** in accordance with Paragraph 8.23.12, as soon after the **Authority's** direction as is appropriate taking into account the complexity, importance and urgency of the proposed modification and in accordance with the time periods specified in the CUSC, which shall not be extended unless approved by the Panel and not objected to by the Authority after receiving notice in accordance with the timetable set by the Authority in Paragraph 8.17B.6.
- 8.17B.5 The timetable referred to in Paragraph 8.17B.2 (d) for implementation of any proposed modification shall be in accordance with any direction(s) issued by the **Authority** for the implementation of a proposed modification where no such direction has been issued by the **Authority**, the timetable shall be such as will enable the modification to take effect as soon as practicable after the **Authority** has directed that such modification should be made, account being taken of the complexity, importance of the proposed modification and in accordance with the time periods specified in the CUSC, which shall not be extended unless approved by the Panel and not objected to by the Authority after receiving notice with the **Authority** having discretion to change the timetable.
- 8.17B.6 The timetable for the completion of the procedural steps for an **Authority Led CUSC Modification**, as outlined in Paragraphs 8.17B.2, 8.17B.3, 8.17B.4, shall be set by the **Authority** in its sole discretion.
- 8.17B.7 The **Authority's** published conclusions and directions and the

**Authority Led CUSC Modification Proposal** shall not fetter the voting rights of the **Panel Members** or any recommendation it makes in relation to any **Authority Led CUSC Modification Proposal** or the procedures informing the report described at Paragraph 8.17B.2.

#### **8.17C BACKSTOP DIRECTION**

**8.17C.1** Where a CUSC Modification Proposal has been made in relation to a Significant Code Review in accordance with Paragraph 8.17A.1 the Authority may issue a direction (a “Backstop Direction”), which requires such proposal(s) and any alternatives to be withdrawn and which causes the Significant Code Review phase to recommence.

#### **8.18 CUSC MODIFICATION PROPOSAL EVALUATION**

- 8.18.1 This Paragraph 8.18 is subject to the **Urgent CUSC Modification Proposals** procedures set out in Paragraph 8.24 and the **Significant Code Review** procedures set out in Paragraph 8.17.
- 8.18.2 A **CUSC Modification Proposal** shall, subject to Paragraph 8.16.8, be discussed by the **CUSC Modifications Panel** at the next following **CUSC Modifications Panel** meeting convened.
- 8.18.3 The **Proposer’s** representative shall attend such **CUSC Modifications Panel** meeting and the **CUSC Modifications Panel** may invite the **Proposer’s** representative to present their **CUSC Modification Proposal** to the **CUSC Modifications Panel**.
- 8.18.4 The **CUSC Modifications Panel** shall evaluate each **CUSC Modification Proposal** against the **Self-Governance Criteria**.
- 8.18.5 The **CUSC Modifications Panel** shall follow the procedure set out in Paragraph 8.25 in respect of any **CUSC Modification Proposal** that the **CUSC Modifications Panel** considers meets the **Self-Governance Criteria** unless the **Authority** makes a direction in accordance with Paragraph 8.25.2 and in such a case that **CUSC Modification Proposal** shall be a **Standard CUSC Modification Proposal** and shall follow the procedure set out in Paragraphs 8.19, 8.20, 8.22 and 8.23.
- 8.18.6 Unless the **Authority** makes a direction in accordance with Paragraph 8.25.4, a **CUSC Modification Proposal** that the **CUSC Modifications Panel** considers does not meet the **Self-Governance Criteria** shall be a **Standard CUSC Modification Proposal** and shall follow the procedure set out in Paragraphs 8.19, 8.20, 8.22 and 8.23.
- 8.18.7 The **CUSC Modifications Panel** shall evaluate each **CUSC Modification Fast Track Proposal** against the **Fast Track Criteria**.
- 8.18.8 The **CUSC Modifications Panel** shall follow the procedure set out in Paragraph 8.29 in respect of any **CUSC Modification Fast Track**



**Proposal.** The provisions of Paragraphs 8.19 to 8.25 shall not apply to a **CUSC Modification Fast Track Proposal**.

- 8.18.8A The **CUSC Modification Panel** shall evaluate each **CUSC Modification Proposal** and determine whether the **CUSC Modification Proposal** constitutes an **EBR Amendment** and its expected impact on the objectives of the **Electricity Balancing Regulation** (and in the event of disagreement **The Company's** view shall prevail).

## **8.19 PANEL PROCEEDINGS**

- 8.19.1 (a) The **Code Administrator** and the **CUSC Modifications Panel** shall together establish a timetable to apply for the **CUSC Modification Process**.
- (b) The **CUSC Modifications Panel** shall establish the part of the timetable for the consideration by the **CUSC Modifications Panel** and by a **Workgroup** (if any) which shall be no longer than four months unless in any case the particular circumstances of the **CUSC Modification Proposal** (taking due account of its complexity, importance and urgency) justify an extension of such timetable, and provided the **Authority**, after receiving notice, does not object, taking into account all those issues.
- (c) The **Code Administrator** shall establish the part of the timetable for the consultation to be undertaken by the **Code Administrator** under this Section 8 and separately the preparation of a **CUSC Modification Report** to the **Authority**. Where the particular circumstances of the **CUSC Modification Proposal** (taking due account of its complexity, importance and urgency) justify an extension of such timescales and provided the **Authority**, after receiving notice, does not object, taking into account all those issues, the **Code Administrator** may revise such part of the timetable.
- (d) In setting such a timetable, the **CUSC Modifications Panel** and the **Code Administrator** shall exercise their respective discretions such that, in respect of each **CUSC Modification Proposal**, a **CUSC Modification Report** may be submitted to the **Authority** as soon after the **CUSC Modification Proposal** is made as is consistent with the proper evaluation of such **CUSC Modification Proposal**, taking due account of its complexity, importance and urgency.
- (e) Having regard to the complexity, importance and urgency of particular **CUSC Modification Proposals**, the **CUSC Modifications Panel** may determine the priority of **CUSC Modification Proposals** and may (subject to any objection from the **Authority** taking into account all those issues) adjust the priority of the relevant **CUSC Modification Proposal** accordingly.

- (f) where the **CUSC Modification Proposal** constitutes an **EBR Amendment** the timetable shall be such that the **Code Administrator's** consultation is not less than one month.
- 8.19.2 In relation to each **CUSC Modification Proposal**, the **CUSC Modifications Panel** shall determine at any meeting of the **CUSC Modifications Panel** whether to:
  - (a) amalgamate the **CUSC Modification Proposal** with any other **CUSC Modification Proposal**;
  - (b) invite the **Proposer** to further develop their **CUSC Modification Proposal** before presenting to a subsequent meeting of the **CUSC Modifications Panel** or to withdraw their **CUSC Modification proposal**;
  - (c) establish a **Workgroup** of the **CUSC Modifications Panel**, to consider the **CUSC Modification Proposal**;
  - (d) review the evaluation made pursuant to Paragraph 8.18.4, taking into account any new information received; or
  - (e) proceed directly to wider consultation (in which case the **Proposer's** right to vary their **CUSC Modification Proposal** shall lapse).
- 8.19.3 Subject to Paragraphs 8.14.3 and 8.17A.4(b), the **CUSC Modifications Panel** may decide to amalgamate a **CUSC Modification Proposal** with one or more other **CUSC Modification Proposals** where the subject-matter of such **CUSC Modification Proposals** is sufficiently proximate to justify amalgamation on the grounds of efficiency and/or where such **CUSC Modification Proposals** are logically dependent on each other.
- 8.19.4 Without prejudice to each **Proposer's** right to withdraw their **CUSC Modification Proposal** prior to the amalgamation of their **CUSC Modification Proposal** where **CUSC Modification Proposals** are amalgamated pursuant to Paragraph 8.19.3:
  - (a) such **CUSC Modification Proposals** shall be treated as a single **CUSC Modification Proposal**;
  - (b) references in this Section 8 to a **CUSC Modification Proposal** shall include and apply to a group of two or more **CUSC Modification Proposals** so amalgamated;
  - (c) the **Proposers** of each such **CUSC Modification Proposal** shall co-operate in deciding which of them is to provide a representative for any **Workgroup** in respect of the amalgamated **CUSC Modification Proposal** and, in default of agreement, the **Panel Chairperson** shall nominate one of the **Proposers** for that purpose.
- 8.19.5 In respect of any **CUSC Modification Proposal** that the **CUSC Modifications Panel** determines to proceed directly to wider consultation in accordance with Paragraph 8.19.2, the **CUSC Modifications Panel**, may at any time prior to the **CUSC Modifications Panel Recommendation Vote** having taken place decide to establish a **Workgroup** of the **CUSC Modifications Panel**

and the provisions of Paragraph 8.20 shall apply. In such case the **CUSC Modifications Panel** shall be entitled to adjust the timetable referred to at Paragraph 8.19.1(b) and the **Code Administrator** shall be entitled to adjust the timetable referred to at Paragraph 8.19.1(c), provided that the **Authority**, after receiving notice, does not object.

- 8.19.6 Where the **CUSC Modifications Panel** in accordance with Paragraph 8.19.2(b) invites the Proposer to further develop their CUSC Modification Proposal, and the Proposer agrees, on the Proposer presenting this to a subsequent meeting of the **CUSC Modifications Panel**, the **Panel** will determine a way forward from the options in 8.19.2 (a), (c), (d) and (e) or invite the **Proposer** to withdraw their modification proposal.
- 8.19.7 Where the **CUSC Modifications Panel** in accordance with Paragraphs 8.19.2(b) or 8.19.6 invites the **Proposer** to further develop or withdraw their **CUSC Modification Proposal** and this is declined, the **Panel** will determine a way forward from the options in 8.19.2 (a), (c), (d) or (e).

## 8.20 WORKGROUPS

- 8.20.1 If the **CUSC Modifications Panel** has decided not to proceed directly to wider consultation (or where the provisions of Paragraph 8.19.5 apply), a **Workgroup** will be established, or an existing **Standing Group** identified and actioned, by the **CUSC Modifications Panel** to assist the **CUSC Modifications Panel** in evaluating whether a **CUSC Modification Proposal** better facilitates achieving the **Applicable CUSC Objectives** and whether a **Workgroup Alternative CUSC Modification(s)** would, as compared with the **CUSC Modification Proposal**, better facilitate achieving the **Applicable CUSC Objectives** in relation to the issue or defect identified in the **CUSC Modification Proposal**. Where a **Standing Group** is identified and actioned in relation to a **CUSC Modification Proposal**, a reference to **Workgroup** in this Section 8 shall, in relation to that **CUSC Modification Proposal**, be deemed to be a reference to that **Standing Group** acting in that capacity. Unless specifically appointed pursuant to this Paragraph or permitted pursuant to Paragraph 8.22, a **Standing Group** shall not comment upon any **CUSC Modification Proposal**.
- 8.20.2 A single **Workgroup** may be responsible for the evaluation of more than one **CUSC Modification Proposal** at the same time, but need not be so responsible.
- 8.20.3 A **Workgroup** shall comprise at least five (5) persons (who may be **Panel Members**) selected by the **CUSC Modifications Panel** from those nominated by **CUSC Parties**, **BSC Parties**, the **Citizens Advice** or the **Citizens Advice Scotland** for their relevant experience and/or expertise in the areas forming the subject-matter of the **CUSC Modification Proposal(s)** to be considered by such **Workgroup** (and the **CUSC Modifications Panel** shall ensure, as far as possible, that an appropriate cross-section of representation, experience and expertise is represented on such **Workgroup**) provided that there shall always be at least one member representing

**The Company** and if, and only if, the **CUSC Modifications Panel** is of the view that a **CUSC Modification Proposal** is likely to have an impact on the **STC**, the **CUSC Modifications Panel** may invite the **STC** committee to appoint a representative to become a member of the **Workgroup**. A representative of the **Authority** may attend any meeting of a **Workgroup** as an observer and may speak at such meeting.

8.20.4 The **Code Administrator** shall in consultation with the **CUSC Modifications Panel** appoint the chairperson of the **Workgroup** who shall act impartially and as an independent chairperson.

8.20.5 No **Workgroup** or meeting of a **Workgroup** will be considered quorate with less than five (5) persons, in addition to the **Code Administrator** representative or the chairperson of the **Workgroup**. Where insufficient persons are nominated to a **Workgroup** for it to be quorate, the **Code Administrator** will report this to the next meeting of the **CUSC Modifications Panel**. The **Panel** may:

- (a) Request the **Code Administrator** to seek further nominations;
- (b) Reconsider their decision on how to progress the **CUSC Modification Proposal** as allowed under 8.19.2; or
- (c) Request that those parties that have nominated themselves to a **Workgroup** which is less than quorate should proceed as a **Limited Membership Workgroup**, subject to the following additional checks and balances:
  - (i) A **Limited Membership Workgroup** shall always hold a **Workgroup Consultation** in addition to the mandatory **Code Administrator Consultation**.
  - (ii) Prior to the **Workgroup Consultation**, a draft of this shall be circulated to the **CUSC Modifications Panel** for five (5) days or another timescale as agreed by the **CUSC Modifications Panel** for approval.
  - (iii) At the same time as the **Workgroup Consultation** is initiated, the **Code Administrator** shall again formally seek nominations and if quoracy is not established then again seek advice from the **CUSC Modifications Panel** on how to proceed from the options set out in this 8.20.5.

Where a **Workgroup** remains non-quorate, and with the permission of the **CUSC Modifications Panel**, a **Limited Membership Workgroup** may (subject to Paragraph 8.20.6) continue following a **Workgroup Consultation** as if it were a standard **Workgroup**.

8.20.6 A **Limited Membership Workgroup** may at any point be instructed by the **Authority** to either:

- (a) Stop work: or

- (b) To provide a report on progress to the next meeting of the **CUSC Modifications Panel**

The **Authority** may also at any point instruct the **Code Administrator** to seek further nominations for membership

8.20.7 Where a specific meeting of an otherwise quorate **Workgroup** is not quorate, or where member(s) of a **Limited Membership Workgroup** are unable to attend a meeting:

- (a) A member of the **Workgroup** unable to attend will be invited by the **Code Administrator** to send an alternate
- (b) All members will be invited to participate by telephone, webinar or other equivalent if not able to attend in person
- (c) A meeting may proceed as a **Workgroup** meeting as long as none of the members either present or absent raise an objection to this, however no voting can take place unless the **Code Administrator** has obtained enough votes to be quorate from members not in attendance or from all members of a **Limited Membership Workgroup**. This shall include where there has not been an opportunity to check with all **Workgroup** members to see if they have an objection (typically where a change of plans or circumstances has occurred too late to achieve this),
- (d) If any **Workgroup** member objects to the progressing of a **Workgroup** without them, they must communicate this to the **Code Administrator** at least 24 hours before the meeting indicating that they will not be present and do not wish the meeting to take place. The **Code Administrator** will then endeavour to rearrange the meeting to accommodate such a member's availability.
- (e) Where a **Workgroup** member is repeatedly unavailable, as guidance on 3 consecutive occasions, and does not give permission for the **Workgroup** to proceed without them as in (d), under 8.20.9 the **CUSC Modifications Panel** may choose to replace or remove them.

8.20.8 The **CUSC Modifications Panel** may add further members or the **Workgroup** chairperson may add or vary members to a **Workgroup**.

8.20.9 The **CUSC Modifications Panel** may (but shall not be obliged to) replace any member or observer of a **Workgroup** appointed pursuant to Paragraph 8.20.3 at any time if such member is unwilling or unable for whatever reason to fulfil that function and/or is deliberately and persistently disrupting or frustrating the work of the **Workgroup**.

8.20.10 The **CUSC Modifications Panel** shall determine the terms of reference of each **Workgroup** and may change those terms of reference from time to time as it sees fit.

8.20.11 The terms of reference of a **Workgroup** must include provision in respect of the following matters:

- (a) those areas of a **Workgroup's** powers or activities which require the prior approval of the **CUSC Modifications Panel**;
- (b) the seeking of instructions, clarification or guidance from the **CUSC Modifications Panel**, including on the suspension of a **Workgroup Alternative CUSC Modification(s)** during a **Significant Code Review Phase**;
- (c) the timetable for the work to be done by the **Workgroup**, in accordance with the timetable established pursuant to Paragraph 8.19.1 (save where Paragraph 8.19.5 applies); and
- (d) the length of any **Workgroup Consultation**.

In addition, prior to the taking of any steps which would result in the undertaking of a significant amount of work (including the production of draft legal text to modify the **CUSC** in order to give effect to a **CUSC Modification Proposal** and/or **Workgroup Alternative CUSC Modification(s)**, with the relevant terms of reference setting out what a significant amount of work would be in any given case), the **Workgroup** shall seek the views of the **CUSC Modifications Panel** as to whether to proceed with such steps and, in giving its views, the **CUSC Modifications Panel** may consult the **Authority** in respect thereof.

- (e) whether, and the extent to which, the **CUSC Modification Proposal** may constitute an amendment to the **EBR Article 18 Terms and Conditions**; and
- (f) where the **Workgroup** considers that a **CUSC Modification Proposal** may constitute an amendment to the **EBR Article 18 Terms and Conditions**, the impact of those amendments on the objectives of the **Electricity Balancing Regulation**.

8.20.12 Subject to the provisions of this Paragraph 8.20.12 and unless otherwise determined by the **CUSC Modifications Panel**, the **Workgroup** shall develop and adopt its own internal working procedures for the conduct of its business and shall provide a copy of such procedures to the **Panel Secretary** in respect of each **CUSC Modification Proposal** for which it is responsible. Unless the **CUSC Modifications Panel** otherwise determines, meetings of each **Workgroup** shall be open to attendance by a representative of any **CUSC Party**, any **BSC Party**, the **Citizens Advice**, the **Citizens Advice Scotland** and any person invited by the chairperson, and the chairperson of a **Workgroup** may invite any such person to speak at such meetings.

8.20.13 After development by the **Workgroup** of the **CUSC Modification Proposal**, and (if applicable) after development of any draft **Workgroup Alternative CUSC Modification(s)**, the **Workgroup** will (subject to the provisions of Paragraph 8.20.19) consult ("**Workgroup Consultation**") on the **CUSC Modification Proposal** and, if applicable, on any draft **Workgroup Alternative CUSC Modification(s)** with:

- (a) **CUSC Parties**; and
- (b) such other persons who may properly be considered to have an appropriate interest in it.

Where following the establishment of a **Workgroup** in relation to a **CUSC Modification Proposal**, the terms of reference of a **Standing Group** have been amended by the **CUSC Modifications Panel** to include the ability to comment on that **CUSC Modification Proposal**, that **Standing Group** as a body shall be deemed to fall within subparagraph (b) above and therefore shall be able to respond to the **Workgroup Consultation**. It shall not, however, in so doing undertake the functions of a **Workgroup**. In the absence of such a change in terms of reference, the **Standing Group** as a body shall have no ability to respond to any **Workgroup Consultation**.

8.20.14 The **Workgroup Consultation** will be undertaken by issuing a **Workgroup Consultation** paper (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties** and such other persons, who have supplied relevant details, shall meet this requirement). Such **Workgroup Consultation** paper will include:

- (a) Issues which arose in the **Workgroup** discussions
- (b) Details of any draft **Workgroup Alternative CUSC Modification(s)**
- (c) The date proposed by the **Code Administrator** as the **Proposed Implementation Date**.

8.20.15 **Workgroup Consultation** papers will be copied to **Core Industry Document Owners**, the **CM Administrative Parties**, the **CfD Administrative Parties** and the secretary of the **STC** committee.

8.20.16 Any **CUSC Party**, **BSC Party**, the **Citizens Advice** or the **Citizens Advice Scotland** may (subject to Paragraph 8.20.20) raise a **Workgroup Consultation Alternative Request** in response to the **Workgroup Consultation**. Such **Workgroup Consultation Alternative Request** must include:

- (a) the information required by Paragraph 8.16.4 (which shall be read and construed so that any references therein to "amendment proposal" or "proposal" shall be read as "request" and any reference to "**Proposer**" shall be read as "requester"); and

- (b) sufficient detail to enable consideration of the request including details as to how the request better facilitates the **Applicable CUSC Objectives** than the current version of the **CUSC**, than the **CUSC Modification Proposal** and than any draft **Workgroup Alternative CUSC Modification(s)**.

8.20.17 The **Workgroup** shall consider and analyse any comments made or any **Workgroup Consultation Alternative Request** made by any **CUSC Party** in response to the **Workgroup Consultation**.

8.20.18 If a majority of the members of the **Workgroup** or the chairperson of the **Workgroup** believe that the **Workgroup Consultation Alternative Request** may better facilitate the **Applicable CUSC Objectives** than the **CUSC Modification Proposal**, the **Workgroup** shall develop it as a **Workgroup Alternative CUSC Modification(s)** or, where the chairperson of the **Workgroup** agrees, amalgamate it with one or more other draft **Workgroup Alternative CUSC Modification(s)** or **Workgroup Consultation Alternative Request(s)**;

8.20.19 Unless the **CUSC Modifications Panel** directs the **Workgroup** otherwise pursuant to Paragraph 8.20.,20 and provided that a **Workgroup Consultation** has been undertaken in respect of the **CUSC Modification Proposal**, no further **Workgroup Consultation** will be required in respect of any **Workgroup Alternative CUSC Modification(s)** developed in respect of such **CUSC Modification Proposal**.

8.20.20 The **CUSC Modifications Panel** may, at the request of the chairperson of the **Workgroup**, direct the **Workgroup** to undertake further **Workgroup Consultation(s)**. At the same time as such direction the **CUSC Modifications Panel** shall adjust the timetable referred to at Paragraph 8.19.1(b) and the **Code Administrator** shall be entitled to adjust the timetable referred to at Paragraph 8.19.1 (c), provided that the **Authority**, after receiving notice, does not object. No **Workgroup Consultation Alternative Request** may be raised by any **CUSC Party** during any second or subsequent **Workgroup Consultation**.

8.20.21 The **Workgroup** shall finalise the **Workgroup Alternative CUSC Modification(s)** for inclusion in the report to the **CUSC Modifications Panel**.

8.20.22

- (a) Each **Workgroup** chairperson shall prepare a report to the **CUSC Modifications Panel** responding to the matters detailed in the terms of reference in accordance with the timetable set out in the terms of reference.
- (b) If a **Workgroup** is unable to reach agreement on any such matter, the report must reflect the views of the members of the **Workgroup**.
- (c) The report will be circulated in draft form to **Workgroup** members and a period of not less than five (5) **Business**



**Days** or if all **Workgroup** members agree three (3) **Business Days** given for comments thereon. Any unresolved comments made shall be reflected in the final report.

8.20.23 The chairperson or another member (nominated by the chairperson) of the **Workgroup** shall attend the next **CUSC Modifications Panel** meeting following delivery of the report and may be invited to present the findings and/or answer the questions of **Panel Members** in respect thereof. Other members of the **Workgroup** may also attend such **CUSC Modifications Panel** meeting.

8.20.24 At the meeting referred to in Paragraph 8.20.23 the **CUSC Modifications Panel** shall consider the **Workgroup's** report and shall determine whether to:-

- (a) refer the **CUSC Modifications Proposal** back to the **Workgroup** for further analysis (in which case the **CUSC Modifications Panel** shall determine the timetable and terms of reference to apply in relation to such further analysis); or
- (b) proceed then to wider consultation as set out in Paragraph 8.22; or
- (c) decide on another suitable course of action.

8.20.25 Subject to paragraph 8.17.4 if, at any time during the assessment process carried out by the **Workgroup** pursuant to this Paragraph 8.20, the **Workgroup** considers that a **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification(s)** falls within the scope of a **Significant Code Review**, it shall consult on this as part of the **Workgroup Consultation** and include its reasoned assessment in the report to the **CUSC Modifications Panel** prepared pursuant to Paragraph 8.20.22. If the **CUSC Modifications Panel** considers that the **CUSC Modification Proposal** or the **Workgroup Alternative CUSC Modification(s)** falls within the scope of a **Significant Code Review**, it shall consult with the **Authority**. If the **Authority** directs that the **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** falls within the scope of the **Significant Code Review**, the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** shall be suspended or withdrawn during the **Significant Code Review Phase**, in accordance with Paragraph 8.17.3.

8.20.26 The **Proposer** may, at any time prior to the final evaluation by the **Workgroup** (in accordance with its terms of reference and working practices) of that **CUSC Modification Proposal** against the **Applicable CUSC Objectives**, vary their **CUSC Modification Proposal** on notice (which may be given verbally) to the chairperson of the **Workgroup** provided that such varied **CUSC Modification Proposal** shall address the same issue or defect originally identified by the **Proposer** in their **CUSC Modification Proposal**.

8.20.27 The **CUSC Modifications Panel** may (but shall not be obliged to) require a **CUSC Modification Proposal** to be withdrawn in

accordance with paragraph 8.17.6 if, in the **Panel's** opinion, the **Proposer** of that **CUSC Modification Proposal** is deliberately and persistently disrupting or frustrating the work of the **Workgroup** and that **CUSC Modification Proposal** shall be deemed to have been so withdrawn. In the event that a **CUSC Modification Proposal** is so withdrawn, the provisions of paragraph 8.16.10 shall apply in respect of that **CUSC Modification Proposal**.

## 8.21 STANDING GROUPS

- 8.21.1 The **CUSC Modifications Panel** may set up one or more standing groups (each a "**Standing Group**") to consider and report to the **CUSC Modifications Panel** on issues specified by the **CUSC Modifications Panel** relating to the connection and use of system arrangements in **Great Britain**, including the **Charging Methodologies**. The **CUSC Modifications Panel** may change issues specified from time to time as it sees fit. In setting up a **Standing Group**, the **CUSC Modifications Panel** shall determine the terms of reference of the **Standing Group** (and may change those terms of reference from time to time as it sees fit) and specify a time period within which the **Standing Group** is to report to it on the issue it is to consider and may establish other timetable requirements in relation to the intended scope of the **Standings Group's** considerations. At the end of the time period by which the **Standing Group** is to report, the **CUSC Modifications Panel** shall decide whether the **Standing Group** is to continue and, if it is to continue, shall specify a time period in which it is to further report.
- 8.21.2 A **Standing Group** shall comprise at least five (5) persons (who may be **Panel Members**) selected by the **CUSC Modifications Panel** from those nominated by **CUSC Parties** for their relevant experience and/or expertise in the aspect or issue to be considered by such **Standing Group** (and the **CUSC Modifications Panel** shall ensure, as far as possible, that an appropriate cross-section of representation, experience and expertise is represented on such **Standing Group**) provided that there shall always be at least one member representing **The Company** and if, and only if, the **CUSC Modifications Panel** is of the view that a **CUSC Modification Proposal** is likely to have an impact on the **STC**, the **CUSC Modifications Panel** may invite the **STC** committee to appoint a representative to become a member of the **Standing Group**. A representative of the **Authority** may attend any meeting of a **Standing Group** as an observer and may speak at such meeting.
- 8.21.3 The **Code Administrator** shall in consultation with the **CUSC Modifications Panel** appoint the chairperson of each **Standing Group** who shall act impartially and as an independent chairperson.
- 8.21.4 The **CUSC Modifications Panel** may add further members or the **Standing Group** chairperson may add or vary members to a **Standing Group** after it is established.
- 8.21.5 The **CUSC Modifications Panel** may (but shall not be obliged to) replace any member of a **Standing Group** appointed pursuant to Paragraph 8.21.2 at any time if such member is unwilling or unable

for whatever reason to fulfil that function and/or is deliberately and persistently disrupting or frustrating the work of the **Standing Group**.

#### 8.21.6

- (a) Each **Standing Group** chairperson shall prepare a report to the **CUSC Modifications Panel** responding to the matter detailed in the terms of reference in accordance with the time period set by the **CUSC Modifications Panel**.
- (b) If a **Standing Group** is unable to reach agreement on any such matter, the report must reflect the views of the members of the **Standing Group**.
- (c) The report will be circulated in draft form to **Standing Group** members and a period of not less than five (5) **Business Days** given for comments thereon. Any unresolved comments made shall be reflected in the final report.
- (d) The chairperson or another member (nominated by the chairperson) of the **Standing Group** shall attend the next **CUSC Modifications Panel** meeting following delivery of the report and may be invited to present the findings and/or answer the questions of **Panel Members** in respect thereof. Other members of the **Standing Group** may also attend such **CUSC Modifications Panel** meeting.

8.21.7 Subject to the provisions of this Paragraph 8.21 and unless otherwise determined by the **CUSC Modifications Panel**, the **Standing Group** shall develop and adopt its own internal working procedures for the conduct of its business and shall provide a copy of such procedures to the **Panel Secretary**. Unless the **CUSC Modifications Panel** otherwise determines, meetings of each **Standing Group** shall be open to attendance by a representative of any **CUSC Party**, any **BSC Party**, the **Citizens Advice**, the **Citizens Advice Scotland** and any person invited by the chairperson or any other member of that **Standing Group**, and the chairperson or any other member of that **Standing Group** may invite any person to speak at such meetings.

## 8.22 THE CODE ADMINISTRATOR CONSULTATION

- 8.22.1 In respect of any **CUSC Modification Proposal** where a **Workgroup** has been established or a **Standing Group** identified and actioned Paragraph 8.22.2 to 8.22.6 shall apply.
- 8.22.2 After consideration of any **Workgroup** report on the **CUSC Modification Proposal** and if applicable any **Workgroup Alternative CUSC Modification(s)** by the **CUSC Modifications Panel** and a determination by the **CUSC Modifications Panel** to proceed to wider consultation, the **Code Administrator** shall bring to the attention of and consult on the **CUSC Modification Proposal**

and if applicable any **Workgroup Alternative CUSC Modification(s)** with:

- (i) **CUSC Parties**; and
- (ii) such other persons who may properly be considered to have an appropriate interest in it, including **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**; and
- (iii) where the **CUSC Modification Proposal**, and if applicable, any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment** with the **Authority** and other relevant stakeholders.
- (iv) Where the **CUSC Modification Proposal**, and if applicable, any **Workgroup Alternative CUSC Modification (s)** constitutes an **EBR Amendment** the **Code Administrator's** consultation will be not less than one month.

Where following the establishment of a **Workgroup**, the terms of reference of a **Standing Group** have been amended by the **CUSC Modifications Panel** to include the ability to comment on that **CUSC Modification Proposal**, that **Standing Group** as a body shall be deemed to fall within sub-paragraph (ii) above and therefore shall be able to respond to the **Code Administrator's** consultation. It shall not, however, in so doing undertake the functions of a **Workgroup**. In the absence of such a change in terms of reference, the **Standing Group** as a body shall have no ability to respond to any consultation.

8.22.3 The consultation will be undertaken by issuing a Consultation Paper (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties** and such other persons, who have supplied relevant details, shall meet this requirement).

8.22.4 The Consultation Paper will contain:

- (a) the proposed drafting for the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** (unless the **Authority** decides none is needed in the **CUSC Modification Report** under Paragraph 8.22.5) and will indicate the issues which arose in the **Workgroup** discussions, where there has been a **Workgroup** and will incorporate **The Company's** and the **CUSC Modifications Panel's** initial views on the way forward; and
- (b) the date proposed by the **Code Administrator** as the **Proposed Implementation Date** and, where the **Workgroup** terms of reference require and the dates proposed by the **Workgroup** are different from those proposed by the **Code Administrator**, those proposed by the **Workgroup**. In relation to a **CUSC Modification Proposal** that meets the **Self-Governance Criteria**, the **Code Administrator** may not propose an implementation date earlier than the sixteenth (16)

**Business Day** following the publication of the **CUSC Modifications Panel's** decision to approve or reject the **CUSC Modification Proposal**. Views will be invited on these dates.

- 8.22.5 Where the **CUSC Modifications Panel** is of the view that the proposed text to amend the CUSC for a **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** is not needed in the **CUSC Modification Report** (and provided the **CUSC Modification Proposal** and/or **Workgroup Alternative CUSC Modification(s)** does not constitute an **EBR Amendment**), the **CUSC Modifications Panel** shall consult (giving its reasons as to why it is of this view) with the **Authority** as to whether the **Authority** would like the **CUSC Modification Report** to include the proposed text to amend the **CUSC**. If it does not, no text needs to be included. If it does, and no detailed text has yet been prepared, the **Code Administrator** shall prepare such text to modify the **CUSC** in order to give effect to such **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** and shall seek the conclusions of the relevant **Workgroup** before consulting those identified in Paragraph 8.22.2.
- 8.22.6 Consultation Papers will be copied to **Core Industry Document Owners**, the **CM Administrative Parties**, the **CfD Administrative Parties** and the secretary of the **STC** committee.
- 8.22.7 In respect of any **CUSC Modification Proposal** where a **Workgroup** has not been established nor a **Standing Group** identified and actioned Paragraph 8.22.7 to 8.22.11 shall apply.
- 8.22.8 After determination by the **CUSC Modifications Panel** to proceed to wider consultation, such consultation shall be conducted by the **Code Administrator** on the **CUSC Modification Proposal** with:
- (i) **CUSC Parties**; and
  - (ii) such other persons who may properly be considered to have an appropriate interest in it, including **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**.; and
  - (iii) where the **CUSC Modification Proposal** and if applicable, any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment** with the **Authority** and other relevant stakeholders.
  - (iv) Where the **CUSC Modification Proposal** and if applicable, any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment** the **Code Administrator's** consultation will be not less than one month.

Where following the decision of the **CUSC Modifications Panel** to proceed directly to consultation by the **Code Administrator**, in relation to a **CUSC Modification Proposal**, the terms of reference

of a **Standing Group** have been amended by the **CUSC Modifications Panel** to include the ability to comment on that **CUSC Modification Proposal**, that **Standing Group** as a body shall be deemed to fall within sub-paragraph (ii) above and therefore shall be able to respond to the **Code Administrator's** consultation. It shall not, however, in so doing undertake the functions of a **Workgroup**. In the absence of such a change in terms of reference, the **Standing Group** as a body shall have no ability to respond to any consultation.

8.22.9 The consultation will be undertaken by issuing a Consultation Paper (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties** and such other persons, who have supplied relevant details, shall meet this requirement). The Consultation Paper will be copied to the **CM Administrative Parties** and the **CFD Administrative Parties**.

8.22.10 The Consultation Paper will contain:

- (a) the proposed drafting for the **CUSC Modification Proposal** (unless the Authority decides none is needed in the **CUSC Modification Report** under Paragraph 8.22.11) and will incorporate **The Company's** and the **CUSC Modifications Panel's** initial views on the way forward; and
- (b) the date proposed by the **Code Administrator** as the **Proposed Implementation Date**. Views will be invited on this date.
- (c) where a **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment**, the expected impact on the objectives of the **Electricity Balancing Regulation**.

8.22.11 Where the **CUSC Modifications Panel** is of the view that the proposed text to amend the **CUSC** for a **CUSC Modification Proposal** is not needed (and provided the **CUSC Modification Proposal**, and if applicable, any **Workgroup Alternative CUSC Modification(s)**, does not constitute an **EBR Amendment**), the **CUSC Modifications Panel** shall consult (giving its reasons to why it is of this view) with the **Authority** as to whether the **Authority** would like the **CUSC Modification Report** to include the proposed text to amend the **CUSC**. If it does not, no text needs to be included. If it does, and no detailed text has yet been prepared, the **Code Administrator** shall prepare such text to modify the **CUSC** in order to give effect to such **CUSC Modification Proposal** and consult those identified in Paragraph 8.22.2.

## 8.23 CUSC MODIFICATION REPORT

8.23.1 Subject to the **Code Administrator's** consultation having been completed, the **CUSC Modifications Panel** shall prepare and submit to the **Authority** a report (the "**CUSC Modification Report**") in

accordance with this Paragraph 8.23 for each **CUSC Modification Proposal** which is not withdrawn.

8.23.1.A Where a **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification** constitutes an **EBR Amendment**, the **Panel** will consider any consultation responses received and any further work required to assess these as required under **CUSC Paragraph 8.18.8A**

8.23.2 The matters to be included in a **CUSC Modification Report** shall be the following (in respect of the **CUSC Modification Proposal**):

- (a) A description of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)**, including the details of, and the rationale for, any variations made (or, as the case may be, omitted) by the **Proposer** together with the views of the **Workgroup**;
- (b) the **Panel Members' Recommendation**;
- (c) a summary (agreed by the **CUSC Modifications Panel**) of the views (including any recommendations) from **Panel Members** in the **CUSC Modifications Panel Recommendation Vote** and the conclusions of the **Workgroup** (if there is one) in respect of the **CUSC Modification Proposal** and of any **Workgroup Alternative CUSC Modification(s)**;
- (d) an analysis of whether (and, if so, to what extent) the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** would better facilitate achievement of the **Applicable CUSC Objective(s)** with a detailed explanation of the **CUSC Modifications Panel's** reasons for its assessment, including, where the impact is likely to be material, an assessment of the quantifiable impact of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time, and providing a detailed explanation of the **CUSC Modifications Panel's** reasons for that assessment;
- (e) an analysis of whether (and, if so, to what extent) any **Workgroup Alternative CUSC Modification(s)** would better facilitate achievement of the **Applicable CUSC Objective(s)** as compared with the **CUSC Modification Proposal** and any other **Workgroup Alternative CUSC Modification(s)** and the current version of the **CUSC**, with a detailed explanation of the **CUSC Modifications Panel's** reasons for its assessment, including, where the impact is likely to be material, an assessment of the quantifiable impact of the **Workgroup Alternative CUSC Modification(s)** on greenhouse gas emissions, to be conducted in accordance with such current guidance on the treatment of carbon costs and evaluation of the greenhouse gas emissions as may be issued by the **Authority** from time to time, and providing a detailed

explanation of the **CUSC Modifications Panel**'s reasons for that assessment;

- (f) the **Proposed Implementation Date** taking into account the views put forward during the process described at Paragraph 8.22.4(b) such date to be determined by the **CUSC Modifications Panel** in the event of any disparity between such views and those of the **Code Administrator**;
- (g) an assessment of:
  - (i) the impact of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** on the **Core Industry Documents** and the **STC** and an indication of potential inconsistencies between the **CUSC Modification Proposal** and the **Capacity Market Documents** and/or the **CfD Documents**;
  - (ii) the changes which would be required to the **Core Industry Documents** and the **STC** in order to give effect to the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)**;
  - (iii) the mechanism and likely timescale for the making of the changes referred to in Paragraph (ii);
  - (iv) the changes and/or developments which would be required to central computer systems and, if practicable, processes used in connection with the operation of arrangements established under the **Core Industry Documents**, the **STC**, the **Capacity Market Documents** and the **CfD Documents**;
  - (v) the mechanism and likely timescale for the making of the changes referred to in Paragraph (iv);
  - (vi) an estimate of the costs associated with making and delivering the changes referred to in Paragraphs (ii) and (iv), such costs are expected to relate to: for (ii) the costs of amending the **STC** and for (iv) the costs of changes to computer systems and possibly processes which are established for the operation of the **Core Industry Documents**, the **STC**, the **Capacity Market Documents** and the **CfD Documents**.

together with an analysis and a summary of representations in relation to such matters, including any made by **Small Participants**, the **Citizens Advice** and the **Citizens Advice Scotland**;



- (h) to the extent such information is available to the **Code Administrator**, an assessment of the impact of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** on **CUSC Parties** in general (or classes of **CUSC Parties** in general), including the changes which are likely to be required to their internal systems and processes and an estimate of the development, capital and operating costs associated with implementing the changes to the **CUSC** and to **Core Industry Documents** and the **STC**;
- (i) copies of (and a summary of) all written representations or objections made by consultees during the consultation in respect of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** and subsequently maintained;
- (j) a copy of any impact assessment prepared by **Core Industry Document Owners** and the **STC** committee and a copy of any impact assessment related to the **CUSC Modification Proposal** prepared by the **CM Administrative Parties** in relation to the **Capacity Market Rules**, the **Secretary of State** in relation to the **Capacity Market Documents**, the **CfD Administrative Parties** in relation to the **AF Rules**, or the **Secretary of State** in relation to the **CfD Documents**, and the views and comments of the **Code Administrator** in respect thereof;
- (k) whether or not, in the opinion of **The Company**, the **CUSC Modification Proposal** (or any **Workgroup Alternative CUSC Modification(s)**) should be made;
- (l) whether the **CUSC Modification Proposal** and if applicable, any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment** and if so, and in addition to (i) above, **The Company's** justification for including or not including the views resulting from the relevant consultation in the **CUSC Modification Proposal** and if applicable, any **Workgroup Alternative CUSC Modification (s)**.
- (m) where a **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment**, the expected impact on the objectives of the **Electricity Balancing Regulation**.

8.23.3 A draft of the **CUSC Modification Report** will be circulated by the **Code Administrator** to **CUSC Parties**, **Panel Members** and such other persons who may properly be considered to have an appropriate interest in it, which for these purposes will include the **CM Administrative Parties** and the **CfD Administrative Parties** (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties** and **Panel Members**, who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made thereon. Any unresolved comments made shall be reflected in the final **CUSC Modification Report**.

8.23.4 A draft of the **CUSC Modification Report** shall be tabled at a meeting of the **CUSC Modifications Panel** prior to submission of that **CUSC Modification Report** to the **Authority** held in accordance with the timetable established pursuant to Paragraph 8.19.1, and at which the **CUSC Modifications Panel** may consider any minor changes to the legal drafting, which may include any issues identified through the **Code Administrator's** consultation and:

(i) if the change required is a typographical error the **CUSC Modifications Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**; or

(ii) if the change required is not considered to be a typographical error then the **CUSC Modifications Panel** may direct the **Workgroup** to review the change. If the **Workgroup** unanimously agree that the change is minor the **CUSC Modifications Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**. For changes that are not considered by the **Workgroup** to be minor the **Code Administrator** shall issue the **CUSC Modification Proposal** for further **Code Administrator** consultation after which the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**.

(iii) if a change is not required after consideration, the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**.

(iv) In the case of a modification that had been directed pursuant to CUSC 8.19.2(e) to proceed directly to wider consultation without the formation of a **Workgroup**, and if the change required is not considered to be a typographical error, then the **CUSC Modifications Panel** may direct the **Code Administrator** in conjunction with the **Proposer** to review the change. If the **CUSC Modifications Panel**, the **Code Administrator** and the **Proposer** agree that the change is minor the **CUSC Modifications Panel** may instruct the **Code Administrator** to make the appropriate change and the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**, otherwise for changes that are not considered to be minor the **Code Administrator** shall issue the **CUSC Modification Proposal** for further **Code Administrator** consultation after which the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**. In the case of a change that is not considered to be minor, the **CUSC Modifications Panel** may also consider whether to establish a **Workgroup** of the **CUSC Modifications Panel**, to further consider

the **CUSC Modification Proposal**, in which case the procedures set out within CUSC 8.20 will be followed as required.

(v) if a change is not required after consideration by the **CUSC Modifications Panel**, the **Panel Chairperson** will undertake the **CUSC Modifications Panel Recommendation Vote**.

8.23.5 A draft of the **CUSC Modification Report** following the **CUSC Modifications Panel Recommendation Vote** will be circulated by the **Code Administrator** to **Panel Members** (and in electronic mails to **Panel Members**, who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made on whether the **CUSC Modification Report** accurately reflects the views of the **Panel Members** as expressed at the **CUSC Modifications Panel Recommendation Vote**. Any unresolved comments made shall be reflected in the final **CUSC Modification Report**.

8.23.6 Each **CUSC Modification Report** shall be addressed and furnished to the **Authority** and none of the facts, opinions or statements contained in such **CUSC Modification Report** may be relied upon by any other person.

8.23.7 Subject to Paragraphs 8.23.9 to 8.23.13, in accordance with the **ESO Licence**, the **Authority** may approve the **CUSC Modification Proposal** or a **Workgroup Alternative CUSC Modification(s)** contained in the **CUSC Modification Report** (which shall then be an "**Approved CUSC Modification**" until implemented). If the **Authority** believes that neither the **CUSC Modification Proposal** (nor any **Workgroup Alternative CUSC Modification(s)**) would better facilitate achievement of the **Applicable CUSC Objectives**, then there will be no approval. In such a case, the **Code Administrator** will notify **CUSC Parties** and will raise the issue at the next **CUSC Modifications Panel** meeting.

8.23.8 The **Code Administrator** shall copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **CUSC Modification Report** to:

- (i) each **CUSC Party**;
- (ii) each **Panel Member**;
- (iii) any person who may request a copy and shall place a copy on the **Website**; and
- (iv) the **CM Administrative Parties** and the **CfD Administrative Parties**

8.23.9 **Revised Fixed Proposed Implementation Date**

8.23.9.1 Where the **Proposed Implementation Date** included in a **CUSC Modification Report** is a **Fixed Proposed Implementation Date** and the **Authority** considers that the **Fixed Proposed Implementation Date** is or may no longer

be appropriate or might otherwise prevent the **Authority** from making such decision by reason of the effluxion of time the **Authority** may direct the **CUSC Modifications Panel** to recommend a revised **Proposed Implementation Date**.

8.23.9.2 Such direction may:

- (a) specify that the revised **Proposed Implementation Date** shall not be prior to a specified date;
- (b) specify a reasonable period (taking into account a reasonable period for consultation) within which the **CUSC Modifications Panel** shall be requested to submit its recommendation; and
- (c) provide such reasons as the **Authority** deems appropriate for such request (and in respect of those matters referred to in Paragraphs 8.23.9.2(a) and (b) above).

8.23.9.3 Before making a recommendation to the **Authority**, the **CUSC Modifications Panel** will consult on the revised **Proposed Implementation Date**, and may in addition consult on any matters relating to the **CUSC Modification Report** which in the **CUSC Modifications Panel**'s opinion have materially changed since the **CUSC Modification Report** was submitted to the **Authority** and where it does so the **CUSC Modifications Panel** shall report on such matters as part of its recommendation under **CUSC** Paragraph 8.23.9.4, with:

- (a) **CUSC Parties**; and
- (b) such other persons who may properly be considered to have an appropriate interest in it.

Such consultation will be undertaken in accordance with **CUSC** Paragraphs 8.22.3 and 8.22.6.

8.23.9.4 Following the completion of the consultation held pursuant to **CUSC** Paragraph 8.23.9.3 the **CUSC Modifications Panel** shall report to the **Authority** with copies of all the consultation responses and recommending a **Revised Proposed Implementation Date**.

8.23.9.5 The **Authority** shall notify the **CUSC Modifications Panel** as to whether or not it intends to accept the **Revised Proposed Implementation Date** and where the **Authority** notifies the **CUSC Modifications Panel** that it intends to accept the **Revised Proposed Implementation Date**, the **Revised Proposed Implementation Date** shall be deemed to be the **Proposed Implementation Date** as specified in the **CUSC Modification Report**.

8.23.10 **Authority Approval**

If:

- (a) the **Authority** has not given notice of its decision in respect of a **CUSC Modification Report** within two (2) calendar months (in the case of an **Urgent CUSC Modification Proposal**), or four (4) calendar months (in the case of all other **CUSC Modification Proposals**) from the date upon which the **CUSC Modification Report** was submitted to it; or
- (b) the **CUSC Modifications Panel** is of the reasonable opinion that the circumstances relating to the **CUSC Modification Proposal** and/or **Workgroup Alternative CUSC Modification** which is the subject of a **CUSC Modification Report** have materially changed,

the **CUSC Modifications Panel** may request the **Panel Secretary** to write to the **Authority** requesting the **Authority** to give an indication of the likely date by which the **Authority's** decision on the **CUSC Modification Proposal** will be made.

8.23.11 **CUSC** Paragraphs 8.23.9 and 8.23.10 shall only apply in respect of any **CUSC Modification Proposals** submitted after the **CAP 179 Implementation Date**.

8.23.12 If the **Authority** determines that the **CUSC Modification Report** is such that the **Authority** cannot properly form an opinion on the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)**, or where the **CUSC Modification Proposal** and/or any **Workgroup Alternative CUSC Modification(s)** constitutes an **EBR Amendment** where the **Authority** requires an amendment to **CUSC Modification Proposal** and/or any **Workgroup Alternative CUSC Modification(s)** in order to approve it, it may issue a direction to the **CUSC Modifications Panel**:

- (a) specifying the additional steps (including drafting or amending existing drafting associated with the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)**), revision (including revision to the timetable), analysis or information that it requires in order to form such an opinion; and
- (b) requiring the **CUSC Modification Report** to be revised and to be re-submitted.

8.23.13 If a **CUSC Modification Report** is to be revised and re-submitted in accordance with a direction issued pursuant to Paragraph 8.23.12, it shall be re-submitted as soon after the **Authority's** direction as is appropriate, (and in the case of an **EBR Amendment** within 2 months), taking into account the complexity, importance and urgency of the **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)**. The **CUSC Modifications Panel** shall decide on the level of analysis and consultation required in order to comply with the **Authority's** direction and shall agree an appropriate timetable for meeting its obligations. Once the **CUSC Modification Report** is revised, the **CUSC Modifications Panel** shall carry out its **CUSC Modifications Panel Recommendation**

**Vote** again in respect of the revised **CUSC Modification Report** and re-submit it to the **Authority** in compliance with Paragraphs 8.23.4 to 8.23.6.

8.23.14 where Paragraph 8.23.9 and/or Paragraph 8.23.10 is applied to a **CUSC Modification Proposal** which constitutes an **EBR Amendment** the process and timetable adopted shall meet the minimum consultation requirements of the **Electricity Balancing Regulation**.

## **8.24 URGENT CUSC MODIFICATION PROPOSALS**

8.24.1 If a **Relevant Party** recommends to the **Panel Secretary** that a proposal should be treated as an **Urgent CUSC Modification Proposal** in accordance with this Paragraph 8.24, the **Panel Secretary** shall notify the **Panel Chairperson** who shall then, in accordance with Paragraphs 8.24.2(a) to (e) inclusive, and notwithstanding anything in the contrary in this Section 8, endeavour to obtain the views of the **CUSC Modifications Panel** as to the matters set out in Paragraph 8.24.3. If for any reason the **Panel Chairperson** is unable to do that, the **Panel Secretary** shall attempt to do so (and the measures to be undertaken by the **Panel Chairperson** in the following paragraphs shall in such case be undertaken by the **Panel Secretary**).

8.24.2

- (a) The **Panel Chairperson** shall determine the time by which, in their opinion, a decision of the **CUSC Modifications Panel** is required in relation to such matters, having regard to the degree of urgency in all circumstances, and references in this Paragraph 8.24.1 to the “time available” shall mean the time available, based on any such determination by the **Panel Chairperson**;
- (b) The **Panel Secretary** shall, at the request of the **Panel Chairperson**, convene a meeting or meetings (including meetings by telephone conference call, where appropriate) of the **CUSC Modifications Panel** in such manner and upon such notice as the **Panel Chairperson** considers appropriate, and such that, were practicable within the time available, as many **Panel Members** as possible may attend;
- (c) Each **Panel Member** shall be deemed to have consented, for the purposes of Paragraph 8.8.9. to the convening of such meeting or meetings in the manner and on the notice determined by the **Panel Chairperson**. Paragraph 8.8.10 shall not apply to any such business.
- (d) Where:
  - (i) it becomes apparent, in seeking to convene a meeting of the **CUSC Modifications Panel** within the time available, that quorum will not be present; or

- (ii) it transpires that the meeting of the **CUSC Modifications Panel** is not quorate and it is not possible to rearrange such meeting within the time available

The **Panel Chairperson** shall endeavour to contact each **Panel Member** individually in order to ascertain such Panel Member's vote, and (subject to paragraph 8.24.2(e)) any matter to be decided shall be decided by a majority of those **Panel Members** who so cast a vote. Where, for whatever reason no decision is reached, the **Panel Chairperson** shall proceed to consult with the **Authority** in accordance with Paragraph 8.24.5;

- (e) Where the **Panel Chairperson** is unable to contact a least four **Panel Members** within the time available and where:
  - (i) It is only **The Company** who has recommended that the proposal should be treated as an **Urgent CUSC Modification Proposal**, then those **Panel Members** contacted shall decide such matters, such decision may be a majority decision. Where in such cases no decision is made for whatever reason, the **Panel Chairperson** shall proceed to consult with the **Authority** in accordance with Paragraph 8.24.5; or
  - (ii) any **CUSC Party** (other than, and/or in addition to, **The Company**), the **Citizens Advice**, the **Citizens Advice Scotland** or any **BSC Party** has recommended that the proposal should be treated as an **Urgent CUSC Modification Proposal**, then the **Panel Chairperson** may decide the matter (in consultation with those **Panel Members** (if any) which they managed to contact) provided that the **Panel Chairperson** shall include details in the relevant **CUSC Modification Report** of the steps which they took to contact other **Panel Members** first.

8.24.3 The matters referred to in Paragraph 8.24.1 are:

- (a) whether such proposal should be treated as an **Urgent CUSC Modification Proposal** in accordance with this Paragraph 8.24 and
- (b) the procedure and timetable to be followed in respect of such **Urgent CUSC Modification Proposal** which in the case of a **CUSC Modification Proposal** and, if applicable, any **Workgroup Alternative CUSC Modification(s)** which constitutes an **EBR Amendment** shall meet the minimum consultation requirements of the **Electricity Balancing Regulation**.

8.24.4 The **Panel Chairperson** or, in their absence, the **Panel Secretary** shall forthwith provide the **Authority** with the recommendation (if any) ascertained in accordance with Paragraphs 8.24.2(a) to (e)

inclusive, of the **CUSC Modifications Panel** as to the matters referred to in Paragraph 8.24.2, and shall consult the **Authority** as to whether such **CUSC Modification Proposal** is an **Urgent CUSC Modification Proposal** and, if so, as to the procedure and timetable which should apply in respect thereof.

8.24.5 If the **CUSC Modifications Panel** has been unable to make a recommendation in accordance with Paragraph 8.24.2(d) or Paragraph 8.24.2(e) as to the matters referred to in Paragraph 8.24.3 then the **Panel Chairperson** or, in their absence, the **Panel Secretary** may recommend whether they consider that such proposal should be treated as an **Urgent CUSC Modification Proposal** shall forthwith consult the **Authority** as to whether such **CUSC Modification Proposal** is an **Urgent CUSC Modification Proposal** and, if so, as to the procedure and timetable that should apply in respect thereof.

8.24.6 The **CUSC Modifications Panel** shall:

- (a) not treat any **CUSC Modification Proposal** as an **Urgent CUSC Modification Proposal** except with the prior consent of the **Authority**;
- (b) comply with the procedure and timetable in respect of any **Urgent CUSC Modification Proposal** approved by the **Authority**; and
- (c) comply with any direction of the **Authority** issued in respect of any of the matters on which the **Authority** is consulted pursuant to Paragraph 8.24.4 or Paragraph 8.24.5.

8.24.7 For the purposes of this Paragraph 8.24.7, the procedure and timetable in respect of an **Urgent CUSC Modification Proposal** may (with the approval of the **Authority** pursuant to Paragraph 8.24.4 or Paragraph 8.24.5) deviate from all or part of the **CUSC Modification Procedures** or follow any other procedure or timetable approved by the **Authority**, excepting in the case of a **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification(s)** which constitute an **EBR Amendment**, which shall meet the minimum consultation requirements of the **Electricity Balancing Regulation**. The **CUSC Modifications Panel** must notify the **CM Administrative Parties** and the **CfD Administrative Parties** of any **Urgent CUSC Modification Proposal** and when approving any alternative procedure or timetable, the **Authority** must consider whether or not such procedure and timetable should allow for the **CM Administrative Parties** and the **CfD Administrative Parties** to be consulted on the **Urgent CUSC Modification Proposal** and if so how much time should be allowed. Where the procedure and timetable approved by the **Authority** in respect of an **Urgent CUSC Modification Proposal** do not provide for the establishment (or designation) of a **Workgroup** the **Proposer's** right to vary the **CUSC Modification Proposal** pursuant to paragraphs 8.16.10 and 8.20.26 shall lapse from the time and date of such approval.

8.24.8 The **CUSC Modification Report** in respect of an **Urgent CUSC Modification Proposal** shall include:



- (a) a statement as to why the **Proposer** believes that such **CUSC Modification Proposal** should be treated as an **Urgent CUSC Modification Proposal**;
- (b) any statement provided by the **Authority** as to why the **Authority** believes that such **CUSC Modification Proposal** should be treated as an **Urgent CUSC Modification Proposal**;
- (c) any recommendation of the **CUSC Modifications Panel** (or any recommendation of the **Panel Chairperson**) provided in accordance with Paragraph 8.24 in respect of whether any **CUSC Modification Proposal** should be treated as an **Urgent CUSC Modification Proposal**; and
- (d) the extent to which the procedure followed deviated from the **CUSC Modification Procedures** (other than the procedures in this Paragraph 8.24).
- (e) **The Company's** justification for including or not including the views resulting from the relevant consultation in the **CUSC Modification Proposal** and if applicable, any **Workgroup Alternative CUSC Modification (s)**

8.24.9 Each **CUSC Party** and each **Panel Member** shall take all reasonable steps to ensure that an **Urgent CUSC Modification Proposal** is considered, evaluated and (subject to the approval of the **Authority**) implemented as soon as reasonably practicable, having regard to the urgency of the matter and, for the avoidance of doubt, an **Urgent CUSC Modification Proposal** may (subject to the approval of the **Authority**) result in the **CUSC** being amended on the day on which such proposal is submitted.

8.24.10 Where an **Urgent CUSC Modification Proposal** results in an amendment being made in accordance with Paragraph 8.28, the **CUSC Modifications Panel** may or (where it appears to the **CUSC Modifications Panel** that there is a reasonable level of support for a review amongst **CUSC Parties** shall following such amendment, action a **Standing Group** in accordance with Paragraph 8.21 on terms specified by the **CUSC Modifications Panel** to consider and report as to whether any alternative amendment could, as compared with such amendment better facilitate achieving the **Applicable CUSC Objectives** in respect of the subject matter of that **Urgent CUSC Modification Proposal**.

## 8.25 SELF-GOVERNANCE

8.25.1 If the **CUSC Modifications Panel**, having evaluated a **CUSC Modification Proposal** against the **Self-Governance Criteria**, pursuant to Paragraph 8.18.4, considers that the **CUSC Modification Proposal** meets the **Self-Governance Criteria**, the **CUSC Modifications Panel** shall submit to the **Authority** a **Self-Governance Statement** setting out its reasoning in reasonable detail.

8.25.2 The **Authority** may, at any time prior to the **CUSC Modifications Panel's** determination made pursuant to Paragraph 8.25.9, give

written notice that it disagrees with the **Self-Governance Statement** and may direct that the **CUSC Modification Proposal** proceeds through the process for **Standard CUSC Modification Proposals** set out in Paragraphs 8.19, 8.20, 8.22 and 8.23.

- 8.25.3 Subject to Paragraph 8.25.2, after submitting a **Self-Governance Statement**, the **CUSC Modifications Panel** shall follow the procedure set out in Paragraphs 8.19, 8.20 and 8.22.
- 8.25.4 The **Authority** may issue a direction to the **CUSC Modifications Panel** in relation to a **CUSC Modification Proposal** to follow the procedure set out for **CUSC Modification Proposals** that meet the **Self-Governance Criteria**, notwithstanding that no **Self-Governance Statement** has been submitted or a **Self-Governance Statement** has been retracted and the **CUSC Modifications Panel** shall follow the procedure set out in Paragraphs 8.19, 8.20 and 8.22.
- 8.25.5 Subject to the **Code Administrator's** consultation having been completed pursuant to Paragraph 8.22, the **CUSC Modification Panel** shall prepare a report (the "**CUSC Modification Self-Governance Report**").
- 8.25.6 The matters to be included in a **CUSC Modification Self-Governance Report** shall be the following (in respect of the **CUSC Modification Proposal**):
- (a) details of its analysis of the **CUSC Modification Proposal** against the **Self-Governance Criteria**;
  - (b) copies of all consultation responses received;
  - (c) the date on which the **CUSC Modifications Panel Self-Governance Vote** shall take place, which shall not be earlier than seven (7) days from the date on which the **CUSC Modification Self-Governance Report** is furnished to the **Authority** in accordance with Paragraph 8.25.7; and
  - (d) such other information that is considered relevant by the **CUSC Modifications Panel**.
- 8.25.7 A draft of the **CUSC Modification Self-Governance Report** will be circulated by the **Code Administrator** to **CUSC Parties** and **Panel Members** and the **CM Administrative Parties** and the **CfD Administrative Parties** (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties** and **Panel Members**, who must supply relevant details, shall meet this requirement) and a period of no less than five (5) **Business Days** given for comments to be made thereon. Any unresolved comments made shall be reflected in the final **CUSC Modification Self-Governance Report**.
- 8.25.8 Each **CUSC Modification Self-Governance Report** shall be addressed and furnished to the **Authority** and none of the facts, opinions or statements contained in such **CUSC Modification Self-Governance Report** may be relied upon by any other person.

- 8.25.9 Subject to Paragraph 8.25.11, if the **Authority** does not give written notice that its decision is required pursuant to Paragraph 8.25.2, or if the **Authority** determines that the **Self-Governance Criteria** are satisfied in accordance with Paragraph 8.25.4, then the **CUSC Modification Self-Governance Report** shall be tabled at the **Panel Meeting** following submission of that **CUSC Modification Self-Governance Report** to the **Authority** at which the **Panel Chairperson** will undertake the **CUSC Modifications Panel Self-Governance Vote** and the **Code Administrator** shall give notice of the outcome of such vote to the **Authority** as soon as possible thereafter.
- 8.25.10 If the **CUSC Modifications Panel** vote to approve the **CUSC Modification Proposal** pursuant to Paragraph 8.25.9 (which shall then be an “**Approved CUSC Modification Self-Governance Proposal**”) until implemented), then subject to the appeal procedures set out in Paragraphs 8.25.14 to Paragraph 8.25.19 the **CUSC Modification Proposal** may be implemented by **The Company** without the **Authority**’s approval and brought to the attention of **CUSC Parties** and such other persons as may properly be considered to have an appropriate interest in it.
- 8.25.11 The **CUSC Modifications Panel** may at any time prior to the **CUSC Modification Panel**’s determination retract a **Self-Governance Statement** –subject to Paragraph 8.25.4, or if the **Authority** notifies the **CUSC Modifications Panel** that it has determined that a **CUSC Modification Proposal** does not meet the **Self-Governance Criteria** the **CUSC Modifications Panel** shall treat the **CUSC Modification Proposal** as a **Standard CUSC Modification Proposal** and shall comply with Paragraph 8.23, using the **CUSC Modification Self-Governance Report** as a basis for its **CUSC Modification Report**.
- 8.25.12 Except where the **Authority** has issued a direction pursuant to Paragraph 8.25.4, the **CUSC Modifications Panel** may remove a **CUSC Modification Proposal** from the process detailed in this Paragraph 8.25 before making its determination pursuant to Paragraph 8.25.9. In that circumstance, the **CUSC Modification Proposal** shall be treated as a **Standard CUSC Modification Proposal** and shall proceed through the process for **Standard CUSC Modification Proposals** set out in Paragraphs 8.19, 8.20, 8.22 and 8.23.
- 8.25.13 The **Code Administrator** shall make available on the **Website** and copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **CUSC Modification Self-Governance Report** prepared in accordance with Paragraph 8.25 to:
- (i) each **CUSC Party**;
  - (ii) each **Panel Member**; and
  - (iii) any person who may request a copy,
- and shall place a copy on the **Website**.

8.25.14 A **CUSC Party**, the **Citizens Advice** or the **Citizens Advice Scotland** or any **BSC Party** or (where the **CUSC Modification Proposal** and any related **Workgroup Alternative CUSC Modification(s)** is a proposal to modify the **Charging Methodologies**) a **Materially Affected Party** may appeal to the **Authority** the approval or rejection by the **CUSC Modifications Panel** of a **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** in accordance with Paragraph 8.25.9, provided that the **Panel Secretary** is also notified, and the appeal has been made up to and including fifteen (15) **Business Days** after the **CUSC Modifications Panel Self-Governance Vote** has been undertaken pursuant to Paragraph 8.25.9. If such an appeal is made, implementation of the **CUSC Modification Proposal** shall be suspended pending the outcome. The appealing **CUSC Party**, the **Citizens Advice**, the **Citizens Advice Scotland**, **BSC Party** or **Materially Affected Party** must notify the **Panel Secretary** of the appeal when the appeal is made.

8.25.15 The **Authority** shall consider whether the appeal satisfies the following criteria:

- (a) The appealing party is, or is likely to be, unfairly prejudiced by the implementation or non-implementation of that **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)**; or
- (b) The appeal is on the grounds that, in the case of implementation, the **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** may not better facilitate the achievement of at least one of the **Applicable CUSC Objectives**; or
- (c) The appeal is on the grounds that, in the case of non-implementation, the **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** may better facilitate the achievement of at least one of the **Applicable CUSC Objectives**; and
- (d) It is not brought for reasons that are trivial, vexatious or have no reasonable prospect of success.

and if the **Authority** considers that the criteria are not satisfied, it shall dismiss the appeal.

8.25.16 Following any appeal to the **Authority**, a **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** shall be treated in accordance with any decision and/or direction of the **Authority** following that appeal.

8.25.17 If the **Authority** quashes the **CUSC Modifications Panel's** determination in respect of a **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** made in accordance with Paragraph 8.25.9 and takes the decision on the relevant **CUSC Modification Proposal** and any **Workgroup Alternative CUSC Modification(s)** itself, following an appeal to the **Authority**, the **CUSC Modifications Panel's** determination of that **CUSC Modification Proposal** and any **Workgroup Alternative**

**CUSC Modification(s)** contained in the relevant **CUSC Modification Self-governance Report** shall be treated as a **CUSC Modification Report** submitted to the **Authority** pursuant to Paragraph 8.23.6 (for the avoidance of doubt, subject to Paragraphs 8.23.9 to 8.23.13) and the **CUSC Modifications Panel's** determination shall be treated as its recommendation pursuant to Paragraph 8.23.4.

8.25.18 If the **Authority** quashes the **CUSC Modifications Panel's** determination in respect of a **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** made in accordance with paragraph 8.25.9, the **Authority** may, following an appeal to the **Authority**, refer the **CUSC Modification Proposal** back to the **CUSC Modifications Panel** for further re-consideration and a further **CUSC Modifications Panel Self-Governance Vote**.

8.25.19 Following an appeal to the **Authority**, the **Authority** may confirm the **CUSC Modifications Panel's** determination in respect of a **CUSC Modification Proposal** or **Workgroup Alternative CUSC Modification(s)** made in accordance with Paragraph 8.25.9.

## **8.26 TRANSMISSION CHARGING METHODOLOGY FORUM**

8.26.1 A **Transmission Charging Methodology Forum** shall be established by **The Company** and shall be chaired by **The Company**.

8.26.2 The **CUSC Modifications Panel** shall adopt the terms of reference of the **Transmission Charging Methodology Forum** and may change those terms of reference from time to time as it sees fit.

8.26.3 The **Transmission Charging Methodology Forum** shall provide a forum for regular communication and discussion of issues relating to the **Transmission Charging Methodologies** and their development between **The Company** and **CUSC Parties, BSC Parties** and any **Materially Affected Parties**.

## **8.27 CONFIDENTIALITY**

8.27.1 Any representations submitted by a person pursuant to the **CUSC Modification Procedures** may be made publicly available save as otherwise expressly requested by such person by notice in writing to the **Code Administrator**. A **Workgroup Consultation Alternative Request** may in all cases be made publicly available.

8.27.2 The **CUSC Modifications Panel, The Company** and the **Code Administrator** shall not be liable for any accidental publication of a representation which is the subject of a request made under Paragraph 8.27.1.

8.27.3 For the avoidance of doubt, all representations (whether or not marked confidential) shall be sent to the **Authority**.

## **8.28 IMPLEMENTATION**

- 8.28.1 The **CUSC** shall be modified either in accordance with the terms of the direction by the **Authority** relating to, or other approval by the **Authority** of, the **CUSC Modification Proposal** or any **Workgroup Alternative CUSC Modification(s)** contained in the relevant **CUSC Modification Report**, or in respect of **CUSC Modification Proposals** or any **Workgroup Alternative CUSC Modification(s)** that are subject to the determination of the **CUSC Modifications Panel** pursuant to Paragraph 8.25.9, in accordance with the relevant **CUSC Modification Self-Governance Report** subject to the appeal procedures set out in Paragraphs 8.25.14 to 8.25.19.
- 8.28.2 The **Code Administrator** shall forthwith notify (by publication on the **Website** and, where relevant details are supplied by electronic mail):
- (a) each **CUSC Party**;
  - (b) each **Panel Member**;
  - (c) the **Authority**;
  - (d) each **Core Industry Document Owner**,
  - (e) the secretary of the **STC** committee;
  - (f) the **CM Administrative Parties**;
  - (g) **CfD Administrative Parties**;
  - (h) each **BSC Party** via ELEXON;
  - (i) each **Materially Affected Party**; and
  - (j) the **Citizens Advice** and the **Citizens Advice Scotland**

of the change so made and the effective date of the change.

- 8.28.3 Except where a **CUSC Modification Proposal** would amend any of the **Charging Methodologies**, a modification of the **CUSC** shall take effect from the time and date specified in the direction, or other approval, from the **Authority** referred to in Paragraph 8.28.1 or, in the absence of any such time and date in the direction or approval, from 00:00 hours on the day falling ten (10) **Business Days** after the date of such direction, or other approval, from the **Authority**.

A modification of the **Charging Methodologies** shall take effect as follows:

- (i) from 1 April of any given year unless otherwise directed by the **Authority** in accordance with Paragraphs 8.23.9, 8.23.12, 8.23.13 or 8.28.3A and following consultation with the **Panel**;
- (ii) subject to (iii) below, the 1 April shall be determined by reference to date of the **Authority** decision to approve the modification as follows:
  - a) where the Authority decision is more than 6 (six) months prior to the end of a **Charging Year (Charging Year t)**, implementation of that **CUSC Modification Proposal** shall

take effect such that it is implemented in **Charging Year t+1**.

- b) where the Authority decision is less than 6 (six) months prior to the end of Charging Year t, implementation of that **CUSC Modification Proposal** shall be deferred such that it is implemented in **Charging Year t+2**.

(iii) Paragraph (ii) above shall not apply in respect of a **CUSC Modification Proposal** to the **Charging Methodologies**:

- (a) where the **Authority** has directed otherwise;
- (b) where there is at least a **Charging Year** between the date of the **Authority** decision and the **Implementation Date**;
- (c) where the **CUSC Modification** is an **Urgent CUSC Modification**; or
- (d) which **The Company** has raised at the direction of the **Authority** or which the **Authority** has raised.

A modification of the **CUSC** pursuant to Paragraph 8.25.10 shall take effect-, subject to the appeal procedures set out in Paragraphs 8.25.14 to 8.25.19, from the time and date specified by the **Code Administrator** in its notice given pursuant to Paragraph 8.28.2, which shall be given after the expiry of the fifteen (15) **Business Day** period set out in Paragraph 8.25.14 to allow for appeals, or where an appeal is raised in accordance with Paragraph 8.25.14, on conclusion of the appeal in accordance with Paragraphs 8.25.15 or 8.25.19 but where conclusion of the appeal is earlier than the fifteen (15) **Business Day** period set out in Paragraph 8.25.14, notice shall be given after the expiry of this period. A modification of the **CUSC** pursuant to Paragraph 8.29 shall take effect, from the date specified in the **CUSC Modification Fast Track Report**.

8.28.3A Where the **Authority** considers that taking into account the complexity, importance and urgency of the modification exceptional circumstances apply the **Authority** may, having set out in writing its reasons for this, direct a modification of the **CUSC** in respect of the **Charging Methodologies** to take effect from a date other than 1 April.

8.28.4 A modification made pursuant to and in accordance with Paragraph 8.28.1 shall not be impaired or invalidated in any way by any inadvertent failure to comply with or give effect to this Section.

8.28.5 If a modification is made to the **CUSC** in accordance with the **ESO Licence** but other than pursuant to the other **CUSC Modification Procedures** in this Section 8, the **CUSC Modifications Panel** shall determine whether or not to submit the modification for review by a **Standing Group** in accordance with Paragraph 8.21 on terms specified by the **CUSC Modifications Panel** to consider and report as to whether any alternative modification could, as compared with such modification better facilitate achieving the **Applicable CUSC Objectives** in respect of the subject matter of the original modification.

- 8.28.6 Notwithstanding the provisions of Paragraph 8.28.3, **CUSC Modification Proposal** CAP 160 changes the **CUSC Modification Process** and therefore may affect other **CUSC Modification Proposals** which have not yet become **Approved CUSC Modifications**. Consequently, this Paragraph deals with issues arising out of the implementation of **CUSC Modification Proposal** CAP 160. In particular this Paragraph deals with which version of the **CUSC Modification Process** will apply to **CUSC Modification Proposal(s)** which were already instigated prior to the implementation of **CUSC Modification Proposal** CAP 160.

In respect of any **CUSC Modification Proposal** which the **CUSC Modification Panel** has determined, as at the date and time of implementation of **CUSC Modification Proposal** CAP 160 (as directed by the **Authority**), should proceed to wider consultation by **The Company** is known as an “**Old CUSC Modification Proposal**”. In respect of any **CUSC Modification Proposal** where the **CUSC Modification Panel** has not determined, as at the date and time of implementation of **CUSC Modification Proposal** CAP 160 (as directed by the **Authority**), that it should proceed to wider consultation by **The Company** is known as a “**New CUSC Modification Proposal**”. The provisions of Section 8 and the associated definitions in Section 11 which will apply to any **Old CUSC Modification Proposal(s)** are the provisions of Section 8 and the associated definitions in Section 11 of the **CUSC** which are in force immediately prior to the implementation of CAP 160. The provisions of Section 8 and the associated definitions in Section 11 which will apply to any **New CUSC Modification Proposals** are the provisions of the **CUSC** in force from time to time.

- 8.28.7 Notwithstanding the provisions of Paragraph 8.28.3, **CUSC Modification Proposals** CAP 183, 184, 185 and 188 change the **CUSC Modification Process** and therefore may affect other **CUSC Modification Proposals** which have not as at the last date of the implementation of these changes become **Approved CUSC Modifications**. Consequently, this Paragraph deals with issues arising out of the implementation of **CUSC Modification Proposals** CAP 183, 184, 185 and 188. In particular this Paragraph deals with which version of the **CUSC Modification Process** will apply to **CUSC Modification Proposal(s)** which were already instigated prior to the implementation of the last of **CUSC Modification Proposals** CAP 183, 184, 185 and 188.

Any **CUSC Modification Proposal** that was submitted pursuant to Paragraph 8.16.4 prior to the implementation of the last of **CUSC Modification Proposals** CAP 183, 184, 185 and 188 is known as an “**Old CUSC Modification Proposal**”. Any **CUSC Modification Proposal** that was submitted pursuant to Paragraph 8.16.4 on the date of or any date following implementation of the last of **CUSC Modification Proposals** CAP 183, 184, 185 and 188 is known as a “**New CUSC Modification Proposal**”. The provisions of Section 8 and the associated definitions in Section 11 that will apply to any **Old CUSC Modification Proposal(s)** are the provisions of Section 8 and the associated definitions in Section 11 of the **CUSC** that are in force immediately prior to the implementation of the last of CAP 183, 184, 185 and 188. The provisions of Section 8 and the associated



definitions in Section 11 that will apply to any **New CUSC Modification Proposals** are the provisions of the **CUSC** in force from time to time.

- 8.28.8 Modification **CMP365** changes the **CUSC** process for **CUSC Modification Proposals** and therefore may affect other **CUSC Modification Proposals** which have not yet become **Approved CUSC Modifications**. Consequently, this 8.28.8 deals with issues arising out of the implementation of **Modification CMP365**. In particular this deals with which version of the **CUSC** process for **CUSC Modification Proposals** will apply to **CUSC Modification Proposal(s)** which were already instigated prior to the implementation of **Modification CMP365**.

Any **CUSC Modification Proposal** in respect of which a **CUSC Modification Report** has been sent to the **Authority** prior to the date and time of implementation of **Modification CMP365** is known as an “**Old CMP365 CUSC Modification**”. Any **CUSC Modification Proposal** in respect of which a **CUSC Modification Report** has not been sent to the **Authority** as at the date and time of implementation of **Modification CMP365** is known as a “**New CMP365 CUSC Modification**”. The **CUSC** provisions which will apply to any **Old CMP365 CUSC Modification(s)** are the provisions of the **CUSC** in force immediately prior to the implementation of **CMP365**. The provisions of the **CUSC** which will apply to any **New CMP365 CUSC Modifications** are the provisions of the **CUSC** in force from time to time.

## **8.29 FAST TRACK**

- 8.29.1 Where a **Proposer** believes that a modification to the **CUSC** which meets the **Fast Track Criteria** is required, a **CUSC Modification Fast Track Proposal** may be raised. In such case the **Proposer** is only required to provide the details listed in Paragraph 8.16.4 (a), (b), (c), (d), (e) and (k).
- 8.29.2 Provided that the **Panel Secretary** receives any modification to the **CUSC** which the **Proposer** considers to be a **CUSC Modification Fast Track Proposal**, not less than ten (10) **Business Days** (or such shorter period as the **Panel Secretary** may agree, provided that the **Panel Secretary** shall not agree any period shorter than five (5) **Business Days**) prior to the next **CUSC Modifications Panel** meeting, the **Panel Secretary** shall place the **CUSC Modification Fast Track Proposal** on the agenda of the next **CUSC Modifications Panel** meeting, and otherwise, shall place it on the agenda of the next succeeding **CUSC Modifications Panel** meeting.
- 8.29.3 To facilitate the discussion at the **CUSC Modifications Panel** meeting, the **Code Administrator** will circulate a draft of the **CUSC Modification Fast Track Report** to **CUSC Parties**, the **Authority** and **Panel Members** (and its provision in electronic form on the **Website** and in electronic mails to **CUSC Parties**, the **Authority** and **Panel Members**, who must supply relevant details, shall meet this

requirement) for comment not less than five (5) **Business Days** ahead of the **CUSC Modifications Panel** meeting which will consider whether or not the **Fast Track Criteria** are met and whether or not to approve the **CUSC Modification Fast Track Proposal**.

- 8.29.4 It is for the **CUSC Modifications Panel** to decide whether or not a **CUSC Modification Fast Track Proposal** meets the **Fast Track Criteria** and if it does, to determine whether or not to approve the **CUSC Modification Fast Track Proposal**.
- 8.29.5 The **CUSC Modifications Panel's** decision that a **CUSC Modification Fast Track Proposal** meets the **Fast Track Criteria** pursuant to Paragraph 8.29.4 must be unanimous.
- 8.29.6 The **CUSC Modifications Panel's** decision to approve the **CUSC Modification Fast Track Proposal** pursuant to Paragraph 8.29.4 must be unanimous.
- 8.29.7 If the **CUSC Modifications Panel** vote unanimously that the **CUSC Modification Fast Track Proposal** meets the **Fast Track Criteria** and to approve the **CUSC Modification Fast Track Proposal** (which shall then be an "**Approved CUSC Modification Fast Track Proposal**") until implemented, or until an objection is received pursuant to Paragraph 8.29.12), then subject to the objection procedures set out in paragraph 8.29.12 the **CUSC Modification Fast Track Proposal** will be implemented by **The Company** without the **Authority's** approval. If the **CUSC Modifications Panel** do not unanimously agree that the **CUSC Modification Proposal** meets the **Fast Track Criteria** and/or do not unanimously agree that the **CUSC Modification Fast Track Proposal** should be made, then the **Panel Secretary** shall, in accordance with Paragraph 8.16.4A notify the **Proposer** that additional information is required if the **Proposer** wishes the **CUSC Modification Proposal** to continue.
- 8.29.8 Provided that the **CUSC Modifications Panel** have unanimously agreed to treat a **CUSC Modification Proposal** as a **CUSC Modification Fast Track Proposal** and unanimously approved that **CUSC Modification Fast Track Proposal**, the **CUSC Modifications Panel** shall prepare and approve the **CUSC Modification Fast Track Report** for issue in accordance with Paragraph 8.29.11.
- 8.29.9 The matters to be included in a **CUSC Modification Fast Track Report** shall be the following (in respect of the **CUSC Modification Fast Track Proposal**):
- (a) a description of the proposed modification and of its nature and purpose;
  - (b) details of the changes required to the **CUSC**, including the proposed legal text to modify the **CUSC** to implement the **CUSC Modification Fast Track Proposal**;
  - (c) details of the votes required pursuant to Paragraphs 8.29.5 and 8.29.6

- (d) the intended implementation date, from which the **Approved CUSC Modification Fast Track Proposal** will take effect, which shall be no sooner than fifteen (15) **Business Days** after the date of notification of the **CUSC Modifications Panel's** decision to approve; and
- (e) details of how to object to the **Approved CUSC Modification Fast Track Proposal** being made.

8.29.10 Upon approval by the **CUSC Modifications Panel** of the **CUSC Modification Fast Track Report**, the **Code Administrator** will issue the report in accordance with Paragraph 8.29.11.

8.29.11 The **Code Administrator** shall copy (by electronic mail to those persons who have supplied relevant details to the **Code Administrator**) the **CUSC Modification Fast Track Report** prepared in accordance with Paragraph 8.29 to:

- (i) each **CUSC Party**;
- (ii) each **Panel Member**;
- (iii) the **Authority**; and
- (iv) any person who may request a copy,

and shall place a copy on the **Website**.

8.29.12 A **CUSC Party**, a **BSC Party**, the **Citizens Advice**, the **Citizens Advice Scotland** or the **Authority** may object to the **Approved CUSC Modification Fast Track Proposal** being implemented, and shall include with such objection an explanation as to why the objecting person believes that it does not meet the **Fast Track Criteria**. Any such objection must be made in writing (including by email) and be clearly stated to be an objection to the **Approved CUSC Modification Fast Track Proposal** in accordance with this Paragraph 8.29 of the **CUSC** and be notified to the **Panel Secretary** by the date up to and including fifteen (15) **Business Days** after notification of the **CUSC Modifications Panel's** decision to approve the **CUSC Modification Fast Track Proposal**. If such an objection is made the **Approved CUSC Modification Fast Track Proposal** shall not be implemented. The **Panel Secretary** will notify each **Panel Member**, each **CUSC Party** and the **Authority** of the objection. The **Panel Secretary** shall notify the **Proposer**, in accordance with Paragraph 8.16.4A that additional information is required if the **Proposer** wishes the **CUSC Modification Proposal** to continue.

## ANNEX 8A ELECTION OF USERS' PANEL MEMBERS

### 8A.1 GENERAL

#### 8A.1.1 Introduction

**8A.1.1.1** This Annex 8A sets out the basis for election of **Users' Panel Members** and **Alternate Members** for the purpose of Paragraphs 8.4.2. and 8.7.2

**8A.1.1.2** This Annex 8A shall apply:

- (a) in relation to each year (the "**Election Year**") in which the term of office of **Users' Panel Members** and **Alternate Members** expires, for the purposes of electing **Users' Panel Members** and **Alternate Members** to hold office with effect from 1st October in that year;
- (b) subject to and in accordance with Paragraph 8A.4, upon a **Users' Panel Member** and/or **Alternate Members** ceasing to hold office before the expiry of their term of office.

**8A.1.1.3** For the purposes of an election under Paragraph 8A.1.1.2(a) references to **Users** are to persons who are **Users** as at 20th June in the election year.

**8A.1.1.4** On or around 20<sup>th</sup> June in each election year the **Code Administrator** shall publish a list of **Users** (in accordance with Paragraph 8A.1.1.3) and their associated **Voting Groups** (as defined in Paragraph 8A.3.1.2).

**8A.1.1.5** All Users shall provide reasonable assistance to the **Code Administrator** to ensure that the list referred to in Paragraph 8A.1.1.4 is complete, accurate and up to date.

**8A.1.1.6** Where and to the extent that any **User** identifies an error or omission in such list (including in respect of the allocated **Voting Groups**), the **User** shall use best endeavours to notify the **Code Administrator** as soon as reasonably practicable and in any case in advance of the date identified under Paragraph 8A1.2.1(b). The **Code Administrator** shall use reasonable endeavours to investigate any errors or omissions of which it has received notice and to make the relevant rectifications in advance of the date identified under Paragraph 8A1.2.1(b).

**8A.1.1.7** The **Code Administrator** shall administer each election of **Users' Panel Members** and **Alternate Members** pursuant to this Annex 8A.

#### 8A.1.2 Election timetable

**8A.1.2.1** The **Code Administrator** shall not later than 1st July in the election year prepare and circulate to all **Users** (by publication on the **Website** and, where relevant details are supplied, by electronic mail), with a copy to the **Authority**, an invitation to nominate candidates who must be willing to be either a **User Panel Member** or an **Alternate Member** and a timetable for the election (the "**Election Timetable**"), setting out:

- (a) the date by which nominations of candidates are to be received, which shall not be less than three (3) weeks after the timetable is

circulated;

- (b) the date by which the **Code Administrator** shall circulate a list of candidates and voting papers;
- (c) the date by which voting papers are to be submitted, which shall not be less than three (3) weeks after the date for circulating voting papers;
- (d) the date by which the results of the election will be made known, which shall not be later than 15th September in the **Election Year**.

**8A.1.2.2** If for any reason it is not practicable to establish an election timetable in accordance with Paragraph 8A.2.1.1 or to proceed on the basis of an election timetable which has been established, the **Code Administrator** may establish a different timetable, or revise the election timetable, by notice to all **Users**, the **CUSC Modifications Panel** and the **Authority**, provided that such timetable or revised timetable shall provide for the election to be completed before 1st October in the **Election Year**.

**8A.1.2.3** A nomination or voting paper received by the **Code Administrator** later than the respective required date under the election timetable (subject to any revision under Paragraph 8A.1.2.2) shall be disregarded in the election.

## **8A.2. CANDIDATES**

### **8A.2.1 Nominations**

**8A.2.1.1** Nominations for candidates shall be made in accordance with the **Election Timetable**.

**8A.2.1.2** Subject to Paragraph 8A.1.1.3, each **User** may nominate one candidate for election by giving notice to the **Code Administrator**.

### **8A.2.2 List of candidates**

**8A.2.2.1** The **Code Administrator** shall draw up a list of the nominated candidates and circulate the list to all **Users** by the date specified in the **Election Timetable**.

**8A.2.2.2** The list shall specify the **User** by whom each candidate was nominated and any affiliations which the candidate may wish to have drawn to the attention of **Users**.

**8A.2.2.3** Except where Paragraphs 8A.4.3 or 8A.4.4 apply, if seven (7) or fewer candidates are nominated no further steps in the election shall take place and such candidate(s) shall be treated as elected as **Users' Panel Members** and Paragraph 8A.3.2.4 shall apply in relation to such candidate(s).

**8A2.2.4** Where Paragraph 8A.4.3 applies, if only one (1) candidate is nominated, no further steps in the election shall take place and such candidate shall be treated as elected as a **Panel Member** and Paragraph 8A.3.2.4 shall apply in relation to such candidate.

**8A.2.2.5** Where Paragraph 8A.4.4 applies, if five (5) or fewer candidates are

nominated, no further steps in the election shall take place and such candidate(s) shall be treated as elected as **Alternate Members** and Paragraph 8A.3.2.4 shall apply in relation to such candidate(s).

- 8A.2.2.6** Each nominated candidate shall make the declaration referred to in Paragraph 8.3.4(b)(iii) in order for such candidate's relevant interests to be published alongside the list of nominated candidates pursuant to Paragraphs 8A2.2.1 and 8A.2.2.2. Failure to make such a declaration shall result in the relevant candidate becoming an ineligible candidate who shall not be included on the list of nominated candidates.

### **8A.3. VOTING**

#### **8A.3.1 Voting papers**

- 8A.3.1.1** Voting papers shall be submitted in accordance with the election timetable.

- 8A.3.1.2** In accordance with the process set out in Paragraph 8A.1.1 the **Code Administrator** will allocate each **User** to a **Voting Group**. For the purposes of this Annex 8A, a "**Voting Group**" means a **User** who is eligible to vote and all **Affiliates** of that **User** who are eligible to vote

- 8A.3.1.3** Each **Voting Group** shall be entitled to submit one voting paper in respect of each of the following **Voting Sub-Groups**, provided that one or more **Users** in such **Voting Group** fall within the relevant **Voting Sub-Group**:

- (a) the **Generation Voting Sub-Group**;
- (b) the **Supply Voting Sub-Group**;
- (c) the **Demand Voting Sub-Group**; and
- (d) the **Interconnector Voting Sub-Group**.

For the avoidance of doubt, each **Voting Group** will therefore be entitled to submit up to four (4) voting papers, being one paper per **Voting Sub-Group**.

- 8A.3.1.4** All **Users** eligible to vote within a **Voting Group** shall receive voting papers. Each **Voting Group** shall be responsible for designating which specific **User(s)** within their **Voting Group** shall submit voting paper(s) on behalf of the relevant Voting Sub-Group(s) in accordance with Paragraph 8A.3.1.3.

- 8A.3.1.5** In the event that the number of voting papers submitted by **Users** within a **Voting Group** exceeds the entitlement set out in Paragraph 8A.3.1.3:

- (a) the **Code Administrator** shall use reasonable endeavours to contact each of the relevant **Users** to establish which voting paper(s) shall be deemed valid and which voting paper(s) shall be deemed invalid and disregarded; and
- (b) where the **Code Administrator** has not been able to contact the relevant **Users** using reasonable endeavours, the **Code Administrator** shall select from the voting papers at random. Any

voting paper(s) selected by the **Code Administrator** shall be deemed valid and all other voting paper(s) from the relevant **Voting Group** shall be deemed invalid and disregarded

### **8A.3.2 Preference votes and voting rounds**

**8A.3.2.1** Each **Voting Group** submitting a voting paper or voting papers shall vote by indicating on each eligible voting paper a first, second and third preference ("**Preference Votes**") among the candidates.

**8A.3.2.2** A voting paper need not indicate a second, or a third, preference, but the same candidate may not receive more than one **Preference Vote** in a single voting paper.

**8A.3.2.3** Candidates shall be elected in three voting rounds (together where necessary with a further round under Paragraph 8A.3.6) in accordance with the further provisions of this Paragraph 8A.3.

**8A.3.2.4** The **Code Administrator** shall determine which candidates are elected and announce (to the **Authority** and all **Users**) the results of the election in accordance with the election timetable.

**8A.3.2.5** The **Code Administrator** shall not disclose the **Preference Votes** cast by **Users** within any **Voting Group** or received by candidates; but a **User** may by notice to the **Authority** require that the **Authority** scrutinise the conduct of the election, provided that such **User** shall bear the costs incurred by the **Authority** in doing so unless the **Authority** recommends that the election results should be annulled.

**8A.3.2.6** Further references to voting papers in this Paragraph 8A.3 do not include voting papers which are invalid or are to be disregarded (i.e. voting papers not made or submitted in accordance with the **CUSC**.)

### **8A.3.3 First voting round**

**8A.3.3.1** In the first voting round:

(a) the number of first **Preference Votes** allocated under all voting papers to each candidate shall be determined.

(b) the first round qualifying total shall be:

$$(T / N) + 1$$

where

T is the total number of first **Preference Votes** in all voting papers;

N is the number of **Users' Panel Members** and/or **Alternate Members** to be elected.

**8A.3.3.2** If the number of first **Preference Votes** allocated to any candidate is equal to or greater than the first round qualifying total, that candidate shall be elected.

### **8A.3.4 Second voting round**

**8A.3.4.1** In the second voting round:

- (a) the remaining candidates are those which were not elected in the first voting round;
- (b) the remaining voting papers are voting papers other than those under which the first **Preference Votes** were for candidates elected in the first voting round;
- (c) the number of first and second **Preference Votes** allocated under all remaining voting papers to each remaining candidate shall be determined;
- (d) the second round qualifying total shall be

$$( T' / N' ) + 1$$

where T' is the total number of first **Preference Votes** and second **Preference Votes** allocated under all remaining voting papers; N' is the number of **Panel Members** and/or **Alternate Members** remaining to be elected after the first voting round.

**8A.3.4.2** If the number of first and second **Preference Votes** allocated to any remaining candidate is equal to or greater than the second round qualifying total, that candidate shall be elected.

**8A.3.5 Third voting round**

**8A.3.5.1** In the third voting round:

- (a) the remaining candidates are those which were not elected in the first or second voting rounds;
- (b) the remaining voting papers are voting papers other than those under which the first or second **Preference Votes** were for candidates elected in the first or second voting rounds;
- (c) the number of first, second and third **Preference Votes** allocated under all remaining voting papers to each remaining candidate shall be determined;
- (d) the third round qualifying total shall be

$$( T'' / N'' ) + 1$$

where T'' is the total number of first **Preference Votes**, second **Preference Votes** and third **Preference Votes** allocated under all remaining voting papers;

N'' is the number of **Panel Members** remaining to be elected after the first and second voting rounds.

**8A.3.5.2** If the number of first, second and third **Preference Votes** allocated to any remaining candidate is equal to or greater than the third round qualifying total, that candidate shall be elected.

**8A.3.6 Further provisions**



**8A.3.6.1** If after any voting round the number of candidates achieving the required **Preference Votes** threshold exceeds the number of persons remaining to be elected, the following tie-break provisions shall apply between the tied candidates. In addition, if after the third voting round any **Panel Member(s)** or **Alternate Member(s)** remain to be elected the following tie-break provisions shall apply between the remaining candidates:

- (a) the tied or remaining candidates (as applicable) shall be ranked in order of the number of first **Preference Votes** allocated to them, and the candidate(s) with the greatest number of such votes shall be elected;
- (b) in the event of a tie between two or more candidates within Paragraph (a), the candidate(s) (among those tied) with the greatest number of second **Preference Votes** shall be elected;
- (c) in the event of a tie between two or more candidates within Paragraph (b), the **Code Administrator** shall select the candidate(s) (among those tied) to be elected by drawing lots.

**8A.3.6.2** As soon as reasonably practicable after any election process has concluded the **Code Administrator** shall publish an election report including but not limited to the following:

- i) the total number of voting papers distributed to **Users** eligible to vote;
- ii) the total number of voting papers received;
- iii) the total number of first, second and third preference votes allocated to each candidate in all voting papers;
- iv) the total number of remaining voting papers in each voting round;
- v) the total number of remaining **Panel Members** to be elected in each voting round;
- vi) the value of the qualifying total in each voting round; and
- vii) the total number of qualifying **Preference Votes** allocated to each remaining candidate under all remaining voting papers in each voting round.

### **8A.3.7 Alternate Members and Panel Members**

**8A.3.7.1** Except where Paragraphs 8A.4.3 or 8A.4.4 apply, the seven (7) candidates receiving the greatest number of votes shall be elected as **Users' Panel Members** and the next five (5) shall be elected as **Alternate Members**.

**8A.3.7.2** Where Paragraph 8A.4.3 applies the number of candidate(s) up to and including the number of **Panel Member Interim Vacancies** receiving the greatest number of votes pursuant to the **Interim Panel and Alternate Election Process** shall be elected as **Users' Panel Member(s)** and the remaining candidates up to and including the number of **Alternate Member Interim Vacancies** receiving the greatest number of votes shall be elected as **Alternate Member(s)**.

**8A.3.7.3** Where Paragraph 8A.4.4 applies the five (5) candidates receiving the greatest number of votes pursuant to the **Alternate Election Process** shall be elected as **Alternate Members**.

#### **8A.4. VACANCIES**

##### **8A.4.1 General**

**8A.4.1.1** If a **Panel Member** ceases to hold office pursuant to Paragraph 8.6.1 (b) (i) then Paragraph 8A.4.2 shall apply.

**8A.4.1.2** [Not used]

**8A.4.1.3** If an **Alternate Member** ceases to hold office pursuant to Paragraph 8.6 (the “**Resigning**” **Alternate Member**) then Paragraph 8A.4.4 shall apply.

**8A.4.1.4** The provisions of Paragraph 8A.2.1.2 shall apply, mutatis mutandis, to any replacement **Panel Member** or any replacement **Alternate Member** under this Paragraph 8A.4.

**8A.4.2** [Not used]

##### **8A.4.3 Replacement of a Panel Member who ceases to hold office pursuant to Paragraph 8.6.1**

**8A.4.3.1** Subject to Paragraph 8A.4.3.2, such **Panel Member** shall, where one or more **Alternate Member(s)** hold office, be replaced by the **Alternate Member** who previously received the highest number of cumulative **Preference Votes** but if there were a tie-break in relation to such **Preference Votes** then the tie-break provisions set out in Paragraph 8A.3.6.1 shall apply, in either circumstance such **Alternate Member** selected to be a **Panel Member** shall then become a **Resigning Alternate Member** and be replaced in accordance with Paragraph 8A.4.4.

**8A.4.3.2** If there are no **Alternate Members** in office upon a **Panel Member** ceasing to hold office then:

(a) Where there are not less than six (6) months remaining until the next full election further **Panel Members** shall be elected in accordance with Paragraphs 8A.2, 8A.3 and subject to the following Paragraphs 8A.4.3.3 to 8A.4.3.5 (inclusive) (the “**Interim Panel and Alternate Election Process**”).

(b) Where there are less than six (6) months remaining until the next full election no further **Panel Members** or **Alternate Members** shall be elected pursuant to this Paragraph 8A.4.3 and the positions shall remain vacant until the next full election.

**8A.4.3.3** Where this Paragraph 8A.4.3.3 applies the **Code Administrator** shall indicate in the invitation referred to at Paragraph 8A.1.2.1 the number of vacancies for both **Panel Member(s)** (“**Panel Member Interim Vacancies**”) and **Alternate Member(s)** (“**Alternate Member Interim Vacancies**”) for which the **Interim Panel and Alternate Election Process** is being held.

**8A.4.3.4** Any **Panel Member(s)** or **Alternate Member(s)** elected pursuant to the **Interim Panel and Alternate Election Process** shall cease to hold office

at the next full election.

**8A.4.3.5** The timetable for the **Interim Panel and Alternate Election Process** shall be expedited and the **Code Administrator** shall prepare a timetable accordingly.

**8A.4.4 Replacement of a Resigning Alternate Member**

**8A.4.4.1** Subject to Paragraph 8A.4.4.2 a **Resigning Alternate Member** shall not be replaced.

**8A.4.4.2** If there are no **Alternate Members** remaining in office following the resignation of an **Alternate Member** or their appointment as **Panel Member** in accordance with 8A.4.2 or 8A.4.3 then

- (a) Where there are not less than six (6) months remaining until the next full election further **Alternate Members** shall be elected in accordance with Paragraphs 8A.2, 8A.3 and subject to the following paragraphs 8A.4.4.3 to 8A.4.4.5 (inclusive) (the "**Alternate Election Process**").
- (b) Where there are less than six (6) months remaining until the next full election no further **Alternate Members** shall be elected and the positions shall remain vacant until the next full election

**8A.4.4.3** Where this paragraph 8A.4.4.3 applies, a reference in Paragraphs 8A.2 and 8A.3 to a **Users' Panel Member** or **Panel Member** shall not apply except in the case of Paragraph 8A.3.5.1 (d) where the reference to "**Panel Members**" shall be read and construed as a reference to "**Alternate Members**".

**8A.4.4.4** Any **Alternate Member(s)** elected pursuant to the **Alternate Election Process** shall cease to hold office at the next full election.

**8A.4.4.5** The timetable for the **Alternate Election Process** shall be expedited and the **Code Administrator** shall prepare a timetable accordingly.

**END OF SECTION 8**

**CUSC - SECTION 9**  
**INTERCONNECTORS**  
**CONTENTS**

9.1 Introduction

PART I – CONNECTION TO THE NATIONAL ELECTRICITY  
TRANSMISSION SYSTEM BY INTERCONNECTOR OWNERS

9.2 Connection – Introduction

9.3 Being Operational, Connection and Energisation

9.4 Export of Power from the Interconnector Connection Site

9.5 Import of Power to the Interconnector Connection Site

9.6 [no heading]

9.7 Maintenance of Transmission Connection Assets

9.8 Outages

9.9 Connection Charges

9.10 Special Automatic Facilities

9.11 Protection and Control Relay Settings / Fault Clearance Times

9.12 Other Site Specific Technical Conditions

9.13 Safety Rules

9.14 Interface Agreement

9.15 Principles of Ownership

9.16 Event of Default

9.17 New Connection Sites

PART II – USE OF THE NATIONAL ELECTRICITY TRANSMISSION  
SYSTEM BY INTERCONNECTOR USERS AND INTERCONNECTOR  
ERROR ADMINISTRATORS

9.18 Introduction

9.19 Rights to Use the National Electricity Transmission System

9.20 Use of System Application

9.21 Termination and Related Provisions

## **CUSC - SECTION 9**

### **INTERCONNECTORS**

#### **9.1 INTRODUCTION**

This Section 9 of the **CUSC** deals with **Interconnectors** other than **Distribution Interconnector Owners** (which are dealt with in Section 3). Part I provides for connection to the **National Electricity Transmission System** by an **Interconnector Owner** and Part II for use of the **National Electricity Transmission System** by **Interconnector Users** and **Interconnector Error Administrators**.

#### **PART I - CONNECTION TO THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM BY INTERCONNECTOR OWNERS**

#### **9.2 CONNECTION - INTRODUCTION**

This Part I deals with connection to the **National Electricity Transmission System** by an **Interconnector Owner**. The **User** for the purposes of this Part I will therefore be the **Interconnector Owner**.

#### **9.3 BEING OPERATIONAL, CONNECTION AND ENERGISATION**

##### **9.3.1 Right to Remain Connected**

Subject to the other terms and conditions of the relevant **Bilateral Connection Agreement** and the **Grid Code** and any **Operating Agreement**, each **User** as between **The Company** and that **User** shall have the right for the **User's Equipment** to remain connected to the **National Electricity Transmission System** at the **Connection Site** of an **Interconnector** specified in the relevant **Bilateral Connection Agreement** once **Commissioned** and then for the duration of the relevant **Bilateral Connection Agreement** in relation to that **Connection Site**.

##### **9.3.2 Right to Remain Energised and Operational**

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement** and the **Grid Code** and any **Operating Agreement** each **User** as between **The Company** and that **User** shall have the right for the **User's Equipment** at the **Connection Site** of an **Interconnector** to remain **Energised**

and **Operational** once **Commissioned** for the duration of the **Bilateral Connection Agreement** in relation to that **Connection Site**.

### 9.3.3 **Obligation to Remain Connected**

- (a) Without prejudice to its rights to make **Modifications** to the **User's Plant** (and/or **User's Equipment** as the case may be) pursuant to the **CUSC** and subject to the provisions of Paragraph 5.2 and the other provisions of the **CUSC**, the **Grid Code** and any **Operating Agreement**, the **User** shall keep the **User's Equipment** at the **Connection Site** of an **Interconnector** connected to the **National Electricity Transmission System** until **Decommissioning** or **Disconnection** is permitted pursuant to the **CUSC** and the relevant **Bilateral Connection Agreement**.
- (b) For as long as the **User** is connected to the **National Electricity Transmission System** and the **User's Equipment** is **Energised** and **Operational** the **User** shall ensure:
  - (i) that there is an **Interconnector Error Administrator** appointed in respect of that **Interconnector**; and
  - (ii) that any party with whom it enters into an agreement for use of that **Interconnector** is a party to the **CUSC** and is in receipt of a **Use of System Interconnector Confirmation Notice** prior to and during its use of that **Interconnector**.

## 9.4 **EXPORT OF POWER FROM THE INTERCONNECTOR CONNECTION SITE**

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement** and the **Grid Code** and any **Operating Agreement**, **The Company** shall accept into the **National Electricity Transmission System** at the **Connection Site** of an **Interconnector** power up to the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** as specified in Appendix C to the relevant **Bilateral Connection Agreement** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints which could not be avoided by the exercise of **Good Industry Practice**.

## 9.5 **IMPORT OF POWER TO THE INTERCONNECTOR CONNECTION SITE**

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement**, the **Grid Code** and any **Operating Agreement**, **The Company** shall transport a supply of power to a **Connection Site** of an **Interconnector** through the **National Electricity Transmission System** up to the amount specified in the **Bilateral Connection Agreement** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints which could not be avoided by the exercise of **Good Industry Practice** by **The Company**.

- 9.6** The **User** shall not permit the transfer of any amount of electricity onto the **National Electricity Transmission System** in excess of the **Transmission Entry Capacity** and (if any) **STTEC** and/or **LDTEC** and/or any **Temporary Received TEC** less any **Temporary Donated TEC** for the relevant **Period** specified in Appendix C to the relevant **Bilateral Connection Agreement** or permit the taking of any amounts of electricity off the **National Electricity Transmission System** in excess of the value as specified in Appendix C to the relevant **Bilateral Connection Agreement** save as expressly permitted or instructed pursuant to an **Emergency Instruction** under the **Grid Code** or save as expressly permitted pursuant to any **Operating Agreement** or the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.

#### **9.6A Connection Entry Capacity**

With respect to a particular connection to the **National Electricity Transmission System**, each **User**, as between **The Company** and that **User**, shall not operate its **User's Equipment** such that any of it exceeds the **Connection Entry Capacity** specified for each **Generating Unit** or the **Connection Entry Capacity** to the **Connection Site** such figures being set out in Appendix C to the relevant **Bilateral Connection Agreement** save as expressly permitted pursuant to an **Emergency Instruction** under the **Grid Code** or save as expressly permitted pursuant to any **Operating Agreement** or the **Fuel Security Code** or as may be necessary or expedient in accordance with **Good Industry Practice**.

#### **9.7 MAINTENANCE OF TRANSMISSION CONNECTION ASSETS**

Subject to the other provisions of the **CUSC**, the relevant **Bilateral Connection Agreement**, the **Grid Code** and any **Operating Agreement**, **The Company** shall use all reasonable endeavours to maintain the **Transmission Connection Assets** at each **Connection Site** of an **Interconnector** in the condition necessary to render the same fit for the purpose of passing power up to the **Connection Entry Capacity** specified in Appendix C to the **Bilateral Connection Agreement** as appropriate between the



## **User's Equipment and the National Electricity Transmission System.**

### **9.8 OUTAGES**

Subject to the provisions of the **Grid Code** and any **Operating Agreement**, **The Company** and the **User** shall as between themselves be entitled to plan and execute outages of parts of, in the case of **The Company**, the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** and, in the case of the **User**, its **System** or **Plant** or **Apparatus** at any time and from time to time.

### **9.9 CONNECTION CHARGES**

#### **9.9.1 Connection Charges**

Subject to the provisions of the **CUSC**, and the relevant **Bilateral Connection Agreement**, each **User** shall, as between **The Company** and that **User**, with effect from the relevant date set out in the relevant **Bilateral Connection Agreement** be liable to pay to **The Company** the **Connection Charges** calculated and applied in accordance with the **Statement of the Connection Charging Methodology** and as set out in the relevant **Bilateral Connection Agreement**. The **User** shall make those payments in accordance with the provisions of the **CUSC**. **The Company** shall apply and calculate the **Connection Charges** in accordance with the **Statement of the Connection Charging Methodology**.

#### **9.9.2 Obligation to provide Security**

The **User** shall provide **The Company** with **Security Cover** in respect of **Termination Amounts** in respect of **Transmission Connection Assets** commissioned after the **Transfer Date** in accordance with the provisions of Part III of Section 2.

#### **9.9.3 Outturn Reconciliation**

- (a) The following provisions relate to the ability for invoices to be issued for **Connection Charges** based on an estimate of the cost of **Transmission Connection Asset Works**, and for a reconciliation once those costs are known.
- (b) **The Company** shall be entitled to invoice the **User** for **Connection Charges** payable in accordance with the **CUSC** in respect of any **Plant** and **Apparatus** installed as part of the **Transmission Connection Asset Works** on the basis set out in the **Statement of the Connection Charging Methodology**, until the final cost of carrying out the said **Transmission Connection Asset Works** shall have been determined.

- (c) As soon as practicable after the **Completion Date** and in any event within one year thereof **The Company** shall provide to the **User** a written statement specifying the **Connection Charges** calculated in accordance with the **Charging Statements** based on the cost of carrying out the **Transmission Connection Asset Works** (the “**Cost Statement**”). **The Company** shall be entitled to revise Appendix B to the relevant **Bilateral Connection Agreement** accordingly.
- (d) In the event that the **Connection Charges** specified in the **Cost Statement** are greater than the amount paid by the **User** based on **The Company’s** estimate under Paragraph 2.14.3(b), the **User** shall pay to **The Company** the difference between the two amounts plus interest on a daily basis from the date of payment by the **User** of the amounts calculated on **The Company’s** estimate to the date of payment by the **User** of the difference at the **Base Rate**. In the event that the **Connection Charges** specified in the **Cost Statement** are less than the amount paid by the **User** based on **The Company’s** estimate, **The Company** shall pay to the **User** the difference between the two amounts plus interest on a daily basis from the date of payment by the **User** of the amounts calculated on **The Company’s** estimate to the date of repayment by **The Company** at the **Base Rate**. Such payment of reconciliation shall be made by one party to the other within 28 (twenty eight) days of the **Cost Statement**.

#### 9.9.4 Connection Charges – One-off Charges

- (a) The following provisions relate to the payment for certain **One-off Works**, which arise in relation to the construction of a **Connection Site**.
- (b) The **User** shall forthwith on the relevant date set out in the relevant **Bilateral Connection Agreement** be liable to pay to **The Company** the **One-off Charge** (if any) as set out in the relevant **Bilateral Connection Agreement**.
- (c) **The Company** shall invoice the **User** for an amount equal to **The Company’s** estimate of the **One-off Charge** before, on or after the relevant date set out in the relevant **Bilateral Connection Agreement** and the **User** shall pay to **The Company** the amount stated in **The Company** invoice at the later of such relevant date or 28 (twenty eight) days after the date of the said invoice.
- (d) As soon as practicable thereafter **The Company** shall provide the **User** with a statement of the **One-off Charge**.

In the event of the amount specified in the statement being more than the amount paid by the **User** to **The Company** in terms of Paragraph 2.14.4(c), the **User** shall pay to **The Company** the difference plus interest on a daily basis from the date of the invoice under Paragraph 2.14.4(c) to the date of invoice for the difference at the **Base Rate** from time to time within 28 days (twenty eight) days of the date of **The Company's** invoice. In the event of the amount specified in the statement being less than the amount paid by the **User** under the terms of Paragraph 2.14.4(c), **The Company** shall forthwith pay to the **User** an amount equal to the difference plus interest calculated on a daily basis at the **Base Rate** from the date of payment by the **User** under Paragraph 2.14.4(c) to the date on which the difference is repaid by **The Company**.

#### 9.9.5 Connection Charges – Site Specific Maintenance Charge

- (a) **The Company** shall be entitled to invoice each **User** for the indicative **Site Specific Maintenance Charge** in each **Financial Year** as set out in the **Statement of the Connecting Charging Methodology**.
- (b) As soon as reasonably practicable and in any event by 31 July in each **Financial Year** **The Company** shall:
  - (i) in accordance with the **Statement of the Connection Charging Methodology** calculate the actual **Site Specific Maintenance Charge** that would have been payable by the **User** during the preceding **Financial Year** (the “**Actual Charge**”) and compare this with the indicative **Site Specific Maintenance Charge** received from the **User** during the preceding **Financial Year** (the “**Notional Charge**”) and
  - (ii) prepare and send to the **User** a **Maintenance Reconciliation Statement** specifying the **Actual Charge** and the **Notional Charge** for the preceding **Financial Year**.
- (c) Two months after the date of issue of the **Maintenance Reconciliation Statement** and in any event by 30 September **The Company** shall issue a credit note in relation to any sums shown by the **Maintenance Reconciliation Statement** to be due to the **User** or an invoice in respect of sums due to **The Company** (such invoice to be payable within 30 days of the date of the invoice) and in each case interest thereon calculated pursuant to Paragraph 9.9.5(e) below.

- (d) Interest on all amounts due under this Paragraph 9.9.5 shall be payable by the paying **CUSC Party** to the other on such amounts from the date of payment applicable to the month concerned until the date of invoice for such amounts and such interest shall be calculated on a daily basis at a rate equal to the **Base Rate** during such period.

#### 9.9.6 Payment

The **Connection Charges** in the **Financial Year** in which the **Charging Date** occurs shall be apportioned as follows:-

For each complete calendar month from **Charging Date** to the end of the **Financial Year** in which the **Charging Date** occurs the **User** shall be liable to pay one twelfth of the **Connection Charges** and for each part of a calendar month the **User** shall be liable to pay to **The Company** one twelfth of the **Connection Charges** prorated by a factor determined by the number of days for which the **User** is liable divided by the total number of days in such calendar month.

- 9.9.7 The provisions of Paragraphs 2.15 (Revision of Charges), 2.16 (Data Requirements), 2.17 (Replacement of Transmission Connection Assets), 2.18 Termination Amounts Re-use) and 2.19 to 2.22 inclusive (Security and Termination Amounts) of the **CUSC** shall apply to this Section 9 as if set out herein in full.

#### 9.10 SPECIAL AUTOMATIC FACILITIES

**The Company** and each **User** shall, as between **The Company** and that **User** operate respectively the **National Electricity Transmission System** and the **User's Equipment** in accordance with the schemes set out in Appendix F3 to the relevant **Bilateral Connection Agreement** and/or any **Operating Agreement**.

#### 9.11 PROTECTION AND CONTROL RELAY SETTINGS/FAULT CLEARANCE TIMES

**The Company** and the **User** shall record the respective protection and control relay settings and fault clearance times to be operated by each of them in documents in the format set out in Appendix F4 to the relevant **Bilateral Connection Agreement** and shall operate them accordingly.

#### 9.12 OTHER SITE SPECIFIC TECHNICAL CONDITIONS

- 9.12.1 The **User** shall ensure that, in the case of a **Connection Site Commissioned** prior to the **Transfer Date**, on the **Transfer Date**,

and in the case of a **Connection Site Commissioned** after the **Transfer Date**, on the **Completion Date(s)**, the **User's Equipment** complies with the site specific technical conditions set out in Appendix F5 to the relevant **Bilateral Connection Agreement** and/or in the relevant **Operating Agreement**.

9.12.2 The **User** shall use all reasonable endeavours to ensure during the period in which it is a party to a particular **Bilateral Connection Agreement** that the **User's Equipment** which is subject to that **Bilateral Connection Agreement** shall continue to comply with the site-specific technical conditions set out in Appendix F5 to that **Bilateral Connection Agreement** and/or in the relevant **Operating Agreement**.

9.12.3 If the **User** or **The Company** wishes to modify, alter or otherwise change the site specific technical conditions relating to a **Connection Site** or the manner of their operation:

- (a) under Appendix F4 to the relevant **Bilateral Connection Agreement** it may do so upon obtaining the agreement of the other party such agreement not to be unreasonably withheld;
- (b) under Appendices F1 or F3 or F5 to the relevant **Bilateral Connection Agreement** it shall be deemed to be a **Modification** for the purposes of the **CUSC**.

9.12.4 Where, in the case of a **Connection Site Commissioned** in England and Wales prior to the **Transfer Date**, on or immediately prior to the **Transfer Date** a **User's Equipment** subject to a particular **Bilateral Connection Agreement** has any of the following technical attributes or facilities:

- (a) circuit breaker fail protection
- (b) pole slipping protection
- (c) fault disconnection facilities
- (d) automatic switching equipment
- (e) control arrangements
- (f) voltage and current signals for system monitoring
- (g) control telephony
- (h) operational metering,

the **User** shall, as between **The Company** and that **User**, use all reasonable endeavours to ensure that during the period of such

**Bilateral Connection Agreement** the **User's Equipment** which is subject to that **Bilateral Connection Agreement** retains such technical attributes or facilities provided always that if the **User** wishes to modify alter or otherwise change the same or their operation it may do so by following the procedures relating to a **Modification** in accordance with the **CUSC**.

### 9.13 SAFETY RULES

9.13.1 In relation to a **Connection Site Onshore** **The Company** shall procure that the **Relevant Transmission Licensee** supplies to the **User** a copy of their **Safety Rules** current from time to time, including any site-specific **Safety Rules**, and also a copy of the **Local Safety Instructions** applicable at each **Connection Site** from time to time.

9.13.2 In relation to a **Connection Site Onshore** each **User** will supply to the **Relevant Transmission Licensee** a copy of their **Safety Rules** current from time to time, including any site-specific **Safety Rules**, and also a copy of the **Local Safety Instructions** applicable at each **Connection Site** from time to time.

### 9.14 INTERFACE AGREEMENT

9.14.1 In relation to **Connection Sites** and **New Connection Sites Onshore** **The Company** shall procure that the **Relevant Transmission Licensee** shall enter into an **Interface Agreement** with a **User** in either case in a form to be agreed between them but based substantially on the forms set out in Schedule 2 as appropriate where such **Interface Agreement(s)** is/are required pursuant to the applicable **Bilateral Connection Agreement** or otherwise.

9.14.2 In relation to **Connection Sites** and **New Connection Sites Onshore** the **User** undertakes to enter into an **Interface Agreement** with the **Relevant Transmission Licensee** in a form to be agreed between them but based substantially on the forms set out in Exhibit O to the **CUSC** as appropriate where such **Interface Agreement(s)** is/are required pursuant to the applicable **Bilateral Connection Agreement** or otherwise.

### 9.15 PRINCIPLES OF OWNERSHIP

9.15.1 Subject to any contrary agreement in any **Bilateral Connection Agreement** or elsewhere, the division of ownership of **Plant** and **Apparatus** shall be at the electrical boundary, such boundary to be in relation to **Plant** and **Apparatus** located between the **National Electricity Transmission System** and an **Interconnector** at the busbar clamp on the busbar side of the

busbar isolators in the **Interconnector** transformer circuits at a **Connection Site**.

- 9.15.2 For the avoidance of doubt nothing in this Paragraph 9.16 shall effect any transfer of ownership in any **Plant** or **Apparatus**.

## **9.16 EVENT OF DEFAULT**

- 9.16.1 Where **The Company** has given notice of event of default to an **Interconnector User** or **Interconnector Error Administrator** in accordance with Section 5 **The Company** shall be entitled to request the **User** to cease or procure the cessation of the transfer of power across the relevant **Interconnector** by or on behalf of that **Interconnector User** or **Interconnector Error Administrator**.

- 9.16.2 As soon as practicable after such request from **The Company** the **User** shall cease or procure the cessation of the transfer of power across the relevant **Interconnector** by or on behalf of that **Interconnector User**.

## **9.17 NEW CONNECTION SITES**

- 9.17.1 If the **User** wishes to connect a **New Connection Site** it shall complete and submit to **The Company** a **Connection Application** in accordance with the **Gated Application and Offer Process** and comply with the terms thereof.

- 9.17.2 The **Connection Application** and **Connection Offer** shall be processed in accordance with the **Gated Application and Offer Process**.

- 9.17.2A An application for a **New Connection Site** which is a **Gate 1 Application** shall include the provision of a **Letter of Acknowledgement**.

The **Applicant** shall ensure that a **Letter of Acknowledgement** shall pertain to the **New Connection Site** if this is known and otherwise shall be a general acknowledgement of the project and its offshore nature as set out in the **Connection Application** by reference to the offshore specific guidance in the **LoA Guidance**.

- 9.17.3 The **Connection Offer** shall remain open for acceptance (subject to **CUSC** Paragraph 6.10.4.4) for 3 months from its receipt by that **User** unless either that **User** or **The Company** makes an application to the **Authority** under condition E13 of the **ESO Licence**, in which event the **Connection Offer** shall remain open for acceptance until the date 14 days after any determination by the **Authority** pursuant to such application.

- 9.17.4 If the **Connection Offer** is accepted by that **User** the connection shall proceed according to the terms of the **CUSC** and the relevant **Bilateral Connection Agreement** and **Construction Agreement** entered into consequent upon acceptance of the **Offer**.

## **PART II - USE OF THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM BY INTERCONNECTOR USERS AND INTERCONNECTOR ERROR ADMINISTRATORS**

### **9.18 INTRODUCTION**

This Part II deals with rights and obligations relating to use of the **National Electricity Transmission System** by **Interconnector Users** and **Interconnector Error Administrators**. An **Interconnector Error Administrator** is deemed to be using the **National Electricity Transmission System** because of its registered **BM Units**. The **User** for the purposes of this Part II will therefore be an **Interconnector User** and/or an **Interconnector Error Administrator**. Where the **Interconnector Error Administrator** is **The Company**, the **User** for the purposes of this Part II will be **The Company**.

### **9.19 RIGHTS TO USE THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM**

- 9.19.1 Subject to the provisions of the **CUSC**, the **Grid Code** and any relevant **Operating Agreement** **The Company** shall as between **The Company** and that **User** transport a supply of power through the **National Electricity Transmission System** together with such margin as **The Company** shall in its reasonable opinion consider necessary having due regard to **The Company's** duties under the **ESO Licence** except to the extent (if any) that **The Company** is prevented from doing so by transmission constraints or by insufficiency of generation which, in either case, could not have been avoided by the exercise of **Good Industry Practice** by **The Company**.
- 9.19.2 This right is subject to there being a **Bilateral Connection Agreement** between the **Interconnector Owner** and **The Company** for the **Connection Site** of the relevant **Interconnector**.
- 9.19.3 The **User** acknowledges that breach of the provisions of the **CUSC** by an **Interconnector Owner** may give rise to **Deenergisation** or **Disconnection** of the **Connection Site** of that **Interconnector** pursuant to Section 5.
- 9.19.4 Subject to the provisions of the **Grid Code** and any **Operating Agreement** **The Company** shall be entitled to plan and execute



outages of parts of the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** at any time and from time to time.

## **9.20 USE OF SYSTEM APPLICATION**

- 9.20.1 If a **User** wishes to use the **National Electricity Transmission System** in accordance with this Part II, it shall complete and submit to **The Company** a **Use of System Application** and comply with the terms thereof.
- 9.20.2 Without prejudice to condition E12 of the **ESO Licence**, **The Company** shall make a **Use of System Offer** to that prospective **User** as soon as practicable after receipt of the **Use of System Application** and (save where the **Authority** commits to a longer period) in any event not more than 28 days after receipt by **The Company** or the **Use of System Application**.
- 9.20.3 The **Use of System Offer** shall be in the form of **Use of System Interconnector Offer Notice**. The provisions of condition E12 of the **ESO Licence** shall apply to an application by a **User** under this Section 9 Part II as if the **Use of System Interconnector Offer Notice** and **Use of System Interconnector Confirmation Notice** was an agreement for the purposes of that condition.
- 9.20.4 The **Use of System Interconnector Offer** shall remain open for acceptance for 28 days from its receipt by that **User** unless either that **User** or **The Company** makes an application to the **Authority** under condition E13 of the **ESO Licence**, in which event the **Use of System Interconnector Offer Notice** shall remain open for acceptance until the date 14 days after any determination by the **Authority** pursuant to such application.
- 9.20.5 Upon acceptance of the **Use of System Interconnector Offer** (as offered by **The Company** or determined by the **Authority**) by the **User** and the issuing by **The Company** of a **Use of System Interconnector Confirmation Notice**, the **User** shall have the right to use the **National Electricity Transmission System** in accordance with this Section. Such right shall continue until a **Use of System Termination Notice** is submitted pursuant to Paragraph 9.23.1 or the use ceases in accordance with 9.23.2.
- 9.20.6 Such rights shall be conditional upon the **Applicant**, if it is not already a party to the **CUSC Framework Agreement**, becoming a party to the **CUSC Framework Agreement**.

## **9.21 TERMINATION AND RELATED PROVISIONS**

9.21.1 A **User** may terminate its use of the **National Electricity Transmission System** by giving **The Company** a **Use of System Termination Notice** not less than 28 days prior to such termination of use and the right to use the **National Electricity Transmission System** shall cease upon the termination date in the **Use of System Termination Notice**.

9.21.2.1 Use shall cease forthwith upon:

- (a) There ceasing to be a **Bilateral Connection Agreement** for the **Connection Site** of the relevant **Interconnector**;
- (b) disconnection of the **Connection Site** of the relevant **Interconnector** pursuant to Section 5;
- (c) an **Event of Default** by the **User** as provided for in Section 5.

9.21.2.2 Use shall be suspended for the period of any **Deenergisation** of the **Connection Site** of the relevant **Interconnector** pursuant to the **CUSC**.

### **PART III - INTERCONNECTORS ADJUSTMENT PAYMENTS**

#### **9.22 INTRODUCTION**

This Part III deals with **Interconnector Adjustment Payments**. The **User** for the purposes of this Part III will therefore be the **Interconnector Owner**.

#### **9.23 DATA EXCHANGE FOR CHARGE SETTING**

9.23.1 This section sets out when a **User** shall provide its best estimates of the Interconnector Adjustment Payments to **The Company** which is required so that **The Company** can calculate **Transmission Network Use of System Charges** and the date by which the **User** shall provide a statement to the **Authority** of the estimates sent to **The Company**.

9.23.2 By 1 November 2017 and then by 1 November in each subsequent **Financial Year**, each **User** will provide **The Company** with a best forecast of its **Interconnector Adjustment Payments** for that **Financial Year** and the following **Financial Year**. The **User** will update and provide a final forecast of the **Interconnector Adjustment Payments** for that and the following **Financial Year** by each 25 January.

- 9.23.3 On or before 25 January in 2018 and each following **Financial Year** (or such later date as the **Authority** may direct) the **User** shall provide a statement to the **Authority** of the forecast provided to **The Company** under Paragraph 9.23.2 for the previous **Financial Year**.

## 9.24 REVENUE FORECAST INFORMATION PROVISION

- 9.24.1 This section describes the data exchange process between **The Company** and the **User**, which is required so that **The Company** can regularly publish the forecast annual revenue used in the calculation of **Transmission Network Use of System Charges** over a five year period, so that parties that pay **Transmission Network Use of System Charges** can understand future changes.
- 9.24.2 Each **User** will report or forecast their **Interconnector Adjustment Payments** for the current **Financial Year** and each of the next five **Financial Years** on a nominal price basis (money of the day), and provide this data and narrative by e-mail no later than the close of the 5th business day each February and October.
- 9.24.3 All financial values will be supplied to the nearest £100k.
- 9.24.4 Each **User** will provide contact details with respect to answering any query with regards to their data.
- 9.24.5 Each **User** shall provide all necessary assistance in response to any reasonable query from **The Company** regarding the data submitted by that **User**.

## 9.25 USE OF SUBSTITUTE DATA

- 9.25.1 Under Paragraphs 9.23 and 9.24 where no data is provided by the **User** or the data is subject to dispute, **The Company** shall use, for the purposes of calculating or forecasting the **Transmission Network Use of System Charges**, the data that it believes to be the most accurate until **The Company** is satisfied with the data provided or any dispute has been resolved.
- 9.25.2 For the avoidance of doubt, the use of substitute data as referred to in paragraph 9.25.1 will not affect the invoicing of **The Company** by the **User**, or the **User** by **The Company**.
- 9.25.3 Where **The Company** has used substitute data, **The Company** shall notify the relevant **User**.

- 9.25.4 If applicable, once any dispute has been resolved, charges shall be revised on the basis of the appropriate data.

**9.26 INVOICING (PAYMENT TO THE USER)**

- 9.26.1 This section describes the process applied when **Interconnector Adjustment Payments** are made from **The Company** to the **User** in a given **Financial Year**.
- 9.26.2 The **User** shall receive payment from **The Company** for the **Interconnector Adjustment Payments** in monthly instalments. By 1 October each year **The Company** shall email the **User** requesting a forecast of their **Interconnector Adjustment Payments** for the following **Financial Year** only. The **Interconnector** shall email **The Company**, on or before 1st November each year, their forecast of the **Interconnector Adjustment Payments** for the following **Financial Year**. Revisions to the **Interconnector Adjustment Payments** can be made up to 25th January each year for the following **Financial Year**.
- 9.26.3 The amount forecast in Paragraph 9.26.2 shall be accompanied by an invoicing schedule to detail the annual and monthly amounts for **Interconnector Adjustment Payments** as defined in the **Interconnector** Licences.
- 9.26.4 The **User** shall invoice **The Company** equal amounts over the remaining months of the **Financial Year**, matching the amounts shown in the schedule provided under Paragraph 9.26.3 and totalling the annual **Interconnector Adjustment Payments**. **The Company** shall pay the recurrent monthly **User** invoice on the later of
- (a) the 15th day following the day that the **User's** invoice was despatched; and
  - (b) the 16th day of the month to which the invoiced payments relate,
  - (c) unless, in such case, such payment day is not a **Business Day** in which case payment shall be made on the next **Business Day**.
- 9.26.5 Paper invoices will be despatched by post, and supported by email, where feasible, to **The Company**. The **User's** bank account details shall be included with each monthly invoice.

- 9.26.6 All payments will be by BACS.
- 9.26.7 Only under exceptional circumstances, can **Interconnector Adjustment Payments** from **The Company** be changed after final notification on 25th January. Exceptional circumstances mean an event or circumstance that is beyond the reasonable control of the licensee and for which it should not reasonably bear the financial risk.

**9.27 PAYMENT (PAYMENT TO THE COMPANY)**

- 9.27.1 This section describes the process for when **Interconnector Adjustment Payments** are made from the **User** to **The Company** in a given **Financial Year**.
- 9.27.2 **The Company** shall receive payment of the **Interconnector Adjustment Payments** from the **User** in monthly instalments. By 1 October each year **The Company** shall email the **User** requesting a forecast of their **Interconnector Adjustment Payments** for the following **Financial Year**. The **User** shall email **The Company**, on or before 1st November each year, their forecast of the **Interconnector Adjustment Payments** for the following **Financial Year** only. Revisions to the **Interconnector Adjustment Payments** can be made up to 25th January each year for the following **Financial Year**.
- 9.27.3 The amount forecast in Paragraph 9.27.2 shall be accompanied by an invoicing schedule to detail the annual and monthly amounts for **Interconnector Adjustment Payments**.
- 9.27.4 **The Company** shall invoice the **User** equal amounts over the remaining months of the **Financial Year**, matching the amounts shown in the schedule provided under Paragraph 9.27.3 and totalling the annual **Interconnector Adjustment Payments**. The **User** shall pay the recurrent monthly **Company** invoice on the later of
- (a) the 15th day following the day that **The Company's** invoice was despatched; and
  - (b) the 16th day of the month to which the invoiced payments relate,
  - (c) unless, in such case, such payment day is not a **Business Day** in which case payment shall be made on the next **Business Day**.
- 9.27.5 Paper invoices will be despatched by post, and supported by email, where feasible, to the **User**. **The Company's** bank account details shall be included with each monthly invoice.

9.27.6 All payments will be by BACS.

9.27.7 Only under exceptional circumstances, can **Interconnector Adjustment Payments to The Company** be changed after final notification on 25th January. Exceptional circumstances mean an event or circumstance that is beyond the reasonable control of the licensee and for which it should not reasonably bear the financial risk.

**END OF SECTION 9**

**CUSC - SECTION 10**

**TRANSITION ISSUES**

**CONTENTS**

**Part1 CUSC MODIFICATION 223 (WACM1 and WACM2) TRANSITION**

**Part 2 CUSC MODIFICATION CMP293 and CMP294 (Modifications relating to the transfer of the system operator functions from National Grid Electricity Transmission plc to National Grid Electricity System Operator Limited) Transition**

## Part 1

### 10.1 INTRODUCTION

- 10.1.1 This Section 10, Part 1, deals with issues arising out of the transition associated with the approval and implementation of **CMP 223**. For the purposes of this Section 10, Part 1, the version of the **CUSC** as amended by **CMP 223** shall be referred to as the “**Post CMP223 CUSC**” and the version of the **CUSC** prior to amendment by **CMP 223** shall be referred to as the “**Pre CMP 223 CUSC**”.
- 10.1.2 **CMP 223** affects **Users** in the category of (a) an **Embedded Power Station** which is the subject of a **Bilateral Embedded Generation Agreement** and (b) a **Distribution System** directly connected to the **National Electricity Transmission System** where there is an **Associated DNO Construction Agreement** and references to **User** in this Section 10, Part 1, shall be construed accordingly.
- 10.1.3 Part 1 of this Section sets out the arrangements such that by the **CMP223 Transition Period End Date**:
- (a) **Existing Associated DNO Construction Agreements** have been amended in line with the provisions introduced under **CMP223**;
  - (b) The **Cancellation Charge Secured Amount Statement** issued by **The Company** for the **CMP 223 Security Period** in respect of **Existing Associated DNO Construction Agreements** and **Existing BEGA Construction Agreements** reflects the adjusted % introduced under **CMP223**;
  - (c) Where an **Existing Associated DNO Construction Agreement** provides for more than one of a **Relevant Embedded Small Power Station** and/or **Relevant Embedded Medium Power Station** and/or **Embedded Large Power Station** which is the subject of a **BELLA**, **Users** have received the necessary information in respect of the **Cancellation Charge** and the **Cancellation Charge Secured Amount** in respect of each such project.
- 10.1.4 This Section 10, Part 1, comprises:
- (a) this Introduction; and



(b) **CMP 223** transition issues.

10.1.5 The provisions of the **Post CMP 223 CUSC** shall be suspended (except as specifically provided for in this Section 10, Part 1, and for the purposes of interpretation and definitions and for enabling the doing of anything which may require to be done in relation to but in advance of the **CMP 223 Transition Period End Date** to achieve the objectives at 10.1.4) in respect of the **Users** until the **CMP 223 Transition Period End Date**. Any termination of an **Existing Associated DNO Construction Agreement** or **Existing BEGA Construction Agreement** or reduction in **Transmission Entry Capacity** or **Developer Capacity** which takes effect prior to or on the **CMP 223 Transition Period End Date** shall therefore be dealt with, and the rights and obligations of **The Company** and the **User** to each other, shall be as provided for in the **Existing Associated DNO Construction Agreement** or **Existing BEGA Construction Agreement**.

10.1.6 In this Section 10, Part 1:

- (a) the term “**Applicants**”; shall mean **Users** who apply for an offer of a type referred to in (j) during the **CMP 223 Transition Period**;
- (b) the term “**CMP 223**”, shall mean **CUSC Modification Proposal 223** (Arrangements for Relevant Distributed Generators under the Enduring Generation User Commitment);
- (c) the term “**CMP 223 Implementation Date**”, shall mean the **Implementation Date** for **CMP 223**;
- (d) the term “**CMP 223 Security Period**”, shall mean the **Security Period** immediately following the **CMP 223 Transitional Period End Date**;
- (e) the term “**CMP 223 Transition Period End Date**” shall mean the day before the day of the first **Security Period** which is not less than 6 months from the **CMP 223 Implementation Date**;
- (f) the term “**CMP 223 Transition Period**”, shall mean the period from the **CMP 223 Implementation Date** ending on and including the **CMP 223 Transition Period End Date** and is the period with which this Section 10, Part 1 deals;
- (g) the term “**Existing Associated DNO Construction Agreement**”, shall mean an **Associated DNO**

**Construction Agreement** where the **Construction Works** will not be completed prior to the **CMP 223 Transition Period End Date**;

- (h) the term “**Existing BEGA Construction Agreement**”, shall mean a **Construction Agreement** with a **User** who is party to a **Bilateral Embedded Generation Agreement** where the **Construction Works** under this or the **Associated DNO Construction Agreement** will not be completed prior to the **CMP 223 Transition Period End Date** ;
- (i) the term “**Existing Construction Agreement**”, shall mean, as appropriate, an **Existing Associated DNO Construction Agreement** or an **Existing BEGA Construction Agreement**;
- (j) the term “**New Applications**”, shall mean a **Request for a Statement of Works** or **Modification Application** associated with **Distributed Generation** or **Use of System Application** by a **User** or prospective **User** or a **Modification Application** to vary any such agreements made during the **CMP 223 Transition Period**;
- (k) the term “**Outstanding Applications**”, shall mean an offer of a type referred to in (j) where the application was made prior to the **CMP 223 Implementation Date**;
- (l) the term “**Outstanding Offers**”, shall mean an offer to a **User** or prospective **User** of a type referred to in (j) which has not been accepted at the **CMP 223 Implementation Date** but is still capable of being accepted.

10.1.8 Without prejudice to any specific provision under this Section 10, Part 1 as to the time within which or the manner in which **The Company** or a **User** should perform its obligations under this Section 10, Part 1, where **The Company** or a **User** is required to take any step or measure under this Section 10, Part 1, such requirement shall be construed as including any obligation to:

- (a) take such step or measure as quickly as reasonably practicable; and
- (b) do such associated or ancillary things as may be necessary to complete such step or measure as quickly as reasonably practicable.

## 10.2 CMP 223 TRANSITION

### *Existing Construction Agreements*

- 10.2.1 **The Company** shall offer to amend each **Existing Associated DNO Construction Agreement** such that it is consistent at the **CMP 223 Transition Period End Date** with the amendments introduced by **CMP 223**.
- 10.2.2 **The Company** shall make the offer in respect of each **Existing Associated DNO Construction Agreement** to each **User** as soon as reasonably practicable after the **CMP 223 Implementation Date**.
- 10.2.3 If **The Company** and a **User** fail to agree changes to an **Existing Associated DNO Construction Agreement** either such person may refer the matter to the **Authority** under Condition E13 Paragraph 5 of the **ESO Licence**.
- 10.2.4 In respect of the **CMP 223 Security Period**, the **Cancellation Charge Secured Amount Statement** sent to each **User** with an **Existing Associated DNO Construction Agreement** or **Existing BEGA Construction Agreement** shall reflect the provisions introduced by **CMP 223** and each such **User** shall put security arrangements in place in accordance with **CUSC Section 15** such security arrangements to be effective from the start of the **CMP 223 Security Period**.

### *Outstanding Applications and New Applications*

- 10.2.5 **The Company** shall make **Offers** such that prior to the **CMP 223 Transition Period End Date** the arrangements for security and liability within the agreements are consistent with those under the **Pre CMP 223 CUSC** but such that on **CMP 223 Transition Period End Date** the arrangements for security and liability within the agreements are consistent with those under the **Post CMP 223 CUSC** and shall to the extent practicable make such **Offers** within the original or standard timescales.

## Part 2

### 10.3 Introduction

- 10.3.1 This Section 10, Part 2 deals with issues arising out of the transition associated with the approval and implementation of **CMP293 and CMP294** (Modifications relating to the transfer of the system operator role from National Grid Electricity Transmission plc to The Company).
- 10.3.2 This Section 10, Part 2 sets out the arrangements such that:

- (a) the rights and obligations of National Grid Electricity Transmission plc (No: 2366977 whose registered office is at 1-3 Strand, London WC2N 5EH) under the **CUSC** and the **CUSC Agreements** were novated to The Company (No: 11014226 to reflect the **Transfer of System Operator Role**;
- (b) certain amendments were made to the **CUSC Agreements** to reflect the **Transfer of the System Operator Role**; and
- (c) each **CUSC Party** will co-operate in relation to the transition.

10.3.3 The provisions of the **Post CMP293 and CMP294 CUSC** shall be suspended until the **SO Transfer Date** expect for this Section 10, Part 2 (which will take immediate effect).

10.3.4 In this Section 10, Part 2:

- (a) the term “**CMP293 and CMP294**” shall mean **CUSC Modification Proposal 293 and 294** (Modifications relating to the transfer of the system operator role from National Grid Electricity Transmission plc to The Company);
- (b) the term “**CUSC Agreement**” shall mean each or any of the agreements listed in Paragraph 10.4.3;
- (c) the term “**Post CMP293 and CMP294 CUSC**” means the version of the CUSC as amended by **CMP293 and CMP294**;
- (d) the term “**Pre CMP293 and CMP294 CUSC**” means the version of the CUSC prior to amendments by **CMP293 and CMP294**;
- (e) the term “**SO Transfer Date**” means the date and time on which the **Transmission Licence** granted to National Grid Electricity Transmission plc was transferred in part to The Company to effect the **Transfer of the System Operator Role**; and
- (f) the term “**Transfer of the System Operator Role**” means the transfer, by means of the transfer in part of the **Transmission Licence** granted to **National Grid Electricity Transmission plc**, of the system operator role to **The Company**.

10.3.5 Without prejudice to any specific provision under this Section 10, Part 2 as to the time within which or the manner in which any **CUSC Party** should perform its obligations under this Section 10, Part 2, where a **CUSC Party** is required to take any step or measure under this Section, Part 2, such requirement shall be construed as including any obligation to:

- (a) take such step or measure as quickly as reasonable practicable; and
- (b) do such associated or ancillary things as may be necessary to complete such step or measure as quickly as reasonably practicable.

#### **10.4 CMP293 and CMP294: NOVATION OF CUSC AGREEMENTS**

10.4.1 National Grid Electricity Transmission plc and The Company shall each enter into a novation agreement in the form published by National Grid Electricity Transmission plc as part of the **CMP293 and CMP294** process.

10.4.2 Such novation agreement will, with effect from the **SO Transfer Date**, novate to The Company all rights and obligations of National Grid Electricity Transmission plc under the agreements referred to in Paragraph 10.4.4 (including all rights, obligations and liabilities of National Grid Electricity Transmission plc that may have accrued in respect of the period prior to the **SO Transfer Date**) as more specifically provided for in the novation agreement.

10.4.3 Such novation agreement shall be in respect of each **CUSC Agreement**, being the following:

the **CUSC Framework Agreement**;

all **Bilateral Agreements**

all **Construction Agreements**;

all **Mandatory Services Agreements**; and

all **Transmission Related Agreements**.

10.4.4 National Grid Electricity Transmission plc shall enter into such novation agreement in (to the extent applicable) its own right, and also (to the extent applicable) on behalf of the **CUSC Parties**.

10.4.5 Each **CUSC Party** hereby irrevocably and unconditionally authorises National Grid Electricity Transmission to execute and

deliver, on behalf of such **CUSC Party**, a novation agreement as envisaged by this section.

- 10.4.6 Each **CUSC Party** shall do all such things as **The Company** may reasonably request in relation to the novation of the agreements referred to in Paragraph 10.4.3 from National Grid Electricity Transmission plc to The Company, whether before or after the **Transfer Date**, including to such things as may be necessary or desirable to facilitate the novation.

#### 10.5 **CMP293 and CMP294: AMENDMENTS TO CUSC AGREEMENTS**

- 10.5.1 Each **CUSC Agreement** shall be read and construed, with effect from **SO transfer Date**, as if it had been amended in accordance with any changes to its corresponding proforma exhibit to the **Post CMP293 and CMP294 CUSC** and The Company will enter into the necessary agreements in this respect with National Grid Electricity Transmission plc pursuant to the **STC**. Each **CUSC Party** acknowledges and agrees that the provisions of this Paragraph 10.5.1 shall apply notwithstanding the provisions in the **CUSC Agreements** as to variation of those agreements.
- 10.5.2 Each **CUSC Agreement** shall be read and construed such that any obligation, arising prior to the **SO Transfer Date**, to provide or renew security in respect of the **Security Period** commencing on the **SO Transfer Date** shall be construed to require the security to be provided to or renewed in the name of The Company in accordance with the process notified by National Grid Electricity Transmission plc.
- 10.5.3 The **CUSC** and each **CUSC Agreement** shall be read and construed such that any general obligations regarding the provision of security shall be construed to require the replacement of any existing security to be provided in the name of National Grid Electricity Transmission System Operator Limited not less than 75 (seventy five) days (or if such day is not a Business Day the next following Business Day) prior to 31 March 2019 and effective from the **SO Transfer Date** in accordance with the process notified by National Grid Electricity Transmission plc.
- 10.5.4 In the context of any **Site Responsibility Schedule** in existence at the **SO Transfer Date** which would require, following the **Transfer of the System Operator Role**, the signature of either The Company instead of National Grid Electricity Transmission plc or both the signature of The Company and National Grid Electricity Transmission plc, National Grid Electricity System Operator Limited and National Grid Electricity Transmission plc acknowledge and the other Parties agree that the signature of National Grid Electricity Transmission plc on such **Site**

**Responsibility Schedule** shall be considered to be the signature of The Company and/or National Grid Electricity Transmission plc as appropriate.

#### 10.6 **CMP293 and CMP294: TRANSITIONAL ISSUES**

- 10.6.1 Each **CUSC Party** shall take such steps and do such things in relation to the **CUSC** and the CUSC Agreements as are within its power and as are necessary or appropriate in order to give full and timely effect to the **Transfer of the System Operator Role**.
- 10.6.2 Each **CUSC Party** agrees that all things done by National Grid Electricity Transmission plc pursuant to CUSC prior to the **SO Transfer Date** (including but not limited to the making of offers, the provision of reports and statements and the serving of notices) shall be deemed to have been done by National Grid Electricity System Operator Limited and all things received by National Grid Electricity Transmission plc pursuant to CUSC (including but not limited to applications and notices) shall be deemed to have been received by The Company.
- 10.6.3 In particular:
  - 10.6.3.1 **Users** acknowledge and agree that National Grid Electricity Transmission plc can exchange information and data submitted by **Users** under the **CUSC** prior to the **SO Transfer Date** with The Company to the extent necessary to enable the transition of the system operator role from National grid Electricity Transmission plc to The Company;
  - 10.6.3.2 National Grid Electricity Transmission plc will identify and publish as soon as practicable [and in any event prior to [x] January 2019] any requirements on **Users** necessary to manage the transition of the operations, systems, process and procedures and the rights and obligations relating to the **Transfer of the SO Role** under the **CUSC** from National Grid Electricity Transmission plc to The Company.

END OF SECTION 10

## **CUSC - SECTION 11**

### **INTERPRETATION AND DEFINITIONS**

#### **CONTENTS**

- 11.1 Introduction
- 11.2 Interpretation and Construction
- 11.3 Definitions



## **SECTION 11**

### **INTERPRETATION AND DEFINITIONS**

#### **11.1 INTRODUCTION**

This Section sets out general rules to be applied in interpreting the **CUSC**, **Bilateral Agreements**, **Construction Agreements** and **Mandatory Services Agreements**. It also sets out the defined terms used by the **CUSC** (other than those defined elsewhere in the **CUSC**) and other agreements. Those other agreements may, in accordance with Paragraph 11.2.2, have their own further interpretation rules and defined terms which apply only to the individual agreements.

#### **11.2 INTERPRETATION AND CONSTRUCTION:**

11.2.1 In the **CUSC** and in each **Bilateral Agreement** and in each **Mandatory Services Agreement** and each **Construction Agreement**:

- (a) the interpretation rules in this Paragraph 11.2; and
- (b) the words and expressions defined in Paragraph 11.3,

shall, unless the subject matter or context otherwise requires or is inconsistent therewith, apply.

11.2.2 Save as otherwise expressly provided in the **CUSC**, in the event of any inconsistency between the provisions of any **Bilateral Agreement**, **Mandatory Services Agreement** or **Construction Agreement** and the **CUSC**, the provisions of the **Bilateral Agreement** or **Mandatory Services Agreement** or **Construction Agreement** shall prevail in relation to the **Connection Site** which is the subject thereof to the extent that the rights and obligations of **Users** not party to that **Bilateral Agreement**, **Mandatory Services Agreement** or **Construction Agreement** are not affected.

11.2.3 If in order to comply with any obligation in the **CUSC**, any **Bilateral Agreement** or any **Construction Agreement** any **CUSC Party** is under a duty to obtain the consent or approval (including any statutory licence or permission) ("the **Consent**") of a third party (or the **Consent** of another **CUSC Party**) such obligation shall be deemed to be subject to the obtaining of such **Consent** which the **CUSC Party** requiring the **Consent** shall use its reasonable endeavours to obtain including (if there are reasonable grounds therefor) pursuing any appeal in order to obtain such **Consent**.

11.2.4 If such **Consent** is required from any **CUSC Party** then such **CUSC Party** shall grant such **Consent** unless it is unable to do so or it would be unlawful for it to do so provided that such grant by such **CUSC Party** may be made subject to such reasonable conditions as such **CUSC Party** shall reasonably determine.

- 11.2.5 For the avoidance of doubt if the **CUSC Party** who is under a duty to obtain such **Consent** fails to obtain such **Consent** having complied with this Paragraph 11.2 the obligation on that **CUSC Party** (in relation to which such **Consent** is required) shall cease.
- 11.2.6 In the **CUSC** and in each **Bilateral Agreement** and in each **Mandatory Services Agreement** and each **Construction Agreement**:
- (a) unless the context otherwise requires all references to a particular Paragraph, Part, Section, Schedule or Exhibit shall be a reference to that Paragraph, Part, Section, Schedule or Exhibit in or to the **CUSC** and all references to a particular Appendix shall be a reference to that Appendix to a **Bilateral Agreement** or **Mandatory Services Agreement** or **Construction Agreement** (as the case may be);
  - (b) a table of contents and headings are inserted for convenience only and shall be ignored in construing the **CUSC** or a **Bilateral Agreement**, **Construction Agreement** or **Mandatory Services Agreement** as the case may be;
  - (c) references to the words "include" or "including" are to be construed without limitation to the generality of the preceding words;
  - (d) unless the context otherwise requires any reference to an Act of Parliament or any part or section or other provision of or schedule to an Act of Parliament shall be construed, at the particular time, as including a reference to any modification, extension or re-enactment thereof then in force and to all instruments, orders or regulations then in force and made under or deriving validity from the relevant Act of Parliament; and
  - (e) references to the masculine shall include the feminine and references in the singular shall include the plural and vice versa and words denoting persons shall include any individual, partnership, firm, company, corporation, joint venture, trust, association, organisation or other entity, in each case whether or not having separate legal personality.
- 11.2.7 In the case of **OTSDUW Build**, if the **Transmission Interface Site** is **Operational** prior to the **OTSUA Transfer Time** the **User's Equipment** will be connected to the **National Electricity Transmission System** through the connection of the **OTSUA** to the **National Electricity Transmission System** at the **Transmission Interface Point** until the **OTSUA Transfer Time**. In such case and until the **OTSUA Transfer Time**, where provisions of the **CUSC** apply in relation to (a) **User's Equipment**; such provisions and references to **User's Equipment** shall be construed where the context requires as being instead references to or including (as the context requires) **OTSUA** unless the context otherwise requires; and (b) **User's Equipment** by reference to the **Connection Site**; such provisions and references to **User's Equipment** and **Connection Site** in the **CUSC** shall be construed as being instead references to or including (as the context requires) **OTSUA** and **Transmission Interface Site** respectively unless the context otherwise requires;

11.2.8 Obligations on **The Company** shall be interpreted as obligations to procure that the **Relevant Transmission Licensee** fulfils such obligations, where relevant.

### 11.3 DEFINITIONS

The following terms shall have the following meanings:

|                                                        |                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"5 Business Days Period"</b>                        | means, in the context of Section 17, the 5 <b>Business Days</b> after closure of a <b>Gate 2 Application Window</b> ;                                                                                                                                             |
| <b>"10 Clear Days"</b>                                 | defined as 10 complete periods of 24 hours from 00:00hrs to 24:00hrs;                                                                                                                                                                                             |
| <b>"15 Business Days Period"</b>                       | means, in the context of Section 17, the 15 <b>Business Days</b> after closure of a <b>Gate 2 Application Window</b> ;                                                                                                                                            |
| <b>"ABSVD Methodology Statement"</b>                   | the document entitled "Applicable Balancing Services Volume Data Methodology Statement", as published by <b>The Company</b> as the same may be amended from time to time;                                                                                         |
| <b>"Accession Agreement"</b>                           | an agreement in or substantially in the form of Exhibit A to the <b>CUSC</b> whereby an applicant accedes to the <b>CUSC Framework Agreement</b> ;                                                                                                                |
| <b>"Acceptance Volume"</b>                             | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                          |
| <b>"Act"</b>                                           | the Electricity Act 1989;                                                                                                                                                                                                                                         |
| <b>"Active Power"</b>                                  | the product of voltage and the in-phase component of alternating current measured in units of watts and standard multiples thereof i.e.<br><br><div style="margin-left: 40px;"> 1000 watts = 1kW<br/> 1000 kW = 1MW<br/> 1000 MW = 1GW<br/> 1000 GW = 1TW; </div> |
| <b>"Actual Amount"</b>                                 | as defined in Paragraph 3.13;                                                                                                                                                                                                                                     |
| <b>"Actual Attributable Works Cancellation Charge"</b> | where the <b>Attributable Works Cancellation Charge</b> is calculated in accordance with Paragraph 3.5.2 of Part Two of the <b>User Commitment Methodology</b> ;                                                                                                  |
| <b>"Additional Load"</b>                               | <b>Site Load</b> other than <b>Station Load</b> and importing <b>Generating Units</b> for processes other than the production of electricity;                                                                                                                     |
| <b>"Additional Scheduling Data"</b>                    | as defined in the <b>Grid Code</b> on the day prior to the <b>NETA Go-live Date</b> ;                                                                                                                                                                             |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Adjusted LDTEC Profile" | the <b>LDTEC Profile</b> as adjusted by the MW cap specified by the <b>User</b> in its acceptance of the <b>LDTEC Block Offer</b> in accordance with <b>CUSC</b> Paragraph 6.32.6.4;                                                                                                                                                                                                                                                                                                   |
| "Adjustment Revenue"     | A positive or negative adjustment to overall Generator TNUoS charges to ensure compliance with the Limiting Regulation.                                                                                                                                                                                                                                                                                                                                                                |
| "Adjustment Tariff"      | The non locational £/kW tariff that applies Adjustment Revenue to Generators liable for TNUoS charges to ensure compliance with the Limiting Regulation.                                                                                                                                                                                                                                                                                                                               |
| "Advancement"            | advancement of the <b>Construction Programme</b> to enable an earlier <b>Completion Date</b> for connection to or use of the <b>National Electricity Transmission System</b> or <b>Energisation</b> in the case of <b>Embedded Power Stations</b> ;                                                                                                                                                                                                                                    |
| "Advancement Request"    | a request for <b>Advancement</b> in the form set out in the <b>Gate 2 Criteria Methodology</b> ;                                                                                                                                                                                                                                                                                                                                                                                       |
| "Affected User"          | a <b>User</b> : <ul style="list-style-type: none"> <li>a) with <b>Transmission Entry Capacity</b> for the <b>Connection Site</b> against which the affected <b>Export BM Unit</b> or <b>Associated Export BM Unit</b> is registered and who is paying or in receipt of generator <b>Transmission Network Use of System Charges</b> by reference to such <b>Transmission Entry Capacity</b>; or</li> <li>b) an <b>Interconnector Owner</b>;</li> </ul>                                  |
| "Affiliate"              | in relation to <b>The Company</b> (and in relation to Paragraphs 3.6.9.8, 6.14, 8A.3.1.2 and 8A.4.2.2, any <b>User</b> ) means any holding company or subsidiary of <b>The Company</b> (or the <b>User</b> as the case may be) or any subsidiary of a holding company of <b>The Company</b> (or the <b>User</b> as the case may be), in each case within the meaning of sections 736, 736A and 736B of the Companies Act 1985 as substituted by section 144 of the Companies Act 1989; |
| "AF Rules"               | has the meaning given to "allocation framework" in section 13(2) of the Energy Act 2013                                                                                                                                                                                                                                                                                                                                                                                                |
| "Agency"                 | means the Agency for the Cooperation of the Energy Regulators established under 2009/713/EC of the European Parliament and of the Council of the 13 July 2009 establishing an Agency for the Cooperation of Energy Regulators as amended from time to time;                                                                                                                                                                                                                            |
| "Agency Business"        | any business of <b>The Company</b> or any <b>Affiliate</b> or <b>Related Undertaking</b> in the purchase or other acquisition or sale or other disposal of electricity as agent for any other <b>Authorised Electricity Operator</b> ;                                                                                                                                                                                                                                                 |

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Agreed Ancillary Services"</b>          | <b>Part 2 System Ancillary Services</b> and <b>Commercial Ancillary Services</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Agreed Value"</b>                       | the value attributed by <b>The Company</b> to the form of security provided that if <b>The Company</b> and the <b>User</b> cannot agree on such value then the value will be determined by an expert appointed by <b>The Company</b> and the <b>User</b> or, failing their agreement as to the expert, the expert nominated by the Director General of The Institute of Credit Management;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Alternate Election Process"</b>         | as defined in Paragraph 8A.4.4.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Alternate Member(s)"</b>                | persons appointed as such pursuant to Paragraph 8.7.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Alternate Member Interim Vacancies"</b> | as defined in Paragraph 8A.4.3.3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Allowed Interruption"</b>               | <p>shall mean an <b>Interruption</b> as a result of any of the following:</p> <ul style="list-style-type: none"> <li>a) an <b>Event</b> other than an <b>Event</b> on the <b>National Electricity Transmission System</b>;</li> <li>b) an event of <b>Force Majeure</b> pursuant to Paragraph 6.19 of the <b>CUSC</b>;</li> <li>c) <ul style="list-style-type: none"> <li>(i) a <b>Total Shutdown</b></li> <li>(ii) a <b>Partial Shutdown</b>, but only for any period of <b>Interruption</b> which coincides with a <b>Market Suspension Period</b>;</li> </ul> </li> <li>d) action taken under the <b>Fuel Security Code</b>;</li> <li>e) <b>Disconnection</b> or <b>Deenergisation</b> by or at the request of <b>The Company</b> under Section 5 of the <b>CUSC</b>, except in the case of an <b>Emergency Deenergisation Instruction</b>;</li> <li>f) the result of a direction of the Authority or <b>Secretary of State</b>;</li> <li>g) tripping of the <b>User's Circuit Breaker(s)</b> following receipt of a signal from a <b>System to Generator Operational Intertripping Scheme</b> which has been armed in accordance with Paragraph 4.2A.2.1(b).</li> </ul> <p>or if provided for in a <b>Bilateral Agreement</b> with the affected <b>User</b>;</p> |
| <b>"Ancillary Services"</b>                 | <b>System Ancillary Services</b> and/or <b>Commercial Ancillary Services</b> as the case may be;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                                              |                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Ancillary Services Agreement"</b>                        | an agreement between <b>The Company</b> and a <b>User</b> or other person to govern the provision of and payment for one or more <b>Ancillary Services</b> , which term shall include without limitation a <b>Mandatory Services Agreement</b> ;                                 |
| <b>"Annual Average Cold Spell (ACS) Conditions"</b>          | a particular combination of weather elements which gives rise to a level of peak <b>Demand</b> within an <b>The Company Financial Year</b> which has a 50% chance of being exceeded as a result of weather variation alone;                                                      |
| <b>"Annual Wider Cancellation Amount Statement"</b>          | the statement published by <b>The Company</b> each <b>Financial Year</b> in accordance with the <b>User Commitment Methodology</b> ;                                                                                                                                             |
| <b>"Apparatus"</b>                                           | all equipment in which electrical conductors are used, supported or of which they may form a part;                                                                                                                                                                               |
| <b>"Apparent Power"</b>                                      | As defined in the <b>Grid Code</b>                                                                                                                                                                                                                                               |
| <b>Applicant"</b>                                            | a person applying for connection and/or use of system under the <b>CUSC</b> ;                                                                                                                                                                                                    |
| <b>"Applicable CUSC Objectives"</b>                          | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                           |
| <b>"Applicable Value"</b>                                    | the highest contractual <b>Transmission Entry Capacity</b> figure for year "t" provided to <b>The Company</b> up to and including 31 October in year "t-1" for publication in the October update of the <b>Electricity Ten Year Statement</b> ;                                  |
| <b>"Application for a STTEC"</b>                             | an application made by a <b>User</b> in accordance with the <b>Offer"</b> Paragraph 6.31 for <b>Short Term Capacity</b> for a <b>STTEC Period</b> ;                                                                                                                              |
| <b>"Approved Agency"</b>                                     | the panel of three independent assessment agencies appointed by <b>The Company</b> and other network operators from time to time for the purpose of providing <b>Independent Credit Assessments</b> details of such agencies to be published on the <b>The Company Website</b> ; |
| <b>"Approved CUSC Modification"</b>                          | as defined in Paragraph 8.23.7;                                                                                                                                                                                                                                                  |
| <b>"Approved CUSC Modification Fast Track Proposal"</b>      | as defined in Paragraph 8.29.7, provided that no objection is received pursuant to Paragraph 8.29.12;                                                                                                                                                                            |
| <b>"Approved CUSC Modification Self-Governance Proposal"</b> | as defined in Paragraph 8.25.10;                                                                                                                                                                                                                                                 |

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Applicable Balancing Services Volume Data" | has the meaning given in the <b>Balancing and Settlement Code</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Approved Credit Rating"                    | a long term debt rating of not less than BB- by Standard and Poor's Corporation or a rating not less than Ba3 by Moody's Investor Services, or a short term rating which correlates to those long term ratings, or an equivalent rating from any other reputable credit agency approved by <b>The Company</b> ; or such other lower rating as may be reasonably approved by <b>The Company</b> from time to time                                                                                                                                                                                                                                                                                                                                                                                            |
| Assimilated Law                             | has the same meaning as that given by section 6(7) of the European Union (Withdrawal) Act 2018;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| "Associated DNO Construction Agreement"     | a <b>Construction Agreement</b> between <b>The Company</b> and a <b>User</b> in the category of a <b>Distribution System</b> directly connected to the <b>National Electricity Transmission System</b> in respect of works required on the <b>National Electricity Transmission System</b> as a consequence of the connection of <b>Distributed Generation</b> to the <b>Distribution System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Associated Export BM Unit"                 | <p>an <b>Export BM Unit</b> where:</p> <p>(i) that <b>Export BM Unit</b> and an <b>Import BM Unit</b> are comprised in the <b>User's Equipment</b> are both registered as being associated with each other by being listed in <b>Appendix C</b> of the same <b>Bilateral Connection Agreement</b>; and</p> <p>the <b>Import BM Unit</b> is <b>Deenergised</b> and as a direct consequence of the <b>Deenergisation</b> of the <b>Import BM Unit</b> the <b>Export BM Unit</b> is also <b>Deenergised</b>;</p>                                                                                                                                                                                                                                                                                               |
| "Attributable Works"                        | those components of the <b>Construction Works</b> which are required (a) to connect a <b>Power Station</b> or <b>Interconnector</b> which is to be connected at a <b>Connection Site</b> to the nearest suitable <b>MITS Node</b> ; or (b) in respect of an <b>Embedded Power Station</b> from the relevant <b>Grid Supply Point</b> to the nearest suitable <b>MITS Node</b> ; (and in any case above where the <b>Construction Works</b> include a <b>Transmission</b> substation that once constructed will become the <b>MITS Node</b> , the <b>Attributable Works</b> will include such <b>Transmission</b> substation) but excluding in each case (a) and (b) any <b>[Excepted Works]</b> , and which in relation to a particular <b>User</b> are as specified in its <b>Construction Agreement</b> ; |
| "Attributable Works Cancellation Charge"    | the component of the <b>Cancellation Charge</b> which applies on and after the <b>Trigger Date</b> and prior to the <b>Charging Date</b> as more particularly described in Part Two of the <b>User Commitment Methodology</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                                                                        |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Attributable Capital Cost"</b>                                     | <b>Works</b> | means the fees, expenses and costs of whatever nature reasonably and properly incurred or due in respect of each component within the <b>Attributable Works</b> ;                                                                                                                                                                                                                                                                                                           |
| <b>"Authorised Recipient"</b>                                          |              | in relation to any <b>Protected Information</b> , means any <b>Business Person</b> who, before the <b>Protected Information</b> had been divulged to them by <b>The Company</b> or any <b>Subsidiary of The Company</b> , had been informed of the nature and effect of Paragraph 6.15.1 and who requires access to such <b>Protected Information</b> for the proper performance of their duties as a <b>Business Person</b> in the course of <b>Permitted Activities</b> ; |
| <b>"Authority"</b>                                                     |              | the Director General of Electricity Supply appointed for the time being pursuant to section 1 of the <b>Act</b> or, after the coming into force of section 1 of the Utilities Act 2000, the Gas and Electricity Markets Authority established by that section;                                                                                                                                                                                                              |
| <b>"Available LDTEC"</b>                                               |              | is the level of MW for an <b>LDTEC Week</b> as notified by <b>The Company</b> to a <b>User</b> in (in the case of the first seven <b>LDTEC Weeks</b> ) the <b>LDTEC Indicative Block Offer</b> and for subsequent <b>LDTEC Weeks</b> in an <b>LDTEC Availability Notification</b> ;                                                                                                                                                                                         |
| <b>"Back Stop Date"</b>                                                |              | in relation to an item of <b>Derogated Plant</b> , the date by which it is to attain its <b>Required Standard</b> , as specified in or pursuant to the relevant <b>Derogation</b> ;                                                                                                                                                                                                                                                                                         |
| <b>"Balancing and Settlement Code" or "BSC"</b>                        |              | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Balancing Code" or "BC"</b>                                        |              | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Balancing Mechanism"</b>                                           |              | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Balancing Services"</b>                                            |              | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Balancing Services Activity"</b>                                   |              | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Balancing Services Agreement"</b>                                  |              | an agreement between <b>The Company</b> and a <b>User</b> or other person governing the provision of and payment for one or more <b>Balancing Services</b> ;                                                                                                                                                                                                                                                                                                                |
| <b>"Balancing Services Use of System Charges"</b>                      |              | the element of <b>Use of System Charges</b> payable in respect of the <b>Balancing Services Activity</b> ;                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Balancing Services Use of System Charges Forecast Information"</b> |              | <b>The Company's</b> estimate of the average expected <b>Balancing Services Use of System Charges</b> for each month in the <b>Current Financial Year</b> and each month of the following <b>Financial Year</b> .                                                                                                                                                                                                                                                           |



|                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Balancing Services Use of System Reconciliation Statement" | as defined in Paragraph 3.15.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| "Balancing Services Use of System Working Capital Facility" | the component of the working capital facility, which is capped to a level as agreed between <b>The Company</b> and <b>The Authority</b> , available to <b>The Company</b> which is ringfenced for the purposes of <b>BSUoS Charges</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Bank Account"                                              | <p>a bank account in the name of <b>The Company</b> at such branch of Barclays Bank PLC, or such branch of any other bank, in the City of London as is notified by <b>The Company</b> to the <b>User</b> in which deposits of principal sums from the <b>User</b> shall be ascertainable, bearing interest from (and including) the date of deposit of principal sums to (but excluding) the date of withdrawal of principal sums from such account, mandated for withdrawal of principal solely by <b>The Company</b> against delivery of a <b>Notice of Drawing</b> for the amount demanded therein and mandated for the transfer of any interest accrued to the <b>Bank Account</b> to such account to:</p> <p>a) an associated bank account in the name of <b>The Company</b> in which the interest accruing in respect of the principal sums deposited by the <b>User</b> shall be ascertainable; or</p> <p>b) such bank account as the User may specify;</p> |
| "Base Rate"                                                 | in respect of any day, the rate per annum which is equal to the base lending rate from time to time of Barclays Bank PLC as at the close of business on the immediately preceding <b>Business Day</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Base Value at Risk"                                        | the sum of <b>HH Base Value at Risk</b> , <b>NHH Base Value at Risk</b> , <b>FDSC Base Value at Risk</b> and the <b>UMS Base Value at Risk</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "BELLA Application"                                         | an application for a <b>BELLA</b> in the form or substantially in the form set out in Exhibit Q;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "BELLA Offer"                                               | an offer for a <b>BELLA</b> in the form or substantially the form set out in Exhibit R including any revision or extension of such offer;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Bi-annual Estimate"                                        | an estimate pursuant to Paragraph 2.21.2 of all payments to be made or which may be required to be made by the <b>User</b> in any relevant period, such estimate to be substantially in the form set out in Exhibit L to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Bid"                                                       | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Bid-Offer Acceptance"                                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Bid-Offer Volume"                                          | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Bilateral Agreement"</b>                                                            | in relation to a <b>User</b> , a <b>Bilateral Connection Agreement</b> or a <b>Bilateral Embedded Generation Agreement</b> , or a <b>BELLA</b> or a <b>Virtual Lead Party Agreement</b> between <b>The Company</b> and the <b>User</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Bilateral Connection Agreement"</b>                                                 | an agreement entered into pursuant to Paragraph 1.3.1 a form of which is set out in Exhibit 1 to <b>Schedule 2</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Bilateral Embedded Generation Agreement"</b>                                        | an agreement entered into pursuant to Paragraph 1.3.1, a form of which is set out in Exhibit 2 to <b>Schedule 2</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Bilateral Embedded Licence exemptable Large power station Agreement" or "BELLA"</b> | an agreement in respect of an <b>Embedded Exemptable Large Power Station</b> entered into pursuant to Paragraph 1.3.1, a form of which is set out in Exhibit 5 to <b>Schedule 2</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Bilateral Insurance Policy"</b>                                                     | a policy of insurance taken out by the <b>User</b> with a company in the business of providing insurance who meets the <b>Requirements</b> for the benefit of <b>The Company</b> and upon which <b>The Company</b> can claim if the circumstances set out in <b>CUSC</b> Paragraph 5.3.1(b) (i) to (v) arise in respect of such <b>User</b> and which shall provide security for the <b>Agreed Value</b> . In addition <b>The Company</b> may accept such a policy from such a company who does not meet the <b>Requirements</b> up to an <b>Agreed Value</b> where <b>The Company</b> agrees or where <b>The Company</b> does not agree as determined by an expert appointed by <b>The Company</b> and the <b>User</b> or failing their agreement as to the expert the expert nominated by the Director General of The Institute of Credit Management; |
| <b>"Block LDTEC"</b>                                                                    | is at any given time the lower of the MW figure in the <b>LDTEC Profile</b> or <b>Adjusted LDTEC Profile</b> for an <b>LDTEC Period</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"BM Unit"</b>                                                                        | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"BM Unit Identifiers"</b>                                                            | the identifiers (as defined in the <b>Balancing and Settlement Code</b> ) of the <b>BM Units</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"BM Unit Metered Volume"</b>                                                         | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Boundary Point Metering System"</b>                                                 | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"British Grid Systems Agreement"</b>                                                 | the agreement made on 30 March 1990 of that name between <b>The Company</b> , Scottish Hydro Electric plc, and Scottish Power plc;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"BSC Agent"</b>                                                                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"BSC Framework Agreement"</b>                      | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"BSC Panel"</b>                                    | the Panel as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"BSC Party"</b>                                    | a person who is for the time being bound by the <b>Balancing and Settlement Code</b> by virtue of being a party to the <b>BSC Framework Agreement</b> ;                                                                                                                                                                                                                                                                                          |
| <b>"Business Day"</b>                                 | any week-day other than a Saturday on which banks are open for domestic business in the City of London;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Business Person"</b>                              | any person who is a <b>Main Business Person</b> or a <b>Corporate Functions Person</b> and <b>"Business Personnel"</b> shall be construed accordingly;                                                                                                                                                                                                                                                                                           |
| <b>"Cancellation Charge"</b>                          | the charge payable by certain <b>Users</b> in the event of termination of a <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> or <b>Construction Agreement</b> or a reduction in <b>Transmission Entry Capacity</b> or a reduction in <b>Interconnector User Commitment Capacity</b> or a reduction in <b>Developer Capacity</b> as calculated in accordance with the <b>User Commitment Methodology</b> ; |
| <b>"Cancellation Charge Profile"</b>                  | the profile as applied to the <b>Fixed Attributable Works Cancellation Charge</b> and <b>Wider Cancellation Charge</b> in accordance with Part Two of the <b>User Commitment Methodology</b> ;                                                                                                                                                                                                                                                   |
| <b>"Cancellation Charge Secured Amount"</b>           | the amount to be secured by a <b>User</b> from the start of and during a <b>Security Period</b> as such amount is applied and calculated in accordance with Part Three of the <b>User Commitment Methodology</b> ;                                                                                                                                                                                                                               |
| <b>"Cancellation Charge Secured Amount Statement"</b> | the statement issued by <b>The Company</b> to a <b>User</b> in accordance with Part Two of the <b>User Commitment Methodology</b> showing the <b>Cancellation Charge Secured Amount</b> for a given <b>Security Period</b> such statement to be in substantially the form set out in Exhibit MM2 to the <b>CUSC</b> ;                                                                                                                            |
| <b>"Cancellation Charge Shortfall"</b>                | the difference between (a) the <b>Cancellation Charge Secured Amount</b> (or such higher sum as paid by the <b>Developer</b> to the <b>User</b> in respect of the <b>Cancellation Charge</b> ) and (b) the <b>Cancellation Charge</b> payable by the <b>User</b> ;                                                                                                                                                                               |
| <b>"Cancellation Charge Statement"</b>                | the statement issued by <b>The Company</b> to a <b>User</b> in accordance with Part Two of the <b>User Commitment Methodology</b> such statement to be in substantially the form set out in Exhibit MM1 to the <b>CUSC</b> ;                                                                                                                                                                                                                     |

|                                              |                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"CAP 179<br/>Implementation Date"</b>     | shall mean the date specified as the <b>Implementation Date</b> in the direction issued by the <b>Authority</b> approving <b>CUSC Amendment Proposal 179</b> (Prevention of Timing Out of Authority Decisions on Amendment Proposals);                                                                                                                                        |
| <b>"Capability Payment"</b>                  | as defined in Paragraph 4.2A.4(a)(i);                                                                                                                                                                                                                                                                                                                                         |
| <b>"Capacity Market Documents"</b>           | The <b>Capacity Market Rules</b> , The Electricity Capacity Regulations 2014 and any other Regulations made under Chapter 3 of Part 2 of the Energy Act 2013 which are in force from time to time;                                                                                                                                                                            |
| <b>"Capacity Market Rules"</b>               | The rules made under section 34 of the Energy Act 2013 as modified from time to time in accordance with that section and The Electricity Capacity Regulations 2014;                                                                                                                                                                                                           |
| <b>"Category 1<br/>Intertripping Scheme"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Category 2<br/>Intertripping Scheme"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Category 3<br/>Intertripping Scheme"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Category 4<br/>Intertripping Scheme"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"CCGT Unit"</b>                           | a <b>Generating Unit</b> within a <b>CCGT Module</b> ;                                                                                                                                                                                                                                                                                                                        |
| <b>"Central Volume Allocation"</b>           | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                      |
| <b>"CfD Administrative Parties"</b>          | The Secretary of State, a <b>CfD Counterparty</b> and any <b>CfD Settlement Services Provider</b> ;                                                                                                                                                                                                                                                                           |
| <b>"CfD Counterparty"</b>                    | a person designated as a "CfD counterparty" under section 7(1) of the Energy Act 2013;                                                                                                                                                                                                                                                                                        |
| <b>"CfD Documents"</b>                       | the <b>AF Rules</b> , The Contracts for Difference (Allocation) Regulations 2014, The Contracts for Difference (Definition of Eligible Generator) Regulations 2014 and The Contracts for Difference (Electricity Supplier Obligations) Regulations 2014 and any other regulations made under Chapter 2 of Part 2 of the Energy Act 2013 which are in force from time to time; |
| <b>"CfD Settlement Services Provider"</b>    | means any person: <ul style="list-style-type: none"> <li>(i) appointed for the time being and from time to time by a <b>CfD Counterparty</b>; or</li> </ul>                                                                                                                                                                                                                   |

|                                                              |                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                              | (ii) who is designated by virtue of Section C1.2.1B of the <b>Balancing and Settlement Code</b> ,<br><br>in either case to carry out any of the CFD settlement activities (or any successor entity performing CFD settlement activities);                             |
| <b>“Charges for Physical Assets Required for Connection”</b> | shall mean charges paid by producers for physical assets required for connection to the system or the upgrade of the connection.                                                                                                                                      |
| <b>“Charging Band”</b>                                       | a band containing sites from one of the <b>Residual Charging Groups</b> created for the purpose of <b>Transmission Demand Residual</b> charging in accordance with 14.15.137 of the <b>Connection and Use of System Code</b> ;                                        |
| <b>“Charging Date”</b>                                       | as defined in the <b>Construction Agreement</b> ;                                                                                                                                                                                                                     |
| <b>“Charging Dispute”</b>                                    | as defined in Paragraph 7.2.1;                                                                                                                                                                                                                                        |
| <b>“Charging Methodologies”</b>                              | (a) the <b>Use of System Charging Methodology</b> ; and/or<br>(b) the <b>Connection Charging Methodology</b> ;                                                                                                                                                        |
| <b>“Charging Statements”</b>                                 | the <b>Statement of the Connection Charging Methodology</b> , the <b>Statement of the Use of System Charging Methodology</b> , and the <b>Statement of Use of System Charges</b> ;                                                                                    |
| <b>“Circuit Breaker”</b>                                     | a mechanical switching device, capable of making, carrying and breaking currents under normal circuit conditions and also of making, carrying for a specified time and breaking currents under specified abnormal circuit conditions, such as those of short circuit; |
| <b>“Citizens Advice”</b>                                     | Means the National Association of Citizens Advice Bureaux                                                                                                                                                                                                             |
| <b>“Citizens Advice Scotland”</b>                            | Means the Scottish Association of Citizens Advice Bureaux                                                                                                                                                                                                             |
| <b>“CM Administrative Parties”</b>                           | the <b>Secretary of State</b> , the <b>CM Settlement Body</b> , and any <b>CM Settlement Services Provider</b> ;                                                                                                                                                      |
| <b>“CMP434”</b>                                              | <b>CUSC Modification Proposal 434: Implementing Connections Reform</b> ;                                                                                                                                                                                              |
| <b>“CMP434 Implementation Date”</b>                          | shall mean the date specified as the <b>Implementation Date</b> for <b>CMP434</b> in the direction issued by the <b>Authority</b> approving <b>CMP434</b> ;                                                                                                           |
| <b>“CMP434 Gate 1 Agreement”</b>                             | the form of <b>Gate 1 Agreement</b> introduced through <b>CMP434</b> ;                                                                                                                                                                                                |

|                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"CMP434 Gate 2 Agreement"</b>                            | the form of <b>Gate 2 Agreement</b> introduced through <b>CMP434</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"CMP435"</b>                                             | <b>CUSC Modification Proposal 435</b> : Application of <b>Gate 2 Criteria</b> to existing contracted background;                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"CMP435 Implementation Date"</b>                         | the date specified as the <b>Implementation Date</b> for <b>CMP435</b> in the direction issued by the Authority approving <b>CMP435</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"CMRS"</b>                                               | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"CM Settlement Body"</b>                                 | the Electricity Settlements Company Ltd or such other person as may from time to time be appointed as Settlement Body under regulation 80 of the Electricity Capacity Regulations 2014;                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"CM Settlement Services Provider"</b>                    | any person with whom the <b>CM Settlement Body</b> has entered into a contract to provide services to it in relation to the performance of its functions under the <b>Capacity Market Documents</b> ;                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Code Administration Code of Practice"</b>               | <p>the code of practice approved by the <b>Authority</b> and:</p> <p>(a) developed and maintained by the code administrators in existence from time to time;</p> <p>(b) amended subject to the <b>Authority's</b> approval from time to time; and</p> <p>(c) re-published from time to time;</p>                                                                                                                                                                                                                                                                                              |
| <b>"Code Administrator"</b>                                 | <b>The Company</b> carrying out the role of Code Administrator pursuant to Section 8;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Code of Practice"</b>                                   | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Combined Cycle Gas Turbine Module" or "CCGT Module"</b> | a collection of <b>Generating Units</b> (registered under the <b>Grid Code PC</b> ) comprising one or more <b>Gas Turbine Units</b> (or other gas based engine units) and one or more <b>Steam Units</b> where, in normal operation, the waste heat from the <b>Gas Turbine Units</b> is passed to the water/steam system of the associated <b>Steam Units</b> and where the component units within the <b>CCGT Module</b> are directly connected by steam or hot gas lines to enable those units to contribute to the efficiency of the combined cycle operation of the <b>CCGT Module</b> ; |
| <b>"Commercial Ancillary Services"</b>                      | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Commercial Boundary"</b>                                | (unless otherwise defined in the relevant <b>Mandatory Services Agreements</b> ), the commercial boundary between either <b>The Company</b> or a <b>Public Distribution System Operator</b> (as the case                                                                                                                                                                                                                                                                                                                                                                                      |

|                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                            | may be) and the <b>User</b> at the higher voltage terminal of the generator step-up transformer;                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Commercial Services Agreement"</b>                     | an agreement between <b>The Company</b> and a <b>User</b> or other person to govern the provision of and payment for one or more <b>Agreed Ancillary Services</b> ;                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Commissioned"</b>                                      | in respect of <b>Plant</b> and <b>Apparatus</b> commissioned before the <b>Transfer Date</b> means <b>Plant</b> and <b>Apparatus</b> recognised as having been commissioned according to the commissioning procedures current at the time of commissioning and in respect of <b>Plant</b> and <b>Apparatus</b> commissioned after the <b>Transfer Date</b> means <b>Plant</b> and/or <b>Apparatus</b> certified by the <b>Independent Engineer</b> as having been commissioned in accordance with the relevant <b>Commissioning Programme</b> ; |
| <b>"Commissioning Programme"</b>                           | in relation to a particular user, as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Commissioning Programme Commencement Date"</b>         | as defined in relation to a particular <b>User</b> in the <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Competent"</b>                                         | a <b>Gate 1 Application</b> or <b>Gate 2 Application</b> is competent when in the opinion of <b>The Company</b> acting reasonably the <b>Gate 1 Application</b> or <b>Gate 2 Application</b> form has been completed as required, the required data has been provided and the application fee paid to <b>The Company</b> ;                                                                                                                                                                                                                      |
| <b>"Competent Authority"</b>                               | the <b>Secretary of State</b> , the <b>Authority</b> and any local or national agency, authority, department, inspectorate, minister (including Scottish ministers), ministry, official or public or statutory person (whether autonomous or not) of, or of the government of, the United Kingdom;                                                                                                                                                                                                                                              |
| <b>"Competitively Appointed Transmission Owner (CATO)"</b> | means such person who has been awarded a <b>Transmission Licence</b> on the basis of an <b>Onshore Tender Process</b> and in relation to whose <b>Transmission Licence</b> the Standard Conditions in Section D (transmission owner standard conditions) have been given effect;                                                                                                                                                                                                                                                                |
| <b>"Completion Date"</b>                                   | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Composite Demand Charges"</b>                          | in respect of a <b>User</b> its <b>Demand</b> related <b>Transmission Network Use of System Charges</b> for each <b>Transmission Network Use of System Demand Zone</b> ;                                                                                                                                                                                                                                                                                                                                                                        |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Conditional Progression Milestones”</b>     | those <b>User Progression Milestones</b> categorised as such in <b>CUSC</b> Section 16;                                                                                                                                                                                                                                                                                                                                                                       |
| <b>“Confidential Information”</b>               | all data and other information supplied to a <b>User</b> by another <b>CUSC Party</b> under the provisions of the <b>CUSC</b> or any <b>Bilateral Agreement</b> , <b>Construction Agreement</b> or <b>Mandatory Services Agreement</b> ;                                                                                                                                                                                                                      |
| <b>“Connect and Manage Arrangements”</b>        | the arrangements whereby pursuant to Standard Condition C11 of the <b>ESO Licence</b> and Standard Condition D16 of a <b>Relevant Transmission Licensee’s</b> transmission licence connection to and or use of the <b>National Electricity Transmission System</b> is permitted by virtue of a <b>Connect and Manage Derogation</b> on completion of the <b>Enabling Works</b> but prior to completion of the <b>Wider Transmission Reinforcement Works</b> ; |
| <b>“Connect and Manage Derogation”</b>          | means the temporary derogation from the <b>NETS SQSS</b> available to <b>The Company</b> pursuant to Standard Condition E7 of the <b>ESO Licence</b> and/or a <b>Relevant Transmission Licensee</b> pursuant to Standard Condition D3 of its transmission licence;                                                                                                                                                                                            |
| <b>“Connect and Manage Derogation Criteria”</b> | the criteria detailed as such in <b>CUSC</b> Section 13.2.4;                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>“Connect and Manage Derogation Report”</b>   | the report required to be prepared by <b>The Company</b> and/or a <b>Relevant Transmission Licensee</b> in respect of a <b>Connect and Manage Derogation</b> ;                                                                                                                                                                                                                                                                                                |
| <b>“Connect and Manage Implementation Date”</b> | means the date which the Secretary of State determines shall be the connect and manage implementation date;                                                                                                                                                                                                                                                                                                                                                   |
| <b>“Connect and Manage Power Station”</b>       | means a <b>Power Station</b> which is directly connected to the <b>National Electricity Transmission System</b> or which is <b>Distributed Generation</b> ;                                                                                                                                                                                                                                                                                                   |
| <b>“Connect and Manage Transition Period”</b>   | means the period ending 6 months after the <b>Connect and Manage Implementation Date</b> ;                                                                                                                                                                                                                                                                                                                                                                    |
| <b>“Connected Planning Data”</b>                | in relation to a particular user, as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                           |
| <b>“Connection”</b>                             | a direct connection to the <b>National Electricity Transmission System</b> by a <b>User</b> ;                                                                                                                                                                                                                                                                                                                                                                 |
| <b>“Connection Application”</b>                 | an application for a <b>New Connection Site</b> in the form or substantially in the form set out in Exhibit B to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                            |
| <b>“Connection Boundary”</b>                    | shall be the boundary defined by Paragraph 14.2.6 of the Statement of the Connection Charging Methodology;                                                                                                                                                                                                                                                                                                                                                    |



|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Connection Charges"</b>                     | charges made or levied or to be made or levied for the carrying out (whether before or after the date on which the <b>ESO Licence</b> comes into force) of works and provision and installation of electrical plant, electric lines and ancillary meters in constructing entry and exit points on the <b>National Electricity Transmission System</b> , together with charges in respect of maintenance and repair of such items in so far as not otherwise recoverable as <b>Use of System Charges</b> , all as more fully described in the <b>ESO Licence</b> , whether or not such charges are annualised, including all charges provided for in the statement of <b>Connection Charging Methodology</b> (such as <b>Termination Amounts</b> and <b>One-off Charges</b> ); |
| <b>"Connection Charging Methodology"</b>        | as defined in the <b>ESO Licence</b> and set out in Section 14;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Connection Conditions" or "CC"</b>          | that portion of the <b>Grid Code</b> which is identified as the <b>Connection Conditions</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Connection Entry Capacity"</b>              | the figure specified as such for the <b>Connection Site</b> and each <b>Generating Units</b> as set out in Appendix C of the relevant <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Connection Offer"</b>                       | an offer or (where appropriate) the offers for a <b>New Connection Site</b> in the form or substantially in the form set out in Exhibit C including any revision or extension of such offer or offers;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Connection Site"</b>                        | each location more particularly described in the relevant <b>Bilateral Agreement</b> at which a <b>User's Equipment</b> and <b>Transmission Connection Assets</b> required to connect that <b>User</b> to the <b>National Electricity Transmission System</b> are situated (or, in the case of <b>OTSDUW Build</b> , each location that will become such from the <b>OTSUA Transfer Time</b> and, until the <b>OTSUA Transfer Time</b> , is the location where the <b>User's Equipment</b> connects to the <b>OTSUA</b> ). If two or more <b>Users</b> own or operate <b>Plant</b> and <b>Apparatus</b> which is connected at any particular location that location shall constitute two (or the appropriate number of) <b>Connection Sites</b> ;                             |
| <b>"Connection Site Demand Capability"</b>      | the capability of a <b>Connection Site</b> to take power to the maximum level forecast by the <b>User</b> from time to time and forming part of the <b>Forecast Data</b> supplied to <b>The Company</b> pursuant to the <b>Grid Code</b> together with such margin as <b>The Company</b> shall in its reasonable opinion consider necessary having regard to <b>The Company's</b> duties under the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Connections Network Design Methodology"</b> | the methodology developed or to be developed in accordance with the <b>ESO Licence</b> and <b>Transmission Licences</b> as approved by the <b>Authority</b> and published on <b>The Company's Website</b> as such methodology may be revised from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Consents"</b>                            | <p>in relation to a particular <b>User</b>, as defined in its <b>Construction Agreement</b>;</p> <p>In relation to any Works:-</p> <ul style="list-style-type: none"> <li>a) all such planning and other statutory consents; and</li> <li>b) all wayleaves, easements, rights over or interests in land or any other consent; or for commencement and carrying on of any activity proposed to be undertaken at or from such Works when completed</li> <li>c) permission of any kind as shall be necessary for the construction of the Works;</li> </ul> |
| <b>"Construction Agreement"</b>              | an agreement entered into pursuant to Paragraph 1.3.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Construction Programme"</b>              | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Construction Progression Milestones"</b> | those <b>User Progression Milestones</b> categorised as such in <b>CUSC</b> Section 16;                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Construction Works"</b>                  | In relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Consumer Representative"</b>             | Means the person appointed by the <b>Citizens Advice</b> or the <b>Citizens Advice Scotland</b> (or any successor body) representing all categories of customers, appointed in accordance with Paragraph 8.4.2(b)                                                                                                                                                                                                                                                                                                                                       |
| <b>"Consumption"</b>                         | as defined in the <b>Balancing and Settlement Code</b> in relation to a Consumption BM Unit;                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Control Telephony"</b>                   | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Contract Test"</b>                       | a test (not being a <b>Reactive Test</b> ) described in a <b>Market Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Contract Start Days"</b>                 | as defined in Paragraph 3.3 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Core Industry Documents"</b>             | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Core Industry Document Owner"</b>        | in relation to a <b>Core Industry Document</b> , the body(ies) or entity(ies) responsible for the management and operation of procedures for making changes to such document;                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Corporate Functions Person"</b>          | <p>any person who is:</p> <ul style="list-style-type: none"> <li>(a) a director of <b>The Company</b>; or</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                                |                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                | <p>(b) an employee of <b>The Company</b> or any of its subsidiaries carrying out any administrative, finance or other corporate services of any kind which in part relate to the <b>Main Business</b>;<br/>or</p> <p>(c) engaged as an agent of or adviser to or performs work in relation to or services for the <b>Main Business</b>;</p> |
| <b>"Cost Adjustment"</b>                       | a payment whose value and timing has been approved by the Authority and which is made by a Licensed Distribution Network Operator as a contribution to the cost of a Transmission infrastructure investment made by a Licensed Transmission Owner that recognises the shared value to the different parties.                                |
| <b>"Cost Statement"</b>                        | as defined in Paragraph 2.14.3;                                                                                                                                                                                                                                                                                                             |
| <b>"Credit Assessment Score"</b>               | a score between zero and ten given by an <b>Approved Agency</b> in the <b>Independent Credit Assessment</b> ;                                                                                                                                                                                                                               |
| <b>"Credit Assessment Sum"</b>                 | the proportion of the <b>Unsecured Credit Cover</b> extended by <b>The Company</b> to a <b>User</b> who does not meet the <b>Approved Credit Rating</b> and calculated in accordance with Paragraph 3.26.6;                                                                                                                                 |
| <b>"Credit Rating"</b>                         | the credit requirements set by <b>The Company</b> from time to time in relation to <b>Termination Amounts</b> ;                                                                                                                                                                                                                             |
| <b>"CUSC"</b>                                  | this <b>Connection and Use of System Code</b> ;                                                                                                                                                                                                                                                                                             |
| <b>"CUSC Framework Agreement"</b>              | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                             |
| <b>"CUSC Implementation Date"</b>              | 00.01 on the 18 September 2001;                                                                                                                                                                                                                                                                                                             |
| <b>"CUSC Modification Fast Track Proposal"</b> | a proposal to modify the <b>CUSC</b> which is raised pursuant to Paragraph 8.29 and has not yet been approved or rejected by the <b>CUSC Modifications Panel</b> ;                                                                                                                                                                          |
| <b>"CUSC Modification Fast Track Report"</b>   | a report prepared pursuant to Paragraph 8.29;                                                                                                                                                                                                                                                                                               |
| <b>"CUSC Modification Procedures"</b>          | the procedures for the modification of the <b>CUSC</b> (including the implementation of <b>Approved CUSC Modifications</b> ) as set out in Section 8;                                                                                                                                                                                       |
| <b>"CUSC Modification Process"</b>             | the part of the <b>CUSC Modification Procedures</b> relating to consideration by the <b>CUSC Modifications Panel</b> and <b>Workgroups</b> , consultation by the <b>Workgroups</b> and <b>The Company</b> and preparation of a <b>CUSC Modification Report</b> by the <b>CUSC Modifications Panel</b> ;                                     |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "CUSC Modification Proposal"                    | a proposal to modify the <b>CUSC</b> which is not rejected pursuant to Paragraphs 8.16.5 or 8.16.6 and has not yet been implemented;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| "CUSC Modification Register"                    | as defined in Paragraph 8.13.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "CUSC Modification Report"                      | a report prepared pursuant to Paragraph 8.23;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "CUSC Modification Self-Governance Report"      | a report prepared pursuant to Paragraph 8.25;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "CUSC Modifications Panel"                      | the body established and maintained pursuant to Paragraph 8.3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "CUSC Modifications Panel Recommendation Vote"  | the vote of <b>Panel Members</b> undertaken by the <b>Panel Chairperson</b> in accordance with Paragraph 8.23.4 as to whether in their view they believe each <b>CUSC Modification Proposal</b> , or <b>Workgroup Alternative CUSC Modification</b> would better facilitate achievement of the <b>Applicable CUSC Objective(s)</b> and so should be made;                                                                                                                                                                                                                                                                |
| "CUSC Modifications Panel Self-Governance Vote" | The vote of <b>Panel Members</b> undertaken by the <b>Panel Chairperson</b> in accordance with Paragraph 8.25.9 as to whether they believe each <b>CUSC Modification Proposal</b> , as compared with the then existing provisions of the <b>CUSC</b> and any <b>Workgroup Alternative CUSC Modification</b> set out in the <b>CUSC Modification Self-Governance Report</b> , would better facilitate achievement of the <b>Applicable CUSC Objective(s)</b> ;                                                                                                                                                            |
| "CUSC Party"                                    | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Customer"                                      | a person to whom electrical power is provided (whether or not they are the provider of such electrical power) other than power to meet <b>Station Demand</b> of that person;                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| "Customer Services Team"                        | the customer services team identified within <b>The Company</b> which manages the commercial interface with parties connected to the transmission network, as identified on the <b>Website</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "CVA Storage Facility"                          | is an <b>Electricity Storage Facility</b> that: <ul style="list-style-type: none"> <li>i. performs <b>Electricity Storage</b> as its sole function;</li> <li>ii. is operated by a <b>Storage Facility Operator</b></li> <li>iii. has its imports and exports measured only by <b>Half Hourly Metering Systems</b> which are registered in the <b>Central Meter Registration Service (CMRS)</b>, and as a <b>BM Unit</b> within the <b>Central Registration Service (CRS)</b> and where those <b>Half Hourly Metering Systems</b> only measure activities necessary for performing <b>Electricity Storage</b>;</li> </ul> |

- iv. comprises plant and apparatus registered as part of a **BM Unit** or **BM Units** which only perform activities necessary for **Electricity Storage**, and the **BM Units** are listed within a bi-lateral agreement; and
- v. is the subject of a valid **Declaration**

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"DC Converter"</b>                       | As defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Data Registration Code" or "DRC"</b>    | the portion of the <b>Grid Code</b> which is identified as the <b>Data Registration Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"DCLF"</b>                               | Direct Current Load Flow;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Declaration"</b>                        | is a statement to be submitted by the <b>Registrant</b> of the relevant <b>BM Unit(s)</b> or <b>Single Site</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Deemed HH Forecasting Performance"</b>  | the sum calculated in accordance with Section 3, Appendix 2 Paragraph 3 as it may be revised in accordance with paragraph 3.22.7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Deemed NHH Forecasting Performance"</b> | the sum calculated in accordance with Section 3, Appendix 2 Paragraph 6 as it may be revised pursuant to Paragraph 3.22.8.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Deenergisation" or "Deenergise(d)"</b>  | the movement of any isolator, breaker or switch or the removal of any fuse whereby no electricity can flow to or from the relevant <b>System</b> through the <b>User's Equipment</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Defaulting Party"</b>                   | as defined in Paragraph 4.3.2.11;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Defendant Party"</b>                    | as defined in Paragraph 7.5.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Delivering"</b>                         | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Delivery Body"</b>                      | the person designated as the delivery body pursuant to regulations made under section 6BB of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"De-Load"</b>                            | the difference (expressed in MW) between the <b>Maximum Export Limit</b> and <b>Final Physical Notification Data</b> as adjusted by the <b>Acceptance Volume</b> in respect of a <b>Bid-Offer Acceptance</b> (if any), and <b>"De-Loaded"</b> shall be construed accordingly; except in the case of a <b>Power Park Module</b> , where <b>De-Load</b> is the difference (expressed in MW) between <u>Power Available</u> and the <b>Final Physical Notification Data</b> as adjusted by the <b>Acceptance Volume</b> in respect of a <b>Bid-Offer Acceptance</b> (if any), and <b>"De-Loaded"</b> shall be construed accordingly; |
| <b>"Demand"</b>                             | the demand of MW and Mvar of electricity (i.e. both <b>Active Power</b> and <b>Reactive Power</b> ), unless otherwise stated;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Demand Forecast"</b>                        | a <b>User's</b> forecast, in accordance with paragraph 14.17.19. of its <b>Demand</b> submitted to <b>The Company</b> in accordance with paragraphs 3.10, 3.11 and 3.12;                                                                                                                                                                                                                                                                      |
| <b>"Depreciation Period"</b>                    | in relation to a <b>Transmission Connection Asset</b> for a particular <b>User</b> , the period which commences on the asset's initial effective charging date, and which expires after the appropriate duration, which unless otherwise agreed upon connection is 40 years excluding FMS metering electronics that are agreed between the <b>User</b> and <b>The Company</b> ;                                                               |
| <b>"Derogation"</b>                             | means (a) a direction issued by the <b>Authority</b> relieving a <b>CUSC Party</b> from the obligation under its <b>Licence</b> to comply with such parts of the <b>Grid Code</b> or any <b>Distribution Code</b> or in the case of <b>The Company</b> the <b>ESO Licence</b> as may be specified in such direction and/or (b) a <b>Connect and Manage Derogation</b> as the context requires and "Derogated" shall be construed accordingly; |
| <b>"Derogated Plant"</b>                        | <b>Plant</b> or <b>Apparatus</b> which is the subject of a <b>Derogation</b> ;                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Design Variation"</b>                       | is a connection design (which provides for connection to the <b>National Electricity Transmission System</b> ) which fails to satisfy the relevant deterministic criteria detailed for an Onshore Connection in paragraphs 2.5 to 2.13 and for an Offshore Connection in 7.7 to 7.19, as appropriate, of the <b>NETS SQSS</b> ;                                                                                                               |
| <b>"Designated Information Exchange System"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Designated Sum"</b>                         | means such sum as shall be directed by the <b>Authority</b> as soon as practicable after the determination of an approved <b>Use of System Charging Methodology</b> ;                                                                                                                                                                                                                                                                         |
| <b>"Designated sum"</b>                         | As defined in Standard Condition C13 of the Transmission Licence                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"De-synchronisation"</b>                     | the act of taking a <b>BM Unit</b> off a <b>System</b> to which it has been <b>Synchronised</b> , by opening any connecting circuit breaker, and "De-synchronised" shall be construed accordingly;                                                                                                                                                                                                                                            |
| <b>"Detailed Planning Data"</b>                 | detailed additional data which <b>The Company</b> requires under the <b>PC</b> in support of Standard Planning Data;                                                                                                                                                                                                                                                                                                                          |
| <b>"Developer"</b>                              | In the context of the connection agreements between <b>The Company</b> and the owner/operator of a <b>Distribution System</b> where those agreements or <b>Modifications</b> to those agreements are triggered by <b>Embedded Power Stations</b> means the developer of the <b>Embedded Power Station</b> as more particularly described in those agreements;                                                                                 |

|                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Developer Capacity"</b>                                       | the MW figure as specified as such by a <b>User</b> in a <b>BELLA</b> or in a <b>Construction Agreement</b> entered into between <b>The Company</b> and a <b>User</b> in the category of a <b>Distribution System</b> directly connected to the <b>National Electricity Transmission System</b> as a consequence of a <b>Request for a Statement of Works</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Directive"</b>                                                | includes any present or future directive, requirement, instruction, direction or rule of any <b>Competent Authority</b> , (but only, if not having the force of law, if compliance with the <b>Directive</b> is in accordance with the general practice of persons to whom the <b>Directive</b> is addressed) and includes any modification, extension or replacement thereof then in force;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Directly-Connected User" or "Directly-Connected Customer"</b> | A large, usually industrial, consumer of electricity who is directly connected to the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Disconnect" or "Disconnection"</b>                            | <p>without prejudice to the interpretation of the terms "<b>Disconnect</b>" or "<b>Disconnection</b>" to <b>Users</b> acting in capacities other than those detailed, the following definitions shall apply:</p> <ul style="list-style-type: none"> <li>(a) for <b>Users</b> acting in their capacity as <b>Generators</b> with <b>Embedded Large Power Stations</b> or <b>Embedded Medium Power Stations</b>, passing power on to a <b>Distribution System</b> through a connection to a <b>Distribution System</b> which had not been commissioned as at the <b>Transfer Date</b>, means permanent physical disconnection of the <b>User's Equipment</b> at the site of connection to the <b>Distribution System</b>;</li> <li>(b) for <b>Users</b> who are <b>Trading Parties</b> (as defined in the <b>Balancing and Settlement Code</b>) acting in their capacity as responsible for <b>Small Power Stations</b> which are <b>Embedded</b>, means, permanent physical disconnection of the <b>User's Equipment</b> or <b>Equipment</b> for which the <b>User</b> is responsible (as defined in Section K of the <b>Balancing and Settlement Code</b>) at the site of connection to the <b>Distribution System</b>;</li> <li>(c) for <b>Users</b> acting in a capacity other than those detailed in (a) or (b), means permanent physical disconnection of a <b>User's Equipment</b> at any given <b>Connection Site</b> which permits removal thereof from the <b>Connection Site</b> or removal of all <b>Transmission Connection Assets</b> there from (as the case may be);</li> </ul> |
| <b>"Dispute Resolution Procedure"</b>                             | the procedures set out in Section 7;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Dispute Statement"</b>                                        | as defined in Paragraph 3.17.4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Distributed Generation"</b>                                   | means for the purposes of the <b>Connect and Manage Arrangements</b> , Section 6 and Section 15 of the <b>CUSC</b> :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

- (a) an **Embedded Power Station** which is the subject of a **Bilateral Embedded Generation Agreement**;
- (b) an **Embedded Power Station** which is the subject of a **Bilateral Embedded Licence Exemptable Large Power Station Agreement**;
- (c) a **Relevant Embedded Medium Power Station**;
- (d) a **Relevant Embedded Small Power Station**.

**"Distribution Agreement"**

an agreement entered into by a **User** with the owner/operator of the **Distribution System** for the connection of the **User's Equipment** (or equipment for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) to and use of such **Distribution System**;

**"Distribution Code(s)"**

the **Distribution Code(s)** drawn up by **Public Distribution System Operators** pursuant to the terms of their respective **Licence(s)** as from time to time revised in accordance with those **Licences**;

**"Distribution Connection Agreement"**

in the context of the **Distribution Queue Management Process** means, as appropriate, the agreements between the owner/operator of a **Distribution System** and (a) a **User** for the connection of a **User's** project to that **Distribution System** or (b) a developer for the connection of it's project to the **Distribution System**;

**"Distribution Connection and Use of System Agreement or "DCUSA"**

means the Distribution Connection and Use of System Agreement established pursuant to the **Distribution Licence** as revised from time to time.

**"Distribution EG Related Application"**

a **Connection Application** or **Modification Application** made by the owner/operator of a **Distribution System** where triggered by **Embedded Power Stations** (and including in this context a **Transmission Evaluation Application**);

**"Distribution Interconnector"**

as defined in the **Balancing and Settlement Code**;

**"Distribution Interconnector Owner"**

the **Owner** of a **Distribution Interconnector** or of that part of a **Distribution Interconnector** directly connected to a **Distribution System**;

**"Distribution Licence"**

a licence issued under section 6(1)(c) of the **Act**;



|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Distribution Queue Management Process”</b> | the queue management process adopted by the owner/operator of a <b>Distribution System</b> in respect of connections to the <b>Distribution System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Distribution System"</b>                   | the system consisting (wholly or mainly) of electric lines owned or operated by any <b>Authorised Electricity Operator</b> and used for the distribution of electricity from <b>Grid Supply Points</b> or generation sets or other entry points to the point of delivery to <b>Customers</b> or <b>Authorised Electricity Operators</b> , and includes any <b>Remote Transmission Assets</b> operated by such <b>Authorised Electricity Operator</b> and any electrical plant and meters owned or operated by the <b>Authorised Electricity Operator</b> in connection with the distribution of electricity, but shall not include any part of the <b>National Electricity Transmission System</b> ; |
| <b>“Distribution Voltage”</b>                  | a voltage of 132kV or below in England & Wales. A voltage of below 132kV in Scotland. Generally taken to be voltages lower than those defined as transmission voltages;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>“Demand Voting Sub-Group”</b>               | all <b>User(s)</b> in a <b>Voting Group</b> who fall within any one or more of the following categories: <ul style="list-style-type: none"> <li>(a) <b>Directly Connected Users</b> with a <b>Bilateral Agreement</b>; and</li> <li>(b) a <b>User</b> with a <b>Bilateral Agreement</b> in respect of a <b>Distribution System</b>;</li> </ul>                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Dormant CUSC Party"</b>                    | a <b>CUSC Party</b> which does not enjoy any ongoing rights and/or obligations for the period of its dormancy under the <b>CUSC</b> , as provided for in Section 5;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>“Downstream Party”</b>                      | a third party connected to a <b>Non-Embedded Customer’s System</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>“EA Cut Off Date”</b>                       | 23:59 on the date before the <b>CMP435 Implementation Date</b> being the date which determines what are categorised as <b>Existing Agreements</b> for a <b>Project</b> for the purposes of this Section 18;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"EA Gated Design Process"</b>               | the one off design process run by <b>The Company</b> in accordance with the <b>Gated Process for Projects with Existing Agreements</b> starting and finishing on the dates for this as set out in the <b>EA Timetable</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>“EA Request”</b>                            | a request by a <b>User</b> under Paragraph 18.8 for <b>Existing Agreements</b> for a <b>Project</b> to be given the status of <b>Gate 2 Existing Agreements</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"EA Request Window"</b>                   | the period of time determined by <b>The Company</b> in accordance with the <b>Gated Process for Projects with Existing Agreements</b> starting and finishing on the dates for this as set out in the <b>EA Timetable</b> with the start date not being less than 4 weeks from the <b>CMP435 Implementation Date</b> and the duration being not less 2 weeks;                                                                                                |
| <b>"EA Timetable"</b>                        | the timetable setting out the timings (start and end dates and durations) of the various stages of the <b>Gated Process for Projects with Existing Agreements</b> ;                                                                                                                                                                                                                                                                                         |
| <b>"Earthing"</b>                            | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"EBR Amendment"</b>                       | means (a) any amendment to contractual arrangements for the provision of and payment for <b>Balancing Services</b> referred to in Section 4.2B5 or (b) any amendment to CUSC which amends the <b>EBR Article 18 Terms or Conditions</b> in, as the case may be, such contractual arrangements or <b>CUSC</b> including to introduce a new provision for the purposes of Article 18 into, as the case may be, such contractual arrangements or <b>CUSC</b> ; |
| <b>"EBR Article 18 Terms and Conditions"</b> | means terms and conditions which have been approved by the Authority pursuant to and for the purposes of Article 18 of the <b>Electricity Balancing Regulation</b> . In the context of <b>CUSC</b> these terms and conditions are identified for convenience in <b>CUSC</b> Exhibit Y as such Exhibit Y is amended from time to time                                                                                                                        |
| <b>"EdF Documents"</b>                       | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Effective"</b>                           | an <b>EA Request</b> is effective when in the opinion of <b>The Company</b> acting reasonably the <b>EA Request</b> meets the requirements at Paragraph 18.8;                                                                                                                                                                                                                                                                                               |
| <b>"Election Timetable"</b>                  | as defined in Paragraph 8A.1.2.1;                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Election Year"</b>                       | as defined in Paragraph 8A.1.1.2;                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Electricity Balancing Regulation"</b>    | means the English version of Commission Regulation (EU) 2017/2195 as converted into <b>Assimilated Law</b> ;                                                                                                                                                                                                                                                                                                                                                |
| <b>"Electricity Generation"</b>              | The process of generating electricity by a <b>Generator</b> .                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Electricity Generation Facility"</b>     | Is a facility where <b>Electricity Generation</b> occurs as its sole function.                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Electricity Regulation"</b>              | means the English version of Commission Regulation (EU) 2019/943 (being the recast of (EU) 714/2009) as converted into <b>Assimilated Law</b>                                                                                                                                                                                                                                                                                                               |

|                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Electricity Storage”</b>                                  | Is the conversion of electrical energy into a form of energy which can be stored, the storing of that energy, and the subsequent reconversion of that energy back into electrical energy.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>“Electricity Storage Facility”</b>                         | is a facility where <b>Electricity Storage</b> occurs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>“Electricity System Operator Licence” or “ESO Licence”</b> | means a licence granted or treated as granted under section 6(1)(da) of the Electricity Act 1989;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>“Electricity Ten Year Statement (ETYS)”</b>                | as defined in the Grid Code,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>“Electricity Transmission System Operation Regulation”</b> | means the English version of Commission Regulation (EU) 2017/1485 as converted into <b>Assimilated Law</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>“Electronic Communication Platform”</b>                    | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>“Eligible Services”</b>                                    | Shall mean any <b>Balancing Service</b> or <b>Ancillary Service</b> which imports or exports <b>Reactive Energy</b> but does not result in the production or export of any <b>Active Power</b> to the <b>NETS</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>“Eligible Services Facility”</b>                           | For the purposes of CUSC Section 14 shall mean a <b>Single Site</b> that can only and solely provide <b>Eligible Services to The Company</b> and does not undertake <b>Electricity Storage</b> or <b>Electricity Generation</b> or consume any <b>Active Power</b> other than for the provision of the <b>Eligible Services</b> .                                                                                                                                                                                                                                                                                                                                         |
| <b>"Embedded"</b>                                             | <p>a direct connection to a <b>Distribution System</b> or the <b>System</b> of any other <b>User</b> to which <b>Customers</b> and/or <b>Power Stations</b> are connected;</p> <p>in the context of the <b>Charging Methodologies</b> it shall mean a direct connection to a <b>Distribution System</b> or the <b>System</b> of any other <b>User</b> to which <b>Customers</b> and/or <b>Power Stations</b> are connected, such connection being either a direct connection or a connection via a busbar of another <b>User</b> or of a <b>Relevant Transmission Licensee</b> (but with no other connection to the <b>National Electricity Transmission System</b>);</p> |
| <b>"Embedded Generator MW Register"</b>                       | the Register set up by <b>The Company</b> pursuant to Paragraph 6.35;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Emergency Deenergisation Instruction"</b>                 | <p>an instruction issued by <b>The Company</b> to a <b>User</b> to either:</p> <p>(a) <b>Deenergise</b> that <b>User's Equipment</b>, or</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

- (b) request the owner of the **Distribution System to which the User's Equipment** or equipment for which that **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**) is connected to **Deenergise** that **User's Equipment** or equipment for which that **User** is responsible (as defined in Section K of the **Balancing and Settlement Code** or ;
- (c) declare its **Maximum Export Limit** in respect of the **BM Unit(s)** associated with such **User's Equipment** to zero and to maintain it at that level during the **Interruption Period**,

where in **The Company's** reasonable opinion:

- (i) the condition or manner of operation of any **Transmission Plant** and/or **Apparatus** is such that it may cause damage or injury to any person or to the **National Electricity Transmission System**; and
- (ii) if the **User's Equipment** connected to such **Transmission Plant** and/or **Apparatus** was not **Deenergised** and/or the **Maximum Export Limit** of such **User's Equipment** connected to such **Transmission Plant** and/or **Apparatus** was not reduced to zero then it is likely that the **Transmission Plant** and/or **Apparatus** would automatically trip; and
- (iii) if such **Transmission Plant** and/or **Apparatus** had tripped automatically, then
  - (I) the **BM Unit** comprised in such **User's Equipment** (other than an **Interconnector Owner**); or
  - (II) an **Interconnector** of an **Affected User** who is an **Interconnector Owner**,

would, solely as a result of **Deenergisation** of **Plant** and **Apparatus** forming part of the **National Electricity Transmission System**, have been **Deenergised**;

**"Emergency Instruction"**

as defined in the **Grid Code**;

**"EMR Documents"**

means The Energy Act 2013, The Electricity Capacity Regulations 2014, the **Capacity Market Rules**, The Contracts for Difference (Allocation) Regulations 2014, The Contracts for Difference (Definition of Eligible Generator) Regulations 2014, The Contracts for Difference (Electricity Supplier Obligations) Regulations 2014, The Electricity Market Reform (General) Regulations 2014, the **AF**

|                                        |                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                        | <b>Rules</b> and any other regulations or instruments made under Chapter 2 (contracts for difference), Chapter 3 (capacity market) or Chapter 4 (investment contracts) of Part 2 of the Energy Act 2013 which are in force from time to time;                                                                                                    |
| <b>"EMR Functions"</b>                 | Has the meaning given to "EMR functions" in Chapter 5 of Part 2 of the Energy Act 2013;                                                                                                                                                                                                                                                          |
| <b>"Enabling Works"</b>                | those elements of the <b>Transmission Reinforcement Works</b> identified as such in accordance with <b>CUSC</b> Section 13 and which in relation to a particular <b>User</b> are as specified and by its acceptance of the <b>Offer</b> or <b>Modification Offer</b> , agreed by the <b>User</b> in the relevant <b>Construction Agreement</b> ; |
| <b>"End Date"</b>                      | shall mean 5.00pm on the date 12 months from (and not including) the <b>Security Amendment -Implementation Date</b> ;                                                                                                                                                                                                                            |
| <b>"Energisation" or "Energise(d)"</b> | the movement of any isolator, breaker or switch or the insertion of any fuse so as to enable <b>Energy</b> to flow from and to the relevant <b>System</b> through the <b>User's Equipment</b> (and in the case of <b>OTSDUW Build</b> , the <b>OTSUA</b> prior to the <b>OTSUA Transfer Time</b> );                                              |
| <b>"Energy"</b>                        | the electrical energy produced, flowing or supplied by an electric circuit during a time interval, being the integral with respect to time of the power, measured in units of watt-hours or standard multiples thereof i.e.<br><br>1000 Wh = 1KWh<br><br>1000 KWh = 1MWh<br><br>1000 MWh = 1GWh<br><br>1000 GWh = 1TWh;                          |
| <b>"Energy Density Tables"</b>         | the tables of this name set out in the section of the <b>LoA Guidance</b> dealing with <b>Connection Applications</b> for a <b>New Connection Site Onshore</b> as such tables may be updated by <b>The Company</b> from time to time but where any changes will not be made without prior engagement with industry;                              |
| <b>"Energy Metering Equipment"</b>     | as the phrase " <b>Metering Equipment</b> " is defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                             |
| <b>"Energy Metering System"</b>        | as the phrase " <b>Metering System</b> " is defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                |
| <b>"Enforceable"</b>                   | <b>The Company</b> (acting reasonably) is satisfied that the security is legally enforceable and in this respect the <b>User</b> shall obtain such legal opinion at its expense as <b>The Company</b> (acting reasonably shall require);                                                                                                         |

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Engineering Charge"</b>              | as set out in the <b>Statement of Use of System Charges</b> from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Enhanced Reactive Power Service"</b> | as defined in Paragraph 1.2 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Enhanced Rate"</b>                   | in respect of any day the rate per annum which is 4% per annum above the <b>Base Rate</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Equivalent Unmetered Supply"</b>     | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Escrow Account"</b>                  | <p>a bank account in the name of <b>The Company</b> at such branch of Barclays Bank PLC or such branch of any other bank, in the City of London as is notified by <b>The Company</b> to the <b>User</b> in which deposits of principal sums from the <b>User</b> shall be ascertainable, bearing interest from (and including) the date of deposit of principal sums to (but excluding) the date of withdrawal of principal sums from such account, mandated for withdrawal of any sums solely by <b>The Company</b> and mandated for the transfer of any interest accrued to such account to:</p> <p>a) an associated bank account in the name of <b>The Company</b> in which the interest accruing in respect of the principal sums deposited by the <b>User</b> shall be ascertainable; or</p> <p>b) such bank account as the <b>User</b> may specify;</p> |
| <b>"Estimated Demand"</b>                | the forecast <b>Demand (Active Power)</b> data filed with <b>The Company</b> pursuant to the <b>Charging Statements</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"ET Interface Operator"</b>           | the operator of the <b>Onshore Distribution System</b> to which an <b>ET Offshore Transmission System</b> connects;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"ET Interface Point"</b>              | the electrical point of connection between an <b>Offshore Transmission System</b> and an <b>Onshore Distribution System</b> and in relation to a particular <b>User</b> as defined in its <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"ET Offshore Transmission System"</b> | an <b>Offshore Transmission System</b> connected at an <b>ET Interface Point</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"ET Restrictions on Availability"</b> | is in the context of an <b>ET Offshore Transmission System</b> the reduction in capability as set out in the relevant <b>Notification of ET Restrictions on Availability</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"ET Use of System Charges"</b>        | the element of <b>Use of System Charges</b> consisting of charges payable by <b>The Company</b> to the <b>ET Interface Operator</b> in respect of the connection to a <b>Distribution System</b> by an <b>Offshore</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                            | <b>Transmission System</b> and use of such <b>Distribution System</b> by means of such <b>Offshore Transmission System</b> ;                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>“European Commission”</b>               | means the institution of that name established under The Treaty on European Union as amended from time to time;                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>“Evaluation of Transmission Impact”</b> | The process undertaken by <b>The Company</b> to understand the effect of a <b>Relevant Embedded Power Station</b> on the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>“Event”</b>                             | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>“Event of Default”</b>                  | any of the events set out in Section 5 as constituting an event of default;                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>“Excepted Works”</b>                    | any <b>Construction Works</b> which have been designated as “onshore transmission (reinforcement)” by the <b>Authority</b> in its decision of 19 October 2022 titled ‘Offshore Transmission Network Review: Decision on asset classification’ included in <b>The Company’s</b> ‘Pathway to 2030 (Holistic Network Design)’ report published in July 2022 or in any decisions by the <b>Authority</b> on the classification of assets included in <b>The Company’s</b> ‘Beyond 2030’ report published in March 2024; |
| <b>“Exchange Rate”</b>                     | the <b>Transmission Entry Capacity</b> available to a specific party as a direct result of a specific reduction in the <b>Transmission Entry Capacity</b> available to another party.                                                                                                                                                                                                                                                                                                                               |
| <b>“Exchange Rate Request”</b>             | a joint request from a <b>User</b> and another <b>User</b> to calculate the <b>Exchange Rate</b> that would apply were they to agree to a <b>TEC Trade</b> ;                                                                                                                                                                                                                                                                                                                                                        |
| <b>“Excitation System”</b>                 | the equipment providing the field current of a machine, including all regulating and control elements as well as field discharge or suppression equipment and protective devices;                                                                                                                                                                                                                                                                                                                                   |
| <b>“Exemptable”</b>                        | where the person generating electricity at the relevant <b>Power Station</b> is, or would be (if it generated electricity at no other <b>Power Station</b> and/or did not hold a <b>Generation Licence</b> ) exempt from the requirement to hold a <b>Generation Licence</b> under the <b>Act</b> ;                                                                                                                                                                                                                 |
| <b>“Exempt Export BM Unit”</b>             | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>“Exempt Generator”</b>                  | any generator who, under the terms of the Electricity (Class Exemptions from the Requirement for a Licence) Order 2001, is not obliged to hold a generation licence;                                                                                                                                                                                                                                                                                                                                                |

|                                                    |                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Exemptible Generation”</b>                     | generating plant where the party generating electricity at that generating plant is, or would (if it generated electricity at no other generating plant and/or did not hold a generation licence) be, exempt from the requirement to hold a generation licence (including Scottish generation that export between 50 and 100MW that was connected on or before 30 September 2000); |
| <b>"Exempt Power Station"</b>                      | a <b>Power Station</b> where the person generating electricity at that <b>Power Station</b> is exempt from the requirement to hold a <b>Generation Licence</b> under the <b>Act</b> ;                                                                                                                                                                                              |
| <b>“Existing Agreements”</b>                       | the agreements of the type determined according to Paragraph 18.5;                                                                                                                                                                                                                                                                                                                 |
| <b>“Existing ICM Construction Agreement”</b>       | a <b>Construction Agreement</b> entered into between <b>The Company</b> and a <b>User</b> prior to the <b>Connect and Manage Implementation Date</b> and which is on the basis of the <b>Interim Connect and Manage Arrangements</b> ;                                                                                                                                             |
| <b>“Existing Offshore Agreement”</b>               | any <b>Bilateral Connection Agreement</b> and <b>Construction Agreement</b> entered into under the <b>OTSDUW Arrangements</b> and where the <b>User</b> is undertaking <b>OTSDUW Build</b> on or before the <b>OTSUA Commissioning Period Effective Date</b> ;                                                                                                                     |
| <b>“Existing Offshore Generator”</b>               | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                    |
| <b>"Existing Security Cover"</b>                   | the <b>Security Cover</b> held by <b>The Company</b> in respect of a <b>User</b> pursuant to <b>CUSC</b> Section 3 Part III immediately prior to the <b>Security Amendment Implementation Date</b> ;                                                                                                                                                                               |
| <b>“Export”</b>                                    | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                           |
| <b>“Export BM Unit”</b>                            | a <b>BM Unit</b> registered in accordance with Section K of the <b>BSC</b> in respect of <b>Export</b> ;                                                                                                                                                                                                                                                                           |
| <b>“Export Capacity”</b>                           | For the purpose of paragraph 6.5.1(f) <b>Export Capacity</b> is the maximum continuous <b>Active Power</b> expressed in MW which is permitted to flow from a <b>Power Station</b> to a <b>Distribution System</b>                                                                                                                                                                  |
| <b>“Ex-Post Reconciliation”</b>                    | The charge or credit to Demand and Generator Users in respect of TNUoS charges in the event of a breach of the Limiting Regulation.                                                                                                                                                                                                                                                |
| <b>"External Interconnection"</b>                  | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                               |
| <b>"Externally Interconnected System Operator"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                               |



|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Fast Track Criteria”                   | <p>a <b>CUSC Modification Proposal</b> that, if implemented,</p> <p>(a) would meet the <b>Self-Governance Criteria</b>; and</p> <p>(b) is properly a housekeeping modification required as a result of some error or factual change, including but not limited to:</p> <ul style="list-style-type: none"> <li>(i) updating names or addresses listed in the <b>CUSC</b>;</li> <li>(ii) correcting any minor typographical errors;</li> <li>(iii) correcting formatting and consistency errors, such as paragraph numbering; or</li> <li>(iv) updating out of date references to other documents or paragraphs.</li> </ul> |
| “FDSC”                                  | Shall mean the same as <b>Final Demand Site Count</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| “FDSC Forecast”                         | The forecast, produced by <b>The Company</b> , of the <b>FDSC</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| “FDSC Base Percentage”                  | the % value for the relevant <b>Security Period</b> as specified in the table in paragraph 2A of Section 3, Appendix 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| “FDSC Charges”                          | that element of <b>Transmission Network Use of System Demand Charges</b> relating to <b>Final Demand Site Count</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| “FDSC Base Value at Risk”               | the sum as calculated in accordance with Paragraph 3.23.4a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| “Final Demand Site Count or FDSC”       | A count of individual <b>Final Demand Sites</b> for each <b>Charging Band</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| “Final Adjustments Statement”           | as defined in Paragraph 4.3.2.6(b);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| “Final Demand”                          | Means electricity which is consumed other than for the purposes of generation or export onto the electricity network                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| “Final Demand Reconciliation Statement” | as defined in Paragraph 3.12.7(a);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| “Final Demand Site”                     | <p>Shall mean;</p> <ol style="list-style-type: none"> <li>1. For <b>Users</b> with a <b>Bilateral Connection Agreement</b>, a <b>Single Site</b> which has associated <b>Final Demand</b>, except <b>Single Sites</b> which are for; <ol style="list-style-type: none"> <li>a. <b>Users</b> who own or operate a <b>Distribution System</b>, or</li> </ol> </li> </ol>                                                                                                                                                                                                                                                    |

- b. **Interconnector Users**, or
  - c. **Users** of a **Non-Final Demand Site** with a valid **Declaration**
- 2. For **Users** with a **Bilateral Embedded Generation Agreement or BELLA**, as defined as 'Final Demand Site' in the **DCUSA** except **Non-Final Demand Site** with a valid **Declaration**
- 3. For all other parties, as defined as 'Final Demand Site' in the **DCUSA**

|                                                       |                                                                                                                                                                  |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Final Monthly Statement"</b>                      | as defined in Paragraph 4.3.2.6;                                                                                                                                 |
| <b>"Final Physical Notification Data"</b>             | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                         |
| <b>"Final Reconciliation Settlement Run"</b>          | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                         |
| <b>"Final Reconciliation Volume Allocation Run"</b>   | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                         |
| <b>"Final Statement"</b>                              | as defined in Paragraph 4.3.2.6(a);                                                                                                                              |
| <b>"Final Sums"</b>                                   | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                      |
| <b>"Financial Year"</b>                               | the period of 12 months ending on 31st March in each calendar year;                                                                                              |
| <b>"First Gated Application Window and Offer Run"</b> | the first run of the <b>Gated Application Window and Offer Process</b> following the <b>CMP434 Implementation Date</b> ;                                         |
| <b>"First Offer"</b>                                  | as defined in Paragraph 6.10.4;                                                                                                                                  |
| <b>"First Security Period"</b>                        | from the date of <b>Construction Agreement</b> to the 31 March or 30 September, whichever is the first to occur;                                                 |
| <b>"First User"</b>                                   | as defined in Paragraph 6.10.3;                                                                                                                                  |
| <b>"Fixed Works Attributable Cancellation Charge"</b> | where the <b>Attributable Works Cancellation Charge</b> is calculated in accordance with Paragraph 3.5.1 of Part TWO of the <b>User Commitment Methodology</b> ; |
| <b>"Fixed BSUoS Price"</b>                            | the volumetric fixed price (in £/MWh) for <b>BSUoS Charges</b> calculated and published by <b>The Company</b> for each <b>Fixed Price Period</b> ;               |

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Fixed Price Period"</b>                   | <p>the period of time during which the <b>Fixed BSUoS Price</b> applies. Each <b>Fixed Price Period</b> shall apply for 12 months, from 1<sup>st</sup> April to 31<sup>st</sup> March, comprising:</p> <ul style="list-style-type: none"> <li>(a) the Spring Summer Tariff (1st April to 30th September);</li> <li>and</li> <li>(b) the Autumn Winter Tariff (1st October to 31st March).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Fixed Proposed Implementation Date"</b>   | <p>the proposed date(s) for the implementation of a <b>CUSC Modification Proposal</b> or <b>Workgroup Alternative CUSC Modification</b> such date to be a specific date by reference to an assumed date by which a direction from the <b>Authority</b> approving the <b>CUSC Modification Proposal</b> or <b>Workgroup Alternative CUSC Modification</b> is required in order for the <b>CUSC Modification Proposal</b> or any <b>Workgroup Alternative CUSC Modification</b>, if it were approved, to be implemented by the proposed date;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"FMS Date"</b>                             | 1st April 1993;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Force Majeure"</b>                        | <p>in relation to any <b>CUSC Party</b> any event or circumstance which is beyond the reasonable control of such <b>CUSC Party</b> and which results in or causes the failure of that <b>CUSC Party</b> to perform any of its obligations under the <b>CUSC</b> including act of God, strike, lockout or other industrial disturbance, act of the public enemy, war declared or undeclared, threat of war, terrorist act, blockade, revolution, riot, insurrection, civil commotion, public demonstration, sabotage, act of vandalism, lightning, fire, storm, flood, earthquake, accumulation of snow or ice, lack of water arising from weather or environmental problems, explosion, fault or failure of <b>Plant</b> and <b>Apparatus</b> (which could not have been prevented by <b>Good Industry Practice</b>), governmental restraint, Act of Parliament, other legislation, bye law and <b>Directive</b> (not being any order, regulation or direction under section 32, 33, 34 and 35 of the <b>Act</b>) provided that lack of funds shall not be interpreted as a cause beyond the reasonable control of that <b>CUSC Party</b> and provided, for the avoidance of doubt, that weather conditions which are reasonably to be expected at the location of the event or circumstance are also excluded as not being beyond the reasonable control of that <b>CUSC Party</b>;</p> |
| <b>"Forecasting Performance Related VAR "</b> | <p>the sum of <b>HH Forecasting Performance Related VAR</b> and <b>NHH Forecasting Performance Related VAR</b>;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Frequency"</b>                            | <p>the number of alternating current cycles per second (expressed in Hertz) at which a <b>System</b> is running;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Frequency Deviation"</b>                  | <p>a positive or negative deviation from <b>Target Frequency</b>;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Frequency Response"</b>                          | an automatic response by a <b>BM Unit</b> or <b>CCGT Unit</b> to a change in <b>Frequency</b> with the aim of containing <b>System Frequency</b> within the limits provided for under the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Frequency Sensitive Mode"</b>                    | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Fuel Security Code"</b>                          | the document of that title designated as such by the <b>Secretary of State</b> as from time to time amended;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Full TEC Reduction Notice Period"</b>            | means one <b>Financial Year</b> and 5 <b>Business Days</b> prior to the beginning of the <b>Financial Year</b> from which the decrease in <b>Transmission Entry Capacity</b> or <b>Disconnection</b> (as appropriate) is to take effect;                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Gas Insulated Switchgear" or "GIS"</b>           | SF6 switchgear where the substation busbars (and the interfacing switchgear between those busbars and any connecting circuits) are of an integrated metal enclosed, gas insulated construction;                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"GB Transmission System" or "GBTS"</b>            | for the purposes of Section 12 means the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within <b>Great Britain</b> and used for the transmission of electricity from one <b>Power Station</b> to a sub-station or to another <b>Power Station</b> or between sub-stations or to or from any <b>External Interconnection</b> and includes any <b>Plant</b> and <b>Apparatus</b> or meters owned or operated by any transmission licensee within <b>Great Britain</b> in connection with the transmission of electricity but shall not include <b>Remote Transmission Assets</b> ; |
| <b>"Gas Turbine Unit"</b>                            | a <b>Generating Unit</b> driven by a gas turbine (for instance an aero-engine);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Gas System Planner Licence" or "GSP Licence"</b> | a licence granted or treated as granted under section 7AA(1) of the Gas Act 1986;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Gate 1 Agreements"</b>                           | the (a) agreements (including, as required, the <b>Bilateral Agreement</b> ) entered into between the <b>Gated Applicant</b> and <b>The Company</b> on acceptance of a <b>Gate 1 Offer</b> and (b) the <b>Gate 1 Existing Agreements</b> ;                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Gate 1 Application"</b>                          | an application for a <b>Gate 1 Offer</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Gate 1 ATV"</b>                                  | the Agreement to Vary issued by <b>The Company</b> to the <b>User</b> in respect of <b>Existing Agreements</b> for a <b>Project</b> in accordance with Paragraph 18.13 ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Gate 1 Conditional Clause"</b>                   | the clause included in a <b>Gate 1 Offer</b> making the <b>Gate 1 Agreements</b> conditional until a <b>Gate 2 Offer</b> is accepted and in the <b>Gate 1 ATV</b> making the <b>Gate 1 Existing Agreements</b> conditional until a <b>Gate 2 Offer</b> is accepted;                                                                                                                                                                                                                                                                                                                                                                                |

|                                                 |                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Gate 1 Existing Agreements”</b>             | the <b>Existing Agreements</b> for a <b>Project</b> (as amended by the <b>Gate 1 ATV</b> ) on the execution of the <b>Gate 1 ATV</b> ;                                                                                                                            |
| <b>“Gate 1 Offer”</b>                           | the offer made by <b>The Company</b> to a <b>Gated Applicant</b> in response to a <b>Gate 1 Application</b> ;                                                                                                                                                     |
| <b>“Gate 1 Notification”</b>                    | a notification in writing by a <b>User</b> to <b>The Company</b> that it does not intend to submit an <b>EA Request</b> in respect of <b>Existing Agreements</b> for a <b>Project</b> ;                                                                           |
| <b>“Gate 2 Agreements”</b>                      | The (a) agreements (including, as required, the <b>Bilateral Agreement</b> ) entered into between the <b>Gated Applicant</b> and <b>The Company</b> on acceptance of a <b>Gate 2 Offer</b> ; and (b) the <b>Gate 2 Existing Agreements</b> ;                      |
| <b>“Gate 2 Application”</b>                     | an application for a <b>Gate 2 Offer</b> ;                                                                                                                                                                                                                        |
| <b>“Gate 2 Criteria”</b>                        | the criteria which a <b>Gate 2 Application</b> and <b>EA Request</b> has to meet as set out in the <b>Gate 2 Criteria Methodology</b> ;                                                                                                                           |
| <b>“Gate 2 Criteria Methodology”</b>            | the methodology developed or to be developed by <b>The Company</b> in accordance with the <b>ESO Licence</b> and approved by the <b>Authority</b> and published by <b>The Company</b> on the <b>Website</b> as such methodology may be revised from time to time; |
| <b>“Gate 2 Existing Agreements”</b>             | the <b>Existing Agreements</b> for a <b>Project</b> (as amended by the <b>Gate 2 Modification Offer</b> ) on the acceptance of the <b>Gate 2 Modification Offer</b> ;                                                                                             |
| <b>“Gate 2 Offer”</b>                           | the offer made by <b>The Company</b> to a <b>Gated Applicant</b> in response to a <b>Gate 2 Application</b> ;                                                                                                                                                     |
| <b>“Gate 2 Modification Offer”</b>              | the <b>Modification Offer</b> made by <b>The Company</b> to the <b>User</b> in respect of <b>Existing Agreements</b> for a <b>Project</b> in accordance with Paragraph 18.14 above;                                                                               |
| <b>“Gated Agreements”</b>                       | the <b>Gate 1 Agreements</b> or <b>Gate 2 Agreements</b> as appropriate;                                                                                                                                                                                          |
| <b>“Gated Applicant”</b>                        | an applicant for a <b>Gated Application</b> ;                                                                                                                                                                                                                     |
| <b>“Gated Application”</b>                      | an application of a type referred to as such in Section 17;                                                                                                                                                                                                       |
| <b>“Gated Application and Offer Process”</b>    | the process as set out in Section 17;                                                                                                                                                                                                                             |
| <b>“Gated Application Window”</b>               | as generally defined in the <b>Gated Application and Offer Process</b> with the specific timing for such specified in the relevant <b>Gated Application Window and Offer Run</b> ;                                                                                |
| <b>“Gated Application Window and Offer Run”</b> | the <b>First Gated Application Window and Offer Run</b> and each subsequent run of the <b>Gated Application Window and Offer Process</b> opened by <b>The Company</b> ;                                                                                           |

|                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Gated Design Process”</b>                                | as generally defined in the <b>Gated Application and Offer Process</b> with the specific timing for such specified in the relevant <b>Gated Application Window and Offer Run</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>“Gated Modification”</b>                                  | a <b>Modification</b> of a type specified as such in the <b>Gated Modification Guidance</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>“Gated Modification Application”</b>                      | a <b>Modification Application</b> for a <b>Gated Modification</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>“Gated Modification Guidance”</b>                         | the guidance (as it may be amended from time to time) published by <b>The Company</b> on the type of <b>Modifications</b> that <b>The Company</b> will treat as being <b>Gated Modification Applications</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>“Gated Modification Offer”</b>                            | a <b>Modification Offer</b> made by <b>The Company</b> in response to a <b>Gated Modification Application</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>“Gated Offers”</b>                                        | offers made by <b>The Company</b> in response to a <b>Gated Application</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>“Gated Process for Projects with Existing Agreements”</b> | the process as set out in <b>CUSC</b> Section 18;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>“Gated Timetable”</b>                                     | the timetable for each <b>Gated Application Window and Offer Run</b> setting out the timings (start and end dates and durations) of the various stages in the <b>Gated Application Window and Offer Run</b> as published by <b>The Company</b> on the <b>Website</b> . In each <b>Gated Application Window and Offer Run</b> , the <b>Gated Application Window</b> shall open no earlier than 4 weeks after the publication of the timetable (and in the case of the <b>First Gated Application Window and Offer Run</b> , with publication being no earlier than 4 weeks after the <b>CMP434 Implementation Date</b> ) and shall be of a duration not less than 4 weeks; |
| <b>"Generating Plant"</b>                                    | a <b>Large Power Station</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Generating Unit"</b>                                     | unless otherwise provided in the <b>Grid Code</b> any <b>Apparatus</b> which produces electricity;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Generation Capacity"</b>                                 | the normal full load capacity of a <b>Generating Unit</b> as declared by the <b>Generator</b> , less the MW consumed by the <b>Generating Unit</b> through the <b>Generating Unit's</b> unit transformer when producing the same;                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Generation Licence"</b>                                  | the licence granted to a <b>Generator</b> pursuant to section 6(1)(a) of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>“Generation Licensee”</b>                                 | A <b>User</b> who holds a <b>Generation Licence</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Generation Reconciliation Statement"</b>                 | as defined in Paragraph 3.12.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>“Generation Voting Sub-Group”</b>                         | all <b>User(s)</b> in a <b>Voting Group</b> who fall within any one or more of the following categories:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                  | <ol style="list-style-type: none"> <li>1) a <b>User</b> with a <b>Bilateral Agreement</b> in respect of a <b>Directly Connected Power Station</b>;</li> <li>2) a <b>User</b> with a <b>Bilateral Agreement</b> in respect of an <b>Embedded Exemptable Large Power Station</b>; and</li> <li>3) a <b>User</b> with a <b>Bilateral Agreement</b> in respect of an <b>Embedded Power Station</b>;</li> </ol> |
| <b>"Generator"</b>                               | a person who generates electricity under licence or exemption under the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                       |
| <b>"Generator"</b>                               | As defined in the <b>Grid Code</b>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Genset"</b>                                  | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"GIS Asset Outage"</b>                        | as defined in the relevant <b>Bilateral connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                         |
| <b>"Good Industry Practice"</b>                  | in relation to any undertaking and any circumstances, the exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and experienced operator engaged in the same type of undertaking under the same or similar circumstances;                                                                                                   |
| <b>"Great Britain"</b>                           | The landmass of England and Wales and Scotland, including internal waters;                                                                                                                                                                                                                                                                                                                                 |
| <b>"Grid Code"</b>                               | the <b>Grid Code</b> drawn up pursuant to the <b>ESO Licence</b> , as from time to time revised ;                                                                                                                                                                                                                                                                                                          |
| <b>"Grid Supply Point"</b><br><b>("GSP")</b>     | a point of delivery from the <b>National Electricity Transmission System</b> to a <b>Distribution System</b> or a <b>Non-Embedded Customer</b> ;                                                                                                                                                                                                                                                           |
| <b>"Gross Asset Value"</b>                       | the value calculated by <b>The Company</b> in accordance with recognised accounting principles and procedures as published by <b>The Company</b> from time to time;                                                                                                                                                                                                                                        |
| <b>"Group"</b>                                   | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"GSP Group"</b>                               | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                   |
| <b>"HH Base Percentage"</b>                      | the % value for the relevant <b>Security Period</b> as specified in the table in paragraph 1 of Section 3, Appendix 2;                                                                                                                                                                                                                                                                                     |
| <b>"HH Base Value at Risk"</b>                   | the sum as calculated in accordance with Paragraph 3.22.3;                                                                                                                                                                                                                                                                                                                                                 |
| <b>"HH Charges"</b>                              | that element of <b>Transmission Network Use of System Demand Charges</b> relating to half-hourly metered <b>Demand</b> ;                                                                                                                                                                                                                                                                                   |
| <b>"HH Forecasting Performance Related VAR "</b> | the amount resulting from multiplying the <b>Deemed HH Forecasting Performance</b> and the <b>Indicative Annual HH TNUoS Charge</b> calculated on the basis of the latest <b>Demand Forecast</b> received by <b>The Company</b> ;                                                                                                                                                                          |

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "High Frequency Response"             | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "High Voltage" or "HV"                | a voltage exceeding 650 volts;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Holding Payment"                     | that component of the payment for <b>Mode A Frequency Response</b> calculated in accordance with Paragraph 4.1.3.9;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| "ICRP"                                | Investment Cost Related Pricing;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Identified Onshore Circuit"          | A single transmission HVDC subsea circuit or a single transmission AC subsea circuit between two MITS Nodes where there is only one route for the power to flow between the two MITS Nodes.                                                                                                                                                                                                                                                                                                                                                                                                               |
| "Implementation Date"                 | is the date and time for implementation of an <b>Approved CUSC Modification</b> as specified in accordance with Paragraph 8.28.3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Import"                              | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Import BM Unit"                      | a <b>BM Unit</b> registered in accordance with Section K of the <b>BSC</b> in respect of <b>Import</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Indemnified Persons"                 | as defined in Paragraph 8.12.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Independent Engineer"                | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| "Independent Credit Assessment"       | an assessment of the creditworthiness of a <b>User</b> or entity by an <b>Approved Agency</b> as nominated by the <b>User</b> or entity obtained in accordance with Paragraph 3.26.7, 3.26.8 and 3.26.9;                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Independent Security Arrangement"    | a guarantee in favour of <b>The Company</b> in a form satisfactory to <b>The Company</b> and which is provided by an entity which meets the <b>Requirements</b> . In addition <b>The Company</b> may accept such a policy from an entity who does not meet the <b>Requirements</b> up to an <b>Agreed Value</b> where <b>The Company</b> agrees or where <b>The Company</b> does not agree as determined by an expert appointed by <b>The Company</b> and the <b>User</b> or failing their agreement as to the expert the expert nominated by the Director General of The Institute of Credit Management; |
| "Indicative Annual FDSC TNUoS charge" | <b>The Company's</b> forecast of the <b>User's</b> total <b>FDSC Charges</b> relating to a <b>Financial Year</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Indicative Annual HH TNUoS charge"   | <b>The Company's</b> forecast of the <b>User's</b> total <b>HH Charges</b> relating to a <b>Financial Year</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Indicative Annual NHH TNUoS charge"  | <b>The Company's</b> forecast of the <b>User's</b> total <b>NHH Charges</b> relating to a <b>Financial Year</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Indicative Annual UMS TNUoS charge"</b>       | <b>The Company's</b> forecast of the <b>User's</b> total <b>UMS Charges</b> relating to a <b>Financial Year</b>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Indicative Block LDTEC"</b>                   | is the <b>Available LDTEC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Indicative Maximum Generation Capability"</b> | has the meaning attributed to it in Paragraph 4.2.3.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Industry Code"</b>                            | means a multilateral code or agreement created and maintained pursuant to a licence granted by the <b>Authority</b> under section 6 of the Act or under sections 7, 7ZA or 7A of the Gas Act 1986;                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Information Request Notice"</b>               | a notice that will be issued by <b>The Company</b> to a relevant party setting out <b>The Company's</b> reasonable requirements for relevant information in accordance with section 172 of the Energy Act 2023. This will be prepared in accordance with <b>The Company's</b> published <b>Information Request Statement</b> ;                                                                                                                                                                                                                           |
| <b>"Information Request Statement"</b>            | a statement prepared and published by <b>The Company</b> , in accordance with section 172 of the Energy Act 2023 and condition D2.5 of the <b>ESO Licence</b> and <b>GSP Licence</b> , setting out the process that <b>The Company</b> will follow when requesting information from relevant parties by the issue of an <b>Information Request Notice</b> ;                                                                                                                                                                                              |
| <b>"Initial Charge"</b>                           | as defined in Paragraph 3.16.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Initial Demand Reconciliation Statement"</b>  | as defined in Paragraph 3.13.4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Initial Volume Allocation Run"</b>            | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Initial Settlement Run"</b>                   | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Insolvency Proceedings"</b>                   | shall mean any action or step taken: <ul style="list-style-type: none"> <li>(a) for the administration, winding up, dissolution or bankruptcy of the <b>Developer</b>; or</li> <li>(b) for the appointment of a receiver or administrative receiver in respect of any of the <b>Developer's</b> assets; or</li> <li>(c) for making a proposal to any of the <b>Developer's</b> creditors with a view to avoiding insolvency; or</li> <li>(d) for the taking of possession by anyone with an interest in any asset of the <b>Developer</b>; or</li> </ul> |

- (e) any analogous procedure or step is taken in any jurisdiction in relation to any matter referred to in clause (a) to (d) (inclusive) above;

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Installed Capacity"              | the figure, in the context of the <b>Original Red Line Boundary</b> only, being the intended maximum amount of <b>Active Power</b> that the, as appropriate, <b>User's Equipment</b> or <b>Developer's Equipment</b> sited within the <b>Original Red Line Boundary</b> would be capable of exporting and/or importing (independent of the <b>Connection Entry Capacity</b> and/or <b>Transmission Entry Capacity</b> and/or <b>Developer Capacity</b> , and any limitations to the maximum amount of <b>Active Power</b> related to such capacities) expressed in whole MW, or in MW to one decimal place as declared (for each technology type, if more than one) by the <b>User</b> on the <b>Original Red Line Boundary</b> ; |
| "Insurance Performance Bond"      | a <b>Performance Bond</b> provided by a company in the business of providing insurance which meets the <b>Requirements</b> . In addition <b>The Company</b> may accept such a policy from such a company who does not meet the <b>Requirements</b> up to an <b>Agreed Value</b> where <b>The Company</b> agrees or where <b>The Company</b> does not agree as determined by an expert appointed by <b>The Company</b> and the <b>User</b> or failing their agreement as to the expert the expert nominated by the Director General of The Institute of Credit Management;                                                                                                                                                         |
| "Intellectual Property" or "IPRs" | patents, trade marks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same are registered and including applications for registration of any of the same) and rights under licences and consents in relation to any of the same and all rights or forms of protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world;                                                                                                                                                                                                                                                                           |
| "Interactivity"                   | means where there are two or more applications for connection and/or use of system which would be using or connecting to the same part of the <b>Total System</b> which comprises the existing or future <b>NETS</b> and/or <b>Distribution System</b> where not all the applicants can be connected, <b>Interactivity</b> is the process that determines the queue position of the applications that can be connected with or without further changes to the network;                                                                                                                                                                                                                                                            |
| "Interactivity Policy"            | the policy adopted by <b>The Company</b> for the purposes of managing <b>Interactivity</b> and published on its website as it may be amended from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Interconnected System Operator"  | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Interconnector"                  | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Interconnector Adjustment Payments"</b>      | the payments (whether positive or negative) as notified by the <b>Interconnectors</b> to <b>The Company</b> pursuant to the conditions in their respective licences for the purposes of the ESO Licence condition F3 Part C Pass-through (PTt);                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Interconnector Asset Owner"</b>              | the owner of an <b>Interconnector</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Interconnector Error Administrator"</b>      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Interconnector Owner"</b>                    | the owner of an <b>Interconnector</b> , or of that part of an <b>Interconnector</b> , directly connected to the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Interconnector User"</b>                     | <p>(a) in relation to an <b>Interconnector</b> connected to the <b>National Electricity Transmission System</b>, as defined in the <b>Balancing and Settlement Code</b>; and</p> <p>(b) in relation to a <b>Distribution Interconnector</b>, a Lead Party (as defined in the <b>Balancing and Settlement Code</b>) in respect of a single <b>BM Unit</b> where under Section K5 of the <b>Balancing and Settlement Code</b> the <b>BM Unit</b> has been allocated in relation to that <b>Distribution Interconnector</b> or if there is no such allocation, as defined in the <b>Balancing and Settlement Code</b>;</p> |
| <b>"Interconnector User Commitment Capacity"</b> | <p>(a) for <b>Interconnectors</b> whose <b>Connection Site</b> is below the B11 boundary as set out in the annual Electricity Ten Year Statement, this is the figure for the purposes of <b>CUSC</b> Paragraph 9.5 as specified in Appendix C of the <b>User's Bilateral Connection Agreement</b>; and</p> <p>(b) for <b>Interconnectors</b> whose <b>Connection Site</b> is above the B11 boundary as set out in the annual Electricity Ten Year Statement, this is the figure for the purposes of <b>CUSC</b> Paragraph 9.4 as specified in Appendix C of the <b>User's Bilateral Connection Agreement</b>;</p>       |
| <b>"Interconnector Voting Sub-Group"</b>         | <p>all <b>User(s)</b> in a <b>Voting Group</b> who fall within any one or more of the following categories:</p> <p>(a) <b>Interconnector Owners</b> with a <b>Bilateral Agreement</b>; and</p> <p>(b) <b>Interconnector Users</b></p>                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Interface Agreement"</b>                     | the agreement(s) entered into pursuant to Paragraph 2.11 and Paragraph 9.13 based substantially on the forms set out in Exhibit O to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“Interim Connect and Manage Arrangements”</b>                 | the arrangements in place between 8 May 2009 and the <b>Connect and Manage Implementation Date</b> whereby <b>Offers</b> were made by <b>The Company</b> on the basis that a <b>Derogation</b> would be obtained from the <b>Authority</b> such that identified <b>Transmission Reinforcement Works</b> did not need to be completed prior to connection and/or use of system;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>“Interim Operational Notification” or “ION”</b>               | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>“Interim Operational Notification Part A” or “ION Part A”</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>“Interim Operational Notification Part B” or “ION Part B”</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>“Interim Panel and Alternate Election process”</b>            | As defined in Paragraph 8A.4.3.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>“Interruption”</b>                                            | <p>where either:-</p> <ul style="list-style-type: none"> <li>(i) solely as a result of <b>Deenergisation</b> of <b>Plant and Apparatus</b> forming part of the <b>National Electricity Transmission System</b>; or</li> <li>(ii) in accordance with an <b>Emergency Deenergisation Instruction</b>; or</li> <li>(iii) solely as a result of an <b>User Emergency Deenergisation</b>; <ul style="list-style-type: none"> <li>a) An <b>Export BM Unit</b> comprised in the <b>User’s Equipment</b> of an <b>Affected User</b> (other than an <b>Interconnector Owner</b>) is <b>Deenergised</b>; or</li> <li>b) an <b>Associated Export BM Unit</b> of an <b>Affected User</b> is (other than an <b>Interconnector Owner</b>) <b>Deenergised</b> from the <b>National Electricity Transmission System</b>; or</li> <li>c) an <b>Interconnector</b> of an <b>Affected User</b> who is an <b>Interconnector Owner</b> is <b>Deenergised</b>; or</li> <li>d) The <b>Maximum Export Limit</b> in respect of the <b>BM Unit(s)</b> associated with such <b>User’s Equipment</b> is zero.</li> </ul> </li> </ul> |
| <b>“Interruption Payment”</b>                                    | <p>the payment for a <b>Relevant Interruption</b> calculated as follows:</p> <p>1) In the case of a <b>Relevant Interruption</b> arising as a result of a <b>Planned Outage</b>;</p> <p>In the case of an <b>Affected User</b> other than an <b>Interconnector Owner</b></p> $\sum_{i=k}^{i=n} \text{Maximum}(\text{Average daily } \pounds \text{ per MW rate}_i, \text{Actual daily } \pounds \text{ per MW rate}_i) * \text{Affected MW}_i$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

In the case of an **Affected User** who is an **Interconnector Owner**

$$\sum_{i=k}^{i=n} \text{Average daily £ per MW rate}_i * \text{MW specified as the}$$

**Transmission Entry Capacity** for the **Connection Site**

where:

i = calendar days

k = 1, representing the first calendar day associated with a **Relevant Interruption**.

n = number of complete or part complete calendar days of a **Relevant Interruption**

2) In the case of a **Relevant Interruption** arising as a result of either an **Emergency Deenergisation Instruction** or a **User Emergency Deenergisation**

In the case of an **Affected User** other than an **Interconnector Owner**

j = p

$$\sum \text{System Buy Price}_j * 0.5 * \text{Affected MW}_j$$

j = 1

Plus (if applicable)

j = m

$$\sum \text{Market Price}_j * 0.5 * \text{Affected MW}_j$$

j = 4

In the case of an **Affected User** who is an **Interconnector Owner**

j = p

$$\sum \text{System Buy Price}_j * 0.5 * \text{MW specified as the Transmission Entry Capacity for the Connection Site}$$

j = 1

Plus (if applicable)

j = m

$$\sum \text{Market Price}_j * 0.5 * \text{MW specified as the Transmission Entry Capacity for the Connection Site}$$

j = 4

where;

j = **Settlement Periods** from the time when the **Emergency Deenergisation Instruction** was issued by **The Company** or commencement of the **User Emergency Deenergisation** (as applicable), with 1 representing the first **Settlement Period**.

$m$  = The duration of the **Relevant Interruption** (being the **Interruption Period**), in **Settlement Periods** for which **Gate Closure** has not yet occurred (which shall be greater than 3, up to a maximum value of 48)

$p$  = The duration of the **Relevant Interruption** in **Settlement Periods** for which **Gate Closure** has occurred (up to a maximum value of 3).

and after the first 24 hours of a Relevant Interruption a sum calculated as 1 above save that  $k$  shall be equal to 2.

3) In the case of all other Relevant Interruptions:

In the case of an **Affected User** other than an **Interconnector Owner**

$$j = p$$

$$\sum_{j=1} \text{System Buy Price}_j * 0.5 * \text{Affected MW}_j$$

Plus (if applicable)

$$j = m$$

$$\sum_{j=4} \text{Market Price}_j * 0.5 * \text{Affected MW}_j$$

In the case of an **Affected User** who is an **Interconnector Owner**

$$j = p$$

$$\sum_{j=1} \text{System Buy Price}_j * 0.5 * \text{MW specified as the Transmission Entry Capacity for the Connection Site}$$

Plus (if applicable)

$$\sum_{j=4}^{j=m} \text{Market Price}_j * 0.5 * \text{MW specified as the Transmission Entry Capacity for the Connection Site}$$

where;

$j$  = **Settlement Periods** from the start of the **Relevant Interruption**, with 1 representing the first **Settlement Period**.

$m$  = The duration of the **Relevant Interruption** (being the **Interruption Period**), in **Settlement Periods** for which **Gate Closure** has not yet occurred (which shall be greater than 3, up to a maximum value of 48)

p = The duration of the **Relevant Interruption** in **Settlement Periods** for which **Gate Closure** has occurred (up to a maximum value of 3).

and after the first 24 hours of a **Relevant Interruption** a sum calculated in accordance with paragraph 1 above save that k shall be equal to 2.

Provided always that an **Affected User** shall not receive payment in respect of more than one **Relevant Interruption** for the same period.

4. In the event of the relevant **Market Price** being zero then for purpose of paragraphs 2 or 3 above the **Market Price** shall be deemed to be the most recent preceding positive price.

Throughout this definition of **Interruption Payment**:

**Average daily £ per MW rate** = (TNUoS income derived from generators/ total system **Transmission Entry Capacity**) / 365, calculated by reference in each case to figures for the **Financial Year** prior to that in which the **Relevant Interruption** occurs to give a daily £ per MW rate;

**Actual daily £ per MW rate** = (Annual TNUoS charge of an **Affected User** for the **Financial Year** / **Transmission Entry Capacity** for the **Connection Site**) / 365 calculated by reference to the tariff in the **Statement of Use of System Charges** for the **Financial Year** in which the **Relevant Interruption** occurs;

**Affected MW** = in the case of either **Export BM Units** or **Associated Export BM Units**, the MW arrived at after deducting from the **Transmission Entry Capacity** for the **Connection Site** the sum of the **Connection Entry Capacity** of the unaffected **Export BM Units** at the **Connection Site**;

**System Buy Price** is as defined in the **Balancing and Settlement Code**;

**Market Price** is as defined in the **Balancing and Settlement Code**.

#### **“Interruption Period”**

For a **Planned Outage**, shall mean the period in whole calendar days commencing with the notification of the **Affected User** by **The Company** of the start of **Relevant Interruption** and ending on the notification of the **Affected User** by **The Company** that the **Relevant Interruption** has ended;

For a **Relevant Interruption** arising as a result of:

- (i) an **Emergency Deenergisation Instruction**, shall mean the period from the start of the **Settlement Period** in which **The Company** gave notification to the **Affected User** of the start of such **Relevant Interruption**; or

- (ii) a **User Emergency Deenergisation**, shall mean the period from the start of the **Settlement Period** in which the **User Emergency Deenergisation** commenced,

until the end of the **Settlement Period** in respect of which (i) **The Company** gave notification to the **Affected User** by **The Company** that the **Relevant Interruption** has ended or (ii), in the case of a **User Emergency Deenergisation**, means the earlier of (a) when the **Export BM Unit** is **Reenergised** or (b) when the issue on the **National Electricity Transmission System** giving rise to the **User Emergency Deenergisation** is resolved, which shall be measured in:

- i) whole **Settlement Periods** for the first 24 hours from the time of either notification by **The Company** to the **Affected User** of the start of such **Relevant Interruption** or when the **User Emergency Deenergisation** commenced (as applicable); and
- ii) whole calendar days for any time after the first 24 hour period referred to in i) above.

In the case of all other **Relevant Interruptions** the duration, shall mean the period from the start of such **Relevant Interruption** which shall be measured in:

- i) whole **Settlement Periods** for the first 24 hours from the start of such **Relevant Interruption**; and
- ii) whole calendar days for any time after the first 24 hour period referred to in i) above.

**"Intertrip Contracted Unit"**

- (i) in the case of a **Power Park Module**, the collection of **Non-Synchronous Generating Units** which are registered as a **Power Park Module** under the **Grid Code**; and

- (ii) all other cases, a **Generating Unit**,

unless, in either case, the **Bilateral Agreement** specifies otherwise.

**"Intertrip Payment"**

as defined in Paragraph 4.2A.4(c);

**"Isolation"**

as defined in the **Grid Code**;

**"ISOP"**

Independent System Operator and Planner, means a person designated by the Secretary of State under section 162 of the



|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | Energy Act 2023 as the holder of the <b>ESO Licence</b> , and the <b>GSP Licence</b> . For the time being that person is <b>NESO</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Joint System Incident"</b>              | <p>Paragraphs (a) and (b) below are without prejudice to the application of Paragraph 6.4 to <b>Users</b> acting in capacities other than those detailed in Paragraphs (a) and (b),</p> <p>(a) for <b>Users</b> in respect of their <b>Connection Sites</b> which were not <b>Commissioned</b> as at the <b>Transfer Date</b>, shall have the meaning given to that term in the <b>Grid Code</b>;</p> <p>(b) for <b>Users</b> acting in their capacity as <b>Generators</b> with <b>Embedded Large Power Stations</b> or <b>Embedded Medium Power Stations</b> and who are passing power onto a <b>Distribution System</b> through a connection with a <b>Distribution System</b> which was not <b>Commissioned</b> as at the <b>Transfer Date</b>, means an event wherever occurring (other than on an <b>Embedded Medium Power Station</b> or <b>Embedded Small Power Station</b>) which, in the opinion of <b>The Company</b> or a <b>User</b> has or may have a serious and/or widespread effect, being (in the case of an event on a <b>User(s) System(s)</b>) (other than on an <b>Embedded Medium Power Station</b> or <b>Embedded Small Power Station</b>), on the <b>National Electricity Transmission System</b> , and (in the case of an event on the <b>National Electricity Transmission System</b>), on a <b>User(s) System(s)</b> (other than on an <b>Embedded Independent Generating Plant</b>);</p> |
| <b>"Joint Temporary TEC Exchange Users"</b> | means the <b>Temporary TEC Exchange Donor User</b> and the <b>Temporary TEC Exchange Recipient User</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Key Consents"</b>                       | those <b>Consents</b> a <b>User</b> requires in respect of its <b>Power Station</b> project which are identified by <b>The Company</b> as key for the purposes of Part Three of the <b>User Commitment Methodology</b> and in relation to a particular <b>User</b> as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Key Consents In Place Date"</b>         | the date that <b>The Company</b> confirms in writing to the <b>User</b> that <b>The Company</b> is satisfied, for the purposes of Part Three of the <b>User Commitment Methodology</b> , that the <b>User</b> has been granted the <b>Key Consents</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Land Charge"</b>                        | the charge (if any) set out in Appendix B to a <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Large Power Station"</b>                | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"LDTEC"</b>                              | Is, in the case of an accepted <b>LDTEC Block Offer</b> , <b>Block LDTEC</b> or, in the case of an accepted <b>LDTEC Indicative Block Offer</b> , <b>Indicative Block LDTEC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"LDTEC Availability Notification"</b> | the form set out in Exhibit T to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"LDTEC Block Offer"</b>               | is an offer made by <b>The Company</b> for <b>Short Term Capacity</b> in accordance with the terms of Paragraphs 6.32.4.6 and 6.32.6.1 in response to an <b>LDTEC Request</b> ;                                                                                                                                                                                                                                                                                                                            |
| <b>"LDTEC Charge"</b>                    | being a component of the <b>Use of System Charges</b> which is made or levied by <b>The Company</b> and to be paid by the <b>User</b> , in the case of an accepted <b>LDTEC Block Offer</b> , for <b>Block LDTEC</b> and in the case of an accepted <b>LDTEC Indicative Block Offer</b> for <b>Requested LDTEC</b> and in the case of an accepted <b>Temporary TEC Exchange Rate Offer</b> for <b>Temporary Received TEC</b> , in each case calculated in accordance with the <b>Charging Statements</b> ; |
| <b>"LDTEC Indicative Block Offer"</b>    | is an offer made by <b>The Company</b> for <b>Short Term Capacity</b> in accordance with the terms of Paragraphs 6.32.6.4 and 6.32.6.2 in response to an <b>LDTEC Request</b> ;                                                                                                                                                                                                                                                                                                                            |
| <b>"LDTEC Indicative Profile"</b>        | is a profile in MW that indicates <b>The Company's</b> assessment of the MW capacity that may be available to a <b>User</b> for the <b>LDTEC Period</b> which has been prepared solely for the purpose of enabling a <b>User</b> to make its assessment of an <b>LDTEC Indicative Block Offer</b> ;                                                                                                                                                                                                        |
| <b>"LDTEC Offer"</b>                     | is an <b>LDTEC Block Offer</b> and/or an <b>LDTEC Indicative Offer</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"LDTEC Period"</b>                    | is,<br><br>(a) a period of weeks or part thereof within a <b>Financial Year</b> as specified by the <b>User</b> in its <b>LDTEC Request Form</b> for a minimum period of seven weeks commencing on a Monday at 0.00 hours and finishing at 23.59 on any given day no later than the last day of such <b>Financial Year</b> , or<br><br>(b) in the case of an accepted <b>Temporary TEC Exchange Offer</b> , the <b>Temporary TEC Exchange Period</b> ;                                                     |
| <b>"LDTEC Profile"</b>                   | is a profile in MW of <b>The Company's</b> assessment of the MW capacity that is available to a <b>User</b> for the <b>LDTEC Period</b> (not exceeding the maximum level in the <b>LDTEC Request</b> ) in an <b>LDTEC Block Offer</b> ;                                                                                                                                                                                                                                                                    |
| <b>"LDTEC Request"</b>                   | is an application made by a user for an <b>LDTEC Block Offer</b> and/or an <b>LDTEC Indicative Block Offer</b> made using an <b>LDTEC Request Form</b> ;                                                                                                                                                                                                                                                                                                                                                   |
| <b>"LDTEC Request Fee"</b>               | the fee to be paid by the <b>User</b> to <b>The Company</b> for an <b>LDTEC Request</b> as detailed in the <b>Charging Statements</b> ;                                                                                                                                                                                                                                                                                                                                                                    |

|                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"LDTEC Request Form"</b>                                                     | is the form set out in Exhibit S to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"LDTEC Week"</b>                                                             | is a week or part thereof within an <b>LDTEC Period</b> commencing on Monday at 0.00 and finishing on 23:59 on the last day within such week;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Leading"</b>                                                                | in relation to <b>Reactive Power</b> , importing Mvar;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Legal Challenge"</b>                                                        | an appeal to the Competition Commission or a judicial review in respect of the <b>Authority's</b> decision to approve or not to approve a <b>CUSC Modification Proposal</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Legally Binding Decisions of the European Commission and/or the Agency"</b> | means any relevant legally binding decision or decisions of the European Commission and/or the Agency, but a binding decision does not include a decision that is not, or so much of a decision as is not, <b>Assimilated Law</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Less than 100MW"</b>                                                        | Is defined as not having the capability to export 100MW to the <b>Total System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Letter of Acknowledgement"</b>                                              | the letter to be provided with the <b>Connection Application</b> for a <b>New Connection Site Offshore</b> or <b>New Connection Site</b> for an <b>Offshore Project</b> and obtained from either The Crown Estate or Crown Estate Scotland;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Letter of Authority"</b>                                                    | the letter to be provided with the <b>Connection Application</b> , such letter to be in the appropriate format as found at Section 2 Schedule 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Letter of Credit"</b>                                                       | <p>(a) in respect of Paragraph 2.22 shall mean an irrevocable standby letter of credit in a form reasonably satisfactory to <b>The Company</b> but in any case expressed to be governed by the Uniform Customs and Practice for Documentary Credits 1993 Revision ICC Publication No. 500 or such other form as may be reasonably satisfactory to <b>The Company</b> and allowing for partial drawings and providing for the payment to <b>The Company</b> on demand forthwith on and against <b>The Company's</b> delivery to the issuer thereof of a <b>Notice of Drawing</b> of the amount demanded therein;</p> <p>(b) in all other cases shall mean an unconditional irrevocable standby letter of credit in such form as <b>The Company</b> may reasonably approve issued for the account of the <b>User</b> in sterling in favour of <b>The Company</b>, allowing for partial drawings and providing for the payment to <b>The Company</b> forthwith on demand by any United Kingdom clearing bank or any other bank which in each case has a long term debt rating of not less than single "A" by Standard and Poor's Corporation or by Moody's Investors Services, or such other</p> |

bank as **The Company** may approve and which shall be available for payment at a branch of the issuing bank;

|                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Licence"</b>                                             | any licence granted pursuant to Section 6 of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Licence Standards"</b>                                   | the standards to be met by <b>The Company</b> under condition E7 of the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Licensable Generation"</b>                               | generating plant that is not <b>Exemptible Generation</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Limited Membership Workgroup</b>                          | <p>A <b>Workgroup</b> having less than five (5) but more than two (2) persons that have nominated themselves for membership in addition to the <b>Code Administrator</b> representative and the chairperson of the <b>Workgroup</b>.</p> <p>Members of a <b>Limited Membership Workgroup</b> where employed by companies that are considered to be an <b>Affiliate</b> of each other will be considered to be a single workgroup member for the purposes of fulfilling this minimum requirement.</p> |
| <b>"Limiting Regulation"</b>                                 | European Commission Regulation 838/2010 in the context of setting limits on annual average transmission charges payable by Generators (or any subsequent UK law specifying such limits).                                                                                                                                                                                                                                                                                                             |
| <b>"Liquidated Damages"</b>                                  | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"LoA Guidance"</b>                                        | the guidance on the requirements for the <b>Letter of Authority</b> and <b>Letter of Acknowledgment</b> published by <b>The Company</b> on the <b>Website</b> (as it may be amended from time to time);                                                                                                                                                                                                                                                                                              |
| <b>"Local Safety Instructions"</b>                           | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"London Court of International Arbitration"</b>           | the leading London-based arbitral institution and not-for-profit company limited by guarantee of that name with a registered company number of 0204767 providing for the resolution of commercial disputes in accordance with its arbitration rules;                                                                                                                                                                                                                                                 |
| <b>"Loss of Transmission Access Compensation Claim Form"</b> | A form amended from time to time by agreement between the <b>CUSC Modification Panel</b> and <b>The Company</b> , to be completed by a claimant for submission of Relevant Interruption claims and available on a website maintained by <b>The Company</b> .                                                                                                                                                                                                                                         |
| <b>"MCUSA"</b>                                               | the <b>Master Connection and Use of System Agreement</b> dated 30 March 1990 (now amended to become the <b>CUSC Framework Agreement</b> );                                                                                                                                                                                                                                                                                                                                                           |

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Main Business"</b>                        | any business of <b>The Company</b> or any of its subsidiaries which it is required to carry on under the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Main Business Person"</b>                 | any employee of <b>The Company</b> or any director or employee of its subsidiaries who is engaged solely in the <b>Main Business</b> and <b>"Main Business Personnel"</b> shall be construed accordingly;                                                                                                                                                                                                                                                                                                                    |
| <b>"Main System Circuits"</b>                 | means <b>Transmission Circuits</b> but excluding a <b>Grid Supply Point</b> transformer;                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Maintenance Reconciliation Statement"</b> | the statement prepared in accordance with Paragraph 2.14.5 and Paragraph 9.9.5;                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Mandatory Ancillary Services"</b>         | <b>Part 1 System Ancillary Services</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Mandatory Services Agreement"</b>         | an agreement between <b>The Company</b> and a <b>User</b> to govern the provision of and payment for <b>Mandatory Ancillary Services</b> or to govern the payment by <b>The Company</b> to a <b>User</b> for <b>Obligatory Reactive Power Service</b> provided by an <b>Offshore Transmission Licensee</b> in accordance with the <b>STC</b> ;                                                                                                                                                                               |
| <b>"Market Agreement"</b>                     | as defined in Paragraph 3.1 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Market Day"</b>                           | as defined in Paragraph 3.3 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Market Suspension Period"</b>             | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Material Effect"</b>                      | an effect causing <b>The Company</b> or a <b>Relevant Transmission Licensee</b> to effect any works or to alter the manner of operation of <b>Transmission Plant</b> and/or <b>Transmission Apparatus</b> at the <b>Connection Site</b> or the site of connection or a <b>User</b> to effect any works or to alter the manner of operation of its <b>Plant</b> and/or <b>Apparatus</b> at the <b>Connection Site</b> or the site of connection which in either case involves that party in expenditure of more than £10,000; |
| <b>"Materially Affected Party"</b>            | any person or class of persons designated by the <b>Authority</b> as such, in relation to the <b>Charging Methodologies</b> ;                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Maximum Export Capacity"</b>              | as defined in the <b>Grid Code</b> and in relation to a particular <b>User</b> , as defined in its <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Maximum Export Limit"</b>                 | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Maximum Generation"</b>                   | means a Balancing Service provided from the Available BM Units by generating at a level above the MEL so as to increase the total export of <b>Active Power</b> from the <b>Power Station</b> to the <b>National</b>                                                                                                                                                                                                                                                                                                         |

|                                               |                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                               | <b>Electricity Transmission</b> System, contributing towards <b>The Company's</b> requirement for additional short-term generation output, all as more particularly described in Paragraph 4.2;                                                                                           |
| <b>"Maximum Generation BM Unit"</b>           | means, as between <b>The Company</b> and a User, the BM Units, specified in the <b>Maximum Generation Service Agreement</b> ;                                                                                                                                                             |
| <b>"Maximum Generation Energy Fee"</b>        | the amount (£/MWh) set out in the <b>Maximum Generation Service Agreement</b> as the same may be revised from time to time in accordance with Paragraph 4.2.5;                                                                                                                            |
| <b>"Maximum Generation Energy Payment"</b>    | has the meaning attributed to it in Paragraph 4.2.5.1;                                                                                                                                                                                                                                    |
| <b>"Maximum Generation Instruction"</b>       | has the meaning attributed to it in Paragraph 4.2.4.1;                                                                                                                                                                                                                                    |
| <b>"Maximum Generation Redeclaration"</b>     | has the meaning attributed to it in Paragraph 4.2.3.3;                                                                                                                                                                                                                                    |
| <b>"Maximum Generation Service Agreement"</b> | an agreement between <b>The Company</b> and a <b>User</b> specifying, amongst other things, the <b>BM Units</b> and the <b>Maximum Generation Energy Fee</b> applicable to the provision of <b>Maximum Generation</b> ;                                                                   |
| <b>"Maximum Import Capacity"</b>              | as defined in the <b>Grid Code</b> and in relation to a particular <b>User</b> , as defined in its <b>Bilateral Connection Agreement</b> in the context of the <b>Charging Methodologies</b> it shall mean as defined in the <b>Distribution Connection and Use of System Agreement</b> ; |
| <b>"Medium Power Station"</b>                 | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                      |
| <b>"Meters"</b>                               | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                  |
| <b>"Metering Equipment"</b>                   | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                  |
| <b>"Meter Operator Agent"</b>                 | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                  |
| <b>"Metering System"</b>                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                  |
| <b>"Methodology"</b>                          | the <b>Statement of the Use of System Charging Methodology</b> or the <b>Statement of the Connection Charging Methodology</b> (and <b>"Methodologies"</b> shall be construed accordingly);                                                                                                |
| <b>"Milestone Default Notice"</b>             | the notice issued by <b>The Company</b> to a <b>User</b> for the purposes of Paragraph 16.4.4 of the <b>Queue Management Process</b> ;                                                                                                                                                    |
| <b>"Minister of the Crown"</b>                | as defined in the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                    |

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"MITS Connection Works"</b>        | means those <b>Transmission Reinforcement Works</b> (inclusive of substation works) that are required from the <b>Connection Site</b> to connect to a <b>MITS Substation</b> (and in the context of an <b>Embedded Power Station</b> , "connection site" shall mean the associated <b>Grid Supply Point</b> identified as such in the relevant <b>Bilateral Agreement</b> );                                                                                           |
| <b>"MITS Node"</b>                    | means in the context of ascertaining the <b>Attributable Works</b> , a node with (i) more than four <b>Transmission</b> circuits or (ii) two or more <b>Transmission</b> circuits and a <b>Grid Supply Point</b> ;                                                                                                                                                                                                                                                     |
| <b>"MITS Substation"</b>              | means (in the context of the definition of <b>MITS Connection Works</b> , a <b>Transmission</b> substation with more than 4 <b>Main System Circuits</b> connecting at that substation;                                                                                                                                                                                                                                                                                 |
| <b>"Mixed Demand Site"</b>            | Means a <b>Final Demand Site</b> which also contains <b>Electricity Generation</b> and/or <b>Electricity Storage</b> and/or provides an <b>Eligible Service</b> .                                                                                                                                                                                                                                                                                                      |
| <b>"Mode A Frequency Response"</b>    | as defined in Paragraph 4.1.3.3;                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Modification"</b>                 | any actual or proposed replacement, renovation, modification, alteration, or construction by or on behalf of a <b>User</b> or <b>The Company</b> to either the <b>User's Plant</b> or <b>Apparatus</b> or the manner of its operation or <b>Transmission Plant</b> or <b>Transmission Apparatus</b> or the manner of its operation which in either case has or may have a <b>Material Effect</b> on another <b>CUSC Party</b> at a particular <b>Connection Site</b> ; |
| <b>"Modification Affected User"</b>   | as defined in Paragraph 6.9.3.2;                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Modification Application"</b>     | an application in the form or substantially in the form set out in Exhibit I to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Modification Notification"</b>    | a notification in the form or substantially in the form set out in Exhibit K to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Modification Offer"</b>           | an offer in the form or substantially in the form set out in Exhibit J to the <b>CUSC</b> , including any revision or extension of such offer;                                                                                                                                                                                                                                                                                                                         |
| <b>"Multi-Purpose Interconnector"</b> | as defined in the Energy Act 2023;                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"National Electricity Transmission System" or "NETS"</b>           | the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within <b>Great Britain</b> and <b>Offshore</b> and used for the transmission of electricity from one <b>Power Station</b> to a sub-station or to another <b>Power Station</b> or between sub-stations or to or from any <b>External Interconnection</b> and includes any <b>Plant</b> and <b>Apparatus</b> or meters owned or operated by any transmission licensee within <b>Great Britain</b> and <b>Offshore</b> in connection with the transmission of electricity but shall not include <b>Remote Transmission Assets</b> ; |
| <b>"National Electricity Transmission System SQSS" or "NETS SQSS"</b> | is the National Electricity Transmission System Security and Quality of Supply Standards as referred to in condition E7 of the <b>ESO Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"National Energy System Operator or NESO"</b>                      | The Company with registered number 11014226, as the designated <b>ISOP</b> and holder of the <b>ESO Licence</b> and the <b>GSP Licence</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Natural Demand"</b>                                               | the <b>Demand (Active Power)</b> which is necessary to meet the needs of <b>Customers</b> excluding that <b>Demand (Active Power)</b> met by <b>Embedded Generating Units</b> whose generation is not traded by <b>Trading Parties</b> through <b>Energy Metering Systems</b> registered under the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                             |
| <b>"Net Asset Value"</b>                                              | the <b>Gross Asset Value</b> of the <b>Transmission Connection Asset</b> in question less depreciation over the <b>Replacement Period</b> calculated in accordance with recognised accounting principles and procedures;                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"New Connection Site"</b>                                          | a proposed <b>Connection Site</b> in relation to which there is no <b>Bilateral Agreement</b> in force between the <b>CUSC Parties</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"New CUSC Party"</b>                                               | as defined in Paragraph 6.13;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Net Demand"</b>                                                   | Sum of the <b>BM Unit Metered Volumes (QM<sub>ij</sub>)</b> of the <b>Trading Unit</b> during the three <b>Settlement Periods</b> of the <b>Triad</b> expressed as a positive number (i.e. $\sum QM_{ij}$ );                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"NGET"</b>                                                         | National Grid Electricity Transmission plc (No: 2366977) whose registered office is at 1-3 Strand, London, WC2N 5EH;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"NHH Base Percentage"</b>                                          | the % value for the relevant <b>Security Period</b> as specified in the table in paragraph 2 of Section 3, Appendix 2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"NHH Charges"</b>                                                  | that element of <b>Transmission Network Use of System Demand Charges</b> relating to non-half-hourly metered <b>Demand</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"NHH Base Value at Risk"</b>                                       | the sum as calculated in accordance with Paragraph 3.22.4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "NHH Forecasting Performance Related VAR " | the amount resulting from multiplying the <b>Deemed NHH Forecasting Performance</b> and the <b>Indicative Annual HH TNUoS Charge</b> calculated on the basis of the latest <b>Demand Forecast</b> received by <b>The Company</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Nominated Registered Capacity"            | as defined in Appendix 5 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Non-Embedded Customer"                    | a <b>Customer</b> except for a <b>Public Distribution System Operator</b> receiving electricity direct from the <b>National Electricity Transmission System</b> irrespective of from whom it is supplied;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Non-Embedded User"                        | A <b>User</b> , except for a <b>Public Distribution System Operator</b> , receiving electricity direct from the <b>National Electricity Transmission System</b> irrespective of from whom it is supplied;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Non-Final Demand Site"                    | Means a <b>Single Site</b> (whether commissioning, operating, maintaining or decommissioning) which is either a; <ul style="list-style-type: none"> <li>i. <b>Electricity Storage Facility</b> and/or an <b>Electricity Generation Facility</b></li> <li>ii. <b>Eligible Services Facility</b></li> </ul> <p>The <b>Non-Final Demand Site</b> shall have an export <b>Metering System</b> and an import <b>Metering System</b> with associated metering equipment which only measures export from <b>Electricity Generation</b> and/or <b>Electricity Storage</b> or <b>Eligible Services</b> and import for, or directly relating to <b>Electricity Generation</b> and/or <b>Electricity Storage</b> or <b>Eligible Services</b> (and not export from another source or import for another activity), which is subject to a <b>Declaration</b>.</p> |
| "Non- Performing Party"                    | as defined in Paragraph 6.19;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Non Standard Boundary"                    | where the division of ownership of <b>Plant</b> and <b>Apparatus</b> is contrary to the principles of ownership set out in <b>CUSC</b> Paragraph 2.12;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| "Non-Standard Interconnector"              | an <b>Interconnector</b> which is connected to an offshore converter station in the connecting jurisdiction and which does not subsist for the purposes of offshore transmission activities in <b>Great Britain</b> as such definition may evolve for regulatory purposes;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Non-Synchronous Generating Unit"          | as defined in the <b>Grid Code</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| "Notice of Drawing"                        | a notice of drawing signed by or on behalf of <b>The Company</b> substantially in the form set out in Exhibit N to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| "Notification Date"                        | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Notification of Circuit Outage"</b>                               | as defined in the relevant <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Notification of Circuit Restriction"</b>                          | as defined in the relevant <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Notification of Fixed Attributable Works Cancellation Charge"</b> | the notification issued by <b>The Company</b> to a <b>User</b> , in accordance with Part Two of the <b>User Commitment Methodology</b> showing the <b>Fixed Attributable Works Cancellation Charge</b> such statement to be in substantially the form set out in Exhibit MM3 to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                     |
| <b>"Notification of Restrictions on Availability"</b>                 | as defined in the relevant <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Notification of ET Restrictions on Availability"</b>              | as defined in the relevant <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Notional Amount"</b>                                              | as defined in Paragraph 3.13;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Nuclear Generator"</b>                                            | as defined in Paragraph 6.11;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Nuclear Site Licence Provisions Agreement"<sup>1</sup></b>        | shall mean each of the following agreements (as from time to time amended) (a) the agreement between <b>NGET</b> and Magnox Electric plc (formally called Nuclear Electric plc) dated 30 March 1990, (b) the agreement between <b>NGET</b> and British Energy Generation Limited dated 31 March 1996, (c) the agreement between SP Transmission Limited and British Energy Generation (UK) Limited dated 29 May 1991 in relation to Hunterston power station and Torness power station, and (d) the agreement between SP Transmission Limited and British Nuclear Fuels plc in relation to Chapelcross power station; |
| <b>"Obligatory Reactive Power Service"</b>                            | as defined in Paragraph 1.1 of Schedule 3, Part I or provided by an <b>Offshore Transmission Licensee</b> in accordance with the <b>STC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Offer"</b>                                                        | an offer for connection to and/or use of the <b>National Electricity Transmission System</b> made by <b>The Company</b> in relation to the <b>CUSC</b> ;<br><br>In the context of the <b>Charging Methodologies</b> it shall have the meaning as defined in the BSC;                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Offer Acceptance Period"</b>                                      | the period for acceptance as set out in <b>CUSC</b> Paragraphs 1.7.3, 2.13.4, 3.7.4, 6.9.2.3 and 9.17.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

---

<sup>1</sup> The dates and names of parties with NSLPAs need to be updated in due course.

|                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Offshore"</b>                                  | means wholly or partly in the <b>Offshore Waters</b> and when used in conjunction with another defined term and the terms together are not otherwise defined means that the associated term is to be read accordingly;                                                                                                                                                                                                                                                                                                                 |
| <b>"Offshore Construction Works"</b>               | In relation to a particular <b>User</b> means those elements of the <b>Construction Works</b> to be undertaken by an <b>Offshore Transmission Licensee</b> on the <b>Offshore Transmission System</b> as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                |
| <b>"Offshore Grid Entry Point"</b>                 | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Offshore Platform"</b>                         | a single structure comprising of <b>Plant</b> and <b>Apparatus</b> located <b>Offshore</b> which includes one or more <b>Offshore Grid Entry Points</b> ;                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Offshore Project"</b>                          | An <b>Interconnector</b> , <b>Power Station</b> located in <b>Offshore Waters</b> , <b>Multi-Purpose Interconnector</b> , <b>Non-Standard Interconnector</b> or other project which has leases awarded to it in <b>Offshore Waters</b> by the Crown Estate or Crown Estate Scotland or any other project which connects to the <b>National Electricity Transmission System Onshore</b> but has or involves assets outside of the jurisdiction of <b>Great Britain</b> and which is not caught by any of the aforementioned categories; |
| <b>"Offshore Standard Design"</b>                  | is a connection design (which provides for connection to the <b>National Electricity Transmission System</b> ) of a <b>Connection Site</b> located <b>Offshore</b> which satisfies the minimum deterministic criteria detailed in paragraphs 7.7 to 7.19 of the <b>NETS SQSS</b> but does not satisfy the deterministic criteria detailed in paragraphs 2.5 to 2.13 of the <b>NETS SQSS</b> ;                                                                                                                                          |
| <b>"Offshore Tender Process"</b>                   | that process followed by the <b>Authority</b> to make, in prescribed cases, a determination on a competitive basis of the person to whom an offshore transmission licence is to be granted;                                                                                                                                                                                                                                                                                                                                            |
| <b>"Offshore Tender Regulations"</b>               | those regulations made by the <b>Authority</b> in accordance with section 6C of the <b>Act</b> to facilitate the determination on a competitive basis of the person to whom an offshore transmission licence is to be granted;                                                                                                                                                                                                                                                                                                         |
| <b>"Offshore Transmission"</b>                     | means as defined in the Energy Act 2004;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Offshore Transmission Implementation Plan"</b> | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                                                                          |                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Offshore Transmission Licensee"</b>                                  | means such person in relation to whose <b>Licence</b> the standard conditions in Section E (offshore transmission owner standard conditions) of such <b>Licence</b> have been given effect or any person in that prospective role;                                                                                                                                                   |
| <b>"Offshore Transmission Owner"</b>                                     | means either (a) such person in relation to whose <b>Licence</b> the standard conditions in Section E (offshore transmission owner standard conditions) of such <b>Licence</b> have been given effect; or (b) a party who has acceded to the <b>STC</b> prior to the grant of a <b>Licence</b> referred to in (a) above as a requirement of the <b>Offshore Tender Regulations</b> ; |
| <b>"Offshore Transmission Reinforcement Works"</b>                       | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                          |
| <b>"Offshore Transmission System"</b>                                    | a <b>System</b> used (or to be used) for the purposes of <b>Offshore Transmission</b> and for which there is (or where the <b>OTSDUW Arrangements</b> apply, will be) an <b>Offshore Transmission Licensee</b> ;                                                                                                                                                                     |
| <b>"Offshore Transmission System Development User Works" or "OTSDUW"</b> | in relation to a particular <b>User</b> where the <b>OTSDUW Arrangements</b> apply means those activities and/or works to be undertaken by the <b>User</b> as identified in Part 2 of Appendix I of the relevant <b>Construction Agreement</b> ;                                                                                                                                     |
| <b>"Offshore Transmission System User Assets" or "OTSUA"</b>             | in relation to a particular <b>User</b> , any <b>Plant</b> and <b>Apparatus</b> resulting from <b>OTSDUW Build</b> which form the <b>Offshore Transmission System</b> to which the <b>User's Equipment</b> is to be or is connected, as identified in its <b>Construction Agreement</b> ;                                                                                            |
| <b>"Offshore Waters"</b>                                                 | has the meaning given to "offshore waters" in Section 90(9) of the Energy Act 2004;                                                                                                                                                                                                                                                                                                  |
| <b>"Offtaking"</b>                                                       | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                             |
| <b>"One Off Charge"</b>                                                  | the costs, including profits and overheads of carrying out the <b>One Off Works</b> , together with the <b>Net Asset Value</b> of any asset made redundant as a result of the <b>Construction Works</b> an estimate of which is specified in Appendix B1 to the relevant <b>Construction Agreement</b> and/or <b>Bilateral Agreement</b> ;                                           |
| <b>"One Off Works"</b>                                                   | the works described in Appendix B1 to the relevant <b>Construction Agreement</b> and/or <b>Bilateral Agreement</b> ;                                                                                                                                                                                                                                                                 |
| <b>"Onshore"</b>                                                         | means within <b>Great Britain</b> and when used in conjunction with another defined term and the terms together are not otherwise defined means that the associated term is to be read accordingly;                                                                                                                                                                                  |
| <b>"Onshore Tender Process"</b>                                          | the process followed by the <b>Delivery Body</b> to make, in prescribed cases, a determination on a competitive basis of the person to whom an onshore transmission licence is recommended to be                                                                                                                                                                                     |

granted by the **Authority** or a **Relevant Contract** is recommended to be awarded, as more particularly described in the **Onshore Tender Regulations**;

**“Onshore Tender Regulations”**

those regulations made by the **Authority** in accordance with section 6C of the **Act** to facilitate the determination on a competitive basis of the person to whom an onshore transmission licence is to be granted;

**“Onshore Transmission Licensee”**

means-**NGET**, Scottish Hydro Electric Transmission plc, SP Transmission plc, a **Competitively Appointed Transmission Owner** or such other person in relation to whose transmission licence the Standard Conditions in Section D (transmission owner standard conditions) have been given effect;

**“Onshore Transmission System”**

the part of the **National Electricity Transmission System** which is not an **Offshore Transmission System**;

**“Onshore Construction Works”**

in relation to a particular **User**, means those elements of the **Construction Works** to be undertaken other than on the **Offshore Transmission System** as defined in its **Construction Agreement**;

**“Onshore Transmission Reinforcement Works”**

in relation to a particular **User**, as defined in its **Construction Agreement**;

**“Operating Agreement(s)”**

the operating agreements or arrangements identified in the **Bilateral Connection Agreement** between **The Company** and the **Interconnector Owner** of the relevant **Interconnector** and made between either **The Company** and the relevant **Interconnector Owner** and/or **The Company** and the relevant **Interconnected System Operator**;

**“Operating Code” or “OC”**

the portion of the **Grid Code** which is identified as the **Operating Code**;

**“Operation Diagrams”**

as defined in the **Grid Code**;

**“Operational”**

in relation to a **Connection Site** means that the same has been **Commissioned** (which for the avoidance of doubt does not necessarily include commissioning of **Generating Units** connected at the **Connection Site**) and that the **User** can use such **User's Equipment** to undertake those acts and things capable of being undertaken by **BSC Parties** and in relation to a **Transmission Interface Site** means, in the case of **OTSDUW Build**, that the same has been **Commissioned** and that the **User** can use the **OTSUA**;

|                                                      |                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Operational Date"</b>                            | the date on which <b>The Company</b> issues the <b>Operational Notification</b> ;                                                                                                                                                                                                                                                 |
| <b>"Operational Effect"</b>                          | any effect on the operation of any <b>System</b> which causes that <b>System</b> to operate (or be at a materially increased risk of operating) differently to the way in which it would have normally operated in the absence of that effect;                                                                                    |
| <b>"Operational Intertripping"</b>                   | the automatic tripping of circuit breakers to prevent abnormal system conditions occurring, such as over voltage, overload, system instability etc. after the tripping of other circuit breakers following power system fault(s) which includes <b>System to Power Station</b> and <b>System to Demand</b> intertripping schemes; |
| <b>"Operational Metering Equipment"</b>              | meters, instrument transformers (both voltage and current), transducers, metering protection equipment including alarms circuitry and their associated outstations as may be necessary for the purpose of CC.6.5.6 of the <b>Grid Code</b> and the corresponding provision of the relevant <b>Distribution Code</b> ;             |
| <b>"Operational Notification"</b>                    | the notice of that name given to the <b>User</b> by <b>The Company</b> under Paragraphs 1.5.5 or 3.2.6 as appropriate;                                                                                                                                                                                                            |
| <b>"Original Party"</b>                              | as defined in the <b>CUSC Framework Agreement</b> ;                                                                                                                                                                                                                                                                               |
| <b>"Original Red Line Boundary"</b>                  | the red line boundary provided (a) with a <b>Gate 2 Application</b> or (b) <b>EA Request</b> in accordance with the <b>Gate 2 Criteria Methodology</b> ;                                                                                                                                                                          |
| <b>"Original Red Line Boundary Reduction Clause"</b> | the clause introduced to Schedule 2 Exhibit 3 and 3A under <b>CMP434</b> and in the context of directly connected parties only to address the consequences of non-compliance with the ongoing obligations in respect of the <b>Original Red Line Boundary</b> under the <b>Queue Management Process</b> ;                         |
| <b>"Other Dispute"</b>                               | as defined in Paragraph 7.2.3;                                                                                                                                                                                                                                                                                                    |
| <b>"Other Party"</b>                                 | as defined in Paragraph 7.5.1;                                                                                                                                                                                                                                                                                                    |
| <b>"Other User"</b>                                  | as defined in Paragraph 6.10.3;                                                                                                                                                                                                                                                                                                   |
| <b>"OTSDUW Arrangements"</b>                         | the arrangements whereby (a) <b>OTSDUW Build</b> or (b) the design, planning and consenting of assets that are to comprise an <b>Offshore Transmission System</b> are capable of being undertaken by a <b>User</b> ;                                                                                                              |
| <b>"OTSDUW Build"</b>                                | the design, planning, consenting, construction, installation and commissioning by (or on behalf of) a <b>User</b> of <b>OTSUA</b> which forms an <b>Offshore Transmission System</b> which at the <b>OTSUA Transfer Time</b> will be owned by an <b>Offshore Transmission Licensee</b> ;                                          |

|                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“OTSDUW Staged Build”</b>                                                | <b>OTSDUW Build</b> that is to be undertaken by the <b>User</b> in stages but which is part of a single <b>Qualifying Project</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>“OTSUA Commissioning Period”</b>                                         | has the meaning given to commissioning period in Section 6G(1) of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>“OTSUA Commissioning Period Effective Date”</b>                          | the date upon which, in accordance with the modification issued by the <b>Authority</b> to <b>The Company</b> pursuant to Section 6H of the <b>Act</b> , the amendments to the <b>CUSC</b> as provided for in such modification take effect;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>“OTSUA Completion Notice”</b>                                            | the notice to be issued by <b>The Company</b> to the <b>Authority</b> in respect of <b>OTSUA</b> or <b>OTSUA Operational at the OTSUA Commissioning Period Effective Date</b> , in accordance with condition D4 of the <b>ESO Licence</b> and Section 6G of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>“OTSUA Completion Notice Trigger Date”</b>                               | means: <ul style="list-style-type: none"> <li>a) other than in the case of <b>OTSDUW Staged Build</b>, the date upon which <b>The Company</b>, having already issued the <b>Energisation Operational Notification</b> and <b>Interim Operational Notification Part A</b>, issues the <b>Interim Operational Notification Part B</b> to the <b>User</b>; and</li> <li>c) in the case of <b>OTSDUW Staged Build</b>, the date upon which, by reference to the last stage of <b>OTSDUW Build</b>, <b>The Company</b>, having already issued the <b>Energisation Operational Notification</b> and <b>Interim Operational Notification Part A</b>, issues the <b>Interim Operational Notification Part B</b> for such stage to the <b>User</b> provided that all such documentation has already been issued in respect of all earlier stages of the <b>OTSDUW Staged Build</b>.</li> </ul>                                                                                                                                      |
| <b>“OTSUA Operational at the OTSUA Commissioning Period Effective Date”</b> | means <b>OTSUA</b> in respect of which: <ul style="list-style-type: none"> <li>a) other than in the case of <b>OTSDUW Staged Build</b>, <b>The Company</b>, has already issued the <b>Energisation Operational Notification</b> and <b>Interim Operational Notification</b> to the <b>User</b> (recognising that they may be in different form but where they achieve the same effect as the <b>Interim Operational Part A</b> and <b>Interim Operation Notification Part B</b>); and</li> <li>b) in the case of <b>OTSDUW Staged Build</b>, the date, by reference to the last stage of <b>OTSDUW Build</b>, <b>The Company</b>, has already issued the <b>Energisation Operational Notification</b> and <b>Interim Operational Notification</b> to the <b>User</b> (recognising that they may be in different form but where they achieve the same effect as the <b>Interim Operational Part A</b> and <b>Interim Operation Notification Part B</b>) provided that such documentation has already been issued</li> </ul> |

|                                             |                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | in respect of all earlier stages of the <b>OTSDUW Staged Build</b> ,                                                                                                                                                                                                                                                                                                      |
|                                             | on or before the <b>OTSUA Commissioning Period Effective Date</b> and where the <b>OTSUA Transfer Time</b> has not occurred at the <b>OTSUA Commissioning Period Effective Date</b> ;                                                                                                                                                                                     |
| <b>"OTSUA Transfer Time"</b>                | the time and date at which the <b>OTSUA</b> are transferred by the relevant <b>User</b> to an <b>Offshore Transmission Licensee</b> ;                                                                                                                                                                                                                                     |
| <b>"Output"</b>                             | the actual <b>Active Power</b> or <b>Reactive Power</b> output achieved by a <b>BM Unit</b> ;                                                                                                                                                                                                                                                                             |
| <b>"Output Useable"</b>                     | shall have the meaning given to that term in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                       |
| <b>"Panel Chairperson"</b>                  | a person appointed as such in accordance with Paragraph 8.4.1;                                                                                                                                                                                                                                                                                                            |
| <b>"Panel Member"</b>                       | any of the persons listed in Paragraph 8.3.1(b);                                                                                                                                                                                                                                                                                                                          |
| <b>"Panel Member Interim Vacancies"</b>     | as defined in Paragraph 8A.4.3.3;                                                                                                                                                                                                                                                                                                                                         |
| <b>"Panel Members' Recommendation"</b>      | the recommendation in accordance with the <b>CUSC Modifications Panel Recommendation Vote</b> ;                                                                                                                                                                                                                                                                           |
| <b>"Panel Secretary"</b>                    | a person appointed as such in accordance with Paragraph 8.3.1(c);                                                                                                                                                                                                                                                                                                         |
| <b>"Part 1 System Ancillary Services"</b>   | as defined in <b>Grid Code</b> CC 8.1;                                                                                                                                                                                                                                                                                                                                    |
| <b>"Part 2 System Ancillary Services"</b>   | as defined in <b>Grid Code</b> CC 8.1;                                                                                                                                                                                                                                                                                                                                    |
| <b>"Partial Shutdown "</b>                  | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                      |
| <b>"Party Liable"</b>                       | as defined in Paragraph 6.12.1;                                                                                                                                                                                                                                                                                                                                           |
| <b>"Payment Date"</b>                       | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                  |
| <b>"Payment Record Sum"</b>                 | the proportion of the <b>Unsecured Credit Cover</b> extended by <b>The Company</b> to a <b>User</b> who does meeting the <b>Approved Credit Rating</b> calculated in accordance with Paragraph 3.26.4 and 3.26.5;                                                                                                                                                         |
| <b>"Pending CUSC Modification Proposal"</b> | a <b>CUSC Modification Proposal</b> in respect of which, at the relevant time, the <b>Authority</b> has not yet made a decision as to whether to direct such <b>Proposed CUSC Modification</b> to be made pursuant to the <b>ESO Licence</b> (whether or not a <b>CUSC Modification Report</b> has been submitted in respect of such <b>CUSC Modification Proposal</b> ); |
| <b>"Performance Bond"</b>                   | an on first demand without proof or conditions irrevocable performance bond or performance guarantee executed as a deed                                                                                                                                                                                                                                                   |



in a form reasonably satisfactory to **The Company** but in any case allowing for partial drawings and providing for the payment to **The Company** on demand forthwith on and against **The Company's** delivery to the issuer thereof of a **Notice of Drawing** of the amount demanded therein;

|                                           |                                                                                                                                                                                              |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Permitted Activities"</b>             | activities carried on for the purposes of the <b>Main Business</b> ;                                                                                                                         |
| <b>"Physical Notification"</b>            | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                     |
| <b>"Planned Outage"</b>                   | as defined in the <b>Grid Code</b> ;                                                                                                                                                         |
| <b>"Planning Code" or PC</b>              | that portion of the <b>Grid Code</b> which is identified as the <b>Planning Code</b> ;                                                                                                       |
| <b>"Plant"</b>                            | fixed and moveable items used in the generation and/or supply and/or transmission of electricity other than <b>Apparatus</b> ;                                                               |
| <b>"Pool Member"</b>                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                     |
| <b>"Pooling and Settlement Agreement"</b> | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                     |
| <b>"Power Park Module"</b>                | as defined in the <b>Grid Code</b> ;                                                                                                                                                         |
| <b>"Power Park Unit"</b>                  | as defined in the <b>Grid Code</b> ;                                                                                                                                                         |
| <b>"Power Station"</b>                    | as defined in the <b>Grid Code</b> ;                                                                                                                                                         |
| <b>"Practical Completion Date"</b>        | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                  |
| <b>"Preference Votes"</b>                 | as defined in Paragraph 8A.3.2.1;                                                                                                                                                            |
| <b>"Prescribed Rate"</b>                  | the rate of interest set for the relevant period as the statutory interest rate for the purposes of the Late Payment of Commercial Debts (interest) Act 1998;                                |
| <b>"Pre Trigger Amount"</b>               | the component of the <b>Cancellation Charge</b> that applies before the <b>Trigger Date</b> and which is more particularly described in Part Two of the <b>User Commitment Methodology</b> ; |
| <b>"Primary Response"</b>                 | as defined in the <b>Grid Code</b> ;                                                                                                                                                         |
| <b>"Proceedings"</b>                      | as defined in Paragraph 6.23.1;                                                                                                                                                              |
| <b>"Production"</b>                       | as defined in the <b>Balancing and Settlement Code</b> in relation to a Production BM Unit;                                                                                                  |
| <b>"Profiled Unmetered Supply"</b>        | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                     |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Progress Report"</b>                   | as defined in Paragraph 8.14;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Project"</b>                           | in the context of Section 18 this is the <b>User's</b> (or as context requires <b>Developer's</b> ) project which is the subject of the existing <b>Agreements</b> (and in the case of existing <b>Agreements</b> which provide for more than one existing <b>Project</b> in respect of <b>Embedded Power Stations</b> , existing <b>Project</b> shall be construed accordingly by reference to each existing <b>Project</b> );                                                                                                                                                                                                                |
| <b>"Project Designation Methodology"</b>   | the methodology developed or to be developed by <b>The Company</b> in accordance with the <b>ESO Licence</b> and approved by the <b>Authority</b> and published by <b>The Company</b> on the <b>Website</b> as such methodology may be revised from time;                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Project Milestone Remedy Period"</b>   | the period starting on the date that the <b>Milestone Default Notice</b> is issued and ending on the date which is 60 days from the date of issue of this notice;                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Proposed Implementation Date"</b>      | the proposed date(s) for the implementation of a <b>CUSC Modification Proposal</b> or <b>Workgroup Alternative CUSC Modification</b> such date(s) to be either (i) described by reference to a specified period after a direction from the <b>Authority</b> approving the <b>CUSC Modification Proposal</b> or <b>Workgroup Alternative CUSC Modification</b> or (ii) a <b>Fixed Proposed Implementation Date</b> ;                                                                                                                                                                                                                            |
| <b>"Proposer"</b>                          | in relation to a particular <b>CUSC Modification Proposal</b> , the person who makes such <b>CUSC Modification Proposal</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Protected Information"</b>             | any information relating to the affairs of a <b>CUSC Party</b> which is furnished to <b>Business Personnel</b> pursuant to the <b>CUSC</b> or a <b>Bilateral Agreement</b> or a <b>Mandatory Services Agreement</b> or a <b>Construction Agreement</b> or pursuant to a direction under section 34 of the <b>Act</b> or pursuant to the provisions of the <b>Fuel Security Code</b> unless, prior to such information being furnished, such <b>CUSC Party</b> has informed the recipient thereof by notice in writing or by endorsement on such information, that the said information is not to be regarded as <b>Protected Information</b> ; |
| <b>"Provisional Statement"</b>             | as defined in Paragraph 4.3.2.1(a);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Provisional Monthly Statement"</b>     | as defined in Paragraph 4.3.2.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Provisional Adjustments Statement"</b> | as defined in Paragraph 4.3.2.1(b);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**"Public Distribution System Operator"**

a holder of a **Distribution Licence** who was the holder, or is a successor to a company which was the holder of a **Public Electricity Supply Licence** relating to distribution activities in **Great Britain** on the **CUSC Implementation Date**;

**"Public Electricity Supply Licence"**

a licence issued under section 6(1)(c) of the **Act** prior to the coming in force of section 30 of the Utilities Act 2000;

**"Qualified Bank" or "Qualifying Bank"**

means either:

- (a) a City of London branch of a bank, its successors and assigns, which has throughout the validity period of the **Performance Bond** or **Letter of Credit** it issues in favour of **The Company**, a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating provided that such bank is not during such validity period put on any credit watch or any similar credit surveillance which gives **The Company** reasonable cause to doubt that such bank may not be able to maintain the aforesaid rating throughout the validity period and no other event has occurred which gives **The Company** reasonable cause to have such doubt; or
- (b) a branch in **Great Britain** of a regulated insurance company, its successors and assigns, which throughout the validity period of the **Performance Bond** or **Letter of Credit** it issues in favour of **The Company**, is authorised or licensed to provide arrangements of this type in the United Kingdom, and has a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating provided that such regulated insurance company is not during such validity period put on any credit watch or any similar credit surveillance which gives **The Company** reasonable cause to doubt that such regulated insurance company may not be able to maintain the aforesaid rating throughout the validity period and no other event has occurred which gives **The Company** reasonable cause to have such doubt.

**"Qualified Company" or**

a company which is a public company or a private company within the meaning of section 1(3) of the Companies Act 1985 and which is either :

**"Qualifying Company"**

- (a) a shareholder of the User or any holding company of such shareholder-or
- (b) any subsidiary of any such holding company, but only where the subsidiary

- (i) demonstrates to The Company's satisfaction that it has power under its constitution to give a Performance Bond other than in respect of its subsidiary;
- (ii) provides an extract of the minutes of a meeting of its directors recording that the directors have duly concluded that the giving of the Performance Bond is likely to promote the success of that subsidiary for the benefit of its members;
- (iii) provides certified copies of the authorisation by every holding company of the subsidiary up to and including the holding company of the User, of the giving of the Performance Bond,

(the expressions "holding company" and "subsidiary" having the respective meanings assigned thereto by section 736, Companies Act 1985 as supplemented by section 144(3), Companies Act 1989) and which has throughout the validity period of the Performance Bond it gives in favour of The Company, a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating or such lesser rating which The Company may in its absolute discretion allow by prior written notice given pursuant to a resolution of its board of directors for such period and on such terms as such resolution may specify provided that such company is not during such validity period put on any credit watch or any similar credit surveillance procedure which gives The Company reasonable cause to doubt that such company may not be able to maintain the aforesaid rating throughout the validity period of the Performance Bond and no other event has occurred which gives The Company reasonable cause to have such doubt;

**"Qualifying Guarantee"**

a guarantee in favour of **The Company** in a form proposed by the **User** and agreed by **The Company** (whose agreement shall not be unreasonably withheld or delayed) and which is provided by

- (i) an entity which holds an **Approved Credit Rating** provided that such guarantee cannot secure a sum greater than the level of **User's Allowed Credit** that would be available to that entity in accordance with Paragraph 3.26.2 if it was a User; or
- (ii) an entity with an **Independent Credit Assessment** provided that such guarantee cannot secure a sum greater than the level of **User's Allowed Credit** that would be available to that entity in accordance with Paragraph 3.26.6 if it was a **User**; and
- (iii) which in either case does not, when aggregated with all other **Qualifying Guarantees** provided by that entity, exceed (a)

the level of **User's Allowed Credit** that would be available to that entity in accordance with Paragraph 3.26 if it was a **User** or (b) if the entity is a **User** the level of **User's Allowed Credit** available to it in accordance with Paragraph 3.26 less any amount relied on by the **User** in respect of its own requirements.

|                                                             |                                                                                                                                                                                                                                           |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Qualifying Project"</b>                                 | has the meaning ascribed to it in the <b>Act</b> ;                                                                                                                                                                                        |
| <b>"Queue Management Guidance"</b>                          | the guidance on the <b>Queue Management Process</b> (as it may be amended from time to time) published by <b>The Company</b> on the <b>Website</b> ;                                                                                      |
| <b>"Queue Management Process"</b>                           | the process as set out in <b>CUSC</b> Section 16 to measure and provide a status ("On Track" or "Termination" as set out within that process) of the progress of a <b>User's</b> project against the <b>User Progression Milestones</b> ; |
| <b>"Rated MW"</b>                                           | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                      |
| <b>"Reactive Despatch Instruction"</b>                      | an instruction relating to <b>Reactive Power</b> given by <b>The Company</b> to a <b>Generator</b> in accordance with <b>Grid Code BC2</b> ;                                                                                              |
| <b>"Reactive Despatch to Zero Mvar Network Restriction"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                      |
| <b>"Reactive Energy"</b>                                    | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                  |
| <b>"Reactive Power"</b>                                     | the product of voltage and current and the sine of the phase angle between them measured in units of voltamperes reactive and standard multiples thereof i.e.:- 1000 Var = 1Kvar<br><br>1000 Kvar = 1Mvar;                                |
| <b>"Reactive Test"</b>                                      | a test conducted pursuant to <b>Grid Code</b> OC 5.5.1;                                                                                                                                                                                   |
| <b>"Readiness Declaration"</b>                              | the declaration provided with a <b>Gate 2 Application</b> or <b>EA Request</b> in the form and with the detail as required in accordance with the <b>Gate 2 Criteria Methodology</b> ;                                                    |
| <b>"Reasonable Charges"</b>                                 | reasonable cost reflective charges comparable to charges for similar services obtainable in the open market;                                                                                                                              |
| <b>"Reconciled Charge"</b>                                  | as defined in Paragraph 3.15.1 and like terms shall be construed accordingly;                                                                                                                                                             |
| <b>"Reconciliation Settlement Run"</b>                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                  |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Reenergisation" or "Reenergised"</b>        | any <b>Energisation</b> after a <b>Deenergisation</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Registered Capacity"</b>                    | has the meaning given in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Registered Data"</b>                        | those items of <b>Standard Planning Data</b> and <b>Detailed Planning Data</b> which upon connection become fixed (subject to any subsequent changes);                                                                                                                                                                                                                                           |
| <b>"Registrant"</b>                             | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                         |
| <b>"Regulations"</b>                            | the Electricity Supply Regulations 1988 or any amendment or re-enactment thereof;                                                                                                                                                                                                                                                                                                                |
| <b>"Rejected CUSC Modification Proposal"</b>    | a <b>CUSC Modification Proposal</b> in respect of which the <b>Authority</b> has decided not to direct <b>The Company</b> to modify the <b>Code</b> pursuant to the <b>ESO Licence</b> in the manner set out herein;                                                                                                                                                                             |
| <b>"Related Person"</b>                         | means, in relation to an individual, any member of their immediate family, their employer (and any former employer of theirs within the previous 12 months), any partner with whom they are in partnership, and any company or Affiliate of a company in which they or any member of their immediate family controls more than 20% of the voting rights in respect of the shares of the company; |
| <b>"Related Undertaking"</b>                    | in relation to <b>The Company</b> (and for the purposes of Paragraph 6.15, a <b>User</b> ) means any undertaking in which <b>The Company</b> has a participating interest as defined by section 260(1) of the Companies Act 1985 as substituted by section 22 of the Companies Act 1989;                                                                                                         |
| <b>"Release Date"</b>                           | as defined in Paragraph 2.22.2;<br>;                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Relevant Contract"</b>                      | has the meaning given to that term in section 6BA of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                            |
| <b>"Relevant Embedded Power Station"</b>        | Shall mean a <b>Relevant Embedded Small Power Station</b> or a <b>Relevant Embedded Medium Power Station</b> ;                                                                                                                                                                                                                                                                                   |
| <b>"Relevant Embedded Medium Power Station"</b> | an <b>Embedded Medium Power Station</b> which is an <b>Exempt Power Station</b> ;                                                                                                                                                                                                                                                                                                                |

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Relevant Embedded Small Power Station"</b> | an <b>Embedded Small Power Station</b> that the <b>User</b> who owns or operates the <b>Distribution System</b> to which the <b>Embedded Small Power Station</b> intends to connect reasonably believes may have a significant system effect on the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                                                                                            |
| <b>"Relevant Interruption"</b>                 | an <b>Interruption</b> other than an <b>Allowed Interruption</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Relevant Offshore Agreement"</b>           | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Relevant Party"</b>                        | as defined in Paragraph 8.16.10(a);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Relevant Transmission Licensee"</b>        | means in respect of the <b>Onshore Transmission System</b> each <b>Onshore Transmission Licensee</b> in respect of its part of the <b>Onshore Transmission System</b> and in respect of each Offshore Transmission System the Offshore Transmission Licensee for that Offshore Transmission System;                                                                                                                                                                                                                                                                                                                              |
| <b>"Remote Transmission Assets"</b>            | any <b>Plant</b> and <b>Apparatus</b> or meters owned by <b>NGET</b> which (a) are embedded in a <b>Distribution System</b> or a <b>User System</b> and which are not directly connected by <b>Plant</b> and/or <b>Apparatus</b> owned by <b>NGET</b> to a <b>sub-station</b> owned by <b>NGET</b> and (b) are by agreement between <b>NGET</b> and such <b>Public Distribution System Operator</b> or <b>User</b> under the direction and control of such <b>Public Distribution System Operator</b> or <b>User</b> ;                                                                                                           |
| <b>"Replacement Period"</b>                    | <p>in relation to a <b>Transmission Connection Asset</b>, the period commencing on the date on which such <b>Transmission Connection Asset</b> is or was originally <b>Commissioned</b>, after which it is assumed for accounting purposes such <b>Transmission Connection Asset</b> will need to be replaced, which shall be 40 years except</p> <p>(a) in the case of <b>Transmission Connection Assets</b> located <b>Offshore</b> where it shall be 20 years, or</p> <p>unless otherwise agreed between the <b>CUSC Parties</b> to a <b>Bilateral Agreement</b> and recorded in the relevant <b>Bilateral Agreement</b>;</p> |
| <b>"Reported Period(s) of Increase"</b>        | the period of time during which a <b>User's Demand</b> and/or <b>FDSC</b> and/or <b>Unmetered Supply Volume</b> increased not being more than 20 <b>Business Days</b> , as notified to <b>The Company</b> under paragraph 3.23.7, paragraph 3.23.8 or paragraph 3.23.8A                                                                                                                                                                                                                                                                                                                                                          |
| <b>"Request for a STTEC Authorisation"</b>     | a request made by a <b>User</b> in accordance with the terms Paragraph 6.31 for <b>Short Term Capacity</b> for a <b>STTEC</b> Period;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Requested LDTEC"</b>                       | the figure in MW for the <b>LDTEC Period</b> (not exceeding the maximum level in the <b>LDTEC Request</b> ) specified in the <b>User's</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

acceptance of the **LDTEC Indicative Block Offer** in accordance with paragraph 6.32.6.5;

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Required Amount"</b>                  | as defined in Paragraph 2.21.2(c);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Required Sovereign Credit Rating"</b> | a long term debt rating of not less than A by Standard and Poor's Corporation or a rating not less than A2 by Moody's Investor Services or a short term rating which correlates to those long term ratings or an equivalent rating from any other reputable credit agency approved by <b>The Company</b> in respect of non local currency obligations;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Required Standard"</b>                | in relation to an item of <b>Derogated Plant</b> , the respective standard required of that item (which shall not exceed that required by the <b>Grid Code</b> or the <b>Licence Standards</b> , as the case may be) as specified in or pursuant to the relevant <b>Derogation</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Requirements"</b>                     | <p>shall mean an entity who throughout the validity period of the <b>Bilateral Insurance Policy, Insurance Performance Bond</b> or <b>Independent Security Arrangement</b>:</p> <ul style="list-style-type: none"> <li>(a) holds a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating provided that such entity is not during such validity period put on any credit watch or any similar credit surveillance which gives <b>The Company</b> reasonable cause to doubt that such entity may not be able to retain the aforesaid rating throughout the validity period; and</li> <li>(b) the country of residence of such entity meets the <b>Required Sovereign Credit Rating</b>; and</li> <li>(c) the security provided is <b>Enforceable</b>; and</li> <li>(d) there are no material conditions preventing the exercise by <b>The Company</b> of its rights under the <b>Bilateral Insurance Policy, Insurance Performance Bond</b> or <b>Independent Security Arrangement</b>;</li> </ul> |
| <b>"Reservation"</b>                      | where for the purposes of a <b>Gate 1 Offer</b> or <b>Gate 1 ATV</b> for a <b>New Connection Site</b> or new <b>Large Embedded Power Station</b> with a <b>BEGA</b> or <b>BELLA</b> as appropriate a connection point to and/or capacity on the <b>National Electricity Transmission System</b> and/or a completion date for that <b>New Connection Site</b> or new <b>Large Embedded Power Station</b> with a <b>BEGA</b> or <b>BELLA</b> is reserved by <b>The Company</b> (and reference to <b>Reservation</b> and <b>Reserved</b> in any <b>Gate 1 Agreements</b> shall be construed accordingly);                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Residual Charging Group"</b>          | a group of <b>Final Demand Sites</b> or <b>Unmetered Supplies</b> with similar connection characteristics for which <b>Charging Bands</b> may or may not be set for the purposes of recovering the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



revenue related to the **Transmission Demand Residual**.  
The list of **Residual Charging Groups** are;

- Domestic,
- Low Voltage No Maximum Import Capacity (LV No MIC),
- Low Voltage with Maximum Import Capacity (LV MIC),
- High Voltage (HV),
- Extra High Voltage (EHV),
- Transmission
- Unmetered Supplies (UMS);

**"Resigning Alternate Member"**

as defined in Paragraph 8A.4.1.3;

**"Resigning Panel Member"**

as defined in Paragraph 8A.4.1;

**"Response"**

**Primary Response, Secondary Response and High Frequency Response** or any of them as the case may be;

**"Response Energy Payment"**

that component of the payment for Mode A **Frequency Response** calculated in accordance with Paragraph 4.1.3.9A;

**"Restricted Export Level Payment"**

in respect of each Restricted Export Level Period, the payment for each day comprised within the Restricted Export Level Period or (where the Restricted Export Level Period starts or ends during a day) part of a day calculated as follows:

The higher of:

A. the £ per MW calculated by reference to the total TNUoS income derived from generators divided by the total system Transmission Entry Capacity, in each case using figures for the Financial Year prior to that in which the System to Generator Operational Intertipping Scheme trips, this is then divided by 365 to give a daily £ per MW rate; or

B. the actual £ per MW of the User (who requests in accordance with Clause 4.2A.4) by reference to the tariff in the Use of System Charging Statement for the Financial Year in which the System to Generator Operational Intertipping Scheme trips divided by 365 to give a daily £ per MW rate.

A or B are then multiplied by:

the MW arrived at after deducting from the Transmission Entry Capacity for the Connection Site the Restricted MW Export Level;

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Restricted Export Level Period"</b>             | as defined in Paragraph 4.2A.4(b)(ii);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Restricted MW Export Level"</b>                 | as defined in Paragraph 4.2A.2.1(c)(i);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Restrictions on Availability"</b>               | is, in the context of a <b>Design Variation</b> or an <b>Offshore Connection</b> , the outage or reduction in capability as set out in the relevant <b>Notification of Restrictions on Availability</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Retail Price Index"</b>                         | <p>the general index of retail prices published by the Office for National Statistics each month in respect of all items or:</p> <ul style="list-style-type: none"> <li>(a) if the said index for any month in any year shall not have been published on or before the last day of the third month after such month such index for such month or months as the parties hereto agree produces as nearly as possible the same result shall be substituted or in default of the parties reaching agreement within six weeks after the last day of such three month period then as determined by a sole Chartered Accountant appointed by agreement by both parties or in the absence of agreement on the application of either party by the President of the <b>London Court of International Arbitration</b> who shall act as an expert and whose decision shall be final and binding on the parties; or</li> <li>(b) if there is a material change in the basis of the said index, such other index as the parties agree produces as nearly as possible the same result shall be substituted or in default of the parties reaching agreement within six weeks after the occurrence of the material change in the basis of the said index then as determined by the sole Chartered Accountant appointed by agreement by both parties or in the absence of agreement on the application of either party by the President of the <b>London Court of International Arbitration</b> who shall act as an expert and whose decision shall be final and binding on the parties;</li> </ul> |
| <b>"Revised Indicative Annual HH TNUoS charge"</b>  | the value calculated in accordance with Appendix 2 paragraph 5;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Revised Indicative Annual NHH TNUoS charge"</b> | the value calculated in accordance with Appendix 2 paragraph 8;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Revised Proposed Implementation Date"</b>       | the revision to a <b>Fixed Proposed Implementation Date</b> recommended to the <b>Authority</b> by the <b>CUSC Modifications Panel</b> pursuant to <b>CUSC</b> Paragraph 8.23.9.4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Safety Coordinator(s)"</b>                  | a person or persons nominated by the Relevant Transmission Licensee and each User in relation to Connection Points (or in the case of <b>OTSUA</b> operational prior to the <b>OTSUA Transfer Time, Transmission Interface Points</b> ) to be responsible for the co-ordination of Safety Precautions (as defined in the Grid Code) at each Connection Point when work and/or testing is to be carried out on a system which necessitates the provision of Safety Precautions on HV Apparatus, pursuant to OC8;                                                                         |
| <b>"Safety Rules"</b>                           | the rules of a <b>Relevant Transmission Licensee</b> or a <b>User</b> that seek to ensure that persons working on <b>Plant</b> and/or <b>Apparatus</b> to which the rules apply are safeguarded from hazards arising from the <b>System</b> ;                                                                                                                                                                                                                                                                                                                                           |
| <b>"Second Offer"</b>                           | as defined in Paragraph 6.10.4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Secondary BM Unit"</b>                      | as defined in the <b>Balancing and Settlement Code</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Secondary Response"</b>                     | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Secretary of State"</b>                     | has the meaning given to that term in the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Secured Amount Statement"</b>               | a statement accompanying the <b>Bi-annual Estimate</b> setting out the amount to be secured by the <b>User</b> under Paragraph 2.21 based on figures contained in the <b>Bi-annual Estimate</b> being the amount for which security shall be provided to <b>The Company</b> pursuant to that Paragraph such statement to be substantially in the form set out in Exhibit M to the <b>CUSC</b> ;                                                                                                                                                                                         |
| <b>"Secured Event"</b>                          | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Security Amendment"</b>                     | the <b>Proposed Amendment</b> in respect of <b>Amendment Proposal 089\090\091</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Security Amendment Implementation Date"</b> | the <b>Implementation Date</b> of the <b>Security Amendment</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Security Amount"</b>                        | in respect of the <b>User</b> the aggregate of available amounts of each outstanding (a) <b>Letter of Credit</b> , (b) <b>Qualifying Guarantee</b> and (c) the principal amount (if any) of cash that the <b>User</b> has paid to the credit of the <b>Escrow Account</b> (and which has not been repaid to the <b>User</b> ); for the purpose of this definition, in relation to a <b>Letter of Credit</b> or <b>Qualifying Guarantee</b> "available amount" means the face amount thereof less (i) payments already made thereunder and (ii) claims made thereunder but not yet paid; |
| <b>"Security Cover"</b>                         | for each <b>User</b> , the <b>User's Security Requirement</b> less the <b>User's Allowed Credit</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Security Period"</b>                         | means the <b>First Security Period</b> and each 6 month period thereafter commencing on the 1 April or 1 October until 30 days after the relevant <b>Charging Date</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Security and Quality of Supply Standard"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Security Requirement"</b>                    | the aggregate amount for the time being which the <b>User</b> shall be required by <b>The Company</b> to provide and maintain by way of <b>Security Cover</b> and its <b>User's Allowed Credit</b> in accordance with Paragraph 3.22;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Security Standard"</b>                       | the <b>Security and Quality of Supply Standard</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Self-Governance Criteria"</b>                | <p>a <b>CUSC Modification Proposal</b> that, if implemented,</p> <p>(a) is unlikely to have a material effect on:</p> <p>(i) existing or future electricity consumers; and</p> <p>(ii) competition in the generation, distribution, or supply of electricity or any commercial activities connected with the generation, distribution or supply of electricity; and</p> <p>(iii) the operation of the <b>National Electricity Transmission System</b>; and</p> <p>(iv) matters relating to sustainable development, safety or security of supply, or the management of market or network emergencies; and</p> <p>(v) the <b>CUSC's</b> governance procedures or the <b>CUSC's</b> modification procedures, and</p> <p>(b) is unlikely to discriminate between different classes of <b>CUSC Parties</b>;</p> <p>c) other than where the modification meets the <b>Fast Track Criteria</b> will not constitute an <b>EBR Amendment</b>.</p> |
| <b>"Self-Governance Statement"</b>               | <p>the statement made by the <b>CUSC Modifications Panel</b> and submitted to the <b>Authority</b>:</p> <p>(a) confirming that, in its opinion, the <b>Self-Governance Criteria</b> are met and the <b>CUSC Modification Proposal</b> is suitable for the self-governance route; and</p> <p>(b) providing a detailed explanation of the <b>CUSC Modification Panel's</b> reasons for that opinion;</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Separate Business"</b>                     | the <b>Transmission Business</b> taken separately from any other business of <b>The Company</b> , but so that where all or any part of such business is carried out by an <b>Affiliate</b> or <b>Related Undertaking</b> of <b>The Company</b> such part of the business as is carried out by that <b>Affiliate</b> or <b>Related Undertaking</b> shall be consolidated with any other such business of <b>The Company</b> (and of any other <b>Affiliate</b> or <b>Related Undertaking</b> ) so as to form a single <b>Separate Business</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Settlement Administration Agent (SAA)"</b> | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Settlement Day"</b>                        | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Settlement Period"</b>                     | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Settlement Run"</b>                        | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Shortfall Action Threshold Amount"</b>     | means the amount as notified by the <b>Authority</b> to <b>The Company</b> from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Shortfall Application Date"</b>            | shall mean, as appropriate: <ol style="list-style-type: none"> <li>1. <ol style="list-style-type: none"> <li>(a) the date by which the <b>User</b> has issued and served court proceedings on the <b>Developer</b> for the recovery of the <b>Cancellation Charge Shortfall</b>; or</li> <li>(b) the date by which the <b>User</b> has instigated <b>Insolvency Proceedings</b> against the <b>Developer</b> for the recovery of the <b>Cancellation Charge Shortfall</b>; or</li> <li>(c) where the <b>Developer</b> is the subject of <b>Insolvency Proceedings</b> instigated other than by the <b>User</b>, the date by which the <b>User</b> has submitted its claim for the <b>Cancellation Charge Shortfall</b> under these; or</li> </ol> </li> <li>2. such date (being an alternative to the dates in 1 above) as approved by the <b>Authority</b> following a request from the <b>User</b>; or</li> <li>3. where the <b>Cancellation Charge Shortfall</b> is less than the <b>Shortfall Action Threshold Amount</b> and the <b>User</b> has undertaken all preparatory steps necessary to undertake the activity in 1 above; the date which is 30 days (or the first <b>Business Day</b> following this) from the date of payment of the <b>Cancellation Charge</b> by the <b>User</b>;</li> </ol> |

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Short Term Capacity"</b>           | the right to export on to the <b>National Electricity Transmission System</b> power in accordance with the provisions of <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Significant Code Review"</b>       | <p>a review of one or more matters which the <b>Authority</b> considers is likely to:</p> <p>(a) relate to the <b>CUSC</b> (either on its own or in conjunction with other Industry Codes); and</p> <p>(b) be of particular significance in relation to its principal objective and/or general duties (under section 3A of the Act), statutory functions and/or relevant obligations arising under <b>Assimilated Law</b>, and</p> <p>concerning which the <b>Authority</b> has issued a notice to the <b>CUSC Parties</b> (among others, as appropriate) stating:</p> <p>(i) that the review will constitute a significant code review;</p> <p>(ii) the start date of the significant code review; and</p> <p>(iii) the matters that will fall within the scope of the review;</p>                                                               |
| <b>"Significant Code Review Phase"</b> | <p>the period</p> <p>commencing either:</p> <div style="margin-left: 40px;"> <p>(i) on the start date of a <b>Significant Code Review</b> as stated in the notice issued by the <b>Authority</b>; or</p> <p>(ii) on the date the <b>Authority</b> makes a direction under Paragraph 8.17C (a "<b>Backstop Direction</b>")</p> <p>and</p> </div> <p>ending either:</p> <p>(a) on the date on which the <b>Authority</b> issues a statement that no directions will be issued in relation to the <b>CUSC</b>; or</p> <p>(b) If no statement is made under Paragraph 8.17.11 or 8.17.6A, on the date which <b>The Company</b> has made a <b>CUSC Modification Proposal</b> in accordance with Paragraph 8.17.6, or the <b>Authority</b> makes a modification proposal in respect of a <b>Significant Code Review</b> under Paragraph 8.17A.1: or</p> |

(c) Immediately, if neither a statement, a modification proposal nor directions are made by the **Authority** up to and including twenty eight (28) days from the **Authority's** publication of its **Significant Code Review** conclusions; or

(d) if a statement has been made under Paragraph 8.17.6A or a direction has been made under Paragraph 8.17C (a "**Backstop Direction**"), on the date specified in accordance with Paragraph 8.17.6A.

**"Single Site"**

Shall mean either;

1. For **Users** with a **Bilateral Connection Agreement**, the **Connection Site** as defined in the **Bilateral Connection Agreement**, or
2. For all other parties, as defined as 'Single Site' in the **DCUSA**

**"Site Common Drawings"**

as defined in the **Grid Code**;

**"Site Load"**

the sum of the **BM Unit Metered Volumes (QM<sub>ij</sub>)**, expressed as a positive number, of **BM Units** within the **Trading Unit** with QM<sub>i</sub> less than zero during the three **Settlement Periods** of the **Triad** (i.e.  $\sum QM_{ij}$  where  $QM_{ij} < 0$ ), which may comprise **Station Load** and **Additional Load**;

**"Site Responsibility Schedule"**

a schedule containing the information and prepared on the basis of the provisions set out in Appendix 1 of the **CC**;

**"Site Specific Maintenance Charge"**

the element of the **Connection Charges** relating to maintenance and repair calculated in accordance with the **Connection Charging Methodology**;

**"Site Specific Requirements"**

those requirements reasonably required by **The Company** in accordance with the **Grid Code** at the site of connection of a **Relevant Embedded Power Station**;

**"Small Independent Generating Plant"**

a **Medium Power Station**;

**"Small Participant"**

(a) a generator, supplier, distributor, or new entrants to the electricity market in Great Britain that can demonstrate to the **Code Administrator** that it is resource-constrained and, therefore in particular need of assistance;

(b) any other participant or class of participant that the **Code Administrator** considers to be in particular need of assistance; and

|                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                              | (c) a participant or class of participant that the <b>Authority</b> has notified to the <b>Code Administrator</b> as being in particular need of assistance;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Small Power Station"</b>                                 | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Small Power Station Trading Party"</b>                   | a <b>Trading Party</b> trading on behalf of one or more <b>Small Power Stations</b> whether owned by the <b>Trading Party</b> or another person;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"SMRS"</b>                                                | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Sole Trading Unit"</b>                                   | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Standard CUSC Modification Proposal"</b>                 | A <b>CUSC Modification Proposal</b> that does not fall within the scope of a <b>Significant Code Review</b> subject to any direction by the <b>Authority</b> pursuant to Paragraphs 8.17.3 and 8.17.4, nor meets the <b>Self-Governance Criteria</b> subject to any direction by the <b>Authority</b> pursuant to Paragraph 8.25.4 and in accordance with any direction under Paragraph 8.25.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Statement of the Connection Charging Methodology"</b>    | the statement produced pursuant to and in accordance with condition E11 of the <b>ESO Licence</b> , as modified from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Statement of Use of System Charges"</b>                  | the statement produced pursuant to and in accordance with condition E10 of the <b>ESO Licence</b> , as modified from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Statement of the Use of System Charging Methodology"</b> | the statement produced pursuant to condition E10 of the <b>ESO Licence</b> , as modified from time to time;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Station Demand"</b>                                      | <p>in respect of any generating station and <b>Generator</b>, means that consumption of electricity (excluding any supply to any <b>Customer</b> of the relevant <b>Generator</b> who is neither such <b>Generator</b> nor a member of a qualifying group of which such <b>Generator</b> is a part) from the <b>National Electricity Transmission System</b> or a <b>Distribution System</b> at premises on the same site as such generating station, with premises being treated as on the same site as each other if they are:</p> <ul style="list-style-type: none"> <li>(i) the same premises;</li> <li>(ii) immediately adjoining each other;</li> <li>(iii) separated from each other only by road, railway or watercourse or by other premises (other than a pipe-line, electric line or similar structure) occupied by the consumer in question or by any other person who together with that consumer forms a qualifying group; and for the purpose of this definition "generating station" and "qualifying group" shall have the meanings given those expressions when used in</li> </ul> |



the Electricity (Class Exemptions from the Requirement for a Licence) Order 1990;

|                                    |                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Station Load"</b>              | the <b>Station Load</b> is equal to the sum of the demand of <b>BM Units</b> solely comprising the <b>Station Transformers</b> within the <b>Power Station</b> . For the avoidance of doubt, <b>Station Load</b> excludes <b>BM Units</b> comprising <b>Additional Load</b> ;                                                                                        |
| <b>"Station Transformer"</b>       | has the meaning given in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                      |
| <b>"Steam Unit"</b>                | a <b>Generating Unit</b> whose prime mover converts the heat energy in steam to mechanical energy;                                                                                                                                                                                                                                                                   |
| <b>"STC"</b>                       | the <b>System Operator - Transmission Owner Code</b> entered into by <b>The Company</b> pursuant to the <b>ESO Licence</b> and by Transmission Licensees pursuant to the <b>Transmission Licence</b> respectively, and as from time to time revised in accordance with these Licences;                                                                               |
| <b>"Storage Facility Operator"</b> | is a <b>User</b> or other entity who is responsible for the operation of an <b>Electricity Storage Facility</b>                                                                                                                                                                                                                                                      |
| <b>"Storage Tariff"</b>            | the Transmission Network Use of System charge of that name as published by the Company in the Statement of Use of System Charges                                                                                                                                                                                                                                     |
| <b>"STTEC"</b>                     | the figure in MW (if any) for the <b>STTEC Period</b> granted by <b>The Company</b> in accordance with Paragraph 6.31 of the <b>CUSC</b> and specified as such in Appendix C of the relevant <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> ;                                                                               |
| <b>"STTEC Authorisation"</b>       | the authorisation notified by <b>The Company</b> for <b>Short Term Capacity</b> in accordance with the terms of Paragraph 6.3.1.6.1 in response to a <b>Request for a STTEC Authorisation</b> ;                                                                                                                                                                      |
| <b>"STTEC Charge"</b>              | being a component of the <b>Use of System Charges</b> which is made or levied by <b>The Company</b> and to be paid by the <b>User</b> for <b>STTEC</b> calculated in accordance with the <b>Charging Statements</b> ;                                                                                                                                                |
| <b>"STTEC Offer"</b>               | an offer made by <b>The Company</b> for <b>Short Term Capacity</b> in accordance with the terms of Paragraphs 6.31.6.2 and 6.31.6.3 in response to an <b>Application for a STTEC Offer</b> ;                                                                                                                                                                         |
| <b>"STTEC Period"</b>              | in the case of a <b>STTEC Authorisation</b> , a period of 28 days commencing on a Monday at 00.00 hours and finishing at 23.59 on a Sunday. In the case of a <b>STTEC Offer</b> , a period of either 28, 35, or 42 days (as specified by the <b>User</b> in its <b>STTEC Request Form</b> ) commencing on a Monday at 0.00 hours and finishing at 23.59 on a Sunday; |

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "STTEC Request"                   | either a <b>Request for a STTEC Authorisation</b> or an <b>Application for a STTEC Offer</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| "STTEC Request Fee"               | the non-refundable fee to be paid by the <b>User</b> to <b>The Company</b> as detailed in the <b>Charging Statements</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "STTEC Request Form"              | the form set out in Exhibit P to the <b>CUSC</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| "Subsidiary"                      | has the meaning given to that term in section 736A of the Companies Act 1985;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| "Supplemental Agreement"          | an agreement entered into pursuant to clause 2 of the <b>MCUSA</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| "Supplier"                        | a person who holds a <b>Supply Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Supply Agreement"                | an agreement between a <b>Non-Embedded Customer</b> and a <b>Supplier</b> for the supply of electricity to the <b>Non-Embedded Customer's Connection Site</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Supplier Half Hourly Demand"     | means <b>BM Unit Metered Volumes (QM<sub>ij</sub>)</b> expressed as a positive number (i.e. $\sum QM_{ij}$ ) of the <b>Trading Unit</b> during the three <b>Settlement Periods</b> of the <b>Triad</b> due to half-hourly metered imports;                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Supply Licence"                  | a licence granted under section 6(1)(d) of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| "Supplier Non Half-Hourly Demand" | means <b>BM Metered Volumes (QM<sub>ij</sub>)</b> expressed as a positive number (i.e. $\sum QM_{ij}$ ) of the <b>Trading Unit</b> over the charging year between <b>Settlement Periods</b> 33 to 38 due to Non-half-hourly metered imports;                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Supplier Volume Allocation"      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Supplier Voting Sub-Group"       | all <b>User(s)</b> in a <b>Voting Group</b> who are <b>Suppliers</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "SVA Storage Facility"            | is an <b>Electricity Storage Facility</b> that: <ul style="list-style-type: none"> <li>i. performs <b>Electricity Storage</b> as its sole function;</li> <li>ii. is operated by a <b>Storage Facility Operator</b></li> <li>iii. has its imports and exports, measured only by <b>Half Hourly Metering Systems</b> which are registered in the <b>Supplier Meter Registration Service (SMRS)</b> as part of a <b>Supplier BM Unit</b>, and where those <b>Half Hourly Metering Systems</b> only measure activities necessary for performing <b>Electricity Storage</b>; and</li> <li>iv. is the subject of a valid <b>Declaration</b>.</li> </ul> |
| "Synchronous Compensation"        | the operation of rotating synchronous apparatus for the specific purpose of either generation or absorption of <b>Reactive Power</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Synchronised"</b>                                         | the condition where an incoming <b>BM Unit</b> or <b>CCGT Unit</b> or <b>System</b> is connected to the busbars of another <b>System</b> so that the <b>Frequencies</b> and phase relationships of that <b>BM Unit</b> or <b>CCGT Unit</b> or the <b>System</b> , as the case may be, and the <b>System</b> to which it is connected are identical;                                                                                                        |
| <b>"System Ancillary Services"</b>                            | <b>Mandatory Ancillary Services</b> and <b>Part 2 System Ancillary Services</b> ;                                                                                                                                                                                                                                                                                                                                                                          |
| <b>"System"</b>                                               | any <b>User System</b> or the <b>National Electricity Transmission System</b> as the case may be;                                                                                                                                                                                                                                                                                                                                                          |
| <b>"System Restoration :</b>                                  | (as defined in the <b>Grid Code</b> )"                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"System to Generator Operational Intertripping"</b>        | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"System to Generator Operational Intertripping Scheme"</b> | as defined in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Target Frequency"</b>                                     | the <b>Frequency</b> determined by <b>The Company</b> in its reasonable opinion as the desired operating <b>Frequency</b> of the <b>Total System</b> . This will normally be 50.00 Hz plus or minus 0.05 Hz, except in exceptional circumstances as determined by <b>The Company</b> in its reasonable opinion. An example of exceptional circumstances may be difficulties caused in operating the <b>System</b> during disputes affecting fuel supplies; |
| <b>"TEC Increase Request"</b>                                 | a request for an increase in <b>Transmission Entry Capacity</b> pursuant to <b>CUSC</b> paragraph 6.30.2;                                                                                                                                                                                                                                                                                                                                                  |
| <b>"TEC Register"</b>                                         | the register set up by <b>The Company</b> pursuant to Paragraph 6.30.3.1;                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"TEC Trade"</b>                                            | a trade between parties of their respective <b>Transmission Entry Capacity</b> ;                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Tendered Capability Breakpoints"</b>                      | as defined in Paragraph 1.4 of Appendix 5 of Schedule 3, Part I;                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>"Temporary Donated TEC"</b>                                | is the temporary MW reduction in the export rights of the <b>Temporary TEC Exchange Donor User</b> arising from acceptance of a <b>Temporary TEC Exchange Offer</b> ;                                                                                                                                                                                                                                                                                      |
| <b>"Temporary Received TEC"</b>                               | is at any time the <b>Temporary TEC Exchange Rate</b> ;                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                                               |                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Temporary TEC Exchange Donor User"</b>                    | is a <b>User</b> that has jointly made a <b>Temporary TEC Exchange Rate Request</b> to reduce its rights to export for the duration of the <b>Temporary TEC Exchange Period</b> ;                                                                                                            |
| <b>"Temporary TEC Exchange Notification of Interest Form"</b> | is the form set out in Exhibit X to the <b>CUSC</b> ;                                                                                                                                                                                                                                        |
| <b>"Temporary TEC Exchange Offer"</b>                         | is an offer made by <b>The Company</b> for a <b>Temporary TEC Exchange Rate</b> in accordance with the terms of Paragraphs 6.34.4.6;                                                                                                                                                         |
| <b>"Temporary TEC Exchange Period"</b>                        | is a period within a <b>Financial Year</b> as specified in the <b>Temporary TEC Exchange Rate Request Form</b> being for a minimum of four weeks and commencing at 0.00 hours on a Monday and finishing at 23.59 on any given day no later than the last day of such <b>Financial Year</b> ; |
| <b>"Temporary TEC Exchange Rate Request Fee"</b>              | is the single fee to be paid to <b>The Company</b> for a <b>Temporary TEC Exchange Rate Request</b> as detailed in the <b>Charging Statements</b> ;                                                                                                                                          |
| <b>"Temporary TEC Exchange Rate Request Form"</b>             | is the form set out in Exhibit W to the <b>CUSC</b> ;                                                                                                                                                                                                                                        |
| <b>"Temporary TEC Exchange Rate Request"</b>                  | is a joint application made by a <b>Temporary TEC Exchange Donor User</b> and a <b>Temporary TEC Exchange Recipient User</b> for a <b>Temporary TEC Exchange Rate Offer</b> ;                                                                                                                |
| <b>"Temporary TEC Exchange Rate"</b>                          | is a weekly profile of the additional export rights in MW available to the <b>Temporary TEC Exchange Recipient User</b> as a direct result of the temporary reduction in export rights in MW of the <b>Temporary TEC Exchange Donor User</b> ;                                               |
| <b>"Temporary TEC Exchange Recipient User"</b>                | is a <b>User</b> that has jointly made a <b>Temporary TEC Exchange Rate Request</b> to increase its rights to export for the duration of the <b>Temporary TEC Exchange Period</b> ;                                                                                                          |
| <b>"Temporary TEC Trade Exchange"</b>                         | a trade made pursuant to CUSC Paragraph 6.34;                                                                                                                                                                                                                                                |
| <b>"Tenders"</b>                                              | as defined in Paragraph 3.3 of Schedule 3, Part I;                                                                                                                                                                                                                                           |
| <b>"Tenderers"</b>                                            | as defined in Paragraph 3.3 of Schedule 3, Part I;                                                                                                                                                                                                                                           |
| <b>"Tender Period"</b>                                        | as defined in Paragraph 3.3 of Schedule 3, Part I;                                                                                                                                                                                                                                           |
| <b>"Term"</b>                                                 | without prejudice to the interpretation of <b>Term</b> in respect of <b>Users</b> acting in other capacities, for <b>Users</b> acting in respect of their <b>Connection Sites</b> which were not <b>Commissioned</b> at the <b>Transfer</b>                                                  |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                            | <b>Date</b> , it means the term of the relevant <b>Bilateral Connection Agreement</b> commencing on the date of the <b>Bilateral Connection Agreement</b> and ending in accordance with Clause 9 of that agreement;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Termination Amount"</b>                | in relation to a <b>Connection Site</b> , the amount calculated in accordance with the <b>Charging Statements</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"The Company"</b>                       | has the meaning given to <b>NESO or National Energy System Operator</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"The Company Credit Rating"</b>         | any one of the following:- <ul style="list-style-type: none"> <li>(a) a credit rating for long term debt of A- and A3 respectively as set by Standard and Poor's or Moody's respectively;</li> <li>(b) an indicative long term private credit rating of A- and A3 respectively as set by Standard and Poor's or Moody's as the basis of issuing senior unsecured debt;</li> <li>(c) a short term rating by Standard and Poor's or Moody's which correlates to a long term rating of A- and A3 respectively; or</li> <li>(d) where the <b>User's Licence</b> issued under the Electricity Act 1989 requires that User to maintain a credit rating, the credit rating defined in that <b>User's Licence</b>;</li> </ul> |
| <b>"The Company's Engineering Charges"</b> | the charges levied by <b>The Company</b> in relation to an application for connection and/or use of the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"The Company Prescribed Level"</b>      | the forecast value of the regulatory asset value of <b>NGET</b> for a <b>Financial Year</b> as set out in the document published from time to time by Ofgem setting this out and currently know as "Ofgem's Transmission Price Control Review of The Company – Transmission Owner Final Proposals" such values to be published on <b>The Company Website</b> by reference to <b>The Company</b> credit arrangements no later than 31 January prior to the beginning of the <b>Financial Year</b> to which such value relates;                                                                                                                                                                                         |
| <b>"Third Party Claim"</b>                 | as defined in Paragraph 7.5.3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Third Party Works"</b>                 | in relation to a particular <b>User</b> those works, defined as such in its <b>Construction Agreement</b> ; being works undertaken on assets belonging to someone other than a <b>Relevant Transmission Licensee</b> or the <b>User</b> where such works are required by <b>The Company</b> to enable it to provide the connection to and/or use of the <b>National Electricity Transmission System</b> by the <b>User</b> or required as a consequence of connection to and/or use of the <b>National Electricity Transmission System</b> by the <b>User</b> ;                                                                                                                                                       |

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"TNUoS Tariff Forecast Timetable"</b>    | an annual timetable prepared and published by <b>The Company</b> by the end of January of each <b>Financial Year</b> (t) which sets out when <b>The Company</b> will publish updates in <b>Financial Year</b> (t+1) (being not less than quarterly) to the forecast of <b>Transmission Network Use of System Charges</b> for the <b>Financial</b> (t+2).                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Total System"</b>                       | the <b>National Electricity Transmission System</b> and all <b>User Systems</b> in <b>Great Britain</b> and <b>Offshore</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Total System Chargeable HH Demand"</b>  | the total of all half-hourly metered <b>Demands</b> for which <b>HH Charges</b> are paid, taken over a period of time which may or may not be that to which <b>HH Charges</b> relate;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Total System Chargeable NHH Demand"</b> | the total of all half-hourly metered <b>Demands</b> for which <b>NHH Charges</b> are paid, taken over a period of time which may or may not be that to which <b>NHH Charges</b> relate.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>"Trading Party"</b>                      | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Trading Unit"</b>                       | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Transfer Date"</b>                      | "24.00" hours on 30th March 1990;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Transfer Scheme"</b>                    | schemes made under sections 65 and 66 of the <b>Act</b> and effected on the <b>Transfer Date</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Transitional Agreements"</b>            | those <b>Existing Agreements</b> which have been entered into following the <b>Authority's</b> decision of 21 August 2024 on the transitional approach to offers provided for in the decision (and any subsequent extension to the time period for this approach) and which as a consequence have not been studied and so do not contain the usual detail and commitments regarding <b>Construction Works</b> and <b>Construction Programme</b> ;                                                                                                                                                                                                                                                                   |
| <b>"Transmission"</b>                       | means, when used in conjunction with another term relating to equipment, whether defined or not, that the associated term is to be read as being part of or directly associated with the <b>National Electricity Transmission System</b> and not of or with the <b>User System</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Transmission Business"</b>              | the authorised business of <b>The Company</b> or any <b>Affiliate</b> or <b>Related Undertaking</b> in the planning, development, construction and maintenance of the <b>National Electricity Transmission System</b> (whether or not pursuant to directions of the Secretary of State made under section 34 or 35 of the <b>Act</b> ) and the operation of such system for the transmission of electricity, including any business in providing connections to the <b>National Electricity Transmission System</b> but shall not include (i) any other <b>Separate Business</b> or (ii) any other business (not being a <b>Separate Business</b> ) of <b>The Company</b> or any <b>Affiliate</b> or <b>Related</b> |

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                  | <b>Undertaking</b> in the provision of services to or on behalf of any one or more persons;                                                                                                                                                                                                                                                                                                                                          |
| <b>“Transmission Charging Methodology Forum”</b> | the charging methodology forum (and related arrangements) established to facilitate meetings between <b>The Company</b> and any other persons whose interests are materially affected by the applicable <b>Charging Methodologies</b> for the purpose of discussing the further development of the applicable <b>Charging Methodologies</b> ;                                                                                        |
| <b>“Transmission Circuits”</b>                   | as defined in the <b>NETS SQSS</b> ;                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>“Transmission Connection Assets”</b>          | the <b>Transmission Plant</b> and <b>Transmission Apparatus</b> necessary to connect the <b>User’s Equipment</b> to the <b>National Electricity Transmission System</b> at any particular <b>Connection Site</b> in respect of which <b>The Company</b> charges <b>Connection Charges</b> (if any) as listed or identified in Appendix A to the <b>Bilateral Connection Agreement</b> relating to each such <b>Connection Site</b> ; |
| <b>“Transmission Demand Residual”</b>            | the total sum of annual <b>Transmission Network Use of System</b> revenue to be recovered through the <b>Transmission Demand Residual Tariffs</b> from <b>Final Demand Sites</b> and <b>Unmetered Supplies</b> only;                                                                                                                                                                                                                 |
| <b>“Transmission Demand Residual Tariffs”</b>    | the £/site <b>Transmission Network Use of System</b> tariffs or £/kWh <b>UMS Tariff</b> that are levied on <b>Final Demand Sites</b> and <b>Unmetered Supplies</b> only;                                                                                                                                                                                                                                                             |
| <b>“Transmission Connection Asset Works”</b>     | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>“Transmission Entry Capacity”</b>             | the figure specified as such as set out in Appendix C of the relevant <b>Bilateral Connection Agreement</b> or <b>Bilateral Embedded Generation Agreement</b> ;                                                                                                                                                                                                                                                                      |
| <b>“Transmission Evaluation”</b>                 | where a <b>Relevant Embedded Power Station</b> with an agreement for connection to and/or for the use of a <b>User’s Distribution System</b> wants the <b>User</b> to make a <b>Gate 2 Application</b> in respect of its project;                                                                                                                                                                                                    |
| <b>“Transmission Evaluation Application”</b>     | an application by the owner/operator of a <b>Distribution System</b> for <b>Transmission Evaluation</b> (which application can be for one or more <b>Relevant Embedded Power Stations</b> ) in the form or substantially the form set out in Appendix U;                                                                                                                                                                             |

|                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Transmission Impact Assessment"</b>                                   | A means of conducting an <b>Evaluation of Transmission Impact</b> as more fully described in the <b>Bilateral Connection Agreement</b> ;                                                                                                                                                                                                                                                                          |
| <b>"Transmission Interface Point"</b>                                     | as defined in the <b>Grid Code</b> in the context of a <b>Construction Agreement</b> means the electrical point of connection between the <b>Offshore Transmission System</b> and an <b>Onshore Transmission System</b> as set out in the <b>Offshore Works Assumptions</b> .                                                                                                                                     |
| <b>"Transmission Interface Site"</b>                                      | the site at which the <b>Transmission Interface Point</b> is located;                                                                                                                                                                                                                                                                                                                                             |
| <b>"Transmission Licence(s)"</b>                                          | the transmission licence or licences granted to one or all of the Licensees: <b>NGET, SP Transmission Limited, Scottish Hydro Electric Transmission Limited</b> , any <b>Competitively Appointed Transmission Owner</b> and any <b>Offshore Transmission Licensee</b> under section 6(1)(b) of Act. References to "transmission licensee" and "transmission licensees" will be construed in the CUSC accordingly; |
| <b>"Transmission Network Services"</b>                                    | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Transmission Licensees Assets"</b>                                    | The Plant and Apparatus owned by the <b>Relevant</b> Transmission Licensees necessary to connect the User's Equipment to the <b>National Electricity Transmission System</b> at any particular Connection Site in respect of which <b>The Company</b> charges Connection Charges (if any) as listed or identified in [Appendix A] to the Bilateral Agreement relating to each such Connection Site;               |
| <b>"Transmission Network Use of System Charges"</b>                       | the element of <b>Use of System Charges</b> payable in respect of <b>Transmission Network Services</b> (including for the avoidance of doubt <b>Transmission Network Use of System Demand Reconciliation Charges</b> and <b>ET Use of System Charges</b> );                                                                                                                                                       |
| <b>"Transmission Network Use of System Demand Charges"</b>                | that element of <b>Transmission Network Use of System Charges</b> relating to <b>Demand, Final Demand Sites</b> and <b>Unmetered Supply</b>                                                                                                                                                                                                                                                                       |
| <b>"Transmission Network Use of System Demand Zone"</b>                   | each of the zones identified by <b>The Company</b> in the <b>Charging Statements</b> for charging of <b>Transmission Network Use of System Charges</b> in relation to <b>Demand</b> ;                                                                                                                                                                                                                             |
| <b>"Transmission Network Use of System Demand Reconciliation Charges"</b> | sums payable by the <b>User</b> to <b>The Company</b> under invoices issued to the <b>User</b> pursuant to Paragraph 3.12.7;                                                                                                                                                                                                                                                                                      |
| <b>"Transmission Owner Activity"</b>                                      | The Function of the <b>Relevant</b> Transmission Licensees' Transmission Business as defined in the Transmission Licences;                                                                                                                                                                                                                                                                                        |



|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Transmission Owner Price Index (TOPI)"</b>       | The price index adjustment method as described in Part F of Special Condition 2.1 of the <b>Relevant Transmission Licensee's Transmission Licence</b> .                                                                                                                                                                                                                                                                                      |
| <b>"Transmission Related Agreement"</b>              | an agreement between <b>The Company</b> and a <b>User</b> substantially in the form of Schedule 2 Exhibit 5;                                                                                                                                                                                                                                                                                                                                 |
| <b>"Transmission Services Activity"</b>              | as defined in the <b>Transmission Licence</b> ;                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>"Transmission Services Use of System Charges"</b> | the element of <b>Use of System Charges</b> payable in respect of the <b>Transmission Services Activity</b> ;                                                                                                                                                                                                                                                                                                                                |
| <b>"Transmission Reinforcement Works"</b>            | in relation to a particular <b>User</b> , as defined in its <b>Construction Agreement</b> or <b>BELLA</b> as appropriate;                                                                                                                                                                                                                                                                                                                    |
| <b>"Transmission Voltage"</b>                        | In Scotland voltages of 132kV and above; in England and Wales voltages above 132kV – usually 275kV and 400kV;                                                                                                                                                                                                                                                                                                                                |
| <b>"Transmission Works Register"</b>                 | the register set up by <b>The Company</b> pursuant to Paragraph 6.36.1;                                                                                                                                                                                                                                                                                                                                                                      |
| <b>"Transmission Works"</b>                          | in relation to a particular <b>User</b> , those works which are specified in Appendix H or identified as <b>OTSDUW</b> in to the relevant <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                    |
| <b>"Triad"</b>                                       | is used as a short hand way to describe the three <b>Settlement Periods</b> of highest transmission systems <b>Demand</b> , namely the half hour <b>Settlement Period</b> of system peak <b>Demand</b> and the two half hour <b>Settlement Periods</b> of next highest <b>Demand</b> , which are separated from the system peak <b>Demand</b> and from each other by at least <b>10 Clear Days</b> , between November to February inclusive; |
| <b>"Trigger Date"</b>                                | as identified by <b>The Company</b> in accordance with Part Two of the <b>User Commitment Methodology</b> and in relation to a particular <b>User</b> as defined in its <b>Construction Agreement</b> ;                                                                                                                                                                                                                                      |
| <b>"UMS Base Percentage"</b>                         | the % value of the relevant <b>Security Period</b> as specified in the table in paragraph 2B Section 3, Appendix 2                                                                                                                                                                                                                                                                                                                           |
| <b>"UMS Charges"</b>                                 | that element of <b>Transmission Network Use of System Demand Charges</b> relating to <b>Unmetered Supply</b> .                                                                                                                                                                                                                                                                                                                               |
| <b>"UMS Base Value at Risk"</b>                      | the sum as calculated in accordance with Paragraph 3.23.4b                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"UMS Tariff"</b>                                  | a <b>Transmission Demand Residual Tariff</b> levied on <b>Unmetered Supplies</b> ;                                                                                                                                                                                                                                                                                                                                                           |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Unmetered Supply Volume"</b>           | the amount of <b>Energy</b> associated with <b>Unmetered Supply</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Unmetered Supply Volume Forecast"</b>  | the forecast, produced by <b>The Company</b> , of the <b>Unmetered Supply Volume</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Unacceptable Operating Condition</b>    | a failure of <b>Plant</b> and <b>Apparatus</b> forming part of the <b>National Electricity System Transmission System</b> that results in the following effect at the <b>Connection Site</b> : <ul style="list-style-type: none"> <li>i) the loss of one or more phases causing an energy unbalance (<b>Grid Code</b> CC6.1.6);</li> <li>ii) frequency being outside the ranges listed in <b>Grid Code</b> CC6.1.3;</li> <li>iii) voltages being outside values stated in <b>Grid Code</b> CC6.1.4;</li> <li>iv) loss of synchronising signal to an <b>Export BMU Unit</b>;</li> </ul> |
| <b>"Undertaking"</b>                       | as defined in section 259 of the Companies Act 1985;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Unmetered Supply"</b>                  | as defined in the <b>Balancing and Settlement Code</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Unsecured Credit Cover"</b>            | the maximum amount of unsecured credit available to each <b>User</b> for the purposes of Part III of Section 3 of the <b>CUSC</b> at any time which shall be a sum equal to 2% of the <b>The Company Prescribed Level</b> in the relevant <b>Financial Year</b> ;                                                                                                                                                                                                                                                                                                                      |
| <b>"Unusual Load Characteristics"</b>      | loads which have characteristics which are significantly different from those of the normal range of domestic, commercial and industrial loads (including loads which vary considerably in duration or magnitude);                                                                                                                                                                                                                                                                                                                                                                     |
| <b>"Urgent CUSC Modification Proposal"</b> | an <b>CUSC Modification Proposal</b> treated or to be treated as an <b>Urgent CUSC Modification Proposal</b> in accordance with Paragraph 8.24;                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>"Use of System"</b>                     | use of the <b>National Electricity Transmission System</b> for the transport of electricity by any <b>Authorised Electricity Operator</b> or <b>Interconnector User</b> or <b>Interconnector Error Administrator</b> ;                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Use of System Application"</b>         | an application for a <b>Bilateral Embedded Generation Agreement</b> or for <b>Use of System</b> in the form or substantially in the form set out in Exhibit D or F to the <b>CUSC</b> as appropriate;                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Use of System Charges"</b>             | charges made or levied or to be made or levied by <b>The Company</b> for the provision of services as part of the <b>Transmission Business</b> to any <b>Authorised Electricity Operator</b> as more fully described at condition E10 of the <b>ESO Licence</b> and in the <b>Bilateral Agreements</b> and Section 3 and Section 9 Part II but which shall not include <b>Connection Charges</b> ;                                                                                                                                                                                     |

|                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Use of System Charging Methodology"</b>                         | as defined in the <b>Transmission Licence</b> and set out in Section 14;                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"Use of System Interconnector Confirmation Notice"</b>           | the part of the <b>Use of System Interconnector Offer and Confirmation Notice</b> by which <b>The Company</b> confirms the use of the <b>National Electricity Transmission System</b> by an <b>Interconnector User</b> or an <b>Interconnector Error Administrator</b> ;                                                                                                                                                                                 |
| <b>"Use of System Interconnector Offer and Confirmation Notice"</b> | the notice which combines the offer and confirmation in relation to the use of the <b>National Electricity Transmission System</b> by an <b>Interconnector User</b> or an <b>Interconnector Error Administrator</b> , in the form set out in Exhibit H to the <b>CUSC</b> ;                                                                                                                                                                              |
| <b>"Use of System Interconnector Offer Notice"</b>                  | the part of the <b>Use of System Interconnector Offer and Confirmation Notice</b> by which <b>The Company</b> offers an <b>Interconnector User</b> or an <b>Interconnector Error Administrator</b> use of the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                          |
| <b>"Use of System Offer"</b>                                        | an offer (or in the case of a use of system generation offer and where appropriate, offers) made by <b>The Company</b> to a <b>User</b> pursuant to Paragraph 3.7 or 9.19 substantially in the form of <b>Exhibit G</b> (Use of System Supply Offer) or <b>Exhibit E</b> (Use of System Generation Offer) or <b>Exhibit H</b> (Use of System Interconnector Offer) or Exhibit 7 Schedule 2 (Use of System Virtual Lead Party Offer) to the <b>CUSC</b> ; |
| <b>"Use of System Payment Date"</b>                                 | the date for payment of <b>Use of System Charges</b> ;                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>"Use of System Supply Confirmation Notice"</b>                   | the part of the <b>Use of System Supply Offer and Confirmation Notice</b> by which <b>The Company</b> confirms the use of the <b>National Electricity Transmission System</b> by a <b>Supplier</b> ;                                                                                                                                                                                                                                                     |
| <b>"Use of System Supply Offer and Confirmation Notice"</b>         | the notice which combines the offer and confirmation in relation to the use of the <b>National Electricity Transmission System</b> by a <b>Supplier</b> , in the form set out in Exhibit G to the <b>CUSC</b> ;                                                                                                                                                                                                                                          |
| <b>"Use of System Supply Offer Notice"</b>                          | the part of the <b>Use of System Supply Offer and Confirmation Notice</b> by which <b>The Company</b> offers a <b>Supplier</b> use of the <b>National Electricity Transmission System</b> ;                                                                                                                                                                                                                                                              |
| <b>"User"</b>                                                       | a person who is a party to the <b>CUSC Framework Agreement</b> other than <b>The Company</b> ;                                                                                                                                                                                                                                                                                                                                                           |
| <b>"User Commitment Methodology"</b>                                | the methodology and principles applied by <b>The Company</b> in the application and calculation of the <b>Cancellation Charge</b> and <b>Cancellation Charge Secured Amount</b> such principles being set out in <b>CUSC</b> Section 15;                                                                                                                                                                                                                 |

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"User Development"</b>              | shall have the meaning set out in the <b>Connection Application</b> or the <b>Use of System Application</b> as the case may be;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"User Progression Milestones"</b>   | the <b>Conditional Progression Milestones</b> and <b>Construction Progression Milestones</b> used for the purposes of the <b>Queue Management Process</b> to demonstrate that a <b>User</b> is progressing with that <b>User's</b> project to the required timescales for that <b>User's</b> project, the <b>User Progression Milestones</b> for a <b>User</b> (derived in accordance with <b>CUSC</b> Section 16) being set out in Appendix Q of the <b>Construction Agreement</b> relating to a specific <b>User's</b> project;                                                                                                                                                                                                                                     |
| <b>"User's Allowed Credit"</b>         | that proportion of the <b>Unsecured Credit Cover</b> extended to a <b>User</b> by <b>The Company</b> as calculated in accordance with Paragraph 3.26;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"User Emergency Deenergisation"</b> | the <b>Deenergisation</b> of the <b>User's Equipment</b> or equipment for which that <b>User</b> is responsible (as defined in Section K of the <b>Balancing and Settlement Code</b> ) by a <b>User</b> pursuant to <b>CUSC</b> Paragraph 5.2.2 or by automatic means as a direct consequence of an <b>Unacceptable Operating Condition</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"User's Equipment"</b>              | Means; <ol style="list-style-type: none"> <li>4) the <b>Plant</b> and <b>Apparatus</b> owned by a <b>User</b> (ascertained in the absence of agreement to the contrary by reference to the rules set out in Paragraph 2.12) which: (a) is connected to (or in the case of <b>OTSDUW Build</b> will, at the <b>OTSUA Transfer Time</b>, be connected to) the <b>Transmission Connection Assets</b> forming part of the <b>National Electricity Transmission System</b> at any particular <b>Connection Site</b> to which that <b>User</b> wishes so to connect, or (b) is connected to a <b>Distribution System</b> to which that <b>User</b> wishes so to connect but excluding for the avoidance of doubt any <b>OTSUA</b>;</li> <li>5) <b>VLP Assets</b></li> </ol> |
| <b>"User's Licence"</b>                | a <b>User's</b> licence to carry on its business granted pursuant to Section 6 of the <b>Act</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"User System"</b>                   | any system owned or operated by a <b>User</b> comprising <b>Generating Units</b> and/or <b>Distribution Systems</b> (and/or other systems consisting (wholly or mainly) of electric lines which are owned or operated by a person other than a <b>Public Distribution System Operator</b> and <b>Plant</b> and/or <b>Apparatus</b> (including in the case of <b>OTSDUW Build</b> , any <b>OTSUA</b> prior to the <b>OTSUA Transfer Time</b> ) connecting <b>Generating Units</b> , <b>Distribution Systems</b> (and/or other systems consisting wholly or mainly of electric lines which are owned or operated by a person other than a <b>Public Distribution</b>                                                                                                    |

|                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                          | <b>System Operator</b> or <b>Non-Embedded Customers</b> to the <b>National Electricity Transmission System</b> or (except in the case of <b>Non-Embedded Customers</b> ) to the relevant other <b>User System</b> , as the case may be, including any <b>Remote Transmission Assets</b> operated by such <b>User</b> or other person and any <b>Plant</b> and/or <b>Apparatus</b> and meters owned or operated by such <b>User</b> or other person in connection with the distribution of electricity but does not include any part of the <b>National Electricity Transmission System</b> ; |
| <b>"Utilities Act 2000"</b>                              | Electricity Act 1989, as amended by the Utilities Act 2000;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Valid"</b>                                           | valid for payment to be made thereunder against delivery of a <b>Notice of Drawing</b> given within the period stated therein;                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Value Added Tax"</b>                                 | United Kingdom value added tax or any tax supplementing or replacing the same;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>"Value At Risk Amendment"</b>                         | the <b>Proposed Amendment</b> in respect of <b>Amendment Proposal 127</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>"Value At Risk Amendment Implementation Date"</b>     | the <b>Implementation Date</b> of the <b>Value At Risk Amendment</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Value At Risk Amendment Implementation End Date"</b> | the date one year following the <b>Value At Risk Amendment Implementation Date</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Variations Clause"</b>                               | the Clause in the <b>Existing Agreements</b> that requires <b>The Company</b> and the <b>User</b> to effect any amendment required to be made to those by the <b>Authority</b> as a result of a change in the <b>CUSC</b> , the <b>ESO Licence</b> or <b>Transmission Licence</b> , an order or direction made pursuant to the <b>Act</b> or a <b>Licence</b> or as a result of settling any of the terms thereof;                                                                                                                                                                           |
| <b>"Voting Group"</b>                                    | as defined in Paragraph 8A.3.1.2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Voting Sub-Group"</b>                                | the Demand Voting Sub-Group, Generation Voting Sub-Group, Interconnector Voting Sub-Group and/or Supply Voting Sub-Group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>"Virtual Lead Party (VLP)"</b>                        | as defined in the <b>Balancing and Settlement Code</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Virtual Lead Party Agreement (VLPA)"</b>             | An agreement entered into pursuant to Paragraph 1.3.1 a form of which is set out in Exhibit 7 to Schedule 2;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>"VLP Assets"</b>                                      | Equipment owned or operated by a <b>Virtual Lead Party</b> which is part of a <b>Secondary BM Unit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Website"</b>                                    | the site established by <b>The Company</b> on the World-Wide Web for the exchange of information among <b>CUSC Parties</b> and other interested persons in accordance with such restrictions on access as may be determined from time to time by <b>The Company</b> ;                                                                                                                                                                                                                                          |
| <b>"Week"</b>                                       | means a period of seven <b>Calendar Days</b> commencing at 05.00 hours on a Monday and terminating at 05.00 hours on the next following Monday;                                                                                                                                                                                                                                                                                                                                                                |
| <b>"Weekly Maximum Generation Declaration"</b>      | has the meaning attributed to it in Paragraph 4.2.3.1;                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>"Wider Cancellation Charge"</b>                  | a component of the <b>Cancellation Charge</b> that applies on and after the <b>Trigger Date</b> as more particularly described in Part Two of the <b>User Commitment Methodology</b> ;                                                                                                                                                                                                                                                                                                                         |
| <b>"Wider Transmission Reinforcement Works"</b>     | in relation to a particular <b>User</b> means those <b>Transmission Reinforcement Works</b> other than the <b>Enabling Works</b> and which are specified in the relevant <b>Construction Agreement</b> ;                                                                                                                                                                                                                                                                                                       |
| <b>"Workgroup"</b>                                  | a <b>Workgroup</b> established by the <b>CUSC Modifications Panel</b> pursuant to Paragraph 8.20.1;                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>"Workgroup Consultation"</b>                     | as defined in Paragraph 8.20.13, and any further consultation which may be directed by the <b>CUSC Modifications Panel</b> pursuant to Paragraph 8.20.20                                                                                                                                                                                                                                                                                                                                                       |
| <b>"Workgroup Consultation Alternative Request"</b> | any request from a <b>CUSC Party</b> , a <b>BSC Party</b> the <b>Citizens Advice</b> or the <b>Citizens Advice Scotland</b> for a <b>Workgroup Alternative CUSC Modification</b> to be developed by the <b>Workgroup</b> expressed as such and which contains the information referred to at Paragraph 8.20.16. For the avoidance of doubt any <b>WG Consultation Alternative Request</b> does not constitute either a <b>CUSC Modification Proposal</b> or a <b>Workgroup Alternative CUSC Modification</b> ; |
| <b>"Workgroup Alternative CUSC Modification"</b>    | an alternative modification to the <b>CUSC Modification Proposal</b> developed by the <b>Workgroup</b> under the <b>Workgroup</b> terms of reference (either as a result of a <b>Workgroup Consultation</b> or otherwise) and which is believed by a majority of the members of the <b>Workgroup</b> or by the chairperson of the <b>Workgroup</b> to better facilitate the <b>Applicable CUSC Objectives</b> than the <b>CUSC Modification Proposal</b> or the current version of the <b>CUSC</b> .           |

## ANNEX 1 – INTERPRETATION AND DEFINITIONS

*Insert the following new definitions in alphabetical order:*

**“Authority Led CUSC Modification”**

a proposal to modify the **CUSC** which directly arises from a **Significant Code Review** and where the process of the modification is led by the **Authority** in accordance with its **SCR Guidance**;

**“Authority Led CUSC Modification Proposal”**

a proposal for an Authority Led CUSC Modification which has been submitted pursuant to and in accordance with Section 8 Paragraph 8.17B;

**“Authority Led CUSC Modification Report”**

means, in relation to an Authority Led CUSC Modification Proposal, the report prepared pursuant to and in accordance with Section 8 Paragraph 8.17B.2;

**“Backstop Direction”**

has the meaning given to it in Section 8 Paragraph 8.17C;

**“SCR Guidance”**

means, any document of that title created, published as amended from time to time, by the **Authority** to provide guidance to interested parties on the conduct of a **Significant Code Review** by the Authority;

**END OF SECTION 11**

**CUSC - SECTION 12**

**NOT USED**



**CUSC - SECTION 13**

**ENABLING WORKS**

**CONTENTS**

- 13.1 Introduction
- 13.2 Enabling Works
- 13.3 MITS Map
- 13.4 Report

## 13.1 INTRODUCTION

- 13.1. This Section 13 deals with the identification and assessment of the **Enabling Works** to be included in an **Offer** made under the **Connect and Manage Arrangements** and the assessment of the need for and scope of a **Connect and Manage Derogation**.

## 13.2 ENABLING WORKS

- 13.2.1 In making an **Offer**, the **Construction Works** (if any) which are required to be completed prior to connection and/or use of system are identified and set out in a **Construction Agreement**. Under the **Connect and Manage Arrangements** the **Construction Agreement** will identify:

- (a) in the case of an **Onshore Connection Site** or **Onshore** site of connection, which of the **Transmission Reinforcement Works** are the **Enabling Works** relevant to that **Applicant**; and
- (b) in the case of an **Offshore Connection Site**, which of the **Onshore Transmission Reinforcement Works** are the **Enabling Works** relevant to that **Applicant**. For the avoidance of doubt, any **Offshore Transmission Reinforcement Works** shall be in addition to and will not be affected by the **Enabling Works** identified pursuant to the **Connect and Manage Arrangements**.

- 13.2.2 The **Connect and Manage Derogation Criteria** shall be used to identify the extent and nature of the **Enabling Works** required in each offer of a **Construction Agreement**. Subject to Paragraph 13.2.5, it is anticipated that the **Enabling Works** shall not generally be greater than the **MITS Connection Works**. The **Enabling Works** shall not be less than those works required to satisfy the criteria set out in Paragraph 13.2.4.

- 13.2.3 Where the **Enabling Works** in any case as assessed in accordance with 13.2.2 above are such that connection and/or use of system on completion of such works but in advance of any identified **Wider Transmission Reinforcement Works** does not comply with the requirements of the **NETS SQSS** a **Connect and Manage Derogation** will be required. The **Connect and Manage Derogation Criteria** will be used to justify the need for and scope of such a **Connect and Manage Derogation** in the **Connect and Manage Derogation Report**.

- 13.2.4 The **Enabling Works** will as a minimum include (and, subject to 13.2.5.1 shall not exceed) those **Transmission Reinforcement**

**Works** (in the case of an **Onshore Connection Site** or **Onshore** site of connection) or **Onshore Transmission Reinforcement Works** (in the case of an **Offshore Connection Site**) required to meet the following criteria (the **Connect and Manage Derogation Criteria**):

- 13.2.4.1 achieve compliance with the “Pre-fault Criteria” set out in Chapter 2 (Generation Connection Criteria Applicable to the Onshore Transmission System) of the **NETS SQSS**;
- 13.2.4.2 achieve compliance with the “Limits to Loss of Power Infeed Risks” set out in Chapter 2 (Generation Connection Criteria Applicable to the Onshore Transmission System) of the **NETS SQSS**;
- 13.2.4.3 enable **The Company** to operate the **National Electricity Transmission System** in a safe manner;
- 13.2.4.4 resolve any fault level issues associated with the connection and/or use of system by the **Connect and Manage Power Station**;
- 13.2.4.5 comply with the minimum technical, design and operational criteria and performance requirements under the **Grid Code**;
- 13.2.4.6 meet other statutory obligations including but not limited to obligations under any **Nuclear Site Licence Provisions Agreement**; and
- 13.2.4.7 avoid any adverse impact on other **Users**.

13.2.5 The **Enabling Works** set out in a **Construction Agreement** may only be greater than:

- 13.2.5.1 the works assessed as being required under 13.2.4 above where and to the extent that the **Applicant** or **User** has requested that this be the case (in its application or otherwise); and/or
- 13.2.5.2 the **MITS Connection Works** where and to the extent that
  - 13.2.5.2.1 the **Applicant** or **User** has requested that this be the case (in its application or otherwise); or
  - 13.2.5.2.2 **The Company** and/or the **Relevant Transmission Licensee** consider it necessary

in order to satisfy the criteria set out in Paragraph 13.2.4.

### 13.3 MITS MAP

The Company will include within the **Electricity Ten Year Statement (ETYS)** a map of the **National Electricity Transmission System** identifying the relevant **MITS Substations** for the purposes of the **MITS Connection Works**.

### 13.4 REPORT

On or before the end of each **Financial Year** The Company shall publish a report showing:

- (a) by reference to the number of **Offers** made under the **Connect and Manage Arrangements** during that **Financial Year**, the percentage of **Offers** where the **Enabling Works** were above the **MITS Connection Works** and the percentage of **Offers** where the **Enabling Works** were below the **MITS Connection Works**; and
- (b) by reference to each **Construction Agreement** where the **Enabling Works** were completed during that **Financial Year**, the period of time that it took to complete those **Enabling Works** and the transmission owner that undertook them.

**END OF SECTION 13**

## **CUSC - SECTION 14**

### **CHARGING METHODOLOGIES**

#### **CONTENTS**

14.1 Introduction

Part I -The Statement of the Connection Charging Methodology

14.2 Principles

14.3 The Calculation of the Basic Annual Connection Charge for an Asset

14.4 Other Charges

14.5 Connection Agreements

14.6 Termination Charges

14.7 Contestability

14.8 Asset Replacement

14.9 Data Requirements

14.10 Applications

14.11 Illustrative Connection Charges

14.12 Examples of Connection Charge Calculations

14.13 Nominally Over Equipped Connection Sites

Part 2 -The Statement of the Use of System Charging Methodology

Section 1 – The Statement of the Transmission Use of System Charging Methodology;

14.14 Principles

14.15 Derivation of Transmission Network Use of System Tariff

14.16 Derivation of the Transmission Network Use of System Energy Consumption Tariff and Short Term Capacity Tariffs

14.17 Demand Charges

14.18 Generation Charges

14.19 Data Requirements

14.20 Applications

14.21 Transport Model Example

14.22 Illustrative Calculation of Boundary Sharing Factors (BSFs) and Shared / Not-Shared incremental km

14.23 Example: Calculation of Zonal Generation Tariffs and Charges

14.24 Example: Calculation of Zonal Demand Tariff

14.25 Reconciliation of Demand Related Transmission Network Use of System Charges

14.26 Classification of parties for charging purposes

14.27 Transmission Network Use of System Charging Flowcharts

14.28 Example: Determination of **The Company's** Forecast for Demand Charge Purposes

14.29 Stability & Predictability of TNUoS tariffs

Section 2 – The Statement of the Balancing Services Use of System Charging Methodology

14.30 Principles

14.31 Calculation of the Daily Balancing Services Use of System Charges

14.32 Settlement of BSUoS

CUSC Section 14 Schedule 1 - Calculation of charges that fall within the Connection Exclusion EU Regulation 838/2010

## **CUSC - SECTION 14**

### **CHARGING METHODOLOGIES**

#### 14.1 Introduction

- 14.1.1 This section of the CUSC sets out the statement of the Connection Charging Methodology and the Statement of the Use of System Methodology

## Part 1 - The Statement of the Connection Charging Methodology

### 14.2 Principles

#### Costs and their Allocation

- 14.2.1 Connection charges enable **The Company** to recover, with a reasonable rate of return, the costs involved in providing the assets that afford connection to the National Electricity Transmission System.
- 14.2.2 Connection charges relate to the costs of assets installed solely for and only capable of use by an individual User. These costs may include civil costs, engineering costs, and land clearance and preparation costs associated with the connection assets, but for the avoidance of doubt no land purchase costs will be included.
- 14.2.3 Connection charges are designed not to discriminate between Users or classes of User. The methodology is applied to both connections that were in existence at Vesting (30 March 1990) and those that have been provided since.

#### Connection/Use of System Boundary

- 14.2.4 The first step in setting charges is to define the boundary between connection assets and transmission system infrastructure assets.
- 14.2.5 In general, connection assets are defined as those assets solely required to connect an individual User to the National Electricity Transmission System, which are not and would not normally be used by any other connected party (i.e. "single user assets"). For the purposes of this Statement, all connection assets at a given location shall together form a connection site.
- 14.2.6 Connection assets are defined as all those single user assets which:
  - a) for Double Busbar type connections, are those single user assets connecting the User's assets and the first transmission licensee owned substation, up to and including the Double Busbar Bay;
  - b) for teed or mesh connections, are those single user assets from the User's assets up to, but not including, the HV disconnector or the equivalent point of isolation;
  - c) for cable and overhead lines at a transmission voltage, are those single user connection circuits connected at a transmission voltage equal to or less than 2km in length that are not potentially shareable.
- 14.2.7 Shared assets at a banked connection arrangement will not normally be classed as connection assets except where both legs of the banking are single user assets under the same Bilateral Connection Agreement.
- 14.2.8 Where customer choice influences the application of standard rules to the connection boundary, affected assets will be classed as connection assets. For example, in England & Wales NGET does not normally own busbars below 275kV, where **The Company** and the customer agree that NGET will own the busbars at a low voltage substation, the assets at that substation will be classed as connection assets and will not automatically be transferred into infrastructure.



- 14.2.9 The design of some connection sites may not be compatible with the basic boundary definitions in 14.2.6 above. In these instances, a connection boundary consistent with the principles described above will be applied.

## 14.3 The Calculation of the Basic Annual Connection Charge for an Asset

### Pre and Post Vesting Connections

- 14.3.1 Post Vesting connection assets are those connection assets that have been commissioned since 30 March 1990. Pre Vesting connection assets are those that were commissioned on or before the 30 March 1990.
- 14.3.2 The basic connection charge has two components. A non-capital component, for which both pre and post vesting assets are treated in the same way and a capital component for which there are slightly different options available for pre and post vesting assets. These are detailed below.

### Calculation of the Gross Asset Value (GAV)

- 14.3.3 The GAV represents the initial total cost of an asset to the transmission licensee. For a new asset it will be the costs incurred by the transmission licensee in the provision of that asset. Typically, the GAV is made up of the following components:

Construction Costs - Costs of bought in services  
 Engineering - Allocated equipment and direct engineering cost  
 Interest During Construction – Financing cost  
 Liquidated Damages Premiums - Premium required to cover Liquidated Damages if applicable.

Some of these elements may be optional at the User's request and are a matter of discussion and agreement at the time the connection agreement is entered into.

- 14.3.4 The GAV of an asset is re-valued each year normally using one of two methods. For ease of calculation, April is used as the base month.
- In the Modern Equivalent Asset (MEA) revaluation method, the GAV is indexed each year with reference to the prevailing price level for an asset that performs the same function as the original asset;
  - In the Transmission Owner Price Index (TOPI) revaluation method, the original cost of an asset is indexed each year by the TOPI formula set out in paragraph 14.3.6. For Pre Vesting connection assets commissioned on or before 30 March 1990, the original cost is the 1996/97 charging GAV (MEA re-valued from vesting). The original costs of Post Vesting assets are calculated based on historical cost information provided by the transmission licensee's.
- 14.3.5 In the MEA revaluation method, the MEA value is based on a typical asset. An MEA ratio is calculated to account for specific site conditions, as follows:
- The outturn GAV (as calculated in paragraph 14.3.4 above) is re-indexed by TOPI to the April of the **Financial Year** the Charging Date falls within;
  - This April figure is compared with the MEA value of the asset in the **Financial Year** the Charging Date falls within and a ratio calculated;
  - If the asset was commissioned at a Connection Site where, due to specific conditions, the asset cost more than the standard MEA value, the ratio would be greater than 1. For example, if an asset cost 10% more to construct and

commission than the typical asset the MEA ratio would be 1.1. If, however, the asset was found only to cost 90% of the typical MEA value the ratio would be 0.9;

- The MEA ratio is then used in all future revaluations of the asset. The April GAV of the asset in any year is thus the current MEA value of the asset multiplied by the ratio calculated for the **Financial Year** the Charging Date falls within.

14.3.6 The TOPI revaluation method is as follows:

- The outturn GAV (as calculated in paragraph 14.3.4 above) is re-indexed by TOPI to the April of the **Financial Year** the Charging Date falls within. This April GAV is thus known as the Base Amount;
- The Base Amount GAV is then indexed to the following April by using the TOPI formula used in the Transmission Owner's Price Control. April GAVs for subsequent **Financial years** are found using the same process of indexing by TOPI.

$$\text{i.e. } GAV_n = GAV_{n-1} * TOPI_n$$

- TOPI calculation for year n is as follows:

$$TOPI_n = \frac{(\text{May to October average TOPI})_{n-1}}{(\text{May to October average TOPI})_{n-2}}$$

### Calculation of Net Asset Value

14.3.7 The Net Asset Value (NAV) of each asset for year n, used for charge calculation, is the average (mid year) depreciated GAV of the asset. The following formula calculates the NAV of an asset, where  $A_n$  is the age of the asset (number of completed **Financial Years** old) in year n:

$$NAV_n = GAV_n * \frac{\text{Depreciation Period} - (A_n + 0.5)}{\text{Depreciation Period}}$$

14.3.8 In constant price terms an asset with an initial GAV of £1m and a depreciation period of 40 years will normally have a NAV in the year of its commissioning of £0.9875m (i.e. a reduction of 1.25%) and in its second year of £0.9625m (i.e. a further reduction of 2.5% or one fortieth of the initial GAV). This process will continue with an annual reduction of 2.5% for each year of the asset's life.

### Capital Components of the Connection charge for Post Vesting Connection Assets

14.3.9 The standard terms for a connection offer will be:

- 40 year life (with straight line depreciation);
- TOPI indexation

14.3.10 In addition a number of options exist:

- a capital contribution based on the allocated GAV at the time of commissioning will reduce capital. Typically a capital contribution made in advance of or at the time of commissioning will include costs to cover the elements outlined below and charges are calculated as set out in the equations below;

- Construction costs
- Engineering costs (Engineering Charge x job hours)
- Interest During Construction (IDC)
- Return element (6%)
- Liquidated Damages Premium (LD) (if applicable)

General Formula:

Capital Contribution Charge = (Construction Costs + Engineering Charges) x (1+Return %) + IDC + LD Premium

- The MEA and TOPI revaluation methods are described further in 14.3.21. As an example, we will assume MEA revaluation is a 7.5% rate of return, AND 6% on the TOPI revaluation basis;
- annual charges based on depreciation periods other than 40 years;
- annuity based charging;
- indexation of GAVs based on principles other than MEA revaluation and TOPI indexation. No alternative forms of indexation have been employed to date.

14.3.11 For new connection assets, should a User wish to agree to one or more of the options detailed above, instead of the standard connection terms, the return elements charged by the transmission licensee may also vary to reflect the re-balancing of risk between the transmission licensee and the User. For example, if Users choose a different indexation method, an appropriate rate of return for such indexation method will be derived.

14.3.12 A User can choose to make a capital contribution based on the allocated and depreciated NAV of a commissioned asset. For a capital contribution to take account at the start of **Financial Year** n, the User may, at most once per year, make a full or partial capital contribution of at least 10% of the NAV prevailing as of 31st March in year n-1. The User shall notify **The Company** of the capital contribution amount no later than 1st September in year n-1, and pay the capital contribution 45 days prior to the start of **Financial Year** n which will be applied to the NAV prevailing at the start of year n. As the capital component of the connection charge for year n will reduce as a result of the capital contribution, a reduced rate of return element will be payable and a lower security requirement will be required in **Financial Year** n and subsequent years.

### Capital Components of the Connection charge for Pre Vesting Connection Assets

14.3.13 The basis of connection charges for GB assets commissioned on or before 30 March 1990 is broadly the same as the standard terms for connections made since 30 March 1990. Specifically charges for pre vesting connection assets are based on the following principles:

- The GAV is the 1996/97 charging GAV (MEA re-valued from vesting) subsequently indexed by the same measure of TOPI as used in the Transmission Owner's Price Control;
- 40 year life (with straight line depreciation);

- 6% rate of return

14.3.14 Pre-vesting 1996 MEA GAVs for Users' connection sites are available from **The Company** on request from the **Charging Team**.

### Non-Capital Components - Charging for Maintenance and Transmission Running Costs

14.3.15 The non-capital component of the connection charge is divided into two parts, as set out below. Both of these non-capital elements will normally be identified in the charging appendices of relevant Bilateral Agreements.

#### Part A: Site Specific Maintenance Charges

14.3.16 This is a maintenance only component that recovers a proportion of the costs and overheads associated with the maintenance activities conducted on a site-specific basis for connection assets of the transmission licensees.

14.3.17 Site-specific maintenance charges will be calculated each year based on the forecast total site specific maintenance for NETS divided by the total GAV of the transmission licensees NETS connection assets, to arrive at a percentage of total GAV. For 2010/11 this will be 0.52%. For the avoidance of doubt, there will be no reconciliation of the site-specific maintenance charge.

#### Part B: Transmission Running Costs

14.3.18 The Transmission Running Cost (TRC) factor is calculated at the beginning of each price control to reflect the appropriate amount of other Transmission Running Costs (rates, operation, indirect overheads) incurred by the transmission licensees that should be attributed to connection assets.

14.3.19 The TRC factor is calculated by taking a proportion of the forecast Transmission Running Costs for the transmission licensees (based on operational expenditure figures from the latest price control) that corresponds with the proportion of the transmission licensees' total connection assets as a function of their total business GAV. This cost factor is therefore expressed as a percentage of an asset's GAV and will be fixed for the entirety of the price control period. The currently applicable TRC factor, calculated as above, is detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**<sup>3</sup>.

14.3.20 To illustrate the calculation, the following example uses the average operating expenditure from the published price control and the connection assets of each transmission licensee expressed as a percentage of their total system GAV to arrive at the 2010/11 GB TRC value of 1.45%:

#### Example:

Connection assets as a percentage of total system GAV for each TO:

|                                 |       |
|---------------------------------|-------|
| Scottish Power Transmission Ltd | 15.1% |
| Scottish Hydro Transmission Ltd | 8.6%  |
| NGET                            | 12.5% |

Published current price control average annual operating expenditure (£m):

|                                 |       |
|---------------------------------|-------|
| Scottish Power Transmission Ltd | 29.1  |
| Scottish Hydro Transmission Ltd | 11.3  |
| NGET                            | 295.2 |

Total GB Connection GAV = £2.12bn

GB TRC Factor =  $(15.1\% \times £29.1m + 8.6\% \times £11.3m + 12.5\% \times £295.2m) / £2.12bn$

GB TRC Factor = 1.99%

Net GB TRC Factor = Gross GB TRC Factor – Site Specific Maintenance Factor\*

Net GB TRC Factor = 1.99% - 0.54% = 1.45%

\* Note – the Site Specific Maintenance Factor used to calculate the TRC Factor is that which applies for the first year of the price control period or in this example, is the 2007/8 Site Specific Maintenance Factor of 0.54%.

### The Basic Annual Connection Charge Formula

14.3.21 The charge for each connection asset in **Financial Year n** can be derived from the general formula below. This is illustrated more fully by the examples in **Appendix 2: Examples of Connection Charge Calculations.**

$$\text{Annual Connection Charge}_n = D_n (GAV_n) + R_n (NAV_n) + SSF_n (TOPIGAV_n) + TC_n (GAV_n)$$

Where:

For n = year to which charge relates within the Depreciation Period

n = year to which charge relates

$GAV_n$  = GAV for year n re-valued by relevant indexation method

$TOPIGAV_n$  = GAV for year n re-valued by TOPI indexation

$NAV_n$  = NAV for year n based on re-valued  $GAV_n$

$D_n$  = Depreciation rate as percentage (equal to  $1/\text{Depreciation Period}$ )  
(typically  $1/40 = 2.5\%$  of GAV)

$R_n$  =

For assets subject to TOPI indexation, the real pre-tax Weighted Average Cost of Capital for the Relevant Transmission Licensee for year n ( $WACC_n$ ).

For asset subject to MEA indexation, the real pre-tax Weighted Average Cost of Capital for the Relevant Transmission Licensee for year n ( $WACC_n$ ) plus 1.5 percentage points.

Where for the year n:

$$WACC_n = \left( \left( \frac{\text{real post tax cost of equity}}{1 - \text{corporation tax rate}} \right) \times (1 - \text{notional gearing \%}) \right) + (\text{real cost of debt} \times \text{notional gearing \%})$$

And where for the calculation of WACC<sub>n</sub>: The real post-tax cost of equity, notional gearing %, real cost of debt and the corporation tax rate, are as specified in the latest published Ofgem Price Control Financial Model (PCFM) relating to year n, or should Ofgem fail to publish or cease to publish a PCFM, those specified in the latest public regulatory determination(s) or decision(s) should be used.

$SSF_n$  = Site Specific Factor for year n as a % (equal to the Site Specific Cost/Total Site GAV)

$TC_n$  = Transmission Running Cost component for year n (other Transmission Owner Activity costs).

For n = year to which charge relates beyond the Depreciation Period

n = year to which charge relates

$GAV_n$  = GAV for year n re-valued by relevant indexation method

$TOPIGAV_n$  = GAV for year n re-valued by TOPI indexation

$NAV_n$  = 0

$D_n$  = 0

$R_n$  = 0

$SSF_n$  = Site Specific Factor for year n as a % (equal to the Site Specific Cost/Total Site GAV)

$TC_n$  = Transmission Running cost component for year n (other Transmission Owner Activity costs).

14.3.22 Note that, for the purposes of deriving asset specific charges for site-specific maintenance, the TOPI re-valued GAV is used. This is to ensure that the exact site charges are recovered from the assets at the site. The site costs are apportioned to the assets on the basis of the ratio of the asset GAV to total Site GAV.

### Adjustment for Capital Contributions

14.3.23 If a User chooses to make a 100% capital contribution (either pre-commissioning or post-commissioning) to **The Company** towards their allocation of a connection asset then no capital charges will be payable and hence the connection charges for that asset would be calculated as follows:

$$\text{Annual Connection Charge}_n = SSF_n (TOPIGAV_n) + TC_n (GAV_n)$$

14.3.24 If a User chooses to make a partial capital contribution(s) (either pre-commissioning or post-commissioning) to **The Company** towards their allocation of a connection asset, for example PCCF = 50%, then the connection charges for that asset would be calculated as follows:

$$\text{Annual Connection Charge}_n = D_n (GAV_n * PCCF) + R_n (NAV_n * PCCF) + SSF_n (TOPIGAV_n) + TC_n (GAV_n)$$

PCCF = Partial Capital Contribution Factor taking into account a capital contribution made pre-commissioning compared to the GAV (as outlined in 14.3.10), and any capital contributions made post-commissioning compared to the appropriate NAV (as outlined in 14.3.12) as appropriate.

### Modification of Connection Assets

- 14.3.25 Where a modification to an existing connection occurs at the User's request or due to developments to the transmission system, their annual connection charges will reflect any additional connection assets that are necessary to meet the User's requirements. Charges will continue to be levied for existing assets that remain in service. Termination charges as described in **Chapter 5** below will be charged for any existing connection assets made redundant as a result of the modification.



## 14.4 Other Charges

- 14.4.1 In addition to the basic annual connection charges set out above, the User may pay **The Company** for certain other costs related to their connection. These will be set out in the Bilateral and Construction Agreements where appropriate and are described below.

### One-off Works

- 14.4.2 To provide or modify a connection, the transmission licensee may be required to carry out works on the transmission system that, although directly attributable to the connection, may not give rise to additional connection assets. These works are defined as “one-offs”. Liability for one-off charges is established with reference to the principles laid out below:

- Where a cost cannot be capitalised into either a connection or infrastructure asset, typically a revenue cost
- Where a non-standard incremental cost is incurred as a result of a User's request, irrespective of whether the cost can be capitalised
- Termination Charges associated with the write-off of connection assets at the connection site.

Consistent with these principles and in accordance with Connection Charging Methodology modification GB ECM-01, which was implemented on 1 December 2005, a one-off charge will be levied for a **Category 1 Intertripping Scheme** or a **Category 3 Intertripping Scheme**. A one-off charge will not be levied for a **Category 2 Intertripping Scheme** or a **Category 4 Intertripping Scheme**.

- 14.4.3 The one-off charge is a charge equal to the cost of the works involved, together with a reasonable return, as shown in 14.4.4 below.

- 14.4.4 For information, the general formula for the calculation of the one-off charge for works is outlined below.

One-off Charge = (Construction Costs + Engineering Charges) x (1 + Return %) + IDC + LD Premium

Where:            Engineering Charges = “Engineering Charge” x job hours  
                       Return % = 6%  
                       IDC = Interest During Construction  
                       LD Premium = **The Company** Liquidated Damages Premium (if applicable)

- 14.4.5 The calculation of the one-off charge for write-off of assets is outlined below:

Write-off Charge = 100% of remaining NAV of redundant assets

- 14.4.6 One-offs are normally paid on an agreed date, which is usually upon completion of the works. However, arrangements may be agreed between the transmission licensee and the User to pay the charge over a longer period. If a one-off is paid over a longer period it is termed a Transmission Charge. It is usually a depreciating finance charge or annuity based charge with a rate of return element and may include agreement on a schedule of termination payments if the agreement is terminated before the end of

the annuity period. The charge is usually inflated annually by the same TOPI figure that is used to inflate GAVs, though Users can request alternative indexation methods.

- 14.4.7 Where an infrastructure asset has been subject to One-off Works, and a User has paid a relating charge calculated in accordance with paragraph 14.4.4, **The Company** may adjust the treatment of the assets within the TNUoS transport model as set out in paragraphs 14.15.15 to 14.15.22.

### Miscellaneous Charges

- 14.4.8 Other contract specific charges may be payable by the User, these will be set out in the Bilateral and Construction Agreements where appropriate.

### Rental sites

- 14.4.9 Where **The Company** owns a site that is embedded within a distribution network, the connection charge to the User is based on the capital costs and overheads but does not include maintenance charges.

### Final Metering Scheme (FMS)/Energy Metering Systems

- 14.4.10 Charges for FMS metering are paid by the registrant of the FMS metering at the connection site. It is charged on a similar basis as other Connection Assets. The electronic components of the FMS metering have a replacement and depreciation period in line with those advised by the transmission licensees, whilst the non-electronic components normally retain a 40 year replacement and depreciation period (or a User specified depreciation period as appropriate).

## 14.5 Connection Agreements

### Indicative Agreement

- 14.5.1 The standard connection agreement offered by **The Company** is an indicative price agreement. From the Charging Date as set out in the User's Bilateral Connection Agreement, the User's initial connection charge is based on a fair and reasonable estimate of the expected costs of the connection.

### Outturning the Indicative Agreement

- 14.5.2 Once the works required to provide a new or modified connection are completed and the costs finalised, the connection scheme is "outturned". **The Company** reconciles the monies paid by the User on the indicative charge basis against the charges that would have been payable based on the actual costs incurred in delivering the project together with any relevant interest. This process involves agreeing a new charging GAV (The Base Amount) with the User in line with the elements stated in paragraph 14.3.3 and then calculating connection charges with this GAV.
- 14.5.3 In addition, for Users that have chosen MEA revaluation their MEA ratios are agreed at outturn and this ratio is used for MEA revaluation in subsequent years.
- 14.5.4 In the case of connection asset replacement where there is no initiating User, the outturn is agreed with the User at the site.

### Firm Price Agreement

- 14.5.5 In addition to the options stated in paragraph 14.3.10 above, firm price agreements are also available. Typically with this option the charges to be incurred, and any indexation, are agreed between **The Company** and the User and connection charges are not recalculated once outturn costs are known. A typical example of a firm price agreement is:
- Capital Contribution
  - Firm Price GAV
  - Running Costs (based on a firm price GAV)
  - Fixed Schedule of Termination Amounts
- 14.5.6 When a User selects a firm price agreement some or all of the above elements can be made firm. Any elements of the agreement that have not been made firm will be charged on an indicative basis in accordance with this statement.
- 14.5.7 Final Sums and Consents costs are never made firm in a Firm Price Agreement. Details of both are set out in the Construction Agreement.

## Monthly Connection Charges

- 14.5.8 The connection charge is an annual charge payable monthly.
- 14.5.9 If the initial Charging Date does not fall within the current **Financial Year** being charged for and there are no revisions to charges during the year, the monthly connection charge will equal the annual connection charge divided by twelve.
- 14.5.10 For the **Financial Year** in which the Charging Date occurs (as set out in the User's Bilateral Agreement) or for any **Financial Year** in which a revision to charges has occurred during the **Financial Year**, for each complete calendar month from the Charging Date (or effective date of any charge revision) to the end of the **Financial Year** in which the Charging Date (or charge revision) occurs, the monthly connection charge shall be equal to the annual connection charge divided by twelve.
- 14.5.11 For each part of a calendar month, the charge will be calculated as one twelfth of the annual connection charge prorated by the ratio of the number of days from and including the Charging Date to the end of the month that the Charging Date falls in and the number of days in that month.
- 14.5.12 For example, say the annual connection charge for **Financial Year** 2010/11 is £1.2m and the Charging Date falls on the 15<sup>th</sup> November 2010, the monthly charges for the **Financial Year** 2010/11 would be as follows:
- |                                      |   |               |
|--------------------------------------|---|---------------|
| • November = £1,200,000/12 * (16/30) | = | £53,333.33    |
| • Dec 10, Jan 11, Feb 11, Mar 11     | = | £1,200,000/12 |
|                                      | = | £100,000.00   |
- 14.5.13 The above treatment does not apply to elements such as Miscellaneous Charges (as defined in 14.4.8) and Transmission Charges (annuitised one-offs, as defined in 14.4.6). If the Charging Date falls within a **Financial Year**, then the full annual charge will remain payable and will be spread evenly over the remaining months. This is because these payments are an annuitisation of charges that would normally be paid up-front as one-off payments.

## 14.6 Termination Charges

### Charges Liabile

14.6.1 Where a User wholly or partially disconnects from the transmission system they will pay a termination charge. The termination charge will be calculated as follows:

- Where the connection assets are made redundant as a result of the termination or modification of a Bilateral Connection Agreement, the User will be liable to pay an amount equal to the NAV of such assets as at the end of the **Financial Year** in which termination or modification occurs, plus:
- The reasonable costs of removing such assets. These costs being inclusive of the costs of making good the condition of the connection site
- If a connection asset is terminated before the end of a **Financial Year**, the connection charge for the full year remains payable. Any remaining Use of System Charges (TNUoS and BSUoS) also remain payable
- For assets where it has been determined to replace upon the expiry of the relevant Replacement Period in accordance with the provisions set out in the CUSC and in respect of which a notice to Disconnect or terminate has been served in respect of the Connection Site at which the assets were located; and due to the timing of the replacement of such assets, no Connection Charges will have become payable in respect of such assets by the User by the date of termination; the termination charges will include the reasonable costs incurred by the transmission licensee in connection with the installation of such assets
- Previous capital contributions paid to **The Company** will be taken into account

14.6.2 The Calculation of Termination amounts for **Financial Year n** is as follows:

$$\text{Termination Charge}_n = \text{UoS}_n + \text{C}_n + \text{NAV}_{an} + \text{R} - \text{CC}$$

Where:

UoS<sub>n</sub> = Outstanding Use of System Charge for year (TNUoS and BSUoS)

C<sub>n</sub> = Outstanding Connection Charge for year

NAV<sub>an</sub> = NAV of Type A assets as at 31 March of **Financial Year n**

R = Reasonable costs of removal of redundant assets and making good

CC = An allowance for previously paid capital contributions

14.6.3 Examples of reasonable costs of removal for terminated assets and making good the condition of the site include the following:

- If a circuit breaker is terminated as a result of a User leaving a site, this may require modifications to the protection systems.
- If an asset were terminated and its associated civils had been removed to 1m below ground then the levels would have to be made up. This is a common condition of planning consent.

### Repayment on Re-Use of Assets

- 14.6.4 If any assets in respect of which a termination charge was made to **The Company** are re-used at the same site or elsewhere on the system, including use as infrastructure assets, **The Company** will make a payment to the original terminating User to reflect the fact that the assets are being reused.
- 14.6.5 The arrangements for such repayments for re-use of Assets are that **The Company** will pay the User a sum equal to the lower of:
- i.) the Termination Amount paid in respect of such Assets; or
  - ii.) the NAV attributed to such Assets for charging purposes upon their re-use
- less any reasonable costs incurred in respect of the storage of those assets.
- 14.6.6 The definition of re-use is set out in the CUSC. Where **The Company** decides to dispose of a terminated asset where it is capable of re-use, **The Company** shall pay the User an appropriate proportion of the sale proceeds received.

### Valuation of Assets that are re-used as connection assets or existing infrastructure assets re-allocated to connection

- 14.6.7 If an asset is reused following termination or allocated to connection when it has previously been allocated to TNUoS, a value needs to be determined for the purposes of connection charges. In both instances the connection charge will be based on the standard formula set out in paragraph 14.3.21. The Gross Asset Value will be based on the original construction costs and indexed by TOPI. Where original costs are not known a reasonable value will be agreed between **The Company** and the User based on similar types of asset in use. The Net Asset Value will be calculated as if the asset had been in continuous service as a connection asset from its original commissioning date taking into account the depreciation period.
- 14.6.8 Where an asset has been refurbished or updated to bring it back into service a new value and an appropriate replacement period will be agreed between **The Company** and the User. This will be based on the value of similar types of asset in service and the costs of the refurbishment.

## 14.7 Contestability

- 14.7.1 Some connection activities may be undertaken by the User. The activities are the provision, or construction, of connection assets, the financing of connection assets and the ongoing maintenance of those assets. While some Users have been keen to see contestability wherever possible, contestability should not prejudice system integrity, security and safety. These concerns have shaped the terms that are offered for contestability in construction and maintenance.

### Contestability in Construction

- 14.7.2 Users have the option to provide (construct) connection assets if they wish. Formal arrangements for Users exercising this choice are available and further information on User choice in construction can be obtained from **The Company**.

## 14.8 Asset Replacement

- 14.8.1 Appendix A of a User's Bilateral Connection Agreement specifies the age (number of complete **Financial Years** old), for charging purposes, of each of the NETS connection assets at the Connection Site for the corresponding **Financial Year**. Connection charges are calculated on the assumption that the assets will not need to be replaced until the charging age has reached the duration of the asset's Replacement Period.

If a connection asset is to be replaced, **The Company** will enter into an agreement for the replacement with the User. Where replacement occurs before the original asset's charging age has reached the duration of its Replacement Period, **The Company** will continue to charge for the original asset and make no charge to the existing User for the new asset until the original asset's charging age has reached the duration of its Replacement Period.

Where the replacement occurs after the original asset's charging age has reached the duration of its Replacement Period, **The Company** will charge on the basis of the original asset until replaced and on the basis of the new asset on completion of the works.

- 14.8.2 When the original asset's charging age has reached the duration of its Replacement Period the User's charge will be calculated on the then Net Asset Value of the new asset. The new asset begins depreciating for charging purposes upon completion of the asset replacement.

The Basic Annual Connection Charge Formulae are set out in **Chapter 2: The Basic Annual Connection Charge Formula**.

### Asset Replacement that includes a change of Voltage

- 14.8.3 There are a number of situations where an asset replacement scheme may involve a change in the voltage level of a User's connection assets. These replacement schemes can take place over a number of years and may involve a long transitory period in which connection assets are operational at both voltage levels.
- 14.8.4 These situations are inevitably different from case to case and hence further charging principles will need to be developed over time as more experience is gained. Set out below, are some generic principles. This methodology will be updated as experience develops.
- 14.8.5 The general principles used to date are to ensure that, in the transitory period of an asset replacement scheme, the User does not pay for two full transmission voltage substations and that the charges levied reflect the Replacement Period of the original connection assets. In addition, in line with paragraph 14.8.1 above, charges will only be levied for the new assets once the original assets would have required replacement.
- 14.8.6 For example, a transmission licensee in investing to meet a future Security Standard need on the main transmission system, may require the asset replacement of an existing 275kV substation with a 400kV substation prior to the expiry of the original assets' Replacement Period. In this case, **The Company** will seek to recover the connection asset component via connection charges when the assets replaced were due for asset replacement. Prior to this, the User should not see an increase in charges and therefore the investment costs would be recovered through TNUoS charges.

In addition, if in the interim stage the User has, say, one transformer connected to the 275kV substation and one transformer connected to the 400kV substation, the charge



will comprise an appropriate proportion of the HV assets at each site and not the full costs of the two substations. Note that the treatment described above is only made for transitory asset replacement and not enduring configurations where a User has connection assets connected to two different voltage substations.

## 14.9 Data Requirements

- 14.9.1 Under the connection charging methodology no data is required from Users in order to calculate the connection charges payable by the User.

## 14.10 Applications

- 14.10.1 Application fees are payable in respect of applications for new connection agreements and modifications to existing agreements based on the reasonable costs transmission licensees incur in processing these applications. Users can opt to pay a fixed price application fee in respect of their application or pay the actual costs incurred. The fixed price fees for applications are detailed in the **Statement of Use of System Charges**.
- 14.10.2 If a User chooses not to pay the fixed fee, the application fee will be based on an advance of transmission licensees' Engineering and out-of pocket expenses and will vary according to the size of the scheme and the amount of work involved. Once the associated offer has been signed or lapses, a reconciliation will be undertaken. Where actual expenses exceed the advance, **The Company** will issue an invoice for the excess. Conversely, where **The Company** does not use the whole of the advance, the balance will be refunded.
- 14.10.3 **The Company** will refund the first application fee paid (the fixed fee or the amount post-reconciliation) made under the Construction Agreement for new or modified existing agreements. The refund shall be made either on commissioning or against the charges payable in the first three years of the new or modified agreement. The refund will be net of external costs.
- 14.10.4 **The Company** will not refund application fees for applications to modify a new agreement or modified existing agreement at the User's request before any charges become payable. For example, **The Company** will not refund an application fee to delay the provision of a new connection if this is made prior to charges becoming payable.

## 14.11 Illustrative Connection Charges

### From 2021/22 First Year Connection Charges based on the TOPI Method (6% rate of return used as an example)

14.11.1 The following table provides an indication of typical charges for new connection assets. Before using the table, it is important to read through the notes below as they explain the assumptions used in calculating the figures.

#### Calculation of Gross Asset Value (GAV)

14.11.2 The GAV figures in the following table were calculated using the following assumptions:

- Each asset is new
- The GAV includes estimated costs of construction, engineering, Interest During Construction and Liquidated Damages premiums

For details of the Calculation of the Gross Asset Value, see Chapter 2 of this Statement.

#### Calculation of first year connection charge

14.11.3 The first year connection charges in the following table were calculated using the following assumptions:

- The assets are new
- The assets are depreciated over 40 years
- The rate of return is assumed to be 6% for TOPI indexation
- The connection charges include maintenance costs at a rate of 0.52% of the GAV
- The connection charges include Transmission Running Costs at a rate of 1.45% of the GAV

For details of the Basic Annual Connection Charge Formula, see Chapter 2 of this Statement.

Please note that the actual charges will depend on the specific assets at a site. Agreement specific NAVs and GAVs for each User will be made available on request.

#### Notes on Assets

The charges for Double and Single Busbar Bays include electrical and civil costs.


Transformer cable ratings are based on winter soil conditions.

In this example, transformer charges include civil costs of plinth and noise enclosure and estimated transport costs, but not costs of oil dump tank and fire trap moat. Transport costs do not include hiring heavy load sea transportation or roll-on roll-off ships.

|                                                             | £000's |        |       |        |       |        |
|-------------------------------------------------------------|--------|--------|-------|--------|-------|--------|
|                                                             | 400kV  |        | 275kV |        | 132kV |        |
|                                                             | GAV    | Charge | GAV   | Charge | GAV   | Charge |
| Double Busbar Bay                                           | 2300   | 239    | 1890  | 197    | 630   | 65     |
| Single Busbar Bay                                           | 1830   | 190    |       |        | 460   | 50     |
| Transformer Cables<br>100m<br>(incl. Cable sealing<br>ends) |        |        |       |        |       |        |
| 120MVA                                                      |        |        | 970   | 100    | 310   | 30     |
| 180MVA                                                      | 1480   | 150    | 970   | 101    | 320   | 30     |
| 240MVA                                                      | 1520   | 158    | 980   | 102    | 355   | 37     |
| 750MVA                                                      | 1540   | 160    | 1135  | 118    |       |        |
| Transformers                                                |        |        |       |        |       |        |
| 45MVA 132/66kV                                              |        |        |       |        | 1060  | 110    |
| 90MVA 132/33kV                                              |        |        |       |        | 1020  | 106    |
| 120MVA 275/33kV                                             |        |        | 2110  | 219    |       |        |
| 180MVA 275/66kV                                             |        |        | 2560  | 266    |       |        |
| 180MVA 275/132kV                                            |        |        | 2180  | 227    |       |        |
| 240MVA 275/132kV                                            |        |        | 2630  | 273    |       |        |
| 240MVA 400/132kV                                            | 3180   | 340    |       |        |       |        |

Connection Examples

Example 1

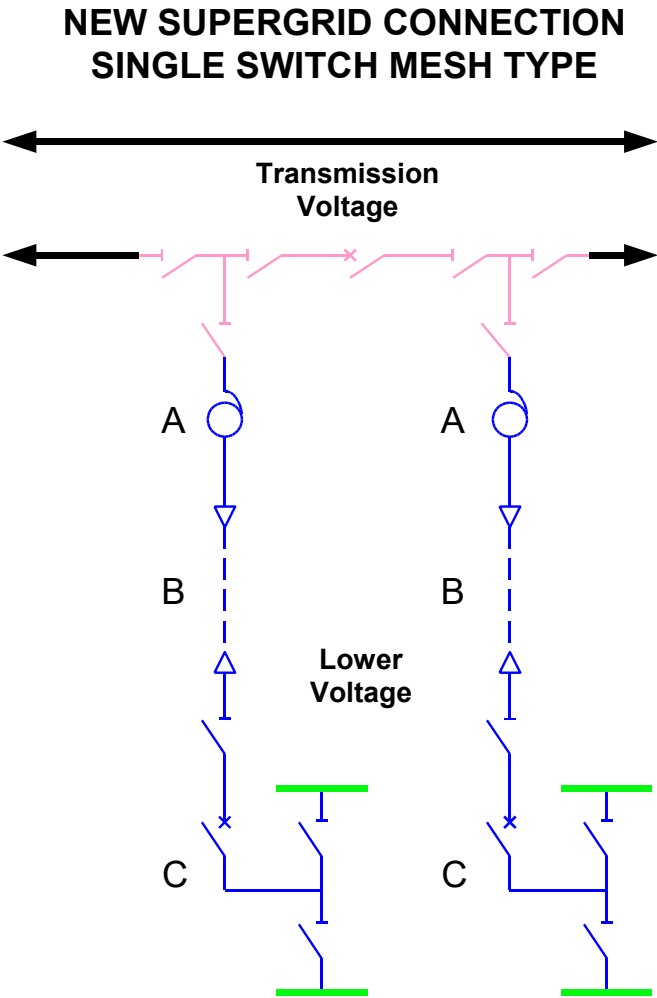


| KEY: |                                                  |
|------|--------------------------------------------------|
|      | Existing Transmission Assets (infrastructure)    |
|      | New Transmission Assets (infrastructure)         |
|      | New connection assets wholly charged to customer |
|      | Customer Assets                                  |

| SCHEDULE FOR NEW CONNECTION |                                    |                            |                                    |                            |
|-----------------------------|------------------------------------|----------------------------|------------------------------------|----------------------------|
| Ref                         | 132/33kV                           |                            | 400/132kV                          |                            |
|                             | Description                        | First Year Charges (£000s) | Description                        | First Year Charges (£000s) |
| A                           | 2 x 90MVA Transformers             | 212                        | 2 x 240MVA Transformers            | 680                        |
| B                           | 2 x 100m 90MVA Cables              | 20                         | 2 x 100m 240MVA Cables             | 72                         |
| C                           | 2 x Double Busbar Transformer Bays | 20                         | 2 x Double Busbar Transformer Bays | 130                        |
| Total                       |                                    | 252                        | Total                              | 882                        |

Example 2

NEW SUPERGRID CONNECTION  
DOUBLE BUSBAR TYPE

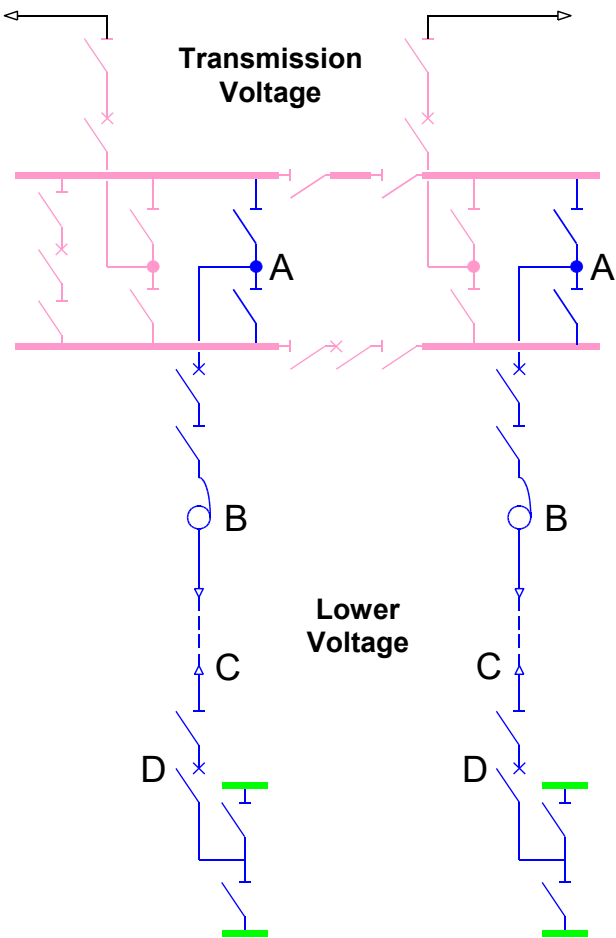


KEY:

|  |                                                  |
|--|--------------------------------------------------|
|  | Existing Transmission Assets (infrastructure)    |
|  | New Transmission Assets (infrastructure)         |
|  | New connection assets wholly charged to customer |
|  | Customer Assets                                  |

| SCHEDULE FOR NEW CONNECTION |                                    |                            |                                    |                            |
|-----------------------------|------------------------------------|----------------------------|------------------------------------|----------------------------|
| Ref                         | 132/33kV                           |                            | 400/132kV                          |                            |
|                             | Description                        | First Year Charges (£000s) | Description                        | First Year Charges (£000s) |
| A                           | 2 x Double Busbar Transformer Bays | 130                        | 2 x Double Busbar Transformer Bays | 478                        |
| B                           | 2 x 90MVA Transformers             | 212                        | 2 x 240MVA Transformers            | 680                        |
| C                           | 2 x 100m 90MVA Cables              | 20                         | 2 x 100m 240MVA Cables             | 74                         |
| D                           | 2 x Double Busbar Transformer Bays | 20                         | 2 x Double Busbar Transformer Bays | 130                        |
| Total                       |                                    | 382                        | Total                              | 1362                       |

Example 3

EXTENSION OF SINGLE SWITCH MESH  
TO FOUR SWITCH MESH  
(extension to single user site)

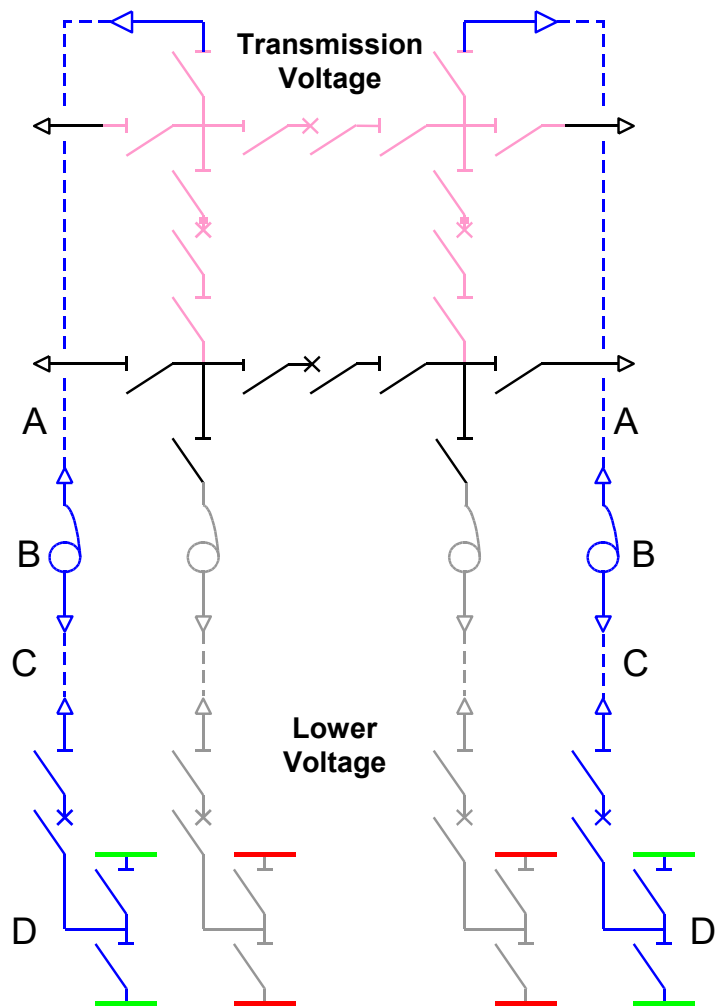

| KEY: |                                                           |
|------|-----------------------------------------------------------|
|      | Existing Transmission Assets (infrastructure)             |
|      | New Transmission Assets (infrastructure)                  |
|      | New connection assets wholly charged to customer          |
|      | Existing connection assets wholly charged to another user |
|      | Customer Assets                                           |
|      | Other Users Assets                                        |

| SCHEDULE FOR NEW CONNECTION |                                    |                            |                                    |                            |
|-----------------------------|------------------------------------|----------------------------|------------------------------------|----------------------------|
| Ref                         | 132/33kV                           |                            | 400/132kV                          |                            |
|                             | Description                        | First Year Charges (£000s) | Description                        | First Year Charges (£000s) |
| A                           | 2 x 100m 240MVA Cables             | 74                         | 2 x 100m 240MVA Cables             | 316                        |
| B                           | 2 x 90MVA Transformers             | 212                        | 2 x 240MVA Transformers            | 680                        |
| C                           | 2 x 100m 90MVA Cables              | 20                         | 2 x 100m 240MVA Cables             | 74                         |
| D                           | 2 x Double Busbar Transformer Bays | 20                         | 2 x Double Busbar Transformer Bays | 130                        |
| Total                       |                                    | 326                        | Total                              | 1200                       |

## 14.12 Examples of Connection Charge Calculations

The following examples of connection charge calculations are intended as general illustrations.

### Example 1

14.12.1 This example illustrates the method of calculating the first year connection charge for a given asset value. This method of calculation is applicable to indicative price agreements for new connections, utilising the TOPI method of charging, and assuming:

- i) the asset is commissioned on 1 April 2010
- ii) there is no inflation from year to year i.e. GAV remains constant
- iii) the site specific maintenance charge component remains constant throughout the 40 years at 0.52% of GAV
- iv) the Transmission Running Cost component remains constant throughout the 40 years at 1.45% of GAV
- v) the asset is depreciated over 40 years
- vi) the rate of return charge remains constant at 6% for the 40 year life of the asset
- vii) the asset is terminated at the end of its 40 year life

For the purpose of this example, the asset on which charges are based has a Gross Asset Value of £3,000,000 on 1 April 2010.

| Charge                                               | Calculation       |                 |
|------------------------------------------------------|-------------------|-----------------|
| Site Specific Maintenance Charge<br>(0.52% of GAV)   | 3,000,000 x 0.52% | £15,600         |
| Transmission Running Cost<br>(1.45% of GAV)          | 3,000,000 x 1.45% | £43,500         |
| Capital charge<br>(40 year depreciation 2.5% of GAV) | 3,000,000 x 2.5%  | £75,000         |
| Return on mid-year NAV<br>(6%)                       | 2,962,500 x 6%    | £177,750        |
| TOTAL                                                |                   | <u>£311,850</u> |

**The first year charge of £311,850 would reduce in subsequent years as the NAV of the asset is reduced on a straight-line basis.**

This gives the following annual charges over time (assuming no inflation):

| Year | Charge   |
|------|----------|
| 1    | £311,850 |
| 2    | £307,350 |
| 10   | £271,350 |
| 40   | £136,350 |

Based on this example, charges of this form would be payable until 31 March 2050.

### Example 2



14.12.2 The previous example assumes that the asset is commissioned on 1 April 2010. If it is assumed that the asset is commissioned on 1 July 2010, the first year charge would equal 9/12th of the first year annual connection charge i.e. £233,887.50

This gives the following annual charges over time:

| Year | Charge                                                   |
|------|----------------------------------------------------------|
| 1    | £233,887.50 (connection charge for period July to March) |
| 2    | £307,350                                                 |
| 10   | £271,350                                                 |
| 40   | £136,350                                                 |

### Example 3

14.12.3 In the case of a firm price agreement, there will be two elements in the connection charge, a finance component and a running cost component. These encompass the four elements set out in the examples above. Using exactly the same assumptions as those in example 1 above, the total annual connection charges will be the same as those presented. These charges will not change as a result of the adoption of a different charging methodology by **The Company**, providing that the connection boundary does not change.

### Example 4

14.12.4 If a User has chosen a 20-year depreciation period for their Post Vesting connection assets and subsequently remains connected at the site beyond the twentieth year their charges are calculated as follows.

For years 21-40 they will pay a connection charge based on the following formula:

$$\text{Annual Connection Charge}_n = \text{SSF}_n (\text{TOPIGAV}_n) + \text{TC}_n (\text{GAV}_n)$$

The NAV will be zero and the asset will be fully depreciated so there will be no rate of return or depreciation element to the charge.

## 14.13 Nominally Over Equipped Connection Sites

- 14.13.1 This chapter outlines examples of ways in which a connection site can be considered as having connection assets that exceed the strict, theoretical needs of the individual Users at the connection site. These can be described as:

### Historical

- 14.13.2 This is where the connection assets at the connection site were installed to meet a requirement of the Users for connection capacity that no longer exists. An example would be where a User, at one time, had a requirement for, say, 270 MW. This would allocate three 240 MVA 400/132kV transformers to the User. Due to reconfiguration of that User's network only 200 MW is now required from the connection site. The lower requirement would only allocate two transformers, but all the transformers are kept in service. The connection assets will continue to be assigned to the User's connection, and charged for as connection, until the User makes a Modification Application to reduce the historical requirement. In some cases the Modified requirement will mean that Termination Payments will have to be made on some connection assets.

### Early Construction

- 14.13.3 If a User has a multi-phase project, it may be necessary to install connection assets for the latter phases at the time of the first phase. These connection assets could be charged from the first phase charging date.

### Connection site Specific Technical or Economic Conditions

- 14.13.4 In circumstances where the transmission licensee has identified a wider requirement for development of the transmission system, it may elect to install connection assets of greater size and capacity than the practicable minimum scheme required for a particular connection. In these circumstances, however, connection charges for the party seeking connection will normally be based on the level of connection assets consistent with the practicable minimum scheme needed to meet the applicant's requirements.
- 14.13.5 There may be cases where there are specific conditions such that the practicable minimum scheme at a site has to be greater than the strict, theoretical interpretation of the standards. In these cases all assets will still be assigned to connection and connection charges levied.
- 14.13.6 A practicable minimum scheme is considered in terms of the system as a whole and may include a change in voltage level.

## Part 2 - The Statement of the Use of System Charging Methodology

### Section 1 – The Statement of the Transmission Use of System Charging Methodology

#### 14.14 Principles

- 14.14.1 Transmission Network Use of System charges reflect the cost of installing, operating and maintaining the transmission system for the Transmission Owner (TO) (including Competitively Appointed Transmission Owners (CATOs)). Activity function of the Transmission Businesses of each Relevant Transmission Licensee. These activities are undertaken to the standards prescribed by the **ESO Licence** and the Transmission Licences, to provide the capability to allow the flow of bulk transfers of power between connection sites and to provide transmission system security.
- 14.14.2 The allowed revenue defined for these activities agreed with the Authority at the time of the Transmission Owners' price control review for the succeeding price control period. The allowed revenue can be adjusted during the price control period. Transmission Network Use of System Charges are set to recover the allowed revenue as set by the price control (where necessary, allowing for any  $K_i$  adjustment for under or over recovery in a previous year net of the income recovered through pre-vesting connection charges).
- 14.14.2a The payments made to Competitively Appointed Transmission Owners (CATOs) are not set via a price control of the same form as incumbent Transmission Owners; instead, the payment to each CATO takes the form of a Tender Revenue Stream (TRS). The method for determining the TRS for a CATO will be prescribed within its licence. Transmission Network Use of System Charges are set to recover the Allowed Revenue which is determined in accordance with the terms of the CATO's licence, such Allowed Revenue may include amongst other things the TRS, adjustments for indexation and incentivisation, and other payments provided for under its licence.
- 14.14.3 The basis of charging to recover the allowed revenue is the Investment Cost Related Pricing (ICRP) methodology, which was initially introduced by **The Company** in 1993/94 for England and Wales. The principles and methods underlying the ICRP methodology were set out in **The Company** document "**Transmission Use of System Charges Review: Proposed Investment Cost Related Pricing for Use of System (30 June 1992)**".
- 14.14.4 In December 2003, **The Company** published the Initial Thoughts consultation for a GB methodology using the England and Wales methodology as the basis for consultation. The Initial Methodologies consultation published by **The Company** in May 2004 proposed two options for a GB charging methodology with a Final Methodologies consultation published in August 2004 detailing **The Company's** response to the Industry with a recommendation for the GB charging methodology. In December 2004, **The Company** published a Revised Proposals consultation in response to the Authority's invitation for further review on certain areas in **The Company's** recommended GB charging methodology.

14.14.5 In April 2004 **The Company** introduced a DC Loadflow (DCLF) ICRP based transport model for the England and Wales charging methodology. The DCLF model has been extended to incorporate Scottish network data with existing England and Wales network data to form the GB network in the model. In April 2005, the GB charging methodology implemented certain proposals which have been further expanded so that the model now includes the following:

- i.) The application of multi-voltage circuit expansion factors with a forward-looking Expansion Constant that does not include substation costs in its derivation.
- ii.) The application of locational security costs, by applying a multiplier to the Expansion Constant reflecting the difference in cost incurred on a secure network as opposed to an unsecured network.
- iii.) The application of a de-minimus level demand charge of £0/kW for Half Hourly and £0/kWh for Non-Half Hourly metered demand and £0/KWh for **Unmetered Supplies** and £0/site/day for **Transmission Demand Residual Tariffs**, to avoid the application of negative demand charges.
- iv.) The application of 132kV expansion factor on a Transmission Owner basis reflecting the regional variations in network upgrade plans.
- v.) **The Company** will set tariffs in a manner so that the locational varying element, as established by the DCLF ICRP model and, where appropriate, local substation and local circuit charges, are levied on all Generator and Demand Users. Any remaining Transmission Owner revenues will be recovered from demand only in a non-locational manner through the **Transmission Demand Residual Tariffs**
- vi.) For the purpose of compliance with the Limiting Regulation in the context of setting limits on the annual charges paid by generation **The Company** will exclude Charges for Physical Assets Required for Connection when calculating the total amount to be recovered from Generators (GCharge (Forecast)).
- vii.) If having applied the exclusion of Charges for Physical Assets Required for Connection **The Company** identifies that an adjustment to TNUoS Charges is required to remain compliant with the Limiting Regulation then an Adjustment Tariff will be applied to all Generators in the following circumstances.
  - a) The Adjustment Tariff will be applied if **The Company** identifies that either:
    - a. Annual average TNUoS charges payable by Generator Users will fall below €0/MWh
    - b. Annual average TNUoS charges payable by Generator Users will exceed €2.50/MWh adjusted by a risk margin to allow for error in tariff setting.
  - b) Where annual average TNUoS charges to Generators are positive under the GCharge (Forecast) the Adjustment Tariff will be applied if the Adjustment Revenue is less than £0. The Adjustment Revenue is expressed as:

$$AdjRevenue = (GO * ((CapEC * (1 - y)) * ER)) -$$

OR

$GCharge(Forecast)$

- c) Where annual average TNUoS charges to Generators are negative under the  $GCharge(Forecast)$  the Adjustment Revenue will be the difference between £0 and the total recovered from Generators. The Adjustment Revenue will be expressed as:

$$AdjRevenue = 0 - GCharge(Forecast)$$

- d) The total adjusted revenue expected to be recovered from Generators ( $AdjGenRev$ ) through TNUoS tariffs can therefore be expressed as:

$$AdjGenRev = GCharge(Forecast) + AdjRevenue$$

- e) The error margin used in calculating TNUoS tariffs for the **Financial Year** is expressed as:

$$y = (1 + ErrorGenRev) / (1 - ErrorGO) - 1$$

- f) Where:

$y$  = error margin expressed in %.

$ErrorGenRev$  = the highest absolute percentage error in generation revenue collection, adjusted by systemic error, from the past 5 full years (year t-6 to t-2 inclusive). Systemic error is the average of %error in generation revenue collection for the past 5 full years. Systemic error can be positive or negative.

$ErrorGO$  = the highest absolute percentage error in generation TWh outputs, from the past 5 full years (year t-6 to t-2 inclusive).

- g) The Company will use the latest OBR Forecast of £/€ exchange rate published prior to the 31st October in the year preceding the relevant **Financial Year** to convert average annual TNUoS charges payable by Generators in the  $GCharge(Forecast)$  to a comparable value for the purposes of assessing compliance with the Limiting Regulation.
- h) The Adjustment Tariff used in the calculation will be either:
1. a negative £/kW tariff that reduces annual average TNUoS charges to Generators to below the risk adjusted upper limit of the Limiting Regulation in accordance with 14.14.5 (f).

OR

2. a positive £/kW tariff that increases annual average TNUoS charges to Generators to above the lower limit of the Limiting Regulation in accordance with 14.14.5 (f).

Expressed in either case as:

$$AdjTariff = \frac{AdjRevenue}{ChargeableCapacit}$$

Where;

CapEC = Upper limit of the range specified in the Limiting Regulation

y = Error margin built in to adjust CapEC

GO = Forecast GB Generation Output for generation liable for Transmission charges (i.e. energy injected into the transmission network in MWh) for the **Financial Year**

ER = The latest OBR Forecast €/£ Exchange Rate published prior to the 31st October in the year preceding the relevant **Financial Year**

GCharge (Forecast) = The total forecast TNUoS revenue to be recovered from Generators in the **Financial Year** minus Charges for Physical Assets Required for Connection.

AdjRevenue = Adjustment Revenue

Chargeable Capacity = as per paragraph 14.18.6

AdjTariff = Any Adjustment Tariff required to remain compliant with the Limiting Regulation.

viii.) The currently applicable number of generation zones, determined in accordance with 14.15.37 and using the criteria outlined in paragraph 14.15.42, is detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

ix.) The number of demand zones has been determined as 14, corresponding to the 14 GSP groups.

14.14.6 The underlying rationale behind Transmission Network Use of System charges is that efficient economic signals are provided to Users when services are priced to reflect the incremental costs of supplying them. Therefore, charges should reflect the impact that Users of the transmission system at different locations would have on the Transmission Owner's costs, if they were to increase or decrease their use of the respective systems. These costs are primarily defined as the investment costs in the transmission system, maintenance of the transmission system and maintaining a system capable of providing a secure bulk supply of energy.

The **ESO Licence** requires **The Company** to operate the National Electricity Transmission System to specified standards. In addition **The Company** and transmission licensees are required to plan and develop the National Electricity Transmission System to meet these standards. These requirements mean that the system must conform to a particular Security Standard and capital investment requirements are largely driven by the need to conform to both the deterministic and supporting cost benefit analysis aspects of this standard. It is this obligation, which provides the underlying rationale for the ICRP approach, i.e. for any changes in generation and demand on the system, **The Company** must ensure that it satisfies the requirements of the Security Standard.

14.14.7 The Security Standard identifies requirements on the capacity of component sections of the system given the expected generation and demand at each node, such that demand can be met and generators' output over the course of a year (capped at their Transmission Entry Capacity, TEC) can be accommodated in the most economic and efficient manner. The derivation of the incremental investment costs at different points on the system is therefore determined against the requirements of the system both at the time of peak demand and across the remainder of the year. The Security Standard uses a Demand Security Criterion and an Economy Criterion to assess capacity requirements. The charging methodology therefore recognises both these elements in its rationale.

- 14.14.8 The Demand Security Criterion requires sufficient transmission system capacity such that peak demand can be met through generation sources as defined in the Security Standard, whilst the Economy Criterion requires sufficient transmission system capacity to accommodate all types of generation in order to meet varying levels of demand efficiently. The latter is achieved through a set of deterministic parameters that have been derived from a generic Cost Benefit Analysis (CBA) seeking to identify an appropriate balance between constraint costs and the costs of transmission reinforcements.
- 14.14.9 The TNUoS charging methodology seeks to reflect these arrangements through the use of dual backgrounds in the Transport Model, namely a Peak Security background representative of the Demand Security Criterion and a Year Round background representative of the Economy Criterion.
- 14.14.10 To recognise that various types of generation will have a different impact on incremental investment costs the charging methodology uses a generator's TEC, Peak Security flag, and Annual Load Factor (ALF) when determining Transmission Network Use of System charges relating to the Peak Security and Year Round backgrounds respectively. For the Year Round background the diversity of the plant mix (i.e the proportion of low carbon and carbon generation) in each charging zone is also taken into account.
- 14.14.11 In setting and reviewing these charges **The Company** has a number of further objectives. These are to:
- offer clarity of principles and transparency of the methodology;
  - inform existing Users and potential new entrants with accurate and stable cost messages;
  - charge on the basis of services provided and on the basis of incremental rather than average costs, and so promote the optimal use of and investment in the transmission system; and
  - be implementable within practical cost parameters and time-scales.
- 14.14.12 **The Company** will typically calculate TNUoS tariffs annually, publishing final tariffs in respect of a **Financial Year** by the end of the preceding January. However **The Company** may update the tariffs part way through a **Financial Year**.

## 14.15 Derivation of the Transmission Network Use of System Tariff

- 14.15.1 The Transmission Network Use of System (TNUoS) Tariff comprises two separate elements. Firstly, a locationally varying element derived from the DCLF ICRP transport model to reflect the costs of capital investment in, and the maintenance and operation of, a transmission system to provide bulk transport of power to and from different locations. Secondly, a non-locationally varying element related to the provision of residual revenue recovery from demand only.
- 14.15.2 For generation TNUoS tariffs the locational element itself is comprised of five separate components. Three wider components –
- Wider Peak Security Component
  - Wider Year Round Not-shared component
  - Wider Year Round component

These components reflect the costs of the wider network under the different generation backgrounds set out in the Demand Security Criterion (for Peak Security component) and Economy Criterion (for both Year Round components) of the Security Standard. The two Year Round components reflect the unshared and shared costs of the wider network based on the diversity of generation plant types.

Two local components –

- Local substation, and
- Local circuit

These components reflect the costs of the local network.

Accordingly, the wider tariff represents the combined effect of the three wider locational tariff components the combination of the two local locational tariff components.

Finally, an Adjustment Tariff component may also be charged to Generators as per paragraph 14.14.5.

- 14.15.3 The process for calculating the TNUoS tariff is described below.

### The Transport Model

#### Model Inputs

- 14.15.4 The DCLF ICRP transport model calculates the marginal costs of investment in the transmission system which would be required as a consequence of an increase in demand or generation at each connection point or node on the transmission system, based on a study of peak demand conditions using both Peak Security and Year Round generation backgrounds on the transmission system. One measure of the investment costs is in terms of MWkm. This is the concept that ICRP uses to calculate marginal costs of investment. Hence, marginal costs are estimated initially in terms of increases or decreases in units of kilometres (km) of the transmission system for a 1 MW injection to the system.



14.15.5 The transport model requires a set of inputs representative of the Demand Security and Economy Criterion set out in the Security Standards. These conditions on the transmission system are represented in the Peak Security and Year Round background respectively as follows:

- Nodal generation information per node (TEC, plant type and SQSS scaling factors)
- Nodal net demand information
- Transmission circuits between these nodes
- The associated lengths of these routes, the proportion of which is overhead line or cable and the respective voltage level
- The cost ratio of each of 132kV overhead line, 132kV underground cable, 275kV overhead line, 275kV underground cable and 400kV underground cable to 400kV overhead line to give circuit expansion factors
- The cost ratio of each separate sub-sea AC circuit and HVDC circuit to 400kV overhead line to give circuit expansion factors
- 132kV overhead circuit capacity and single/double route construction information is used in the calculation of a generator's local charge.
- Offshore transmission cost and circuit/substation data

14.15.6 For a given **Financial Year "t"**, the nodal generation TEC figure and generation plant types at each node will be based on the Applicable Value for year "t" in the **NETS Electricity Ten Year Statement (ETYS)** in year "t-1" plus updates to the October of year "t-1". The contracted TECs and generation plant types in the **NETS Electricity Ten Year Statement (ETYS)** include all plant belonging to generators who have a Bilateral Agreement with the TOs. For example, for 2010/11 charges, the nodal generation data is based on the forecast for 2010/11 in the 2009 **NETS Electricity Ten Year Statement (ETYS)** plus any data included in the quarterly updates in October 2009.

14.15.7 Scaling factors for different generation plant types are applied on their aggregated capacity for both Peak Security and Year Round backgrounds. The scaling is either Fixed or Variable (depending on the generation plant type as referenced in the table below) and based on the factors used in the Security Standard, which are referenced in the same table.

A 10% floor for the Year Round Background variable scaling factor is used for charging purposes. If the methodology set out in the SQSS for calculating the variable scaling factor results in a lower number, the variable factor will be set at 10%, and fixed scaling factors adjusted by a uniform amount. This adjustment will be based on the SQSS principle that the total scaled output of all generation plant shall equal the ACS (Annual Average Cold Spell) peak demand minus total imports from external systems, and can be calculated using the following equation.

$$Adjustment = \frac{ACS_{Peak\ Demand} - \sum(TEC \times 10\%)_{Variable\ Plant}}{\sum(TEC \times Year\ Round\ Scaling\ Factor)_{Fixed\ Plant}}$$

$$Adjusted\ Fixed\ Scaling\ Factor = Adjustment \times Scaling\ Factor$$

| Generation Plant Type | Peak Security Background | Year Round Background |
|-----------------------|--------------------------|-----------------------|
| Intermittent          | Fixed (0%)               | Fixed (70%)           |
| Nuclear & CCS         | Variable                 | Fixed (85%)           |

|                      |            |                 |
|----------------------|------------|-----------------|
| Interconnectors      | Fixed (0%) | Fixed (100%)    |
| Hydro                | Variable   | Variable (>10%) |
| Pumped Storage       | Variable   | Fixed (50%)     |
| Peaking              | Variable   | Fixed (0%)      |
| Other (Conventional) | Variable   | Variable (>10%) |

14.21 includes an example of adjusting scaling factors to ensure compliance with the floor.

The base scaling factors and generation plant types are set out in the Security Standard. These may be reviewed from time to time. The latest version will be used in the calculation of TNUoS tariffs and is published in the Statement of Use of System Charges

- 14.15.8 **The Company** will categorise plant based on the categorisations described in the Security Standard. Peaking plant will include oil and OCGT technologies and Other (Conv.) represents all remaining conventional plant not explicitly stated elsewhere in the table. In the event that a power station is made up of more than one technology type, the type of the higher Transmission Entry Capacity (TEC) would apply.
- 14.15.9 Nodal net demand data for the transport model will be based upon the GSP net demand that Users have forecast to occur at the time of Annual Average Cold Spell (ACS) Demand for year "t" in the April **Electricity Ten Year Statement (ETYS)** for year "t-1" plus updates to the October of year "t-1".
- 14.15.10 Subject to paragraphs 14.15.15 to 14.15.22, Transmission circuits for **Financial Year "t"** will be defined as those with existing wayleaves for the year "t" with the associated lengths based on the circuit lengths indicated for year "t" in the April **NETS Electricity Ten Year Statement (ETYS)** for year "t-1" plus updates to October of year "t-1". If certain circuit information is not explicitly contained in the **NETS Electricity Ten Year Statement (ETYS)**, **The Company** will use the best information available.
- 14.15.11 The circuit lengths included in the transport model are solely those, which relate to assets defined as 'Use of System' assets.
- 14.15.12 For HVDC circuits, the impedance will be calculated to provide flows based on a ratio of the capacity provided by the HVDC link relative to the capacities on all major transmission system boundaries that it parallels.
- 14.15.13 The transport model employs the use of circuit expansion factors to reflect the difference in cost between (i) AC Circuits and HVDC circuits, (ii) underground and sub-sea circuits, (iii) cabled circuits and overhead line circuits, (iv) 132kV and 275kV circuits, (v) 275kV circuits and 400kV circuits, and (vi) uses 400kV overhead line (i.e. the 400kV overhead line expansion factor is 1). As the transport model expresses cost as marginal km (irrespective of cables or overhead lines), some account needs to be made of the fact that investment in these other types of circuit (specifically HVDC and sub-sea cables of various voltages, 400kV underground cable, 275kV overhead line, 275kV underground cable, 132kV overhead line and 132kV underground cable) is more expensive than for 400kV overhead line. This is done by effectively 'expanding' these more expensive circuits by the relevant circuit expansion factor, thereby producing a larger marginal kilometre to reflect the additional cost of investing in these circuits compared to 400kV

overhead line. When calculating the local circuit tariff for a generator, alternative 132kV and offshore expansion factors to those used in the remainder of the tariff calculation are applied to the generator's local circuits.

- 14.15.14 The circuit expansion factors for HVDC circuits and AC subsea cables are determined on a case by case basis using the costs which are specific to individual projects containing HVDC or AC subsea circuits.

#### **Adjustments to Model Inputs associated with One-off Works**

- 14.15.15 Where, following the implementation of CUSC Modification CMP203, a User has paid a One-Off Charge that related to One-off Works carried out on an onshore circuit, and such One-off Works would affect the value of a TNUoS tariff paid by the User, the transport model inputs associated with the onshore circuit shall be adjusted by **The Company** to reflect the asset value that would have been modelled if the works had been undertaken on the basis of the original asset design rather than the One-off Works.
- 14.15.16 Subject to paragraphs 14.15.17 to 14.15.19, where, prior to the implementation of CUSC Modification CMP203, a User has paid a One-Off Charge (or has paid a charge to the relevant TO prior to 1st April 2005 on the same principles as a One-Off Charge) that related to works equivalent to those described under paragraph 14.15.15, an adjustment equivalent to that under paragraph 14.15.15 shall be made to the transport model inputs as follows.
- 14.15.17 Such adjustment shall be made following a User's request, which must be received by **The Company** no later than the second occurrence of 31<sup>st</sup> December following the implementation of CUSC Modification CMP203.
- 14.15.18 **The Company** shall only make an adjustment to the transport model inputs, under paragraph 14.15.16 where the charge was paid to the relevant TO prior to 1st April 2005 where evidence has been provided by the User that satisfies **The Company** that works equivalent to those under paragraph 14.15.15 were funded by the User.
- 14.15.19 Where a User has sufficient reason to believe that adjustments under paragraph 14.15.18 should be made in relation to specific assets that affect a TNUoS tariff that applies to one of its sites and outlines its reasoning to **The Company**, **The Company** shall (upon the User's request and subject to the User's payment of reasonable costs incurred by **The Company** in doing so) use its reasonable endeavours to assist the User in obtaining any evidence **The Company** or a TO may have to support its position.
- 14.15.20 Where a request is made under paragraph 14.15.16 on or prior to 31<sup>st</sup> December in a **Financial Year**, and **The Company** is satisfied based on the accompanying evidence provided to **The Company** under paragraph 14.15.17 that it is a valid request, the transport model inputs shall be adjusted accordingly and taken into account in the calculation of TNUoS tariffs effective from the year commencing on the 1<sup>st</sup> April following this and otherwise from the next subsequent 1<sup>st</sup> April.
- 14.15.21 The following table provides examples of works for which adjustments to transport model inputs would typically apply:

| Ref | Description of works                                                                                                                                                               | Adjustments                                                                                                                                                                                                                       |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Undergrounding - A User requests to underground an overhead line at a greater cost.                                                                                                | As the cable cost will be more expensive than the overhead line (OHL) equivalent, the circuit will be modelled as an OHL.                                                                                                         |
| 2   | Substation Siting Decision - A User requests to move the existing or a planned substation location to a place that means that the works cannot be justified as economic by the TO. | As the revised substation location may result in circuits being extended. If this is the case, the originally designed circuit lengths (as per the originally designed substation location) would be used in the transport model. |
| 3   | Circuit Routing Decision - A User asks to move an existing or a planned circuit route in a way in which the works cannot be justified as economic by the TO.                       | As any circuit route changes that extend circuits are likely to result in a greater TNUoS tariff, the originally designed circuit lengths would be used in the transport model.                                                   |
| 4   | Building circuits at lower voltages - A User requests lower tower height and therefore a different voltage.                                                                        | As lower voltage circuits result in a higher expansion factor being used, the circuits would be modelled at the originally designed higher voltage.                                                                               |

14.15.22 The following table provides examples of works for which adjustments to transport model typically would not apply:

| Ref | Description of works                                                                                                                       | Reasoning                                                                                                                                                 |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Undergrounding - A User chooses to have a cable installed via a tunnel rather than buried.                                                 | Cable expansion factors are applied in the transport model regardless of whether a cable is tunnelled and buried, so there is no increased TNUoS cost.    |
| 2   | Additional circuit route works - A User asks for screening to be provided around a new or existing circuit route.                          | Circuit expansion factors are applied in the transport model irrespective of these works, so there is no increased TNUoS cost.                            |
| 3   | Additional circuit route works - A User requests that a planned overhead line route is built using alternative transmission tower designs. | Circuit expansion factors are applied in the transport model irrespective of these works, so there is no increased TNUoS cost.                            |
| 4   | Additional substation works - A User asks for screening to be provided around a new or existing substation.                                | The additional substation works will not affect the User's TNUoS charge as there is no effect on power flows or circuit costs within the transport model. |

| Ref | Description of works                                                                                                                                                                                               | Reasoning                                                                                                                                                                                                                                        |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5   | Additional substation works - Changes to connection assets (e.g. HV-LV transformers and associated switchgear), metering, additional LV supplies, additional protection equipment, additional building works, etc. | The additional substation works will not affect the User's TNUoS charge as there is no effect on power flows or circuit costs within the transport model.                                                                                        |
| 6   | Diversion - A User asks to temporarily move an existing or a planned circuit route in a way in which the works cannot be justified as economic by the TO.                                                          | The temporary circuit changes will not be incorporated into the transport model.                                                                                                                                                                 |
| 7   | Connection Entry Capacity (CEC) before Transmission Entry Capacity (TEC). A User asks for a connection in a year prior to the relating TEC; i.e. physical connection without capacity.                             | No additional works are being undertaken, works are simply being completed well in advance of the generator commissioning. The One-Off Charge reflects the depreciated value of the assets prior to commissioning (and any TNUoS being charged). |
| 8   | Early asset replacement - An asset is replaced prior to the end of its expected life.                                                                                                                              | As the asset is simply replaced, no data in the transport model is expected to change.                                                                                                                                                           |
| 9   | Additional Engineering/Mobilisation costs - A User requests changes to the planned works, that results in additional operational costs.                                                                            | The data in the transport model is unaffected.                                                                                                                                                                                                   |
| 10  | Offshore (Generator Build) - Any of the works described above or under paragraph 14.15.18.                                                                                                                         | The value of the works will not form part of the asset transfer value therefore will not be used as part of the offshore tariff calculation.                                                                                                     |
| 11  | Offshore (Offshore Transmission Owner (OFTO) Build) - Any of the works described above or under paragraph 14.15.18.                                                                                                | As part of determining the TNUoS revenue associated with each asset, the value of the One-Off Works would be excluded when pro-rating the OFTO's allowed revenue against assets by asset value.                                                  |

14.15.23 **The Company** shall publish any adjusted transport model inputs that it intends to use in the calculation of TNUoS tariffs effective from the year commencing on the following 1<sup>st</sup> April in the NETS **Electricity Ten Year Statement (ETYS)** October Update. Any further adjustments that **The**

**Company** makes shall be published by **The Company** upon the publication of the final TNUoS tariffs for the year concerned.

## Model Outputs

- 14.15.24 The transport model takes the inputs described above and carries out the following steps individually for Peak Security and Year Round backgrounds.
- 14.15.25 Depending on the background, the TEC of the relevant generation plant types are scaled by a percentage as described in 14.15.7, above. The TEC of the remaining generation plant types in each background are uniformly scaled such that total national generation (scaled sum of contracted TECs) equals total national ACS Demand.
- 14.15.26 For each background, the model then uses a DCLF ICRP transport algorithm to derive the resultant pattern of flows based on the network impedance required to meet the nodal net demand using the scaled nodal generation, assuming every circuit has infinite capacity. Flows on individual transmission circuits are compared for both backgrounds and the background giving rise to the highest flow is considered as the triggering criterion for future investment of that circuit for the purposes of the charging methodology. Therefore all circuits will be tagged as Peak Security or Year Round depending upon the background resulting in the highest flow. In the event that both backgrounds result in the same flow, the circuit will be tagged as Peak Security. Then it calculates the resultant total network Peak Security MWkm and Year Round MWkm, using the relevant circuit expansion factors as appropriate.
- 14.15.27 Using these baseline networks for Peak Security and Year Round backgrounds, the model then calculates for a given injection of 1MW of generation at each node, with a corresponding 1MW offtake (net demand) distributed across all demand nodes in the network, the increase or decrease in total MWkm of the whole Peak Security and Year Round networks. The proportion of the 1MW offtake allocated to any given demand node will be based on total background nodal net demand in the model. For example, with a total net GB demand of 60GW in the model, a node with a net demand of 600MW would contain 1% of the offtake i.e. 0.01MW.
- 14.15.28 Given the assumption of a 1MW injection, for simplicity the marginal costs are expressed solely in km. This gives a Peak Security marginal km cost and a Year Round marginal km cost for generation at each node (although not that used to calculate generation tariffs which considers local and wider cost components). The Peak Security and Year Round marginal km costs for demand at each node are equal and opposite to the Peak Security and Year Round nodal marginal km respectively for generation and this is used to calculate demand tariffs. Note the marginal km costs can be positive or negative depending on the impact the injection of 1MW of generation has on the total circuit km.
- 14.15.29 Using a similar methodology as described above in 14.15.27, the local and wider marginal km costs used to determine generation TNUoS tariffs are calculated by injecting 1MW of generation against the node(s) the generator is modelled at and increasing by 1MW the offtake across the distributed reference node. It should be noted that although the wider marginal km costs are calculated for both Peak Security and Year Round backgrounds, the local marginal km costs are calculated on the Year Round background.

14.15.30 In addition, any circuits in the model, identified as local assets to a node will have the local circuit expansion factors which are applied in calculating that particular node's marginal km. Any remaining circuits will have the TO specific wider circuit expansion factors applied.

14.15.31 An example is contained in 14.21 Transport Model Example.

### Calculation of local nodal marginal km

14.15.32 In order to ensure assets local to generation are charged in a cost reflective manner, a generation local circuit tariff is calculated. The nodal specific charge provides a financial signal reflecting the security and construction of the infrastructure circuits that connect the node to the transmission system.

14.15.33 Main Interconnected Transmission System (MITS) nodes are defined as:

- Grid Supply Point connections with 2 or more transmission circuits connecting at the site; or
- connections with more than 4 transmission circuits connecting at the site.

14.15.34 Where a Grid Supply Point is defined as a point of supply from the National Electricity Transmission System to network operators or non-embedded customers excluding generator or interconnector load alone. For the avoidance of doubt, generator or interconnector load would be subject to the circuit component of its Local Charge. A transmission circuit is part of the National Electricity Transmission System between two or more circuit-breakers which includes transformers, cables and overhead lines but excludes busbars and generation circuits.

14.15.35 Generators directly connected to a MITS node will have a zero local circuit tariff.

14.15.36 Generators not connected to a MITS node will have a local circuit tariff derived from the local nodal marginal km for the generation node i.e. the increase or decrease in marginal km along the transmission circuits connecting it to all adjacent MITS nodes (local assets).

### Calculation of zonal marginal km

14.15.37 Given the requirement for relatively stable cost messages through the ICRP methodology and administrative simplicity, nodes are assigned to zones. The currently applicable number of generation zones is detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

14.15.38 Demand zone boundaries have been fixed and relate to the GSP Groups used for energy market settlement purposes.

14.15.39 The nodal marginal km are amalgamated into zones by weighting them by their relevant generation or demand capacity.

14.15.40 Generators will have zonal tariffs derived from both, the wider Peak Security nodal marginal km; and the wider Year Round nodal marginal km for the generation node calculated as the increase or decrease in marginal km along all transmission circuits except those classified as local assets.

The zonal Peak Security marginal km for generation is calculated as:

$$WNMkm_{jPS} = \frac{NMkm_{jPS} * Gen_j}{\sum_{j \in Gi} Gen_j}$$

$$ZMkm_{GiPS} = \sum_{j \in Gi} WNMkm_{jPS}$$

Where

|                     |   |                                                                                                    |
|---------------------|---|----------------------------------------------------------------------------------------------------|
| Gi                  | = | Generation zone                                                                                    |
| j                   | = | Node                                                                                               |
| NMkm <sub>PS</sub>  | = | Peak Security Wider nodal marginal km from transport model                                         |
| WNMkm <sub>PS</sub> | = | Peak Security Weighted nodal marginal km                                                           |
| ZMkm <sub>PS</sub>  | = | Peak Security Zonal Marginal km                                                                    |
| Gen                 | = | Nodal Generation (scaled by the appropriate Peak Security Scaling factor) from the transport model |

Similarly, the zonal Year Round marginal km for generation is calculated as

$$WNMkm_{jYR} = \frac{NMkm_{jYR} * Gen_j}{\sum_{j \in Gi} Gen_j}$$

$$ZMkm_{GiYR} = \sum_{j \in Gi} WNMkm_{jYR}$$

Where

|                     |   |                                                                                                 |
|---------------------|---|-------------------------------------------------------------------------------------------------|
| NMkm <sub>YR</sub>  | = | Year Round Wider nodal marginal km from transport model                                         |
| WNMkm <sub>YR</sub> | = | Year Round Weighted nodal marginal km                                                           |
| ZMkm <sub>YR</sub>  | = | Year Round Zonal Marginal km                                                                    |
| Gen                 | = | Nodal Generation (scaled by the appropriate Year Round Scaling factor) from the transport model |

14.15.41 The zonal Peak Security marginal km for demand zones are calculated as follows. If Nodal Demand from a node is less than 0 (Exporting) the nodal demand will be set to zero and therefore not contribute to the Zonal marginal km

$$WNMkm_{jPS} = \frac{-1 * NMkm_{jPS} * Dem_j}{\sum_{j \in Di} Dem_j}$$

$$ZMkm_{DiPS} = \sum_{j \in Di} WNMkm_{jPS}$$

Where:

|     |   |                                                |
|-----|---|------------------------------------------------|
| Di  | = | Demand zone                                    |
| Dem | = | Positive Nodal Net Demand from transport model |

Similarly, the zonal Year Round marginal km for demand zones are calculated as follows:



$$WNMkm_{jYR} = \frac{-1 * NMkm_{jYR} * Dem_j}{\sum_{j \in Di} Dem_j}$$

$$ZMkm_{DiYR} = \sum_{j \in Di} WNMkm_{jYR}$$

14.15.42 The number of generation zones will be fixed to 27 zones and the assignment of existing relevant nodes to these 27 generation zones will be fixed to those that are effective as of 31<sup>st</sup> March 2021 based on methodology in effect during the 2020/21. Relevant nodes are considered to be those with generation connected to them. **Financial Year**. Any newly created relevant nodes will be assigned to one of the 27 generation zones.

14.15.43 Not Used

14.15.44 Not Used

14.15.45 Not Used

#### Accounting for Sharing of Transmission by Generators

14.15.46 A proportion of the marginal km costs for generation are shared incremental km reflecting the ability of differing generation technologies to share transmission investment. This is reflected in charges through the splitting of Year Round marginal km costs for generation into Year Round Shared marginal km costs and Year Round Not-Shared marginal km which are then used in the calculation of the wider £/kW generation tariff.

14.15.47 The sharing between different generation types is accounted for by (a) using transmission network boundaries between generation zones set by connectivity between generation charging zones, and (b) the proportion of Low Carbon and Carbon generation behind these boundaries.

14.15.48 The zonal incremental km for each generation charging zone is split into each boundary component by considering the difference between it and the neighbouring generation charging zone using the formula below;

$$Blkm_{ab} = Zlkm_b - Zlkm_a$$

Where;

Blkm<sub>ab</sub> = boundary incremental km between generation charging zone A and generation charging zone B

Zlkm = generation charging zone incremental km.

14.15.49 The table below shows the categorisation of Low Carbon and Carbon generation. This table will be updated by **The Company** in the Statement of Use of System Charges as new generation technologies are developed.


| Carbon  | Low Carbon                   |
|---------|------------------------------|
| Coal    | Wind                         |
| Gas     | Hydro (excl. Pumped Storage) |
| Biomass | Nuclear                      |
| Oil     | Marine                       |

|                 |       |
|-----------------|-------|
| Pumped Storage  | Tidal |
| Interconnectors |       |


Determination of Connectivity

14.15.50 Connectivity is based on the existence of electrical circuits between TNUoS generation charging zones that are represented in the Transport model. Where such paths exist, generation charging zones will be effectively linked via an incremental km transmission boundary length. These paths will be simplified through in the case of;


- Parallel paths – the longest path will be taken. An illustrative example is shown below with x, y and z representing the incremental km between zones.

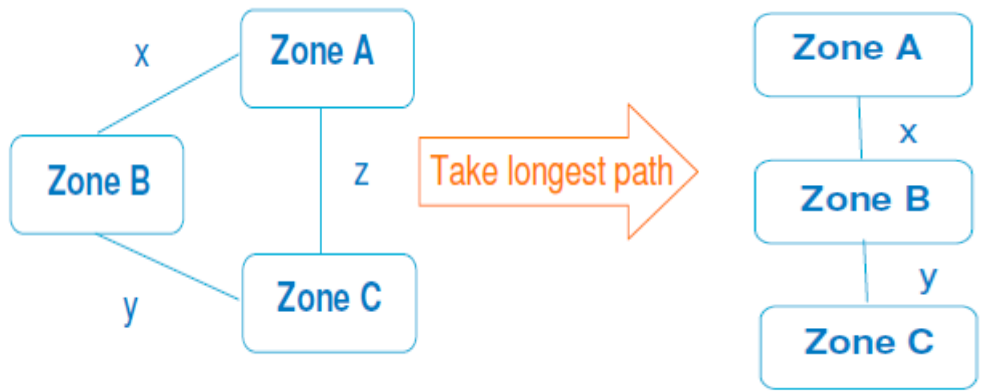

- Parallel zones – parallel zones will be amalgamated with the incremental km immediately beyond the amalgamated zones being the greater of those existing prior to the amalgamation. An illustrative example is shown below with a, b, c, and d representing the initial incremental km between zones, and x and y representing the final incremental km following zonal amalgamation.

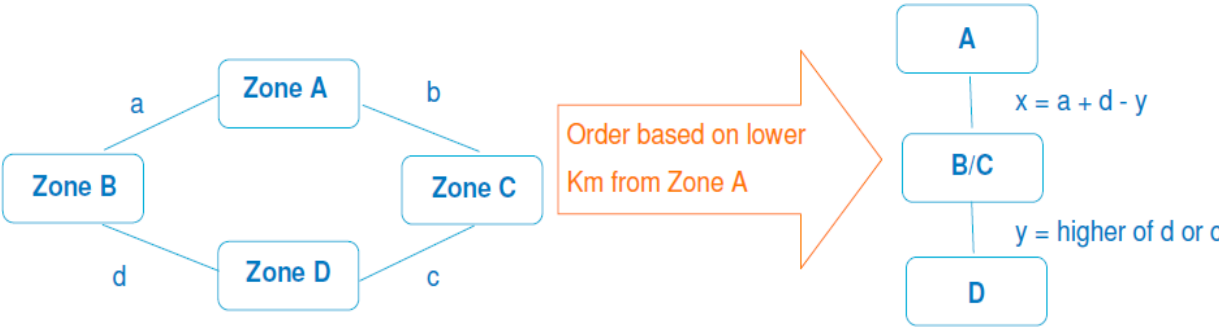

14.15.51 An illustrative Connectivity diagram is shown below:

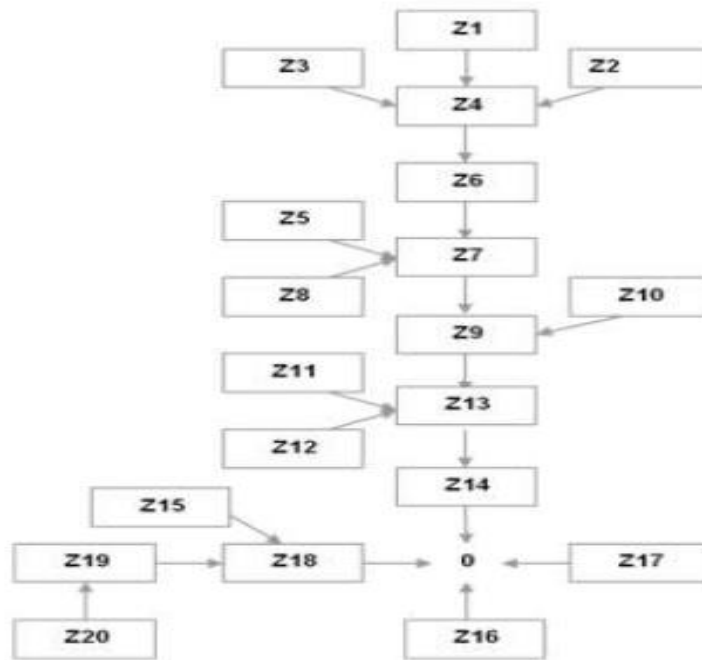

The arrows connecting generation charging zones and amalgamated generation charging zones represent the incremental km transmission boundary lengths towards the notional centre of the system. Generation located in charging zones behind arrows is considered to share based on the ratio of Low Carbon to Carbon cumulative generation TEC within those zones.

14.15.52 **The Company** will review Connectivity at the beginning of a new price control period, and under exceptional circumstances such as major system reconfigurations. If any such reassessment is required, it will be undertaken against a background of minimal change to existing Connectivity and in line with the notification process set out in the **ESO Licence**, the Transmission Licence and the CUSC.

#### Calculation of Boundary Sharing Factors

14.15.53 Boundary sharing factors (BSFs) are derived from the comparison of the cumulative proportion of Low Carbon and Carbon generation TEC behind each of the incremental MWkm boundary lengths using the following formulae

–

If  $\frac{LC}{LC+C} \leq 0.5$ , then all Year round marginal km costs are shared i.e. the BSF is 100%.

Where:

LC = Cumulative Low Carbon generation TEC behind the relevant transmission boundary

C = Cumulative Carbon generation TEC behind the relevant transmission boundary

If  $\frac{LC}{LC+C} > 0.5$  then the BSF is calculated using the following formula: -

$$BSF = \left( -2 \times \left( \frac{LC}{LC+C} \right) \right) + 2$$

Where:

BSF = boundary sharing factor.

- 14.15.54 The shared incremental km for each boundary are derived from the multiplication of the boundary sharing factor by the incremental km for that boundary;

$$SBIkm_{ab} = BIIkm_{ab} \times BSF_{ab}$$

Where;

SBIkm<sub>ab</sub> = shared boundary incremental km between generation charging zone A and generation charging zone B

BSF<sub>ab</sub> = generation charging zone boundary sharing factor.

- 14.15.55 The shared incremental km is discounted from the incremental km for that boundary to establish the not-shared boundary incremental km. The not-shared boundary incremental km reflects the cost of transmission investment on that boundary accounting for the sharing of power stations behind that boundary.

$$NSBIkm_{ab} = BIIkm_{ab} - SBIkm_{ab}$$

Where;

NSBIkm<sub>ab</sub> = not shared boundary incremental km between generation charging zone A and generation charging zone B.

- 14.15.56 The shared incremental km for a generation charging zone is the sum of the appropriate shared boundary incremental km for that generation charging zone as derived from the connectivity diagram.

$$\sum_a^n NSBIkm_{ab} = ZMkm_{nYRS}$$

Where;

ZMkm<sub>nYRS</sub> = Year Round Shared Zonal Marginal km for generation charging zone n.

- 14.15.57 The not-shared incremental km for a generation charging zone is the sum of the appropriate not-shared boundary incremental km for that generation charging zone as derived from the connectivity diagram.

$$\sum_a^n NSBIkm_{ab} = ZMkm_{nYRNS}$$

Where;

ZMkm<sub>nYRNS</sub> = Year Round Not-Shared Zonal Marginal km for generation zone n.

## Deriving the Final Local £/kW Tariff and the Wider £/kW Tariff

14.15.58 The zonal marginal km ( $ZMkm_{Gi}$ ) are converted into costs and hence a tariff by multiplying by the **Expansion Constant** and the **Locational Security Factor** (see below). The nodal local marginal km ( $NLMkm^L$ ) are converted into costs and hence a tariff by multiplying by the **Expansion Constant** and a **Local Security Factor**.

### The Expansion Constant

14.15.59 The expansion constant, expressed in £/MWkm, represents the annuitised value of the transmission infrastructure capital investment required to transport 1 MW over 1 km. Its magnitude is derived from the projected cost of 400kV overhead line, including an estimate of the cost of capital, to provide for future system expansion.

14.15.60 In the methodology, the expansion constant is used to convert the marginal km figure derived from the transport model into a £/MW signal. The tariff model performs this calculation, in accordance with 14.15.96 – 14.15.121, and also then calculates the residual element of the overall tariff (to ensure correct revenue recovery in accordance with the price control), in accordance with 14.15.137.

14.15.61 The transmission infrastructure capital costs used in the calculation of the expansion constant are provided via an externally audited process. They also include information provided from all onshore Transmission Owners (TOs). They are based on historic costs and tender valuations adjusted by a number of indices (e.g. global price of steel, labour, inflation, etc.). The objective of these adjustments is to make the costs reflect current prices, making the tariffs as forward looking as possible. This cost data represents **The Company's** best view; however it is considered as commercially sensitive and is therefore treated as confidential. The calculation of the expansion constant also relies on a significant amount of transmission asset information, much of which is provided in the **Electricity Ten Year Statement (ETYS)**.

14.15.62 For each circuit type and voltage used onshore, an individual calculation is carried out to establish a £/MWkm figure, normalised against the 400KV overhead line (OHL) figure, these provide the basis of the onshore circuit expansion factors discussed in 14.15.70 – 14.15.77. In order to simplify the calculation a unity power factor is assumed, converting £/MVAkm to £/MWkm. This reflects that the fact tariffs and charges are based on real power.

14.15.63 The table below shows the first stage in calculating the onshore expansion constant. A range of overhead line types is used and the types are weighted by recent usage on the transmission system. This is a simplified calculation for 400kV OHL using example data:

| 400kV OHL expansion constant calculation |      |           |             |         |        |
|------------------------------------------|------|-----------|-------------|---------|--------|
| MW                                       | Type | £(000)/km | Circuit km* | £/MWkm  | Weight |
| A                                        | B    | C         | D           | E = C/A | F=E*D  |
| 6500                                     | La   | 700       | 500         | 107.69  | 53846  |
| 6500                                     | Lb   | 780       | 0           | 120.00  | 0      |
| 3500                                     | La/b | 600       | 200         | 171.43  | 34286  |
| 3600                                     | Lc   | 400       | 300         | 111.11  | 33333  |
| 4000                                     | Lc/a | 450       | 1100        | 112.50  | 123750 |

|      |      |     |          |                               |             |
|------|------|-----|----------|-------------------------------|-------------|
| 5000 | Ld   | 500 | 300      | 100.00                        | 30000       |
| 5400 | Ld/a | 550 | 100      | 101.85                        | 10185       |
| Sum  |      |     | 2500 (G) |                               | 285400 (H)  |
|      |      |     |          | Weighted Average<br>(J= H/G): | 114.160 (J) |

\*These are circuit km of types that have been provided in the previous 10 years. If no information is available for a particular category the best forecast will be used.

- 14.15.64 The weighted average £/MWkm (J in the example above) is then converted in to an annual figure by multiplying it by an annuity factor. The formula used to calculate of the annuity factor is shown below:

$$Annuityfactor = \frac{1}{\left[ \frac{1 - (1 + WACC)^{-AssetLife}}{WACC} \right]}$$

- 14.15.65 The Weighted Average Cost of Capital (WACC) and asset life are established at the start of a price control and remain constant throughout a price control period. The WACC used in the calculation of the annuity factor is NGET's regulated rate of return, this assumes that it will be reasonably representative of all licensees. The asset life used in the calculation is 50 years; the appropriateness of this is reviewed when the annuity factor is recalculated at the start of a price control period. These assumptions, applied in accordance with 14.15.64, provide a current annuity factor, as set out in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

- 14.15.66 The final step in calculating the expansion constant is to add a share of the annual transmission overheads (maintenance, rates etc). This is done by multiplying the average weighted cost (J) by an 'overhead factor'. The 'overhead factor' represents the total business overhead in any year divided by the total Gross Asset Value (GAV) of the transmission system. This is recalculated at the start of each price control period. The currently applicable overhead factor used in the calculation of the current expansion constant is, calculated as above, and detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**. The overhead and annuitised costs are then added to give the expansion constant.

- 14.15.67 Using the previous example, and the 2009/10 values for the annuity factor (6.6%) and overhead factor (1.8%), the final steps in establishing the expansion constant are demonstrated below:

| 400kV OHL expansion constant calculation | Ave £/MWkm |
|------------------------------------------|------------|
| OHL                                      | 114.160    |
| Annuitised                               | 7.535      |
| Overhead                                 | 2.055      |
| Final                                    | 9.589      |

- 14.15.68 This process is carried out for each voltage onshore, along with other adjustments to take account of upgrade options, see 14.15.73, and normalised against the 400KV overhead line cost (the expansion constant) the resulting ratios provide the basis of the onshore expansion factors. The

process used to derive circuit expansion factors for Offshore Transmission Owner networks is described in 14.15.80.

14.15.69 This process of calculating the incremental cost of capacity for a 400kV OHL, along with calculating the onshore expansion factors is carried out for the first year of the price control and is increased by inflation, TOPI, (May–October average increase, as defined in the **ESO Licence** and/or **Transmission Licence**) each subsequent year of the price control period. The currently applicable expansion constant is detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

14.15.69A Notwithstanding Paragraph 14.15.69 from the first year of (and during) the T2 price control (which starts on 1st April 2021), until a further change is made, the Expansion Constant will be that used in the 2020/21 **Financial Year** inflated in accordance with TOPI as per paragraph 14.15.69; and plus inflation as defined in the **ESO License** and/or **Transmission Licence** for each subsequent year of the T2 price control.

### **Onshore Wider Circuit Expansion Factors**

14.15.70 Base onshore expansion factors are calculated by deriving individual expansion constants for the various types of circuit, following the same principles used to calculate the 400kV overhead line expansion constant. The factors are then derived by dividing the calculated expansion constant by the 400kV overhead line expansion constant. The factors will be fixed for each respective price control period.

14.15.71 In calculating the onshore underground cable factors, the forecast costs are weighted equally between urban and rural installation, and direct burial has been assumed. The operating costs for cable are aligned with those for overhead line. An allowance for overhead costs has also been included in the calculations.

14.15.72 The 132kV onshore circuit expansion factor is applied on a TO basis. This is to reflect the regional variation of plans to rebuild circuits at a lower voltage capacity to 400kV. The 132kV cable and line factor is calculated on the proportion of 132kV circuits likely to be uprated to 400kV. The 132kV expansion factor is then calculated by weighting the 132kV cable and overhead line costs with the relevant 400kV expansion factor, based on the proportion of 132kV circuitry to be uprated to 400kV. For example, in the TO areas of NGET and Scottish Power where there are no plans to uprate any 132kV circuits, the full cable and overhead line costs of 132kV circuit are reflected in the 132kV expansion factor calculation.

14.15.73 The 275kV onshore circuit expansion factor is applied on a GB basis and includes a weighting of 83% of the relevant 400kV cable and overhead line factor. This is to reflect the averaged proportion of circuits across all three Onshore Transmission Licensees which are likely to be uprated from 275kV to 400kV across GB within a price control period.

14.15.74 The 400kV onshore circuit expansion factor is applied on a GB basis and reflects the full costs for 400kV cable and overhead lines.

- 14.15.75 AC sub-sea cable and HVDC circuit expansion factors are calculated on a case by case basis using actual project costs (Specific Circuit Expansion Factors) net of any Cost Adjustments.
- 14.15.76 Calculation of HVDC circuit expansion factors, and AC sub-sea circuit expansion factors, shall include only: the cost of the converters (where applicable); and the cost of the cable; and a percentage of the total overhead project costs, defined as the combined costs of the cables and converters (as relevant) divided by the total capital cost of the project minus a percentage of the Cost Adjustment, defined as the combined costs of the cables, converters (as relevant) and appropriate overhead costs, as calculated above, all divided by the total capital cost of the project.
- 14.15.77 The TO specific onshore circuit expansion factors which are currently applicable, are detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

### Onshore Local Circuit Expansion Factors

- 14.15.78 The local onshore circuit tariff is calculated using local onshore circuit expansion factors. These expansion factors are calculated using the same methodology as the onshore wider expansion factor but without taking into account the proportion of circuit kms that are planned to be uprated.
- 14.15.79 In addition, the 132kV onshore overhead line circuit expansion factor is subdivided into four more specific expansion factors. This is based upon maximum (winter) circuit continuous rating (MVA) and route construction whether double or single circuit. The 132kV onshore overhead line circuit expansion factors which are currently applicable, are detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

### Onshore Expansion Factors in RIIO-T2

- 14.15.79A Notwithstanding Paragraph 14.15.69, the previous paragraphs and following the same intent as adopted at Paragraph 14.15.69A, from the first year of (and during) the T2 price control (which starts on 1st April 2021), until a further change is made, the Onshore expansion factors (being the Onshore local circuit factors and the Onshore wider circuit expansion factors, except those used for HVDC circuits and sub-sea AC cable) will be the value used in the 2020/21 **Financial Year**. For clarity HVDC circuits and sub-sea AC cable will continue to be calculated in accordance with 14.15.75.

### Offshore Circuit Expansion Factors

- 14.15.80 Offshore expansion factors (£/MWkm) are derived from information provided by Offshore Transmission Owners for each offshore circuit. Offshore expansion factors are Offshore Transmission Owner and circuit specific. Each Offshore Transmission Owner will periodically provide, via the STC, information to derive an annual circuit revenue requirement. The offshore circuit revenue shall include revenues associated with the Offshore Transmission Owner's reactive compensation equipment, harmonic filtering equipment, asset spares and HVDC converter stations.
- 14.15.81 In the year that the offshore transmission assets are transferred to the Offshore Transmission Owner, the offshore circuit expansion factor would be calculated as follows:



$$\frac{CRevOFTOI}{L \times CircRat} \div \text{Onshore 400kV OHL Expansion Constant}$$

Where:

|           |   |                                                        |
|-----------|---|--------------------------------------------------------|
| CRevOFTOI | = | The offshore circuit revenue in £ for Year 1           |
| L         | = | The total circuit length in km of the offshore circuit |
| CircRat   | = | The continuous rating of the offshore circuit          |

14.15.82 In all subsequent years, the offshore circuit expansion factor would be calculated as follows:

$$\frac{AvCRevOFTO}{L \times CircRat} \div \text{Onshore 400kV OHL Expansion Constant}$$

Where:

|            |   |                                                                                                                                                              |
|------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AvCRevOFTO | = | The annual offshore circuit revenue averaged over the remaining years of the onshore National Electricity Transmission System Operator (NETSO) price control |
| L          | = | The total circuit length in km of the offshore circuit                                                                                                       |
| CircRat    | = | The continuous rating of the offshore circuit                                                                                                                |

14.15.83 For the avoidance of doubt, the offshore circuit revenue values, *CRevOFTOI* and *AvCRevOFTO* shall be determined using asset values after the removal of any One-Off Charges.

14.15.84 Prevailing OFFSHORE TRANSMISSION OWNER specific expansion factors will be published in **The Company's Statement of Use of System Charges** which is available from the **Charging website**. These shall be recalculated for the start of each price control period using the formula in paragraph 14.15.82. For each subsequent year within the price control period, these expansion factors will be adjusted by the annual Offshore Transmission Owner specific indexation factor, *OFTOInd*, calculated as follows;

$$OFTOInd_{t,f} = \frac{OFTORevInd_{t,f}}{TOPI_t}$$

where:

|                                 |   |                                                                                                                                                                                   |
|---------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>OFTOInd<sub>t,f</sub></i>    | = | the indexation factor for Offshore Transmission Owner <i>f</i> in respect of <b>Financial Year <i>t</i></b> ;                                                                     |
| <i>OFTORevInd<sub>t,f</sub></i> | = | the indexation rate applied to the revenue of Offshore Transmission Owner <i>f</i> under the terms of its transmission licence in respect of <b>Financial Year <i>t</i></b> ; and |
| <i>TOPI<sub>t</sub></i>         | = | the indexation rate applied to the expansion constant in respect of <b>Financial Year <i>t</i></b> .                                                                              |

## Offshore Interlinks

- 14.15.85 The revenue associated with an Offshore Interlink shall be divided entirely between those generators benefiting from the installation of that Offshore Interlink. Each of these Users will be responsible for their charge from their charging date, meaning that a proportion of the Offshore Interlink revenue may be socialised prior to all relevant Users being chargeable. The proportion associated with each User will be based on the Measure of Capacity to the MITS using the Offshore Interlink(s) in the event of a single circuit fault on the User's circuit from their offshore substation towards the shore, compared to the Measure of Capacity of the other Users.

Where:

An *Offshore Interlink* is a circuit which connects two offshore substations that are connected to a Single Common Substation. It is held in open standby until there is a transmission fault that limits the User's ability to export power to the Single Common Substation. In the Transport Model, they are to be modelled in open standby.

A *Single Common Substation* is a substation where:

- i. each substation that is connected by an Offshore Interlink is connected via at least one circuit without passing through another substation; and
- ii. all routes connecting each substation that is connected by an Offshore Interlink to the MITS pass through.

The Measure of Capacity to the MITS for each Offshore substation is the result of the following formula or zero whichever is larger. For the situation with only one interlink, all terms relating to C should be set to zero:

For Substation A:

$$\min \{ \text{Cap}_{IAB}, \text{ILF}_A \times \text{TEC}_A - \text{RCap}_A, \text{Cap}_B - \text{ILF}_B \times \text{TEC}_B + \min (\text{Cap}_{IBC}, \text{Cap}_C - \text{ILF}_C \times \text{TEC}_C) \}$$

For Substation B:

$$\min \{ \text{ILF}_B \times \text{TEC}_B - \text{RCap}_B, \min (\text{Cap}_{IAB}, \text{Cap}_A - \text{ILF}_A \times \text{TEC}_A) + \min (\text{Cap}_{IBC}, \text{Cap}_C - \text{ILF}_C \times \text{TEC}_C) \}$$

For Substation C:

$$\min \{ \text{Cap}_{IBC}, \text{ILF}_C \times \text{TEC}_C - \text{RCap}_C, \text{Cap}_B - \text{ILF}_B \times \text{TEC}_B + \min (\text{Cap}_{IAB}, \text{Cap}_A - \text{ILF}_A \times \text{TEC}_A) \}$$

and

$\text{Cap}_{IAB}$  = total capacity of the Offshore Interlink between substations A and B

$\text{Cap}_{IBC}$  = total capacity of the Offshore Interlink between substations B and C

$\text{Cap}_X$  = total capacity of the circuit between offshore substation X and the Single Common Substation, where X is A, B or C.

$\text{RCap}_X$  = remaining capacity of the circuit between offshore substation X and the Single Common Substation in the event of a single cable fault, where X is A, B or C.

$\text{TEC}_X$  = the sum of the TEC for the Users connected, or contracted to connect, to offshore substation X, where X is A, B or C, where the value of TEC will be the maximum TEC that each User has held since the initial charging date, or is contracted to hold if prior to the initial charging date.

$\text{ILF}_X$  = Offshore Interlink Load Factor, where X is A, B or C.

The Offshore Interlink Load Factor (ILF) is based on the Annual Load Factor (ALF). Until all the Users connected to a Single Common Substation have a station specific Annual Load Factor based on five years of data, the generic ALF for the fuel type will be used as the ILF for all stations. When all Users have a station specific ALF, the value of the ALF in the first such year will be used as the ILF in the calculation for all subsequent **Financial Years**.

- 14.15.86 The apportionment of revenue associated with Offshore Interlink(s) in 14.15.85 applies in situations where the Offshore Interlink was included in the design phase, or if one or more User(s) has already financially committed or been commissioned then only where that User(s) agrees to the Offshore Interlink.
- 14.15.87 Alternatively to the formula specified in 14.15.85 the proportion of the OFTO revenue associated with the Offshore Interlink allocated to each generator benefiting from the installation of an Offshore Interlink may be agreed between these Users. In this event:
- a. All relevant Users shall notify **The Company** of its respective proportions three months prior the OTSDUW asset transfer in the case of a generator build, or the charging date of the first generator, in the case of an OFTO build.
  - b. All relevant Users may agree to vary the proportions notified under (a) by each writing to **The Company** three months prior to the charges being set for a given **Financial Year**.
  - c. Once a set of proportions of the OFTO revenue associated with the Offshore Interlink has been provided to **The Company**, these will apply for the next and future **Financial Years** unless and until **The Company** is informed otherwise in accordance with (b) by all of the relevant Users.
  - d. If all relevant Users are unable to reach agreement on the proportioning of the OFTO revenue associated with the Offshore Interlink they can raise a dispute. Any dispute between two or more Users as to the proportioning of such revenue shall be managed in accordance with CUSC Section 7 Paragraph 7.4.1 but the reference to the 'London Court of International Arbitration' shall instead be to the 'Authority' and the Authority's determination of such dispute shall, without prejudice to apply for judicial review of any determination, be final and binding on the Users.

### **The Locational Onshore Security Factor**

- 14.15.88 The locational onshore security factor for everything other than Identified Onshore Circuits is derived by running a secure DCLF ICRP transport study of the network excluding local circuits and Identified Onshore Circuits based on the same market background as used for Zoning in the DCLF ICRP transport model. This calculates the nodal marginal costs where peak net demand can be met despite the Security and Quality of Supply Standard contingencies (simulating single and double circuit faults) on the network. Essentially the calculation of secured nodal marginal costs is identical to the process outlined above except that the secure DCLF study additionally calculates a nodal marginal cost taking into account the requirement to be

secure against a set of worse case contingencies in terms of maximum flow for each circuit.

- 14.15.89 For the purposes of 14.15.88 the secured nodal cost differential is compared to that produced by the DCLF ICRP transport model and the resultant ratio of the two determines the locational security factor using the Least Squares Fit method. Further information may be obtained from the charging website<sup>2</sup>.
- 14.15.90 For the purposes of 14.15.88 the locational onshore security factor, derived in accordance with paragraphs 14.15.88 and 14.15.89 and expressed to two decimal places, is based on an average from a number of studies conducted by **The Company** to account for future network developments. This security factor is reviewed for each price control period and fixed for the duration. The locational onshore security factor which is currently applicable, is detailed in **The Company's Statement of Use of System Charges**, which is available from the **Charging website**.
- 14.15.90A An Identified Onshore Circuit shall be defined as a single transmission HVDC subsea circuit or a single transmission AC subsea circuit between two MITS Nodes where there is only one route for the power to flow between the two MITS Nodes. The expansion factors for Identified Onshore Circuits are adjusted by dividing the applicable expansion factor for the Identified Onshore Circuits, calculated as per Sections 14.15.70 to 14.15.77, by the locational onshore security factor calculated in 14.15.90. When the locational onshore security factor is applied as per Section 14.15.94 and 14.15.95, this would result in an effective locational onshore security factor for Identified Onshore Circuits of 1.0.

### Local Security Factors

- 14.15.91 Local onshore security factors are generator specific and are applied to a generator's local onshore circuits. If the loss of any one of the local circuits prevents the export of power from the generator to the MITS then a local security factor of 1.0 is applied. For generation with circuit redundancy, a local security factor is applied that is equal to the locational security factor, derived in accordance with paragraphs 14.15.88 and 14.15.90.
- 14.15.92 Where a Transmission Owner has designed a local onshore circuit (or otherwise that circuit once built) to a capacity lower than the aggregated TEC of the generation using that circuit, then the local security factor of 1.0 will be multiplied by a Counter Correlation Factor (CCF) as described in the formula below;

$$CCF = \frac{D_{\min} + T_{cap}}{G_{cap}}$$

Where;  $D_{\min}$  = minimum annual net demand (MW) supplied via that circuit in the absence of that generation using the circuit

$T_{cap}$  = transmission capacity built (MVA)

<sup>2</sup> <https://www.nationalgrideso.com/industry-information/charging>

$G_{cap}$  = aggregated TEC of generation using that circuit

CCF cannot be greater than 1.0.

14.15.93 A specific offshore local security factor (LocalSF) will be calculated for each offshore connection using the following methodology:

$$LocalSF = \frac{NetworkExportCapacity}{\sum_k Gen_k}$$

Where:

NetworkExportCapacity = the total export capacity of the network disregarding any Offshore Interlinks

k = the generation connected to the offshore network

14.15.94 The local offshore security factor for single circuits with a single cable will be 1.0 and for multiple circuit connections will be capped at the locational onshore security factor, derived in accordance with 14.15.88-14.15.90.

14.15.95 The offshore local security factor for configurations with one or more Offshore Interlinks is updated so that the offshore circuit tariff will include the proportion of revenue associated with the Offshore Interlink(s). The specific offshore local security factor for configurations involving an Offshore Interlink, which may be greater than the locational onshore security factor, will be calculated for each offshore connection using the following methodology:

$$LocalSF = \frac{IRevOFTO \times NetworkExportCapacity}{CRevOFTO \times \sum_k Gen_k} + LocalSF_{initial}$$

Where:

IRevOFTO = The appropriate proportion of the Offshore Interlink(s) revenue in £ associated with the offshore connection calculated in 14.15.85

CRevOFTO = The offshore circuit revenue in £ associated with the circuit(s) from the offshore substation to the Single Common Substation.

LocalSF<sub>initial</sub> = Initial Local Security Factor calculated in 14.15.93 and 14.15.94  
And other definitions as in 14.15.93.

### Initial Transport Tariff

14.15.96 First an Initial Transport Tariff (ITT) must be calculated for both Peak Security and Year Round backgrounds. For Generation, the Peak Security zonal marginal km (ZMkm<sub>PS</sub>), Year Round Not-Shared zonal marginal km (ZMkm<sub>YRNS</sub>) and Year Round Shared zonal marginal km (ZMkm<sub>YRS</sub>) are simply multiplied by the expansion constant and the locational security factor to give the Peak Security ITT, Year Round Not-Shared ITT and Year Round Shared ITT respectively:

$$ZMkm_{GiPS} \times EC \times LSF = ITT_{GiPS}$$

$$ZMkm_{GiYRNS} \times EC \times LSF = ITT_{GiYRNS}$$

$$ZMkm_{GiYRS} \times EC \times LSF = ITT_{GiYRS}$$

Where

|                 |   |                                                                           |
|-----------------|---|---------------------------------------------------------------------------|
| $ZMkm_{GiPS}$   | = | Peak Security Zonal Marginal km for each generation zone                  |
| $ZMkm_{GiYRNS}$ | = | Year Round Not-Shared Zonal Marginal km for each generation charging zone |
| $ZMkm_{GiYRS}$  | = | Year Round Shared Zonal Marginal km for each generation charging zone     |

|                |   |                                                                                         |
|----------------|---|-----------------------------------------------------------------------------------------|
| EC             | = | Expansion Constant                                                                      |
| LSF            | = | Locational Security Factor                                                              |
| $ITT_{GiPS}$   | = | Peak Security Initial Transport Tariff (£/MW) for each generation zone                  |
| $ITT_{GiYRNS}$ | = | Year Round Not-Shared Initial Transport Tariff (£/MW) for each generation charging zone |
| $ITT_{GiYRS}$  | = | Year Round Shared Initial Transport Tariff (£/MW) for each generation charging zone.    |

- 14.15.97 Similarly, for demand the Peak Security zonal marginal km ( $ZMkm_{PS}$ ) and Year Round zonal marginal km ( $ZMkm_{YR}$ ) are simply multiplied by the expansion constant and the locational security factor to give the Peak Security ITT and Year Round ITT respectively:

$$ZMkm_{DiPS} \times EC \times LSF = ITT_{DiPS}$$

$$ZMkm_{DiYR} \times EC \times LSF = ITT_{DiYR}$$

Where

|               |   |                                                      |
|---------------|---|------------------------------------------------------|
| $ZMkm_{DiPS}$ | = | Peak Security Zonal Marginal km for each demand zone |
| $ZMkm_{DiYR}$ | = | Year Round Zonal Marginal km for each demand zone    |

|              |   |                                                                   |
|--------------|---|-------------------------------------------------------------------|
| $ITT_{DiPS}$ | = | Peak Security Initial Transport Tariff (£/MW) for each demand one |
| $ITT_{DiYR}$ | = | Year Round Initial Transport Tariff (£/MW) for each demand zone   |

zone

- 14.15.98 The next step is to multiply these ITTs by the expected metered triad gross GSP group demand and generation capacity to gain an estimate of the initial revenue recovery for both Peak Security and Year Round backgrounds. The metered triad gross GSP group demand and generation capacity are based on analysis of forecasts provided by Users and are confidential.

Metered triad gross GSP group demand is net demand for all GSP groups less embedded exports for all GSP groups.

a.

Where

|          |   |                                                                                                       |
|----------|---|-------------------------------------------------------------------------------------------------------|
| $ITRR_G$ | = | Initial Transport Revenue Recovery for generation                                                     |
| $G_{Gi}$ | = | Total forecast Generation for each generation zone (based on analysis of confidential User forecasts) |
| $ITRR_D$ | = | Initial Transport Revenue Recovery for gross GSP group demand                                         |
| $D_{Di}$ | = | Total forecast Metered Triad gross GSP group Demand for                                               |

each demand zone (based on analysis of confidential User forecasts)

In addition, the initial tariffs for generation are also multiplied by the **Peak Security flag** when calculating the initial revenue recovery component for the Peak Security background. When calculating the initial revenue recovery for the Shared component of the Year Round background, the initial tariffs are multiplied by the **Annual Load Factor** (see below). When calculating the initial revenue recovery for the Not Shared component of the Year Round background, the initial tariffs are multiplied by the **Year Round Not Shared Flag**.

#### Peak Security (PS) Flag

- 14.15.99 The revenue from a specific generator due to the Peak Security locational tariff needs to be multiplied by the appropriate Peak Security (PS) flag. The PS flags indicate the extent to which a generation plant type contributes to the need for transmission network investment at peak demand conditions. The PS flag is derived from the contribution of differing generation sources to the demand security criterion as described in the Security Standard. In the event of a significant change to the demand security assumptions in the Security Standard, **The Company** will review the use of the PS flag.

| Generation Plant Type | PS flag |
|-----------------------|---------|
| Intermittent          | 0       |
| Other                 | 1       |

#### Year Round Not Shared (YRNS) Flag

- 14.15.100 The revenue from a specific generator due to the Year Round Not Shared locational tariff needs to be multiplied by the appropriate Year Round Not Shared (YRNS) flag. The YRNS flag indicates the extent to which a generation plant type contributes to the need for transmission network investment at year round demand conditions in areas of the System where the proportion of Low Carbon generation exceeds Carbon generation as defined in 14.15.49.

| Generation Plant Type   | YRNS flag |
|-------------------------|-----------|
| Non Conventional Carbon | 1         |
| Conventional Carbon     | ALF       |

#### Annual Load Factor (ALF)

- 14.15.101 The ALF for each individual Power Station is calculated using the relevant TEC (MW) and corresponding output data. Where output data is not available for a Power Station, including for new Power Stations and emerging Power Station technologies, generic data for the appropriate generation plant type will be used.
- 14.15.102 For a given **Financial Year** “t” the Power Station ALF will be based on information from the previous five **Financial Years**, calculated for each **Financial Year** as set out below.

$$ALF = \frac{\sum_{p=1}^{17520} GMWh_p}{\sum_{p=1}^{17520} TEC_p \times 0.5}$$

Where:

GMWh<sub>p</sub> is the maximum of FPN or actual metered output in a Settlement Period related to the power station TEC (MW); and

TEC<sub>p</sub> is the TEC (MW) applicable to that Power Station for that Settlement Period including any STTEC and LDTEC, accounting for any trading of TEC.

- 14.15.103 The appropriate output (FPN or actual metered) figure is derived from **BM Unit** data available to **The Company** and relates to the total TEC of the Power Station.
- 14.15.104 Once all five **Financial Year** ALFs have been calculated for the individual Power Station they are compared, and the highest and lowest figures are discarded. The final ALF, to be used for transmission charging purposes, is calculated as the average of the remaining three ALFs.
- 14.15.105 In the event that only four **Financial Years** of complete output (FPN or actual metered) data are available for an individual Power Station then the higher three **Financial Years** ALF would be used in the calculation of the final ALF. In the event that only three **Financial Years** of complete output (FPN or actual metered) data are available then these three **Financial Years** would be used.
- 14.15.106 Due to the aggregation of output (FPN or actual metered) data for dispersed generation (e.g. cascade hydro schemes), where a single generator BMU consists of geographically separated power stations, the ALF would be calculated based on the total output of the BMU and the overall TEC of those Power Stations.
- 14.15.107 In the event that there are not three full **Financial Years** of an individual power station's output available, missing output (FPN or actual metered) data would be replaced by generic data for that generation plant type to ensure three **Financial Years** of information are available for the Power Station. The derivation of the generic data is described in paragraphs 14.15.111-14.15.114.
- 14.15.108 Users will receive draft ALFs before 25<sup>th</sup> December of the **Financial Year** (t-1) for the **Financial Year** (t) and will have a period of 15 **Business Days**
- 14.15.109 from date of publishing to notify **The Company** of any errors. Failure to agree changes relating to errors will be treated as a charging dispute under the CUSC.
- 14.15.110 The ALFs used in the setting of final tariffs will be published in the annual Statement of Use of System Charges. Changes to ALFs after this publication will not result in changes to published tariffs (e.g. following dispute resolution).

#### Derivation of Generic ALFs

- 14.15.111 The generic ALF is derived from the average annual output of the ten most recently commissioned GB generation of a particular generation plant type that have at least five **Financial Years'** data, using an identical methodology



to that used for the Power Station specific calculation described above. Where less than ten GB generators of a particular generation plant type exist, then data from all existing generators of that particular generation plant type will be used. Example generation plant type categories are listed below;

| Fuel Type                 |
|---------------------------|
| Biomass                   |
| Coal                      |
| Gas                       |
| Hydro                     |
| Nuclear (by reactor type) |
| Oil & OCGTs               |
| Pumped Storage            |
| Onshore Wind              |
| Offshore Wind             |
| CHP                       |

- 14.15.112 **The Company** will keep these categories under review and update as necessary. Where within a category there is a significant locational difference consideration will be given to zonal generic factors. The factors used will be published in the Statement of Use of System Charges and will be reviewed annually.
- 14.15.113 If a User can demonstrate that the generation plant type of a Power Station has changed, consideration will be given to the use of relevant generic ALF information in the calculation of their charges until sufficient specific data is available.
- 14.15.114 For new and emerging generation plant types, where insufficient data is available to allow a generic ALF to be developed, **The Company** will use the best information available e.g. from manufacturers and data from use of similar technologies outside GB. The factor will be agreed with the relevant Generator. In the event of a disagreement the standard provisions for dispute in the CUSC will apply.

### TNUoS Embedded Export Tariff

- 14.15.115 Embedded exports are exports measured on a half-hourly basis by Metering Systems, in accordance with the BSC, that are not subject to generation TNUoS.
- 14.15.116 The embedded export tariff will be applied to the metered Triad volumes of Embedded Exports for each demand zone as follows:

$$EET_{Di} = ITT_{DiPS} + ITT_{DiYR} + EX$$

Where

ITT<sub>DIPS</sub> = Peak Security Initial Transport Tariff for the demand zone;  
 ITT<sub>DIYR</sub> = Year Round Initial Transport Tariff for the demand zone, and  
 EX: First **Financial Year** following the implementation date of CMP 264/265:

$$= \frac{2}{3}(XP - AGIC) + AGIC$$

Second **Financial Year** following the implementation date of CMP 264/265:

$$= \frac{1}{3}(XP - AGIC) + AGIC$$

Third **Financial Year** following the implementation date of CMP 264/265 and every subsequent **Financial Year**:

$$= AGIC$$

Where

XP = Value of demand residual in **Financial Year** prior to implementation

AGIC = The Avoided GSP Infrastructure Credit (AGIC) which represents the unit cost of infrastructure reinforcement at GSPs which is avoided as a consequence of embedded generation connected to the distribution networks served by those GSPs. It is calculated from the average annuitised cost of that infrastructure reinforcement divided by the average capacity delivered by a supergrid transformer.

The Avoided GSP Infrastructure Credit is calculated at the beginning of each price control period and in the first applicable **Financial Year** following the implementation date of CMP264/265 using data submitted by onshore TSOs as part of the price control process. The data used is from the most recent [20] schemes submitted under the price control process and indexed each year by the TOPI formula set out in 14.3.6 until the end of the price control. For the avoidance of doubt, this approach does not include the cost of the supergrid transformers or any other connection assets as they are paid for by the relevant DNOs through their connection charges.

The Value of  $EET_{Di}$  will be floored at zero, so that  $EET_{Di}$  is always zero or positive.

The embedded export tariff applicable where a User directly connected to the National Electricity Transmission System is located at a Grid Supply Point that connects to more than one demand zone, will be derived as follows:

$$ITT_{DcPS} = \text{average} (ITT_{DaPS}, ITT_{DbPS}, ITT_{DdPS} \dots)$$

$$ITT_{DcYR} = \text{average} (ITT_{DaYR}, ITT_{DbYR}, ITT_{DdYR} \dots)$$

$ITT_{DcPS}$  = average of Peak Security Initial Transport Tariff attributable to each demand zone ( $ITT_{DaPS}, ITT_{DbPS}, ITT_{DdPS} \dots$ ); and

$ITT_{DcYR}$  = average of Year Round Initial Transport Tariff attributable to each demand zone ( $ITT_{DaYR}, ITT_{DbYR}, ITT_{DdYR} \dots$ ).

Where C is demand directly connected to the National Electricity Transmission System at a Grid Supply Point that connects to more than one demand zone, and a, b, d... are the relevant GSP Groups.

### Initial Revenue Recovery

14.15.117 For the Peak Security background the initial tariff for generation is multiplied by the total forecast generation capacity and the PS flag to give the initial revenue recovery:

$$\sum_{Gi=1}^n (ITT_{GiPS} \times G_{Gi} \times F_{PS}) = ITRR_{GPS}$$

Where

$ITRR_{GPS}$  = Peak Security Initial Transport Revenue Recovery for generation

$G_{Gi}$  = Total forecast Generation for each generation zone (based on analysis of confidential User forecasts)

$F_{PS}$  = Peak Security flag appropriate to that generator type  
 $n$  = Number of generation zones

The initial revenue recovery for gross GSP group demand for the Peak Security background is calculated by multiplying the initial tariff by the total forecast metered triad gross GSP group demand:

$$\sum_{Di=1}^{14} (ITT_{DiPS} \times D_{Di}) = ITRR_{DPS}$$

Where:

$ITRR_{DPS}$  = Peak Security Initial Transport Revenue Recovery for gross  
 GSP group demand  
 $D_{Di}$  = Total forecast Metered Triad gross GSP group Demand for each demand zone (based on analysis of confidential User forecasts)

14.15.118 For the Year Round background, the initial tariff for generation is multiplied by the total forecast generation capacity whilst calculating Initial Recovery for the Not-Shared component from Non Conventional Carbon. For Conventional Carbon the initial tariff for the Not Shared component is multiplied by both, the total forecast generation capacity and the ALF to give the initial revenue recovery. The initial tariff for the Shared component is multiplied by both, the total forecast generation capacity and the ALF to give the initial revenue recovery:

$$\sum_{Gi=1}^n (ITT_{GiYRNSNCC} \times G_{Gi}) = ITRR_{GYRNSNCC}$$

$$\sum_{Gi=1}^n (ITT_{GiYRNSCC} \times G_{Gi} \times ALF) = ITRR_{GYRNSCC}$$

$$\sum_{Gi=1}^n (ITT_{GiYRS} \times G_{Gi} \times ALF) = ITRR_{GYRS}$$

$$ITRR_{GYRNS} = ITRR_{GYRNSNCC} + ITRR_{GYRNSCC}$$

Where:

$ITRR_{GYRNSNCC}$  for = Year Round Not-Shared Initial Transport Revenue Recovery for Non Conventional Carbon generation  
 $ITRR_{GYRNSCC}$  for = Year Round Not-Shared Initial Transport Revenue Recovery for Conventional Carbon generation  
 $ITRR_{GYRNS}$  for = Year Round Not-Shared Initial Transport Revenue Recovery for generation  
 $ITRR_{GYRS}$  = Year Round Shared Initial Transport Revenue Recovery for generation

ALF = Annual Load Factor appropriate to that generator.

14.15.119 Similar to the Peak Security background, the initial revenue recovery for gross GSP group demand for the Year Round background is calculated by multiplying the initial tariff by the total forecast metered triad gross GSP group demand:

$$\sum_{Di=1}^{14} (ITT_{DiYR} \times D_{Di}) = ITRR_{Dyr}$$

Where:

$ITRR_{Dyr}$  = Year Round Initial Transport Revenue Recovery for gross GSP group demand

14.15.120 The initial revenue recovery for Embedded Exports is the Embedded Export Tariff multiplied by the total forecast volume of Embedded Export at triad:

$$ITRR_{EE} = \sum_{Di=1}^{14} (EET_{Di} \times EEV_{Di})$$

Where

$ITRR_{EE}$  = Initial Revenue impact for Embedded Exports  
 $EEV_{Di}$  = Forecast Embedded Export metered volume at Triad (MW)

For the avoidance of doubt, the initial revenue recovery for embedded exports can be positive or negative.

## Deriving the Final Local Tariff (£/kW)

### Local Circuit Tariff

14.15.121 Generation with a local circuit tariff is calculated by multiplying the Year Round nodal marginal km along the local circuit by the expansion constant and the relevant local security factor (whether onshore or offshore) and summing across local circuits to give the local circuit tariff:

$$\sum_k \frac{NLMkm_{Gj}^L \times EC \times LocalSF_k}{1000} = CLT_{Gi}$$

Where

$k$  = Local circuit  $k$  for generator  
 $NLMkm_{Gj}^L$  = Year Round Nodal marginal km along local circuit  $k$  using local circuit expansion factor.  
 $EC$  = Expansion Constant  
 $LocalSF_k$  = Local Security Factor for circuit  $k$

$CLT_{Gi}$  = Circuit Local Tariff (£/kW)

### Onshore Local Substation Tariff

14.15.122 All chargeable generation is subject to the local substation tariff component which is determined by assessing the generation substation type which is the substation at the connection charging boundary, against three cost determining factors:

- (a) HV connection voltage – the voltage at the boundary between the User's connection assets and the transmission system;
- (b) Sum of TEC at the generation substation – the combined TEC of all generation at the connecting substation; and
- (c) The level of redundancy at the generation substation – single busbar / single switch mesh connections are examples of no redundancy connections, whereas examples of connections with redundancy include double busbar and mesh sub station designs.

14.15.123 Using the above factors, the corresponding £/kW tariffs that are currently applicable, are detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**.

14.15.124 The process for calculating Local Substation Tariffs will be carried out for the first year of the price control and will subsequently be indexed by TOPI for each subsequent year of the price control period.

14.15.125 The effective **Local Tariff** (£/kW) is calculated as the sum of the circuit and substation onshore and/or offshore components:

$$ELT_{Gi} = CLT_{Gi} + SLT_{Gi}$$

Where

$ELT_{Gi}$  = Effective Local Tariff (£/kW)

$SLT_{Gi}$  = Substation Local Tariff (£/kW)

14.15.126 Where tariffs do not change mid way through a **Financial Year**, final local tariffs will be the same as the effective tariffs:

$ELT_{Gi} = LT_{Gi}$

Where

$LT_{Gi}$  = Final Local Tariff (£/kW)

14.15.127 Where tariffs are changed part way through the year, the final tariffs will be calculated by scaling the effective tariffs to reflect that the tariffs are only applicable for part of the year and parties may have already incurred TNUoS liability.

$$LT_{Gi} = \frac{12 \times \left( ELT_{Gi} \times \sum_{Gi=1}^{21} G_{Gi} - FLL_{Gi} \right)}{b \times \sum_{Gi=1}^{21} G_{Gi}} \quad \text{and} \quad FT_{Di} = \frac{12 \times \left( ET_{Di} \times \sum_{Di=1}^{14} D_{Di} - FL_{Di} \right)}{b \times \sum_{Di=1}^{14} D_{Di}}$$

Where:

b = number of months the revised tariff is applicable for

FLL = Forecast local liability incurred over the period that the original tariff is applicable for

14.15.128 For the purposes of charge setting, the total local charge revenue is calculated by:

$$LCRR_G = \sum_{j=Gi} LT_{Gi} * G_j$$

Where

LCRR<sub>G</sub> = Local Charge Revenue Recovery  
 G<sub>j</sub> = Forecast chargeable Generation or Transmission Entry Capacity in kW (as applicable) for each generator (based on analysis of confidential information received from Users)

### Offshore substation local tariff

14.15.129 All offshore chargeable generation is subject to an offshore substation tariff. The offshore substation tariff shall be the sum of transformer, switchgear and platform components.

14.15.130 Each tariff component, expressed in £/kW, shall be the ratio of the Offshore Transmission Owner revenue (£) and rating associated with the transformers, switchgear or platform (kW) at each offshore substation. The Offshore Transmission Owner revenue of each tariff component shall include that associated with asset spares. In the case of the platform component, the relevant rating shall be the lower of the transformer or switchgear ratings. As with the offshore circuit expansion factors, the Offshore Transmission Owner revenue associated with each tariff component shall be averaged over the remaining years of the NETSO price control.

14.15.131 Offshore Transmission Owner revenue associated with interest during construction and project development overheads will be attributed to the relevant asset category with which it is associated. If these or any other costs included in the Offshore Transmission Owner revenue are not readily attributable to a given asset category, they will be pro-rated across the various asset categories based on their relative cost.

14.15.132 A discount shall be provided to the offshore substation tariff to reflect the average cost of civil engineering for onshore substations. The currently applicable discount is detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**. This will be inflated by TOPI each year and reviewed every price control period.

14.15.133 Offshore substation tariffs shall be reviewed at the start of every onshore price control period. For each subsequent year within the price control period, these shall be inflated in the same manner as the associated Offshore Transmission Owner Revenue.

14.15.134 The revenue from the offshore substation local tariff is calculated by:

$$SLTR = \sum_{\text{All offshore substations}} \left( SLT_k \times \sum_k Gen_k \right)$$

Where:

SLT<sub>k</sub> = the offshore substation tariff for substation k  
 Gen<sub>k</sub> = the generation connected to offshore substation k

### The Residual Tariff

The total revenue to be recovered through TNUoS charges is determined each year with reference to the Transmission Licensees' Price Control formulas less the costs expected to be recovered through Pre-Vesting connection charges. Hence in any given year  $t$ , a target revenue figure for TNUoS charges (TRR $_t$ ) is set as follows:

$$TRR_t = R_t - PVC_t$$

Where

TRR $_t$  = TNUoS Revenue Recovery target for year  $t$ .

$R_t$  = Forecast Revenue allowed under **The Company's** Price Control for year  $t$  (this term includes a number of adjustments, including for over/under recovery from the previous year). For further information, refer to condition F3 of the **ESO Licence**.

PVC $_t$  = Forecast Revenue from Pre-Vesting connection charges for year  $t$

14.15.136 In normal circumstances, the revenue forecast to be recovered from the initial transport tariffs will not equate to the total revenue target. This is due to a number of factors. For example, the transport model assumes, for simplicity, smooth incremental transmission investments can be made. In reality, transmission investment can only be made in discrete 'lumps'. The transmission system has been planned and developed over a long period of time. Forecasts and assessments used for planning purposes will not have been borne out precisely by events and therefore some distinction between an optimal system for one year and the actual system can be expected.

14.15.137 As a result of the factors above, in order to ensure adequate recovery of total Transmission Owner revenue, a set of non-locational **Transmission Demand Residual Tariffs** are calculated, which include infrastructure substation asset costs. These tariffs are billed alongside the initial transport tariffs for demand only so that the total revenue recovery is achieved. The total amount of revenue to be recovered through **Transmission Demand Residual Tariffs** is defined as the **Transmission Demand Residual**.

$$TDR = TRR - ITRR_{DPS} - ITRR_{DYS} - ITRR_{EE} - ITRR_{GPS} - ITRR_{GYRNS} - ITRR_{GYRS} - LCRR_{GG} - AdjRevenue$$

Where

TDR = **Transmission Demand Residual**

AdjRevenue = Adjustment Revenue as per paragraph 14.14.5

### Creation of Charging Bands for use in Transmission Demand Residual Tariff Setting

14.15.137 To produce the **Transmission Demand Residual Tariffs** a set of **Charging Bands** are to be created for each of the **Residual Charging Groups** using the following methodology.

(a) For domestic **Final Demand Sites** whether connected to the **Distribution** system or **Transmission** system there will be one **Charging Band** and;

- (b) For non-domestic **Final Demand Sites** connected to the **Distribution** system there will be four **Charging Bands** for each of the **Residual Charging Groups** according to the methodology introduced to Schedule 32 of the **DCUSA** via DCUSA modification DCP358 and entitled 'RESIDUAL CHARGING BANDS' with boundaries set at the 40<sup>th</sup>, 70<sup>th</sup> and 85<sup>th</sup> percentiles and;
- (c) For **Final Demand Sites** directly connected to the **Transmission** system there will be four **Charging Bands** using the latest 24 months of gross **Consumption** data (from the **Final Reconciliation Settlement Run** or **Reconciliation Settlement Run**) with boundaries set at the 40<sup>th</sup>, 70<sup>th</sup> and 93<sup>rd</sup> percentiles and;
- (d) For **Unmetered Supplies** there will be one **Charging Band**.

14.15.138 These **Charging Bands** will be reviewed periodically and be implemented effective from the beginning of each **Onshore Transmission Owner** price control period.

#### Transmission Demand Residual Tariff Setting

| Domestic <b>Final Demand Sites</b>                 |                                                                       |
|----------------------------------------------------|-----------------------------------------------------------------------|
| LV No Mic                                          | Band 1 ( $\leq 40^{\text{th}}$ percentile)                            |
|                                                    | Band 2 ( $> 40^{\text{th}}$ percentile – 70 <sup>th</sup> percentile) |
|                                                    | Band 3 ( $> 70^{\text{th}}$ percentile – 85 <sup>th</sup> percentile) |
|                                                    | Band 4 ( $> 85^{\text{th}}$ percentile)                               |
| LV MIC                                             | Band 1 ( $\leq 40^{\text{th}}$ percentile)                            |
|                                                    | Band 2 ( $> 40^{\text{th}}$ percentile – 70 <sup>th</sup> percentile) |
|                                                    | Band 3 ( $> 70^{\text{th}}$ percentile – 85 <sup>th</sup> percentile) |
|                                                    | Band 4 ( $> 85^{\text{th}}$ percentile)                               |
| HV                                                 | Band 1 ( $\leq 40^{\text{th}}$ percentile)                            |
|                                                    | Band 2 ( $> 40^{\text{th}}$ percentile – 70 <sup>th</sup> percentile) |
|                                                    | Band 3 ( $> 70^{\text{th}}$ percentile – 85 <sup>th</sup> percentile) |
|                                                    | Band 4 ( $> 85^{\text{th}}$ percentile)                               |
| EHV                                                | Band 1 ( $\leq 40^{\text{th}}$ percentile)                            |
|                                                    | Band 2 ( $> 40^{\text{th}}$ percentile – 70 <sup>th</sup> percentile) |
|                                                    | Band 3 ( $> 70^{\text{th}}$ percentile – 85 <sup>th</sup> percentile) |
|                                                    | Band 4 ( $> 85^{\text{th}}$ percentile)                               |
| <b>Directly Connected Users Final Demand Sites</b> | Band 1 ( $\leq 40^{\text{th}}$ percentile)                            |
|                                                    | Band 2 ( $> 40^{\text{th}}$ percentile – 70 <sup>th</sup> percentile) |
|                                                    | Band 3 ( $> 70^{\text{th}}$ percentile – 93 <sup>rd</sup> percentile) |
|                                                    | Band 4 ( $> 93^{\text{rd}}$ percentile)                               |
| <b>Unmetered Supplies</b>                          |                                                                       |

14.15.139

The **Transmission Demand Residual Tariffs** are derived from the **Transmission Demand Residual** value calculated in 14.15.136 and the total aggregate annual consumption of all **Final Demand Sites** and **Unmetered Supplies**.

14.15.140

To determine the proportion of the **Transmission Demand Residual** to be recovered from each **Charging Band**:



- (a) Where there are **Final Demand Sites** in a **Charging Band** the total annual consumption from **Final Demand Sites** in the **Charging Band** in question is divided by the total annual consumption from all **Final Demand Sites** and **Unmetered Supplies** creating a percentage value.
- (b) Where there are **Unmetered Supplies** in a **Charging Band** the total annual consumption from **Unmetered Supplies** in the **Charging Band** in question is divided by the total annual consumption from all **Final Demand Sites** and **Unmetered Supplies** creating a percentage value.

This percentage is multiplied by the **Transmission Demand Residual** to give the total value to be recovered from the **Charging Band**.

14.15.141

**To set the Transmission Demand Residual Tariff for each Charging Band:**

- (a) For each **Charging Band** containing **Final Demand Sites** the total value to be recovered from the **Charging Band** as per 14.15.140 is divided by the number of **Final Demand Sites** in the **Charging Band** to create a £/site annual charge. This charge is further divided by the number of days in the charging year for which this tariff applies to produce the **Transmission Demand Residual Tariff** for the **Charging Band** (£/site/day).
- (b) For each **Charging Band** containing **Unmetered Supplies** the total value to be recovered from the **Charging Band** as per 14.15.140 is divided by the total annual consumption from **Unmetered Supplies** in the **Charging Band** in question to create a p/kWh charge. This tariff is also defined as the **UMS Tariff**.

**Final £/kW Tariff**

- 14.15.138 The effective Transmission Network Use of System tariff (TNUoS) for generation can now be calculated as the sum of the initial transport wider tariffs for Peak Security and Year Round backgrounds and Adjustment Tariff and local tariff (for generation):

$$ET_{Gi} = \frac{ITT_{GiPS} + ITT_{GiYRNS} + IFF_{GiYRS} + AdjTariff_i}{1000} + LT_{Gi}$$

and

The effective Transmission Network Use of System tariff (TNUoS) for the HH Demand Locational can now be calculated as the sum of the initial transport wider tariffs for Peak Security and Year Round backgrounds for half-hourly metered demand:

$$ET_{Di} = \frac{ITT_{DiPS} + ITT_{DiYR}}{1000}$$

Where

$ET_{Gi}$  = Effective Generation TNUoS Tariff expressed in £/kW ( $ET_{Gi}$  would only be applicable to a Power Station with a PS flag of 1 and ALF of 1; in all other circumstances  $ITT_{GiPS}$ ,  $ITT_{GiYRNS}$  and  $ITT_{GiYRS}$  will be applied using Power Station specific data)

$\text{AdjTariff}_i = \text{AdjTariff}$  (from 14.14.5) applicable in time period 'i'.

$\text{ET}_{Di}$  = Effective HH Demand Locational TNUoS Tariff expressed in £/kW

The effective Transmission Network Use of System tariff (TNUoS) for embedded exports can now be calculated by expressing the embedded export tariff in £/kW values:

$$\text{ET}_{EEi} = \frac{\text{EET}_{Di}}{1000}$$

Where

$\text{ET}_{EEi}$  = Effective Embedded Export TNUoS Tariff expressed in £/kW

For the purposes of the annual Statement of Use of System Charges  $\text{ET}_{Gi}$  will be published as  $\text{ITT}_{GiPS}$ ,  $\text{ITT}_{GiYRNS}$ ,  $\text{ITT}_{GiYRS}$ ,  $\text{LT}_{Gi}$  and  $\text{AdjTariff}_i$  (if required)

14.15.139 Where tariffs do not change mid way through a **Financial Year**, final demand and generation tariffs will be the same as the effective tariffs.

$$\text{FT}_{Gi} = \text{ET}_{Gi}$$

$$\text{FT}_{Di} = \text{ET}_{Di}$$

$$\text{FT}_{EEAi} = \text{ET}_{EEi}$$

14.15.140 Where tariffs are changed part way through the year, the final tariffs will be calculated by scaling the effective tariffs to reflect that the tariffs are only applicable for part of the year and parties may have already incurred TNUoS liability.

$$\text{FT}_{Gi} = \frac{12 \times \left( \text{ET}_{Gi} \times \sum_{Gi=1}^{20} G_{Gi} - \text{FL}_{Gi} \right)}{b \times \sum_{Gi=1}^{27} G_{Gi}}$$

$$\text{FT}_{Di} = \frac{12 \times \left( \text{ET}_{Di} \times \sum_{Di=1}^{14} D_{Di} - \text{FL}_{Di} \right)}{b \times \sum_{Di=1}^{14} D_{Di}} \quad \text{and} \quad \text{FT}_{EEi} = \frac{12 \times (\text{ET}_{EEi} \times \sum_{Di=1}^{14} \text{EET}_{Di} - \text{FL}_{Di})}{b \times \sum_{Di=1}^{14} \text{EET}_{Di}}$$

Where:

b = number of months the revised tariff is applicable for

FL = Forecast liability incurred over the period that the original tariff is applicable for

Note: The  $\text{ET}_{Gi}$  element used in the formula above will be based on an individual Power Stations PS flag and ALF for Power Station  $G_{Gi}$ , aggregated to ensure overall correct revenue recovery.

14.15.141 If the final HH Demand Locational TNUoS Tariff results in a negative number then this is collared to £0/kW with the resultant revenue to be refunded to the **Final Demand** smeared over the remaining demand zones via the **Transmission Demand Residual**:

If  $FT_{Di} < 0$ , then  $i = 1$  to  $z$

$$\text{Therefore, } NRRT_D = \frac{\sum_{i=1}^z (FT_{Di} \times D_{Di})}{\sum_{i=z+1}^{14} D_{Di}}$$

Therefore the revised Final Tariff for the gross demand zones with positive Final tariffs is given by:

$$\text{For } i = 1 \text{ to } z: \quad RFT_{Di} = 0$$

$$\text{For } i = z+1 \text{ to } 14: \quad RFT_{Di} = FT_{Di} + NRRT_D$$

Where

$NRRT_D$  = Non Recovered Revenue Tariff (£/kW)

$RFT_{Di}$  = Revised Final Tariff (£/kW)

14.15.142 The tariffs applicable for any particular year are detailed in **The Company's Statement of Use of System Charges**, which is available from the **Charging website**. Archived tariff information may also be obtained from the Charging website.

14.15.143 The zonal maps referenced in **The Company's Statement of Use of System Charges** and available on the **Charging website** contain detailed information for the **Financial Year** in question of which Grid Supply Points fall into which TNUoS zones.

14.15.144 New Grid Supply Points will be classified into zones on the following basis:

- For demand zones, according to the GSP Group to which the Grid Supply Point is allocated for energy market settlement purposes.
- For a User directly connected to the National Electricity Transmission System, the following rules will apply to determine its demand zone:
  - If the Connection Site falls within a GSP Group's geographic area, the new GSP that connects directly at the site will be assigned to the demand zone corresponding to the GSP Group, unless;
  - A User is directly connected to the National Electricity Transmission System at a Grid Supply Point that connects to more than one demand zone, in which case, for the purpose of DCLF modelling, the User's demand will be spread evenly across the relevant GSP Groups to calculate the relevant zonal demand tariffs.
- For generation zones, with reference to the geographic proximity to existing zones and, where close to a boundary between existing zones, with reference to the marginal costs arising from transport model studies. The GSP will then be allocated to the zone, which contains the most similar marginal costs.

14.15.145 **The Company** has available, upon request, the DCLF ICRP transport model, tariff model template and data necessary to run the model, consisting of nodal values of generation and demand connection points to the NETS. The model and data will enable the basic nodal charges to be determined and will also

allow sensitivity analysis concerning alternative developments of generation and demand to be undertaken. The model is available from the Charging Team and whilst it is free of charge, it is provided under licence to restrict its distribution and commercial use.

14.15.146 **The Company** will be pleased to run specific sensitivity studies for Users under a separate study contract in line with the fees set out in the **Statement of Use of System Charges**. Please contact the **Charging Team**.

14.15.147 The factors which will affect the level of TNUoS charges from year to year include but are not limited to-;


- the forecast level of peak demand on the system
- the Price Control formula (including the effect of any under/over recovery from the previous year),
- the expansion constant,
- the locational security factor,
- the PS flag
- the Year Round Not Shared (YRNS) Flag
- the ALF of a generator
- changes in the transmission network
- HVDC circuit impedance calculation
- changes in the pattern of generation capacity and demand.
- Changes in the pattern of embedded exports
- the £/ € exchange rate and expected Generator Output
- Number of **Final Demand Sites** per **Charging Band**
- Volume (in kWh) apportioned to each **Charging Band**

14.15.148 In accordance with Standard Licence Condition C13, generation directly connected to the NETS 132kV transmission network which would normally be subject to generation TNUoS charges but would not, on the basis of generating capacity, be liable for charges if it were connected to a licensed distribution network qualifies for a reduction in transmission charges by a designated sum, determined by the Authority. Any shortfall in recovery will result in a unit amount increase in gross demand charges to compensate for the deficit. Further information is provided in the Statement of the Use of System Charges.

### Stability & Predictability of TNUoS tariffs

14.15.149 A number of provisions are included within the methodology to promote the stability and predictability of TNUoS tariffs. These are described in 14.29.

14.15.150 Demand tariffs for Demand Users directly connected to the NETS at GSPs that connect to more than one demand zone, will be derived from averages of the Peak Security and Year Round tariffs respectively attributable to each demand zone, as set out below:

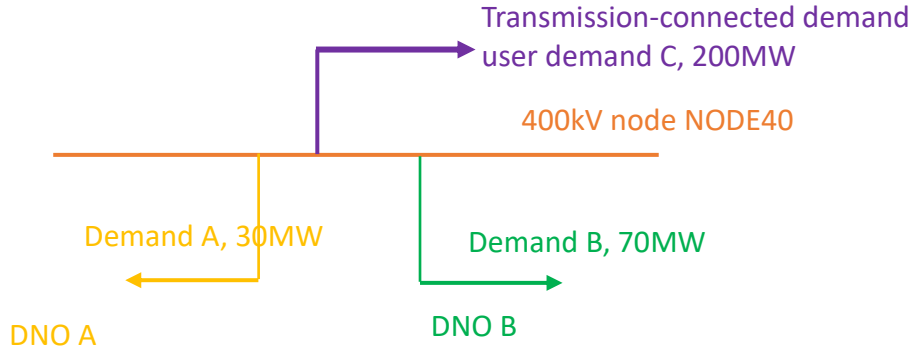

As demand C connects at a Connection Site consisting of connections to more than one demand zone, for the purpose of DCLF Transport modelling and calculation of demand zonal tariffs, demand C is spread evenly across the multiple GSP Groups (A and B). Therefore demand C at NODE40 is split into two parts: 100MW at GSP Group A, and 100MW at GSP Group B. The zonal demand at A and B is calculated as below (copying 14.15.41):

The zonal Peak Security marginal km for demand zone A and B is calculated as follows.

$$WNMkm_{jPS} = \frac{-1 * NMkm_{jPS} * Dem_j}{\sum_{j \in Di} Dem_j}$$

$$ZMkm_{DiPS} = \sum_{j \in Di} WNMkm_{jPS}$$

Where:

Di = Demand zone  
 Dem = Positive Nodal Net Demand from transport model, including 100MW at NODE40 by demand C for demand zone A, and 100MW at NODE40 by demand C for demand zone B.

If Nodal Demand from a node is less than 0 (Exporting) the nodal demand will be set to zero and therefore not contribute to the Zonal marginal km

Similarly, the zonal Year Round marginal km for demand zones is calculated as follows:

$$WNMkm_{jYR} = \frac{-1 * NMkm_{jYR} * Dem_j}{\sum_{j \in Di} Dem_j}$$

$$ZMkm_{DiYR} = \sum_{j \in Di} WNMkm_{jYR}$$

Once the zonal Peak Security and Year Round tariffs are calculated for demand zones A and B (according to 14.15.97), a set of new demand zonal tariffs will be created for demand C as below –

Zonal Peak Security tariff for demand C = average (Zone A Peak Security tariff, Zone B Peak Security tariff)  
 Zonal Year Round tariff for demand C = average (Zone A Year Round tariff, Zone B Year Round tariff)

For demand C,  $ZMkm_{DCPS} = ZMkm_{DAPS} + ZMkm_{DBPS}$ , and  
 $ZMkm_{DCYR} = ZMkm_{DAYR} + ZMkm_{DBYR}$

### Allocating Final Demand Sites to Charging Bands

14.15.142 **Users** who own or operate a **Distribution System** shall maintain a methodology in **DCUSA** entitled "ALLOCATION OF CUSTOMERS TO CHARGING BANDS BY DNO/IDNO PARTIES" (introduced by **DCUSA** modification DCP360) to allocate **Final Demand Sites** and **Unmetered Supplies** to **Charging Bands** for their respective **Distribution System**.

14.15.143 **Charging Bands** that are determined in accordance with 14.15.137, **Final Demand Sites** and **Unmetered Supplies** will be allocated to **Charging Bands** as follows;

1. For **Embedded Final Demand Sites** and **Unmetered Supplies**, **Users** who own or operate a **Distribution System** shall allocate **Embedded Final Demand Sites** and **Unmetered Supplies** to **Charging Bands** for their respective network as per the methodology described in 14.15.147
2. For **Final Demand Sites** connected to the **NETS**, the following hierarchy will apply, starting at (i) and progressing to (iv) to determine the correct **Charging Band** as created in 14.15.137;

- i. Where available, the mean average of the latest 24 months **Consumption** data for the specific **Final Demand Site** shall be used.

Where this is not available in terms of (ii), (iii) and (iv);

- ii. The mean average of as much data **Consumption** data as is available for the specific **Final Demand Site**, or;
- iii. **The Company** making use of any valid information as is available or made available to best estimate the expected **Consumption** of the **Final Demand Site**, or;
- iv. Should no data or information be available for the specific **Final Demand Site**, a 12 month mean average of all **Consumption** from all **NETS** connected **Final Demand Sites** shall be used.

14.15.143a For all **Final Demand Sites** allocated under 14.15.143 2. (iii), in the September following the completion of a full **Financial Year** for which the **Final Demand Site** has recorded actual metered data a review of the **Charging Band** allocation of the specific **Final Demand Site** will take place by **The Company**.

14.15.143b This review, (the "**September New Site** review") will use the material change in circumstances as per paragraph 14.15.149 to determine whether the **Final Demand Site** will be reallocated to a different **Charging Band**.

14.15.143c **The Company** shall notify any **Final Demand Site** and it's **Supplier(s)** should they be included in a **September New Site** review. This notification shall be no issued later than the 15th calendar day in August prior to the **September New Site** review.

14.15.143d Following the conclusion of the **September New Site** review, **The Company** shall notify both the **Final Demand Site** and it's **Supplier(s)** of the outcome within 5 **Business Days** of the completion of the **September New Site** review. The **Transmission Demand Residual Tariff** as per the new **Charging Band** will apply from 1<sup>st</sup> October immediately following the **September New Site** review should any **Final Demand Sites** be reallocated to a different **Charging Band**.

14.15.143e **The Company** shall complete all **September New Site** reviews by the 15th calendar day of September.

14.15.143f **Final Demand Sites** will be subject to the **September New Site** review no more than once during the duration of their **Bilateral Connection Agreement**.

14.15.144 For the purpose of determining the **Transmission Demand Residual Tariff** liability for a given **Final Demand Site**, the **Final Demand Site** will be allocated to a **Charging Band**.

- Allocation to a **Charging Band** for **NETS** connected **Final Demand Sites** will be in accordance with 14.15.143.2. The **Final Demand Site** will be allocated into a **Charging Band** where the **Final Demand Site's** gross **Consumption** value, is less than or equal to the maximum threshold for that **Charging Band**.
- Allocation to a **Charging Band** for **Embedded Final Demand Sites** will be in accordance with the methodology described in 14.15.142 and 14.15.143.1.

14.15.144a For **Mixed Demand Sites** connected to the **NETS**, the provisions of 14.15.144 shall be applied to the **Mixed Demand Site's** gross **Consumption** except where a valid **Declaration** is provided by the **User**. This **Declaration** shall clearly identify the **Metering Systems** (or **Operational Metering Equipment** where a **Metering System** is not viable) used to isolate and identify gross **Final Demand Consumption** from any other **Consumption** at the **Mixed Demand Site**. A **Mixed Demand Site's** gross **Final Demand Consumption** shall either be measured using meters installed at each **Final Demand** asset, or alternatively, be calculated as the difference between the **Mixed Demand Site's** gross **Consumption** as metered at the site boundary, and consumption metered at each asset which does not consume **Final Demand**. Should a valid **Declaration** be provided, any **Consumption** not associated with **Final Demand** will be removed before the provisions of 14.15.144 are applied. Where it is unclear whether the **Consumption** is **Final Demand** or not, it will be treated as **Final Demand**.

14.15.144b For **Embedded Mixed Demand Sites**, the methodology described in 14.15.142 shall be used.

14.15.145 For the purpose of determining the **Transmission Demand Residual Tariff** liability for a given **Unmetered Supply**, the **Unmetered Supply** will be allocated to the appropriate **Residual Charging Group** in accordance with 14.15.137.

14.15.146 **Final Demand Sites** and **Unmetered Supplies** will be assigned to a **Charging Band** for the duration of the **Onshore Transmission Owner** price control, unless;

1. The **Final Demand Site** or and **Unmetered Supply** is reassigned by an intervention as described in 14.15.147 - 14.15.151, or
2. the **Authority** directs that the **Final Demand Site** or **Unmetered Supply** should be reassigned to a different **Charging Band**.

Once allocated and subject to the intervention process, **Final Demand Sites** and **Unmetered Supplies** will be re-allocated to **Charging Bands** prior to the start of each **Onshore Transmission Owner** price control in accordance with 14.15.138.

### Charging Banding Interventions

14.15.147 **Users** who own or operate a **Distribution System** shall maintain a methodology in **DCUSA** entitled "EXCEPTIONAL CIRCUMSTANCES RESULTING IN RE-ALLOCATION TO A DIFFERENT BAND WITHIN A PRICE CONTROL PERIOD" (introduced by **DCUSA** modification DCP360) to manage interventions and disputes from **Embedded Final Demand Sites** and **Unmetered Supplies** connected to their respective **Distribution System**.

14.15.148 Where a **Final Demand Site** or **Unmetered Supply** (or their nominated **Supplier(s)** or agent) or a **User** or **The Company** wishes to challenge the allocation of such a **Final Demand Site** to a **Charging Band**, it shall;

1. For **Embedded Final Demand Sites** and **Unmetered Supplies**, **Users** who own or operate a **Distribution System** shall follow the methodology described in 14.15.147 for their respective network
2. For **Final Demand Sites** directly connected to the **NETS**, follow the process as defined in **CUSC** Section 7.3 to demonstrate a material change in circumstances.

14.15.149 For the purposes of 14.15.148.2 a material change in circumstances for **NETS** connected **Final Demand Sites** must be demonstrated by;

1. the voltage of connection of the **Final Demand Site** changing with an accompanying signed **Construction Agreement**; or
2. should **Consumption** data be used as the basis of **Directly Connected Final Demand Site Charging Bands**, providing 12 months of actual metered gross **Consumption** data which shows gross **Consumption** is lower than 50% or greater than 50% of the **Consumption** data applied to the relevant subheading of 14.15.143. For reductions in **Consumption**, this shall be accompanied with a signed letter from **The Company** Director (or equivalent) confirming the rationale for the exceptional and significant changes to consumption (including historical **Consumption**); or
3. A notice to **Disconnect** is provided in accordance with **CUSC** Section 5.7.

14.15.150 Any changes to **Transmission Network Use of System Demand Charges** as a result of a intervention (as described in 14.15.147) shall be collected or refunded (as appropriate) through the reconciliation process described in 14.25.

14.15.151 The requirements of 14.15.147 - 14.15.150 shall not preclude the **Final Demand Site's** or **Unmetered Supply's** right to refer the matter directly to the **Authority** for determination.

## Declarations

14.15.152 A **Declaration** is a statement to be submitted by the **Registrant** of the relevant **BM Unit(s)** or **Single Site**, which:

- (a) is signed by one of the **Storage Facility Operator's** registered Directors that confirms that a **Electricity Storage Facility** fulfils the criteria set out in the definitions of **SVA Storage Facility** and **CVA Storage Facility** as applicable; and either
  - (i) for **SVA Storage Facility** only, is submitted in accordance with the **BSC** and contains other details that are required in accordance with **BSC** Section S; or
  - (ii) for **CVA Storage Facility** only, identifies the specific **BM Units** which only perform activities necessary for **Electricity Storage** and is submitted to **The Company**.
- (b) is signed by one of the **Electricity Generation Facility's** registered Directors that confirms that the **Electricity Generation Facility** only perform activities necessary for **Electricity Generation** and is submitted to **The Company**.
- (c) is signed by one of the **Eligible Services Facility's** registered Directors that confirms the **Eligible Services Facility** can only perform activities



necessary for **Eligible Services** and does not consume any **Active Power** other than for the provision of **Eligible Services** and is submitted to **The Company**.

- (d) is signed by one of the **Mixed Demand Site's** registered Directors that confirms the **Mixed Demand Site** contains both **Final Demand** and a **Generator** or **Electricity Storage Plant** and is submitted to **The Company**.

The validity of a **Declaration** for an **SVA Storage Facility** is determined in accordance with BSC Section S, and of a **Declaration** for a **CVA Storage Facility**, **Non-Final Demand Site** and **Eligible Services Facility** is determined by **The Company**.

- 14.15.153 A **Declaration** received by **The Company** will either be accepted or rejected within three **Business Days** and shall take effect on the effective date and time as notified to the **Registrant**. Any disagreement between **The Company** and the **Registrant** on the validity of a **Declaration** will be treated as a **Charging Dispute**.
- 14.15.154 Any **Declarations** that are accepted by **The Company** shall be valid in perpetuity. Should circumstance at the relevant **BM Unit(s)** or **Single Site** change in such a way that the **Declaration** is no longer accurate, it is the responsibility of the **User** to resubmit a revised **Declaration** as soon as possible to reflect the change in circumstance. **The Company** will validate any revised **Declarations** as per 14.15.153.
- 14.15.155 **The Company** shall, at its sole discretion and acting reasonably, have the right to audit and revalidate a previously approved **Declaration**. The **User** agrees to support and cooperate with any audit and/or revalidation as required (including access to site if required). An inaccurate **Declaration** shall immediately be deemed to be invalid and the provisions of this Section 14 applied to the relevant **BM Unit(s)** or **Single Site** to:
- (a) reflect no **Declaration** being in effect for the next calendar day; and
    - (i) retroactively apply **Transmission Network Use of System Charges** from the date of invalidity to the later of:
      - (ii) a previously valid **Declaration**; or
      - (iii) the **Final Reconciliation Statement** as per paragraph 3.13.7.

#### **14.15.156 Anticipatory Investment**

- 14.15.156.1 **Anticipatory Investment** (AI) is investment in transmission assets which goes beyond the needs of the immediate offshore development or developments. Where **Anticipatory Investment** has been identified by the Authority, the generators' Offshore local tariff will be calculated as per 14.15.121, and 14.15.129 – 14.15.134, but will utilise their individual generation connected and their proportion (AI or non-AI) of the OFTO revenue, Network Export Capacity, and asset ratings rather than those of the total project.
- 14.15.156.2 Any generator(s) connected to the **Offshore Transmission System** at the point of asset transfer to the OFTO, will become liable for Offshore local tariffs for the non-AI portion of the OFTO revenue. Any subsequent generator(s) will become liable for Offshore local tariffs for the AI portion of the OFTO revenue at the point of connection.
- 14.15.156.3 During the period between the **Offshore Transmission System** being transferred to the OFTO and the subsequent generator(s) connecting, the AI portion of the OFTO revenue cannot be recovered from the subsequent generator(s). The difference between what is payable to the OFTO but cannot be recovered from the subsequent generator(s) is referred to as the 'AI Cost Gap.'

14.15.156.4 Prior to the subsequent generator(s) connecting, the AI Cost Gap will be recovered from demand customers via the **Transmission Demand Residual**. The AI Cost Gap will be repaid to demand customers by the subsequent generator(s), once connected to the transmission system, either:

- Through the AI Cost Gap Tariff. This tariff will be applied over a period of time equal to the number of days for which the subsequent generator(s) share of the AI Cost Gap was accrued, rounded up to a whole number of years, in addition to the number of days remaining in the charging year in which the subsequent generator(s) connects (if it connects after the first day of a charging year); or
- alternatively, if decided by the generator(s), be paid via one payment in the charging year in which the subsequent generator(s) connects.

14.15.156.5 *Calculating the AI Cost Gap:* The AI proportion of OFTO revenue associated to the subsequent generator(s), will be identified for each full or partial charging year prior to the subsequent generator(s) connecting. Each year's value will be inflated in line with the average increase in May – October CPIH as described in 14.15.156.6, to ensure it is in the appropriate price base for the year the AI Cost Gap Tariff becomes applicable. The total of these values will be the AI Cost Gap.

**14.15.156.6** The inflation to be applied to the AI Cost Gap and the AI Cost Gap Tariff will be calculated as follows:

$$\text{Inflation in year } t = \frac{(\text{May to October average CPIH})_{t-1}}{(\text{May to October average CPIH})_{t-2}}$$

14.15.156.7 *Calculating the AI Cost Gap Tariff:* The AI Cost Gap Tariff for the subsequent generator (generator  $i$ ) which is expressed in £/kW, shall be the ratio of the AI Cost Gap that generator  $i$  is liable to pay for the relevant year (£) and the **Transmission Entry Capacity** (kW) of generator  $i$ , i.e:

- AI Cost Gap Tariff for Generator  $i = \frac{n \times \text{AI Cost Gap}}{N \times \text{TEC}_i}$
- Where:
  - $\text{TEC}_i$  = **Transmission Entry Capacity** of generator  $i$  in kW
  - $n$  = number of days remaining in the year over which the tariff is to be paid
  - $N$  = total number of days over which the tariff is applicable (calculated as per 14.15.156.4)

14.15.156.8 The calculation described in 14.15.156.6 shall be used for the initial partial year in which generator  $i$  connects (if applicable) and the first full charging year. For each subsequent year that the AI Cost Gap Tariff is applicable after the year of calculation, the full year AI Cost Gap Tariff for generator  $i$  shall be inflated in line with the average increase in May to October CPIH as per 14.15.156.6.

## 14.16 Derivation of the Transmission Network Use of System Energy Consumption Tariff and Short Term Capacity Tariffs

- 14.16.1 For the purposes of this section, Lead Parties of Balancing Mechanism (BM) Units that are liable for Transmission Network Use of System Demand Charges are termed Suppliers.
- 14.16.2 Following calculation of the Transmission Network Use of System £/kW HH Locational Demand Tariff (as outlined in Chapter 2: Derivation of the TNUoS Tariff) for each GSP Group a NHH Demand Locational Tariff is calculated as follows:

$$p/kWh \text{ Tariff} = \frac{(NHHD_F * £/kW \text{ Tariff} - FL_G)}{NHH C_G} * 100$$

Where:

**£/kW Tariff** = The £/kW Effective HH Demand Locational Tariff (£/kW), as calculated previously, for the GSP Group concerned.

**NHHD<sub>F</sub>** = **The Company's** forecast of Suppliers' non-half-hourly metered Triad Demand (kW) for the GSP Group concerned. The forecast is based on historical data.

**FL<sub>G</sub>** = Forecast Liability incurred for the GSP Group concerned.

**NHHC<sub>G</sub>** = **The Company's** forecast of GSP Group non-half-hourly metered total energy consumption (kWh) for the period 16:00 hrs to 19:00hrs inclusive (i.e. settlement periods 33 to 38) inclusive over the period the tariff is applicable for the GSP Group concerned.

### Short Term Transmission Entry Capacity (STTEC) Tariff

- 14.16.3 The Short Term Transmission Entry Capacity (STTEC) tariff for positive zones is derived from the Effective Tariff (ET<sub>Gi</sub>) annual TNUoS £/kW tariffs (14.15.138). If multiple set of tariffs are applicable within a single **Financial Year**, the Final Tariff used in the STTEC calculation will be prorated in an identical manner to that used when calculating a generators annual liability. The periods over which the tariff would be prorated would be identical to the periods used when calculating the wider tariff (i.e. over the whole **Financial Year**, not just the period that the STTEC is applicable for). STTECs will not be reconciled following a mid year charge change. The premium associated with the flexible product is associated with the analysis that 90% of the annual charge is linked to the system peak. The system peak is likely to occur in the period of November to February inclusive (120 days, irrespective of leap years). The calculation for positive generation zones is as follows:

$$\frac{FT_{Gi} \times 0.9 \times STTEC \text{ Period}}{120} = \text{STTEC tariff (£/kW/period)}$$

Where:

FT = Final annual TNUoS Tariff expressed in £/kW  
 Gi = Generation zone  
 STTEC Period = A period applied for in days as defined in the CUSC

- 14.16.4 For the avoidance of doubt, the charge calculated under 14.16.3 above will represent each single period application for STTEC. Requests for multiple /STTEC periods will result in each STTEC period being calculated and invoiced separately.
- 14.16.5 The STTEC tariff for generators with negative final tariffs is set to zero to prevent Users receiving greater than 100% of the annual TNUoS payment that would have been received for that capacity under a firm TEC.

### Limited Duration Transmission Entry Capacity (LDTEC) Tariffs

- 14.16.6 The Limited Duration Transmission Entry Capacity (LDTEC) tariff for positive zones is derived from the equivalent zonal STTEC tariff for up to the initial 17 weeks of LDTEC in a given **Financial Year** (whether consecutive or not). For the remaining weeks of the year, the LDTEC tariff is set to collect the balance of the annual TNUoS liability over the maximum duration of LDTEC that can be granted in a single application. If multiple set of tariffs are applicable within a single **Financial Year**, the Final Tariff used in the LDTEC calculation will be prorated in an identical manner to that used when calculating a generators annual liability. The periods over which the tariff would be prorated would be identical to the periods used when calculating the wider tariff (ie over the whole **Financial Year**, not just the period that the STTEC is applicable for). LDTECs will not be reconciled following a mid year charge change:

Initial 17 weeks (high rate):

$$\text{LDTEC tariff (£/kW/week)} = \frac{FT_{Gi} \times 0.9 \times 7}{120}$$

Remaining weeks (low rate):

$$\text{LDTEC tariff (£/kW/week)} = \frac{FT_{Gi} \times 0.1075 \times 7}{316 - 120} \times (1 + P)$$

where  $FT$  is the final annual TNUoS tariff expressed in £/kW;  
 $G_i$  is the generation TNUoS zone; and  
 $P$  is the premium in % above the annual equivalent TNUoS charge as determined by **The Company**, which shall have the value 0.

- 14.16.7 The LDTEC tariff for generators with negative final tariffs is set to zero to prevent Users receiving greater than 100% of the annual TNUoS payment that would have been received for that capacity under a firm TEC.
- 14.16.8 The tariffs applicable for any particular year are detailed in **The Company's Statement of Use of System Charges** which is available from the **Charging website**. Historical tariffs are also available on the **Charging website**.

### 14.17 Demand Charges

## Parties Liable for Demand Charges

14.17.1 Demand charges are subdivided into charges for demand locational, **Transmission Demand Residual**, energy and embedded export. The following parties shall be liable for some or all of the categories of demand charges:

- The Lead Party of a Supplier BM Unit;
- Power Stations with a Bilateral Connection Agreement;
- Parties with a Bilateral Embedded Generation Agreement

14.17.2 Classification of parties for charging purposes, section 14.26, provides an illustration of how a party is classified in the context of Use of System charging and refers to the paragraphs most pertinent to each party.

## Basis of Demand Locational Charges

14.17.3 Demand Locational charges are based on a de minimis £0/kW charge for Half Hourly and £0/kWh for Non Half Hourly metered demand.

14.17.4 Chargeable Demand Locational Capacity is the value of Half Hourly metered Triad demand (kW). Chargeable Energy Capacity is the energy consumption (kWh). The definition of both these terms is set out below.

14.17.5 If there is a single set of demand locational tariffs within a **Financial Year**, the Chargeable Demand Locational Capacity is multiplied by the relevant demand locational tariff, for the calculation of demand locational charges.

14.17.6 If there is a single set of energy tariffs within a **Financial Year**, the Chargeable Energy Capacity is multiplied by the relevant energy consumption tariff for the calculation of energy charges.

14.17.7 If multiple sets of demand locational tariffs are applicable within a single **Financial Year**, demand locational charges will be calculated by multiplying the Chargeable Demand Locational Capacity by the relevant tariffs pro-rated across the months that they are applicable for, as below,

$$\text{Annual Liability}_{\text{Demand Chargeable Demand Locational Capacity}} \times \left( \frac{(a \times \text{Tariff 1}) + (b \times \text{Tariff 2})}{12} \right)$$


where:

Tariff 1 = Original tariff

Tariff 2 = Revised tariff,

a = Number of months over which the original tariff is applicable,

b = Number of months over which the revised tariff is applicable.

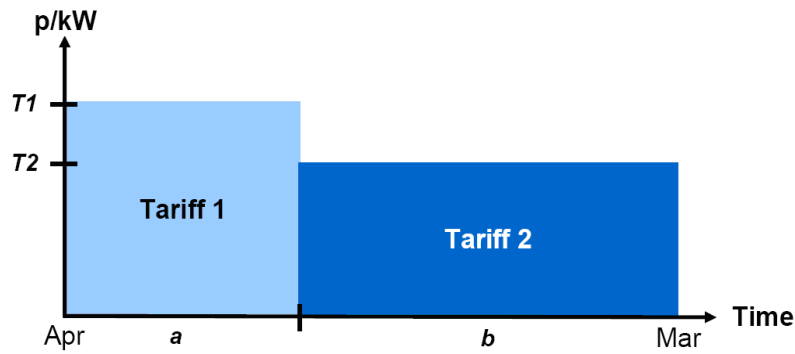


- 14.17.8 If multiple sets of energy tariffs are applicable within a single **Financial Year**, energy charges will be calculated by multiplying relevant Tariffs by the Chargeable Energy Capacity over the period that the tariffs are applicable for and summing over the year.

$$\begin{aligned} \text{Annual Liability}_{\text{Energy}} = & \text{Tariff } 1 \times \sum_{T1_s}^{T1_E} \text{Chargeable Energy Capacity} \\ & + \text{Tariff } 2 \times \sum_{T2_s}^{T2_E} \text{Chargeable Energy Capacity} \end{aligned}$$

Where:

- $T1_s$  = Start date for the period for which the original tariff is applicable,  
 $T1_E$  = End date for the period for which the original tariff is applicable,  
 $T2_s$  = Start date for the period for which the revised tariff is applicable,  
 $T2_E$  = End date for the period for which the revised tariff is applicable.

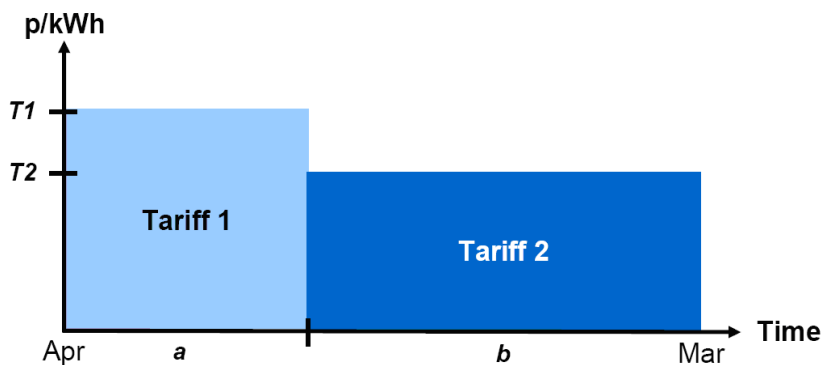

### Basis of Embedded Export Charges

- 14.17.9 Embedded export charges are based on a £/kW charge for Half Hourly metered embedded export.
- 14.17.10 Chargeable Embedded Export Capacity is the value of Embedded Export at Triad (kW). The definition of this term is set out below.
- 14.17.11 If there is a single set of embedded export tariffs within a **Financial Year**, the Chargeable Embedded Export Capacity is multiplied by the relevant embedded export tariff, for the calculation of embedded export charges.

14.17.12 If multiple sets of embedded export tariffs are applicable within a single **Financial Year**, embedded export charges will be calculated by multiplying the Chargeable Embedded Export Capacity by the relevant tariffs pro rated across the months that they are applicable for, as below,

$$\text{Annual Liability}_{\text{Demand Chargeable Embedded Export Capacity}} \times \left( \frac{(a \times \text{Tariff 1}) + (b \times \text{Tariff 2})}{12} \right)$$

where:

Tariff 1 = Original tariff,

Tariff 2 = Revised tariff,

a = Number of months over which the original tariff is applicable,

b = Number of months over which the revised tariff is applicable.

### Supplier BM Unit

14.17.13 A Supplier BM Unit charges will be the sum of its energy, demand locational, Transmission Demand Residual and embedded export liabilities where:

- The Chargeable Demand Locational Capacity will be the average of the Supplier BM Unit's half-hourly metered gross demand during the Triad (and the £/kW tariff), *and*
- The Chargeable Embedded Export Capacity will be the average of the Supplier BM Unit's half-hourly metered embedded export during the Triad (and the £/kW tariff), *and*
- The Chargeable Energy Capacity will be the Supplier BM Unit's non half-hourly metered energy consumption over the period 16:00 hrs to 19:00 hrs inclusive every day over the Financial Year (and the p/kWh tariff), *and*
- The **Transmission Demand Residual** charge for **Final Demand Sites** will be the sum of the number of sites per **Charging Band** as served by that **Supplier BM Unit** multiplied by the number of days the sites were served by that **Supplier BM Unit** and multiplied by the applicable **Transmission Demand Residual Tariff** £/site/day as determined in 14.15.141. Where a **Connection Site** is served by more than one **Supplier BM Unit**, the charges will be divided by **The Company**, annually, between the relevant **Supplier BM Units** in proportion to their annual **Consumption** from the previous year, *and*
- The **Transmission Demand Residual** charge for **Unmetered Supplies** will be the sum of the forecast monthly volume of **Unmetered Supplies** per **Charging Band** as served by that **Supplier BM Unit** multiplied by the applicable **UMS Tariff** (p/kWh) as determined in 14.15.141.

### Power Stations with a Bilateral Connection Agreement and Licensable Generation with a Bilateral Embedded Generation Agreement

14.17.14 The Chargeable Demand Locational Capacity for a Power Station with a Bilateral Connection Agreement or Licensable Generation with a Bilateral Embedded Generation Agreement will be based on the average of the net

import over each Triad leg of the BM Units associated with the Power Station (in Appendix C of its Bilateral Connection Agreement or Bilateral Embedded Generation Agreement, including metered additional load) during the Triad.

### **Exemptible Generation and Derogated Distribution Interconnectors with a Bilateral Embedded Generation Agreement**

14.17.15 The demand charges for Exemptible Generation and Derogated Distribution Interconnector with a Bilateral Embedded Generation Agreement will be the sum of its gross demand and embedded export liabilities where:

The Chargeable Demand Locational Capacity for Exemptible Generation and Derogated Distribution Interconnectors with a Bilateral Embedded Generation Agreement will be based on the average of the metered gross demand of each BM Unit specified in Appendix C of the Bilateral Embedded Generation Agreement during the Triad.

- The Chargeable Embedded Export Capacity for Exemptible Generation and Derogated Distribution Interconnectors with a Bilateral Embedded Generation Agreement will be based on the average of the metered embedded export of each BM Unit specified in Appendix C of the Bilateral Embedded Generation Agreement during the Triad.


### **Small Generators Tariffs**

14.17.16 In accordance with Standard Licence Condition C13, any under recovery from the MAR arising from the small generators discount will result in a unit amount of increase to the **Transmission Demand Residual**.

### **The Triad**

14.17.17 The Triad is used as a short hand way to describe the three settlement periods of highest transmission system demand within a **Financial Year**, namely the half hour settlement period of system peak net demand and the two half hour settlement periods of next highest net demand, which are separated from the system peak net demand and from each other by at least 10 Clear Days, between November and February of the **Financial Year** inclusive. Exports on directly connected Interconnectors and Interconnectors capable of exporting more than 100MW to the Total System shall be excluded when determining the system peak net demand. An illustration is shown below.



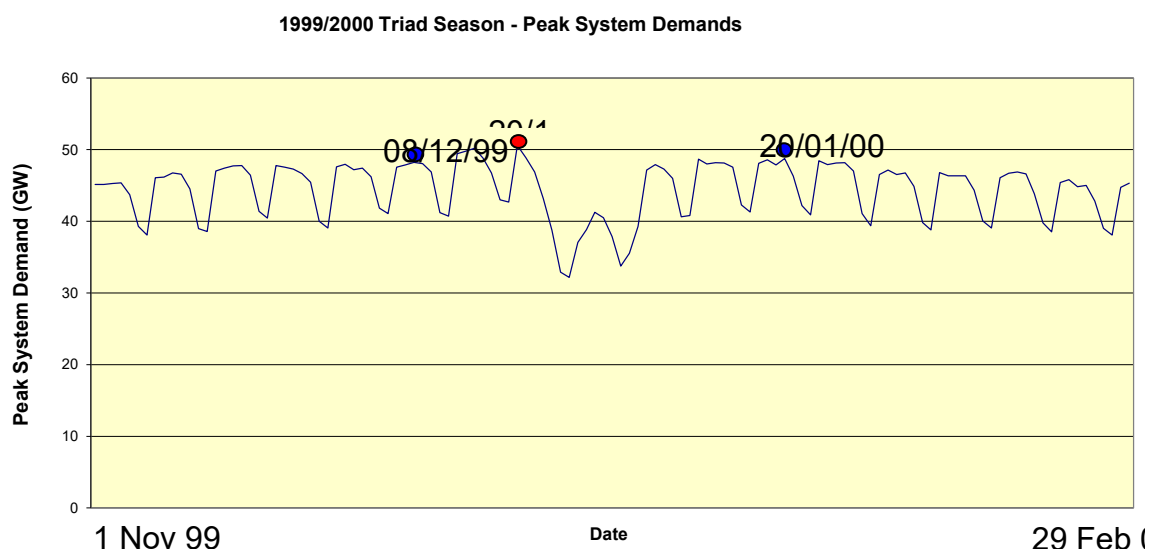

### Half-hourly metered Demand Locational charges

14.17.18 For Supplier BMUs and BM Units associated with Exemptible Generation and Derogated Distribution Interconnectors with a Bilateral Embedded Generation Agreement, if the average half-hourly metered gross demand volume over the Triad results in an import, the Chargeable Gross Demand Capacity will be positive resulting in the BMU being charged.

If the average half-hourly metered embedded export volume over the Triad results in an export, the Chargeable Embedded Export Capacity will be negative resulting in the BMU being paid the relevant tariff; where the tariff is positive. For the avoidance of doubt, parties with Bilateral Embedded Generation Agreements that are liable for Generation charges will not be eligible for payment of the embedded export tariff.

### Monthly Charges

14.17.19 Throughout the year Users will submit a Demand Forecast. A Demand Forecast will include:

- half-hourly metered gross demand to be supplied during the Triad for each BM Unit
- half-hourly metered embedded export to be exported during the Triad for each BM Unit
- non-half hourly metered energy to be supplied over the period 16:00 hrs to 19:00 hrs inclusive every day over the **Financial Year** for each BM Unit

14.17.20 Throughout the year, Users' monthly demand charges will be based on;

- a. For **HH Charges** the **User's Demand Forecast** half-hourly metered embedded export to be supplied during the Triad for each BM Unit, multiplied by the relevant zonal £/kW tariff; and where this results in a positive value the **User's Demand Forecast** half hourly metered embedded export to be supplied during the Triad for each **BM Unit**, multiplied by the relevant zonal £/kW tariff.
- b. For **NHH Charges** the **User's Demand Forecast** non-half hourly metered energy to be supplied over the period 16:00 hrs to 19:00 hrs inclusive every day

over the **Financial Year** for each **BM Unit**, multiplied by the relevant zonal p/kWh tariff.

- a. The **Final Demand Site Count Forecast** for the latest day (that **The Company** has data available for) multiplied by the relevant £/Site/Day **Transmission Demand Residual Tariff** for the relevant **Charging Band**.
- b. the **Unmetered Supply Volume Forecast** for the latest day (that **The Company** has data available for) multiplied by the UMS Tariff.

**Users'** annual TNUoS demand charges are based on these forecasts with the **Demand Forecast** split evenly over the 12 months of the year. **Users** have the opportunity to vary their **Demand Forecasts** on a quarterly basis over the course of the year, with the **Demand Forecast** requested in February relating to the next **Financial Year**. **Users** will be notified of the timescales and process for each of the quarterly updates. **The Company** will revise the monthly **Transmission Network Use of System Demand Charges** by calculating the annual charge based on the above forecasts, subtracting the amount paid to date, and splitting the remainder evenly over the remaining months. For the avoidance of doubt, only positive **Demand Forecasts** (i.e. representing a net import from the system), positive **FDSC Forecast** and positive **Unmetered Supply Volume Forecast** will be used in the calculation of charges.

**Demand Forecasts** for a **User** will be considered positive where:

- The sum of the gross demand forecast and embedded export forecast is positive; and
- The non-half hourly metered energy forecast is positive.

14.17.21 **Users** should submit reasonable demand forecasts of gross demand, embedded export and energy in accordance with the **CUSC**. **The Company** shall use the following methodology to derive a forecast to be used in determining whether a **User's** forecast is reasonable, in accordance with the **CUSC**, and this will be used as a replacement forecast if the **User's** total forecast is deemed unreasonable. **The Company** will, at all times, use the latest available Settlement data.

For existing **Users**:

- i) The **User's** Triad gross demand and embedded export for the preceding **Financial Year** will be used where **User** settlement data is available and where **The Company** calculates its forecast before the **Financial Year**. Otherwise, the **User's** average weekday settlement period 35 half-hourly metered (HH) gross demand and embedded export in the **Financial Year** to date is compared to the equivalent average gross demand and embedded export for the corresponding days in the preceding year. The percentage difference is then applied to the **User's** HH gross demand and embedded export at Triad in the preceding **Financial Year** to derive a forecast of the **User's** HH gross demand and embedded export at Triad for this **Financial Year**.
- ii) The **User's** non half-hourly metered (NHH) energy consumption over the period 16:00 hrs to 19:00 hrs every day in the **Financial Year** to date is compared to the equivalent energy consumption over the corresponding days in the preceding year. The percentage difference is then applied to the **User's** total NHH energy consumption in the preceding **Financial Year** to derive a forecast of the **User's** NHH energy consumption for this **Financial Year**.

For new Users who have completed a Use of System Supply Confirmation Notice in the current **Financial Year**:

- iii) The User's average weekday settlement period 35 half-hourly metered (HH) gross demand and embedded export over the last complete month for which **The Company** has settlement data is calculated. Total system average HH gross demand and embedded export for weekday settlement period 35 for the corresponding month in the previous year is compared to total system HH gross demand and embedded export at Triad in that year and a percentage difference is calculated. This percentage is then applied to the User's average HH gross demand and embedded export for weekday settlement period 35 over the last month to derive a forecast of the User's HH gross demand and embedded export at Triad for this **Financial Year**.
- iv) The User's non half-hourly metered (NHH) energy consumption over the period 16:00 hrs to 19:00 hrs every day over the last complete month for which **The Company** has settlement data is noted. Total system NHH energy consumption over the corresponding month in the previous year is compared to total system NHH energy consumption over the remaining months of that **Financial Year** and a percentage difference is calculated. This percentage is then applied to the User's NHH energy consumption over the month described above, and all NHH energy consumption in previous months is added, in order to derive a forecast of the User's NHH metered energy consumption for this **Financial Year**.

14.17.22 14.28 Determination of **The Company's** Forecast for Demand Charge Purposes illustrates how the demand forecast will be calculated by **The Company**.

#### **Reconciliation of Demand Charges and TNUoS Charges in the event of exceeding the limits to Generator charges in the Limiting Regulation**

14.17.23 The reconciliation process is set out in the CUSC. The demand reconciliation process compares the monthly charges paid by Users against actual outturn charges. Due to the Settlements process, reconciliation of demand charges is carried out in two stages; initial reconciliation and final reconciliation.

14.17.24 In the event of annual average transmission charges incurred by Generator Users in the **Financial Year** not being in compliance with the upper or lower limits in the Limiting Regulation an Ex-Post Reconciliation adjustment will be applied to Generator and Demand Users to bring charges back into compliance.

#### **Initial Reconciliation of demand charges**

14.17.25 The initial reconciliation process compares Users' demand forecasts, **The Company's FDSC Forecast** and **Unmetered Supply Volume Forecast** and corresponding monthly charges paid over the year against actual outturn data (using latest Settlement data available at the time) and corresponding charges. Initial reconciliation is carried out in three parts; Initial Reconciliation Part 1 deals with the reconciliation of half-hourly metered demand charges, Initial Reconciliation Part 2 deals with the reconciliation of non-half-hourly metered demand charges and Initial Reconciliation Part 3 deals with the reconciliation of **Transmission Demand Residual** charges.

### **Initial Reconciliation Part 1– Half-hourly metered demand**

- 14.17.26 **The Company** will identify the periods forming the Triad once it has received Central Volume Allocation data from the Settlement Administration Agent for all days up to and including the last day of February. Once **The Company** has notified Users of the periods forming the Triad they will not be changed even if disputes are subsequently resolved which would change the periods forming the Triad.
- 14.17.27 Initial outturn charges for half-hourly metered gross demand will be determined using the latest available data of actual average Triad gross demand (kW) multiplied by the zonal gross demand tariff(s) (£/kW) applicable to the months concerned for each zone for that **Financial Year**. These actual values are then reconciled against the monthly charges paid in respect of half-hourly gross demand.
- 14.17.28 Initial outturn charges for half-hourly metered embedded export will be determined using the latest available data of actual average Triad embedded export (kW) multiplied by the zonal embedded export tariff(s) (£/kW) applicable to the months concerned for each zone for that **Financial Year**. These actual values are then reconciled against the monthly charges paid in respect of half-hourly embedded exports.

### **Initial Reconciliation Part 2 – Non-half-hourly metered demand**

- 14.17.29 Actual payments for non-half-hourly metered demand will be determined using the latest available actual energy consumption data (kWh) for the period 16:00 hrs to 19:00 hrs inclusive (i.e. settlement periods 33 to 38) over the year multiplied by the energy consumption tariff(s) (p/kWh) applicable to the months concerned for each zone. These actual values are then reconciled against the monthly charges paid in respect of non-half-hourly energy consumption.

### **Initial Reconciliation Part 3 – FDSC and Unmetered Supply Volume**

- 14.17.29a Actual payments for Transmission Demand Residual charges will be determined using the latest FDSC and Unmetered Supply Volume (provided by the Settlement Administration Agent) multiplied by the relevant Transmission Demand Residual Tariff. These actual values are then reconciled against the charges paid by the User.

### **Final Reconciliation of demand charges**

- 14.17.30 The final reconciliation process compares Users' charges (as calculated during the initial reconciliation process using the latest available data) against final outturn demand charges (based on finalised FDSC and Unmetered Supply Volume, settlement data of half-hourly gross demand, embedded exports and non-half-hourly energy consumption).
- 14.17.31 Final actual charges will be determined using the final demand reconciliation data taken from the Final Reconciliation Settlement Run or the Final Reconciliation Volume Allocation Run.

### **Reconciliation of manifest errors**

- 14.17.32 In the event that a manifest error, or multiple errors in the calculation of TNUoS tariffs results in a material discrepancy in a Users TNUoS tariff, the reconciliation process

for all Users qualifying under Section **Error! Reference source not found.** will be in accordance with Sections **Error! Reference source not found.** to **Error! Reference source not found.**30. The reconciliation process shall be carried out using recalculated TNUoS tariffs. Where such reconciliation is not practicable, a post-year reconciliation will be undertaken in the form of a one-off payment.

14.17.33 A manifest error shall be defined as any of the following:

- a) an error in the transfer of relevant data between the Transmission Licensees or Distribution Network Operators;
- b) an error in the population of the Transport Model with relevant data;
- c) an error in the function of the Transport Model; or
- d) an error in the inputs or function of the Tariff Model.

14.17.34 A manifest error shall be considered material in the event that such an error or, the net effect of multiple errors, has an impact of the lesser of either:

- (a) an error in a User's TNUoS tariff of at least +/-£0.76/kW; or
- (b) an error in a User's TNUoS tariff which results in an error in the annual TNUoS charge of a User in excess of +/-£377,735.

Thresholds are stated in 2020/21 money and will be indexed annually by the Transmission Owner Price Index (TOPI) thereafter, starting from 1st April 2021.

14.17.35 A manifest error shall only be reconciled if it has been identified within the **Financial Year** for which the error has an effect. Errors identified outside of this period will not be eligible for reconciliation retrospectively.

#### **Ex-post Reconciliation of Generator and Demand Charges in the event of exceeding the limits to Generator charges in the Limiting Regulation**

14.17.36 **The Company** shall, following the completion of each **Financial Year**, produce a statement setting out the annual average transmission charges paid in aggregate by Generators in €/MWh as per paragraph 14.14.5.

14.17.37 In the event that the annual average transmission charges attributable to Generators exceeds the upper limit established in the Limiting Regulation then an Ex-post Reconciliation will be calculated for Generation and Demand Users as per the below and will be invoiced at the time of generation reconciliation and initial demand reconciliation.

i) The Ex-post Reconciliation amount for Demand Users will be calculated as :

$$Dadj = GCharge (Actual) - (GO_A * (CapEC * ER_A))$$

Where:

Dadj = Revenue to be recovered from Demand

GO<sub>A</sub> = Actual generator output in the previous **Financial Year**

CapEC = The upper limit of the Limiting Regulation

ER<sub>A</sub> = Actual exchange rate in the previous **Financial Year**

GCharge (Actual) = Actual charges to Generators in the previous **Financial Year**

ii) The rate applied to HH gross Demand, in order to adjust for any TNUoS recovery from generation outside of the range of the Limiting Regulation

$$DRadj = \left( \frac{Dadj}{GTD} \right)$$

Where

DRadj = Rate applied to AHHD in £/kW

GTd = Total actual system metered Gross Triad Demand (kW)

- iii) The rate applied to NHH energy consumption, in order to adjust for compliance with the Limiting Regulation in the **Financial Year** is calculated by:

$$ERadj = \left( \frac{Dadj - (AHHD \times DRadj)}{ANHHC} \right) \times 100$$

Where

AHHD = The actual gross half-hourly metered Triad Demand (kW) for HH Demand

ERadj = Rate applied to energy consumption for the Demand Recovery in p/kWh

ANHHC = Total actual annual non-half-hourly metered energy consumption (kWh) for the period 16:00 hrs to 19:00 hrs inclusive (i.e. settlement periods 33 to 38) for each day of the preceding **Financial Year**,

- iv) The Ex-Post Reconciliation amount for Generation Users will be calculated as:

$$Gadj = Dadj * -1$$

Where:

Dadj = Revenue to be recovered from demand Users

Gadj = Revenue to be paid to generation Users

- v) The rate applied to Generator Chargeable Capacity in the preceding **Financial Year**, in order to adjust for any recovery of TNUoS from generation outside of the range of the Limiting Regulation, is:

$$GRadj = \frac{Gadj}{ChargeableCapacity}$$

Where:

GRadj = Adjustment rate to be applied to Generators

Chargeable Capacity = As per paragraph 14.18.6

14.17.38 In the event that the annual average transmission charges attributable to Generators is below the lower limit established in the Limiting Regulation then an Ex-post Reconciliation will be calculated for Generator and Demand Users as per the below and will be invoiced at the time of generation reconciliation and initial demand reconciliation.

- i) Ex-post reconciliation for Demand Users:

$$Dadj = GCharge (Actual) - 0$$

Where:

Dadj = Revenue to be credited to Demand

GCharge (Actual) = Actual charges to Generators in the previous **Financial Year**

- ii) The rate applied to HH gross Demand, in order to adjust for any recovery of TNUoS from generation outside of the range of the Limiting Regulation

$$DRadj = \left( \frac{Dadj}{GTD} \right)$$

Where

DRadj = Rate applied to AHHD in £/kW

GTD = Total actual system metered gross triad demand (kW)

- iii) The rate applied to NHH energy consumption, in order to adjust for compliance with the Limiting Regulation in the **Financial Year** is calculated by:

$$ERadj = \left( \frac{Dadj - (AHHD \times DRadj)}{ANHHC} \right) \times 100$$

Where

AHHD = The actual gross half-hourly metered Triad Demand (kW) for HH Demand

ERadj = Rate applied to energy consumption for the Demand Recovery in p/kWh

ANHHC = Total actual annual non-half-hourly metered energy consumption (kWh) for the period 16:00 hrs to 19:00 hrs inclusive (i.e. settlement periods 33 to 38) for each day of the preceding **Financial Year**

#### Ex-post reconciliation for Generation Users:

The recovery from Generator Users will be

$$Gadj = Dadj * -1$$

Where:

Dadj = Revenue to be dispersed to Demand

Gadj = Revenue to be recovered from Generation

- iv) The rate applied to Generator Chargeable Capacity in the preceding **Financial Year**, in order to adjust for any recovery of TNUoS from generation outside of the range of the Limiting Regulation, is:

$$GRadj = \frac{Gadj}{ChargeableCapacity}$$

Where:

GRadj = Adjustment rate to be applied to Generators

Chargeable Capacity = As per paragraph 14.18.6

#### **Implementation of P272**

14.17.39.1 BSC modification P272 requires Suppliers to move Profile Classes 5-8 to Measurement Class E - G (i.e. moving from NHH to HH settlement) by April 2016. The majority of these meters are expected to transfer during the preceding **Financial Year** up until the implementation date of P272 and some meters will have been transferred before the start of 1<sup>ST</sup> April 2015. A change from NHH to HH within a **Financial Year** would normally result in Suppliers being liable for TNUoS for part of the year as NHH and also being subject to HH charging. This section describes how **The Company** will treat

this situation in the transition to P272 implementation for the purposes of TNUoS charging; and the forecasts that Suppliers should provide to **The Company**.

- 14.17.39.2 Notwithstanding 14.17.13, for each **Financial Year** which begins after 31 March 2015 and prior to implementation of BSC Modification P272, all demand associated with meters that are in NHH Profile Classes 5 to 8 at the start of that **Financial Year** as well as all meters in Measurement Classes E G will be treated as Chargeable Energy Capacity (NHH) for the purposes of TNUoS charging for the full **Financial Year**.
- 14.17.39.3 **The Company** will calculate the Chargeable Energy Capacity associated with meters that have transferred to HH settlement but are still treated as NHH for the purposes of TNUoS charging from Settlement data provided directly from Elexon i.e. Suppliers need not Supply any additional information if they accept this default position
- 14.17.39.4 The forecasts that Suppliers submit to **The Company** under CUSC 3.10, 3.11 and 3.12 for the purpose of TNUoS monthly billing referred to in 14.17.20 and 14.17.21 for both Chargeable Demand Capacity and Chargeable Energy Capacity should reflect this position i.e. volumes associated those Metering Systems that have transferred from a Profile Class to a Measurement Class in the BSC (NHH to HH settlement) but are to be treated as NHH for the purposes of TNUoS charging should be included in the forecast of Chargeable Energy Capacity and not Chargeable Demand Capacity.
- 14.17.39.5 Where a Supplier wishes for Metering Systems that have transferred from Profile Class to Measurement Class in the BSC (NHH to HH settlement) prior to 1<sup>st</sup> April 2015, to be treated as Chargeable Demand Capacity (HH/ Measurement Class settled) it must inform **The Company** prior to October 2015. **The Company** will treat these as Chargeable Demand Capacity (HH / Measurement Class settled) for the purposes of calculating the actual annual liability for the **Financial Years** up until implementation of P272. For these cases only, the Supplier should notify **The Company** of the Meter Point Administration Number(s) (MPAN). For these notified meters the Supplier shall provide **The Company** with verified metered demand data for the hours between 4pm and 7pm of each day of each **Financial Year** up to implementation of P272 and for each Triad half hour as notified by **The Company** prior to May of the following **Financial Year** up until two years after the implementation of P272 to allow reconciliation (e.g. May 2017 and May 2018 for the **Financial Year** 2016/17). Where the Supplier fails to provide the data or the data is incomplete for a **Financial Year** TNUoS charges for that MPAN will be reconciled as part of the Supplier's NHH BMU (Chargeable Energy Capacity). Where a Supplier opts, if eligible, for TNUoS liability to be calculated on Chargeable Demand Capacity it shall submit the forecasts referred to in 14.17.35.4 taking account of this.
- 14.17.39.6 **The Company** will maintain a list of all MPANs that Suppliers have elected to be treated as HH. This list will be updated monthly and will be provided to registered Suppliers upon request.

**HH Elective Metering from 1st April 2017. The following section describes how meters migrating to, or already within, Measurement Classes E,F and G will be charged in terms of TNUoS after 31st March 2017.**



- 14.17.40.1 A change from NHH to HH within a **Financial Year** would normally result in Suppliers being liable for TNUoS for part of the year as NHH and also being subject to HH charging. This section describes how **The Company** will treat this situation for Non-Half Hourly (NHH) meters migrating to Measurement Classes E, F & G for the **Financial Year** which begins after 31 March 2017.
- 14.17.40.2 Notwithstanding 14.17.13, for each **Financial Year** which begins after 31 March 2017 demand associated with Measurement Classes F and G will be treated as Chargeable Energy Capacity (NHH) for the purposes of TNUoS charging. Demand associated with Measurement Class E will continue to be treated as Chargeable Demand Capacity (HH).
- 14.17.40.3 **The Company** will calculate the Chargeable Energy Capacity associated with meters that have transferred to HH settlement but are still treated as NHH for the purposes of TNUoS charging from Settlement data provided directly from ELEXON i.e. Suppliers need not Supply any additional information.
- 14.17.40.4 The forecasts that Suppliers submit to **The Company** under CUSC 3.10, 3.11, 3.12 and 14.17.19 for the purpose of TNUoS monthly billing referred to in 14.17.20 and 14.17.21 for both Chargeable Demand Capacity and Chargeable Energy Capacity should reflect the basis on which demand will be charged for TNUoS.

**The following section describes the arrangements that will apply in relation to introduction of half-hourly settlement on a market-wide basis.**

- 14.17.41.1 Subject to 14.17.40.2, when an MPAN is settled under the MHHS Target Operating Model (as defined in Section C12 of the **Balancing and Settlement Code**) its associated **BM Unit** gross demand, embedded export or energy consumption will be charged TNUoS as per 14.17.13, except in the following circumstances:
- (i) When an MPAN with a non half-hourly **Metering System** transitions to a half hourly **Metering System** with a current transformer at Non-Domestic Premises (as defined in a **Supply Licence**) and is reported as such from BSCCo (as defined in the **Balancing and Settlement Code**), to **The Company**, its associated **BM Unit** gross demand or embedded export will be treated as Chargeable Demand Locational Capacity or Chargeable Embedded Export Capacity respectively.
  - (ii) When an MPAN with a non half-hourly **Metering System** transitions to a half-hourly **Metering System** with whole current metering at Non-Domestic Premises and is reported as such from BSCCo to **The Company**, its associated **BM Unit** energy consumption will be treated as Chargeable Energy Capacity.
  - (iii) When an MPAN transitions to a half-hourly **Metering System** at Domestic Premises (as defined in a **Supply Licence**) and is reported as such from BSCCo to **The Company**, its associated **BM Unit** energy consumption will be treated as Chargeable Energy Capacity

### Further Information

- 14.17.42 Paragraph 14.25 (Reconciliation of Demand Related Transmission Network Use of System Charges) of this statement illustrates how the monthly charges are reconciled against the actual values for gross demand, embedded consumption and consumption for half-hourly gross demand, embedded export and non-half-hourly metered demand respectively.

- 14.17.43 **The Statement of Use of System Charges** contains the £/kW zonal demand locational tariffs, the £/kW zonal embedded export tariffs, the p/kWh energy consumption tariffs, and the **Transmission Demand Residual tariffs** for the current charging year.
- 14.17.44 Transmission Network Use of System Charging Flowcharts of this statement contains flowcharts demonstrating the calculation of these charges for those parties liable.

## 14.18 Generation charges

### Parties Liable for Generation Charges

14.18.1 The following CUSC parties shall be liable for generation charges:

- i) Parties of Generators that have a Bilateral Connection Agreement with **The Company**.
- ii) Parties of Licensable Generation that have a Bilateral Embedded Generation Agreement with **The Company**.

14.18.2 14.26 Classification of parties for charging purposes provides an illustration of how a party is classified in the context of Use of System charging and refers to the relevant paragraphs most pertinent to each party.

### Structure of Generation Charges

14.18.3 Generation Tariffs are comprised of Wider and Local Tariffs. The Wider Tariff is comprised of (i) a Peak Security element, (ii) a Year Round Not-Shared element, (iii) Year Round Shared element and (iv) and, (iv) the Adjustment tariff (if required).. The Peak Security element of the Wider Tariff is not applicable for intermittent generators as the PS flag is set to zero. The Year Round Not Shared element is multiplied by the YRNS Flag, which for Non-Conventional Carbon Generators results in no change to the tariff, whereas for Conventional Carbon generators the tariff is reduced by ALF

14.18.4 The Local Tariff contains a substation element and may also contain a circuit element. Specifically, all transmission connected generation will be liable to pay a local substation charge, with some of these also being liable to pay a local circuit charge. For the avoidance of doubt, embedded generation has a zero local tariff.

14.18.5 The intention of the charging rules is to charge the same physical entity only once.

14.18.6 The basis of the generation charge for Power Stations is the Chargeable Capacity and the short-term chargeable capacity (as defined below for positive and negative charging zones).

14.18.7 If there is a single set of Wider and Local generation tariffs within a **Financial Year**, the Chargeable Capacity is multiplied by the relevant generation tariff to calculate the annual liability of a generator.

$$\text{Local Annual Liability} = \text{Chargeable Capacity} \times \text{Local Tariff}$$

The Wider Tariff is broken down into components as described in 14.18.3. The breakdown of the Wider Charge for Conventional and Intermittent Power Stations are given below:

Conventional Low Carbon-

$$\text{Wider Annual Liability} = \text{Chargeable Capacity} \times (\text{PS Tariff} + \text{YRNS Tariff}) + (\text{YRS Tariff} \times \text{ALF}) + \text{AdjTariff}$$

## Conventional Carbon

$$\text{Wider Annual Liability Chargeable Capacity} \times (\text{PS Tariff} + (\text{YRNS Tariff} \times \text{ALF}) + (\text{YRS Tariff} \times \text{ALF}) + \text{AdjTariff})$$

## Intermittent -

$$\begin{aligned} \text{Wider Annual Liability} \\ = \text{Chargeable Capacity} \times (\text{YRNS Tariff} \\ + (\text{YRS Tariff} \times \text{ALF}) + \text{AdjTariff}) \end{aligned}$$

Where:

PS Tariff = Wider Peak Security Tariff

YRNS Tariff = Wider Year Round Not-Shared Tariff

YRS Tariff = Wider Year Round Shared Tariff

Adj Tariff = Adjustment Tariff

- 14.18.8 If multiple sets of Wider and Local generation tariffs are applicable within a single **Financial Year**, the Chargeable Capacity is multiplied by the relevant tariffs pro rated over the entire **Financial Year**, across the months that they are applicable for.

$$\text{Annual Liability} = \text{Chargeable Capacity} \times \left( \frac{a \times \text{Tariff 1} + b \times \text{Tariff 2}}{12} \right)$$


where:

Liability 1 = Original annual liability,

Liability 2 = Revised annual liability,

a = Number of months over which the original liability is applicable,

b = Number of months over which the revised liability is applicable.

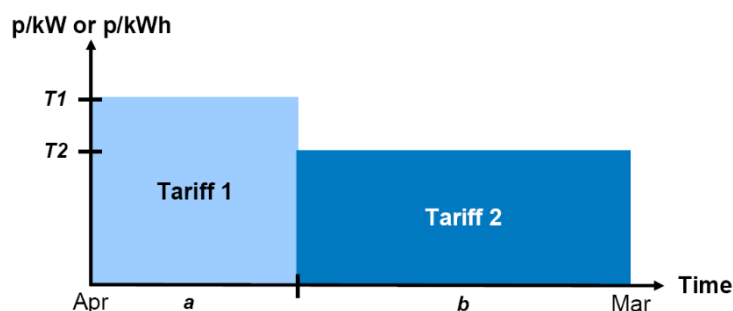

- 14.18.9 For the avoidance of doubt if there are multiple sets of Wider and Local generation tariffs applicable within a single **Financial Year** and a tariff changes from being positive to negative or vice versa, the Chargeable Capacity for the entire **Financial Year** will be determined based on the net position of the pro rated tariffs for each affected generator.

## Basis of Wider Generation Charges

### Generation with positive wider tariffs

- 14.18.10 The Chargeable Capacity for Power Stations with positive wider generation tariffs is the highest Transmission Entry Capacity (TEC) applicable to that Power Station for that **Financial Year**. A Power Station should not exceed its TEC as to do so would be in breach of the CUSC, except where it is entitled to do so under the specific circumstances laid out in the CUSC (e.g. where a User has been granted Short Term Transmission Entry Capacity, STTEC). For the avoidance of doubt, TNUoS Charges will be determined on the TEC held by a User as specified within a relevant bilateral agreement regardless of whether or not it enters into a temporary TEC Exchange (as defined in the CUSC).
- 14.18.11 The short-term chargeable capacity for Power Stations situated with positive generation tariffs is any approved STTEC or LDTEC applicable to that Power Station during a valid STTEC Period or LDTEC Period, as appropriate.
- 14.18.12 For Power Stations, the short term chargeable capacity for LDTEC with positive generation tariffs referred to in Paragraph 14.18.11 will be the capacity purchased either on a profiled firm<sup>1</sup> or indicative<sup>2</sup> basis and shall be assessed according to the capacity purchased on a weekly basis. The short-term chargeable capacity for LDTEC in any week may comprise of a number of increments, which shall be determined by considering LDTEC purchased previously in the **Financial Year** (whether or not in the same LDTEC Period). For example, if in a given week the LDTEC is 200MW but in a previous week the LDTEC had been 150MW, the short-term chargeable capacity in the latter week would comprise of two increments: one of 150MW and a second of 50MW. Further examples are provided in 14.16.6.

### Generation with negative wider tariffs

- 14.18.13 The Chargeable Capacity for Power Stations with negative wider generation tariffs is the average of the capped metered volumes during the three settlement periods described in 14.18.14 below, for the Power Station (i.e. the sum of the metered volume of each BM Unit associated with Power Station in Appendix C of its Bilateral Agreement). A Power Station should not exceed its TEC as to do so would be in breach of the CUSC, except where it is entitled to do so under the specific circumstances laid out in the CUSC (e.g. where a User has been granted Short Term Transmission Entry Capacity). If TEC is exceeded, the metered volumes would each be capped by the TEC for the Power Station applicable for that **Financial Year**. For the avoidance of doubt, TNUoS Charges will be determined on the TEC held by a User as specified within a relevant bilateral agreement regardless of whether or not it enters into a temporary TEC Exchange (as defined in the CUSC).
- 14.18.14 The three settlement periods are those of the highest metered volumes for the Power Station and the two half hour settlement periods of the next highest metered volumes which are separated from the highest metered volumes and each other by at least 10 Clear Days, between November and February of the relevant **Financial Year** inclusive. These settlement periods do not have to coincide with the Triad.

<sup>1</sup> where an LDTEC Block Offer has been accepted (Profiled Block LDTEC) and a firm profile of capacity has been purchased.

<sup>2</sup> where an LDTEC Indicative Block Offer has been accepted (Indicative Profiled Block LDTEC) and a right to future additional capacity up to a requested level has been purchased, the availability of which will be notified on a weekly basis in accordance with the CUSC.

**Example**

If the highest TEC for a Power Station were **250MW** and the highest metered volumes and resulting capped metered volumes were as follows:

| Date                                 | 19/11/08     | 13/12/08     | 06/02/09     |
|--------------------------------------|--------------|--------------|--------------|
| Highest Metered Volume in month (MW) | <b>245.5</b> | <b>250.3</b> | <b>251.4</b> |
| Capped Metered Volume (MW)           | <b>245.5</b> | <b>250.0</b> | <b>250.0</b> |

Then, the chargeable Capacity for the Power Station would be:

$$\left( \frac{245.5 + 250 + 250}{3} \right) = \mathbf{248.5 \text{ MW}}$$

Note that in the example above, the Generator has exceeded its TEC on 13 December 2007 and 6 February 2008 and would therefore be in breach of the CUSC unless the generator had an approved STTEC or LDTEC value. (The STTEC and LDTEC charge for negative zones is currently set at zero).

- 14.18.15 The short-term chargeable capacity for Power Stations with negative generation tariffs is any approved STTEC or LDTEC applicable to that Power Station during a valid STTEC Period or LDTEC Period, as applicable.
- 14.18.16 For Power Stations with negative generation tariffs, the short-term chargeable capacity for LDTEC referred to in Paragraph 14.18.15 will be the capacity purchased either on a profiled firm or indicative basis and shall be assessed according to the capacity purchased on a weekly basis. The short-term chargeable capacity for LDTEC in any week may comprise of a number of increments, which shall be determined by considering LDTEC purchased previously in the **Financial Year** (whether or not in the same LDTEC Period). For example, if in a given week the LDTEC is 200MW but in a previous week the LDTEC had been 150MW, the short-term chargeable capacity in the latter week would comprise of two increments: one of 150MW and a second at 50MW.
- 14.18.17 As noted above, a negative LDTEC tariff in negative generation charging zones is set to zero. Accordingly no payments will be made for use of LDTEC (in any of its forms) in these zones.

**Basis of Local Generation Charges**

- 14.18.18 The Chargeable Capacity for Power Stations will be the same as that used for wider generation charges, except that each component of the local tariff shall be considered separately as to whether it is a positive or negative tariff component. This means that where a local circuit tariff is negative, the final charging liability for this element will be based on actual metered output as described in Paragraph 14.18.13.

## Monthly Charges

14.18.19 Initial Transmission Network Use of System Generation Charges for each **Financial Year** will be based on the Power Station Transmission Entry Capacity (TEC) for each User as set out in their Bilateral Agreement. The charge is calculated as above. This annual TNUoS generation charge is split evenly over the months remaining in the year. For positive final generation tariffs, if TEC increases during the **Financial Year**, the party will be liable for the additional charge incurred for the **full** year, which will be recovered uniformly across the remaining chargeable months in the relevant **Financial Year** (subject to Paragraph 14.18.21 below). An increase in monthly charges reflecting an increase in TEC during the **Financial Year** will result in interest being charged on the differential sum of the increased and previous TEC charge. The months liable for interest will be those preceding the TEC increase from April in year t. For negative final generation tariff, any increase in TEC during the year will lead to a recalculation of the monthly charges for the remaining chargeable months of the relevant **Financial Year**. However, as TEC decreases do not become effective until the start of the **Financial Year** following approval, no recalculation is necessary in these cases. As a result, if TEC increases, monthly payments to the generator will increase accordingly.

14.18.20 The provisions described above for increases in TEC during the **Financial Year** shall not apply where the LDTEC (in any of its forms) has been approved for use before the TEC is available, which will typically mean the LDTEC has been approved after the TEC increase has been approved. In such instances, the party shall commence payments for TEC during the LDTEC Period for LDTEC purchased up to the future level of TEC and LDTEC Charges will only apply to LDTEC that is incremental to the TEC increase. For the avoidance of doubt, where TEC has been approved after LDTEC in a given year, these provisions shall not apply and the LDTEC shall be considered additional to the TEC and charged accordingly.

## Ad hoc Charges

14.18.21 For each STTEC period successfully applied for, a charge will be calculated by multiplying the STTEC by the tariff calculated in accordance with Paragraph 14.16.3. **The Company** will invoice Users for the STTEC charge once the application for STTEC is approved.

14.18.22 For Power Stations utilising LDTEC (in any of its forms) the LDTEC Charge for each LDTEC Period is the sum of the charging liabilities associated with each incremental level of short term chargeable capacity provided by LDTEC within the LDTEC Period (assessed on a weekly basis). The charging liability for a given incremental level of short term chargeable capacity is the sum of:


- i) the product of the higher tariff rate (calculated in accordance with Paragraph 14.16.6) and capacity purchased at this increment for the first 17 weeks in a **Financial Year** (whether consecutive or not); and
- ii) the product of the lower tariff rate (calculated in accordance with Paragraph 14.16.6) and capacity purchased at this increment in any additional weeks within the same **Financial Year** (whether consecutive or not).

14.18.23 For each LDTEC Period successfully applied for, the LDTEC Charge will be split evenly over the relevant LDTEC Period and charged on a monthly basis. LDTEC charges will apply to both LDTEC (in any of its forms) and Temporary

Received TEC held by a User. For the avoidance of doubt, the charging methodology will not differentiate between access rights provided to a generator by LDTEC or through Temporary Received TEC obtained through a Temporary TEC Exchange (as defined in the CUSC).

### Example

The diagrams below show two cases where LDTEC has been purchased: in Case A, two LDTEC Periods have been purchased; and in Case B one LDTEC Period has been purchased. The total capacity purchased in both cases is the same. The top diagrams illustrate the capacity purchased, while lower diagrams illustrate the incremental levels of short term chargeable capacities of LDTEC and the tariff rate that would apply to that capacity.

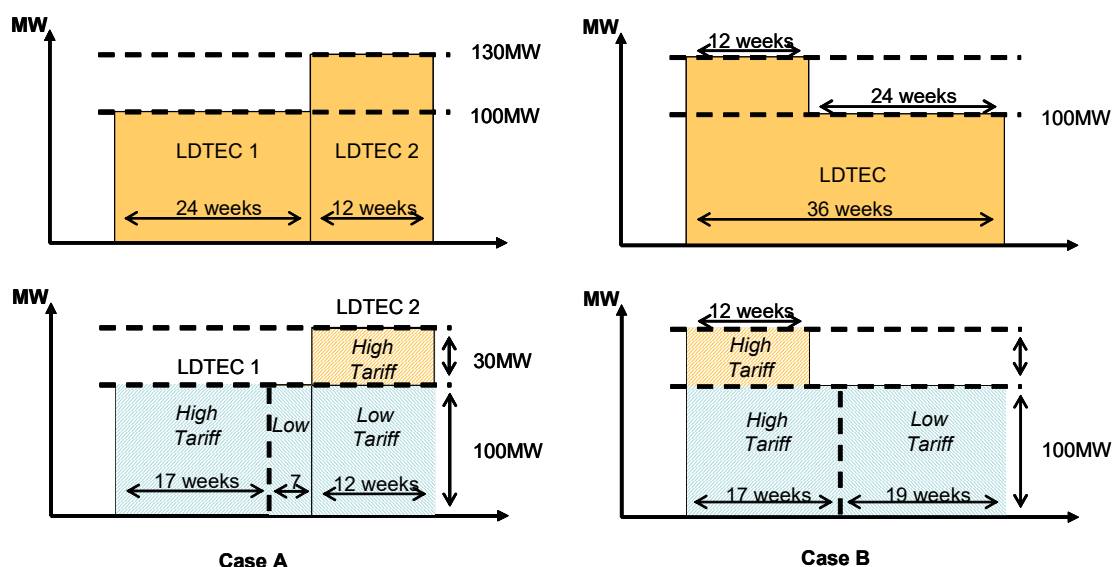

In both cases, the total amount charged for the LDTEC would be the same:

- |                                                                                                                                                                                                                  |                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><input type="checkbox"/> <u>Capacity charges at the higher tariff rate:</u></p> <ul style="list-style-type: none"> <li>• 17 weeks at the 100MW increment</li> <li>• 12 weeks at the 30MW increment</li> </ul> | <p><input type="checkbox"/> <u>Capacity charges at the lower tariff rate:</u></p> <ul style="list-style-type: none"> <li>• 19 weeks at the 100MW increment</li> </ul> <p><input type="checkbox"/></p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### **Embedded Transmission Use of System Charges “ETUoS”**

14.18.24 The ETUoS charges are a component of Use of System charges levied on offshore generators whose offshore transmission connection is embedded in an onshore distribution network. The charge relates to the provision and use of the onshore distribution network.

14.18.25 The main purpose of ETUoS charges is to pass through the charges that are levied by the DNO on the NETSO to the offshore generator(s). This charge, known as the ETUoS<sub>DNO</sub> charge, reflects the charges levied by the DNO for the costs of any works on and use of the DNO network in accordance with the DNO's charging statements and will include, but is not limited to, upfront charges and capital contributions in respect of any works as well as the ongoing and annual Use of System charges for generation connected to the distribution network.

14.18.26 In the case of some relevant transitional offshore generation projects, ETUoS will also be used to pass through historic DNO capital contributions forming



part of the Offshore Transmission Owner tender revenue stream, this is known as the  $ETUoS_{OFTO}$  tariff.

- i) The  $ETUoS_{OFTO}$  tariff shall be the ratio of the Offshore Transmission Owner revenue (£) associated with DNO capital contributions and the Transmission Entry Capacity (TEC) of the generation connected to the offshore substation.
- ii) In the year of asset transfer to the OFTO, the  $ETUoS_{OFTO}$  tariff would be calculated as follows:

$$\frac{DNRevOFTO1}{TEC}$$

Where:

$DNRevOFTO1$  = The offshore revenue associated to DN capital contributions, in £, for Year 1

$TEC$  = the Transmission Entry Capacity of the generation connected to the offshore substation

- iii) In all subsequent years, the  $ETUoS_{OFTO}$  tariff would be calculated as follows:

$$\frac{AvDNRevOFTO}{TEC}$$

Where:

$AvDNRevOFTO$  = The annual offshore revenue associated to

DN capital contributions averaged over the remaining years of the National Electricity Transmission System Operator (NETSO) price control, in £

$TEC$  = the Transmission Entry Capacity of the generation connected to the offshore substation

- iv)  $ETUoS_{OFTO}$  tariffs shall be reviewed at the start of every onshore price control period. For each subsequent year within the price control period, these shall be inflated in the same manner as the associated Offshore Transmission Owner Revenue.

14.18.27 The specific nature of the  $ETUoS_{DNO}$  charge and the payment profile for these will depend upon the charging arrangements of the relevant DNO and reference should be made to the relevant DNO's charging statement. In terms of applicable transitional offshore generation projects the  $ETUoS_{OFTO}$  payment profile will be consistent with the recovery of the Offshore Transmission Owner revenue stream, and paragraph 14.18.27.

14.18.28 Where a DNO's charge relates to more than one offshore generator, the related  $ETUoS_{DNO}$  charge will represent a straight pass through of the distribution charge specific to each relevant offshore generator. Where specific information is not available, charges will be pro-rated based on the TEC of the relevant offshore generators connected to that offshore network.

14.18.29 Invoices for ETUoS<sub>DNO</sub> charges shall be levied by **The Company** on the offshore generator as soon as reasonably practicable after invoices have been received by **The Company** for payment such that **The Company** can meet its payment obligations to the DNO. The initial payments and payment dates will be outlined in a User's Construction Agreement and/or Bilateral Agreement.

14.18.30 As the ETUoS<sub>DNO</sub> charges reflect the DNO charges to **The Company**, such charges will be subject to variation when varied by the DNO. Where the User disputes regarding the ETUoS<sub>DNO</sub> charge please note that this will result in a dispute between **The Company** and DNO under the DCUSA.

### Reconciliation of Generation Charges

14.18.31 The reconciliation process is set out in the CUSC and in line with the principles set out above.

14.18.32 In the event of a manifest error in the calculation of TNUoS charges which results in a material discrepancy in a User's TNUoS charge as defined in Sections 14.17.33 to 14.17.38, the generation charges of Users qualifying under Section **Error! Reference source not found.** will be reconciled in line with 14.18.20 and 14.18.25 using the recalculated tariffs.

### Further Information

14.18.33 **The Statement of Use of System Charges** contains the £/kW generation zonal tariffs for the current **Financial Year**.

## 14.19 Data Requirements

### Data Required for Charge Setting

- 14.19.1 Users who are Generators or Interconnector Asset Owners provide to **The Company** a forecast for the following **Financial Year** of the highest Transmission Entry Capacity (TEC) applicable to each Power Station or Interconnector for that **Financial Year**. For **Financial Year** 2008/9 Scottish Generators or Interconnector Asset Owners provide to **The Company** a forecast of the equivalent highest 'export' capacity figure. This data is required by **The Company** as the basis for setting TNUoS tariffs. **The Company** may request these forecasts in the November prior to the **Financial Year** to which they relate, in accordance with the CUSC. Additionally users who are Generators provide to **The Company** details of their generation plant type.
- 14.19.2 Users who are owners or operators of a User System (e.g. Distribution companies) provide a forecast for the following **Financial Year** of the Natural Demand attributable to each Grid Supply Point equal to the forecasts of Natural Demand under both Annual Average Cold Spell (ACS) Conditions and a forecast of the average metered Demand attributable to such Grid Supply Point for the Triad. This data **Electricity Ten Year Statement (ETYS)** is compiled from week 24 data submitted in accordance with the Grid Code.
- 14.19.3 **The BSCCo** will provide data to **The Company** with respect to **Final Demand Site** counts and **Unmetered Supply** volumes to enable the development of the **Transmission Demand Residual Tariffs**.
- 14.19.4 For the following **Financial Year**, **The Company** shall use these forecasts as the basis of Transmission Network Use of System charges for such **Financial Year**. A description of how this data is incorporated is included in 14.15 Derivation of the Transmission Network Use of System Tariff.
- 14.19.5 If no data is received from the User, then **The Company** will use the best information available for the purposes of calculation of the TNUoS tariffs. This will normally be the forecasts provided for the previous **Financial Year**.

### Data Required for Calculating Users' Charges

- 14.19.6 In order for **The Company** to calculate Users' TNUoS charges, Users who are Suppliers shall provide to **The Company** forecasts of half-hourly and non-half-hourly demand in accordance with paragraph 14.17.19 and 14.17.20 and in accordance with the CUSC.

## 14.20 Applications

- 14.20.1 Application fees are payable in respect of applications for new Use of System agreements; modifications to existing agreements; and applications for short-term access products or services. These are based on the reasonable costs that transmission licensees incur in processing these applications.

### Applications for short-term access

- 14.20.2 Application fees for short-term access products or services are fixed and detailed in the **Statement of Use of System Charges**. These are non-refundable except for the following limited instances:
- Where a User (or Users) withdraw their application in accordance with any interactivity provisions that may be contained within the CUSC; or
  - Where the application fee covers ongoing assessment work that is contingent on the acceptance of the offer.
- 14.20.3 In either case, the refunded amount will be proportional to the remaining assessment time available.
- 14.20.4 To ensure that application fees for short-term access are cost reflective, fees may be comprised of a number of components. For instance, the LDTEC Request Fee is comprised of a number of components and the total fee payable is the sum of those components that apply to the type(s) of LDTEC Offer(s) requested. For example:
- The LDTEC Request Fee for an LDTEC Block Offer is the basic request fee.
  - The LDTEC Request Fee for an LDTEC Indicative Block Offer is the sum of the basic request fee and the additional rolling assessment fee.
  - The LDTEC Request Fee payable for a combined LDTEC Block Offer and LDTEC Indicative Block Offer is the sum of the basic request fee, the additional rolling assessment fee, and the additional combined application fee.

### Applications for new or modified existing Use of System Agreements


- 14.20.5 Users can opt to pay a fixed price application fee in respect of their application or pay the actual costs incurred. The fixed price fees for applications are detailed in the **Statement of Use of System Charges**.
- 14.20.6 If a User chooses not to pay the fixed fee, the application fee will be based on an advance of transmission licensees' Engineering and out-of pocket expenses and will vary according to the size of the scheme and the amount of work involved. Once the associated offer has been signed or lapsed, a reconciliation will be undertaken. Where actual expenses exceed the advance, **The Company** will issue an invoice for the excess. Conversely, where **The Company** does not use the whole of the advance, the balance will be returned to the User.

- 14.20.7 **The Company** will refund the first application fee paid (the fixed fee or the amount post-reconciliation) and consent payments made under the Construction Agreement for new or modified existing agreements. The refund shall be made either on commissioning or against the charges payable in the first three years of the new or modified agreement. The refund will be net of external costs.
- 14.20.8 **The Company** will not refund application fees for applications to modify a new agreement or modified existing agreement at the User's request before any charges become payable. For example, **The Company** will not refund an application fee to delay the provision of a new connection if this is made prior to charges becoming payable.

## 14.21 Transport Model Example

For the purposes of the DCLF Transport algorithm, it has been assumed that the value of circuit impedance is equal to the value of circuit reactance.

Consider the following 3-node network, where generation at node A is intermittent and generation at node B is conventional:

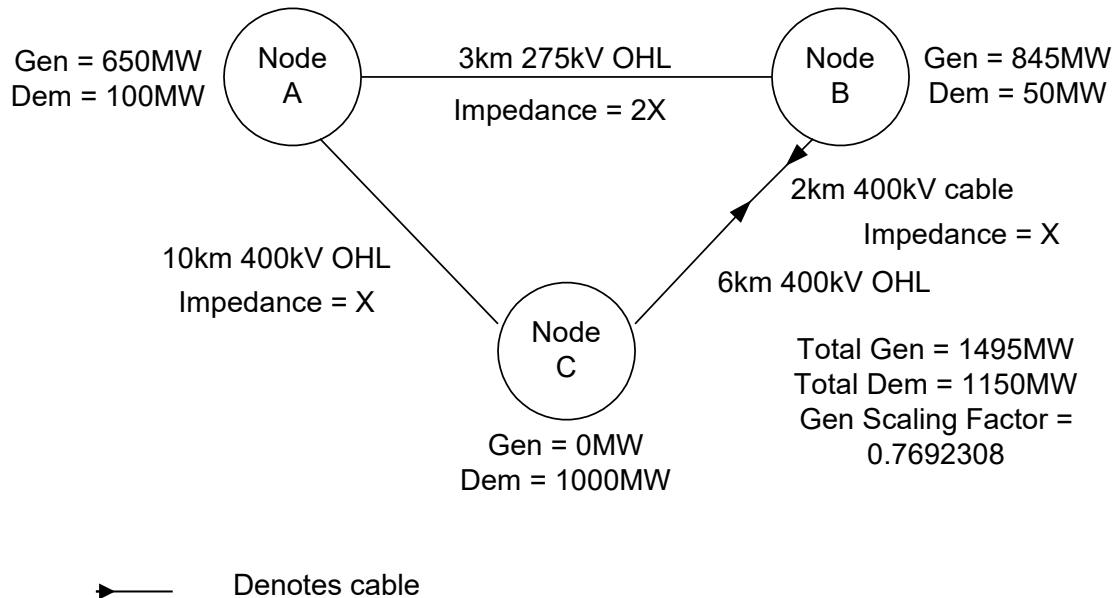

For both Peak Security and Year Round generation backgrounds, the nodal generation is scaled according to the relevant Scaling Factors, as per 14.15.7, such that total system generation equals total system demand minus total imports from external systems.

### Scaling Factor Adjustment to 10% minimum

If the SQSS process gives a variable scaling factor less than 10%, then it will be adjusted along with the fixed factors as per the following example.

Total Unscaled TEC = 107600  
 ACS Demand = 49870

Increasing the variable scaling factor to 10% results in an increase of 5190MW to total scaled generation, which is then counteracted by a uniform 10.06% reduction to all fixed scaling factors (N.B some rounding included below). "Scaling Factor after 10% floor applied" column in the table below gives the required scaling factors to ensure total scaled TEC is equal to 49870 (ACS).

| Generator Type | TEC   | Type     | Year Round Background SQSS Scaling Factor | Scaled Generation (SQSS) | Scaling Factor after 10% floor applied | Scaled Generation after floor applied for variable |
|----------------|-------|----------|-------------------------------------------|--------------------------|----------------------------------------|----------------------------------------------------|
| Biomass        | 2000  | Variable | -5%                                       | -100                     | 10.00%                                 | 200                                                |
| CCGT           | 30000 | Variable | -5%                                       | -1500                    | 10.00%                                 | 3000                                               |
| CHP            | 2000  | Variable | -5%                                       | -100                     | 10.00%                                 | 200                                                |

|                 |       |          |      |       |        |       |
|-----------------|-------|----------|------|-------|--------|-------|
| Coal            | 0     | Variable | -5%  | 0     | 10.00% | 0     |
| Hydro           | 600   | Variable | -5%  | -30   | 10.00% | 60    |
| Interconnectors | 10000 | Fixed    | 100% | 10000 | 89.94% | 8994  |
| Nuclear         | 6000  | Fixed    | 85%  | 5100  | 76.45% | 4587  |
| OCGT            | 2000  | Fixed    | 0%   | 0     | 0%     | 0     |
| Pump Storage    | 10000 | Fixed    | 50%  | 5000  | 44.97% | 4497  |
| Tidal           | -     | Fixed    | 70%  | 0     | 62.96% | 0     |
| Wave            | -     | Fixed    | 70%  | 0     | 62.96% | 0     |
| Wind Offshore   | 25000 | Fixed    | 70%  | 17500 | 62.96% | 15740 |
| Wind Onshore    | 20000 | Fixed    | 70%  | 14000 | 62.96% | 12592 |

Total scaled generation for fixed plant types in SQSS = 51600

Reduction required/SQSS fixed generation = 5190/51600 = 10.06%

#### **Peak Security background:**

A fixed scaling factor of 0% is applied to intermittent generation at node A and a variable scaling factor is applied to the conventional generation at node B so that the total generation is equal to the total demand.


Node A Generation =

$$0 * 643\text{MW} = 0\text{MW}$$

Node B Generation = 1150/

$$1500 * 1500\text{MW} = 1150\text{MW}$$


This gives the following balanced system , where the actual generation after the application of scaling factors is shown:

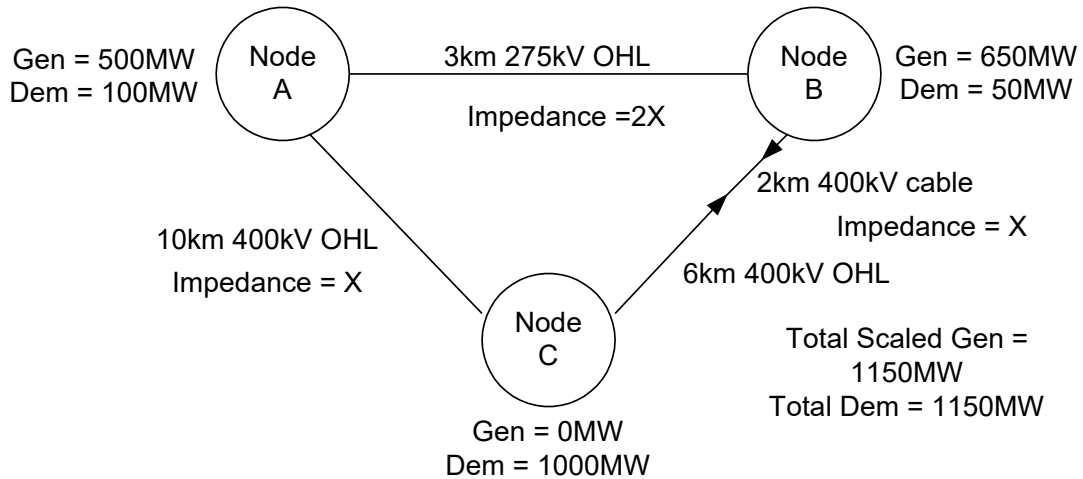

Assuming Node A is the reference node<sup>†</sup>, each 400kV circuit has impedance  $X$ , the 275kV circuit has impedance  $2X$ , the 400kV cable circuit expansion factor is 10 and the 275kV overhead line circuit expansion factor is 2, the DCLF transport algorithm calculates the base case power flows for Peak Security background as follows:

Node B exports, whilst Nodes A and C import. Hence the DCLF algorithm derives flows to deliver export power from Node B to meet import needs at Nodes A and C.

Step 1: Net export from Node B to Node A is 100MW; both routes BA and BC-CA have impedance  $2X$ ; hence 50MW would flow down both routes.

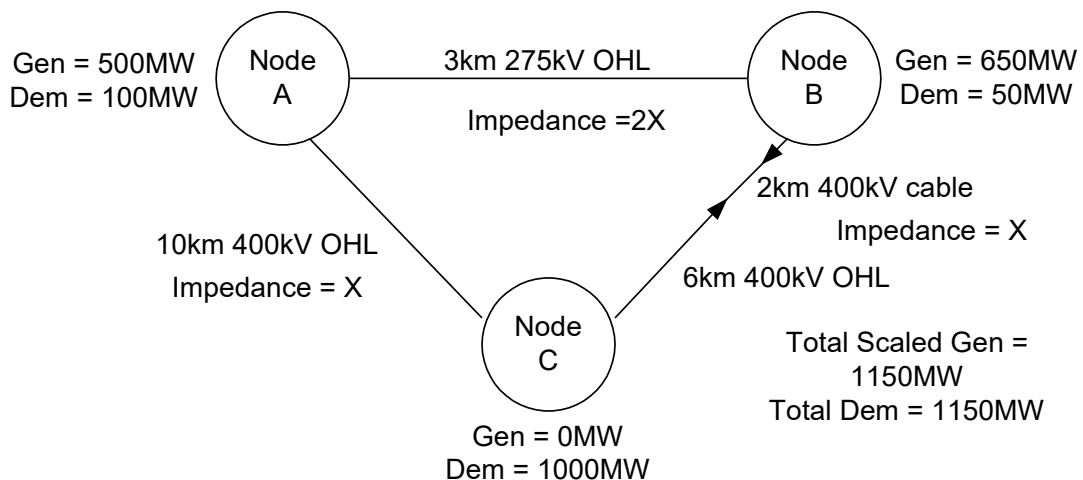

Step 2: Net export from Node B to Node C is 1000MW; route BC has impedance  $X$  and route BA-AC has impedance  $3X$ ; hence 750MW would flow down BC and 250MW along BA-AC

<sup>†</sup> For simplicity, fixed reference node has been used instead of a distributed reference node.



Step 3: Using super-position to add the flows derived in Steps 1 and 2 derives the following;

$$\begin{aligned}
 \text{Flow AC} &= -50\text{MW} + 250\text{MW} = 200\text{MW} \\
 \text{Flow AB} &= -50\text{MW} - 250\text{MW} = -300\text{MW} \\
 \text{Flow BC} &= 50\text{MW} + 750\text{MW} = 800\text{MW}
 \end{aligned}$$


**Year Round background:**

A fixed scaling factor of 70% is applied to intermittent generation at node A and a variable scaling factor is applied to the conventional generation at node B so that the total generation is equal to the total demand.


$$\text{Node A Generation} = 70\% * 643\text{MW} = 450\text{MW}$$

$$\text{Node B Generation} = (1150 - 450) / 1500 * 1500\text{MW} = 700\text{MW}$$

This gives the following balanced system, where the actual generation after the application of scaling factors is shown:

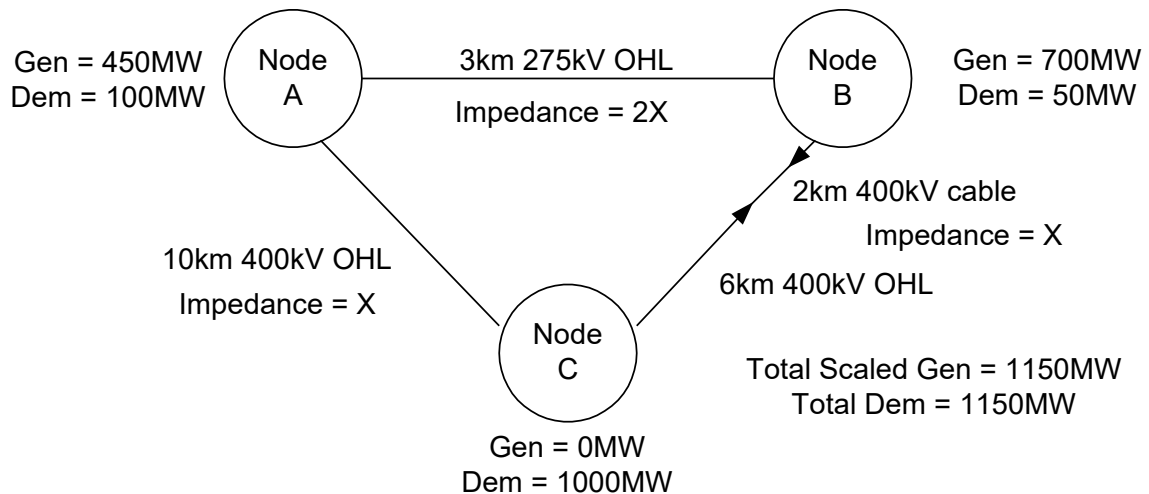

Assuming the same circuit impedances and expansion factors as used above in the Peak Security background, the DCLF transport algorithm calculates the base case power flows for Year Round background as follows:

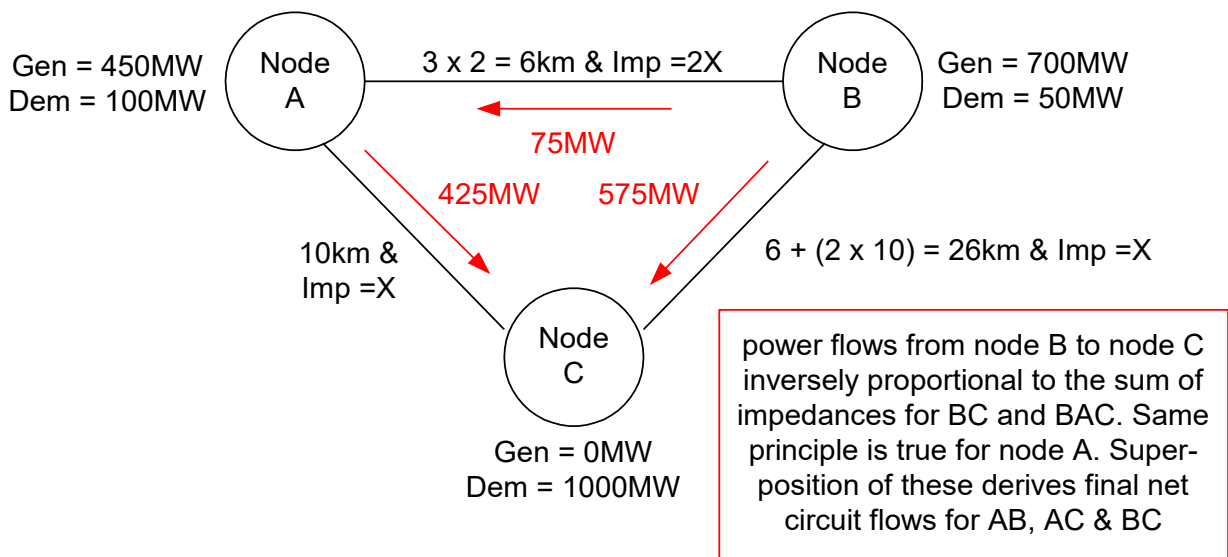

Nodes A and B export, whilst Node C imports. Hence the DCLF algorithm derives flows to deliver export power from Nodes A and B to meet import needs at Node C.


Step 1: Net export from Node A is 350MW; route AC has impedance X and route AB-BC has impedance 3X; hence 262.5MW would flow down AC and 87.5MW along AB-BC

Step 2: Net export from Node B is 650MW; route BC has impedance X and route BA-AC has impedance 3X; hence 487.5MW would flow down BC and 162.5MW along BA-AC

Step 3: Using super-position to add the flows derived in Steps 1 and 2 derives the following;

|         |   |                   |   |       |
|---------|---|-------------------|---|-------|
| Flow AC | = | 262.5MW + 162.5MW | = | 425MW |
| Flow AB | = | 87.5MW – 162.5MW  | = | -75MW |
| Flow BC | = | 87.5MW + 487.5MW  | = | 575MW |

Then, based on the background giving rise to highest flow, each circuit is tagged as either Peak Security or Year Round.

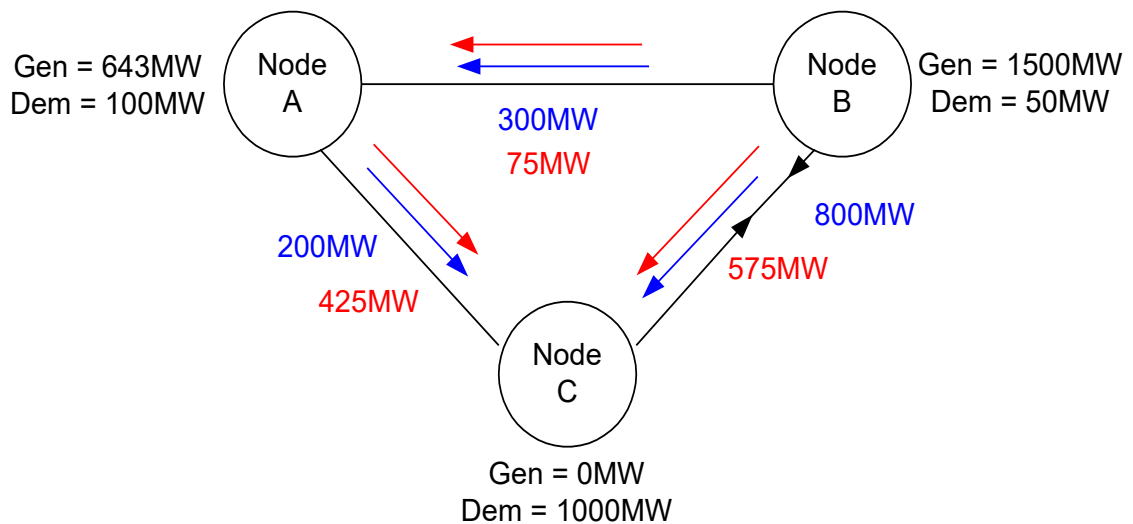


Therefore, circuits AB and BC are tagged as Peak Security and AC is tagged as Year Round.

Total Peak Security cost =  $(300 \times 6) + (800 \times 26) = 22,600 \text{ MWkm}$   
(base case)

Total Year Round cost =  $425 \times 10 = 4,250 \text{ MWkm}$   
(base case)

We then 'inject' 1MW of generation at each node with a corresponding 1MW offtake (demand) at the reference node and recalculate the total Peak Security MWkm cost and Year Round MWkm cost (noting that each circuit is only in one background). The difference from the base case for Peak Security and Year Round costs is the marginal km or shadow cost for Peak Security and Year Round networks respectively. The size and direction of the incremental MW is shown below along with the resultant when superimposed on the relevant base case flow (i.e. higher of the Peak Security and Year Round) depicted in brackets:.

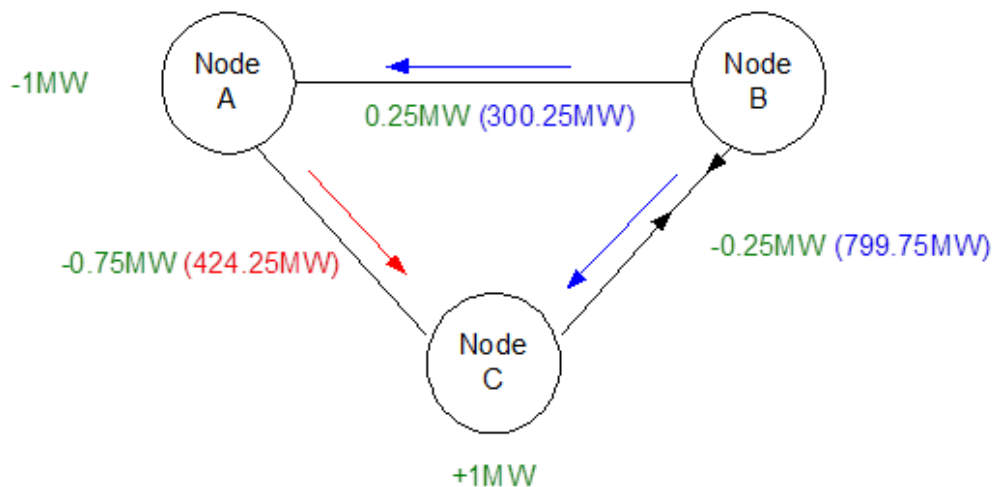

To calculate relevant Peak Security and Year Round the marginal km for node C:

$$\text{Total Peak Security Cost} = (300.25 \times 6) + (799.75 \times 26) = 22,595$$

$$\text{Total Year Round Cost} = 424.25 \times 10 = 4,242.5 \text{ MWkm}$$

$$\begin{aligned} \text{Marginal Peak Security cost} &= \text{Incremental total Peak Security cost} - \text{Base case total Peak Security cost} \\ &= 22,595 - 22,600 = -5 \text{ MWkm} \end{aligned}$$

$$\begin{aligned} \text{Marginal Year Round cost} &= \text{Incremental total Year Round cost} - \text{Base case total Year Round cost} \\ &= 4,242.5 - 4,250 = -7.5 \text{ MWkm} \end{aligned}$$


Thus the overall cost has reduced by .5 for Peak Security (i.e. the marginal km = 5) and by 7.5 for Year Round (i.e the Year Round marginal km = -7.5)

## 14.22 Illustrative Calculation of Boundary Sharing Factors (BSFs) and Shared / Not-Shared incremental km


The following illustrative example shows how the boundary sharing factors and shared / not-shared incremental km are calculated for the transmission system described in the table below.

| Generation Charging Zone | A   | B   | C   | D   |
|--------------------------|-----|-----|-----|-----|
| Zonal MWkm               | 450 | 350 | 150 | 100 |

The diagram below shows the expanded connectivity of this transmission system.

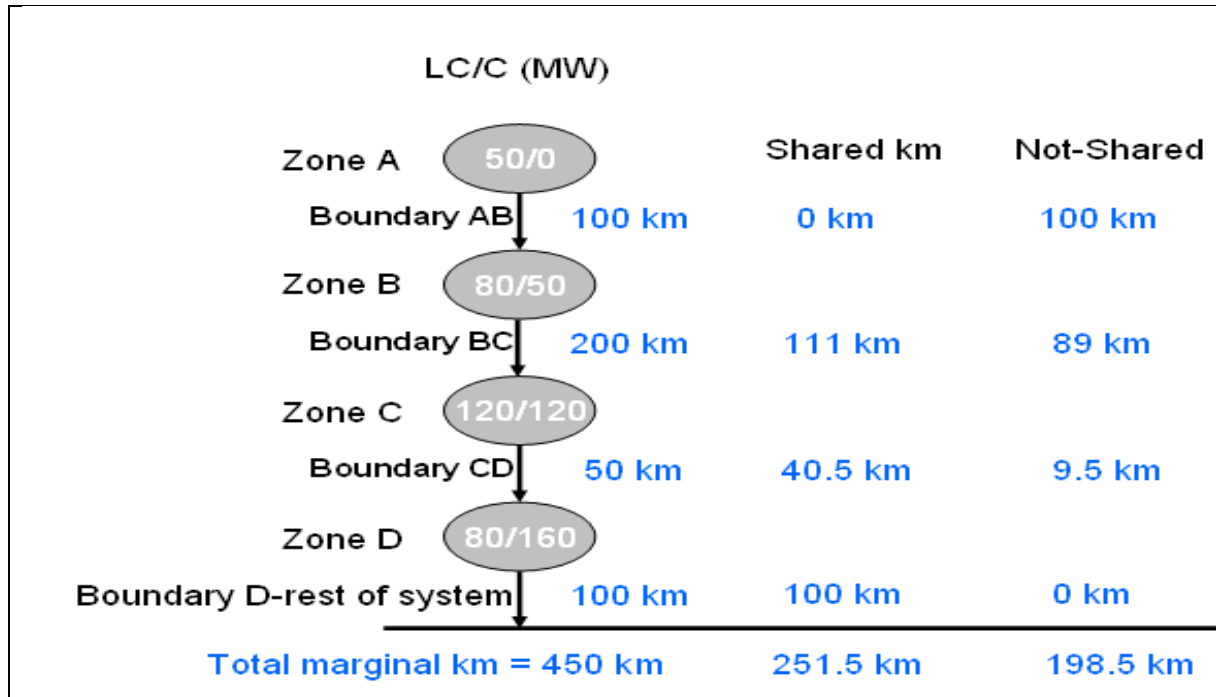

up

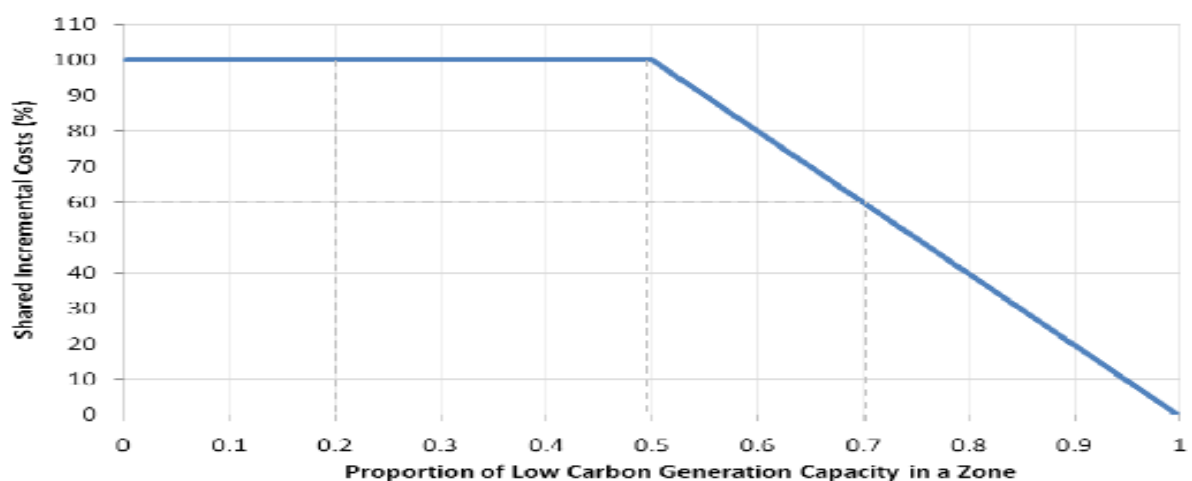

The above figure illustrates how the Year Round marginal km are split into Shared and Not-Shared.

(a) For Boundary AB (where 50MW of the generation is Low Carbon (LC) and 0MW of the generation is Carbon (C) and Year Round boundary marginal km = 100km) -

$$\frac{LC}{(LC+C)} = \frac{50}{50+0} = 1 \quad \text{which is greater than 0.5, therefore the following formula will}$$

be used to calculate the Boundary Sharing Factor (BSF) –

$$BSF = -2 \times \left( \frac{LC}{LC+C} \right) + 2 = -2 \times \left( \frac{50}{50+0} \right) + 2 = 0 \quad (0\%)$$

Year Round Shared marginal km = 0.0 \* 100km = 0 km

Year Round Not-Shared marginal km = (100 – 0)km = 100 km

(b) For Boundary BC (where 130MW of generation is Low Carbon (LC) and 50MW of generation is Carbon (C) and Year Round boundary marginal km = 200km) –

$$\frac{LC}{(LC+C)} = \frac{(50+80)}{(50+80)+(0+50)} = 0.722 \quad \text{which is greater than 0.5, therefore the}$$

following formula will be used to the BSF –

$$BSF = -2 \times \left( \frac{LC}{LC+C} \right) + 2 = -2 \times \left( \frac{130}{130+50} \right) + 2 = 0.556 \quad (55.6\%)$$

Year Round Shared marginal km = 0.556 \* 200km = 111 km

Year Round Not-Shared marginal km = (200 – 111)km = 89 km

(c) For Boundary CD (where 250MW of generation is Low Carbon (LC) and 170MW of generation is Carbon (C) and Year Round boundary marginal km = 50km) –

$$\frac{LC}{(LC+C)} = \frac{(50+80+120)}{(50+80+120)+(0+50+120)} = 0.595 \quad \text{which is greater than 0.5, therefore}$$

the following formula will be used to calculate the BSF –

$$BSF = -2 \times \left( \frac{LC}{LC+C} \right) + 2 = -2 \times \left( \frac{250}{250+170} \right) + 2 = 0.810 \quad (81\%)$$

Year Round Shared marginal km = 0.81 \* 50km = 40.5 km

Year Round Not-Shared marginal km = (50 – 40.5)km = 9.5 km

(d) For Boundary D-rest of system (where 330MW of generation is Low Carbon (LC) and 330MW of generation is Carbon (C) and Year Round boundary marginal km = 100km) –

$$\frac{LC}{(LC+C)} = \frac{(50+80+120+80)}{(50+80+120+80)+(0+50+120+160)} = 0.5 \quad \text{therefore it is at the threshold}$$

at which maximum sharing occurs between LC and C generation. Therefore 100% of the Year Round zonal marginal km will be shared. (i.e. BSF=1.0);

Year Round Shared marginal km = 1.0 \* 100 = 100 km

Year Round Not-Shared marginal km = (100 – 100)km = 0 km

The shared zonal marginal km for each generation charging zone will be the sum of the relevant shared boundary marginal km as shown in the table below (assuming the node below D is the centre of the system i.e. zonal MWkm of 0). These not-shared zonal incremental km are then use to calculate wider £/kW generation tariffs.

| <b>Boundary/Zone</b>     | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> |
|--------------------------|----------|----------|----------|----------|
| <b>A-B</b>               | 0        |          |          |          |
| <b>B-C</b>               | 111      | 111      |          |          |
| <b>C-D</b>               | 40.5     | 40.5     | 40.5     |          |
| <b>D-rest of system</b>  | 100      | 100      | 100      | 100      |
| <b>Shared Zonal MWkm</b> | 251.5    | 251.5    | 140.5    | 100      |
| <b>Total Zonal MWkm</b>  | 450      | 350      | 150      | 100      |

The not-shared zonal marginal km for each generation charging zone will be the sum of the relevant not-shared boundary marginal km as shown in the table below (assuming the node below D is the centre of the system i.e. zonal MWkm of 0). These not-shared zonal incremental km are then use to calculate wider £/kW generation tariffs.

| <b>Boundary/Zone</b>         | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> |
|------------------------------|----------|----------|----------|----------|
| <b>A-B</b>                   | 100      |          |          |          |
| <b>B-C</b>                   | 89       | 89       |          |          |
| <b>C-D</b>                   | 9.5      | 9.5      | 9.5      |          |
| <b>D-rest of system</b>      | 0        | 0        | 0        | 0        |
| <b>Not-Shared Zonal MWkm</b> | 198.5    | 98.5     | 9.5      | 0        |
| <b>Total Zonal MWkm</b>      | 450      | 350      | 150      | 100      |

## 14.23 Example: Calculation of Zonal Generation Tariff

### Wider

Let us consider all nodes in a generation zone in this example.

The table below shows a sample output of the transport model comprising the node, the Peak Security wider nodal marginal km and Year Round wider nodal marginal km (observed on non-local assets) of an injection at the node with a consequent withdrawal across distributed reference node, the generation sited at the node, scaled to ensure total national generation equals total national demand, for both Peak Security and Year Round generation backgrounds..

| Gen Zone      | Node   | Wider Nodal Marginal km (Peak Security) | Scaled Generation (Peak Security) | Wider Nodal Marginal km (Year Round) | Scaled Generation (Year Round) |
|---------------|--------|-----------------------------------------|-----------------------------------|--------------------------------------|--------------------------------|
| 4             | ABNE10 | 5.73                                    | 0.00                              | 459.90                               | 0.00                           |
| 4             | CLAY1S | 239.67                                  | 0.00                              | 306.47                               | 0.00                           |
| 4             | CLUN1S | 46.41                                   | 22.90                             | 502.16                               | 18.76                          |
| 4             | COUA10 | 45.39                                   | 0.00                              | 423.30                               | 0.00                           |
| 4             | DYCE1Q | 162.70                                  | 0.00                              | 357.81                               | 0.00                           |
| 4             | ERRO10 | 46.82                                   | 56.13                             | 534.03                               | 45.99                          |
| 4             | FIDD1B | 91.88                                   | 0.00                              | 220.59                               | 0.00                           |
| 4             | FINL1Q | 79.69                                   | 12.35                             | 495.63                               | 10.12                          |
| 4             | GRIF1S | 33.31                                   | 0.00                              | 521.16                               | 71.40                          |
| 4             | KIIN10 | 79.69                                   | 0.00                              | 495.63                               | 0.00                           |
| 4             | LOCH10 | 79.69                                   | 35.18                             | 495.63                               | 28.82                          |
| 4             | MILC10 | 117.69                                  | 0.00                              | 328.86                               | 0.00                           |
| 4             | PERS20 | 266.00                                  | 0.00                              | 384.05                               | 0.00                           |
| 4             | TUMB1Q | 46.82                                   | 0.00                              | 536.27                               | 0.00                           |
| <b>Totals</b> |        |                                         | <b>126.56</b>                     |                                      | <b>175.09</b>                  |

In order to calculate the generation tariff we would carry out the following steps.

- (i) calculate the generation weighted wider nodal shadow costs.

For this example zone this would be as follows:

| Gen Zone      | Node   | Wider Nodal Marginal km (Peak Security) | Scaled Generation (Peak Security) (MW) | Gen Weighted Wider Nodal Marginal km (Peak Security) | Wider Nodal Marginal km (Year Round) | Scaled Generation (Year Round) (MW) | Gen Weighted Wider Nodal Marginal km (Year Round) |
|---------------|--------|-----------------------------------------|----------------------------------------|------------------------------------------------------|--------------------------------------|-------------------------------------|---------------------------------------------------|
| 4             | CLUN1S | 46.41                                   | 22.90                                  | 8.39                                                 | 502.16                               | 18.76                               | 53.80                                             |
| 4             | ERRO10 | 46.82                                   | 56.13                                  | 20.76                                                | 534.03                               | 45.99                               | 140.27                                            |
| 4             | FINL1Q | 79.69                                   | 12.35                                  | 7.77                                                 | 495.63                               | 10.12                               | 28.65                                             |
| 4             | GRIF1S | N/A                                     | N/A                                    | N/A                                                  | 521.16                               | 71.40                               | 212.52                                            |
| 4             | LOCH10 | 79.69                                   | 35.18                                  | 22.15                                                | 495.63                               | 28.82                               | 81.58                                             |
| <b>Totals</b> |        |                                         | <b>126.56</b>                          |                                                      |                                      | <b>175.09</b>                       |                                                   |



|                                          |
|------------------------------------------|
| i.e. $\frac{79.69 \times 35.18}{126.56}$ |
|------------------------------------------|

- (ii) sum the generation weighted wider nodal shadow costs to give Peak Security and Year Round zonal figures

For this example zone this would be:

**.Peak Security:** (8.39 + 20.76+7.77+22.15) km = **59.07km**

**Year Round:** (53.80 + 140.27 + 28.65 + 212.52 + 81.58) = **516.82 km**

- (iii) In this example we have assumed that accounting for sharing in the Year Round background gives:

Year Round Shared marginal km = 344.56km

Year Round Not-Shared marginal km = 172.26km

)

- (iv) calculate the initial Peak Security wider transport tariff, Year Round Shared wider transport tariff and Year Round Not-Shared wider transport tariff by multiplying the figure in (iii) above by the expansion constant (& dividing by 1000 to put into units of £/kW).

For zone 4 and assuming an expansion constant of £10.07/MWkm and a locational security factor of 1.8:

$$(a) \text{ Initial Peak Security wider tariff} - \frac{59.07 \text{ km} * £10.07/\text{MWkm} * 1.8}{1000} = \underline{\underline{£1.071/\text{kW}}}$$

- b) Initial Year Round Shared wider tariff -

$$\frac{344.56 \text{ km} * £10.07/\text{MWkm} * 1.8}{1000} = \underline{\underline{£6.245/\text{kW}}}$$

- c) Initial Year Round Not-Shared wider tariff -

$$\frac{172.26 \text{ km} * £10.07/\text{MWkm} * 1.8}{1000} = \underline{\underline{£1.309/\text{kW}}}$$

## Local

- (v) If we assume (for the sake of this example) that the generator connecting at CLUN1S is a thermal plant with a Peak Security flag of 1 and an Annual Load Factor (ALF) of 60%, which connects via 10km of 132kV 100MVA rated single circuit overhead line from the nearest MITS node, with no redundancy, the substation is rated at less than 1320MW, and there is no other generation or demand connecting to this circuit, then:

the local substation tariff shall be as published in accordance with paragraph 14.15.122. For this example we the local substation tariff will be £0.133/kW; and

- a) running the transport model with a local circuit expansion factor of 10.0 applied to the 10km of overhead line connecting CLUN1S to the nearest MITS node and the

wider circuit expansion factors applied to all other circuits, gives a local nodal marginal cost of 100MWkm. This is the additional MWkm costs associated with the node's local assets. Applying the expansion constant of £10.07/MWkm and local security factor of 1.0 and dividing by 1000 gives a local circuit tariff of £1.007/kW.

### Adjustment Tariff

- (vi) We now need to calculate the Adjustment Tariff. This is calculated by taking the Adjustment Revenue and dividing this by the Chargable Generation Capacity (as per to 14.14.5 (viii) (h)) create a £/kW figure

Assuming annual average transmission charges paid by Generators is due to fall below €0, **The Company** will add Adjustment Revenue to ensure that compliance with the Limiting Regulation is maintained – in this example let us assume it is £260m and the GB-wide generation Chargable Capacity is 60GW (60,000,000kW). This would mean the non-locational Adjustment Tariff would be calculated as;

$$\text{Adjustment Tariff (AdjTariff)} = \frac{\text{Adjustment Revenue}}{\text{Chargable Capacity}}$$

$$\text{Adjustment Tariff (AdjTariff)} = \frac{£260m}{60,000,000kW}$$

$$\text{Adjustment Tariff (AdjTariff)} = £4.33/kW$$

- (vii) Therefore the charges for thermal plant with a TEC of 100MW and an ALF of 60%, connecting at CLUN1S is:

|                                              |                         |
|----------------------------------------------|-------------------------|
| = Wider Peak Security Tariff * PS Flag * TEC | = 1.071 * 1 * 100,000   |
| = Wider Year Round Shared Tariff * ALF * TEC | = 6.245 * 0.6 * 100,000 |
| = Wider Year Round Not-Shared Tariff * TEC   | = 1.309 * 100, 000      |
| = Local substation Tariff * TEC              | = 0.133 * 100,000       |
| = Local circuit Tariff * TEC                 | = 1.007 * 100,000       |
| = Adjustment Tariff * TEC                    | = 4.33 * 100,000        |

(effectively, £11597/kW \* 100,000kW = £1,159,700)

- (viii) Alternatively, if we assume that the generator connecting at CLUN1S is an intermittent wind generation plant (instead of a thermal plant) with a TEC of 100MW, PS Flag of 0 and an ALF of 30%, then the charges payable will be –

|                                              |                         |
|----------------------------------------------|-------------------------|
| = Wider Peak Security Tariff * PS Flag * TEC | = 1.071 * 0 * 100,000   |
| = Wider Year Round Shared Tariff * ALF * TEC | = 6.245 * 0.3 * 100,000 |
| = Wider Year Round Not-Shared Tariff * TEC   | = 1.309 * 100, 000      |
| = Local substation Tariff * TEC              | = 0.133 * 100,000       |
| = Local circuit Tariff * TEC                 | = 1.007 * 100,000       |
| = Adjustment Tariff * TEC                    | = 4.33 * 100,000        |

(effectively, £8.653/kW \* 100,000kW = £865,300)

## 14.24 Example: Calculation of Zonal Demand Locational Tariff

Let us consider all nodes in the same demand zone in this example

The table below shows an example output of the transport model comprising the node, the Peak Security and Year Round nodal marginal km of an injection at the node with a consequent withdrawal at the distributed reference node, the generation sited at the node, scaled to ensure total national generation = total national net demand and the net demand sited at the node.

Where the Demand (MW) is negative this indicates that the Demand node is Exporting rather than importing.

| Demand Zone | Node | Peak Security<br>Nodal<br>Marginal km | Year<br>Round<br>Nodal<br>Marginal<br>km | Demand<br>(MW) |
|-------------|------|---------------------------------------|------------------------------------------|----------------|
| 1           | A    | 110                                   | 80                                       | 100            |
| 1           | B    | 140                                   | 90                                       | 100            |
| 1           | C    | 120                                   | 80                                       | 0              |
| 1           | D    | 100                                   | 100                                      | -50            |
| 1           | E    | 100                                   | 70                                       | 50             |
|             |      | <b>Totals</b>                         |                                          | <b>200</b>     |

| Demand Zone | Node        | Peak Security<br>Nodal Marginal<br>km | Year Round<br>Nodal Marginal<br>km | Net<br>Demand<br>(MW) |
|-------------|-------------|---------------------------------------|------------------------------------|-----------------------|
| 14          | ABHA4A      | -77.25                                | -230.25                            | 127                   |
| 14          | ABHA4B      | -77.27                                | -230.12                            | 127                   |
| 14          | ALVE4A      | -82.28                                | -197.18                            | 100                   |
| 14          | ALVE4B      | -82.28                                | -197.15                            | 100                   |
| 14          | AXMI40_SWEB | -125.58                               | -176.19                            | 97                    |
| 14          | BRWA2A      | -46.55                                | -182.68                            | 96                    |
| 14          | BRWA2B      | -46.55                                | -181.12                            | 96                    |
| 14          | EXET40      | -87.69                                | -164.42                            | 340                   |
| 14          | HINP20      | -46.55                                | -147.14                            | 0                     |
| 14          | HINP40      | -46.55                                | -147.14                            | 0                     |
| 14          | INDQ40      | -102.02                               | -262.50                            | 444                   |
| 14          | IROA20_SWEB | -109.05                               | -141.92                            | 462                   |
| 14          | LAND40      | -62.54                                | -246.16                            | 262                   |
| 14          | MELK40_SWEB | 18.67                                 | -140.75                            | 83                    |
| 14          | SEAB40      | 65.33                                 | -140.97                            | 304                   |
| 14          | TAUN4A      | -66.65                                | -149.11                            | 55                    |
| 14          | TAUN4B      | -66.66                                | -149.11                            | 55                    |
|             |             | <b>Totals</b>                         |                                    | <b>2748</b>           |

In order to calculate the gross demand tariff we would carry out the following steps:

- (i) Change Negative Demand values to 0 (zero) , which in this example is Node D

| Demand Zone   | Node | Peak Security<br>Nodal Marginal<br>km | Year Round<br>Nodal Marginal<br>km | Demand (MW) |
|---------------|------|---------------------------------------|------------------------------------|-------------|
| 1             | A    | 110                                   | 80                                 | 100         |
| 1             | B    | 140                                   | 90                                 | 100         |
| 1             | C    | 120                                   | 80                                 | 0           |
| 1             | D    | 100                                   | 100                                | 0           |
| 1             | E    | 100                                   | 70                                 | 50          |
| <b>Totals</b> |      |                                       |                                    | <b>250</b>  |

- (ii) calculate the demand weighted nodal shadow costs

For this example zone this would be as follows:

| Demand Zone   | Node | Peak Security<br>Nodal Marginal<br>km | Year Round<br>Nodal Marginal<br>km | Demand<br>(MW) | Peak Security<br>Demand Weighted<br>Nodal Marginal<br>km | Year Round<br>Demand Weighted<br>Nodal Marginal<br>km |
|---------------|------|---------------------------------------|------------------------------------|----------------|----------------------------------------------------------|-------------------------------------------------------|
| 1             | A    | 110                                   | 80                                 | 100            | 44                                                       | 32                                                    |
| 1             | B    | 140                                   | 90                                 | 100            | 56                                                       | 36                                                    |
| 1             | C    | 120                                   | 80                                 | 0              | 0                                                        | 0                                                     |
| 1             | D    | 100                                   | 100                                | 0              | 0                                                        | 0                                                     |
| 1             | E    | 100                                   | 70                                 | 50             | 20                                                       | 14                                                    |
| <b>Totals</b> |      |                                       |                                    | <b>250</b>     | <b>120</b>                                               | <b>82</b>                                             |

- (iii) sum the Peak Security and Year Round demand weighted nodal shadow costs to give zonal figures. For this example zone this is shown in the above table and is 120km for Peak Security background and 82km for Year Round background.

- (iv) i.) calculate the transport (locational) tariffs by multiplying the figures in (ii) above by - 1. This changes the original Nodal Marginal Km for injecting (Generation) into Nodal Marginal Km for withdrawing (Demand). Then multiply by the expansion constant, the locational security factor and then divide by 1000 to put into units of £/kW:

For this example zone, assuming an expansion constant of £10.07/MWkm and a locational security factor of 1.80:

$$\begin{aligned} \text{a) Peak Security tariff -} \\ - (120\text{km} * \underline{\underline{\pounds 10.07/\text{MWkm}}} * 1.8) &= \underline{\underline{-\pounds 2.47/\text{kW}}} \end{aligned}$$

1000

$$\text{b) Year Round tariff -} \\ \frac{-(82 * £10.07/\text{MWkm} * 1.8)}{1000} = \underline{\underline{-£1.49/\text{kW}}}$$

The Locational signal for Demand within this zone is negative for both Peak and Year Round, which indicates withdrawing at this part of the network, reduces total system flows.

ii.) A NHH locational demand element is calculated in accordance with the methodology given in 14.16.2.

- (v) i.) We now need to calculate the **Transmission Demand Residual Tariffs**. This is calculated by first taking the total revenue to be recovered from demand less the revenue which would be recovered through the demand locational and energy tariffs and revenue recovery through embedded export tariffs.

Assuming the total revenue to be recovered from gross GSP group demand= £779m. Assuming the total recovery from GSP group demand locational and energy tariffs is £140m, total recovery from embedded export tariffs is -£10m the total revenue to be recovered through the **Transmission Demand Residual Tariffs** will be as follows:

$$£779\text{m} - £140\text{m} - -£10\text{m} = £649\text{m}$$

ii.) The total revenue to be recovered from the **Transmission Demand Residual Tariffs** as calculated in (i) above is then apportioned between the **Charging Bands** as set in 14.15.137 by the sum of the annual energy consumption of the **Final Demand Sites** or **Unmetered Supplies** as appropriate allocated to a **Charging Band** as divided by the total annual energy consumption from all GB **Final Demand Sites** and **Unmetered Supplies**.

iii.) An example is as follows:

The total annual consumption of all GB **Final Demand Sites** and **Unmetered Supplies** is 100TWh.

The sum of the annual energy consumption of all **Final Demand Sites** in HV Charging Band 1 is 1TWh

Using the example of total revenue to be recovered through the **Transmission Demand Residual Tariffs** above of £649m, HV Charging Band 1 **Final Demand Sites** will be liable for 1% of this cost.

The annual cost per site will be  $\frac{£6,490,000}{N}$  where N is the total number of sites in HV Charging Band 1.

If, in this example, N = 12,000 the annual charge per **Final Demand Site** in HV Charging Band 1 will be £540.83.

The **Transmission Demand Residual Tariff** per **Final Demand Site** in HV Charging Band 1 will be set as a daily charge. The annual charge, in this example £540.83, will be divided by the number of days in the charging year to deliver a **Transmission Demand Residual Tariff** (£/site/day).

In this example;  $\frac{£540.83}{365 \text{ days}}$  or £1.48/site/day.

- (vii) The Transmission Demand Residual tariff is subject to further adjustment to allow for the minimum £0/kW gross demand charge.

## 14.25 Reconciliation of Demand Related Transmission Network Use of System Charges

This appendix illustrates the methodology used by **The Company** in the reconciliation of Transmission Network Use of System charges for demand. The example highlights the different stages of the calculations from the monthly invoiced amounts, right through to Final Reconciliation.

### Monthly Charges - HH and NHH

Suppliers provide half-hourly (HH) gross demand and embedded export forecasts and non-half-hourly (NHH) demand forecasts by BM Unit every quarter; The Company provides FDSC Forecasts and Unmetered Supply Volume Forecasts on behalf of Suppliers. An example of such forecasts and the corresponding monthly invoiced amounts, based on tariffs of £10.00/kW for gross demand, £5.00/kW for embedded export and 1.20p/kWh for energy consumption, is as follows:

HH and NHH Forecasts

|       | Forecast HH<br>Triad Gross<br>Demand<br>HHD <sub>F</sub> (kW) | HH Gross<br>Demand<br>Monthly<br>Invoiced<br>Amount (£) | Forecast HH<br>Triad<br>Embedded<br>Export<br>HHEE <sub>F</sub> (kW) | HH<br>Embedded<br>Generation<br>Monthly<br>Invoiced<br>Amount (£) | Forecast<br>NHH<br>Energy<br>Consumption<br>NHHCF(kWh) | NHH<br>Monthly<br>Invoiced<br>Amount (£) | Net Monthly<br>Invoiced<br>Amount (£) |
|-------|---------------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------|
| Apr   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 15,000,000                                             | 15,000                                   | 24,750                                |
| May   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 15,000,000                                             | 15,000                                   | 24,750                                |
| Jun   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 15,000,000                                             | 15,000                                   | 24,750                                |
| Jul   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Aug   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Sep   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Oct   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Nov   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Dec   | 12,000                                                        | 10,000                                                  | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 28,750                                |
| Jan   | 7,200                                                         | (6,000)                                                 | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 12,750                                |
| Feb   | 7,200                                                         | (6,000)                                                 | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 12,750                                |
| Mar   | 7,200                                                         | (6,000)                                                 | -600                                                                 | (250)                                                             | 18,000,000                                             | 19,000                                   | 12,750                                |
| Total |                                                               | 72,000                                                  |                                                                      | (3,000)                                                           |                                                        | 216,000                                  | 285,000                               |

As shown, for the first nine months the Supplier provided a 12,000kW HH triad gross demand forecast, and hence paid HH gross demand monthly charges of £10,000  $((12,000\text{kW} \times £10.00/\text{kW})/12)$  for that BM Unit. In January the Supplier provided a revised forecast of 7,200kW, implying a forecast annual charge reduced to £72,000  $(7,200\text{kW} \times £10.00/\text{kW})$ . The Supplier had already paid £90,000, so the excess of £18,000 was credited back to the supplier in three £6,000 instalments over the last three months of the year.

The Supplier provided an embedded export triad forecast of -600kW and hence was paid an embedded export credit of £250  $((600\text{kW} \times £5.00/\text{kW})/12)$  for that BM Unit (For the avoidance of doubt, if the embedded export tariff is negative this will result in a debit).

The Supplier also initially provided a 15,000,000kWh NHH energy consumption forecast, and hence paid NHH monthly charges of £15,000  $((15,000,000\text{kWh} \times 1.2\text{p}/\text{kWh})/12)$  for that BM Unit. In July the Supplier provided a revised forecast of 18,000,000kWh, implying a forecast annual charge increased to £216,000  $(18,000,000\text{kWh} \times 1.2\text{p}/\text{kWh})$ . The Supplier had

already paid £45,000, so the remaining £171,000 was split into payments of £19,000 for the last nine months of the year.

The right hand column shows the net monthly HH and NHH charges for the BM Unit.

### Monthly Charge – TDR

The User shall not be required to submit forecasts of FDSC or Unmetered Supply Volume. **The Company** shall use the latest daily actual FDSC and Unmetered Supply Volume prior to the forecast as the basis of the forecast.

As an example, at the start of the year the supplier has sites in just three of the charging bands, as shown below. The April invoice is calculated as the annual liability divided by 12.

| Charging Band | TDR Quantity | Tariff      | April Invoice                         |
|---------------|--------------|-------------|---------------------------------------|
| Band 1        | 240 Sites    | £1/Site/Day | = 240 x 1 x 365 / 12<br>= £7,300      |
| Band 2        | 180 Sites    | £2/Site/Day | = 180 x 2 x 365 / 12<br>= £10,950     |
| UMS           | 4800kWh/day  | £0.012/kWh  | = 4800 x 0.012 x 365 / 12<br>= £1,752 |
|               |              | Total       | £20,002                               |

Each month the Company recalculates the forecast liability for the full year, based on any revision to the FDSC and Unmetered Supply Volume for the previous months, and the latest forecast for the remainder of the year. The amount the supplier has already paid is deducted from this annual liability, and the balance is divided by the number of months left to bill.

### Initial Reconciliation (Part 1a – HH Demand)

The Supplier's outturn HH triad gross demand, based on latest settlement data (and therefore subject to change in subsequent settlement runs), was 9,000kW. The HH triad gross demand reconciliation charge is therefore calculated as follows:

$$\text{HHD Reconciliation Charge} = (\text{HHD}_A - \text{HHD}_F) \times \text{£/kW Tariff}$$

$$= (9,000\text{kW} - 7,200\text{kW}) \times \text{£}10.00/\text{kW}$$

$$= 1,800\text{kW} \times \text{£}10.00/\text{kW}$$

$$= \text{£}18,000$$

To calculate monthly interest charges, the outturn HHD charge is split equally over the 12-month period. The monthly reconciliation amount is the monthly outturn HHD charge less the HH gross demand monthly invoiced amount. Interest payments are calculated based on these monthly reconciliation amounts using Barclays Base Rate.

### Initial Reconciliation (Part 1b – Embedded Export)

The Supplier's outturn HH triad embedded export, based on latest settlement data (and therefore subject to change in subsequent settlement runs), was 500kW. The HH triad embedded export reconciliation charge is therefore calculated as follows:

$$\text{HHEE Reconciliation Charge} = (\text{HHEE}_A - \text{HHEE}_F) \times \text{£/kW Tariff}$$



$$\begin{aligned}
 &= (-500\text{kW} - -600\text{kW}) \times £5.00/\text{kW} \\
 &= 100\text{kW} \times £5.00/\text{kW} \\
 &= \mathbf{£500}
 \end{aligned}$$

To calculate monthly interest charges, the outturn HHEE charge is split equally over the 12-month period. The monthly reconciliation amount is the monthly outturn HHEE charge less the HH embedded generation monthly invoiced amount. Interest payments are calculated based on these monthly reconciliation amounts using Barclays Base Rate.

### Initial Reconciliation (Part 2 – NHH Demand)

The Supplier's outturn NHH energy consumption, based on latest settlement data, was 17,000,000kWh. The NHH energy consumption reconciliation charge is therefore calculated as follows:

$$\begin{aligned}
 \text{NHH Reconciliation Charge} &= \frac{(\text{NHH}_{\text{C}_A} - \text{NHH}_{\text{C}_F}) \times \text{p/kWh Tariff}}{100} \\
 &= \frac{(17,000,000\text{kWh} - 18,000,000\text{kWh}) \times 1.20\text{p/kWh}}{100} \\
 &= \frac{-1,000,000\text{kWh} \times 1.20\text{p/kWh}}{100} \\
 &= \mathbf{-£12,000}
 \end{aligned}$$

The monthly reconciliation amount is equal to the outturn energy consumption charge for that month less the NHH monthly invoiced amount. Interest payments are calculated based on these monthly reconciliation amounts using Barclays Base Rate.

### Initial Reconciliation (Part 3 - TDR)

The Supplier's outturn Transmission Demand Residual charge is calculated for each month using FDSC and Unmetered Supply Volume based on latest settlement data as follows,

| Charging Band | Latest TDR Quantity | Tariff      | April Charge                    | Original April Invoice | Initial Demand Reconciliation for April |
|---------------|---------------------|-------------|---------------------------------|------------------------|-----------------------------------------|
| Band 1        | 230 Sites           | £1/Site/Day | = 230 x 1 x 30 days<br>= £6,900 | £7,300                 | -£400                                   |
| Band 2        | 200 Sites           | £2/Site/Day | = 200 x 2 x 30<br>= £12,000     | £10,950                | £1,050                                  |
| UMS           | 5000kWh/day         | £0.012/kWh  | = 5000 x 0.012 x 30<br>= £1,800 | £1,752                 | £48                                     |
|               |                     | Total       | £20,700                         | £20,002                | £698                                    |

If the Supplier's TDR quantity was the same for every month of the year, the total TDR reconciliation charge would be:

$$\text{TDR Reconciliation Charge} = [ (230-240) * 1 + (200-180) * 2 + (5000-4800) * 0.012 ] * 365$$

$$= \text{£}11,826$$

The monthly reconciliation amount is the monthly outturn Transmission Demand Residual Charge less the monthly invoiced amount. Interest payments are calculated based on these monthly reconciliation amounts using Barclays Base Rate.

On the above examples, the net initial TNUoS demand reconciliation charge (across HH, EE, NHH and TDR, but excluding interest) is therefore £18,000 + £500 - £12,000 + £11,826 = £18,326.

### Final Reconciliation

Finally, let us now suppose that after all final Settlement data has been received (up to 14 months after the relevant dates) as shown in the below table;

| Settlement Data item     | Initial Value | Final Value   |
|--------------------------|---------------|---------------|
| HH triad gross demand    | 9,000kW       | 9,500kW       |
| HH triad embedded export | -500kW        | -550kW        |
| NHH energy consumption   | 17,000,000kWh | 16,700,000kWh |
| Band 1                   | 230 Sites     | 235 Sites     |
| Band 2                   | 200 Sites     | 195 Sites     |
| UMS                      | 5,000kWh/day  | 5,100kWh/day  |

This would mean the Final Reconciliation calculations would be.

$$\begin{aligned} \text{Final HH Gross Demand} &= (9,500\text{kW} - 9,000\text{kW}) \times \text{£}10.00/\text{kW} \\ \text{Reconciliation Charge} &= \text{£}5,000 \end{aligned}$$

$$\begin{aligned} \text{Final HH Embedded Export} &= (-550\text{kW} - -500\text{kW}) \times \text{£}5.00/\text{kW} \\ \text{Reconciliation Charge} &= -\text{£}250 \end{aligned}$$

$$\begin{aligned} \text{Final NHH Reconciliation Charge} &= \frac{(16,700,000\text{kWh} - 17,000,000\text{kWh}) \times 1.20\text{p/kWh}}{100} \\ &= -\text{£}3,600 \end{aligned}$$

$$\text{FDSC Charging Band 1} = (235 \text{ Sites} - 230 \text{ Sites}) \times \text{£}1/\text{Site/Day} \times 365 \text{ days} = \text{£}150$$

$$\text{FDSC Charging Band 2} = (195 \text{ Sites} - 200 \text{ Sites}) \times \text{£}2/\text{Site/Day} \times 365 \text{ Days} = -\text{£}300$$

$$\text{UMS Charging Band} = (5,100\text{kWh/day} - 5,000\text{kWh/day}) \times 0.012/\text{kWh} \times 365 \text{ Days} = -\text{£}36$$

Consequently, the net final TNUoS demand reconciliation charge will be £5,000 - £250 - £3,600 + £150 - £300 + £36 = £1,036

Monthly reconciliation amounts are calculated in a similar way as for the Initial Reconciliation, being (i) for HH Demand and Embedded Export, the outturn annual charge divided by 12, and for NHH Demand and TDR it is the outturn charge for the month; less (ii) the amount already invoiced for that month (including through the Initial Reconciliation). Interest payments are calculated based on these monthly reconciliation amounts using Barclays Base Rate.

**Terminology:**

**HHD<sub>A</sub>** = The Supplier's outturn half-hourly metered Triad Gross Demand (kW) for the demand zone concerned.

**HHD<sub>F</sub>** = The Supplier's forecast half-hourly metered Triad Gross Demand (kW) for the demand zone concerned.

**HHEE<sub>A</sub>** = The Supplier's outturn half-hourly metered Triad Embedded Export (kW) for the demand zone concerned.

**HHEE<sub>F</sub>** = The Supplier's forecast half-hourly metered Triad Embedded Export (kW) for the demand zone concerned.

**NHHC<sub>A</sub>** = The Supplier's outturn non-half-hourly metered daily Energy Consumption (kWh) for the period 16:00 hrs to 19:00 hrs inclusive (i.e. settlement periods 33 to 38) from April 1<sup>st</sup> to March 31<sup>st</sup>, for the demand zone concerned.

**NHHC<sub>F</sub>** = The Supplier's forecast non-half-hourly metered daily Energy Consumption (kWh) for the period 16:00 hrs to 19:00 hrs inclusive (i.e. settlement periods 33 to 38) from April 1<sup>st</sup> to March 31<sup>st</sup>, for the demand zone concerned.

**£/kW Tariff** = The £/kW Gross Demand or Embedded Export Tariff as shown in Schedule 1 of **The Statement of Use of System Charges** for the demand zone concerned.

**p/kWh Tariff** = The Energy Consumption Tariff shown in Schedule 1 of **The Statement of Use of System Charges** for the demand zone concerned.

14.26 Classification of parties for charging purposes

In the event of any conflict between this Appendix and the main text within this Statement, the main text within the Statement shall take precedence.

In the following diagrams, the parties liable for Transmission Network Use of System charges are outlined in red.

| SUPPLIER                                                                                                          |                             |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <div><div>Supplier Use of System Agreement</div><div><div>Supplier BMU1</div><div>Supplier BMUn</div></div></div> |                             |
| Demand Charges<br>See 14.17.13 and 14.17.18.                                                                      | Generation Charges<br>None. |

| POWER STATION WITH A BILATERAL CONNECTION AGREEMENT                                                                                                                                 |                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>Bilateral Connection Agreement Appendix C</div><div><div>Gen Unit BMU1</div><div>Gen Unit BMUn</div><div>Station Load BMU</div><div>Additional Load BMU</div></div></div> |                                                                                                                                                                                                                 |
| Demand Charges<br>See 14.17.18.                                                                                                                                                     | Generation Charges<br>See 14.18.1 i) and 14.18.3 to 14.18.9 and 14.18.18.<br><br>For generators in positive zones, see 14.18.10 to 14.18.12.<br><br>For generators in negative zones, see 14.18.13 to 14.18.17. |


| PARTY WITH A BILATERAL EMBEDDED GENERATION AGREEMENT                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <div><div><div><div>Gen Unit BMU1</div><div>Gen Unit BMUn</div><div>Station Load BMU</div><div>Additional Load BMU</div></div></div><div><div><div>Demand Charges</div><div>See 14.17.14, 14.17.15 and 14.17.18.</div></div><div><div>Generation Charges</div><div>See 14.18.1 ii).</div><div>For generators in positive zones, see 14.18.3 to 14.18.12 and 14.18.18.</div><div>For generators in negative zones, see 14.18.3 to 14.18.9 and 14.18.13 to 14.18.18.</div></div></div></div> |  |

## 14.27 Transmission Network Use of System Charging Flowcharts


The following flowcharts illustrate the parties liable for Demand and Generation TNUoS charges and the calculation of those charges.

In the event of any conflict between this Appendix and the main text within this Statement, the main text within the Statement shall take precedence.

### Demand Charges

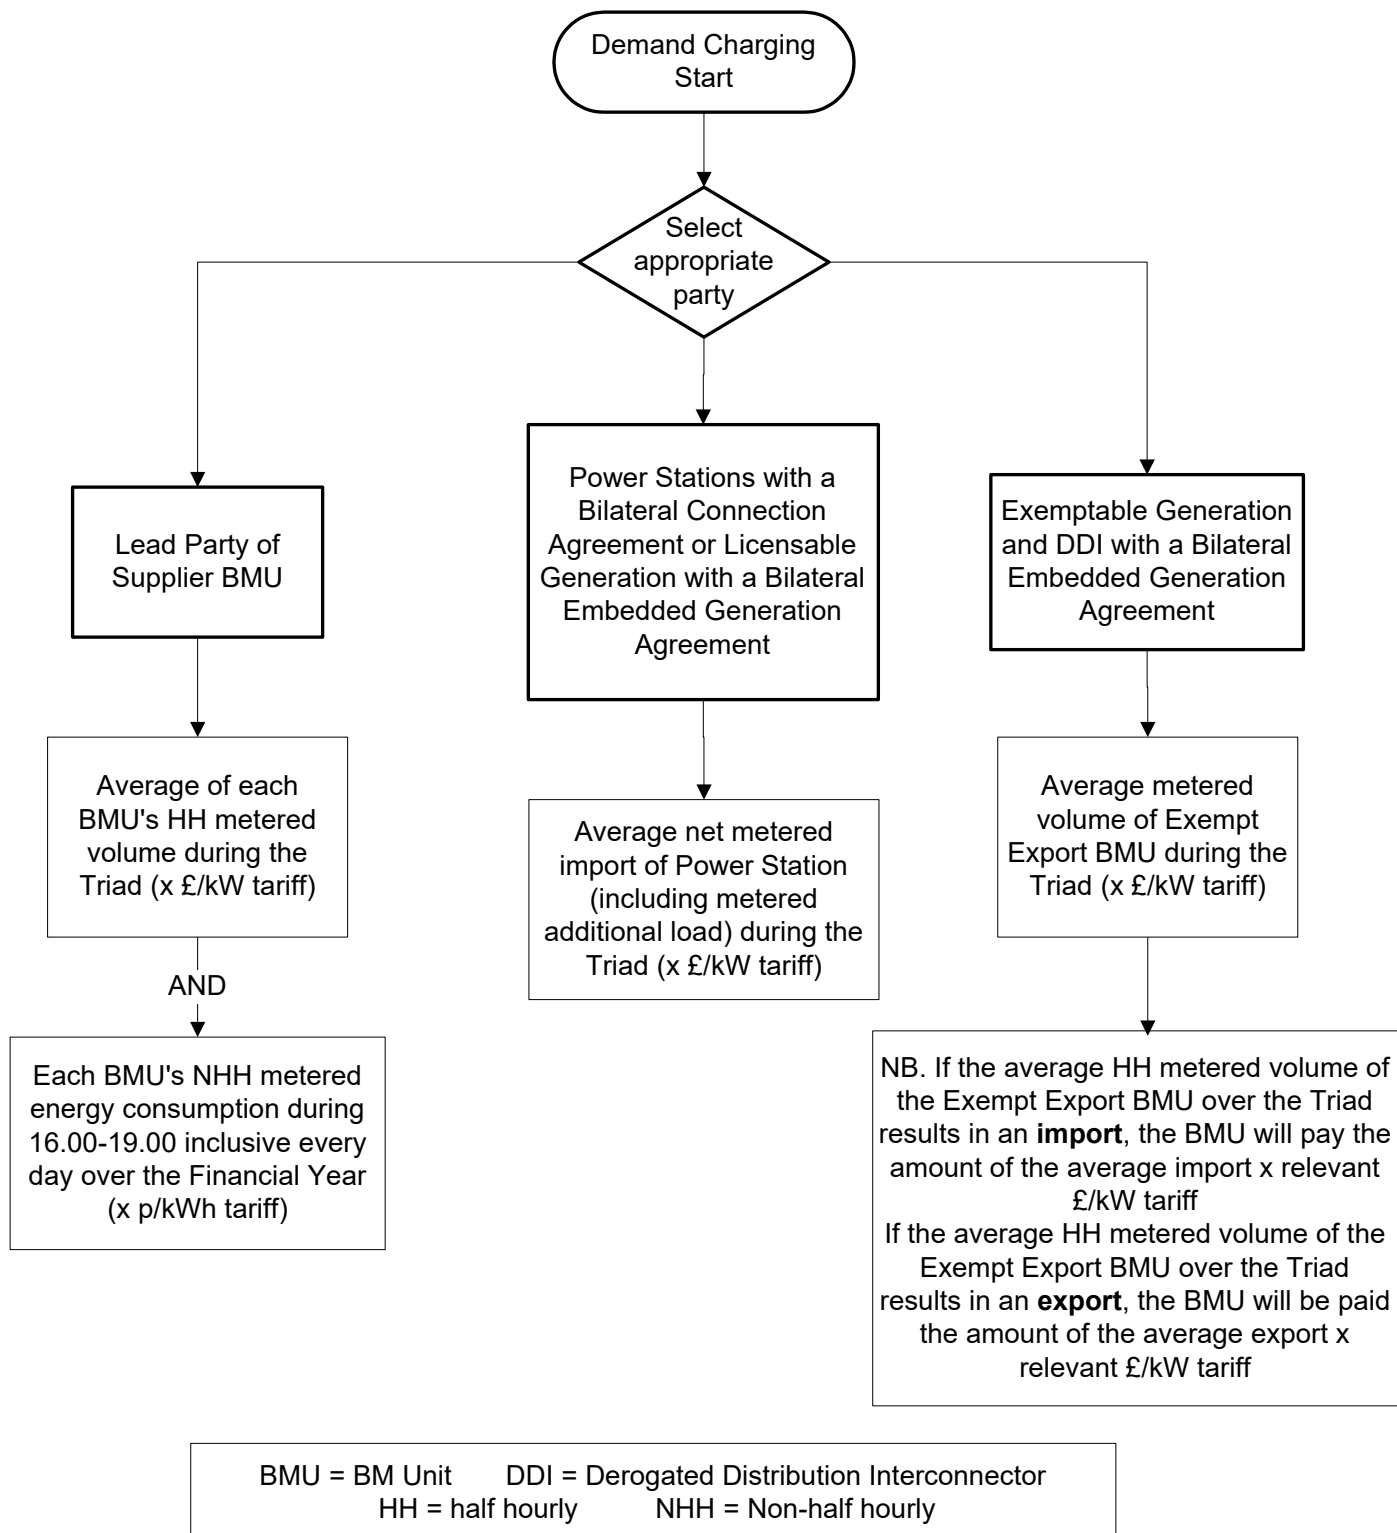

## Generation Charges

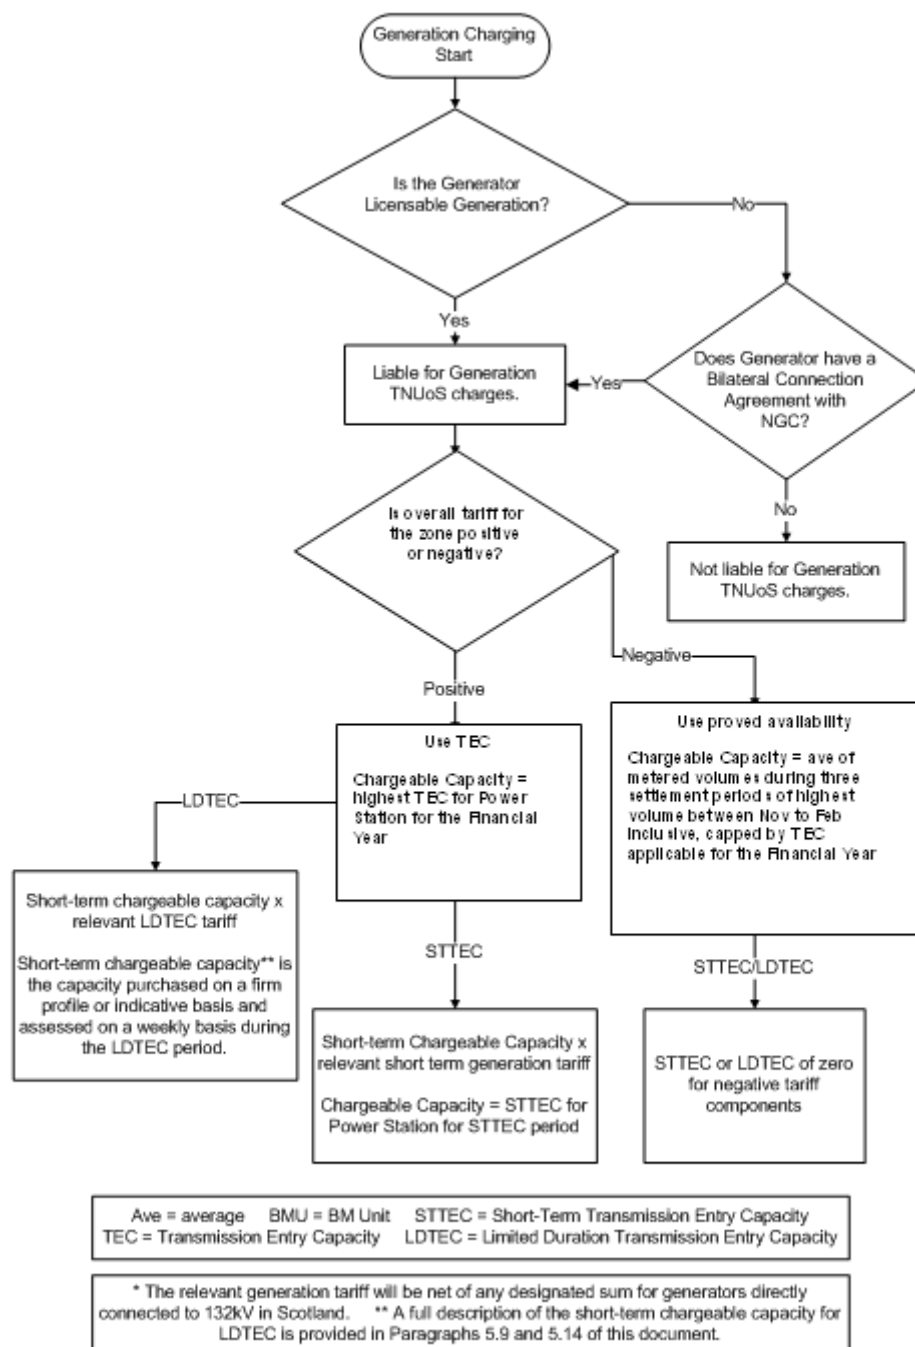

## 14.28 Example: Determination of The Company's Forecast for Demand Charge Purposes

**The Company** will use the latest available settlement data for calculation of HH demand and NHH energy consumption forecasts for the **Financial Year**.

The **Financial Year** runs from 1<sup>st</sup> April to 31<sup>st</sup> March inclusive and for the purpose of these examples the year April 2005 to March 2006 is used.

Where the preceding year's settlement data is not available at the time that **The Company** needs to calculate its forecast, **The Company** will use settlement data from the corresponding period in **Financial Year** minus two unless indicated otherwise.

All values used with the examples are purely for illustrative purposes only.

### i) Half-Hourly (HH) Metered Demand Forecast – Existing User

At the time of calculation of a HH demand forecast before the relevant **Financial Year** (approximately 10<sup>th</sup> March), **The Company** will be aware at a system level which dates will be used for the determination of Triad. However, **The Company** may not have settlement data at a User level if the Triad dates were to span a period that includes the latter half of February.

When undertaking forecasting before the relevant **Financial Year**, **The Company** will use the User's Triad demand for the previous year for its forecast providing it holds User settlement data for this period, thus:

$$F = T$$

where:

F = Forecast of User's HH demand at Triad for the **Financial Year**

T = User's HH gross demand and embedded export at Triad in **Financial Year** minus one

Where **The Company** determines its forecast within a **Financial Year**:

$$F = T * D/P$$

where:

F = Forecast of User's HH demand at Triad for the **Financial Year**

T = User's HH gross demand and embedded export at Triad in the preceding **Financial Year**

D = User's average half hourly metered gross demand and embedded export in settlement period 35 in the **Financial Year** to date

P = User's average half hourly metered gross demand and embedded export in settlement period 35 for the period corresponding to D in the preceding **Financial Year**

Where **The Company** determines its forecast before the relevant **Financial Year** and User settlement data for the Triad period is not available, **The Company** shall apply the formula immediately above (within year forecast) but substitute the following definitions for the values T, D, and P:



T = User's HH gross demand and embedded export at Triad in the **Financial Year** minus two

D = User's average half hourly metered gross demand and embedded export in settlement period 35 in the **Financial Year** minus one, to date

P = User's average half hourly metered gross demand and embedded export in settlement period 35 for the period corresponding to D in the **Financial Year** minus two

**Example** (where User settlement data is not yet available for the Triad period):

**The Company** calculates a HH demand forecast on the above methodology at 10<sup>th</sup> March 2005 for the period 1<sup>st</sup> April 2005 to 31<sup>st</sup> March 2006.

Gross demand:

$$F = 10,000 * 13,200 / 12,000$$

$$F = 11,000 \text{ kW}$$

where:

T = 10,000 kW (period November 2003 to February 2004)

D = 13,200 kW (period 1<sup>st</sup> April 2004 to 15<sup>th</sup> February 2005#)

P = 12,000 kW (period 1<sup>st</sup> April 2003 to 15<sup>th</sup> February 2004)

# Latest date for which settlement data is available.

Embedded export:

$$F = -280 * -300 / -350$$

$$F = -240 \text{ kW}$$

where:

T = -280 kW (period November 2003 to February 2004)

D = -300 kW (period 1<sup>st</sup> April 2004 to 15<sup>th</sup> February 2005#)

P = -350 kW (period 1<sup>st</sup> April 2003 to 15<sup>th</sup> February 2004)

# Latest date for which settlement data is available.

## ii) Non Half-Hourly (NHH) Metered Energy Consumption Forecast – Existing User

$$F = E * D/P$$

where:

F = Forecast of User's NHH metered energy consumption for the **Financial Year**

E = User's summed NHH energy consumption over the hours 16:00 to 19:00 for each day in the preceding **Financial Year**

D = User's summed NHH energy consumption for the hours 16:00 to 19:00 for each day for the **Financial Year** to date

P = User's summed NHH energy consumption for the hours 16:00 to 19:00 for each day for the period corresponding to D in the preceding **Financial Year**

**Example:**

**The Company** calculates a NHH energy consumption forecast on the above methodology at 10<sup>th</sup> June 2005 for the period 1<sup>st</sup> April 2005 to 31<sup>st</sup> March 2006.

$$F = 50,000,000 * 4,400,000 / 4,000,000$$

$$F = 55,000,000 \text{ kWh}$$

where:

$$E = 50,000,000 \text{ kWh (period 1<sup>st</sup> April 2004 to 31<sup>st</sup> March 2005)}$$

$$D = 4,400,000 \text{ kWh (period 1<sup>st</sup> April 2005 to 15<sup>th</sup> May 2005\#)}$$

$$P = 4,000,000 \text{ kWh (period 1<sup>st</sup> April 2004 to 15<sup>th</sup> May 2004)}$$

# Latest date for which settlement data is available

Where forecasting before the relevant **Financial Year** concerned, **The Company** would in the above example use values for E and P from **Financial Year** 2003/04 and D from **Financial Year** 2004/05.

**iii) Half-Hourly (HH) Metered Demand Forecast – New User**

$$F = M * T/W$$

where:

F = Forecast of User's HH metered gross demand and embedded export at Triad for the **Financial Year**

M = User's HH average weekday period 35 demand for the last complete month for which settlement data is available

T = Total system HH gross demand and embedded export at Triad in the preceding **Financial Year**

W = Total system HH average weekday settlement period 35 metered demand for the corresponding period to M for the preceding year

**Example:**

**The Company** calculates a HH demand forecast on the above methodology at 10<sup>th</sup> September 2005 for a new User registered from 10<sup>th</sup> June 2005 for the period 10<sup>th</sup> June 2004 to 31<sup>st</sup> March 2006.

Gross demand:

$$F = 1,000 * 17,000,000 / 18,888,888$$

$$F = 900 \text{ kW}$$

where:

$$M = 1,000 \text{ kW (period 1<sup>st</sup> July 2005 to 31<sup>st</sup> July 2005)}$$

$$T = 17,000,000 \text{ kW (period November 2004 to February 2005)}$$

$$W = 18,888,888 \text{ kW (period 1<sup>st</sup> July 2004 to 31<sup>st</sup> July 2004)}$$

Embedded export:

$$F = -150 * -7,200,000 / -6,000,000$$

$$F = -180 \text{ kW}$$

where:

$$M = -150 \text{ kW (period 1<sup>st</sup> July 2005 to 31<sup>st</sup> July 2005)}$$

$$T = -7,200,000 \text{ kW (period November 2004 to February 2005)}$$

$$W = -6,000,000 \text{ kW (period 1<sup>st</sup> July 2004 to 31<sup>st</sup> July 2004)}$$

**iv) Non Half Hourly (NHH) Metered Energy Consumption Forecast – New User**

$$F = J + (M * R/W)$$

where:

- F = Forecast of User's NHH metered energy consumption for the **Financial Year**
- J = Residual part month summed NHH metered energy consumption for the hours 16:00 to 19:00 for each day where new User registration takes place other than on the first of a month
- M = User's summed NHH metered energy consumption for the hours 16:00 to 19:00 for each day for the last complete month for which settlement data is available
- R = Total system summed NHH metered energy consumption for the hours 16:00 to 19:00 for each day for the period from the start of that defined under M but for the preceding year and until the end of that preceding **Financial Year**
- W = Total system summed NHH metered energy consumption for the hours 16:00 to 19:00 for each day for the period identified in M but for the preceding **Financial Year**

**Example:**

**The Company** calculates a NHH energy consumption forecast on the above methodology at 10<sup>th</sup> September 2005 for a new User registered from 10<sup>th</sup> June 2005 for the period 10<sup>th</sup> June 2005 to 31<sup>st</sup> March 2006.

$$F = 500 + (1,000 * 20,000,000,000 / 2,000,000,000)$$

$$F = 10,500 \text{ kWh}$$

where:

- J = 500 kWh (period 10<sup>th</sup> June 2005 to 30<sup>th</sup> June 2005)
- M = 1,000 kWh (period 1<sup>st</sup> July 2005 to 31<sup>st</sup> July 2005)
- R = 20,000,000,000 kWh (period 1<sup>st</sup> July 2004 to 31<sup>st</sup> March 2005)
- W = 2,000,000,000 kWh (period 1<sup>st</sup> July 2004 to 31<sup>st</sup> July 2004)

## 14.29 Stability & Predictability of TNUoS tariffs

### Stability of tariffs

The Transmission Network Use of System Charging Methodology has a number of elements to enhance the stability of the tariffs, which is an important aspect of facilitating competition in the generation and supply of electricity. This appendix seeks to highlight those elements.

Each node of the transmission network is assigned to a zone, these zones are themselves fixed. The result of this is to dampen fluctuations that would otherwise be observed at a given node caused by changes in generation, demand, and network parameters. The criteria used to establish generation zones are part of the methodology and are described in Paragraph 14.15.42.

In addition to fixing zones, other key parameters within the methodology are also fixed for the duration of the price control period or annual changes restricted in some way. Specifically:

- the expansion constant, which reflects the annuitised value of capital investment required to transport 1MW over 1km by a 400kV over-head line, changes annually according to TOPI. The other elements used to derive the expansion constant are only reviewed at the beginning of a price control period to ensure that it remains cost-reflective. This review will consider those components outlined in Paragraph 14.15.59 to Paragraph 14.15.69.
- the expansion factors, which are set on the same basis of the expansion constant and used to reflect the relative investment costs in each TO region of circuits at different transmission voltages and types, are fixed for the duration price control. These factors are reviewed at the beginning of a price control period and will take account of the same factors considered in the review of the expansion constant.
- the locational security factor, which reflects the transmission security provided under the NETS Security and Quality of Supply Standard, is fixed for the duration of the price control period and reviewed at the beginning of a price control period.
- the **Transmission Demand Residual Charging Bands** which are used in setting **Transmission Demand Residual Tariffs** are fixed for the duration of the **Onshore Transmission Owner** price control period and reviewed at the beginning of a price control period

### Predictability of tariffs

**The Company** revises TNUoS tariffs each year to ensure that these remain cost-reflective and take into account changes to allowable income under the price control and TOPI. There are a number of provisions within the **ESO Licence** and the CUSC designed to promote the predictability of annually varying charges. Specifically, **The Company** is required to give the Authority 150 days notice of its intention to change use of system charges together with a reasonable assessment of the proposals on those charges; and to give Users 2 months written notice of any revised charges. **The Company** typically provides an additional months notice of revised charges through the publication of “indicative” tariffs. Shorter notice periods are permitted by the framework but only following consent from the Authority.

These features require formal proposals to change the Transmission Use of System Charging Methodology to be initiated in October to provide sufficient time for a formal consultation and the Authority's veto period before charges are indicated to Users.

More fundamentally, **The Company** also provides Users with the tool used by **The Company** to calculate tariffs. This allows Users to make their own predictions on how future changes in the generation and supply sectors will influence tariffs. Along with the price control information, the data from the **Electricity Ten Year Statement (ETYS)**, and Users own prediction of market activity, Users are able to make a reasonable estimate of future tariffs and perform sensitivity analysis.

To supplement this, **The Company** also prepares an annual information paper that provides an indication of the future path of the locational element of tariffs over the next five years.<sup>1</sup> This analysis is based on data included within the **Electricity Ten Year Statement (ETYS)**. This report typically includes:

- an explanation of the events that have caused tariffs to change;
- sensitivity analysis to indicate how generation and demand tariffs would change as a result of changes in generation and demand at certain points on the network that are not included within the SYS;
- an assessment of the compliance with the zoning criteria throughout the five year period to indicate how generation zones might need to change in the future, with a view to minimising such changes and giving as much notice of the need, or potential need, to change generation zones; and
- a complete dataset for the DCLF Transport Model developed for each future year, to allow Users to undertake their own sensitivity analysis for specific scenarios that they may wish to model.

The first year of tariffs forecasted in the annual information paper are updated twice throughout the proceeding **Financial Year** as the various Transport and Tariff model inputs are received or amended. These updates are in addition to the Authority 150 days notice and publication of “indicative” tariffs.

The parameters used in the calculation of generation cap (in paragraph 14.15.5) will be published along with the forecast and confirmed values in the Tariff Information Paper which is produced in compliance with Condition 5 (of the NGC’s proposed GB electricity transmission use of system charging methodology - the Authority’s decisions document March 2005 80/5).

In addition, **The Company** will, when revising generation charging zones prior to a new price control period, undertake a zoning consultation that uses data from the latest information paper. The purpose of this consultation will be to ensure tariff zones are robust to contracted changes in generation and supply, which could be expected to reduce the need for re-zoning exercises within a price control period.

The calculation, as undertaken by **The Company**, of the **Charges for Physical Assets required for Connection** when setting TNUoS Charges for a Charging Year

To aid in the transparency and understanding of the setting of TNUoS Tariffs, at the same time as **The Company** publishes the draft and final TNUoS Charges for a Charging Year, **The Company** shall publish the details and components applied in the above calculation, the figures attributed to these and the output of the calculations as provided for in the proforma calculation schedule attached at Schedule 1 to this CUSC Section 14. The output shall be published in the form as set out in Schedule 1 to this CUSC Section 14.

Guidance on the Calculation of the **Charges for Physical Assets required for Connection** when setting TNUoS Charges for a Charging Year

<sup>1</sup> <http://www.nationalgrid.com/uk/Electricity/Charges/gbchargingapprovalconditions/5/>

To aid in the transparency and understanding of the setting of TNUoS Tariffs in each Charging Year, and in any event no later than the date **The Company** publishes the draft TNUoS Charges for the following Charging Year, **The Company** shall publish guidance on how it will undertake the calculation to set TNUoS tariffs in compliance with the **Limiting Regulation** for that following Charging Year and when assessing compliance following the conclusion of that Charging Year.

## Section 2 – The Statement of the Balancing Services Use of System Charging Methodology

### 14.30 Principles

- 14.30.1 The **ESO Licence** allows **The Company** to derive revenue through the Balancing Services Use of System (BSUoS) Charges. This statement explains the methodology used in order to calculate the BSUoS Charges.
- 14.30.2 **The Company** keeps the electricity system in balance (energy balancing) and maintains the quality and security of supply (system balancing). Users pay for the cost of these through BSUoS Charges.
- 14.30.3 All Users excluding those Users with valid Declarations, Interconnectors and Virtual Lead Parties are liable for Balancing Services Use of System charges based on their Final Demand in each Settlement Day.
- 14.30.4 BSUoS Charges are calculated on a fixed price basis as described in Section 14.31.
- 14.30.5 BSUoS Charges comprise the following costs:
- (i) The Total Costs of the Balancing Mechanism
  - (ii) Total Balancing Services Contract costs
  - (iii) Internal Expenditure (as defined in the **ESO Licence**)
  - (iv) RAV Returns (as defined in the **ESO Licence**)
  - (v) Costs associated with contracting for and developing Balancing Services
  - (vi) Adjustments
  - (vii) Costs invoiced to **The Company** associated with Manifest Errors and Special Provisions.
  - (viii) All costs under Relevant Contracts awarded through the Onshore Tender Process.



## 14.31 Calculation of the Daily Balancing Services Use of System Charges

### Calculation of the Daily Balancing Services Use of System Charges

- 14.31.1 BSUoS Charges are calculated and levied for each Settlement Day based on the Fixed BSUoS Price.
- 14.31.2 The Fixed BSUoS Price will be the same for all Settlement Days within the same Fixed Price Period, unless a revised Fixed BSUoS Price comes into effect as outlined in Paragraph 14.31.15.
- 14.31.3 The Fixed BSUoS Price is calculated using forecast average Total BSUoS Costs.

### Calculation of forecast Total BSUoS Costs

- 14.31.4 The forecast average Total BSUoS Costs for a Fixed Price Period  $t$  ( $fBSUoSOT_t$ ) are calculated using the following formula:

$$fBSUoSOT_t = fBSUoSEXT_t + fBSUoSINT_t + kb_t$$

Where:

$fBSUoSOT_t$  = forecast average Total BSUoS Costs associated with BSUoS for the Fixed Price Period  $t$

$fBSUoSEXT_t$  = forecast External BSUoS Costs. The terms which make up External BSUoS Costs are set out as term  $EXT_t$  in part E of condition F1 of the **ESO Licence**

$fBSUoSINT_t$  = forecast Internal BSUoS Costs. The terms which make up Internal BSUoS Costs are set out as term  $INT_t$  in Part D of condition F1 of the **ESO Licence**.

$fBSUoSRTN_t$  = RAV Returns (as defined in the **ESO Licence**) and is set out as term  $RTN_t$  in Part F of condition F1 of the **ESO Licence**.

$kb_t$  = the amount included in the Fixed BSUoS Price for Fixed Price Period  $t$ , to account for any over or under recovery from previous Fixed Price Periods. For the first Fixed Price Period ( $t=0$ ) this amount is zero.

- 14.31.5 The amount included to account for over or under recovery, described in Paragraph 14.31.4, is calculated by subtracting the forecast revenue collected via the Fixed BSUoS Price allocated to Total BSUoS Costs in Fixed Price Periods prior to Fixed Price Period  $t$ , from the latest forecast of Total BSUoS Costs, as calculated by applying the latest values to the formula in Paragraph 14.31.4, for those same Fixed Price Periods prior to Fixed Price Period  $t$ . This is inclusive of any revenue collected from Final Reconciliation (RF) BSUoS Charges, pursuant to Paragraph 14.32.4.
- 14.31.6 The process described in Paragraph 14.31.5 does not apply to Final Reconciliation (RF) BSUoS Charges for Settlement Days which occur before the start of the first Fixed Price Period, on 1st April 2023.

### Calculating the Fixed BSUoS Price

- 14.31.7 The Fixed BSUoS Price for each Fixed Price Period  $t$  is calculated by the following formula:

$$FixedBSUoS P_t = \frac{fBSUoS TOT_t}{fTQM_t + fSGQM_t}$$

Where:

$FixedBSUoS P_t$  = the Fixed BSUoS Price for the Fixed Price Period  $t$

$fBSUoS TOT_t$  = forecast average Total BSUoS Costs for the Fixed Price Period  $t$

$fTQM_t$  = forecast of the total Transmission Connected Site BM Unit Metered Volume during the Fixed Price Period  $t$

$fSGQM_t$  = forecast of the total Gross Demand BM Unit Volume during the Fixed Price Period  $t$

### Notice of Fixed BSUoS Price

- 14.31.8 Users are given a notice period of at least three months of the Fixed BSUoS Price, for the next Fixed Price Period.

### Calculation of BSUoS Charges for BM Units

- 14.31.9 The Total BSUoS Charges for an individual BM Unit are calculated for each Settlement Day, denoted by  $d$ , based on the BM Unit's metered volumes for each Settlement Period, denoted by  $j$ , and based on the Fixed BSUoS Price.
- 14.31.10 Supplier BM Units and Exempt Export BM Units, prefixed by  $i$ , have their Total BSUoS Charges calculated by the following formula:

$$BSUoS TOT_{id} = FixedBSUoS P_d \times \sum_{j \in d} SGQM_{ij}$$

Where:

$BSUoS TOT_{id}$  = the Total BSUoS Charges for a Supplier or Exempt Export BM Unit  $i$ , on Settlement Day  $d$

$FixedBSUoS P_d$  = the Fixed BSUoS Price on Settlement Day  $d$ .

$SGQM_{ij}$  = the Gross Demand Supplier or Exempt Export BM Unit Volume for a Supplier or Exempt Export BM Unit  $i$  for Settlement Period  $j$

- 14.31.11 All Transmission Connected BM Units, prefixed by  $m$ , have their Total BSUoS Charges calculated by the following formula:

$$BSUoS TOT_{md} = FixedBSUoS P_d \times \sum_{j \in d} TQM_{mj}$$

Where:

$BSUoS TOT_{md}$  = the Total BSUoS Charges for a Transmission Connected BM Unit  $m$  on Settlement Day  $d$

FixedBSUoSPd = the Fixed BSUoS Price on Settlement Day d.

TQMmj = the total Transmission Connected Site BM Unit Metered Volume for a Transmission Connected BM Unit m for Settlement Period j

### Calculation of BSUoS Charges for a BSUoS liable customer

14.31.12 The BSUoS Charges for a BSUoS liable customer c on a Settlement Day d will be calculated by the following formula:

$$BSUoSTOT_{cd} = \sum_{i,m \in c} (BSUoSTOT_{id} + BSUoSTOT_{md})$$

Where:

BSUoSTOT<sub>cd</sub> = the Total BSUoS Charges for a BSUoS liable customer c on Settlement Day d

BSUoSTOT<sub>id</sub> = the Total BSUoS Charges for a Supplier or Exempt Export BM Unit i on Settlement Day d

BSUoSTOT<sub>md</sub> = the Total BSUoS Charges for a Transmission Connected BM Unit m on Settlement Day d

### Definition of the BSUoS charging base

14.31.13 XBSUoS liability is based on a User's Final Demand.

### Interconnector BM Units

14.31.14 BM Unit and Trading Units associated with Interconnectors, including those associated with the Interconnector Error Administrator, are not liable for BSUoS Charges. BM Units, including Secondary BM Units, which are associated with Virtual Lead Parties are not liable for BSUoS Charges.

### Issuing a revised Fixed BSUoS Price

14.31.15 If before or during a Fixed Price Period, The Company forecasts that it will neither recover sufficient funds through BSUoS Charges nor will it hold sufficient funds in the Industry BSUoS Fund and the BSUoS Working Capital Facility to meet balancing costs during that Fixed Price Period, The Company has the right to set a revised Fixed BSUoS Price for the entirety of or remainder of that Fixed Price Period.

14.31.16 In the case that The Company needs to issue a revised Fixed BSUoS Price, then The Company will use reasonable endeavours to consult on the revised Fixed BSUoS Price prior to its application. The Company will provide a minimum notice of five Business Days before the commencement of a revised Fixed BSUoS Price.

14.31.17 The revised Fixed BSUoS Price, described in Paragraph 14.31.15, is determined by the following formula:

$$FixedBSUoSPrev_s = \frac{fBSUoSTOT_s}{fTQM_s + fSGQM_s}$$

Where:

$\text{FixedBSUoSPrev}_s$  = The revised Fixed BSUoS Price for the number of Settlement Days  $s$  remaining in the Fixed Price Period

$\text{fBSUoSTOT}_s$  = forecast of remaining balancing costs for the number of Settlement Days  $s$  remaining in the Fixed Price Period. The Company would use reasonable endeavours to consult on this value, pursuant to Paragraph 14.31.16.

$\text{fTQM}_s$  = forecast of the total Transmission Connected Site BM Unit Metered Volume for the number of Settlement Days  $s$  remaining in the Fixed Price Period

$\text{fSGQM}_s$  = forecast of the total Gross Demand BM Unit Volume for the number of Settlement Days  $s$  remaining in the Fixed Price Period

- 14.31.18 Pursuant to Paragraph 14.3 1.17, the revised Fixed BSUoS Price only covers costs for the remainder of the fixed Price Period. The BSUoS Working Capital Facility would be built back up in subsequent Fixed Price Periods, via the Fixed BSUoS Prices calculated for those Fixed Price Periods.

## 14.32 Settlement of BSUoS

### Settlement and Reconciliation of BSUoS Charges

- 14.32.1 There are two stages of the reconciliation of BSUoS Charges described below:

- Initial Settlement (SF)
- Final Reconciliation (RF)

#### Initial Settlement of BSUoS

- 14.32.2 **The Company** will calculate initial settlement (SF) BSUoS Charges in accordance with the methodology set out in section 14.31 above, using the latest available data, including data from the Initial Settlement Run and the Initial Volume Allocation Run.

#### Reconciliation of BSUoS Charges

- 14.32.3 Final Reconciliation will result in the calculation of a reconciled charge for each Settlement Day in the Financial Year. **The Company** will calculate Final Reconciliation (RF) BSUoS Charges (with the inclusion of interest as defined in the CUSC) in accordance with the methodology set out in section 14.31 above, using the latest available data, including data from the Final Reconciliation Settlement Run and the Final Reconciliation Volume Allocation Run.
- 14.32.4 Pursuant to Paragraph 14.31.5, any revenue collected or paid out by The Company as part of Final Reconciliation (RF) BSUoS Charges during a Fixed Price Period  $t$  will be considered as part of the revenue associated

with that Fixed Price Period  $t$ , for the purposes of calculating the over or under recovery factor for subsequent Fixed Price Periods.

### Unavailability of Data

- 14.32.5 If any of the elements required to calculate the BSUoS Charges in respect of any Settlement Day have not been notified to **The Company** in time for it to do the calculations then **The Company** will use data for the corresponding Settlement Day in the previous week. If no such values for the previous week are available to **The Company** then **The Company** will substitute such variables as it shall, at its reasonable discretion, think fit and calculate Balancing Services Use of System Charges on the basis of these values. When the actual data becomes available a reconciliation run will be undertaken.

### Disputes

- 14.32.6 If **The Company** or any customer identifies any error which would affect the total Balancing Services Use of System Charges on a Settlement Day then **The Company** will recalculate the charges following resolution of the error. Revised invoices and/or credit notes will be issued for the change in charges, plus interest as set out in the CUSC. The charge recalculation and issuing of revised invoices and/or credit notes will not take place for any day where the total change in the Balancing Services Use of System Charges are less than £2000.

### Relationship between the Statement of the Use of System Charging Methodology and the ESO Licence

- 14.32.7 BSUoS Charges are made on a daily basis and as such this Statement sets out the details of the calculation of such charges on a daily basis. Customers may, when verifying Balancing Services Use of System Charges refer to the **ESO Licence** which sets out the maximum allowed revenue that **The Company** may recover .
- 14.32.8 **The Company** has, where possible and appropriate, attempted to ensure that acronyms allocated to variables within the Balancing Services charging software, and associated reporting, match with the acronyms given to those variables used within this statement.

### 14.32.9 Balancing Services Use of System Acronym Definitions

For the avoidance of doubt “as defined in the BSC” relates to the Balancing and Settlement Code as published from time to time.

| EXPRESSION                                      | ACRONYM                  | Unit  | Definition                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|--------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Balancing Mechanism Unit                        | BM Unit or BMU           |       | As defined in the BSC                                                                                                                                                                                                                                                                                                                                                                                                        |
| System Restoration Costs                        | $SRC_d$                  | £     | The total costs associated with the provision of System Restoration (as defined in the <b>Grid Code</b> ), including procuring, testing, warming, utilisation, capital contributions and payments for the cost of feasibility studies. This item also includes the costs of any validated claims made for costs of supporting the Electricity System Restoration Standard at <b>Users'</b> sites, in accordance with CMP398. |
| External Balancing Services Use of System Costs | $BSUoS_{EXT_jd}$         | £     | External System Operator (SO) Balancing Services Use of System Costs applicable to Settlement Period j for Settlement Day d                                                                                                                                                                                                                                                                                                  |
| Internal Balancing Services Use of System Costs | $BSUoS_{INT_d}$          | £     | Internal System Operator (SO) Balancing Services Use of System Costs applicable to Settlement Period j for Settlement Day d                                                                                                                                                                                                                                                                                                  |
| Balancing Services Use of System tariff         | $BSUoS_{tariff_j}$       | £/MWh | Tariff for the Balancing Services Use of System Charge applicable to Settlement Period j                                                                                                                                                                                                                                                                                                                                     |
| Total Balancing Services Use of System Costs    | $BSUoS_{TOT}$            | £     | Total Balancing Services Use of System Charges                                                                                                                                                                                                                                                                                                                                                                               |
| BSUoS Working Capital Facility                  | BWCF                     | £     | As defined in Section 11                                                                                                                                                                                                                                                                                                                                                                                                     |
| Fixed BSUoS Price                               | $FixedBSUoS_{P_t}$       | £/MWh | The Fixed BSUoS Price for the Fixed Price Period t, as defined in Section 11                                                                                                                                                                                                                                                                                                                                                 |
| Revised Fixed BSUoS Price                       | $FixedBSUoS_{P_{rev_s}}$ | £/MWh | The revised Fixed BSUoS Price which applies for a number of Settlement Days s within a Fixed Price Period, as described in Paragraph 14.31.15                                                                                                                                                                                                                                                                                |
| Over/under recovery factor                      | $kb_t$                   | £     | The factor included in the Fixed BSUoS Price for Fixed Price Period t, to account for any over or under recovery from previous Fixed Price Periods. For the first Fixed Price Period ( $t=0$ ) this factor is zero.                                                                                                                                                                                                          |
| BM Unit Metered Volume                          | $QM_{ij}$                | MWh   | As defined in the BSC                                                                                                                                                                                                                                                                                                                                                                                                        |

| EXPRESSION                                                          | ACRONYM    | Unit | Definition                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------|------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross Final Demand<br>BM Unit Volume                                | SGQM       | MWh  | The Import data as at the Transmission System Boundary by Settlement Period for Supplier BM Units in respect to gross Final Demand volume (exclusive of all export volumes and import volumes from BM Units or Single Sites with a valid Declaration), multiplied by the applicable TLM |
| Supplier BM Unit                                                    |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Transmission Loss<br>Multiplier                                     | $TLM_{ij}$ |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Transmission<br>Connected Final<br>Demand BM Unit<br>Metered Volume | TQM        | MWh  | The BM Unit Metered Volume for Final Demand with a Bilateral Agreement with The Company, exclusive of export volumes, which is multiplied by the TLM                                                                                                                                    |
| Transmission System<br>Boundary                                     |            |      | As defined in the Balancing and Settlement Code                                                                                                                                                                                                                                         |
| Total System Energy<br>Imbalance Volume                             | $TQEI_j$   | MWh  | As defined in the Balancing and Settlement Code in force immediately prior to 1 April 2001                                                                                                                                                                                              |
| Final Reconciliation<br>Settlement Run                              |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Final Reconciliation<br>Volume Allocation Run                       |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Initial Settlement Run                                              |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Initial Volume<br>Allocation Run                                    |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |
| Lead Party                                                          |            |      | As defined in the BSC                                                                                                                                                                                                                                                                   |

CUSC Section 14 Schedule 1

Calculation of charges that fall within the Connection Exclusion  
EU Regulation 838/2010

Schedule 1  
The proforma of the form and content to be published for the purposes of the calculation in accordance with Paragraph 14.29.

| <u>Project Name</u> | <u>Transmission Asset name</u> | <u>PARC/Non PARC</u> | <u>Annual Local Charge for company Transmission Asset</u> | <u>TEC</u> | <u>Tariff</u> |
|---------------------|--------------------------------|----------------------|-----------------------------------------------------------|------------|---------------|
|                     |                                |                      |                                                           |            |               |



## **CUSC SECTION 15**

### **USER COMMITMENT METHODOLOGY**

#### **CONTENTS**

|                   |                                                                                  |
|-------------------|----------------------------------------------------------------------------------|
| <b>Part One</b>   | <b>Introduction</b>                                                              |
| <b>Part Two</b>   | <b>Calculation of Cancellation Charge</b>                                        |
| <b>Part Three</b> | <b>Calculation of Cancellation Charge Secured Amount and Credit Requirements</b> |
| <b>Part Four</b>  | <b>Reconciliation of Actual Attributable Works Cancellation Charge</b>           |

## **PART ONE INTRODUCTION**

- 1 Where (a) a **Construction Agreement** and/or a **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** between a **User** in respect of the categories specified below and **The Company** is terminated or (b) there is a reduction in **Transmission Entry Capacity** by or in respect of such **User** or (c) there is a reduction in **Developer Capacity** in a **Construction Agreement** prior to the **Charging Date**, or (d) there is a reduction in **Interconnector User Commitment Capacity** by or in respect of such **User**, such **User** shall pay to **The Company** the **Cancellation Charge** calculated and applied in accordance with Part Two of this Section 15
  
- 2 The **Cancellation Charge** is payable by **Users** on termination of agreements with and reductions in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** in respect of **Users** in the categories of
  - (a) a **Power Station** directly connected to the **National Electricity Transmission System** in respect of which there is a **Bilateral Connection Agreement** with **The Company**;
  - (b) an **Embedded Power Station** in respect of which there is a **Bilateral Embedded Generation Agreement** with **The Company**;
  - (c) a **Distribution System** directly connected to the **National Electricity Transmission System** in respect of which there is a **Construction Agreement** associated with **Distributed Generation**
  - (d) an **Interconnector** directly connected to the **National Electricity Transmission System** in respect of which there is a **Bilateral Connection Agreement** with **The Company**

and reference to **User** in this Section 15 shall be interpreted accordingly.

For the avoidance of doubt this schedule does not apply to **Users** other than those described above.

For the avoidance of doubt in respect of **Users** in the case of category (b) above where **The Company** has an associated **Construction Agreement** with a **User** in the category of (c) above, the **Cancellation Charge** payable by a **User** in category (b) above will not include the **Attributable Works Cancellation Charge** component of the **Cancellation Charge**. In such case the **Attributable Works Cancellation Charge** component of the **Cancellation Charge** will be payable by the associated **User** in category (c) above.

For the avoidance of doubt in the case of:

- (i) **Users** in the case of category (c) above; and
- (ii) **Distributed Generation** (other than an **Embedded Power Station** which is the subject of a **Bilateral Embedded Generation Agreement**),

the **Cancellation Charge** does not apply for reductions in **Developer Capacity** on or after the **Charging Date** or termination on or after the **Charging Date**.

For information, for **Users** other than **Users** in the categories to which this Section 15 applies, the liability for and security requirements in respect of **Final Sums**, which are due on termination of a **Construction Agreement** are as set out in the **Construction Agreement** (and in the proforma attached at **CUSC Schedule 2, Exhibit 3**).

For the avoidance of doubt, in addition to the **Cancellation Charge**, **Termination Amounts** also apply in respect of **Transmission Connection Assets**.

- 3**     **The Company** shall apply and calculate the **Cancellation Charge** in accordance with Part Two of this Section 15.

The **Cancellation Charge** is made up of a number of components: the “**Pre Trigger Amount**”, “**Attributable Works Cancellation Charge**” and “**Wider Cancellation Charge**” which apply at different stages.

- 4**     As provided for at Paragraph 3.5, the **Attributable Works Cancellation Charge** can be (at the **User’s** election in accordance with Paragraph 7) on the basis of the **Fixed Cancellation Charge** (Paragraph 3.6) rather than the **Actual Attributable Works Cancellation Charge** (Paragraph 3.7).

- 5 This Section 15 also sets out in Part Three the level of, and arrangements for, security required in respect of the **Cancellation Charge**.
- 6 **The Company** shall apply and calculate the **Cancellation Charge Secured Amount** in accordance with this Section 15 Part Three.
- 7 This Section 15 also sets out in Part Four the reconciliation process in respect of the **Actual Attributable Works Cancellation Charge**.
- 8 For reference a number of terms used in this Section 15 are defined within this Section 15.
- 9 **Distributed Generation**  
**Users** in the category of (c) above are liable for the **Cancellation Charge** (or where the **Distributed Generation** has a **Bilateral Embedded Generation Agreement**, the **Attributable Works Cancellation Charge** component of the **Cancellation Charge**) on a reduction in **Developer Capacity** (or in the case of **Distributed Generation** with a **Bilateral Embedded Generation Agreement**) **Transmission Entry Capacity** and/or termination of the **Construction Agreement** between **The Company** and the **User**. Given this such **Users** will have arrangements in place with the **Distributed Generation** for reimbursement by the **Distributed Generation** of the **Cancellation Charge** and recognising this there are specific payment arrangements between the **User** and **The Company** provided for in the **Construction Agreement** Between the **User** and **The Company**.

## **PART TWO CALCULATION OF CANCELLATION CHARGE**

**1.1** The **Cancellation Charge** payable shall be calculated in accordance with this Part Two of Section 15.

**1.2** Value Added Tax will be payable on any **Cancellation Charge**.

### **2 Completion Date and Trigger Date**

**2.1** In making an **Offer** to a **User The Company** will consider the **Construction Works** and **Construction Programme** associated with that **Offer** and taking into account the nature and programming of the **Construction Works** and the **Consents** associated with this will identify dates in the **Construction Agreement** as the **Completion Date**.

**2.2** The **Trigger Date** will be (a) the 1 April which is three **Financial Years** prior to the start of the **Financial Year** in which the **Charging Date** occurs or (b) where the **Charging Date** is less than three **Financial Years** from the date of the **Construction Agreement**, the date of the **Construction Agreement** (in which case the **Financial Year** in which such date falls is the relevant **Financial Year** within the **Cancellation Charge Profile** working back from the **Charging Date**).

**2.3** The **Trigger Date** is the date from which the **Wider Cancellation Charge** applies and the date from which, in the case of the **Fixed Cancellation Charge**, the **Fixed Attributable Works Cancellation Charge** rather than the **Pre Trigger Amount** applies. Prior to the **Trigger Date**, only the **Attributable Works Cancellation Charge** applies, or in case of the **Fixed Cancellation Charge**, the **Pre Trigger Amount** applies.

**2.4 Changes to Construction Programme or Construction Works or Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity**

**2.4.1** Where the **Construction Programme** or the **Construction Works** or **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** subsequently changes from that in the original **Construction Agreement** the following principles

will apply in respect of reassessing the **Trigger Date** and the **Cancellation Charge**.

**2.4.2** Where such change is as a result of **The Company's** exercise of its rights under the **Construction Agreement** then:

- (i) Where there is a delay to the **Completion Date** and the **Trigger Date** has not passed, the **Trigger Date** will be revised by reference to the revised **Completion Date**. The period for which the **Pre Trigger Amount** applies, will be adjusted to reflect the new **Trigger Date**;
- (ii) Where there is a delay to the **Completion Date** and the **Trigger Date** has passed, the **Trigger Date** will be revised by reference to the revised **Completion Date** and the **Cancellation Charge** (including the **Cancellation Charge Profile**) will be adjusted to reflect the revised date.
- (iii) In the case of a **Fixed Cancellation Charge**, a change in the **Attributable Works** will not adjust the **Cancellation Charge Profile** unless the **Completion Date** has also changed in which case (ii) above will apply.

**2.4.3** Where a change is as a result of the **User's** request then, notwithstanding any change in the **Completion Date**;

- (i) Where there is a delay to the **Completion Date** and the **Trigger Date** has not passed, the **Trigger Date** will be revised by reference to the revised **Completion Date**. The period for which the **Pre Trigger Amount** applies, will be adjusted to reflect the new **Trigger Date**;
- (ii) Where there is a delay to the **Completion Date** and the **Trigger Date** has passed, the **Trigger Date** will not be revised by reference to the revised **Completion Date** and the **Cancellation Charge** will not be adjusted downwards but will be held at that level and will increase from that level in line with any new **Construction Programme**.

### 3 Calculation of Cancellation Charge

**3.1** The **Cancellation Charge** is the charge due to **The Company** by a **User** on termination of a **Construction Agreement**, **Disconnection** or a reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** prior to the **Charging Date** and **Disconnection** or a reduction in **Transmission Entry Capacity** or **Interconnector User Commitment Capacity** on or after the **Charging Date**.

**3.2** This calculation of the **Cancellation Charge** is different:

- (a) where the **Construction Agreement** is terminated or **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** is reduced before the **Trigger Date** (the “**Pre Trigger Amount**” or “**Actual Attributable Works Cancellation Charge**”) (Paragraphs 3.6.1 and 3.7);
- (b) where the **Construction Agreement** is terminated or **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** is reduced on or after the **Trigger Date** but prior to the **Charging Date** (the “**Fixed Attributable Works Cancellation Charge**” or “**Actual Attributable Works Cancellation Charge**” and the “**Wider Cancellation Charge**”) (Paragraphs 3.5 to 3.8);
- (c) depending whether the **Attributable Works Cancellation Charge** is a **Fixed Cancellation Charge** or **Actual Attributable Works Cancellation Charge** (Paragraphs 3.5 to 3.7);
- (d) where the **Transmission Entry Capacity** or **Interconnector User Commitment Capacity** is reduced or **Disconnection** occurs on or after the **Charging Date** (the “**Wider Cancellation Charge**”) (Paragraph 3.8).

**3.3 Where the Construction Agreement is terminated or Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity is reduced before the Trigger Date**

Where a **Construction Agreement** is terminated or **Transmission Entry Capacity** is reduced or **Developer Capacity** is reduced or **Interconnector User Commitment Capacity** is reduced before the **Trigger Date** the **Cancellation Charge** shall be calculated as follows:

***Cancellation Charge = Attributable Works Cancellation Charge***

**3.4 Where the Construction Agreement is terminated or Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity is reduced on or after the Trigger date but prior to the Charging Date**

Where a **Construction Agreement** is terminated or **Transmission Entry Capacity** is reduced or **Developer Capacity** is reduced or **Interconnector User Commitment Capacity** is reduced on or after the Trigger date but prior to the **Charging Date** the **Cancellation Charge** shall be calculated as follows:

***Cancellation Charge = Attributable Works Cancellation Charge plus Wider Cancellation Charge***

The following Paragraphs set out in detail the **Attributable Works Cancellation Charge** and **Wider Cancellation Charge** and Paragraph 3.7 sets out the above calculation by formula.

**3.5 Attributable Works Cancellation Charge**

The **Attributable Works Cancellation Charge** can be either the **Fixed Cancellation Charge** or **Actual Attributable Works Cancellation Charge**.

**3.6 Fixed Cancellation Charge**

The calculation of the **Fixed Cancellation Charge** is different where the **Construction Agreement** is terminated or **Transmission Entry Capacity** or



**Developer Capacity** or **Interconnector User Commitment Capacity** is reduced before (“**Pre Trigger Amount**”) or on or after the **Trigger Date** (“**Fixed Attributable Works Cancellation Charge**”).

### 3.6.1 Pre Trigger Amount

Should a **Construction Agreement** be terminated, or **Transmission Entry Capacity** be reduced or **Developer Capacity** be reduced or **Interconnector User Commitment Capacity** be reduced before the **Trigger Date** the **Fixed Cancellation Charge** is the **Pre Trigger Amount** calculated as a £/MW figure by reference to the **Cancellation Charge Profile** and derived in accordance with the formula at Paragraph 3.9 and set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 7:

### 3.6.2 Fixed Attributable Works Cancellation Charge

Where a **Construction Agreement** is terminated or **Transmission Entry Capacity** is reduced or **Developer Capacity** is reduced or **Interconnector User Commitment Capacity** is reduced on or after the **Trigger Date** but prior to the **Charging Date** the **Fixed Cancellation Charge** is the **Fixed Attributable Works Cancellation Charge** calculated as follows:

***Fixed Attributable Works Cancellation Charge = (Attributable Works Cancellation Amount x MW Reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity) x Cancellation Charge Profile***

*Where the Attributable Works Cancellation Amount results in a £/MW figure calculated as follows:*

***(Estimated Attributable Works Capital Cost x (1 – Local Asset Reuse Factor) x Strategic Investment Factor x Distance Factor) / Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity***

Where the **Estimated Attributable Works Capital Cost** is the fair and reasonable estimate of the **Attributable Works Capital Cost** for each component within the **Attributable Works** and which is as set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6.

Where the **Attributable Works** are as specified in Appendix MM of the **Construction Agreement** at the time of the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6.

Where the **Local Asset Reuse Factor** is the factor representing the potential for reuse of each component within the **Attributable Works** as set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6.

Where the **Strategic Investment Factor** is a factor calculated for each component within the **Attributable Works** as a ratio of the **Transmission Entry Capacity** and/or **Developer Capacity** and/or **Interconnector User Commitment Capacity** sharing those **Attributable Works** against the secured capability of the **Transmission** assets and set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6.

Where the **Distance Factor** is a factor calculated for each component within the **Attributable Works** as a ratio of distance to the nearest suitable MITS substation and distance to the MITS substation where the **Attributable Works** connect as set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6. This factor is only valid for components where distance is relevant i.e. cables and overhead lines.

Where the **Cancellation Charge Profile** is the profile derived in accordance with the formula at Paragraph 3.10 and set out in the **Notification of Fixed Cancellation Charge** by reference to which an election is made in accordance with Paragraph 6.

**3.6.3** The **Pre Trigger Amount** and the **Attributable Works Cancellation Amount** (and the factors used in deriving this) and the **Cancellation Charge Profile** are fixed at the time an election is made in accordance with Paragraph 7 and the **Pre Trigger Amount** and **Attributable Works Cancellation Amount** are not subject to any further specific adjustment, reconciliation or credit should any of the **Transmission** assets resulting from the **Attributable Works** be reused or of benefit to other **Users**.

### **3.7 Actual Attributable Works Cancellation Charge**

**3.7.1** The **Actual Attributable Works Cancellation Charge** is the **Attributable Works Capital Cost** in respect of each component within the **Attributable Works** at the time at which the **Construction Agreement** is terminated or **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** is reduced including (a) fees, expenses and costs properly payable by **The Company** in respect of, or arising from the termination by **The Company** or any third party of any contract for or relating to the carrying out of any of the **Attributable Works** provided it is negotiated on an arms length basis (including any such arising under the **STC**) and (b) a sum equal to the reasonable costs of removing any **Transmission Connection Assets** and of making good the remaining **Plant** and **Apparatus** following such removal and (c) proper and reasonable expenses incurred and or paid or which **The Company** is legally bound to incur or pay in seeking **Consents** for the **Attributable Works** and (d) interest on any such amounts from the date they were paid by **The Company** to the date of **The Company's** invoice at 2% over **Base Rate** from time to time and for the time being provided that in each case **The Company** shall take into account the **Local Asset Reuse Factor**, the **Strategic Investment Factor** and the **Distance Factor** as calculated in paragraph 3.6.2, of the **Attributable Works** and any of the resulting **Transmission** assets.

**3.7.2** In the case of the **Actual Attributable Works Cancellation Charge**, on termination of the **Construction Agreement** or reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** prior to the **Charging Date**, **The Company** shall be entitled to invoice the **User** for a sum equal to **The Company's** fair and reasonable estimate of the **Actual Attributable Works Cancellation Charge** and so (a) in the case of

termination, the **User** shall pay to **The Company** on account of the **Actual Attributable Works Cancellation Charge** a sum equal to the estimate of **Actual Attributable Works Cancellation Charge** as shown in the **Cancellation Charge Statement** for the period in which the termination occurs and (b) in the case of a reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity**, a sum by reference to the MW reduction based on the £/MW figure derived from the estimate of **Actual Attributable Works Cancellation Charge** as shown in the **Cancellation Charge Statement** for the period in which the termination occurs. These will then be subject to reconciliation in accordance with this Section 15 Part Four.

### 3.8 Wider Cancellation Charge

The **Wider Cancellation Charge** results in a £/MW charge calculated as follows:

***Zonal Unit Amount x (MW of reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity) x Cancellation Charge Profile***

The **Zonal Unit Amount** is a £/MW figure calculated by reference to the **Generation Zone** in which the **Power Station** or **Interconnector** is to be located as set out in the **Cancellation Charge Statement**. It is calculated by reference to the **Annual Wider Cancellation Charge Statement** for the **Financial Year** in which notice of reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** is given and/or notice of **Disconnection** is given or, where in the case of an **Event of Default** where notice is not given, the **Financial Year** in which the reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** or **Disconnection** occurs.

*Where the Zonal Unit Amount = Load Related Boundary Capex apportioned to Boundaries by Boundary (LR) Level and Non Load Related Boundary Capex apportioned to Boundaries by Boundary (NLR) Level, summated and multiplied by Boundary Non Compliance Factors and then mapped to Generation Zones and divided by the Wider User Commitment Liability Base, excluding those Power Stations or Interconnectors in respect of which a Construction Agreement has terminated or The Company has been notified of a reduction in the Transmission Entry Capacity or Developer Capacity or*

*Interconnector User Commitment Capacity or Disconnection within the period in question.*

*Where **Load Related Boundary Capex** is the capex required to increase capability in the network as determined by **The Company** for a given **Financial Year**, excluding any **Attributable Works Capital Cost**, multiplied by the **User Risk Factor** and the **Global Asset Reuse Factor**, as set out in the **Annual Wider Cancellation Charge Statement**.*

*Where **Non Load Related Boundary Capex** is the capex required to maintain capability in the network as determined by **The Company** for a given **Financial Year**, excluding any **Attributable Works Capital Cost**, multiplied by the **User Risk Factor** and the **Global Asset Reuse Factor**, as set out in the **Annual Wider Cancellation Charge Statement**.*

*Where the **User Risk Factor** is the share of total risk between generation and consumers, set at 0.5.*

*Where the **Global Asset Reuse Factor** for a given **Financial Year** is as set out in the **Annual Wider Cancellation Charge Statement**.*

*Where the **Boundaries** are as detailed in Section 8 of the **Electricity Ten Year Statement (ETYS)**.*

*Where **Boundary (LR) Level** is the depth of each **Boundary** as determined by **The Company** multiplied by the increase in required capability on that **Boundary** over the forthcoming four year period, as set out in the **Electricity Ten Year Statement (ETYS)**.*

*Where **Boundary (NLR) Level** is the depth of each **Boundary** as determined by **The Company** multiplied by the available capability on that **Boundary** in the year in question, as set out in the **Electricity Ten Year Statement (ETYS)**.*

*Where **Boundary Non Compliance Factors** are the ratio between the available capability and required capability on each **Boundary** as detailed in Section 8 of the **Electricity Ten Year Statement (ETYS)**, capped at 100%.*

Where **Generation Zones** are (a) as defined in the **Electricity Ten Year Statement (ETYS)** for the **Financial Year** in which the termination or reduction in **Transmission Entry Capacity** or reduction in **Developer Capacity** or reduction in **Interconnector User Commitment Capacity** occurs prior to the **Charging Date** (or where not so defined as set out in the relevant **Cancellation Charge Statement**) or (b) as defined in the **Electricity Ten Year Statement (ETYS)** for the **Financial Year** in which the notice of **Disconnection** or reduction in **Transmission Entry Capacity** occurs on or after the **Charging Date**.

Where the **Wider User Commitment Liability Base** is the total amount of generation and **Interconnector User Commitment Capacity** in MW liable for the **Wider Cancellation Charge** in the year in question and the total amount of generation and **Interconnector User Commitment Capacity** in MW which will become liable for the **Wider Cancellation Charge** in the year in question and set out in the **Annual Wider Cancellation Charge Statement**.

Where the **Cancellation Charge Profile** is the profile derived in accordance with the formula at Paragraph 3.10 or 3.11, as appropriate.

### 3.9 Where the Construction Agreement is terminated or Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity is reduced before the Trigger Date

Should a **Construction Agreement** be terminated, or **Transmission Entry Capacity** be reduced or **Developer Capacity** be reduced or **Interconnector User Commitment Capacity** be reduced before the **Trigger Date** the **Cancellation Charge** shall be calculated as follows:

*Cancellation Charge = Either the Actual Attributable Works Charge or, where on the Fixed Attributable Works Cancellation Charge, a charge calculated as follows:*

*Reduction in Transmission Entry Capacity or Reduction in Developer Capacity or Reduction in Interconnector User Commitment Capacity x Pre Trigger Amount<sub>t</sub>*

Where:

- *Transmission Entry Capacity /Developer Capacity /Interconnector User Commitment Capacity expressed in MW.*

- *Termination of Construction Agreement equates to a reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity to zero*
- *Pre Trigger Amount<sub>t</sub> which varies according to the number of Financial Years from the date of the Construction Agreement to the Trigger Date:*
  - *up to the end of the first Financial Year (i.e.  $t = 1$ ), the lower of either (a) Pre Trigger Amount<sub>t</sub> = (£1000/MW) or (b) a sum equivalent to the Cancellation Charge (and if not known an estimate of this) which would apply in the Financial Year which is 3 Financial Years prior to the Financial Year in which the Charging Date occurs.*
  - *Where  $t = 2$ , the lower of either (a) Pre Trigger Amount<sub>t</sub> = (£2000/MW) or (b) a sum equivalent to the Cancellation Charge (and if not known an estimate of this) which would apply in the Financial Year which is 3 Financial Years prior to the Financial Year in which the Charging Date occurs.*
  - *Where  $t \geq 3$  up to Trigger Date, the lower of either (a) Pre Trigger Amount<sub>t</sub> = (£3000/MW) or (b) a sum equivalent to the Cancellation Charge (and if not known an estimate of this) which would apply in the Financial Year which is 3 Financial Years prior to the Financial Year in which the Charging Date occurs.*

### **3.10 Where the Construction Agreement is terminated or Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity is reduced on or after the Trigger Date but prior to the Charging Date**

Where a **Construction Agreement** is terminated or **Transmission Entry Capacity** is reduced or **Developer Capacity** is reduced or **Interconnector User Commitment Capacity** is reduced on or after the **Trigger Date** but prior to the **Charging Date** a **User** shall pay the **Cancellation Charge** calculated as follows:

*Cancellation Charge = the sum of (a) Fixed Attributable Works Cancellation Charge or Actual Attributable Works Cancellation Charge and (b) Wider Cancellation Charge*

*(a) Either the Actual Attributable Works Charge or, where on the Fixed Attributable Works Cancellation Charge, a charge calculated as follows:*

Where:

- *Termination of Construction Agreement equates to reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity to zero*
- *Fixed Attributable Works Cancellation Charge = Attributable Works Cancellation Amount x MW reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity x Cancellation Charge Profile<sub>t</sub>*
- *Cancellation Charge Profile<sub>t</sub> which varies according to the number of Financial Years working back from the Charging Date to the Trigger Date:*

- *In the Financial Year in which the Charging Date occurs (t=0), Cancellation Charge Profile = 1.0,*
- *In the Financial Year which is 1 Financial Year prior to the Financial Year in which the Charging Date occurs (t=1), Cancellation Charge Profile = 0.75;*
- *In the Financial Year which is 2 Financial Years prior to the Financial Year in which the Charging Date occurs (t=2), Cancellation Charge Profile = 0.5; and*
- *In the Financial Year which is 3 Financial Years prior to the Financial Year in which the Charging Date occurs (t=3), Cancellation Charge Profile, = 0. 25.*

**AND**

**(b) Wider Cancellation Charge**

Where:

- *Termination of Construction Agreement equates to reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity to zero*
- *Wider Cancellation Charge = Zonal Unit Amount x reduction in Transmission Entry Capacity or Developer Capacity or Interconnector User Commitment Capacity x Cancellation Charge Profile<sub>t</sub>*
- *Cancellation Charge Profile<sub>t</sub> which varies according to the number of Financial Years working back from the Charging Date to the Trigger Date:*
  - *In the Financial Year in which the Charging Date occurs (t=0), Cancellation Charge Profile = 1.0,*
  - *In the Financial Year which is 1 Financial Year prior to the Financial Year in which the Charging Date occurs (t=1), Cancellation Charge Profile = 0.75;*
  - *In the Financial Year which is 2 Financial Years prior to the Financial Year in which the Charging Date occurs (t=2), Cancellation Charge Profile = 0.5; and*
  - *In the Financial Year which is 3 Financial Years prior to the Financial Year in which the Charging Date occurs (t=3), Cancellation Charge Profile = 0.25.*

**3.11 Where the Transmission Entry Capacity or Interconnector User Commitment Capacity is reduced or Notice of Disconnection is given on or after the Charging Date**

The **Cancellation Charge** payable on notice of **Disconnection** and/or a reduction in **Transmission Entry Capacity** or **Interconnector User Commitment Capacity** on or after the **Charging Date** is calculated on a £/MW basis as follows by reference to the **Zonal Unit Amount** for the **Financial Year** in which the notice is given:



*Cancellation Charge = Wider Cancellation Charge*

Where:

- *Disconnection equates to reduction in Transmission Entry Capacity or Interconnector User Commitment Capacity to zero*
- *Wider Cancellation Charge = Zonal Unit Amount for year in which notice of disconnection or reduction is given x reduction in Transmission Entry Capacity or Interconnector User Commitment Capacity x Cancellation Charge Profile<sub>t</sub>.*
- *Cancellation Charge Profile<sub>t</sub> which varies according to the number of Financial Years notice given from the date of notification to Disconnection or reduction in Transmission Entry Capacity or Interconnector User Commitment Capacity:*
  - *where notice is given in the Financial Year in which such notice is to take effect (t=0) Cancellation Charge Profile = 1,*
  - *except as provided below where notice is given in the Financial Year prior to the Financial Year in which such notice is to take effect (t=1), Cancellation Charge Profile = 0.75,*
  - *where notice of reduction of Transmission Entry Capacity is given in the CMP 213 Judicial Review Period which is within a Financial Year prior to the CMP213 Financial Year in which such notice is to take effect (t=1), for the purposes of the Cancellation Charge such notice shall be deemed to have been given in timescales such that the Cancellation Charge Profile = zero where;*
    - *the “CMP213 Judicial Review Period” means the period of 20 Business Days (inclusive) from the day on which (having exhausted all appeals) the Judicial Review proceedings against the Authority’s decision to approve Approved CUSC Modification 213 are concluded*
    - *The « CMP213 Financial Year » means the Financial Year in which Approved CUSC Modification 213 is directed by the Authority to take effect,*
  - *where notice is given in the Financial Year which is two Financial Years prior to the Financial Year in which such notice is to take effect (t=2), Wider Cancellation Charge = zero.*

## **4 Annual Wider Cancellation Charge Statement**

**4.1** By not later than 31 January prior to the start of each **Financial Year** **The Company** will publish a statement showing:

- (a) the **Zonal Unit Amount** by **Generation Zone** for that **Financial Year**;
- (b) the **Wider User Commitment Liability Base** for that **Financial Year**;
- (c) the **Total TO Capex** for that **Financial Year** (*where the **Total TO Capex** is the forecast of the **Load Related Boundary Capex** and **Non Load Related Boundary Capex** for a given **Financial Year**, excluding the total **Attributable Works Capital Cost***);
- (d) a forecast of the **Total TO Capex** for the following three **Financial Years**;
- (e) the **Global Asset Reuse Factor** for that **Financial Year**;
- (f) the **Boundary Non Compliance Factors** for that **Financial Year**;
- (g) a forecast of the **Zonal Unit Amount** by **Generation Zone** for the following three **Financial Years**;
- (h) the % of the **Cancellation Charge** that is required to be secured prior to (and including) and after the **Key Consents in Place Date**.

**4.2** In the event that for any **Financial Year** it is proposed to change the **Global Asset Reuse Factor** or the % of the **Cancellation Charge** that is required to be secured prior to (and including) and after the **Key Consents in Place Date** from that set out in the **Annual Wider Cancellation Charge Statement** for the previous **Financial Year**, **The Company** shall not make such change without first consulting on the change (and its provision in electronic form on the Website and in electronic mails to **CUSC Parties** and such other persons who have supplied relevant details shall meet this requirement).

## **5. Statement of Cancellation Charge**

**5.1** With an **Offer** **The Company** shall provide each **User** with an indicative profile of the estimated spend in respect of the **Attributable Works** and a **Notification of Fixed Cancellation Charge**.

## **5.2 Cancellation Charge Statement**

**5.2.1** The **Company** shall issue a **Cancellation Charge Statement** to a **User** showing the amount of the payment required or which may be required to be made by the **User** to **The Company** in respect of the **Cancellation Charge** prior to the **Charging Date** at the following times and in respect of the following periods:-

- (i) Forthwith on and with effect from the signing of the **Construction Agreement**, in respect of the period from and including the day of signing of the **Construction Agreement** until the next following 30 September or 31 March, whichever is the earlier; and thereafter
- (ii) not less than 75 (seventy five) days (or if such day is not a **Business Day** the next following **Business Day**) prior to each 30 September and 31 March thereafter in respect of the period of six calendar months commencing on the immediately following 1 October or 1 April (as the case may be), until the earlier of either the termination of the relevant **Construction Agreement** or the **Charging Date**.

**5.3** If a **User** does not elect for the **Fixed Cancellation Charge** (unless and until a **User** subsequently elects for a **Fixed Cancellation Charge** as provided for at Paragraph 7 or advises **The Company** that it does not wish to receive this) **The Company** shall provide a **Notification of Fixed Cancellation Charge** and an estimate of the **Actual Attributable Works Cancellation Charge** with each **Cancellation Charge Statement**.

**5.4** The **Actual Attributable Works Cancellation Charge** shall apply unless and until a **User** elects for a **Fixed Cancellation Charge** in accordance with Paragraph 7.

**5.5 Estimating the Actual Attributable Works Cancellation Charge**

In the case of the **Actual Attributable Works Cancellation Charge**, the **Cancellation Charge Statement** shall set out a fair and reasonable estimate of the **Actual Attributable Works Cancellation Charge** for the 6 month period and, for the project generally. In addition the 6 month estimate of the **Actual Attributable Works Cancellation Charge** shall, for the purposes of assessing the **Cancellation Charge Secured Amount**, be prorated on a MW basis between those **Users** who share a component within the **Attributable Works**.

## **6 Electing for the Fixed Cancellation Charge**

- 6.1** To elect for a the **Fixed Cancellation Charge**, a **User** must notify **The Company** to this effect by (a) returning a signed copy of the **Notification of Fixed Cancellation Charge** with its acceptance of the **Construction Agreement** or (b) , where a **User** does not elect at that time, it can elect 45 days (or if such day is not a **Business Day** the next following **Business Day**) prior to each 30 September or 31 March thereafter by returning a signed copy of the **Notification of Fixed Cancellation Charge** as provided with the relevant **Cancellation Charge Statement**.
- 6.2** Once a **User** has elected for the **Fixed Cancellation Charge**, the **Pre Trigger Amount**, **Attributable Works Amount** and **Cancellation Charge Profile** will then be fixed as that set out in the **Notification of Fixed Cancellation Charge** by reference to which such election was made and a **User** cannot revert to the **Actual Attributable Works Cancellation Charge**.
- 6.2.2** If the **User** becomes aware that the bank or insurance company issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, the **User** shall so notify **The Company** in writing as soon as it becomes so aware. If **The Company** becomes aware that the bank or insurance company issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, **The Company** may notify the **User** to that effect in writing. Where the bank, insurance company or the company so ceases to be either a **Qualified Bank** or a **Qualified Company** (as the case may be) as a consequence of **The Company** having reasonable cause to doubt the continued rating of the said bank, insurance company or company, such notice shall be accompanied by a statement setting out **The Company's** reasons for having such doubt. The **User** shall within 21 days of the giving of such notice by **The Company** or the **User** whichever is the earlier provide a replacement **Performance Bond** and/or **Letter of Credit** from a **Qualified Bank** or **Qualified Company**, as the case may be, and/or provide a cash deposit in the required amount in a **Bank Account**. From the date the replacement **Performance Bond** or **Letter of Credit** or **Bank Account** cash deposit is effectively and unconditionally provided and **Valid**, **The Company** will consent in writing to the security which it replaces being released.

## **7 Cancellation Charge Secured Amount Statement**

**7.1** Where a **User** has to provide security in accordance with Part Three of this Section 15 the **Cancellation Charge Statement** shall be accompanied by the **Cancellation Charge Secured Amount Statement**.

**7.2** The **Cancellation Charge Secured Amount** shall be based on the highest level of **Cancellation Charge** due within the period covered by the **Cancellation Charge Secured Amount Statement**.

## **8 Interconnector Transition to Cancellation Charge**

**8.1** This provision only applies in respect of **Users** who are **Interconnectors**.

**8.2** The provisions of this Section 15 shall apply in respect of the first **Security Period** which is not less than 6 months after the **Implementation Date** for **CUSC Modification Proposal 222**. In the period prior to that **Security Period** and as soon as practicable after the **Implementation Date** for **CUSC Modification Proposal 222**

**8.2.1 The Company** shall

**8.2.1.1** offer to amend each **User's Construction Agreement** such that it will be substantially in the form of that set out Schedule 2, Exhibit 3 Part 1 (as it relates to the **Cancellation Charge** arrangements);

**8.2.1.2** send to each **User** in respect of each **Construction Agreement** a **Cancellation Charge Statement** for that **Security Period**

**8.2.2** the **User** shall put **Security Arrangements** in place in respect of its **Construction Agreement** in accordance with **CUSC** Section 15 to be effective from the start of that **Security Period** to the next following 31 March or 30 September (whichever is the earlier).

**8.3** If **The Company** and a **User** fail to agree changes to the **Construction Agreement** either such person may refer the matter to the **Authority** under condition E13.5 of the **ESO Licence**.

### **PART THREE**

#### **1. CALCULATION OF CANCELLATION CHARGE SECURED AMOUNT AND CREDIT REQUIREMENTS**

**2.** Each **User** which has a **Construction Agreement** shall provide security in respect of each of its **Construction Agreements** for the **Cancellation Charge Secured Amount** as applied and calculated in accordance with this Part Three of Section 15:

**2.1** in the case of a **User** which meets **The Company Credit Rating** at the date of the **Construction Agreement** in accordance with Paragraph 4; and

**2.2** in the case of a **User** which does not meet **The Company Credit Rating** at the date of the **Construction Agreement** or thereafter ceases to meet it, in accordance with Paragraph 5.

#### **3. CALCULATION OF CANCELLATION CHARGE SECURED AMOUNT**

**3.1** Prior to the **Trigger Date** the **Cancellation Charge Secured Amount** is the **Cancellation Charge** as set out in the **Cancellation Charge Statement** for the relevant **Security Period**.

**3.2** On or after the **Trigger Date** until the **Charging Date** the **Cancellation Charge Secured Amount** is that percentage of the figure shown as the **Cancellation Charge** in the **Cancellation Charge Statement** for the relevant **Security Period** determined as follows:

|                                                                  |                                                                                                            |
|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| For Users in category (a) as per Section 15 Part One Paragraph 2 |                                                                                                            |
| Prior to (and including) the <b>Key Consents In Place Date</b>   | the % for that <b>Financial Year</b> as set out in the <b>Annual Wider Cancellation Charge Statement</b> . |
| From the <b>Key Consents In Place Date</b>                       | the % for that <b>Financial Year</b> as set out in the <b>Annual Wider Cancellation Charge Statement</b> . |

|                                                                            |                                                                                                                                              |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                            |                                                                                                                                              |
| For Users in categories (b) and (c) as per Section 15 Part One Paragraph 2 |                                                                                                                                              |
| Prior to (and including) the <b>Key Consents In Place Date</b>             | the % for that <b>Financial Year</b> for <b>Distributed Generation</b> as set out in the <b>Annual Wider Cancellation Charge Statement</b> . |
| From the <b>Key Consents In Place Date</b>                                 | the % for that <b>Financial Year</b> for <b>Distributed Generation</b> as set out in the <b>Annual Wider Cancellation Charge Statement</b> . |

**3.3** The **User** shall notify **The Company** once it considers that it has been granted the **Key Consents**. **The Company** shall respond as soon as practicable after such notification confirming that it is satisfied that this is the case or giving reasons why it is not so satisfied.

**3.4** The **Cancellation Charge Secured Amount** shall be calculated using the **Cancellation Charge** inclusive of any applicable **Value Added Tax** that would be due.

#### **4. PROVISION OF SECURITY WHERE USER MEETS THE COMPANY CREDIT RATING**

**4.1** The **User** shall as soon as possible after entering into a **Construction Agreement** and/or **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** and in any event no later than one (1) month after the date of the same confirm to **The Company** whether it meets **The Company Credit Rating**. Thereafter not less than 75 days before the 1 April and 1 October each year until 30 days after the **Charging Date** the **User** shall confirm to **The Company** whether it meets **The Company Credit Rating** (which in the case of a long term private credit rating shall be confirmed by Standard and Poor's or Moody's within a period of 45 days prior to the date of confirmation). The **User** shall inform **The Company** in writing forthwith if it becomes aware of no longer meeting **The Company Credit Rating** or if it is or is likely to be put on credit watch or any similar credit surveillance procedure which may give **The Company** reasonable cause to

believe that the **User** may not be able to sustain meeting **The Company Credit Rating** for at least 12 months.

**4.2** In the event that the **User** has elected to provide **The Company** with an indicative credit rating and **The Company** is of the reasonable opinion that the **User** has ceased to comply with the requirements of Paragraph 4.1 then **The Company** may require the **User** forthwith:

- (i) to apply to Standard and Poor's and/or Moody's for a further indicative long term private credit rating; or
- (ii) to confirm to **The Company** that it shall provide the security referred to in Paragraph 4.4 below.

**4.3** In the event of the **User**:

- (i) not meeting **The Company Credit Rating**; or
- (ii) having a credit rating below **The Company Credit Rating**; or
- (iii) not having obtained from Standard and Poor's or Moody's within 30 days of the written notification under Paragraph 4.2(i) above an indicative long term private credit rating,

or if **The Company** becomes aware that:

- (iv) the **User** ceases to meet **The Company Credit Rating**; or
- (v) the **User** is put on credit watch or other similar credit surveillance procedure as specified above which may give **The Company** reasonable cause to believe that the **User** may not be able to maintain **The Company Credit Rating** for at least 12 months; or
- (vi) the **User** has not obtained from Standard and Poor's within 30 days of the written notification by **The Company** under Paragraph 4.2(i) above a further indicative long term private credit rating,



the **User** shall (where appropriate on receipt of written notification from **The Company**) comply with the terms of Paragraph 4.4.

**4.4** The **User** shall within 21 days of the giving of a notice under Paragraph 4.3 or within 30 days of the **User** confirming to **The Company** under Paragraph 4.2(ii) that it will provide the security specified below (whichever is the earlier), provide **The Company** with the security specified below to cover the **Cancellation Charge Secured Amount** for the relevant **Security Period** as notified by **The Company** to the **User**.

**4.5** The form of security provided shall be of a type set out in Paragraph 6.

**4.6** If the facts of circumstances giving rise to the obligation of the **User** to provide the security have ceased, then **The Company** shall release the security.

## **5. PROVISION OF SECURITY WHERE USER DOES NOT MEET OR CEASES TO MEET THE COMPANY CREDIT RATING**

**5.1** Each **User** hereby agrees that it shall at the date of the relevant **Construction Agreement** and/or **Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** provide to **The Company** or procure the provision to **The Company** of, and the **User** shall until 28 days after the **Charging Date** maintain or procure that there is maintained in full force and effect (including by renewal or replacement) a security arrangement from time to time and for the time being as set out in Paragraph 6 to provide security for the **Cancellation Charge Secured Amount**.

**5.2** If there shall be any dispute between the **User** and **The Company** as to:-

- (i) the fairness and reasonableness of the estimate of the **Attributable Works Capital Charge**; or
- (ii) the calculation of the **Cancellation Charge**, or
- (iii) whether there has been an **Event of Default** as provided in **CUSC** Section 5; or
- (iv) the lawfulness or otherwise of any termination or purported termination of the **Construction Agreement**,

such dispute shall not affect the ability of **The Company** to make demands pursuant to the security arrangement to be provided pursuant to this **CUSC** Section 15 and to recover the amount or amounts payable thereunder, it being acknowledged by the **User** that but for such being the case **The Company's** security would be illusory by reason of the period of validity of the relevant security being likely to expire or capable of expiring before the final resolution of such dispute. The **User** accordingly covenants with **The Company** that it will not take any action, whether by way of proceedings or otherwise, designed or calculated to prevent, restrict or interfere with the payment to **The Company** of any amount secured under the security arrangement nor seek nor permit nor assist others to do so.

## **6. TYPES OF SECURITY**

**6.1** The **User** shall from time to time and for the time being as set out in Paragraph 5 provide security for the **Cancellation Charge Secured Amount** by any one of the following:-

**6.1.1** A **Performance Bond** or **Letter of Credit** from a **Qualified Bank** for **Cancellation Charge Secured Amount** for a given **Security Period**, such **Performance Bond** or **Letter of Credit** to be **Valid** for at least that given **Security Period** and to be renewed periodically where applicable in the manner stated in paragraph 6.2.3; or

**6.1.2** A cash deposit in a **Bank Account** at least for the amount of the **Cancellation Charge Secured Amount** to be secured for a given **Security Period**, such cash deposit to be increased or reduced periodically where applicable in the manner stated in paragraph 6.2.4; or

**6.1.3** A **Performance Bond** from a **Qualified Company** for the amount of the **Cancellation Charge Secured Amount** to be secured for a given **Security Period**, such **Performance Bond** to be **Valid** for at least that **Security Period** and to be renewed periodically where applicable in the manner stated in paragraph 6.2.3.

## **6.2 General Provisions regarding Security**

- 6.2.1** Any **Notice of Drawing** to be delivered to Barclays Bank PLC or any other bank at which the **Bank Account** shall have been opened or a **Qualified Bank** or a **Qualified Company** may be delivered by hand, by post or by other agreed communication method.
- 6.2.2** If the **User** becomes aware that the bank issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, the **User** shall so notify **The Company** in writing as soon as it becomes so aware. If **The Company** becomes aware that the bank issuing the **Performance Bond** or **Letter of Credit** ceases to be a **Qualified Bank** or that the company giving the **Performance Bond** ceases to be a **Qualified Company**, **The Company** may notify the **User** to that effect in writing. Where the bank or the company so ceases to be either a **Qualified Bank** or a **Qualified Company** (as the case may be) as a consequence of **The Company** having reasonable cause to doubt the continued rating of the said bank or company, such notice shall be accompanied by a statement setting out **The Company's** reasons for having such doubt. The **User** shall within 21 days of the giving of such notice by **The Company** or the **User** whichever is the earlier provide a replacement **Performance Bond** and/or **Letter of Credit** from a **Qualified Bank** or **Qualified Company**, as the case may be, and/or provide a cash deposit in the required amount in a **Bank Account**. From the date the replacement **Performance Bond** or **Letter of Credit** or **Bank Account** cash deposit is effectively and unconditionally provided and **Valid**, **The Company** will consent in writing to the security which it replaces being released.
- 6.2.3** The following provisions shall govern the issuance, renewal and release of the **Performance Bond** or **Letter of Credit**:-
- 6.2.3.1** The **Performance Bond** or **Letter of Credit** shall be **Valid** initially for the **First Security Period**. Such **Performance Bond** or **Letter of Credit** shall be for an amount not less than the **Cancellation Charge Secured Amount** for that **First Security Period**.

**6.2.3.2** On a date which is at least 45 days (or if such day is not a **Business Day** then on the immediately preceding **Business Day**) before the start of each following **Security Period** such **Performance Bond** or **Letter of Credit** shall be renewed so as to be **Valid** for not less than such **Security Period** and in the case of the last **Security Period** to be **Valid**, unless **The Company** agrees otherwise, for 45 days after the last day of such **Security Period**. Such renewed **Performance Bond** or **Letter of Credit** shall be for an amount not less than the **Cancellation Charge Secured Amount** to be secured during that **Security Period**.

**6.2.4** The following provisions shall govern the maintenance of cash deposits in the **Bank Account**:-

**6.2.4.1** The amount of the **User's** cash deposit to be maintained in the **Bank Account** shall be maintained by the **User** from the date of the **Construction Agreement** at least to the end of the **First Security Period**. Such cash deposit shall be in the amount of the **Cancellation Charge Secured Amount** to be secured during that **First Security Period**.

**6.2.4.2** If the amount of the **Cancellation Charge Secured Amount** to be secured from the start of each **Security Period** is an amount greater than the amount then secured, the **User's** cash deposit in the **Bank Account** in respect of the **Security Amount** shall be increased by the **User** to such greater amount on the date which is 21 calendar days before the start of the given **Security Period**.

**6.2.4.2a** The value of any cash deposit to be provided by the **User** under 6.2.4.2 shall be notified to **The Company** in writing on or before 45 calendar days before the start of the given **Security Period**.

**6.2.4.3** If the **Cancellation Charge Secured Amount** for a given **Security Period** is smaller than the amount then secured, the **User's** cash deposit in the **Bank Account** in respect of the **Security Amount** shall not be reduced to the amount so stated

until the expiry of 7 days after the start of that given **Security Period** ("the **Release Date**").

**6.2.4.4** The sum equal to the amount of reduction in the **User's** cash deposit in the **Bank Account** in respect of the **Security Amount** shall be paid by **The Company** to the **User** from the **Bank Account** on the **Release Date**.

**6.2.4.5** Any interest accruing in respect of the **User's** cash deposit in the **Bank Account** in respect of the **Security Amount** shall be for the account of and belong to the **User** absolutely, and **The Company** agrees to take any steps required to be taken by it for the release from the **Bank Account** (or any other bank account in the name of **The Company** in which such interest is held) and payment to the **User** of such interest as soon as **The Company** shall have received notice from the **User** requesting such payment.

**6.2.4.6** For the avoidance of doubt, the **User's** cash deposit in the **Bank Account** shall remain the sole property and entitlement of the **User** until such time when (and to such extent as) the **Company** exercises its right of set off against the **User's** cash deposit in accordance with the terms of the **CUSC**, and the **User** shall have no right to have the cash deposit returned to it for so long as it is under any prospective or contingent liability to the **Company**.

**6.3** Notwithstanding any provision aforesaid:-

**6.3.1** The **User** may provide different securities to **The Company** at any one time, each securing a different amount, provided that the aggregate amount secured by such securities shall be not less than the amount of the **Cancellation Charge Secured Amount** required to be secured for that **Security Period**.

**6.3.2** The **User** may upon the expiry of at least 14 days prior written notice to **The Company**, substitute one type of security for another provided that unless **The Company** shall otherwise agree in writing such substituted security must be **Valid** from the

first day of the relevant **Security Period** and committed at least 45 days before this in the following manner:-

- (a) where a **Performance Bond** or a **Letter of Credit** is to substitute for other securities, it must be issued or given at least 45 days before the start of the **Security Period** to which it relates.
- (b) where a cash deposit in a **Bank Account** is to substitute for other securities, it must be deposited into the **Bank Account** at least 45 days before the start of the **Security Period** to which it relates.

**6.3.3** Upon request by the **User** to **The Company**, securities substituted in the aforesaid manner shall, providing the substitute security shall be **Valid**, be released on the first day of the **Security Period** which the substitute security is securing. However, where the **Cancellation Charge Secured Amount** to be secured for any **Security Period** is less than the amount required to be secured in the preceding **Security Period**, the substituted security shall not be released until 7 days after the start of the **Security Period** that that substitute security is securing.

**6.3.4** Where the **User** provides securities to **The Company** in multiple types as per paragraph 6.1, the provisions of paragraph 6.2.3 and 6.2.4 shall apply respectively to each type of security.

**PART FOUR**                      **RECONCILIATION OF ACTUAL ATTRIBUTABLE WORKS CANCELLATION CHARGE**

1. As soon as practicable and in any event within 60 days of the date, as appropriate, of termination of the **Construction Agreement** or reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** **The Company** shall:
  - (a) furnish the **User** with a statement showing a revised estimate of the **Actual Attributable Works Cancellation Charge** and will provide as soon as practicable evidence of such having been incurred; and
  - (b) furnish the **User** with justification of and supporting information in respect of its assessment of the actual or potential for reuse and any strategic benefits of the **Attributable Works** and any of the resulting **Transmission** assets.
2. As soon as reasonably practicable after termination of this **Construction Agreement** or reduction in **Transmission Entry Capacity** or **Developer Capacity** or **Interconnector User Commitment Capacity** and in any event within 12 months of such event **The Company** shall provide the **User** with a final statement of the **Actual Attributable Works Cancellation Charge**. If the **Actual Attributable Works Cancellation Charge** is greater than the payments made by the **User** in respect of **The Company's** estimate(s) of the **Actual Attributable Works Cancellation Charge** the **User** shall within 28 days of the said statement and invoice prepared by **The Company** pay to **The Company** the additional payments due by the **User** together with interest calculated thereon on a daily basis at **Base Rate** for the time being and from time to time from the date of previous payment(s) to the date of the final statement of the **Actual Attributable Works Cancellation Charge** and final invoice for the **Attributable Works Cancellation Charge**. If the **Actual Attributable Works Cancellation Charge** is less than the payments made by the **User** in respect of **The Company's** estimate(s) of the **Actual Attributable Works Cancellation Charge** **The Company** shall forthwith pay to the **User** the excess paid together with interest on a daily basis at **Base Rate** for the time being and from time to time from the date of payment of the fair and reasonable estimate of the **Actual Attributable Works Cancellation Charge** to the date of reimbursement by **The Company** of the said excess paid.

## CUSC SECTION 16

### QUEUE MANAGEMENT PROCESS

#### **Introduction**

- 16.1 The process set out in this Section 16 will be applied by **The Company** in measuring the progression of a **User's** project (excluding any **OTSDUW**) against the **Completion Date**, or where the **User's Project** is staged, the relevant **Completion Date** in the **Construction Agreement** related to that project. The process identifies a set of milestones as set out below against which progress is measured and if not achieved provides for the termination of the **Construction Agreement**. Although provision for this process is included within **Gate 1 Agreements** the process and provisions within this Section will only be actively applied in **Gate 2 Agreements**.
- 16.2 The **Queue Management Process** will not be applied and included in (i) **Construction Agreements** with an **Embedded Power Station** relating to a **Bilateral Embedded Generation Agreement** or (ii) **Construction Agreements** with the owner/operator of a **Distribution System** directly connected to the **National Electricity Transmission System** where the **Construction Agreement** is required because of a connection to that **Distribution System** and the **Distribution Queue Management Process** applies.
- 16.3 **The User Progression Milestones and Evidence**

The milestone events/timings against which the progress of a **User's** project will be measured by **The Company** are listed in the table below.

The table also shows the evidence a **User** has to provide to **The Company** to show that a milestone event has been met.

A **User Progression Milestone** must be achieved by the date which represents the end of the milestone period identified for that milestone. Once achieved a **Conditional Progression Milestone** must also continue to be met on an ongoing basis, that is, the statutory consent and planning permission initiated and secured and the land rights achieved to demonstrate compliance with the **Conditional Progression Milestone** must remain in place.

**The Company** will provide (in the form of Appendix Q) a Table based on the above with each **Construction Agreement**. This will specify the dates of the milestone periods for the **User's** project derived in accordance with this Section 16 and set out in each Appendix Q.

Where a **User's** project is being delivered in discrete "stages" of **Equipment**, or programme for example when the project relates to the installation of different technology types or co-located sites, and they are being progressed discretely a separate Appendix Q will be provided for each "stage" and the **Queue Management Process** applied to each "stage" separately



| Milestone                                                                   | Detail                                                                                                                                                                                                                                                                           | Evidence                                                                                                                                                                                                                                                                                                                                         | Milestone Period                   |
|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Milestone 1)<br><b>Initiated Statutory Consents and Planning Permission</b> | Where statutory consents are required for the construction of the <b>User's</b> project, the <b>User</b> must begin the process of seeking statutory consents, including Planning Permission for the project within the timescales and be able to provide the required evidence. | Submission of planning application to the relevant Statutory Authority or, if the <b>User's</b> project does not require a statutory consent, a declaration from the <b>User</b> to that effect.                                                                                                                                                 | See table (varies with lead time). |
| Milestone 2)<br><b>Secured Statutory Consents and Planning Permission</b>   | Where required for the construction of the <b>User's</b> project, the <b>User</b> must have secured statutory consents, including Planning Permission for the project within the timescales and be able to provide the required evidence                                         | The planning decision notice confirms planning permission has been granted and that this permission allows the <b>User</b> to meet the terms included in its <b>Construction Agreement</b> .<br><br>Compliance with this milestone is ongoing.                                                                                                   | See table (varies with lead time)  |
| Milestone 3)<br><b>Secure Land Rights</b>                                   | The <b>User</b> must have secured the required land rights to enable the construction of the project. The <b>User</b> may be the owner/occupier of the land or has the necessary agreement from the owner/occupier.                                                              | The <b>User</b> shall provide documentation to demonstrate that:<br>(i) The <b>User</b> is an owner or tenant of the land on which the proposed site is or will be situated; or<br>(ii) The <b>User</b> has entered into an agreement to lease (which meets the requirements in the <b>Gate 2 Criteria Methodology</b> ) the land from the owner | See table                          |

|  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  |  | <p>of the land on which the proposed site is or will be situated; or</p> <p>(iii) The <b>User</b> has an option to purchase or to lease the land from the owner of the land on which the proposed site is or will be situated and this option meets the requirements and parameters set out in the <b>Gate 2 Criteria Methodology</b>; or</p> <p>(iv) For an <b>Offshore Project</b>, which depending on the type of <b>Offshore Projects</b> (and set out in the <b>LoA Guidance</b>) the land rights are provided by reference to the seabed or <b>Onshore Connection Site</b> (a) the <b>User</b> has entered into an agreement for occupation or use of the seabed upon which the <b>User's</b> project (excluding any <b>OTSDUW</b>) is or will be located or (b) the requirements at (ii) and (iii) above apply.</p> <p>Nb the obligation is to secure and evidence the land right for the site of the installation e.g. Power Station or demand site so the evidence does not relate to rights e.g. easements associated with that site or <b>OTSDUW</b>.</p> |  |
|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

|                                                         |                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                             |                                   |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
|                                                         |                                                                                                                                                                                                                                   | Compliance with this milestone is ongoing and additionally measured against the requirements regarding the <b>Original Red Line Boundary</b> as set out in Paragraph 16.4.9.3 below.                                                                                                                                                                                                                                        |                                   |
| Milestone 4) <b>N/A for Transmission</b>                | This milestone does not apply for Transmission                                                                                                                                                                                    | Null                                                                                                                                                                                                                                                                                                                                                                                                                        | Null                              |
| Milestone 5) <b>Contestable Design Works Submission</b> | This milestone will apply where a <b>User</b> has gone down the contestable route for connection.                                                                                                                                 | Written confirmation from the <b>Relevant Transmission Licensee</b> that design obligations as bilaterally agreed in a User-Self Build agreement have been received.                                                                                                                                                                                                                                                        | See table (varies with lead time) |
| Milestone 6) <b>Agree Construction Plan</b>             | The <b>User</b> must have agreed a construction plan for the detailed <b>User's Works</b> with <b>The Company</b> which demonstrates how they will be progressing the <b>User's Works</b> to achieve the <b>Completion Date</b> . | The <b>User's</b> construction plan shall demonstrate how the <b>User</b> will be ready for the <b>Commissioning Programme Commencement Date</b> and <b>Completion Date</b> . This must include a detailed programme for the <b>User's Works</b> with a fixed start and end date as agreed with the <b>Relevant Transmission Licensee</b> , and be a programme aligned with the <b>Commissioning Programme Commencement</b> | See table (varies with lead time) |

|                                             |                                                                                                                                                                                            | <b>Date and Completion Date.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                   |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Milestone 7)<br><b>Project Commitment</b>   | This milestone demonstrates that the project has the necessary commitment or backing for it to proceed.                                                                                    | One of the following:<br><ul style="list-style-type: none"> <li>• Binding contract issued by the <b>User</b> for main plant equipment; or</li> <li>• Capital contribution payments made to <b>The Company</b> in advance of connection; or</li> <li>• A decision paper from a formal, minuted meeting of the <b>User's</b> board of directors evidencing Final Investment Decision (FID); or</li> <li>• award of a governmental or regulatory subsidy which provides financial support or incentive to the <b>User's</b> project.</li> </ul> | See table (varies with lead time) |
| Milestone 8)<br><b>Project Construction</b> | Project construction is the project phase ie the period from when a <b>User</b> begins the site works to carry out construction of its project until completion of the <b>User's Works</b> | Commence construction according to the construction plan agreed under Milestone 6.<br><br>Evidence for meeting this milestone will be a letter from the <b>User's</b> board of directors or equivalent to state construction has commenced.                                                                                                                                                                                                                                                                                                  | See table (varies with lead time) |

The date by which a **User Progression Milestone** has to be achieved is derived from the following Tables working (except in the case of **Conditional Progression Milestone M1**) backwards from the **Completion Date** (or where staged, relevant **Completion Date**) in a **Connection Offer** to the date on which the **Connection Offer** is made by **The Company** to the **User**. The date by which **Conditional Progression Milestone M1** has to be achieved is

derived from the following Table based on the earlier of two dates as set out in that Table.

The **User Progression Milestones** are categorised as **Conditional Progression Milestones** and **Construction Progression Milestones**. Different rights and obligations on **The Company** to terminate the **User's Construction Agreement** apply for each of these categories.

As noted above compliance with the **Conditional Progression Milestones** is measured on an ongoing basis.

### Conditional Progression Milestones

| Retained Distribution Milestone Names for consistency | From 0 up to 2 years (0 – 729 days) from contracted Completion date                                                                                                                                                                                                                                                                                                                                                                                                | 2 up to 3 years (730 – 1094 days) from contracted Completion date | 3 up to 4 years (1095 to 1459 days) from contracted Completion date | 4 up to 5 years (1460 – 1824 days) from contracted Completion date | 5 years (1825 days) and above from contracted Completion date |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------|
| <b>Milestones:</b>                                    | All durations for milestones other than M1 are calculated back from the contracted Completion Date<br>Durations for M1 (unless M1 has already been met at the time of the Gate 2 Application) will be the earlier of (a) the date calculated forwards from the Gate 2 Offer date (based on an agreed standard time period for each planning type as referred to below) to move from M3 to M1) and (b) the date calculated back from the contracted Completion Date |                                                                   |                                                                     |                                                                    |                                                               |
| <b>M1 - Initiate Planning Consent</b>                 | Bilaterally negotiated                                                                                                                                                                                                                                                                                                                                                                                                                                             | 18 months                                                         | 24 months                                                           | 36 months                                                          | 48 months                                                     |
| <b>M2 - Secure Consent</b>                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 12 months                                                         | 18 months                                                           | 24 months                                                          | 30 months                                                     |
| <b>M3 - Land Rights</b>                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 21 months                                                         | 27 months                                                           | 39 months                                                          | 51 months                                                     |

The standard time period for each planning type to move from M3 to M1 is as follows:

| <b><u>Planning / Technology Type</u></b>                | <b><u>Timescale from Gate 2 Offer date to M1</u></b> |
|---------------------------------------------------------|------------------------------------------------------|
| Town and Country Planning (England, Scotland and Wales) | 2 years                                              |
| Section 36 (England/Scotland)                           | 3 years                                              |
| Development of National Significance (Wales)            | 3 years                                              |
| NSIP / DCO (England and Wales)                          | 3 years                                              |

|                                                              |              |
|--------------------------------------------------------------|--------------|
| Offshore (including Offshore Wind, Interconnectors and OHAs) | 5 years      |
| Nuclear                                                      | Case by Case |
| Novel technologies                                           | Case by Case |

### Construction Progression Milestones

| Retained Distribution Milestone Names for consistency | From 0 up to 2 years (0 – 729 days) from contracted Completion date | 2 up to 3 years (730 – 1094 days) from contracted Completion date | 3 up to 4 years (1095 to 1459 days) from contracted Completion date | 4 up to 5 years (1460 – 1824 days) from contracted Completion date | 5 years (1825 days) and above from contracted Completion date |
|-------------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------|
| <b>Milestones:</b>                                    | All durations referenced back from contracted Completion Date       |                                                                   |                                                                     |                                                                    |                                                               |
| <b>M5 - Contestable Design Works Submission</b>       | Bilaterally negotiated                                              | 12 months                                                         | 15 months                                                           | 18 months                                                          | 21 months                                                     |
| <b>M6 - Agree Construction Plan</b>                   |                                                                     | 9 months                                                          | 12 months                                                           | 15 months                                                          | 18 months                                                     |
| <b>M7 - Project Commitment</b>                        |                                                                     | 6 months                                                          | 9 months                                                            | 12 months                                                          | 15 months                                                     |
| <b>M8 - Initiate Construction</b>                     |                                                                     | 3 months                                                          | 6 months                                                            | 9 months                                                           | 12 months                                                     |

Where durations are referred to as being “bilaterally negotiated” this means that **The Company**, the **Relevant Transmission Licensee** and the **User** will aim to agree the durations for the purposes of Appendix Q during the **Offer** preparation period. Where not so agreed by the time the **Offer** is made, Appendix Q will reflect the durations proposed by **The Company** and **Relevant Transmission Licensee** and discussions will continue with a view to agreeing these during the **Offer** acceptance period.

## 16.4 Project Milestone Communications

16.4.1 As soon as practicable and in any event by the due date for meeting a **User Progression Milestone**, the **User** shall document and provide the evidence in accordance with the table above of progress on a **User Progression Milestone** to prove to **The Company’s** reasonable satisfaction that that **User Progression Milestone** has been met.

16.4.2 The **User** will notify **The Company** and the **Relevant Transmission Licensee**, at the earliest opportunity, as soon as it becomes aware of any issues that could impact on the **User’s** ability to meet any of the

**User Progression Milestones** and specifically of any that the **User** believes could fall under 16.5 below. Where the **User** believes that an issue could fall under 16.5 below evidence supporting this shall be provided to **The Company**.

- 16.4.3 **The Company** will upon receipt of evidence provided in accordance with 16.4.1 above, advise the **User** within 10 **Business Days** as to whether it is satisfied that the **User Progression Milestone** has been met and whether the status of the **User's** project is categorised by **The Company** as "On Track" or "Termination".
- 16.4.4 If no evidence is provided in accordance with 16.4.1 above, or the evidence provided is considered insufficient to demonstrate that the milestone has been met, and as a consequence the status of the **User's** project is categorised as "Termination" **The Company** will notify the **User** that the **User's** project is categorised as "Termination" and that the **Project Milestone Remedy Period** has started.
- 16.4.5 If during the **Project Milestone Remedy Period** the **User's** project progresses such that it achieves the **User Progression Milestone** against which it was categorised as "Termination", the **User's** project shall be re-categorised by **The Company** as being "On Track" by reference to that **User Progression Milestone** and the **User** notified accordingly.
- 16.4.6 Where at the end of the **Project Milestone Remedy Period** for a **Conditional Progression Milestone** the status of the **User's** project is still categorised as "Termination", **The Company** shall terminate the **Construction Agreement**. Where at the end of the **Project Milestone Remedy Period** for a **Construction Progression Milestone** the status of the **User's** project is still categorised as "Termination", **The Company** may terminate the **Construction Agreement**.
- 16.4.7 Whether or not any of the **User Progression Milestones** have been achieved and/or what constitutes progress towards achieving them is a matter for the sole discretion of **The Company**.
- 16.4.8 **The Company**, the **Relevant Transmission Licensee** and the **User** shall constructively engage as required during the **Project Milestone Remedy Period** to understand whether the relevant **User Progression Milestone** can or is likely to be met and whether the issues in achieving the **User Progression Milestone** fall or are likely to fall under 16.5 below.
- 16.4.9 **Ongoing compliance with the Conditional Progression Milestones**
- 16.4.9.1 Having achieved a **Conditional Progression Milestone** the **User** shall notify **The Company** (or respond to **The Company's** request for confirmation on this point) at the earliest opportunity in the event that it

no longer meets or has reason to believe it will not continue to meet the requirements set out for that **Conditional Progression Milestone**.

- 16.4.9.2 In the event that the ongoing requirements of a **Conditional Progression Milestone** are no longer met, **The Company** will notify the **User** that the **User's** project is categorised as "Termination" and the provisions of 16.4.5 to 16.4.8 shall apply.
- 16.4.9.3 **Specific Provisions regarding Ongoing Compliance with the Original Red Line Boundary**
- 16.4.9.3.1 The **User** shall be required to confirm at each **User Progression Milestone** that the **User's** project meets the minimum acreage requirements as set out in the **LoA Guidance** i.e. that the land is equal to or greater than that provided for the technologies included in the **Gate 2 Application**.
- 16.4.9.3.2 The **Original Red Line Boundary** can only be changed as provided for in the **Queue Management Guidance**.
- 16.4.9.3.3 Subject to any changes in the **Original Red Line Boundary** provided for under the **Queue Management Guidance**, only 50% of whatever **Installed Capacity** is built within the **Original Red Line Boundary** can then be located outside of the **Original Red Line Boundary**.
- 16.4.9.3.4 A relaxation from the 50% requirement above is possible where this is justified and evidenced by the **User** in accordance with the **Queue Management Guidance**.

## 16.5 **Exceptional Issues on User Progression Milestones**

There may be a small number of exceptional issues outwith the **User's** control which may lead to **User** project delay and a **User** not being able to meet a **User Progression Milestone**.

The Exceptional issues which apply in the context of the **Queue Management Process** are as follows:

- Where the **User** is delayed in carrying out the **User's Works** which entitles the **User** to fix a later date or dates under Clause 3.2 of the **Construction Agreement** (Delays and Force Majeure) and that delay is the reason that a **User Progression Milestone** is not met;
- Where the **User** is not able to meet a **User Progression Milestone** due to an event of **Force Majeure**;
- Where delays caused by a party (other than the **User**, **The Company** or a **Relevant Transmission Licensee**) can be demonstrated to have an impact upon the **User** meeting a **User Progression Milestone** and the **User** could not have avoided these delays or their impact by the exercise of **Good Industry Practice**



- Where a **User** is not able to meet a **User Progression Milestone** due to Planning appeals and third-party challenges in relation to the **User's Consents**;
- Any delay in the achievement of a milestone by the **User** which is caused by a **Relevant Transmission Licensee** or **The Company**
- Where a **User** can demonstrate that a forward looking M1 would have a detrimental impact on developing their **User's** project provided that any adjustment cannot be later than the backwards looking M1.

Where the **User** believes an exceptional issue applies it shall provide written evidence to this effect supported by confirmation from the **User's** board of directors or equivalent body for **The Company's** consideration.

Where a **User's** project is not able or is considered unlikely to meet a **User Progression Milestone**, as a result of an exceptional issue under the headings here, and providing the **User** notifies **The Company** and the **Relevant Transmission Licensee** of the delay and reasons for the delay at the earliest opportunity and provides reasonable evidence to justify this and satisfies **The Company** that the specific delay falls under this Paragraph 16.5, such delay will not result in the **User's** project being categorised as "termination" in relation to the relevant **User Progression Milestone** or **User Progression Milestones**. In such circumstances **The Company** will consequently issue a new milestone date for the missed milestone.

Whether or not the exceptional issues as listed here apply and the period of any extension, is a matter for the sole discretion of **The Company**.

## 16.6 Implementation

16.6.1 The **Queue Management Process** will be:

- (i) included in any **Construction Agreements** (other than those which fall within Paragraph 16.2 above) offered as part of any new **Connection Offers**; and
- (ii) introduced into any **Construction Agreements** (other than those which fall within Paragraph 16.2 above) which do not have the **Queue Management Process** already included within it) when a **Modification Offer** is made; and
- (iii) introduced into any **Existing CMP376 Construction Agreement** which does not have the **Queue Management Process** already included within it through an Agreement to Vary that **Existing CMP376 Construction Agreement** in accordance with the process set out in Paragraph 16.6.3

in each case from the **CMP376 Implementation Date**.

16.6.2 Each **User** with an **Existing CMP376 Construction Agreement** shall be notified by **The Company** within:

- (a) ten **Business Days** of the **CMP376 Implementation Date** for an **Existing Construction Agreement** of a type in Paragraph 16.6.6 (c)(i) below; and
- (b) ten **Business Days** of the date of the **Construction Agreement** for an **Existing Construction Agreement** of a type in Paragraph 16.6.6 (c)(ii) below; and
- (c) in accordance with Paragraph 16.6.4 for an **Existing Construction Agreement** of a type in Paragraph 16.6.6 (c)(iii)

and in each case such notice shall invite the **User** to make a **Modification Application** to incorporate the **Queue Management Process** into its **Existing CMP 376 Construction Agreement**.

16.6.3 Where a **User** with an **Existing CMP376 Construction Agreement** does not make a **Modification Application** within 6 months of being notified in accordance with Paragraph 16.6.2 or does not accept the **Modification Offer** made in response to the **User's Modification Application** (and acknowledging that such offer may be disputed and referred to the **Authority** for determination) **The Company** shall issue the **CMP376 Agreement to Vary** to the **User**. The **CMP376 Agreement to Vary** shall be issued to the **User** as soon as practicable after the 6 months or failure to accept.

16.6.4 A **User** with a **Construction Agreement** (other than those which fall within Paragraph 16.2 above) where the **Completion Date** is on or before the date which is two years from the **CMP376 Implementation Date** will not have the **Queue Management Process** introduced into that **Construction Agreement** provided that the **User's** project is progressing in accordance with and is reasonably aligned to the **Construction Programme** in that **Construction Agreement**. If **The Company** has reason to believe that that is not the case and the **User** has not been able to demonstrate that it is progressing to **The Company's** reasonable satisfaction **The Company** shall notify the **User** that the **Construction Agreement** is to be treated as an **Existing CMP376 Construction Agreement** and the provisions of Paragraph 16.6.3 shall apply but with the reference to "within 6 months of being notified in accordance with Paragraph 16.6.2" being replaced with "2 months after the issue of such notice".

16.6.5 In the case of **Modification Offers**, the **Queue Management Process** will be applied and Appendix Q created by reference to the **Completion Date** in the **Modification Offer** and the date on which the **Modification Offer** is made by **The Company** to the **User**. In the case of the **CMP376 Agreement to Vary**, the **Queue Management Process** will be applied and Appendix Q created by reference to the **Completion Date** in the **Existing CMP 376 Construction Agreement** and the date on which the **CMP 376 Agreement to Vary** is offered by **The Company** to the **User**.

16.6.6 In this Paragraph 16.6:

- (a) the term **CMP376 Implementation Date** shall mean the **Implementation Date** for CUSC Modification Proposal 376 (Inclusion of Queue Management Process within the CUSC); and
- (b) the term **CMP376 Agreement to Vary** shall mean the Agreement to Vary issued by **The Company** to the **User** in accordance with Paragraph 16.16.3 above introducing the **Queue Management Process** and Appendix Q into an **Existing CMP376 Construction Agreement**; and
- (c) the term **Existing CMP376 Construction Agreement** shall mean a **Construction Agreement** (other than those which fall within Paragraph 16.2 above) where the **Works** under that **Construction Agreement** are not completed at the **CMP376 Implementation Date** and:
  - (i) the **Construction Agreement** is dated on or before the **CMP376 Implementation Date** and the **Completion Date** is after the date which is two years from the **CMP376 Implementation Date**; or
  - (ii) the **Construction Agreement** is the subject of an **Offer** made on or prior to the **CMP376 Implementation Date**, is dated after the **CMP376 Implementation Date** and the **Completion Date** is after the date which is two years from the **CMP376 Implementation Date**; or
  - (iii) the **Construction Agreement** has a **Completion Date** which is on or before the date which is two years from the **CMP376 Implementation Date** and where **The Company** has issued a notice to the **User** under Paragraph 16.6.4 above.

## CUSC SECTION 17

### GATED APPLICATION AND OFFER PROCESS

#### Introduction

- 17.1.** This Section explains the processes for making the applications and offers that fall under the **Gated Application and Offer Process**.
- 17.2.** The **Gated Application and Offer Process** will first apply from the **CMP434 Implementation Date** and from the **CMP434 Implementation Date** applications and offers which fall under the **Gated Application and Offer Process** can only be made in accordance with the **Gated Application and Offer Process**.
- 17.3.** **CUSC** contains processes for applications and offers and the **Gated Application and Offer Process** replaces those processes where the **Applications** are **Gated Applications**. As a consequence, where the **Application** is a **Gated Application** the **Offer** and **Acceptance** processes and timelines shall be replaced (as noted in the relevant **CUSC** Sections) with this **Gated Application and Offer Process**.
- 17.4.** The **Gated Application and Offer Process** comprises of the following activities:
- **Gated Application Window**
  - **Gated Design Process**
  - **Offer**

The **Gated Application and Offer Process** will be undertaken in accordance with the **Gated Timetable** for a **Gated Application Window and Offer Run**.

#### **17.5. Gated Applications**

After the **CMP434 Implementation Date** the following types of applications have to follow and offers can only be made in accordance with the **Gated Application and Offer Process**:

- 17.5.1.** An application for a **New Connection Site** (including a **Grid Supply Point**). This includes an application for a **New Connection Site** where the **New Connection Site** is triggered by a **Transmission Evaluation Application**. This does not however include an application for such **New Connection Site** by an owner/operator of a **Distribution System** where the application is not triggered by **Embedded Power Stations**.
- 17.5.2.** An application for a **Bilateral Embedded Generation Agreement**.

- 17.5.3. An application for a **BELLA**.
- 17.5.4. A **Transmission Evaluation Application** under **CUSC** Section 6 Paragraph 6.5.5.
- 17.5.5. An application (by **Modification Application**) for a **Gate 2 Offer** in respect of a **Gate 1 Agreement**.
- 17.5.6. A **Modification Application** (in addition to those referred to in Paragraph 17.5.4 and 17.5.5) to (a) any **Gate 2 Agreements** or (b) (any **Gate 1 Agreements** with **Reservation** (where the **Modification Application** is not requesting a **Gate 2 Offer**), which in either case is a **Gated Modification Application** and so has to follow the **Gated Application and Offer Process**.

## 17.6. Making a Gated Application

- 17.6.1. A **Gated Application** can be made at any time within the **Gated Application Window**.
- 17.6.2. In the case of a **Transmission Evaluation Application**, the application can be made after the closure of the **Gate 2 Application Window** on the basis that the owner/operator of the **Distribution System** will (a) within the **5 Business Days Period** provide the basic information required to create construction planning assumptions and (b) within the **15 Business Days Period** provide full technical data and the items referred to at Paragraph 17.7.3.2.
- 17.6.3. **Gated Applications** for a **New Connection Site** or applications for a **BEGA** for a **Large Embedded Power Station** or **BELLA** can, at the **Applicant's** choice, be made on the basis of a **Gate 1 Application** or (initially or subsequently) a **Gate 2 Application**.
- 17.6.4. The owner/operator of the **Distribution System** will be notified by **The Company** as soon as reasonably practicable of the **Gate 1 Application** or **Gate 2 Application** for a **BEGA** or **BELLA** by **Modification Notice**.
- 17.6.5. A **Gate 2 Application** for a **BEGA** and **BELLA** can be made at any time but will not progress as a **Gate 2 Application** until and within the **Gated Application Window** in which the **Distribution EG Related Application** is made.
- 17.6.6. The owner/operator of the **Distribution System** will, subject to the requirements of Paragraph 17.6.8 having been met:
  - a) use reasonable endeavours to submit the **Distribution EG Related Application** to **The Company** in the current or next available **Gated Application Window** after the notification to it

by **The Company** of a **Gate 2 Application** by a **Large Embedded Power Station** for a **BEGA** or **BELLA**; and

- b) in all other cases, submit the **Distribution EG Related Application** to **The Company** by reference to a **Gated Application Window** in the period specified in Paragraph 17.6.2 where prior to or within that **Gated Application Window** a **Relevant Embedded Power Station** has notified the owner/operator of the **Distribution System** that it wants the owner/operator of the **Distribution System** to submit a **Gate 2 Application** and the owner/operator of the **Distribution System** considers that the **Gate 2 Criteria** for readiness has been met.

**17.6.7. Embedded Power Stations** should as soon as reasonably practicable notify the owner/operator of the **Distribution System** of their intention to make or their having made (in the case of **Large Embedded Power Stations**) a **Gate 1 Application** and/or (otherwise) a **Gate 2 Application**.

**17.6.8. Embedded Power Stations** should be aware that the owner/operator of the **Distribution System** will have its own requirements of them (including the **Embedded Power Station** having entered into an agreement for connection to and use of the **Distribution System** and paying any relevant fees) prior to the owner/operator of the **Distribution System** submitting the **Distribution EG Related Application**.

**17.6.9.** Other than as expressly noted above, a **Gate 1 Application** or **Gate 2 Application** can only be made in the **Gated Application Window**.

**17.6.10.** A subsequent **Gate 2 Application** in respect of **Gate 1 Agreements** can (except in case of **Reservation** which will be subject to the **Gated Modification Guidance** and other relevant guidance) include changes to the project from that as described in the **Gate 1 Agreements**.

## **17.7. Assessment of the Gated Applications**

**17.7.1.** A **Gated Application** will need to be **Competent**. In the case of a **Gate 2 Application** for a **BEGA** or **BELLA** both that **Gate 2 Application** and the **Distribution EG Related Application** have to be **Competent** in the same **Gated Application Window**.

**17.7.2.** A **Gate 1 Application** for a **New Connection Site**, should also include, as appropriate, a **Letter of Authority** or a **Letter of Acknowledgment**.

**17.7.3.** A **Gate 2 Application** should also show and evidence readiness to proceed by:

- 17.7.3.1. in the case of a **Gate 2 Application** for a **New Connection Site, BEGA** for a **Large Embedded Power Station** or **BELLA**, including the **Readiness Declaration** and (except where the **Gate 2 Criteria Methodology** expressly provides otherwise) the **Original Red Line Boundary** (including the **Installed Capacity**). As these are provided by the **Large Embedded Power Station** in the case of a **Gate 2 Application** by a **Large Embedded Power Station** these are not required to be included in the **Distribution EG Related Application**;
- 17.7.3.2. in the case of a **Gate 2 Application** for a **Distribution EG Related Application** in respect of a (or more than one) **Relevant Embedded Power Station** (including where they have a **BEGA**), including the **Readiness Declaration** and **Original Red Line Boundary** (including the **Installed Capacity**) in respect of the (and if more than one each) **Relevant Embedded Power Stations** being those provided to the owner/operator of the **Distribution System** by the **Relevant Embedded Power Station**.
- 17.7.4. **The Company** will notify the **User** whether a **Gate 1 Application** is **Competent** and complies with Paragraph 17.7.2 as soon as reasonably practicable after receipt of the **Gate 1 Application**.
- 17.7.5. A **Gate 2 Application** will be checked and assessed by **The Company** against the **Gate 2 Criteria**.
- 17.7.6. **The Company** will notify the **User** (and also in the case of a **Large Embedded Power Station**, the owner/operator of the **Distribution System**) whether a **Gate 2 Application** is **Competent** and complies with (but always subject to Paragraphs 17.8 and 17.10 below) the **Gate 2 Criteria** such that it can enter the **Gated Design Process** as soon as reasonably practicable after receipt of the **Gate 2 Application** and in any event prior to the start of the **Gated Design Process**.
- 17.7.7. Any **Gate 1 Application** not notified accordingly by **The Company** under Paragraph 17.7.4 above will not receive a **Gate 1 Offer**. Any **Gate 2 Application** not notified accordingly by **The Company** under Paragraph 17.7.6 above will not be able to progress to the **Gated Design Process** in that **Gated Application and Offer Process Run**.
- 17.7.8. Where **The Company** is considering **Reservation** in respect of the **Gate 1 Offer**, **The Company** will advise the **Gated Applicant** as soon as reasonably practicable after receipt of the **Gate 1 Application** and that as a consequence the **Gate 1 Offer** may be provided later in the **Gated Design Process**, given the design process involved to confirm the **Reservation**. **Reservation** will only be provided for in a **Gate 1 Offer** where the **User** has indicated in the **Gate 1 Application** that it

is happy for this to be considered and **The Company** has notified the **Gated Applicant** of this.

#### 17.7.9. Installed Capacity

The sum of the **Installed Capacity** provided within a **Gate 2 Application** and the capacity of any existing **User's Equipment** or **Developer's** equipment at the same site, must be equal to or greater than the total **Transmission Entry Capacity** or **Developer Capacity** or directly connected **Demand** MWs (as applicable) which will outturn at the relevant **Connection Site** or site of connection of the **Embedded Power Station** (as applicable) as a consequence of the **Gate 2 Application**.

#### 17.8. Gate 2 Criteria

The **Gate 2 Application** must meet the **Gate 2 Criteria**. The **Gate 2 Criteria**, the process of evidencing and confirming that readiness has been met (and what is required for this) from a **Gated Applicant** is set out in the **Gate 2 Criteria Methodology**.

#### 17.9. Ongoing Compliance with the Original Red Line Boundary

There are also particular requirements and consequences for ongoing compliance with the **Original Red Line Boundary** and these are set out in Paragraph 16.4.9 of the **Queue Management Process** and the **Original Red Line Boundary Reduction Clause**.

#### 17.10. Checking of the Readiness Declarations

**17.10.1.** Although a **Gate 2 Application** may be notified as able to progress to the **Gated Design Process** under Paragraph 17.7.6, during and as soon as reasonably practicable within the **Gated Design Process** further detailed checks of the readiness submissions will be undertaken as follows in accordance with the **Gate 2 Criteria Methodology**:

**17.10.1.1.** **The Company** shall use reasonable endeavours to undertake a more detailed check as set out in the **Gate 2 Criteria Methodology** on all (unless specified otherwise in the **Gate 2 Criteria Methodology**) the **Readiness Declarations** provided (other than where the **Readiness Declaration** is provided for a **Relevant Embedded Power Station** by the owner/operator of a **Distribution System** where it is expected that such owner/operator will use reasonable endeavours to undertake this detailed check).



- 17.10.1.2.** Within 15 **Business Days** of the end of the **Gated Design Process**, **The Company** will publish on the **Website** the percentage of detailed checks which have been undertaken under Paragraph 17.10.1.1 as a percentage of the total of **Gate 2 Applications** which were **Competent** and met the **Gate 2 Criteria** for readiness for the purposes of entering that **Gated Design Process**. To facilitate and enable this, each owner/operator of a **Distribution System** shall within 10 **Business Days** of the end of the **Gated Design Process** provide the percentage of detailed checks it has undertaken for the purposes of Paragraph 17.10.1.1 as a percentage of the total of its **Gate 2 Applications** that entered the **Gated Design Process**.
- 17.10.1.3.** **The Company** shall check the evidence provided in all the **Readiness Declarations** for duplications and overlaps. Where duplications and/or overlaps are identified in the **Original Red Line Boundaries** **The Company** will contact the relevant parties concerned. In the event that duplications and/or overlaps are identified the process relating to this in the **Gate 2 Criteria Methodology** will be applied to establish whether in those circumstances any (and if so which) **Gate 2 Application** has not met the **Gate 2 Criteria**.
- 17.10.2.** Following the above **The Company** will notify the **User** (and in the case of a **Large Embedded Power Station**, the owner/operator of the **Distribution System**) whether the **Gate 2 Application** has fully met the **Gate 2 Criteria** (and where this is a **Transmission Evaluation Application** involving more than one **Relevant Embedded Power Station** whether all, none or which of the **Relevant Embedded Power Stations** have met the **Gate 2 Criteria**).
- 17.10.3.** If the **Gate 2 Criteria** has been met **The Company** will confirm to the **User** that a **Gate 2 Offer** will be made.
- 17.10.4.** If the **Gate 2 Criteria** has not been met **The Company** will confirm to the **User** (providing substantiated reasons why) that the **Gate 2 Application** has been rejected and that a **Gate 2 Offer** will not be made.
- 17.10.5.** In the case of a **Transmission Evaluation Application** involving more than one **Relevant Embedded Power Station**, the **Gate 2 Offer** will only be progressed on the basis of the **Relevant Embedded Power Stations** (and MW) that have met the **Gate 2 Criteria** and the **Gate 2 Application** deemed to be amended accordingly.

- 17.10.6.** The notifications under Paragraphs 17.10.2 to 17.10.4 will be given by **The Company** to the **User** as soon as reasonably practicable.

#### **17.11. Gated Design Process**

The **Gate 2 Applications** assessed by **The Company** as meeting the **Gate 2 Criteria** will be processed in accordance with the **Connections Network Design Methodology** and the **Project Designation Methodology**.

#### **17.12. Gate 1 Offer**

- 17.12.1.** A **Gate 1 Offer** shall be provided by **The Company** as soon as reasonably practicable within the **Gated Design Process**. Where a **Gate 1 Offer** includes **Reservation** that **Gate 1 Offer** will be provided later in the **Gated Design Process**, given the design involved, than one which does not include **Reservation**.

- 17.12.2.** A **Gate 1 Offer** shall be provided in the **CUSC** form relevant to the **Gated Application** but will not have the full details in the Appendices and will include the **Gate 1 Conditional Clause**, the effect of which is to make all the rights and obligations conditional until a **Gate 2 Offer** is accepted. A connection location and date will be provided but only on an indicative basis and the connection date and location will only be confirmed (with all the other details) in a **Gate 2 Offer** following a **Gate 2 Application**.

- 17.12.3.** There is an exception to Paragraph 17.12.2 where **Reservation** has been included. In that case, whilst the rights and obligations remain conditional, the connection date and connection location of, as appropriate, the **Connection Site** or **Transmission Interface Site** or site of Connection may be provided and identified in the **Gate 1 Offer** and any **Gate 2 Offer** will be made on the basis of these subject to a **Gate 2 Offer** being applied for and accepted by the **Applicant** in the timescales specified in the **Gate 1 Offer**.

#### **17.13. Gate 2 Offer**

- 17.13.1.** Any **Gate 2 Offers** shall be provided by **The Company**, in the timescales for this set out in the **Gated Timetable** for that **Gated Application Window and Offer Run**.

- 17.13.2.** A **Gate 2 Offer** shall be made in the **CUSC** form relevant to the **Gated Application** and provide a connection date and location and the **Construction Works** and **Construction Programme** in respect of this.

- 17.13.3.** If the **Gated Applicant** has already accepted a **Gate 1 Offer**, the **Gate 2 Offer** will be a **Modification Offer** to, inter alia, remove the effect of the **Gate 1 Conditional Clause** and on acceptance the rights and obligations (including in respect of **Cancellation**

**Charges** or **Final Sums** and the **Queue Management Process**) will apply.

- 17.14.** Any dispute between **The Company** and the **User** as to whether the **Gated Application** is **Competent**, meets the requirements at Paragraphs 17.7.2 and 17.7.3 and/or conforms to the **Gate 2 Criteria** shall be treated as an **Other Dispute** in accordance with **CUSC** Section 7.

**End of Section 17**

## **CUSC - SECTION 18**

### **GATED PROCESS FOR PROJECTS WITH EXISTING AGREEMENTS**

#### **CONTENTS**

|               |                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------------------------------------------|
| 18.1 - 18.4   | Introduction                                                                                                            |
| 18.5 - 18.7   | Existing Agreements                                                                                                     |
| 18.8          | EA Request Process                                                                                                      |
| 18.9          | Gate 2 Criteria                                                                                                         |
| 18.10         | Checking of the Readiness Declaration                                                                                   |
| 18.11         | EA Gated Design Process                                                                                                 |
| 18.12         | Outcome of the Gated Process for Projects with Existing Agreements                                                      |
| 18.13         | Gate 1 ATV                                                                                                              |
| 18.14 - 18.15 | Gate 2 Modification Offer                                                                                               |
| 18.16         | Additional clarity on approach on Existing Agreements for a Project which has been triggered by Embedded Power Stations |

## **Introduction**

- 18.1. This Section introduces and sets out the process by which (reflecting the changes implemented under **CUSC CMP434** in respect of certain new types of applications) **Existing Agreements** for a **Project** will be given the status of **Gate 1 Existing Agreements** or **Gate 2 Existing Agreements** and amended to align the **Existing Agreements** for a **Project** with the approach applied to corresponding agreements in the **Gated Application and Offer Process**.
- 18.2. This **Gated Process for Projects with Existing Agreements** will apply from the **CMP435 Implementation Date**. The **Gated Process for Projects with Existing Agreements** is a one off exercise to address **Existing Agreements**. Once given the status of **Gate 1 Existing Agreements** or **Gate 2 Existing Agreements** and amended accordingly they will be treated as, as appropriate, **Gate 1 Agreements** or **Gate 2 Agreements** in terms of the ongoing processes, rights and obligations in **CUSC** (as modified on the implementation of **CMP434**).
- 18.3. The elements of the **Gated Application and Offer Process** will apply during this **Gated Process for Projects with Existing Agreements** where and to the extent expressly referred to in this **Gated Process for Projects with Existing Agreements**.
- 18.4. The **Gated Process for Projects with Existing Agreements** comprises of the following key activities:
- An **EA Request Window** for submitting an **EA Request** (including reduction in **Transmission Entry Capacity** or **Developer Capacity** and request for **Advancement**)
  - **Existing Agreements** for a **Project** where a **Gate 1 Notification** is provided or an **EA Request** is not made within the **EA Request Window** will be given the status of **Gate 1 Existing Agreements** and **Gate 1 ATVs** issued
  - Assessment of an **EA Request** (to establish it is **Effective**)
  - **EA Gated Design Process** for those **Projects** who have submitted an **EA Request** which is **Effective** (such process will include checks of **Readiness Declarations**, assessment against **Gate 2 Criteria** and whether **Advancement** is available)
  - **Existing Agreements** for a **Project** given status of **Gate 2 Existing Agreements** following the **EA Gated Design Process** and issue of **Gate 2 Modification Offers** (including **Advancement**)

The **EA Timetable** shall be published by **The Company** as soon as practicable and with prior notice of the start date of the **EA Request Window**.

## **18.5. Existing Agreements**

Agreements of the following types entered into between **The Company** and the **User** prior to **EA Cut Off Date** where the connection to and/or use of system or right for **Embedded Power Stations** to be **Energised** in each case provided for under these has not yet happened are **Existing Agreements** for the purposes of this Section 18.

- 18.5.1. A **Bilateral Connection Agreement** and the associated **Construction Agreement** for a **New Connection Site** (including a **Grid Supply Point**) with a directly connected **User**. This includes a **Bilateral Connection Agreement** and the associated **Construction Agreement** for a **New Connection Site** by an owner/operator of a **Distribution System** where the application is triggered by **Embedded Power Stations** but not where the application is not triggered by **Embedded Power Stations**.
- 18.5.2. A **Bilateral Embedded Generation Agreement** and the associated **Construction Agreement** regardless of the size of the **Embedded Power Station**.
- 18.5.3. A **BELLA**
- 18.5.4. A **Bilateral Connection Agreement** for an already connected/operational **Project** but where there is a variation to that **Bilateral Connection Agreement** and a **Construction Agreement** for a live/ongoing **Modification** (including in the case of **Grid Supply Points** any such **Modification** triggered by **Embedded Power Stations**).
- 18.5.5. A **Bilateral Embedded Generation Agreement** for an already operational **Project** but where there is a variation to that **Bilateral Embedded Generation Agreement** and a **Construction Agreement** for a live/ongoing **Modification**.
- 18.5.6. A **BELLA** for an already operational **Project** but where there is a variation to that **BELLA** for a live/ongoing **Modification**.
- 18.5.7. For the avoidance of doubt, a **Bilateral Connection Agreement** (or **Modification** or variation to it) with an owner/operator of a **Distribution System** and any associated **Construction Agreement** are not **Existing Agreements** where such agreements are not triggered by one or more **Embedded Power Stations**.
- 18.6. In order for the **Existing Agreements** that relate to one or more **Projects** to apply for the status of **Gate 2 Existing Agreements** in respect of such **Projects** a **User** must submit an **EA Request** in respect of the **Existing Agreements** for the applicable **Project** which is **Effective** within the **EA Request Window**.
- 18.7. Where an **EA Request** is not submitted within the **EA Request Window**, is not **Effective**, or a **User** sends a **Gate 1 Notification** during the **EA Request Window**, the **Existing Agreements** will be given the status of **Gate 1 Existing Agreements** and **The Company** will notify the **User** accordingly as soon as reasonably practicable and in any event prior to the start of the **EA Gated**

**Design Process** and unless the **User** decides to terminate the **Existing Agreements** for a **Project** (in which case the current provisions regarding **Cancellation Charge** or **Final Sums** will apply) the **Gate 1 ATV** process below will be followed.

## 18.8. EA Request Process

- 18.8.1. An **EA Request** can be submitted by a **User** in respect of a **Project** at any time within the **EA Request Window**. An **EA Request** can ask for **Advancement** but other than **Advancement** and as provided for at Paragraph 18.8.6 no other changes to the **Existing Agreements** can be requested through the **EA Request**.
- 18.8.2. An **EA Request** (other than one which is seeking **Advancement** or which is in respect of **Transitional Agreements**) shall be deemed to be a **Modification Application** but neither a **Modification Application** nor a fee for a **Modification Application** is required. In this case, the **Readiness Declaration** and **Original Red Line Boundary** (including the **Installed Capacity**) will constitute the **EA Request**.
- 18.8.3. An **EA Request** which is seeking **Advancement** or an **EA Request** in respect of **Transitional Agreements** will require both a **Modification Application** and a fee for the **Modification Application**. In this case, the **Modification Application**, the **Readiness Declaration** and **Original Red Line Boundary** (including the **Installed Capacity**) will constitute the **EA Request**.
- 18.8.4. To be **Effective**, an **EA Request** for **Existing Agreements** for a **Project** which has a **BEGA** and associated **Construction Agreement** for a **Large Power Station** or **BELLA** will also require that the owner/operator of the **Distribution System** submits an **EA Request** within the **EA Request Window**. In such case the corresponding **EA Request** submitted by a **User** in the category of the owner/operator of a **Distribution System** shall take the form of an acknowledgement of the **EA Request** submitted by the **Embedded Power Station** (including the request for **Advancement** and in the case of **Advancement** will require a **Modification Application** and fee).
- 18.8.5. An **EA Request** for **Existing Agreements** for a **Project** for a **Relevant Embedded Power Station** must be made by the owner/operator of the **Distribution System** to which the **Relevant Embedded Power Station** is to be connected. In such case, the **EA Request** will include the **Readiness Declaration** and **Original Red Line Boundary** (including the **Installed Capacity**) provided to the owner/operator of the **Distribution System** by the **Relevant Embedded Power Station**.
- 18.8.6. An **EA Request** can include notification of a reduction in **Transmission Entry Capacity** or **Developer Capacity** and where it does so such reduction will trigger payment of a **Cancellation Charge** in accordance with **CUSC** Section 15 or **Final Sums**.

18.8.7. Where the **Existing Agreements** for a **Project** provide for more than one stage of **User's Works** within that overall **Project** or more than one technology type in the **User's Works** within that overall **Project** or, in the case of new **Grid Supply Points** or **Grid Supply Points** which are the subject of a **Modification** triggered by **Embedded Power Stations**, the **Existing Agreements** refer to more than one **Relevant Embedded Power Station** and/or **Embedded Large Power Station Project**, the **EA Request** can be made in part by reference to the specific stage, technology or **Embedded Power Station Project** and the **Existing Agreements** amended as required to reflect this.

18.8.8. **The Company** will confirm whether an **EA Request** is (but always subject to Paragraphs 18.9 and 18.10 below) **Effective** for the purposes of entering the **EA Gated Design Process** as soon as reasonably practicable after receipt of the **EA Request** and in any event prior to the start of the **EA Gated Design Process**.

#### 18.9. **Gate 2 Criteria**

To be given the status of **Gate 2 Existing Agreements** the **EA Request** must meet the requirements of the **Gate 2 Criteria**.

The **Gate 2 Criteria**, the process of evidencing and confirming that readiness has been met (and what is required of a **User**) in respect of this is set out in the **Gate 2 Criteria Methodology**.

#### 18.10. **Checking of the Readiness Declaration**

18.10.1. Although an **EA Request** may be confirmed as **Effective** prior to the start of the **EA Gated Design Process**, during and as soon as reasonably practicable within the **EA Gated Design Process** further detailed checks of the readiness submissions will be undertaken as follows:

18.10.1.1. **The Company** shall use reasonable endeavours to undertake a more detailed check as set out in the **Gate 2 Criteria Methodology** on all the **Readiness Declarations** submitted in respect of **Existing Agreements** for a **Project** (other than where the **Readiness Declaration** is provided for a **Relevant Embedded Power Station** by the owner/operator of a **Distribution System** where it is expected that such owner/operator will use reasonable endeavours to undertake this detailed check).

18.10.1.2. Within 15 **Business Days** of the end of the **EA Gated Design Process**, **The Company** will publish on the **Website** the percentage of detailed checks which have been undertaken under Paragraph 18.10.1.1 as a percentage of the total of **EA Requests** which were **Effective** for the purposes of entering that **EA Gated Design Process**. To



facilitate and enable this, each owner/operator of a **Distribution System** shall within 10 **Business Days** of the end of the **EA Gated Design Process** provide to **The Company** the percentage of detailed checks it has undertaken for the purposes of Paragraph 18.10.1.1 as a percentage of the total of its **EA Requests** that entered the **EA Gated Design Process**.

18.10.1.3. **The Company** shall check the evidence provided in all the **Readiness Declarations** submitted in respect of **Existing Agreements** for a **Project** for duplications and overlaps against any other **Readiness Declarations** submitted in respect of **Existing Agreements** for a **Project**. Where duplications or overlaps are identified in the **Original Red Line Boundaries**, **The Company** will contact the relevant parties concerned. In the event that duplications and/or overlaps are identified the process relating to this in the **Gate 2 Criteria Methodology** will be applied to establish whether in those circumstances any (and if so which) **Project** has not met the **Gate 2 Criteria**.

18.10.1.4. The **Project** will be assessed against the **Gate 2 Criteria**.

18.10.2. Following the above **The Company** will notify the **User** (and in the case where the **Project** is a **Large Power Station**, the owner/operator of the **Distribution System**) whether the **EA Request** has fully met the **Gate 2 Criteria** in respect of **Existing Agreements** for a **Project**. If the **Gate 2 Criteria** has been met **The Company** will confirm to the **User** that the **Existing Agreements** for a **Project** will be given the status of **Gate 2 Existing Agreements**. If the **Gate 2 Criteria** has not been met **The Company** will confirm to the **User** (providing substantiated reasons why) that the **Existing Agreements** for a **Project** will not be given the status of **Gate 2 Existing Agreements** and will be, as appropriate, given the status of **Gate 1 Existing Agreements**. Such notifications will be given by **The Company** to the **User** as soon as reasonably practicable. Where this is an **EA Request** by the owner/operator of a **Distribution System** relating to **Existing Agreements** relating to more than one **Relevant Embedded Power Station** the notification will confirm which (if any) of the **Relevant Embedded Power Stations** in the **Existing Agreements** have met the **Gate 2 Criteria** and only those will be given "Gate 2 Status" and the **Existing Agreements** processed on that basis.

## 18.11. EA Gated Design Process

18.11.1. Where a **User** has submitted an **EA Request** in respect of **Existing Agreements** for a **Project** and the **EA Request** meets the **Gate 2 Criteria** the **EA Request** will be processed in accordance with the **Connections Network Design Methodology** and the **Project Designation Methodology**.

- 18.11.2. A **User** which has requested **Advancement** for a **Project** in their **EA Request** will be accommodated where practicable and the **User** notified whether this can be accommodated or not where reasonably practicable prior to the issue of the **Gate 2 Modification Offer**. The **Connections Network Design Methodology** sets out the process for the management of requests for **Advancement**.

## 18.12. Outcome of the Gated Process for Projects with Existing Agreements

- 18.12.1. The outcome of the **Gated Process for Projects with Existing Agreements** is that the **Existing Agreements** for a **Project** are given the status of **Gate 1 Existing Agreements** or **Gate 2 Existing Agreements** as appropriate and amended by a **Gate 1 ATV** or a **Gate 2 Modification Offer** to reflect this.

- 18.12.2. Until given the status of **Gate 1 Existing Agreements** or **Gate 2 Existing Agreements** and, as appropriate, the **Gate 1 ATV** is entered into or **Gate 2 Modification Offer** is accepted the **Existing Agreements** for a **Project** will continue in accordance with their terms provided that any obligations on **The Company** to progress the **Construction Works** (including seeking **Consents**) in any **Existing Agreements** for (and in respect of) a **Project** given the status of **Gate 1 Existing Agreements** are deemed to have been waived by the **User** with effect from, as appropriate, the **Gate 1 Notification** or notification by **The Company** to the **User** under Paragraphs 18.7 or 18.10.2.

- 18.12.3. Once the **Gate 1 ATV** is entered into:

- 18.12.3.1. there will be no longer be any liability for payment of a **Cancellation Charge** or **Final Sums** under that **Existing Agreement** for that **Project**; and

- 18.12.3.2. any obligation to provide security under that **Existing Agreement** for that **Project** will cease,

and as a consequence **The Company** shall as soon as reasonably practicable after and in any event within 6 weeks of the **Gate 1 ATV** being entered into, release and return any security arrangement held by **The Company** in respect of the same.

## 18.13. Gate 1 ATV

- 18.13.1. Where an **EA Request** was not submitted by a **User** within the **EA Request Window** or it was not **Effective**, a **Gate 1 ATV** for the **Existing Agreements** for that **Project** shall be issued by **The Company** as soon as reasonably practicable after the closure of the **EA Request Window** and in any event prior to the end of the **EA Gated Design Process**.

- 18.13.2. Where a **Gate 1 Notification** has been provided by a **User**, a **Gate 1 ATV** for the **Existing Agreements** for that **Project** shall be issued by **The Company** as soon as reasonably practicable after receipt of the **Gate 1 Notification** and in any event prior to the end of the **EA Gated Design Process**.
- 18.13.3. Where an **EA Request** was submitted by a **User** in respect of the **Existing Agreements** for a **Project** but the **Gate 2 Criteria** has not been met, a **Gate 1 ATV** for the **Existing Agreements** for that **Project** shall be issued by **The Company** as soon as reasonably practicable and in any event prior to the end of the **EA Gated Design Process**.
- 18.13.4. Where **The Company** is considering **Reservation** in respect of the **Existing Agreements** for a **Project**, **The Company** will advise the **User** as soon as reasonably practicable and in any event prior to the start of the **EA Gated Design Process** of this and that as a consequence the **Gate 1 ATV** may be provided later in the **EA Gated Design Process**, given the design process involved to confirm the **Reservation**. If the **User** is not interested in **Reservation** being considered it can advise **The Company** accordingly at this point otherwise the **Gate 1 ATV** will be progressed on the basis of **Reservation**. **Reservation** will only be provided for in a **Gate 1 ATV** where the **User** has been notified that **The Company** is considering **Reservation** and the **User** has confirmed it is interested in **Reservation**.
- 18.13.5. A **Gate 1 ATV** shall amend the **Existing Agreements** for a **Project** as required to align with the form and content of a **CMP434 Gate 1 Agreement** under the **Gated Application and Offer Process** being to (as appropriate) amongst other things:
- 18.13.5.1. include the **Gate 1 Conditional Clause**, the effect of which is to make all the rights and obligations under the **Existing Agreements** conditional until a **Gate 2 Offer** is accepted.
  - 18.13.5.2. delete the content of all Appendices in the **Existing Agreements** other than to include a new or (where it already exists) a replacement Appendix in the **Construction Agreement** containing the **User Data/Developer Data**, and the indicative or **Reserved** connection date and location.
  - 18.13.5.3. the connection location and date provided for in the **Existing Agreements** for a **Project** will remain as they currently are in the **Existing Agreements** but are now only provided (unless **Reservation** is applied) on an indicative basis and the connection date and location will only be confirmed (with all the other details) in any subsequent **Gate 2 Offer** following a **Gate 2 Application** under a **Gated Application Window and Offer Run**.
  - 18.13.5.4. where **Reservation** is included, whilst the rights and obligations remain conditional, the connection date and connection location

of, as appropriate, the **Connection Site** or **Transmission Interface Site** or site of Connection may be provided and identified in the **Gate 1 ATV** and any **Gate 2 Offer** will be made on the basis of these subject to a **Gate 2 Offer** being accepted by the **Applicant** in the timescales specified in the **Gate 1 ATV**.

- 18.13.5.5. the particular approach for **Existing Agreements** for a **Project** with owner/operators of **Distribution Systems** where triggered by **Embedded Power Stations** is addressed at Paragraph 18.16 below.
- 18.13.5.6. in the case of **Existing Agreements** for a **Project** where the **User's Works** are staged or the **Existing Agreements** provide for more than one technology type in the **User's Works**, and the **EA Request** is not submitted in respect of all of these and/or not all stages or technology types meet the **Gate 2 Criteria** the **Existing Agreements** for a **Project** will be adapted to reflect and achieve the intent of the **Gate 1 Conditional Clause** by reference to those stages/technology types that do not meet the **Gate 2 Criteria** and to provide the equivalent of a **Gate 2 Agreement** for those that do.
- 18.13.5.7. introduction of **Original Red Line Boundary Reduction Clause**.
- 18.13.6. The **Variations Clause** in the **Existing Agreements** requires **The Company** and the **User** to effect any amendment required to the **Existing Agreements** by the **Authority** as a result of a change in the **CUSC**. The changes proposed in the **Gate 1 ATV** are to implement the changes to **Existing Agreements** as a consequence of and to align with the implementation of **CMP435**.
- 18.13.7. The **Gate 1 ATV** should be signed and returned to **The Company** within the period as notified by **The Company** being not less than 4 weeks from issue or such later period as may be agreed between **The Company** and the **User** and if not signed and returned in this time period **The Company** will as provided for in the **Variations Clause** (and having first engaged with the **User**) sign on the **User's** behalf.
- 18.13.8. **Existing Agreements** given the status of **Gate 1 Existing Agreements** do not have to provide a **Letter of Authority** or **Letter of Acknowledgement**.
- 18.14. **Gate 2 Modification Offer**
  - 18.14.1. Where the **Existing Agreements for a Project** have been given the status of **Gate 2 Existing Agreements**, a **Gate 2 Modification Offer** shall be provided by **The Company** in respect of the **Existing Agreements** for a **Project** within the timescales specified for this in the **EA Timetable**.
  - 18.14.2. A **Gate 2 Modification Offer** shall amend the **Existing Agreements** for a **Project** as required to align with the form and content of a **CMP434 Gate 2**

**Agreement** under the **Gated Application and Offer Process** being to amongst other things:

- 18.14.2.1. provide for any changes to the **Existing Agreements** for a **Project** to reflect **Advancement** (including and notwithstanding **CUSC** Section 16 which does not provide for **User Progression Milestone** dates to be brought forward, any changes to advance the **User Progression Milestone** dates to reflect the **Advancement**);
- 18.14.2.2. update Appendix Q (Queue Management Process - User Progression Milestones) to reflect the change in approach to the calculation of the **User Progression Milestone** date for M1 and add a new Appendix for User Data/Developer Data or update (if it exists) to include the **Installed Capacity** data;
- 18.14.2.3. provide for any changes to the **Existing Agreements** for a **Project** including **Connection Site** or Site of Connection, **Construction Programme** and **Construction Works** and changes as a consequence of this to reflect the outcome of the **EA Gated Design Process**.
- 18.14.3. A **Gate 2 Modification Offer** shall remain open for acceptance in accordance with **CUSC** Paragraph 6.9.
- 18.14.4. If a **Gate 2 Modification Offer** is not accepted by a **User** **The Company** will notify the **User** that the status given to the **Existing Agreements** for that **Project** has been changed to **Gate 1 Existing Agreements** and that a **Gate 1 ATV** will be issued by **The Company** to the **User** as soon as reasonably practicable and the provisions of Paragraph 18.13 above will apply.
- 18.15. Any dispute between **The Company** and the **User** as to whether the **EA Request** is **Effective** and/or the **Gate 2 Criteria** has been met shall be treated as an **Other Dispute** in accordance with **CUSC** Section 7.
- 18.16. **Additional clarity on approach on Existing Agreements for a Project which has been triggered by Embedded Power Stations**
  - 18.16.1. This section is intended to clarify the position on what is to happen with the **Existing Agreements** for a **Project** with the owner/operator of a **Distribution System** which are triggered by **Embedded Power Stations** and the **Existing Agreements** for a **Project** with the **Embedded Power Stations**:
    - 18.16.1.1. for **Relevant Embedded Power Stations** (where there is no **BEGA**) the **Existing Agreements** for a **Project** are only with the owner/operator of the **Distribution System** and the **Existing**

**Agreements** can provide for one or more **Relevant Embedded Power Stations**;

- 18.16.1.2. for **Embedded Power Stations** (where there is a **BEGA** or **BELLA**) there are two sets of **Existing Agreements** for a **Project**, one set with the owner/operator of the **Distribution System** and one set with the owner/operator of the **Embedded Power Station** so the effect of this **Gated Process for Projects with Existing Agreements** on both sets of **Existing Agreements** has to be determined.

The effect on the **Existing Agreements for a Project** in the circumstances where: a **Gate 1 Notification** is submitted within the **EA Request Window** by a **Large Embedded Power Station**, an **EA Request** is not submitted within the **EA Request Window**, the **EA Request** is not **Effective** or the **Gate 2 Criteria** is not met (and in the case where the **Existing Agreements** provide for more than one **Embedded Power Station**) is not the same for all the **Embedded Power Stations**.

18.16.2. As a consequence in the circumstances referred to in Paragraph 18.16.1:

- 18.16.2.1. in the case of **Existing Agreements** for a **Project** of the type at Paragraph 18.16.1.1 and save for **Existing Agreements** as provided for in Paragraph 18.16.2.3, the **Existing Agreements** for that **Project** will be treated, as agreed between **The Company** and the **User** as having either been terminated by the **User** or changed to be the equivalent of a **Gate 1 Agreement**. The termination or change to being the equivalent of a **Gate 1 Agreement** will be effective on, as appropriate, the day after (a) the closure of the **EA Request Window** or (b) notification that the **Gate 2 Criteria** has not been met under Paragraph 18.10.2. Such termination of or change in the **Existing Agreements** will not trigger payment of a **Cancellation Charge** in accordance with **CUSC** Section 15;
- 18.16.2.2. in the case of **Existing Agreements** for a **Project** of the type at Paragraph 18.16.1.2 but where the **Relevant Embedded Power Station** has a **BEGA**, the **BEGA** will also be treated, as agreed between **The Company** and the **User**, as having either been terminated by the **User** or changed to be the equivalent of a **Gate 1 Agreement** in the same circumstances and on the same basis as at Paragraph 18.16.2.1 above;
- 18.16.2.3. in the case of **Existing Agreements** for a **Project** of the type at Paragraph 18.16.1.1 where the **Existing Agreements** for a **Project** provide for more than one **Relevant Embedded Power Station** and/or **Embedded Large Power Station** but not all meet the **Gate 2 Criteria**, the **Existing Agreements** for a **Project** will be amended as required through the **Gate 2 Modification Offer** so as to remove any reference to any

**Relevant Embedded Power Station** and/or **Embedded Large Power Station** for which an **EA Request** has not been made, an **EA Request** is not **Effective** or which do not meet the **Gate 2 Criteria**. Such amendment will not trigger payment of a **Cancellation Charge** in accordance with **CUSC** Section 15;

- 18.16.2.4. in the case of **Existing Agreements** for a **Project** of the type at Paragraph 18.16.1.2 (where the **BEGA** is with a **Large Embedded Power Station**) (a) the **BEGA** or **BELLA** will be offered a **Gate 1 ATV** and (b) the **Existing Agreements** with the owner/operator of the **Distribution System** will be treated, as agreed between **The Company** and the **User**, as having either been terminated by the **User** or changed to be the equivalent of a **Gate 1 Agreement** in the same circumstances and on the same basis as at Paragraph 18.16.2.1.
- 18.16.3. In the case of **Existing Agreements** for a **Project** of the type at Paragraph 18.16.1.2 in order to receive a **Gate 2 Modification Offer** and be given the status of **Gate 2 Existing Agreements**:
  - 18.16.3.1. where the **BEGA** is with a **Relevant Embedded Power Station**, both the **User** with the **BEGA** and the owner/operator of the **Distribution System** will be offered and must accept the respective **Gate 2 Modification Offer**. Unless both **Gate 2 Modification Offers** are accepted, Paragraph 18.16.2.1 and 18.16.2 will apply;
  - 18.16.3.2. where the **BEGA** is with a **Large Embedded Power Station** or there is a **BELLA**, (a) an **EA Request** must be made by both the party with the **BEGA** or **BELLA** and the owner/operator of the **Distribution System** (b) both these **EA Requests** must be **Effective** and the **Project** must meet the **Gate 2 Criteria** and (c) both the **User** with the **BEGA** or **BELLA** and the owner/operator of the **Distribution System** must accept the respective **Gate 2 Modification Offer**. Unless both **Gate 2 Modification Offers** are accepted, Paragraph 18.16.2.4 will apply.
- 18.16.4. A **Large Embedded Power Station** with a **BEGA** or **BELLA** should notify the owner/of the **Distribution System** as soon as reasonably practicable of its intention to make an **EA Request** and whether it is seeking **Advancement**.

END OF SECTION 18

## Schedule 1

| Account Name                                | Trade Register Number | Account Registered Address                                                                         | Category of use                                      | CUSC Accession date |
|---------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------|---------------------|
| 24 POWER LTD                                | 12598609              | Victoria Court, 91 Huddersfield Road, Holmfirth , United Kingdom, HD9 3JA                          | Directly Connected Power Station                     | 17/05/2022          |
| 3R ENERGY SOLUTIONS LIMITED                 | SC354680              | 19 BUCCLEUCH STREET, LANARK , UNITED KINGDOM, TD9 0HL                                              | Dormant CUSC Party; Embedded Power Station           | 13/05/2015          |
| 548 UK INVESTMENT HOLDINGS LIMITED          | 14400118              | 50 Broadway, London , United Kingdom, SW1H 0RG                                                     | Directly Connected Power Station                     | 05/05/2023          |
| A'CHRUACH WIND FARM LIMITED                 | 06572505              | CONNECT HOUSE, LONDON , UNITED KINGDOM, SW19 7JY                                                   | Directly Connected Power Station                     | 30/09/2014          |
| Aarhus Energy A/S                           | 44422778              | Søren Frichs Vej 38K, st. tv., Åbyhøj, Åbyhøj, Denmark, 8230                                       | Interconnector User                                  | 09/05/2024          |
| ABBEY PROPERTIES CAMBRIDGESHIRE LIMITED     | 03138929              | Nene Lodge,Funthams Lane, Whittlesey, Peterborough, Cambridgeshire, United Kingdom, PE7 2PB        | Directly Connected Power Station                     | 05/12/2022          |
| ABBOTSHAUGH ENERGY STORAGE LIMITED          | 13587232              | Unit 25.7 Coda Studios189 Munster Road, London , United Kingdom, SW6 6AW                           | Directly Connected Power Station                     | 23/03/2022          |
| ABEI ENERGY LIMITED                         | 11974488              | Orgin Workspace,Berkeley Square, Bristol , United Kingdom, BS8 1HP                                 | Directly Connected Power Station                     | 01/04/2025          |
| ABERARDER WIND FARM LLP                     | OC398487              | No.1 Forbury Place, 43 Forbury Road,, Reading , United Kingdom, RG1 3JH                            | Directly Connected Power Station                     | 15/05/2015          |
| ABERDEEN OFFSHORE WIND FARM LIMITED         | SC278869              | 4 Jackson's Entry,Holyrood Road, Edinburgh , United Kingdom, EH8 8PJ                               | Directly Connected Power Station                     | 04/02/2016          |
| ABEREDW ENERGY PARK LIMITED                 | 12904601              | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , UNITED KINGDOM, CF10 1DY                                    | Embedded Power Station                               | 03/06/2021          |
| ABERGELLI POWER LIMITED                     | 08190497              | DRAX POWER STATION, SELBY , United Kingdom, YO8 8PH                                                | Directly Connected Power Station                     | 21/09/2017          |
| ABERTHAW ENERGY LIMITED                     | 13334556              | THE ESTATES OFFICE, NEWPORT , United Kingdom, NP20 4PG                                             | Directly Connected Power Station                     | 03/12/2021          |
| Aberthaw Green Limited                      | 12725483              | 17th Floor Hylo,103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                             | Directly Connected Power Station                     | 27/06/2024          |
| ACDC INFRASTRUCTURE LIMITED                 | 13672389              | 1 Bartholomew Lane, London , United Kingdom, EC2N 2AX                                              | Non-Embedded Customer Site                           | 17/11/2022          |
| ACHLACHAN WIND FARM LLP                     | OC393612              | 1st Floor Midland House, 77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL  | Embedded Exemptable Large Power Station              | 18/12/2017          |
| ACKRON WIND FARM LTD                        | SC474066              | 1ST FLOOR,1 WEST REGENT STREET, GLASGOW , United Kingdom, G2 1RW                                   | Embedded Power Station                               | 29/04/2021          |
| ADELA ENERGY LTD                            | 11621670              | Strelley HallMain StreetStrelley, Nottingham, Nottinghamshire, United Kingdom, NG8 6PE             | Virtual Lead Party                                   | 01/09/2020          |
| ADV 004 LIMITED                             | 12317010              | 70 Jermyn Street, London , United Kingdom, SW1Y 6NY                                                | Embedded Power Station                               | 15/05/2023          |
| ADVANCED ELECTRICITY NETWORKS LIMITED       | 14657793              | Nexus Park Avenue East,Skyline 120, Braintree, Essex, United Kingdom, CM77 7AL                     | Independent Distribution N/W Operator                | 13/03/2024          |
| Advance Grid Solutions Limited              | SC744757              | 4 Linnet Way,Strathclyde Business Park, Bellshill , United Kingdom, ML4 3RA                        | Directly Connected Power Station                     | 20/02/2024          |
| A Energi Vannkraft AS                       | NO882973972           | Kjøita 18, Kristiansand , Norway, 4630                                                             | Interconnector User                                  | 17/04/2025          |
| AEUK BATTERY PROJECT III LTD                | 14431299              | Origin Workspace,40 Berkeley Square, Bristol , United Kingdom, BS8 1HP                             | Directly Connected Power Station                     | 20/02/2025          |
| AEUK BATTERY PROJECT II LTD                 | 14421795              | Origin Workspace,40 Berkeley Square, Bristol , United Kingdom, BS8 1HP                             | Directly Connected Power Station                     | 03/01/2025          |
| AEUK WIND PROJECT II LTD                    | 14990905              | Origin Workspace,40 Berkeley Square, Bristol , United Kingdom, BS8 1HP                             | Directly Connected Power Station                     | 20/12/2024          |
| AFTON WIND FARM LIMITED                     | 10332231              | 60 MILTON GATE CHISWELL STREET, LONDON , United Kingdom, EC1Y 4AG                                  | Directly Connected Power Station                     | 07/06/2017          |
| AGILE ENERGY RECOVERY (INVERURIE) LIMITED   | SC487774              | 1 Marischal Square, Broad Street, Aberdeen , United Kingdom, AB10 1BL                              | Embedded Power Station                               | 31/03/2021          |
| Agratas Limited                             | 15069959              | 18 Grosvenor Place, London , United Kingdom, SW1X 7HS                                              | Non-Embedded Customer Site                           | 19/10/2023          |
| AGR RENEWABLES LIMITED                      | 07647332              | 4th Floor Burlington Building,19 Heddon Street, London , United Kingdom, W1B 4BG                   | Directly Connected Power Station                     | 26/10/2023          |
| AGR SOLAR 2 LIMITED                         | 12294992              | WHITE HART HOUSE HIGH STREET, OXTED , United Kingdom, RH8 0DT                                      | Directly Connected Power Station                     | 06/01/2021          |
| AGR SOLAR 3 LIMITED                         | 12295197              | WHITE HART HOUSE HIGH STREET, OXTED , United Kingdom, RH8 0DT                                      | Directly Connected Power Station                     | 06/01/2021          |
| AGR SOLAR 4 LIMITED                         | 12295056              | WHITE HART HOUSE HIGH STREET, OXTED , United Kingdom, RH8 0DT                                      | Directly Connected Power Station                     | 06/01/2021          |
| AIK2A SUSTAINABLE ENERGY LTD                | SC488512              | 13 Queen's Road, Aberdeen , United Kingdom, AB15 4YL                                               | Directly Connected Power Station                     | 20/08/2019          |
| AIKENGALL COMMUNITY WIND COMPANY LIMITED    | SC313596              | CALEDONIAN EXCHANGE, EDINBURGH , United Kingdom, EH3 8HE                                           | Embedded Exemptable Large Power Station              | 30/11/2007          |
| AIKENGALL II COMMUNITY WIND COMPANY LIMITED | SC457920              | CALEDONIAN EXCHANGE, Edinburgh , United Kingdom, EH3 8HE                                           | Directly Connected Power Station                     | 20/08/2019          |
| AIRIES WINDFARM LIMITED                     | SC407954              | 13 QUEEN'S ROAD, ABERDEEN , United Kingdom, AB15 4YL                                               | Directly Connected Power Station                     | 06/08/2014          |
| Akku Tealing Limited                        | SC758389              | Bowling Green Road, Cupar , United Kingdom, KY15 4HD                                               | Directly Connected Power Station                     | 03/06/2024          |
| AL BOUM PHOTO LTD                           | 13057703              | 88 GRAYS INN ROAD, LONDON , United Kingdom, WC1X 8AA                                               | Directly Connected Power Station                     | 19/01/2022          |
| ALBUSIA LTD                                 | 15594668              | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                          | Directly Connected Power Station                     | 23/07/2024          |
| ALCEMI STORAGE DEVELOPMENTS 1 LIMITED       | 12376951              | FIRST FLOOR WINSTON HOUSE, LONDON , United Kingdom, N3 1DH                                         | Directly Connected Power Station                     | 23/05/2022          |
| Alcemi Storage Developments 23 Ltd          | 14615636              | First Floor, Winston House, 349 Regents Park Road,, London , United Kingdom, N3 1DH                | Directly Connected Power Station                     | 23/01/2024          |
| ALCEMI STORAGE DEVELOPMENTS 2 LIMITED       | 12376960              | FIRST FLOOR WINSTON HOUSE, LONDON , United Kingdom, N3 1DH                                         | Directly Connected Power Station                     | 11/08/2022          |
| ALCEMI STORAGE DEVELOPMENTS 3 LIMITED       | 12376962              | FIRST FLOOR WINSTON HOUSE, LONDON , United Kingdom, N3 1DH                                         | Directly Connected Power Station                     | 19/04/2021          |
| ALCEMI STORAGE DEVELOPMENTS 4 LIMITED       | 12376965              | FIRST FLOOR WINSTON HOUSE, LONDON , United Kingdom, N3 1DH                                         | Directly Connected Power Station                     | 15/03/2021          |
| ALCEMI STORAGE DEVELOPMENTS 5 LIMITED       | 12376959              | FIRST FLOOR WINSTON HOUSE, LONDON , United Kingdom, N3 1DH                                         | Directly Connected Power Station                     | 08/09/2021          |
| ALCEMI STORAGE DEVELOPMENTS 6 LIMITED       | 13848257              | First Floor, Winston House,349 Regents Park Road, London , United Kingdom, N3 1DH                  | Directly Connected Power Station                     | 17/06/2022          |
| ALCEMI STORAGE DEVELOPMENTS 8 LTD           | 13848254              | First Floor, Winston House,349 Regents Park Road, London , United Kingdom, N3 1DH                  | Directly Connected Power Station                     | 18/07/2023          |
| ALLIANDER N.V.                              | 34108286              | UTRECHTSEWEG 68, ARNHEM , Netherlands, 6812 AH                                                     | Interconnector User                                  | 13/03/2008          |
| ALLT AN TUIR RENEWABLE ENERGY PARK LIMITED  | SC705418              | c/o Womble Bond Dickinson (UK) Llp,2 Semple Street, Edinburgh , United Kingdom, EH3 8BL            | Embedded Power Station                               | 08/06/2022          |
| Alpha Energy ApS                            | 42985449              | Hermodsvej 5B, Aabyhoj , Denmark, 8230                                                             | Interconnector User                                  | 22/08/2022          |
| ALPHATARAXIA EUROPIUM B.V.                  | 72270853              | JOOP GEESINKWEG 701, AMSTERDAM-DUIVENDRECHT , Netherlands, 1114 AB                                 | Interconnector User                                  | 03/06/2021          |
| ALPIQ SUISSE SA                             | CH550-0076169-3       | CHEMIN DE MORNEX 10, LAUSANNE , Switzerland, 1003                                                  | Interconnector User                                  | 14/07/2006          |
| Alverdiscott 10 Renewables Ltd              | 14605063              | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                   | Directly Connected Power Station                     | 30/11/2023          |
| AMAZON DATA SERVICES UK LIMITED             | 09959151              | 1 PRINCIPAL PLACE, LONDON , UNITED KINGDOM, EC2A 2FA                                               | Non-Embedded Customer Site                           | 31/07/2019          |
| Amersham 10 Renewables Limited              | 15122671              | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                  | Directly Connected Power Station                     | 22/11/2023          |
| AMINTH ENERGY LTD                           | 11049753              | Amp Technology Centre Advanced Manufacturing Park, Brunel Way, Rotherham , United Kingdom, S60 5WG | Interconnector Owner                                 | 20/11/2018          |
| Ancleggan Limited                           | 12951231              | Biddlesgate Farm, Cranborne, Wimborne, Dorset, United Kingdom, BH21 5RS                            | Embedded Power Station                               | 25/09/2023          |
| ANDERSHAW WIND POWER LIMITED                | 07886325              | 5th Floor,20 Fenchurch Street, London , United Kingdom, EC3M 3BY                                   | Embedded Power Station                               | 16/10/2013          |
| ANESCO LIMITED                              | 07443091              | The Green Easter Park Benyon Road, Reading, Bershire, UK, RG7 2PQ                                  | Directly Connected Power Station                     | 07/03/2022          |
| ANGLO AMERICAN WOODSMITH LIMITED            | 07251600              | 17 CHARTERHOUSE STREET, LONDON , United Kingdom, EC1N 6RA                                          | Non-Embedded Customer Site                           | 17/09/2021          |
| ANGLO ENERGY STORAGE LTD                    | 13237697              | Unit 4,Shielling Court, Corby , United Kingdom, NN18 9QD                                           | Directly Connected Power Station                     | 22/12/2022          |
| AN SUIDHE WIND FARM LIMITED                 | 05469552              | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                      | Directly Connected Power Station                     | 29/07/2005          |
| Apatura Battery Ltd                         | 13884355              | 3rd Floor 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                            | Directly Connected Power Station                     | 03/07/2023          |
| Appin Wind Farm Limited                     | 12672772              | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                      | Directly Connected Power Station                     | 12/02/2024          |
| APPLEFORD 2 RENEWABLES LTD                  | 14915058              | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                  | Directly Connected Power Station                     | 31/08/2023          |
| Appleford 7 Renewables Limited              | 01491437              | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                   | Directly Connected Power Station                     | 31/08/2023          |
| AQUIND LIMITED                              | 06681477              | 5 STRATFORD PLACE, LONDON , United Kingdom, W1C 1AX                                                | Interconnector Owner                                 | 01/06/2016          |
| ARBROATH LIMITED                            | 12142520              | C/O Gresham House Asset Management Limited5 New Street Square, London , EC4A 3TW                   | Embedded Power Station                               | 30/07/2020          |
| ARDAGH GLASS LIMITED                        | 00567801              | Headlands Lane, Knottingley, West Yorkshire, United Kingdom, WF11 0HP                              | Non-Embedded Customer Site                           | 05/12/2024          |
| Ardonald Renewables Limited                 | 15511410              | Willowpit Lane, Hilton, Derby, United Kingdom, DE65 5FN                                            | Directly Connected Power Station                     | 27/06/2024          |
| ARENKO CLEANTECH LIMITED                    | 08831289              | Harmsworth House13-15 Bouverie Street, London, Greater London, United Kingdom, EC4Y 8DP            | Directly Connected Power Station; Dormant CUSC Party | 13/02/2020          |
| ARISE AB                                    | 556274-6726           | P.O. BOX: 808, HALMSTAD , Sweden, 301 18                                                           | Directly Connected Power Station                     | 20/04/2022          |
| Arise Renewable Energy UK Limited           | 13569939              | 78 York Street, London , United Kingdom, W1H 1DP                                                   | Directly Connected Power Station                     | 24/05/2023          |
| ARJO WIGGINS FINE PAPERS LIMITED            | 00961440              | 2ND FLOOR 110 CANNON STREET, LONDON , United Kingdom, EC4N 6EU                                     | Embedded Power Station                               | 02/03/2005          |
| Arkaig Hydrogen Plant Limited               | SC759981              | 39 George Street, Edinburgh , United Kingdom, EH2 2HN                                              | Non-Embedded Customer Site                           | 20/12/2023          |
| ARK ESTATES 1 LIMITED                       | 12104497              | Spring Park, Westwells Road, Corsham, Wiltshire, United Kingdom, SN13 9GB                          | Non-Embedded Customer Site                           | 16/04/2021          |
| ARK ESTATES 2 LIMITED                       | 12113969              | SPRING PARK,WESTWELLS ROAD, CORSHAM , United Kingdom, SN13 9GB                                     | Directly Connected Power Station                     | 03/09/2019          |
| ARK ESTATES 3 LIMITED                       | 12777470              | SPRING PARK,WESTWELLS ROAD, CORSHAM , United Kingdom, SN13 9GB                                     | Non-Embedded Customer Site                           | 12/05/2021          |



|                                                   |                    |                                                                                                                        |                                                             |            |
|---------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------|
| ARLINGTON (GROUP SERVICES) LIMITED                | 11545785           | 4 Kingdom Street, London , United Kingdom, W2 6BD                                                                      | Directly Connected Power Station                            | 22/05/2023 |
| ARLINGTON ENERGY (DEVELOPMENT) LIMITED            | 11867454           | 70 Jermyn Street, London , United Kingdom, SW1Y 6NY                                                                    | Directly Connected Power Station                            | 25/04/2023 |
| ARL 009 LIMITED                                   | 11113979           | 4TH FLOOR ABBEY HOUSE,BOOTH STREET, MANCHESTER , United Kingdom, M2 4AB                                                | Embedded Power Station                                      | 29/11/2019 |
| ARM Cedar Limited                                 | 15507927           | 338 Euston Road, London , United Kingdom, NW1 3BG                                                                      | Directly Connected Power Station                            | 24/12/2024 |
| Aros Commodities A/S                              | 43398288           | Skt. Clemens Torv 11, 1. sal. Arhaus C., Arhaus , Denmark, DK8000                                                      | Interconnector User                                         | 25/03/2024 |
| Arosource ApS                                     | 44372487           | Hack Kampmanns Plads 3, st. th, Aarhus C., Aarhus, Aarhus, Denmark, 8000                                               | Interconnector User                                         | 16/05/2024 |
| Arran View Storage Limited                        | 12479235           | Manor Court Yard,Stretton on the Fosse, Radstock , United Kingdom, BA3 4QF                                             | Embedded Exemptable Large Power Station                     | 26/10/2023 |
| ARRESGILL ENERGY LIMITED                          | SC734816           | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                                | Directly Connected Power Station                            | 08/02/2023 |
| Arresgill Energy Storage 1 Limited                | SC760928           | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                                | Directly Connected Power Station                            | 09/11/2023 |
| ARTFIELD FOREST WIND FARM LTD                     | 11756439           | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                           | Embedded Exemptable Large Power Station                     | 15/10/2019 |
| ARVEN OFFSHORE WIND FARM LIMITED                  | 14406699           | Shepherd And Wedderburn LlpOctagon Point5 Cheapside, London , United Kingdom, EC2V 6AA                                 | Directly Connected Power Station                            | 25/10/2023 |
| ARVEN SOUTH LIMITED                               | 14306369           | c/o Shepherd And Wedderburn Llp,Octagon Point,5 Cheapside, London , United Kingdom, EC2V 6AA                           | Directly Connected Power Station                            | 29/07/2024 |
| ASHGREEN ENERGY FARM LIMITED                      | 10487668           | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                            | 31/01/2020 |
| ASSEL VALLEY WIND ENERGY LIMITED                  | SC464714           | Beauly House,Dochfour Business Centre, Dochgarroch, Inverness , United Kingdom, IV3 8GY                                | Directly Connected Power Station                            | 01/07/2015 |
| ASTWOOD GREEN ENERGY LTD                          | 14496383           | The Goods Shed, Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                                 | Directly Connected Power Station                            | 30/01/2023 |
| ATLANTIC SUPERCONNECTION LLP                      | OC371296           | Purnells, Suite 4 Portfolio House,3 Princes Street, Dorchester, Dorset, United Kingdom, DT1 1TP                        | Interconnector Owner                                        | 29/03/2019 |
| Atlas Energy Designated Activity Company          | 754439             | 32 Molesworth Street, Dublin, Dublin, Ireland, D02 Y512                                                                | Interconnector User                                         | 10/12/2024 |
| Auchnasavil Battery Storage Ltd                   | SC712813           | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                   | Directly Connected Power Station                            | 07/09/2022 |
| AUCHROBERT WIND ENERGY LIMITED                    | SC478613           | Beauly House,Dochfour Business Centre, Dochgarroch, Inverness , United Kingdom, IV3 8GY                                | Directly Connected Power Station                            | 13/07/2016 |
| Aukera Energy Limited                             | 13732955           | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                 | Directly Connected Power Station                            | 07/02/2024 |
| AURORA FLOATING OFFSHORE WIND LIMITED             | 12887867           | Chi An Lorell Sector 2,Aerohub Business Park, St. Mawgan, Newquay, United Kingdom, TR8 4RZ                             | Directly Connected Power Station                            | 27/01/2022 |
| Aurora Utilities Limited                          | 14668032           | 5th Floor, 25 Old Broad Street, London , United Kingdom, EC2N 1HN                                                      | Independent Distribution N/W Operator                       | 27/11/2024 |
| AW1 ENERGY STORAGE LIMITED                        | 12763409           | Uskmouth Power Station,West Nash Road, Nash, Newport, United Kingdom, NP18 2BZ                                         | Directly Connected Power Station                            | 22/03/2021 |
| AWEL Y MOR OFFSHORE WIND FARM LIMITED             | 12270928           | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                          | Directly Connected Power Station                            | 03/09/2020 |
| AXLE ENERGY LIMITED                               | 14633671           | 113–115 Fonthill RoadFinsbury Park, London, Greater London, United Kingdom, N4 3HH                                     | Interconnector User                                         | 23/05/2024 |
| Axpo Solutions AG                                 | CHE-105.779.348    | Lerzenstrasse 10, Dietikon , Switzerland, 8953                                                                         | Interconnector User                                         | 11/02/2015 |
| AXPO UK LIMITED                                   | 06600942           | 155 FENCHURCH STREET, LONDON , United Kingdom, EC3M 6AL                                                                | Supplier                                                    | 12/11/2013 |
| AYRE OFFSHORE WIND FARM LIMITED                   | 13847599           | Ibex House, Baker Street, Weybridge, Surrey, United Kingdom, KT13 8AH                                                  | Directly Connected Power Station                            | 20/09/2022 |
| BAGLAN GENERATING LIMITED                         | 03689741           | 10 FLEET PLACE, LONDON , United Kingdom, EC4M 7QS                                                                      | Directly Connected Power Station                            | 18/09/2001 |
| BAGLAN OPERATIONS LIMITED                         | 03882153           | 10 FLEET PLACE, LONDON , United Kingdom, EC4M 7QS                                                                      | Directly Connected Power Station                            | 18/09/2001 |
| BAILLIE WINDFARM LIMITED                          | SC256692           | c/o Eversheds LLP,3-5 Melville Street, Edinburgh , United Kingdom, EH3 7PE                                             | Embedded Power Station                                      | 26/10/2005 |
| Balance Power Ltd                                 | 09285621           | 27-28 Eastcastle Street, London , United Kingdom, W1W 8DH                                                              | Directly Connected Power Station                            | 20/03/2023 |
| Balance Power Projects Limited                    | 10564553           | 107 Mere Grange Business Park, St. Helens, Merseyside, United Kingdom, WA9 5GG                                         | Directly Connected Power Station                            | 06/11/2023 |
| Balbougie Energy Centre II Limited                | 13484500           | 141-145 Curtain Road, London , United Kingdom, EC2A 3BX                                                                | Embedded Power Station                                      | 24/11/2022 |
| BALMEANACH WIND FARM LIMITED                      | SC671620           | 1st Floor, 50 Lothian Road, Edinburgh , United Kingdom, EH3 9BY                                                        | Embedded Exemptable Large Power Station                     | 22/04/2021 |
| BALNACRAIG BATTERY STORAGE LIMITED                | SC725328           | Office 202 One Lochrin Square, 92-94 Fountainbridge, Edinburgh , United Kingdom, EH3 9QA                               | Embedded Exemptable Large Power Station                     | 04/01/2023 |
| BALWEN LIMITED                                    | 12896619           | 19TH FLOOR 22 BISHOPSGATE, LONDON , United Kingdom, EC2N 4BQ                                                           | Directly Connected Power Station                            | 15/06/2021 |
| BANC DU ENERGY PARK LIMITED                       | 12576992           | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                        | Embedded Power Station                                      | 03/09/2021 |
| Banks Renewables (Bodinglee Wind Farm) Limited    | 12857095           | Inkerman House, St. Johns Road,Meadowfield, Durham , United Kingdom, DH7 8XL                                           | Directly Connected Power Station                            | 11/07/2022 |
| Banks Renewables (Lethans East Wind Farm) Limited | 08332209           | Inkerman House,St. Johns Road,Meadowfield Industrial Estate, Durham , United Kingdom, DH7 8XL                          | Directly Connected Power Station                            | 19/04/2023 |
| BANKS RENEWABLES (LETHANS WIND FARM) LIMITED      | 08217768           | Inkerman House,St John's Road, Meadowfield, Durham , United Kingdom, DH7 8XL                                           | Directly Connected Power Station                            | 16/10/2014 |
| BANKS RENEWABLES (MILL RIG WIND FARM) LIMITED     | 08773091           | Inkerman House,St John's Road, Meadowfield, Durham , United Kingdom, DH7 8XL                                           | Dormant CUSC Party; Embedded Exemptable Large Power Station | 07/01/2020 |
| BARCLAYS BANK PLC                                 | 01026167           | 1 CHURCHILL PLACE, LONDON, LONDON, United Kingdom, E14 5HP                                                             | Interconnector User                                         |            |
| BARKING POWER LIMITED                             | 02354681           | GUILDHALL,PO BOX 270, LONDON, LONDON, United Kingdom, EC2P 2EJ                                                         | Directly Connected Power Station; Dormant CUSC Party        | 18/09/2001 |
| BARROW OFFSHORE WIND LIMITED                      | 04145993           | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                      | Directly Connected Power Station                            | 12/05/2010 |
| BASINGSTOKE EAST 2 RENEWABLES LTD                 | 14914367           | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                            | 31/08/2023 |
| Basingstoke East 7 Renewables Ltd                 | 14914353           | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                            | 31/08/2023 |
| BayWa r.e. Energy Trading GmbH                    | HRB 238502         | Katharinenstraße 6, Leipzig , Germany, 04109                                                                           | Interconnector User                                         | 31/07/2024 |
| BAYWA R.E. ENERGY TRADING UK LIMITED              | 15405596           | 22 Chancery Lane, London , United Kingdom, WC2A 1LS                                                                    | Interconnector User                                         | 31/07/2024 |
| BAYWA R.E. UK LIMITED                             | 07538870           | 22 CHANCERY LANE, LONDON, LONDON, United Kingdom, WC2A 1LS                                                             | Directly Connected Power Station                            | 29/07/2020 |
| BB2 WIND FARM LIMITED                             | 12280775           | 19TH FLOOR 22 BISHOPSGATE, LONDON , United Kingdom, EC2N 4BQ                                                           | Directly Connected Power Station                            | 25/08/2021 |
| BCM ENERGY                                        | 813273554          | BOULEVARD JULES FAVRE, LYON 06 , France, 69006                                                                         | Interconnector User                                         | 08/07/2021 |
| BD Energy A/S                                     | DK43343122         | Mejlgade 47, 2, Aarhus C, Aarhus C, Denmark, 8000                                                                      | Interconnector User                                         | 29/12/2023 |
| BEACON FEN ENERGY PARK LIMITED                    | 13347752           | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                            | 17/07/2023 |
| Beacon Solar Limited                              | 15705695           | 12 Cathedral Road, Cardiff , United Kingdom, CF11 9LJ                                                                  | Directly Connected Power Station                            | 28/03/2025 |
| BEARSDEN BESS LTD                                 | 13912752           | Overross House,Ross Park, Ross-On-Wye , United Kingdom, HR9 7US                                                        | Directly Connected Power Station                            | 03/11/2023 |
| BEATRICE OFFSHORE WINDFARM LIMITED                | SC350248           | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                            | 14/02/2011 |
| BEAUFORT WIND LIMITED                             | 04712922           | Connect House,133-137 Alexandra Road, Wimbledon, London , United Kingdom, SW19 7JY                                     | Embedded Power Station                                      | 31/03/2005 |
| BEAW FIELD SHETLAND LIMITED                       | 07551084           | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                          | Directly Connected Power Station                            | 25/06/2016 |
| BEECHGREEN ENERGYFARM LIMITED                     | 11860483           | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                            | 21/10/2019 |
| BEFERLEAH ENERGY PARK LIMITED                     | 15040447           | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                 | Directly Connected Power Station                            | 22/09/2023 |
| BEINNEUN WIND FARM LTD                            | 07661372           | 33 HOLBORN, LONDON , United Kingdom, EC1N 2HT                                                                          | Embedded Power Station                                      | 29/01/2013 |
| BEN AKETIL WIND ENERGY LIMITED                    | SC254421           | Beauly House,Dochfour Business Centre, Dochgarroch, Inverness , United Kingdom, IV3 8GY                                | Embedded Exemptable Large Power Station                     | 29/06/2005 |
| Benbrack Wind Farm Limited                        | 12971043           | c/o Cms Cameron Mckenna Nabarro Olswang Llp, Cannon Place, 78 Cannon Street, London , United Kingdom, EC4N 6AF         | Directly Connected Power Station                            | 16/02/2021 |
| BEN SCA WIND FARM LIMITED                         | SC587934           | c/o Ocean Winds UK Limited, 5th Floor, Atria 1, 144 Morrison Street, Edinburgh , United Kingdom, EH3 8EX               | Embedded Exemptable Large Power Station                     | 13/05/2020 |
| Benthead Solar Limited                            | SC708803           | c/o Locogen Limited, 4 West Silvermills Lane, Edinburgh , United Kingdom, EH3 5BD                                      | Embedded Power Station                                      | 14/06/2022 |
| BERKSWELL ENERGY PARK LIMITED                     | 14376601           | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                 | Directly Connected Power Station                            | 19/06/2023 |
| BERRY BURN WIND FARM LIMITED                      | 04511914           | 19TH FLOOR 22 BISHOPSGATE, LONDON , United Kingdom, EC2N 4BQ                                                           | Embedded Power Station                                      | 30/06/2005 |
| BERRYHILL SOLAR FARM LIMITED                      | SC677678           | Wind 2 Office, 2 Walker Street, Edinburgh , United Kingdom, EH3 7LB                                                    | Embedded Exemptable Large Power Station                     | 21/09/2022 |
| BERWICK BANK A LIMITED                            | 07294493           | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                            | 06/02/2020 |
| Berwick Bank B Limited                            | 13884182           | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                            | 29/03/2023 |
| BERWICK BANK C LIMITED                            | 07294599           | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                            | 06/07/2020 |
| BERWICK RENEWABLES TX LIMITED                     | 15508573           | Badgers Farm, Willowpit Lane,Hilton, Derby , United Kingdom, DE65 5FN                                                  | Directly Connected Power Station                            | 02/05/2024 |
| BES COMMERCIAL ELECTRICITY LTD                    | 06882734           | PARKSIDE STAND, FLEETWOOD , United Kingdom, FY7 6TX                                                                    | Supplier                                                    |            |
| BESS HOLDCO 2 LIMITED                             | 10671242           | Burdett House15-16 Buckingham Street, London , WC2N 6DU                                                                | Virtual Lead Party                                          | 11/11/2021 |
| BEXLEY GREEN ENERGY CENTRE LTD                    | 15346083           | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                  | Directly Connected Power Station                            | 03/01/2025 |
| BGI TRADING LIMITED                               | 10971802           | 245 HAMMERSMITH ROAD, LONDON , United Kingdom, W6 8PW                                                                  | Supplier                                                    | 14/01/2021 |
| BHP BILLITON MARKETING AG                         | CH-170.3.014.047-1 | JOECHLERWEG 2, BAAR, BAAR, Switzerland, 6340                                                                           | Interconnector User                                         | 28/07/2003 |
| BIG BATTERY (FLATTERTON FARM) LIMITED             | SC733684           | Third Floor, Suite 2, Ink Building, 24 Douglas Street, Glasgow , United Kingdom, G2 7NQ                                | Embedded Exemptable Large Power Station                     | 17/07/2024 |

|                                             |                    |                                                                                                                        |                                                                           |            |
|---------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|------------|
| BIG BATTERY (LETHAM FARM) LIMITED           | SC728715           | Third Floor, Suite 2, Ink Building,24, Douglas Street, Glasgow , United Kingdom, G2 7NQ                                | Embedded Power Station                                                    | 01/01/2024 |
| BIG BATTERY (SHERIFF FAULDS FARM 1) LIMITED | SC722086           | Third Floor, Suite 2, Ink Building, 24, Douglas Street, Glasgow , United Kingdom, G2 7NQ                               | Embedded Exemptable Large Power Station                                   | 15/01/2024 |
| Biggleswade 10 Renewables Limited           | 15128288           | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                                          | 22/11/2023 |
| BKW AG                                      | CH-035.3.000.316-4 | VIKTORIAPLATZ 2, BERN , Switzerland, 3000                                                                              | Interconnector User                                                       | 07/01/2004 |
| BLACKCRAIG WIND FARM (SCOTLAND) LIMITED     | SC493311           | Morton Fraser Quartermile Two, 5th Floor, 2 Lister Square, Edinburgh , United Kingdom, EH3 9GL                         | Directly Connected Power Station                                          | 29/04/2015 |
| BLACKHILLOCK FLEXPOWER LTD                  | SC698712           | 272 BATH STREET, GLASGOW , United Kingdom, G2 4JR                                                                      | Directly Connected Power Station                                          | 21/12/2021 |
| Black Knowe Energy Limited                  | SC734817           | Muirhall Farm, CarnwathAuchengray, Lanark , United Kingdom, ML11 8LL                                                   | Directly Connected Power Station                                          | 26/06/2023 |
| BLACKPARK ENERGY STORAGE LIMITED            | SC595139           | c/o Foresight Group LLP,Clarence House, 133 George Street, Edinburgh , United Kingdom, EH2 4JS                         | Directly Connected Power Station                                          | 19/04/2021 |
| BLAENCOTHI ENERGY PARK LIMITED              | 13687872           | HODGE HOUSE GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                        | Embedded Power Station                                                    | 19/10/2022 |
| BLAIRGOWRIE BESS LTD                        | 14761727           | The Factory, Whitchurch,, Ross-On-Wye, Herefordshire, United Kingdom, HR9 6D                                           | Directly Connected Power Station                                          | 29/09/2023 |
| BLARGHOUR WIND FARM LIMITED                 | 09171723           | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                      | Directly Connected Power Station                                          | 18/08/2020 |
| BLARY HILL ENERGY LIMITED                   | 09507308           | Beaufort Court, Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                   | Directly Connected Power Station                                          | 14/03/2019 |
| BLOXWICH ENERGY STORAGE LIMITED             | 10884765           | c/o Gresham House Asset Management Limited, 5 New Street Square, London , United Kingdom, EC4A 3TW                     | Embedded Power Station                                                    | 12/09/2018 |
| BLUEBELL WIND FARM LIMITED                  | 11120093           | 16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                                            | Directly Connected Power Station                                          | 15/01/2019 |
| BLUEFIELD RENEWABLE DEVELOPMENTS LIMITED    | 12642196           | 1st Floor 25 King Street, Bristol , United Kingdom, BS1 4PB                                                            | Directly Connected Power Station                                          | 16/02/2024 |
| BLUEFLOAT ENERGY UK HOLDINGS LIMITED        | 12955781           | ONE GLASS WHARF, BRISTOL , United Kingdom, BS2 0ZX                                                                     | Directly Connected Power Station                                          | 22/04/2021 |
| Blue Gem Wind Limited                       | 11116383           | Bridge Innovation Centre, Pembrokeshire Science & Technology Park, Pembroke Dock, , United Kingdom, SA72 6UN           | Directly Connected Power Station                                          | 18/03/2020 |
| BLUEGRIDPOWER LTD                           | 10512978           | Suite 1 3rd Floor,11-12, St James's Square, London , United Kingdom, SW1Y 4LB                                          | Non-Embedded Customer Site                                                | 21/08/2020 |
| BLUE PLANET SOLAR LIMITED                   | 12326987           | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                              | Directly Connected Power Station                                          | 22/10/2021 |
| Bluestone Energy Ltd                        | 11673645           | 35th Floor (Leaf B) Tower 42,25 Old Broad Street, London , United Kingdom, EC2N 1HQ                                    | Embedded Power Station                                                    | 19/04/2023 |
| BNP PARIBAS                                 | FC013447           | 10 Harewood Avenue, London , United Kingdom, NW1 6AA                                                                   | Interconnector User                                                       | 29/11/2023 |
| BNP PARIBAS DEPOSITARY SERVICES LIMITED     | 14168              | IFC 1 THE ESPLANADE, SAINT HELIER , Jersey (United Kingdom), JE1 4BP                                                   | Non-Embedded Customer Site                                                | 24/10/2023 |
| BNRG ALBION LIMITED                         | 12634537           | 3rd Floor, Norvin House, 45-55 Commercial Street, London , United Kingdom, E1 6BD                                      | Directly Connected Power Station                                          | 07/06/2023 |
| BNRG LANGMEAD LIMITED                       | 09355380           | Ham Farm;Main Road, Bosham , PO18 8EH                                                                                  | Directly Connected Power Station                                          | 24/01/2024 |
| BOAT OF GARTEN BESS LIMITED                 | 13564582           | 1st Floor Midland House, 77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                      | Embedded Exemptable Large Power Station                                   | 28/10/2021 |
| BOC LIMITED                                 | 00337663           | Forge, 43 Church Street West, Woking, Surrey, United Kingdom, GU21 6HT                                                 | Non-Embedded Customer Site                                                | 18/09/2001 |
| Bodelwyddan Solar & Energy Storage Limited  | 13307064           | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station                                          | 21/12/2021 |
| BOOM DEVELOPMENTS LTD                       | 12488646           | Unit 5e Park Farm, Chichester Road, Arundel, West Sussex, United Kingdom, BN18 0AG                                     | Embedded Power Station                                                    | 12/04/2022 |
| BOOM POWER LTD                              | 12254340           | Unit 5e Park Farm, Chichester Road, Arundel, West Sussex, United Kingdom, BN18 0AG                                     | Directly Connected Power Station                                          | 12/11/2021 |
| BORALEX LIMITED                             | 04732465           | 16 WEST BOROUGH, WIMBORNE , United Kingdom, BH21 1NG                                                                   | Directly Connected Power Station                                          | 23/03/2006 |
| BORD GAIS ENERGY LIMITED                    | 463078             | 1 WARRINGTON PLACE, DUBLIN, DUBLIN, IRELAND, 2                                                                         | Interconnector User                                                       | 31/05/2014 |
| BORELAND ENERGY LTD                         | SC743486           | Boreland, Glen Lochay, Killin, Perthshire, United Kingdom, FK21 8TT                                                    | Directly Connected Power Station                                          | 05/09/2024 |
| BOTLEY GREEN ENERGY CENTRE LTD              | 14437740           | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                  | Directly Connected Power Station                                          | 04/12/2024 |
| BOULFRUICH WIND FARM LIMITED                | SC171876           | Boulfrulich, Houstry, Dunbeath, Caithness, United Kingdom, KW6 6EN                                                     | Embedded Power Station                                                    | 23/05/2005 |
| BOWDUN OFFSHORE WIND FARM LIMITED           | 13847868           | Ibex House, Baker Street,, Weybridge, Surrey, United Kingdom, KT13 8AH                                                 | Directly Connected Power Station                                          | 16/09/2022 |
| BOYNDIE WIND ENERGY LIMITED                 | SC242760           | Beauly House, Dochfour Business Centre, Dochgarroch, Inverness, United Kingdom, IV3 8GY                                | Embedded Power Station                                                    | 01/07/2005 |
| BP ALTERNATIVE ENERGY INVESTMENTS LIMITED   | 05998019           | Chertsey Road, Sunbury On Thames, Middlesex, United Kingdom, TW16 7BP                                                  | Directly Connected Power Station                                          | 06/05/2021 |
| BP GAS MARKETING LIMITED                    | 00908982           | Chertsey Road, Sunbury On Thames, Middlesex, UK, TW16 7BP                                                              | Interconnector User; Supplier                                             | 17/04/2019 |
| BP NORTH EAST OFFSHORE WIND LIMITED         | 14789320           | Chertsey Road, Sunbury-on-Thames , United Kingdom, TW16 7BP                                                            | Embedded Power Station                                                    | 12/12/2024 |
| BPUWL 29 LIMITED                            | 14917678           | Second Floor Hanover House, 47 Corn Street, Bristol , United Kingdom, BS1 1HT                                          | Embedded Power Station                                                    | 25/09/2024 |
| BRACO ENERGY STORAGE LIMITED                | 12614452           | c/o Foresight Group Llp,The Shard, 32 London Bridge Street, London , United Kingdom, SE1 9SG                           | Embedded Power Station                                                    | 15/09/2020 |
| Braco West BESS Limited                     | 13706145           | 1st Floor Midland House, 77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                      | Embedded Exemptable Large Power Station                                   | 19/11/2021 |
| BRADWELL POWER GENERATION COMPANY LIMITED   | 09941394           | 5th Floor Rex House, 4-12 Lower Regent Street, London , United Kingdom, SW1Y 4PE                                       | Directly Connected Power Station; Dormant CUSC Party                      | 30/01/2017 |
| BRAEMORE WOOD WINDFARM LIMITED              | 04599450           | Alexander House, 1 Mandarin Road,Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Dormant CUSC Party; Embedded Exemptable Large Power Station               | 04/06/2015 |
| BRAES OF DOUNE WIND FARM (SCOTLAND) LIMITED | SC255020           | Dla Piper Scotland Llp, Collins House, Rutland Square, Edinburgh , United Kingdom, EH1 2AA                             | Embedded Power Station                                                    | 08/12/2005 |
| BRAIDFIELD BATTERY STORAGE LIMITED          | SC717244           | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                   | Directly Connected Power Station                                          | 27/03/2023 |
| Braintree 10 Renewables Limited             | 15125518           | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                                          | 22/11/2023 |
| BRAMFORD 2 GREEN ENERGY CENTRE LTD          | 14437476           | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                       | Directly Connected Power Station                                          | 09/12/2024 |
| BRAMFORD GREEN ENERGY CENTRE LTD            | 14433788           | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                  | Directly Connected Power Station                                          | 04/12/2024 |
| BRAMFORD GREEN LIMITED                      | 12516896           | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                | Directly Connected Power Station                                          | 24/07/2020 |
| BRAMLEY 2 RENEWABLES LTD                    | 14915202           | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                                          | 31/08/2023 |
| BRAMLEY 7 RENEWABLES LTD                    | 14915277           | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                       | Directly Connected Power Station                                          | 31/08/2023 |
| BRAMLEY BESS LIMITED                        | 12295046           | WHITE HART HOUSE HIGH STREET, OXTED , United Kingdom, RH8 0DT                                                          | Directly Connected Power Station                                          | 06/01/2021 |
| BRAXBESS LTD                                | 14573446           | 7 Furze Hill House, Furze Hill, Hove , United Kingdom, BN3 1PU                                                         | Directly Connected Power Station                                          | 20/01/2023 |
| BREESEA LIMITED                             | 07883217           | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                      | Directly Connected Power Station                                          | 19/06/2015 |
| BRIDGWATER GREEN LIMITED                    | 12516809           | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                | Directly Connected Power Station                                          | 24/07/2020 |
| BRITISH GAS TRADING LIMITED                 | 03078711           | Millstream,Maidenhead Road, Windsor, Berkshire, United Kingdom, SL4 5GD                                                | Supplier                                                                  | 18/09/2001 |
| BRITNED DEVELOPMENT LIMITED                 | 04251409           | 1-3 STRAND, LONDON , United Kingdom, WC2N 5EH                                                                          | Interconnector Owner                                                      | 16/02/2002 |
| BRIXTON (HEATHROW ESTATE) LIMITED           | 04523673           | 1 NEW BURLINGTON PLACE, LONDON , United Kingdom, W1S 2HR                                                               | Non-Embedded Customer Site                                                | 24/10/2022 |
| Broadclyst Energy Storage Limited           | 13307080           | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station                                          | 06/01/2022 |
| BROADHAVEN DISTRIBUTION LIMITED             | 11239800           | 27-28 EASTCASTLE STREET, LONDON , United Kingdom, W1W 8DH                                                              | Embedded Exemptable Large Power Station                                   | 14/09/2016 |
| BROCKLOCH RIG WINDFARM LIMITED              | SC149100           | c/o Harper Macleod Llp,The Cadoro, 45 Gordon Street, Glasgow , United Kingdom, G1 3PE                                  | Directly Connected Power Station                                          | 11/04/2006 |
| BROCKWELL ENERGY LIMITED                    | SC560225           | The Eagle Building-Third Floor, 19 Rose Street, Edinburgh , United Kingdom, EH2 2PR                                    | Directly Connected Power Station                                          | 01/09/2020 |
| BROCKWELL STORAGE & SOLAR LIMITED           | 09819652           | 16 Stratford Place, London , United Kingdom, W1C 1BF                                                                   | Directly Connected Power Station                                          | 14/04/2021 |
| BROKEN CROSS WIND FARM LIMITED              | SC579904           | Ground Floor West Suite Prospect House, 5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                          | Directly Connected Power Station                                          | 25/10/2018 |
| BROOK GREEN TRADING LIMITED                 | 09523064           | 80 HAMMERSMITH ROAD, LONDON , United Kingdom, W14 8UD                                                                  | Supplier                                                                  | 09/09/2016 |
| BROWNIELEYS RENEWABLES LLP                  | SO303878           | MUIRDEN FARM MUIRDEN, TURRIFF , United Kingdom, AB53 4NH                                                               | Directly Connected Power Station                                          | 04/05/2016 |
| BRUTON ONE BESS LIMITED                     | 13935958           | 31 City Business Centre,Hyde Street, Winchester, Hampshire, United Kingdom, SO23 7TA                                   | Directly Connected Power Station                                          | 24/01/2024 |
| BRYN GILWERN ENERGY PARK LIMITED            | 13052399           | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                        | Embedded Power Station                                                    | 03/06/2021 |
| Bryn Glas Energy Park Limited               | 13686094           | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                       | Embedded Power Station                                                    | 19/10/2022 |
| BRYNGWYN ENERGY PARK LIMITED                | 13688038           | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                        | Embedded Power Station                                                    | 19/10/2022 |
| BRYT ENERGY LIMITED                         | 10167351           | 1 Victoria Squarenull, Birmingham , B1 1BD                                                                             | Supplier                                                                  | 21/12/2016 |
| BSR APPLICATIONS LIMITED                    | 08264822           | 35 And 35a The Maltings, Lower Charlton Trading Estate, Shepton Mallet, Somerset, United Kingdom, BA4 5QE              | Directly Connected Power Station; Embedded Exemptable Large Power Station | 19/11/2024 |
| BUCCLEUCH ESTATES, LTD. (THE)               | SC012615           | BUCCLEUCH WEATHERHOUSE, BOWHILL, SELKIRK, UNITED KINGDOM, TD7 5ES                                                      | Directly Connected Power Station                                          | 03/06/2024 |
| BUCHAN OFFSHORE WIND LIMITED                | SC719636           | Suite 3b, 58 Waterloo Street, Glasgow , United Kingdom, G2 7DA                                                         | Directly Connected Power Station                                          | 18/09/2023 |
| BUK23 Limited                               | SC758698           | Ground Floor West Suite,Prospect House, 5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                          | Directly Connected Power Station                                          | 20/12/2023 |
| BUNTINGTON GREEN ENERGY CENTRE LTD          | 14438293           | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC27 8AF                                                       | Directly Connected Power Station                                          | 21/09/2023 |
| BURBO EXTENSION LTD                         | 07307131           | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                      | Directly Connected Power Station                                          | 10/03/2011 |
| Burwell 11 Solar Limited                    | 11884312           | 6th Floor, 33 Holborn, London, London, United Kingdom, EC1N 2HT                                                        | Directly Connected Power Station                                          | 07/11/2019 |



|                                                     |           |                                                                                                                                                         |                                                      |            |
|-----------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| Bushbury 10 Renewables Limited                      | 15125508  | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                                        | Directly Connected Power Station                     | 22/11/2023 |
| BUSINESS POWER AND GAS LIMITED                      | 09523024  | Jubilee House, East Beach, Lytham St. Annes, , United Kingdom, FY8 5FT                                                                                  | Supplier                                             | 07/04/2016 |
| Bute Hydrogen Project 1 Limited                     | 15078056  | The Broadgate Tower,Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| Bute Hydrogen Project 2 Limited                     | 15077939  | The Broadgate Tower.Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| BUTE HYDROGEN PROJECT 3 LIMITED                     | 15078022  | The Broadgate Tower,Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| BUTE HYDROGEN PROJECT 4 LIMITED                     | 15078071  | The Broadgate Tower,Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| BUTE HYDROGEN PROJECT 5 LIMITED                     | 15078097  | The Broadgate Tower,Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| Bute Hydrogen Project 6 Limited                     | 15078180  | The Broadgate Tower.Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| Bute Hydrogen Project 7 Limited                     | 15078238  | The Broadgate Tower Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                                                  | Directly Connected Power Station                     | 11/01/2024 |
| BW ESS DEVELOPMENT UK LIMITED                       | 11122632  | Office 10, Wingate Business Exchange,Wingate Square, London , United Kingdom, SW4 0AF                                                                   | Directly Connected Power Station                     | 15/02/2022 |
| C.GEN KILLINGHOLME LIMITED                          | 06422434  | 130 Shaftesbury Avenue, 2nd Floor, London , United Kingdom, W1D 5EU                                                                                     | Directly Connected Power Station                     | 30/04/2013 |
| C & S ENERGY LIMITED                                | 13272189  | 73 Maygrove Road, London , United Kingdom, NW6 2EG                                                                                                      | Directly Connected Power Station                     | 21/09/2021 |
| C A COMMODITIES A/S                                 | 41338741  | KANNIKEGADE 16 A, 02, AARHUS C , Denmark, 8000                                                                                                          | Interconnector User                                  | 22/03/2022 |
| CALDERDALE WIND FARM LTD                            | 13200694  | C/O Enshore Subsea Limited Port Of Blyth;South Harbour, Blyth , NE24 3PB                                                                                | Directly Connected Power Station                     | 17/09/2024 |
| CALDER WATER COMMUNITY WIND CO LTD                  | SC412643  | Caledonian Exchange, 19a Canning Street, Edinburgh , United Kingdom, EH3 8HE                                                                            | Embedded Exemptable Large Power Station              | 07/11/2013 |
| CALEDONIA OFFSHORE WIND FARM LIMITED                | 13844888  | Shepherd And Wedderburn Llp Octagon Point, 5 Cheapside, London , United Kingdom, EC2V 6AA                                                               | Directly Connected Power Station                     | 12/06/2023 |
| CAMBRIDGE POWER LIMITED                             | 12481022  | Salisbury House,Station Road, Cambridge , United Kingdom, CB1 2LA                                                                                       | Directly Connected Power Station                     | 05/07/2022 |
| CAM CAPITAL LIMITED                                 | 07612329  | 64 NEW CAVENDISH STREET, LONDON , United Kingdom, W1G 8TB                                                                                               | Directly Connected Power Station                     | 19/08/2020 |
| Canterbury North 10 Renewables Limited              | 15125499  | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                                        | Directly Connected Power Station                     | 22/11/2023 |
| CAPBAL LIMITED                                      | SC519076  | 29 RUTLAND SQUARE, EDINBURGH , United Kingdom, EH1 2BW                                                                                                  | Dormant CUSC Party; Embedded Power Station           | 04/12/2018 |
| CAPELLA BESS LTD                                    | 13115768  | Beaufort Court Egg Farm LaneOff Station Road, Kings Langley, Hertfordshire , WD4 8LR                                                                    | Directly Connected Power Station                     | 07/03/2025 |
| CAPTURED CARBON LIMITED                             | 497694    | 3rd Floor,1-3 The Green, Malahide, Co.Dublin, Ireland, K36 KC44                                                                                         | Interconnector User                                  | 03/08/2015 |
| CARBON FREE 2030 ENERGY LIMITED                     | 14057298  | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                                               | Directly Connected Power Station                     | 31/01/2023 |
| CAR DUIBH WIND FARM LIMITED                         | 12820057  | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                                                           | Directly Connected Power Station                     | 20/02/2025 |
| CARE POWER (BARNSELY) LIMITED                       | 10042216  | Prennau House,Copse Walk, Pontprennau, Cardiff, United Kingdom, CF23 8XH                                                                                | Embedded Power Station                               | 13/06/2022 |
| CARE POWER (BROOK FARM) LIMITED                     | 10780034  | Prennau House,Copse Walk, Pontprennau, Cardiff , CF23 8XH                                                                                               | Embedded Power Station                               | 21/11/2022 |
| CARE POWER (BURWELL 1) LIMITED                      | 11110483  | Prennau House,Copse Walk, Pontprennau, Cardiff, United Kingdom, CF23 8XH                                                                                | Embedded Power Station                               | 31/08/2021 |
| CARE POWER (NEWTONWOOD) LIMITED                     | 11257609  | Prennau House,Copse Walk, Pontprennau, Cardiff, United Kingdom, CF23 8XH                                                                                | Embedded Power Station                               | 18/12/2023 |
| CARGILL PLC                                         | 01387437  | Velocity V1, Brooklands Drive, Weybridge, Surrey, United Kingdom, KT13 0SL                                                                              | Interconnector User                                  | 06/09/2004 |
| CARLTON POWER LIMITED                               | 08833435  | 26 Ellerbeck Court, Stokesley, Middlesbrough, United Kingdom, TS9 5PT                                                                                   | Directly Connected Power Station                     | 30/10/2022 |
| CARMARTHEN BESS LIMITED                             | 15206371  | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                                                        | Directly Connected Power Station                     | 09/01/2024 |
| Carnegie (BES) Ltd                                  | 12864991  | Princes House Suite 2a38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                                                               | Directly Connected Power Station                     | 10/11/2022 |
| CARRAVINDOON LIMITED                                | 12710427  | Biddlesgate Farm, Cranborne, Wimborne, United Kingdom, BH21 5RS                                                                                         | Embedded Power Station                               | 08/07/2022 |
| CARRINGTON POWER LIMITED                            | 04706728  | 132 Manchester Road, Carrington, Manchester, United Kingdom, M31 4AY                                                                                    | Directly Connected Power Station                     | 25/04/2008 |
| Carrington Storage Limited                          | 06711448  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                                                        | Directly Connected Power Station                     | 18/05/2009 |
| Carrog Storage Facility Limited                     | 14197726  | Unit 5e,Park Farm, Chichester Road, Arundel , United Kingdom, BN18 0AG                                                                                  | Directly Connected Power Station                     | 09/08/2023 |
| CATHKIN ENERGY STORAGE LIMITED                      | 13341612  | Rooms 481 - 499, Second Floor Salisbury House,, London Wall, London, United Kingdom, EC2M 5SQ                                                           | Embedded Exemptable Large Power Station              | 05/05/2022 |
| CAUSEYMIRE WINDFARM LIMITED                         | SC149105  | 50 Lothian Road, Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                                                                   | Embedded Power Station                               | 31/03/2005 |
| CBB SPV LIMITED                                     | 15747963  | 2 Crossways Business Centre, Bicester Road Kingswood, Aylesbury, Buckinghamshire, United Kingdom,, Aylesbury, Buckinghamshire, United Kingdom, HP18 0RA | Directly Connected Power Station                     | 21/08/2024 |
| CBS ENERGY STORAGE ASSETS UK LIMITED                | 02352390  | MillstreamMaidenhead Road, Windsor, Berkshire, UK, SL4 5GD                                                                                              | Embedded Power Station                               | 18/09/2001 |
| CELSA MANUFACTURING (UK) LIMITED                    | 04577881  | Building 58, East Moors Road, Cardiff , United Kingdom, CF24 5NN                                                                                        | Non-Embedded Customer Site                           | 27/06/2003 |
| CELTIC SEA OFFSHORE WIND FARM LIMITED               | 13469943  | Shepherd And Wedderburn Llp,Octagon Point, 5 Cheapside, London , United Kingdom, EC2V 6AA                                                               | Directly Connected Power Station                     | 24/01/2022 |
| Celtic Sea Wind Electric Limited                    | 14044542  | Calcutt Court, Calcutt, Swindon , United Kingdom, SN6 6JR                                                                                               | Directly Connected Power Station                     | 20/09/2023 |
| CELTPOWER LIMITED                                   | 02656561  | 3 PRENTON WAY, PRENTON , United Kingdom, CH43 3ET                                                                                                       | Directly Connected Power Station; Dormant CUSC Party | 10/11/2003 |
| CENERGISE LIMITED                                   | 535935    | 125 BAGGOT STREET LOWER, DUBLIN , Ireland, D02 EW74                                                                                                     | Interconnector User                                  | 11/02/2014 |
| Central Bedfordshire Council                        | N/A       | Priory House, Monks Walk, Chicksands, Shefford, Bedfordshire, United Kingdom, SG17 5TQ                                                                  | Directly Connected Power Station                     | 27/10/2022 |
| CENTRICA BUSINESS SOLUTIONS UK OPTIMISATION LIMITED | 08355344  | MillstreamMaidenhead Road, Windsor, Berkshire, UK, SL4 5GD                                                                                              | Virtual Lead Party                                   | 29/07/2020 |
| CENTRICA ENERGY LIMITED                             | 02877398  | Millstream,Maidenhead Road, Windsor, Berkshire, United Kingdom, SL4 5GD                                                                                 | Interconnector User                                  | 18/09/2001 |
| CENTRICA ENERGY TRADING A/S                         | 20293195  | SKELAGERVEJ 1, AALBORG , Denmark, 9000                                                                                                                  | Interconnector User                                  | 08/09/2010 |
| CERULEA LIMITED                                     | 08584174  | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                                                       | Directly Connected Power Station                     | 19/06/2015 |
| CERULEAN WINDS LIMITED                              | 12626805  | 1 HIGH STREET, GUILDFORD , UNITED KINGDOM, GU2 4HP                                                                                                      | Directly Connected Power Station                     | 12/06/2024 |
| CESA (KIRKCALDY) LIMITED                            | 14517581  | 33 Cavendish Square, London , United Kingdom, W1G 0PW                                                                                                   | Directly Connected Power Station                     | 07/08/2023 |
| CEZ A.S.                                            | 45274649  | 2/1444, DUHOVA, PRAHA , Czech Republic, 140 53                                                                                                          | Interconnector User                                  | 15/01/2020 |
| CF Flex Power GmbH                                  | HRB174868 | Budapester St. 47, Hamburg, Hamburg, GERMANY, 20359                                                                                                     | Interconnector User                                  | 13/05/2024 |
| CFP Commodities Limited                             | 670121    | 118 Lower Baggott Street, Dublin, DUBLIN, Ireland, D02 AW89                                                                                             | Interconnector User                                  | 15/10/2024 |
| CHICKERELL SOLAR LIMITED                            | 11505358  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                                                        | Directly Connected Power Station                     | 04/04/2022 |
| CHILTERN RENEWABLES LIMITED                         | 12459542  | Unit 3 Cotswold Business Park, Millfield Lane, Caddington, Luton, Bedfordshire, United Kingdom, LU1 4AJ                                                 | Directly Connected Power Station                     | 19/10/2022 |
| Chiltern Renewables Millfield Limited               | 14475395  | Unit 3 Cotswold Business Park, Millfield Lane, Caddington, Luton, Bedfordshire, United Kingdom, LU1 4AJ                                                 | Directly Connected Power Station                     | 15/06/2023 |
| CHINT SOLAR UK MANAGEMENT LTD                       | 14721949  | 25 Farringdon Street, London , EC4A 4AB                                                                                                                 | Directly Connected Power Station                     | 17/02/2025 |
| CHIRMORIE WIND FARM LIMITED                         | 09171934  | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                                                       | Directly Connected Power Station                     | 01/03/2016 |
| CHRISTOPHER MORAN ENERGY LIMITED                    | 07395884  | CHELSEA CLOISTERS,SLOANE AVENUE, LONDON , United Kingdom, SW3 3DW                                                                                       | Directly Connected Power Station                     | 11/02/2019 |
| CHRYSAOR PETROLEUM COMPANY U.K. LIMITED             | 00792712  | 23 Lower Belgrave Street, London , United Kingdom, SW1W 0NR                                                                                             | Non-Embedded Customer Site                           | 16/09/2022 |
| Cilfynydd BESS Limited                              | 14469856  | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                                                        | Directly Connected Power Station                     | 15/06/2023 |
| CILFYNYDD GREEN ENERGY LIMITED                      | 13298796  | 3rd Floor, Norfolk House, 106 Saxon Gate West, Milton Keynes , United Kingdom, MK9 2DN                                                                  | Directly Connected Power Station                     | 18/11/2021 |
| CILFYNYDD GRID SERVICES LIMITED                     | 13396965  | 3rd Floor, 24 Savile Row, London , United Kingdom, W1S 2ES                                                                                              | Directly Connected Power Station                     | 30/03/2023 |
| CINERGY GLOBAL POWER (UK) LIMITED                   | 03504828  | c/o Pricewaterhousecoopers Llp,2 Humber Quays, Wellington Street West, Hull , United Kingdom, HU1 2BN                                                   | Directly Connected Power Station                     | 18/09/2001 |
| CITIGEN (LONDON) LIMITED                            | 02427823  | Westwood Way, Westwood Business Park, Coventry , United Kingdom, CV4 8LG                                                                                | Embedded Power Station                               | 18/09/2001 |
| CLASHINDARROCH WINDFARM EXTENSION LIMITED           | 12435260  | Chelsea Cloisters, Sloane Avenue, London , United Kingdom,, SW3 3DW                                                                                     | Directly Connected Power Station                     | 17/12/2024 |
| CLASHINDARROCH WIND FARM LIMITED                    | 05358030  | 5th Floor 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                                                                             | Embedded Power Station                               | 10/09/2014 |
| CLAVERHOUSE GENERATION LIMITED                      | SC604760  | Clyde View (Suite F3) Riverside Business Park, 22 Pottery Street, Greenock , United Kingdom, PA15 2UZ                                                   | Directly Connected Power Station                     | 21/03/2019 |
| Clayfords Energy Storage Ltd                        | SC595136  | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                                                    | Embedded Exemptable Large Power Station              | 21/04/2022 |
| CLEAN AIR RENEWABLES LIMITED                        | 13695350  | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                                               | Directly Connected Power Station                     | 08/09/2022 |
| Clean Earth Energy Limited                          | 07225190  | Unit 2a/2b Bees Park Road, Wadebridge , United Kingdom, PL27 6HB                                                                                        | Embedded Power Station                               | 22/09/2023 |
| Clean Planet Solar Farm Limited                     | 13189132  | Unit 2 Crossways, Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                                                         | Directly Connected Power Station                     | 11/04/2023 |
| CLEARSTONE SERVICES LIMITED                         | 10487840  | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                                                  | Directly Connected Power Station                     | 22/08/2018 |
| CLEVE HILL SOLAR PARK LIMITED                       | 08904850  | 3rd Floor 24 Savile Row, London, London, United Kingdom, W1S 2ES                                                                                        | Directly Connected Power Station                     | 05/11/2018 |
| Cloud Hill Windfarm Limited                         | 13180855  | 22 Chancery Lane, London , United Kingdom, WC2A 1LS                                                                                                     | Directly Connected Power Station                     | 15/06/2022 |
| CLOUDHQ DIDCOT POWER LP                             | OE023539  | 3RD FLOOR 37 ESPLANADE, SAINT HELIER , Jersey (United Kingdom, JE1 1AD                                                                                  | Non-Embedded Customer Site                           | 29/04/2020 |
| CLOUDHQ UK LIMITED                                  | 10150306  | c/o Buzzacott Llp, 130 Wood Street, London , United Kingdom, EC2V 6DL                                                                                   | Non-Embedded Customer Site                           | 18/12/2018 |

|                                         |            |                                                                                                                        |                                                      |            |
|-----------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| CLUMP FARM SOLAR LIMITED                | 12368142   | 22 CHANCERY LANE, LONDON , United Kingdom, WC2A 1LS                                                                    | Directly Connected Power Station                     | 01/12/2020 |
| CLYDE WINDFARM (SCOTLAND) LIMITED       | SC281105   | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                     | 01/08/2005 |
| CNOC BUIDHE WIND ENERGY HUB LIMITED     | 13325515   | 10 Victoria Street, Bristol , United Kingdom, BS1 6BN                                                                  | Directly Connected Power Station                     | 03/12/2021 |
| CNOOC PETROLEUM EUROPE LIMITED          | 01051137   | Prospect House,97 Oxford Road, Uxbridge , United Kingdom, UB8 1LU                                                      | Non-Embedded Customer Site                           | 31/05/2024 |
| COALBURN ENERGY LIMITED                 | 15700870   | Level 8 Lily House 13 Hanover Square, Mayfair, London , United Kingdom, W1S 1HN                                        | Directly Connected Power Station                     | 23/01/2025 |
| COBBLESTONE ENERGY DMCC                 | DMCC179669 | Unit No: 1701,SABA 1,Plot No: JLT-PH1-E3A,Jumeirah Lakes Towers, Dubai, Dubai, United Arab Emirates, JLT-PH1-E3A,      | Interconnector User                                  | 10/12/2021 |
| COBBLESTONE ENERGY LTD                  | 10468940   | Unit 28 City Business Centre, Lower Road, London , United Kingdom, SE16 2XB                                            | Interconnector User                                  | 11/12/2018 |
| COCKENZIE STORAGE B LTD                 | 15592524   | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                                              | Directly Connected Power Station                     | 20/02/2025 |
| COCKENZIE STORAGE LIMITED               | 11007306   | 5 New Street Square, London , United Kingdom, EC4A 3TW                                                                 | Directly Connected Power Station                     | 18/11/2022 |
| CODDINGTON 10 RENEWABLES LTD            | 14914945   | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                       | Directly Connected Power Station                     | 31/08/2023 |
| CODLING WIND PARK III LIMITED           | 531195     | c/o Cooney Carey Consulting Limited,The Courtyard,Carmanhall Road, Sandyford, Dublin 18, Ireland, D18 YD27             | Directly Connected Power Station                     | 22/12/2020 |
| CODLING WIND PARK LIMITED               | 358470     | c/o Cooney Carey Consulting Limited,The Courtyard,Carmanhall Road, Sandyford, Dublin 18, Ireland, D18 YD27             | Directly Connected Power Station                     | 12/12/2012 |
| COGLE MOSS RENEWABLES LLP               | SO304944   | Muirden Farm, Turriff, Aberdeenshire, United Kingdom, AB53 4NH                                                         | Embedded Power Station                               | 21/09/2020 |
| COIRE GLAS HYDRO PUMPED STORAGE LIMITED | SC561128   | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                     | 08/06/2018 |
| COIRE NA CLOICHE WINDFARM LLP           | SO304435   | 5 ATHOLL CRESCENT, EDINBURGH , United Kingdom, EH3 8EJ                                                                 | Embedded Power Station                               | 23/12/2015 |
| COLT DATA CENTRE SERVICES UK LIMITED    | 07306352   | Colt House, 20 Great Eastern Street, London , United Kingdom, EC2A 3EH                                                 | Directly Connected Power Station; Dormant CUSC Party | 06/10/2021 |
| COMCOM TRADING d.o.o.                   | 8633118000 | Lapajnetova ulica 29, Idrija, Idrija, Slovenia, 5280                                                                   | Interconnector User                                  | 16/02/2024 |
| COMPAGNIE NATIONALE DU RHONE            | B957520901 | 2 RUE ANDRE BONIN, LYON , France, 69004                                                                                | Interconnector User                                  | 08/10/2010 |
| CONNECTID 1 LIMITED                     | 14714608   | The Surrey Technology Centre, The Surrey Research Park, Guildford , United Kingdom, GU2 7YG                            | Directly Connected Power Station                     | 15/12/2023 |
| CONNECTID 2 LIMITED                     | 14714921   | The Surrey Technology Centre, The Surrey Research Park, Guildford , United Kingdom, GU2 7YG                            | Directly Connected Power Station                     | 14/12/2023 |
| CONNECTID 3 LIMITED                     | 14714607   | The Surrey Technology Centre, The Surrey Research Park, Guildford , United Kingdom, GU2 7YG                            | Directly Connected Power Station                     | 15/12/2023 |
| Connectid 9 Limited                     | 14713671   | The Surrey Technology Centre, The Surrey Research Park, Guildford , United Kingdom, GU2 7YG                            | Directly Connected Power Station                     | 15/12/2023 |
| CONRAD (BASINGSTOKE) LIMITED            | 12500002   | Suites D&E,Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Power Station                               | 13/06/2024 |
| CONRAD (BISPHAM) LIMITED                | 10487882   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Power Station                               | 22/06/2020 |
| Conrad (Blackpool) Limited              | 12611339   | Suites D&E,Windrush CourtBlacklands Way, Abingdon, Abingdon, United Kingdom, OX14 1SY                                  | Embedded Power Station                               | 03/08/2023 |
| CONRAD (CHATTERLEY) LIMITED             | 10322690   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Power Station                               | 20/04/2020 |
| CONRAD (EYE) LIMITED                    | 14405221   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Directly Connected Power Station                     | 24/05/2023 |
| CONRAD (MIDDLEWICH) LIMITED             | 11596046   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Power Station                               | 20/04/2020 |
| CONRAD (REDSGAR) LIMITED                | 11596310   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Directly Connected Power Station                     | 20/01/2020 |
| CONRAD (SWINDON) LIMITED                | 10923676   | Suites D&E,Windrush Court, Blacklands Way, Abingdon, Abingdon, United Kingdom, OX14 1SY                                | Embedded Power Station                               | 13/06/2024 |
| CONRAD (TORQUAY) LIMITED                | 13207993   | Suites D&E, Windrush Court, Blacklands Way, Abingdon, Abingdon, United Kingdom, OX14 1SY                               | Embedded Power Station                               | 13/06/2024 |
| Conrad (Walpole) Limited                | 14405214   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Directly Connected Power Station                     | 31/05/2023 |
| CONRAD (WINCHESTER) LIMITED             | 10923638   | Suites D&E Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Power Station                               | 26/07/2024 |
| Conrad Energy (Developments) II Limited | 12886485   | Suites D&E,Windrush Court, Blacklands Way, Abingdon , United Kingdom, OX14 1SY                                         | Embedded Exemptable Large Power Station              | 12/02/2024 |
| CONRAD ENERGY (TRADING) LIMITED         | 10969329   | Suites D & E, Windrush CourtBlacklands Way, Abingdon, Abingdon, UK, OX14 1SY                                           | Supplier                                             | 10/01/2020 |
| CONSTELLATION GENERATION LIMITED        | 09198137   | Suite 1, 7th Floor,50 Broadway, London, LONDON, United Kingdom, SW1H 0BL                                               | Interconnector User; Supplier                        | 07/06/2018 |
| Contullich Energy Storage Limited       | 14074698   | Beaufort Court,Egg Farm Lane, Kings Langley , United Kingdom, WD4 8LR                                                  | Directly Connected Power Station                     | 19/07/2024 |
| CONVEX ENERGY GMBH                      | HRB196620  | EUREF-CAMPUS 6 - 9, BERLIN , GERMANY, 10829                                                                            | Interconnector User                                  | 02/12/2020 |
| CO-OPERATIVE ENERGY LIMITED             | 06993470   | Co-Operative House, Warwick Technology Park, Gallows Hill, Warwick , United Kingdom, CV34 6DA                          | Supplier                                             | 28/08/2012 |
| COPENHAGEN ENERGY TRADING A/S           | 42526991   | BAG ELEFANTERNE 1, ST TH, KOBENHAVN V , DENMARK, 1799                                                                  | Interconnector User                                  | 13/01/2022 |
| Copper Nose Energy Ltd                  | 14150596   | 68 Dalling Road, London , United Kingdom, W6 0JA                                                                       | Directly Connected Power Station                     | 24/11/2022 |
| CORBY POWER LIMITED                     | 92329494   | Mitchell Road, Phoenix Parkway, Corby, Northamptonshire, United Kingdom, NN17 5QT                                      | Embedded Power Station                               | 18/09/2001 |
| Corio Generation Limited                | 13715492   | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                | Directly Connected Power Station                     | 03/08/2023 |
| CORONA ENERGY RETAIL 4 LIMITED          | 02798334   | Building 2 Level 2, Croxley Park, Watford , United Kingdom, WD18 8YA                                                   | Supplier                                             | 24/06/2019 |
| CORONATION POWER LIMITED                | 04971270   | Crown House, 108 Aldersgate Street, London , United Kingdom, EC1A 2JQ                                                  | Dormant CUSC Party; Embedded Power Station           | 15/05/2019 |
| CORRIEGARTH 2 WIND FARM LIMITED         | 12207006   | 22 CHANCERY LANE, LONDON , United Kingdom, WC2A 1LS                                                                    | Directly Connected Power Station                     | 04/05/2020 |
| CORRIEGARTH WIND ENERGY LIMITED         | SC486712   | Dla Piper Scotland Llp.Collins House, Rutland Square, Edinburgh , United Kingdom, EH1 2AA                              | Directly Connected Power Station                     | 07/08/2015 |
| CORRIEMOILLIE WINDFARM LIMITED          | 09377951   | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                     | 02/04/2015 |
| CORRIMONY ENERGY LIMITED                | SC358976   | 10 ARDROSS STREET, INVERNESS , United Kingdom, IV3 5NS                                                                 | Embedded Exemptable Large Power Station              | 26/01/2017 |
| Corshellach Energy Storage Limited      | 14074757   | Beaufort Court,Egg Farm Lane, Kings Langley , United Kingdom, WD4 8LR                                                  | Directly Connected Power Station                     | 19/07/2024 |
| Coryton 10 Renewables Limited           | 15125478   | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                       | Directly Connected Power Station                     | 22/11/2023 |
| CORYTON ENERGY COMPANY, LTD.            | FC020597   | Maples And Calder, Ugland House,PO BOX 309, George Town, Grand Cayman, Cayman Islands, PO BOX 309                      | Directly Connected Power Station                     | 18/09/2001 |
| COSTA HEAD WIND FARM LIMITED            | SC385352   | c/o Hoolan Energy Limited, 16 Young Street, Edinburgh , United Kingdom, EH2 4JB                                        | Directly Connected Power Station                     | 02/06/2016 |
| COTTAM SOLAR PROJECT LIMITED            | 12711231   | Unit 20.2 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station                     | 29/01/2021 |
| COULOMB ENERGY SUPPLY LIMITED           | 07488842   | Px HouseWestpoint Road, Stockton-On-Tees , TS17 6BF                                                                    | Supplier                                             | 30/08/2012 |
| COUPAR LIMITED                          | 11966683   | c/o Gresham House Asset Management Limited,5 New Street Square, London , United Kingdom, EC4A 3TW                      | Embedded Power Station                               | 27/01/2021 |
| COUPAR TWO LIMITED                      | 13465261   | 6TH FLOOR 2 LONDON WALL PLACE, LONDON , United Kingdom, EC2Y 5AU                                                       | Embedded Power Station                               | 05/04/2022 |
| COUR WIND FARM (SCOTLAND ) LIMITED      | SC493307   | 4th Floor Saltire Court, 20 Castle Terrace, Edinburgh , United Kingdom, EH1 2EN                                        | Directly Connected Power Station                     | 29/04/2015 |
| COWLEY 2 RENEWABLES LTD                 | 14914340   | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                       | Directly Connected Power Station                     | 31/08/2023 |
| COWLEY 7 RENEWABLES LTD                 | 14914334   | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                        | Directly Connected Power Station                     | 31/08/2023 |
| COWLEY BALDON GREEN LIMITED             | 12517381   | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                | Directly Connected Power Station                     | 24/07/2020 |
| COYLTON ENERGY LIMITED                  | 14096780   | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                           | Directly Connected Power Station                     | 28/11/2022 |
| Cragside Energy Limited                 | 13093560   | 15 Golden Square,4th Floor, London , United Kingdom, W1F 9JG                                                           | Directly Connected Power Station                     | 13/06/2023 |
| Craig Watch Wind Farm Limited           | 12792263   | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                           | Directly Connected Power Station                     | 11/03/2022 |
| CRAIG WIND FARM LIMITED                 | 05539653   | c/o Temporis Capital Limited,7th Floor, Wellington House, 125 -130 Strand, London , United Kingdom, WC2R 0AP           | Directly Connected Power Station                     | 18/04/2016 |
| CRAKAIG WIND ENERGY HUB LIMITED         | 14751820   | 10 Victoria Street, Bristol , United Kingdom, BS1 6BN                                                                  | Embedded Power Station                               | 15/01/2025 |
| CREAG RIABHACH WIND FARM LTD            | SC424471   | 2 Castle Terrace, 4th Floor, Edinburgh , United Kingdom, EH1 2EL                                                       | Directly Connected Power Station                     | 12/12/2014 |
| CREYKE BECK BATTERY 2 LIMITED           | 14359695   | Mills & Reeve LlpBotanic House100 Hills Road, Cambridge , CB2 1PH                                                      | Directly Connected Power Station                     | 07/08/2023 |
| CRONOS ENERGY LTD                       | 10768224   | Amp Technology Centre Advanced Manufacturing Park, Brunel Way, Rotherham , United Kingdom, S60 5WG                     | Interconnector Owner                                 | 20/11/2018 |
| CROOKEDSTANE WINDFARM LIMITED           | SC415902   | Ground Floor West Suite, Prospect House, 5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                         | Directly Connected Power Station; Dormant CUSC Party | 22/09/2015 |
| CROSSDYKES WF LIMITED                   | SC424921   | c/o Brodies Llp,Capital Square, 58 Morrison Street, Edinburgh, Edinburgh, United Kingdom, EH3 8BP                      | Directly Connected Power Station                     | 21/07/2015 |
| CROSSRAIL LIMITED                       | 04212657   | 5 Endeavour Square, Stratford, London, United Kingdom, E20 1JN                                                         | Non-Embedded Customer Site                           | 09/04/2010 |
| CROWN GAS AND POWER 2 LIMITED           | 11357910   | The Oil Centre,Bury New Road, Heap Bridge, Bury , United Kingdom, BL9 7HY                                              | Supplier                                             | 27/07/2021 |
| CRYOBATTERY ONE LIMITED                 | 12041852   | SUITE A 6 HONDURAS STREET, LONDON , United Kingdom, EC1Y 0TH                                                           | Directly Connected Power Station                     | 27/11/2020 |
| CRYSTAL RIG III LIMITED                 | SC353920   | c/o Harper Macleod Llp,The Cadoro,45 Gordon Street, Glasgow, London, United Kingdom, G1 3PE                            | Directly Connected Power Station                     | 13/04/2016 |
| CRYSTAL RIG II LIMITED                  | SC257737   | c/o Harper Macleod Llp,The Cadoro, 45 Gordon Street, Glasgow, London, United Kingdom, G1 3PE                           | Directly Connected Power Station                     | 02/10/2006 |
| CRYSTAL RIG IV LIMITED                  | SC167068   | c/o Harper Macleod Llp,The Cadoro, 45 Gordon Street, Glasgow , United Kingdom, G1 3PE                                  | Directly Connected Power Station                     | 01/06/2020 |
| CRYSTAL RIG WINDFARM LIMITED            | 04364525   | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                              | Embedded Exemptable Large Power Station              | 31/03/2005 |
| CSE22 LIMITED                           | 10824187   | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                     | 01/05/2020 |



|                                                        |             |                                                                                                                        |                                                              |            |
|--------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|------------|
| CSE23 LIMITED                                          | 10824252    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 27/05/2020 |
| CSE25 LIMITED                                          | 11354620    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 12/01/2022 |
| CSE26 LIMITED                                          | 11354627    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 07/06/2022 |
| CSE27 LIMITED                                          | 11354710    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 03/08/2023 |
| CSE28 LIMITED                                          | 11354731    | 8 DEVONSHIRE SQUARE, LONDON , UNITED KINGDOM, EC2M 4PL                                                                 | Directly Connected Power Station                             | 11/07/2023 |
| CSE29 LIMITED                                          | 11354705    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 23/06/2023 |
| CSE30 LIMITED                                          | 11354785    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 03/08/2023 |
| CSE33 LIMITED                                          | 11354830    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 08/02/2023 |
| CSE34 LIMITED                                          | 11354838    | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 11/07/2023 |
| CSE37 Limited                                          | 13891981    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 19/09/2023 |
| CSE38 LIMITED                                          | 13892270    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 19/11/2024 |
| CSE39 LIMITED                                          | 13892303    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 19/09/2023 |
| CSE41 LIMITED                                          | 13892074    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 15/05/2023 |
| CSE42 LIMITED                                          | 13892056    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 15/06/2023 |
| CSE43 LIMITED                                          | 13891979    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 11/07/2023 |
| CSE45 LIMITED                                          | 14450117    | 8 Devonshire Square, London , United Kingdom, EC2M 4PL                                                                 | Directly Connected Power Station                             | 03/08/2023 |
| CS UK HOLDINGS III LIMITED                             | 10909660    | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                             | 16/03/2020 |
| CUBICO UK DEVELOPMENT LIMITED                          | 13308909    | 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                                                      | Directly Connected Power Station                             | 16/02/2024 |
| CULHAM STORAGE LIMITED                                 | 14305030    | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                       | Directly Connected Power Station                             | 01/02/2023 |
| CUMBERHEAD WEST WIND FARM LTD.                         | SC535501    | 320 ST. VINCENT STREET, GLASGOW , United Kingdom, G2 5AD                                                               | Directly Connected Power Station                             | 21/11/2019 |
| CUMBERHEAD WIND ENERGY LIMITED                         | 08926189    | 33 HOLBORN, LONDON , United Kingdom, EC1N 2HT                                                                          | Directly Connected Power Station                             | 23/02/2015 |
| Current Commodities A/S                                | 38617990    | Niels W. Gades Vej 1, Aarhus C, AARHUS, Denmark, 8000                                                                  | Interconnector User                                          | 02/09/2024 |
| Cuxton Energy Storage Limited                          | 13048364    | c/o Low Carbon Limited,Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                         | Embedded Power Station                                       | 13/09/2022 |
| CWE Lochend Ltd                                        | 13465111    | First Floor River CourtThe Old Mill Office ParkMill Lane, Goldalming, Surrey , GU7 1EZ                                 | Embedded Exemptable Large Power Station                      | 18/03/2025 |
| CWP Energy Limited                                     | SC803977    | Caledonian Exchange,19a Canning Street, Edinburgh , United Kingdom, EH3 8HE                                            | Embedded Exemptable Large Power Station                      | 11/04/2006 |
| CYP SOLAR LIMITED                                      | 12357995    | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                             | 09/02/2022 |
| DAINES ENERGY PARK LIMITED                             | 14446646    | 1st Floor Sackville House143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                   | Directly Connected Power Station                             | 21/04/2023 |
| DALIA HOLDINGS LTD                                     | 11762101    | First Floor, Winston House,349 Regents Park Road, London , United Kingdom, N3 1DH                                      | Directly Connected Power Station                             | 15/06/2023 |
| DALMARNOCK BESS LTD                                    | 13090868    | The Factory, Whitchurch, Ross On Wye, Herefordshire, United Kingdom, HR9 6DF                                           | Embedded Power Station                                       | 16/11/2021 |
| DALMARNOCK STORAGE LTD                                 | 15025787    | 19 Friar Road, Brighton , United Kingdom, BN1 6NG                                                                      | Directly Connected Power Station                             | 08/01/2024 |
| DALQUHANDY WIND FARM LIMITED                           | SC579907    | Ground Floor West Suite, Prospect House, 5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                         | Directly Connected Power Station; Non-Embedded Customer Site | 19/07/2018 |
| DALRIADA RENEWABLES LIMITED                            | 13732818    | 1st Floor Sackville House,143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                  | Directly Connected Power Station                             | 15/03/2024 |
| DALSWINTON WINDFARM (SCOTLAND) LIMITED                 | SC279014    | 50 Lothian Road, Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                                  | Embedded Power Station                                       | 13/10/2006 |
| DAMSONGREEN ENERGYFARM LIMITED                         | 15426313    | Alexander House,1 Mandarin Road,Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA  | Directly Connected Power Station                             | 07/02/2025 |
| Danske Commodities A/S                                 | 28113951    | Vaerkmestergade 38000, Aarhus, Denmark, Denmark, 8000                                                                  | Interconnector User; Virtual Lead Party                      | 22/02/2008 |
| DARE POWER LTD                                         | 13381297    | 43-45 Dorset Street, London , United Kingdom, W1U 7NA                                                                  | Interconnector User                                          | 01/04/2022 |
| Darlington Solar 1 Limited                             | 13370167    | 111 Park Street, Mayfair, London , United Kingdom, W1K 7JF                                                             | Directly Connected Power Station                             | 11/07/2023 |
| DC01 UK Limited                                        | 14262393    | Unit 3 Cotswold Business Park,Millfield Lane, Caddington, Luton, United Kingdom, LU1 4AJ                               | Directly Connected Power Station                             | 14/12/2022 |
| DC ENERGY TRADING V.O.F.                               | 86227289    | Stationsplein 21, Goes , Netherlands, 4461 HP                                                                          | Interconnector User                                          | 09/08/2023 |
| DE 001 LIMITED                                         | 15312543    | Old Pump House,19 Hooper Street, London , United Kingdom, E1 8BU                                                       | Directly Connected Power Station                             | 06/12/2024 |
| DEALANACH LIMITED                                      | SC658650    | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                                | Directly Connected Power Station                             | 26/01/2022 |
| Decerna Limited                                        | 08183909    | Decerna House, 32-33, Apex Business Village, Annitsford, Cramlington, Northumberland, United Kingdom, NE23 7BF         | Directly Connected Power Station                             | 16/01/2024 |
| DEESIDE POWER (UK) LIMITED                             | 08887001    | Saltend Power Station,Saltend Chemicals Park, Hedon Road, Hull, East Riding Of Yorkshire, United Kingdom, HU12 8GA     | Directly Connected Power Station                             | 03/06/2014 |
| DELL WIND FARM LIMITED                                 | 08974131    | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                      | Directly Connected Power Station                             | 02/03/2020 |
| DELTA GAS AND POWER LIMITED                            | 09933244    | 344-354 GRAY'S INN ROAD, LONDON , United Kingdom, WC1X 8BP                                                             | Supplier                                                     | 12/09/2017 |
| D-ENERGI TRADING LIMITED                               | 10769307    | Unit D, Madison Place,Central Park, Northampton Road, Manchester , United Kingdom, M40 5AG                             | Supplier                                                     | 22/12/2020 |
| DENGIE MARSHES WIND FARM LIMITED                       | 16027722    | Cornelius Barton & CoAlliance House 29-30High Holborn, London , United Kingdom, WC1V 6AZ                               | Embedded Power Station                                       | 20/03/2025 |
| DEUTSCHE BANK AG LONDON                                | BR000005    | Winchester House,1 Great Winchester Street, London, LONDON, UK, EC2N 2DB                                               | Interconnector User                                          | 04/11/2008 |
| DIAMOND WIND LIMITED                                   | SC415420    | HUMBIE MILL, HUMBIE , United Kingdom, EH36 5PB                                                                         | Directly Connected Power Station                             | 14/04/2014 |
| DIDCOT BATTERY LIMITED                                 | 11577622    | c/o Buzzacott Llp130 Wood Street, London , United Kingdom, EC2V 6DL                                                    | Directly Connected Power Station                             | 05/08/2021 |
| DIGITAL POWER ENERGY SUPPLY UK LIMITED                 | 11042157    | The Barns Offices, Little Grimsby, Louth , United Kingdom, LN11 0TZ                                                    | Supplier                                                     | 01/02/2022 |
| DISTRIBUTED ENERGY CUSTOMER SOLUTIONS LIMITED          | 04942184    | Millstream, Maidenhead Road, Windsor, Berkshire, United Kingdom, SL4 5GD                                               | Directly Connected Power Station; Dormant CUSC Party         | 27/10/2005 |
| DODO ENERGY LIMITED                                    | 11042718    | 274 HATFIELD ROAD, ST ALBANS , United Kingdom, AL1 4UN                                                                 | Supplier                                                     | 27/02/2019 |
| DOGBERBANK OFFSHORE WIND FARM PROJECT 1 HOLDCO LIMITED | 10930991    | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station; Dormant CUSC Party         |            |
| DOGBERBANK OFFSHORE WIND FARM PROJECT 1 PROJCO LIMITED | 07791991    | No.1 Forbury Place, 43 Forbury Road, Reading, BERKSHIRE, United Kingdom, RG1 3JH                                       | Directly Connected Power Station                             | 12/06/2017 |
| DOGBERBANK OFFSHORE WIND FARM PROJECT 2 HOLDCO LIMITED | 10931831    | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station; Dormant CUSC Party         |            |
| DOGBERBANK OFFSHORE WIND FARM PROJECT 2 PROJCO LIMITED | 07914510    | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                             | 12/06/2017 |
| DOGBERBANK OFFSHORE WIND FARM PROJECT 3 HOLDCO LIMITED | 10931009    | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station; Dormant CUSC Party         |            |
| Dollymans Storage Limited                              | 10915634    | 4th Floor 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                        | Embedded Power Station                                       | 28/11/2022 |
| Don Cossack Ltd                                        | 13057675    | 88 Grays Inn Road, London , United Kingdom, WC1X 8AA                                                                   | Directly Connected Power Station                             | 18/04/2023 |
| DORENELL WINDFARM EXTENSION LIMITED                    | 12900205    | Chelsea Cloisters, Sloane Avenue,, London , United Kingdom, SW3 3DW                                                    | Directly Connected Power Station                             | 31/03/2023 |
| DORENELL WINDFARM LIMITED                              | 05628395    | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                             | 09/11/2015 |
| DOUGLAS WEST EXTENSION LTD                             | SC587662    | 320 ST VINCENT STREET, GLASGOW , UNITED KINGDOM, G2 5AD                                                                | Directly Connected Power Station                             | 08/08/2019 |
| DOUGLAS WEST WIND FARM LTD                             | SC524434    | Dia Piper Scotland Llp,Collins House, Rutland Square, Edinburgh , United Kingdom, EH1 2AA                              | Directly Connected Power Station                             | 31/03/2017 |
| DOWNIEBRAE BESS LTD                                    | 14657677    | Overross House,Ross Park, Ross-on-Wye, Herefordshire, United Kingdom, HR9 7US                                          | Directly Connected Power Station                             | 15/09/2023 |
| Downing Renewable Developments LLP                     | OC439748    | 6TH FLOOR ST MAGNUS HOUSE, LONDON , UNITED KINGDOM, EC3R 6HD                                                           | Directly Connected Power Station                             | 12/06/2023 |
| Dragon Green 2 Renewables Ltd                          | 14914407    | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                        | Directly Connected Power Station                             | 31/08/2023 |
| DRAGON GREEN 7 RENEWABLES LTD                          | 14913700    | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                      | Directly Connected Power Station                             | 31/08/2023 |
| DRAKELOW GREEN ENERGY LIMITED                          | 13358336    | 3rd Floor, Norfolk House,106 Saxon Gate West, Milton Keynes , United Kingdom, MK9 2DN                                  | Directly Connected Power Station                             | 06/12/2021 |
| Drax Cruachan Expansion Limited                        | 06657393    | Drax Power Station, Drax, Selby, North Yorkshire, United Kingdom, YO8 8PH                                              | Directly Connected Power Station                             | 05/04/2022 |
| Drax Energy Solutions Limited                          | 05893966    | Drax Power StationDrax, Selby, North Yorkshire, UK, YO8 8PH                                                            | Supplier                                                     | 11/01/2007 |
| Drax Power Limited                                     | 04883589    | Drax Power Station, Drax, Selby, North Yorkshire, United Kingdom, YO8 8PH                                              | Directly Connected Power Station                             | 16/12/2003 |
| DRAX PUMPED STORAGE LIMITED                            | 06657336    | Drax Power StationDrax, Selby, North Yorkshire, UK, YO8 8PH                                                            | Directly Connected Power Station                             | 01/07/2021 |
| Drax River Hydro Limited                               | 05956747    | Drax Power Station, Drax, Selby, North Yorkshire, United Kingdom, YO8 8PH                                              | Embedded Exemptable Large Power Station                      | 01/07/2021 |
| Drongan Battery Storage Ltd                            | SC730119    | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                   | Directly Connected Power Station                             | 27/03/2023 |
| DRUIM LEATHANN WINDFARM LIMITED                        | SC414109    | Ground Floor West Suite, Prospect House, 5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                         | Directly Connected Power Station                             | 03/01/2013 |
| Drummarnock Wind Farm Limited                          | SC671213    | Office 202 One Lochrin Square, 92-94 Fountainbridge, Edinburgh , EH3 9QA                                               | Directly Connected Power Station                             | 14/06/2022 |
| DUDGEON OFFSHORE WIND LIMITED                          | 04418909    | ONE KINGDOM STREET, LONDON , United Kingdom, W2 6BD                                                                    | Directly Connected Power Station                             | 02/07/2010 |
| Duferco Energia SpA                                    | 03544070174 | Via Paolo Imperiale 4, Genoa, Genoa, Italy, 16126                                                                      | Interconnector User                                          | 14/09/2023 |

|                                                     |               |                                                                                                                        |                                                                           |            |
|-----------------------------------------------------|---------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|------------|
| DUMMUIES WINDFARM HUNTLY LIMITED                    | 05624537      | 100 AVEBURY BOULEVARD, MILTON KEYNES , United Kingdom, MK9 1FH                                                         | Embedded Power Station                                                    | 16/03/2006 |
| DUNMAGLASS WIND FARM LIMITED                        | SC607482      | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                                          | 01/02/2019 |
| Dvalin ApS                                          | 40420347      | 10 Niels Jernes Vej, Aalborg, Aalborg, Denmark, 9220                                                                   | Interconnector User                                                       | 11/05/2022 |
| Dyce Battery Storage Limited                        | SC705681      | The Shires, 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                       | Embedded Exemptable Large Power Station                                   | 06/12/2022 |
| DYCE ENERGY LIMITED                                 | 09995796      | B3 Patrick Tobin Business Park,Bolton Road, Wath-Upon-Dearne, Rotherham, United Kingdom, S63 7LL                       | Supplier                                                                  | 12/04/2021 |
| E.E.W. ECO ENERGY WORLD DEVELOPMENT HOLDING LIMITED | 11794857      | 13 Hanover Square, London , United Kingdom, W1S 1HN                                                                    | Directly Connected Power Station                                          | 22/09/2022 |
| E.ON ENERGY SOLUTIONS LIMITED                       | 03407430      | Westwood Way, Westwood Business Park, Coventry , United Kingdom, CV4 8LG                                               | Supplier                                                                  |            |
| E.ON NEXT ENERGY LIMITED                            | 03782443      | Westwood WayWestwood Business Park, Coventry, KENT, UK, CV4 8LG                                                        | Supplier                                                                  | 18/09/2001 |
| E.ON UK PLC                                         | 02366970      | Westwood Way, Westwood Business Park, Coventry , United Kingdom, CV4 8LG                                               | Directly Connected Power Station; Supplier                                | 31/03/2005 |
| E.ON UK STEVEN'S CROFT LIMITED                      | 10253456      | Westwood Way, Westwood Business Park, Coventry , United Kingdom, CV4 8LG                                               | Directly Connected Power Station                                          | 20/12/2018 |
| E (GAS AND ELECTRICITY) LIMITED                     | 08520118      | Bowcliffe Hall,Bramham, Wetherby, West Yorkshire, United Kingdom, LS23 6LP                                             | Supplier                                                                  | 16/05/2014 |
| EARBA LIMITED                                       | 14386618      | Canal Head North, Kendal , LA9 7BZ                                                                                     | Directly Connected Power Station                                          | 19/09/2023 |
| EARLSBURN WIND ENERGY LIMITED                       | SC254429      | Beauly House, Dochfour Business Centre, Dochgarroch, Inverness, United Kingdom, IV3 8GY                                | Embedded Exemptable Large Power Station                                   | 02/08/2005 |
| EARL SHILTON ENERGY PARK LIMITED                    | 14376476      | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                 | Directly Connected Power Station                                          | 19/06/2023 |
| EAST ANGLIA ONE LIMITED                             | 07366753      | 3rd Floor, 1 Tudor Street, London , United Kingdom, EC4Y 0AH                                                           | Directly Connected Power Station                                          | 03/10/2014 |
| EAST ANGLIA ONE NORTH LIMITED                       | 11121800      | 3rd Floor, 1 Tudor Street, London , United Kingdom, EC4Y 0AH                                                           | Directly Connected Power Station                                          | 03/03/2021 |
| EAST ANGLIA THREE LIMITED                           | 08141208      | 3rd Floor, 1 Tudor Street, London , United Kingdom, EC4Y 0AH                                                           | Directly Connected Power Station                                          | 11/02/2016 |
| EAST ANGLIA TWO LIMITED                             | 11121842      | 3rd Floor, 1 Tudor Street, London , United Kingdom, EC4Y 0AH                                                           | Directly Connected Power Station                                          | 29/04/2021 |
| EastCoastGridServices Ltd                           | 13518282      | 67 Westow Street, London , United Kingdom, SE19 3RW                                                                    | Directly Connected Power Station                                          | 07/09/2022 |
| EASTERN POWER NETWORKS PLC                          | 02366906      | Newington House, 237 Southwark Bridge Road, London , United Kingdom, SE1 6NP                                           | Directly Connected Distribution System                                    | 18/09/2001 |
| Eccles Energy Centre Limited                        | SC766863      | 13 Queen's Road, Aberdeen , United Kingdom, AB15 4YL                                                                   | Directly Connected Power Station                                          | 03/04/2025 |
| Eccles Grid Stability Limited                       | 11323302      | 3rd Floor 1 Dover Street, London , United Kingdom, W1S 4LD                                                             | Directly Connected Power Station                                          | 19/12/2023 |
| Eclipse Power Networks Limited                      | 09633506      | 25 Osier Way, Olney , United Kingdom, MK46 5FP                                                                         | Independent Distribution N/W Operator                                     | 21/12/2017 |
| ECOCEL ENERGY (STORAGE) LTD                         | SC745066      | 44 Milton Road, East Kilbride, Glasgow, United Kingdom, G74 5BU                                                        | Directly Connected Power Station; Embedded Exemptable Large Power Station | 27/08/2024 |
| ECODEV (ALYTH) LTD                                  | 13774236      | Overross House, Ross Park, Ross-on-Wye, Herefordshire, United Kingdom, HR9 7US                                         | Directly Connected Power Station                                          | 04/11/2022 |
| ECODEV GROUP LTD                                    | 10276309      | Overross House,Ross Park, Ross-on-Wye, Herefordshire, United Kingdom, HR9 7US                                          | Embedded Power Station                                                    | 31/08/2021 |
| ECODEV PROJECTS LTD                                 | 13910272      | The Factory, Whitchurch,, Ross On Wye, Herefordshire, United Kingdom, HR9 6DF                                          | Directly Connected Power Station                                          | 23/05/2023 |
| ECO GREEN MANAGEMENT LIMITED                        | 06957198      | 4305 Park Approach, Leeds , United Kingdom, LS15 8GB                                                                   | Supplier                                                                  | 23/09/2016 |
| Econergy International Limited                      | 12669318      | 1st Floor, 76-80 Old Broad Street, London , United Kingdom, EC2M 1QP                                                   | Directly Connected Power Station                                          | 07/12/2022 |
| ECOTRICITY GENERATION LIMITED                       | 03117225      | Lion House, Rowcroft, Stroud , United Kingdom, GL5 3BY                                                                 | Directly Connected Power Station                                          | 19/07/2022 |
| ECOTRICITY LIMITED                                  | 03043412      | Lion House, Rowcroft, Stroud, Stroud, United Kingdom, GL5 3BY                                                          | Supplier                                                                  | 28/08/1997 |
| Edelweiss Energia S.P.A.                            | IT03258290166 | VIA VITTORIO VENETO 42, SARNICO, SARNICO, Italy, 24067                                                                 | Interconnector User                                                       | 25/04/2014 |
| EDF DEVELOPMENT COMPANY LIMITED                     | 06222043      | Nova North,11 Bressenden Place, London , United Kingdom, SW1E 5BY                                                      | Directly Connected Power Station; Dormant CUSC Party                      | 03/10/2008 |
| EDF ENERGY (THERMAL GENERATION) LIMITED             | 04267569      | Nova North,11 Bressenden Place, London , United Kingdom, SW1E 5BY                                                      | Directly Connected Power Station                                          | 01/12/2016 |
| EDF ENERGY (TSO) LIMITED                            | 03432165      | 90 WHITFIELD STREET, LONDON , United Kingdom, W1T 4EZ                                                                  | Directly Connected Power Station                                          | 18/09/2001 |
| EDF ENERGY CUSTOMERS LIMITED                        | 02228297      | Nova North,11 Bressenden Place, London, LONDON, United Kingdom, SW1E 5BY                                               | Supplier                                                                  | 18/09/2001 |
| EDF ENERGY LIMITED                                  | 02366852      | Nova North, 11 Bressenden Place, London, LONDON, United Kingdom, SW1E 5BY                                              | Directly Connected Power Station                                          | 18/09/2001 |
| EDF ENERGY NUCLEAR GENERATION LIMITED               | 03076445      | Javelin House, Building 1420, Charlton Court, Gloucester Business Park, Gloucester , United Kingdom, GL3 4AE           | Directly Connected Power Station                                          | 18/09/2001 |
| EDF ENERGY RENEWABLES LIMITED                       | 06456689      | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                                          | 30/01/2015 |
| EDF Service National                                | 552 081 317   | 2, rue Louis Murat, Paris , France, 75008 Paris                                                                        | Interconnector User                                                       |            |
| EDF TRADING LIMITED                                 | 03750288      | 80 Victoria Street, Cardinal Place 3rd Floor, London , United Kingdom, SW1E 5JL                                        | Interconnector User                                                       | 18/09/2001 |
| EDGWARE ENERGY LIMITED                              | 09256462      | Windmill Hill Business Park, Whitehill Way, Swindon, Swindon, United Kingdom, SN5 6PB                                  | Supplier; Virtual Lead Party                                              | 12/11/2018 |
| EDINTORE WIND FARM LIMITED                          | SC432839      | c/o Robb Ferguson Regent Court, 70 West Regent Street, Glasgow , United Kingdom, G2 2QZ                                | Embedded Exemptable Large Power Station                                   | 23/02/2015 |
| EDP RENEWABLES UK LIMITED                           | SC297087      | 1st Floor, 50 Lothian Roadnull, Edinburgh , EH3 9BY                                                                    | Embedded Exemptable Large Power Station                                   | 16/05/2014 |
| EEB15 LIMITED                                       | 10789285      | THE OLD RECTORY CHURCH STREET, WEYBRIDGE , United Kingdom, KT13 8DE                                                    | Embedded Power Station                                                    | 28/11/2018 |
| EEB 19 LIMITED                                      | 10978393      | THE OLD RECTORY,CHURCH STREET, WEYBRIDGE, UNITED KINGDOM, KT13 8DE                                                     | Embedded Power Station                                                    | 11/06/2019 |
| EEB57 Limited                                       | 12559995      | The Old Rectory, Church Street, Weybridge, Surrey, United Kingdom, KT13 8DE                                            | Directly Connected Power Station                                          | 15/11/2023 |
| EEB68 LIMITED                                       | 13207804      | THE OLD RECTORY CHURCH STREET, WEYBRIDGE , United Kingdom, KT13 8DE                                                    | Directly Connected Power Station                                          | 31/01/2023 |
| EEB74 LIMITED                                       | 13463938      | The Old Rectory,Church Street, Weybridge, Surrey, United Kingdom, KT13 8DE                                             | Directly Connected Power Station                                          | 20/02/2024 |
| EFW NESS LIMITED                                    | SC627853      | 37 ALBYN PLACE, ABERDEEN , United Kingdom, AB10 1YN                                                                    | Directly Connected Power Station                                          | 20/08/2019 |
| EGGBOROUGH POWER LIMITED                            | 03782700      | Part Ground Floor, Paradigm Building 3175 Century Way, Thorpe Park, Leeds, LEEDS, United Kingdom, LS15 8ZB             | Directly Connected Power Station                                          | 18/09/2001 |
| EGNEDOL PEMBROKE ECO-POWER LIMITED                  | 09295745      | THE WHITE HOUSE WATERSTON ROAD, MILFORD HAVEN , United Kingdom, SA73 1DR                                               | Directly Connected Power Station                                          | 24/05/2017 |
| Eio Energy ApS                                      | 43423320      | P.O. Pedersens Vej 2, Aarhus N, AARHUS, Denmark, 8200                                                                  | Interconnector User                                                       | 14/02/2024 |
| EIRGRID INTERCONNECTOR DESIGNATED ACTIVITY COMPANY  | 473045        | The Oval,160 Shelbourne Road, Ballsbridge, Dublin, Ireland, 4                                                          | Interconnector Owner                                                      | 30/07/2010 |
| EKU ENERGY FAUNE PROJECTS (UK) LIMITED              | 13361703      | The Corner Building, 91-93 Farringdon Road, London , United Kingdom, EC1M 3LN                                          | Embedded Power Station                                                    | 23/02/2023 |
| EL (WEST WEYBRIDGE) LIMITED                         | 13327847      | 101 New Cavendish Street, 1st Floor South, London , United Kingdom, W1W 6XH                                            | Directly Connected Power Station                                          | 12/09/2023 |
| ELBESS LTD                                          | 14484708      | Suite 77 Furze Hill House, Furze Hill, Hove, United Kingdom, BN3 1PU                                                   | Directly Connected Power Station                                          | 03/02/2023 |
| ELCHIES WIND LIMITED                                | 06801474      | 2ND FLOOR, 36 BROADWAY, LONDON , UNITED KINGDOM, SW1H 0BH                                                              | Directly Connected Power Station                                          | 03/08/2016 |
| ELECLINK LIMITED                                    | 07595420      | 4 KINGDOM STREET, LONDON , United Kingdom, W2 6BD                                                                      | Interconnector Owner                                                      | 07/12/2012 |
| ELECTRABEL                                          | 0403.170.701  | Boulevard Simon Bolivar 36, Brussels , Belgium, 1000                                                                   | Interconnector User                                                       |            |
| ELECTRICITY NORTH WEST LIMITED                      | 02366949      | Electricity North WestBorron Street, Stockport, Stockport, UK, SK1 2JD                                                 | Directly Connected Distribution System                                    | 18/09/2001 |
| ELECTRICITY PLUS SUPPLY LIMITED                     | 05199936      | Network Hq 508 Edgware Road, The Hyde, London , United Kingdom, NW9 5AB                                                | Supplier                                                                  | 15/11/2004 |
| ELECTRORROUTE ENERGY LIMITED                        | 10364177      | MID CITY PLACE,71 HIGH HOLBORN, LONDON , UNITED KINGDOM, WC1V 6BA                                                      | Supplier                                                                  | 08/11/2017 |
| ELECTRORROUTE ENERGY TRADING LIMITED                | 497188        | MARKET HOUSE, LETTERKENNY, DUBLIN 2, IRELAND, F92 C92T                                                                 | Interconnector User                                                       | 13/12/2011 |
| ELEMENTS GREEN DEVELOPMENT LTD                      | 14167850      | 8 Queen Street, London , United Kingdom, W1J 5PD                                                                       | Directly Connected Power Station                                          | 13/06/2023 |
| ELEMENTS GREEN LIMITED                              | 13665201      | 8 QUEEN STREET, LONDON , United Kingdom, W1J 5PD                                                                       | Directly Connected Power Station                                          | 17/11/2022 |
| ELEMENTS GREEN TRENT LTD                            | 13665771      | 8 Queen Street, London , United Kingdom, W1J 5PD                                                                       | Directly Connected Power Station                                          | 15/12/2021 |
| ELGIN ENERGY ES CO LIMITED                          | 07176403      | Twp Accounting Llp, The Old Rectory, Church Street, Weybridge, Surrey, United Kingdom, KT13 8DE                        | Directly Connected Power Station                                          | 22/12/2022 |
| ELMYA ENERGY UK 13 LIMITED                          | 14142768      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 29/01/2025 |
| ELMYA ENERGY UK 17 LIMITED                          | 14535687      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 02/12/2023 |
| ELMYA ENERGY UK 1 LIMITED                           | 14059656      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 22/10/2024 |
| ELMYA RPC UK BRAYBROOKE LIMITED                     | 14142763      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 11/04/2023 |
| ELMYA RPC UK GRANGE ROAD LIMITED                    | 14059907      | 6th Floor, 9 Appold Street, London , United Kingdom, EC2A 2AP                                                          | Directly Connected Power Station                                          | 29/03/2023 |
| ELMYA RPC UK HUNTERSTON LIMITED                     | 14059815      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 06/12/2022 |
| ELMYA RPC UK MELBOURNE LIMITED                      | 14059928      | 6th Floor,9 Appold Street, London , United Kingdom, EC2A 2AP                                                           | Directly Connected Power Station                                          | 28/03/2023 |
| ELMYA RPC UK MORNINGSIDE LIMITED                    | 14535749      | Princes House,Suite 2a, 38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                            | Directly Connected Power Station                                          | 22/10/2024 |
| ELMYA RPC UK REDNAL LIMITED                         | 14142767      | 6th Floor,9 Appold Street, London , EC2A 2AP                                                                           | Directly Connected Power Station                                          | 22/09/2023 |
| ELSTREE GREEN LIMITED                               | 12517332      | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                | Directly Connected Power Station                                          | 24/07/2020 |
| ELVANFOOT ENERGY STORAGE LIMITED                    | SC679842      | Muirhall Farm, Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                               | Directly Connected Power Station                                          | 23/09/2021 |

|                                          |                 |                                                                                                    |                                         |            |
|------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------|-----------------------------------------|------------|
| EnBW Energie Baden-Württemberg AG        | HRB 107956      | Durlacher Allee 93, Karlsruhe, Karlsruhe, Germany, 76131                                           | Interconnector User                     | 03/10/2024 |
| ENDESA GENERACION SA                     | A82434697       | AVENIDA LA BORBOLLA, 5, SEVILLA , Spain, 41004                                                     | Interconnector User                     | 25/10/2012 |
| ENECO BURN OF WHILK LIMITED              | 08767037        | c/o Pinsent Masons LLP, 1 Park Row, Leeds , United Kingdom, LS1 5AB                                | Embedded Exemptable Large Power Station | 16/01/2015 |
| ENECO ENERGY TRADE B.V.                  | 30167836        | MARTEN MEESWEG 5, ROTTERDAM , Netherlands, 3068 AV                                                 | Interconnector User; Supplier           | 28/09/2009 |
| ENECO MOY LIMITED                        | 07145797        | c/o Pinsent Masons, 1 Park Row, Leeds , United Kingdom, LS1 5AB                                    | Embedded Power Station                  | 03/06/2015 |
| ENECO UK LIMITED                         | 06616497        | c/o Pinsent Masons, 1 Park Row, Leeds , United Kingdom, LS1 5AB                                    | Directly Connected Power Station        | 26/09/2011 |
| ENEL GLOBAL TRADING S.P.A.               | IT05918271007   | VLE REGINA MARGHERITA 125, ROMA , Italy, 198                                                       | Interconnector User                     | 21/10/2014 |
| ENEL X UK LIMITED                        | 06937931        | Epworth House25 City Road, London, LONDON, UK, EC1Y 1AA                                            | Virtual Lead Party                      | 18/08/2020 |
| Energetech Europe BV                     | 82542953        | Teleport Boulevard 124,124-130,Office Unit 1.05, Amsterdam, Amsterdam, The Netherlands, 1043EJ     | Interconnector User                     | 20/09/2023 |
| ENERGETECH TRADING DMCC                  | DMCC183541      | Cluster V, Dubai, Dubai, United Arab Emirates, N/A                                                 | Interconnector User                     | 10/06/2022 |
| ENERGETICK APS                           | 42643785        | Orientkaj 4, 1., Nordhavn , Denmark, 2150                                                          | Interconnector User                     | 15/07/2022 |
| ENERGIA CUSTOMER SOLUTIONS NI LIMITED    | NI35800         | Greenwood House, 64 Newforge Lane, Belfast , United Kingdom, BT9 5NF                               | Interconnector User                     | 04/03/2005 |
| ENERGI DANMARK A/S                       | 17225898        | TANGEN 29, AARHUS N, Danmark, Denmark, 8200                                                        | Interconnector User                     | 04/04/2011 |
| ENERGIEKONTOR UK LTD                     | 03830819        | 114 St Martin's Lane, Covent Garden, London , United Kingdom, WC2N 4BE                             | Directly Connected Power Station        | 02/12/2019 |
| Energi Generation 14 Ltd                 | 10702376        | 14 Beechwood Close, Lytham , United Kingdom, FY8 4BF                                               | Directly Connected Power Station        | 12/06/2023 |
| Energi Generation 6 Ltd                  | 10701876        | 14 Beechwood Close, Lytham , United Kingdom, FY8 4BF                                               | Directly Connected Power Station        | 20/11/2023 |
| ENERGY ASSETS NETWORKS LIMITED           | 10068882        | SHIP CANAL HOUSE 98 KING STREET, MANCHESTER , United Kingdom, M2 4WU                               | Independent Distribution N/W Operator   | 04/06/2019 |
| ENERGYA VM GESTION DE ENERGIA SLU        | ES-B83393066    | CALLE FEDERICO MOMPOU, 5 ED 1 PLTA 4, MADRID, MADRID, Spain, 28050                                 | Interconnector User                     | 20/01/2014 |
| ENERGYFARM DIVOT HILL LTD                | 15417775        | 4330 Park Approach,Thorpe Park, Leeds , United Kingdom, LS15 8GB                                   | Directly Connected Power Station        | 21/11/2024 |
| ENERGYFARM ROWAN LLP                     | OC446822        | 4330 Park Approach, Thorpe Park, Leeds, United Kingdom, LS15 8GB                                   | Directly Connected Power Station        | 17/01/2024 |
| ENERGYFARM STRATH OYKEL LLP              | OC446819        | 114 St Martin's Lane, London , United Kingdom, WC2N 4BE                                            | Directly Connected Power Station        | 14/01/2025 |
| ENERGYFARM UK ACHEILDH LTD               | 15087195        | 4330 Park Approach, Leeds , England, LS15 8GB                                                      | Directly Connected Power Station        | 15/04/2025 |
| ENERGYFARM UK CORNHARROW LLP             | OC428014        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 20/03/2023 |
| ENERGYFARM UK CRAIGINMODDIE LLP          | OC436174        | 4330 Park Approach, Thorpe Park, Leeds, United Kingdom, LS15 8GB                                   | Directly Connected Power Station        | 26/02/2024 |
| ENERGYFARM UK FELL LLP                   | OC429449        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 15/02/2022 |
| ENERGYFARM UK GARBET LLP                 | OC429448        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Embedded Power Station                  | 14/10/2022 |
| ENERGYFARM UK GLENSHIMMEROCH LLP         | OC428013        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 22/06/2020 |
| ENERGYFARM UK HARE CRAIG LLP             | OC429444        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 26/11/2021 |
| ENERGYFARM UK LAIRG LLP                  | OC428012        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 01/04/2021 |
| ENERGYFARM UK MANQUHILL LTD              | 15408800        | 4330 Park Approach, Thorpe Park, Leeds , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 21/11/2024 |
| ENERGYFARM UK MARGREE LLP                | OC436123        | 4330 Park Approach,Thorpe Park, Leeds , United Kingdom, LS15 8GB                                   | Directly Connected Power Station        | 14/01/2022 |
| ENERGYFARM UK NARACHAN LLP               | OC429447        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Embedded Power Station                  | 31/10/2022 |
| ENERGYFARM UK OVERHILL LLP               | OC428015        | 4330 PARK APPROACH, THORPE PARK, LEEDS , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 22/06/2020 |
| ENERGYGRIDPOWER2 LTD                     | 13292361        | Suite 1, 3rd Floor, 11-12 St. James's Square, London , United Kingdom, SW1Y 4LB                    | Directly Connected Power Station        | 14/10/2021 |
| ENERGYGRIDPOWER3 LTD                     | 13291849        | Suite 1, 7th Floor, 50 Broadway,11 - 12 St. James's Square, London , United Kingdom, SW1H OBL      | Directly Connected Power Station        | 14/10/2021 |
| ENERGYGRIDPOWER LTD                      | 13291845        | Suite 1, 3rd Floor, 11 - 12 St. James's Square, LONDON , United Kingdom, SW1Y 4LB                  | Directly Connected Power Station        | 09/11/2021 |
| ENERGYHUBDEVELOPMENTS LIMITED            | 13028274        | 19 Friar Road, Brighton , United Kingdom, BN1 6NG                                                  | Directly Connected Power Station        | 03/02/2023 |
| ENERGY ISLES SHETLAND LIMITED            | 12044893        | 19TH FLOOR 22 BISHOPSGATE, LONDON , UNITED KINGDOM, EC2N 4BQ                                       | Directly Connected Power Station        | 06/02/2020 |
| ENERGY POWER RESOURCES LIMITED           | 03302734        | 6th Floor,33 Holborn, London , United Kingdom, EC1N 2HT                                            | Embedded Power Station                  | 18/09/2001 |
| Energy UK Fell LLP                       | OC429449        | 4330 Park Approach, Thorpe Park, Leeds , United Kingdom, LS15 8GB                                  | Directly Connected Power Station        | 15/02/2024 |
| ENEUS ENERGY LIMITED                     | SC739030        | Suite 2, Ground Floor, Orchard Brae House,30 Queensferry Road, Edinburgh , United Kingdom, EH4 2HS | Directly Connected Power Station        | 26/03/2025 |
| ENGELHART CTP (SWITZERLAND) SA           | CHE-275.115.728 | ROUTE DE PRE-BOIS 29, WORLD TRADE CENTER II, COINTRIN , Switzerland, 1216                          | Interconnector User                     | 16/12/2015 |
| ENGIE ENERGY MANAGEMENT                  | 831958211       | BOULEVARD SIMON BOLIVAR 34, BRUXELLES, BRUXELLES, Belgium, 1000                                    | Interconnector User                     | 20/01/2017 |
| ENGIE GLOBAL MARKETS                     | B437982937      | 1 PL SAMUEL DE CHAMPLAIN, COURBEVOIE , France, 92400                                               | Interconnector User                     | 09/09/2002 |
| Engie Power Limited                      | 04236804        | No. 1 Leeds, 26 Whitehall Road, Leeds , United Kingdom, LS12 1BE                                   | Supplier                                | 25/03/2005 |
| Enki Trading s.r.o                       | 28664779        | Hybernská 1034/5, Prague, Prague, Czech Republic, 110 00                                           | Interconnector User                     | 04/01/2023 |
| ENRAY POWER LTD                          | 13052159        | Magma House,16 Davy Court, Castle Mound Way, Rugby , United Kingdom, CV23 0UZ                      | Directly Connected Power Station        | 24/01/2024 |
| ENSOC ENERGY SERVICES COMPANY AG         | CHE-485.204.837 | RIGISTRASSE 3, ZUG , Switzerland, 6300                                                             | Interconnector User                     | 29/09/2021 |
| ENSO GREEN HOLDINGS A LIMITED            | 12759332        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 23/10/2020 |
| ENSO GREEN HOLDINGS B LIMITED            | 12763872        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 04/12/2020 |
| ENSO GREEN HOLDINGS C LIMITED            | 12761273        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 07/12/2020 |
| ENSO GREEN HOLDINGS D LIMITED            | 12762856        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 02/12/2020 |
| ENSO GREEN HOLDINGS F LIMITED            | 12764449        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 05/11/2020 |
| ENSO GREEN HOLDINGS G LIMITED            | 12768166        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 22/03/2021 |
| ENSO GREEN HOLDINGS H LIMITED            | 12767586        | 17th Floor Hylo,103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                             | Directly Connected Power Station        | 19/09/2024 |
| ENSO GREEN HOLDINGS I LIMITED            | 12758956        | 17th Floor Hylo, 103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                            | Directly Connected Power Station        |            |
| ENSO GREEN HOLDINGS K LIMITED            | 12763391        | 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                             | Directly Connected Power Station        | 15/10/2019 |
| ENSO GREEN HOLDINGS LIMITED              | 12153574        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                            | Directly Connected Power Station        | 15/10/2019 |
| ENSO GREEN HOLDINGS N LIMITED            | 12767316        | 17th Floor Hylo,103-105 Bunhill Row, London , Unted Kingdom, EC1Y 8LZ                              | Directly Connected Power Station        | 17/12/2024 |
| ENSO GREEN HOLDINGS Q LIMITED            | 13327737        | 17th Floor Hylo,103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                             | Directly Connected Power Station        | 01/07/2024 |
| ENSO GREEN HOLDINGS R LIMITED            | 13328511        | Ropemaker Place, 28 Ropemaker Street,, London , United Kingdom, EC2Y 9HD                           | Directly Connected Power Station        | 14/04/2022 |
| ENSO GREEN HOLDINGS V LIMITED            | 13328563        | 17th Floor Hylo,103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                             | Directly Connected Power Station        | 01/07/2024 |
| ENSO GREEN HOLDINGS W LIMITED            | 13328645        | 17th Floor Hylo 103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                             | Directly Connected Power Station        | 18/03/2025 |
| ENSO GREEN HOLDINGS X LIMITED            | 13328111        | ROPEMAKER PLACE, LONDON , United Kingdom, EC2Y 9HD                                                 | Directly Connected Power Station        | 03/11/2021 |
| ENSO GREEN HOLDINGS Z LIMITED            | 13328913        | ROPEMAKER PLACE, LONDON , United Kingdom, EC2Y 9HD                                                 | Directly Connected Power Station        | 19/12/2024 |
| Enviromena Project Management UK Limited | 12079566        | 15 Diddenham Court, Lambwood Hill, Grazeley, Berkshire, United Kingdom, RG7 1JQ                    | Directly Connected Power Station        | 11/12/2023 |
| ENZEE Commodities A/S                    | 42676330        | Aboulevardeen 3,1 sal, Aarhus C , Denmark, 8000                                                    | Interconnector User                     | 08/11/2023 |
| EOLFI SAS                                | 477 951 644     | 10 Place de Catalogne, Paris , France, 75014                                                       | Directly Connected Power Station        | 11/10/2021 |
| EP COMMODITIES, A.S.                     | 3437680         | KLIMENTSKA 1216/46, PRAHA 1 , Czech Republic, 11000                                                | Interconnector User                     | 15/07/2021 |
| EPG ENERGY LIMITED                       | 06616147        | Hurst House, 131-133 New London Road, Chelmsford, Essex, United Kingdom, CM2 0QT                   | Supplier                                |            |
| EP LANGAGE LIMITED                       | 03462783        | Byron House, 7 - 9 St. James's Street, London , United Kingdom, SW1A 1EE                           | Directly Connected Power Station        | 18/09/2001 |
| EPL NEWCOS LIMITED                       | 14062571        | 2nd Floor,Regis House, 45 King William Street, London , United Kingdom, EC4R 9AN                   | Directly Connected Power Station        | 11/07/2023 |
| EPL NEWCO6 LIMITED                       | 14062645        | 2nd Floor,Regis House, 45 King William Street, London , United Kingdom, EC4R 9AN                   | Directly Connected Power Station        | 11/07/2023 |
| EPL NEWCO7 LIMITED                       | 14115311        | 2nd Floor Regis House, 45 King William Street, London , EC4R 9AN                                   | Directly Connected Power Station        | 25/09/2024 |
| EPL NEWCO8 LIMITED                       | 14117875        | 2nd Floor, Regis House, 45 King William Street, London , United Kingdom, EC4R 9AN                  | Directly Connected Power Station        | 09/11/2023 |
| EPL NEWCO9 LIMITED                       | 14117944        | 2nd Floor, Regis House, 45 King William Street, London , United Kingdom, EC4R 9AN                  | Directly Connected Power Station        | 09/11/2023 |
| E Power Limited                          | 04625938        | 6th Floor 17a Curzon Street, London , United Kingdom, W1J 5HS                                      | Directly Connected Power Station        | 25/08/2022 |
| EPPING ENERGY PARK LIMITED               | 14370231        | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL             | Directly Connected Power Station        | 26/05/2023 |
| EPR EYE LIMITED                          | 02234141        | 6th Floor,33 Holborn, London , United Kingdom, EC1N 2HT                                            | Embedded Power Station                  |            |



|                                            |                 |                                                                                                                       |                                                      |            |
|--------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| EPR GLANFORD LIMITED                       | 02547498        | 6th Floor,33 Holborn, London , United Kingdom, EC1N 2HT                                                               | Embedded Power Station                               | 18/09/2001 |
| EPR THETFORD LIMITED                       | 03057688        | 6th Floor,33 Holborn, London , United Kingdom, EC1N 2HT                                                               | Embedded Power Station                               | 18/09/2001 |
| EP SHB LIMITED                             | 02571241        | Byron House, 7 - 9 St. James's Street, London , United Kingdom, SW1A 1EE                                              | Directly Connected Power Station                     | 18/09/2001 |
| Epsilon Generation Limited                 | 11118545        | THE OLD RECTORY CHURCH STREET, WEYBRIDGE , United Kingdom, KT13 8DE                                                   | Embedded Power Station                               | 10/11/2022 |
| EP UK POWER DEVELOPMENT LTD                | 10808313        | Byron House, 7 - 9 St. James's Street, London , United Kingdom, SW1A 1EE                                              | Directly Connected Power Station                     | 03/08/2017 |
| EQUINICITY LTD                             | 11374646        | The Quadrangle Imperial Square, Cheltenham, Cheltenham, United Kingdom, GL50 1PZ                                      | Supplier                                             | 29/10/2019 |
| Equinix (LD-A) Limited                     | OE005938        | 44 Esplanade, Saint Helier , Jersey, JE4 9WU                                                                          | Non-Embedded Customer Site                           | 22/08/2024 |
| EQUINOR NEW ENERGY LIMITED                 | 06824625        | 1 Kingdom Streetnull, London , W2 6BD                                                                                 | Directly Connected Power Station                     | 02/05/2019 |
| EROVA ENERGY LIMITED                       | 557068          | Molesworth House,1-2 South Frederick Street, Dublin , Ireland, D02 N820                                               | Interconnector User; Virtual Lead Party              | 25/04/2017 |
| ER PROJECT DEVELOPMENT CO LIMITED          | 14420107        | The Barn, Ford Farm, Aldbourne, Marlborough, United Kingdom, SN8 2DP                                                  | Directly Connected Power Station                     | 31/05/2023 |
| ESB ASSET DEVELOPMENT UK LIMITED           | 06925667        | Tricor Suite 4th Floor, 50 Mark Lane, London , United Kingdom, EC3R 7QR                                               | Directly Connected Power Station                     | 14/09/2018 |
| ESBI CONTRACTING LIMITED                   | 200660          | 27 FITZWILLIAM STREET LOWER, DUBLIN 2 , IRELAND, D02 KT92                                                             | Directly Connected Power Station; Dormant CUSC Party | 21/07/2008 |
| ESB INDEPENDENT ENERGY (NI) LIMITED        | 252609          | 27 FITZWILLIAM STREET LOWER, DUBLIN 2 , IRELAND, D02 KT92                                                             | Interconnector User                                  | 04/03/2005 |
| ESB INDEPENDENT GENERATION TRADING LIMITED | 466142          | 27 FITZWILLIAM STREET LOWER, DUBLIN 2 , IRELAND, D02 KT92                                                             | Embedded Power Station                               | 08/06/2017 |
| ESGAIR GALED ENERGY PARK LIMITED           | 13153937        | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                      | Embedded Power Station                               | 03/09/2021 |
| ESP ELECTRICITY LIMITED                    | 04718806        | 1st Floor, Bluebird House,Mole Business Park, Leatherhead, Surrey, United Kingdom, KT22 7BA                           | Independent Distribution N/W Operator                | 19/07/2018 |
| ESSO PETROLEUM COMPANY,LIMITED             | 00026538        | Ermyn House, Ermyn Way, Leatherhead, Surrey, United Kingdom, KT22 8UX                                                 | Embedded Power Station                               | 26/02/2010 |
| ETP UK 1 LTD                               | 14548137        | 17 Grosvenor Street, Mayfair, London , United Kingdom, W1K 4QG                                                        | Directly Connected Power Station                     | 15/06/2023 |
| ETP UK 2 LTD                               | 14545198        | 17 Grosvenor Street, Mayfair, London, United Kingdom, W1K 4QG                                                         | Directly Connected Power Station                     | 04/09/2023 |
| EUROPEAN COMMODITY CLEARING AG             | HRB 22362       | AUGUSTUSPLATZ 9, LEIPZIG , Germany, DE-04109                                                                          | Interconnector User                                  | 25/07/2013 |
| EVOLUTION POWER LIMITED                    | 13544817        | 2nd Floor,Regis House, 45 King William Street, London , United Kingdom, EC4R 9AN                                      | Directly Connected Power Station                     | 06/03/2023 |
| EWII Energi A/S                            | DK20810440      | Kokbjerg 30, Kolding, KOLDING, Denmark, 6000                                                                          | Interconnector User                                  | 02/04/2024 |
| Exagen Development Limited                 | 11698003        | 71 - 75 Shelton Street, London , United Kingdom, WC2H 9JQ                                                             | Directly Connected Power Station                     | 01/08/2022 |
| EXAGEN GROUP LIMITED                       | 12783713        | 71-75 Shelton Street Covent Garden, London , WC2H 9JQ                                                                 | Directly Connected Power Station                     | 16/12/2024 |
| EXERGY SOLUTIONS LIMITED                   | 13532972        | 2.18 Trafford House Chester RoadOld Trafford, Stretford, Greater Manchester, UK, M32 0RS                              | Virtual Lead Party                                   | 15/11/2023 |
| EXETER MAIN BATTERY LIMITED                | 12368146        | 22 CHANCERY LANE, LONDON , United Kingdom, WC2A 1LS                                                                   | Directly Connected Power Station                     | 04/12/2020 |
| Exeter Storage Limited                     | 13869756        | 4th Floor 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                       | Directly Connected Power Station                     | 14/07/2022 |
| EXPRESS DISTRIBUTION PARK LTD              | 13410141        | 4 King Square, Bridgwater , TA6 3YF                                                                                   | Directly Connected Power Station                     | 04/11/2024 |
| EXXONMOBIL CHEMICAL LIMITED                | 00867162        | Ermyn House, Ermyn Way, Leatherhead , United Kingdom, KT22 8UX                                                        | Non-Embedded Customer Site                           | 31/03/2005 |
| EXXONMOBIL GAS MARKETING EUROPE LIMITED    | 02517230        | Ermyn House, Ermyn Way, Leatherhead, Surrey, UK, KT22 8UX                                                             | Interconnector User                                  | 08/05/2024 |
| Ezpada AG                                  | CHE-110.624.390 | Baarerstrasse 139, Zug, ZUG, Switzerland, 6300                                                                        | Interconnector User                                  | 03/10/2024 |
| F & S ENERGY LIMITED                       | 07524841        | 87-91 Springfield Roadnull, Chelmsford, CHELMSFORD , CM2 6JL                                                          | Supplier                                             | 01/02/2013 |
| FAB LINK LIMITED                           | 54637           | c/o Collas Crill Trust Limited,Glategny Court, Glategny Esplanade, St Peter Port , Guernsey (United Kingdom), GY1 1WR | Interconnector Owner                                 | 27/01/2014 |
| Fairways Battery Storage Ltd               | SC716348        | The Shires, 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                      | Embedded Exemptable Large Power Station              | 04/01/2023 |
| FALKIRK POWER LTD                          | 13321637        | The Factory, Whitchurch, Ross-on-Wye, Herefordshire, United Kingdom, HR9 6DF                                          | Embedded Power Station                               | 06/10/2022 |
| FALLAGO RIG WINDFARM LIMITED               | SC226523        | Atria One, Level 7, 144 Morrison Street, Edinburgh , United Kingdom, EH3 8EX                                          | Directly Connected Power Station                     | 21/10/2010 |
| FARMOOR ENERGY LIMITED                     | 07111074        | Drax Power Station, Drax, Selby, North Yorkshire, United Kingdom, YO8 8PH                                             | Supplier                                             | 11/04/2013 |
| FARRINGDON ENERGY LIMITED                  | 09256369        | Endeavour House 3rd Floor, Coopers End Road, Stansted , United Kingdom, CM24 1SJ                                      | Supplier                                             | 16/03/2020 |
| FARR WINDFARM LIMITED                      | SC166005        | 50 Lothian Road, Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                                 | Directly Connected Power Station                     | 02/08/2005 |
| FASNAKYLE BATTERY STORAGE LIMITED          | SC725349        | 33 BOTHWELL ROAD, HAMILTON , United Kingdom, ML3 0AS                                                                  | Embedded Power Station                               | 20/01/2023 |
| FEARNA PSH LIMITED                         | 14819538        | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                     | 24/04/2024 |
| FENWICK SOLAR PROJECT LIMITED              | 13705886        | 5e Park Farm, Chichester Road, Arundel , United Kingdom, BN18 0AG                                                     | Directly Connected Power Station                     | 03/10/2023 |
| FERRYMUIR ENERGY STORAGE LIMITED           | 11194667        | 8th Floor,100 Bishopsgate, London , United Kingdom, EC2N 4AG                                                          | Embedded Exemptable Large Power Station              | 30/09/2020 |
| FETTERESSO WIND LIMITED                    | 06801490        | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                             | Embedded Exemptable Large Power Station              | 10/10/2014 |
| FIDDLERS FERRY LTD                         | 14385301        | The Factory,Whitchurch, Ross-on-Wye, Herefordshire, United Kingdom, HR9 6DF                                           | Directly Connected Power Station                     | 27/03/2023 |
| FIELD AUCHTERAW LTD.                       | SC621663        | 9th Floor,41 West Campbell Street, Glasgow , United Kingdom, G2 6SE                                                   | Embedded Exemptable Large Power Station              | 01/10/2021 |
| FIELD CORRIEMOILLIE LTD                    | 15258085        | Montacute Yards,185-186 Shoreditch High Street, London , United Kingdom, E1 6HU                                       | Directly Connected Power Station                     | 23/01/2025 |
| FIELD DEVCO LTD                            | 14347177        | Fora Montacute Yards, Shoreditch High St, London , United Kingdom, E1 6HU                                             | Directly Connected Power Station                     | 08/08/2023 |
| Field Devco Ltd                            | 14347177        | Fora Montacute YardsShoreditch High St, London , E1 6HU                                                               | Directly Connected Power Station                     | 17/03/2025 |
| Field Drum Farm Ltd                        | SC721836        | 9th Floor, 41 West Campbell Street,West Campbell Street, Glasgow , United Kingdom, G2 6SE                             | Embedded Power Station                               | 31/10/2023 |
| FIELD HARTMOOR LTD                         | 13995703        | Fora Montacute Yards,Shoreditch High Street, London , United Kingdom, E1 6HU                                          | Directly Connected Power Station                     | 18/03/2023 |
| FIELD KNOCKNAGAEI LTD                      | 15249773        | Montacute Yards,185-186 Shoreditch High Street, London , United Kingdom, E1 6HU                                       | Directly Connected Power Station                     | 10/05/2023 |
| Fig Power Limited                          | 13879348        | Finzels Reach, Counterslip, Bristol, United Kingdom, BS1 6BX                                                          | Embedded Power Station                               | 03/07/2024 |
| Firma Vogt Solar Ltd                       | 13979492        | 14A High Cross, Truro, Cornwall, United Kingdom, TR1 2AJ                                                              | Directly Connected Power Station                     | 13/02/2024 |
| First Hydro Company                        | 02444277        | Dinorwig Power StationLlanberis, Gwynedd, Gwynedd, UK, LL55 4TY                                                       | Directly Connected Power Station                     | 18/09/2001 |
| FIRSTWAY SOLAR LTD                         | 14056763        | 67 Westow Street, London , United Kingdom, SE19 3RW                                                                   | Directly Connected Power Station                     | 12/08/2024 |
| Fishcross Generation Limited               | SC604768        | Clyde View (Suite F3), Riverside Business Park, 22 Pottery Street, Greenock , United Kingdom, PA15 2UZ                | Directly Connected Power Station                     | 30/07/2024 |
| FIVE ESTUARIES OFFSHORE WIND FARM LIMITED  | 12292474        | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                         | Directly Connected Power Station                     | 08/09/2020 |
| FLAVUSIA LTD                               | 15594838        | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                                             | Directly Connected Power Station                     | 23/07/2024 |
| Fleet Green Limited                        | 12725583        | Ropemaker Place, 28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                               | Directly Connected Power Station                     | 01/07/2024 |
| FLEET SOLAR LIMITED                        | 12368193        | 22 CHANCERY LANE, LONDON , UNITED KINGDOM, WC2A 1LS                                                                   | Directly Connected Power Station                     | 04/12/2020 |
| Flemyland Battery Storage Ltd              | SC729992        | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                  | Directly Connected Power Station                     | 02/03/2023 |
| FLEXIBLE GENERATION 1 LTD                  | 14247769        | 4th Floor 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                       | Directly Connected Power Station                     | 15/05/2023 |
| FLEXIBLEGRIDPOWER2 LTD                     | 10683876        | Suite 1 3rd Floor, 11-12 St James's Square, London , United Kingdom, SW1Y 4LB                                         | Directly Connected Power Station                     | 21/07/2020 |
| FLEXIBLEGRIDPOWER LTD                      | 10683796        | Suite 1 3rd Floor, 11-12 St James's Square, London , United Kingdom, SW1Y 4LB                                         | Non-Embedded Customer Site                           | 12/03/2021 |
| FLEXION ENERGY SPV 2 LTD                   | 14073230        | 27 Old Gloucester Street, London , United Kingdom, WC1N 3AX                                                           | Embedded Power Station                               | 21/08/2023 |
| FLEXION ENERGY UK STORAGE LTD              | 13492210        | 27 Old Gloucester Street, London , United Kingdom, WC1N 3AX                                                           | Embedded Exemptable Large Power Station              | 06/03/2023 |
| FLEXITRICITY LIMITED                       | SC263298        | Mainpoint,102 West Port, Edinburgh, Edinburgh, United Kingdom, EH3 9DN                                                | Supplier; Virtual Lead Party                         | 24/09/2018 |
| Flooring Porter Ltd                        | 13342788        | 88 Grays Inn Road, London , United Kingdom, WC1X 8AA                                                                  | Directly Connected Power Station                     | 18/04/2023 |
| FLOTATION ENERGY LIMITED                   | SC597702        | 12 Alva Street, Edinburgh , United Kingdom, EH2 4QG                                                                   | Directly Connected Power Station                     | 16/08/2021 |
| FOEL FACH WIND FARM LIMITED                | 14144097        | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                     | Directly Connected Power Station                     | 27/11/2024 |
| FOREPOWER LINCOLN (250) LIMITED            | 13932692        | Medforth House,Catfoss Lane, Brandesburton, Driffield, United Kingdom, YO25 8ES                                       | Directly Connected Power Station                     | 06/12/2024 |
| Forestry Finance Ltd                       | 13597923        | 7 Queen Annes Grove, London , United Kingdom, W4 1HW                                                                  | Directly Connected Power Station                     | 21/12/2022 |
| FORSA ENERGY GAS HOLDINGS LIMITED          | 10913384        | Masters House107 Hammersmith Road, London, LONDON, UK, W14 0QH                                                        | Directly Connected Power Station                     | 30/10/2024 |
| FORTUM GLASGOW LIMITED                     | 10359853        | 4th Floor, Phoenix House, 1 Station Hill, Reading, Berkshire, United Kingdom, RG1 1NB                                 | Embedded Exemptable Large Power Station              | 04/07/2018 |
| FOSSE GREEN ENERGY LIMITED                 | 13438725        | S10 Blyth Workspace Commissioners Quay, Quay Road, Blyth , United Kingdom, NE24 3AF                                   | Directly Connected Power Station                     | 24/11/2022 |
| FOUNDDIGITAL DS LIMITED                    | 10767987        | 63/66 Hatton Garden, Fifth Floor, Suite 23, London , United Kingdom, EC1N 8LE                                         | Dormant CUSC Party; Non-Embedded Customer Site       | 16/04/2021 |
| Found Digital DS Ltd                       | 10767987        | 63/66 Hatton Garden, Fifth Floor, Suite 23,, London , United Kingdom, EC1N 8LE                                        | Non-Embedded Customer Site                           | 16/04/2021 |
| FOXGLOVE ENERGY SUPPLY LTD                 | 09689035        | 16 North Mills, Frog Island, Leicester , United Kingdom, LE3 5DL                                                      | Supplier                                             |            |



|                                                         |            |                                                                                                                  |                                                      |            |
|---------------------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| FPC ELECTRIC LAND LIMITED                               | 09542958   | 101 New Cavendish Street1st Floor South, London , W1W 6XH                                                        | Directly Connected Power Station                     | 10/01/2023 |
| FRASERBURGH ENERGY LTD                                  | 13453110   | Temporis Capital, Wellington House, 125-130 Strand,, London, London , WC2R OAP                                   | Dormant CUSC Party                                   | 21/03/2022 |
| FREASDAIL ENERGY LIMITED                                | 09605716   | Beaufort Court, Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                             | Directly Connected Power Station                     | 09/03/2016 |
| FRED. OLSEN RENEWABLES LIMITED                          | 13633932   | 64-65 VINCENT SQUARE, LONDON , United Kingdom, SW1P 2NU                                                          | Directly Connected Power Station                     | 05/01/2023 |
| FRED OLSEN SEAWIND LIMITED                              | 02672436   | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                        | Directly Connected Power Station                     | 17/11/2021 |
| FREEPOINT COMMODITIES EUROPE LLP                        | OC367926   | 62 BUCKINGHAM GATE, LONDON, LONDON, United Kingdom, SW1E 6AJ                                                     | Interconnector User                                  | 06/02/2013 |
| Frodsham Devco Limited                                  | 15999224   | First Floor, 5 Fleet Place, London , United Kingdom, EC4M 7RD                                                    |                                                      | 04/03/2025 |
| Frodsham Solar Limited                                  | 14432433   | 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                                                | Embedded Power Station                               | 09/04/2024 |
| FRONTIER POWER INTERNATIONAL LIMITED                    | 10917493   | The American Barns, Banbury Road, Lighthorne, Warwick , United Kingdom, CV35 0AE                                 | Interconnector Owner                                 | 21/08/2020 |
| FRV TH Powertek Limited                                 | 14161993   | Parkes & Swan Limited The Officers' Mess, Coldstream Road,, Caterham , CR3 5QX                                   | Directly Connected Power Station                     | 19/12/2023 |
| FRV Tyler Hill BESS 1 Ltd                               | 13869939   | C/O Parkes & Swan Limited, The Officers Mess, , CR3 5QX, Caterham                                                | Directly Connected Power Station                     | 19/09/2024 |
| FS WEST GOURDIE LIMITED                                 | 12356268   | The Long Barn, Manor Courtyard, Stratton-On-The-Fosse, Radstock, United Kingdom, BA3 4QF                         | Embedded Exemptable Large Power Station              | 23/12/2020 |
| FUSE ENERGY SUPPLY LIMITED                              | 08469701   | Fuse Energy, Level39 One Canada SquareCanary Wharf, London, London , E14 5AB                                     | Supplier                                             | 16/05/2022 |
| FUTURE ENERGY LLANWERN LIMITED                          | 11578319   | Hailstone House, Hailstone Hill, Nr Cricklade, Wiltshire, United Kingdom, SN6 6JP                                | Directly Connected Power Station                     | 15/05/2019 |
| FUTURE POWER ENTERPRISES LTD                            | 14884426   | Temporis Capital, Wellington House, 125-130 Strand, London , United Kingdom, WC2R 0AP                            | Directly Connected Power Station                     | 04/12/2024 |
| GALAWHISTLE WIND FARM LIMITED                           | 07715284   | Connect House,133-137 Alexandra Road, Wimbledon, London, United Kingdom, SW19 7JY                                | Directly Connected Power Station                     | 01/12/2011 |
| GALILEO 01 LIMITED                                      | SC738436   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 05/09/2023 |
| GALILEO 02 LIMITED                                      | SC738437   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 04/06/2024 |
| GALILEO 04 LIMITED                                      | SC761010   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 13/09/2023 |
| GALILEO 05 LIMITED                                      | SC761068   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 14/11/2024 |
| GALILEO 07 LIMITED                                      | SC761089   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 02/04/2025 |
| GALILEO 09 LIMITED                                      | 14710288   | C12 Cathedral Road, Cardiff , United Kingdom, CF11 9LJ                                                           | Directly Connected Power Station                     | 27/01/2025 |
| GALILEO 10 LIMITED                                      | SC761091   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 08/05/2024 |
| GALILEO 12 LIMITED                                      | SC783153   | 7-9, North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                 | Directly Connected Power Station                     | 02/12/2024 |
| GALILEO 13 LIMITED                                      | SC783292   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 05/04/2024 |
| GALILEO 15 LIMITED                                      | 15358916   | C12 Cathedral Road, Cardiff , United Kingdom, CF11 9LJ                                                           | Directly Connected Power Station                     | 05/03/2025 |
| GALILEO 16 LIMITED                                      | SC792765   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH2 1AW                                                  | Directly Connected Power Station                     | 27/03/2025 |
| Galileo Empower UK Limited                              | SC683992   | 7-9 North St. David Street, Edinburgh , United Kingdom, EH4 1AW                                                  | Directly Connected Power Station                     | 28/02/2024 |
| GALLOPER WIND FARM LIMITED                              | 07320597   | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                    | Directly Connected Power Station                     |            |
| GARREG FAWR ENERGY PARK LIMITED                         | 13052403   | HODGE HOUSE GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                  | Embedded Power Station                               | 03/06/2021 |
| GARSCADDEN PARK LIMITED                                 | SC665314   | 200 St. Vincent Street, Glasgow , United Kingdom, G2 5SG                                                         | Directly Connected Power Station                     | 04/10/2024 |
| GARVARY WIND FARM LTD                                   | 09749336   | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                | Directly Connected Power Station                     | 04/05/2022 |
| GATE BURTON ENERGY PARK LIMITED                         | 12660764   | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                          | Directly Connected Power Station                     | 03/06/2021 |
| GATEWAY ENERGY CENTRE LIMITED                           | 07146501   | 30 Crown Place, Earl Street, London , United Kingdom, EC2A 4ES                                                   | Directly Connected Power Station                     | 04/09/2014 |
| GATROBEN OFFSHORE DEVELOPMENTS 2 LIMITED                | 13587611   | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                            | Directly Connected Power Station                     | 06/10/2021 |
| GAZPROM MARKETING & TRADING LIMITED                     | 03768267   | 20 TRITON STREET, LONDON, London, United Kingdom, NW1 3BF                                                        | Interconnector User; Virtual Lead Party              | 20/12/2007 |
| GEN-I, trgovanje in prodaja električne energije, d.o.o. | 1587714000 | Vrbina 17, Krsko, Krsko, Slovenia, 8270                                                                          | Interconnector User                                  | 13/02/2025 |
| Geocore (Newarthill) Ltd                                | SC772814   | 21 Melville Street, Edinburgh , United Kingdom, EH3 7PE                                                          | Directly Connected Power Station                     | 23/02/2024 |
| Geocore Ltd                                             | SC711786   | 21 Melville Street, Edinburgh , United Kingdom, EH3 7PE                                                          | Directly Connected Power Station                     | 07/12/2022 |
| GETLINK PROJECTS 2 LIMITED                              | 15001715   | Uk Terminal;Ashford Road, Folkestone , CT18 8XX                                                                  | Interconnector Owner                                 | 12/09/2024 |
| GF Norwich Energy Ltd                                   | 14824334   | 20-22 Wenlock Road, London , United Kingdom, N1 7GU                                                              | Directly Connected Power Station                     | 07/02/2024 |
| GF Sellindge Energy Ltd                                 | 14824340   | 20-22 Wenlock Road, London , N1 7GU                                                                              | Directly Connected Power Station                     | 04/10/2024 |
| GF THORNTON ENERGY LTD                                  | 14754797   | 20-22 Wenlock Road, London , United Kingdom, N1 7GU                                                              | Directly Connected Power Station                     | 23/10/2023 |
| GIGABOX DEVELOPMENTS LIMITED                            | 11731923   | 1st Floor Midland House,77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                 | Embedded Exemptable Large Power Station              | 29/10/2019 |
| GIGABOX NO 5 LIMITED                                    | 13614175   | 1st Floor Midland House, 77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                | Embedded Exemptable Large Power Station              | 20/05/2022 |
| GILKES ENERGY LIMITED                                   | 03203285   | Canal Head North, Kendal, Cumbria, United Kingdom, LA9 7BZ                                                       | Directly Connected Power Station                     | 07/11/2022 |
| GLAXO OPERATIONS LTD                                    | 00711851   | 980 Great West Road, Brentford , United Kingdom, TW8 9GS                                                         | Embedded Exemptable Large Power Station              | 25/07/2023 |
| GLENCHAMBER WIND ENERGY LIMITED                         | 08986190   | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                              | Directly Connected Power Station                     | 03/12/2014 |
| GLENCORE ENERGY UK LTD.                                 | 04542769   | 18 HANOVER SQUARE, LONDON , United Kingdom, W1S 1JY                                                              | Interconnector User                                  | 12/07/2022 |
| GLENDEVON ENERGY STORAGE LIMITED                        | 13146302   | c/o Foresight Group Llp,The Shard, 32 London Bridge Street, London , United Kingdom, SE1 9SG                     | Embedded Exemptable Large Power Station              | 16/06/2021 |
| GLENDOE STORAGE LIMITED                                 | 13869958   | 4th Floor 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                  | Directly Connected Power Station                     | 03/03/2022 |
| GLENDYE WIND FARM LIMITED                               | 09171944   | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                | Directly Connected Power Station                     | 05/05/2022 |
| GLEN EARRACH ENERGY LIMITED                             | SC777268   | 50 Lothian Road;Festival Square, Edinburgh , EH3 9WJ                                                             | Directly Connected Power Station                     | 06/02/2025 |
| GLEN KYLLACHY WIND FARM LIMITED                         | 11914689   | 27-28 EASTCASTLE STREET, LONDON , United Kingdom, W1W 8DH                                                        | Directly Connected Power Station                     | 16/05/2019 |
| Glen Lednock Wind Farm Limited                          | 15296141   | Stirling Square,5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                           | Directly Connected Power Station                     | 14/08/2024 |
| GLENMUCKLOCH PUMPED STORAGE HYDRO LIMITED               | SC522520   | c/o Foresight Group,Clarence House,131-135 George Street, Edinburgh , United Kingdom, EH2 4JS                    | Directly Connected Power Station                     | 01/04/2016 |
| GLENMUCKLOCH RENEWABLE ENERGY LIMITED                   | SC474474   | c/o Foresight Group,Clarence House, 131-135 George Street, Edinburgh , United Kingdom, EH2 4JS                   | Directly Connected Power Station                     | 11/06/2015 |
| GLENROTHERS BESS LTD                                    | 13641024   | The Factory, Whitchurch, Ross On Wye, Herefordshire, United Kingdom, HR9 6DF                                     | Embedded Power Station                               | 26/01/2023 |
| GLENS OF FOUDLAND WIND FARM LIMITED                     | 04493791   | c/o RES Limited,Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR              | Embedded Power Station                               | 31/03/2005 |
| GLENTAGGART WIND LIMITED                                | SC580101   | c/o Brockwell Energy Limited, The Eagle Building-Third Floor,19 Rose Street, Edinburgh , United Kingdom, EH2 2PR | Directly Connected Power Station                     | 25/08/2021 |
| GLEN ULLINISH WF 2 LTD                                  | SC666970   | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                          | Directly Connected Power Station                     | 30/11/2020 |
| GLEN ULLINISH WF LIMITED                                | SC380407   | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                          | Directly Connected Power Station                     | 16/11/2012 |
| GLOBAL INFRASTRUCTURE UK LIMITED                        | 10031299   | 5 NEW STREET SQUARE, LONDON , UNITED KINGDOM, EC4A 3TW                                                           | Non-Embedded Customer Site                           | 02/05/2023 |
| Global Risk Management A/S                              | DK79332216 | 7 Strandvejen, Middelfart , Denmark, 5500                                                                        | Interconnector User                                  | 11/08/2020 |
| GLOUCESTER ENERGY PARK LIMITED                          | 14220265   | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                           | Directly Connected Power Station                     | 17/02/2023 |
| Gnera Energia y Tecnologia SL                           | 84196997   | Planta 7, Edificio AbedulSerrano Galvache 56, Madrid, MADRID, Spain, 28033                                       | Interconnector User                                  | 15/11/2023 |
| GOOD ENERGY DEVELOPMENT (NO.7) LIMITED                  | 08719457   | GOOD ENERGY, MONKTON PARK OFFICE, CHIPPENHAM , United Kingdom, SN15 1GH                                          | Directly Connected Power Station; Dormant CUSC Party | 17/07/2015 |
| GOOD ENERGY LIMITED                                     | 03899612   | GOOD ENERGY, MONKTON PARK OFFICE, CHIPPENHAM , United Kingdom, SN15 1GH                                          | Supplier                                             |            |
| GOODMAN UK LIMITED                                      | 03625138   | Cornwall House, Blythe Valley Park,, Solihull, West Midlands, United Kingdom, B90 8AF                            | Non-Embedded Customer Site                           | 21/07/2023 |
| GORDONSTOWN HILL WIND FARM LIMITED                      | 06772099   | Third Floor, 10 Lower Grosvenor Place, London , United Kingdom, SW1W 0EN                                         | Embedded Exemptable Large Power Station              |            |
| GPC 013 LTD                                             | 14605861   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Embedded Power Station                               | 28/03/2024 |
| GPC 016 Ltd                                             | 14605888   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Embedded Power Station                               | 21/03/2024 |
| GPC 1039 Ltd                                            | 14247712   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Directly Connected Power Station                     | 20/12/2022 |
| GPC 1119 Ltd                                            | 14428809   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Directly Connected Power Station                     | 03/05/2023 |
| GPC 1127 Ltd                                            | 14757688   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Embedded Power Station                               | 03/01/2024 |
| GPC 1134 Ltd                                            | 14527803   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Directly Connected Power Station                     | 09/08/2023 |
| GPC 1137 Ltd                                            | 14735508   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Embedded Power Station                               | 11/12/2023 |
| GPC 1154 Ltd                                            | 14342160   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Directly Connected Power Station                     | 25/09/2023 |
| GPC 1169 Ltd                                            | 14757640   | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                         | Embedded Power Station                               | 02/04/2024 |

|                                                   |           |                                                                                                                               |                                                      |            |
|---------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| GPC 1184 LTD                                      | 14736773  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Embedded Exemptable Large Power Station              | 31/03/2025 |
| GPC 1210 Ltd                                      | 14431015  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Directly Connected Power Station                     | 24/01/2024 |
| GPC 1211 Ltd                                      | 14443829  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Directly Connected Power Station                     | 23/10/2023 |
| GPC 2008 Ltd                                      | 14736935  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Embedded Power Station                               | 31/01/2024 |
| GPC 612 Ltd                                       | 14574747  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Embedded Power Station                               | 18/09/2023 |
| GPC 680 Ltd                                       | 14574720  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Embedded Power Station                               | 30/01/2024 |
| GPC 700 Ltd                                       | 14403812  | 3rd Floor, 1 Ashley Road, Altrincham, Cheshire, United Kingdom, WA14 2DT                                                      | Directly Connected Power Station                     | 03/05/2023 |
| GRAIN NORTH POWER LIMITED                         | 12164360  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                              | Directly Connected Power Station                     | 14/09/2021 |
| Grain South Power Limited                         | 12164408  | First Floor, 145 Kensington Church Street, London , United Kingdom, W8 7LP                                                    | Directly Connected Power Station                     | 29/09/2021 |
| GRANGEMOUTH CHP LIMITED                           | SC178243  | Inchyra Road, Grangemouth, Stirlingshire, United Kingdom, FK3 9XB                                                             | Embedded Power Station                               | 01/09/2004 |
| GRAVEN HILL PURCHASER LTD                         | 13128906  | One, Fleet Place, London , United Kingdom, EC4M 7WS                                                                           | Directly Connected Power Station                     | 16/10/2024 |
| GREAT CASTERTON ENERGY PARK LIMITED               | 15040612  | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                        | Directly Connected Power Station                     | 29/09/2023 |
| GREATER GABBARD OFFSHORE WINDS LIMITED            | 04985731  | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                         | Directly Connected Power Station                     | 31/01/2005 |
| Greenchoice B.V.                                  | 24302685  | Kruisplein 15, Rotterdam, ROTTERDAM, Netherlands, 3014DB                                                                      | Interconnector User                                  | 15/01/2025 |
| GREEN ENERGY (UK) LIMITED                         | 04194006  | Black Swan House,23 Baldock Street, Ware , United Kingdom, SG12 9DH                                                           | Supplier                                             | 09/02/2015 |
| GREEN ENERGY INTERNATIONAL LIMITED                | 10086572  | TRINITY HOUSE NEWBY ROAD, STOCKPORT , United Kingdom, SK7 5DA                                                                 | Directly Connected Power Station                     | 28/04/2022 |
| GREEN ENERGY MAB LTD                              | 14169451  | c/o Srs Direct,Corporation House,Corporation Road, Swansea , United Kingdom, SA4 6SD                                          | Directly Connected Power Station                     | 03/02/2025 |
| GREENFIELDS (T) LIMITED                           | 09145738  | 5th Floor, North Side, 7/10 Chandos Street,Cavendish Square, London , United Kingdom, W1G 9DQ                                 | Directly Connected Power Station                     | 09/10/2018 |
| GREENGAIRS EAST WIND FARM LIMITED                 | 07383770  | Springfield, Ackenthwaite, Milnthorpe, United Kingdom, LA7 7DQ                                                                | Embedded Power Station                               | 12/11/2019 |
| GREEN GENERATION ENERGY NETWORKS CYMRU LIMITED    | 13060815  | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                               | Directly Connected Distribution System               | 27/05/2021 |
| GreenGridPower1 Ltd                               | 12831353  | 67 Westow Street, London , United Kingdom, SE19 3RW                                                                           | Embedded Exemptable Large Power Station              | 05/07/2022 |
| GREEN HYDROGEN SOLAR FARM LIMITED                 | 14389052  | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                     | Directly Connected Power Station                     | 15/05/2023 |
| GREEN INVESTMENT GROUP LIMITED                    | SC574147  | ATRIA ONE 144 MORRISON STREET, EDINBURGH , UNITED KINGDOM, EH3 8EX                                                            | Directly Connected Power Station                     | 18/09/2020 |
| Greenland Wind Farm Limited                       | SC723561  | c/o Locogen Limited, 4 West Silvermills Lane, Edinburgh, Midlothian, United Kingdom, EH3 5BD                                  | Directly Connected Power Station                     | 13/01/2023 |
| GREENLINK INTERCONNECTOR LIMITED                  | 536954    | Unit 3, 4075 Kingswood Road,Citywest Business Campus, Saggart, Co. Dublin, Ireland, D24 KF85                                  | Interconnector Owner                                 | 11/11/2014 |
| GREENPOWER (CARRAIG GHEAL) LIMITED                | SC245115  | The E-Centre,Cooperage Way, Alloa, Clackmannanshire, United Kingdom, FK10 3LP                                                 | Directly Connected Power Station                     | 02/11/2005 |
| GREENPOWER (INTERNATIONAL) LTD.                   | SC203660  | THE E CENTRE, ALLOA , United Kingdom, FK10 3LP                                                                                | Embedded Exemptable Large Power Station              | 03/12/2024 |
| GREENTECH PROJECTS HOLDING UK LIMITED             | 12676147  | Challenge House, Sherwood Drive,, Milton Keynes , United Kingdom, MK3 6DP                                                     | Embedded Exemptable Large Power Station              | 23/08/2022 |
| GREENWIRE TRANSMISSION PENTIR LIMITED             | 536955    | Building 3400, Avenue 3000,Cork Airport Business Park, Cork , Ireland, T12 D23C                                               | Directly Connected Power Station; Dormant CUSC Party | 11/12/2014 |
| GREENWIRE TRANSMISSION SOUTH WALES LIMITED        | 568810    | Building 3400, Avenue 3000,Cork Airport Business Park, Cork , Ireland                                                         | Directly Connected Power Station; Dormant CUSC Party | 14/12/2017 |
| Grenergy Renewables UK Limited                    | 12875804  | 6th Floor, 25 Farringdon Street, London , United Kingdom, EC4A 4AB                                                            | Directly Connected Power Station                     | 20/02/2025 |
| Gresham House Asset Management Limited            | 09447087  | 5 New Street Square, London , United Kingdom, EC4A 3TW                                                                        | Directly Connected Power Station                     | 19/04/2023 |
| Gresham House Devco Pipeline Limited              | 11007494  | 5 New Street Square, London , United Kingdom, EC4A 3TW                                                                        | Directly Connected Power Station                     | 05/05/2023 |
| Greta IV Limited                                  | 14548630  | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                     | Directly Connected Power Station                     | 17/08/2023 |
| GREтна GRID SERVICES LIMITED                      | 12394809  | 1030 CENTRE PARK,SLUTCHERS LANE, WARRINGTON , UNITED KINGDOM, WA1 1QL                                                         | Non-Embedded Customer Site                           | 29/01/2021 |
| GRIDBEYOND LIMITED                                | 08211691  | Office 7.08, Gridiron Building 1 Pancras SquareKing's Cross, London, Greater London, UK, N1C 4AG                              | Virtual Lead Party                                   | 24/09/2018 |
| GRIDLINK INTERCONNECTOR LIMITED                   | 10181689  | c/o D&M Financial Services, Anumerate Office 2.05 Clockwise, Old Town Hall, 30 Tweedy Road, Bromley , United Kingdom, BR1 3FE | Interconnector Owner                                 | 27/10/2016 |
| GRIDMOVE LTD                                      | 11749475  | 20-22 Wenlock Road, London , United Kingdom, N1 7GU                                                                           | Directly Connected Power Station                     | 24/11/2021 |
| GRIFFIN WIND FARM LIMITED                         | SC245113  | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                          | Directly Connected Power Station                     | 07/11/2005 |
| GROVEHURST ENERGY LIMITED                         | 02197516  | 350 EUSTON ROAD, LONDON , United Kingdom, NW1 3AX                                                                             | Embedded Power Station                               | 18/09/2001 |
| Grupotec Renewables Limited                       | 07543880  | Parkshot House, 5 Kew Road, Richmond , United Kingdom, TW9 2PR                                                                | Embedded Power Station                               | 19/04/2023 |
| GRUPOTEC SOLAR UK 5 LIMITED                       | 14888176  | 5 Kew Road, Richmond, London, United Kingdom, TW9 2PR                                                                         | Embedded Power Station                               | 01/05/2024 |
| GT R4 LIMITED                                     | 13281221  | c/o Johnston Carmichael LLP,Birchin Court, 20 Birchin Lane, London , United Kingdom, EC3V 9DU                                 | Directly Connected Power Station                     | 24/08/2021 |
| GTR London 2 S.À R.L                              | B 284 296 | 2 Rue Edward Steichen, Luxembourg , Grand-Duchy de Luxembourg, 2540                                                           | Non-Embedded Customer Site                           | 29/04/2024 |
| GUNFLEET SANDS II LIMITED                         | 06114226  | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                             | Directly Connected Power Station                     | 03/12/2007 |
| Gunfleet Sands II Ltd                             | 06114226  | 5 Howick Place, London , United Kingdom, SW1P 1WG                                                                             | Directly Connected Power Station                     | 17/02/2011 |
| GUNFLEET SANDS LIMITED                            | 04019207  | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                             | Directly Connected Power Station                     | 17/02/2011 |
| GWYDDELWERN BESS LIMITED                          | 15206459  | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                              | Directly Connected Power Station                     | 09/01/2024 |
| GWYNT GLAS OFFSHORE WIND FARM LIMITED             | 13499295  | Alexander House,1 Mandarin Road,Rainton Bridge Business Park,, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA        | Directly Connected Power Station                     | 26/05/2022 |
| GWYNT Y MOR OFFSHORE WIND FARM LIMITED            | 03697015  | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                                 | Directly Connected Power Station                     | 10/08/2007 |
| HABITAT ENERGY LIMITED                            | 10923911  | 3rd Floor 24 Savile Rownull, London, LONDON, United Kingdom, W1S 2ES                                                          | Virtual Lead Party                                   | 15/04/2020 |
| HAGSHAW HILL REPOWERING LTD                       | SC603085  | 320 ST. VINCENT STREET, GLASGOW, GLASGOW, United Kingdom, G2 5AD                                                              | Directly Connected Power Station                     | 28/05/2019 |
| HAGSHAW REPOWERING 2 LTD                          | SC732631  | J R W, 19 Buccleuch Street, Hawick, Roxburghshire, United Kingdom, TD9 0HL                                                    | Directly Connected Power Station                     | 06/12/2022 |
| HAMS HALL GREEN ENERGY LIMITED                    | 13483632  | The Goods Shed, Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                                        | Directly Connected Power Station                     | 16/02/2022 |
| HARESHAW RIG WF LIMITED                           | SC651792  | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                                       | Directly Connected Power Station                     | 15/09/2020 |
| HARKER ENERGY PARK LIMITED                        | 14487367  | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                        | Directly Connected Power Station                     | 12/07/2023 |
| Harmony BD Ltd                                    | 10683446  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Embedded Power Station                               | 28/11/2022 |
| Harmony BF Ltd                                    | 10772215  | Conyngham Hall, Bond End, Knaresborough, United Kingdom, HG5 9AY                                                              | Embedded Power Station                               | 11/07/2023 |
| HARMONY BW LTD                                    | 15609692  | 10 St James Business Park, Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                       | Directly Connected Power Station                     | 03/04/2025 |
| HARMONY CBR LTD                                   | 15605529  | 10 St James Business Park, Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                       | Directly Connected Power Station                     | 08/04/2025 |
| Harmony CTF 2 Limited                             | 11558612  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Embedded Power Station                               | 20/09/2022 |
| HARMONY CTF LIMITED                               | 10683553  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Embedded Power Station                               | 13/09/2022 |
| HARMONY DL LTD                                    | 14233742  | 10 St James Business Park, Grimbald Crag Court, Knaresborough , HG5 8QB                                                       | Directly Connected Power Station                     | 03/04/2025 |
| HARMONY ENERGY 3 LIMITED                          | 12345037  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Non-Embedded Customer Site                           | 27/03/2025 |
| HARMONY ENERGY LIMITED                            | 10141078  | 10 St James Business Park,Grimbald Cragg Court, Knaresborough, North Yorkshire, United Kingdom, HG5 8QB                       | Directly Connected Power Station                     | 21/06/2022 |
| Harmony FM Limited                                | 10944636  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Embedded Power Station                               | 25/01/2023 |
| HARMONY HB LIMITED                                | 10683540  | Conyngham Hall, Bond End,, Knaresborough , United Kingdom, HG5 9AY                                                            | Embedded Power Station                               | 02/04/2020 |
| HARMONY JF LIMITED                                | 10959382  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                             | Embedded Power Station                               | 15/08/2018 |
| HARMONY MF LIMITED                                | 13596721  | 10 St James Business Park,Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                        | Directly Connected Power Station                     | 03/04/2025 |
| Harmony MS Limited                                | 15754938  | 10 St James Business Park, Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                       | Directly Connected Power Station                     | 03/04/2025 |
| Harmony SH Limited                                | 15611259  | 10 St James Business Park, Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                       | Directly Connected Power Station                     | 04/04/2025 |
| Hartree Partners Power & Gas Company (UK) Limited | 04308186  | 2nd Floor Cardinal Place,100 Victoria Street, London , United Kingdom, SW1E 5JL                                               | Interconnector User                                  | 17/01/2023 |
| HARTREE PARTNERS SUPPLY (UK) LIMITED              | 09283816  | 2nd Floor, Cardinal Place,100 Victoria Street, London , United Kingdom, SW1E 5JL                                              | Supplier                                             | 14/09/2016 |
| Hatchworks Investments Ltd                        | 11324088  | St Georges House6th Floor15 Hanover Square, London , United Kingdom, W1S 1HS                                                  | Directly Connected Power Station                     | 31/05/2023 |
| HAVBREDEY LIMITED                                 | SC717714  | Regus Building, 1st Floor, 93 George Street, Edinburgh , United Kingdom, EH2 3ES                                              | Directly Connected Power Station                     | 05/02/2025 |
| HAWKERS HILL ENERGY PARK LIMITED                  | 10010531  | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                           | Embedded Power Station                               | 01/02/2022 |
| HB197END Limited                                  | 12147583  | 8th Floor, 100 Bishopsgate, London , United Kingdom, EC2N 4AG                                                                 | Directly Connected Power Station                     | 07/09/2020 |
| HB222BRI LTD                                      | 12119824  | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                                              | Directly Connected Power Station                     | 14/09/2021 |
| HB333MIL LTD                                      | 12023569  | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                                              | Directly Connected Power Station                     | 13/09/2021 |

|                                                         |           |                                                                                                                         |                                         |            |
|---------------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------|
| HB411MIN Limited                                        | 12119919  | Basement 68 Gloucester Street, London , United Kingdom, SW1V 4EF                                                        | Directly Connected Power Station        | 07/09/2020 |
| HB825AXM LTD                                            | 11824601  | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                                        | Directly Connected Power Station        | 07/01/2020 |
| HD000ACT LTD                                            | 12023670  | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                                        | Directly Connected Power Station        | 18/03/2020 |
| HD001KIR LTD                                            | 11776395  | 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                                                 | Directly Connected Power Station        | 11/09/2019 |
| HD143OCK LTD                                            | 12023540  | BASEMENT 68 GLOUCESTER STREET, LONDON, LONDON, United Kingdom, SW1V 4EF                                                 | Directly Connected Power Station        | 18/03/2020 |
| HD144WHI LTD                                            | 12023571  | BASEMENT 68 GLOUCESTER STREET, LONDON, LONDON, United Kingdom, SW1V 4EF                                                 | Directly Connected Power Station        | 20/03/2020 |
| HD381GRE Limited                                        | 12023580  | Basement 68 Gloucester Street, London , United Kingdom, SW1V 4EF                                                        | Directly Connected Power Station        | 14/09/2021 |
| HD639LEG LIMITED                                        | 11824675  | BASEMENT 68 GLOUCESTER STREET, LONDON, LONDON, United Kingdom, SW1V 4EF                                                 | Directly Connected Power Station        | 27/02/2020 |
| HD777FRY LTD                                            | 12023701  | BASEMENT 68 GLOUCESTER STREET, LONDON, LONDON, United Kingdom, SW1V 4EF                                                 | Directly Connected Power Station        | 18/03/2020 |
| HD888CAP LIMITED                                        | 11802123  | BASEMENT 68 GLOUCESTER STREET, LONDON, LONDON, United Kingdom, SW1V 4EF                                                 | Directly Connected Power Station        | 11/09/2019 |
| HDCI HAYES LONDON LIMITED                               | 13085639  | Colt House,20 Great Eastern Street, London , United Kingdom, EC2A 3EH                                                   | Non-Embedded Customer Site              | 30/03/2022 |
| HEADWIND DEVELOPMENT SERVICES LIMITED                   | 06964875  | Connect House,133-137 Alexandra Road, Wimbledon, London, United Kingdom, SW19 7JY                                       | Embedded Power Station                  | 02/10/2024 |
| HEATHROW AIRPORT LIMITED                                | 01991017  | The Compass Centre,Nelson Road, Hounslow , United Kingdom, TW6 2GW                                                      | Directly Connected Power Station        | 02/05/2025 |
| HEIT LR LIMITED                                         | 08527265  | 10 St James Business Park,Grimbald Crag Court, Knaresborough , United Kingdom, HG5 8QB                                  | Embedded Power Station                  | 09/04/2018 |
| HEIT PW2 LIMITED                                        | 11558969  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                       | Embedded Power Station                  | 10/05/2022 |
| HEIT PW LIMITED                                         | 10776494  | Conyngham Hall, Bond End, Knaresborough , United Kingdom, HG5 9AY                                                       | Embedded Power Station                  | 10/05/2022 |
| Helios Power Trading A/S                                | 41622296  | 13 Hasselager Centervej, Viby J , Denmark, 8260                                                                         | Interconnector User                     | 27/07/2021 |
| HESTA HEAD WIND FARM LIMITED                            | SC385374  | Suites 303 And 312 Floor 3, 2 West Regent Street, Glasgow , United Kingdom, G2 1RW                                      | Directly Connected Power Station        | 02/06/2016 |
| HFD RENEWABLES LIMITED                                  | SC699755  | 177 Bothwell Street, Glasgow , United Kingdom, G2 7ER                                                                   | Directly Connected Power Station        | 28/01/2025 |
| High Brenfield Wind Farm Limited                        | 15292500  | Stirling Square,5-7 Carlton Gardens, London , SW1Y 5AD                                                                  | Embedded Power Station                  | 10/02/2025 |
| HIGH CONSTELLATION WINDFARM LIMITED                     | 11800500  | 22 CHANCERY LANE, LONDON , United Kingdom, WC2A 1LS                                                                     | Directly Connected Power Station        | 03/04/2020 |
| HIGHLAND WIND FARM LIMITED                              | 13299694  | 14B, Tower 42, 25 Old Broad St, London , United Kingdom, EC2N 1HN                                                       | Directly Connected Power Station        | 12/05/2022 |
| HIGHLAND WIND LIMITED                                   | SC675148  | 4TH FLOOR 115 GEORGE STREET, EDINBURGH , United Kingdom, EH2 4JN                                                        | Directly Connected Power Station        | 17/06/2021 |
| HIGH SPEED TWO (HS2) LIMITED                            | 06791686  | Two Snowhill,Snow Hill Queensway, Birmingham , United Kingdom, B4 6GA                                                   | Non-Embedded Customer Site              | 22/12/2015 |
| HILL OF GLASCHYLE RENEWABLES LLP                        | SO303879  | MUIRDEN FARM, TURRIFF, Aberdeenshire, United Kingdom, AB53 4NH                                                          | Directly Connected Power Station        | 28/10/2015 |
| HILL OF TOWIE LIMITED                                   | 06952881  | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                     | Directly Connected Power Station        | 28/10/2009 |
| HILL STREET SHELFCO 1 LIMITED                           | 14842959  | 31 Hill Street, London , United Kingdom, W1J 5LS                                                                        | Directly Connected Power Station        | 22/11/2023 |
| HIRWAUN POWER LIMITED                                   | 08190283  | DRAX POWER STATION, SELBY, LONDON, United Kingdom, YO8 8PH                                                              | Directly Connected Power Station        | 18/07/2014 |
| HM GB (WIND) LTD                                        | 12421411  | 16 Kier Park, Ascot , SL5 7DS                                                                                           | Embedded Power Station                  | 01/04/2025 |
| HOCKLIFFE GREEN ENERGY CENTRE LTD                       | 14435128  | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                   | Directly Connected Power Station        | 09/12/2024 |
| HOLLYGREEN ENERGYFARM LIMITED                           | 15776139  | Alexander House, 1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station        | 03/12/2024 |
| HOME ENERGY TRADING LTD                                 | 10364306  | GRANVILLE HALL GRANVILLE ROAD, LEICESTER , United Kingdom, LE1 7RU                                                      | Supplier                                | 09/08/2018 |
| HOPSRIG WIND FARM LIMITED                               | SC501771  | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                                 | Directly Connected Power Station        | 28/09/2015 |
| HORIZON NUCLEAR POWER OLDBURY LIMITED                   | 06811995  | Sefton Park,Bells Hill, Stoke Poges,, Buckinghamshire, United Kingdom, SL2 4HD                                          | Directly Connected Power Station        | 11/04/2012 |
| HORIZON NUCLEAR POWER WYLFA LIMITED                     | 06811987  | Sefton Park, Bells Hill, Stoke Poges, Buckinghamshire, United Kingdom, SL2 4HD                                          | Directly Connected Power Station        | 07/07/2009 |
| HORNSEA 1 LIMITED                                       | 07640868  | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                       | Directly Connected Power Station        | 22/09/2010 |
| HOUSEHILL BESS LIMITED                                  | 14168554  | 1st Floor Midland House,77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                        | Embedded Exemptable Large Power Station | 17/01/2023 |
| HUMBER TECH PARK LIMITED                                | 15528913  | c/o Dragon Argent Limited, 63 Bermondsey Street, London , United Kingdom, SE1 3XF                                       | Directly Connected Power Station        | 25/10/2024 |
| Huntly Development Trust Limited                        | SC358964  | Brander Building,The Square, Huntly, Aberdeenshire, United Kingdom, AB54 8BR                                            | Embedded Exemptable Large Power Station | 23/04/2024 |
| HVS GRIDCO LTD                                          | 12633642  | SUITE A 6 HONDURAS STREET, LONDON , United Kingdom, EC1Y 0TH                                                            | Directly Connected Power Station        | 04/11/2020 |
| HVS SITECO LTD                                          | 12616131  | First Floor, Hobhouse Court, Suffolk Street, London , United Kingdom, SW1Y 4HH                                          | Directly Connected Power Station        | 23/01/2025 |
| HYDROCK CONSULTANTS LIMITED                             | 03118932  | Over Court BarnsOver Lane, Almondsbury, Bristol, Avon, United Kingdom, BS32 4DF                                         | Embedded Power Station                  | 06/11/2023 |
| HYWIND (SCOTLAND) LIMITED                               | 08709450  | ONE KINGDOM STREET, LONDON , United Kingdom, W2 6BD                                                                     | Directly Connected Power Station        | 26/12/2014 |
| IBERDROLA ENERGIA ESPANA S.A.U.                         | A95758371 | PLAZA EUSKADI, 5, BILBAO, BILBAO, Spain, 48009                                                                          | Interconnector User                     | 01/10/2014 |
| IB VOGT UK LTD                                          | 06451452  | 127 Cheapside, London , United Kingdom, EC2V 6BT                                                                        | Directly Connected Power Station        | 30/11/2023 |
| IDAHO ENERGY LIMITED                                    | 11751953  | 2 LONDON WALL PLACE, LONDON , United Kingdom, EC2Y 5AU                                                                  | Supplier                                | 02/06/2021 |
| IGP ENERGY STORAGE 2 LIMITED                            | 14731208  | Unit 25.7, Coda Studios189 Munster Rd, London , United Kingddom, SW6 6AW                                                | Directly Connected Power Station        | 11/10/2024 |
| IGP ENERGY STORAGE 3 LIMITED                            | 14817010  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 04/06/2024 |
| IGP ENERGY STORAGE 4 LIMITED                            | 14817026  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 18/07/2024 |
| IGP ENERGY STORAGE 5 LIMITED                            | 14832885  | Unit 25.7 Coda Studios, 189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station        | 13/11/2023 |
| IGP ENERGY STORAGE 6 LIMITED                            | 14832860  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 13/11/2023 |
| IGP INTERNATIONAL PROSPECTING LIMITED                   | 11838529  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 01/12/2022 |
| IGP SOLAR 14 LIMITED                                    | 13211481  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 22/12/2021 |
| IGP SOLAR 16 LIMITED                                    | 13211590  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 01/12/2021 |
| IGP SOLAR 17 LIMITED                                    | 13266705  | Unit 25.7 Coda Studios, 189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station        | 03/12/2021 |
| IGP SOLAR 19 LIMITED                                    | 13290216  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 22/12/2021 |
| IGP SOLAR 22 LIMITED                                    | 13307072  | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                               | Directly Connected Power Station        | 07/09/2023 |
| IG RENEWABLES SPV 1 LTD                                 | 14971486  | 3 Queen Street, London , United Kingdom, W1J 5PA                                                                        | Directly Connected Power Station        | 09/01/2024 |
| ILI (Borders PSH) Ltd                                   | SC581726  | The Shires, 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                        | Directly Connected Power Station        | 20/12/2022 |
| ILI (Trossachs PSH) Ltd                                 | SC581741  | The Shires, 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                        | Directly Connected Power Station        | 20/03/2023 |
| ILI Aurelius Ltd                                        | SC825293  | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                    | Non-Embedded Customer Site              | 17/04/2025 |
| ILI Rufus Ltd                                           | SC825440  | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                    | Non-Embedded Customer Site              | 01/05/2025 |
| INCH CAPE OFFSHORE LIMITED                              | SC373173  | 5th Floor, 40 Princes Street, Edinburgh , United Kingdom, EH2 2BY                                                       | Directly Connected Power Station        | 04/01/2012 |
| IN COMMODITIES A/S                                      | 38381954  | TANGEN 6, AARHUS N , Denmark, 8200                                                                                      | Interconnector User                     | 15/08/2017 |
| Independent Distribution Connection Specialists Limited | 13901266  | 55 Baker Street, London , United Kingdom, W1U 7EU                                                                       | Independent Distribution N/W Operator   | 15/02/2024 |
| INDEPENDENT POWER NETWORKS LIMITED                      | 04935008  | SYNERGY HOUSE WINDMILL AVENUE, BURY ST EDMUNDS , United Kingdom, IP30 9UP                                               | Independent Distribution N/W Operator   | 07/02/2006 |
| INDIAN QUEENS POWER LIMITED                             | 02928100  | Saltend Power Station,Saltend Chemicals Park,Hedon Road, Hull, East Riding Of Yorkshire, United Kingdom, HU12 8GA       | Directly Connected Power Station        | 18/09/2001 |
| INDIGO POWER LIMITED                                    | 12159646  | 200 Brook Drive, Green Park, Reading, United Kingdom, RG2 6UB                                                           | Independent Distribution N/W Operator   | 15/07/2020 |
| Inductive Energy A/S                                    | 42192287  | Abogade 15, Aarhus N, AARHUS, Denmark, 8200                                                                             | Interconnector User                     | 15/05/2024 |
| Ineos Infrastructure (Grangemouth) Limited              | 06981874  | The Adelphi 1-11, John Adam Street, London , United Kingdom, WC2N 6HT                                                   | Non-Embedded Customer Site              | 30/09/2011 |
| INNOVA RENEWABLES LIMITED                               | 12092691  | 3rd Floor, St George's House,13-14 Ambrose Street, Cheltenham , United Kingdom, GL50 3LG                                | Directly Connected Power Station        | 13/12/2021 |
| INOVYN ENERGY LIMITED                                   | 02076043  | Bankes Lane Office,Bankes Lane, Runcorn, Cheshire, United Kingdom, WA7 4EL                                              | Non-Embedded Customer Site              | 18/09/2001 |
| Invenergy Development UK Ltd                            | SC726480  | 50 Lothian Road, Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                                   | Directly Connected Power Station        | 16/04/2024 |
| INVENERGY SERVICES UK LIMITED                           | SC501024  | 50 Lothian Road,Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                                    | Directly Connected Power Station        | 31/01/2022 |
| IPC GRID CONNECTION LIMITED                             | 14903216  | 49 Wood Vale, London , United Kingdom, SE23 3DT                                                                         | Directly Connected Power Station        | 10/11/2023 |
| IPC GRID CONNECTION TWO LIMITED                         | 15291356  | 49 Wood Vale, London , United Kingdom,, SE23 3DT                                                                        | Directly Connected Power Station        | 25/09/2024 |
| IQ ENERGY CENTRE LIMITED                                | 11678461  | Millhouse,32-38 East Street, Rochford, Essex, United Kingdom, SS4 1DB                                                   | Directly Connected Power Station        | 07/06/2019 |
| Irena BESS LIMITED                                      | 13984476  | 30 Queen Square, Bristol , United Kingdom, BS1 4ND                                                                      | Directly Connected Power Station        | 30/11/2022 |
| IRON ACTON GREEN LIMITED                                | 12517505  | Ropemaker Place,28 Ropemaker Street,, London , United Kingdom, EC2Y 9HD                                                 | Directly Connected Power Station        | 24/07/2020 |



|                                               |                |                                                                                                                             |                                         |            |
|-----------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------|
| Isenau Energy Storage Resources Eight Limited | 14497014       | 147a Northcote Road, London , United Kingdom, SW11 6QB                                                                      | Directly Connected Power Station        | 16/08/2023 |
| Isenau Energy Storage Resources Five Limited  | 14369829       | 147a Northcote Road, London , United Kingdom, SW11 6QB                                                                      | Directly Connected Power Station        | 18/08/2023 |
| Isenau Energy Storage Resources Four Limited  | 14369816       | 147a Northcote Road, London , United Kingdom, SW11 6QB                                                                      | Directly Connected Power Station        | 15/04/2024 |
| Isenau Energy Storage Resources Two Limited   | 14245764       | 147a Northcote Road, London , United Kingdom, SW11 6QB                                                                      | Directly Connected Power Station        | 06/02/2024 |
| ISLAND GREEN POWER UK LIMITED                 | 08615657       | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                                   | Directly Connected Power Station        | 01/06/2021 |
| ISLAY TIDAL POWER LIMITED                     | SC521051       | 26 DUBLIN STREET, EDINBURGH , United Kingdom, EH3 6NN                                                                       | Directly Connected Power Station        | 20/04/2016 |
| J.P. Morgan Ventures Energy Corporation       | 13-3804817     | 270 Park Avenue, New York , USA, NY 10017                                                                                   | Interconnector User                     | 30/06/2006 |
| J Aron & Company                              | 13-3092284     | 200 WEST STREET, NEW YORK , United States of America, 10282                                                                 | Interconnector User                     | 17/02/2004 |
| JBM SOLAR PROJECTS 12 LTD                     | 12140230       | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                      | Directly Connected Power Station        | 10/07/2020 |
| JBM SOLAR PROJECTS 13 LIMITED                 | 12140364       | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                      | Directly Connected Power Station        | 08/07/2020 |
| JBM SOLAR PROJECTS 14 LTD                     | 12140396       | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                      | Directly Connected Power Station        | 10/07/2020 |
| JBM SOLAR PROJECTS 2 LTD                      | 11761556       | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                      | Embedded Power Station                  | 01/08/2024 |
| JBM SOLAR PROJECTS 33 LIMITED                 | 13237568       | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                      | Directly Connected Power Station        | 24/01/2023 |
| JEPIPHANY LIMITED                             | 15091275       | 3rd Floor St George's House, 13-14 Ambrose Street, Cheltenham , United Kingdom, GL50 3LG                                    | Directly Connected Power Station        | 05/02/2024 |
| JG PEAR'S GRID CONNECTION LIMITED             | 10146372       | Bella Vista Farm,Hartcliffe Road, Penistone, Sheffield, United Kingdom, S36 9FN                                             | Directly Connected Power Station        | 05/12/2016 |
| JP MORGAN MARKETS LIMITED                     | 01592029       | 25 Bank Street,Canary Wharf, London , United Kingdom, E14 5JP                                                               | Interconnector User                     | 15/01/2008 |
| JP MORGAN SECURITIES PLC                      | 02711006       | 25 Bank Street,Canary Wharf, London , United Kingdom, E14 5JP                                                               | Interconnector User                     | 01/06/2007 |
| Juniper Energy Limited                        | 15825395       | Alexander House, 1 Mandarin Road,Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA      | Directly Connected Power Station        | 26/11/2024 |
| JWM Energia sp. z o.o.                        | 0000451843     | JWM Energia sp. z o.o., Kolejowa 57, Katowice, Poland, 40-602                                                               | Interconnector User                     | 06/03/2025 |
| KARI ENERGY LIMITED                           | 12603435       | c/o Tmf Group,13th Floor 1 Angel Court, London , United Kingdom, EC2R 7HJ                                                   | Directly Connected Power Station        | 25/10/2021 |
| KEADBY GENERATION LIMITED                     | 02729513       | KEADBY POWER STATION, SCUNTHORPE , UNITED KINGDOM, DN17 3EF                                                                 | Directly Connected Power Station        | 18/09/2001 |
| KEGWORTH 10 RENEWABLES LTD                    | 14914243       | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                             | Directly Connected Power Station        | 31/08/2023 |
| KEITH RENEWABLE LIMITED                       | 13124496       | Crown House,108 Aldersgate Street, London , United Kingdom, EC1A 4JQ                                                        | Embedded Power Station                  | 26/04/2022 |
| KEITH SOLAR PV LIMITED                        | 14180200       | 14B, Tower 42, 25 Old Broad St, London , United Kingdom, EC2N 1HN                                                           | Directly Connected Power Station        | 01/07/2022 |
| KEITH STORAGE SOLUTIONS LIMITED               | 11248767       | 19TH FLOOR 22 BISHOPSGATE, LONDON , UNITED KINGDOM, EC2N 4BQ                                                                | Non-Embedded Customer Site              | 30/06/2020 |
| KENNOXHEAD WIND FARM LIMITED                  | 12602263       | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                           | Directly Connected Power Station        | 16/10/2020 |
| KILBRAUR WIND ENERGY LIMITED                  | SC254430       | Beauly House,Dochfour Business Centre, Dochgarroch, Inverness , United Kingdom, IV3 8GY                                     | Directly Connected Power Station        | 30/06/2005 |
| KILDRUMMY WIND FARM LIMITED                   | 07400002       | 5th Floor,20 Fenchurch Street, London , United Kingdom, EC3M 3BY                                                            | Embedded Exemptable Large Power Station | 31/07/2012 |
| Kilmarnock Energy Centre Limited              | SC766862       | 13 Queen's Road, Aberdeen , United Kingdom, AB15 4YL                                                                        | Directly Connected Power Station        | 03/04/2025 |
| KILMARNOCK FLEXPOWER LTD                      | SC692127       | 272 BATH STREET, GLASGOW , United Kingdom, G2 4JR                                                                           | Directly Connected Power Station        | 21/03/2022 |
| KINCARDINE OFFSHORE WINDFARM LIMITED          | SC475345       | c/o Cms Cameron McKenna Nabarro Olswang Llp,4th Floor Saltire Court, 20 Castle Terrace, Edinburgh , United Kingdom, EH1 2EN | Embedded Power Station                  | 29/04/2016 |
| KINCORTH ENERGY STORAGE SYSTEM LTD            | SC783932       | 6 Castle Street,, Edinburgh, Midlothian , EH2 3AT                                                                           | Embedded Exemptable Large Power Station | 30/01/2025 |
| Kinraig Energy Centre Limited                 | 13459551       | Millhouse, 32-38 East Street, Rochford , United Kingdom, SS4 1DB                                                            | Embedded Power Station                  | 07/03/2022 |
| KINGSTON SPACE PROPERTY LIMITED               | 12663171       | 73 CORNHILL, LONDON , United Kingdom, EC3V 3QQ                                                                              | Non-Embedded Customer Site              | 24/12/2021 |
| KINLOCHLEVEN POWER LTD                        | SC552928       | 1st Floor Cef Building,Inveralmond Road,Inveralmond Industrial Estate, Perth , United Kingdom, PH1 3TW                      | Directly Connected Power Station        | 20/03/2018 |
| KINMUCK ENERGY STORAGE LIMITED                | 13384297       | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                                   | Directly Connected Power Station        | 20/09/2021 |
| KIRK HILL WIND FARM LIMITED                   | 09172034       | 1 PHIPP STREET, LONDON , United Kingdom, EC2A 4PS                                                                           | Embedded Power Station                  | 12/04/2016 |
| Kirkton Wind Farm Ltd                         | SC662410       | Wind 2 Office, 2 Walker Street, Edinburgh , United Kingdom, EH3 7LB                                                         | Directly Connected Power Station        | 21/03/2022 |
| KIWI POWER LTD                                | 07104653       | 35 Ballards Lane, London , United Kingdom, N3 1XW                                                                           | Virtual Lead Party                      | 21/04/2020 |
| Knockcronal Wind Farm Limited                 | 11964184       | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                                | Directly Connected Power Station        | 05/04/2022 |
| KOCH SUPPLY & TRADING SARL                    | CH-112-980-714 | CHEMIN DE BLANDONNET 8, VERNIER, VERNIER, Switzerland, 1214                                                                 | Interconnector Owner                    | 21/12/2015 |
| Koehler Renewable Energy UK Limited           | SC710079       | c/o Robb Ferguson,Regent Court, 70 West Regent Street, Glasgow , United Kingdom, G2 2QZ                                     | Directly Connected Power Station        | 20/02/2025 |
| KONA ASSET 3 LIMITED                          | 14521622       | Orchard Works, Carterton Industrial Estate, Carterton , United Kingdom, OX18 3EZ                                            | Directly Connected Power Station        | 12/12/2024 |
| KONA ASSET 4 LIMITED                          | 14523258       | Orchard Works,Carterton Industrial Estate, Carterton , United Kingdom, OX18 3EZ                                             | Directly Connected Power Station        | 18/12/2023 |
| Kona Energy Limited                           | 13184249       | 15-19 Bloomsbury Way, London , United Kingdom, WC1A 2TH                                                                     | Directly Connected Power Station        | 11/03/2025 |
| KSP (GRENDON) 1 LIMITED                       | 16278391       | 73 Cornhill, London , United Kingdom, EC3V 3QQ                                                                              | Non-Embedded Customer Site              | 24/04/2025 |
| KSP (IRONBRIDGE) 1 LIMITED                    | 16256066       | 73 Cornhill, London , United Kingdom, EC3V 3QQ                                                                              | Non-Embedded Customer Site              | 24/04/2025 |
| KSP (L) LIMITED                               | 16264169       | 73 Cornhill, London , United Kingdom, EC3V 3QQ                                                                              | Non-Embedded Customer Site              | 24/04/2025 |
| KSP (RUGELEY) 1 LIMITED                       | 16256065       | 73 Cornhill, London , United Kingdom, EC3V 3QQ                                                                              | Non-Embedded Customer Site              | 24/04/2025 |
| KS SPV 75 LIMITED                             | 13808213       | Office 17, Cleveland House,39 Old Station Road, Newmarket , United Kingdom, CB8 8QE                                         | Directly Connected Power Station        | 23/01/2024 |
| KULUZUMBOO LIMITED                            | 09874701       | 189-193 EARLS COURT ROAD, LONDON , United Kingdom, SW5 9AN                                                                  | Interconnector Owner                    | 02/04/2019 |
| KXP ALPHA III LIMITED                         | 14177817       | 30 Orange Street, London , United Kingdom, WC2H 7HH                                                                         | Directly Connected Power Station        | 26/10/2022 |
| KXP ALPHA II LIMITED                          | 14177716       | 30 Orange Street, London , United Kingdom, WC2H 7HH                                                                         | Directly Connected Power Station        | 26/10/2022 |
| KXP ALPHA I LIMITED                           | 14169073       | 30 Orange Street, London , United Kingdom, WC2H 7HH                                                                         | Directly Connected Power Station        | 24/11/2022 |
| KYPE EXTENSION WIND FARM LIMITED              | 08791006       | Inkerman House,St John's Road, Meadowfield, Durham , United Kingdom, DH7 8XL                                                | Directly Connected Power Station        | 01/05/2015 |
| LAGRAE BATTERY STORAGE LIMITED                | SC762496       | Buccleuch Weatherhouse,Bowhill, Selkirk , United Kingdom, TD7 5ES                                                           | Directly Connected Power Station        | 02/07/2024 |
| LAIRDMANNOCH ENERGY PARK LIMITED              | SC714903       | Wind 2 Office, 2 Walker Street, Edinburgh, Midlothian, United Kingdom, EH3 7LA                                              | Directly Connected Power Station        | 24/02/2025 |
| LAKESIDE ENERGY STORAGE LIMITED               | 10942509       | Carlton House, High Street,Higham Ferrers, Rushden , United Kingdom, NN10 8BW                                               | Directly Connected Power Station        | 26/10/2021 |
| LAN FAWR ENERGY PARK LIMITED                  | 13060780       | HODGE HOUSE GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                                             | Embedded Power Station                  | 03/06/2021 |
| Langage 10 Renewables Limited                 | 14605013       | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                             | Directly Connected Power Station        | 14/12/2023 |
| LANGAGE ENERGY PARK LIMITED                   | 03886291       | 26 Ellerbeck Court, Stokesley, Middlesbrough, United Kingdom, TS9 5PT                                                       | Directly Connected Power Station        | 19/07/2022 |
| LAUGHTON SOLAR PARK LIMITED                   | 12007066       | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                                   | Directly Connected Power Station        | 18/11/2019 |
| LAWMOOR DEVELOPMENTS ENERGY STORAGE LIMITED   | SC799659       | 64 Strathclyde Street, Glasgow , UK, G40 4JR                                                                                | Embedded Exemptable Large Power Station | 15/11/2024 |
| LDV HARBURNHEAD LIMITED                       | SC420122       | 13 QUEEN'S ROAD, ABERDEEN , United Kingdom, AB15 4YL                                                                        | Embedded Power Station                  | 17/06/2015 |
| Learielaw Energy Storage Ltd                  | SC639604       | 33 BOTHWELL ROAD, HAMILTON , United Kingdom, ML3 0AS                                                                        | Directly Connected Power Station        | 18/05/2023 |
| LEEP ELECTRICITY NETWORKS LIMITED             | 06684589       | LEVEL 2, METRO 33 TRAFFORD ROAD, SALFORD , United Kingdom, M5 3NN                                                           | Independent Distribution N/W Operator   | 22/12/2015 |
| LEGACY GREEN ENERGY LIMITED                   | 13299031       | The Goods Shed,Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                                       | Directly Connected Power Station        | 25/01/2022 |
| Leighton Buzzard 10 Renewables Limited        | 15128338       | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                             | Directly Connected Power Station        | 22/11/2023 |
| LEITHENWATER WIND ENERGY HUB LIMITED          | 13325593       | 10 Victoria Street, Bristol , United Kingdom, BS1 6BN                                                                       | Embedded Exemptable Large Power Station | 08/07/2022 |
| LEL BILBO SOLAR LIMITED                       | 11296012       | 33 CAVENDISH SQUARE, LONDON , United Kingdom, W1G 0PG                                                                       | Embedded Power Station                  | 24/05/2019 |
| LEVELISE LIMITED                              | 10653159       | Synergy House,Woolpit Business Park, Woolpit, Bury St. Edmunds, United Kingdom, IP30 9UP                                    | Virtual Lead Party                      | 09/11/2021 |
| LG-B-300                                      | SC765613       | Lovat Estates Office, Station Road, Beauly , United Kingdom, IV4 7DA                                                        | Directly Connected Power Station        | 29/01/2025 |
| LG-B-50a Limited                              | SC765614       | Lovat Estates Office, Station Road, Beauly , United Kingdom, IV4 7DA                                                        | Embedded Power Station                  | 08/05/2024 |
| LH NGET GRID SERVICES LIMITED                 | 14649836       | c/o Lightrock Power Limited,Electric Works, 3 Concoure Way, Sheffield , United Kingdom, S1 2BJ                              | Directly Connected Power Station        | 02/02/2024 |
| LIBERTY STEEL DALZELL LTD                     | 10071517       | 40 GROSVENOR PLACE, LONDON , United Kingdom, SW1X 7GG                                                                       | Non-Embedded Customer Site              | 17/06/2016 |
| Lightsource Renewable UK Development Limited  | 08945965       | 7th Floor, 33 Holborn, London , United Kingdom, EC1N 2HU                                                                    | Directly Connected Power Station        | 15/06/2020 |
| LIGHTSOURCE SPV 191 LIMITED                   | 08938960       | 7TH FLOOR,33 HOLBORN, LONDON , United Kingdom, EC1N 2HT                                                                     | Directly Connected Power Station        | 21/07/2022 |
| LIGHTSOURCE SPV 192 LIMITED                   | 08938959       | 7TH FLOOR,33 HOLBORN, LONDON , United Kingdom, EC1N 2HT                                                                     | Directly Connected Power Station        | 13/06/2023 |
| LIGHTSOURCE SPV 204 LIMITED                   | 08943830       | 7TH FLOOR,33 HOLBORN, LONDON , United Kingdom, EC1N 2HT                                                                     | Directly Connected Power Station        | 21/07/2022 |

|                                                |                  |                                                                                                                        |                                                      |            |
|------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| LIGHTSOURCE SPV 214 LIMITED                    | 08946243         | 7th Floor, 33 Holborn, London , United Kingdom, EC1N 2HT                                                               | Directly Connected Power Station                     | 09/04/2022 |
| Light Valley Solar Limited                     | 13290180         | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                              | Directly Connected Power Station                     | 03/12/2021 |
| LIME DOWN SOLAR PARK LIMITED                   | 13211532         | Unit 25.7 Coda Studios, 189 Munster Road, London , United Kingdom, SW6 6AW                                             | Directly Connected Power Station                     | 05/07/2021 |
| LIMEJUMP ENERGY LIMITED                        | 08246300         | Shell CentreYork Road, London, London , SE1 7NA                                                                        | Supplier                                             | 19/03/2018 |
| Limekiln Extension Limited                     | 10988722         | 16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                                            | Directly Connected Power Station                     | 28/09/2023 |
| LIMEKILN GRID LIMITED                          | 12615099         | 16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                                            | Directly Connected Power Station                     | 02/09/2020 |
| LIMEKILN WIND LIMITED                          | 08074755         | Infinergy Limited,16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                          | Directly Connected Power Station                     | 07/04/2020 |
| LINCS WIND FARM LIMITED                        | SC213646         | 13 QUEENS ROAD, ABERDEEN , United Kingdom, AB15 4YL                                                                    | Directly Connected Power Station                     | 27/10/2005 |
| LINK PARK HEATHROW LLP                         | OC404614         | MAGMA HOUSE CASTLE MOUND WAY, RUGBY , United Kingdom, CV23 0UZ                                                         | Non-Embedded Customer Site                           | 19/01/2021 |
| LISTER BATTERY LTD                             | 12473807         | c/o Gresham House Asset Management Limited, 5 New Street Square, London , United Kingdom, EC4A 3TW                     | Directly Connected Power Station                     | 11/03/2020 |
| LISTER DRIVE SOLUTIONS LIMITED                 | 12781976         | 19TH FLOOR 22 BISHOPSGATE, LONDON , United Kingdom, EC2N 4BQ                                                           | Non-Embedded Customer Site                           | 17/08/2021 |
| LITTLEBROOK GREEN ENERGY CENTRE LTD            | 14440750         | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                       | Directly Connected Power Station                     | 20/02/2025 |
| Little Harrowden 10 Renewables Limited         | 15128323         | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                       | Directly Connected Power Station                     | 22/11/2023 |
| Llyn Lort Energy Park Limited                  | 13153924         | Hodge House,Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                        | Embedded Power Station                               | 03/09/2021 |
| Llyn Lort II Energy Park Limited               | 14273760         | Hodge House,Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                        | Embedded Power Station                               | 02/10/2023 |
| LIÿr Floating Wind Limited                     | SC608546         | The Boathouse,Hawkcraig Road, Aberdour , United Kingdom, KY3 0TZ                                                       | Directly Connected Power Station                     | 06/09/2022 |
| LOCH KEMP STORAGE LIMITED                      | 10813231         | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                       | Directly Connected Power Station                     | 03/03/2022 |
| LOCH LIATH WIND FARM LIMITED                   | 12836747         | 19TH FLOOR 22 BISHOPSGATE, LONDON , United Kingdom, EC2N 4BQ                                                           | Directly Connected Power Station                     | 19/11/2024 |
| Lochluchart Battery Storage Limited            | SC696025         | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                   | Embedded Exemptable Large Power Station              | 02/02/2023 |
| LOCHORE BESS LTD                               | 14725777         | The Factory, Whitchurch, Ross-On-Wye , United Kingdom, HR9 6DF                                                         | Directly Connected Power Station                     | 06/11/2023 |
| LOGANHEAD WF LIMITED                           | SC453136         | Muirhall Farm,Auchengray, Carnwath, Lanark South, South Lanarkshire, United Kingdom, ML11 8LL                          | Directly Connected Power Station                     | 28/06/2017 |
| LONDON ARRAY LIMITED                           | 04344423         | NUMBER 22 MOUNT EPHRAIM, TUNBRIDGE WELLS , United Kingdom, TN4 8AS                                                     | Directly Connected Power Station                     | 06/03/2008 |
| LONDON POWER NETWORKS PLC                      | 03929195         | Newington House , London, United Kingdom, SE1 6NP                                                                      | Directly Connected Distribution System               | 18/09/2001 |
| LONDORF CAPITAL LIMITED                        | 08393551         | 2 LANSDOWNE ROW, LONDON , UNITED KINGDOM, W1J 6HL                                                                      | Directly Connected Power Station                     | 14/12/2021 |
| Longburn Wind Farm Limited                     | 07735135         | c/o Tmf Group, 13th Floor, One Angel Court, London , United Kingdom, EC4A 4AB                                          | Directly Connected Power Station; Dormant CUSC Party | 17/02/2014 |
| LONGFIELD SOLAR ENERGY FARM LIMITED            | 11618210         | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                     | 03/10/2019 |
| LONGHILL WIND FARM LLP                         | OC428018         | 114 St. Martin's Lane, Covent Garden, London, United Kingdom, WC2N 4BE                                                 | Embedded Exemptable Large Power Station              | 12/10/2020 |
| LONGPARK WINDFARM LIMITED                      | 06708766         | Alexander House,1 Mandarin Road,Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA  | Directly Connected Power Station                     | 24/03/2010 |
| LONG STRATTON ENERGY PARK LIMITED              | 15040380         | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                 | Directly Connected Power Station                     | 29/09/2023 |
| Lovat Estates Limited                          | SC179037         | Lovat Estate Office, Beauly , United Kingdom, IV4 7DA                                                                  | Directly Connected Power Station                     | 14/06/2023 |
| LOVEDEAN GREEN LIMITED                         | 12517014         | Ropemaker Place,28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                 | Directly Connected Power Station                     | 24/07/2020 |
| LOW CARBON SOLAR PARK 18 LIMITED               | 13347611         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Embedded Power Station                               | 28/03/2023 |
| LOW CARBON SOLAR PARK 28 LIMITED               | 14219218         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                     | 22/01/2024 |
| LOW CARBON SOLAR PARK 34 LIMITED               | 14224113         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                     | 19/09/2023 |
| LOW CARBON SOLAR PARK 35 LIMITED               | 14228854         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                     | 19/09/2023 |
| LOW CARBON SOLAR PARK 39 LIMITED               | 14443655         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Interconnector Owner                                 | 23/01/2024 |
| Low Carbon Solar Park 40 Limited               | 14443694         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                     | 22/01/2024 |
| LOW CARBON SOLAR PARK 43 LIMITED               | 14443807         | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                                | Directly Connected Power Station                     | 22/01/2024 |
| Lower 48 Energy BESS Limited                   | 14373103         | 33 Bedford Place, London , United Kingdom, WC1B 5JU                                                                    | Directly Connected Power Station                     | 23/06/2023 |
| LOWER FRANKTON BESS LIMITED                    | 15206408         | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                       | Directly Connected Power Station                     | 09/01/2024 |
| LUMINOUS ENERGY GROUP LIMITED                  | 08416646         | Hartham Park, Hartham Lane, Corsham , United Kingdom, SN13 0RP                                                         | Directly Connected Power Station                     | 12/12/2023 |
| LUMINUS                                        | 471811661        | KONING ALBERT II-LAAN 7, BRUSSEL , Belgium, 1210                                                                       | Interconnector User                                  | 01/02/2022 |
| LUNANHEAD ENERGY STORAGE LIMITED               | 12848218         | c/o Foresight Group Llp,The Shard, 32 London Bridge Street, London , United Kingdom, SE1 9SG                           | Embedded Exemptable Large Power Station              | 01/04/2021 |
| LYNEMOUTH POWER LIMITED                        | 07866585         | Lynemouth Power Station, Ashington, Northumberland, United Kingdom, NE63 9NW                                           | Embedded Power Station                               | 03/10/2013 |
| LYSE PRODUKSJON AS                             | 980335216        | Breiflåtveien 18, Stavanger, Stavanger, Norway, 4017                                                                   | Interconnector User                                  | 01/03/2024 |
| LZN LIMITED                                    | 04846309         | c/o Pinsent Masons Llp, 1 Park Row, Leeds , United Kingdom, LS1 5AB                                                    | Directly Connected Power Station                     | 05/08/2005 |
| M2 Energy Storage Limited                      | SC748399         | 201 West George Street, Glasgow , United Kingdom, G2 2LW                                                               | Directly Connected Power Station                     | 20/02/2025 |
| MABLETHORPE GREEN ENERGY CENTRE LIMITED        | 13230498         | 3rd Floor, Norfolk House,106 Saxon Gate West, Milton Keynes , United Kingdom, MK9 2DN                                  | Directly Connected Power Station                     | 24/01/2023 |
| Macduff Battery Storage Ltd                    | SC723975         | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                   | Embedded Exemptable Large Power Station              | 31/10/2022 |
| MACQUARIE BANK LTD                             | 46 008 583 542   | Level 6, 50 Martin Place, Sydney , Australia, NSW 2000                                                                 | Interconnector User                                  | 31/07/2014 |
| MA ENERGY LIMITED                              | 06541758         | Pearl Assurance House,319 Ballards Lane, London , United Kingdom, N12 8LY                                              | Interconnector User                                  |            |
| Maesnant Energy Park Limited                   | 13685890         | The Broadgate Tower Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                 | Embedded Power Station                               | 19/10/2022 |
| MAGNORA OFFSHORE WIND AS                       | 927 136 546      | 9. ETASJE KARENSLYST ALLE 2, OSLO , NORWAY, 278                                                                        | Directly Connected Power Station                     | 22/02/2022 |
| MALLARD PASS SOLAR FARM LIMITED                | 12575861         | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                     | 08/10/2021 |
| MANNINGTON ENERGY CENTRE LIMITED               | 11433331         | 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                                                      | Directly Connected Power Station                     | 02/03/2020 |
| MANX UTILITIES                                 | N/A              | PO BOX 177, DOUGLAS , Isle Of Man (United Kingdom), IM99 1PS                                                           | Distribution Interconnector Owner                    | 18/09/2001 |
| MARBLE POWER LIMITED                           | 08474535         | Office 7, Kestral Court,Waterwells Drive, Quedgeley, Gloucester, United Kingdom, GL2 2AT                               | Supplier                                             | 19/05/2015 |
| MARCHWOOD POWER LIMITED                        | 04229146         | Oceanic Way,Marchwood Industrial Park, Marchwood, Southampton, United Kingdom, SO40 4BD                                | Directly Connected Power Station                     |            |
| Maresconnect Limited                           | 605488           | The Victorians,15-18 Earlsfort Terrace, Dublin 2 , Ireland, D02 YX28                                                   | Interconnector Owner                                 | 01/10/2018 |
| MARKET HARBOROUGH GREEN ENERGY CENTRE LTD      | 14438087         | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                       | Directly Connected Power Station                     | 20/02/2025 |
| MAS 002 LIMITED                                | 14690765         | 70 Jermyn Street, London , United Kingdom, SW1Y 6NY                                                                    | Directly Connected Power Station                     | 12/11/2024 |
| MAS 005 Limited                                | 14689808         | 70 Jermyn Street, London , United Kingdom, SW1Y 6NY                                                                    | Embedded Exemptable Large Power Station              | 10/02/2025 |
| MAXEN POWER SUPPLY LIMITED                     | 10298693         | Olympic House,28-42 Clements Road, Ilford, Essex, United Kingdom, IG1 1BA                                              | Supplier                                             | 09/07/2018 |
| MEDWAY POWER LIMITED                           | 02537903         | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                  | Directly Connected Power Station                     | 18/09/2001 |
| MELKSHAM CALNE GREEN LIMITED                   | 12517251         | 18 Navigation Way, Ashton-On-Ribble, Preston, United Kingdom, PR2 2YP                                                  | Directly Connected Power Station                     | 24/07/2020 |
| MELKSHAM ENERGY CENTRE ONE LTD                 | 09047132         | Millhouse, 32-38 East Street, Rochford, Essex, United Kingdom, SS4 1DB                                                 | Directly Connected Power Station; Dormant CUSC Party | 15/06/2020 |
| MELKSHAM ENERGY CENTRE TWO LTD                 | 11869745         | Millhouse, 32-38 East Street, Rochford, Essex, United Kingdom, SS4 1DB                                                 | Directly Connected Power Station; Dormant CUSC Party | 15/06/2020 |
| Melvich Wind Energy Hub Limited                | 13035564         | 10 Victoria Street, Bristol , United Kingdom, BS1 6BN                                                                  | Directly Connected Power Station                     | 09/12/2021 |
| Menter Môn Morlais Limited                     | 10747114         | Neuadd Y DrefBulkeley Square, Llangefni , United Kingdom, LL77 7LR                                                     | Directly Connected Power Station                     | 16/09/2020 |
| MERCIA POWER RESPONSE LIMITED                  | 09688709         | STRELLEY HALL, NOTTINGHAM , UNITED KINGDOM, NG8 6PE                                                                    | Directly Connected Power Station                     | 01/12/2023 |
| MERCURIA ENERGY TRADING SA                     | CH-660-1372004-2 | RUE DU RHONE 50, GENEVE , Switzerland, 1204                                                                            | Interconnector User                                  | 24/07/2013 |
| MERSEY REACTIVE POWER LIMITED                  | 12650628         | St Magnus House, 6th Floor,3 Lower Thames Street, London , United Kingdom, EC3R 6HD                                    | Non-Embedded Customer Site                           | 10/12/2020 |
| METROPOLITAN WASTE MANAGEMENT (ORSETT) LIMITED | 06401632         | c/o Street Fuel Ltd, Berth 6, Basin 3,Chatham Dockyards, Gillingham , United Kingdom, ME4 4SR                          | Directly Connected Power Station                     | 20/12/2024 |
| MEYGEN PLC                                     | SC347501         | 26 DUBLIN STREET, EDINBURGH , United Kingdom, EH3 6NN                                                                  | Directly Connected Power Station                     | 08/12/2010 |
| Meygrid Limited                                | SC786510         | 26 Dublin Street, Edinburgh , United Kingdom, EH3 6NN                                                                  | Directly Connected Power Station                     | 08/05/2024 |
| MFT ENERGY A/S                                 | 38175130         | MARGRETHEPLADSEN 4 03, AARHUS C , Denmark, 8000                                                                        | Interconnector User                                  | 13/06/2018 |
| MGT TESSIDE LIMITED                            | 06574235         | 8 White Oak Square,London Road, Swanley , United Kingdom, BR8 7AG                                                      | Directly Connected Power Station                     | 12/02/2009 |
| Mid Craigie BESS Limited                       | 14905884         | 1st Floor Midland House,77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                       | Embedded Exemptable Large Power Station              | 06/06/2023 |
| Middleton Energy Storage Limited               | 13524329         | 8th Floor, 100 Bishopsgate, London , United Kingdom, EC2N 4AG                                                          | Directly Connected Power Station                     | 08/07/2022 |

|                                                            |                 |                                                                                                    |                                            |            |
|------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------|--------------------------------------------|------------|
| MID HILL WIND LIMITED                                      | SC257734        | c/o Harper Macleod Llp,The Cadoro, 45 Gordon Street, Glasgow , United Kingdom, G1 3PE              | Embedded Exemptable Large Power Station    | 22/07/2005 |
| MILLBROOK POWER LIMITED                                    | 08920458        | DRAX POWER STATION, SELBY, SELBY, United Kingdom, YO8 8PH                                          | Directly Connected Power Station           | 24/02/2015 |
| Millennium Commodities I Designated Activity Company       | 761010          | 32 Molesworth Street, Dublin 2 , Ireland                                                           | Interconnector User                        | 25/10/2024 |
| MILLENNIUM WIND ENERGY LIMITED                             | SC254420        | Beauly House,Dochfour Business Centre, Dochgarroch, Inverness , United Kingdom, IV3 8GY            | Directly Connected Power Station           | 30/06/2005 |
| Milligansbush Battery Storage Ltd                          | SC760555        | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                               | Directly Connected Power Station           | 30/01/2025 |
| Mill Rig Wind Farm LLP                                     | OC431615        | Inkerman House St. Johns Road, Meadowfield Industrial Estate, Durham , United Kingdom, DH7 8XL     | Directly Connected Power Station           | 25/11/2021 |
| MILLTOWN AIRFIELD SOLAR PV LIMITED                         | 08838324        | 4TH FLOOR 1 TUDOR STREET, LONDON , UNITED KINGDOM, EC4Y 0AH                                        | Embedded Power Station                     | 28/11/2018 |
| MILTON FARM ENERGY PARK LIMITED                            | SC723912        | 10 Newton Place, Glasgow , United Kingdom, G3 7PR                                                  | Embedded Exemptable Large Power Station    | 09/05/2024 |
| MINNYGAP ENERGY LIMITED                                    | 09644754        | ST HELEN'S 1 UNDERSHAFT, LONDON , United Kingdom, EC3P 3DQ                                         | Directly Connected Power Station           | 18/10/2016 |
| MINSCA WINDFARM (SCOTLAND) LIMITED                         | SC279051        | Fourth Floor, 12 Blenheim Place, Edinburgh , United Kingdom, EH7 5JH                               | Embedded Power Station                     | 29/09/2006 |
| MITCHELL ENERGY LTD                                        | Sc455085        | JRW 19 BUCCLEUCH STREET, LANARK , United Kingdom, TD9 0HL                                          | Directly Connected Power Station           | 28/03/2025 |
| MOEL CHWA ENERGY PARK LIMITED                              | 13036635        | HODGE HOUSE GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                    | Directly Connected Power Station           | 22/06/2021 |
| MOELFRE ENERGY PARK LIMITED                                | 13011082        | HODGE HOUSE,GUILDHALL PLACE, CARDIFF , UNITED KINGDOM, CF10 1DY                                    | Directly Connected Power Station           | 24/06/2021 |
| Mona Offshore Wind Limited                                 | 13497266        | Chertsey Road, Sunbury On Thames, Middlesex, United Kingdom, TW16 7BP                              | Directly Connected Power Station           | 25/09/2023 |
| MONETS GARDEN BATTERY LTD                                  | 12472854        | c/o Gresham House Asset Management Limited, 5 New Street Square, London , United Kingdom, EC4A 3TW | Directly Connected Power Station           | 11/03/2020 |
| MONK FRYSTON 1 LIMITED                                     | 16286977        | 73 Cornhill, London , United Kingdom, EC3V 3QQ                                                     | Non-Embedded Customer Site                 | 01/05/2025 |
| Monolith Capital AG                                        | CHE-143.474.602 | Grabenstrasse 2, Baar, Zug, Switzerland, CH-6340                                                   | Interconnector User                        | 05/03/2024 |
| Montreathmont Energy Centre Limited                        | 12988209        | Millhouse, 32-38 East Street, Rochford , United Kingdom, SS4 1DB                                   | Embedded Power Station                     | 17/02/2022 |
| Moor Vannin Offshore Wind Farm Limited                     | 013051V         | 33-37 Athol Street, Douglas , Isle of Man, IM1 1LB                                                 | Directly Connected Power Station           | 26/05/2023 |
| Morar Hydrogen Plant Limited                               | SC759983        | 39 George Street, Edinburgh , United Kingdom, EH2 2HN                                              | Non-Embedded Customer Site                 | 20/12/2023 |
| MORAY OFFSHORE RENEWABLE POWER LIMITED                     | 10303640        | Shepherd And Wedderburn Llp,Octagon Point,5 Cheapside, London , United Kingdom, EC2V 6AA           | Directly Connected Power Station           | 02/06/2021 |
| MORAY OFFSHORE WINDFARM (EAST) LIMITED                     | 07101438        | Shepherd And Wedderburn Llp,Octagon Point,5 Cheapside, London, London, United Kingdom, EC2V 6AA    | Directly Connected Power Station           | 09/08/2010 |
| MORAY OFFSHORE WINDFARM (WEST) LIMITED                     | 10515140        | Shepherd And Wedderburn Llp,Octagon Point,5 Cheapside, London, LONDON, United Kingdom, EC2V 6AA    | Directly Connected Power Station           | 23/08/2017 |
| MORECAMBE WIND LIMITED                                     | 05294242        | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                  | Directly Connected Power Station           | 22/10/2013 |
| Morgan Offshore Wind Limited                               | 13497271        | Chertsey Road, Sunbury-on-Thames, Middlesex, United Kingdom, TW16 7BP                              | Directly Connected Power Station           | 25/09/2023 |
| Morven Offshore Wind Limited                               | 13792251        | Chertsey Road, Sunbury On Thames,, Middlesex, United Kingdom, TW16 7BP                             | Directly Connected Power Station           | 23/04/2024 |
| Morwind Ltd                                                | 13015099        | Harbour Lights, Busvannah, Penryn , United Kingdom, TR10 9LQ                                       | Directly Connected Power Station           | 31/01/2022 |
| MOSDALE ENERGY LIMITED                                     | 13645113        | 189-193 EARLS COURT ROAD, LONDON , United Kingdom, SW5 9AN                                         | Directly Connected Power Station           | 23/06/2023 |
| MOSSMORRAN STORAGE LTD                                     | 15025798        | 19 Friar Road, Brighton , United Kingdom, BN1 6NG                                                  | Directly Connected Power Station           | 08/01/2024 |
| MOSSY HILL SHETLAND LIMITED                                | 07075398        | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                      | Directly Connected Power Station           | 04/06/2019 |
| MOSTYN SEAPOWER LIMITED                                    | 11992210        | THE PORT OF MOSTYN COAST ROAD, HOLYWELL, Flintshire, United Kingdom, CH8 9HE                       | Directly Connected Power Station           | 26/09/2019 |
| MOYLE INTERCONNECTOR LIMITED                               | NI36562         | First Floor, The Arena Building,85 Ormeau Road, Belfast , United Kingdom, BT7 1SH                  | Interconnector Owner                       | 16/03/2005 |
| MSFT MCIO LIMITED                                          | 09616816        | 1 Blossom Yard,Fourth Floor, London , United Kingdom, E1 6RS                                       | Non-Embedded Customer Site                 | 25/01/2021 |
| MUA ELECTRICITY LIMITED                                    | 10622250        | HIVIEW HOUSE,HIGHGATE ROAD, LONDON , UNITED KINGDOM, NW5 1TN                                       | Directly Connected Power Station           | 31/05/2023 |
| MUIRDEN ENERGY LLP                                         | SO302777        | Muirden Farm, Turriff,, Aberdeenshire, United Kingdom, AB53 4NH                                    | Dormant CUSC Party; Embedded Power Station | 27/11/2014 |
| MUIR MHØR OFFSHORE WIND FARM LIMITED                       | SC717262        | 4 Jackson's Entry, Holyrood Road, Edinburgh , United Kingdom, EH8 8PJ                              | Directly Connected Power Station           | 28/08/2023 |
| MVV ENVIRONMENT BALDOVIE LIMITED                           | SC148254        | FORTIES ROAD, DUNDEE , United Kingdom, DD4 0NS                                                     | Embedded Exemptable Large Power Station    |            |
| MVV ENVIRONMENT SERVICES LIMITED                           | 08500792        | 40 CREEK ROAD, PLYMOUTH , United Kingdom, PL5 1FL                                                  | Supplier                                   | 07/11/2014 |
| NADARA LIMITED                                             | SC546368        | Fourth Floor, 12 Blenheim Place, Edinburgh , United Kingdom, EH7 5JH                               | Dormant CUSC Party; Embedded Power Station | 29/09/2006 |
| NANT AMAN ENERGY PARK LIMITED                              | 13248724        | Hodge House.Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                    | Directly Connected Power Station           | 25/11/2021 |
| NANT CEIMENT ENERGY PARK LIMITED                           | 13229301        | Hodge House,Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                    | Embedded Power Station                     | 03/06/2021 |
| NANT MITHIL ENERGY PARK LIMITED                            | 13052400        | HODGE HOUSE GUILDHALL PLACE, CARDIFF , United Kingdom, CF10 1DY                                    | Embedded Power Station                     | 03/06/2021 |
| NASDAQ OMX STOCKHOLM AB                                    | 52-1165937      | TULLVAKTSVAGEN 15, STOCKHOLM , SWEDEN, 105 78                                                      | Interconnector User                        | 22/10/2013 |
| NATIONAL GAS TRANSMISSION PLC                              | 02006000        | National Grid House,Warwick Technology Park,Gallows Hill, Warwick , United Kingdom, CV34 6DA       | Non-Embedded Customer Site                 | 14/02/2006 |
| National Grid Electricity Distribution (East Midlands) plc | 02366923        | Avonbank,Feeder Road, Bristol , United Kingdom, BS2 0TB                                            | Directly Connected Distribution System     | 18/09/2001 |
| NATIONAL GRID ELECTRICITY DISTRIBUTION (SOUTH WALES) PLC   | 02366985        | Avonbank,Feeder Road, Bristol , United Kingdom, BS2 0TB                                            | Directly Connected Distribution System     | 18/09/2001 |
| NATIONAL GRID ELECTRICITY DISTRIBUTION (SOUTH WEST) PLC    | 02366894        | Avonbank,Feeder Road, Bristol , United Kingdom, BS2 0TB                                            | Directly Connected Distribution System     | 18/09/2001 |
| National Grid Electricity Distribution (West Midlands) Plc | 03600574        | Avonbank,Feeder Road, Bristol , United Kingdom, BS2 0TB                                            | Directly Connected Distribution System     | 12/11/2001 |
| National Grid Grain LNG Limited                            | 04463679        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Non-Embedded Customer Site                 | 31/10/2006 |
| NATIONAL GRID IFA 2 LIMITED                                | 09129992        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 16/02/2017 |
| NATIONAL GRID INTERCONNECTOR HOLDINGS LIMITED              | 08169384        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 26/09/2014 |
| NATIONAL GRID INTERCONNECTORS LIMITED                      | 03385525        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 14/08/2006 |
| NATIONAL GRID INTERNATIONAL LIMITED                        | 02537092        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 29/12/2004 |
| NATIONAL GRID NORTH SEA LINK LIMITED                       | 08082344        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 26/03/2015 |
| NATIONAL GRID VIKING LINK LIMITED                          | 09075537        | 1-3 Strand, London , United Kingdom, WC2N 5EH                                                      | Interconnector Owner                       | 10/04/2015 |
| NATIVE RIVER LTD                                           | 12997344        | C/O Watson Farley & Williams Llp15 Appold Street, London , EC2A 2HB                                | Directly Connected Power Station           | 26/07/2021 |
| NATPOWER MARINE LIMITED                                    | 15009953        | Lilly House,13 Hanover Square, London , United Kingdom, W1S 1HN                                    | Directly Connected Power Station           | 14/12/2023 |
| NATPOWER MARINE UK LIMITED                                 | 15361289        | Level 8 Lily House, 13 Hanover Square, London , United Kingdom, W1S 1HN                            | Directly Connected Power Station           | 12/09/2024 |
| Naturalis Energy Developments Ltd                          | 12222848        | Third Floor, 10 Lower Grosvenor Place, London , United Kingdom, SW1W 0EN                           | Embedded Power Station                     | 18/03/2022 |
| NATURGY LIMITED                                            | 376223          | 24 - 28 TARA STREET, DUBLIN 2 , IRELAND, D07 YX67                                                  | Interconnector User                        | 25/04/2014 |
| NAVENBY ENERGY LIMITED                                     | 15700663        | Level 8 Lily House,13 Hanover Square,Mayfair, London , United Kingdom, W1S 1HN                     | Directly Connected Power Station           | 16/12/2024 |
| NAVENBY GREEN ENERGY CENTRE LTD                            | 14437953        | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                   | Directly Connected Power Station           | 04/12/2024 |
| NEART NA GAOITHE OFFSHORE WIND LIMITED                     | SC356223        | ATRIA ONE 144 MORRISON STREET, EDINBURGH, EDINBURGH, UNITED KINGDOM, EH3 8EX                       | Directly Connected Power Station           | 17/02/2010 |
| NEAS ENERGY LIMITED                                        | 06993636        | Millstream,Maidenhead Road, Windsor, Berkshire, United Kingdom, SL4 5GD                            | Supplier                                   | 11/04/2013 |
| NECTON GREEN ENERGY CENTRE LTD                             | 14469002        | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                              | Directly Connected Power Station           | 11/11/2024 |
| Necton Grid Solutions Limited                              | 14655633        | 19th Floor, 22 Bishopsgate, London , EC2N 4BQ                                                      | Directly Connected Power Station           | 18/09/2024 |
| NEILSTON GRID SERVICES LIMITED                             | 12648776        | FOURTH FLOOR, 2 KINGSWAY, CARDIFF , United Kingdom, CF10 3FD                                       | Non-Embedded Customer Site                 | 25/11/2020 |
| Nembus BESS Limited                                        | 14401674        | 30 Queen Square,Penthouse Office, Bristol , United Kingdom, BS1 4ND                                | Directly Connected Power Station           | 09/10/2023 |
| NEMO LINK LIMITED                                          | 08169409        | GRAND BUILDINGS, LONDON , United Kingdom, WC2N 5EH                                                 | Interconnector Owner                       | 27/02/2015 |
| NETWORK RAIL INFRASTRUCTURE LIMITED                        | 02904587        | 1 EVERS Holt STREET, LONDON, LONDON, UNITED KINGDOM, NW1 2DN                                       | Non-Embedded Customer Site                 | 18/09/2001 |
| NET ZERO MARINE SERVICES LIMITED                           | 13351530        | 9-10 Copper Row, London , United Kingdom, SE1 2LH                                                  | Directly Connected Power Station           | 27/10/2023 |
| Net Zero One Limited                                       | 13505202        | The Long Barn Manor Courtyard, Stratton-On-The-Fosse, Radstock , United Kingdom, BA3 4QF           | Directly Connected Power Station           | 09/06/2022 |
| NET ZERO TEESSIDE POWER LIMITED                            | 12473751        | CHERTSEY ROAD, SUNBURY-ON-THAMES , United Kingdom, TW16 7BP                                        | Directly Connected Power Station           | 03/06/2021 |
| Neuconnect Britain Ltd                                     | 11138769        | c/o FULCRUM,105 PICCADILLY, LONDON , UNITED KINGDOM, W1J 7NJ                                       | Interconnector Owner                       | 28/02/2019 |
| Newatt Srl                                                 | 03591360049     | Piazza Cecilia Arione Morando 6B, Magliano Alfieri, Cuneo, Italy, 12050                            | Interconnector User                        | 14/09/2023 |
| NEW CUMNOCK BESS LTD                                       | 14725803        | The Factory, Whitchurch, Ross-On-Wye, Herefordshire, United Kingdom, HR9 6DF                       | Directly Connected Power Station           | 17/12/2024 |
| NEW DEER ENERGY CENTRE LIMITED                             | SC766864        | 13 Queen's Road, Aberdeen , United Kingdom, AB15 4YL                                               | Directly Connected Power Station           | 03/04/2025 |
| NEW ENERGY PARTNERSHIP LIMITED                             | 13895454        | Building 7 Floor 4,Vantage Point Business Village, Mitcheldean , United Kingdom, GL17 0DD          | Directly Connected Power Station           | 19/04/2023 |
| NEWHOUSE ENERGY STORAGE LIMITED                            | SC592721        | 33 BOTHWELL ROAD, HAMILTON , United Kingdom, ML3 0AS                                               | Embedded Exemptable Large Power Station    | 25/04/2022 |



|                                                |                 |                                                                                                                           |                                         |            |
|------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------|
| NEWLANDS HILL WIND ENERGY HUB LIMITED          | 13327241        | 10 Victoria Street, Bristol , United Kingdom, BS1 6BN                                                                     | Directly Connected Power Station        | 07/07/2022 |
| NEW MARTON GREEN ENERGY CENTRE LIMITED         | 15365178        | Flat 81 Blake Tower, 2 Fann Street, London , EC2Y 8AF                                                                     | Directly Connected Power Station        | 22/01/2025 |
| Newton Energi Limited                          | 10190922        | Meadow House,Long Bennington Business Park, Long Bennington, Newark, United Kingdom, NG23 5JR                             | Directly Connected Power Station        | 16/11/2023 |
| NEXTPOWER EELPOWER CAMILLA LIMITED             | SC614202        | 5 SOUTH CHARLOTTE STREET, EDINBURGH , United Kingdom, EH2 4AN                                                             | Embedded Exemptable Large Power Station | 08/10/2019 |
| Ninfield 10 Renewables Limited                 | 15125441        | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                          | Directly Connected Power Station        | 22/11/2023 |
| NINFIELD GREEN ENERGY CENTRE LIMITED           | 14003910        | 3rd Floor, Norfolk House, 106 Saxon Gate West, Milton Keynes , United Kingdom, MK9 2DN                                    | Directly Connected Power Station        | 15/02/2023 |
| NISTHILL WIND FARM LIMITED                     | 13944407        | 16 West Boroughnull , Dorset , BH21 1NG                                                                                   | Embedded Exemptable Large Power Station | 27/11/2024 |
| Nitor Energy AS                                | 38680781        | Klosterport, Aarhus , Denmark, 8000                                                                                       | Interconnector User                     | 27/07/2021 |
| NLEI LTD                                       | SC511747        | Ground Floor West Suite,Prospect House,5 Thistle Street, Edinburgh , United Kingdom, EH2 1DF                              | Directly Connected Power Station        | 16/02/2016 |
| NNB GENERATION COMPANY (HPC) LIMITED           | 06937084        | 90 WHITFIELD STREET, LONDON , UNITED KINGDOM, W1T 4EZ                                                                     | Directly Connected Power Station        | 26/09/2013 |
| Nordic Energy House ApS                        | 39533685        | 27 Østergade, Aarhus , Denmark, 8000                                                                                      | Interconnector User                     | 08/12/2020 |
| NORD POOL EUROPEAN MARKET COUPLING OPERATOR AS | 984058098       | LILLEAKERVEIEN 2A, OSLO , Norway, 283                                                                                     | Interconnector User                     | 23/05/2014 |
| NORFOLK BOREAS LIMITED                         | 03722058        | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station        | 11/09/2006 |
| Norfolk Vanguard East Ltd                      | 12476373        | First Floor, 1 Tudor Street, London EC4Y 0AH                                                                              | Directly Connected Power Station        | 10/03/2021 |
| NORFOLK VANGUARD WEST LIMITED                  | 08141115        | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station        | 11/02/2016 |
| NORIKER POWER LTD                              | 09675162        | Fourth Floor The Quadrangle,Imperial Square, Cheltenham, Hereford, United Kingdom, GL50 1PZ                               | Directly Connected Power Station        | 02/10/2023 |
| NORLYS ENERGY TRADING A/S                      | 41419849        | OVERBAEKKEN 6, AALBORG , Denmark, 9000                                                                                    | Interconnector User                     | 16/05/2022 |
| NORTHAMPTON ENERGY PARK LIMITED                | 15040505        | 1st Floor Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                    | Directly Connected Power Station        | 29/09/2023 |
| NORTHCONNECT LIMITED                           | SC633953        | 37 Albyn Place, Aberdeen , United Kingdom, AB10 1YN                                                                       | Interconnector Owner                    | 03/02/2020 |
| NORTHERN POWERGRID (NORTHEAST) PLC             | 02906593        | Lloyds Court, 78 Grey Street, Newcastle Upon Tyne , United Kingdom, NE1 6AF                                               | Directly Connected Distribution System  | 18/09/2001 |
| NORTHERN POWERGRID (YORKSHIRE) PLC             | 04112320        | Lloyds Court, 78 Grey Street, Newcastle Upon Tyne , United Kingdom, NE1 6AF                                               | Directly Connected Distribution System  | 21/03/2025 |
| NORTH FALLS OFFSHORE WIND FARM LIMITED         | 12435947        | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                             | Directly Connected Power Station        | 23/11/2020 |
| Northfleet Devco Limited                       | 15941657        | 5 Fleet Place, London , United Kingdom, EC4M 7RD                                                                          | Directly Connected Power Station        | 19/11/2024 |
| NORTH KYLE WIND FARM LIMITED                   | SC572042        | c/o Brockwell Energy Limited,The Eagle Building-Third Floor,19 Rose Street, Edinburgh, Edinburgh, United Kingdom, EH2 2PR | Directly Connected Power Station        | 15/05/2019 |
| Northland Power UK Limited                     | 11587463        | 21 Holborn Viaduct, London , United Kingdom, EC1A 2DY                                                                     | Directly Connected Power Station        | 05/10/2021 |
| North Lanrigg Battery Storage Ltd              | SC737400        | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                      | Directly Connected Power Station        | 20/07/2023 |
| NORTHPOOL B.V.                                 | 56443838        | 3E BINNENVESTGRACHT 23 N, LEIDEN, The Netherlands, Netherlands, 2312 NR                                                   | Interconnector User                     | 02/08/2018 |
| Northumberland Estates Limited                 | 05941545        | Quayside House ,110 Quayside,, Newcastle Upon Tyne , United Kingdom, NE1 3DX                                              | Embedded Power Station                  | 05/06/2023 |
| NORWICH GREEN ENERGY LIMITED                   | 13476169        | The Goods Shed,Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                                     | Directly Connected Power Station        | 16/02/2022 |
| NOVENTUM POWER SOLAR 11 LIMITED                | 15371784        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 28/10/2024 |
| NOVENTUM POWER SOLAR 12 LIMITED                | 15370475        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 24/09/2024 |
| NOVENTUM POWER SOLAR 13 LIMITED                | 15370498        | 6th Floor 2 London Wall Place,, London , United Kingdom, EC2Y 5AU                                                         | Directly Connected Power Station        | 28/10/2024 |
| NOVENTUM POWER SOLAR 14 LIMITED                | 15370476        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 17/09/2024 |
| NOVENTUM POWER SOLAR 15 LIMITED                | 15370540        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 16/10/2024 |
| NOVENTUM POWER SOLAR 1 LIMITED                 | 14742996        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 15/01/2024 |
| NOVENTUM POWER SOLAR 2 LIMITED                 | 14743068        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 30/09/2023 |
| NOVENTUM POWER SOLAR 3 LIMITED                 | 14743154        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 30/09/2023 |
| NOVENTUM POWER SOLAR 4 LIMITED                 | 14743131        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 15/01/2024 |
| NOVENTUM POWER SOLAR 5 LIMITED                 | 14743200        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 15/01/2024 |
| NOVENTUM POWER SOLAR 6 LIMITED                 | 15094892        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 20/06/2024 |
| NOVENTUM POWER SOLAR 7 LIMITED                 | 15093621        | 6th Floor 2 London Wall Place, London , United Kingdom, EC2Y 5AU                                                          | Directly Connected Power Station        | 15/01/2024 |
| Noventum Power Solar 8 Limited                 | 15251228        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 20/08/2024 |
| Noventum Power Solar 9 Limited                 | 15251143        | 19 Eastbourne Terrace, London , United Kingdom, W2 6LG                                                                    | Directly Connected Power Station        | 20/08/2024 |
| NOVERGY LTD                                    | 11676519        | Hartham Park,Hartham Lane, Corsham , United Kingdom, SN13 0RP                                                             | Directly Connected Power Station        | 05/02/2020 |
| NPOWER COMMERCIAL GAS LIMITED                  | 03768856        | Westwood Way,Westwood Business Park, Coventry , United Kingdom, CV4 8LG                                                   | Supplier                                | 25/05/2021 |
| NPOWER LIMITED                                 | 03653277        | Westwood Way,Westwood Business Park, Coventry , UNITED KINGDOM, CV4 8LG                                                   | Supplier                                | 18/09/2001 |
| NP SPV 21 LIMITED                              | 14673199        | Lilly House, 13 Hanover Square, London , United Kingdom, W1S 1HN                                                          | Directly Connected Power Station        | 08/12/2023 |
| NP SPV 22 LIMITED                              | 14858948        | Lilly House, 13 Hanover Square, London , United Kingdom, W1S 1HN                                                          | Directly Connected Power Station        | 08/12/2023 |
| NP SPV23 LIMITED                               | 14858360        | Level 8 Lily House,13 Hanover Square, Mayfair, London, United Kingdom, W1S 1HN                                            | Directly Connected Power Station        | 08/12/2023 |
| NP SPV24 LIMITED                               | 14858485        | 12 Bridewell Place, London , United Kingdom, EC4V 6AP                                                                     | Directly Connected Power Station        | 03/12/2024 |
| NP SPV 29 LIMITED                              | 15006705        | Level 8 Lily House,13 Hanover Square,, Mayfair, London, United Kingdom, W1S 1HN                                           | Directly Connected Power Station        | 04/10/2024 |
| NP SPV30 LIMITED                               | 15006757        | Level 8, Lily House, 13 Hanover Square, London , United Kingdom, W1S 1HN                                                  | Directly Connected Power Station        | 16/12/2024 |
| NP SPV31 Limited                               | 14673340        | 12 Bridewell Place, Third Floor East,, London , EC4V 6AP                                                                  | Directly Connected Power Station        | 10/10/2024 |
| NP SPV32 LIMITED                               | 14858425        | 12 Bridewell Place,, London , EC4V 6AP                                                                                    | Directly Connected Power Station        | 04/10/2024 |
| NP SPV33 LIMITED                               | 14859626        | 12 Bridewell Place,, London , EC4V 6AP                                                                                    | Directly Connected Power Station        | 28/11/2024 |
| NP SPV34 LIMITED                               | 14858567        | Level 8 Lily House 13 Hanover Square, Mayfair, London, , W1S 1HN                                                          | Directly Connected Power Station        | 23/12/2024 |
| NP SPV35 LIMITED                               | 14858518        | 12 Bridewell Place, London , EC4V 6AP                                                                                     | Directly Connected Power Station        | 18/11/2024 |
| NP SPV 39 LIMITED                              | 15006461        | Lilly House, 13 Hanover Square, London , United Kingdom, W1S 1HN                                                          | Directly Connected Power Station        | 18/01/2024 |
| NP SPV 41 LIMITED                              | 15592880        | Level 8 Lily House,13 Hanover Square, Mayfair, London, United Kingdom, W1S 1HN                                            | Directly Connected Power Station        | 05/12/2024 |
| NP SPV 43 Limited                              | 15850610        | Level 8 Lily House, 13 Hanover Square, Mayfair, London, United Kingdom, W1S 1HN                                           | Directly Connected Power Station        | 24/01/2025 |
| NS SOLAR KINNON PARK LIMITED                   | 14541632        | 13-17 Margett StreetCottenham , CB24 8QY                                                                                  | Embedded Exemptable Large Power Station | 27/03/2025 |
| NTT Global Data Centers LON2-A Ltd             | 16122721        | 1 King William Street, London , United Kingdom, EC4N 7BJ                                                                  | Non-Embedded Customer Site              | 25/03/2025 |
| NUCLEAR DECOMMISSIONING AUTHORITY              | N/A             | Herdus House,Westlakes Science & Technology Park, Moor Row, Cumbria, United Kingdom, CA24 3HU                             | Non CUSC Party                          |            |
| NUCLEAR RESTORATION SERVICES LIMITED           | 02264251        | Hinton House,Birchwood Park Avenue, Risley, Warrington, Cheshire, United Kingdom, WA3 6GR                                 | Embedded Power Station                  | 18/09/2001 |
| NURSING ENERGY TWO LIMITED                     | 11020721        | 6th Floor, St Magnus House,3 Lower Thames Street, London , United Kingdom, EC3R 6HD                                       | Directly Connected Power Station        | 09/07/2019 |
| Nvalue AG                                      | CHE 113 939 430 | Shileggstrasse 23, Wollerau , Switzerland, 8832                                                                           | Interconnector User                     | 07/04/2021 |
| O&G Solar (SPV 19) Limited                     | 13892141        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 08/03/2023 |
| O&G Solar (SPV 20) Limited                     | 14028889        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 06/02/2024 |
| O&G Solar (SPV 30) Limited                     | 14214882        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 06/12/2022 |
| O&G Solar (SPV 31) Limited                     | 14135842        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 06/12/2022 |
| O&G Solar (SPV 36) Limited                     | 14368457        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 26/05/2023 |
| O&G Solar (SPV 38) Limited                     | 14370357        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 13/06/2023 |
| O&G Solar (SPV 39) Limited                     | 14373796        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 19/06/2023 |
| O&G Solar (SPV 40) Limited                     | 14376431        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 26/05/2023 |
| O&G Solar (SPV 47) Limited                     | 14444176        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 20/02/2025 |
| O&G Solar (SPV 49) Limited                     | 14448556        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 25/07/2023 |
| O&G Solar (SPV 57) Limited                     | 15040467        | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                                    | Directly Connected Power Station        | 14/05/2024 |
| OAKLANDS FARM SOLAR LIMITED.                   | 12915335        | 22 Chancery Lane, London , United Kingdom, WC2A 1LS                                                                       | Directly Connected Power Station        | 12/06/2023 |
| Octopus Energy Limited                         | 09263424        | UK House,5th Floor, 164-182 Oxford Street, London, London, United Kingdom, W1D 1NN                                        | Supplier                                | 06/11/2015 |

|                                                       |                 |                                                                                                          |                                                                              |            |
|-------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------|
| OCTOPUS ENERGY TRADING LIMITED                        | 09263368        | Uk House, 5th Floor, 164-182 Oxford Street, London , United Kingdom, W1D 1NN                             | Supplier                                                                     | 19/11/2015 |
| OFFSHORE WIND LIMITED                                 | 12125532        | ONE ST PETER'S SQUARE, MANCHESTER , United Kingdom, M2 3DE                                               | Directly Connected Power Station                                             | 09/02/2021 |
| OFFSHORE WIND POWER LIMITED                           | SC605260        | Clava House, Cradlehall Business Park, Inverness , United Kingdom, IV2 5GH                               | Directly Connected Power Station                                             | 01/05/2020 |
| OKU Power Limited                                     | 659293          | Paramount Court,Corrig Road,Sandyford Industrial Estate, Dublin, DUBLIN, Ireland, 18                     | Interconnector User                                                          | 24/03/2023 |
| Oliver Forest Wind Farm Limited                       | 14293534        | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                             | Directly Connected Power Station                                             | 09/10/2023 |
| Ompex AG                                              | CHE-112.711.924 | 20 Mühlebachstrasse, Zürich , Switzerland, 8008                                                          | Interconnector User                                                          | 04/03/2021 |
| ONE EARTH SOLAR FARM LIMITED                          | 13078087        | UNIT 2 CROSSWAYS BICESTER ROAD, AYLESBURY , United Kingdom, HP18 0RA                                     | Directly Connected Power Station                                             | 05/05/2021 |
| ONE PLANET DEVELOPMENTS LIMITED                       | 12261202        | Biddlesgate Farm,Cranborne, Wimborne , United Kingdom, BH21 5RS                                          | Directly Connected Power Station                                             | 24/01/2024 |
| ONE PLANET SOLAR FARM LIMITED                         | 12327233        | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                | Directly Connected Power Station                                             | 22/10/2021 |
| Onpath Energy Limited                                 | 02387216        | Chase House, 4 Mandarin Road, Houghton-Le-Spring , United Kingdom, DH4 5RA                               | Directly Connected Power Station                                             | 04/12/2023 |
| Onpath Energy Limited (KYPE MUIR WIND FARM) LIMITED   | 06917667        | Inkerman House,St John's Road, Meadowfield, Durham , United Kingdom, DH7 8XL                             | Directly Connected Power Station                                             | 15/10/2013 |
| OnPath Energy Limited (MIDDLE MUIR WIND FARM) LIMITED | 07376956        | Inkerman House,St John's Road, Meadowfield, Durham , United Kingdom, DH7 8XL                             | Directly Connected Power Station                                             | 28/01/2014 |
| OPDE UK LIMITED                                       | 08848489        | 12 Hammersmith Grove, London , United Kingdom, W6 7AP                                                    | Directly Connected Power Station                                             | 29/03/2023 |
| OPTIMAL POWER NETWORKS LIMITED                        | 11024024        | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                    | Independent Distribution N/W Operator                                        | 30/11/2020 |
| Optimax Energy Gmbh                                   | HRB 29307       | Kathe-Kollwitz-Str.1, Leipzig , Germany, 4109                                                            | Interconnector User                                                          | 30/08/2018 |
| OPTIMUS WIND LIMITED                                  | 07883284        | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                        | Directly Connected Power Station                                             | 19/06/2015 |
| OPUS ENERGY (CORPORATE) LIMITED                       | 05199937        | DRAX POWER STATION, SELBY , United Kingdom, YO8 8PH                                                      | Supplier                                                                     | 15/11/2004 |
| OPUS ENERGY LIMITED                                   | 04382246        | DRAX POWER STATION, SELBY , United Kingdom, YO8 8PH                                                      | Supplier                                                                     | 02/09/2002 |
| OPUS ENERGY RENEWABLES LIMITED                        | 07126582        | DRAX POWER STATION, SELBY , United Kingdom, YO8 8PH                                                      | Supplier                                                                     | 01/06/2012 |
| Orddu Energy Park Limited                             | 14877649        | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                         | Directly Connected Power Station                                             | 09/01/2024 |
| Orkney Islands Council                                | N/A             | School Place, Kirkwall, Orkney, United Kingdom, KW15 1NY                                                 | Directly Connected Power Station                                             | 19/02/2024 |
| ORMONDE ENERGY LIMITED                                | 04874027        | 5th Floor, 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                             | Embedded Power Station                                                       | 11/09/2006 |
| ORRÖN ENERGY DEVELOPMENT LIMITED                      | 14737332        | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HB                                         | Directly Connected Power Station                                             | 16/08/2023 |
| ORSTED BURBO (UK) LIMITED                             | 04129545        | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                        | Embedded Power Station; Interconnector User                                  | 09/05/2007 |
| ORSTED ESS MERSEY LIMITED                             | 11206846        | 5 Howick Placenull, London, LONDON , SW1P 1WG                                                            | Embedded Power Station                                                       |            |
| ORSTED HORNSEA PROJECT FOUR LIMITED                   | 08584182        | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                        | Directly Connected Power Station                                             | 01/03/2016 |
| ORSTED HORNSEA PROJECT THREE (UK) LIMITED             | 08584210        | 5 HOWICK PLACE, LONDON , UNITED KINGDOM, SW1P 1WG                                                        | Directly Connected Power Station                                             | 19/06/2015 |
| ORSTED ONSHORE UK LIMITED                             | 06636519        | 5 HOWICK PLACE, LONDON , UNITED KINGDOM, SW1P 1WG                                                        | Embedded Power Station                                                       | 17/10/2013 |
| ORSTED POWER (UK) LIMITED                             | 04984787        | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                        | Directly Connected Power Station                                             | 16/01/2023 |
| ORTHIOS DISTRIBUTION (ANGLESEY) LIMITED               | 09540941        | c/o Begbies Traynor,29th Floor, 40 Bank Street, London , United Kingdom, E14 5NR                         | Independent Distribution N/W Operator                                        | 05/04/2016 |
| ORTHIOS POWER (ANGLESEY) LIMITED                      | 06983862        | c/o Begbies Traynor,31st Floor, 40 Bank Street, London , United Kingdom, E14 5NR                         | Embedded Power Station                                                       | 16/08/2016 |
| OSSPV001 LIMITED                                      | 10933403        | 8th Floor 100 Bishopsgatenull, London, LONDON, UK, EC2N 4AG                                              | Embedded Power Station                                                       | 29/07/2021 |
| OURACK WIND FARM LLP                                  | S0305106        | 3rd Floor, The Tun Building,4 Jackson's Entry, Holyrood Road, Edinburgh , United Kingdom, EH8 8PJ        | Directly Connected Power Station                                             | 11/10/2022 |
| Ouse Energy Limited                                   | 13270213        | 189-193 Earls Court Road, London , United Kingdom, SW5 9AN                                               | Directly Connected Power Station                                             | 05/04/2022 |
| OUTLOOK ENERGY LTD                                    | 12061886        | ASTON HOUSE CORNWALL AVENUE, LONDON , United Kingdom, N3 1LF                                             | Interconnector User                                                          | 08/03/2022 |
| OUTOKUMPU STAINLESS LIMITED                           | 02794127        | Distribution Offices,Europa Link, Sheffield , United Kingdom, S9 1TZ                                     | Non CUSC Party                                                               | 11/10/2022 |
| OVO ELECTRICITY LTD                                   | 06858121        | 1 Rivergate, Temple Quay, Bristol , United Kingdom, BS1 6ED                                              | Supplier                                                                     |            |
| P3P ENERGY SUPPLY LIMITED                             | 10872509        | FIRST FLOOR 5 FLEET PLACE, LONDON, LONDON, United Kingdom, EC4M 7RD                                      | Supplier                                                                     | 25/02/2020 |
| P3P PARTNERS LLP                                      | OC365083        | First Floor, 5 Fleet Place, London , United Kingdom, EC4M 7RD                                            | Directly Connected Power Station                                             | 04/05/2023 |
| PATRIZIA PIM LIMITED                                  | 01878842        | 24 Endell Street, London , United Kingdom, WC2H 9HQ                                                      | Non-Embedded Customer Site                                                   | 25/08/2021 |
| PAUL'S HILL II LIMITED                                | SC353922        | c/o Harper Macleod Llp,The Cadoro,45 Gordon Street, Glasgow , United Kingdom, G1 3PE                     | Embedded Exemptable Large Power Station                                      | 09/12/2014 |
| PAUL'S HILL WIND LIMITED                              | 04364516        | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                | Embedded Exemptable Large Power Station                                      | 22/07/2005 |
| PD300RON Ltd                                          | 13277482        | Basement 68 Gloucester Street, London , United Kingdom, SW1V 4EF                                         | Directly Connected Power Station                                             | 24/06/2022 |
| PD503HAN LTD                                          | 13247820        | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                         | Directly Connected Power Station                                             | 14/09/2021 |
| PD688IRO LTD                                          | 13255644        | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                         | Directly Connected Power Station                                             | 14/09/2021 |
| PD813ETY LTD                                          | 13247847        | BASEMENT 68 GLOUCESTER STREET, LONDON , United Kingdom, SW1V 4EF                                         | Directly Connected Power Station                                             | 14/09/2021 |
| PEAK GEN POWER 2 LIMITED                              | 08179576        | Gables Lodge,62 Kenilworth Road, Leamington Spa, Warwickshire, United Kingdom, CV32 6JX                  | Embedded Power Station                                                       | 10/05/2018 |
| PEAK GEN TOP CO LIMITED                               | 08544585        | Gables Lodge62, Kenilworth Road, Leamington Spa, Warwickshire , CV32 6JX                                 | Interconnector User                                                          | 25/09/2024 |
| PEEL NRE DEVELOPMENTS LIMITED                         | 06335364        | Venus Building,1 Old Park Lane, Traffordcity, Manchester, United Kingdom, M41 7HA                        | Embedded Power Station                                                       | 26/10/2022 |
| PELHAM ENERGY PARK LIMITED                            | 14376564        | 1st Floor Sackville House,143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                    | Directly Connected Power Station                                             | 08/08/2023 |
| PELHAM GREEN ENERGY CENTRE LTD                        | 14437509        | Flat 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                    | Directly Connected Power Station                                             | 21/11/2024 |
| PENCLOE WIND ENERGY LIMITED                           | SC398688        | 50 Lothian Road,Festival Square, Edinburgh , United Kingdom, EH3 9WJ                                     | Embedded Power Station                                                       | 28/04/2014 |
| PENMANSHIEL ENERGY LIMITED                            | 08263863        | CUBICO SUSTAINABLE INVESTMENTS, LONDON , United Kingdom, EC3A 8BE                                        | Directly Connected Power Station; Dormant CUSC Party; Embedded Power Station | 03/10/2014 |
| PENTLAND ROAD WINDFARM LIMITED                        | 06661827        | Harpford Farm, Payton, Wellington, Somerset, United Kingdom, TA21 0EE                                    | Embedded Exemptable Large Power Station                                      | 13/11/2008 |
| Penwortham (BES) Ltd                                  | 13789677        | Unit 1, Junction Lane, Newton-le-Willows , United Kingdom, WA12 8DN                                      | Directly Connected Power Station                                             | 10/11/2022 |
| PENWORTHAM GREEN ENERGY LIMITED                       | 13358478        | The Goods Shed,Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                    | Directly Connected Power Station                                             | 18/11/2021 |
| PEN Y CYMOEDD WIND FARM LIMITED                       | 03494498        | 5th Floor, 70 St Mary Axe, London , United Kingdom, EC3A 8BE                                             | Directly Connected Power Station                                             | 20/12/2006 |
| PEPPERHILL SOLAR FARM LIMITED                         | 13354040        | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                  | Directly Connected Power Station                                             | 31/05/2022 |
| Perry Barr Limited                                    | 11307128        | 25 Great Pulteney Street, London , W1F 9LF                                                               | Directly Connected Power Station                                             | 17/12/2024 |
| PETERHEAD FLEXPOWER LTD                               | SC692128        | 272 BATH STREET, GLASGOW , United Kingdom, G2 4JR                                                        | Directly Connected Power Station                                             | 21/12/2021 |
| PetroChina International (London) CO., Limited        | 04410974        | The Adelphi 1-11, John Adam Street, London, LONDON, United Kingdom, WC2N 6HT                             | Interconnector User                                                          | 25/07/2024 |
| PETROINEOS TRADING LIMITED                            | 107836          | 44 Esplanade, St Helier, St Helier, Jersey (United Kingdom, JE4 9WG                                      | Interconnector User                                                          | 16/04/2014 |
| P-FREQUENCY LTD                                       | 14034023        | 3 Dove Tree Apartments;95 Grove Park, London , NW9 0FP                                                   | Directly Connected Power Station                                             | 24/03/2025 |
| PINES BURN WIND FARM LLP                              | OC428008        | Sovereign House, 212-224 Shaftesbury Avenue, London , United Kingdom, WC2H 8HQ                           | Directly Connected Power Station                                             | 26/08/2020 |
| PITKEVY BATTERY STORAGE LIMITED                       | SC668224        | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                     | Embedded Exemptable Large Power Station                                      | 06/03/2022 |
| Pittlesheugh Farm BESS Limited                        | SC749339        | Pittlesheugh Farm, Greenlaw, Duns, United Kiongdom, TD10 6UL                                             | Directly Connected Power Station                                             | 20/02/2025 |
| PIVOTED POWER LLP                                     | OC420973        | Alexander House 1 Mandarin RoadRainton Bridge Business Park, Houghton Le Spring, Sunderland, uk, DH4 5RA | Directly Connected Power Station                                             | 06/09/2018 |
| PLANET 9 ENERGY LIMITED                               | 10167383        | Eastcastle House,27/28 Eastcastle Street, London , United Kingdom, W1W 8DH                               | Supplier                                                                     | 02/11/2016 |
| POGBIE WIND FARM (GRID) LIMITED                       | SC575533        | Loganwood House,High Mathernock Farm,Auchentiber Road, Kilmacolm, Renfrewshire, United Kingdom, PA13 4SP | Directly Connected Power Station                                             | 10/11/2017 |
| Point and Sandwick Power Limited                      | SC369199        | 26 Lewis Street, Stornoway, Isle Of Lewis, United Kingdom, HS1 2JF                                       | Embedded Power Station                                                       | 03/03/2023 |
| POLLIE HILL WIND FARM LIMITED                         | 14139559        | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                        | Directly Connected Power Station                                             | 27/02/2024 |
| Pond Flexible Energy Park Limited                     | 14486869        | Inkerman House,St. Johns Road, Meadowfield, County Durham, United Kingdom, DH7 8XL                       | Directly Connected Power Station                                             | 21/09/2023 |
| POTENCIA ENERGY LIMITED                               | SC758168        | 216 West George Street, Glasgow , United Kingdom, G2 2PQ                                                 | Directly Connected Power Station                                             | 13/03/2023 |
| POWER BY BRITISHVOLT LIMITED                          | 12381543        | 1 More London Place, London , United Kingdom, SE1 2AF                                                    | Non-Embedded Customer Site                                                   | 10/08/2021 |
| POWERMART APS                                         | 36201770        | ABOULEVARDEN 17 A, 03, AARHUS C , Denmark, 8000                                                          | Interconnector User                                                          | 18/10/2017 |
| POWER NI ENERGY LIMITED                               | NI27394         | GREENWOOD HOUSE, BELFAST , United Kingdom, BT9 5NW                                                       | Interconnector User                                                          | 29/06/2012 |
| Power On Technologies Ltd t/a Joulen                  | NI643146        | 19 Bedford Street, Belfast , United Kingdom, BT2 7EJ                                                     | Virtual Lead Party                                                           | 17/04/2025 |
| POWERSITE LTD                                         | 08076202        | MULBERRY HOUSE, ANDOVER , United Kingdom, SP11 6EF                                                       | Directly Connected Power Station                                             | 13/09/2017 |
| POZITIVE ENERGY LTD                                   | 09523048        | THE OCTAGON 27 MIDDLEBOROUGH, COLCHESTER , United Kingdom, CO1 1TG                                       | Supplier                                                                     | 26/09/2016 |



|                                            |            |                                                                                                                        |                                                                           |            |
|--------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|------------|
| PRIESTGILL WIND FARM LIMITED               | 07640919   | Springfield, Ackenthwaite,, Milnthorpe, United Kingdom, LA7 7DQ                                                        | Directly Connected Power Station                                          | 10/09/2019 |
| PRIVATE ENERGY PARTNERS (UK) LTD           | 12673927   | 3rd Floor, 24 Savile Row, London , United Kingdom, W1S 2ES                                                             | Directly Connected Power Station                                          | 17/03/2025 |
| PROGRESS POWER LIMITED                     | 08421833   | DRAX POWER STATION, SELBY, YORKSHIRE, United Kingdom, YO8 8PH                                                          | Directly Connected Power Station                                          | 12/11/2013 |
| PROLOGIS UK CCCXXVIII S.À R.L              | OE021391   | 34 Avenue de la Liberté, Luxembourg , Luxembourg, 1930                                                                 | Directly Connected Power Station                                          | 13/07/2023 |
| Pulse Clean Energy Limited                 | 07056616   | 2 New Bailey, 6 Stanley Street, Salford, Manchester , UNITED KINGDOM, M3 5GS                                           | Directly Connected Power Station                                          | 06/12/2023 |
| PULSE CLEAN ENERGY SPV FRANKLIN LIMITED    | 13726084   | 197 Kensington High Street, London , United Kingdom, W8 6BA                                                            | Directly Connected Power Station                                          | 12/04/2023 |
| QAIR RENEWABLES UK LIMITED                 | 09800258   | 5th Floor, Exchange Station,Tithebarn Street, Liverpool , United Kingdom, L2 2QP                                       | Directly Connected Power Station                                          | 23/01/2023 |
| QAIR SCOTLAND LIMITED                      | SC705805   | 1 Johns Place;Leith, Edinburgh , EH6 7EL                                                                               | Directly Connected Power Station                                          | 17/03/2025 |
| Q-Energy Sustainable Investments Ltd       | 13821241   | 58 Marylebone High Street, London , United Kingdom, W1U 5HT                                                            | Directly Connected Power Station                                          | 07/12/2023 |
| QUARK ENERGY TRADING LIMITED               | 13051162   | Oxford Centre For Innovation, New Road, Oxford, OXFORD, United Kingdom,, OX1 1BY                                       | Interconnector User                                                       | 12/04/2023 |
| Queequeg Renewables Ltd                    | 11780524   | 2nd Floor, The Works,14 Turnham Green Terrace Mews, London , United Kingdom, W4 1QU                                    | Directly Connected Power Station                                          | 21/09/2023 |
| QUENT ApS                                  | 39711303   | Svanemøllevej 41, Hellerup, Hellerup, Denmark, 2900                                                                    | Interconnector User                                                       | 06/02/2023 |
| QUESTPIT LIMITED                           | 09533916   | 7th Floor, Aldgate High Street, London , United Kingdom, EC3N 1AG                                                      | Non-Embedded Customer Site                                                | 25/07/2024 |
| QUIXWOOD MOOR LIMITED                      | 07455293   | Suite 5, 7th Floor, 50 Broadway, London , United Kingdom, SW1H 0DB                                                     | Dormant CUSC Party; Embedded Power Station                                | 07/10/2014 |
| Rabbit Marketing Ltd                       | 13341181   | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                                              | Directly Connected Power Station                                          | 08/12/2023 |
| RACE BANK WIND FARM LIMITED                | 05017828   | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                      | Directly Connected Power Station                                          | 27/10/2005 |
| RAD CHP LIMITED                            | 14200920   | 5 Seaforth Place, London , United Kingdom, SW1E 6AB                                                                    | Non-Embedded Customer Site                                                | 09/11/2023 |
| RADIANT ENERGY HOLDINGS LIMITED            | 14423102   | St Georges House 6th Floor;15 Hanover Square, London , United Kingdom, W1S 1HS                                         | Dormant CUSC Party                                                        | 02/06/2023 |
| RADIUS ENERGY LIMITED                      | 11211289   | Eurocard Centre Herald Park,Herald Drive, Crewe , United Kingdom, CW1 6EG                                              | Supplier                                                                  | 28/07/2021 |
| RAMPION EXTENSION DEVELOPMENT LIMITED      | 12091939   | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                 | Directly Connected Power Station                                          | 05/10/2021 |
| RAMPION OFFSHORE WIND LIMITED              | 07199847   | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                 | Directly Connected Power Station                                          | 20/12/2001 |
| RAYLEIGH GREEN LIMITED                     | 12517501   | Ropemaker Place28 Ropemaker Street, London , United Kingdom, EC2Y 9HD                                                  | Directly Connected Power Station                                          | 24/07/2020 |
| RDRL LIMITED                               | SC457854   | 295 Fenwick Road;Giffnock, Glasgow , G46 6UH                                                                           | Non-Embedded Customer Site                                                | 07/04/2025 |
| REBEL ENERGY SUPPLY LIMITED                | 10767623   | First Floor, 10 Queen Street Place, London , United Kingdom, EC4R 1BE                                                  | Supplier                                                                  | 02/02/2021 |
| Recell Energy Bloom Developments Limited   | 14160610   | 5 Sidings Court, White Rose Way, Doncaster, Yorkshire, United Kingdom, DN4 5NU                                         | Embedded Power Station                                                    | 16/10/2022 |
| RECHARGE PRODUCTION UK LIMITED             | 14631941   | 27 Old Gloucester Street, London , United Kingdom, WC1N 3AX                                                            | Directly Connected Power Station                                          | 06/04/2023 |
| Regen Properties LLP                       | OC433666   | 167 Broadhurst Gardens, London , United Kingdom, NW6 3AU                                                               | Non-Embedded Customer Site                                                | 21/07/2022 |
| REGENT POWER LIMITED                       | 09875997   | c/o Regent Gas Ltd,Regent House,Kendal Avenue, London , United Kingdom, W3 0XA                                         | Supplier                                                                  | 15/11/2021 |
| REG GREENBURN LIMITED                      | SC508240   | c/o Gillespie Macandrew Llp,5 Atholl Crescent, Edinburgh , United Kingdom, EH3 8EJ                                     | Directly Connected Power Station                                          | 21/12/2018 |
| REG KNOCKODHAR LIMITED                     | SC566750   | 2 SEMPLE STREET, EDINBURGH , United Kingdom, EH3 8BL                                                                   | Directly Connected Power Station                                          | 08/05/2019 |
| REG Power Developments Limited             | 13535415   | Unit 3b Damery Works, Damery LaneWoodford, Berkeley, Gloucestershire, United Kingdom, GL13 9JR                         | Directly Connected Power Station                                          | 12/10/2023 |
| RELAY BALBEGGIE LIMITED                    | 13084817   | 1 Vine Street, London , United Kingdom, W1J 0AH                                                                        | Embedded Exemptable Large Power Station                                   | 14/03/2023 |
| RELAY HOLDCO LIMITED                       | 13084817   | 1 Vine Street, London , United Kingdom, W1J 0AH                                                                        | Directly Connected Power Station                                          | 02/01/2025 |
| RELAY SUTTIESIDE LIMITED                   | 13084884   | 1 VINE STREET, LONDON , United Kingdom, W1J 0AH                                                                        | Directly Connected Power Station                                          | 19/10/2021 |
| Renantis Energy Trading Srl. UK Branch     | BR022176   | 10 Lower Grosvenor Place, London , United Kingdom, SW1W 0EN                                                            | Supplier                                                                  | 04/07/2024 |
| Renantis UK Limited                        | 04501104   | Third Floor, 10 Lower Grosvenor Place, London , United Kingdom, SW1W 0EN                                               | Directly Connected Power Station                                          | 29/09/2023 |
| Renesola Hercules Energy 1 Limited         | 13057891   | 9 St. Clare Street, London , United Kingdom, EC3 1LQ                                                                   | Directly Connected Power Station                                          | 17/11/2022 |
| Renewable Connections Developments Limited | 12351905   | Level 4 Ldn:W, 3 Noble Street, London , United Kingdom, EC2V 7EE                                                       | Embedded Exemptable Large Power Station                                   | 28/03/2025 |
| Renewable Energy Systems Limited           | 01589961   | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                    | Directly Connected Power Station                                          | 05/08/2005 |
| RENEWABLES NORTH WEST LTD                  | 13987235   | 264 Manchester Road, Warrington, Cheshire, United Kingdom, WA1 3RB                                                     | Embedded Power Station                                                    | 06/02/2024 |
| RENEWCO POWER LIMITED                      | SC708511   | 10 Newton Place, Glasgow , United Kingdom, G3 7PR                                                                      | Directly Connected Power Station                                          | 25/01/2023 |
| RE Projects Development Limited            | 08805101   | 565 High Road, Leytonstone, London, United Kingdom, E11 4PB                                                            | Directly Connected Power Station                                          | 04/12/2022 |
| RESPECT ENERGY S.A.                        | 0000759658 | Ludwika Rydygiera 8, Warsaw , Poland, 01-793                                                                           | Interconnector User                                                       | 04/01/2023 |
| RES UK & IRELAND LIMITED                   | 04913493   | Beaufort Court Egg Farm LaneOff Station Road, Kings Langley , WD4 8LR                                                  | Directly Connected Power Station; Embedded Exemptable Large Power Station | 27/02/2006 |
| REVOLUTION ENERGY (SCOTLAND) LIMITED       | SC582024   | 16 Muir Street, Hamilton , ML3 6EP                                                                                     | Directly Connected Power Station                                          | 20/02/2024 |
| REWE 11 Limited                            | 15054172   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 13/12/2023 |
| REWE 1 LIMITED                             | 13710920   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 24/05/2023 |
| REWE 2 LIMITED                             | 13714757   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 28/11/2022 |
| REWE 3 LIMITED                             | 13714767   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 21/03/2023 |
| REWE 4 LIMITED                             | 13714782   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 21/11/2022 |
| REWE 5 LIMITED                             | 13714747   | Palladium House, 1-4 Argyll Street, London , United Kingdom, W1F 7LD                                                   | Directly Connected Power Station                                          | 21/03/2023 |
| REWE 6 LIMITED                             | 13714752   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 24/05/2023 |
| REWE 7 LIMITED                             | 14475805   | 111 Park Street, Mayfair, London , United Kingdom, W1K 7JF                                                             | Directly Connected Power Station                                          | 11/07/2023 |
| REWE 8 LIMITED                             | 14479318   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 11/08/2023 |
| REWE 9 LIMITED                             | 14879799   | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                              | Directly Connected Power Station                                          | 26/10/2023 |
| RHIGOS BESS LIMITED                        | 15206496   | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                       | Directly Connected Power Station                                          | 09/01/2024 |
| RHIWLAS ENERGY PARK LIMITED                | 12580599   | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                       | Embedded Power Station                                                    | 03/09/2021 |
| RICHBOROUGH ENERGY PARK LIMITED            | 10158720   | 4 ALBEMARLE STREET, LONDON , UNITED KINGDOM, W1S 4GA                                                                   | Directly Connected Power Station                                          | 30/06/2020 |
| RIGGHILL WIND FARM LIMITED                 | 06850808   | Seebeck House,1 Seebeck Place, Knowlhill, Milton Keynes, Buckinghamshire, United Kingdom, MK5 8FR                      | Embedded Power Station                                                    | 06/11/2020 |
| RISQ ENERGY LIMITED                        | 12705570   | 3rd Floor,80 Cannon Street, London, LONDON, United Kingdom, EC4N 6HL                                                   | Interconnector User                                                       | 16/06/2023 |
| RIVER NENE POWER LIMITED                   | 04262250   | FIRST FLOOR, TEMPLEBACK, BRISTOL , United Kingdom, BS1 6FL                                                             | Embedded Power Station                                                    | 18/09/2001 |
| RIVOX WIND ENERGY HUB LIMITED              | 13547705   | 10 Victoria Street, BRISTOL , United Kingdom, BS1 6BN                                                                  | Directly Connected Power Station                                          | 23/05/2022 |
| ROARING HILL ENERGY STORAGE LTD            | 10272710   | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                    | Directly Connected Power Station                                          | 30/11/2021 |
| Rochdale (BES) Ltd                         | 13789732   | Unit 1, Junction Lane, Newton-le-Willows , United Kingdom, WA12 8DN                                                    | Directly Connected Power Station                                          | 10/11/2022 |
| ROCKSAVAGE POWER COMPANY, LTD.             | FC018868   | Maples And Calder, Ugland House,PO BOX 309, George Town, Grand Cayman, Cayman Islands                                  | Directly Connected Power Station                                          | 18/09/2001 |
| Rosefield Energyfarm Limited               | 11618221   | Alexander House,1 Mandarin Road, Rainton Bridge Business Park, Houghton Le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                                          | 05/06/2020 |
| Rosside Energy Limited                     | 11033624   | 565 High Road, Leytonstone, London, United Kingdom, E11 4PB                                                            | Directly Connected Power Station                                          | 13/10/2023 |
| ROTHES III LIMITED                         | SC307540   | c/o Harper Macleod Llp,The Cadoro,45 Gordon Street, Glasgow , United Kingdom, G1 3PE                                   | Embedded Exemptable Large Power Station                                   | 09/12/2014 |
| ROTHES II LIMITED                          | 04916606   | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                              | Embedded Exemptable Large Power Station                                   | 05/05/2006 |
| ROTHES WIND LIMITED                        | 04364513   | 2ND FLOOR, 36 BROADWAY, LONDON , United Kingdom, SW1H 0BH                                                              | Embedded Exemptable Large Power Station                                   | 31/03/2005 |
| Rothienorman Flexpower A Ltd               | SC745788   | 272 Bath Street, Glasgow , United Kingdom, G2 4JR                                                                      | Directly Connected Power Station                                          | 05/08/2022 |
| ROTHIENORMAN FLEXPPOWER LTD                | SC691670   | 272 BATH STREET, GLASGOW , UNITED KINGDOM, G2 4JR                                                                      | Directly Connected Power Station                                          | 21/12/2021 |
| ROTHIENORMAN GRID SERVICES LIMITED         | 12648462   | FOURTH FLOOR, 2 KINGSWAY, CARDIFF , United Kingdom, CF10 3FD                                                           | Non-Embedded Customer Site                                                | 03/03/2021 |
| ROWAN ONSHORE WINDFARMS LIMITED            | 06708797   | Alexander House,1 Mandarin Road,Rainton Bridge Business Park, Houghton le Spring, Sunderland, United Kingdom, DH4 5RA  | Directly Connected Power Station                                          | 10/04/2024 |
| ROWNALL FARM SOLAR LIMITED                 | 12368199   | 22 CHANCERY LANE, LONDON , United Kingdom, WC2A 1LS                                                                    | Directly Connected Power Station                                          | 08/09/2020 |
| RPC ELMYA CARNATION DEVCO LIMITED          | 15303566   | Princes House, Suite 2a, 38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                           | Directly Connected Power Station                                          | 18/09/2024 |
| RPC ELMYA CARNATION FOXDALE LIMITED        | 16013631   | Princes House,Suite 2a, 38 Jermyn Street, London , United Kingdom,, SW1Y 6DN                                           | Directly Connected Power Station                                          | 27/02/2025 |
| RPC ELMYA CARNATION GISSING LIMITED        | 16014880   | Princes House,Suite 2a, 38 Jermyn Street, London , United Kingdom,, SW1Y 6DN                                           | Directly Connected Power Station                                          | 27/02/2025 |
| RPC ELMYA CARNATION KILWORTH LIMITED       | 16014937   | Princes House,Suite 2a, 38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                            | Directly Connected Power Station                                          | 27/02/2025 |

|                                                    |           |                                                                                                                           |                                                                           |            |
|----------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|------------|
| RPC ELMYA CARNATION TOWCASTER LIMITED              | 16014941  | Princes House,Suite 2a, 38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                               | Directly Connected Power Station                                          | 27/02/2025 |
| RUFUSIA LTD                                        | 15594981  | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                                                 | Directly Connected Power Station                                          | 20/02/2025 |
| RUGELEY POWER GENERATION LIMITED                   | 03300792  | Rooms 481-499, Second Floor, Salisbury House, London Wall, London, United Kingdom, EC2M 5SQ                               | Directly Connected Power Station                                          | 29/09/2017 |
| RUGELEY POWER LIMITED                              | 04212554  | Rooms 481-499 Second Floor, Salisbury House,, London Wall, London, United Kingdom, EC2M 5SQ                               | Directly Connected Power Station; Dormant CUSC Party                      | 18/09/2001 |
| RWE COGEN UK (HYTHE) LIMITED                       | 04445217  | Bishop Fleming Llp,16 Queen Square, Bristol, BRISTOL, United Kingdom, BS1 4NT                                             | Embedded Power Station                                                    | 09/03/2004 |
| RWE GENERATION UK PLC                              | 03892782  | Windmill Hill Business Park,Whitehill Way, Swindon , United Kingdom, SN5 6PB                                              | Directly Connected Power Station                                          | 18/09/2001 |
| RWE MARKINCH LIMITED                               | 06574689  | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                             | Directly Connected Power Station                                          | 22/12/2009 |
| RWE Renewables UK Dogger Bank South (East) Limited | 13656240  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 05/12/2024 |
| RWE RENEWABLES UK DOGGER BANK SOUTH (WEST) LIMITED | 13656525  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 05/12/2024 |
| RWE RENEWABLES UK HUMBER WIND LIMITED              | 04899318  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 14/09/2007 |
| RWE RENEWABLES UK LIMITED                          | 03758404  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 24/02/2022 |
| RWE RENEWABLES UK ONSHORE WIND LIMITED             | 03758407  | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                             | Directly Connected Power Station; Embedded Power Station                  | 22/09/2006 |
| RWE RENEWABLES UK OPERATIONS LIMITED               | 02692529  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Embedded Power Station                                                    | 29/12/2005 |
| RWE RENEWABLES UK ROBIN RIGG EAST LIMITED          | 03568724  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 22/01/2010 |
| RWE RENEWABLES UK ROBIN RIGG WEST LIMITED          | 04150735  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          | 22/01/2010 |
| RWE RENEWABLES UK SOLAR AND STORAGE LIMITED        | 14539260  | Windmill Hill Business ParkWhitehill Way, Swindon , SN5 6PB                                                               | Directly Connected Power Station                                          | 21/08/2023 |
| RWE RENEWABLES UK SWINDON LIMITED                  | 02550622  | Windmill Hill Business Park, Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                   | Directly Connected Power Station                                          | 09/05/2008 |
| RWE RENEWABLES UK ZONE SIX LIMITED                 | 07054842  | Windmill Hill Business Park,Whitehill Way, Swindon, Wiltshire, United Kingdom, SN5 6PB                                    | Directly Connected Power Station                                          |            |
| RWE STALLINGBOROUGH LIMITED                        | 6269884   | WINDMILL HILL BUSINESS PARK, SWINDON , United Kingdom, SN5 6PB                                                            | Embedded Power Station; No longer a CUSC Party                            | 25/07/2007 |
| RWE SUPPLY & TRADING GMBH                          | HRB 14327 | RWE PLATZ 6, ESSEN , Germany, 45141                                                                                       | Interconnector User                                                       | 04/03/2011 |
| RYE HOUSE 10 RENEWABLES LIMITED                    | 15125422  | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                          | Directly Connected Power Station                                          | 22/11/2023 |
| S4N SPITAL LTD                                     | 14439316  | 51 Hollingbourne Road, London , United Kingdom, SE24 9NB                                                                  | Directly Connected Power Station                                          | 30/08/2023 |
| SAGE NORTH SEA LIMITED                             | FC033971  | Paget-Brown Trust Company Ltd Century YardCricket Square PO BOX 1111, George Town, Grand Cayman, Cayman Islands, Ky1-1102 | Non-Embedded Customer Site                                                | 15/02/2018 |
| SALAMANDER WIND PROJECT COMPANY LIMITED            | SC662940  | 2nd Floor, 2 Lochrin Square,96 Fountainbridge, Edinburgh , United Kingdom, EH3 9QA                                        | Directly Connected Power Station                                          | 27/01/2022 |
| SALTEND CHEMICALS PARK LIMITED                     | 10542068  | Px House,Westpoint Road, Stockton-On-Tees , United Kingdom, TS17 6BF                                                      | Directly Connected Power Station                                          | 20/12/2023 |
| Saltend Cogeneration Company Limited               | 03274929  | Saltend Power Station,Saltend Chemicals Park,Hedon Road, Hull, East Riding Of Yorkshire, United Kingdom, HU12 8GA         | Directly Connected Power Station                                          | 18/09/2001 |
| SAMBAR POWER LIMITED                               | SC380227  | Second Floor, 112 George Street, Edinburgh , United Kingdom, EH2 4LH                                                      | Directly Connected Power Station                                          | 18/11/2022 |
| SANDY KNOWE WIND FARM LIMITED                      | 06850950  | c/o Tmf Group,13th Floor, One Angel Court, London, London, United Kingdom, EC2R 7HJ                                       | Directly Connected Power Station                                          | 22/07/2014 |
| SANQUHAR COMMUNITY WIND COMPANY LIMITED            | SC459230  | Caledonian Exchange,19a Canning Street, Edinburgh , United Kingdom, EH3 8HE                                               | Directly Connected Power Station                                          | 18/07/2014 |
| SANQUHAR II COMMUNITY WIND CO LTD                  | SC449688  | Caledonian Exchange,19a Canning Street, Edinburgh , United Kingdom, EH3 8HE                                               | Directly Connected Power Station                                          | 22/08/2016 |
| SAVE OUR PLANET ENERGY LIMITED                     | 14057269  | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                                 | Directly Connected Power Station                                          | 05/02/2025 |
| SCIRA OFFSHORE ENERGY LIMITED                      | 05119310  | 1 KINGDOM STREET, LONDON , United Kingdom, W2 6BD                                                                         | Embedded Power Station                                                    | 09/01/2007 |
| SCORPIA ENERGY SUPPLY LTD                          | 12665145  | Connect House,133-137 Alexandra Road, Wimbledon, London, United Kingdom, SW19 7JY                                         | Supplier                                                                  | 02/09/2024 |
| SCOT ELEC 1 LIMITED                                | 14893585  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                          | Non-Embedded Customer Site                                                | 21/06/2024 |
| SCOT ELEC 2 LIMITED                                | 14888343  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                          | Directly Connected Power Station                                          | 31/03/2025 |
| SCOT ELEC 3 LIMITED                                | 15074773  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                          | Non-Embedded Customer Site                                                | 04/04/2024 |
| SCOT ELEC 4 LIMITED                                | 15075463  | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                          | Non-Embedded Customer Site                                                | 30/05/2024 |
| Scot Stability Limited                             | SC668729  | 272 Bath Street, Glasgow , United Kingdom, G2 4JR                                                                         | Directly Connected Power Station                                          | 07/04/2025 |
| Scottish Hydro Electric Power Distribution Plc     | SC213460  | Inveralmond House, 200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                      | Directly Connected Distribution System                                    | 01/01/1999 |
| ScottishPower Energy Retail Limited                | SC190287  | 320 St. Vincent Street, Glasgow , United Kingdom, G2 5AD                                                                  | Supplier                                                                  | 18/09/2001 |
| SCOTTISHPOWER RENEWABLES (UK) LIMITED              | NI028425  | The Soloist,1 Lanyon Place, Belfast, Ireland, United Kingdom, BT1 3LP                                                     | Directly Connected Power Station                                          | 31/03/2005 |
| SEABANK POWER LIMITED                              | 02591188  | Severn Road, Hallen, Bristol, United Kingdom, BS10 7SP                                                                    | Directly Connected Power Station                                          | 18/09/2001 |
| SEAGREEN 1A LIMITED                                | 12575047  | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                     | Directly Connected Power Station                                          | 01/06/2020 |
| SEAGREEN ALPHA WIND ENERGY LIMITED                 | 07185533  | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                     | Directly Connected Power Station; Dormant CUSC Party                      | 18/02/2015 |
| SEAGREEN BRAVO WIND ENERGY LIMITED                 | 07185543  | No.1 Forbury Place,43 Forbury Road,, Reading , United Kingdom, RG1 3JH                                                    | Directly Connected Power Station; Dormant CUSC Party                      | 18/02/2015 |
| Seagreen Wind Energy Limited                       | 06873902  | No.1 Forbury Place, 43 Forbury Road, Reading, BERKSHIRE, United Kingdom, RG1 3JH                                          | Directly Connected Power Station                                          | 17/08/2010 |
| SEAGULL PROPERTIES LIMITED                         | 06885531  | Corner Oak,1 Homer Road, Solihull, West Midlands, United Kingdom, B91 3QG                                                 | Directly Connected Power Station                                          | 05/03/2025 |
| SEAHILLS PROPERTIES LIMITED                        | SC695795  | Unit 1a Halbeath Interchange Business Park, Kingseat Road,, Dunfermline, , Fife, KY11 8RY                                 | Embedded Exemptable Large Power Station                                   | 23/12/2024 |
| SECTION 31 SOLUTIONS LTD                           | 13135012  | 2 Hopkins Mead, Chelmsford , United Kingdom, CM2 6SS                                                                      | Directly Connected Power Station                                          | 21/12/2023 |
| SEFE Energy Limited                                | 03904624  | 20 TRITON STREET, LONDON , UNITED KINGDOM, NW1 3BF                                                                        | Supplier                                                                  |            |
| SEGro PROPERTIES LIMITED                           | 00448911  | 1 New Burlington Place, London , United Kingdom, W1S 2HR                                                                  | Directly Connected Power Station                                          | 28/02/2025 |
| SELLAFIELD LIMITED                                 | 01002607  | HINTON HOUSE, WARRINGTON , United Kingdom, WA3 6GR                                                                        | Dormant CUSC Party; Embedded Power Station                                | 18/09/2001 |
| SELLINDGE GRID SERVICES LIMITED                    | 12395277  | Fourth Floor, 2 Kingsway, Cardiff , United Kingdom, CF10 3FA                                                              | Directly Connected Power Station                                          | 08/04/2022 |
| Sellindge West 10 Renewables Limited               | 15125694  | Century House1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                           | Directly Connected Power Station                                          | 22/11/2023 |
| SEMBCORP (WILTON BESS) LTD                         | 15151480  | Sembcorp UK Headquarters, Wilton International, Middlesbrough, Cleveland, UK, TS90 8WS                                    | Directly Connected Power Station                                          | 08/02/2024 |
| SEMBCORP UTILITIES (UK) LIMITED                    | 04636301  | Sembcorp UK Headquarters,Wilton International,, Middlesbrough, Cleveland, United Kingdom, TS90 8WS                        | Directly Connected Power Station                                          | 20/03/2003 |
| SE RIGIFA BESS LTD                                 | 14044436  | Calcutt Court, Calcutt, Swindon, United Kingdom, SN6 6JR                                                                  | Embedded Exemptable Large Power Station                                   | 08/05/2024 |
| SETT WIND DEVELOPMENT LIMITED                      | 10988810  | 16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                                               | Directly Connected Power Station                                          | 20/08/2019 |
| SEVERN POWER LIMITED                               | 05392552  | Severn Power Station,West Nash Road, Nash, Newport, United Kingdom, NP18 2BZ                                              | Directly Connected Power Station; Embedded Exemptable Large Power Station | 04/11/2005 |
| Shama BESS Limited                                 | 14522918  | Penthouse Office30 Queen Square, Bristol , United Kingdom, BS1 4ND                                                        | Directly Connected Power Station                                          | 31/08/2023 |
| SHAW-ENERGI LTD                                    | 03949279  | Unit 1, Junction Lane,Sankey Valley Industrial Estate, Newton Le Willows, Warrington, United Kingdom, WA12 8DN            | Directly Connected Power Station                                          | 19/05/2020 |
| SHEAF ENERGY LIMITED                               | 13270168  | 168 Church Roadnull, Hove , BN3 2DL                                                                                       | Directly Connected Power Station                                          | 27/09/2022 |
| Sheilhill Battery Storage Limited                  | SC726914  | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                      | Directly Connected Power Station                                          | 07/09/2022 |
| SHELL ENERGY EUROPE LIMITED                        | 04162523  | Shell Centre, LONDON, LONDON, UK, SE1 7NA                                                                                 | Interconnector User                                                       | 25/08/2014 |
| SHELL ENERGY UK LIMITED                            | 07489042  | Shell Centre,York Road, London , United Kingdom, SE1 7NA                                                                  | Supplier                                                                  | 25/02/2013 |
| Shell New Energies UK Ltd                          | 04153040  | Shell Centre, London , United Kingdom, SE1 7NA                                                                            | Directly Connected Power Station                                          | 20/02/2025 |
| SHELL UK LIMITED                                   | 00140141  | SHELL CENTRE, LONDON , UNITED KINGDOM, SE1 7NA                                                                            | Non-Embedded Customer Site                                                | 31/03/2005 |
| Shetland Offshore Wind Limited                     | 14306989  | Tricor Suite, 4th Floor,50 Mark Lane, London , United Kingdom, EC3R 7QR                                                   | Directly Connected Power Station                                          | 30/05/2023 |
| Shiel Hydrogen Plant Limited                       | SC759982  | 39 George Street, 4th Floor, Edinburgh , United Kingdom, EH2 2HN                                                          | Non-Embedded Customer Site                                                | 20/12/2023 |
| Shotwick Land Limited                              | 10380450  | 45-51 Wychtree Street, Swansea , United Kingdom, SA6 8EX                                                                  | Directly Connected Power Station                                          | 21/03/2024 |
| SIMEC LOCHABER HYDROPOWER 2 LIMITED                | 00750143  | c/o Marble Power Ltd,1st Floor, 3 More London Place, London , United Kingdom, SE1 2RE                                     | Directly Connected Power Station; Embedded Power Station                  | 08/12/2014 |
| SIMEC USKMOUTH POWER LIMITED                       | 05104786  | Uskmouth Power Station,West Nash Road, Nash, Newport, United Kingdom, NP18 2BZ                                            | Directly Connected Power Station; No longer a CUSC Party                  | 25/08/2004 |
| SIMEC WIND ONE LTD                                 | 10060100  | BIRDPORT CORPORATION ROAD, NEWPORT , United Kingdom, NP19 4RE                                                             | Directly Connected Power Station; Dormant CUSC Party                      | 22/01/2018 |
| SINCLAIR OFFSHORE WIND FARM LIMITED                | SC750268  | First Floor, 2 Lochrin Square,96 Fountainbridge, Edinburgh , United Kingdom, EH3 9QA                                      | Directly Connected Power Station                                          | 26/01/2024 |
| SINQ POWER LIMITED                                 | 09284085  | NO. 1 DOVECOTE OLD HALL ROAD, SALE , United Kingdom, M33 2GS                                                              | Supplier                                                                  | 02/02/2016 |
| SIRIUS ECODEV (BROXBURN) LTD                       | 12129867  | THE FACTORY, WHITCHURCH, ROSS-ON-WYE , United Kingdom, HR9 6DF                                                            | Embedded Power Station                                                    | 21/04/2022 |
| SIRIUSECODEV (GASTARD) LTD                         | 14807829  | Russell House,Littleburn Industrial Estate, Langley Moor, Durham, United Kingdom, DH7 8HJ                                 | Directly Connected Power Station                                          | 12/12/2023 |
| SIRIUS ECODEV (KEITHICK) LTD                       | 13170877  | Overross House, Ross Park, Ross-on-Wye , United Kingdom, HR9 7US                                                          | Embedded Power Station                                                    | 27/10/2021 |
| SIRIUS ECODEV (STIRLING) LTD                       | 13459817  | The Factory,Whitchurch, Ross-on-Wye , United Kingdom, HR9 6DF                                                             | Embedded Power Station                                                    | 24/03/2022 |



|                                                   |          |                                                                                                                       |                                                          |            |
|---------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------|
| SIRIUS RENEWABLE ENERGY LTD                       | 10925888 | Russel House,Mill Road, Langley Moor, County Durham, United Kingdom, DH7 8HJ                                          | Embedded Power Station                                   | 18/11/2021 |
| Sizewell C Limited                                | 09284825 | 25 Copthall Avenue, London , United Kingdom, EC2R 7BP                                                                 | Directly Connected Power Station                         | 26/06/2015 |
| SIZING JOHN LIMITED                               | 12997545 | C/O Watson Farley & Williams Llp15 Appold Street, London , EC2A 2HB                                                   | Directly Connected Power Station                         | 17/08/2021 |
| Skelmersdale Energy Storage Limited               | 11347214 | 3 More London Riverside, London , United Kingdom,, SE1 2AQ                                                            | Embedded Power Station                                   | 15/11/2022 |
| SKY UK DEVELOPMENT LIMITED                        | 13630960 | UK House, 5th Floor,164-182 Oxford Street, London , United Kingdom, W1D 1NN                                           | Directly Connected Power Station                         | 06/03/2025 |
| Slickly Wind Farm Limited                         | 11248508 | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                         | Directly Connected Power Station                         | 07/07/2021 |
| SLOUGH HEAT & POWER LIMITED                       | 00174142 | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Non-Embedded Customer Site                               | 08/09/2021 |
| SMARTESTENERGY BUSINESS LIMITED                   | 06468946 | Ridgeworth House,Liverpool Gardens, Worthing, West Sussex, United Kingdom, BN11 1RY                                   | Supplier                                                 |            |
| SMARTESTENERGY LIMITED                            | 03994598 | The Columbus Building7 Westferry Circus, London, LONDON, UK, E14 4HD                                                  | Supplier                                                 | 18/01/2001 |
| SMS ENERGY SERVICES LIMITED                       | 03197379 | Prennau House,Copse Walk,Cardiff Gate Business Park, Pontprennau, Cardiff, United Kingdom, CF23 8XH                   | Directly Connected Power Station                         | 04/03/2024 |
| SNEDDON LAW COMMUNITY WIND COMPANY LTD            | SC443267 | Caledonian Exchange,19a Canning Street,, Edinburgh , United Kingdom, EH3 8HE                                          | Embedded Power Station                                   | 22/08/2016 |
| SO ENERGY TRADING LIMITED                         | 09263295 | Studio 2 Power Road Studios 114 Power RoadChiswick, London , W4 SPY                                                   | Supplier                                                 | 07/10/2015 |
| SOFIA OFFSHORE WIND FARM LIMITED                  | 07791964 | Windmill Hill Business Park, Whitehill Way, Swindon , United Kingdom, SN5 6PB                                         | Directly Connected Power Station                         | 27/03/2017 |
| SOLAR 2 LIMITED                                   | 11913504 | Linden House,Wrexham Road, Mold Business Park, Mold , United Kingdom, CH7 1XP                                         | Embedded Power Station                                   | 23/09/2024 |
| SOLAR 2 PROJECT J LIMITED                         | SC709552 | WIND 2 OFFICE, 2 WALKER STREET, EDINBURGH , United Kingdom, EH3 7LA                                                   | Directly Connected Power Station                         | 20/10/2022 |
| SOLAR CENTURY HOLDINGS LIMITED                    | 03570325 | 19TH FLOOR, 22 BISHOPSGATE, LONDON , UNITED KINGDOM, EC2N 4BQ                                                         | Directly Connected Power Station                         | 21/02/2020 |
| SOLARFIVE LTD                                     | 12602740 | 2 West Street, Henley-On-Thames, Oxfordshire, United Kingdom, RG9 2DU                                                 | Directly Connected Power Station                         | 20/09/2021 |
| SolarFour Ltd                                     | 12602174 | 2 West Street, Henley-On-Thames, Oxfordshire, United Kingdom, RG9 2DU                                                 | Directly Connected Power Station                         | 21/12/2023 |
| SolarNine Ltd                                     | 15010349 | 16 Great Queen Street, Covent, London, United Kingdom, WC2B 5AH                                                       | Directly Connected Power Station                         | 03/04/2025 |
| SOLAR SECURITIES LIMITED                          | 07074035 | 6 Hatfield Close, West Byfleet , United Kingdom, KT14 6PG                                                             | Directly Connected Power Station                         | 02/05/2024 |
| SolarSeven Ltd                                    | 12603936 | 16 Great Queen Street, Covent Garden, London, United Kingdom, WC2B 5AH                                                | Directly Connected Power Station                         | 26/03/2025 |
| SolarTen Ltd                                      | 15136171 | 16 Great Queen Street, Covent Garden, London, United Kingdom, WC2B 5AH                                                | Directly Connected Power Station                         | 31/03/2025 |
| SolarThree Ltd                                    | 12602707 | 2 West Street, Henley-On-Thames, Oxfordshire, United Kingdom, RG9 2DU                                                 | Directly Connected Power Station                         | 01/02/2023 |
| SOLWAYBANK ENERGY LIMITED                         | 09275294 | Beaufort Court,Egg Farm Lane, Kings Langley, Hertfordshire, United Kingdom, WD4 8LR                                   | Directly Connected Power Station                         | 15/11/2017 |
| SONI LIMITED                                      | NI38715  | Castlereagh House,12 Manse Road, Belfast , United Kingdom, BT6 9RT                                                    | Interconnector Error Administrator                       | 04/03/2005 |
| Sonnedix Weston Limited                           | 13987895 | 90 Union Street, London , United Kingdom, SE1 0NW                                                                     | Embedded Exemptable Large Power Station                  | 19/04/2023 |
| SONNINGMAY WIND LIMITED                           | 10722635 | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                     | Directly Connected Power Station                         | 26/10/2018 |
| SOUNDMARK WIND LIMITED                            | 10721881 | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                     | Directly Connected Power Station                         | 26/10/2018 |
| SOURCE ENERGIE LIMITED                            | 12655787 | CALCUTT COURT CALCUTT, SWINDON , United Kingdom, SN6 6JR                                                              | Directly Connected Power Station                         | 21/11/2022 |
| Source GalileoLimited                             | 13475747 | Calcutt Court,Calcutt, Swindon , United Kingdom, SN6 6JR                                                              | Directly Connected Power Station                         | 06/03/2024 |
| SOUTH EASTERN POWER NETWORKS PLC                  | 03043097 | Newington House, 237 Southwark Bridge Road, London , United Kingdom, SE1 6NP                                          | Directly Connected Distribution System                   | 18/09/2001 |
| Southern Electric Power Distribution Plc          | 04094290 | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Distribution System                   | 18/09/2001 |
| SOUTH GRANTHAM ENERGY CENTRE LIMITED              | 15670595 | Level 4 Ldn:W, 3 Noble Street, London , United Kingdom, EC2V 7EE                                                      | Directly Connected Power Station                         | 06/02/2025 |
| SOUTH KENT ENERGY PARK LIMITED                    | 13353151 | Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                                               | Directly Connected Power Station                         | 31/05/2022 |
| SOUTH KILBRAUR WIND FARM LIMITED                  | SC583096 | WIND 2 OFFICE 2,WALKER STREET, EDINBURGH , UNITED KINGDOM, EH3 7LB                                                    | Embedded Exemptable Large Power Station                  | 03/10/2018 |
| SOUTH KYLE WIND FARM LIMITED                      | SC617500 | Dla Piper Scotland Llp,Collins House,Rutland Square, Edinburgh , United Kingdom, EH1 2AA                              | Directly Connected Power Station                         | 13/03/2020 |
| South Street BESS Limited                         | 15278086 | 3rd Floor, St Georges House,13-14 Ambrose Street, Cheltenham, Gloucestershire, United Kingdom, GL50 3LG               | Directly Connected Power Station                         | 03/02/2025 |
| SOUTH TEES SITE COMPANY LIMITED                   | 10424065 | Teesside Airport Business Suite,Teesside International Airport, Darlington , United Kingdom, DL2 1NJ                  | Non-Embedded Customer Site                               | 05/10/2021 |
| South West Wind Holdco Limited                    | 13981274 | Amp Technology Centre Advanced Manufacturing Park, Brunel Way, Rotherham , United Kingdom, S60 5WG                    | Directly Connected Power Station                         | 23/01/2023 |
| SPALDING ENERGY COMPANY LTD                       | FC019668 | c/o Maples And Calder,Attorneys-At-Law,Ugland House,, George Town, B.W.Indies, Cayman Islands, PO Box 309             | Directly Connected Power Station                         | 18/09/2001 |
| SPALDING ENERGY EXPANSION LIMITED                 | 06790895 | 30 Crown Place, Earl Street, London , United Kingdom, EC2A 4ES                                                        | Directly Connected Power Station                         | 04/09/2014 |
| SP Distribution plc                               | SC189125 | 320 St. Vincent Street, Glasgow , United Kingdom, G2 5AD                                                              | Directly Connected Distribution System                   | 01/09/2004 |
| SPECIALITY STEEL UK LIMITED                       | 10491177 | 7 Fox Valley Way, Stocksbridge, Sheffield, United Kingdom, S36 2JA                                                    | Dormant CUSC Party; Non-Embedded Customer Site           | 07/06/2017 |
| SPECTRUMRESERVE LTD                               | 10726304 | Suite 1, 7th Floor, 50 Broadway, London , United Kingdom, SW1H 0BL                                                    | Directly Connected Power Station                         | 20/08/2020 |
| SPEYSIDE RENEWABLE ENERGY PARTNERSHIP LIMITED     | SC403396 | 13 QUEENS ROAD, ABERDEEN, London, United Kingdom, AB15 4YL                                                            | Embedded Exemptable Large Power Station                  | 13/06/2016 |
| SPEYSLAW SOLAR LIMITED                            | 09370270 | 4TH FLOOR 1 TUDOR STREET, LONDON , UNITED KINGDOM, EC4Y 0AH                                                           | Embedded Power Station                                   | 28/11/2018 |
| SPIORAD NA MARA LIMITED                           | SC717716 | Regus Building, 1st Floor, 93 George Street, Edinburgh , United Kingdom, EH2 3ES                                      | Directly Connected Power Station                         | 29/11/2023 |
| Spirebush Ltd                                     | SC697238 | J R W,19 Buccleuch Street, Hawick, Roxburgh, United Kingdom, TD9 0HL                                                  | Directly Connected Power Station                         | 11/11/2021 |
| SP MANWEB PLC                                     | 02366937 | 3 PRENTON WAY, PRENTON , UNITED KINGDOM, CH43 3ET                                                                     | Directly Connected Distribution System                   | 18/09/2001 |
| SPRINGWELL ENERGYFARM LIMITED                     | 13484004 | Alexander House,1 Mandarin Road,Rainton Bridge Business Park, Houghton le Spring, Sunderland, United Kingdom, DH4 5RA | Directly Connected Power Station                         | 20/04/2022 |
| SQUARE1 ENERGY LIMITED                            | 11042192 | 71 Graham Road, Malvern, Worcestershire, United Kingdom, WR14 2JS                                                     | Supplier                                                 | 27/02/2019 |
| SQUEAKY CLEAN ENERGY LIMITED                      | 09812682 | 151-153 WARDOUR STREET, LONDON , United Kingdom, W1F 8WE                                                              | Supplier                                                 | 19/08/2016 |
| SSE BATTERY MONK FRYSTON LIMITED                  | 13212047 | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                         | 05/08/2021 |
| SSE COTTERED SOLAR LIMITED                        | 15346645 | No. 1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                               | Directly Connected Power Station                         | 22/10/2024 |
| SSE DAINES BESS LIMITED                           | 15344013 | No. 1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                               | Directly Connected Power Station                         | 22/10/2024 |
| SSE DE SOLAR HOLDCO LIMITED                       | 14189570 | No. 1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                               | Directly Connected Power Station                         | 11/04/2023 |
| SSE EGGBOROUGH LIMITED                            | 14939853 | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station                         | 01/07/2024 |
| SSE ENERGY SUPPLY LIMITED                         | 03757502 | No.1 Forbury Place43 Forbury Road, Reading, BERKSHIRE, UK, RG1 3JH                                                    | Interconnector User; Supplier                            | 18/09/2001 |
| SSE Enterprise Energy Solutions                   | 08462158 | Ocean Court, Caspian Road, Atlantic Street, Altrincham , United Kingdom, WA14 5HH                                     | Virtual Lead Party                                       | 31/03/2021 |
| SSE ENTERPRISE LIMITED                            | 10060563 | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                         | 20/12/2023 |
| SSE EWERBY SOLAR LIMITED                          | 14959032 | No. 1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                               | Directly Connected Power Station                         | 01/07/2024 |
| SSE FERRYBRIDGE BATTERY LIMITED                   | 14411214 | No. 1 Forbury Place, 43 Forbury Road, Reading, BERKSHIRE, United Kingdom, RG1 3JH                                     | Directly Connected Power Station                         | 02/07/2024 |
| SSE FIDDLERS FERRY BATTERY LIMITED                | 14418916 | No. 1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station                         | 01/07/2024 |
| SSE Generation Limited                            | 02310571 | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station; Embedded Power Station | 18/09/2001 |
| SSE HYDROGEN DEVELOPMENTS LIMITED                 | 15238086 | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Non-Embedded Customer Site                               | 19/08/2024 |
| SSE IMPERIAL PARK PN LIMITED                      | 02631510 | No. 1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station                         | 20/12/2023 |
| SSE Plc                                           | SC117119 | Inveralmond House200 Dunkeld Road, Perth , PH1 3AQ                                                                    | Directly Connected Power Station; Dormant CUSC Party     | 18/09/2011 |
| SSE RENEWABLES HOLDINGS LIMITED                   | 314061   | Red Oak South,South County Business Park, Leopardstown, Dublin, Ireland, D18 W688                                     | Directly Connected Power Station                         | 08/07/2010 |
| SSE RENEWABLES OFFSHORE WINDFARM HOLDINGS LIMITED | SC436251 | Inveralmond House,200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                         | 25/05/2021 |
| SSE RENEWABLES SERVICES (UK) LIMITED              | NI043294 | Millennium House,25 Great Victoria Street, Belfast , United Kingdom, BT2 7AQ                                          | Directly Connected Power Station; Embedded Power Station | 20/02/2006 |
| SSE RENEWABLES SOLAR & BATTERY HOLDINGS LIMITED   | 13561962 | No. 1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                               | Directly Connected Power Station                         | 11/07/2023 |
| SSE RENEWABLES WIND FARMS (UK) LIMITED            | SC654502 | Inveralmond House,200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                         | 02/08/2021 |
| SSE SOUTHERY SOLAR LIMITED                        | 14953142 | No. 1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station                         | 01/07/2024 |
| SSE STAYTHORPE POWER LIMITED                      | 14043534 | No.1 Forbury Place, 43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                | Directly Connected Power Station                         | 14/10/2022 |
| SSE THERMAL GENERATION (SCOTLAND) LIMITED         | SC664055 | Inveralmond House,200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                         | 01/06/2021 |
| SSE TODDLBURN LIMITED                             | SC259104 | Inveralmond House,200 Dunkeld Road, Perth , United Kingdom, PH1 3AQ                                                   | Directly Connected Power Station                         | 28/11/2005 |
| SSE UTILITY SOLUTIONS LIMITED                     | 06894120 | No.1 Forbury Place,43 Forbury Road, Reading , United Kingdom, RG1 3JH                                                 | Directly Connected Power Station                         | 28/02/2022 |
| STANDARD LIFE ASSURANCE LTD                       | SC286833 | Standard Life House, 30 Lothian Road, Edinburgh , United Kingdom, EH1 2DH                                             | Non-Embedded Customer Site                               | 14/12/2021 |
| STARK ENERGY LIMITED                              | 11857289 | 306 The Plaza, 100 Old Hall Street, Liverpool , United Kindom, L3 9QJ                                                 | Directly Connected Power Station                         | 12/12/2022 |

|                                           |                 |                                                                                                                     |                                                      |            |
|-------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------|
| STARLIGHT ENERGY UK LIMITED               | 13505799        | 5th Floor North Side, 7/10 Chandos Street,Cavendish Square, London , United Kingdom, W1G 9DQ                        | Directly Connected Power Station                     | 15/05/2023 |
| STATERA ENERGY LIMITED                    | 09840486        | 4th Floor 80 Victoria Streetnull, London , SW1E 5JL                                                                 | Directly Connected Power Station                     | 11/01/2018 |
| STATKRAFT ENERGY LTD.                     | 06544123        | 19th Floor 22 Bishopsgatenull, London , EC2N 4BQ                                                                    | Embedded Power Station                               | 15/12/2008 |
| STATKRAFT HIGHLANDS PSH LIMITED           | SC581757        | The Garment Factory,10 Montrose Street, Glasgow , United Kingdom, G1 1RE                                            | Directly Connected Power Station                     | 19/01/2021 |
| STATKRAFT HYDROGEN UK HOLDING LIMITED     | 14509580        | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                       | Directly Connected Power Station                     | 08/05/2024 |
| STATKRAFT IRELAND LIMITED                 | 487313          | Building 3400,Cork Airport Business Park, Cork , Ireland, T12AE76                                                   | Directly Connected Power Station                     | 20/08/2019 |
| STATKRAFT MARKETS GMBH                    | HRB 37885       | Derendorfer Allee 2a, Düsseldorf, Düsseldorf, Germany, 40476                                                        | Interconnector User; Supplier                        | 19/11/2003 |
| STATKRAFT UK LTD                          | 05742795        | 19th Floor 22 Bishopsgatenull, London , EC2N 4BQ                                                                    | Directly Connected Power Station                     | 15/12/2009 |
| Statkraft Windco 1 Limited                | 13558599        | 19th Floor 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                        | Directly Connected Power Station                     | 14/03/2023 |
| STG Switzerland GmbH                      | CHE-463.317.717 | Baarerstrasse 55, Zug, ZUG, Switzerland, 6300                                                                       | Interconnector User                                  | 23/10/2023 |
| St James Group Limited                    | 03190056        | Berkeley House, 19 Portsmouth Road, Cobham, Surrey, UK, KT11 1JG                                                    | Directly Connected Power Station                     | 04/04/2025 |
| Stoke Bardolph 10 Renewables Limited      | 15128170        | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                   | Directly Connected Power Station                     | 22/11/2023 |
| STORNOWAY WIND FARM LIMITED               | SC225262        | c/o Edf Renewables,Atria One, 144 Morrison Street, Edinburgh , United Kingdom, EH3 8EX                              | Embedded Power Station                               | 12/12/2013 |
| STORY FUTURE ENERGY LIMITED               | 14086033        | Burgh Road Industrial Estate, Carlisle , United Kingdom, CA2 7NA                                                    | Directly Connected Power Station                     | 26/11/2024 |
| Stranoch Windfarm Limited                 | 02825049        | Alexander House, 1 Mandarin Road, Houghton le Spring , United Kingdom, DH4 5RA                                      | Directly Connected Power Station                     | 10/07/2024 |
| Strath Tirry Wind Energy 2021 Ltd         | 13659419        | Third Floor, 10 Lower Grosvenor Place, London , United Kingdom, SW1W 0EN                                            | Embedded Power Station                               | 21/03/2022 |
| STRATH TIRRY WIND ENERGY LIMITED          | 12534303        | Unit 3b, Damery Works,Damery Lane, Woodford, Berkeley, Gloucestershire, United Kingdom, GL13 9JR                    | Embedded Power Station                               | 23/02/2021 |
| STRATHY WIND FARM LIMITED                 | SC663103        | Inveralmond House,200 Dunkeld Road, Perth, Perth, United Kingdom, PH1 3AQ                                           | Directly Connected Power Station                     | 01/03/2021 |
| Stromar Offshore Wind Farm Limited        | SC716924        | 2nd Floor, 2 Lochrin Square,96 Fountainbridge, Edinburgh , United Kingdom, EH3 9QA                                  | Directly Connected Power Station                     | 18/02/2025 |
| STRONELAIRG WIND FARM LIMITED             | SC607491        | INVERALMOND HOUSE, PERTH, 200 Dunkeld Road, United Kingdom, PH1 3AQ                                                 | Directly Connected Power Station                     | 01/02/2019 |
| STROUPSTER CAITHNESS WIND FARM LIMITED    | 08254673        | 5TH FLOOR, 20 FENCHURCH STREET, LONDON , United Kingdom, EC3M 3BY                                                   | Embedded Exemptable Large Power Station              | 19/12/2012 |
| Sun4net Ltd                               | 08797521        | 51 Hollingbourne Road, London , United Kingdom, SE24 9NB                                                            | Directly Connected Power Station                     | 06/12/2022 |
| SUNDON BATTERY STORAGE LIMITED            | 10824109        | c/o Foresight Group Llp,The Shard,32 London Bridge Street, London , United Kingdom, SE1 9SG                         | Directly Connected Power Station                     | 21/10/2019 |
| SUNDON GREEN LIMITED                      | 12726010        | 18 Riversway Business VillageNavigation Way, Ashton-On-Ribble, Preston, UK, PR2 2YP                                 | Directly Connected Power Station                     | 25/08/2022 |
| SUNNICA LIMITED                           | 08826077        | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                           | Directly Connected Power Station                     | 13/02/2019 |
| SUNSHINE PROJECT 01 LIMITED               | 13117802        | Denbridge Road, Bromley , United Kingdom, BR1 2AG                                                                   | Embedded Power Station                               | 01/05/2024 |
| Sunshine Project 03 Limited               | 13117246        | 20 Denbridge Road, Bromley , United Kingdom, BR1 2AG                                                                | Directly Connected Power Station                     | 03/12/2024 |
| SUSI EELPOWER DUNSINANE LIMITED           | 12356110        | 124 CITY ROAD, LONDON , United Kingdom, EC1V 2NX                                                                    | Embedded Exemptable Large Power Station              | 24/09/2020 |
| SUSI EELPOWER FORDTOWN LIMITED            | SC595142        | 6 QUEENS ROAD, ABERDEEN , United Kingdom, AB15 4ZT                                                                  | Embedded Exemptable Large Power Station              | 15/10/2021 |
| SUTTON BRIDGE POWER GENERATION            | 02586357        | Severn Power Station,West Nash Road, Nash, Newport, United Kingdom, NP18 2BZ                                        | Directly Connected Power Station                     | 18/09/2001 |
| Swansea Grid Solutions Limited            | 12371459        | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                       | Directly Connected Power Station                     | 11/10/2023 |
| SWEET BRIAR 2 ENERGY PARK LIMITED         | 16218290        | 25 King Street, Bristol , United Kingdom, BS1 4PB                                                                   | Directly Connected Power Station                     | 15/04/2025 |
| SWITCH BUSINESS GAS AND POWER LTD         | 09310083        | GRANTA LODGE, MALVERN , United Kingdom, WR14 2JS                                                                    | Supplier                                             | 25/05/2016 |
| SYLVAMO UK LIMITED                        | SC004787        | Commerce House, South Street, Elgin, Moray, United Kingdom, IV30 1JE                                                | Embedded Power Station                               | 15/03/2005 |
| TAGENERGY DEVELOPMENT UK LIMITED          | 13370962        | Carlton House, High Street, Higham Ferrers, Northamptonshire, United Kingdom, NN10 8BW                              | Embedded Power Station                               | 06/11/2023 |
| TARCHON ENERGY LIMITED                    | 11040231        | Amp Technology Centre Advanced Manufacturing Park, Brunel Way, Rotherham , United Kingdom, S60 5WG                  | Interconnector Owner                                 | 22/01/2019 |
| TARENNI ENERGY PARK LIMITED               | 13248705        | Hodge House, Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                    | Directly Connected Power Station                     | 25/11/2021 |
| Tarland Limited                           | 11966492        | Crown House108 Aldersgate Street, London , United Kingdom, EC1A 4JQ                                                 | Embedded Power Station                               | 24/02/2021 |
| TATA STEEL UK LIMITED                     | 02280000        | 18 GROSVENOR PLACE, LONDON, LONDON, UNITED KINGDOM, SW1X 7HS                                                        | Non-Embedded Customer Site                           | 05/05/2022 |
| TBC 001 Limited                           | 14486279        | 4c Princes House38 Jermyn Street , SW1Y 6DN                                                                         | Directly Connected Power Station                     | 14/12/2023 |
| TBC 002 LIMITED                           | 14486288        | 4c Princes House,38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                                | Directly Connected Power Station                     | 25/03/2023 |
| TBC 003 LIMITED                           | 14486514        | 4c Princes House,38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                                | Directly Connected Power Station                     | 31/07/2023 |
| TBC PARTNERS LIMITED                      | 14468409        | 4c Princes House, 38 Jermyn Street, London , United Kingdom, SW1Y 6DN                                               | Directly Connected Power Station                     | 26/11/2023 |
| TEBLAND WIND FARM LIMITED                 | SC689060        | Floor 1/1, 39 St. Vincent Place, Glasgow , United Kingdom, G1 2ER                                                   | Directly Connected Power Station                     | 06/04/2022 |
| TELIS ENERGY UK LIMITED                   | 14259671        | Suite 1, 7th Floor,50 Broadway, London , United Kingdom, SW1H 0BL                                                   | Directly Connected Power Station                     | 15/05/2023 |
| Templemurry Limited                       | 13302073        | Biddlesgate Farm,Cranborne, Wimborne , United Kingdom, BH21 5RS                                                     | Embedded Power Station                               | 24/06/2022 |
| TEVIOT WF LIMITED                         | SC653266        | Muirhall Farm,Auchengray, Carnwath, Lanark, South Lanarkshire, United Kingdom, ML11 8LL                             | Directly Connected Power Station                     | 06/04/2021 |
| THANET OFFSHORE WIND LIMITED              | 04512200        | 5th Floor, St Mary Axe, London , United Kingdom, EC3A 8BE                                                           | Embedded Power Station                               | 04/10/2007 |
| THE ABBEY GROUP CAMBRIDGESHIRE LIMITED    | 02197844        | Nene Lodge,Funthams Lane, Whittlesey, Peterborough, Cambridgeshire, United Kingdom, PE7 2PB                         | Embedded Exemptable Large Power Station              | 28/08/2023 |
| THE CLEAN FUTURE RENEWABLES LIMITED       | 13815181        | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                           | Directly Connected Power Station                     | 25/08/2022 |
| The Crown State                           | N/A             | 1 ST JAMES'S MARKET, LONDON , UNITED KINGDOM, SW1Y 4AH                                                              | Non CUSC Party                                       |            |
| THEDDLETHORPE FLEXIBLE GENERATION LIMITED | 14304859        | 4th Floor, 80 Victoria Street, London , United Kingdom, SW1E 5JL                                                    | Directly Connected Power Station                     | 01/02/2022 |
| THE ELECTRICITY NETWORK COMPANY LIMITED   | 05581824        | Synergy House,Windmill Avenue, Woolpit, Bury St. Edmunds, United Kingdom, IP30 9UP                                  | Independent Distribution N/W Operator                | 24/05/2006 |
| THE EUROPEAN MARINE ENERGY CENTRE LIMITED | SC249331        | The Charles Clouston Building O.R.I.C., Back Road, Stromness, Orkney, United Kingdom, KW16 3AW                      | Embedded Power Station                               | 31/03/2005 |
| The Farm Energy Company Limited           | 10048543        | 2 Jubilee Way, Faversham , United Kingdom, ME13 8GD                                                                 | Directly Connected Power Station                     | 10/05/2024 |
| THORNEY LANE LLP                          | OC338779        | Thorney Business Park, Thorney Lane North, Iver, Buckinghamshire, United Kingdom, SLO 9HF                           | Non-Embedded Customer Site                           | 16/04/2021 |
| Thorpe Marsh Green Energy Hub Limited     | 14403918        | 20 St. James's Street, 7th Floor, London , United Kingdom, SW1A 1ES                                                 | Directly Connected Power Station                     | 21/08/2023 |
| THURROCK FLEXIBLE GENERATION LIMITED      | 10917470        | 4th Floor 80 Victoria Street, London, LONDON, United Kingdom, SW1E 5JL                                              | Directly Connected Power Station                     | 28/08/2018 |
| THURSO GRID SERVICES LIMITED              | 12393509        | 1030 CENTRE PARK,SLUTCHERS LANE, WARRINGTON , UNITED KINGDOM, WA1 1QL                                               | Non-Embedded Customer Site                           | 03/03/2021 |
| TIDAL LAGOON (SWANSEA BAY) PLC            | 08141301        | 8TH FLOOR, ONE CENTRAL SQUARE, CARDIFF , United Kingdom, CF10 1FS                                                   | Directly Connected Power Station; Dormant CUSC Party | 03/02/2014 |
| TILBURY GREEN POWER LIMITED               | 06453656        | Equitix Management Services, Unit G1 Ash Tree Court, Nottingham Business Park, Nottingham , United Kingdom, NG8 6PY | Embedded Power Station                               | 17/11/2022 |
| TI LIRIC Limited                          | 12300898        | 17th Floor, 88 Wood Street, London , United Kingdom, EC2V 7DA                                                       | Interconnector Owner                                 | 16/12/2022 |
| TILLBRIDGE SOLAR LIMITED                  | 12887594        | 111 Park Street, Mayfair, London, United Kingdom, W1K 7JF                                                           | Directly Connected Power Station                     | 13/11/2020 |
| TINZ PROGRAMME 1 PROJECTCO 1 LIMITED      | 13078692        | GABLES LODGE, LEAMINGTON SPA , United Kingdom, CV32 6JX                                                             | Non-Embedded Customer Site                           | 06/09/2021 |
| TINZ PROGRAMME 1 PROJECTCO 2 LIMITED      | 13078723        | GABLES LODGE, LEAMINGTON SPA , United Kingdom, CV32 6JX                                                             | Directly Connected Power Station                     | 19/11/2021 |
| TINZ PROGRAMME 1 PROJECTCO 3 LIMITED      | 13078880        | GABLES LODGE, LEAMINGTON SPA, LEAMINGTON SPA, United Kingdom, CV32 6JX                                              | Directly Connected Power Station                     | 09/12/2021 |
| TINZ PROGRAMME 2 PROJECTCO 1 LIMITED      | 13692059        | Gables Lodge,62 Kenilworth Road, Leamington Spa , United Kingdom, CV32 6JX                                          | Non-Embedded Customer Site                           | 24/01/2022 |
| TINZ PROGRAMME 3 HOLDCO LIMITED           | 13721318        | Gables Lodge,62 Kenilworth Road, Leamington Spa , United Kingdom, CV32 6JX                                          | Directly Connected Power Station                     | 31/05/2022 |
| TINZ PROGRAMME 3 PROJECTCO 1 LIMITED      | 13757518        | GABLES LODGE, LEAMINGTON SPA, Warwickshire, United Kingdom, CV32 6JX                                                | Directly Connected Power Station                     | 26/03/2023 |
| TINZ PROGRAMME 3 PROJECTCO 4 LIMITED      | 13757901        | Gables Lodge, 62 Kenilworth Road, Leamington Spa , United Kingdom, CV32 6JX                                         | Directly Connected Power Station                     | 26/06/2023 |
| TI PROJECTCO 1 LIMITED                    | 14410303        | 17th Floor, 88 Wood Street, London , United Kingdom, EC2V 7DA                                                       | Directly Connected Power Station                     | 05/06/2023 |
| TI PROJECTCO 2 LIMITED                    | 14410318        | 17th Floor, 88 Wood Street, London , United Kingdom, EC2V 7DA                                                       | Directly Connected Power Station                     | 05/06/2023 |
| TI PROJECTCO 3 LIMITED                    | 14410404        | 17th Floor, 88 Wood Street, London , United Kingdom, EC2V 7DA                                                       | Directly Connected Power Station                     | 05/06/2023 |
| TOFTINGALL WIND LIMITED                   | 13695678        | 16 West Borough, Wimborne, Dorset, United Kingdom, BH21 1NG                                                         | Embedded Exemptable Large Power Station              | 24/05/2024 |
| Tolkien Solar Farm Limited                | 14347966        | Trinity House,Newby Road, Hazel Grove, Stockport, United Kingdom, SK7 5DA                                           | Directly Connected Power Station                     | 03/02/2023 |
| Tollgate Energy Storage Limited           | 13048014        | c/o Low Carbon Limited,Stirling Square, 5-7 Carlton Gardens, London , United Kingdom, SW1Y 5AD                      | Embedded Power Station                               | 13/09/2022 |
| TOMATO ENERGY LIMITED                     | 09735768        | Devonshire Business Centre,Aviary Court,Wade Road, Basingstoke , United Kingdom, RG24 8PE                           | Supplier                                             | 09/08/2017 |
| TORMYWHEEL WIND FARM LIMITED              | SC272942        | 2 SEMPLE STREET, EDINBURGH , United Kingdom, EH3 8BL                                                                | Embedded Exemptable Large Power Station              | 24/01/2017 |
| TOTALENERGIES E&P UK LIMITED              | 00811900        | 18th Floor, 10 Upper Bank Street, Canary Wharf, London, United Kingdom, E14 5BF                                     | Non-Embedded Customer Site                           | 16/09/2022 |



|                                                    |                    |                                                                                                                  |                                                          |            |
|----------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------|
| TOTALENERGIES GAS & POWER LIMITED                  | 02172239           | Bridge Gate, 55 - 57 High Street, Redhill, Surrey, United Kingdom, RH1 1RX                                       | Supplier                                                 | 18/09/2001 |
| TOUCAN ENERGY LIMITED                              | 09688876           | 1 LONG LANE, LONDON , United Kingdom, SE1 4PG                                                                    | Supplier                                                 | 31/08/2018 |
| Tradergy S.L.                                      | B67694125          | Alberto Alcocer Avenue 24, 7th Floor, Madrid, Madrid, Spain, 28036                                               | Interconnector User                                      | 10/12/2024 |
| TRAFIGURA DENMARK APS                              | 43431579           | c/o Accura Advokatpartnerselskab,Alexandriagade 8, Nordhavn, Nordhavn, Denmark, DK-2150                          | Interconnector User                                      | 15/09/2023 |
| TRAILSTONE GMBH                                    | HB154548           | KURFUERSTENDAMM 194, BERLIN , Germany, 10707                                                                     | Interconnector User                                      | 23/05/2014 |
| TRAILSTONE RENEWABLES GMBH                         | HRB 206999         | KURFUERSTENDAMM 194, BERLIN , Germany, 10707                                                                     | Interconnector User                                      | 27/04/2020 |
| TRALORG WIND FARM LIMITED                          | 09916617           | 100 LIVERPOOL STREET, LONDON , United Kingdom, EC2M 2AT                                                          | Directly Connected Power Station                         | 25/01/2016 |
| TRANQUILITY ENERGY LIMITED                         | 12267627           | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                        | Directly Connected Power Station                         | 05/01/2022 |
| TRANSPORT FOR WALES                                | 09476013           | 3 LLYS CADWYN, PONTYPRIDD , United Kingdom, CF37 4TH                                                             | Non-Embedded Customer Site                               | 07/01/2020 |
| Trasteel Nordic ApS                                | DK43565729         | Beierholm, Voergårdvej 2, Aalborg, Aalborg, Denmark, 9200                                                        | Interconnector User                                      | 31/07/2024 |
| Trent BESS III LIMITED                             | 13552338           | 2 Crossways Business Centre, Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                       | Directly Connected Power Station                         | 05/04/2022 |
| Trent BESS II Limited                              | 14548773           | 2 Crossways Business Centre, Bicester Road, Kingswood, Aylesbury, Buckinghamshire, United Kingdom, HP18 0RA      | Directly Connected Power Station                         | 26/11/2024 |
| Trent BESS I Limited                               | 15567018           | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, Buckinghamshire, United Kingdom, HP18 0RA       | Directly Connected Power Station                         | 26/11/2024 |
| TRIBUS CLEAN ENERGY LIMITED                        | 11494471           | 2 Crossways Business Centre,Bicester Road, Kingswood, Aylesbury, United Kingdom, HP18 0RA                        | Directly Connected Power Station                         | 15/02/2024 |
| TRIO POWER LIMITED                                 | 15032495           | UK House, 5th Floor,164-182 Oxford Street, London, Gloucestershire, United Kingdom, W1D 1NN                      | Directly Connected Power Station                         | 24/01/2025 |
| TRITAX ACQUISITION 52 LIMITED                      | 16247180           | 72 Broadwick Street, London , United Kingdom, W1F 9QZ                                                            | Non-Embedded Customer Site                               | 15/04/2025 |
| TRITON KNOLL OFFSHORE WIND FARM LIMITED            | 03696654           | Windmill Hill Business Park, Whitehill Way, Swindon, Swindon, United Kingdom, SN5 6PB                            | Directly Connected Power Station                         | 28/07/2009 |
| TROSTON WINDFARM LIMITED                           | 15052348           | 1st Floor, Sackville House, 143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                          | Directly Connected Power Station                         | 11/01/2024 |
| TRU ENERGY LIMITED                                 | 09735909           | Gable House, 239 Regents Park Road, London , United Kingdom, N3 3LF                                              | Supplier                                                 | 14/06/2017 |
| TULLO WIND FARM LIMITED                            | 04580320           | 1 PARK ROW, LEEDS , United Kingdom, LS1 5AB                                                                      | Embedded Exemptable Large Power Station                  | 02/08/2005 |
| TULLYMURDOCH LIMITED                               | 08101703           | 7th Floor, Wellington House, 125-130 Strand, London , United Kingdom, WC2R 0AP                                   | Embedded Power Station                                   | 15/08/2014 |
| TURBINE MARKETING SPV LIMITED                      | 11393385           | Wader Lodge, Cusworth, Doncaster, United Kingdom, DNS 7TR                                                        | Directly Connected Power Station                         | 27/06/2019 |
| TWENTYSHILLING LIMITED                             | 07990781           | 27-28 EASTCASTLE STREET, LONDON, London, United Kingdom, W1W 8DH                                                 | Directly Connected Power Station                         | 30/10/2014 |
| TWINSHIELS WIND FARM LTD                           | SC390355           | c/o Eneco Ness House,Dochfour Business Centre, Dochgarroch, Inverness, United Kingdom, IV3 8GY                   | Embedded Power Station                                   | 18/12/2015 |
| Twyn Hywel Energy Park Ltd                         | 12576991           | Hodge House,Guildhall Place, Cardiff , United Kingdom, CF10 1DY                                                  | Directly Connected Power Station                         | 24/06/2021 |
| TYLER HILL RENEWABLES LIMITED                      | 08731028           | Venture X, 1 Ariel Way, London , United Kingdom, W12 7SL                                                         | Directly Connected Power Station                         | 29/07/2024 |
| UC ENERGY LTD                                      | 10972017           | 30 Old Bailey, London , United Kingdom, EC4M 7AU                                                                 | Supplier                                                 | 26/07/2024 |
| UISENIS POWER LIMITED                              | SC389045           | c/o Anderson Strathern,58 Morrison Street, Edinburgh , United Kingdom, EH3 8BP                                   | Directly Connected Power Station                         | 18/04/2012 |
| UKAEA LTD                                          | 14458243           | Culham Science Centre, Abingdon, Oxfordshire, United Kingdom, OX14 3DB                                           | Non CUSC Party; Non-Embedded Customer Site               | 01/02/2004 |
| UK ATOMIC ENERGY AUTHORITY                         | N/A                | CULHAM CAMPUS, ABINGDON, OXFORDSHIRE, UNITED KINGDOM, OX14 3DB                                                   | Non CUSC Party                                           |            |
| UK MAINSTREAM RENEWABLE POWER LIMITED              | 06538309           | 10 ORANGE STREET, HAYMARKET, LONDON, UNITED KINGDOM, WC2H 7DQ                                                    | Directly Connected Power Station                         | 28/01/2021 |
| UK POWER DISTRIBUTION LIMITED                      | 06339585           | Eleanor HouseQueenswood Office Park,Newport Pagnell Road, Northampton, Northamptonshire, United Kingdom, NN4 7JJ | Directly Connected Distribution System                   | 07/02/2022 |
| UK POWER NETWORKS (IDNO) LIMITED                   | 06489447           | Newington House,237 Southwark Bridge Road, London , United Kingdom, SE1 6NP                                      | Independent Distribution N/W Operator                    | 28/07/2009 |
| UK POWER NETWORKS SERVICES (CONTRACTING) LIMITED   | 02228168           | Newington House,237 Southwark Bridge Road, London , United Kingdom, SE1 6NP                                      | Non-Embedded Customer Site                               | 18/09/2001 |
| UK POWER RESERVE LIMITED                           | 07385282           | 6th Floor, Radcliffe House,Blenheim Court, Solihull , United Kingdom, B91 2AA                                    | Embedded Power Station; Supplier                         | 10/06/2016 |
| UK RENFREWSHIRE 1 LTD                              | 14225523           | Lilly House,13 Hanover Square, London , United Kingdom, W1S 1HN                                                  | Directly Connected Power Station                         | 08/11/2023 |
| UK UTILITY RESERVE LIMITED                         | 11008814           | 6th Floor, Radcliffe House, Blenheim Court, Solihull , United Kingdom, B91 2AA                                   | Embedded Power Station                                   |            |
| ULZIESIDE WIND ENERGY LIMITED                      | SC386880           | Caledonian Exchange, 19a Canning Street, Edinburgh , United Kingdom, EH3 8HE                                     | Directly Connected Power Station; Dormant CUSC Party     | 28/04/2014 |
| UNIFY ENERGY LIMITED                               | 09523118           | UNION ALBERT SQUARE, MANCHESTER , United Kingdom, M2 6LW                                                         | Supplier                                                 | 30/09/2016 |
| Union Fenosa Generacion SA                         | Registro Mercantil | Avenida San Luis, 77, Madrid, MADRID, Spain, 28033                                                               | Interconnector User                                      | 11/11/2002 |
| UNIPER GLOBAL COMMODITIES SE                       | HRB 61123          | HOLZSTR. 6, DUESSELDORF , Germany, 40221                                                                         | Interconnector User                                      | 24/07/2008 |
| UNIPER HYDROGEN UK LIMITED                         | 09513014           | Compton House,2300 The Crescent,Birmingham Business Park, Birmingham , United Kingdom, B37 7YE                   | Directly Connected Power Station                         | 28/01/2025 |
| UNIPER UK LIMITED                                  | 02796628           | Compton House 2300 The CrescentBirmingham Business Park, Birmingham, West Midlands, UK, B37 7YE                  | Directly Connected Power Station                         | 13/08/2015 |
| UNITED GAS & POWER TRADING LTD                     | 09995683           | 16 Otley Road, Guiseley, Leeds, United Kingdom, LS20 8AH                                                         | Supplier                                                 | 15/01/2018 |
| UPM-KYMMENE (UK) LIMITED                           | SC102969           | 1 Meadowhead Road, Irvine, Ayrshire, United Kingdom, KA11 5AT                                                    | Non-Embedded Customer Site                               | 15/03/2005 |
| URUK BESS LIMITED                                  | 14578390           | 30 Queen Square,Penthouse Office, Bristol, Somerset, United Kingdom, BS1 4ND                                     | Embedded Power Station                                   | 21/03/2025 |
| USKMOUTH ENERGY STORAGE LIMITED                    | 13989624           | 128 CITY ROAD, LONDON , UNITED KINGDOM, EC1V 2NX                                                                 | Directly Connected Power Station                         | 02/08/2022 |
| UTILITA ENERGY LIMITED                             | 04849181           | Hutwood Court Bournemouth Road, Chandler's Ford, Eastleigh, Hampshire, United Kingdom, SO53 3QB                  | Supplier                                                 | 19/12/2003 |
| VALDA ENERGY LIMITED                               | 11212563           | Unit 11, Talisman Business Centre,Talisman Road, Bicester , United Kingdom, OX26 6HR                             | Supplier                                                 | 10/07/2019 |
| VANTAGE DATA CENTERS UK LIMITED                    | 06132144           | 2 Old Bath Road, Newbury, Berkshire, United Kingdom, RG14 1QL                                                    | Non-Embedded Customer Site                               | 18/01/2022 |
| VANTAGE DATA CENTERS UNITED KINGDOM (OPCO) LIMITED | 14236061           | 1 Bartholomew Lane, London , United Kingdom, EC2N 2AX                                                            | Non-Embedded Customer Site                               | 27/10/2023 |
| VATTENFALL AB                                      | 556036-2138        | EVENEMANGSGATAN 13, SOLNA, SOLNA, SWEDEN, 169 79                                                                 | Interconnector User                                      | 29/08/2003 |
| VATTENFALL ENERGY TRADING GMBH                     | HRB 80335          | DAMMTORSTR. 29 - 32, HAMBURG, HAMBURG, Germany, 20354                                                            | Interconnector User; Supplier                            | 13/03/2008 |
| VATTENFALL ENERGY TRADING NETHERLANDS N.V.         | 09096519           | Hoekenrode 8, Amsterdam , Netherlands, 1102 BR                                                                   | Interconnector User                                      |            |
| VATTENFALL NETWORKS LTD                            | 02731769           | 5th Floor 70St Mary Axe, London , EC3A 8BE                                                                       | Independent Distribution N/W Operator                    | 05/04/2018 |
| VATTENFALL WIND POWER LTD                          | 06205750           | 5th Floor 70St Mary Axe, London, LONDON, UK, EC3A 8BE                                                            | Directly Connected Power Station; Embedded Power Station | 11/08/2008 |
| VDC CWL SERVICES LIMITED                           | OE032481           | 44 Esplanade, Saint Helier , Jersey, JE4 9WU                                                                     | Non-Embedded Customer Site                               | 09/09/2024 |
| VDC UK MANAGEMENT COMPANY LIMITED                  | 12361880           | 1 Bartholomew Lane, London , United Kingdom, EC2N 2AX                                                            | Non-Embedded Customer Site                               | 26/08/2020 |
| VIKING ENERGY WIND FARM LLP                        | SO305400           | Inveralmond House,200 Dunkeld Road, Perth, Perth, United Kingdom, PH1 3AQ                                        | Directly Connected Power Station                         | 06/02/2020 |
| VIRIDIS 178 LIMITED                                | 09464998           | 110 CANNON STREET, LONDON , United Kingdom, EC4N 6EU                                                             | Embedded Power Station                                   | 11/08/2015 |
| VIRIDISIA LTD                                      | 15594522           | 2 Upperton Gardens, Eastbourne , United Kingdom, BN21 2AH                                                        | Directly Connected Power Station                         | 20/02/2025 |
| VIRIDOR ENVIROSCOT LIMITED                         | SC182926           | c/o Shepherd & Wedderburn Llp,9 Haymarket Square, Edinburgh , United Kingdom, EH3 8FY                            | Embedded Exemptable Large Power Station                  | 15/12/2015 |
| Virmati Energy Ltd                                 | 13095982           | Montacute Yards183 Shoreditch High Street, London, LONDON, UK, E1 6HU                                            | Directly Connected Power Station                         | 17/03/2023 |
| Virtus Data Centres Limited                        | 06762600           | 4th Floor,20 Balderton Street, London , United Kingdom, W1K 6TL                                                  | Non-Embedded Customer Site                               | 26/04/2022 |
| Virtus Holdco Limited                              | 07670473           | 4th Floor,20 Balderton Street, London , United Kingdom, W1K 6TL                                                  | Non-Embedded Customer Site                               | 07/07/2022 |
| Virtus Saunderton                                  | 13618549           | 64 New Cavendish Street, London , United Kingdom, W1G 8TB                                                        | Directly Connected Power Station                         | 28/09/2022 |
| Vital Energi Solutions Limited                     | 07828647           | Century House, Roman Road, Blackburn, Lancashire, United Kingdom, BB1 2LD                                        | Embedded Power Station                                   | 02/10/2023 |
| Vitol S.A                                          | CHE-107.746.845    | Pl. des Bergues 3, 1201 Geneva PO Box 2056, 1211 Geneva 1, Geneva, Geneva, Switzerland, 1211                     | Interconnector User                                      | 22/02/2008 |
| VOLTA ENERGY DESIGNATED ACTIVITY COMPANY           | 746154             | CUSTOM HOUSE PLAZA BLOCK 6, INTERNATIONAL FINANCIAL SERVICES CENTRE, DUBLIN, DUBLIN, IRELAND, D01 X9Y5           | Interconnector User                                      | 13/02/2024 |
| VOLTALIA UK LTD                                    | 07489990           | The Wheelhouse, Bond's Mill Estate, Stonehouse, Gloucestershire, United Kingdom, GL10 3RF                        | Embedded Exemptable Large Power Station                  | 26/01/2023 |
| VOLTIS PEOPLE LIMITED                              | 13774196           | 315, 37 Cremer Street, London , United Kingdom, E2 8HD                                                           | Embedded Power Station                                   | 17/04/2023 |
| VOLTWISE POWER HOLDINGS LIMITED                    | 14687074           | 125 Old Broad Street, London , United Kingdom, EC2N 1AR                                                          | Embedded Power Station                                   | 12/08/2024 |
| VOLUE MARKET SERVICES AS                           | 863 769 132        | LANGBRYGGEN 9, ARENDAL , NORWAY, 4841                                                                            | Interconnector User                                      | 14/01/2011 |
| Vox Charlie Ltd                                    | 13099852           | 30 Orange Street, London , United Kingdom, WC2H 7HH                                                              | Embedded Power Station                                   | 25/05/2023 |
| VPI IMMINGHAM B LIMITED                            | 10630563           | 4th Floor, Nova South,160 Victoria Street, London , United Kingdom, SW1E 5LB                                     | Directly Connected Power Station                         | 08/09/2020 |
| VPI IMMINGHAM LLP                                  | OC300980           | 4th Floor, Nova South,160 Victoria Street, London , United Kingdom, SW1E 5LB                                     | Directly Connected Power Station                         | 18/09/2001 |
| VPI POWER LIMITED                                  | SC189124           | Building 1,9 Haymarket Square, Edinburgh , United Kingdom, EH3 8RY                                               | Directly Connected Power Station                         | 18/09/2001 |
| W4B RENEWABLE ENERGY LIMITED                       | 06479668           | Gables Lodge, 62 Kenilworth Road, Leamington Spa , United Kingdom, CV32 6JX                                      | Embedded Power Station                                   | 28/02/2023 |
| WALNEY (UK) OFFSHORE WINDFARMS LIMITED             | 05246622           | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                | Directly Connected Power Station                         | 14/03/2006 |

|                                            |          |                                                                                                                                     |                                            |            |
|--------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------|
| WALNEY EXTENSION LIMITED                   | 07306956 | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                                   | Directly Connected Power Station           | 22/09/2011 |
| WALPOLE GREEN LIMITED                      | 12517507 | 18 Riversway Business Village,Navigation Way, Ashton-On-Ribble, Preston, United Kingdom, PR2 2YP                                    | Directly Connected Power Station           | 24/07/2020 |
| Walsoken Limited                           | 13748823 | Crown House,108 Aldersgate Street, London , United Kingdom, EC1A 4JQ                                                                | Embedded Power Station                     | 20/11/2023 |
| Waltham Cross 2 Renewables Limited         | 14914290 | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                   | Directly Connected Power Station           | 12/12/2023 |
| Waltham Cross 7 Renewables Limited         | 14914262 | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                    | Directly Connected Power Station           | 12/12/2023 |
| WARLEY BATTERY STORAGE                     | 10824037 | 8 DEVONSHIRE SQUARE, LONDON , United Kingdom, EC2M 4PL                                                                              | Directly Connected Power Station           | 08/02/2023 |
| WARLEY GREEN LIMITED                       | 12725706 | 18 Riversway Business Village, Navigation Way, Ashton-On-Ribble, Preston, United Kingdom, PR2 2YP                                   | Directly Connected Power Station           | 01/08/2022 |
| WATHEGAR 2 LIMITED                         | 10276414 | 5 NEW STREET SQUARE, LONDON , United Kingdom, EC4A 3TW                                                                              | Directly Connected Power Station           | 02/05/2017 |
| Waun Hesgog Energy Park Limited            | 13152996 | The Broadgate Tower Third Floor, 20 Primrose Street, London , United Kingdom, EC2A 2RS                                              | Embedded Power Station                     | 03/09/2021 |
| WEAVER POWER LIMITED                       | SC233043 | 13 Queen's Road, Aberdeen , United Kingdom, AB15 4YL                                                                                | Non-Embedded Customer Site                 | 24/02/2021 |
| WELBAR ENERGY STORAGE LIMITED              | 10326869 | HARTHAM PARK HARTHAM PARK, CORSHAM , United Kingdom, SN13 0RP                                                                       | Directly Connected Power Station           | 10/11/2021 |
| Welsh Government                           | N/A      | CROWN BUILDING, CARDIFF , UNITED KINGDOM, CF10 3NQ                                                                                  | Non-Embedded Customer Site                 | 22/05/2022 |
| WELSH POWER GROUP LIMITED                  | 5766467  | FOURTH FLOOR 2 KINGSWAY, CARDIFF , United Kingdom, CF10 3FD                                                                         | Virtual Lead Party                         | 18/01/2022 |
| WEST ANDERSHAW WIND FARM LIMITED           | 13212185 | 19th Floor, 22 Bishopsgate, London , United Kingdom, EC2N 4BQ                                                                       | Directly Connected Power Station           | 05/12/2023 |
| WEST BURTON B LIMITED                      | 13027787 | West Burton B CCGT,Sturton Road, Retford, Nottinghamshire, United Kingdom, DN22 9BL                                                 | Directly Connected Power Station           | 17/05/2021 |
| WEST BURTON SOLAR PROJECT LIMITED          | 13049324 | Unit 25.7 Coda Studios,189 Munster Road, London , United Kingdom, SW6 6AW                                                           | Directly Connected Power Station           | 20/01/2022 |
| WESTERMOST ROUGH LIMITED                   | 06232914 | 5 HOWICK PLACE, LONDON , United Kingdom, SW1P 1WG                                                                                   | Directly Connected Power Station           | 27/01/2009 |
| WESTFIELD ENERGY RECOVERY LIMITED          | SC579887 | c/o Equitix Management Services Limited,Suite 11-10, Avondale House, Strathclyde Business Park, Bellshill , United Kingdom, ML4 3NJ | Dormant CUSC Party; Embedded Power Station | 31/01/2019 |
| West Haddon 10 Renewables Limited          | 15123046 | Century House, 1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                   | Directly Connected Power Station           | 22/11/2023 |
| West Weybridge 10 Renewables Limited       | 15122977 | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                    | Directly Connected Power Station           | 22/11/2023 |
| WHIRLWIND ENERGY STORAGE LIMITED           | 12314124 | 1st Floor Midland House, 77 Huddersfield Road, Mirfield, West Yorkshire, United Kingdom, WF14 8BL                                   | Embedded Exemptable Large Power Station    | 14/06/2023 |
| Whitehill Battery Storage Ltd              | SC696005 | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                                | Directly Connected Power Station           | 07/09/2022 |
| WHITELAW BRAE WINDFARM LIMITED             | SC456527 | Ground Floor, West Suite,Prospect House,5 Thistle Street,, Edinburgh , United Kingdom, EH2 1DF                                      | Directly Connected Power Station           | 03/06/2015 |
| WHITESIDE HILL WINDFARM (SCOTLAND) LIMITED | SC312729 | 13 QUEENS ROAD, ABERDEEN , United Kingdom, AB15 4YL                                                                                 | Directly Connected Power Station           | 29/04/2015 |
| WHITETOWER ENERGY LIMITED                  | 03479694 | First Floor Templeback, 10 Temple Back, Bristol, BRISTOL, United Kingdom, BS1 6FL                                                   | Embedded Power Station                     | 02/07/2019 |
| WILLINGTON ENERGY PARK LIMITED             | 14376802 | 1st Floor Sackville House143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                                | Directly Connected Power Station           | 20/02/2025 |
| WILLINGTON GREEN ENERGY LIMITED            | 13539334 | The Goods Shed, Jubilee Way, Faversham, Kent, United Kingdom, ME13 8GD                                                              | Directly Connected Power Station           | 08/04/2022 |
| WILSON RENEWABLES III LLP                  | SO307605 | Carbiestone House, Ayr, Ayrshire, United Kingdom, KA6 5JU                                                                           | Directly Connected Power Station           | 13/03/2023 |
| WILSON RENEWABLES IV LLP                   | SO307604 | Carbieston House, Ayr, Ayrshire, United Kingdom, KA6 5JU                                                                            | Directly Connected Power Station           | 23/03/2023 |
| WILTON ENERGY LIMITED                      | 04557531 | Sembcorp UK Headquarters,Wilton International, Middlesbrough, Cleveland, United Kingdom, TS90 8WS                                   | Directly Connected Power Station; Supplier | 20/03/2003 |
| WIND 2 LIMITED                             | 10276420 | LINDEN HOUSE WREXHAM ROAD, MOLD , United Kingdom, CH7 1XP                                                                           | Directly Connected Power Station           | 23/08/2021 |
| Wind 2 Project 2 Limited                   | 13697273 | Linden House,Mold Business Park,Wrexham Road, Mold , United Kingdom, CH7 1XP                                                        | Directly Connected Power Station           | 20/06/2023 |
| Wind 2 Project 3 Limited                   | 13740904 | Linden House,Wrexham Road,Mold Business Park, Mold , United Kingdom, CH7 1XP                                                        | Directly Connected Power Station           | 16/04/2025 |
| Wind 2 Project 6 Limited                   | SC714904 | Wind 2 Office2 Walker Street, Edinburgh , United Kingdom, EH3 7LA                                                                   | Directly Connected Power Station           | 22/05/2024 |
| WIND DEVELOPMENT HOLDINGS LIMITED          | 12902171 | LEVEL 25, ONE CANADA SQUARE, LONDON , UNITED KINGDOM, E14 5AA                                                                       | Directly Connected Power Station           | 08/06/2021 |
| WINDEL GRID 1 LIMITED                      | 13438781 | S10 Blyth Workspace Commissioners Quay, Quay Road, Blyth , United Kingdom, NE24 3AF                                                 | Directly Connected Power Station           | 13/11/2023 |
| Wind Harvest Limited                       | SC370464 | Corrary Farm,Glenelg, Kyle , United Kingdom, IV40 8JX                                                                               | Embedded Exemptable Large Power Station    | 11/06/2021 |
| WINDY RIG WIND FARM LIMITED                | 09802052 | 27-28 EASTCASTLE STREET, LONDON, London, United Kingdom, W1W 8DH                                                                    | Directly Connected Power Station           | 06/08/2019 |
| Windy Standard III Ltd                     | SC295868 | c/o Harper Macleod Llp, The Cadoro,45 Gordon Street, Glasgow , United Kingdom, G1 3PE                                               | Directly Connected Power Station           | 16/02/2016 |
| WKN SALLACHY LIMITED                       | SC384979 | 12-16 HOPE STREET, EDINBURGH , United Kingdom, EH2 4DB                                                                              | Directly Connected Power Station           | 09/08/2011 |
| Woodcock Faulds Battery Storage Limited    | SC752620 | 33 Bothwell Road, Hamilton , United Kingdom, ML3 0AS                                                                                | Directly Connected Power Station           | 14/05/2024 |
| Worcestershire Solar 1 Limited             | 12335286 | 5 New Street Square, London , United Kingdom, EC4A 3TW                                                                              | Directly Connected Power Station           | 09/11/2022 |
| WP GRID SERVICES 13 LIMITED                | 13394560 | Fourth Floor, 2 Kingsway, Cardiff , United Kingdom, CF10 3FD                                                                        | Directly Connected Power Station           | 12/12/2023 |
| WP GRID SERVICES 14 LIMITED                | 13394871 | Fourth Floor, 2 Kingsway, Cardiff , United Kingdom, CF10 3FD                                                                        | Directly Connected Power Station           | 31/03/2025 |
| WP Grid Services 16 Limited                | 13396670 | Fourth Floor, 2 Kingsway,, Cardiff , United Kingdom, CF10 3FD                                                                       | Directly Connected Power Station           | 20/02/2024 |
| WP Grid Storage 3 Limited                  | 14049799 | Fourth Floor, 2 Kingsway, Cardiff , United Kingdom, CF10 3FD                                                                        | Directly Connected Power Station           | 08/12/2023 |
| WP Voltage Services 1 Limited              | 13394399 | Fourth Floor, 2 Kingsway, Cardiff , United Kingdom, CF10 3FD                                                                        | Non-Embedded Customer Site                 | 15/04/2025 |
| WP VOLTAGE SERVICES 4 LIMITED              | 13394737 | FOURTH FLOOR, 2 KINGSWAY, CARDIFF , UNITED KINGDOM, CF10 3FD                                                                        | Non-Embedded Customer Site                 | 21/01/2022 |
| WYLFA GREEN LIMITED                        | 12726341 | 17th Floor Hylo,103-105 Bunhill Row, London , United Kingdom, EC1Y 8LZ                                                              | Directly Connected Power Station           | 01/07/2024 |
| Wymondley 10 Renewables Ltd                | 14605051 | Century House,1 The Lakes, Northampton , United Kingdom, NN4 7HD                                                                    | Directly Connected Power Station           | 30/11/2023 |
| WYMONDLEY GREEN ENERGY CENTRE LTD          | 14438314 | 81 Blake Tower, 2 Fann Street, London , United Kingdom, EC2Y 8AF                                                                    | Directly Connected Power Station           | 04/12/2024 |
| WYSEBYHILL ENERGY FARM LIMITED             | 12013703 | Trinity House, Newby Road, Hazel Grove, Stockport, United Kingdom, SK7 5DA                                                          | Directly Connected Power Station           | 20/12/2022 |
| XENON CAPITAL MARKETS LIMITED              | 11033458 | 1 Canada Square 37th Floor, Canary Wharf, London, United Kingdom, E14 5AA                                                           | Interconnector User                        | 30/04/2019 |
| XLCC Limited                               | 13057883 | Kingfisher House, Radford Way, Billericay, Essex, United Kingdom, CM12 0EQ                                                          | Non-Embedded Customer Site                 | 14/06/2023 |
| XLINKS 1 LTD                               | 13481017 | Kingfisher House,Woodbrook Crescent, Billericay, Essex, United Kingdom, CM12 0EQ                                                    | Directly Connected Power Station           | 08/09/2023 |
| XLINKS LIMITED                             | 11891505 | Kingfisher House, Radford Way, Billericay, Essex, United Kingdom, CM12 0EQ                                                          | Directly Connected Power Station           | 14/12/2020 |
| Xrenewable Ltd                             | 11955142 | 20-22 Wenlock Road, London , United Kingdom, N1 7GU                                                                                 | Embedded Exemptable Large Power Station    | 13/09/2022 |
| YAXLEY ENERGY LIMITED                      | 15010102 | Lilly House, 13 Hanover Square,, London , United Kingdom, W1S 1HN                                                                   | Directly Connected Power Station           | 07/10/2024 |
| YAXLEY GREEN ENERGY CENTRE LTD             | 14437282 | Flat 81 Blake Tower, 2 Fann Street,, London , United Kingdom, EC2Y 8AF                                                              | Directly Connected Power Station           | 12/12/2024 |
| Y BRYN WIND FARM LIMITED                   | 12194519 | 22-24 King Street, Maidenhead, Berkshire, United Kingdom, SL6 1EF                                                                   | Directly Connected Power Station           | 20/09/2022 |
| YORK ENERGY PARK LIMITED                   | 14444117 | 1st Floor, Sackville House,143-149 Fenchurch Street, London , United Kingdom, EC3M 6BL                                              | Directly Connected Power Station           | 30/05/2023 |
| YU ENERGY RETAIL LIMITED                   | 08246810 | Cpk House,2 Horizon Place,Nottingham Business Park, Mellors Way, Nottingham , United Kingdom, NG8 6PY                               | Supplier                                   | 08/01/2016 |
| ZENOBE BLACKHILLOCK LIMITED                | 12246552 | Burdett House15-16 Buckingham Street, London, LONDON, UK, WC2N 6DU                                                                  | Directly Connected Power Station           | 06/08/2021 |
| ZENOBE CAPENHURST LIMITED                  | 12246481 | 4TH FLOOR 13 CHARLES II STREET, LONDON , United Kingdom, SW1Y 4QU                                                                   | Directly Connected Power Station           | 28/04/2021 |
| Zenobe Coalburn Limited                    | 13413000 | Burdett House,15-16 Buckingham Street, London , United Kingdom, WC2N 6DU                                                            | Directly Connected Power Station           | 04/10/2023 |
| Zenobe Eccles Limited                      | 12249742 | Burdett House,15-16 Buckingham Street, London , United Kingdom, WC2N 6DU                                                            | Directly Connected Power Station           | 30/01/2025 |
| Zenobe Energy Limited                      | 10436249 | Burdett House,15-16 Buckingham Street, London, London, United Kingdom, WC2N 6DU                                                     | Directly Connected Power Station           | 11/09/2020 |
| ZENOBE STALYBRIDGE LIMITED                 | 14299411 | Burdett House, 15-16 Buckingham Street, London , United Kingdom, WC2N 6DU                                                           | Directly Connected Power Station           | 16/09/2022 |
| ZENOBE WISHAW LIMITED                      | 10726477 | Burdett House,15-16 Buckingham Street,, London , United Kingdom, WC2N 6DU                                                           | Directly Connected Power Station           | 01/04/2021 |
| ZURICH ASSURANCE LTD                       | 02456671 | Unity Place,1 Carfax Close, Swindon, Wiltshire, United Kingdom, SN1 1AP                                                             | Non-Embedded Customer Site                 | 17/03/2021 |

**SCHEDULE 2 - EXHIBIT 1**

**DATED [                      ]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[                      ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**BILATERAL CONNECTION AGREEMENT**

---

**[FOR A DIRECTLY CONNECTED POWER STATION]**

**[FOR A DIRECTLY CONNECTED DISTRIBUTION SYSTEM]**

**[FOR A NON-EMBEDDED CUSTOMER SITE]**

**[FOR AN INTERCONNECTOR OWNER]**

**At [                      ]**

**Reference: [                      ]**

## CONTENTS

1. Definitions, Interpretation and Construction
  2. Commencement
  3. The Connection Site and Transmission Connection Assets
  4. Connection Charges
  - [5. Use of System] (*power station only*)
  6. Credit Requirements
  7. Connection Entry Capacity and Transmission Entry Capacity
  8. Compliance with Site Specific Technical Conditions
  - [9. Electrical Boundary] (*Non Standard Boundary only*)
  - [10. Restrictions on Availability] (*power station with **Design Variation** and/or **Offshore Standard Design** only*) [and ET Restrictions on Availability] (*power station connected via an ET Offshore Transmission System only*)
  11. Term
  12. Variations
  13. General Provisions
  14. Outage of GIS Assets
  15. OTSDUW Build offshore power station providing offshore transmission system under OTSDUW build arrangements only
- 
- |             |                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------|
| Appendix A  | The Connection Site and Transmission Connection Assets                                               |
| Appendix B  | Connection Charges                                                                                   |
| Appendix C  | Connection Entry Capacity and Transmission Entry Capacity (Power Stations and Interconnector Owners) |
| Appendix F1 | Site Specific Technical Conditions - Agreed Balancing Services                                       |
| Appendix F2 | [Not Used]                                                                                           |
| Appendix F3 | Site Specific Technical Conditions - Special Automatic Facilities                                    |
| Appendix F4 | Site Specific Technical Conditions - Protection and Control Relay Settings - Fault Clearance Times   |
| Appendix F5 | Site Specific Technical Conditions - Load Shedding Frequency Sensitive Relays                        |



THIS **BILATERAL CONNECTION AGREEMENT** is made on the [ ] day of [ ] 20[1 ]

**BETWEEN**

- (1) **The Company** registered in England with number 11014226 (“**The Company**”, which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“**User**”, which expression shall include its successors and/or permitted assigns)

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** is required to prepare a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) The **User** has applied for [Connection to] [and use of] [Modification of its existing **Connection** to [and use of]] the **National Electricity Transmission System** and pursuant to the **ESO Licence** **The Company** is required to offer terms in this respect.
- (C) The **User** has applied for connection [and use] in the capacity of a [ ] as set out in Paragraph 1.2.4 of the **CUSC**.
- (D) **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between **CUSC Parties**).
- (E) This **Bilateral Connection Agreement** is entered into pursuant to the **CUSC** and shall be read as being governed by it.
- [(F) The parties are also on even date herewith entering into a **Construction Agreement**.]
- [(G) This **Bilateral Connection Agreement** is entered into on the basis of the **Connect and Manage Arrangements**. *[Directly Connected power Station and Distribution System where associated with Connect and Manage Power Station.]* ]
- [(H) This is a [Gate 1 Agreement][Gate 2 Agreement].]

**NOW IT IS HEREBY AGREED** as follows:

**1.1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** [and the **Construction Agreement**] have the

same meanings, interpretations or constructions in this **Bilateral Connection Agreement** [and the following terms and expressions shall have the meaning set out below:-

**“Construction Agreement”** the agreement made between the parties of even date herewith for the carrying out of construction works;

**“Charging Date”** as defined in the **Construction Agreement**;

**“Circuit [ ]”** [insert detailed description of circuit(s) affected by the **Design Variation**] (*power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only*);]

**“ET Conditions”** any reduction in the **Maximum Export Capacity** and/or **Maximum Import Capacity** or disconnection or deenergisation of the **Offshore Transmission System** at the **ET Interface Point**;] (*power station connected via **ET Offshore Transmission System** only*)

**“ET Condition Period”** the period of time during which the **ET Conditions** apply;] (*power station connected via **ET Offshore Transmission System** only*)

**“ET Interface Point”** means [insert details];] (*power station connected via **ET Offshore Transmission System** only*)

**“GIS Assets”** the assets between the electrical boundary and the point within the **Gas Insulated Switchgear** where the busbar connects to the **Transmission** circuit which connects the **User** to the **National Electricity Transmission System**;

[where the boundary is in accordance with **CUSC** Paragraph 2.12.1(f) (i) only]

**“GIS Asset Outage”** the unavailability of the **GIS Assets** as a result of:

(a) a planned or unplanned incident occurring directly on the **GIS Assets** or

(b) the **GIS Assets** requiring to be **Deenergised** for health and safety reasons to allow for the planned or unplanned availability of a circuit in the immediate vicinity of the **GIS Assets**;

[where the boundary is in accordance with **CUSC** Paragraph 2.12.1(f) (i) only]

**“GIS Asset Outage Period”** the period of time during which the **GIS Asset Outage** applies;

[where the boundary is in accordance with **CUSC** Paragraph 2.12.1(f) (i) only]

**“Maximum Export Capacity”** the figure specified as such in Appendix C Part 4;] (*power station connected via **ET Offshore Transmission System** only*);

**“Maximum Import Capacity”** the figure specified as such in Appendix C Part 4;] (*power station connected via **ET Offshore Transmission System** only*)

**“Outage Conditions [ ]”** the unavailability of **Circuit [ ]** as a result of

(a) a [planned]/[unplanned]/[planned or unplanned] incident occurring directly on **Circuit [ ]**;  
or

- (b) **Circuit [ ]** requiring to be **Deenergised** for health and safety reasons to allow for the planned or unplanned availability of a circuit in the immediate vicinity of **Circuit [ ]**; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*

[**“Outage Period”** the period of time during which the **Outage Conditions** and/or reduced circuit capability apply; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*]

[**“Notification of Circuit Restrictions”** means the notification issued by **The Company** to the **User** in accordance with Clause [10.8] of this **Bilateral Connection Agreement**; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*]

[**“Notification of GIS Asset Outage”** means the notification issued by **The Company** to the **User** in accordance with Clause [14.2] of this **Bilateral Connection Agreement**;

*[where the boundary is in accordance with **CUSC** Paragraph 2.12.1(f) (i) only]*

[**“Notification of Outage Conditions”** means the notification issued by **The Company** to the **User** in accordance with Clause [10.4] of this **Bilateral Connection Agreement**; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*]

[**“Notification of Restrictions on Availability”** means a **Notification of Outage Conditions** and/or a **Notification of Circuit Restrictions** as applicable; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*]

[**“Notification of ET Restrictions on Availability”** means the notification issued by **The Company** to the **User** in accordance with Clause [10.11] of this **Bilateral Connection Agreement** advising of the **ET Conditions**;] *(power station via an **ET Offshore Transmission System** only)*

[**“Relevant Circuits”** means [Circuit [ ]]; *(power station with **Design Variation** and/or **Offshore Standard Design** and/or **Non Standard Boundary** only)*]

[**“Transmission Related Agreement”** means the agreement of even date entered into between the parties for the provision of and payment for **Balancing Services** in respect of **Bid-Offer**

**Acceptances; (power station with *Design Variation* and/or *Offshore Standard Design* and/or *Non Standard Boundary* and/or via an *ET Offshore Transmission System* only))**

**[1.2 Gate 1 Conditional Clause [and Reservation] – Gate 1 Agreements only**

- 1.2.1 As provided for at Clause 1.2 of the **Construction Agreement** and this Clause 1.2 the parties agree that until the **[Gate 2 Date]** the rights and obligations of each party pursuant to this **Bilateral Connection Agreement** other than this Clause 1.2 shall be suspended.
- 1.2.2 [The parties further agree and acknowledge that the information provided for the purposes of the **Gate 1 Agreement** and set out in the Appendix [O][P] to the **Construction Agreement** is indicative only prior to the **[Gate 2 Date]** and shall not be binding on the parties or confer any commitment to these by **The Company** and any reliance on them for any purpose prior to the **Gate 2 Date** is at the **User's** risk – no **Reservation**.] [The parties further agree that the **Connection Site** and **Completion Date** and **Transmission Entry Capacity** [add other capacity refs reflecting import and export] for Interconnector/MPI as set out in Appendix [O][P] to the **Construction Agreement** have been **Reserved** for the purposes of this connection and/or use of system and any **Gate 2 Offer** will reflect this provided that the **Gate 2 Application** is made prior to the **Reservation Expiry Date** and the **Gate 2 Offer** is accepted – where **Reservation**].
- 1.2.3 With effect from the **[Gate 2 Date]** the provisions of this **Bilateral Connection Agreement**, as amended by the **[Gate 2 Offer]** by agreement of the parties shall be in full force and effect.]

**2. COMMENCEMENT**

This **Bilateral Connection Agreement** shall commence on [ ].

**3. THE CONNECTION SITE AND TRANSMISSION CONNECTION ASSETS**

The **Connection Site** and **Transmission Connection Assets** to which this **Bilateral Connection Agreement** relates is more particularly described in Appendix A.

**4. CONNECTION CHARGES**

The **Connection Charges** payable by the **User** in accordance with the **CUSC** in respect of the **Transmission Connection Assets** set out in Appendix A [(including the **One-Off Charge**)] are

set out in Appendix B. These **Connection Charges** shall be payable by the **User** from the [**CUSC Implementation Date**] [or] [**Charging Date**].

**5. [USE OF SYSTEM** *(power station only)*

The right to use the **National Electricity Transmission System** shall commence on and **Use of System Charges** shall be payable by the **User** from the [**CUSC Implementation Date**] [or] [**Charging Date**].]

**6. CREDIT REQUIREMENTS**

The amount to be secured by the **User** from [date] is set out in the **Secured Amount Statement** issued from time to time and as varied from time to time in accordance with Section 2 of the **CUSC**.

**7. CONNECTION ENTRY CAPACITY AND TRANSMISSION ENTRY CAPACITY**

7.1 The **Connection Entry Capacity** in relation to the **Generating Units** and the **Connection Site** and the **Transmission Entry Capacity** in relation to the **Connection Site**, are specified in Appendix C.

7.2 Appendix C Part 3 will set out the **BM Unit Identifiers** of the **BM Units** registered at the **Connection Site** under the **Balancing and Settlement Code**. The **User** will provide **The Company** with the information needed to complete details of these **BM Unit Identifiers** as soon as practicable after the date hereof and thereafter in association with any request to modify the **Transmission Entry Capacity** and **The Company** shall prepare and issue a revised Appendix C incorporating this information. The **User** shall notify **The Company** prior to any alteration in

the **BM Unit Identifiers** and **The Company** shall prepared and issue a revised Appendix C incorporating this information.

- 7.3 **The Company** shall monitor the **Users** compliance with its obligation relating to **Transmission Entry Capacity** against the sum of metered volumes of the **BM Units** set out in Part 3 of Appendix C submitted by the **User** for each **Settlement Period**.

**8. COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS**

The site specific technical conditions applying to the **Connection Site** are set out in Appendices F1 to F5 to this **Bilateral Connection Agreement** as modified from time to time in accordance with Paragraph 6.9 of the **CUSC**.

**9. [ELECTRICAL BOUNDARY (*Non Standard Boundary only*)**

The division of ownership of **Plant** and **Apparatus** at the **Connection Site** shall be at [define ownership boundary]. For the avoidance of doubt, nothing in this Clause 9 shall effect any transfer of ownership in any **Plant** or **Apparatus**.]

**10. [RESTRICTIONS ON AVAILABILITY (*power station with Design Variation and/or Offshore Standard Design and/or Non Standard Boundary only*) [AND ET RESTRICTIONS ON AVAILABILITY - ET Offshore Transmission System only]**

- 10.1 [The division of ownership of **Plant** and **Apparatus** in Clause 9 above is contrary to the principles of ownership set out in **CUSC** Paragraph 2.12.]

- 10.2 [In addition the] [The] **User** acknowledges that the connection design which provides for connection to the **National Electricity Transmission System** is [a variation to the connection design as provided for in Chapter 2 or Chapter 4 (as appropriate) of the **NETS SQSS**] [of an **Offshore Standard Design – User connected at Offshore Transmission System only** [and the **User** further acknowledges that the **User** is connected at an **ET Offshore Transmission System** and that as such its rights under **CUSC** Paragraph 2.3 (Export of Power from Connection Site) and Paragraph 2.4 (Import of Power to Connection Site) are subject to the availability of the **Maximum Export Capacity** and **Maximum Import Capacity** and to the **ET Offshore Transmission System** not being disconnected from or deenergised at the **ET Interface Point-ET Offshore Transmission System only**] and the following provisions shall apply.

- [10.3 It is a condition of the **NETS SQSS** that any **Design Variation** satisfies the criteria set out in paragraphs 2.15 to 2.18 (inclusive) for an Onshore Connection or 7.21 to 7.24 (inclusive) for

an Offshore Connection of the **NETS SQSS** and on that basis [and in light of the non standard principles of ownership] the following provisions will apply.

*power station with **Design Variation** and/or **Non Standard Boundary** only ]*

10.4 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of the **Outage Conditions** and where practicable the expected **Outage Period**. Such notice shall be issued:

10.4.1 In the event that the **Notification of Circuit Outage** relates to a **Planned Outage** on the **National Electricity Transmission System**, where practicable, be in accordance with **Grid Code** OC2 requirements; or

10.4.2 In the event that the **Notification of Circuit Outage** relates to something other than a **Planned Outage** on the **National Electricity Transmission System** or relates to a **Planned Outage** on the **National Electricity Transmission System** but it is not practicable for such notice to be in accordance with **Grid Code** OC2 requirements, as soon as reasonably practicable and **The Company** and the **User** shall agree as soon as practicable after the date hereof the method of such notification.

10.4.3 **The Company** shall promptly notify the **User** when the **Outage Period** will or has ceased.

10.5 **The Company** shall be entitled to revise the **Notification of Circuit Outage** given under Clause 10.4 above at any time.

10.6 The **User** will acknowledge receipt of such **Notification of Circuit Outage** and where practicable shall revise its **Output Useable** forecast for the affected **BM Unit** accordingly.

10.7 Following such **Notification of Circuit Outage** in accordance with Clause 10.4:

10.7.1 [(i) In respect of the **Outage Conditions** [ ], the **User** shall (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflects the outage of the **Relevant Circuits** and (ii) operate its **Power Station** to reflect the outage of the **Relevant Circuits** for all **Settlement Periods** or parts thereof falling within the **Outage Period**.]

10.7.2 In the event that the **User** does not comply with Clauses [ ] above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM**

**Unit** so that the effect is as if the **User** had complied with the relevant Clause, and the provisions of the **Transmission Related Agreement** shall apply.

10.8 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of an event leading to a reduced circuit capability of **Circuit [ ]** and where practicable the expected **Outage Period**. Such notice (including any revision) shall be issued:

10.8.1 In the event that the **Notification of Circuit Restriction** relates to a **Planned Outage** on the **National Electricity Transmission System**, where practicable, be in accordance with **Grid Code OC2** requirements; or

10.8.2 In the event that the **Notification of Circuit Restriction** relates to something other than a **Planned Outage** on the **National Electricity Transmission System** or relates to a **Planned Outage** on the **National Electricity Transmission System** but it is not practicable for such notice to be in accordance with **Grid Code OC2** requirements, such notice shall be given as soon as reasonably practicable and **The Company** and the **User** shall agree as soon as practicable after the date hereof the means of such notification.

10.8.4 **The Company** shall promptly notify the **User** when the period of reduced circuit capability will or has ceased.

10.9 **The Company** shall be entitled to revise the **Notification of Circuit Restriction** given under Clause 10.8 above at any time.

10.10 Following such **Notification of Circuit Restriction** in accordance with Clause 10.8:

10.10.1 [(i) In respect of the reduction in capability of **Circuit [ ]**, the **User** shall (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflects the reduction in capability of the **Relevant Circuits** and (ii) operate its **Power Station** to reflect the reduction in capability of the **Relevant Circuits** for all **Settlement Periods** or parts thereof falling within the **Outage Period**.]

10.10.2 In the event that the **User** does not comply with Clauses [ ] above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM Unit** so that the effect is as if the **User** had complied with the relevant Clause, and the provisions of the **Transmission Related Agreement** shall apply.

10.11 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of the **ET Conditions** and where practicable the expected **ET Condition Period**. Such notice shall be



issued as soon as reasonably practicable and **The Company** and the **User** shall agree as soon as practicable after the date hereof the method of such notification.

10.12 **The Company** shall promptly notify the **User** when the **ET Condition Period** will or has ceased.

10.13 **The Company** shall be entitled to revise the **Notification of ET Restrictions on Availability** given under Clause 10.11 above at any time.

10.14 The **User** will acknowledge receipt of such **Notification of ET Restrictions on Availability** and where practicable shall revise its **Output Useable** forecast for the affected **BM Unit** to reflect the reduction in capability specified in the **Notification of Restrictions on Availability**.

10.15 Following such **Notification of ET Restrictions on Availability** in accordance with Clause 10.11:

10.15.1 the **User** shall (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflect the reduction in capability specified in the **Notification of ET Restrictions on Availability** and (ii) operate its **Power Station** to reflect the reduction in capability specified in the **Notification of ET Restrictions on Availability** for all **Settlement Periods** or parts thereof falling within the **ET Condition Period**.]

10.15.2 In the event that the **User** does not comply with Clause 10.15.1 above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM Unit** so that the effect is as if the **User** had complied with the Clause, and the provisions of the **Transmission Related Agreement** shall apply.

10.16 Where the **User** becomes aware or is notified by **The Company** of any breach of Clauses 14.6 above the **User** shall forthwith take all reasonable steps to comply with the provisions of that Clause.

10.17 Where the **User** becomes aware or is notified by **The Company** of any breach of Clauses 10.7 or 10.10 [or 10.15] above the **User** shall forthwith take all reasonable steps to comply with the provisions of that Clause.

10.18 Where the **User** breaches in whole or in part the provisions of Clause 10.7 or Clause 10.10 [or 10.15] above, the **User** shall at **The Company's** request explain to **The Company's** satisfaction (acting reasonably) the reason for the breach and demonstrate to **The Company's** satisfaction that appropriate steps have been taken to ensure that such breach will not reoccur. In the event that the **User** does not do this **The Company** may give notice to the **User** reducing the **Transmission Entry Capacity** of the **Connection Site** and Appendix C of this **Bilateral Connection Agreement** shall be varied accordingly. This **Transmission Entry Capacity** shall apply until such time as the **User** has explained to **The Company's** reasonable satisfaction the reason for the breach and has demonstrated that appropriate steps have been taken to ensure

that such breach will not reoccur and Appendix C shall be automatically amended thereafter to reflect the reinstatement of the **Transmission Entry Capacity**.

10.19] If within 3 months of a breach of Clause 10.7 or Clause 10.10 [or 10.15] above which entitled **The Company** to take action under Clause 10.12\18 above, the **User** has still failed to provide the explanation and/or demonstration required by **The Company** under Clause 10.12\18 then **The Company** may treat such breach as an **Event of Default** for the purposes of Section 5 of the **CUSC** and following such breach may give notice of termination to the **User** whereupon this **Bilateral Connection Agreement** shall terminate and the provisions of **CUSC** Paragraph 5.4.7 shall apply.

10.20 For the avoidance of doubt any **Deenergisation** resulting from the **Outage Conditions** as set out in the relevant **Notification of Restrictions on Availability** [or **ET Conditions** as set out in the relevant **Notification of ET Restrictions on Availability**] constitutes an **Allowed Interruption**.

10.21.1 **The Company** and the **User** shall act in accordance with **Good Industry Practice** to minimise so far as reasonably practicable the occurrence and duration of (i) the **Outage Conditions** and (ii) an **Event** leading to reduced circuit capability of the **Relevant Circuits**. **The Company** and the **User** will, recognising the effect of the **Outage Conditions** and the reduced circuit capability on the **User's** operations, coordinate the **Outage Conditions** and the reduced circuit capability on the **National Electricity Transmission System** (where they occur as a result of a **Planned Outage**) and the **User's Plant and Apparatus** in accordance with **Good Industry Practice** and to the extent practicable. **The Company** and the **User** acknowledge however that even where **Planned Outages** are coordinated and agreed that **The Company** and/or the **User** may need to cancel or change such **Planned Outage**.

10.21.2 **The Company** and the **User** hereby acknowledge and agree that, where reasonably practicable, alternative operating arrangements shall be implemented to minimise the effect of **Outage Conditions** and reduced circuit capability [, including, but not limited to [describe potential arrangements]]. In the event that **The Company** and the **User** implement alternative operating arrangements in respect of an **Outage Condition** and reduced circuit capability, the provisions of Clauses 10.7 and 10.10 shall not apply to the extent that the alternative operating arrangements mitigate the restrictions (whether in whole or in part) that would otherwise apply to the **User** under this Clause 10 for all **Settlement Periods** or parts thereof falling within the **Outage Period** or period of reduced circuit capability.

[10.22 In the event that the **National Electricity Transmission System** conditions subsequently change such that the conditions required for a design variation under the **NETS SQSS** are no longer met then **The Company** shall be entitled to revise Clause 1, this Clause 10 and the

**Outage Conditions** as necessary to ensure that such **NETS SQSS** conditions continue to be met. *power station with **Design Variation** only* ]

## 11. TERM

Subject to the provisions for earlier termination set out in the **CUSC** this **Bilateral Connection Agreement** shall continue until the **User's Equipment** is **Disconnected** from the **National Electricity Transmission System** at the **Connection Site** (or in the case of **OTSDUW Build**, the **OTSUA** is **Disconnected** from the **National Electricity Transmission System** at the **Transmission Interface Site** prior to the **OTSUA Transfer Time**) in accordance with Section 5 of the **CUSC**.

## 12. VARIATIONS

12.1.1 Subject to Clause 12.2, 12.3, 12.4 [and 12.5 *Offshore only*] [and 12.6 *Gated Agreements only*] below, no variation to this **Bilateral Connection Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.

12.2 **The Company** and the **User** shall effect any amendment required to be made to this **Bilateral Connection Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.

12.3 **The Company** has the right to vary Appendices A and B in accordance with this **Bilateral Connection Agreement** and the **CUSC** including any variation necessary to enable **The**

**Company** to charge in accordance with the **Charging Statements**, or upon any change to the **Charging Statements**.

12.4 Appendices A and B shall be varied automatically to reflect any change to the **Construction Works** or **Transmission Connection Assets** as provided for in the **Construction Agreement**.

[12.5 **The Company** has the right to vary this **Bilateral Connection Agreement** as necessary as provided for in Clause 1.2.3 of the **Construction Agreement**. *Offshore only*].

[12.6 **The Company** has the right to vary the **Transmission Entry Capacity** [other capacity as appropriate] as provided for in Clause [7.4/7.5] of the **Construction Agreement**. *Gated Agreements only*]

### 13. GENERAL PROVISIONS

Paragraph 6.10 and Paragraphs 6.12 to 6.26 of the **CUSC** are incorporated into this **Bilateral Connection Agreement** *mutatis mutandis*.

14. **[OUTAGE OF GIS ASSETS** (*power station/Non-Embedded Customer/DNO with boundary in accordance with **CUSC** Paragraph 2.12.1(f) (i) only*)

14.1 The division of ownership of **Plant** and **Apparatus** in Clause [9] above is in accordance with the principles of ownership set out in **CUSC** Paragraph 2.12.1 (f)(i) and as such the following provisions shall apply.

14.2 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of the **GIS Asset Outage** and where practicable the expected **GIS Asset Outage Period**. Such notice shall be issued:

14.2.1 In the event that the **Notification of GIS Asset Outage** relates to a **Planned Outage** on the **National Electricity Transmission System**, where practicable, be in accordance with **Grid Code** OC2 requirements; or

14.2.2 In the event that the **Notification of GIS Asset Outage** relates to something other than a **Planned Outage** on the **National Electricity Transmission System** or relates to a **Planned Outage** on the **National Electricity Transmission System** but it is not practicable for such notice to be in accordance with **Grid Code** OC2 requirements, as soon as reasonably practicable

and **The Company** and the **User** shall agree as soon as practicable after the date hereof the method of such notification.

- 14.3 **The Company** shall promptly notify the **User** when the **GIS Asset Outage Period** will or has ceased.
- 14.4 **The Company** shall be entitled to revise the **Notification of GIS Asset Outage** given under Clause 14.2 above at any time.
- 14.5 The **User** will acknowledge receipt of such **Notification of GIS Asset Outage** and in the case of a **User** in the category of a **Power Station** shall, where practicable, revise its **Output Useable** forecast for the affected **BM Unit** accordingly.
- 14.6 Following such **Notification of GIS Asset Outage** in accordance with Clause 14.2 a **User** in the category of a **Power Station** shall:
- 14.6.1 (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflects the outage of the **GIS Assets** and (ii) operate its **Power Station** to reflect the **GIS Asset Outage** for all **Settlement Periods** or parts thereof falling within the **GIS Asset Outage Period**.
- 14.6.2 In the event that the **User** does not comply with Clause 14.5 and Clause 14.6.1 above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM Unit** to zero so that the effect is as if the **User** had complied with the Clauses and the provisions of the **Transmission Related Agreement** shall apply.
- 14.7 For the avoidance of doubt any **Deenergisation** resulting from the **GIS Asset Outage** as set out in the relevant **Notification of GIS Asset Outage** constitutes an **Allowed Interruption** in the case of a **User** in the category of a **Power Station** and shall relieve **The Company** from its obligations under **CUSC** Section 2 Paragraphs 2.2.1 and 2.4 in the case of a **User** in the category

of a **Non-Embedded Customer** or a **Distribution System** directly connected to the **National Electricity Transmission System**.

## **15 OTSDUW Build**

15.1 Where the **Transmission Interface Site** is to be **Operational** prior to the **OTSUA Transfer Time**, during such period the following provisions shall apply and the other provisions of this **Bilateral Connection Agreement** shall be construed accordingly.

15.2 The **OTSUA** will be connected to the **National Electricity Transmission System** at the **Transmission Interface Point** and:

- (i) until the **OTSUA Transfer Time** the provisions of **CUSC** Paragraphs 2.2, 2.3 and 2.4 shall apply by reference to the **Transmission Interface Site** rather than the **Connection Site**;
- (ii) until the **OTSUA Transfer Time** the obligation at **CUSC** Paragraph 2.5 shall apply by reference to the **Transmission Plant** and **Transmission Apparatus** at the **Transmission Interface Site**;
- (iii) until the **OTSUA Transfer Time**, in addition to its obligations at Clause 8 of this **Bilateral Connection Agreement**, the **User** shall operate the **OTSUA** in accordance with Appendices OF3 and OF4 to the **Construction Agreement**;
- (iv) until the **OTSUA Transfer Time** the **User** shall comply with the site specific technical conditions set out in Appendix OF5 to the **Construction Agreement** and **CUSC** Paragraph 2.9.3 shall also apply by reference to Appendices OF1, OF3, OF4 and OF5 as attached to the **Construction Agreement**;
- (v) the division of ownership of **Plant** and **Apparatus** at the **Transmission Interface Site** shall be at *[describe electrical or other boundary]* and where there are **GIS Assets** at the **Transmission substation** at the **Transmission Interface Site** the **GIS Outage Restrictions** will apply depending on such boundary;
- (vi) until the **OTSUA Transfer Time** the **Connection Charges** and **Use of System Charges** shall not take account of any **OTSUA** that will, at the **OTSUA Transfer Time**, become **Transmission Connection Assets**;
- (vii) at and after the **OTSUA Transfer Time** the **Connection Charges** and **Use of System Charges** shall take account of the **OTSUA** (including any **OTSUA** that will become **Transmission Connection Assets**);
- (viii) until the **OTSUA Transfer Time** the **Offshore Restrictions on Availability** shall not apply;

(ix) at the **OTSUA Transfer Time** the **Offshore Restrictions on Availability** shall apply.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )

**[name]** )

for and on behalf of )

National Energy System Operator Limited )

SIGNED BY )

**[name]** )

for and on behalf of )

**[User]** )

#### **APPENDIX A**

#### **TRANSMISSION CONNECTION ASSET/CONNECTION SITE**

Company: []

Connection Site: []

Type: []

#### **Part 1 - Pre-Vesting Assets**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
|                          |                           | (As at [ ])       |                    |

#### **Part 2 - Post-Vesting Assets**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
|                          |                           | (As at [ ])       |                    |

#### **Part 3 - Energy Metering Systems (\*)**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
|--------------------------|---------------------------|-------------------|--------------------|



(As at [ ])

(\*) FMS, Energy Metering Systems - The Electronics components have a 15 year replacement period.  
The Non-Electronics components have a 40 year replacement period.

All the above are inclusive of civil engineering works. At double busbar type substations, ownership of main and reserve busbars follows ownership of section switches.

Diagram Reference: [ ]

Appendix Reference: [ ]

Agreement Reference: [ ]

## **APPENDIX B**

### **CONNECTION CHARGES/PAYMENT**

Company: [ ]

Connection Site: [ ]

Type: [ ]

#### **(1) Connection Charges**

The Connection Charges set out below may be revised in accordance with the terms of this Bilateral Connection Agreement and/or the Construction Agreement and/or the CUSC and/or the Charging Statements

##### **Part 1 - Pre-Vesting Assets**

The Connection Charge for those assets extant at 31st March 1990 and specified in Appendix A Part 1 will be at an annual rate for the period [ ] to [ ] of £[ ] where

Rate of Return = [ ]%

Transmission Costs

Part A Site specific maintenance element = £[ ]

Part B Other transmission costs element = £[ ]

##### **Part 2 - Post-Vesting Assets**

The Connection Charge for those assets installed for this agreement after 31st March 1990 and specified in Appendix A Part 2 will be at an annual rate for the period [ ] to [ ] of £[ ] where

Rate of Return = [ ]%

Transmission Costs

Part A Site specific maintenance element = £[ ]

Part B Other transmission costs element = £[ ]

**Part 3 - Energy Metering Systems**

For FMS, Energy Metering Systems assets, installed for this agreement as specified in Appendix A Part 3 the Connection Charge will be at an annual rate for the period from [ ] to [ ] of £[ ]

**Part 4 - Miscellaneous Charges**

The miscellaneous charge shall be £[ ] in respect of the period from [ ] to [ ] payable as an estimated indexed charge in twelve monthly instalments subject to adjustment in accordance

with the terms of this Bilateral Connection Agreement and/or the CUSC and/or the Charging Statements

**Part 5 - One-off / Transmission Charges**

The transmission charge shall be £[ ] in respect of the period from [ ] to [ ] payable as an estimated indexed charge in twelve monthly instalments subject to adjustment in accordance with the terms of this Bilateral Connection Agreement and/or the CUSC and/or the Charging Statements

(2) Payment

The Connection Charges for Parts 1 to 6 shall be payable in equal monthly instalments as specified in Paragraph 6.6 of the CUSC

Appendix Reference: [ ]

**APPENDIX C (Power Stations)**

**CONNECTION ENTRY CAPACITY AND TRANSMISSION ENTRY CAPACITY [AND MAXIMUM EXPORT CAPACITY AND MAXIMUM IMPORT CAPACITY - *ET Offshore Transmission System only*]**

Company:

Grid Supply Point/Connection Site:

**Part 1 Connection Entry Capacity**

Connection Entry Capacity (CEC) expressed as an instantaneous MW figure

|                 | CEC(MW) |
|-----------------|---------|
| Power Station   | [ ]     |
| Generating Unit |         |
| Genset 1        | [ ]     |
| Genset 2        | [ ]     |
| Genset 3        | [ ]     |
| Genset 4        | [ ]     |

**Part 2 Transmission Entry Capacity**

Transmission Entry Capacity (TEC) expressed in average MW taken over a half hour settlement period

TEC(MW)

Power Station [     ]

### Part 3 BM Units comprising Power Station

|            |                                  |
|------------|----------------------------------|
| T_BMU 1    | (Associated with Genset 1)       |
| T_BMU 2    | (Associated with Genset 2)       |
| T_BMU 3    | (Associated with Genset 3)       |
| T_BMU 4    | (Associated with Genset 4)       |
| T_BMU SD-1 | (Station Demand)                 |
| T_BMU AD-1 | (Additional Trading Site Demand) |

**[Part 4 Maximum Export Capacity and Maximum Import Capacity – *ET Offshore Transmission System only*]**

## APPENDIX C (Interconnector Owners)

### CONNECTION ENTRY CAPACITY AND TRANSMISSION ENTRY CAPACITY

Company:

Connection Site:

#### Part 1 Connection Entry Capacity

Connection Entry Capacity (CEC) expressed as an instantaneous MW figure

CEC(MW)

Interconnector [     ]

#### Part 2 Transmission Entry Capacity

Transmission Entry Capacity (TEC) expressed in average MW taken over a half hour settlement period

Interconnector [     ]

#### Part 3 BM Units comprising Interconnector

All BMU's starting with an identifier [I\_FRA for example]. No need to list all individual BMU's

**Part 4 Figure for the Purposes of CUSC Paragraph 9.6**

**APPENDIX F1**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**AGREED BALANCING SERVICES**

**APPENDIX F2**

**[NOT USED]**

**APPENDIX F3**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**SPECIAL AUTOMATIC FACILITIES**

**APPENDIX F4**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**PROTECTION AND CONTROL RELAY SETTINGS**

**FAULT CLEARANCE TIMES**

**APPENDIX F5**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**LOAD SHEDDING FREQUENCY SENSITIVE RELAYS**

**END OF SCHEDULE 2 - EXHIBIT 1**

**SCHEDULE 2 – EXHIBIT1A**

DATED [ ]

NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)

and

[ ] (2)

---

AGREEMENT TO VARY THE  
BILATERAL CONNECTION AGREEMENT  
FOR [ ] SUBSTATION

---

REF: [ ]

**THIS AGREEMENT TO VARY** is made on the [ ] day of [ ] 20[ ]

**BETWEEN**

- (1) **The Company** registered in England with number 11014226 ("**The Company**"), , which expression shall include its successors and/or permitted assigns); and
- (2) [ ] **PLC** a company registered in [ ] with number [ ] whose registered office is at [ ] ("**User**", which expression shall include its successors and/or permitted assigns).

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** has prepared a **Connection and Use of System Code ("CUSC")** setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) **The Company** and the **User** are parties to the **CUSC Framework Agreement** being an agreement by which the **CUSC** is made contractually binding between parties.
- (C) In accordance with the **CUSC** **The Company** and the **User** entered into a **Bilateral Connection Agreement** (the "**Bilateral Connection Agreement**") reference no [ ] brought into effect on the [ ] in respect of its connection to the **National Electricity Transmission System**.
- (D) in accordance with **CUSC** Paragraph 6.5.1 (Evaluation of Transmission Impact) the **User** has notified **The Company** of the **Relevant Embedded Power Stations** (as defined below) which are intending to connect to its **Distribution System**.
- (E) Recognising the volume and volatility of requests for connection to the **Distribution System** and the resulting need for **The Company** to consider the effect of this on the **National Electricity Transmission System**, **The Company** and the **User** have agreed a process to better manage this as between themselves (the "**Transmission Impact Assessment Process**").
- (F) This **Transmission Impact Assessment Process** is used by **The Company** to identify the **Relevant Embedded Power Stations** where the effect on the **National Electricity Transmission System** of the **Energisation** of such **Relevant Embedded Power Stations** to the **Distribution System** can be (a) accommodated subject to **Site Specific Requirements** and/or (b) accommodated with **Construction Works** on the **National Electricity Transmission System** but which can be **Energised** prior to completion of



such works in accordance with the general principles of a **Design Variation** or (c) cannot be accommodated until the completion of works on the **National Electricity Transmission System**.

- (G) **The Company** and the **User** have now agreed to enter into this Agreement in order to amend the terms of the **Bilateral Connection Agreement** to reflect the **Transmission Impact Assessment Process** and provide for the **Energisation** of the **Relevant Embedded Power Stations**.

**NOW IT IS HEREBY AGREED** as follows:-

- 1** Unless the subject matter or context requires or is inconsistent therewith terms and expressions defined in Section 11 of the **CUSC** and in the **Bilateral Connection Agreement** have the same meanings, interpretations or constructions in this Agreement.
- 2** The **Bilateral Connection Agreement** shall be varied with effect from the date hereof as follows:-
  - 2.1** Appendix G (Developers and Relevant Embedded Power Stations) attached to this Agreement shall be annexed to the **Bilateral Connection Agreement** and the Contents Page amended accordingly.
  - 2.2** The following definitions shall be added at Clause 1 of the **Bilateral Connection Agreement**.

|                           |                                                                                                                                                                               |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Developer Capacity</b> | in the context of this <b>Bilateral Connection Agreement</b> shall mean the MW figure for each <b>Relevant Embedded Power Station</b> as identified in Appendix G Schedule 1. |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                   |                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Developers</b> | in the context of this <b>Bilateral Connection Agreement</b> shall mean the developers of the <b>Relevant Embedded Power Stations</b> as identified in Appendix G Schedule 1. |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                         |                                                                                               |
|-----------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Relevant Embedded Power Stations</b> | in the context of this <b>Bilateral Connection Agreement</b> shall mean those <b>Relevant</b> |
|-----------------------------------------|-----------------------------------------------------------------------------------------------|

**Embedded Power Stations** identified as such in Appendix G Schedule 1.

**Technical Limitations**

any technical limitations at the **Connection Site** as specified in Appendix G Schedule 1 Part 2.

**Total MWs**

means the figure specified as such in Appendix G Schedule 1 Part 2.

- 2.5 The following shall be added as Clause [ ] of the Bilateral Connection Agreement and the Contents Page amended accordingly

[ ] **Transmission Impact Assessment Process**

- [ ].1 **The Company** and the **User** have agreed a process utilising **Transmission Impact Assessment** (as detailed in Appendix G to this **Bilateral Connection Agreement**) to manage the **Relevant Embedded Power Stations** which require an **Evaluation of Transmission Impact** assessment by **The Company** under **CUSC** Paragraph 6.5.1.
- [ ].3 The intent and structure of Appendix G Schedule 1, which identifies the **Relevant Embedded Power Stations** which have contracts with the **User** to connect to the **Distribution System** and the specific terms that apply to such **Relevant Embedded Power Stations** (including whether it is the subject of a **Construction Agreement**), is explained in Appendix G Schedule 2.
- [ ].4 The provisions in Appendix G Schedule 2 set out the process through which the **User** can add **Relevant Embedded Power Stations** to Appendix G Schedule 1.
- [ ].5 The **Transmission Impact Assessment Process** envisages and is designed such that Appendix G Schedule 1 is revised and updated and this **Bilateral Connection Agreement** shall be read and construed by reference to the relevant revision of Schedule 1.
- [ ].6 The **User** will provide **The Company** with regular updates (as agreed by both parties but no fewer than one every 6 months) to the **Relevant Embedded Power Stations** set out in Schedule 1 of Appendix G in accordance with the requirements set out in Schedule 2 of Appendix G.

- [ ].7 **The Company** shall review the updates provided by the **User** under paragraph [ ].6 in accordance with the requirements of Schedule 2 of Appendix G and notify **The User** within [5] business days of receipt of the outcome of the review. Should this notification from **The Company** confirm acceptance or not be provided, the update from the **User** will be deemed approved and form part of the **Bilateral Connection Agreement**. Should the update from the **User** not meet the requirements of Schedule 2 of Appendix G, **The Company** shall confirm this via the notification to **The User**.
- [ ].8 Should **The Company** provide a notification to the **User** under paragraph [ ].7 that the requirements of Schedule 2 of Appendix G have not being met, **The Company** and the **User** shall meet within [5] **Business Days** to discuss resolution. Should no resolution be agreed between **The Company** and the **User** (both acting reasonably), the update will not be incorporated into the **Bilateral Connection Agreement** until an agreement is reached or the **Dispute Resolution Procedure** is concluded.
- [ ].9 **The Company** shall be entitled to revise Appendix G Schedule 1 as provided for in the **Transmission Impact Assessment Process**
- 2.6 At Clause 8 (Compliance with Site Specific Technical Conditions) of the **Bilateral Connection Agreement** the following shall be introduced as Clause 8.2 and the previous Clause renumbered as Clause 8.1.
- 8.2 In the context of connection of **Generation** to the **Distribution System**, unless otherwise agreed with **The Company** (and recognising that this may require a **Modification** at the **Connection Site**), the **User** shall not exceed the **Technical Limitations** at the **Connection Site**.
- 2.7 The following shall be added as Clause 8.3 of the **Bilateral Connection Agreement**.
- 8.3 In respect of each **Relevant Embedded Power Station** and in each case prior to **Energising** the connection of that **Relevant Embedded Power Station** to the **Distribution System** the **User** shall ensure that the Site Specific Requirements set out in Appendix F5 (Part 11) identified as applicable to that **Relevant Embedded Power** are in place.

### 3 **CONTRACTS (RIGHTS OF THIRD PARTIES) ACT 1999**

The parties hereto hereby acknowledge and agree for the purposes of the Contracts (Rights of Third Parties) Act 1999 that no rights, powers or benefits are or shall be conferred on any

person pursuant to this Agreement except for such rights, powers or benefits as are expressly conferred on the parties hereto in accordance with, and subject to, its terms.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED** )

By )

)

[ ] )

By )

)

**APPENDIX A****TRANSMISSION CONNECTION ASSET/CONNECTION SITE**

Company: [ ]

Connection Site: [ ]

Type: [ ]

**Part 1 - Pre-Vesting Assets**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
| (As at [ ])              |                           |                   |                    |

**Part 2 - Post-Vesting Assets**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
| (As at [ ])              |                           |                   |                    |

**Part 3 - Energy Metering Systems (\*)**

| <b><u>Allocation</u></b> | <b><u>Description</u></b> | <b><u>Age</u></b> | <b><u>Year</u></b> |
|--------------------------|---------------------------|-------------------|--------------------|
| (As at [ ])              |                           |                   |                    |

(\*) FMS, Energy Metering Systems - The Electronics components have a 15 year replacement period. The Non-Electronics components have a 40 year replacement period.

All the above are inclusive of civil engineering works. At double busbar type substations, ownership of main and reserve busbars follows ownership of section switches.

Diagram Reference: [ ]

Appendix Reference: [ ]

Agreement Reference: [ ]

**APPENDIX B****CONNECTION CHARGES/PAYMENT**

Company: [ ]

Connection Site: [ ]

Type: [ ]

**(1) Connection Charges**

The Connection Charges set out below may be revised in accordance with the terms of this Bilateral Connection Agreement and/or the Construction Agreement and/or the CUSC and/or the Charging Statements

**Part 1 - Pre-Vesting Assets**

The Connection Charge for those assets extant at 31st March 1990 and specified in Appendix A Part 1 will be at an annual rate for the period [ ] to [ ] of £[ ] where

Rate of Return = [ ]%

**Transmission Costs**

Part A Site specific maintenance element = £[ ]

Part B Other transmission costs element = £[ ]

**Part 2 - Post-Vesting Assets**

The Connection Charge for those assets installed for this agreement after 31st March 1990 and specified in Appendix A Part 2 will be at an annual rate for the period [ ] to [ ] of £[ ] where

Rate of Return = [ ]%

**Transmission Costs**

Part A Site specific maintenance element = £[ ]

Part B Other transmission costs element = £[ ]

**Part 3 - Energy Metering Systems**

For FMS, Energy Metering Systems assets, installed for this agreement as specified in Appendix A Part 3 the Connection Charge will be at an annual rate for the period from [ ] to [ ] of £[ ]

**Part 4 - Miscellaneous Charges**

The miscellaneous charge shall be £[ ] in respect of the period from [ ] to [ ] payable as an estimated indexed charge in twelve monthly instalments subject to adjustment in accordance with the terms of this Bilateral Connection Agreement and/or the CUSC and/or the Charging Statements

**Part 5 - One-off / Transmission Charges**

The transmission charge shall be £[ ] in respect of the period from [ ] to [ ] payable as an estimated indexed charge in twelve monthly instalments subject to adjustment in accordance with the terms of this Bilateral Connection Agreement and/or the CUSC and/or the Charging Statements

(2) Payment

The Connection Charges for Parts 1 to 6 shall be payable in equal monthly instalments as specified in Paragraph 6.6 of the CUSC

Appendix Reference: [ ]

**APPENDIX F2**

[NOT USED]

**APPENDIX F3**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**SPECIAL AUTOMATIC FACILITIES**

**APPENDIX F4**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**PROTECTION AND CONTROL RELAY SETTINGS**

**FAULT CLEARANCE TIMES**

**APPENDIX F5**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**LOAD SHEDDING FREQUENCY SENSITIVE RELAYS**



**APPENDIX G – Schedule 1****DEVELOPERS, RELEVANT EMBEDDED POWER STATIONS and TECHNICAL LIMITATIONS**

User: [     ]

Connection Site: [     ] Substation

Date: [Month] [Year]

---

**Part 1 – Developer Capacity** for Relevant Embedded Power Stations connected and Developer Capacity for Relevant Embedded Power Stations in respect of which there are **Gate 2 Agreements** which are to be connected to the Distribution System. Site Specific Requirements (as specified in Clause 11 of the Bilateral Connection Agreement) and Interim Restrictions on Availability (as specified in Clause 12 of the Bilateral Connection Agreement) shall apply where indicated.

| Relevant Embedded Power Station | Developer Capacity in MW | Date of Connection | Technology | Site Specific Conditions # | Interim Restrictions on Availability ^ | Access ahead of completion of all Construction Works Schedule Y/N | Construction Works Schedule * | User Commitment Trigger Date | Consented |
|---------------------------------|--------------------------|--------------------|------------|----------------------------|----------------------------------------|-------------------------------------------------------------------|-------------------------------|------------------------------|-----------|
| Example 1                       | 10                       | [Date 1]           | Wind       | 1 only                     | None                                   | N                                                                 | A                             | [Date 2]                     | Yes       |
| Example 2                       | 17                       | [Date 3]           | Solar      | 1, 2                       | 1A                                     | Y                                                                 | B                             | [Date 4]                     | No        |

\*[Construction Agreement Reference]

Construction Agreement A

Construction Agreement B

# [Captured in Appendix F]

^ [Captured in Appendix D/F]

**Part 2 – Capacity & Technical Conditions Summary**

The following table sets out Capacity and the technical limitations which are based on the capability of the National Electricity Transmission System.

| <b>Capacity Limit Summary</b>      |              |                                                                                                                                                                                                                                                            |
|------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Total MWs Table 1</b>           | <b>[ ]MW</b> | Additional new generation can be added and will be subject to the applicable works schedule, interim restrictions of availability and site specific conditions as detailed in the final row of table in part 1. Generation should be added in queue order. |
| <b>Total Developer Capacity</b>    | <b>[ ]MW</b> | Subject to Cancellation Charge in accordance with CUSC Section 15 User Commitment Methodology                                                                                                                                                              |
| <b>Technical Condition Summary</b> |              |                                                                                                                                                                                                                                                            |

|                                                                                                                               |          |                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Connection Asset Reverse Power Limits</b><br><br>(Usually the SGT at the site, where that SGT is classified as connection) | [ ] MVA  | Where facilities exist, such as an ANM scheme, or other suitable control scheme to curtail generation in the event of a SGT circuit fault this limit can be raised. Detail of the raised limit and associated requirements are contained in technical appendix F3. |
| <b>Fault Level headroom</b>                                                                                                   | [ ] kA   | [Fault level notes]                                                                                                                                                                                                                                                |
| <b><i>Voltage</i></b>                                                                                                         | See Note | Voltages conditions in BCA / Appendix F apply to new generation projects.                                                                                                                                                                                          |
| <b>Generator Technology</b>                                                                                                   | See Note | There is/is not (delete as appropriate) limit on technology change within this GSP.                                                                                                                                                                                |
| <b>Comments/Constraints or Additional Restrictions:</b>                                                                       |          |                                                                                                                                                                                                                                                                    |
| <b>Transferable Capacity (see note below)</b>                                                                                 | [ ] MW   | <b>GSP's:</b> [ ]                                                                                                                                                                                                                                                  |

**Audit & Change Control**

| Date of Base BCA agreement |                 |                   |               |                         |
|----------------------------|-----------------|-------------------|---------------|-------------------------|
| Date Change                | Name & Position | Changes/Comments: | Approved Date | The Company Approved By |
|                            |                 |                   |               |                         |

## APPENDIX G – Schedule 2

### Scope and Use of Appendix G Schedule 1

User: [            ]

Connection Site: [            ] Substation

In accordance with Clause [ ] of this **Bilateral Connection Agreement** the **User** must comply with the requirements set out below in order to manage the **Relevant Embedded Power Stations** and **Developer Capacity** set out in Schedule 1 to this Appendix G. Appendix G Schedule 1 will only include **Relevant Embedded Power Stations** with a signed **Connection Agreement** with the **User** and is structured as follows;

1. **Appendix G Schedule 1 Part 1** – Contains legacy **Relevant Embedded Power Stations** and all new **Relevant Embedded Power Stations**. Legacy **Relevant Embedded Power Stations** should be listed at the top of Part 1 and, unless otherwise specified in the **Bilateral Connection Agreement**, only pre-existing **Site Specific Technical Conditions** or restrictions shall apply. No new legacy **Relevant Embedded Power Stations** can be retrospectively added to Schedule 1.
2. New **Relevant Embedded Power Stations** should be added to Part 1 in contractual order.
3. Part 1 specifies the **Site Specific Requirements**, any **Interim Restrictions on Availability** as set out in the **Bilateral Connection Agreement** and any associated **Construction Works** against each individual **Relevant Embedded Power Station** listed.
4. For the avoidance of doubt **The Company** will provide details of the **Site Specific Requirements**, **Interim Restrictions on Availability** and applicable **Construction Works** that the **User** must apply to any future **Relevant Embedded Power Station** applications and this will be set out at the bottom of Part 1.
5. Where a **Relevant Embedded Power Station** is subsequently connected the **User** will confirm this by replacing the expected connection date with 'connected' when providing the next Appendix G update. The **User** will provide the expected connection dates for each **Relevant Embedded Power Station** and provide any updates ahead of connection, confirming either the revised date of connection or confirmation that they are now 'connected'. Therefore, all dates populated in this section must be recorded as either a date in the future (in the format DD/MM/YYYY) or as 'connected'.
6. Where a **Relevant Embedded Power Station** triggers **Construction Works** they will be unable to connect until these **Construction Works** have been completed unless indicated in Appendix G Schedule 1 Part 1 in which case any **Interim Restrictions on Availability** will apply. Any such **Interim Restrictions on Availability** will be specified in Appendix [ ] to the **Bilateral Connection Agreement** in which case such **Interim Restrictions on Availability** will be indicated in Appendix G Schedule 1 Part 1.
7. **Relevant Embedded Power Stations** that disconnect from the **Distribution System** should be removed from Schedule 1 Part 1 by strike through.

8. Where contracted **Relevant Embedded Power Stations** terminate their agreement or reduce **Developer Capacity** before connection the **User** should notify **The Company** within the timescale ([ ] business days) set out in Clause [ ] of the **Construction Agreement** and removed from Appendix G Schedule 1 Part 1 by striking through. For the avoidance of doubt any such termination will attract a **Cancellation Charge** in accordance with **CUSC** Section 15.
9. **Appendix G Schedule 1 Part 2** - Provides the **User** with **Technical Limitations** that must be applied to all **Relevant Embedded Power Stations**.

#### **Connection Asset Reverse Power Limit**

Where it is possible for the **Total MWs** Table 1 in Appendix G Schedule 1 minus the minimum GSP demand (as provided by the **User** to **The Company** in accordance with the **Data Registration Code**) to exceed the **Connection Asset Reverse Power Limit** the **User** will ensure operational facilities are in place to prevent the **Connection Asset Reverse Power Limit** being exceeded. Where this is managed with an **Automatic Network Management** scheme or other suitable control scheme, the requirements of this facility, including any short term overload capacity, will be defined in technical Appendix F3.

#### **Fault Level headroom**

The **User** will ensure that any changes in fault level caused by changes to the **Relevant Embedded Power Stations** as listed in Appendix G Schedule 1 or other changes to the **User's** network remain below the site fault level limit. The fault level headroom is an indication on limitation of fault level on the **Company's** and **Third Party Users'** equipment at or reflected to the **Connection Site**. **The Company** will recalculate the fault level headroom on receipt of technical data following breach of fault level headroom, or when conditions on the **National Electricity Transmission System** occur. **The Company** will indicate the date that the **User** submitted data in Appendix G Schedule 1 Part 2 was used for the fault level headroom assessment, the **User** will ensure that fault level assessments used for updates to Appendix G Schedule 1 are consistent with this submitted data.

#### **Generation Technology**

If there is a generator technology type limit on the **Grid Supply Point**, then the **User** will ensure any changes proposed to the Appendix G are consistent with that limit.

#### **Reassessment of Limits**

If not otherwise changed, there should be an annual reassessment of limits to avoid the risk of background network changes causing the network to become unsafe or out of standards.

Both **The Company** and the **User** agree to an annual (or as otherwise agreed between the parties) meeting to review the assessment methods to be applied in Appendix G Schedule 1 at the **Connection Site**.

### **10. Administration of Appendix G Schedule 1**

1. All fields for new **Relevant Embedded Power Stations** in Part 1 of Schedule 1 must be populated. The column for **Consent** is required in accordance with **CUSC Section 15 User Commitment Methodology**.

2. In accordance with Clause [] of this **Bilateral Connection Agreement** the **User** will provide **The Company** with regular updates to Appendix G Schedule 1, including confirmation if there are no changes. **The Company** requires such updates to be provided on a monthly basis, noting certain changes require notification sooner than 1 month\* or on a regular basis as agreed between **The Company** and the **User** (but no fewer than one per half calendar year in May and November). Updates must include details of **any Relevant Embedded Power Stations** that;
  - a) have disconnected from the **Distribution System** since the last update and
  - b) \*that have terminated their **Connection Agreement** with the **User**, the **CUSC** requirement for terminations is 5 business days.
  - c) the **User** believes the current connection date is expected to be delayed. Advanced notification of the revised connection date is required imperative.
  - d) other recorded information has changed or any that have subsequently energised. Where the **Relevant Embedded Power Station** has energised the connection date will be updated to 'connected'.
  - e) **new Relevant Embedded Power Station** added since the last update.
3. The submission of each update to Appendix G Schedule 1 from the **User** must clearly identify any changes.
4. Each update from the **User** should be submitted by email to **The Company** at the following address [transmissionconnections@nationalgrideso.com](mailto:transmissionconnections@nationalgrideso.com)
5. **The Company** will review the changes to Appendix G Schedule 1, in accordance with the requirements set out in this Schedule 2 and notify **The User** within [5] business days of receipt of the outcome of the review. In accordance with Clause [10.8] of this **Bilateral Connection Agreement** where no notification is provided by **The Company** or the notification confirms acceptance, the updated **Appendix G Schedule 1** will form part of the **Bilateral Connection Agreement**. Where the notification states there are outstanding concerns, **The Company** and the **User** will meet within [5] business days to discuss further and a revised Appendix G Schedule 1 shall not be incorporated in to the **Bilateral Connection Agreement** until both the **User** and **The Company** agree on the required changes. For the avoidance of doubt **The Company** will only not accept changes to Appendix G Schedule 1 if the changes do not comply with the requirements as set out in this Schedule 2 and may charge the **User** a cost-reflective re-work fee as per **The Company's Statement of Use of System Charges**. Monthly changes to Appendix G will be recorded in the register of embedded generation.
6. [not used]
7. The **Bilateral Connection Agreement** will be deemed to be updated with the latest version of the Appendix G Schedule 1 once **The Company** and **User** agree to an updated Appendix G Schedule 1 in accordance with paragraph 6. The sole criteria used by **The Company** for successful or unsuccessful review will be following the requirements of this Schedule 2. For the avoidance of doubt, the requirement for an **Evaluation of Transmission Impact** (as per **CUSC** paragraph 6.5.1(c)) shall not be deemed as met until Appendix G Schedule 1 is updated.

8. Periodically, **The Company** will reconcile the Appendix G against the changes indicated in Schedule 1 and any changes in the transmission background. If any **Interim Restrictions on Availability** or **Construction Works** are deemed no longer applicable these will be removed and any update to the Securities, together with the invoice for any **Cancellation Charge** in accordance with **CUSC** Section 15 will be provided to the **User**.
9. Where the **User** breaches in whole or in part the provisions of this Appendix G Schedule 2, the **User** shall, if requested by **The Company**, explain to **The Company's** satisfaction (acting reasonably) the reason for the breach and demonstrate to **The Company's** satisfaction that appropriate steps have been taken (or will be taken) to ensure that such breach will not reoccur. If the **User** does not provide such explanation, or if **The Company** is not satisfied with the explanation provided, **The Company** may give written notice to the **User** reducing the **Total MWs** of the **Connection Site** to zero and update Appendix G Schedule 1 accordingly if there is;
  1. A single breach occurs which risks operation of the **National Electricity Transmission System** or creates a risk to life or property or,
  2. Three (3) consecutive material breaches, or
  3. Eight (8) breaches within a twelve (12) month period.

This shall apply until such time as the **User** has explained to **The Company's** reasonable satisfaction the reason for the breach and has demonstrated that appropriate steps have been taken to ensure that such breach will not reoccur, at which point Appendix G Schedule 1 shall be unilaterally amended thereafter by **The Company** to reflect the reinstatement of the **Total MWs**.

10. If within 3 months of a written notice from **The Company** (reducing the **Total MWs** of the **Connection Site** to zero) under paragraph 10.10 above, the **User** has still failed to provide the explanation and/or demonstration required by **The Company** under paragraph 10 then **The Company** may treat such breach as an **Event of Default** for the purposes of Section 5 of the CUSC and following such breach may give notice of termination to the **User** whereupon this **Bilateral Connection Agreement** shall terminate and the provisions of **CUSC** Paragraph 5.4.7 shall apply.



**SCHEDULE 2 - EXHIBIT 2**

**DATED [**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[ (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE  
BILATERAL EMBEDDED GENERATION AGREEMENT**

---

**[USE OF SYSTEM FOR AN EMBEDDED POWER STATION]  
[USE OF SYSTEM FOR A SMALL POWER STATION TRADING PARTY]  
[DISTRIBUTION INTERCONNECTOR OWNER]**

**At [**

**Reference: [**

## **CONTENTS**

- 1. Definitions, Interpretation and Construction**
- 2. Commencement**
- 3. The Site of Connection to the Distribution System**
- 4. Charging Date**
- 5. Use of System**
- 6. Credit Requirements**
- 7. Entry Access Capacity**
- 8. Compliance with Site Specific Technical Conditions**
- 9. [Restrictions on Availability] (*power stations with Design Variation only*)**
- 10. Term**
- 11. Variations**
- 12. General Provisions**

**Appendix A The Site of Connection**

**Appendix B Charges and Payment**

**Appendix C Transmission Entry Capacity**

**Appendix F1 Site Specific Technical Conditions – Balancing Services**

**Appendix F2 [Not Used]**

**Appendix F3 Site Specific Technical Conditions - Special Automatic Facilities**

**Appendix F4 Site Specific Technical Conditions Protection and Control Relay Settings, Fault Clearance Times**

**Appendix F5 Site Specific Technical Conditions - Other**

THIS **BILATERAL EMBEDDED GENERATION AGREEMENT** is made on the [ ] day of [ ] 200[ ].

**BETWEEN**

- (1) **The company** registered in England with number 11014226 (“**The Company**”), which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“**User**”, which expression shall include its successors and/or permitted assigns).

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** is required to prepare a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) The **User** has applied for use of the **National Electricity Transmission System** and pursuant to the **ESO Licence** **The Company** is required to offer terms for use of system.
- (C) The **User** has applied for use of the **National Electricity Transmission System** in the capacity of [ ] as set out in Paragraph 1.2.4 of the **CUSC**.
- (D) As at the date hereof, **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties). This **Bilateral Embedded Generation Agreement** is entered into pursuant to the **CUSC** and shall be read as being governed by it.
- (E) This is a [**Gate 1 Agreement – large only**] [**Gate 2 Agreement**].

**NOW IT IS HEREBY AGREED** as follows:

**1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** [and the **Construction Agreement**] have the same meanings, interpretations or constructions in this **Bilateral Embedded Generation Agreement**. [and the following terms and expressions shall have the meaning set out below:-

[“**Circuit [ ]**” [insert detailed description of circuit(s) affected by the design variation] (*power station with **Design Variation** only*);]

**[“Construction Agreement”** the agreement made between the parties of even date herewith for the carrying out of construction works;]

**[“Outage Conditions [ ]”** the unavailability of **Circuit [ ]** as a result of

(a) a [planned]/ [unplanned]/ [planned or unplanned] incident occurring directly on **Circuit [ ]**; or

(b) **Circuit [ ]** requiring to be **Deenergised** for health and safety reasons to allow for the planned or unplanned availability of a circuit in the immediate vicinity of **Circuit [ ]** (*power station with **Design Variation** only*);]

**[“Outage Period”** the period of time during which the **Outage Conditions** and/or reduced circuit capability apply (*power station with **Design Variation** only*).]]

**[“Notification of Circuit Restrictions”** means the notification issued by **The Company** to the **User** in accordance with Clause [9.2] of this **Bilateral Embedded Generation Agreement**; (*power station with **Design Variation** only*)]

**[“Notification of Outage Conditions”** means the notification issued by **The Company** to the **User** in accordance with Clause [9.4] of this **Bilateral Embedded Generation Agreement**; (*power station with **Design Variation** only*)]

**[“Notification of Restrictions on Availability”** means a **Notification of Outage Conditions** and/or a **Notification of Circuit Restrictions** as applicable; (*power station with **Design Variation** only*)]

**[“Relevant Circuits”** means [**Circuit [ ]**]; (*power station with **Design Variation** only*)]

**[“Transmission Related Agreement”** means the agreement of even date entered into between the parties for the provision of and payment for **Balancing Services** in respect of **Bid-Offer Acceptances**; (*power station with **Design Variation** only*)]

## **1.2 [Gate 1 Conditional Clause [and Reservation] – Gate 1 Agreements only**

**1.2.1** As provided for at Clause 1.2 of the **Construction Agreement** and this Clause 1.2 the parties agree that until the [**Gate 2 Date**] the rights and obligations of each party pursuant to this **Bilateral Embedded Generation Agreement** other than this Clause 1.2 shall be suspended.

**1.2.2** [The parties further agree and acknowledge that the information provided for the purposes of the **Gate 1 Agreement** and set out in the Appendix [O][P] to the **Construction Agreement** is indicative only prior to the [**Gate 2 Date**] and shall not be binding on the parties or confer any commitment to these by **The Company** and any reliance on them for any

purpose prior to the **Gate 2 Date** is at the **User's** risk – no **Reservation**]  
[The parties further agree that the **Connection Site** and **Completion Date** and **Transmission Entry Capacity** as set out in Appendix [O][P] to the **Construction Agreement** have been **Reserved** for the purposes of this connection and/or use of system and any **Gate 2 Offer** will reflect this provided that the **Gate 2 Application** is made prior to the **Reservation Expiry Date** and the **Gate 2 Offer** is accepted – *where Reservation*].

- 1.2.3 With effect from the [Gate 2 Date] the provisions of this **Bilateral Embedded Generation Agreement**, as amended by the [Gate 2 Offer] by agreement of the parties shall be in full force and effect.

## 2. COMMENCEMENT

This **Bilateral Embedded Generation Agreement** shall commence on [ ].

## 3. THE SITE OF CONNECTION TO THE DISTRIBUTION SYSTEM

The site of **Connection** of the **Embedded Power Station** [Distribution Interconnector] to the **Distribution System** to which this **Bilateral Embedded Generation Agreement** relates is more particularly described in Appendix A.

[The sites of **Connection** of the **Embedded Power Stations** [Distribution Interconnector] to the relevant **Distribution Systems** to which this **Bilateral Embedded Generation Agreement** relates are more particularly described in Appendix A.]

## 4. CHARGING DATE

The date from which **Use of System Charges** shall be payable by the **User** (including **One-Off Charges** where applicable) shall be [ ].

## 5. USE OF SYSTEM

The right to use the **National Electricity Transmission System** shall commence on and **Use of System Charges** shall be payable by the **User** from the date hereof.

## 6. CREDIT REQUIREMENTS

[The amount to be secured by the **User** from [date] is set out in the **Secured Amount Statement** issued from time to time and as varied from time to time in accordance with Section 3 of the **CUSC**.]

## 7. TRANSMISSION ENTRY CAPACITY

- 7.1 The **Transmission Entry Capacity** of [each of the] site[s] of **Connection** is [are] and the[ir] value[s] for the purposes of Paragraph 3.2 of the **CUSC** are specified in Appendix C.
- 7.2 Appendix C Part 3 will set out the **BM Unit Identifiers** of the **BM Units** registered at the **Connection Site** under the **Balancing and Settlement Code**. The **User** will provide **The Company** with the information needed to complete details of these **BM Unit Identifiers** as soon as practicable after the date hereof and thereafter in association with any request to modify the **Transmission Entry Capacity** and **The Company** shall prepare and issue a revised Appendix C incorporating this information. The **User** shall notify **The Company** prior to any alteration in the **BM Unit Identifiers** and **The Company** shall prepare and issue a revised Appendix C incorporating this information.
- 7.3 **The Company** shall monitor the **Users** compliance with its obligation relating to **Transmission Entry Capacity** against the sum of metered volumes of the **BM Units** set out in Part 3 of Appendix C and submitted by the **User** for each **Settlement Period**.

## 8. COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS

The site specific technical conditions applying to [each of] the site[s] of **Connection** are set out in Appendices F1 to F5 to this **Bilateral Embedded Generation Agreement** as modified from time to time in accordance with Paragraph 6.9 of the **CUSC**.

## 9. **[RESTRICTIONS ON AVAILABILITY (power stations with Design Variation only)]**

- 9.1 The design of the connection of the **Distribution System** (to which the **User** is to connect) to the **National Electricity Transmission System** is when studied under Chapter 2 of the **NETS SQSS** a variation to the connection design as provided for in that chapter. It is a condition of the **NETS SQSS** that any variation to the connection design satisfies the criteria set out in paragraphs 2.15 to 2.18 (inclusive) of the **NETS SQSS** and on that basis the following provisions shall apply.
- 9.2 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of the **Outage Conditions** and where practicable the expected **Outage Period**. Such notice shall be issued:
- 9.2.1 In the event that the **Notification of Circuit Outage** relates to a **Planned Outage** on the **National Electricity Transmission System**, where practicable, in accordance with **Grid Code** OC2 requirements; or
- 9.2.2 In the event that the **Notification of Circuit Outage** relates to something other than a **Planned Outage** on the **National Electricity Transmission**

- System** or it relates to a **Planned Outage** on the **National Electricity Transmission System** but it is not practicable for such notice to be in accordance with **Grid Code** OC2 requirements, as soon as reasonably practicable and **The Company** and the **User** shall agree as soon as practicable after the date hereof the method of such notification.
- 9.2.4 **The Company** shall promptly notify the **User** when the **Outage Period** will or has ceased.
- 9.3 **The Company** shall be entitled to revise the **Notification of Circuit Outage** given under Clause 9.2 above at any time.
- 9.4 The **User** will acknowledge receipt of such **Notification of Circuit Outage** and where practicable shall revise its **Output Useable** forecast for the affected **BM Unit** accordingly.
- 9.5 Following such **Notification of Circuit Outage** in accordance with Clause 9.2:
- 9.5.1 [(i) In respect of the **Outage Conditions [ ]**, the **User** shall (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflects the outage of the **Relevant Circuits** and (ii) operate its **Power Station** to reflect the outage of the **Relevant Circuits** for all **Settlement Periods** or parts thereof falling within the **Outage Period**.]
- 9.5.2 In the event that the **User** does not comply with Clauses [ ] above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM Unit** so that the effect is as if the **User** had complied with the relevant Clause, and the provisions of the **Transmission Related Agreement** shall apply.
- 9.6 **The Company** shall issue to the **User** a notice that advises the **User** of the occurrence of an event leading to a reduced circuit capability of **Circuit [ ]** and where practicable the expected **Outage Period**. Such notice (including any revision) shall be issued:
- 9.6.1 In the event that the **Notification of Circuit Restriction** relates to a **Planned Outage** on the **National Electricity Transmission System**, where practicable, in accordance with **Grid Code** OC2 requirements; or
- 9.6.2 In the event that the **Notification of Circuit Restriction** relates to something other than a **Planned Outage** on the **National Electricity Transmission System** or relates to a **Planned Outage** on the **National Electricity Transmission System** but it is not practicable for such notice to be in accordance with **Grid Code** OC2 requirements, as soon as reasonably practicable and **The Company** and the **User** shall agree as soon as practicable after the date hereof the means of such notification.
- 9.6.3 **The Company** shall promptly notify the **User** when the period of reduced circuit capability will or has ceased.

- 9.7 **The Company** shall be entitled to revise the **Notification of Circuit Restriction** given under Clause 9.6 above at any time.
- 9.8 Following such **Notification of Circuit Restriction** in accordance with Clause 9.6:
- 9.8.1 [(i) In respect of the reduction in capability of **Circuit [ ]**, the **User** shall (i) ensure that the **Maximum Export Limit** and **Maximum Import Limit** for the **BM Units** relating to the **Power Station** reflects the reduction in capability of the **Relevant Circuits** and (ii) operate its **Power Station** to reflect the reduction in capability of the **Relevant Circuits** for all **Settlement Periods** or parts thereof falling within the **Outage Period**.]
- 9.8.2 In the event that the **User** does not comply with Clauses [ ] above, **The Company** shall issue **Bid-Offer Acceptances** to the **User** to reduce the export from and/or import to the affected **BM Unit** so that the effect is as if the **User** had complied with the relevant Clause, and the provisions of the **Transmission Related Agreement** shall apply.
- 9.9 Where the **User** becomes aware or is notified by **The Company** of any breach of Clause 9.5 or Clause 9.8 above the **User** shall forthwith take all reasonable steps to comply with the provisions of that Clause.
- 9.10 Where the **User** breaches in whole or in part the provisions of Clause 9.5 or Clause 9.8 above, the **User** shall at **The Company's** request explain to **The Company's** satisfaction (acting reasonably) the reason for the breach and demonstrate to **The Company's** satisfaction that appropriate steps have been taken to ensure that such breach will not reoccur. In the event that the **User** does not do this **The Company** may give notice to the **User** reducing the **Transmission Entry Capacity** of the **Connection Site** and Appendix C of this **Bilateral Embedded Generation Agreement** shall be varied accordingly. This **Transmission Entry Capacity** shall apply until such time as the **User** has explained to **The Company's** reasonable satisfaction the reason for the breach and has demonstrated that appropriate steps have been taken to ensure that such breach will not reoccur and Appendix C shall be automatically amended thereafter to reflect the reinstatement of the **Transmission Entry Capacity**.
- 9.11 If within 3 months of a breach of Clause 9.5 or Clause 9.8 above which entitled **The Company** to take action under Clause 9.10 above, the **User** has still failed to provide the explanation and/or demonstration required by **The Company** under Clause 9.10 then **The Company** may treat such breach as an **Event of Default** for the purposes of Section 5 of the **CUSC** and following such breach may give notice of termination to the **User** whereupon this **Bilateral Embedded Generation Agreement** shall terminate and the provisions of **CUSC** Paragraph 5.4.7 shall apply.



- 9.12 For the avoidance of doubt any **Deenergisation** resulting from the **Outage Conditions** as set out in the relevant **Notification of Restrictions on Availability** constitutes an **Allowed Interruption**.
- 9.13.1 **The Company** and the **User** shall act in accordance with **Good Industry Practice** to minimise so far as reasonably practicable the occurrence and duration of (i) the **Outage Conditions** and (ii) an **Event leading to reduced circuit capability of the relevant circuits**. **The Company** and the **User** will, recognising the effect of the **Outage Conditions** and the reduced circuit capability on the **User's** operations, coordinate the **Outage Conditions** and the reduced circuit capability on the **National Electricity Transmission System** (where they occur as a result of a Planned Outage) and the **User's Plant and Apparatus** in accordance with **Good Industry Practice** and to the extent practicable. **Company** and the **User** acknowledge however that even where **Planned Outages** are coordinated and agreed that **The Company** and/or the **User** may need to cancel or change such **Planned Outage**.
- 9.13.2 **The Company** and the **User** hereby acknowledge and agree that, where practicable, alternative operating arrangements shall be implemented to minimise the effect of **Outage Conditions** [, including, but not limited to [describe potential arrangements]]. In the event that **The Company** and the **User** implement alternative operating arrangements in respect of an **Outage Condition**, the provisions of Clause 9.5 and Clause 9.8 shall not apply to the extent that the alternative operating arrangements mitigate the restrictions (whether in whole or in part) that would otherwise apply to the **User** under this Clause 9 for all **Settlement Periods** or parts thereof falling within the **Outage Period**.
- 9.14 In the event that the **National Electricity Transmission System** conditions subsequently change such that the conditions required for a design variation under the **NETS SQSS** are no longer met then **The Company** shall be entitled to revise Clause 1, this Clause 9 and the **Outage Conditions** as necessary to ensure that such **NETS SQSS** conditions continue to be met.]

## 10. TERM

Subject to the provisions for earlier termination set out in the **CUSC**, this **Bilateral Embedded Generation Agreement** shall continue until all of the **User's** equipment [or **Equipment** for which the **User** is responsible (as defined in Section K of the **Balancing and Settlement Code**] is **Disconnected** from the relevant **Distribution System** at the site[s] of **Connection** as provided in Section 5 of the **CUSC**.

## 11. VARIATIONS

- 11.1 Subject to 11.2 and 11.3, no variation to this **Bilateral Embedded Generation Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.

- 11.2 **The Company** and the **User** shall effect any amendment required to be made to this **Bilateral Embedded Generation Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.
- 11.3 **The Company** has the right to vary Appendix B in accordance with this **Bilateral Embedded Generation Agreement** and the **CUSC** including any variation necessary to enable **The Company** to charge in accordance with the **Charging Statements** or upon any change to the **Charging Statements**.

## 12. GENERAL PROVISIONS

Paragraph 6.10 and Paragraphs 6.12 to 6.26 of the **CUSC** are incorporated into this **Bilateral Embedded Generation Agreement** *mutatis mutandis*.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY \_\_\_\_\_ )  
**[name]** \_\_\_\_\_ )  
 for and on behalf of \_\_\_\_\_ )  
 National Energy System Operator \_\_\_\_\_ )  
 Limited \_\_\_\_\_ )

SIGNED BY )  
**[name]** )  
for and on behalf of )  
[User] )

**APPENDIX A**  
**THE SITE OF CONNECTION**

**1. SITE[s] OF CONNECTION**

**Company :**

**Site[s] of Connection :**

**Owner[s] / Operator[s] of Distribution System:**

**APPENDIX B**  
**CHARGES AND PAYMENT**

Company :

Site of Connection:

1. PART 1: ONE-OFF CHARGES
2. PART 2: MISCELLANEOUS CHARGE(S)

**APPENDIX C**

**TRANSMISSION ENTRY CAPACITY**

**Part 1 Transmission Entry Capacity**

Transmission Entry Capacity (TEC) expressed in average MW taken over a half hour settlement period

|               |           |
|---------------|-----------|
|               | TEC(MW)   |
| Power Station | [       ] |

**Part 2 BM Units comprising Power Station**

|            |                                                |
|------------|------------------------------------------------|
| E_BMU 1    | (Associated with Genset 1)                     |
| E_BMU 2    | (Associated with Genset 2)                     |
| E_BMU 3    | (Associated with Genset 3)                     |
| E_BMU 4    | (Associated with Genset 4)                     |
| E_BMU SD-1 | (Station Demand) if applicable                 |
| E_BMU AD-1 | (Additional Trading Site Demand) if applicable |

**APPENDIX F1**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**AGREED BALANCING SERVICES**

**APPENDIX F2**

**[NOT USED]**

**APPENDIX F2**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**SPECIAL AUTOMATIC FACILITIES**



**APPENDIX F3**

**SITE SPECIFIC TECHNICAL CONDITIONS: PROTECTION**

**AND CONTROL RELAY SETTINGS**

**FAULT CLEARANCE TIMES**

**APPENDIX F4**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**OTHER**

**END OF SCHEDULE 2 - EXHIBIT 2**

## **SCHEDULE 2 EXHIBIT 3**

### **PART 1**

*For use with User's in the categories of (i) Power Stations directly connected to the National Electricity Transmission system, (ii) Embedded Power Stations which are the subject of a Bilateral Embedded Generation Agreement, (iii) Interconnectors directly connected to the National Electricity Transmission system or (iv) where, associated with Distributed Generation, a Distribution System directly connected to the National Electricity Transmission System*

*Please note that as the Connect and Manage Arrangements do not apply to Interconnectors, this construction agreement will be adapted accordingly to reflect that, other than in the context of the Cancellation Charge arrangements, it will be based on the form at PART 2*

*Please note that the Queue Management Process will not be applied and included in (i) Construction Agreements with an Embedded Power Station relating to a Bilateral Embedded Generation Agreement or (ii) in Construction Agreements with the owner/operator of a Distribution System directly connected to the National Electricity Transmission System where the Construction Agreement is required because of a connection to that Distribution System and the Distribution Queue Management Process applies.*

### **INDICATIVE**

**DATED [ ] 20[17]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[ ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**CONSTRUCTION AGREEMENT**

---

## CONTENTS

| <u>Clause</u> | <u>Title</u>                                       |
|---------------|----------------------------------------------------|
| 1             | Definitions, Interpretation and Construction       |
| 2             | Carrying out of the Works                          |
| 3             | Delays                                             |
| 4             | Commissioning Programme and Liquidated Damages     |
| 5             | Approval to Connect/Energise/Become Operational    |
| 6             | Independent Engineer                               |
| 7             | Becoming Operational                               |
| 8             | Compliance with Site Specific Technical Conditions |
| 9             | Provision of Security                              |
| 10            | Event of Default                                   |
| 11            | Termination                                        |
| 12            | Term                                               |
| 13            | CUSC                                               |
| 14            | Disputes                                           |
| 15            | Variations                                         |
| 16            | Distributed Generation                             |
| [17           | Queue Management Process]                          |
| [18           | Distribution Queue Management]                     |
| Appendix B1   | One Off Works                                      |
| Appendix G    | Transmission Connection Asset Works                |
| Appendix H    | Transmission Reinforcement Works                   |
| Appendix I    | User's Works                                       |

|                 |                                                        |
|-----------------|--------------------------------------------------------|
| Appendix J      | Construction Programme                                 |
| Appendix K      | Liquidated Damages                                     |
| Appendix L      | Independent Engineer                                   |
| Appendix MM     | Attributable Works and Key Consents                    |
| Appendix N      | Third Party Works                                      |
| Appendix [O][P] | User's Data/Developer's Data                           |
| Appendix Q      | Queue Management Process – User Progression Milestones |

**THIS CONSTRUCTION AGREEMENT** is made on the [ ] day of [ ] 20[17]

**BETWEEN**

- (1) **The company** registered in England with number 11014226 (**"The Company"** (**"The Company"**, which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (**"User"**, which expression shall include its successors and/or permitted assigns)

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** has prepared a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) The **User** has applied for [connection to] [and use of] [modification to its connection to] [or use of] the **National Electricity Transmission System** and pursuant to condition E12 of the **ESO Licence**, **The Company** is required to offer terms in accordance with the **CUSC** in this respect **or** [specific recital to reflect that the **Construction Agreement** is an amendment of an existing signed offer pursuant to the **CUSC** amending documents]
- (C) **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties).
- (D) Certain works are required as part of this offer as set out in this **Construction Agreement**.
- (E) This **Construction Agreement** is entered into pursuant to the terms of the **CUSC**.
- (F) This **Construction Agreement** has been prepared under the **Connect and Manage Arrangements** [and is subject to the **Queue Management Process**].
- (G) This **Construction Agreement** is a [**Gate 1 Agreement**][**Gate 2 Agreement**].

**NOW IT IS HEREBY AGREED** as follows:

## 1.1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** and in the Bilateral Connection Agreement have the same meanings, interpretations or constructions in this **Construction Agreement**.

|                                           |                                                                                                                                                           |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Attributable Works"                      | those <b>Construction Works</b> identified as such in accordance with the <b>User Commitment Methodology</b> and which are set out in Appendix MM Part 1. |
| "Authority"                               | as defined in the <b>CUSC</b> .                                                                                                                           |
| "Bilateral Connection Agreement"          | the <b>Bilateral Connection Agreement</b> entered into between the parties on even date herewith.                                                         |
| "Bilateral Embedded Generation Agreement" | the <b>Bilateral Embedded Generation Agreement</b> entered into between the parties on even date herewith.                                                |
| "Cancellation Charge"                     | as calculated in accordance with the <b>User Commitment Methodology</b> .                                                                                 |

"Charging Date"

the date upon which the **Construction Works** are first **Commissioned** and available for use by the User or if the **Independent Engineer** before, on or after the **Commissioning Programme Commencement Date** shall have certified in writing that the **Transmission Connection Assets**, are completed to a stage where The Company could commence commissioning and by such date the **User's Works** shall not have been so certified then the date falling [ ] days after the date of such certification, provided that the **Transmission Reinforcement Works** are **Commissioned** and **Network Options Assessment Works** are completed as at that date. In the event that the **Transmission Reinforcement Works** are not so **Commissioned** and/or the **Network Options Assessment Works** are not so completed the **Charging Date** shall be the date on which they are **Commissioned** and/or completed as appropriate. *[Exclude **Network Options Assessment Works** from this definition if they are not also Enabling Works].*

"Commissioning Programme Commencement Date"

the date specified in the **Construction Programme** for the commencement of the **Commissioning Programme** or any substituted date fixed under the terms of this **Construction Agreement**

"Commissioning Programme"

the sequence of operations/tests necessary to connect the **User's Works** and the **Transmission Connection Asset Works** to the **National Electricity Transmission System** for the purpose of making the **User's Works** available for operation to be determined pursuant to Clause 2.10 of this **Construction Agreement**.

"Completion Date"

[ ] or such other date as may be agreed in terms of this **Construction Agreement** for completion of the **Construction Works**.



|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Connect and Manage Derogation" | the temporary derogation from the <b>NETS SQSS</b> available to <b>The Company</b> under condition E7 of the <b>ESO Licence</b> and/or the <b>Relevant Transmission Licensee</b> under Standard Condition D3 of its transmission licence;                                                                                                                                                                                                                                          |
| "Connected Planning Data"       | data required pursuant to the <b>Planning Code</b> which replaces data containing estimated values assumed for planning purposes by validated actual values and updated estimates for the future and by updated forecasts for forecast data items.                                                                                                                                                                                                                                 |
| "Consents"                      | <p>in relation to any <b>Works</b>:-</p> <ul style="list-style-type: none"> <li>(a) all such planning and other statutory consents; and</li> <li>(b) all wayleaves, easements, rights over or interests in land or any other consent; or</li> <li>(c) permission of any kind as shall be necessary for the construction of the <b>Works</b> and for commencement and carrying on of any activity proposed to be undertaken at or from such <b>Works</b> when completed.</li> </ul> |
| "Construction Programme"        | the agreed programme for the <b>Works</b> to be carried out by or on behalf of <b>The Company</b> and the <b>User</b> set out in detail in Appendix [J] to this <b>Construction Agreement</b> or as amended from time to time pursuant to Clauses 2.3 and 3.2 of this <b>Construction Agreement</b> .                                                                                                                                                                              |
| "Construction Site"             | the site where the <b>Transmission Connection Asset Works</b> are being undertaken by or on behalf of <b>The Company</b> ;                                                                                                                                                                                                                                                                                                                                                         |
| "Construction Works"            | the <b>Transmission Connection Asset Works, Enabling Works, Network Options Assessment Works</b> and <b>One Off Works</b> and such additional works as are required in order to comply with any                                                                                                                                                                                                                                                                                    |

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | relevant <b>Consents</b> relating to any such works but excluding for the avoidance of doubt any <b>Third Party Works</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| "Dispute Resolution Procedure" | the procedure for referral to arbitration set out in Paragraph 7.4 of the <b>CUSC</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Enabling Works"               | those <b>Transmission Reinforcement Works</b> which are specified in Appendix H Part 1 to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Event of Default"             | any of the events set out in Clause 10 of this <b>Construction Agreement</b> as constituting an event of default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Gate 2 Date"                  | means the date on which the last of the conditions at Clause 1.2 of this <b>Construction Agreement</b> are satisfied - <i>[include only in Gate 1 Agreements with Reservation]</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Independent Engineer"         | <p>the engineer specified in Appendix L to this <b>Construction Agreement</b>. Provided that:-</p> <ul style="list-style-type: none"> <li>(a) where the parties fail to agree on a suitable engineer within 120 days of the date of this <b>Construction Agreement</b>; or</li> <li>(b) where any <b>Independent Engineer</b> appointed from time to time shall fail, refuse or cease to act in the capacity set out herein and no substitute engineer of suitable standing and qualification can be agreed by the parties within 30 days;</li> </ul> <p>then such engineer as the President of the Institution of Electrical Engineers shall, on the application of either party, nominate shall be the <b>Independent Engineer</b>.</p> |

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Installed Capacity”               | the installed capacity provided in the <b>Original Red Line Boundary</b> and set out in Appendix [O][P].                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| “Key Consents”                     | those <b>Consents</b> required in respect of the <b>[User’s/Developer’s] Power Station</b> which <b>The Company</b> has identified as such and which are set out in Appendix MM Part 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| “Liquidated Damages”               | the sums specified in or calculated pursuant to Appendix K to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| “Network Options Assessment Works” | the works set out in the <b>Networks Options Assessment</b> report prepared by <b>The Company</b> pursuant to C13 of the <b>ESO Licence</b> and issued by <b>The Company</b> in [ ] which in <b>The Company’s</b> reasonable opinion are required to be completed before the <b>Completion Date</b> to ensure that the <b>National Electricity Transmission System</b> complies with the requirements of condition E7 of the <b>ESO Licence</b> and Standard Condition D3 of any <b>Relevant Transmission Licensee’s</b> transmission licence prior to the <b>Connection</b> of the <b>User’s Equipment</b> in terms of Clause 7.1 [or 7.2] of this <b>Construction Agreement</b> . |
| “One Off Works”                    | the works described in Appendix B1 to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| “Reservation Expiry Date”          | [ ] being the date as bilaterally negotiated between <b>The Company</b> and the <b>User</b> [and which may be extended by agreement between the parties] on which the <b>Reservation</b> expires. <i>[include only in Gate 1 Agreements with Reservation]</i>                                                                                                                                                                                                                                                                                                                                                                                                                       |
| “Term”                             | the term of this <b>Construction Agreement</b> commencing on the date hereof and ending in accordance with Clause 12.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Third Party Works"                   | the works to be undertaken on assets belonging to a party other than a Relevant Transmission Licensee and the <b>User</b> to enable The Company to provide or as a consequence of the connection to and/or use of the <b>National Electricity Transmission System</b> by the <b>User</b> as specified in Appendix N;                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Transmission Connection Assets"      | the assets specified in Appendix A to the <b>Bilateral Connection Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Transmission Connection Asset Works" | the works necessary for construction and installation of the <b>Transmission Connection Assets</b> at the <b>Connection Site</b> specified in Appendix G to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "Transmission Reinforcement Works"    | those works other than the <b>Transmission Connection Asset Works Network Options Assessment Works</b> and <b>One Off Works</b> , which in the reasonable opinion of <b>The Company</b> (and in the absence of the <b>Connect and Manage Derogation</b> ) are all necessary to extend or reinforce the <b>National Electricity Transmission System</b> to ensure that the <b>National Electricity Transmission System</b> complies with the requirements of condition E7 of the <b>ESO Licence</b> and Standard Condition D3 of any <b>Relevant Transmission Licensee's</b> transmission system and which are specified in Appendix H to this <b>Construction Agreement</b> , where Part 1 is the <b>Enabling Works</b> and Part 2 is the <b>Wider Transmission Reinforcement Works</b> . |
| "Trigger Date"                        | [date] as identified in accordance with the <b>User Commitment methodology</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| "User Progression Milestones"         | the milestones (applied in accordance with <b>CUSC</b> Section 16) for the <b>User's</b> project as set out in Appendix Q of this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

“User’s Works” those works necessary for installation of the **User’s Equipment** which are specified in Appendix I to this **Construction Agreement**.

“Wider Transmission Reinforcement Works” those **Transmission Reinforcement Works** which are specified in Appendix H Part 2 to this **Construction Agreement** where Part 2.1 is works required for the **User** and Part 2.2 is works required for wider system reasons.

“Works” the **Construction Works** and the **User’s Works**.

*Users in the capacity of a Directly Connected Power Station or Embedded Power Station (other than those who are a BELLA) insert the following*

[Notice of Intent the notice issued by **The Company** pursuant to Clause 7.4.4.

Notice of Reduction the notice issued by **The Company** pursuant to Clause 7.4.7 including a revised Appendix C specifying the revised **Transmission Entry Capacity**.

Preliminary Request the request issued by **The Company** pursuant to Clause 7.4.1.

Reduction Fee the fee payable by the **User** to **The Company** in respect of the agreement to vary issued pursuant to Clause 7.4.9 such fee being calculated on the same basis as that set out in the **Charging Statements** as payable on a payment of actual costs basis in respect of a **Modification Application**..

*Users in the capacity of a Directly Connected Distribution System where works are required in respect of a BELLA or a Relevant Embedded Power Station insert the following (and where the Construction Agreement relates to more than one, for each of the Developers)*

|                     |                                                                                                                                                                                                                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [Developer Capacity | the MW figure [ <i>for export</i> ] specified in the <b>Developer's Data</b> .                                                                                                                                                                                                                                             |
| Developer           | <i>Insert name address and registered number</i> who is party to a <b>BELLA</b> with <b>The Company</b> or the subject of the <b>Transmission Evaluation Application</b> .                                                                                                                                                 |
| Developer's Data    | the information provided by the [ <b>Developer-BELLA</b> ] [ <b>User</b> in respect of the <b>Developer</b> in the <b>Transmission Evaluation Application-relevant embedded power station</b> ] and set out in Appendix [P].                                                                                               |
| Developer's Project | the connection of a [xMW wind farm\power station to the <b>User's Distribution System</b> at [ ]]                                                                                                                                                                                                                          |
| Notice of Intent    | the notice issued by <b>The Company</b> pursuant to Clause 7.4.4.                                                                                                                                                                                                                                                          |
| Notice of Reduction | the notice issued by <b>The Company</b> pursuant to Clause 7.4.7 revising the <b>Developer's Capacity</b> for this <b>Construction Agreement</b> and Appendix A to the <b>BELLA</b> .                                                                                                                                      |
| Preliminary Request | the request issued by <b>The Company</b> pursuant to Clause 7.4.1.                                                                                                                                                                                                                                                         |
| Reduction Fee       | the fee payable by the <b>User</b> to <b>The Company</b> in respect of the agreement to vary issued pursuant to Clause 7.4.9 such fee being calculated on the same basis as that set out in the <b>Charging Statements</b> as payable on a payment of actual costs basis in respect of a <b>Modification Application</b> . |

**[A Gate 1 Agreement with/without Reservation only]**

## **1.2 GATED APPLICATION AND OFFER PROCESS – GATE 1 CONDITIONAL CLAUSE [AND RESERVATION]**

1.2.1 The rights and obligations of the **User** and **The Company** under this **Construction Agreement** [and the **[Bilateral Connection Agreement]** **[Bilateral Embedded Generation Agreement]**] are conditional on:

1.2.1.1 the **User** making a **Gate 2 Application**;

1.2.1.2 the **Gate 2 Application** meeting the **Gate 2 Criteria**; and

1.2.1.3 the **User** accepting the terms of the **[Gate 2 Offer]**; *[and*

*in the case of a BEGA,* 1.2.1.4 the owner/operator of the **Distribution System** accepting the related **Gate 2 Offer**.]

1.2.2 The parties agree and acknowledge that until the **Gate 2 Date**, the rights and obligations of each party pursuant to this **Construction Agreement** (other than this Clause 1.2 and Clause 13 – *edit to include any other provisions agreed between the parties as useful to include*) and the **[Bilateral Connection Agreement]** **[Bilateral Embedded Generation Agreement]** shall be suspended.

1.2.3 [The parties further agree that the information provided for the purposes of this **Gate 1 Agreement** and set out in the Appendix [O][P] to this **Construction Agreement** being a proposed **[Connection Site]** [Site of Connection], **Completion Date** and requested **[Transmission Entry Capacity – edit for other capacity types]** are indicative only prior to the **Gate 2 Date** and shall not be binding on the parties or confer any commitment by **The Company** to the **[Connection Site]** [Site of Connection], **Completion Date** or requested **[Transmission Entry Capacity – add other relevant capacity refs as appropriate]** and any reliance on them for any purpose prior to the **Gate 2 Date** is at the **User's** risk- *no reservation*]. [The parties further agree that the **[Connection Site]** [Site of Connection] and **Completion Date** and **[Transmission Entry Capacity-add other relevant capacity refs as appropriate]** as set out in Appendix [O][P] to this **Construction Agreement** have been **Reserved** for the purposes of this connection/use of system and any **Gate 2 Offer** will reflect this position and the requested **[Transmission Entry Capacity- add other relevant capacity refs as appropriate]** provided that the **Gate 2 Application** is made prior to the **Reservation Expiry Date** and the **Gate 2 Offer** is accepted- *Reservation only*].

- 1.2.4 At any time prior to the **Gate 2 Date**, the **User** shall have the right to terminate this **Connection Agreement** by written notice to **The Company** without any liability for any **Cancellation Charge**. This right to terminate shall expire with effect from the **Gate 2 Date**.
- 1.2.5 With effect from the **Gate 2 Date** the provisions of this **Construction Agreement**, as amended by the **Gate 2 Offer** by agreement of the parties, shall be in full force and effect.

## **2. CARRYING OUT OF THE WORKS**

- 2.1** Forthwith following the date of this **Construction Agreement** the **User** shall agree with the **Relevant Transmission Licensee** the **Safety Rules** and **Local Safety Instructions** to apply during the **Construction Programme** and **Commissioning Programme**. Failing agreement within three months of the date of this **Construction Agreement** the matter shall be referred to the **Independent Engineer** for determination in accordance with Clause 6 of the **Construction Agreement**.
- 2.2** Subject to Clauses 2.3 and 2.4 of this **Construction Agreement** forthwith following the date of this **Construction Agreement** **The Company** shall use its best endeavours to obtain in relation to the **Construction Works**, and the **User** shall use its best endeavours to obtain in relation to the **User's Works**, all **Consents**. Each shall give advice and assistance to the other to the extent reasonably required by the other in the furtherance of these obligations. Further, each party shall, so far as it is legally able to do so, grant to the other or the **Relevant Transmission Licensee**, all such wayleaves, easements, servitude rights, rights over or interests (but not estates as regards land in England and Wales and not heritable or leasehold interests as regards land in Scotland) in land or any other consents reasonably required by the other or the **Relevant Transmission Licensee** in order to enable the **Works** to be expeditiously completed and to enable that other to carry out its obligations to the other under this **Construction Agreement** and in all cases subject to such terms and conditions as are reasonable.
- 2.3** The following additional provisions shall apply in respect of the **Consents** and **Construction Works**:-
- 2.3.1** All dates specified in this **Construction Agreement** are subject to **The Company** obtaining **Consents** for the **Construction Works** in a form acceptable to it within the time required to carry out the **Construction Works** in accordance with the **Construction Programme**.
- 2.3.2** In the event of:-
- (a) the **Consents** not being obtained by the required date; or



- (b) the **Consents** being subject to conditions which affect the dates;  
or
- (c) **The Company** wishing to amend the **Construction Works** to facilitate the granting of the **Consents**,

**The Company** shall be entitled to revise the **Construction Works** (and as a consequence Appendix A to the **Bilateral Connection Agreement**) and all dates specified in this **Construction Agreement** and the charges specified in Appendix B to the **Bilateral Connection Agreement**. For the avoidance of doubt such revisions shall be at **The Company's** absolute discretion and the consent of the **User** is not required.

- 2.3.3** The **User** shall be regularly updated by **The Company** in writing or by such other means as the parties may agree as to progress made by **The Company** from time to time in the obtaining of relevant **Consents** pursuant to its obligations under Clause 2.2 or 2.3 of this **Construction Agreement**.
- 2.4** Paragraphs 11.2.3 to 11.2.5 of the **CUSC** relating to **Consents** shall apply to the **Construction Agreement** as if set out here in full.
- 2.5** Prior to the commencement of the **Transmission Connection Asset Works** the **User** shall have the right to terminate this **Construction Agreement** upon giving not less than 7 (seven) days notice in writing to **The Company**. In the event of the **User** terminating this **Construction Agreement** in terms of this Clause 2.5 the provisions of Clause 11 shall apply].
- 2.6** If the **User** fails to obtain all **Consents** for the **User's Works** having complied with the obligations in Clause 2.2 of this **Construction Agreement** the obligation on the **User** to complete the **User's Works** shall cease and the **User** may by written notice to **The Company** terminate this **Construction Agreement** and the provisions of Clause 11 shall apply
- 2.7** Both parties shall be entitled to contract or sub-contract for the carrying out of their respective parts of the **Works** (which in the case of **The Company** shall include work carried out by a **Relevant Transmission Licensee** or its contractors or sub-contractors). The **User** or any contractor on its behalf shall be responsible for commencing and for carrying out the **User's Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme** and **The Company** or any contractor on its behalf shall be responsible for commencing and carrying out the **Construction Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme**.
- 2.8** The parties shall continuously liaise throughout the **Construction Programme** and **Commissioning Programme** and each shall provide to the other all information relating to in the case of the **User** the **User's Works** and in the case

of **The Company** the **Construction Works** reasonably necessary to assist the other in performance of that other's part of the **Works**, and shall use all reasonable endeavours to coordinate and integrate their respective part of the **Works**. There shall be on-site meetings between representatives of the parties at intervals to be agreed between the parties. Each party shall deliver to the other party a written report of progress during each calendar quarter within 7 days of the end of that quarter.

*Users in the capacity of a Directly Connected Distribution System where works are required in respect of a BELLA or a Relevant Embedded Power Station insert the following*

- [“**2.8** The parties shall continuously liaise throughout the **Construction Programme** and **Commissioning Programme** and each shall provide to the other all information relating to its own **Works** reasonably necessary to assist the other in performance of that other's part of the **Works**, and shall use all reasonable endeavours to coordinate and integrate their respective part of the **Works**. There shall be on-site meetings between representatives of the parties at intervals to be agreed between the parties. The **User** shall also provide to **The Company** such information as **The Company** shall reasonably request and which the **User** is entitled to disclose in respect of the **Developer's Project**. Each party shall deliver to the other party where requested a written report of progress during each calendar quarter (including in the case of the **User** progress on the **Developer's Project** to the extent that the **User** has such information and is entitled to disclose it) within 7 days of the end of that quarter.”]
- 2.9** During the period of and at the times and otherwise as provided in the **Construction Programme** and the **Commissioning Programme** **The Company** shall allow the **User**, its employees, agents, suppliers, contractors and sub-contractors necessary access to the **Construction Site** and the **User** shall allow the **Relevant Transmission Licensee** and in either case their employees, agents, suppliers, contractors and sub-contractors necessary access to its site to enable each to carry out the **Transmission Connection Asset Works** and **One Off Works** or **User's Works** but not so as to disrupt or delay the construction and completion of the other's **Works** on the said sites or the operation of the other's **Plant** and **Apparatus** located thereon, such access to be in accordance with any reasonable regulations relating thereto made by the site owner or occupier.
- 2.10** Not later than six months prior to the **Commissioning Programme Commencement Date** **The Company** shall provide the **User** with a draft **Commissioning Programme** for the **Commissioning** of the **Transmission Connection Assets**, and the **User's Equipment**. The **User** shall, as quickly as practicable and in any event within three months of receipt thereof, determine whether or not to approve the proposed **Commissioning Programme** (which approval shall not be unreasonably withheld or delayed) and shall within such three month period either notify **The Company** of its approval or, in the event that the **User** reasonably withholds its approval, notify

**The Company** of any changes or variations to the proposed commissioning programme recommended by the **User**. If **The Company** does not accept such changes or variations submitted by the **User** any dispute shall be referred to the **Independent Engineer** for determination. The **Commissioning Programme** agreed between the parties or determined by the **Independent Engineer** as the case may be shall be implemented by the parties and their sub-contractors in accordance with its terms.

- 2.11** If at any time prior to the **Completion Date** it is necessary for **The Company** or **The Company** in its reasonable discretion wishes to make any addition to or omission from or amendment to the **Transmission Connection Asset Works** and/or **Transmission Reinforcement Works** and/or the **One Off Works** and/or the **Third Party Works** **The Company** shall notify the **User** in writing of such addition, omission or amendment and Appendices [B1 (**One Off Works**), G (**Transmission Connection Asset Works**) H (**Transmission Reinforcement Works**), MM (**Attributable Works**) and N (**Third Party Works**)] to this **Construction Agreement** and consequently Appendices [A (**Transmission Connection Assets**) and B (**Connection Charges and One Off Charges**)] to the associated **Bilateral Connection Agreement** shall be automatically amended to reflect the change. Provided that where a **User** has elected for the **Actual Attributable Works Cancellation Charge** to be based on the **Fixed Attributable Works Cancellation Charge** the **Attributable Works** can only be changed after the **Trigger Date** as provided for in **CUSC** Section 15.
- 2.12** [The **User** shall apply to the Secretary of State for Trade and Industry as part of its application under Section 36 of the Act for its generating station, for deemed planning permission in relation to the substation forming part of the **Transmission Connection Asset Works**. The **User** shall use its best endeavours to procure that the said deemed planning permission is so obtained. **The Company's** obligations under Clause 2.2 of this **Construction Agreement** shall not require it to obtain planning consent for the said substation unless and until the relevant Secretary of State shall for whatever reason refuse to deem the grant of planning permission in respect of the same. The **User** shall liaise with **The Company** as to its construction and operational requirements and shall ensure that the said application meets **The Company's** requirements. **The Company** shall provide the **User** with all information reasonably required by it in relation to the application and the **User** shall ensure that all requirements of **The Company** are incorporated in the application for deemed planning consent.]
- 2.13** [The **Enabling Works** are conditional on British Energy Generation Limited and/or Magnox Electric plc (as the case may be) granting approval to the carrying out of the **Construction Works** in terms of the Nuclear Site Licence Provisions Agreement being an agreement dated 30 March 1990 between **The Company** and Nuclear Electric plc (now called Magnox Electric plc) and an agreement dated 31 March 1996 between **The Company** and British Energy Generation Limited (and described as such). In the event of British Energy

Generation Limited and/or Magnox Electric plc (as the case may be) not granting approval **The Company** shall be entitled to change the **Construction Works**, the **Construction Programme** and all dates specified in this **Construction Agreement**.]

**2.14** [It is hereby agreed and declared for the purposes of the Construction (Design and Management) Regulations 1994 that the **User** is the only client in respect of the **User's Works** and **The Company** is the only client in respect of the **Construction Works** and **Wider Transmission Reinforcement Works** and each of the **User** and **The Company** shall accordingly discharge all the duties of clients under the said **Regulations**.]

**2.15** [**The Company** and the **User** hereby agree and acknowledge that this **Construction Agreement** is not to be treated as a construction contract within the meaning of section 104 of the Housing Grants, Construction and Regeneration Act 1996 and sections 104 to 113 of the said Act shall have no application either to the **Construction Works** or the **User's Works** and the parties' rights and obligations with regard to matters of dispute resolution and payment procedures are as expressly set out herein.

## **2.16 Third Party Works**

**2.16.1** The **User** shall be responsible for carrying out or procuring that the **Third Party Works** are carried out and shall carry them out or procure that they are carried out in accordance with the timescales specified in the **Construction Programme**. The **User** shall confirm to **The Company** or, where requested to do so by **The Company**, provide confirmation from the third party that the **Third Party Works** have been completed.

**2.16.2** Given the nature of these works it may not be possible to fully identify the works required or the third parties they relate to at the date hereof. Where this is the case **The Company** shall, subject to 2.16.3 below, advise the **User** as soon as practicable and in any event by [ ] of the **Third Party Works** and shall be entitled to revise Appendix N and as a consequence the **Construction Programme** as necessary to reflect this.

**2.16.3** Where **Third Party Works** are likely to be **Modifications** required to be made by another user(s) ("the "**First User(s)**") as a consequence of **Modifications** to the **National Electricity Transmission System** to be undertaken by **The Company** under this **Construction Agreement** **The Company** shall as soon as practicable after the date hereof issue the notification to such **First User's** in accordance with **CUSC** Paragraph 6.9.3.1. The **User** should note its obligations under **CUSC** Paragraph 6.10.3 in respect of the costs of any **Modifications** required by the **First User(s)**.

**2.16.4** In the event that the **Third Party Works** have not been completed by the date specified in the **Construction Programme** or, in **The Company's** reasonable opinion are unlikely to be completed by such date, **The Company** shall be

entitled to revise the **Construction Programme** as necessary to reflect such delay and also, where **The Company** considers it necessary to do so, shall be entitled to revise the **Construction Works** (and as a consequence Appendices A and B to the **Bilateral Connection Agreement**). For the avoidance of doubt such revisions shall be at **The Company's** absolute discretion and the consent of the **User** is not required. Further, in the event that the **Third Party Works** have not been completed by [ ] **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User** and in this event the provisions of Clause 11 of this **Construction Agreement** shall apply.

## 2.17 Wider Transmission Reinforcement Works

**The Company** shall keep the **User** advised as to progress on the **Wider Transmission Reinforcement Works** and shall include information on these in the reports produced pursuant to Clause 2.8.

## 3. DELAYS

- 3.1 If either party shall have reason to believe that it is being delayed or will be delayed in carrying out that party's **Works** for any reason (whether it is one entitling it to the fixing of a new date under Clause 3.2 of this **Construction Agreement** or not) it shall forthwith notify the other party in writing of the circumstances giving rise to the delay and of the extent of the actual and/or anticipated delay.
- 3.2 If prior to the **Completion Date** a party (in this Clause 3.2 "the **Affected Party**") shall be delayed in carrying out any of the **Affected Party's Works** (including their commissioning) by reason of any act, default or omission on the part of the other Party (in this Clause the "**Defaulting Party**") or the **Defaulting Party's** employees, agents, contractors or sub-contractors or by reason of an event of **Force Majeure**, the **Affected Party** shall be entitled to have such later date or dates fixed as the **Commissioning Programme Commencement Date** and/or (as the case may be) the **Completion Date** as may be fair and reasonable in the circumstances provided that it shall have notified the **Defaulting Party** in writing of such act, default or omission or event of **Force Majeure** within 28 days of it becoming aware of the occurrence giving rise to the delay together with an estimate of the proposed delay which it will cause the **Affected Party**. In the event of a dispute between the parties over what is or are any fair and reasonable new date or dates to be fixed in the circumstances this shall be promptly referred to and determined by the **Independent Engineer**. Once the new date or dates are fixed the **Construction Programme** and/or **Commissioning Programme** shall be deemed automatically amended as appropriate.

#### 4. COMMISSIONING PROGRAMME AND LIQUIDATED DAMAGES

- 4.1 Each party shall give written notice to the other declaring its readiness to commence the **Commissioning Programme** when this is the case.
- 4.2 The **Commissioning Programme** shall commence forthwith once both parties have given written notice to the other under Clause 4.1.
- 4.3 The **Works** shall be deemed to have been **Commissioned** on the date that the **Independent Engineer** certifies in writing to that effect.
- 4.4 In the event that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date** **The Company** (if and to the extent that it is responsible for delayed commissioning beyond the **Commissioning Programme Commencement Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date**. It is declared and agreed that such **Liquidated Damages** shall cease to be payable in respect of any period after the date of actual commencement of the **Commissioning Programme**.
- 4.5 In the event that the actual date on which the **Construction Works** are **Commissioned** is later than the **Completion Date** **The Company** (if and to the extent that it is responsible for delayed completion beyond the **Completion Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date on which the **Construction Works** are **Commissioned** is later than the **Completion Date**. It is hereby agreed and declared that such **Liquidated Damages** shall cease to be payable in respect of any period after completion of the **Construction Works**.
- 4.6 **Liquidated Damages** payable under Clauses 4.4 and 4.5 of this **Construction Agreement** shall accumulate on a daily basis but shall be payable calendar monthly. On or before the 15th day of each month the party entitled to receive the payment of **Liquidated Damages** shall send to the other party a statement of the **Liquidated Damages** which have accrued due in the previous calendar month. The party receiving such statement shall in the absence of manifest error pay the **Liquidated Damages** shown on the statement within 28 days of the date upon which the statement is received.
- 4.7 Without prejudice to and in addition to the obligation of the **User** pursuant to Clause 2.4 of this **Construction Agreement**, the payment or allowance of **Liquidated Damages** pursuant to this Clause 4 shall be in full satisfaction of **The Company's** liability for failure to perform its obligations by the **Commissioning Programme Commencement Date** and/or the **Completion Date** as appropriate.

- 4.8 In the event that the **User** shall have failed, in circumstances not entitling it to the fixing of a new date as the **Commissioning Programme Commencement Date** pursuant to Clause 3.2, to complete the **User's Works** by [ ] to a stage where the **User** is ready to commence the **Commissioning Programme**, **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User** and the provisions of Clause 11 shall apply.

## 5. APPROVAL TO CONNECT/ENERGISE/BECOME OPERATIONAL

- 5.1 Not later than 4 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.7 and 7.4.10 and likewise the **Site Common Drawings** required under CC 7.5.2 and 7.5.4 and, if necessary, **Gas Zone Diagrams** referred to in CC 7.4.9 and 7.4.12.
- 5.2 Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.8 and 7.4.11 and likewise the **Site Common Drawings** required under CC 7.5.3 and 7.5.5.
- 5.3 Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties:-
- 5.3.1 each party shall submit to the other data within its possession needed to enable the completion of Appendices F3 and F4 to the **Bilateral Connection Agreement**; and
- 5.3.2 the **User** shall submit to **The Company** evidence satisfactory to **The Company** that the **User's Equipment** complies or will on completion of the **User's Works** comply with Clause 8 of this **Construction Agreement** and Paragraphs [1.3.3(b), 2.9 and 6.7] of the **CUSC**.
- 5.4 Not later than 8 weeks prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties each party shall submit to the other:
- 5.4.1 for the **Connection Site** information to enable preparation of **Site Responsibility Schedules** complying with the provisions of Appendix 1 to the **Connection Conditions** together with a list of managers who have been duly authorised by the **User** to sign such **Site Responsibility Schedules** on the **User's** behalf;

- 5.4.2** written confirmation as required under CC.5.2(g) that the list of **Safety Co-ordinators** are authorised and competent [and a list of persons appointed pursuant to **Grid Code** CC5.2(m)];
- 5.4.3** a list of the telephone numbers for the facsimile machines referred to in CC6.5.9.
- 5.4.4** Confirmation of access to the **Electronic Communications Platform** referred to in CC6.5.9 upon access being provided by **The Company**.
- 5.5** If directly connected to the **National Electricity Transmission System** not later than 3 months prior to the expected **Commissioning Programme Commencement Date** each party shall submit to the other a statement of readiness to complete the **Commissioning Programme** in respect of the **Works** and the statement submitted by the **User** shall in addition contain relevant **Connected Planning Data** and a report certifying to **The Company** that, to the best of the information, knowledge and belief of the **User**, all relevant **Connection Conditions** applicable to the **User** have been considered and complied with. If **The Company** considers that it is necessary, it will require this latter report to be prepared by the **Independent Engineer**. The report shall incorporate if requested by **The Company** type test reports and test certificates produced by the manufacturer showing that the **User's Equipment** meets the criteria specified in CC6.
- 5.6** If embedded not later than 3 months prior to the **Charging Date** or by such other time as may be agreed between the **Parties** the **User** shall submit to **The Company** a statement of readiness to use the **National Electricity Transmission System** together with **Connected Planning Data** and a report certifying to **The Company** that, to the best of the information, knowledge and belief of the **User**:-
- (i) all relevant **Connection Conditions** applicable to the **User** have been considered;
  - (ii) CC 6 insofar as it is applicable to the **User** has been complied with; and
  - (iii) the site-specific conditions set out in Appendices [F1, F3, F4] and [F5] to the **Bilateral Embedded Generation Agreement** have been complied with.

If **The Company** considers that it is necessary, it will require this report to be prepared by the **Independent Engineer**. The report shall incorporate if requested by **The Company** type test reports and test certificates produced by the manufacturer showing that the **User's Equipment** meets the criteria.



## 6. INDEPENDENT ENGINEER

The parties agree and shall procure that the **Independent Engineer** shall act as an expert and not as an arbitrator and shall decide those matters referred or reserved to them under this **Construction Agreement** by reference to **Good Industry Practice** using their skill, experience and knowledge and with regard to such other matters as the **Independent Engineer** in their sole discretion considers appropriate. All references to the **Independent Engineer** shall be made in writing by either party with notice to the other being given contemporaneously as soon as reasonably practicable and in any event within 14 days of the occurrence of the dispute to be referred to the **Independent Engineer**. The parties shall promptly supply the **Independent Engineer** with such documents and information as they may request when considering such question. The **Independent Engineer** shall use their best endeavours to give their decision upon the question before them as soon as possible following its referral to them. The parties shall share equally the fees and expenses of the **Independent Engineer**. The parties expressly acknowledge that submission of disputes for resolution by the **Independent Engineer** does not preclude subsequent submission of disputes for resolution by arbitration as provided for in the **Dispute Resolution Procedure**. Pending any such submission the parties shall treat the **Independent Engineer's** decision as final and binding.

## 7. BECOMING OPERATIONAL

- [7.1] If directly connected to the **National Electricity Transmission System** **The Company** shall connect and **Energise** the **User's Equipment** at the **Connection Site** during the course of and in accordance with the **Commissioning Programme** and thereafter upon compliance by the **User** with the provisions of Clause 5 and provided (1) the **Construction Works** excluding the **Network Options Assessment Works** [delete **Network Options Assessment Works** under the Connect and Manage Arrangements if these are not Enabling Works] shall be **Commissioned** and (2) [the **Network Options Assessment Works** and **Third Party Works** shall be completed **The Company** shall forthwith notify the **User** in writing that the **Connection Site** shall become **Operational**.] or
- [7.2] If **Embedded** upon compliance by the **User** with the provisions of Clauses 5.1, 5.2 and 5.3 and subject, if **The Company** so requires, to the Enabling Works [and/or works for the **Modification**] being carried out and/or the [New] **Connection Site** being **Operational** (any or all as appropriate) **The Company** shall forthwith notify the **User** ("**Operational Notification**") in writing that it has the right to use the **National Electricity Transmission System**. It is an express condition of this **Construction Agreement** that in no circumstances, will the **User** use or operate the **User's Equipment** without receiving the **Operational Notification** from **The Company**.]
- 7.3 If, on completion of the **User's Works** in accordance with the terms of this **Construction Agreement** the **Registered Capacity** of the **User's Equipment** is less than [ ]MW, **The Company** shall automatically have the right to amend

Clause 7 and Appendix C to the **Bilateral Connection Agreement** to reflect the actual **Registered Capacity** of the **User's Equipment**.

*Users in the capacity of a Directly Connected Power Station or Embedded Power Station (other than those who are a BELLA) insert the following*

#### **[7.4 Transmission Entry Capacity Reduction**

- 7.4.1** If, at any time prior to the **Completion Date** **The Company** reasonably believes from data provided by the **User** to **The Company**, the reports provided by the **User** pursuant to Clause 2.8 and Clause 5 of this **Construction Agreement**, the commissioning process under the **Construction Agreement** or otherwise that the **User's Equipment** will be such that it will not be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall advise the **User** accordingly in writing setting out its reasons for this belief, the source of the information giving rise to the concern and seeking clarification from the **User**.
- 7.4.2** The **User** shall respond to **The Company** within 15 **Business Days** of the date of the **Preliminary Request** providing such information or data as is necessary to satisfy **The Company's** concerns set out in the **Preliminary Request** and making any amendments necessary to the report provided by the **User** pursuant to Clause 2.8 and / or data provided by the **User** to **The Company** to reflect this.
- 7.4.3** In the event that **The Company** is satisfied from the information provided in accordance with Clause 7.4.2 by the **User** that the **User's Equipment** will be such that it will be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall notify the **User** accordingly.
- 7.4.4** In the event that the **User** does not respond to the **Preliminary Request** or, notwithstanding the **User's** response, **The Company** remains of the view that the **User's Equipment** will be such that it will not reasonably be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall inform the **User** in writing that it intends to amend Clause 7 and Appendix C to the [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**] to reflect the **Transmission Entry Capacity** that it reasonably believes to be the level of power that the **User's Equipment** will be capable of exporting .
- 7.4.5** The **User** shall respond to the **Notice of Intent** within 15 **Business Days** of the date of the **Notice of Intent** explaining why it still reasonably believes that its **User's Equipment** will be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or providing a reasonable explanation as to why this is not the case.

- 7.4.6** In the event that **The Company** is satisfied from the information provided in accordance with Clause 7.4.5 by the **User** that the **User's Equipment** will be such that it will be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall notify the **User** accordingly.
- 7.4.7** Where notwithstanding the **User's** response to the **Notice of Intent** **The Company** remains of the view that the **User's Equipment** will be such that it will not reasonably be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or the **User** does not provide a response that is satisfactory to **The Company** within the timescale specified in 7.4.5 above **The Company** will issue the **Notice of Reduction** to the **User** and will send a copy of the same to the **Authority**.
- 7.4.8** Unless during such period the matter has been referred by the **User** to the **Authority** for determination by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, the **Notice of Reduction** shall take effect on the day 15 **Business Days** after the date of the **Notice of Reduction** and Appendix C of the [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**] shall be amended on that date in the manner set out in the **Notice of Reduction**. Where the matter has been referred the amendments to Appendix C of the [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**] and the date they take effect shall be as set out in the **Authority's** determination.
- 7.4.9** After a **Notice of Reduction** has taken effect **The Company** shall be entitled to make such amendments to this **Construction Agreement** as it requires as a result of the reduction in **Transmission Entry Capacity** effected by the **Notice of Reduction** and as a consequence to the [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**]. **The Company** shall advise the **User** as soon as practicable and in any event within 3 months of the date of the **Notice of Reduction** (or if the matter has been referred by the **User** to the **Authority** for determination, the date of determination) of such amendments by way of offer of an agreement to vary the **Construction Agreement** and [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**]. This agreement to vary will also provide for payment by the **User** of the **Reduction Fee** where applicable. The parties acknowledge that any dispute regarding this variation shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**.
- [7.5 Compliance with Original Red Line Boundary -add only where it's a Gated Agreement for a direct connection**

If a **User** is not compliant at a **User Progression Milestone** with the **Original Red Line Boundary** (other than as it may be changed under the **Queue Management Guidance**) for one or more technologies, **The Company** shall

be entitled to amend the **Construction Agreement** and as a consequence the **Bilateral Connection Agreement** to:

**7.5.1** reduce the **Installed Capacity** (of each technology that is non-compliant).

**7.5.2** remove that technology if the **Installed Capacity** of a technology is reduced to 0 MW.

**7.5.3** reduce the **[Transmission Entry Capacity]** [other relevant capacity] if the sum of the **Installed Capacity** of all technologies is reduced such that it is less than the **[Transmission Entry Capacity]** [other relevant capacity] and such that the **[Transmission Entry Capacity]** [other relevant capacity] is no higher than the sum of the **Installed Capacity** of all technologies.]

**[7.6]** Where there is a reduction in **Transmission Entry Capacity** under Clause 7.4 [or Clause 7.5] prior to the **Charging Date**, on such reduction in **Transmission Entry Capacity** taking effect the **User** the **User** shall pay to **The Company** the **Cancellation Charge** such payment to be made within 14 days of the date of **The Company's** invoice in respect thereof.]

***Users in the capacity of a Directly Connected Distribution System where works are required in respect of a BELLA or a Relevant Embedded Power Station insert the following (and where the Construction Agreement relates to more than one, for each of the Developers)***

#### **[7.4 Developer Capacity Reduction**

**7.4.1** If, at any time prior to the **Completion Date** **The Company** reasonably believes from the reports provided by the **User** pursuant to Clause 2.8 and Clause 5 of this **Construction Agreement** *[in the case of relevant embedded power stations – and/or CUSC Paragraphs 6.5.8 or 6.5.5.11]*, the commissioning process generally or otherwise that the **Developer's Equipment** will be such that it will not be capable of generating at the **Developer Capacity**, **The Company** shall advise the **User** accordingly in writing setting out its reasons and seeking clarification of the position from the **User**.

**7.4.2** The **User** shall respond to **The Company** within 15 **Business Days** of the date of the **Preliminary Request** providing such information or data as is necessary to satisfy **The Company's** concerns set out in the **Preliminary Request** and making any amendments necessary to the report provided by the **User** pursuant to Clause 2.8 and /or data provided by the **User** to **The Company** to reflect this.

**7.4.3** In the event that **The Company** is satisfied from the information provided in accordance with Clause 7.4.2 by the **User** that the **Developer's Equipment**

will be such that it will be capable of generating at the **Developer Capacity** **The Company** shall notify the **User** accordingly.

- 7.4.4** In the event that the **User** does not respond to the **Preliminary Request** or, notwithstanding the **User's** response, **The Company** remains of the view that the **Developer's Equipment** will be such that it will not reasonably be capable of generating at the **Developer Capacity**, **The Company** shall inform the **User** and the **Developer** in writing that it intends to amend the **Developer Capacity** in this **Construction Agreement** [and the associated **BELLA**] to reflect the whole MW figure that it reasonably believes the **Developer's Equipment** will be capable of generating at.
- 7.4.5** The **User** shall respond to the **Notice of Intent** within 15 **Business Days** of the date of the **Notice of Intent** explaining why it still reasonably believes that the **Developer's Equipment** will be capable of generating at the **Developer Capacity** or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or providing a reasonable explanation as to why this is not the case.
- 7.4.6** In the event that **The Company** is satisfied from the information provided in accordance with Clause 7.4.5 by the **User** that the **Developer's Equipment** will be such that it will be capable of generating at the **Developer Capacity** **The Company** shall notify the **User** accordingly.
- 7.4.7** Where notwithstanding the **User's** response **The Company** remains of the view that the **Developer's Equipment** will be such that it will not be capable of generating at the **Developer Capacity** or at or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or the **User** does not provide a response that is satisfactory to **The Company** within the timescale specified in Clause 7.4.5 above **The Company** will issue the **Notice of Reduction** to the **User** and the **Developer** and will send a copy of the same to the **Authority**.
- 7.4.8** Unless during such period the matter has been referred by the **User** to the **Authority** for determination by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, the **Notice of Reduction** shall take effect on the day 15 **Business Days** after the date of the **Notice of Reduction** and the **Developer Capacity** in this **Construction Agreement** [and Appendix A of the associated **BELLA**] shall be amended on that date in the manner set out in the **Notice of Reduction**. Where the matter has been referred the amendments to Appendix A of the associated **BELLA** and the date they take effect shall be as set out in the **Authority's** determination.
- 7.4.9** After a **Notice of Reduction** has taken effect **The Company** shall be entitled to make such amendments to this **Construction Agreement** as it requires as a result of the reduction in the **Developer Capacity** effected by the **Notice of Reduction** and as a consequence to the [Bilateral Connection Agreement or Agreement to Vary] [and **BELLA**]. **The Company** shall advise the **User** as soon as practicable and in any event within 3 months of the date of the **Notice**

**of Reduction** (or if the matter has been referred by the **User** [and **BELLA**] to the **Authority**, the date of determination) of such amendments by way of agreement(s) to vary. The agreement to vary will also provide for payment by the **User** of the **Reduction Fee** and on such reduction in **Developer Capacity** taking effect the **User** shall pay the **Cancellation Charge** in respect of the reduction such payment to be made within 14 days of the date of **The Company's** invoice in respect thereof. The parties acknowledge that any dispute regarding this variation shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**.”]

**7.4.10** Where as a result of the reduction in the **Developer Capacity** effected by the **Notice of Reduction** the **Developer** is no longer an **Embedded Exemptable Large Power Station** and as a result the **BELLA** is to be terminated as provided for in the **BELLA** then the following provisions shall apply:

**7.4.10.1** The agreement to vary referred to in Clause 7.4.9 above shall also provide for such amendments as are necessary to the **Construction Agreement** and [**Bilateral Connection Agreement** or **Agreement to Vary**] to reflect the fact that the **Developer** is no longer to be party to a **BELLA** but is a **Relevant Embedded Power Station**.

**7.4.10.2** Where **The Company** determines that the reduction in the **Developer Capacity** effected by the **Notice of Reduction** is such that if a **Transmission Evaluation Application** had been made by the **User** on the basis of that reduced **Developer Capacity** on the same date as, but instead of, the **Developer's** application for the **BELLA** then no works would have been required on the **National Electricity Transmission System** then **The Company** shall be entitled to terminate this **Construction Agreement** and the provisions of Clause 11 shall apply. In such case **The Company** shall be entitled to make such amendments as are necessary to the [**Bilateral Connection Agreement** or **Agreement to Vary**] to reflect the fact that the **Developer** is no longer party to a **BELLA** but is a **Relevant Embedded Power Station**.

**7.4.10.3** **The Company** and the **User** shall treat the **Developer** as if it had been a **Relevant Embedded Power Station** at the time of its application for a **BELLA** and for the purposes of **CUSC** Paragraph 6.5 as if a) the **Developer's** application for the **BELLA** had been a **Transmission Evaluation Application** under **CUSC** 6.5.5, b) this **Construction Agreement** had been entered into as a result of the **Modification Application** referred to in **CUSC** Paragraph 6.5.5.5, c) the **Notice of Reduction** is a revised **Transmission Evaluation Application** from the **User** under **CUSC** Paragraph 6.5.5.8 by reference to the reduction in the **Developer Capacity** effected by the **Notice of Reduction** and d) the agreement to vary referred to in Clause 7.4.10.1 or 7.4.10.2 as **The Company's** response to the **User's** revised **Transmission Evaluation**

**Application** and the provisions of **CUSC** Paragraph 6.5 shall apply on that basis.

- 7.5 Where there is a reduction in **Developer Capacity** under Clause 7.4 prior to the **Charging Date**, on such reduction in **Developer Capacity** taking effect the **User** shall pay to **The Company** the **Cancellation Charge** such payment to be made within 14 days of the date of **The Company's** invoice in respect thereof.

## 8. COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS

The **User** shall ensure that on the **Completion Date** the **User's Equipment** complies with the site specific technical conditions set out in Appendices F1-5 to the **Bilateral Connection Agreement** .

## 9. PROVISION OF SECURITY

Where required to do so under **CUSC** Section 15, the **User** shall provide **The Company** with security arrangements in accordance with **CUSC** Section 15 Part Three in respect of the **User's** obligations to pay the **Cancellation Charge** to **The Company** on termination of this **Construction Agreement** or a reduction in **[Transmission Entry Capacity]** **[Developer Capacity]** prior to the **Charging Date**.

## 10. EVENT OF DEFAULT

Once any of the **Events of Default** in Paragraph 5.3.1 and/or Paragraph 5.4.6.2 and/or Paragraph 5.4.6.3 of the **CUSC** has occurred and is continuing **The Company** may give notice of termination to the **User** whereupon this **Construction Agreement** shall forthwith terminate and the provisions of Clause 11 shall apply.

## 11. TERMINATION

- 11.1 On termination of this **Construction Agreement** **The Company** shall disconnect all the **User's Equipment** at the **Connection Site** and:

- (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and
- (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may

be agreed between the **Relevant Transmission Licensee** and the **User**.

- 11.2** The **User** shall where this **Construction Agreement** terminates prior to the **Charging Date** be liable forthwith on the date this **Construction Agreement** so terminates to pay to **The Company** the **Cancellation Charge** such payment to be made within 14 days of the date of **The Company's** invoice in respect thereof.

## **12. TERM**

- 12.1** Subject to the provisions for earlier termination set out in the **CUSC** this **Construction Agreement** shall continue until terminated in accordance with Clause 2.5, 2.6, 4.8, 11 or 17 hereof.
- 12.2** In addition this **Construction Agreement** shall terminate upon termination of the associated **Bilateral Connection Agreement** and in the event that this is prior to the **Charging Date** the **User** the provisions of Clause 11 shall apply.
- 12.3** The associated [**Bilateral Connection Agreements** or **Agreement to Vary the Bilateral Connection Agreement**] will automatically terminate upon termination of this **Construction Agreement** prior to the **Charging Date**.
- 12.4** Any provisions for payment shall survive termination of this **Construction Agreement**.

## **13. CUSC**

The provisions of Sections 6.6 (Payment), 6.14 (Transfer and Subcontracting), 6.15 (Confidentiality), 6.18 (Intellectual Property), 6.19 (Force Majeure), 6.20 (Waiver), 6.21 (Notices), 6.22 (Third party Rights), 6.23 (Jurisdiction), 6.24 (Counterparts), 6.25 (Governing Law), 6.26 (Severance of Terms), 6.27 (Language), 6.38 (Directions related to national security) inclusive of the **CUSC** shall apply mutatis mutandis to this **Construction Agreement** as if set out in this **Construction Agreement**.

## **14. DISPUTES**

- 14.1** Except as specifically provided for in this **Construction Agreement** any dispute arising under the terms of this **Construction Agreement** shall be referred to arbitration in accordance with the **Dispute Resolution Procedure**.

## **15. VARIATIONS**

- 15.1** Subject to Clause 15.2 and 15.3 below, no variation to this **Construction Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.



- 15.2** The **Company** and the **User** shall effect any amendment required to be made to this **Construction Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.
- 15.3** The **Company** has the right to vary Appendices in accordance with Clauses 2.3, 2.11 and 7.4 and 7.5 and 17 and Paragraph 6.9 of the **CUSC**.

*[Users in the capacity of a Directly Connected Distribution System insert the following:*

## **16. Distributed Generation**

- 16.1** In consideration of and recognising the provisions at Clause 16.4 of this **Construction Agreement** and notwithstanding that the liability for the **Cancellation Charge** rests with the **User**, the **User** will within 5 **Business Days** of receipt of the same provide the **Developer** with a copy of the **Cancellation Charge Secured Amount Statement**.
- 16.2** Where this **Construction Agreement** is entered into by reference to and provides for the **Construction Works** required as a consequence of more than one **Developer** a **Cancellation Charge**, **Cancellation Charge Statement** and **Cancellation Charge Secured Amount** will be prepared by reference to each **Developer** and the reference to “**Cancellation Charge**” “**Developer**” and “**Developer Capacity**” in this **Construction Agreement** and **CUSC** Section 15 shall be construed accordingly.
- 16.3** In the event that the/a **Developer** reduces its **Developer Capacity** and/or terminates its agreement for connection to the **Distribution System** the **User** shall notify **The Company** in writing within 5 **Business Days** of that event.
- 16.4** In the event of a **Cancellation Charge Shortfall**:

**16.4.1** On application by the **User** in writing (which cannot be made prior to the **Shortfall Application Date** and without the conditions at Clause 16.5 having been met), **The Company** shall pay the **Cancellation Charge Shortfall** to the **User** together with interest calculated thereon on a daily basis at **Base Rate** from the date of the payment of the **Cancellation Charge** to **The Company** by the **User** to the date of the payment of the **Cancellation Charge Shortfall** by **The Company** to the **User**.

**16.4.2** The **User** shall keep **The Company** advised as to any ongoing process to recover the **Cancellation Charge Shortfall** and any associated interest charges from the **Developer** and notify **The Company** when it

has reasonable grounds to believe that it is not practicable to take any further action) to recover the **Cancellation Charge Shortfall** from the **Developer**.

**16.4.3** If at any time the **User** subsequently successfully recovers the **Cancellation Charge Shortfall** in full or part from the **Developer**, the **User** shall forthwith notify **The Company** and pay the amount received to **The Company** together with interest calculated thereon on a daily basis at **Base Rate** from the date of the payment of the **Cancellation Charge Secured Amount** to **The Company** by the **User** to the date of the payment of the **Cancellation Charge Shortfall** by the **User** to **The Company**.

**16.5** In order for the **User** to make an application for payment of a **Cancellation Charge Shortfall** the following conditions must have been met and evidence of this provided to **The Company** by the **User** with the application.

- i) that the **User** asked the **Developer** whether or not it wishes the **User** to elect for the **Fixed Cancellation Charge** and elected accordingly; and
- ii) (in respect of its liability for the **Cancellation Charge** as it relates to this **Construction Agreement**) for each **Security Period** the **User** only sought security from the **Developer** for the amount as set out in the **Cancellation Charge Secured Amount Statement** for that **Security Period**]

## **17 QUEUE MANAGEMENT PROCESS**

**17.1** The **Queue Management Process** shall be incorporated into this **Construction Agreement** and apply between **The Company** and the **User** and Appendix Q to this **Construction Agreement** has been prepared in accordance with the principles set out in **CUSC** Section 16.

**17.2** Where, in accordance with the **Queue Management Process**:

**17.2.1** in the case of any of the **Conditional Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination", **The Company** will terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business Days**); and

**17.2.2** in the case of any of the **Construction Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination", **The Company** may terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business**

**Days)** and on such termination the provisions of Clause 11 of this **Construction Agreement** shall apply.

**17.3** Where in accordance with the **Queue Management Process** there is a variation to the date by which a **User Progression Milestone** has to be met **The Company** shall revise Appendix Q to this **Construction Agreement** as required to reflect such change.

**17.4** Any dispute or difference between **The Company** and the **User** on the **Queue Management Process** in respect of this **Construction Agreement** shall be resolved as an **Other Dispute** under the **Dispute Resolution Procedure**.

#### **[18 Distribution Queue Management <sup>1</sup>**

The **User** will keep **The Company** advised as to the categorisation of the **[User's project/Developer's Project]** in the **Distribution Queue Management Process** and notify **The Company** as soon as practicable if the categorisation of the **[User's project/Developer's Project]** is changed to "Termination" and if and when, in accordance with that process, the **Distribution Connection Agreements** are terminated.]

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

|                                 |   |
|---------------------------------|---|
| SIGNED BY                       | ) |
| <b>[name]</b>                   | ) |
| for and on behalf of            | ) |
| National Energy System Operator | ) |
| Limited                         | ) |
| SIGNED BY                       | ) |
| <b>[name]</b>                   | ) |
| for and on behalf of            | ) |
| <b>[User]</b>                   | ) |

---

<sup>1</sup> Only include where Construction Agreement is for a Power Station with a BEGA or for a DNO and associated with Distributed Generation

**APPENDIX [B]**  
**ONE OFF WORKS**

**APPENDIX [G]**  
**TRANSMISSION CONNECTION ASSET WORKS**

**APPENDIX [H]**  
**TRANSMISSION REINFORCEMENT WORKS**

**Part 1            Enabling Works**

**Part 2            Wider Transmission Reinforcement Works**

## **APPENDIX [I] USER'S WORKS**

**APPENDIX [J]**  
**CONSTRUCTION PROGRAMME**



## **APPENDIX [K]**

### **LIQUIDATED DAMAGES**

Company:

Connection site:

Type:

---

The amount of Liquidated Damages payable by The Company to the User pursuant to this Construction Agreement shall be:

Liquidated Damages under Clause [4] of this Construction Agreement shall be calculated on a daily basis at a rate of £XXXXXX per week subject to the limit that the total Liquidated Damages payable by The Company to the User under this Clause shall not exceed £XXXXXX.

**APPENDIX [L]**

**INDEPENDENT ENGINEER**

Company:

Connection site:

Type:

---

The Independent Engineer will be a Member of the Association of Consulting Engineers (ACE) and shall be agreed between the parties within 120 days of execution of this Construction Agreement or such other period as may be agreed between the parties. Failing agreement it shall be referred to the President of the Institution of Electrical Engineers who shall nominate the Independent Engineer.

## **APPENDIX [MM]**

### **ATTRIBUTABLE WORKS AND KEY CONSENTS**

#### **Part 1**

#### **Attributable Works**

#### **Part 2**

#### **Key Consents**

**APPENDIX [N]**

**THIRD PARTY WORKS**

## **APPENDIX [O][P]**

### **[GATE 1 VERSIONS]**

#### **USER'S DATA**

Power Station/other

Location of Power station/other

Connection Site [(provided for indicative purposes only and subject to Clause 1.2)]  
[Reserved (subject to Clause 1.2)]

Indicative Site of Connection [(provided for indicative purposes only and subject to Clause 1.2)] [Reserved subject to Clause 1.2]

Transmission Entry Capacity/ Demand [requested] [Reserved subject to Clause 1.2]

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date [(provided for indicative purposes only and subject to Clause 1.2)] [Reserved subject to Clause 1.2] when Power Station's/other connection to\use of the National Electricity Transmission System/Distribution System will be energised.

#### **DEVELOPER'S DATA**

Power Station

Location of Power station

Connection Site (GSP) [(provided for indicative purposes only and subject to Clause 1.2)] [*Large BEGA and BELLA only* - Reserved subject to Clause 1.2]

Site of Connection [(provided for indicative purposes only and subject to Clause 1.2)] [*Large BEGA and BELLA only* - Reserved subject to Clause 1.2]

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date [(provided for indicative purposes only and subject to Clause 1.2)] [*Large BEGA and BELLA only* - Reserved subject to Clause 1.2]  
when Power Station's connection to\use of the Distribution System will be energised.

**APPENDIX [O][P]**

**[GATE 2 VERSIONS**

**USER'S DATA**

Power Station/other

Location of Power station/other

Connection Site

Site of Connection

Transmission Entry Capacity/ Demand (as set out in Appendix C of Bilateral Connection Agreement/Bilateral Embedded Generation Agreement)

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date when Power Station's/other connection to\use of the National Electricity Transmission System/Distribution System will be energised.

Installed Capacity

**DEVELOPER'S DATA**

Power Station

Location of Power station

Connection Site (GSP)

Site of Connection

Developer Capacity

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date when Power Station's connection to use of the Distribution System will be energised.  
Installed Capacity



**APPENDIX [Q]**  
**QUEUE MANAGEMENT PROCESS – USER PROGRESSION MILESTONES**

The table below specifies the dates (derived in accordance with **CUSC** Section16) for the **User Progression Milestones** in respect of the **User's** project and the application of the **Queue Management Process**.

**Conditional Progression Milestones**

| <b>Milestone</b>               | <b>Date due</b> |
|--------------------------------|-----------------|
| M1 – Initiate Planning Consent |                 |
| M2 – Secure Consent            |                 |
| M3 – Land Rights               |                 |

**Construction Progression Milestones**

| <b>Milestone</b>                         | <b>Date due</b> |
|------------------------------------------|-----------------|
| M5 – Contestable Design Works Submission |                 |
| M6 – Agree Construction Plan             |                 |
| M7 – Project Commitment                  |                 |
| M8 – Initiate Construction               |                 |

## **SCHEDULE 2 EXHIBIT 3**

### **PART 2**

*For use with Users other than in the categories referred to in PART 1*

*Please note that the Queue Management Process will not be applied and included in Construction Agreements with the owner/operator of a Distribution System directly connected to the National Electricity Transmission System where the Construction Agreement is required because of a connection to that Distribution System and the Distribution Queue Management Process applies*

### **INDICATIVE**

**DATED [ ] 200[1]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[ ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**CONSTRUCTION AGREEMENT**

---

## **CONTENTS**

| <b><u>Clause</u></b> | <b><u>Title</u></b>                                |
|----------------------|----------------------------------------------------|
| 1                    | Definitions, Interpretation and Construction       |
| 2                    | Carrying out of the Works                          |
| 3                    | Delays                                             |
| 4                    | Commissioning Programme and Liquidated Damages     |
| 5                    | Approval to Connect/Energise/Become Operational    |
| 6                    | Independent Engineer                               |
| 7                    | Becoming Operational                               |
| 8                    | Compliance with Site Specific Technical Conditions |
| 9                    | Credit Requirements                                |
| 10                   | Event of Default                                   |
| 11                   | Termination on Event of Default                    |
| 12                   | Term                                               |
| 13                   | CUSC                                               |
| 14                   | Disputes                                           |
| 15                   | Variations                                         |
| [16                  | Queue Management Process]                          |
| [17                  | Distribution Queue Process]                        |
| Appendix B           | One Off Works                                      |
| Appendix G           | Transmission Connection Asset Works                |
| Appendix H           | Transmission Reinforcement Works                   |
| Appendix I           | User's Works                                       |
| Appendix J           | Construction Programme                             |

|                 |                                                        |
|-----------------|--------------------------------------------------------|
| Appendix K      | Liquidated Damages                                     |
| Appendix L      | Independent Engineer                                   |
| Appendix M      | Security Arrangements                                  |
| Appendix N      | Third Party Works                                      |
| Appendix [O][P] | User's Data/Developer's Data                           |
| Appendix Q      | Queue Management Process - User Progression Milestones |

**THIS CONSTRUCTION AGREEMENT** is made on the [ ] day of [ ] 200[1]

**BETWEEN**

- (1) The company registered in England with number 11014226 (“**The Company**”, which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“**User**”, which expression shall include its successors and/or permitted assigns)

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** has prepared a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) The **User** has applied for [connection to] [and use of] [modification to its connection to] [or use of] the **National Electricity Transmission System** and pursuant to condition E12 of the **ESO Licence**, **The Company** is required to offer terms in accordance with the **CUSC** in this respect or [specific recital to reflect that the **Construction Agreement** is an amendment of an existing signed offer pursuant to the **CUSC** amending documents]
- (C) **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties).
- (D) Certain works are required as part of this offer as set out in this **Construction Agreement**.
- (E) This **Construction Agreement** is entered into pursuant to the terms of the **CUSC**.
- (F) [This **Construction Agreement** is subject to the **Queue Management Process**].
- (G) This **Construction Agreement** is a [Gate 1 Agreement] [Gate 2 Agreement].

**NOW IT IS HEREBY AGREED** as follows:

## 1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** and in the Bilateral Connection Agreement have the same meanings, interpretations or constructions in this **Construction Agreement**.

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Authority"                                 | as defined in the <b>CUSC</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| "Bilateral Connection Agreement"            | the <b>Bilateral Connection Agreement</b> entered into between the parties on even date herewith.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Charging Date"                             | the date upon which the <b>Construction Works</b> are first <b>Commissioned</b> and available for use by the User or if the <b>Independent Engineer</b> before, on or after the <b>Commissioning Programme Commencement Date</b> shall have certified in writing that the <b>Transmission Connection Assets</b> , are completed to a stage where The Company could commence commissioning and by such date the <b>User's Works</b> shall not have been so certified then the date falling [ ] days after the date of such certification, provided that the <b>Transmission Reinforcement Works</b> are <b>Commissioned</b> and <b>Network Options Assessment Works</b> are completed as at that date. In the event that the <b>Transmission Reinforcement Works</b> are not so <b>Commissioned</b> and/or the <b>Network Options Assessment Works</b> are not so completed the <b>Charging Date</b> shall be the date on which they are <b>Commissioned</b> and/or completed as appropriate. |
| "Commissioning Programme Commencement Date" | the date specified in the <b>Construction Programme</b> for the commencement of the <b>Commissioning Programme</b> or any substituted date fixed under the terms of this <b>Construction Agreement</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Commissioning Programme” | the sequence of operations/tests necessary to connect the <b>User’s Works</b> and the <b>Transmission Connection Asset Works</b> to the <b>National Electricity Transmission System</b> for the purpose of making the <b>User’s Works</b> available for operation to be determined pursuant to Clause 2.10 of this <b>Construction Agreement</b> .                                                                    |
| “Completion Date”         | [       ] or such other date as may be agreed in terms of this <b>Construction Agreement</b> for completion of the <b>Construction Works</b> .                                                                                                                                                                                                                                                                        |
| “Connected Planning Data” | data required pursuant to the <b>Planning Code</b> which replaces data containing estimated values assumed for planning purposes by validated actual values and updated estimates for the future and by updated forecasts for forecast data items.                                                                                                                                                                    |
| “Consents”                | in relation to any <b>Works</b> :-<br><br>(a) all such planning and other statutory consents; and<br>(b) all wayleaves, easements, rights over or interests in land or any other consent; or<br>(c) permission of any kind as shall be necessary for the construction of the <b>Works</b> and for commencement and carrying on of any activity proposed to be undertaken at or from such <b>Works</b> when completed. |
| “Construction Programme”  | the agreed programme for the <b>Works</b> to be carried out by <b>The Company</b> and the <b>User</b> set out in detail in Appendix [J] to this <b>Construction Agreement</b> or as amended from time to time pursuant to Clauses 2.3 and 3.2 of this <b>Construction Agreement</b> .                                                                                                                                 |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Construction Site"      | the site where the <b>Transmission Connection Asset Works</b> are being undertaken by or on behalf of <b>The Company</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| "Developer" <sup>2</sup> | [insert name address and registered number] who is party to the <b>Distribution Connection Agreements</b> with the <b>User</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| "Developer's Project"    | the connection of a [ ] to the <b>User's Distribution System</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| "Event of Default"       | any of the events set out in Clause 10 of this <b>Construction Agreement</b> as constituting an event of default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| "Final Sums"             | <p>the amount payable by the <b>User</b> on termination of this <b>Construction Agreement</b> being the aggregate from time to time and for the time being of:-</p> <ol style="list-style-type: none"> <li>(1) all <b>The Company Engineering Charges</b> arisen prior to the date of termination;</li> <li>(2) fees, expenses and costs (excluding costs on account of interest charges incurred by The Company) of whatever nature reasonably and properly incurred or due by <b>The Company</b> in respect of any part of the <b>Construction Works</b> carried out prior to the date of termination of this <b>Construction Agreement</b>;</li> <li>(3) fees, expenses and costs properly payable by <b>The Company</b> in respect of, or arising from the termination by it or any third party of any contract for or relating to the carrying out of any <b>Construction Works</b> provided it is negotiated on</li> </ol> |

---

<sup>2</sup> add where Construction Agreement is with owner/operator of a Distribution System and the Construction Agreement is required because of a developers connection to the Distribution System



an arms length basis (including any such arising under the **STC**);

- (4) a sum equal to the reasonable costs of removing any **Transmission Connection Assets** and of making good the remaining **Plant** and **Apparatus** following such removal; and
- (5) interest on any such amounts from the date they were paid by The Company to the date of The Company's invoice at 2% over **Base Rate** from time to time and for the time being.

Provided that no sum shall be due in respect of **Final Sums** in respect of fees, expenses and costs associated with (a) the **Network Options Assessment Works** and/or (b) **Transmission Reinforcement Works** and specified in Part 2 of Appendix H.

Any dispute as to the amount of **Final Sums** shall be referred to arbitration in accordance with the **Dispute Resolution Procedure**.

"Gate 2 Date"

means [the date on which the last of the conditions at Clause 1.2 of this **Construction Agreement** are satisfied - *include only in Gate 1 Agreements with Reservation*]

"Independent Engineer"

the engineer specified in Appendix L to this **Construction Agreement**. Provided that:-

- (a) where the parties fail to agree on a suitable engineer within 120 days of the date of this **Construction Agreement**; or

- (b) where any **Independent Engineer** appointed from time to time shall fail, refuse or cease to act in the capacity set out herein and no substitute engineer of suitable standing and qualification can be agreed by the parties within 30 days;

then such engineer as the President of the Institution of Electrical Engineers shall, on the application of either party, nominate shall be the **Independent Engineer**.

“Installed Capacity”

the installed capacity provided in the **Original Red Line Boundary** and set out in Appendix [O][P].

“Liquidated Damages”

the sums specified in or calculated pursuant to Appendix K to this **Construction Agreement**.

“One Off Works”

the works described in Appendix B1 to this **Construction Agreement**.

the works set out in the Networks Options Assessment report prepared by **The Company** pursuant to C13 of the **ESO Licence** and issued by The Company in [ ] which in The Company’s reasonable opinion are required to be completed before the **Completion Date** to ensure that the **National Electricity Transmission System** complies with the requirements of condition E7 of the **ESO Licence** and Standard Condition D3 of any **Relevant Transmission Licensee’s** transmission licence prior to the **Connection** of the **User’s Equipment** in terms of Clause 7.1 [or 7.2] of this **Construction Agreement**.

“Network Options Assessment Works”

|                                       |                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [“Reservation Expiry Date”            | [ ] being the date as bilaterally negotiated between <b>The Company</b> and the <b>User</b> [and which may be extended by agreement between the parties] on which the <b>Reservation</b> expires.- <i>include only in Gate 1 Agreements with Reservation</i> ]                                                                     |
| “Term”                                | the term of this <b>Construction Agreement</b> commencing on the date hereof and ending in accordance with Clause 12.                                                                                                                                                                                                              |
| “Third Party Works”                   | the works to be undertaken on assets belonging to a party other than a <b>Relevant Transmission Licensee</b> and the <b>User</b> to enable <b>The Company</b> to provide or as a consequence of the connection to and/or use of the <b>National Electricity Transmission System</b> by the <b>User</b> as specified in Appendix N; |
| "Transmission Connection Assets"      | the assets specified in Appendix A to the <b>Bilateral Connection Agreement</b> .                                                                                                                                                                                                                                                  |
| “Transmission Connection Asset Works” | the works necessary for construction and installation of the <b>Transmission Connection Assets</b> at the <b>Connection Site</b> specified in Appendix G to this <b>Construction Agreement</b> .                                                                                                                                   |

“Transmission Reinforcement Works”

those works other than the **Transmission Connection Asset Works**, ) **Network Options Assessment Works** and **One Off Works**, which in the reasonable opinion of **The Company** are all necessary to extend or reinforce the **National Electricity Transmission System** to ensure that the **National Electricity Transmission System** complies with the requirements of condition E7 of the **ESO Licence** and Standard Condition D3 of any **Relevant Transmission Licensee’s** transmission system in relation to and prior to the connection of the **User’s Equipment** at the **Connection Site** and which are specified in Appendix H to this **Construction Agreement**, where Part 1 is works required for the **User** and Part 2 is works required for wider system reasons.

“User Progression Milestones”

the milestones (applied in accordance with **CUSC** Section 16) for the **User’s** project as set out in Appendix Q of this **Construction Agreement**.

“User’s Works”

those works necessary for installation of the **User’s Equipment** which are specified in Appendix I to this **Construction Agreement**.

“Works”

the **Construction Works** and the **User’s Works**.

**[A Gate 1 Agreement with/without Reservation only]**

## **1.2 GATED APPLICATION AND OFFER PROCESS – GATE 1 CONDITIONAL CLAUSE [AND RESERVATION]**

1.2.1 The rights and obligations of the **User** and **The Company** under this **Construction Agreement** [and the **[Bilateral Connection Agreement]**] are conditional on:

- 1.2.1.1 the **User** making a **Gate 2 Application**;
  - 1.2.1.2 the **Gate 2 Application** meeting the **Gate 2 Criteria**; and
  - 1.2.1.3 the **User** accepting the terms of the **Gate 2 Offer**
- 1.2.2 The parties agree that until the **Gate 2 Date**, the rights and obligations of each party pursuant to this **Construction Agreement** (other than this Clause 1.2 and Clause 13 – *and any other provisions that the parties agree are appropriate*) and the **[Bilateral Connection Agreement]** shall be suspended.
- 1.2.3 [The parties further agree that the information provided for the purposes of this **Gate 1 Agreement** and set out in the Appendix [O] to this **Construction Agreement** being a proposed **Connection Site**, **Completion Date** and requested [capacity] are indicative only prior to the **Gate 2 Date** and shall not be binding on the parties or confer any commitment by **The Company** to the **Connection Site**, **Completion Date** or requested [capacity] and any reliance on them for any purpose prior to the **Gate 2 Date** is at the **User's** risk – *no reservation*] [The parties further agree that the **Connection Site** and **Completion Date** and [capacity] as set out in Appendix [O][P] to this **Construction Agreement** have been **Reserved** for the purposes of this connection/use of system and any **Gate 2 Offer** will reflect this position and the requested [capacity] provided that the **Gate 2 Application** is made prior to the **Reservation Expiry Date** and the **Gate 2 Offer** is accepted- reservation only].
- 1.2.4 At any time prior to the **Gate 2 Date**, the **User** shall have the right to terminate this **Connection Agreement** by written notice to **The Company** without any liability for any **Final Sums**. This right to terminate shall expire with effect from the **Gate 2 Date**.
- 1.2.5 With effect from the **[Gate 2 Date]** the provisions of this **Construction Agreement**, as amended by the **[Gate 2 Offer]** by agreement of the parties, shall be in full force and effect.
- 1.2.5 With effect from the **[Gate 2 Date]** the provisions of this **Construction Agreement**, as amended by the **[Gate 2 Offer]** by agreement of the parties, shall be in full force and effect.

## **2 CARRYING OUT OF THE WORKS**

- 2.1 Forthwith following the date of this **Construction Agreement** the **User** shall agree with the **Relevant Transmission Licensee** the **Safety Rules** and **Local Safety Instructions** to apply during the **Construction Programme** and **Commissioning Programme**. Failing agreement within three months of the date of this **Construction Agreement** the matter shall be referred to the **Independent Engineer** for determination in accordance with Clause 6 of the **Construction Agreement**.

- 2.2 Subject to Clauses 2.3 and 2.4 of this **Construction Agreement** forthwith following the date of this **Construction Agreement** **The Company** shall use its best endeavours to obtain in relation to the **Construction Works**, and the **User** shall use its best endeavours to obtain in relation to the **User's Works**, all **Consents**. Each shall give advice and assistance to the other to the extent reasonably required by the other in the furtherance of these obligations. Further, each party shall, so far as it is legally able to do so, grant to the other, or the **Relevant Transmission Licensee**, all such wayleaves, easements, servitude rights, rights over or interests (but not estates as regards land in England and Wales and not heritable or leasehold interests as regards land in Scotland) in land or any other consents reasonably required by the other or the **Relevant Transmission Licensee** in order to enable the **Works** to be expeditiously completed and to enable that other to carry out its obligations to the other under this **Construction Agreement** and in all cases subject to such terms and conditions as are reasonable.
- 2.3 The following additional provisions shall apply in respect of the **Consents** and **Construction Works**:-
- 2.3.1 All dates specified in this **Construction Agreement** are subject to **The Company** obtaining **Consents** for the **Construction Works** in a form acceptable to it within the time required to carry out the **Construction Works** in accordance with the **Construction Programme**.
- 2.3.2 In the event of:-
- (a) the **Consents** not being obtained by the required date; or
  - (b) the **Consents** being subject to conditions which affect the dates; or
  - (c) **The Company** wishing to amend the **Construction Works** to facilitate the granting of the **Consents**,
- The Company** shall be entitled to revise the **Construction Works** (and as a consequence Appendix A to the **Bilateral Connection Agreement**) and all dates specified in this **Construction Agreement** and the charges specified in Appendix B to the **Bilateral Connection Agreement**. For the avoidance of doubt such revisions shall be at **The Company's** absolute discretion and the consent of the **User** is not required.
- 2.3.3 The **User** shall be regularly updated by **The Company** in writing or by such other means as the parties may agree as to progress made by **The Company** from time to time in the obtaining of relevant **Consents** pursuant to its obligations under Clause 2.2 or 2.3 of this **Construction Agreement**.

2.4.1 The **User** shall be liable to pay to **The Company** as part of Final Sums:-

- (a) all **The Company 's Engineering Charges** accrued; and
- (b) proper and reasonable out-of-pocket expenses incurred and/or paid or which **The Company** is legally bound to incur or pay

in seeking and obtaining the **Consents** the subject of Clause 2.2 of this **Construction** excluding any costs associated with the **Network Options Assessment Works** and the works specified in Part 2 of Appendix H.

The **User** acknowledges these out of pocket ancillary expenses may include planning inquiries or appeals and the capital costs together with reasonable legal and surveyors costs of landowners or occupiers in acquiring permanent easements or other rights in respect of any electric line or underground cable forming part of the **Transmission Connection Asset Works**. This sum shall not include any capital costs incurred by **The Company**, in the acquisition by it of the freehold of any land in England and Wales or the feuhold of any land in Scotland in relation to **Connection Sites**. **The Company** shall keep the **User** informed of the level of such charges and expenses being incurred. The **User** shall pay such sums within 28 (twenty eight) days of the date of **The Company 's** invoice therefor.

2.4.2 Paragraphs 11.2.3 to 11.2.5 of the **CUSC** relating to **Consents** shall apply to the **Construction Agreement** as if set out here in full.

2.5 Prior to the commencement of the **Transmission Connection Asset Works** the **User** shall have the right to terminate this **Construction Agreement** upon giving not less than 7 (seven) days notice in writing to **The Company**. In the event of the **User** terminating this **Construction Agreement** in terms of this Clause 2.5 the **User** shall in addition to the payments for which it is liable under Clause 2.4 hereof be liable to pay to **The Company** a sum equal to **The Company 's** estimate or if applicable revised estimate of **Final Sums**. The **User** shall pay such sums within 14 (fourteen) days of the date of **The Company's** invoice(s) therefore and (where applicable) on termination where applicable **The Company** shall disconnect the **User's Equipment** at the **Connection Site** and:

- (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and

- (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**.
- 2.6 If the **User** fails to obtain all **Consents** for the **User's Works** having complied with the obligations in Clause 2.2 of this **Construction Agreement** the obligation on the **User** to complete the **User's Works** shall cease and the **User** may by written notice to **The Company** terminate this **Construction Agreement** whereupon the **User** shall in addition to the sums for which it is liable under Clause 2.4 hereof be liable to pay to **The Company** a sum equal to **The Company 's** estimate or if applicable revised estimate of **Final Sums**. The **User** shall pay such sums within 14 (fourteen) days of the date of **The Company 's** invoice(s) therefore and (where applicable) on termination **The Company** shall disconnect the **User's Equipment** at the **Connection Site** and;
  - (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and
  - (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**.
- 2.7 Both parties shall be entitled to contract or sub-contract for the carrying out of their respective parts of the **Works** (which in the case of **The Company** shall include work carried out by a **Relevant Transmission Licensee** or its contractors or sub-contractors). The **User** or any contractor on its behalf shall be responsible for commencing and for carrying out the **User's Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme** and **The Company** or any contractor on its behalf shall be responsible for commencing and carrying out the **Construction Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme**.
- 2.8 The parties shall continuously liaise throughout the **Construction Programme** and **Commissioning Programme** and each shall provide to the other all information relating to its own **Works** reasonably necessary to assist the other in performance of that other's part of the **Works**, and shall use all reasonable endeavours to coordinate and integrate their respective part of the **Works**. There shall be on-site meetings between representatives of the parties at intervals to be agreed between the parties. Each party shall deliver to the other



party a written report of progress during each calendar quarter within 7 days of the end of that quarter.

- 2.9 During the period of and at the times and otherwise as provided in the **Construction Programme** and the **Commissioning Programme** **The Company** shall allow the **User**, its employees, agents, suppliers, contractors and sub-contractors necessary access to the **Construction Site** and the **User** shall allow the **Relevant Transmission Licensee** and in either case their employees, agents, suppliers, contractors and sub-contractors necessary access to its site to enable each to carry out the **Transmission Connection Asset Works** and **One Off Works** or **User's Works** but not so as to disrupt or delay the construction and completion of the other's **Works** on the said sites or the operation of the other's **Plant** and **Apparatus** located thereon, such access to be in accordance with any reasonable regulations relating thereto made by the site owner or occupier.
- 2.10 Not later than six months prior to the **Commissioning Programme Commencement Date** **The Company** shall provide the **User** with a draft **Commissioning Programme** for the **Commissioning** of the **Transmission Connection Assets**, and the **User's Equipment**. The **User** shall, as quickly as practicable and in any event within three months of receipt thereof, determine whether or not to approve the proposed **Commissioning Programme** (which approval shall not be unreasonably withheld or delayed) and shall within such three month period either notify **The Company** of its approval or, in the event that the **User** reasonably withholds its approval, notify **The Company** of any changes or variations to the proposed commissioning programme recommended by the **User**. If **The Company** does not accept such changes or variations submitted by the **User** any dispute shall be referred to the **Independent Engineer** for determination. The **Commissioning Programme** agreed between the parties or determined by the **Independent Engineer** as the case may be shall be implemented by the parties and their sub-contractors in accordance with its terms.
- 2.11 If at any time prior to the **Completion Date** it is necessary for **The Company** or **The Company** in its reasonable discretion wishes to make any addition to or omission from or amendment to the **Transmission Connection Asset Works** and/or **Transmission Reinforcement Works** and/or the **One Off Works** and/or the **Third Party Works** **The Company** shall notify the **User** in writing of such addition, omission or amendment and Appendices [B1 (One Off Works), G (Transmission Connection Asset Works) H (Transmission Reinforcement Works) and N (Third Party Works)] to this **Construction Agreement** and consequently Appendices [A (Transmission Connection Assets) and B (Connection Charges and One Off Charges)] to the associated **Bilateral Connection Agreement** shall be automatically amended to reflect the change.

- 2.12 [The **User** shall apply to the Secretary of State for Trade and Industry as part of its application under Section 36 of the Act for its generating station, for deemed planning permission in relation to the substation forming part of the **Transmission Connection Asset Works**. The **User** shall use its best endeavours to procure that the said deemed planning permission is so obtained. **The Company's** obligations under Clause 2.2 of this **Construction Agreement** shall not require it to obtain planning consent for the said substation unless and until the relevant Secretary of State shall for whatever reason refuse to deem the grant of planning permission in respect of the same. The **User** shall liaise with **The Company** as to its construction and operational requirements and shall ensure that the said application meets **The Company's** requirements. **The Company** shall provide the **User** with all information reasonably required by it in relation to the application and the **User** shall ensure that all requirements of **The Company** are incorporated in the application for deemed planning consent.]
- 2.13 [The **Transmission Reinforcement Works** are conditional on British Energy Generation Limited and/or Magnox Electric plc (as the case may be) granting approval to the carrying out of the **Construction Works** in terms of the Nuclear Site Licence Provisions Agreement being an agreement dated 30 March 1990 between The Company and Nuclear Electric plc (now called Magnox Electric plc) and an agreement dated 31 March 1996 between The Company and British Energy Generation Limited (and described as such). In the event of British Energy Generation Limited and/or Magnox Electric plc (as the case may be) not granting approval **The Company** shall be entitled to change the **Construction Works**, the **Construction Programme** and all dates specified in this **Construction Agreement**.]
- 2.14 [It is hereby agreed and declared for the purposes of the Construction (Design and Management) Regulations 1994 that the **User** is the only client in respect of the **User's Works** and **The Company** is the only client in respect of the **Construction Works** and each of the **User** and **The Company** shall accordingly discharge all the duties of clients under the said **Regulations**.]
- 2.15 [The **Company** and the **User** hereby agree and acknowledge that this **Construction Agreement** is not to be treated as a construction contract within the meaning of section 104 of the Housing Grants, Construction and Regeneration Act 1996 and sections 104 to 113 of the said Act shall have no application either to the **Construction Works** or the **User's Works** and the parties' rights and obligations with regard to matters of dispute resolution and payment procedures are as expressly set out herein.
- 2.16 **Third Party Works**
- 2.16.1 The **User** shall be responsible for carrying out or procuring that the **Third Party Works** are carried out and shall carry them out or procure that they are carried out in accordance with the timescales specified in the **Construction**

**Programme.** The **User** shall confirm to **The Company** or, where requested to do so by **The Company**, provide confirmation from the third party that the **Third Party Works** have been completed.

2.16.2 Given the nature of these works it may not be possible to fully identify the works required or the third parties they relate to at the date hereof. Where this is the case **The Company** shall, subject to 2.x.3 below, advise the **User** as soon as practicable and in any event by [ ] of the **Third Party Works** and shall be entitled to revise Appendix N and as a consequence the **Construction Programme** as necessary to reflect this.

2.16.3 Where **Third Party Works** are likely to be **Modifications** required to be made by another user(s) (“the “**First User(s)**”) as a consequence of **Modifications** to the **National Electricity Transmission System** to be undertaken by **The Company** under this **Construction Agreement** **The Company** shall as soon as practicable after the date hereof issue the notification to such **First User’s** in accordance with **CUSC** Paragraph 6.9.3.1. The **User** should note its obligations under **CUSC** Paragraph 6.10.3 in respect of the costs of any **Modifications** required by the **First User(s)**.

2.16.4 In the event that the **Third Party Works** have not been completed by the date specified in the **Construction Programme** or, in **The Company’s** reasonable opinion are unlikely to be completed by such date, **The Company** shall be entitled to revise the **Construction Programme** as necessary to reflect such delay and also, where **The Company** considers it necessary to do so, shall be entitled to revise the **Construction Works** (and as a consequence Appendices A and B to the **Bilateral Connection Agreement**). For the avoidance of doubt such revisions shall be at **The Company’s** absolute discretion and the consent of the **User** is not required. Further, in the event that the **Third Party Works** have not been completed by [ ] **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User** and in this event the provisions of Clause 11 of this **Construction Agreement** shall apply.

### **3 DELAYS**

3.1 If either party shall have reason to believe that it is being delayed or will be delayed in carrying out that party’s **Works** for any reason (whether it is one entitling it to the fixing of a new date under Clause 3.2 of this **Construction Agreement** or not) it shall forthwith notify the other party in writing of the circumstances giving rise to the delay and of the extent of the actual and/or anticipated delay.

3.2 If prior to the **Completion Date** a party (in this Clause 3.2 “the **Affected Party**”) shall be delayed in carrying out any of the **Affected Party’s Works** (including

their commissioning) by reason of any act, default or omission on the part of the other Party (in this Clause the “**Defaulting Party**”) or the **Defaulting Party’s** employees, agents, contractors or sub-contractors or by reason of an event of **Force Majeure**, the **Affected Party** shall be entitled to have such later date or dates fixed as the **Commissioning Programme Commencement Date** and/or (as the case may be) the **Completion Date** as may be fair and reasonable in the circumstances provided that it shall have notified the **Defaulting Party** in writing of such act, default or omission or event of **Force Majeure** within 28 days of it becoming aware of the occurrence giving rise to the delay together with an estimate of the proposed delay which it will cause the **Affected Party**. In the event of a dispute between the parties over what is or are any fair and reasonable new date or dates to be fixed in the circumstances this shall be promptly referred to and determined by the **Independent Engineer**. Once the new date or dates are fixed the **Construction Programme** and/or **Commissioning Programme** shall be deemed automatically amended as appropriate.

#### **4 COMMISSIONING PROGRAMME AND LIQUIDATED DAMAGES**

- 4.1 Each party shall give written notice to the other declaring its readiness to commence the **Commissioning Programme** when this is the case.
- 4.2 The **Commissioning Programme** shall commence forthwith once both parties have given written notice to the other under Clause 4.1.
- 4.3 The **Works** shall be deemed to have been **Commissioned** on the date that the **Independent Engineer** certifies in writing to that effect.
- 4.4 In the event that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date** **The Company** (if and to the extent that it is responsible for delayed commissioning beyond the **Commissioning Programme Commencement Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date**. It is declared and agreed that such **Liquidated Damages** shall cease to be payable in respect of any period after the date of actual commencement of the **Commissioning Programme**.
- 4.5 In the event that the actual date on which the **Construction Works** are **Commissioned** is later than the **Completion Date** **The Company** (if and to the extent that it is responsible for delayed completion beyond the **Completion Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date on which the

**Construction Works** are **Commissioned** is later than the **Completion Date**. It is hereby agreed and declared that such **Liquidated Damages** shall cease to be payable in respect of any period after completion of the **Construction Works**.

- 4.6 **Liquidated Damages** payable under Clauses 4.4 and 4.5 of this **Construction Agreement** shall accumulate on a daily basis but shall be payable calendar monthly. On or before the 15th day of each month the party entitled to receive the payment of **Liquidated Damages** shall send to the other party a statement of the **Liquidated Damages** which have accrued due in the previous calendar month. The party receiving such statement shall in the absence of manifest error pay the **Liquidated Damages** shown on the statement within 28 days of the date upon which the statement is received.
- 4.7 Without prejudice to and in addition to the obligation of the **User** pursuant to Clause 2.4 of this **Construction Agreement**, the payment or allowance of **Liquidated Damages** pursuant to this Clause 4 shall be in full satisfaction of **The Company's** liability for failure to perform its obligations by the **Commissioning Programme Commencement Date** and/or the **Completion Date** as appropriate.
- 4.8 In the event that the **User** shall have failed, in circumstances not entitling it to the fixing of a new date as the **Commissioning Programme Commencement Date** pursuant to Clause 3.2, to complete the **User's Works** by [ ] to a stage where the **User** is ready to commence the **Commissioning Programme**, **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User**. In the event of such termination the **User** shall in addition to the amounts for which it is liable under Clause 2.4 to this **Construction Agreement** be liable to **The Company** to pay to **The Company** a sum equal to **The Company's** estimate or revised estimate of **Final Sums**. The **User** shall pay such sums within 14 (fourteen) days of the date of **The Company 's** invoice(s) therefor and on termination (where applicable) **The Company** shall disconnect the **User's Equipment** at the **Connection Site** and:
- (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and
  - (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**.

## 5 APPROVAL TO CONNECT/ENERGISE/BECOME OPERATIONAL

- 5.1 Not later than 4 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.7 and 7.4.10 and likewise the **Site Common Drawings** required under CC 7.5.2 and 7.5.4 and, if necessary, **Gas Zone Diagrams** referred to in CC 7.4.9 and 7.4.12.
- 5.2 Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.8 and 7.4.11 and likewise the **Site Common Drawings** required under CC 7.5.3 and 7.5.5.
- 5.3 Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties:-
- 5.3.1 each party shall submit to the other data within its possession needed to enable the completion of Appendices F3 and F4 to the **Bilateral Connection Agreement**; and
- 5.3.2 the **User** shall submit to **The Company** evidence satisfactory to **The Company** that the **User's Equipment** complies or will on completion of the **User's Works** comply with Clause 8 of this **Construction Agreement** and Paragraphs [2.9 and 6.7] of the **CUSC**.
- 5.4 Not later than 8 weeks prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties each party shall submit to the other:
- 5.4.1 for the **Connection Site** information to enable preparation of **Site Responsibility Schedules** complying with the provisions of Appendix 1 to the **Connection Conditions** together with a list of managers who have been duly authorised by the **User** to sign such **Site Responsibility Schedules** on the **User's** behalf;
- 5.4.2 written confirmation as required under CC.5.2(g) that the list of **Safety Co-ordinators** are authorised and competent [and a list of persons appointed pursuant to **Grid Code** CC5.2(m)];
- 5.4.3 a list of the telephone numbers for the facsimile machines referred to in CC6.5.9.
- 5.4.4 Confirmation of access to the **Electronic Communications Platform** referred to in CC6.5.9 upon access being provided by **The Company**.

- 5.5 Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** each party shall submit to the other a statement of readiness to complete the **Commissioning Programme** in respect of the **Works** and the statement submitted by the **User** shall in addition contain relevant **Connected Planning Data** and a report certifying to **The Company** that, to the best of the information, knowledge and belief of the **User**, all relevant **Connection Conditions** applicable to the **User** have been considered and complied with. If **The Company** considers that it is necessary, it will require this latter report to be prepared by the **Independent Engineer**. The report shall incorporate if requested by **The Company** type test reports and test certificates produced by the manufacturer showing that the **User's Equipment** meets the criteria specified in CC6.

## 6 INDEPENDENT ENGINEER

The parties agree and shall procure that the **Independent Engineer** shall act as an expert and not as an arbitrator and shall decide those matters referred or reserved to them under this **Construction Agreement** by reference to **Good Industry Practice** using their skill, experience and knowledge and with regard to such other matters as the **Independent Engineer** in their sole discretion considers appropriate. All references to the **Independent Engineer** shall be made in writing by either party with notice to the other being given contemporaneously as soon as reasonably practicable and in any event within 14 days of the occurrence of the dispute to be referred to the **Independent Engineer**. The parties shall promptly supply the **Independent Engineer** with such documents and information as they may request when considering such question. The **Independent Engineer** shall use their best endeavours to give their decision upon the question before them as soon as possible following its referral to them. The parties shall share equally the fees and expenses of the **Independent Engineer**. The parties expressly acknowledge that submission of disputes for resolution by the **Independent Engineer** does not preclude subsequent submission of disputes for resolution by arbitration as provided for in the **Dispute Resolution Procedure**. Pending any such submission the parties shall treat the **Independent Engineer's** decision as final and binding.

## 7. BECOMING OPERATIONAL

- 7.1 **The Company** shall connect and **Energise** the **User's Equipment** at the **Connection Site** during the course of and in accordance with the **Commissioning Programme** and thereafter upon compliance by the **User** with the provisions of Clause 5 and provided (1) the **Construction Works** excluding the **Network Options Assessment Works** shall be **Commissioned** and (2) [the **Network Options Assessment Works** and **Third Party Works** shall be completed **The Company** shall forthwith notify the **User** in writing that the **Connection Site** shall become **Operational**.

7.2 **[Compliance with Original Red Line Boundary - add only where it's a Gated Agreement for a direct connection**

If a **User** is not compliant at a **User Progression Milestone** with the **Original Red Line Boundary** (other than as it may be changed under the **Gate 2 Criteria**) for one or more technologies, **The Company** shall be entitled to amend the **Construction Agreement** and as a consequence the **Bilateral Connection Agreement** to:

7.2.1 reduce the **Installed Capacity** (of each technology that is non-compliant).

7.2.2 remove that technology if the **Installed Capacity** of a technology is reduced to 0 MW.

7.2.3 reduce the [relevant capacity] if the sum of the **Installed Capacity** of all technologies is reduced such that it is less than the [capacity] and such that the [capacity] is no higher than the sum of the **Installed Capacity** of all technologies.]

8. **COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS**

The **User** shall ensure that on the **Completion Date** the **User's Equipment** complies with the site specific technical conditions set out in Appendix F 1-5 to the **Bilateral Connection Agreement** .

9. **CREDIT REQUIREMENTS**

Alternate provisions apply depending whether or not the **User** does (9A) or does not (9B) meet **The Company's** required credit rating on signing the **Construction Agreement**. Details of the credit requirements are set out in the **CUSC**.

9A1 **PROVISION OF SECURITY**

9A.1.1 The **User** shall as soon as possible after execution of this **Construction Agreement** and in any event no later than one (1) month after the date of such execution confirm to **The Company** whether it meets **The Company Credit Rating**. Thereafter not less than 75 days before 1 April and 1 October in each year until (subject to Clause 9A.4) 28 days after the **Charging Date** the **User** shall confirm its **The Company Credit Rating** to **The Company** (which in the case of a long term private credit rating shall be confirmed by Standard and Poor's or Moody's within a period of 45 days prior to the date of confirmation). The **User** shall inform **The Company** in writing forthwith if it becomes aware of losing its **The Company Credit Rating** or if it is or is likely to be put on credit watch or any similar credit surveillance procedure which may give **The**



**Company** reasonable cause to believe that the **User** may not be able to sustain its **The Company Credit Rating** for at least 6 months.

9A.1.2 In the event that the **User** has elected to provide **The Company** with an indicative credit rating and **The Company** is of the reasonable opinion that the **User** has ceased to comply with the requirements of Clause 9A.1.1 then **The Company** may require the User forthwith:-

- (i) to apply to Standard and Poor's and/or Moody's for a further indicative long term private credit rating; or
- (ii) to confirm to **The Company** that it shall provide the security referred to in Clause 9A.1.4 hereof.

9A.1.3 In the event of the **User**:-

- (i) not having an **The Company Credit Rating**; or
- (ii) having a credit rating below **The Company Credit Rating**; or
- (iii) not having obtained from Standard and Poor's or Moody's within 30 days of the written notification under Clause 9A.1.2 above an indicative long term private credit rating,

or if **The Company** becomes aware that:

- (iv) the **User** ceases to have an **The Company Credit Rating**; or
- (v) the **User** is put on credit watch or other similar credit surveillance procedure as specified above which may give **The Company** reasonable cause to believe that the User may not be able to maintain an **The Company Credit Rating** for at least 6 months; or
- (vi) the **User** has not obtained from Standard and Poor's within 30 days of the written notification by **The Company** under Clause 9A.1.2(i) above a further indicative long term private credit rating,

the **User** shall (where appropriate on receipt of written notification from **The Company**) comply with the terms of Clause 9A.1.4.

9A.1.4 The **User** shall within 21 days of the giving of a notice under Clause 9A.1.3 or within 30 days of the **User** confirming to **The Company** under Clause 9A.1.2(ii) that it will provide the security specified below (whichever is the earlier), provide **The Company** with the security specified below to cover the **User's** payment obligations to **The Company** arising in the event of, or which have arisen prior to, termination of this **Construction Agreement**. The security to be provided

shall be in an amount not greater than such sums payable on termination (inclusive of any applicable **Value Added Tax** that would be due) and specified in writing by **The Company** to the **User** from time to time as appropriate. Such security shall be provided by way of:-

- (i) an irrevocable on demand standby **Letter of Credit** or guarantee; or
- (ii) cash held in escrow [**Escrow Account/ Bank Account**]; or
- (iii) any other form included in **The Company's** then current policy and procedure

such letter of credit or guarantee or security to be in a form agreed in writing by **The Company** and to be given by a **Qualifying Bank**, or **Qualifying Company**. Cash deposited in [escrow] shall be deposited with a **Qualifying Bank**. The choice of such security shall be at the discretion of the **User**.

9A.1.5 The **User** shall in addition to providing the requisite security enter into an agreement with **The Company**, which shall be supplemental to this **Construction Agreement** (the "Amending Agreement"). The **Amending Agreement** shall be in such form as **The Company** shall reasonably require and shall contain such provisions in relation to the **User's** obligations to provide and maintain security as shall be consequential upon the requirement for security having arisen, in line with **The Company's** then current provisions to the like effect in its agreements with other parties. The **Amending Agreement** shall relate to the procedures required in obtaining and maintaining the security and shall not alter or amend the amount of security required in terms of this **Construction Agreement**.

9A.1.6 In the event of **The Company's** credit requirements being reviewed at any time **The Company** shall advise the **User** in writing of the new credit requirements and the **User** shall within 30 days of such notification confirm in writing to **The Company** whether it wishes to enter into an **Amending Agreement** to reflect the new credit requirements. Thereafter if the **User** has confirmed it wishes to accept the new credit requirements **The Company** and the **User** shall within 30 days of such notification enter into an **Amending Agreement**.

9A.1.7 In the event that the facts or circumstances giving rise to the obligations of the **User** to provide the security have ceased, then **The Company** shall release the security and provisions to that effect shall be included in the **Amending Agreement**.

#### **Final Sums**

9A.2 Within 60 days of the date of termination of this **Construction Agreement** **The Company** shall:

- (a) furnish the **User** with a further statement showing a revised estimate of **Final Sums** and will provide as soon as practicable evidence of such costs having been incurred; and
- (b) by written notice to the **User** inform the **User** of all capital items which cost **The Company** in excess of £10,000 and in relation to which an amount on account of **Final Sums** shall have been paid and whether **The Company** (1) wishes to retain the said capital items or (2) dispose of them.

9A.3.1 In respect of all capital items which The Company wishes to retain (other than those which have been, or are proposed to be installed as a replacement for **Transmission Plant and Transmission Apparatus**) **The Company** shall forthwith reimburse to the **User** the amount paid by the **User** on account of **Final Sums** in respect of the said capital items (including without limitation the amount paid on account of the design, purchase, installation and testing of the said capital item and also associated construction works and interest charges) together with interest calculated thereon on a daily basis from the date of termination of this **Construction Agreement** to the date of payment at **Base Rate** for the time being and from time to time provided that in the event that **The Company** wishes to retain any capital item which has been installed but wishes to remove it to storage or to another site then it shall only reimburse to the **User** the cost of the capital item and not the costs of such installation and shall deduct from any reimbursement due to the **User** the costs of removal and/or storage.

9A.3.2 In respect of all capital items which **The Company** wishes to dispose (other than those which have been, or are proposed to be installed as a replacement for **Transmission Plant and Transmission Apparatus**) it shall forthwith (and subject to **The Company** obtaining the consent of the **Authority** under condition F4 of the **ESO Licence** if required and/or subject to any **Relevant Transmission Licensee** obtaining the consent of the **Authority** under Standard Condition B3 of its transmission licence) sell or procure the sale of the said capital item on an arms-length basis as soon as reasonably practicable. Forthwith upon receipt of the sale proceeds **The Company** shall pay to the **User** the proceeds received from any such sale together with interest thereon calculated on a daily basis from the date of termination to the date of payment at **Base Rate** for the time being and from time to time less any reasonable costs associated with the sale including the costs and expenses reasonably incurred and/or paid and/or which **The Company** is legally bound to pay on removing the capital item, any storage charges and any costs reasonably incurred by **The Company** in respect of reinstatement associated with removal of the capital item. **The Company** shall provide the **User** with reasonably sufficient evidence of all such costs and expenses having been incurred. If the **Authority** does not agree to the disposal of the capital item the capital item shall be retained by **The Company** and **The Company** shall reimburse the **User** the notional current market value in situ of the said capital item as between a willing buyer

and a willing seller as agreed between the parties and failing agreement as determined by reference to arbitration in accordance with the **Dispute Resolution Procedure** together with interest thereon calculated on a daily basis from the date of termination of this **Construction Agreement** to the date of payment at **Base Rate** for the time being and from time to time.

9A.3.3 As soon as reasonably practicable after termination of this **Construction Agreement** **The Company** shall provide the **User** with a statement of and invoice for **Final Sums** together with evidence of such costs having been incurred and/or paid and/or having been committed to be incurred. If the **Final Sums** are greater than the payments made by the **User** in respect of **The Company's** estimate(s) of **Final Sums** the **User** shall within 28 days of the said statement and invoice prepared by **The Company** pay to **The Company** the additional payments due by the **User** together with interest calculated thereon on a daily basis at **Base Rate** for the time being and from time to time from the date of previous payment(s) sums equal to **The Company's** estimate of **Final Sums** to the date of the statement of and invoice for **Final Sums**. If the **Final Sums** is less than the payments made by the **User** in respect of **The Company's** estimate of **Final Sums** paid by the **User** following termination of this **Construction Agreement** **The Company** shall forthwith pay to the **User** the excess paid together with interest on a daily basis at **Base Rate** for the time being and from time to time from the date of payment of the fair and reasonable estimate of **Final Sums** to the date of reimbursement by **The Company** of the said excess paid.

9A.4 The obligations to provide security under this Clause 9A shall continue until either all sums due under this **Construction Agreement** have been paid in full or security arrangements have been put in place by the **User** under the **Bilateral Connection Agreement** in accordance with Section 2 Part III of the **CUSC**. Until such time as the security arrangements are put in place in accordance with Section 2 Part III of the **CUSC** **The Company** shall be entitled to call upon the security put in place under the terms of this **Construction Agreement** for payment of **Termination Amounts** when due under the provisions of the **CUSC**.

Or

9B.1 Provision of Security

9B.1.1 The **User** hereby agrees that it shall forthwith upon the signing of this **Construction Agreement** provide to **The Company** or procure the provision to **The Company** of, and the **User** shall until (subject to Clause 9B.8) 28 days after the **Charging Date** (unless and until this **Construction Agreement** shall be terminated and all sums due or which will or might fall due in respect of which security is to be provided shall have been paid) maintain or procure that there is maintained in full force and effect (including by renewal or replacement), a

security arrangement from time to time and for the time being as set out in Appendix M hereto to provide security for the **User's** obligation to pay **The Company** any and all sums specified by **The Company** in accordance with Clause 9B.2 of this **Construction Agreement** as requiring to be secured in respect of:-

- (a) the **User's** liability to pay **The Company** amounts from time to time due under Clause 2.4 of this **Construction Agreement**; and
- (b) **Final Sums**.

#### 9B.2 Provision of **Bi-annual Estimate** and **Secured Amount Statement**

9B.2.1 **The Company** shall provide to the **User** an estimate ("the **Bi-annual Estimate**") in substantially the form set out in Part 2 of Appendix M to this **Construction Agreement** and showing the amounts of all payments required or which may be required to be made by the **User** to **The Company** in respect of **Final Sums** and **The Company Engineering Charges** and other expenses in relation to seeking **Consents** referred to in Clause 2.4 of this **Construction Agreement** (inclusive of any **Value Added Tax** that would be due) at the following times and in respect of the following periods:-

- (a) forthwith on and with effect from the signing of this **Construction Agreement**, in respect of the period from and including the day of signing of this **Construction Agreement** until the next following 31st March or 30th September (whichever shall first occur); and
- (b) not less than 75 (seventy five) days (or if such day is not a Business Day the next following **Business Day**) prior to each 31st March and 30th September thereafter in respect of the period of six calendar months commencing on the immediately following 1st April or 1st October (as the case may be), until this **Construction Agreement** shall be terminated and all sums due or which will or might fall due in respect of which security is to be provided shall have been paid.

9B.2.2 Such **Bi-annual Estimate** shall be accompanied by a statement (in the form of the **Secured Amount Statement** set out in Part 3 of Appendix M to this **Construction Agreement**) ("**Secured Amount Statement**") specifying the aggregate amount to be secured at the beginning of and throughout each such period.

9B.2.3 If **The Company** shall not provide any subsequent **Bi-annual Estimate** and **Secured Amount Statement** by the requisite date, then the **User** shall at the date it is next required to have in full force and effect security and whether by renewal or replacement or otherwise in respect of the following six calendar month period nonetheless provide security in accordance with the provisions of

this **Construction Agreement** in the same amount as the amount then in force in respect of the then current six calendar month period. Notwithstanding the foregoing, if **The Company** shall provide the **User** with any **Bi-annual Estimate** and **Secured Amount Statement** later than the date specified in Clause 9B.2.1 of this **Construction Agreement**, then the following shall apply. The **User** shall within 30 (thirty) days of receipt of the said **Secured Amount Statement** procure that to the extent that the amount in respect of which security has been or is to be provided pursuant to this Clause 9B.2.3 in respect of the relevant period ("**the Secured Amount**") falls short of the amount stated in the **Secured Amount Statement** ("**the Required Amount**") the Secured Amount shall be adjusted to the **Required Amount**.

#### 9B.3 Entitlement to Estimate

If **The Company** is (for whatever reason) unable on any relevant date to calculate precisely any sum due or which has accrued due or in respect of which the **User** has a liability to **The Company** for payment under any of the provisions of this **Construction Agreement**, **The Company** shall be entitled to invoice the **User** for a sum equal to **The Company's** fair and reasonable estimate of the sums due or which may become due or in respect of which the **User** has a liability to **The Company** for payment. **The Company** shall also be entitled to send the **User** further invoices for such sums not covered in previous invoices. The **User** shall pay **The Company** all sums so invoiced by **The Company**.

#### 9B.4 Demands not Affected by Disputes

It is hereby agreed between **The Company** and the **User** that if there shall be any dispute between the **User** and **The Company** as to:-

9B.4.1 any amount certified by **The Company** in any **Secured Amount Statement** as requiring at any time and from time to time to be secured; or

9B.4.2 the fairness and reasonableness of **The Company's** estimate; or

9B.4.3 whether there has been an **Event of Default** (under the **Construction Agreement** or the **CUSC**), or

9B.4.4 the lawfulness or otherwise of any termination or purported termination of this **Construction Agreement**

such dispute shall not affect the ability of **The Company** to make demands pursuant to the security arrangement to be provided pursuant to Clause 9B.1 of and Appendix M to this **Construction Agreement** and to recover the amount or amounts payable thereunder, it being acknowledged by the **User** that but for such being the case **The Company's** security would be illusory by reason of

the period of validity of the relevant security being likely to expire or capable of expiring before the final resolution of such dispute. The **User** accordingly covenants with **The Company** that it will not take any action, whether by way of proceedings or otherwise, designed or calculated to prevent, restrict or interfere with the payment to **The Company** of any amount secured under the security arrangement nor seek nor permit nor assist others to do so.

- 9B.5 If there shall be any dispute as mentioned in Clause 9B.4 of this **Construction Agreement** the same shall, whether **The Company** shall have terminated this **Construction Agreement** and recovered or sought to recover payment under the security arrangement or not, and without prejudice to **The Company's** right to recover or seek to recover such payment, be referred in the case of Clauses 9B.4.1 and 9B.4.2 to the **Independent Engineer** (and, for the avoidance of doubt the provisions of this **Construction Agreement** relating to the **Independent Engineer** for the purposes of this Clause 9B.5 shall survive termination) and, in the case of Clauses 9B.4.3 and 9B.4.4 be dealt with by referral to arbitration in accordance with the **Dispute Resolution Procedure**.

#### **Final Sums**

- 9B.6 Within 60 days of the date of termination of this **Construction Agreement** **The Company** shall:

- (a) furnish **the User** with a further statement showing a revised estimate of **Final Sums** and will provide as soon as practicable evidence of such costs having been incurred; and
- (b) by written notice to **the User** inform **the User** of all capital items which cost **The Company** in excess of £10,000 and in relation to which an amount on account of **Final Sums** shall have been paid and whether **The Company** (1) wishes to retain the said capital items or (2) dispose of them.

- 9B.7.1 In respect of all capital items which **The Company** wishes to retain (other than those which have been, or are proposed to be installed as a replacement for **Transmission Plant** and **Transmission Apparatus**) **The Company** shall forthwith reimburse to the **User** the amount paid by the **User** on account of **Final Sums** in respect of the said capital items (including without limitation the amount paid on account of the design, purchase, installation and testing of the said capital item and also associated construction works and interest charges) together with interest calculated thereon on a daily basis from the date of termination of this **Construction Agreement** to the date of payment at **Base Rate** for the time being and from time to time provided that in the event that **The Company** wishes to retain any capital item which has been installed but wishes to remove it to storage or to another site then it shall only reimburse to the **User** the cost of the capital item and not the costs of such installation and shall deduct from any reimbursement due to the **User** the costs of removal and/or storage.

9B.7.2 In respect of all capital items which **The Company** wishes to dispose (other than those which have been, or are proposed to be installed as a replacement for **Transmission Plant** and **Transmission Apparatus**) it shall forthwith (and subject to **The Company** obtaining the consent of the **Authority** under Standard Condition B3 of the **Transmission Licence** if required and/or subject to any **Relevant Transmission Licensee** obtaining the consent of the **Authority** under condition F4 of the **ESO Licence**) sell or procure the sale of the said capital item on an arms-length basis as soon as reasonably practicable. Forthwith upon receipt of the sale proceeds **The Company** shall pay to the **User** the proceeds received from any such sale together with interest thereon calculated on a daily basis from the date of termination to the date of payment at **Base Rate** for the time being and from time to time less any reasonable costs associated with the sale including the costs and expenses reasonably incurred and/or paid and/or which **The Company** is legally bound to pay on removing the capital item, any storage charges and any costs reasonably incurred by **The Company** in respect of reinstatement associated with removal of the capital item. **The Company** shall provide the **User** with reasonably sufficient evidence of all such costs and expenses having been incurred. If the **Authority** does not agree to the disposal of the capital item the capital item shall be retained by **The Company** and **The Company** shall reimburse the **User** the notional current market value in situ of the said capital item as between a willing buyer and a willing seller as agreed between the parties and failing agreement as determined by reference to arbitration in accordance with the **Dispute Resolution Procedure** together with interest thereon calculated on a daily basis from the date of termination of this **Construction Agreement** to the date of payment at **Base Rate** for the time being and from time to time.

9B.7.3 As soon as reasonably practicable after termination of this **Construction Agreement** **The Company** shall provide the **User** with a statement of and invoice for **Final Sums** together with evidence of such costs having been incurred and/or paid and/or having been committed to be incurred. If the **Final Sums** are greater than the payments made by the **User** in respect of **The Company's** estimate(s) of **Final Sums** the **User** shall within 28 days of the said statement and invoice prepared by **The Company** pay to **The Company** the additional payments due by the **User** together with interest calculated thereon on a daily basis at **Base Rate** for the time being and from time to time from the date of previous payment(s) sums equal to **The Company's** estimate of **Final Sums** to the date of the statement of and invoice for **Final Sums**.

If the **Final Sums** is less than the payments made by the **User** in respect of **The Company's** estimate of **Final Sums** paid by the **User** following termination of this **Construction Agreement** **The Company** shall forthwith pay to the **User** the excess paid together with interest on a daily basis at **Base Rate** for the time being and from time to time from the date of payment of the fair and reasonable



estimate of **Final Sums** to the date of reimbursement by **The Company** of the said excess paid.

- 9B.8** The obligations to provide security under this Clause 9 B shall continue until either all sums due under this **Construction Agreement** have been paid in full or security arrangements have been put in place by the **User** under the **Bilateral Connection Agreement** in accordance with Section 2 Part III of the **CUSC**. Until such time as the security arrangements are put in place in accordance with Section 2 Part III of the **CUSC** **The Company** shall be entitled to call upon the security put in place under the terms of this **Construction Agreement** for payment of **Termination Amounts** where due under the provisions of the **CUSC**.

## **10. EVENT OF DEFAULT**

As before alternate provisions apply depending whether or not the User does (10A) or does not (10B) meet The Company's required credit rating on signing this **Construction Agreement**

### **10A. Event of Default**

Any of the following events shall constitute an **Event of Default**:-

- 10A.1** If the **User** fails to provide or procure that there is provided to **The Company** within the requisite time any relevant security satisfactory to **The Company**, or to enter into the **Amending Agreement** pursuant to Clauses 9A.1 or 10A.3 of this **Construction Agreement**.
- 10A.2** If having entered into the **Amending Agreement** and having provided security satisfactory to **The Company** pursuant to Clauses 9A.1 and 10A.3 of this **Construction Agreement**.
- (a) The **User** thereafter fails to provide or procure that there is provided to **The Company** or at any time fails to maintain or procure that there is maintained in full force and effect the relevant security arrangement required by this **Construction Agreement** as varied by the **Amending Agreement** or to revise or renew such security with the required replacement security or to maintain or procure that there is maintained in full force and effect any such renewed, revised or substituted security as so required, or if the User shall otherwise be in breach of any of its obligations in respect of security under this **Construction Agreement** as varied by the **Amending Agreement**;
  - (b) The **User** or any shareholder (whether direct or indirect) of the **User** or any other party who may at any time be providing security to **The Company** pursuant to the requirements of this **Construction**

**Agreement** as varied by the **Amending Agreement** takes any action whether by way of proceedings or otherwise designed or calculated to prevent, restrict or interfere with the payment to **The Company** of any amount so secured whether or not there shall be a dispute between the parties;

- (c) Any party who may at any time be providing security to **The Company** pursuant to the provisions of this **Construction Agreement** as varied by the **Amending Agreement** fails to pay to **The Company** any sum demanded pursuant thereto.

10A.3 If

- (i) There is a material adverse change in the financial condition of the **User** such as to give **The Company** reasonable grounds for concluding that there is a substantial probability that the **User** will default in the payment of any sums due or to become due to **The Company** within the next following period of twelve (12) months in terms of or on termination of this **Construction Agreement**; or
- (ii) an event of default has occurred under any banking arrangements (as such may be more particularly described in the **Bilateral Connection Agreement**) (an event of default being any event described as such in the banking arrangements)] put in place by the **User** in connection with a project for which security under this Clause 10A is required by **The Company** and as a result the banks who are party to such banking arrangement have taken steps to declare the principle of the advances under such arrangement immediately due and payable; or
- (iii) any other indebtedness of the **User** for the repayment of borrowed money (in a principal outstanding amount of not less than £1,000,000 pounds sterling or such greater amount specified in the **Bilateral Connection Agreement**) has become due and payable prior to the stated date of maturity thereof by reason of any default or breach on the part of the **User** and the amount in question has not been paid by the **User** or refinanced within a period of 28 days following the date upon which it was so declared due and payable

and in (i) or (ii) or (iii) the **User** fails, within a period of 7 (seven) days following the date on which **The Company** gives the **User** notice in writing of one or other of the above events occurring to provide **The Company** with such security as **The Company** shall require to cover the **User's** payment obligations to **The Company** arising in the event of or which have arisen prior to termination of this **Construction Agreement** and which arise under this **Construction Agreement**. The security to be provided shall be in a form satisfactory to **The Company** in accordance with its then current policy and procedures and in such amount as **The Company** shall specify to the **User** in the aforesaid notice. The

**User** shall if required by **The Company**, in addition to providing the requisite security, within a period of 30 days following the date on which **The Company** gives the **User** such notice enter into an **Amending Agreement**. Such **Amending Agreement** shall contain such provisions in relation to the **User's** obligations to provide and maintain security as shall be consequential upon the requirement for security having arisen and shall be in such form as **The Company** shall reasonably require in line with **The Company's** then current provisions to the like effect in its connection agreements with other parties.

Provided that (in relation to paragraphs (i) or (ii) or (iii) above) if at anytime after the putting in place of security under Clause 10A.3 the **User** shall produce to **The Company** evidence to **The Company's** reasonable satisfaction that there is not a substantial probability of the **User** not being able to make payment to **The Company** of such sums within the next following period of twelve (12) months, **The Company** shall not require the **User** to provide the aforesaid security and shall release any such security then in place. This waiver is without prejudice to **The Company's** right to require security at any time thereafter in the event of any of the circumstances set out in paragraph (i) and/or (ii), and/or (iii) subsequently occurring.

10A.4 Any of the **Events of Default** in Paragraph 5.3.1 of the **CUSC** have occurred and are occurring.

Or

**10B Event of Default**

Any of the following events shall constitute an **Event of Default**:-

**10B.1 If**

- (i) an event of default has occurred under any banking arrangements (as such may be more particularly described in the **Bilateral Connection Agreement**) (an event of default being any event described as such in the banking arrangements) put in place by the **User** in connection with a project for which security under this Clause 10B is required by **The Company** and as a result the banks who are party to such banking arrangement have taken steps to declare the principle of the advances under such arrangement immediately due and payable; or
- (ii) there is a material adverse change in the financial condition of the **User** such as to give **The Company** reasonable grounds for concluding that there is a substantial probability that the **User** will default in the payment of any unsecured sum due or to become due to **The Company** within the next following period of 12 (twelve) months in terms of or on termination of this **Construction Agreement**;

- (iii) any other indebtedness of the **User** for the repayment of borrowed money (in a principal amount of not less than £1,000,000 pounds sterling or such greater amount specified in the **Bilateral Connection Agreement**) has become due and payable prior to the stated date of maturity thereof by reason of any default or breach on the part of the **User** and the amount in question has not been paid by the **User** or refinanced within a period of 28 days following the date upon which it was so declared due and payable

and in either (i) or (ii) or (iii) the **User** fails:-

- (1) within a period of 14 (fourteen) days following the date on which **The Company** gives notice of such circumstances to provide to **The Company** a cash deposit in a **Bank Account**, a **Performance Bond** or **Letter of Credit** (as defined in Appendix M) in favour of **The Company** and **Valid** (as defined in Appendix M) at least up to the last day of the **Financial Year** in which the event occurs for such amount representing **The Company's** reasonable estimate of all unsecured sums to become due to **The Company** in the period up to the end of the **Financial Year** in which the event occurs such sum to be specified in the said notice; or
- (2) to subsequently provide such cash deposit or renew such **Performance Bond** or **Letter of Credit** (or such renewed **Performance Bond** or **Letter of Credit** provided under this paragraph) not less than 45 days prior to its stated expiry date for such amount representing **The Company's** reasonable estimate of the unsecured sums to become due to **The Company** in the next following **Financial Year** valid at least up to the last day of the next following **Financial Year** and to continue the provision of cash deposit a **Performance Bond** or **Letter of Credit** in a similar manner, to such estimate of unsecured sums.

Provided that regarding (i) or (ii) or (iii) if at any time after the putting in place of security under this Clause 10B.1 the **User** shall provide to **The Company** evidence to **The Company's** reasonable satisfaction that there is not a substantial probability of the **User** being unable to make payment to **The Company** of any unsecured sums within the next following period of twelve (12) months, **The Company** shall not require the **User** to provide the aforesaid security and shall release any such security then in place. This waiver is without prejudice to **The Company's** right to return security at any time thereafter in the event of any of the circumstances set out in paragraph (i) and/or (ii) and/or (iii) in this Clause 10B.1 subsequently occurring.

10B.2 If the **User** fails to provide or procure that there is provided to **The Company** or at any time fails to maintain or procure that there is maintained in full force and effect the relevant security arrangement required under Clauses 9B.1 or 10B.1 of and Appendix M to this **Construction Agreement** or to renew or

revise such security or to substitute any security with the required replacement security or to maintain or procure that there is maintained in full force and effect any such renewed, revised or substituted security as so required or if the **User** is otherwise in breach of any of its obligations under Appendix M to this **Construction Agreement**.

10B.3 If the **User** or any shareholder (whether direct or indirect) of the **User** takes any action whether by way of proceedings or otherwise designed or calculated to prevent restrict or interfere with the payment to **The Company** of any amount so secured or seeks or permits or assists others to do so, whether or not there shall be a dispute between the parties.

10B.4 If any party who may at any time be providing or holding security in favour of **The Company** pursuant to Clauses 9B.1 or 10B.1 of and Appendix M to this **Construction Agreement** fails to pay **The Company** any sum demanded in any Notice of Drawing (as defined in Appendix M) pursuant thereto.

10B.5 Any of the **Events of Default** in Paragraph 5.3.1 of the **CUSC** have occurred and are occurring.

## **11. TERMINATION ON EVENT OF DEFAULT**

11.1 Once an **Event of Default** pursuant to Clause 10 has occurred and is continuing **The Company** may give notice of termination to the **User** whereupon this **Construction Agreement** shall forthwith terminate and **The Company** shall disconnect all the **User's Equipment** at the **Connection Site** and:

(a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and

(b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**.

11.2 The **User** shall (notwithstanding any longer time for payment which but for such termination the **User** may have for payment pursuant to this **Construction Agreement**) within 14 days from the date of termination pay to **The Company** all amounts already due and owing on the date this **Construction Agreement** so terminates and if this **Construction Agreement** terminates prior to the

**Charging Date** the **User** shall be liable forthwith on the date this **Construction Agreement** so terminates to pay to **The Company**:-

- (1) a sum equal to all liabilities arising under Clause 2.4 of this **Construction Agreement** which have not yet been invoiced by **The Company** to the **User**; and
- (2) a sum equal to **The Company's** fair and reasonable estimate of **Final Sums**,

such payments in each case to be made within 14 days of the date of **The Company's** invoice(s) in respect thereof subject to adjustment in respect of **The Company's** estimate of **Final Sums** in accordance with Clause 9A.3.3. or 9B.7.3.

## **12. TERM**

- 12.1 Subject to the provisions for earlier termination set out in the **CUSC** this **Construction Agreement** shall continue until terminated in accordance with Clause 2.5, 2.6, 4.8, 11 or 16 hereof.
- 12.2 In addition this **Construction Agreement** shall terminate upon termination of the associated **Bilateral Connection Agreement** and in the event that this is prior to the **Charging Date** the **User** shall in addition to the amounts for which it is liable under Clause 2.4 hereof be liable to pay to **The Company Final Sums** and the provisions of Clause 11 shall apply.
- 12.3 The associated [**Bilateral Connection Agreements** or **Agreement to Vary the Bilateral Connection Agreement**] will automatically terminate upon termination of this **Construction Agreement** prior to the **Charging Date**.
- 12.4 Any provisions for payment shall survive termination of this **Construction Agreement**.

## **13. CUSC**

The provisions of Sections 6.6 (Payment), 6.14 (Transfer and Subcontracting), 6.15 (Confidentiality), 6.18 (Intellectual Property), 6.19 (Force Majeure), 6.20 (Waiver), 6.21 (Notices), 6.22 (Third party Rights), 6.23 (Jurisdiction), 6.24 (Counterparts), 6.25 (Governing Law), 6.26 (Severance of Terms), 6.27 (Language) inclusive of the **CUSC** shall apply mutatis mutandis to this **Construction Agreement** as if set out in this **Construction Agreement**.

## **14. DISPUTES**

Except as specifically provided for in this **Construction Agreement** any dispute arising under the terms of this **Construction Agreement** shall be referred to arbitration in accordance with the **Dispute Resolution Procedure**.

## **15. VARIATIONS**

- 15.1 Subject to Clause 15.2 and 15.3 below, no variation to this **Construction Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.
- 15.2 **The Company** and the **User** shall effect any amendment required to be made to this **Construction Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.
- 15.3 **The Company** has the right to vary Appendices in accordance with Clauses 2.3, 2.11 and 7.4 and 16 and Paragraph 6.9 of the **CUSC**.

## **16. QUEUE MANAGEMENT PROCESS**

- 16.1 The **Queue Management Process** shall be incorporated into this **Construction Agreement** and apply between **The Company** and the **User** and Appendix Q to this **Construction Agreement** has been prepared in accordance with the principles set out in **CUSC** Section 16.
- 16.2 Where, in accordance with the **Queue Management Process**,:
  - 16.2.1 in the case of any of the **Conditional Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination", **The Company** will terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business Days**); and
  - 16.2.2 in the case of any of the **Construction Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination" **The Company** may terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business Days**); and
  - 16.2.3 on such termination the **User** shall in addition to the sums for which it is liable under Clause 2.4 hereof be liable to pay to **The Company** a sum equal to **The Company's** estimate or if applicable revised estimate of **Final Sums**. The **User** shall pay such sums within 14 (fourteen) days of the date of **The**

**Company 's** invoice(s) therefore and (where applicable) on termination **The Company** shall disconnect the **User's Equipment** at the **Connection Site** and;

- (a) the **User** shall remove any of the **User's Equipment** on the **Relevant Transmission Licensee's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**; and
- (b) **The Company** shall procure that the **Relevant Transmission Licensee** removes, any of the **Transmission Connection Assets** on the **User's** land within 6 months of the date of termination or such longer period as may be agreed between the **Relevant Transmission Licensee** and the **User**.

16.3 Where in accordance with the **Queue Management Process** there is a variation to the date by which a **User Progression Milestone** has to be met **The Company** shall revise Appendix Q to this **Construction Agreement** as required to reflect such change.

16.4 Any dispute or difference between **The Company** and the **User** on the **Queue Management Process** in respect of this **Construction Agreement** shall be resolved as an **Other Dispute** under the **Dispute Resolution Procedure**.

#### **[17 Distribution Queue Management<sup>3</sup>**

The **User** will keep **The Company** advised as to the categorisation of the **Developer's Project** in the **Distribution Queue Management Process** and notify **The Company** as soon as practicable if the categorisation of the **Developer's Project** is changed to "Termination" and if and when, in accordance with that process, the **Distribution Connection Agreements** are terminated.]

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )  
**[name]** )  
for and on behalf of )  
National Energy System Operator )  
Limited )

---

<sup>3</sup> Only include where Construction Agreement is for a Distribution Network Operator and associated with a connection to the Distribution System



SIGNED BY )  
**[name]** )  
for and on behalf of )  
**[User]** )

**APPENDIX [B]**  
**ONE OFF WORKS**

**APPENDIX [G]**  
**TRANSMISSION CONNECTION ASSET WORKS**

**APPENDIX [H]**  
**TRANSMISSION REINFORCEMENT WORKS**

**APPENDIX [J]**  
**CONSTRUCTION PROGRAMME**

## **APPENDIX [K]**

### **LIQUIDATED DAMAGES**

Company:

Connection site:

Type:

---

The amount of Liquidated Damages payable by The Company to the User pursuant to this Construction Agreement shall be:

Liquidated Damages under Clause [4] of this Construction Agreement shall be calculated on a daily basis at a rate of £XXXXXX per week subject to the limit that the total Liquidated Damages payable by The Company to the User under this Clause shall not exceed £XXXXXX.

## **APPENDIX [L]**

### **INDEPENDENT ENGINEER**

Company:

Connection site:

Type:

---

The Independent Engineer will be a Member of the Association of Consulting Engineers (ACE) and shall be agreed between the parties within 120 days of execution of this Construction Agreement or such other period as may be agreed between the parties. Failing agreement it shall be referred to the President of the Institution of Electrical Engineers who shall nominate the Independent Engineer.

## **APPENDIX [M]**

### **PART 1**

#### **SECURITY ARRANGEMENT**

##### **1. DEFINITIONS**

In this Appendix M, the following terms have the meanings set out next to them:-

“Bi-annual Estimate” means an estimate pursuant to Clause [9B.2.1] of this Construction Agreement of all payments to be made or which may be required to be made by the User in any relevant period, such estimate to be substantially in the form set out in Part 2 of this Appendix M;

“Bank Account” means a separately designated bank account in the name of The Company at such branch of Barclays Bank PLC, or such branch of any other bank, in the City of London as is notified by The Company to the User, bearing interest from (and including) the date of deposit of principal sums to (but excluding) the date of withdrawal of principal sums from such account, mandated for withdrawal of principal solely by The Company against delivery of a Notice of Drawing for the amount demanded therein and mandated for the transfer of any interest accrued to the Bank Account to such bank account as the User may specify;

“Letter of Credit” means an irrevocable standby letter of credit in a form reasonably satisfactory to The Company but in any case expressed to be governed by the Uniform



Customs and Practice for Documentary Credits 1993 Revision ICC Publication No. 500 or such other form as may be reasonably satisfactory to The Company and allowing for partial drawings and providing for the payment to The Company on demand forthwith on and against The Company's delivery to the issuer thereof of a Notice of Drawing of the amount demanded therein;

**"Notice of Drawing"** means a notice of drawing signed by or on behalf of The Company substantially in the form set out in Part 4 of this Appendix M;

**"Performance Bond"** means an on first demand without proof or conditions irrevocable performance bond or performance guarantee executed as a deed in a form reasonably satisfactory to The Company but in any case allowing for partial drawings and providing for the payment to The Company on demand forthwith on and against The Company's delivery to the issuer thereof of a Notice of Drawing of the amount demanded therein;

**"Qualified Bank"** means a City of London branch of a bank, its successors and assigns, which has throughout the validity period of the Performance Bond or Letter of Credit it issues in favour of The Company, a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating provided that such bank is not during such validity period put on any credit watch or any similar credit surveillance which gives The Company reasonable cause to doubt

that such bank may not be able to maintain the aforesaid rating throughout the validity period and no other event has occurred which gives The Company reasonable cause to have such doubt;

“Qualified Company”

a company which is a public company or a private company within the meaning of section 1(3) of the Companies Act 1985 and which is either :

(a) a shareholder of the **User** or any holding company of such shareholder-or

(b) any subsidiary of any such holding company, but only where the subsidiary

(i) demonstrates to **The Company’s** satisfaction that it has power under its constitution to give a **Performance Bond** other than in respect of its subsidiary;

(ii) provides an extract of the minutes of a meeting of its directors recording that the directors have duly concluded that the giving of the **Performance Bond** is likely to promote the success of that subsidiary for the benefit of its members;

(iii) provides certified copies of the authorisation by every holding company of the subsidiary up to and including the holding company of the **User**, of the giving of the **Performance Bond**,

(the expressions “holding company” and “subsidiary” having the respective meanings assigned thereto by

section 736, Companies Act 1985 as supplemented by section 144(3), Companies Act 1989) and which has throughout the validity period of the **Performance Bond** it gives in favour of **The Company**, a rating of at least A- in Standard and Poor's long term debt rating or A3 in Moody's long term debt rating or such lesser rating which **The Company** may in its absolute discretion allow by prior written notice given pursuant to a resolution of its board of directors for such period and on such terms as such resolution may specify provided that such company is not during such validity period put on any credit watch or any similar credit surveillance procedure which gives **The Company** reasonable cause to doubt that such company may not be able to maintain the aforesaid rating throughout the validity period of the **Performance Bond** and no other event has occurred which gives **The Company** reasonable cause to have such doubt;

"Secured Amount Statement"

means a statement accompanying the Bi-annual Estimate setting out the amount of the User's Obligation based on figures contained in the Bi-annual Estimate being the amount for which security shall be provided to The Company pursuant to Clause 9B of this Construction Agreement;

"User's Obligation"

means the User's obligation to pay under this Construction Agreement:-

- (i) all amounts in respect of which the User has a liability to pay to The Company pursuant to Clause 2.4 of this Construction Agreement Agreement;
  - (ii) Final Sum
- “Valid” means valid for payment to be made thereunder against delivery of a Notice of Drawing given within the period stated therein.

## 2. **SECURITY REQUIREMENT**

The User’s Obligation shall be secured by any one of the following:-

- 2.1 A Performance Bond or Letter of Credit from a Qualified Bank for the amount stated in the Secured Amount Statement as the estimated amount of the User’s Obligation to be secured, such Performance Bond or Letter of Credit to be Valid for at least the period stated in such Secured Amount Statement and to be renewed periodically where applicable in the manner stated in paragraph 3.3 of this Appendix M; or
- 2.2 A cash deposit in a Bank Account at least for the amount stated in the Secured Amount Statement as the estimated amount of the User’s Obligation to be secured, such cash deposit to be increased or reduced periodically where applicable in the manner stated in paragraph 3.4 of this Appendix M; or
- 2.3 A Performance Bond from a Qualified Company for the amount stated in the Secured Amount Statement as the estimated amount of the User’s Obligation to be secured, such Performance Bond to be Valid for at least the period stated in such Secured Amount Statement and to be renewed

periodically where applicable in the manner stated in paragraph 3.3 of this Appendix M.

### 3. **GENERAL PROVISIONS**

- 3.1 Any Notice of Drawing to be delivered to Barclays Bank PLC or any other bank at which the Bank Account shall have been opened or a Qualified Bank or a Qualified Company may be delivered by hand, by post or by other agreed communication method.
- 3.2 If the User becomes aware that the bank issuing the Performance Bond or Letter of Credit ceases to be a Qualified Bank or that the company giving the Performance Bond ceases to be a Qualified Company, the User shall so notify The Company in writing as soon as it becomes so aware. If The Company becomes aware that the bank issuing the Performance Bond or Letter of Credit ceases to be a Qualified Bank or that the company giving the Performance Bond ceases to be a Qualified Company, The Company may notify the User to that effect in writing. Where the bank or the company so ceases to be either a Qualified Bank or a Qualified Company (as the case may be) as a consequence of The Company having reasonable cause to doubt the continued rating of the said bank or company, such notice shall be accompanied by a statement setting out The Company's reasons for having such doubt. The User shall within 21 days of the giving of such notice by The Company or the User whichever is the earlier provide a replacement Performance Bond and/or Letter of Credit from a Qualified Bank or Qualified Company, as the case may be, and/or provide a cash deposit in the required amount in a Bank Account. From the date the replacement Performance Bond or Letter of Credit or Bank Account cash deposit is effectively and unconditionally provided and Valid, The Company will consent in writing to the security which it replaces being released.

3.3 The following provisions shall govern the issuance, renewal and release of the Performance Bond or Letter of Credit:-

3.3.1 The Performance Bond or Letter of Credit shall be Valid initially from the signing of this Construction Agreement at least to and including the following 31st March or 30th September whichever is the earlier date. Such Performance Bond or Letter of Credit shall be for an amount not less than that stated in the Secured Amount Statement as the amount of the User's Obligation to be secured during the period specified in the Secured Amount Statement.

3.3.2 On a date which is at least 45 days (or if such day is not a Business Day then on the immediately preceding Business Day) before the next following 31st March or 30th September whichever is the earlier date such Performance Bond or Letter of Credit shall be renewed so as to be Valid for not less than 6 months commencing from the immediately following 1st April or 1st October (as the case may be). Such renewed Performance Bond or Letter of Credit shall be for an amount not less than the amount of the User's Obligation stated in the Secured Amount Statement as the amount to be secured during the period that such renewed Performance Bond or Letter of Credit shall be Valid.

3.3.3 Thereafter, the renewed Performance Bond or Letter of Credit shall be further renewed in like manner every 6 months.

3.4 The following provisions shall govern the maintenance of cash deposits in the Bank Account:-

3.4.1 The amount of the cash deposit to be maintained in the Bank Account shall be maintained from the date of this Construction Agreement at least

to and including the following 31st March or 30th September, whichever is the earlier date. Such cash deposit shall be in an amount as stated in the Secured Amount Statement as the amount of the User's Obligation to be secured during the period stated in the Secured Amount Statement.

- 3.4.2 If the amount stated in the Secured Amount Statement as the amount of the User's Obligation to be secured from the following 1st April to 30th September or from the following 1st October to 31st March (as the case may be) is an amount greater than the amount then secured, the cash deposit in the Bank Account shall be increased to such greater amount on a date which is 45 days before the following 31st March or 30th September (as the case may be) which immediately precedes the commencement of the relevant above mentioned period.
- 3.4.3 If such amount stated in the Secured Amount Statement is smaller than the amount then secured, the cash deposit in the Bank Account shall not be reduced to the amount so stated until the expiry of 7 days after the next following 31st March or 30th September (as the case may be) ("the Release Date").
- 3.4.4 The sum equal to the amount of reduction in the cash deposit in the Bank Account shall be paid by The Company to the User from the Bank Account on the Release Date.
- 3.4.5 Any interest accruing to the Bank Account shall be for the account of and belong to the User absolutely, and The Company agrees to take any steps required to be taken by it for the release from the Bank Account and payment to the User of such interest as soon as the same shall have been credited to the Bank Account and The Company shall have received notice of such credit.

3.5 Notwithstanding any provision aforesaid:-

3.5.1 The User may provide different securities to The Company at any one time, each securing a different amount, provided that the aggregate amount secured by such securities shall be not less than the aggregate amount required to be secured pursuant to the Secured Amount Statement for any period specified therein.

3.5.2 The User may upon the expiry of at least 14 days prior written notice to The Company, substitute one type of security for another provided that unless The Company shall otherwise agree in writing such substituted security must be Valid from 1st April or 1st October (as the case may be) and committed at least 45 days before the immediately preceding 31st March or 30th September (as the case may be) in the following manner:-

(a) where a Performance Bond or a Letter of Credit is to substitute for other securities, it must be issued or given at least 45 days before such immediately preceding 31st March or 30th September (as the case may be).

(b) where a cash deposit in a Bank Account is to substitute for other securities, it must be deposited into the Bank Account at least 45 days before such immediately preceding 31st March or 30th September (as the case may be).

3.5.3 Upon request by the User to The Company, securities substituted in the aforesaid manner shall, providing the substitute security shall be Valid, be released on the following 1st April or 1st October (as the case may be). However, where the amount required by the Secured Amount Statement to be secured for any period is less than the amount required to be secured in the preceding period, the substituted security shall not



be released until 7 days after the then following 31st March or 30th September (as the case may be).

## **PART 2**

### **BI-ANNUAL ESTIMATE FOR CONSTRUCTION AGREEMENT** **DATED [            ]**

Amount due and amount which will  
or might fall due for the period  
commencing on and including  
[            ] and ending on and  
including [            ] in  
respect of which security is  
required

---

1. The Company Engineering Charges & expenses  
for obtaining Consents pursuant to  
to Clause 2.4
2. Final Sums
- [3. One Off Charge]

**PART 3**

**SECURED AMOUNT STATEMENT**

**CONSTRUCTION AGREEMENT DATED [ ]**

Amount in which security is  
required for the period  
commencing on and including  
[ ] and ending on and  
including [ ]

---

User's Obligation

We hereby certify that the amount to be secured in respect of the User's Obligation is as stated above in respect of the named period.

for and on behalf of  
**NATIONAL ENERGY SYSTEM OPERATOR LIMITED**

Duly authorised officer

**PART 4**

**NOTICE OF DRAWING**

To [            ] Bank/Public Limited Company/Limited

copy to:

[date]

Dear XXXXXX,

RE: **CONSTRUCTION AGREEMENT DATED [            ]**  
**PERFORMANCE BOND NO./DATED [            ]/LETTER OF CREDIT NO.**  
**[            ]/BANK ACCOUNT NO. [            ] ("THE SECURITY")**

---

We refer to the above Security in our favour. We hereby demand immediate payment thereunder in the amount of £[            ].

We require payment to be made by telegraphic transfer to:-

Bank plc

Address:

Sort Code:

Account Name:      National Energy System Operator Limited

Account No:

Yours faithfully,

for and on behalf of  
**NATIONAL ENERGY SYSTEM OPERATOR LIMITED**

Duly authorised officer

**APPENDIX [N]**  
**THIRD PARTY WORKS**

## **APPENDIX [O][P]**

### **GATE 1 VERSIONS**

#### **USER'S DATA**

Project

Location

Connection Site [(provided for indicative purposes only and subject to Clause 1.2)]  
[Reserved (subject to Clause 1.2)]

Demand [requested] [Reserved subject to Clause 1.2]

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date [(provided for indicative purposes only and subject to Clause 1.2)] [Reserved  
subject to Clause 1.2] when connection to\use of the National Electricity  
Transmission System will be energised.

#### **DEVELOPER'S DATA**

Project

Location

Connection Site (GSP) [(provided for indicative purposes only and subject to Clause  
1.2)] [*Large BEGA and BELLA only* - Reserved subject to Clause 1.2]

Site of Connection [(provided for indicative purposes only and subject to Clause 1.2)]  
[*Large BEGA and BELLA only* - Reserved subject to Clause 1.2]

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date [(provided for indicative purposes only and subject to Clause 1.2)] [*Large BEGA and BELLA only* - Reserved subject to Clause 1.2] when Power Station's connection to use of the Distribution System will be energised.

Installed Capacity

**APPENDIX [O][P]**

**[GATE 2 VERSIONS]**

**USER'S DATA**

Project

Location

Connection Site

Demand (as set out in the Bilateral Connection Agreement)

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date when connection to\use of the National Electricity Transmission System will be energised.

Installed Capacity

**DEVELOPER'S DATA**

Project

Location

Connection Site (GSP)

Site of Connection

Developer Capacity

Agreement Reference

[Insert details equivalent to data listed in part 1 of the planning code]

Date when connection to\use of the Distribution System will be energised.

Installed Capacity



**APPENDIX [Q]**  
**QUEUE MANAGEMENT PROCESS – USER PROGRESSION MILESTONES**

The table below specifies the dates (derived in accordance with **CUSC** Section16) for the **User Progression Milestones** in respect of the **User's** project and the application of the **Queue Management Process**.

**Conditional Progression Milestones**

| <b>Milestone</b>               | <b>Date due</b> |
|--------------------------------|-----------------|
| M1 – Initiate Planning Consent |                 |
| M2 – Secure Consent            |                 |
| M3 – Land Rights               |                 |

**Construction Progression Milestones**

| <b>Milestone</b>                         | <b>Date due</b> |
|------------------------------------------|-----------------|
| M5 – Contestable Design Works Submission |                 |
| M6 – Agree Construction Plan             |                 |
| M7 – Project Commitment                  |                 |
| M8 – Initiate Construction               |                 |

**END OF SCHEDULE 2 EXHIBIT 3**

V1.21 31 July 2025

**[SCHEDULE 2 EXHIBIT 3A]**

**INDICATIVE**

**DATED [ ] 20[ ]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[ ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**OFFSHORE CONSTRUCTION AGREEMENT**

---

CONTENTS

| <u>Clause</u> | <u>Title</u>                                                       |
|---------------|--------------------------------------------------------------------|
| 1             | Definitions, Interpretation and Construction                       |
| 2             | Carrying out of the Works                                          |
| 3             | Delays                                                             |
| 4             | Commissioning Programme and Liquidated Damages                     |
| 5             | Approval to Connect/Energise/Become Operational                    |
| 6             | Independent Engineer                                               |
| 7             | Becoming Operational                                               |
| 8             | Compliance with Site Specific Technical Conditions                 |
| 9             | Provision of Security                                              |
| 10            | Event of Default                                                   |
| 11            | Termination                                                        |
| 12            | Term                                                               |
| 13            | CUSC                                                               |
| 14            | Disputes                                                           |
| 15            | Variations                                                         |
| 16            | Restrictive Trade Practices Act                                    |
| 17            | Development of Offshore Transmission System Development User Works |
| 18            | Queue Management Process                                           |
| Appendix B1   | One Off Works                                                      |
| Appendix G    | Transmission Connection Asset Works                                |
| Appendix H1   | Onshore Transmission Reinforcement Works                           |
| Appendix H2   | Offshore Transmission Reinforcement Works                          |
| Appendix I    | User's Works                                                       |

|             |                                                        |
|-------------|--------------------------------------------------------|
| Appendix J  | Construction Programme                                 |
| Appendix K  | Liquidated Damages                                     |
| Appendix L  | Independent Engineer                                   |
| Appendix MM | Attributable Works and Key Consents                    |
| Appendix N  | Third Party Works                                      |
| [Appendix O | User Data]                                             |
| [Appendix P | Offshore Works Assumptions]                            |
| Appendix Q  | Queue Management Process – User Progression Milestones |

**THIS CONSTRUCTION AGREEMENT** is made on the [ ] day of [ ] 20[ ]

**BETWEEN**

- (1) The company registered in England with number 11014226 ("**The Company**", which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] ("**User**", which expression shall include its successors and/or permitted assigns)

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** has prepared a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) The **User** has applied for [connection to and use of] [modification to its connection to] the **National Electricity Transmission System** and pursuant to condition E12 of the **ESO Licence**, **The Company** is required to offer terms in accordance with the **CUSC** in this respect.
- (C) **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties).
- (D) Certain works are required as part of this offer as set out in this **Construction Agreement**.
- (E) This **Construction Agreement** sets out the **Offshore Works Assumptions** used to identify the initial **Onshore Construction Works** and **Construction Programme** and the process whereby this **Construction Agreement** [will be amended to provide for the **Offshore Construction Works**] [may be varied in case of changes to such assumptions].
- (F) This **Construction Agreement** is entered into pursuant to the terms of the **CUSC**.
- (G) The **Queue Management Process** applies to this **Construction Agreement**.
- (H) This is a [**Gate 1 Agreement**] [**Gate 2 Agreement**].

**NOW IT IS HEREBY AGREED** as follows:

### **1.1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** and in the **Bilateral Connection Agreement** have the same meanings, interpretations or constructions in this **Construction Agreement**.

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Authority"                                  | as defined in the <b>CUSC</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Assumed Offshore Tender Process Start Date" | insert date of <b>Offshore Tender Process</b> it is assumed <b>User</b> will enter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| "Attributable Works"                         | those <b>Construction Works</b> identified as such in accordance with the <b>User Commitment Methodology</b> and which are set out in Appendix MM Part 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Bilateral Connection Agreement"             | the <b>Bilateral Connection Agreement</b> entered into between the parties on even date herewith.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| "Cancellation Charge"                        | as calculated in accordance with the <b>User Commitment Methodology</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Charging Date"                              | the date upon which the <b>Construction Works</b> (excluding the <b>Wider Transmission Reinforcement Works</b> are first <b>Commissioned</b> and available for use by the <b>User</b> or if the <b>Independent Engineer</b> before, on or after the <b>Commissioning Programme Commencement Date</b> shall have certified in writing that the [Transmission Connection Assets] [Transmission Plant and Transmission Apparatus at the Transmission Interface Point <sup>1</sup> ] are completed to a stage where <b>The Company</b> could commence commissioning and by such date the <b>User's Works</b> shall not have been so certified then the date falling [ ] days after the date of such certification, provided that the <b>Offshore</b> |

---

<sup>1</sup> Use where OTSDUW build

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | <p><b>Transmission Reinforcement Works</b> and<sup>2]</sup> the <b>Enabling Works</b> are <b>Commissioned</b> and <b>Network Options Assessment Works</b> are completed as at that date. In the event that the <b>Offshore Transmission Reinforcement Works</b> and<sup>3</sup> the <b>Enabling Works</b> are not so <b>Commissioned</b> and/or the <b>Network Options Assessment Works</b> are not so completed the <b>Charging Date</b> shall be the date on which they are <b>Commissioned</b> and/or completed as appropriate.</p> |
| “Commissioning Programme Commencement Date” | the date specified in the <b>Construction Programme</b> for the commencement of the <b>Commissioning Programme</b> or any substituted date fixed under the terms of this <b>Construction Agreement</b>                                                                                                                                                                                                                                                                                                                                 |
| “Commissioning Programme”                   | the sequence of operations/tests necessary to connect the <b>User’s Works</b> and the <b>[Transmission Connection Asset Works]</b> <b>[Transmission Plant and Transmission Apparatus]</b> at the <b>Transmission Interface Point<sup>4]</sup></b> to the <b>National Electricity Transmission System</b> for the purpose of making the <b>User’s Works</b> available for operation to be determined pursuant to Clause 2.10 of this <b>Construction Agreement</b> .                                                                    |
| “Completion Date”                           | [ ] or such other date as may be agreed in terms of this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| “Connect and Manage Derogation”             | the temporary derogation from the <b>NETS SQSS</b> available to <b>The Company</b> under condition E7 of the <b>ESO Licence</b> and/or the <b>Relevant Transmission Licensee</b> under Standard Condition D3 of its transmission licence;                                                                                                                                                                                                                                                                                              |
| “Connected Planning Data”                   | data required pursuant to the <b>Planning Code</b> which replaces data containing estimated values assumed for planning                                                                                                                                                                                                                                                                                                                                                                                                                |

---

<sup>2</sup> Delete where OTSDUW Build

<sup>3</sup> Delete where OTSDUW Build

<sup>4</sup> Use where OTSDUW Build

purposes by validated actual values and updated estimates for the future and by updated forecasts for forecast data items.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Connection Site Specification” | <p>a specification which sets out the following information in relation to the <b>Connection Site</b>:</p> <ul style="list-style-type: none"><li>(a) a description of those <b>OTSUA</b> that are to be classed as <b>Transmission Connection Assets</b> in accordance with the <b>Statement of the Connection Charging Methodology</b>;</li><li>(b) a clear identification of the boundary between the <b>OTSUA</b> and the <b>User’s Equipment</b> (ascertained in the absence of agreement to the contrary with the <b>Relevant Transmission Licensee</b> by reference to <b>CUSC</b> Paragraph 2.12.1);</li><li>(c) information reasonably requested by <b>The Company</b> in order to complete Appendices F1 to F5 in the <b>Bilateral Connection Agreement</b>; and</li><li>(d) a description of the technical design and operating criteria which apply to the <b>User’s Equipment</b>.</li></ul> |
| “Consents”                      | <p>in relation to any <b>Works</b>:-</p> <ul style="list-style-type: none"><li>(a) all such planning and other statutory consents; and</li><li>(b) all wayleaves, easements, rights over or interests in land or any other consent; or</li><li>(c) permission of any kind as shall be necessary for the construction of the <b>Works</b> and for commencement and carrying on of any activity proposed to be undertaken at or from such <b>Works</b> when completed.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| “Construction Programme”        | <p>the agreed programme for the <b>Works</b> (excluding the <b>Wider Transmission Reinforcement Works</b> to be carried out by or on behalf of <b>The Company</b> and the <b>User</b> set out in detail in Appendix [J] to this <b>Construction Agreement</b> or as amended from time to time pursuant to Clauses 2.3 and 3.2 of this <b>Construction Agreement</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Construction Site" <sup>5</sup> | the site where the <b>Transmission Connection Asset Works</b> are being undertaken by or on behalf of <b>The Company</b> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| "Construction Works"             | the [ <b>Offshore Construction Works</b> and <sup>6</sup> ] <b>Onshore Construction Works</b> but excluding for the avoidance of doubt any <b>Third Party Works</b>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Dispute Resolution Procedure"   | the procedure for referral to arbitration set out in Paragraph 7.4 of the <b>CUSC</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Enabling Works"                 | Those <b>Onshore Transmission Reinforcement Works</b> which are specified in Appendix H1 Part 1 to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| "Event of Default"               | any of the events set out in Clause 10 of this <b>Construction Agreement</b> as constituting an event of default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Gate 2 Date"                    | means [the date on which the last of the conditions at Clause 1.2A of this <b>Construction Agreement</b> are satisfied - <i>include only in Gate 1 Agreements with Reservation</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                     |
| "Independent Engineer"           | <p>the engineer specified in Appendix L to this <b>Construction Agreement</b>. Provided that:-</p> <p>(a) where the parties fail to agree on a suitable engineer within 120 days of the date of this <b>Construction Agreement</b>; or</p> <p>(b) where any <b>Independent Engineer</b> appointed from time to time shall fail, refuse or cease to act in the capacity set out herein and no substitute engineer of suitable standing and qualification can be agreed by the parties within 30 days;</p> <p>then such engineer as the President of the Institution of Electrical Engineers shall, on</p> |

---

<sup>5</sup> Delete where OTSDUW Build

<sup>6</sup> Delete where OTSDUW Build

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                            | the application of either party, nominate shall be the <b>Independent Engineer</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Installed Capacity"                       | the installed capacity provided in the <b>Original Red Line Boundary</b> and set out in Appendix [P].                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| "Interface Agreement"                      | the agreement substantially in the form of <b>CUSC</b> Exhibit O [Part IC or Part IIC] to be entered into pursuant to Clause 2.17.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Key Consents"                             | those <b>Consents</b> required in respect of the [User's/Developer's] <b>Power Station</b> which <b>The Company</b> has identified as such and which are set out in Appendix MM Part 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Liquidated Damages"                       | the sums specified in or calculated pursuant to Appendix K to this <b>Construction Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| "Network Options Assessment Works"         | the works set out in the Networks Options Assessment report prepared by <b>The Company</b> pursuant to C13 of the <b>ESO Licence</b> and issued by <b>The Company</b> in [ ] which in <b>The Company's</b> reasonable opinion are required to be completed before the <b>Completion Date</b> to ensure that the <b>National Electricity Transmission System</b> complies with the requirements of condition E7 of the <b>ESO Licence</b> and Standard Condition D3 of any <b>Relevant Transmission Licensee's</b> transmission licence prior to the <b>Connection</b> of the <b>User's Equipment</b> in terms of Clause 7.1 [or 7.2] of this <b>Construction Agreement</b> . |
| "Offshore Agreement to Vary"               | the agreement proposed by <b>The Company</b> to the <b>User</b> pursuant to Clause 1.2.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| "Offshore Construction Works" <sup>7</sup> | the <b>Transmission Connection Asset Works</b> , <b>Offshore Transmission Reinforcement Works</b> and such additional works as are required in order to comply with any relevant <b>Consents</b> relating to any such works.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

---

<sup>7</sup> Delete if OTSDUW Build

“Offshore TO Construction Offer<sup>8</sup>”

the offer to be made to **The Company** in respect of the **Offshore Construction Works** pursuant to the **System Operator – Transmission Owner Code**.

“Offshore Transmission Reinforcement Works<sup>9</sup>”

those works other than the **Transmission Connection Asset Works, Onshore Transmission Reinforcement Works, Network Options Assessment Works and One Off Works**, which in the reasonable opinion of **The Company** are necessary to extend or reinforce the **National Electricity Transmission System** in relation to and prior to the connection of the **User’s Equipment** at the **Connection Site** and which are specified in Appendix H2 to this **Construction Agreement**, where Part 1 is works required for the **User** and Part 2 is works required for wider system reasons[; but **OTSDUW** are excluded from **Offshore Transmission Reinforcement Works** (and are specified in Appendix I Part 2 and not Appendix H2)].

“Offshore Works Assumptions”

the assumptions set out in Appendix [P]\_as amended from time to time in accordance with the provisions of this **Construction Agreement** and/or the **CUSC**

“One Off Works”

the works described in Appendix B1 to this **Construction Agreement**.

“Onshore Construction Works”

the **Onshore Transmission Reinforcement Works, Network Options Assessment Works and One Off Works** and such additional works as are required in order to comply with any relevant **Consents** relating to any such works.

“Onshore Transmission Reinforcement Works”

those works other than the **Transmission Connection Asset Works, [Offshore Transmission Reinforcement Works<sup>10</sup>] [OTSDUW<sup>11</sup>], Network Options**

---

<sup>8</sup> Delete if OTSDUW Build

<sup>9</sup> Delete if OTSDUW Build

<sup>10</sup> Delete if OTSDUW Build

<sup>11</sup> Use if OTSDUW Build

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                       | <p><b>Assessment Works and One Off Works</b>, which in the reasonable opinion of <b>The Company</b> (and in the absence of the <b>Connect and Manage Derogation</b>) are necessary to extend or reinforce the <b>National Electricity Transmission System</b> to ensure that the <b>National Electricity Transmission System</b> complies with the requirements of condition E7 of the <b>ESO Licence</b> and Standard Condition D3 of any <b>Relevant Transmission Licensee's</b> transmission system and which are specified in Appendix H1 to this <b>Construction Agreement</b>, where Part 1 the <b>Enabling Works</b> and Part 2 is the <b>Wider Transmission Reinforcement Works</b>.</p> |
| OTSDUW Development and Data Timetable | has the meaning given in Clause 17.2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ["Reservation Expiry Date"]           | [ ] being the date as bilaterally negotiated between <b>The Company</b> and the <b>User</b> [and which may be extended by agreement between the parties] on which the <b>Reservation</b> expires.- <i>include only in <b>Gate 1 Agreements with Reservation</b></i> ]                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ["Services Capability Specification"] | a specification including, without limitation, information describing the parameters within and to which the services that are to be delivered to <b>The Company</b> through the <b>OTSDUW</b> (and the <b>OTSUA</b> (if any) once transferred to the <b>Relevant Transmission Licensee</b> ) have been planned or are normally capable of being provided including any technical limits that apply.]                                                                                                                                                                                                                                                                                            |
| "Term"                                | the term of this <b>Construction Agreement</b> commencing on the date hereof and ending in accordance with Clause 12.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| "Third Party Works"                   | the works to be undertaken on assets belonging to a party other than a <b>Relevant Transmission Licensee</b> and the <b>User</b> to enable <b>The Company</b> to provide or as a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                     | consequence of the connection to and/or use of the <b>National Electricity Transmission System</b> by the <b>User</b> as specified in Appendix N;                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Transmission Connection Assets"                    | the assets specified in Appendix A to the <b>Bilateral Connection Agreement</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| "Transmission Connection Asset Works" <sup>12</sup> | the works necessary for construction and installation of the <b>Transmission Connection Assets</b> at the <b>Connection Site</b> specified in Appendix G to this <b>Construction Agreement</b> [but <b>OTSDUW</b> are excluded from <b>Transmission Connection Asset Works</b> (and are specified in Appendix I2 and not Appendix G)] ].                                                                                                                                                                                                                               |
| Transmission Interface Agreement                    | an agreement of that name entered into pursuant to Section C, Part Three, paragraph 3.2 of the STC                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ["Transmission Interface Site Specification"]       | a specification which sets out the following information-:<br>(a) a description of those <b>OTSUA</b> at the <b>Transmission Interface Site</b> ;<br>(b) a clear identification of the boundary between the <b>OTSUA</b> and the <b>Onshore Transmission System</b> ; and<br>(c) a description of the technical design and operating criteria which apply to the <b>OTSUA</b> (including any reliance on the <b>User's Equipment</b> in respect the minimum technical, design and operational criteria and performance requirements set out or referred to in CC.6.3)] |
| "Transmission Reinforcement Works"                  | the <b>Offshore Transmission Reinforcement Works</b> and <b>Onshore Transmission Reinforcement Works</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| "Trigger Date"                                      | [date] as identified in accordance with the <b>User Commitment Methodology</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| "User Data"                                         | the data set out in Appendix O.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

---

<sup>12</sup> Delete if OTSDUW Build

|                                          |                                                                                                                                                                                                                                                             |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “User Progression Milestones”            | the milestones (applied in accordance with <b>CUSC</b> Section 16) for the <b>User’s</b> project (excluding any <b>OTSDUW</b> ) as set out in Appendix Q of this <b>Construction Agreement</b> .                                                            |
| “User’s Works”                           | those works necessary for installation of the <b>User’s Equipment</b> which are specified in Appendix I [(Part 1)] to this <b>Construction Agreement</b> [and <b>OTSDUW</b> [subject to Clause [1.4] of this <b>Construction Agreement</b> <sup>13</sup> ]. |
| “Wider Transmission Reinforcement Works” | those <b>Onshore Transmission Reinforcement Works</b> which are specified in Appendix H1 Part 2 to this <b>Construction Agreement</b> where Part 2.1 is works required for the <b>User</b> and Part 2.2 is works required for wider system reasons.         |
| “Works”                                  | the <b>Construction Works</b> and the <b>User’s Works</b> .                                                                                                                                                                                                 |

*Users in the capacity of a Directly Connected Power Station or Embedded Power Station (other than those who are a BELLA) insert the following*

|                             |                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Notice of Intent</b>     | the notice issued by <b>The Company</b> pursuant to Clause 7.4.4                                                                                                                                                                                                                                                            |
| <b>[Notice of Reduction</b> | the notice issued by <b>The Company</b> pursuant to Clause 7.4.7 including a revised Appendix C specifying the revised <b>Transmission Entry Capacity</b> .]                                                                                                                                                                |
| <b>Preliminary Request</b>  | the request issued by <b>The Company</b> pursuant to Clause 7.4.1                                                                                                                                                                                                                                                           |
| <b>[Reduction Fee</b>       | the fee payable by the <b>User</b> to <b>The Company</b> in respect of the agreement to vary issued pursuant to Clause 7.4.9 such fee being calculated on the same basis as that set out in the <b>Charging Statements</b> as payable on a payment of actual costs basis in respect of a <b>Modification Application</b> .] |

---

<sup>13</sup> Delete if OTSDUW Build

*[To include where the **Construction Agreement Is A Gate 1 Agreement**  
[with/without **Reservation**]*

## **1.2A GATED APPLICATION AND OFFER PROCESS – GATE 1 CONDITIONAL CLAUSE [AND RESERVATION]**

1.2A.1 The rights and obligations of the **User** and **The Company** under this **Construction Agreement** [and the **[Bilateral Connection Agreement]**] are conditional on:

- 1.2A.1.1 the **User** making a **Gate 2 Application**;
- 1.2A.1.2 the **Gate 2 Application** meeting the **Gate 2 Criteria**; and
- 1.2A.1.3 the **User** accepting the terms of the **[Gate 2 Offer]**.

1.2A.2 The parties agree that until the **[Gate 2 Date]**, the rights and obligations of each party pursuant to this **Construction Agreement** (other than this Clause 1.2A and Clause 13 – *include any other clauses the parties agree as appropriate*) and the **Bilateral Connection Agreement** shall be suspended.

1.2A.3 [The parties further agree that the information provided for the purposes of this **Gate 1 Agreement** and set out in Appendix P to this **Construction Agreement** being a proposed **Connection Site**, **Transmission Interface Site** and **Completion Date** and requested **Transmission Entry Capacity** are indicative only prior to the **[Gate 2 Offer]** and shall not be binding on the parties or confer any commitment by **The Company** to the **Connection Site**, **Transmission Interface Site**, **Completion Date** or requested **Transmission Entry Capacity** and any reliance on them for any purpose prior to the **Gate 2 Date** is at the **User's** risk. – no Reservation][ The parties further acknowledge and agree that the **Connection Site**, **Transmission Interface Site**, **Completion Date** and **Transmission Entry Capacity** as set out in Appendix [O][P] to this **Construction Agreement** have been **Reserved** for the purposes of this connection and use of system and any **Gate 2 Offer** will reflect this position provided that the **Gate 2 Application** is made prior to the **Reservation Expiry Date** and the **Gate 2 Offer** is accepted.

1.2A.4 At any time prior to the **Gate 2 Date**, the **User** shall have the right to terminate this **Connection Agreement** by written notice to **The Company** without any liability for any **Cancellation Charge**. This right to terminate shall expire with effect from the **Gate 2 Date**.

1.2A.5 With effect from the **[Gate 2 Date]** the provisions of this **Construction Agreement**, as amended by the **[Gate 2 Offer]** by agreement of the parties, shall be in full force and effect.

## Offshore Provisions

- 1.2.1 The nature, extent of and the timescales associated with the **Onshore Construction Works** are based on the **Offshore Works Assumptions** and **User Data**.
- 1.2.2 The **Offshore Construction Works** will need to be identified and where there are changes from the **Offshore Works Assumptions** and/or **User Data** the nature, extent of and the timescales associated with the **Offshore Construction Works** and as a consequence the **Onshore Construction Works** may need to be amended.
- 1.2.3 [The **Company** [shall] as soon as practicable and (save where the **Authority** consents to a longer period) in any event within 3 months of the receipt of notice from the **Authority** that the **Relevant Transmission Licensee** has been appointed propose to the **User** an agreement to vary this **Construction Agreement** and the **Bilateral Connection Agreement**. This agreement to vary will identify the **Offshore Construction Works** as set out in the **Offshore TO Construction Offer** and shall make such further amendments to the **Construction Agreement** and **Bilateral Connection Agreement** as are necessary as a consequence of this identification and the timing of the **Offshore Tender Process** on the **Offshore Works Assumptions** and the **Onshore Construction Works** and shall include such terms and conditions as **The Company** in its discretion requires as a consequence of such amendments]. [In the case of **OTSDUW The Company** may as soon as practicable and (save where the **Authority** consents to a longer period) in any event within 3 months of the receipt of notice from the **Authority** that the **Relevant Transmission Licensee** has been appointed propose to the **User** an agreement to vary this **Construction Agreement** and the **Bilateral Connection Agreement** to amend the **Bilateral Connection Agreement** and **Construction Agreement** as necessary to reflect any inconsistencies between the **OTSDUW**, **OTSUA** and **Offshore Works Assumptions**.]
- 1.2.4 The **Offshore Agreement to Vary** will be open for acceptance for a period of three months from receipt. If the **User** does not accept the **Offshore Agreement to Vary** within three months of receipt [or, where the **Offshore Agreement to Vary** has been referred to the **Authority** pursuant to condition E13.5 of the **ESO Licence**, within 14 days after any determination by the **Authority** pursuant to such application] then **The Company** shall be entitled to terminate this **Construction Agreement**.
- 1.2.5 [With effect from acceptance by the **User** of the **Offshore Agreement to Vary** the provisions of this **Construction Agreement** as amended by the **Offshore Agreement to Vary** shall have full force and effect and the provisions of this Sub-Clause 1.2 shall cease to have any further force or effect.]



- 1.2.6 [The rights and obligations of the **User** and **The Company** under this **Construction Agreement** (with the exception of those rights and obligations under or referred to in this Clause 1.2 and Clause 1.3) are subject to the above provisions of this Clause 1.2 (and neither party shall have any rights or obligations under any other provisions of this **Construction Agreement** until the provisions of sub-clause 1.2.5 have been fulfilled)]

OR

[The rights and obligations of the **User** and **The Company** under this **Construction Agreement** (with the exception of those rights and obligations under or referred to in this Clause 1.2 and Clause 1.3) and Clauses 2.2, 2.3 and 2.4, and rights and obligations flowing from those Clauses) are subject to the above provisions of this Clause 1.2.]

- 1.3 The **User** shall confirm that the **User Data** remains the same prior to the start of the **Offshore Tender Process**.

[1.4 Where the **OTSDUW** comprise only the design, planning and/or consenting of (and/or other pre-construction activities relating to) the [**Offshore Transmission System**], and do not comprise works for construction and installation, direct or indirect references to the **User's Works** shall be deemed to include the **Offshore Construction Works** for the purposes only of (and to the extent so provided in the description of **OTSDUW**) Clauses 2.2, 2.3 and 2.4 of this **Construction Agreement**.]

## 2. CARRYING OUT OF THE WORKS

- 2.1 Forthwith following the date of [the Offshore Agreement to Vary] [this **Construction Agreement**] the User shall agree with the [Relevant Transmission Licensee] [Onshore Transmission Licensee] the Safety Rules and Local Safety Instructions to apply at the [Connection Site] [Transmission Interface Site] during the Construction Programme and Commissioning Programme [and until the **OTSUA Transfer Time**]. Failing agreement within three months of such date the matter shall be referred to the Independent Engineer for determination in accordance with Clause 6 of the Construction Agreement.
- 2.2 Subject to Clauses 2.3 and 2.4 of this **Construction Agreement** forthwith following the date of [the **Offshore Agreement to Vary**] [this **Construction Agreement**] The **Company** shall use its best endeavours to obtain in relation to the **Construction Works**, excluding the **Wider Transmission Reinforcement Works** and the **User** shall use its best endeavours to obtain in relation to the **User's Works**, all **Consents**. Each shall give advice and assistance to the other to the extent reasonably required by the other in the furtherance of these obligations. Further, the **User** and the [**Relevant Transmission Licensee**] [**Onshore Transmission Licensee**] shall, so far

as it is legally able to do so, grant to, the other in respect of the [**Connection Site**] [**Transmission Interface Site**] all such wayleaves, easements, servitude rights, rights over or interests in land or any other consents reasonably required by the **User** or [**Relevant Transmission Licensee**] [**Onshore Transmission Licensee**] in order to enable the **Works** excluding the **Wider Transmission Reinforcement Works** to be expeditiously completed and to enable that other to carry out its obligations to the other under this **Construction Agreement** and in all cases subject to such terms and conditions as are reasonable.

**2.3** The following additional provisions shall apply in respect of the **Consents** and **Construction Works** [and **OTSDUW**] excluding the **Wider Transmission Reinforcement Works**:-

**2.3.1** All dates specified in this **Construction Agreement** are subject to **The Company** obtaining **Consents** for the **Construction Works** in a form acceptable to it within the time required to carry out the **Construction Works** excluding the **Wider Transmission Reinforcement Works** [and the **User** obtaining **Consents** for the **OTSDUW**] in accordance with the **Construction Programme**.

**2.3.2** In the event of:-

- (a) the **Consents** not being obtained by the required date; or
- (b) the **Consents** being subject to conditions which affect the dates; or
- (c) **The Company** wishing to amend the **Construction Works** excluding the **Wider Transmission Reinforcement Works** [or the **User** wishing to amend **OTSDUW**] to facilitate the granting of the **Consents**,

then, in the case of **Construction Works** and **Consents** therefor, **The Company** shall be entitled to revise the **Construction Works** (and as a consequence Appendix A to the **Bilateral Connection Agreement**) and all dates specified in this **Construction Agreement** in relation to those **Construction Works** and the charges specified in Appendix B to the **Bilateral Connection Agreement**. For the avoidance of doubt such revisions shall be at **The Company's** absolute discretion and the consent of the **User** is not required. [In the case of **OTSDUW** and **Consents** therefore, the **User** shall be entitled to revise the **OTSDUW** (including any changes to the **Offshore Works Assumptions**) and the dates specified in this **Construction Agreement** in relation to **OTSDUW**, in which case the **User** shall propose such revisions to **The Company** and the parties shall (without prejudice to paragraph 6.9.2) agree such amendments to this **Construction Agreement** as are necessary to reflect such revisions. The parties acknowledge that any dispute regarding such amendments shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, and where such application is made, the parties shall take into account any determination or other direction from the **Authority**.]

- 2.3.3** The **User** shall be regularly updated by **The Company** in writing or by such other means as the parties may agree as to progress made by **The Company** from time to time in the obtaining of relevant **Consents** pursuant to its obligations under Clause 2.2 or 2.3 of this **Construction Agreement**.
- 2.3.4** [**The Company** shall be regularly updated by the **User** in writing or by such other means as the parties may agree as to progress made by the **User** from time to time in the obtaining of relevant **Consents** for the **OTSDUW** pursuant to its obligations under Clause 2.2 or 2.3 of this **Construction Agreement**.]
- 2.4 Paragraphs 11.2.3 to 11.2.5 of the **CUSC** relating to **Consents** shall apply to the **Construction Agreement** as if set out here in full.
- 2.5 Prior to the commencement of the **Transmission Connection Asset Works** [**Onshore Transmission Reinforcement Works** or any **One Off Works**] the **User** shall have the right to terminate this **Construction Agreement** upon giving not less than 7 (seven) days notice in writing to **The Company**. In the event of the **User** terminating this **Construction Agreement** in terms of this Clause 2.5 the provisions of Clause 11 shall apply.
- 2.6 If the **User** fails to obtain all **Consents** for the **User's Works** having complied with the obligations in Clause 2.2 of this **Construction Agreement** the obligation on the **User** to complete the **User's Works** shall cease and the **User** may by written notice to **The Company** terminate this **Construction Agreement**. In the event of the **User** terminating this **Construction Agreement** in terms of this Clause 2.6 the provisions of Clause 11 shall apply
- 2.7 Both parties shall be entitled to contract or sub-contract for the carrying out of their respective parts of the **Works** excluding the **Wider Transmission Reinforcement Works** (which in the case of **The Company** shall include work carried out by a **Relevant Transmission Licensee** or its contractors or sub-contractors). The **User** or any contractor on its behalf shall be responsible for commencing and for carrying out the **User's Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme** and **The Company** or any contractor on its behalf shall be responsible for commencing and carrying out the **Construction Works** excluding the **Wider Transmission Reinforcement Works** to such stage of completion as shall render them capable of being **Commissioned** in accordance with the **Construction Programme**.
- 2.8 The parties shall continuously liaise throughout the **Construction Programme** and **Commissioning Programme** and each shall provide to the other all information relating to its own **Works** reasonably necessary to assist the other in performance of that other's part of the **Works**, [and where the **User** is undertaking **OTSDUW** such additional information as **The Company** shall require in order to perform its obligations under the **STC** provided that **The Company** shall not request information greater in scope than that which **The Company** would be entitled to receive from a **Relevant Transmission Licensee** were it undertaking the **OTSDUW**,] and shall use all reasonable

endeavours to coordinate and integrate their respective part of the **Works**. There shall be meetings between representatives of the parties at intervals to be agreed between the parties. Each party shall deliver to the other party a written report of progress during each calendar quarter within 7 days of the end of that quarter.

- 2.9 During the period of and at the times and otherwise as provided in the **Construction Programme** and the **Commissioning Programme** **The Company** shall allow the **User**, its employees, agents, suppliers, contractors and sub-contractors necessary access to the [**Construction Site**] [**Transmission Interface Site**] and the **User** shall allow the **Relevant Transmission Licensee** and in either case their employees, agents, suppliers, contractors and sub-contractors necessary access to its site to enable each to carry out the [**Transmission Connection Asset Works**] [**Onshore Transmission Reinforcement Works** or any **One Off Works**] or **User's Works** but not so as to disrupt or delay the construction and completion of the other's **Works** on the said sites or the operation of the other's **Plant** and **Apparatus** located thereon, such access to be in accordance with any reasonable regulations relating thereto made by the site owner or occupier.
- 2.10 Not later than six months prior to the **Commissioning Programme Commencement Date** **The Company** shall provide the **User** with a draft **Commissioning Programme** for the **Commissioning** of the [**Transmission Connection Assets**] [**OTSUA**], and the **User's Equipment**. The **User** shall, as quickly as practicable and in any event within three months of receipt thereof, determine whether or not to approve the proposed **Commissioning Programme** (which approval shall not be unreasonably withheld or delayed) and shall within such three month period either notify **The Company** of its approval or, in the event that the **User** reasonably withholds its approval, notify **The Company** of any changes or variations to the proposed commissioning programme recommended by the **User**. If **The Company** does not accept such changes or variations submitted by the **User** any dispute shall be referred to the **Independent Engineer** for determination. The **Commissioning Programme** agreed between the parties or determined by the **Independent Engineer** as the case may be shall be implemented by the parties and their sub-contractors in accordance with its terms.
- 2.11 If at any time prior to the **Completion Date** it is necessary for **The Company** or **The Company** in its reasonable discretion wishes to make any addition to or omission from or amendment to the [**Transmission Connection Asset Works** and/or] **Transmission Reinforcement Works** and/or the **One Off Works** and/or the **Third Party Works** **The Company** shall notify the **User** in writing of such addition, omission or amendment and Appendices [B1 (One Off Works), [G (Transmission Connection Asset Works)] H (Transmission Reinforcement Works), MM (Attributable Works) and N (Third Party Works)] to this **Construction Agreement** and consequently Appendices [A (Transmission Connection Assets) and B (Connection Charges and One Off Charges)] to the associated **Bilateral Connection Agreement** shall be automatically amended to reflect the change. Provided that where a **User** has elected for the **Local Cancellation Amount** to be based on the **Fixed Local**

**Cancellation Charge Methodology** the **Attributable Works** can only be changed after the **Trigger Date** as provided for in **CUSC** Section 15. [If at any time prior to the **Completion Date** it is necessary for the **User** or the **User** in its reasonable discretion wishes to make any addition to or omission from or amendment to the **OTSDUW** (including any changes to the **Offshore Works Assumptions**), the **User** shall propose such revision to **The Company** and the parties shall (without prejudice to paragraph 6.9.2) agree changes to this **Construction Agreement** as are necessary to reflect such revision. The parties acknowledge that any dispute regarding such amendments shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, and where such application is made, the parties shall take into account any determination or other direction from the **Authority**.]

- 2.12 The **User** shall apply to the Secretary of State for Trade and Industry as part of its application under Section 36 of the Act for its generating station, for deemed planning permission in relation to the substation forming part of the **Transmission Connection Asset Works**. The **User** shall use its best endeavours to procure that the said deemed planning permission is so obtained. **The Company's** obligations under Clause 2.2 of this **Construction Agreement** shall not require it to obtain planning consent for the said substation unless and until the relevant Secretary of State shall for whatever reason refuse to deem the grant of planning permission in respect of the same. The **User** shall liaise with **The Company** as to its construction and operational requirements and shall ensure that the said application meets **The Company's** requirements. **The Company** shall provide the **User** with all information reasonably required by it in relation to the application and the **User** shall ensure that all requirements of **The Company** are incorporated in the application for deemed planning consent.
- 2.13 [The Enabling Works are conditional on British Energy Generation Limited and/or Magnox Electric plc (as the case may be) granting approval to the carrying out of the **Construction Works** in terms of the Nuclear Site Licence Provisions Agreement being an agreement dated 30 March 1990 between **The Company** and Nuclear Electric plc (now called Magnox Electric plc) and an agreement dated 31 March 1996 between The Company and British Energy Generation Limited (and described as such). In the event of British Energy Generation Limited and/or Magnox Electric plc (as the case may be) not granting approval **The Company** shall be entitled to change the **Construction Works**, the **Construction Programme** and all dates specified in this **Construction Agreement**.]
- 2.14 [It is hereby agreed and declared for the purposes of the Construction (Design and Management) Regulations 1994 that the **User** is the only client in respect of the **User's Works** and **The Company** is the only client in respect of the **Construction Works** and each of the **User** and **The Company** shall accordingly discharge all the duties of clients under the said **Regulations**.]
- 2.15 [**The Company** and the **User** hereby agree and acknowledge that this **Construction Agreement** is not to be treated as a construction contract within the meaning of section 104 of the Housing Grants, Construction and Regeneration Act 1996 and sections 104 to 113 of the said Act shall have no

application either to the **Construction Works** or the **User's Works** and the parties' rights and obligations with regard to matters of dispute resolution and payment procedures are as expressly set out herein.

## 2.16 Third Party Works

2.16.1 The **User** shall be responsible for carrying out or procuring that the **Third Party Works** are carried out and shall carry them out or procure that they are carried out in accordance with the timescales specified in the **Construction Programme**. The **User** shall confirm to **The Company** or, where requested to do so by **The Company**, provide confirmation from the third party that the **Third Party Works** have been completed.

2.16.2 Given the nature of these works it may not be possible to fully identify the works required or the third parties they relate to at the date hereof. Where this is the case **The Company** shall, subject to 2.x.3 below, advise the **User** as soon as practicable and in any event by [ ] of the **Third Party Works** and shall be entitled to revise Appendix N and as a consequence the **Construction Programme** as necessary to reflect this.

[2.16.3 Where **Third Party Works** are likely to be **Modifications** required to be made by another user(s) ("the **First User(s)**") as a consequence of **Modifications** to the **National Electricity Transmission System** to be undertaken by **The Company** under this **Construction Agreement** **The Company** shall as soon as practicable after the date hereof issue the notification to such **First User's** in accordance with **CUSC** Paragraph 6.9.3.1. The **User** should note its obligations under **CUSC** Paragraph 6.10.3 in respect of the costs of any **Modifications** required by the **First User(s)**.]

2.16.4 In the event that the **Third Party Works** have not been completed by the date specified in the **Construction Programme** or, in **The Company's** reasonable opinion are unlikely to be completed by such date, **The Company** shall be entitled to revise the **Construction Programme** as necessary to reflect such delay and also, where **The Company** considers it necessary to do so, shall be entitled to revise the **Construction Works** excluding the **Wider Transmission Reinforcement Works** (and as a consequence Appendices A and B to the **Bilateral Connection Agreement**). For the avoidance of doubt such revisions shall be at **The Company's** absolute discretion and the consent of the **User** is not required. Further, in the event that the **Third Party Works** have not been completed by [ ] **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User** and in this event the provisions of Clause 11 of this **Construction Agreement** shall apply.

2.17 Not later than 6 months prior to the **Completion Date** or such other period as the parties shall agree the **User** shall enter into the **Interface Agreement** with the **Relevant Transmission Licensee** to reflect the **Works** excluding the **Wider Transmission Reinforcement Works**<sup>14</sup>. [Not later than 6 months prior to the **Completion Date** or such other period as the parties shall agree the

---

<sup>14</sup> Not OTSDUW Build

**User** shall enter into an agreement (in similar form to the **Interface Agreement**) with the **Onshore Transmission Licensee** to reflect the **Works** excluding the **Wider Transmission Reinforcement Works** at the **Transmission Interface Site** for the period up to and including the **OTSUA Transfer Time**.<sup>15]</sup>

2.18 In the event that there are any [material] changes to the **Offshore Works Assumptions]** **The Company** shall be entitled to revise the **Construction Works** excluding the **Wider Transmission Reinforcement Works** and **Construction Programme** and as a consequence Appendices A, B, C and F3 to F5 in the **Bilateral Connection Agreement** as necessary to reflect such change. **The Company** shall notify the **User** as soon as practicable upon it becoming aware that it may need to exercise its rights under this Clause and provide the **User** with an indication of the nature and scope of the changes required and the reasons for the same.

2.19.1 **The Company** shall keep the **User** advised as to progress on the **Wider Transmission Reinforcement Works** and shall include information on these in the reports produced pursuant to Clause 2.8.

### 3 DELAYS

3.1 If either party shall have reason to believe that it is being delayed or will be delayed in carrying out that party's **Works** excluding the **Wider Transmission Reinforcement Works** for any reason (whether it is one entitling it to the fixing of a new date under Clause 3.2 of this **Construction Agreement** or not) it shall forthwith notify the other party in writing of the circumstances giving rise to the delay and of the extent of the actual and/or anticipated delay.

3.2 If prior to the **Completion Date** a party (in this Clause 3.2 "the **Affected Party**") shall be delayed in carrying out any of the **Affected Party's Works** (including their commissioning) by reason of any act, default or omission on the part of the other Party (in this Clause the "**Defaulting Party**") or the **Defaulting Party's** employees, agents, contractors or sub-contractors or by reason of an event of **Force Majeure**, the **Affected Party** shall be entitled to have such later date or dates fixed as the **Commissioning Programme Commencement Date** and/or (as the case may be) the **Completion Date** as may be fair and reasonable in the circumstances provided that it shall have notified the **Defaulting Party** in writing of such act, default or omission or event of **Force Majeure** within 28 days of it becoming aware of the occurrence giving rise to the delay together with an estimate of the proposed delay which it will cause the **Affected Party**. In the event of a dispute between the parties over what is or are any fair and reasonable new date or dates to be fixed in the circumstances this shall be promptly referred to and determined by the **Independent Engineer**. Once the new date or dates are fixed the **Construction Programme** and/or **Commissioning Programme** shall be deemed automatically amended as appropriate.

---

<sup>15</sup> Use OTSDUW Build

#### 4 COMMISSIONING PROGRAMME AND LIQUIDATED DAMAGES

- 4.1 Each party shall give written notice to the other declaring its readiness to commence the **Commissioning Programme** when this is the case.
- 4.2 The **Commissioning Programme** shall commence forthwith once both parties have given written notice to the other under Clause 4.1.
- 4.3 The **Works** excluding the **Wider Transmission Reinforcement Works** shall be deemed to have been **Commissioned** on the date that the **Independent Engineer** certifies in writing to that effect.
- 4.4 In the event that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date** **The Company** (if and to the extent that it is responsible for delayed commissioning beyond the **Commissioning Programme Commencement Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date of commencement of the **Commissioning Programme** is later than the **Commissioning Programme Commencement Date**. It is declared and agreed that such **Liquidated Damages** shall cease to be payable in respect of any period after the date of actual commencement of the **Commissioning Programme**.
- 4.5 In the event that the actual date on which the **Construction Works** are **Commissioned** is later than the **Completion Date** **The Company** (if and to the extent that it is responsible for delayed completion beyond the **Completion Date**, such responsibility and/or its extent to be determined by the **Independent Engineer** failing agreement between the parties) shall be liable to pay to the **User Liquidated Damages** for each day that the actual date on which the **Construction Works** are **Commissioned** is later than the **Completion Date**. It is hereby agreed and declared that such **Liquidated Damages** shall cease to be payable in respect of any period after completion of the **Construction Works**.
- 4.6 **Liquidated Damages** payable under Clauses 4.4 and 4.5 of this **Construction Agreement** shall accumulate on a daily basis but shall be payable calendar monthly. On or before the 15th day of each month the party entitled to receive the payment of **Liquidated Damages** shall send to the other party a statement of the **Liquidated Damages** which have accrued due in the previous calendar month. The party receiving such statement shall in the absence of manifest error pay the **Liquidated Damages** shown on the statement within 28 days of the date upon which the statement is received.
- 4.7 Without prejudice to and in addition to the obligation of the **User** pursuant to Clause 2.4 of this **Construction Agreement**, the payment or allowance of **Liquidated Damages** pursuant to this Clause 4 shall be in full satisfaction of **The Company's** liability for failure to perform its obligations by the **Commissioning Programme Commencement Date** and/or the **Completion Date** as appropriate.



- 4.8** In the event that the **User** shall have failed, in circumstances not entitling it to the fixing of a new date as the **Commissioning Programme Commencement Date** pursuant to Clause 3.2, to complete the **User's Works** by [ ] to a stage where the **User** is ready to commence the **Commissioning Programme**, **The Company** shall have the right to terminate this **Construction Agreement** upon giving notice in writing to the **User** and the provisions of Clause 11 shall apply.

## **5 APPROVAL TO CONNECT/ENERGISE/BECOME OPERATIONAL**

- 5.1** Not later than 4 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.7 and 7.4.10 and likewise the **Site Common Drawings** required under CC 7.5.2 and 7.5.4 and, if necessary, **Gas Zone Diagrams** referred to in CC 7.4.9 and 7.4.12.

- 5.2** Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties the parties shall prepare and submit the **Operation Diagrams** required to be prepared and submitted by each of them respectively under CC 7.4.8 and 7.4.11 and likewise the **Site Common Drawings** required under CC 7.5.3 and 7.5.5.

- 5.3** Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties:-

**5.3.1** each party shall submit to the other data within its possession needed to enable the completion of Appendices F3 and F4 to the **Bilateral Connection Agreement**; and

**5.3.2** the **User** shall submit to **The Company** evidence satisfactory to **The Company** that the **User's Equipment** [and **OTSUA**] complies or will on completion of the **User's Works** comply with Clause 8 of this **Construction Agreement** and Paragraphs 1.3.3(b), 2.9 and 6.7 of the **CUSC**.

- 5.4** Not later than 8 weeks prior to the expected **Commissioning Programme Commencement Date** or by such other time as may be agreed between the parties each party shall submit to the other:

**5.4.1** for the **Connection Site** information to enable preparation of **Site Responsibility Schedules** complying with the provisions of Appendix 1 to the **Connection Conditions** together with a list of managers who have been duly authorised by the **User** to sign such **Site Responsibility Schedules** on the **User's** behalf;

**5.4.2** written confirmation as required under CC.5.2(g) that the list of **Safety Co-ordinators** are authorised and competent [and a list of persons appointed pursuant to **Grid Code** CC5.2(m)];

- 5.4.3** a list of the telephone numbers for the facsimile machines referred to in CC6.5.9.
- 5.4.4.** Confirmation of access to the **Electronic Communications Platform** referred to in CC6.5.9 upon access being provided by **The Company**
- 5.4.4** [For the **Transmission Interface Site** information to enable preparation of **Site Responsibility Schedules** between the **User** and the **Onshore Transmission Licensee** for the period up to the **OTSUA Transfer Time** and between the **Onshore Transmission Licensee** and **Relevant Transmission Licensee** for the period from the **OTSUA Transfer Time** complying with the provisions of Appendix 1 to the **Connection Conditions**<sup>16</sup>].
- 5.5** Not later than 3 months prior to the expected **Commissioning Programme Commencement Date** each party shall submit to the other a statement of readiness to complete the **Commissioning Programme** in respect of the **Works** excluding the **Wider Transmission Reinforcement Works** and the statement submitted by the **User** shall in addition contain relevant **Connected Planning Data** and a report certifying to **The Company** that, to the best of the information, knowledge and belief of the **User**, all relevant **Connection Conditions** applicable to the **User** have been considered and complied with. If **The Company** considers that it is necessary, it will require this latter report to be prepared by the **Independent Engineer**. The report shall incorporate if requested by **The Company** type test reports and test certificates produced by the manufacturer showing that the **User's Equipment** meets the criteria specified in CC6.

## INDEPENDENT ENGINEER

The parties agree and shall procure that the **Independent Engineer** shall act as an expert and not as an arbitrator and shall decide those matters referred or reserved to them under this **Construction Agreement** by reference to **Good Industry Practice** using their skill, experience and knowledge and with regard to such other matters as the **Independent Engineer** in their sole discretion considers appropriate. All references to the **Independent Engineer** shall be made in writing by either party with notice to the other being given contemporaneously as soon as reasonably practicable and in any event within 14 days of the occurrence of the dispute to be referred to the **Independent Engineer**. The parties shall promptly supply the **Independent Engineer** with such documents and information as they may request when considering such question. The **Independent Engineer** shall use their best endeavours to give their decision upon the question before them as soon as possible following its referral to them. The parties shall share equally the fees and expenses of the **Independent Engineer**. The parties expressly acknowledge that submission of disputes for resolution by the **Independent Engineer** does not preclude subsequent submission of disputes for resolution by arbitration as provided for

---

<sup>16</sup> Use OTSDUW Build

in the **Dispute Resolution Procedure**. Pending any such submission the parties shall treat the **Independent Engineer's** decision as final and binding.

## **7. BECOMING OPERATIONAL**

7.1 **The Company** shall connect and **Energise** the **User's Equipment** at the **Connection Site** [and the **OTSUA** at the **Transmission Interface Site** ] during the course of and in accordance with the **Commissioning Programme** and thereafter upon compliance by the **User** with the provisions of Clause 5 and provided (1) the **Construction Works** excluding the **Wider Transmission Reinforcement Works** and **Network Options Assessment Works** [and the **OTSDUW**] shall be **Commissioned** and (2) the **Network Options Assessment Works** and **Third Party Works** shall be completed. **The Company** shall forthwith notify the **User** in writing that the **Connection Site** [**Transmission Interface Site**<sup>17</sup>] shall become **Operational**.

[7.2 If, on completion of the **User's Works** in accordance with the terms of this **Construction Agreement** the **Registered Capacity** of the **User's Equipment** is less than [ ]MW, **The Company** shall automatically have the right to amend Clause 7 and Appendix C to the **Bilateral Connection Agreement** to reflect the actual **Registered Capacity** of the **User's Equipment**.

***Users in the capacity of a Directly Connected Power Station or Embedded Power Station (other than those who are a BELLA) insert the following.***

### **7.3 Transmission Entry Capacity Reduction**

7.3.1 If, at any time prior to the **Completion Date** **The Company** reasonably believes from data provided by the **User** to **The Company**, the reports provided by the **User** pursuant to Clause 2.8. and Clause 5 of this **Construction Agreement**, the commissioning process under the **Construction Agreement** or otherwise that the **User's Equipment** will be such that it will not be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall advise the **User** accordingly in writing setting out its reasons for this belief, the source of the information giving rise to the concern and seeking clarification from the **User**.

7.3.2 The **User** shall respond to **The Company** within 15 **Business Days** of the date of the **Preliminary Request** providing such information or data as is necessary to satisfy **The Company's** concerns set out in the **Preliminary Request** and making any amendments necessary to the report provided by the **User** pursuant to Clause 2.8 and/or data provided by the **User** to **The Company** to reflect this.

7.3.3 In the event that **The Company** is satisfied from the information provided in accordance with 7.3.2 by the **User** that the **User's Equipment** is such that it will be capable of exporting power onto the **National Electricity**

---

<sup>17</sup> Use OTSDUW Build

**Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall notify the **User** accordingly.

- 7.3.4 In the event that the **User** does not respond to the **Preliminary Request** or, notwithstanding the **User's** response, **The Company** remains of the view that the **User's Equipment** will be such that it will not reasonably be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** **The Company** shall inform the **User** in writing that it intends to amend Clause 7 and Appendix C to the **Bilateral Connection Agreement** to reflect the **Transmission Entry Capacity** that it reasonably believes to be the level of power that the **User's Equipment** will be capable of exporting .
- 7.3.5 The **User** shall respond to the **Notice of Intent** within 15 **Business Days** of the date of the **Notice of Intent** explaining why it still reasonably believes that its **User's Equipment** will be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or providing a reasonable explanation as to why this is not the case.
- 7.3.6 In the event that **The Company** is satisfied from the information provided in accordance with 7.3.5 by the **User** that the **User's Equipment** is such that it will be capable of exporting power onto the **National Electricity Transmission System** up to the level of the **Transmission Entry Capacity** **The Company** shall notify the **User** accordingly.
- 7.3.7 Where notwithstanding the **User's** response to the **Notice of Intent** **The Company** remains of the view that the **User's Equipment** is such that it will not reasonably be capable of exporting power onto the **National Electricity Transmission System** at the level of the **Transmission Entry Capacity** or at more than the MW figure proposed by **The Company** in the **Notice of Intent** or the **User** does not provide a response that is satisfactory to **The Company** within the timescale specified in 7.3.5 above **The Company** will issue the **Notice of Reduction** to the **User** and will send a copy of the same to the **Authority**.
- 7.3.8 Unless during such period the matter has been referred by the **User** to the **Authority** for determination by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, the **Notice of Reduction** shall take effect on the day 15 **Business Days** after the date of the **Notice of Reduction** and Appendix C of the **Bilateral Connection Agreement** shall be amended on that date in the manner set out in the **Notice of Reduction**. Where the matter has been referred the amendments of the **Bilateral Connection Agreement** and the date they take effect shall be as set out in the **Authority's** determination
- 7.3.9 After a **Notice of Reduction** has taken effect **The Company** shall be entitled to make such amendments to this **Construction Agreement** as

are reasonably necessary as a result of the reduction in **Transmission Entry Capacity** effected by the **Notice of Reduction** and as a consequence to the **Bilateral Connection Agreement**. **The Company** shall advise the **User** as soon as practicable and in any event within 3 months of the date of the **Notice of Reduction** (or if the matter has been referred by the **User** to the **Authority** for determination, the date of determination) of such amendments by way of offer of an agreement to vary the **Construction Agreement** and **Bilateral Connection Agreement**. This agreement to vary will also provide for payment by the **User** of the **Reduction Fee** where applicable. The parties acknowledge that any dispute regarding this variation shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**.

#### 7.4 **Compliance with Original Red Line Boundary** *-add only where it's a Gated Agreement*

If a **User** is not compliant at a **User Progression Milestone** with the **Original Red Line Boundary** (other than as it may be changed under the **Queue Management Guidance**) for one or more technologies, **The Company** shall be entitled to amend the **Construction Agreement** and as a consequence the **Bilateral Connection Agreement** to:

7.4.1 reduce the **Installed Capacity** (of each technology that is non-compliant).

7.4.2 remove that technology if the **Installed Capacity** of a technology is reduced to 0 MW.

reduce the [**Transmission Entry Capacity**] if the sum of the **Installed Capacity** [of all technologies] is reduced such that it is less than the [**Transmission Entry Capacity**] and such that the [**Transmission Entry Capacity**] is no higher than the sum of the **Installed Capacity** [of all technologies.]

#### 7.5 Where there is a reduction in **Transmission Entry Capacity** under Clause 7.3 or 7.4 prior to the **Charging Date**, on such reduction in **Transmission Entry Capacity** taking effect the **User** shall pay to **The Company** the **Cancellation Charge** such payment to be made within 14 days of the date of **The Company's** invoice in respect thereof.

### 8. **COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS**

The **User** shall ensure that on the **Completion Date** the **User's Equipment** complies with the site specific technical conditions set out in Appendix F 1-5 to the **Bilateral Connection Agreement** [and that the **OTSUA** complies with the site specific technical conditions set out in Appendix OF to this **Construction Agreement**]. The obligation in respect of **OTSUA** shall apply up to the **OTSUA Transfer Time**, whereupon such provisions shall (without prejudice to any prior non-compliance) cease to apply

## 9. PROVISION OF SECURITY

Where required to do so under the **CUSC** Section 15, the **User** shall provide **The Company** with security arrangements in accordance with **CUSC** Section 15 Part Three in respect of the **User's** obligations to pay the **Cancellation Charge** to **The Company** on termination of this **Construction Agreement** or a reduction in **Transmission Entry Capacity** prior to the **Charging Date**.

## 10. EVENT OF DEFAULT

Once any of the **Events of Default** in Paragraph 5.3.1 and/or Paragraph 5.4.6.2 and/or Paragraph 5.4.6.3 of the **CUSC** has occurred and is continuing **The Company** may give notice of termination to the **User** whereupon this **Construction Agreement** shall forthwith terminate and the provisions of Clause 11 shall apply.

## 11. TERMINATION

11.1 On termination of this **Construction Agreement** **The Company** shall disconnect all the **User's Equipment** at the **Connection Site** and:

- (a) where the **Relevant Transmission Licensee** is the owner of the **Offshore Platform** the **User** shall remove any of the **User's Equipment** on the **Offshore Platform** within such period as may be agreed between the **Relevant Transmission Licensee** and the **User**; or
- (b) where the **User** is the owner of the **Offshore Platform** **The Company** shall procure that the **Relevant Transmission Licensee** removes, any **[Transmission Connection Assets]** on the **Offshore Platform** within such period as may be agreed between the **Relevant Transmission Licensee** and the **User**.]

OR

[(a) **The Company** shall disconnect the **OTSUA** at the **Transmission Interface Site**; and

- (b) the **User** shall remove any of the **OTSUA** on the **Onshore Transmission Licensee's** land at the **Transmission Interface Site** and **The Company** shall (as appropriate) remove or procure that the **Onshore Transmission Licensee** removes its equipment (if any) from the **User's** land at the **Transmission Interface Site** in each case within such period as may be agreed between **Onshore Transmission Licensee** and the **User**. ]

11.2 The **User** shall where this **Construction Agreement** terminates prior to the **Charging Date** be liable forthwith on the date this **Construction Agreement** so terminates to pay to **The Company** the **Cancellation Charge** such payment to be made within 14 days of the date of **The Company's** invoice in respect

thereof.

## 12. TERM

- 12.1 Subject to the provisions for earlier termination set out in the **CUSC** this **Construction Agreement** shall continue until terminated in accordance with Clause 1, 2.5, 2.6, 4.8, 11 or 18 hereof.
- 12.2 In addition this **Construction Agreement** shall terminate upon termination of the associated **Bilateral Connection Agreement** and in the event that this is prior to the **Charging Date** the provisions of Clause 11 shall apply.
- 12.3 The associated **Bilateral Connection Agreements** will automatically terminate upon termination of this **Construction Agreement** prior to the **Charging Date**.
- 12.4 Any provisions for payment shall survive termination of this Construction Agreement.

## 13. CUSC

The provisions of Sections 6.6 (Payment), 6.14 (Transfer and Subcontracting), 6.15 (Confidentiality), 6.18 (Intellectual Property), 6.19 (Force Majeure), 6.24 (Counterparts), 6.20 (Waiver), 6.21 (Notices), 6.22 (Third party Rights), 6.23 (Jurisdiction), 6.25 (Governing Law), 6.26 (Severance of Terms), 6.27 (Language), 6.38 (Directions related to national security), inclusive of the **CUSC** shall apply mutatis mutandis to this **Construction Agreement** as if set out in this **Construction Agreement**.

## 14. DISPUTES

Except as specifically provided for in this **Construction Agreement** any dispute arising under the terms of this **Construction Agreement** shall be referred to arbitration in accordance with the **Dispute Resolution Procedure**.

## 15. VARIATIONS

- 15.1 Subject to Clause 15.2 and 15.3 below, no variation to this **Construction Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.
- 15.2 **The Company** and the **User** shall effect any amendment required to be made to this **Construction Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.
- 15.3 **The Company** has the right to vary this **Construction Agreement** and Appendices in accordance with Clauses 1, 2.3 and 2.11, 2.13, 2.16, 2.18, 7.3, 18 and Paragraph 6.9 of the **CUSC**.

## 16. RESTRICTIVE TRADE PRACTICES ACT

Any restriction or information provision (as each of those terms are defined or construed in Section 43(1) of the Restrictive Trade Practices Act 1976) contained in this **Construction Agreement** shall not take effect or shall cease to have effect:-

- (a) if a copy of this **Construction Agreement** is not provided to the Department of Trade and Industry ("DTI") within 28 days of the date of this **Construction Agreement**; or
- (b) if, within 28 days of the provision of that copy to the DTI, the DTI gives notice of objection to the party providing it.

*[Clause 17 is to be included where the User is undertaking OTSDUW]*

## 17. Development of Offshore Transmission System Development User Works

17.1 To the extent not already provided and, within **three months** of the date of this **Construction Agreement** (or such later date as **The Company** shall agree) the **User** shall provide **The Company** with:

- (a) confirmation of the **OTSDUW** to be undertaken by the **User**;
- (b) confirmation of the programme for the **OTSDUW** to be undertaken by the **User**; and
- (c) information equivalent to that provided under Sections B and D of the **Connection Application** but by reference to the **Transmission Interface Site** rather than the **Connection Site**.

Upon any revision to the **Offshore Works Assumptions**, the **User** shall provide updated information under paragraphs (a), (b) and (c) to and the parties shall (without prejudice to paragraph 6.9.2) agree such amendments to this **Construction Agreement** as are necessary to reflect such updated information. The parties acknowledge that any dispute regarding such amendments shall be referable to and determined by the **Authority** under the provisions of condition E13.5 of the **ESO Licence**, and where such application is made, the parties shall take into account any determination or other direction from the **Authority**.

17.2 The **User** and **The Company** shall within 3 months of the date of this **Construction Agreement** (or such later date as **The Company** and **User** shall agree) agree a timeline (the **OTSDUW Development and Data Timeline**) detailing the activities to be undertaken by the **User** in order to develop the scope of the **OTSDUW** and (provided for under the **PC**) providing for the exchange of data and information required.

17.3 Such data shall take account of **The Company's** obligations to the **Relevant Transmission Licensees** under the **STC** in providing information and data in respect of additions to and changes on the **National Electricity**



**Transmission System** and the need to coordinate the **OTSDUW** with the **Onshore Construction Works** and other works planned on the **National Electricity Transmission System**.

- 17.4 Within six months of the date of this **Construction Agreement** (or such later date as the **The Company** shall agree) the **User** shall provide **The Company** on an initial and indicative basis with:
- (a) information that would enable the **Relevant Transmission Licensee** to complete the **Connection Site Specification** (advising of any changes from or additions required to the site specific technical conditions set out in Appendices F1 to F5 to the **Bilateral Connection Agreement**) (to the extent practicable given the information and data available to the **User** at that time);
  - (b) information that would enable the **Relevant Transmission Licensee** to complete the **Transmission Interface Site Specification** (advising of any changes from or additions required to the site specific technical conditions set out in Appendix OF to this **Construction Agreement**) (to the extent practicable given the information and data available to the **User** at that time);
  - (c) information that would enable the **Relevant Transmission Licensee** to complete the **Services Capability Specification** (to the extent practicable given the information and data available to the **User** at that time).
- 17.5 Information referred to in Clause 17.4 (a), (b) and (c) shall be developed and amended by the **User** and agreed by **The Company** as the design and detail of the **OTSDUW** is finalised and such that the information can be provided by **The Company** to the extent practicable to the **Relevant Transmission Licensee** on its appointment and such that the **Connection Site Specification** and **Services Capability Specification** and **Transmission Interface Site Specification** are capable of being finalised on or prior to the **OTSUA Transfer Time**.
- 17.6 Any dispute between **The Company** and the **User** as to the information provided to enable finalisation of the **Connection Site Specification**, **Services Capability Specification** or **Transmission Interface Site Specification** shall be managed in accordance with **CUSC** Section 7 Paragraph 7.4.1 but the reference to the **London Court of International Arbitration** shall instead be to the **Authority** and the **Authority's** determination of such dispute shall, without prejudice to apply for judicial review of any determination, be final and binding on **The Company** and the **User**.
- 17.7 The **User** shall provide **The Company** with such information and assistance as **The Company** may reasonably require to enable the **Onshore Transmission Licensee** and the **Relevant Transmission Licensee** to have in place a **Transmission Interface Agreement** relating to the **Transmission Interface Site** and an **Interface Agreement** relating to the **Connection Site** in each case from no later than the **OTSUA Transfer Time**.

17.8 Taking into account the expected extent of the **OTSUA Commissioning Period** prior to the **OTSUA Transfer Time**, **The Company** and the **User** shall establish, as part of the **OTSDUW Development and Data Timetable**:

- (a) a timetable for the provision of the items required from the **User** pursuant to Clause 5 of this **Construction Agreement**, the **Grid Code** and **CUSC** Paragraphs 2.10 and 2.11 as they relate to the **Connection Site**; and
- (b) where the **Transmission Interface Site** will be **Operational** prior to the **OTSUA Transfer Time**, by when and to what extent the information referred to in Clause 17.4 (a), (b) and (c) should be in final form prior to the **OTSUA Transfer Time**;
- (c) where the **Transmission Interface Site** will be **Operational** prior to the **OTSUA Transfer Time**, to what extent and by when the **User** has to comply with the requirements in Appendices OF prior to the **OTSUA Transfer Time**.<sup>18</sup>

## 18. QUEUE MANAGEMENT PROCESS

18.1 The **Queue Management Process** shall be incorporated into this **Construction Agreement** and apply between **The Company** and the **User** and Appendix Q to this **Construction Agreement** has been prepared in accordance with the principles set out in **CUSC** Section 16.

18.2 Where, in accordance with the **Queue Management Process**,:

18.2.1 in the case of any of the **Conditional Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination", **The Company** will terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business Days**); and

18.2.2 in the case of any of the **Construction Progression Milestones**, the status of the **User's** project at the end of the **Project Milestone Remedy Period** is categorised as "Termination", **The Company** may terminate this **Construction Agreement** by notice in writing (such notice being not less than 10 **Business Days**); and

18.2.3 on such termination the provisions of Clause 11 of this **Construction Agreement** shall apply.

18.3 Where in accordance with the **Queue Management Process** there is a variation to the date by which a **User Progression Milestone** has to be met **The Company** shall revise Appendix Q to this **Construction Agreement** as required to reflect such change.

---

<sup>18</sup> Use OTSDUW Build

- 18.4 Any dispute or difference between **The Company** and the **User** on the **Queue Management Process** in respect of this **Construction Agreement** shall be resolved as an **Other Dispute** under the **Dispute Resolution Procedure**.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )  
**[name]** )  
for and on behalf of )  
National Energy System Operator )  
Limited )

SIGNED BY )  
**[name]** )  
for and on behalf of )  
**[User]** )

**APPENDIX [B1]  
[Part 1]**

**ONE OFF WORKS**

**APPENDIX [G]**  
**TRANSMISSION CONNECTION ASSET WORKS**

## **APPENDIX [H1]**

### **ONSHORE TRANSMISSION REINFORCEMENT WORKS**

#### **PART 1      Enabling Works**

#### **PART 2      Wider Transmission Reinforcement Works**

## **APPENDIX [H2]**

### **OFFSHORE TRANSMISSION REINFORCEMENT WORKS**

#### **PART 1**

#### **PART 2**

**APPENDIX [I]**  
**USER'S WORKS**

PART 1

PART 2

[OTSDUW – the works for the design, consenting, construction and installation of the Offshore Transmission System] [nb to be edited to identify works post offer and limited to consenting and design in case of early OFTO appointment]



**APPENDIX [J]**  
**CONSTRUCTION PROGRAMME**

**APPENDIX [K]**

**LIQUIDATED DAMAGES**

Company:

Connection site:

Type:

---

The amount of Liquidated Damages payable by The Company to the User pursuant to this Construction Agreement shall be:

Liquidated Damages under Clause [4] of this Construction Agreement shall be calculated on a daily basis at a rate of £XXXXXX per week subject to the limit that the total Liquidated Damages payable by The Company to the User under this Clause shall not exceed £XXXXXX.

**APPENDIX [L]**

**INDEPENDENT ENGINEER**

Company:

Connection site:

Type:

---

The Independent Engineer will be a Member of the Association of Consulting Engineers (ACE) and shall be agreed between the parties within 120 days of execution of this Construction Agreement or such other period as may be agreed between the parties. Failing agreement, it shall be referred to the President of the Institution of Electrical Engineers who shall nominate the Independent Engineer.

## **APPENDIX [MM]**

### **ATTRIBUTABLE WORKS AND KEY CONSENTS**

#### **Part 1**

#### **Attributable Works**

#### **Part 2**

#### **Key Consents**

**APPENDIX [N]**  
**THIRD PARTY WORKS**

## **APPENDIX O**

### **USER DATA**

#### Examples Being

Number of Turbines

Capacity in MW of each Turbine

Manufacturer of Turbines and Machine Type

Reactive Capability of each Turbine

## **APPENDIX P**

### **OFFSHORE WORKS ASSUMPTIONS**

#### Examples Being

Onshore landing point  
Connection to Onshore Transmission System  
Voltage of Cable  
Length of cable  
Assumed ownership of platform  
Assumed tender window  
Assumed preferred bidder decision date  
Assumed start of offshore works build\build programme\completion  
Assumed start of onshore works build\build programme\completion

**APPENDIX [Q]**  
**QUEUE MANAGEMENT PROCESS – USER PROGRESSION MILESTONES**

The table below specifies the dates (derived in accordance with **CUSC** Section16) for the **User Progression Milestones** in respect of the **User's** project and the application of the **Queue Management Process**.

**Conditional Progression Milestones**

| <b>Milestone</b>                      | <b>Date due</b> |
|---------------------------------------|-----------------|
| <b>M1 – Initiate Planning Consent</b> |                 |
| <b>M2 – Secure Consent</b>            |                 |
| <b>M3 – Land Rights</b>               |                 |

**Construction Progression Milestones**

| <b>Milestone</b>                                | <b>Date due</b> |
|-------------------------------------------------|-----------------|
| <b>M5 – Contestable Design Works Submission</b> |                 |
| <b>M6 – Agree Construction Plan</b>             |                 |
| <b>M7 – Project Commitment</b>                  |                 |
| <b>M8 – Initiate Construction</b>               |                 |

**END OF SCHEDULE 2 EXHIBIT 3A**



**SCHEDULE 2 - EXHIBIT 4**

**DATED [ ] 20[1 ]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

**[ ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**MANDATORY SERVICES AGREEMENT**

**RELATING TO [ ] POWER STATION**

---

THIS **MANDATORY SERVICES AGREEMENT** is made on the [ ] day of [ ] 200[ ]

**BETWEEN**

- (1) The company registered in England with number 11014226 ("**The Company**"), which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] ("**User**", which expression shall include its successors and/or permitted assigns)

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** is required to prepare a Connection and Use of System Code (**CUSC**) setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System** and the provision of certain **Balancing Services**.
- (B) As at the date hereof, **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties).
- (C) This **Mandatory Services Agreement** is entered into pursuant to the terms of the **CUSC** and shall be read as being governed by it and, as between **The Company** and the **User**, has priority over the terms of the **CUSC** in accordance with (and subject to) Paragraph 11.2.2 of the **CUSC**.

**NOW IT IS HEREBY AGREED** as follows:

**1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** have the same meanings, interpretations or constructions in this **Mandatory Services Agreement**. Subject thereto, unless the subject matter or context otherwise requires or is inconsistent therewith, in this **Mandatory Services Agreement** the terms set out in Appendix 3 shall have the meanings set out respectively therein.

## 2. COMMENCEMENT

This **Mandatory Services Agreement** shall commence on [ ]  
 (“**Commencement Date**”).

## 3. OBLIGATORY REACTIVE POWER SERVICE - DEFAULT UTILISATION

### 3.1 Schedule 3, Part I to the CUSC

The provisions of this Clause 3 implement the terms of Paragraph 2 of Schedule 3, Part I to the **CUSC** (“**CUSC Schedule**”) with respect to the payments to be made by **The Company** to the **User** for the provision by the **User** from the **BM Units** of the **Obligatory Reactive Power Service**, and in accordance with Paragraph 2.1 thereof the **Parties** hereby agree to make all necessary amendments to this **Mandatory Services Agreement** so as to give effect to the provisions of the **CUSC Schedule** as amended or modified from time to time.

### 3.2 Term and Suspension

[3.2.1 The provisions of this Clause 3 shall be deemed to have applied in relation to each **BM Unit** with effect from 00.00 hours on the [date hereof] [**Commencement Date**] and, subject always to Sub-Clause 3.2.2, shall continue thereafter unless and until the earlier of termination of the **CUSC Schedule** and termination of this **Mandatory Services Agreement**. For the avoidance of doubt, in the event this **Mandatory Services Agreement** is terminated in relation to any individual **BM Unit**, the provisions of this Clause 3 shall terminate in relation to that **BM Unit** only.] OR

[3.2.1 The provisions of Sub-Clauses 3.3 to 3.6 inclusive shall apply with effect from 00.00 hours on the date on which it is demonstrated (having regard to industry practice) to the reasonable satisfaction of **The Company** that each of the [**CCGT**] [**BM**] [**Non-Synchronous Generating**] **Units** complies with the provisions of **Grid Code CC 6.3.2** and **6.3.4** as applicable (or the coming into force of a direction issued by the **Authority** relieving the **User** of the obligation under its **Licence** to comply therewith) or (where **The Company** in its sole discretion requires **Reactive Power** from the **BM Units** before then for the purposes of security of the **National Electricity Transmission System**) such earlier date as **The Company** may agree with the **User** and, subject always to Sub-Clause 3.2.3, shall continue thereafter unless and until the earlier of termination of the **CUSC Schedule** and termination of this **Mandatory Services Agreement**. For the avoidance of doubt, the issue by **The Company** in relation to the **BM Unit** of a **Reactive Despatch Instruction** to unity power factor or zero Mvar shall not imply demonstration to **The Company's** reasonable satisfaction of compliance as referred to above nor imply in relation to

the **BM Unit** agreement by **The Company** of an earlier date as referred to herein.

3.2.2 No demonstration referred to in Sub-Clause 3.2.1 shall take place until the **User** shall have demonstrated to **The Company's** reasonable satisfaction (having regard to industry practice) that [each **[CCGT] [BM] Unit's Excitation System**, and in particular where applicable) the **Under-excitation Limiter**] [the continuously-acting automatic control system required to provide control of the voltage or zero transfer of **Reactive Power** with respect to each **[Power Park Moule] [DC Converter]** has been successfully commissioned and complies with the provisions of **Grid Code CC 6.3.8.**]

3.2.2/3 In relation to any **BM Unit**, the provisions of this Clause 3 (except this Sub-Clause 3.2) shall be suspended and have no force and effect upon the coming into effect, and for the duration of, any agreement (referred to in the **CUSC Schedule** as a "**Market Agreement**" and being either a new **Ancillary Services Agreement** or an agreement incorporating provisions into this **Mandatory Services Agreement**) which may be entered into between the Parties pursuant to Paragraph 3 of the **CUSC Schedule** for the provision by the **User** in relation to that **BM Unit** of:-

- (a) the **Obligatory Reactive Power Service** but with alternative payment arrangements to those provided in this Clause 3; or
- (b) an **Enhanced Reactive Power Service**.

For the avoidance of doubt, with effect from the expiry or termination of any **Market Agreement** such provisions shall in relation to that **BM Unit** cease to be suspended and shall resume full force and effect.

3.2.3/4 Termination or suspension of this Clause 3 shall not affect the rights and obligations of the **Parties** accrued as at the date of termination or suspension.

### **3.3 Capability Data**

3.3.1 The **Parties** agree that, for the purposes of the Appendices to the **CUSC Schedule**:-

- [(a) the figures set out in Table B of Appendix 1, Section A, Part I represent for each **BM Unit** the **Reactive Power** capability at **Rated MW** which the **User** is obliged to provide under and in accordance with the **Grid Code CC 6.3.2(a)**, together with **Reactive Power** capability at other levels of **MW Output** as specified therein by reference to the **Generator Performance**

**Chart** submitted in accordance with **Grid Code OC 2.4.2** and measured at the generator stator terminals; and

- (b) the figures set out in Table A of Appendix 1, Section A, Part I shall constitute for each of the **BM Units** the value of  $Q_{Clead}$  and  $Q_{Clag}$  referred to in Section 2 of Appendix 3 to the **CUSC Schedule** representing the **Reactive Power** capability at **Rated MW** shown at the **Commercial Boundary** (by application of the formulae set out in Appendix 8, Part 1 to the **CUSC Schedule**).]  
*OR*
- [(a) the figures set out in Table B of Appendix 1, Section A, Part I represent for each relevant **CCGT Unit** the **Reactive Power** capability at **Rated MW** which the **User** is obliged to provide under and in accordance with **Grid Code CC 6.3.2(a)**, together with **Reactive Power** capability at other levels of **MW Output** as specified therein by reference to the **Generator Performance Chart** submitted in accordance with **Grid Code OC 2.4.2** and measured at the generator stator terminals; and
- (b) the figures set out in summary Table C of Appendix 1, Section A, Part I represent for the **BM Unit** the **Reactive Power** capability of each relevant **CCGT Unit** at **Rated MW** (derived from Table B) but shown at the high voltage side of the **Generating Unit** step-up transformer by application of the formulae set out in Appendix 8, Part 2 to the **CUSC Schedule**; and
- (c) the figures set out in Table A of Appendix 1, Section A, Part I shall constitute for the **BM Unit** the value of  $Q_{Clead}$  and  $Q_{Clag}$  referred to in Section 2 of Appendix 3 to the **CUSC Schedule** representing the **Reactive Power** capability of the **BM Unit** at **Rated MW** shown at the **Commercial Boundary** (derived by the summation of the **Reactive Power** capability of each relevant **CCGT Unit** at **Rated MW** extracted from summary Table C and by application of the formulae set out in Appendix 8, Part 2 to the **CUSC Schedule**.)]
- [(a) the figures set out in Table B of Appendix 1, Section A, Part I represent for the **BM Unit** the **Reactive Power** capability at **Rated MW** and at various other **Active Power** output levels which the **User** is obliged to provide under and in accordance **Grid Code CC 6.3.2(c)** or **6.3.2(d)(i)** (as the case may be) by reference to the **Generator Performance Chart** submitted in accordance with **Grid Code OC 2.4.2** and measured at either the **Grid Entry Point** in England and Wales or at the HV side of the 33/132 kV or 33/275 kV or 33/400 kV transformer for **Users** connected to the **National Electricity Transmission System** in Scotland or the **User System Entry Point** if **Embedded**; and

- (b) the figures set out in Table A of Appendix 1, Section A, Part I shall constitute for the **BM Unit** the value of  $QC_{lead}$  and  $QC_{lag}$  referred to in Section 2 of Appendix 3 to the **CUSC Schedule** representing the **Reactive Power** capability at **Rated MW** shown at the **Commercial Boundary**.
- [(a) the figures set out in Table B of Appendix 1, Section A, Part I represent for each relevant **Non-Synchronous Generating Unit** the **Reactive Power** capability at **Rated MW** which the **User** is obliged to provide under and in accordance with **Grid Code CC 6.3.2(d)(ii)**, together with **Reactive Power** capability at other levels of **MW Output** as specified therein by reference to the **Generator Performance Chart** submitted in accordance with **Grid Code OC 2.4.2** and measured at the generator stator terminals; and
- (b) where applicable, the figures set out in summary Table C of Appendix 1, Section A, Part I represent for a **Power Park Module** the **Reactive Power** capability of each relevant **Power Park Unit** at **Rated MW** (derived from Table B) but shown at the high voltage side of the **Generating Unit** step-up transformer by application of the formulae set out in Appendix 8, Part 3 to the **CUSC Schedule**; and
- (c) the figures set out in Table A of Appendix 1, Section A, Part I shall constitute for the **BM Unit** the value of  $QC_{lead}$  and  $QC_{lag}$  referred to in Section 2 of Appendix 3 to the **CUSC Schedule** representing the **Reactive Power** capability of the **BM Unit** at **Rated MW** shown at the **Commercial Boundary** (where applicable, derived by the summation of the **Reactive Power** capability of each relevant **Power Park Unit** at **Rated MW** extracted from summary Table C and by application either of the formulae set out in Appendix 8, Part 3 to the **CUSC Schedule** or such other methodology as **The Company** and the **User** may agree in writing.]

### 3.4 Payments to User

- 3.4.1 In respect of each **BM Unit**, and in consideration of the **User** providing the **Obligatory Reactive Power Service** from that **BM Unit**, **The Company** shall pay to the **User** in respect of each calendar month in accordance with Paragraph 4.3 of the **CUSC** the aggregate total payments calculated in accordance with Appendix 1 to the **CUSC Schedule** and referred to therein as "PT".
- 3.4.2 For the purposes of Sub-Clause 3.4.1:-
  - (a) the **Relevant Zone** in which the **BM Units** are situated is specified in Appendix 1, Section A, Part I;

- (b) without prejudice to Paragraph 4.1.2.2 of the **CUSC**, **The Company** shall use the meters and aggregation principles specified and/or referred to in Appendix 1, Section A, Part II to ascertain the amount of **Leading** and **Lagging** Mvarh produced in each **Settlement Period** by the **BM Units**, and such amount of **Leading** or **Lagging** Mvarh shall constitute the respective values of  $U_{lead}$  and  $U_{lag}$  as referred to in paragraph 1 of Appendix 3 to the **CUSC Schedule**; and
- (c) the **Parties** acknowledge that all meters and metered data used for the purposes of this Clause 3 shall comply with the provisions of Appendix 4 to the **CUSC Schedule**.

## 4. FREQUENCY RESPONSE

### 4.1 Paragraph 4.1.3 of CUSC

The provisions of this Clause 4 give effect to the provisions of Paragraph 4.1.3 of the **CUSC** in respect of the provision by the **User** from the **BM Units** of the **Mandatory Ancillary Service of Frequency Response** and the payments to be made by **The Company** to the **User** in respect thereof.

### 4.2 Term

- 4.2.1 The provisions of this Clause 4 shall be deemed to have applied in relation to each **BM Unit** with effect from 00.00 hours on the [date hereof] [**Commencement Date**] and shall continue thereafter unless and until this **Mandatory Services Agreement** is terminated. For the avoidance of doubt, in the event this **Mandatory Services Agreement** is terminated in relation to any individual **BM Unit**, the provisions of this Clause 4 shall terminate in relation to that **BM Unit** only.
- 4.2.2 Termination of this Clause 4 shall not affect the rights and obligations of **The Company** and the **User** accrued as at the date of termination.

### 4.3 Provision of Frequency Response

- 4.3.1 The **Parties** agree that:-

- (a) [subject always to Sub-Clause 4.4,] for the purposes of Paragraph 4.1.3.7 of the **CUSC**, the figures set out in the response tables in Appendix 1, Section B, Part I represent the amount of **Primary Response**, **Secondary Response** and **High Frequency Response** referred to therein;

- (b) [subject always to Sub-Clause 4.4] for the purposes of Paragraph 4.1.3.9 of the **CUSC**, the figures set out in the summary response table in Appendix 1, Section B, Part II represent the capabilities in respect of **Primary Response**, **Secondary Response** and **High Frequency Response** at given levels of **De-Load** referred to therein;
- (c) for the purposes of Paragraph 4.1.3.4 of the **CUSC**, the table in Appendix 1, Section B, Part III shows the permissible combinations of **Primary Response**, **Secondary Response** and **High Frequency Response** referred to therein;
- (d) for the purposes of Paragraph 4.1.3.9 of the **CUSC**, the figures (if any) set out in the plant configuration table in Appendix 1, Section B, Part II represent the plant configuration adjustment factors referred to therein to be applied where the **BM Unit** is a **CCGT Module**;
- (e) [subject always to Sub-Clause 4.4,] for the purposes of Paragraph 4.1.3.9A(a) of the **CUSC** in respect of calculation of the **Response Energy Payment**, the response values in Appendix 1, Section B, Part IV represent the **Frequency Response Power** that is deemed to be delivered in respect of **Primary Response**, **Secondary Response** and **High Frequency Response**.

#### 4.4 [Commissioning and Provisional Response Levels

Without prejudice to Paragraph 4.1.3.14 of the **CUSC**, the **User** acknowledges that the levels of **Response** set out in the response tables in Appendix 1, Section B, Parts I, II and IV are indicative figures only during the period in which the relevant **Generating Unit(s)** is being commissioned and the **User** hereby undertakes to use its reasonable endeavours to forward to **The Company** levels of **Response** which represent the true operating characteristics of such **Generating Unit(s)** for inclusion in Appendix 1, Section B, Parts I, II and IV as soon as possible following completion of commissioning.]



### [Indicative Response Levels

Without prejudice to Paragraph 4.1.3.14 of the **CUSC**, the **Parties** acknowledge and agree that the levels of **Response** set out in Appendix 1, Section B, Parts I, II and IV reflect either the absence of or incomplete submissions of data required for the purposes of this Clause 4 to be made by the **User** for the relevant **BM Unit(s)** as at the **Commencement Date**, and furthermore the performance of such **BM Units(s)** has not been assessed by **The Company** to establish that such levels of **Response** represent the true operating characteristics of such **BM Unit(s)**, and accordingly:-

- (a) to that extent the figures set out in Appendix 1, Section B, Parts I, II and IV for such **BM Unit(s)** are provisional pending:-
  - (i) the submission by the **User** of such complete data, which the **User** hereby undertakes to provide to **The Company**, and
  - (ii) subsequent assessment by **The Company** of the performance of such **BM Unit(s)** (based upon demonstration to **The Company** by the **User** of operation of such **BM Unit(s)** and/or the provision by the **User** to **The Company** of such information as **The Company** shall reasonably require) in order to establish to **The Company's** reasonable satisfaction that such figures represent the true operating characteristics of such **BM Unit(s)**; and
- (b) upon submission by the **User** of such complete data and following assessment by **The Company** of performance of such **BM Unit(s)** as aforesaid, if **The Company** is of the reasonable opinion that any or all of the levels of **Response** set out in Appendix 1, Section B, Parts I, II and IV do not represent the true operating characteristics of such **BM Unit(s)**, then **The Company** shall so notify the **User** and the **Parties** shall discuss and agree consequential changes to the relevant part or parts of Appendix 1, Section B, Parts I, II and IV to reflect such true operating characteristics,

provided always that such complete data shall be submitted by the **User**, the assessment by **The Company** of the performance of such **BM Unit(s)** shall be completed and (where applicable) any consequential changes to the relevant part or parts of Appendix 1, Section B, Parts I, II and IV shall be agreed by the **Parties**, in each case as soon as reasonably practicable and in any event no later than 6 months after the **Commencement Date** (or such later date as the **Parties** may agree in writing). ]

### 5. NOT USED

## 6. GENERAL PROVISIONS

Paragraphs 6.12 (limitation of liability), 6.14 (transfer and subcontracting), 6.15 (confidentiality), 6.18 (intellectual property), 6.19 (force majeure), 6.20 (waiver), 6.21 (notices), 6.22 (third party rights), 6.23 (jurisdiction), 6.24 (counterparts), 6.25 (governing law), 6.26 (severance of terms) and 6.27 (language), 6.38 (Directions related to National Security), and Section 7 (dispute resolution) of the **CUSC** are incorporated into this **Mandatory Services Agreement** *mutatis mutandis*.

## 7. VARIATIONS

**7.1** Subject to Sub-Clause 7.2, no variation to this **Mandatory Services Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.

**7.2 The Company** and the **User** shall effect any amendment required to be made to this **Mandatory Services Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.

## 8. NOTICES

For the purposes of this **Mandatory Services Agreement**, unless and until otherwise notified by the relevant **Party** to the other in accordance with Paragraph 6.21.1 of the **CUSC**, any notice or other communication to be given by **The Company** or the **User** to the other under, or in connection with matters contemplated by, this **Mandatory Services Agreement** shall be sent to the following address and/or email address and marked for the attention of the person named below:

**The Company:** Address:  
Email Address:  
For the attention of:

**User:** \_\_\_\_\_

**Address:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**For the attention of:** \_\_\_\_\_

## 9. BANK ACCOUNT DETAILS

For the purposes of Paragraph 4.3.2.18 of the **CUSC**, unless and until otherwise notified by the relevant **Party** to the other in accordance with that Paragraph, details of each of the **Party's** bank accounts to which sums payable in connection with this **Mandatory Services Agreement** shall be paid are set out below:

**The Company:**                      Bank:  
                                                 Branch:  
                                                 Account Number:

**User:**                                      Bank:  
                                                 Branch:  
                                                 Account Number:

[10.    **AGREEMENT TO AMEND THIS MANDATORY SERVICES AGREEMENT**

The **Parties** hereby acknowledge and agree that the terms of this **Mandatory Services Agreement** may require amendment to reflect the fact that the **Mandatory Services** are provided under this **Mandatory Services Agreement** from **Generating Units** within a **Power Park Module**, and that accordingly certain **Grid Code Connection Conditions** and other relevant requirements of the **Grid Code** and the **CUSC** applicable to **BM Unit(s)** may not apply to such **Generating Unit(s)** or may apply in a modified manner. The **Parties** shall discuss in good faith and endeavour to agree such amendments as soon as reasonably practicable and in any event no later than 6 months after the **Commencement Date** (or such later date as the **Parties** may agree in writing).]

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )  
**[name]** )  
for and on behalf of )  
**NATIONAL ENERGY SYSTEM** )  
**OPERATOR LIMITED** )

SIGNED BY )  
**[name]** )  
for and on behalf of )  
**[User]** )

**APPENDIX 1 – DATA**  
**SECTION A (REACTIVE POWER)**

**Part I**  
**Capability Tables (Relevant Zone [    ])**

**[TABLES BELOW FOR USE WHERE GRID CODE CC6.3.2(a) APPLICABLE  
(EXCEPT FOR CCGT MODULES)]**

BM Unit No.

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| <b>TABLE A</b>     | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|--------------------|------------------------|-------------------|
| <b>AT RATED MW</b> |                        |                   |

**REACTIVE POWER CAPABILITY AT GENERATOR STATOR TERMINAL** (at rated terminal voltage)

| <b>TABLE B</b>                    | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|-----------------------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b>                |           |                        |                   |
| <b>AT FULL OUTPUT<br/>(MW)</b>    |           |                        |                   |
| <b>AT MINIMUM OUTPUT<br/>(MW)</b> |           |                        |                   |

BM Unit No.

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| <b>TABLE A</b>     | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|--------------------|------------------------|-------------------|
| <b>AT RATED MW</b> |                        |                   |

**REACTIVE POWER CAPABILITY AT GENERATOR STATOR TERMINAL** (at rated terminal voltage)

| TABLE B                | MW | LEAD (Mvar) | LAG (Mvar) |
|------------------------|----|-------------|------------|
| AT RATED MW            |    |             |            |
| AT FULL OUTPUT (MW)    |    |             |            |
| AT MINIMUM OUTPUT (MW) |    |             |            |

BM Unit No.

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| TABLE A     | LEAD (Mvar) | LAG (Mvar) |
|-------------|-------------|------------|
| AT RATED MW |             |            |

**REACTIVE POWER CAPABILITY AT GENERATOR STATOR TERMINAL** (at rated terminal voltage)

| TABLE B                | MW | LEAD (Mvar) | LAG (Mvar) |
|------------------------|----|-------------|------------|
| AT RATED MW            |    |             |            |
| AT FULL OUTPUT (MW)    |    |             |            |
| AT MINIMUM OUTPUT (MW) |    |             |            |

BM Unit No.

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| TABLE A     | LEAD (Mvar) | LAG (Mvar) |
|-------------|-------------|------------|
| AT RATED MW |             |            |

**REACTIVE POWER CAPABILITY AT GENERATOR STATOR TERMINAL** (at rated terminal voltage)

| TABLE B                   | MW | LEAD (Mvar) | LAG (Mvar) |
|---------------------------|----|-------------|------------|
| AT RATED MW               |    |             |            |
| AT FULL OUTPUT<br>(MW)    |    |             |            |
| AT MINIMUM OUTPUT<br>(MW) |    |             |            |

OR

*[TABLES BELOW FOR USE WHERE GRID CODE CC6.3.2(a) APPLICABLE -  
CCGT MODULES ONLY]*

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| TABLE A     | MW | LEAD<br>(Mvar) | LAG (Mvar) |
|-------------|----|----------------|------------|
| AT RATED MW |    |                |            |

**REACTIVE POWER CAPABILITY AT GENERATOR STATOR TERMINAL** (at rated terminal voltage)

CCGT Unit No. [       ]

| TABLE B                   | MW | LEAD<br>(Mvar) | LAG (Mvar) |
|---------------------------|----|----------------|------------|
| AT RATED MW               |    |                |            |
| AT FULL OUTPUT<br>(MW)    |    |                |            |
| AT MINIMUM OUTPUT<br>(MW) |    |                |            |

CCGT Unit No. [       ]

| <b>TABLE B</b>                    | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|-----------------------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b>                |           |                        |                   |
| <b>AT FULL OUTPUT<br/>(MW)</b>    |           |                        |                   |
| <b>AT MINIMUM OUTPUT<br/>(MW)</b> |           |                        |                   |

CCGT Unit No. [       ]

| <b>TABLE B</b>                    | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|-----------------------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b>                |           |                        |                   |
| <b>AT FULL OUTPUT<br/>(MW)</b>    |           |                        |                   |
| <b>AT MINIMUM OUTPUT<br/>(MW)</b> |           |                        |                   |

**REACTIVE POWER CAPABILITY AT HV SIDE OF STEP-UP TRANSFORMER** (at rated terminal and nominal system voltage)

| <b>SUMMARY TABLE C</b> | <b>RATED<br/>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG<br/>(Mvar)</b> |
|------------------------|---------------------|------------------------|-----------------------|
| <b>CCGT UNIT</b>       |                     |                        |                       |
|                        |                     |                        |                       |
|                        |                     |                        |                       |

OR

*[TABLES BELOW FOR USE WHERE GRID CODE CC6.3.2(c) or (d)(i)  
APPLICABLE]*



**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

BM Unit No. \_\_\_\_\_

| <b><u>TABLE A</u></b>     | <b><u>MW</u></b> | <b><u>LEAD<br/>(Mvar)</u></b> | <b><u>LAG (Mvar)</u></b> |
|---------------------------|------------------|-------------------------------|--------------------------|
| <b><u>AT RATED MW</u></b> |                  |                               |                          |

**REACTIVE POWER CAPABILITY AT GRID ENTRY POINT (ENGLAND AND WALES) OR HV SIDE OF RELEVANT TRANSFORMER (SCOTLAND) OR USER SYSTEM ENTRY POINT (IF EMBEDDED)**

BM Unit No. \_\_\_\_\_

| <b>TABLE B</b>                      | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|-------------------------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b>                  |           |                        |                   |
| <b>AT 50% OF RATED<br/>MW</b>       |           |                        |                   |
| <b>AT 20% OF RATED<br/>MW</b>       |           |                        |                   |
| <b>AT BELOW 20% OF<br/>RATED MW</b> |           |                        |                   |
| <b>AT 0% OF RATED<br/>MW</b>        |           |                        |                   |

OR

*[TABLES BELOW FOR USE WHERE GRID CODE CC6.3.2(d)(ii) APPLICABLE  
(INCLUDING FOR POWER PARK UNITS)]*

**REACTIVE POWER CAPABILITY AT COMMERCIAL BOUNDARY** (at rated stator terminal and nominal system voltage)

| <b>TABLE A</b>     | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|--------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b> |           |                        |                   |

**REACTIVE POWER CAPABILITY AT NON-SYNCHRONOUS GENERATING UNIT  
STATOR TERMINAL** (at rated terminal voltage)

Non Synchronous Generating Unit (including Power Park Unit): Each

| <b>TABLE B</b>                      | <b>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG (Mvar)</b> |
|-------------------------------------|-----------|------------------------|-------------------|
| <b>AT RATED MW</b>                  |           |                        |                   |
| <b>AT 50% OF RATED<br/>MW</b>       |           |                        |                   |
| <b>AT 20% OF RATED<br/>MW</b>       |           |                        |                   |
| <b>AT BELOW 20% OF<br/>RATED MW</b> |           |                        |                   |
| <b>AT 0% OF RATED<br/>MW</b>        |           |                        |                   |

**REACTIVE POWER CAPABILITY AT HV SIDE OF STEP-UP TRANSFORMER** (at  
rated terminal and nominal system voltage)

| <b>SUMMARY TABLE C</b> | <b>RATED<br/>MW</b> | <b>LEAD<br/>(Mvar)</b> | <b>LAG<br/>(Mvar)</b> |
|------------------------|---------------------|------------------------|-----------------------|
| <b>POWER PARK UNIT</b> |                     |                        |                       |
|                        |                     |                        |                       |
|                        |                     |                        |                       |

*[NOTE: SUMMARY TABLE C ONLY APPLICABLE TO POWER PARK MODULES]*

**Part II**  
**Meters and Aggregation Principles**

[BM Unit No.]

| <u>[BM]<br/>or<br/>[CCGT<br/>]<br/>Unit<br/>No</u> | <u>Metering<br/>Subsystem<br/>ID</u> | <u>Outstation<br/>ID</u> | <u>Channel<br/>Number</u> | <u>Meter<br/>Register<br/>ID</u> | <u>Measurement<br/>Quantity ID<br/>(RI or RE)</u> | Loss<br>Adjustment<br>Factor |
|----------------------------------------------------|--------------------------------------|--------------------------|---------------------------|----------------------------------|---------------------------------------------------|------------------------------|
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |
|                                                    |                                      |                          |                           |                                  |                                                   |                              |

**Aggregation Methodology**

[N/A]

or

*[Category A/B/C/D\* aggregation principles as set out in the latest published version of the document entitled “Methodology Document for the Aggregation of Reactive Power Metering” shall apply]*

*\* Delete as applicable*

**Part III**  
**Calculation of Reactive Power Capability**  
**at the Commercial Boundary**

For the purposes of Appendix 8 to the **CUSC Schedule**, the following table shows the reactive load applicable to each of the relevant **BM Units**, constituting the respective value  $Q_{ts}$  referred to therein:-

| Reactive Load |          |
|---------------|----------|
| BM Unit       | $Q_{ts}$ |
|               |          |
|               |          |
|               |          |
|               |          |

**APPENDIX 1 – DATA (Cont.)**  
**SECTION B (FREQUENCY RESPONSE)**  
**Part I - Frequency Response Data**

Station:

BM Unit Nos.

| Table 1             | Low Frequency Response – Mode A |                       |                              |                              |                              |                              |                              |
|---------------------|---------------------------------|-----------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Genset De-Load (MW) | $\delta f_p$ (Hz)               | Primary Response (MW) | Secondary Response (MW)      |                              |                              |                              |                              |
|                     |                                 |                       | $\delta f_s = -0.1\text{Hz}$ | $\delta f_s = -0.2\text{Hz}$ | $\delta f_s = -0.3\text{Hz}$ | $\delta f_s = -0.4\text{Hz}$ | $\delta f_s = -0.5\text{Hz}$ |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |
|                     | -0.1                            |                       |                              |                              |                              |                              |                              |
|                     | -0.2                            |                       |                              |                              |                              |                              |                              |
|                     | -0.3                            |                       |                              |                              |                              |                              |                              |
|                     | -0.4                            |                       |                              |                              |                              |                              |                              |
|                     | -0.5                            |                       |                              |                              |                              |                              |                              |
|                     | -0.6                            |                       |                              |                              |                              |                              |                              |
|                     | -0.7                            |                       |                              |                              |                              |                              |                              |
|                     | -0.8                            |                       |                              |                              |                              |                              |                              |

Station:  
BM Unit Nos:

| Table 2             | High Frequency Response (MW) - Mode A     |                                |                                |                                |                                |
|---------------------|-------------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Genset De-Load (MW) | Frequency Deviation from Target Frequency |                                |                                |                                |                                |
|                     | $\delta f_n = +0.1 \text{ Hz}$            | $\delta f_n = +0.2 \text{ Hz}$ | $\delta f_n = +0.3 \text{ Hz}$ | $\delta f_n = +0.4 \text{ Hz}$ | $\delta f_n = +0.5 \text{ Hz}$ |
|                     |                                           |                                |                                |                                |                                |
|                     |                                           |                                |                                |                                |                                |
|                     |                                           |                                |                                |                                |                                |
|                     |                                           |                                |                                |                                |                                |
|                     |                                           |                                |                                |                                |                                |
|                     |                                           |                                |                                |                                |                                |

[In relation to the levels of **Response** capability pursuant to Paragraph 4.1.3 of **CUSC** and Table 2 above it is agreed that for low operating outputs, the **High Frequency Response** capability will be limited such that the generation level will under normal operating conditions not be caused to drop below [     ] MW.]

For the purpose of Paragraph 4.1.3.11(a) of the **CUSC** the level of **Response** capability for a **Frequency Deviation** of 0.0 Hz shall be 0.0 MW.

**Part II****Frequency Response Summary Data**

Station:

BM Unit Nos:

| Table 1                   | Frequency Response Capability Summary - Mode A |                                          |                                            |
|---------------------------|------------------------------------------------|------------------------------------------|--------------------------------------------|
| Genset<br>De-Load<br>(MW) | Primary Response<br>@-0.5Hz<br>(MW)            | Secondary<br>Response<br>@-0.2Hz<br>(MW) | High Frequency<br>Response<br>@+0.5Hz (MW) |
|                           | P <sub>MW</sub>                                | S <sub>MW</sub>                          | H <sub>MW</sub>                            |
|                           |                                                |                                          |                                            |
|                           |                                                |                                          |                                            |
|                           |                                                |                                          |                                            |
|                           |                                                |                                          |                                            |
|                           |                                                |                                          |                                            |
|                           |                                                |                                          |                                            |

| Table 2                           | Plant Configuration Adjustment Factor K <sub>GRC</sub> – Mode A |  |
|-----------------------------------|-----------------------------------------------------------------|--|
| 1 Gas Turbine and 1 Steam Turbine |                                                                 |  |
| 1 Gas Turbine                     |                                                                 |  |

*(or whatever configuration is appropriate)*

**Part III**  
**Frequency Response - Permissible Combinations**

Station:  
BM Unit Nos:

| Table 1                 | Mode A Response |   |
|-------------------------|-----------------|---|
| Primary Response        | ✓               | ✓ |
| Secondary Response      |                 | ✓ |
| High Frequency Response | ✓               | ✓ |



**Part IV**  
**Frequency Response Power Delivery Data**

Station:  
 BM Unit Nos:

| Primary Response Power Delivery – Mode A |                     |  |  |  |  |  |
|------------------------------------------|---------------------|--|--|--|--|--|
| Frequency Deviation (Hz)                 | Genset De-load (MW) |  |  |  |  |  |
|                                          |                     |  |  |  |  |  |
| -0.1                                     |                     |  |  |  |  |  |
| -0.2                                     |                     |  |  |  |  |  |
| -0.3                                     |                     |  |  |  |  |  |
| -0.4                                     |                     |  |  |  |  |  |
| -0.5                                     |                     |  |  |  |  |  |

| Primary & Secondary Response Power Delivery – Mode A |                     |  |  |  |  |  |
|------------------------------------------------------|---------------------|--|--|--|--|--|
| Frequency Deviation (Hz)                             | Genset De-load (MW) |  |  |  |  |  |
|                                                      |                     |  |  |  |  |  |
| -0.1                                                 |                     |  |  |  |  |  |
| -0.2                                                 |                     |  |  |  |  |  |
| -0.3                                                 |                     |  |  |  |  |  |
| -0.4                                                 |                     |  |  |  |  |  |
| -0.5                                                 |                     |  |  |  |  |  |

| High Frequency Response Power Delivery – Mode A |                     |  |  |  |  |  |
|-------------------------------------------------|---------------------|--|--|--|--|--|
| Frequency Deviation (Hz)                        | Genset De-load (MW) |  |  |  |  |  |
|                                                 |                     |  |  |  |  |  |
| +0.1                                            |                     |  |  |  |  |  |
| +0.2                                            |                     |  |  |  |  |  |
| +0.3                                            |                     |  |  |  |  |  |
| +0.4                                            |                     |  |  |  |  |  |
| +0.5                                            |                     |  |  |  |  |  |

The figures for genset deload in the tables shall be taken from the figures for genset deload shown in the tables Frequency Response Capability Data tables in Part I.

**APPENDIX 2 - PRICES**

**SECTION A (REACTIVE POWER)**

Not Used

**APPENDIX 2**

**SECTION B (FREQUENCY RESPONSE)**

Not Used

### **APPENDIX 3 – FURTHER DEFINITIONS**

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“BM Units”<br/>[“Commercial Boundary”</b> | <b><i>[identify]</i></b><br>for a <b>BM Unit</b> comprising a <b>Power Park Module</b> or <b>DC Convertor</b> , the <b>Grid Entry Point</b> in England and Wales or the HV side of the 33/132 kV or 33/275 kV or 33/400 kV transformer for <b>Users</b> connected to the <b>National Electricity Transmission System</b> in Scotland or the <b>User System Entry Point</b> if <b>Embedded</b> ; |
| <b>"Frequency Sensitive Mode"</b>            | a <b>Genset</b> operating mode which will result in the <b>Active Power</b> output changing, in response to a change in <b>System Frequency</b> , in a direction which assists in the recovery to <b>Target Frequency</b> by operating so as to provide <b>Primary Response</b> and/or <b>Secondary Response</b> and/or <b>High Frequency Response</b> ;                                        |
| <b>"Full Output"</b>                         | the meaning attributed to it in <b>Grid Code BC 2.A.3.1</b> ;                                                                                                                                                                                                                                                                                                                                   |
| <b>"Generator Performance Chart"</b>         | a diagram which shows the MW and Mvar capability limits within which a <b>BM Unit</b> will be expected to operate under steady state conditions;                                                                                                                                                                                                                                                |
| <b>“Grid Entry Point”</b>                    | The meaning attributed to it in the <b>Grid Code</b> ;                                                                                                                                                                                                                                                                                                                                          |
| <b>"Minimum Output"</b>                      | the meaning attributed to it in <b>Grid Code BC 2.A.3.1</b> ;                                                                                                                                                                                                                                                                                                                                   |
| <b>“Mode A”</b>                              | in relation to <b>Primary, Secondary</b> and/or <b>High Frequency Response</b> means the levels of <b>Response</b> set out in relation thereto in Table 1 and/or (as applicable) Table 2 of Appendix 1, Section B, Part I;                                                                                                                                                                      |
| <b>“Parties”</b>                             | the parties to this <b>Mandatory Services Agreement</b> ;                                                                                                                                                                                                                                                                                                                                       |

**“Reactive Power Zone”**

means those separate areas of England and Wales identified as zones in the Seven Year Statement for 1997 for the purposes of specifying local **Reactive Power** capability and need;

**“Relevant Zone”**

the **Reactive Power Zone** in which the **BM Units** are situated, which for convenience only shall be specified in Appendix 1, Section A, Part I;

**"Under-excitation Limiter"**

the meaning attributed to it in the **Grid Code**;

$\delta f_h$

a **Frequency Deviation** from **Target Frequency** which is achieved 10 seconds from the time of the **Frequency** change and is sustained thereafter;

$\delta f_p$

a **Frequency Deviation** from **Target Frequency** which is achieved 10 seconds from the time of the **Frequency** change and is sustained for a further 20 seconds;

$\delta f_s$

a **Frequency Deviation** from **Target Frequency** which is achieved 30 seconds from the time of the **Frequency** change and is sustained for a further 30 minutes.

**SCHEDULE 2 - EXHIBIT 5**

**DATED** [ \_\_\_\_\_ ]

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)**

**and**

[ \_\_\_\_\_ ] (2)

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**BELLA**

---

**[EMBEDDED EXEMPTABLE LARGE POWER STATION WHICH IS SMRS REGISTERED]**

**At** [ \_\_\_\_\_ ]

**Reference:**[ \_\_\_\_\_ ]

## **CONTENTS**

|                    |                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------|
| <b>1.</b>          | <b>Definitions, Interpretation and Construction</b>                                                    |
| <b>2.</b>          | <b>Conditions Precedent and Commencement</b>                                                           |
| <b>3.</b>          | <b>The Site of Connection to the Distribution System</b>                                               |
| <b>4.</b>          | <b>Outages</b>                                                                                         |
| <b>5.</b>          | <b>Grid Code Matters</b>                                                                               |
| <b>6.</b>          | <b>Operational Notification</b>                                                                        |
| <b>7.</b>          | <b>Compliance with Site Specific Technical Conditions</b>                                              |
| <b>8.</b>          | <b>Term</b>                                                                                            |
| <b>9.</b>          | <b>Variations</b>                                                                                      |
| <b>10.</b>         | <b>Restrictive Trade Practices Act</b>                                                                 |
| <b>11.</b>         | <b>General Provisions</b>                                                                              |
| <b>12.</b>         | <b>Wider Transmission Reinforcement Works</b>                                                          |
| <b>Appendix A</b>  | <b>The Site of Connection</b>                                                                          |
| <b>Appendix F1</b> | <b>Site Specific Technical Conditions - Agreed Balancing Services</b>                                  |
| <b>Appendix F2</b> | <b>[Not Used]</b>                                                                                      |
| <b>Appendix F3</b> | <b>Site Specific Technical Conditions - Special Automatic Facilities</b>                               |
| <b>Appendix F4</b> | <b>Site Specific Technical Conditions Protection and Control Relay Settings, Fault Clearance Times</b> |
| <b>Appendix F5</b> | <b>Site Specific Technical Conditions - Other</b>                                                      |
| <b>Appendix H</b>  | <b>Transmission Reinforcement Works</b>                                                                |

THIS **BELLA** is made on the [ ] day of [ ] 20[ ].

**BETWEEN**

- (1) The company registered in England with number 11014226 (“**The Company**”, which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“**User**”, which expression shall include its successors and/or permitted assigns).

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** is required to prepare a Connection and Use of System Code (**CUSC**).
- (B) The **User** has applied in the capacity of an **EELPS** whose **Boundary Point Metering System** is [to be] registered in **SMRS** or in **CMRS** by a **User** who is responsible for the **Use of System Charges** associated with the **BM Unit** [to be] registered in **CMRS**.
- (C) The **User** has made a **BELLA Application** and **The Company** is required to make a **BELLA Offer** in accordance with Paragraph 1.5.2 of the **CUSC**.
- (D) This **Offer** has been made on the basis of the **Connect and Manage Arrangements**.
- (E) This **BELLA** is a [**Gate 1 Agreement**][**Gate 2 Agreement**].

**NOW IT IS HEREBY AGREED** as follows:

**1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** have the same meanings, interpretations or constructions in this **BELLA** and the following term(s) shall have the meaning(s) set out below:

|                                   |                                                                                                                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DNO</b>                        | name address and registered number of owner\operator of the distribution network to which user is to connect.                                                                                    |
| <b>DNO Construction Agreement</b> | the agreement between <b>The Company</b> and the <b>DNO</b> for <b>Transmission Reinforcement Works</b> as a consequence of the <b>User’s</b> connection to the <b>Distribution System</b> .     |
| <b>Enabling Works</b>             | those elements of the <b>Transmission Reinforcement Works</b> which are required to be completed prior to the <b>User’s Equipment</b> being <b>Energised</b> and specified in Appendix H Part 1. |

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[Gate 2 Agreements</b>                     | the acceptance of the <b>Gate 2 Offers</b> and entering into the <b>Gate 2 Agreements</b> by both (a) the <b>User</b> and (b) the <b>DNO</b> in each case accepting the <b>Gate 2 Offer</b> to amend the <b>Gate 1 Agreements</b> between the <b>User</b> and <b>The Company</b> and the <b>DNO</b> and <b>The Company</b> respectively such that the <b>Gate 1 Agreements</b> become <b>Gate 2 Agreements – Gate 1 Agreement only.</b> ] |
| <b>Notice of Reduction</b>                    | the notice of that name given by <b>The Company</b> to the <b>DNO</b> and the <b>User</b> pursuant to Clause 7 of the <b>DNO Construction Agreement</b> .                                                                                                                                                                                                                                                                                 |
| <b>Notice of Reduction Effective Date</b>     | the date the amendments proposed by the <b>Notice of Reduction</b> take effect.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Transmission Reinforcement Works</b>       | those works which in the reasonable opinion of <b>The Company</b> are necessary to extend or reinforce the <b>National Electricity Transmission System as a consequence of the User's Equipment</b> being <b>Energised</b> specified in Appendix H.                                                                                                                                                                                       |
| <b>User's Capacity</b>                        | the MW [export] figure specified in the <b>User's Data</b> .                                                                                                                                                                                                                                                                                                                                                                              |
| <b>User's Data</b>                            | the data submitted by the <b>User</b> and set out in Appendix A to the <b>BELLA</b> against which the effect on the <b>National Electricity Transmission System</b> of the <b>User's</b> connection to the <b>Distribution System</b> has been assessed.                                                                                                                                                                                  |
| <b>Wider Transmission Reinforcement Works</b> | those elements of the <b>Transmission Reinforcement Works</b> which are not required to be completed prior to the <b>User's Equipment</b> being <b>Energised</b> and specified in Appendix H Part 2.                                                                                                                                                                                                                                      |

## 2. CONDITIONS PRECEDENT AND COMMENCEMENT

2.1 The rights and obligations of the **User** and **The Company** pursuant to this **BELLA** are subject to the following conditions precedent having been fulfilled before such rights and obligations arise:

- 2.1.1 the **User** having provided (in a form reasonably satisfactory to **The Company**) proof of having entered into a **Distribution Agreement** with the owner/operator of the **Distribution System**; and
- 2.1.2 of the acceptance by the owner/operator of the **Distribution System** of any necessary **Modification Offer** relevant to the **Embedded Power Station**; and



- 2.1.3 **The Company** and / or the **Users** as appropriate having received the derogations [if any] required in respect of the Grid Code; and
- [2.1.4 The **Gate 2 Agreements** having been entered into - **Gate 1 Agreements** with/without **Reservation** only].
- 2.2 If the conditions precedent have not been fulfilled, in the case of 2.1.1 and 2.1.3 within 6 months of the date hereof, and in the case of 2.1.2 within 3 months of the date of receipt by the owner/operator of the **Distribution System** of the **Modification Offer**, **The Company** or the **User** may rescind this **BELLA** by giving to the other notice to that effect in which event all rights and liabilities of the parties hereunder and under the **CUSC** in relation to this **Embedded Power Station** shall cease.
- 2.3 This **BELLA** shall commence on [                      ].
- 2.4 It is a condition of this **Agreement** that the **Embedded Exemptable Large Power Station** is **SMRS** registered (or **CMRS** registered by a **Supplier**) in the **BSC**. If, at any time the **Embedded Exemptable Large Power Station** ceases to be **SMRS** registered (or **CMRS** registered by a **Supplier**) and becomes **CMRS** registered other than by a **Supplier** then the **User** hereby undertakes to forthwith apply for and enter into a **Bilateral Embedded Generation Agreement**.

### 3. **THE SITE OF CONNECTION TO THE DISTRIBUTION SYSTEM**

The site of **Connection** of the **EELPS** to the **Distribution System** to which this **BELLA** relates is more particularly described in Appendix A.

### 4. **OUTAGES**

Subject to the provisions of the **Grid Code**, **The Company** and the **User** shall be entitled to plan and execute outages of parts of, in the case of **The Company**, the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** and in the case of the **User**, its **System** or **Plant** or **Apparatus**, at any time and from time to time.

### 5 **GRID CODE MATTERS**

- 5.1 Paragraph 6.3 of the **CUSC** applies in respect of this **Embedded Exemptable Large Power Station** as amended in accordance with the following provisions of this Clause 5.
- 5.2 The provisions in BC1 and BC2 of the **Grid Code** provide that compliance is only required with such provisions in respect of those **Generating Units** at an **Embedded Exemptable Large Power Station** where **The Company** reasonably requires such compliance and has specified such a requirement in respect of such **Generating Units** in the **BELLA**.

[5.2     **The Company** and the **User** hereby agree that compliance by the **User** in respect of this **Embedded Exemptable Large Power Station** with the provisions of BC1 and BC2 of the **Grid Code** are reasonably required and therefore the provisions of BC1 and BC2 shall apply and be complied with by the **User** so far as applicable to it. Therefore, the provisions in BC1 and BC2 in respect of **Generating Units** and **Generating Unit Data** shall apply to and be complied with by the **User**. For the purposes of the **Grid Code** the **User** shall be treated as a **BM Participant**.

[5.2     **The Company** does not require compliance by the **User** in respect of this **Embedded Exemptable Large Power Station** with the provisions of BC1 and BC2]

*[Note: which alternative of Clause 5.2 will apply will depend upon whether or not The Company reasonably requires compliance with these Grid Code obligations. Please note that the User has a right to ask the Authority to determine on these matters.]*

## 6.     **OPERATIONAL NOTIFICATION**

Subject to the provisions of Clause 2.1 having been fulfilled, and subject, if **The Company** so requires, to **Enabling Works** [and/or works for any **Modification Offer**] being carried out and to notification by the **User** that the site of connection of the **User's Equipment** to the **Distribution System** is operational, **The Company** shall forthwith notify ("**Operational Notification**") the **User** in writing that it may energise its **Equipment**.

## 7.     **COMPLIANCE WITH SITE SPECIFIC TECHNICAL CONDITIONS**

7.1     The site specific technical conditions applying to the site of **Connection** are set out in Appendices F1 to F5 to this **BELLA** as modified from time to time in accordance with Paragraph 6.9 of the **CUSC**.

7.2     **The Company** and the **User** shall operate respectively the **National Electricity Transmission System** and the **User System** with the special automatic facilities and schemes set out in Appendix F3 to this **BELLA**.

7.3     The **User** shall ensure that the **User's Equipment** complies with the site specific technical conditions set out in Appendix F4 to this **BELLA**.

7.4     The **User** shall use all reasonable endeavours to ensure that the **User's Equipment** shall continue to comply with the site specific technical conditions set out in Appendix F5 of this **BELLA**.

7.5     If the **User** or **The Company** wishes to modify alter or otherwise change the site specific technical conditions or the manner of their operation under Appendix F1, F3, F4 or F5 to this **BELLA** this shall be deemed to be a **Modification** for the purposes of the **CUSC**.

## **8. TERM**

8.1 Subject to the provisions for earlier termination set out in **CUSC** and Clause 8.2 below, this **BELLA** shall continue until all of the **User's** equipment is **Disconnected** from the relevant **Distribution System** at the site of **Connection** as provided in Section 5 of **CUSC**.

8.2 This **BELLA** shall terminate on the earlier of

- (a) the **Notice of Reduction Effective Date** where as a result of the **Notice of Reduction** the **User** is no longer an **Embedded Exemptable Large Embedded Power Station**.
- (b) termination of the **DNO Construction Agreement** pursuant to Clause 7.4.10.2 of the **Construction Agreement** and provided that the **Bilateral Connection Agreement** between the **DNO** and **The Company** has, where required by **The Company**, been amended to reflect the fact that the **Developer** is no longer party to a **BELLA** but is a **Relevant Embedded Small Power Station**

## 9. VARIATIONS

- 9.1 Subject to 9.2, 9.3 and 9.4, no variation to this **BELLA** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.
- 9.2 **The Company** and the **User** shall effect any amendment required to be made to this **BELLA** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.
- 9.3 If it is necessary for **The Company** or **The Company** in its reasonable discretion wishes to make any addition to or omission from or amendment to the **Transmission Reinforcement Works**, Appendix H shall be automatically amended to reflect the change.
- 9.4 Appendix A shall be automatically amended to reflect any **Notice of Reduction** on the **Notice of Reduction Effective Date**

## 10. RESTRICTIVE TRADE PRACTICES ACT

Any restriction or information provision (as each of those terms are defined or construed in Section 43(1) of the Restrictive Trade Practices Act 1976) contained in this **BELLA** shall not take effect or shall cease to have effect:

- 10.1.1 if a copy of this **BELLA** is not provided to the Department of Trade and Industry ("**DTI**") within 28 days of the date of this; or
- 10.1.2 if, within 28 days of the provision of that copy to the **DTI**, the **DTI** gives notice of objection to the party providing it.

## 11. GENERAL PROVISIONS

Paragraph 6.10 and Paragraphs 6.12 to 6.26 of the **CUSC** are incorporated into this **BELLA** *mutatis mutandis*.

## 12. WIDER TRANSMISSION REINFORCEMENT WORKS

**The Company** shall keep the **User** informed as to its progress on the **Wider Transmission Reinforcement Works**.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )  
  
**[name]** )  
  
for and on behalf of )  
  
National Energy System Operator Limited )

SIGNED BY )  
  
**[name]** )  
  
for and on behalf of )  
  
[User] )

**APPENDIX A**

**THE SITE OF CONNECTION AND USER'S DATA**

**SITE[s] OF CONNECTION**

**Company:**

**Site[s] of Connection:**

**Size of Power Station:**

**Owner[s] / Operator[s] of Distribution System:**

[Insert details equivalent to data listed in part 1 of the planning code]

Anticipated date when Power Station's connection to use of the Distribution System will be energised.

**APPENDIX F1**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**AGREED BALANCING SERVICES**

**APPENDIX F2**

**[NOT USED]**



**APPENDIX F3**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**SPECIAL AUTOMATIC FACILITIES**

**APPENDIX F4**

**SITE SPECIFIC TECHNICAL CONDITIONS: PROTECTION**

**AND CONTROL RELAY SETTINGS**

**FAULT CLEARANCE TIMES**

**APPENDIX F5**

**SITE SPECIFIC TECHNICAL CONDITIONS:**

**OTHER**

**APPENDIX H**

**TRANSMISSION REINFORCEMENT WORKS**

**END OF SCHEDULE 2 - EXHIBIT 5**

**SCHEDULE 2 - EXHIBIT 6**

DATED [ ]

NATIONAL ENERGY SYSTEM OPERATOR LIMITED (1)

and

[ ]

## TRANSMISSION RELATED AGREEMENT REGARDING

## BID PRICE/OFFER PRICE HEDGE

**FOLLOWING FAILURE TO COMPLY WITH**

## RESTRICTIONS ON AVAILABILITY

THIS **TRANSMISSION RELATED AGREEMENT** is made on the                      day of                      200

**BETWEEN**

- (1) The company registered in England with number 11014226 ("**The Company**"), which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] ("**User**", which expression shall include its successors and/or permitted assigns).

**WHEREAS**

- (A) **The Company** and the **User** are parties to the **CUSC Framework Agreement** which gives effect to the document designated by the **Secretary of State** and adopted by **The Company** as the Connection and Use of System Code pursuant to the **ESO Licence**, as from time to time modified pursuant to the **ESO Licence** (the "**CUSC**").
- (B) **The Company** and the **User** are parties to a [**Bilateral Connection Agreement**] [**Bilateral Embedded Generation Agreement**] dated [ ] (ref: [ ]) in respect of the connection to and/or use of the **National Electricity Transmission System** at [ ] (the "**Bilateral Agreement**").
- (D) Under the terms of the **Bilateral Agreement** restrictions on availability apply under certain conditions and as a result the **User** is required to enter into this **Transmission Related Agreement** on the terms and subject to the conditions set out below.

**NOW IT IS HEREBY AGREED** as follows:

**1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION**

- 1.1 Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** and in the **Bilateral Agreement**, [the **Construction Agreement**,] the **Balancing and Settlement Code** and the **Grid Code** have the same meanings, interpretations or constructions in this **Transmission Related Agreement**.
- 1.2 "**Base Rate**" shall be defined in respect of any day as the rate per annum which is equal to the base lending rate from time to time of Barclays Bank plc as at the close of business on the immediately preceding week-day other than a Saturday on which banks are open in the City of London (the "**Business Day**").
- 1.3 "**Enhanced Rate**" shall be defined in respect of any day as the rate per annum which is 4 % per annum above the base lending rate from time to time of Barclays Bank plc at the close of business immediately preceding the **Business Day**.

1.4 “**Party**” shall be defined as each party to this **Transmission Related Agreement** and any successor(s) in title to, or permitted assign(s) of such person.

1.5 References in this **Transmission Related Agreement** to “this **Transmission Related Agreement**” include references to the Schedule hereto.

## 2. **COMMENCEMENT AND TERM**

2.1 This **Transmission Related Agreement** shall come into effect on the date hereof and shall continue in force and effect until the **Bilateral Agreement** is terminated in accordance with the **CUSC**.

2.2 Any provisions for payment shall survive termination of this **Transmission Related Agreement**.

## 3. **PAYMENTS BY THE USER**

3.1 Where in accordance with Clause [9] of the **Bilateral Agreement** the provisions of this **Transmission Related Agreement** are expressed to apply then the **User** shall make a payment to **The Company** determined in accordance with Clause 3.2 hereof.

3.2 The payment by the **User** referred to in Clause 3.1 above shall be an amount calculated on a **Settlement Period** basis and for each relevant **BM Unit** and shall be determined in accordance with the provisions set out below:-

Where in respect of all or part of an **Outage Period**:-

(a) in respect of a **BM Unit**, either the prevailing **Maximum Export Limit** or the prevailing **Maximum Import Limit** is other than that permitted under Clause [10/9] of the **Bilateral Agreement**; and

(b) **The Company** issues in accordance with the **Grid Code** a **Bid-Offer Acceptance** requiring the **BM Unit** to reduce the absolute value of **Output** or **Demand** to the figure as required under Clause [9] of the **Bilateral Agreement**, then the following formula shall apply:-

$$PNGC_i = \sum_{J \in j} \sum^n (\min(0, PB^{n_{ij}}) \times QAB^{n_{ij}} + \max(0, PO^{n_{ij}}) \times QAO^{n_{ij}})$$

Where:-

$PNGC_i$  represents the payment from the User to **The Company** in respect of **BM Unit i**

$\sum_n$  represents the sum over all **Bid-Offer Pair Numbers** for the **BM Unit**

$\sum$

$J \in j$  represents the summation over all **Settlement Periods**  $j$  in the set of **Settlement Periods**  $J$  being those **Settlement Periods** in respect of which both the events specified in (a) and (b) above occurred

And:

$PB^{n_{ij}}$  = **Bid Price**  $n$  for **BM Unit**  $i$  in **Settlement Period**  $j$

$QAB^{n_{ij}}$  = **Period BM Unit Total Accepted Bid Volume**

$PO^{n_{ij}}$  = **Offer Price**  $n$  for **BM Unit**  $i$  in **Settlement Period**  $j$

$QAO^{n_{ij}}$  = **Period BM Unit Total Accepted Offer Volume**

$n$  = **Bid–Offer Pair Number**

$i$  = **BM Unit**

$j$  = **Settlement Period**

3.3 The payment by the **User** referred to in Clause 3.1 above shall be made in accordance with the Schedule to this **Transmission Related Agreement**.

#### 4. **VARIATIONS**

4.1 Subject to Clause 4.2, no variation to this **Transmission Related Agreement** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.

4.2 **The Company** and the **User** shall effect any amendment required to be made to this **Transmission Related Agreement** by the **Authority** as a result of a change in the **CUSC**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.

#### 5. **GENERAL PROVISIONS**

The following provisions of the **CUSC** shall apply to this **Transmission Related Agreement** *mutatis mutandis* as if set out in full herein:-



Paragraphs 6.12 (Liability), 6.14 (Transfer and Sub-contracting), 6.15 (Confidentiality), 6.16 (Data), 6.18 (Intellectual Property), 6.19 (Force Majeure), 6.20 (Waiver), 6.21 (Notices), 6.22 (Third Party Rights), 6.23 (Jurisdiction), 6.25 (Governing Law), 6.26 (Severance of Terms), 6.27 (Language), 6.38 (Directions Relating to national security), 7.4 (Disputes) and 7.5 (Third Party Claims).

## 6. COUNTERPARTS

This **Transmission Related Agreement** may be entered into in any number of counterparts and by different parties in separate counterparts, each of which when signed shall constitute an original but all the counterparts shall together constitute but one and the same agreement.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY )

)

for and on behalf of )

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED** )

SIGNED BY )

)

for and on behalf of )

[ ] )

## SCHEDULE OF PAYMENT PRINCIPLES

1.1 On the fifth **Business Day** of each calendar month **The Company** shall where applicable send to the **User** a statement ("the **Provisional Monthly Statement**") consisting of:-

- (a) a statement (the "**Provisional Statement**") containing details of the payment calculation(s) made pursuant to Clause 3.2 of this **Transmission Related Agreement** in respect of the previous month; and,
- (b) if relevant, a statement showing adjustments to be made (net of interest) in relation to any dispute regarding the payment calculation(s) in respect of any month prior to the previous month ("**the Provisional Adjustments Statement**"),

in each case showing the payments due to or from the **User** as a result thereof and the net amount due to or from the **User**.

- 1.2 If the **User** disagrees with any of the dates, times, facts or calculations as set out in the **Provisional Statement** and/or the **Provisional Adjustments Statement**, it shall produce to **The Company** the evidence which it relies upon in support of such disagreement. The **Parties** shall discuss and endeavour to resolve the matter but if it cannot be resolved the **Parties** may have recourse to an arbitrator appointed pursuant to Paragraph 7.4 of the **CUSC**. Where a dispute is resolved, **The Company** shall adjust the account between itself and the **User** accordingly in the **Final Statement** where practicable or otherwise in the next **Provisional Adjustments Statement** which it issues.
- 1.3 Thirteen **Business Days** after the date specified in paragraph 1.1 **The Company** shall send to the **User** a statement ("the **Final Monthly Statement**") consisting of:-
- (a) a statement ("the **Final Statement**") incorporating:-
    - (i) in the case of an undisputed **Provisional Statement** (or where any dispute has been resolved and no changes have been effected to the calculations contained in the **Provisional Statement**) the calculation made under paragraph 1.1.(a) together with an invoice for the amount shown as being due to or from the **User** (as the case may be) ; or
    - (ii) In the case of a disputed **Provisional Statement** where the dispute has been resolved prior to the issue of the **Final Statement** and changes to the calculations contained in the **Provisional Statement** have been agreed, a revised calculation made under paragraph 1.1(a) together with an invoice for the amount shown as being due to or from the **User** (as the case may be) ; and
  - (b) if a **Provisional Adjustments Statement** has been issued in accordance with paragraph 1.1(b), a statement ("the **Final Adjustments Statement**") showing adjustments to be made in relation to any dispute concerning any month prior to the previous month together with interest thereon up to and including the date of payment referred to in paragraph 1.5 such adjustments will be reflected in the invoice referred to at paragraph 1.3 (a) .
- 1.4 Where either **Party** discovers that any previous **Provisional Monthly Statement** or **Final Monthly Statement** contains an arithmetic error or omission **The Company** shall adjust the account between itself and the **User** accordingly in the next **Provisional Adjustments Statement** which it issues, setting out the reason why the adjustment has been made and the provisions of paragraph 1.2 shall apply *mutatis mutandis* to such adjustments.

- 1.5 The due date of payment in respect of any disputed amount subsequently determined or agreed to be payable shall be the date for payment of the relevant **Provisional Statement** from which the dispute arises. The successful **Party** to the dispute shall be entitled to interest at the **Base Rate** on any disputed amount until the date of payment.
- 1.6 Each **Party** shall pay to the other the net amount shown as due from that **Party** in the **Final Monthly Statement** within three **Business Days** of the date on which such statement is issued.
- 1.7 If either **Party** ("the **Defaulting Party**"), in good faith fails to pay under paragraph 1.6 any amount properly due under this **Transmission Related Agreement**, then such **Defaulting Party** shall pay to the other **Party** interest on such overdue amount from and including the due date of such payment to (but excluding) the date of actual payment at the **Base Rate**. Provided that should the **Defaulting Party** otherwise fail to pay any amount properly due under this **Transmission Related Agreement** on the due date then the **Defaulting Party** shall pay to the other **Party** interest on such overdue amount at the **Enhanced Rate** from the due date on which such payment was properly due to (but excluding) the date of actual payment. Any interest shall accrue from day to day.
- 1.8 If following a dispute or by virtue of paragraphs 1.2 or 1.4 it is determined or agreed that a **Party** was entitled to a further payment from the other **Party**, that **Party** shall be entitled to interest at the **Base Rate** on the amount of such further payment from the due date calculated in accordance with paragraph 1.5 until the date of payment.
- 1.9 If following a dispute or by virtue of the provisions of paragraphs 1.2 or 1.4 it is determined or agreed that a **Party** was not entitled to any payment it has received, the other **Party** shall be entitled to interest at the **Base Rate** on the amount so paid from the date of payment until the date of repayment or the date when the first **Party** makes a payment to the other **Party** which takes such payment into account.
- 1.10 Notwithstanding the terms thereof, **The Company** shall be entitled to set off against any amount falling due and payable by **The Company** to the **User** under any **Balancing Services Agreement** from time to time in force, all or a part of any payment or payments falling due and payable by the **User** to **The Company** under this **Transmission Related Agreement**.
- 1.11 All amounts specified hereunder shall be exclusive of any Value Added Tax or other similar tax and **The Company** or the **User** as the case may be shall pay the Value Added Tax at the rate for the time being and from time to time properly chargeable in respect of all payments made under this **Transmission Related Agreement**.

- 1.12 Save where otherwise stated, references in this Schedule to paragraphs are references to paragraphs of this Schedule.

**Schedule 2 – Exhibit 7**

**DATED [\_\_\_\_\_]**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED**

**and**

**[\_\_\_\_\_ ] (2)**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**VLPA**

---

**VIRTUAL LEAD PARTY AGREEMENT**

**Reference: [\_\_\_\_\_ ]**

## **CONTENTS**

1. DEFINITIONS, INTERPRETATION AND CONSTRUCTION
2. CONDITION PRECEDENTS AND COMMENCEMENT
3. OUTAGES & NETWORK MANAGEMENT
4. GRID CODE MATTERS
5. COMPLIANCE WITH TECHNICAL CONDITIONS
6. TERM
7. VARIATIONS
8. GENERAL PROVISIONS

THIS **VIRTUAL LEAD PARTY AGREEMENT** is made on the [ ] day of [ ] 20[XX]

**BETWEEN**

- (1) The company registered in England with number 11014226 ("**The Company**", which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (the "**User**", which expression shall include its successors and/or permitted assigns).

**WHEREAS**

- (A) Pursuant to the **ESO Licence**, **The Company** is required to prepare a Connection and Use of System Code ("**CUSC**") setting out the terms of the arrangements for connection to and use of the **National Electricity Transmission System**.
- (B) The **User** has applied to **The Company** in the capacity of a **Virtual Lead Party** who intends to operate one or more **Secondary BMU Units**.
- (C) As at the date hereof, **The Company** and the **User** are parties to the **CUSC Framework Agreement** (being an agreement by which the **CUSC** is made contractually binding between the parties).
- (D) This **Virtual Lead Party Agreement ("VLPA")** is entered into pursuant to the **CUSC** and shall be read as being governed by it.

**NOW IT IS HEREBY AGREED** as follows:

## 1 DEFINITIONS, INTERPRETATION AND CONSTRUCTION

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** have the same meanings, interpretations or constructions in this **VLPA**.

## 2 CONDITION PRECEDENTS AND COMMENCEMENT

- 2.1 This **VLPA** shall commence on the date hereof.
- 2.2 It is a condition of this **VLPA** that the **VLP Assets** operated by the **User** are associated to a **SMRS** registered **Boundary Point Metering System** as per the **Balancing and Settlements Code**.

## 3 OUTAGES & NETWORK MANAGEMENT

- 3.1 Subject to the provisions of the **Grid Code**, **The Company** and the **User** shall be entitled to plan and execute outages on parts of, in the case of **The Company**, the **National Electricity Transmission System** or **Transmission Plant** or **Transmission Apparatus** and in the case of the **User**, its **VLP Assets**, at any time and from time to time.

## 4 GRID CODE MATTERS

- 4.1 The **User** is required (as per paragraph 6.3.1 of the **CUSC**) to comply with the relevant parts of the **Grid Code** which apply in respect of the relevant **Boundary Point Metering Systems** associated with the **VLP Assets**, as amended in accordance with the following provisions of this Clause 4.
- 4.2 The provisions in BC1 and BC2 of the **Grid Code** provide that compliance is required with such provisions in respect of those **VLP Assets** in this **VLPA**.

## 5 COMPLIANCE WITH TECHNICAL CONDITIONS

- 5.1 **The Company** and the **User** shall operate respectively the **National Electricity Transmission System** and the **User System** with the special automatic facilities and schemes set out in Appendix F5 to this **VLPA**.
- 5.2 The **User** shall ensure that the **VLP Assets** which it operates for the purposes of this **VLPA** complies with the technical conditions set out in Appendix F5 to this **VLPA**.
- 5.3 **The User** shall use all reasonable endeavours to ensure that the **VLP Assets** shall continue to comply with the technical conditions set out in Appendix F5 of this **VLPA**.

## 6 TERM



6.1 Subject to the provisions for earlier termination set out in the **CUSC**, this **VLPA** shall continue until;

i) the **User** notifies **The Company** in writing, providing no less than 28 days notice, of its wish to terminate this **VLPA**, or;

ii) the **User** has no **VLP Assets** registered to a **Secondary BMU** and so **The Company** may give notice of termination in writing to the **User** whereupon this **VLPA** shall terminate 28 days from such notice.

6.2 Once an **Event of Default** has occurred and is continuing **The Company** may give notice of termination to the **User** whereupon this **VLPA** shall forthwith terminate.

## 7 VARIATIONS

7.1 Subject to 7.2 no variation to this **VLPA** shall be effective unless made in writing and signed by or on behalf of both **The Company** and the **User**.

7.2 **The Company** and the **User** shall effect any amendment required to be made to this **VLPA** by the **Authority** as a result of a change in the **CUSC**, **Grid Code**, the **ESO Licence** or the **Transmission Licence**, an order or direction made pursuant to the **Act** or a **Licence**, or as a result of settling any of the terms hereof. The **User** hereby authorises and instructs **The Company** to make any such amendment on its behalf and undertakes not to withdraw, qualify or revoke such authority or instruction at any time.

## 8 GENERAL PROVISIONS

Paragraph 6.10, Paragraphs 6.12 to 6.26 and Paragraph 6.38 of the **CUSC** are incorporated into this **VLPA** *mutatis mutandis*.

**IN WITNESS WHEREOF** the hands of the duly authorised representatives of the parties hereto at the date first above written

SIGNED BY

.....

for and on behalf of  
**NATIONAL ENERGY SYSTEM OPERATOR LIMITED**

SIGNED BY

.....

for and on behalf of  
**[User]**

**APPENDIX F5**

**TECHNICAL CONDITIONS**  
**OTHER TECHNICAL REQUIREMENTS**

## **CUSC – SCHEDULE 3**

### **CONTENTS**

#### **Part I Balancing Services Market Mechanisms – Reactive Power**

1. Definitions
2. Obligatory Reactive Power Service – Default Payment Arrangements
3. Obligatory Reactive Power Service and Enhanced Reactive Power Services – Market Payment Mechanism
4. Amendment and Conclusion of Mandatory Services Agreements
5. Statutory and Regulatory Obligations
6. Redundant Provisions

#### **Appendices**

- Appendix 1 Obligatory Reactive Power Service – Default Payment Arrangements
- Appendix 2 Obligatory Reactive Power Service and Enhanced Reactive Power Services – Market Mechanism
- Appendix 3 Technical Data
- Appendix 4 Metering
- Appendix 5 Submission of Tenders
- Appendix 6 Qualification and Evaluation Criteria
- Appendix 7 Charging Principles
- Appendix 8 Calculation of Reactive Power Capability at the Commercial Boundary
- Appendix 9 Redundant Provisions

#### **Part II Not Used**

### **SCHEDULE 3**

#### **BALANCING SERVICES**

##### **Part I**

##### **Balancing Services Market Mechanisms - Reactive Power**

#### **1 Definitions and Interpretations**

- 1.1 For the purpose of this Part I and the Appendices, “**Obligatory Reactive Power Service**” means the **Mandatory Ancillary Service** referred to in **Grid Code CC 8.1** which the relevant **User** is obliged to provide (for the avoidance of doubt, as determined by any direction in force from time to time and issued by the **Authority** relieving a relevant **User** from the obligation under its **Licence** to comply with such part or parts of the **Grid Code** or any **Distribution Code** or, in the case of **The Company**, the **ESO Licence** as may be specified in such direction) in respect of the supply of **Reactive Power** (otherwise than by means of synchronous or static compensation except in the case of a **Power Park Module** where synchronous or static compensation within the **Power Park Module** may be used to provide **Reactive Power**) and in respect of the required **Reactive Power** capability referred to in **Grid Code CC 6.3.2**. This **Mandatory Ancillary Service** shall comprise, in relation to a **Generating Unit**, **DC Converter** or **Power Park Module** compliance by the relevant **User** in all respects with all provisions of the **Grid Code** applicable to it relating to that supply of **Reactive Power** and required **Reactive Power** capability, together with the provision of such despatch facilities (including the submission to **The Company** of all relevant technical, planning and other data in connection therewith) and metering facilities (meeting the requirements of Appendix 4), and upon such terms, as shall be set out in a **Mandatory Services Agreement** entered into between **The Company** and the relevant **User**.

For the avoidance of doubt, “**Obligatory Reactive Power Service**” when used in this Part I and the Appendices excludes provision of **Reactive Power** capability from **Synchronous Compensation** and from static compensation equipment ( except in the case of a **Power Park Module** where synchronous or static compensation

within the **Power Park Module** may be used to provide **Reactive Power**, and the production of **Reactive Power** pursuant thereto.

1.2 For the purpose of this Part I and the Appendices, “**Enhanced Reactive Power Service**” means the **Commercial Ancillary Service** of:-

- (a) the provision of **Reactive Power** capability of a **Generating Unit, DC Converter or Power Park Module** in excess of that which a **User** is obliged to provide from that **Generating Unit, DC Converter or Power Park Module**, under and in accordance with the **Connection Conditions** of the **Grid Code** and the production of **Reactive Power** pursuant thereto, which a **User** may agree to provide and which is capable of being made available to, and utilised by, **The Company** in accordance with the **Balancing Codes** of the **Grid Code** (or as may otherwise be agreed in writing between **The Company** and a **User**) for the purposes of voltage support on the **GB Transmission System**, upon and subject to such terms as may be agreed in writing between **The Company** and such **User**; or
- (b) the provision of **Reactive Power** capability from **Synchronous Compensation** or from static compensation equipment (except in the case of a **Power Park Module** where Grid Code CC8,1 specifies that such **Reactive Power** capability is a **Mandatory Ancillary Service**) and the production of **Reactive Power** pursuant thereto, which a **User** or any other person may agree to provide and which is capable of being made available to, and utilised by, **The Company** for the purposes of voltage support on the **GB Transmission System**, upon and subject to such terms as may be agreed in writing between **The Company** and such **User** or other person; or
- (c) such other provision or enhancement of capability of **Plant** and/or **Apparatus** or other equipment to generate or absorb **Reactive Power**, and the production of **Reactive Power** pursuant thereto, which a **User** or any other person may agree to provide and which is capable of being made available to, and utilised by, **The Company** for the purposes of voltage support on the **GB Transmission System**, upon and subject to such terms as may be agreed in writing between **The Company** and such **User** or other person.

- 1.3 Unless otherwise defined in the **CUSC**, terms and expressions found in the **Grid Code** have the same meanings, interpretations and constructions in this Part I and the Appendices.
- 1.4 In this Part I and the Appendices, except where the context otherwise requires, references to a particular Appendix, Part, Section, sub-section, Paragraph or sub-Paragraph shall be a reference to a particular Appendix to or part of this Part I or, as the case may be, that Section, sub-section, Paragraph or sub-Paragraph in this Part I.

## **2. Obligatory Reactive Power Service – Default Payment Arrangements**

- 2.1 Notwithstanding any other provision of the **CUSC**, the provisions of this Part I and the Appendices, together with the **Mandatory Services Agreements** referred to in sub-Paragraph 2.6, shall govern the rights and obligations of **The Company** and relevant **Users** with respect to payments to be made by **The Company** to such **Users** for the provision of the **Obligatory Reactive Power Service**.
- 2.2 Subject always to Paragraph 3, and notwithstanding the provisions of any **Ancillary Services Agreement** now or hereafter in effect (but subject always to sub-Paragraph 4.2), the payments to be made by **The Company** to **Users** for the provision of the **Obligatory Reactive Power Service** in all **Mandatory Services Agreements** under which **Users** are or will be paid for the **Obligatory Reactive Power Service** shall, subject always to sub-Paragraph 2.7, comprise solely payments for utilisation determined in respect of each **Settlement Period** in accordance with sub-Paragraph 2.3.
- 2.3 Save to the extent and for the duration of any **Market Agreement** (as defined in sub-Paragraph 3.1) which may be entered into between **The Company** and a **User** as referred to in Paragraph 3 the utilisation payment for provision of the **Obligatory Reactive Power Service** shall be determined in accordance with the provisions of Appendix 1.
- 2.4 The Parties acknowledge and agree that, as at 1<sup>st</sup> October 1997:-
  - (a) the totality of payments for the provision of the **Obligatory Reactive Power Service**, determined in accordance with the provisions of this Paragraph 2, reflect so far as

reasonably practicable the overall variable costs (on the basis of the charging principles set out in Appendix 7) incurred across all relevant **Generating Units** of the provision of the **Obligatory Reactive Power Service** (whether or not payments are made in respect of those **Generating Units** pursuant to this Paragraph 2 or pursuant to **Market Agreements** entered into in accordance with Paragraph 3); and

- (b) such totality of payments will continue to reflect those overall variable costs notwithstanding all and any variations thereto reasonably anticipated at such date.

- 2.5 It is hereby agreed and acknowledged that nothing in this Part I and the Appendices shall affect in any way the obligation on each **User** to comply with the provisions of the **Grid Code** insofar as they relate to **Reactive Power**. For the avoidance of doubt, and without limiting the foregoing, it is hereby agreed and acknowledged that, notwithstanding that the payments for the **Obligatory Reactive Power Service** shall comprise solely payments for utilisation, nothing in this Part I and the Appendices shall relieve **Users** from the obligations to comply with the provisions of the **Grid Code** in relation to **Reactive Power** by virtue of Paragraph 6.3.3 of the **CUSC** or otherwise howsoever.
- 2.6 **Mandatory Services Agreements** have been and will continue to be entered into bilaterally between **The Company** and **Users** but it is intended that, subject as provided below, **Mandatory Services Agreements** between **The Company** and **Users** providing the **Obligatory Reactive Power Service** will be amended or (if not in existence when this Part I takes effect) concluded so as to give effect to the provisions of sub-Paragraphs 2.2 and 2.3. Subject always to sub-Paragraphs 2.8 and 4.2, **The Company** and each relevant **User** therefore agree, as soon as reasonably practicable, to amend the existing **Mandatory Services Agreement** or conclude a new **Mandatory Services Agreement** in respect of each relevant **Generating Unit**, **DC Converter** or **Power Park Module** in order to give effect to the provisions of sub-Paragraphs 2.2 and 2.3.
- 2.7 For the avoidance of doubt, no payments referred to in this Paragraph 2 shall be payable by **The Company** to a **User** in relation to any **Generating Unit**, **DC Converter** or **Power park Module** unless and until the relevant **Mandatory Services Agreement** is so amended or concluded as provided in sub-Paragraph 2.6.



2.8 Notwithstanding the foregoing provisions of this Paragraph 2, and without prejudice to Paragraph 5, **The Company** shall only be obliged to amend or conclude any **Mandatory Services Agreement** with regard to any **Generating Unit, DC Converter or Power Park Module** if:-

(a) either:-

(i) the leading or lagging **Reactive Power** capability required of that **Generating Unit, DC Converter or Power Park Module** in accordance with **Grid Code CC 6.3.2** (or, where the **Generating Unit, DC Converter or Power Park Module** is **Derogated Plant** of an **Embedded Exemptable Large Power Station** the level to which, it has been **Derogated**) is 15Mvar or more (measured at the **Commercial Boundary**); or

(ii) that **Generating Unit, DC Converter or Power Park Module** is at or comprises a **Large Power Station** where such required capability is less than 15Mvar (measured at the **Commercial Boundary**) and the **User** requests **The Company** in writing to so amend or conclude a **Mandatory Services Agreement** with respect thereto; and

(b) there exists in relation to that **Generating Unit, DC Converter or Power Park Module** metering facilities meeting the requirements of Appendix 4.

3. **Obligatory Reactive Power Service and Enhanced Reactive Power Service – Market Payment Mechanism**

3.1 Nothing in this Part I and the Appendices, and nothing in any **Mandatory Services Agreement** entered into or amended in accordance with sub-Paragraph 2.6, shall prevent or restrict:-

(a) the entering into of an **Ancillary Services Agreement** or the amendment of any **Mandatory Services Agreement** between **The Company** and any **User** to provide for the making of payments by **The Company** to that **User** for the provision of the **Obligatory Reactive Power Service** on an alternative basis to that set out or referred to in Paragraph 2; or

- (a) the entering of an **Ancillary Services Agreement** between **The Company** and any **User** (or other person) for the provision of an **Enhanced Reactive Power Service**,

and any such agreement so entered into in accordance with the principles contained in sub-Paragraph 3.3 is referred to in this Part I and the Appendices as a “**Market Agreement**”.

- 3.2 The coming into effect of a **Market Agreement** in relation to any **Generating Unit**, **DC Converter** or **Power Park Module** shall, in respect of that **Generating Unit**, **DC Converter** or **Power Park Module**, suspend and replace for the duration thereof the provisions for payment for the **Obligatory Reactive Power Service** (if applicable) set out or referred to in Paragraph 2. In such a case, and for the avoidance of doubt, with effect from the expiry or termination of the **Market Agreement**, the provisions for payment for the **Obligatory Reactive Power Service** set out or referred to in Paragraph 2 shall in relation to that **Generating Unit**, **DC Converter** or **Power Park Module** cease to be suspended and shall resume full force and effect.

- 3.3 The following principles shall govern the entering into of **Market Agreements**:-

- (a) *Relevant Dates*

- (i) Each **Market Agreement** will commence on either 1<sup>st</sup> April or 1<sup>st</sup> October, whichever next follows the submission by **The Company** of the package of information as more particularly described in sub-Paragraph 3.3(b)(i) (“**Contract Start Days**”).

- (ii) For the purposes of this sub-Paragraph 3.3:-

- (a) a “**Market Day**” shall be a date not earlier than twelve weeks and not later than eight weeks prior to a **Contract Start Day**; and
    - (b) a “**Tender Period**” shall be a period of at least four consecutive weeks commencing on a date nominated by **The Company** and ending on a **Market Day**.

- (b) *Submission of **Tender** information by **The Company***

- (i) **The Company** shall, acting reasonably and having regard to the principles contained in this sub-Paragraph 3.3, compile a package of information for the use of interested parties comprising technical, procedural and contractual requirements, directions and specifications to govern **Market Agreements** to take effect from the following **Contract Start Day**. **The Company** shall ensure that such requirements, directions and specifications do not conflict with any of the principles contained in this sub-Paragraph 3.3 and so far as reasonably practicable do not discriminate between **Tenderers**.
- (ii) Prior to the commencement of each **Tender Period**, **The Company** shall provide to all persons who shall by then have requested the same the package of information as more particularly described in sub-Paragraph 3.3(b)(i).
- (c) *Submission of **Tenders***

During the **Tender Period**, but for the avoidance of doubt not later than the **Market Day**, an interested party may submit to **The Company**:-

- (i) in relation to any **Generating Unit, DC Converter or Power Park Module** providing the **Obligatory Reactive Power Service**, prices for and **Tendered Capability Breakpoints** relating to the provision thereof; or
- (ii) in relation to that **Generating Unit, DC Converter or Power Park Module** a tender for provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2(a) and/or (b) and/or (c); and/or
- (iii) in relation to any other **Generating Unit, DC Converter or Power Park Module** or other **Plant and Apparatus** (or other equipment), a tender for provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2(b) and/or (c),

in each case in accordance with sub-Paragraph 3.3(d). All such submissions are referred to in this Part I and the Appendices as “**Tenders**”, and “**Tenderers**” shall be construed accordingly.

(d) *Form of **Tenders***

- (i) All **Tenders** submitted by **Users** which comprise:-
  - (a) prices for and **Tendered Capability Breakpoints** relating to the provision of the **Obligatory Reactive Power Service**; and
  - (b) terms for the provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2(a),

shall be completed on the basis that payment will be determined in respect of each **Settlement Period** in accordance with the formulae and other provisions set out in Appendix 2 and in the manner set out in Appendix 5.

- (ii) All other **Tenders** (including without limitation those comprising terms for the provision of the **Enhanced Reactive Power Service** specified in sub-Paragraphs 1.2(b) and (c)) shall be submitted in accordance with and on the basis of such (if any) reasonable directions given by **The Company** in the package of information referred to in sub-Paragraph 3.3(b)(i) or otherwise in such manner as may be reasonably specified by **The Company** from time to time, which directions shall in either case be, so far as reasonably practicable, consistent with the provisions of Appendices 2 and 5.
- (iii) Each **Tender** comprising prices for and **Tendered Capability Breakpoints** relating to the provision of the **Obligatory Reactive Power Service** shall be submitted on the basis that **The Company** may only select all (and not some) of the prices and **Tendered Capability Breakpoints** comprised therein.
- (iv) Save where expressly provided otherwise in a **Tender**, each **Tender** comprising terms for the provision of an **Enhanced Reactive Power Service** shall be treated as having been submitted on the basis that **The Company** may select all or part only of the **Reactive Power** capability comprised therein (which, in the case of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2(a), shall

mean all or part only of the excess capability comprised therein).

- (v) All **Tenders** shall be submitted in respect of periods of whole and consecutive calendar months, to be not less than twelve months and in multiples of six months, to commence on the next following **Contract Start Day**. Save where expressly provided otherwise in a **Tender**, a **Tender** (whether in relation to the **Obligatory Reactive Power Service** or an **Enhanced Reactive Power Service**) shall be treated as having been submitted on the basis that **The Company** may select all or part only of any period so tendered (in multiples of six months), subject to a minimum period of twelve consecutive months, commencing on the next following **Contract Start Day**.
- (e) *Qualification and Evaluation of **Tenders***
  - (i) Each **Tender** must satisfy the mandatory qualification criteria set out in Section A of Appendix 6.
  - (ii) **The Company** shall evaluate and (without prejudice to sub-Paragraphs 3.3(d)(iii), (iv) and (v)) select **Tenders** (or part(s) thereof) on a basis consistent with its obligations under the **Act** the **ESO Licence** and the **CUSC** and, subject thereto, in accordance with the evaluation criteria set out in Section B of Appendix 6. Without limitation, **The Company** reserves the right to require tests of a **Generating Unit**, **DC Converter** or **Power Park Module** or other **Plant and Apparatus** (or other equipment), on a basis to be agreed with a **Tenderer**, as part of the evaluation of a **Tender**.
  - (iii) **The Company** shall use reasonable endeavours to evaluate **Tenders** within five weeks from each **Market Day**.
- (f) *Entering into **Market Agreements***
  - (i) Having selected a **Tender** (or part(s) thereof) in accordance with sub-Paragraph 3.3(e), **The Company** shall notify the relevant **Tenderer** that it wishes to enter into a **Market Agreement** in respect

thereof, and that **Tenderer** and **The Company** shall each use reasonable endeavours to agree the terms of, and enter into a **Market Agreement** in respect thereof as soon as reasonably practicable but in any event not later than two weeks prior to the relevant **Contract Start Day**. Notwithstanding the foregoing, if a **Market Agreement** has not been entered into by the date being two weeks prior to the relevant **Contract Start Day**, then either **The Company** or the **Tenderer** shall be entitled, provided that it shall have used all reasonable endeavours to agree the terms of, and enter into, the **Market Agreement** as aforesaid, to notify the other that it no longer wishes to enter into the **Market Agreement**, whereupon the **Tender** in question shall be deemed to be withdrawn.

- (ii) In the event of a deemed withdrawal of a **Tender** in the circumstances set out in sub-Paragraph 3.3(f)(i), **The Company** shall be entitled to re-evaluate and select all or part of any outstanding **Tenders** in accordance with sub-Paragraphs 3.3(e)(i) and (ii) and to notify one or more **Tenderers** if, in substitution for the **Tender** so deemed to be withdrawn, it wishes to enter into a **Market Agreement** in respect of any other **Tender** or **Tenders** (or part(s) thereof). Following such notification, **The Company** and each **Tenderer** in question shall use reasonable endeavours to agree the terms of, and enter into, a **Market Agreement** prior to the relevant **Contract Start Day**.
- (iii) If, in respect of any **Tender**, a **Market Agreement** is not entered into by the relevant **Contract Start Day**, that **Tender** shall be deemed to be withdrawn.
- (iv) Save where otherwise provided in this Paragraph 3, all **Market Agreements** must be entered into on the basis of the terms set out in the relevant **Tender** (or relevant part(s) thereof).

(g) *Legal Status of **Tenders***

For the avoidance of doubt, a **Tender** shall not constitute an offer open for acceptance by **The Company**, and in respect of any **Tender** (or part(s) thereof) selected by **The Company**

pursuant to sub-Paragraph 3.3(e) or (f), neither the **Tenderer** in question nor **The Company** shall be obliged to provide or pay for the **Obligatory Reactive Power Service** and/or an **Enhanced Reactive Power Service** upon the terms of that **Tender** (or the relevant part(s) thereof) unless and to the extent that those terms are incorporated in a **Market Agreement** subsequently entered into.

(h) *Publication*

- (i) Within the six weeks following each **Contract Start Day**, **The Company** shall provide to all persons requesting the same the following information:-
  - (a) in respect of all **Market Agreements** then subsisting, prices and contracted **Reactive Power** capability on an individual **Tender** basis relating to the period from the immediately preceding **Contract Start Day** until the next following **Contract Start Day**;
  - (b) in respect of all **Mandatory Services Agreements** and **Market Agreements** subsisting in respect of the six month period ending on the immediately preceding **Contract Start Day**, details of utilisation of Mvarh provided by individual **BM Units** (or, where relevant, other **Plant** and/or **Apparatus** or other equipment) pursuant to the **Obligatory Reactive Power Service** and **Enhanced Reactive Power Service**;
  - (c) details of the circumstances surrounding any failure by **The Company** during the preceding six month period to perform any of its duties and responsibilities under this Paragraph 3 in the circumstances referred to in Paragraph 5; and
  - (d) any other information reasonably considered by **The Company** to be pertinent to the **Tender** process, and, to this extent, each relevant **User** consents to the disclosure by **The Company** of the information referred to in sub-sub-Paragraphs (a) and (b) above in so far as it relates to the provision of the **Obligatory**

**Reactive Power Service** and (where applicable) an **Enhanced Reactive Power Service** from its **Generating Units, DC Converters** or **Power Park Modules** and/or other **Plant** and **Apparatus** (or other equipment).

- (ii) Without prejudice to the provision of information pursuant to sub-Paragraph 3.3(h)(i), **The Company** further agrees to use all reasonable endeavours to provide to all persons requesting the same, within the six weeks following each **Contract Start Day**, estimates of the Mvarh absorption and generation by the **GB Transmission System**, where used for the purposes of voltage support, during the preceding six month period.

#### **4. Amendment and Conclusion of Mandatory Services Agreements**

- 4.1 **The Company** and each relevant **User** shall promptly do all such acts and execute and deliver such agreements and other documentation as may be necessary to amend or conclude the relevant **Mandatory Services Agreements** so as to give effect to the provisions of this Part I and the Appendices as amended from time to time.
- 4.2 Sub-Paragraphs 2.6 and 4.1 shall not require **The Company** or any **User** to amend or conclude a **Mandatory Services Agreement** so as to give effect to this Part I and the Appendices if and to the extent that, in respect of any **Generating Unit, DC Converter** or **Power Park Module**. **The Company** and such **User** shall have expressly agreed in writing that no payments shall be made by **The Company** to such **User** under an **Ancillary Services Agreement** for the provision of the **Obligatory Reactive Power Service** from that **Generating Unit, DC Converter** or **Power Park Module** (as the case may be).

#### **5. Statutory and Regulatory Obligations**

- 5.1 Neither **The Company** nor any **User** shall be bound to perform any of its duties or responsibilities under this Part I and the Appendices (including without limitation with regard to the amending or concluding of **Mandatory Services Agreements** in accordance with sub-Paragraph 2.6 and the entering into of **Market Agreements** in accordance with Paragraph 3) if and to the extent that to do so would be likely to involve that party in breach of its



duties and obligations (if any) under the **Act** of or any condition of a **Licence**. Accordingly, nothing in this Part I and the Appendices shall preclude **The Company** from procuring the provision of any **Enhanced Reactive Power Service** in a manner otherwise than in accordance with Paragraph 3 in order to comply with its duties and obligations under the **Act** and/or any condition of the **ESO Licence** to the extent such compliance cannot reasonably be assured by the performance of its duties and responsibilities under Paragraph 3.

- 5.2 Without prejudice to sub-Paragraph 5.1, **The Company** shall not be bound to comply with the provisions of sub-Paragraph 3.3(h) with regard to the disclosure of information to the extent that to do so would be likely to restrict, distort or prevent competition in the provision of the **Obligatory Reactive Power Service** and/or **Enhanced Reactive Power Service**.

## **6. Redundant Provisions**

Certain redundant provisions of Schedule 5 to the **MCUSA** with respect to capability payments comprised within the default payment arrangements and matters for review which were applicable on and from 1 October 1997 but are of no continuing effect by effluxion of time or otherwise, together with other provisions contained elsewhere in this Part I and the Appendices which, prior to the **CUSC Implementation Date**, included reference to such provisions, are set out (or, as the case may be, repeated) for information purposes only in Appendix 9.

## APPENDIX 1

### Obligatory Reactive Power Service – Default Payment Arrangements

The provisions of this Appendix 1, as referred to in sub-Paragraph 2.2 of this Part I, shall apply to the calculation of default payments for provision of the **Obligatory Reactive Power Service** from **BM Units**. All payments shall be expressed in pounds sterling.

#### 1. Total Payment

Total Payment (PT) = PU [*£ per Settlement Period per BM Unit*]

where, subject always to paragraphs 5 and 6 below:

PU = the utilisation payment in respect of a **BM Unit** for a **Settlement Period** determined in accordance with paragraph 2 below.

#### 2. Utilisation Payment

PU = BP<sub>U</sub> \* U [*£ per Settlement Period per BM Unit*]

Where

BP<sub>U</sub> =  $\frac{46,270,000 * I * X * Y}{42,054,693}$  [*£/Mvarh*]

Where

I = defined in paragraph 3 below;

X = 1 (unless the circumstances in sub-paragraphs (a) through to (d) apply)

And where X shall be 0.2 in all **Settlement Periods** from (and including) that in which:-

- (a) the relevant **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) fails a **Reactive Test** until (and including) the

**Settlement Period** in which a subsequent **Reactive Test** is passed in relation to that **BM Unit** (or **CCGT Unit** (as the case may be)); or

- (b) the **User** fails (other than pursuant to an instruction given by **The Company** or as permitted by the **Grid Code**) to set the automatic voltage regulator of the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) to a voltage following mode until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the automatic voltage regulator is so set; or
- (c) the **BM Unit** fails to comply with a **Reactive Despatch Instruction** due to the fact that the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) is unable to increase and/or decrease its Mvar output (other than as a direct result of variations in **System** voltage) until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** is so able to comply; or
- (d) the **BM Unit** fails to have a Mvar range which includes the ability to provide zero Mvar at the **Commercial Boundary** until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** has or once more has such range; and

Y = 1, except that Y shall be 0 in all **Settlement Periods** from and including that in which the **BM Unit** is affected by a **Reactive Despatch to Zero Mvar Network Restriction** until (and including) the **Settlement Period** in which notification is given to **The Company** pursuant to the **Grid Code** that such **Reactive Despatch to Zero Mvar Network Restriction** is no longer affecting that **BM Unit**

U = defined in Section 1 of Appendix 3

### 3. **Indexation**

3.1 The indexation factor I used in the formulae in paragraph 2 above shall be determined as follows:-

- (a) For all periods up to (and including) 31<sup>st</sup> March, 2004, I shall with effect from 1<sup>st</sup> April in respect of each subsequent 12 month period ending 31<sup>st</sup> March be determined as follows:-

$$I = \frac{RP1_2}{RP1_1}$$

where

For the period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March, 1998  $RPI_2 = 155.4$ , and thereafter  $RPI_2$  is the RPI for March of the immediately preceding twelve month period ending 31<sup>st</sup> March.

$RPI_1$  is the RPI for March, 1994 (142.5).

### 3.2

- (b) For all periods from (and including) 1<sup>st</sup> April, 2004, I shall in respect of each calendar month be determined as follows:-

$$I = I_m$$

where

$I_m$  = the indexation factor I for the calendar month in question

$$I_m = C * [(0.5 * FRPI_m / RPI_x) + (0.5 * PI_m)]$$

where

$$C = RPI_x / RPI_1$$

$RPI_x$  is the RPI for March, 2003 (179.9)

$RPI_1$  is as defined in sub-paragraph (a) above

$FRPI_m$  is the Forecast RPI for the calendar month in question

and where  $PI_m$  is a wholesale power price index determined as follows:-

$$PI_m = [(p * HPI_m / HPI_1) + (q * PAPI_m / PAPI_1) + (r * PPI_m / PPI_1)]$$

Where

$HPI_m$  is the mean average of the OTC baseload month ahead Heren power index bid and offer prices for all days on which this index is published in the calendar month immediately preceding the calendar month in question

$PAPI_m$  is the mean average of the OTC baseload month ahead Petroleum Argus power index bid and offer prices for all days on which this index is published in the calendar month immediately preceding the calendar month in question

$PPI_m$  is the mean average of the OTC baseload month ahead Platts power index bid and offer prices for all days on which this index is published in the calendar month immediately preceding the calendar month in question

and where

$p = 1/3$  (subject always to sub-paragraph 3.2 (c))

$q = 1/3$  (subject always to sub-paragraph 3.2(c))

$r = 1/3$  (subject always to sub-paragraph 3.2(c))

and where

$HPI_1$  is the mean average of the OTC baseload month ahead Heren power index bid and offer prices for all days on which this index is published during the period from (and including) 1<sup>st</sup> October 2002 to (and including) 30<sup>th</sup> September 2003

$PAPI_1$  is the mean average of the OTC baseload month ahead Petroleum Argus power index bid and offer prices for all days on which this index is published during the period from (and including) 1<sup>st</sup> October 2002 to (and including) 30<sup>th</sup> September 2003

$PPI_1$  is the mean average of the OTC baseload month ahead Platts power index bid and offer prices for all days on which this index is published during the period from (and including) 1<sup>st</sup> October 2002 to (and including) 30<sup>th</sup> September 2003

3.2 For the purposes of sub-paragraph 3.1 above:-

- (a) the RPI Index used is the **Retail Price Index** with 1987 = 100 base, and the source of the RPI Index is the monthly Office for National Statistics "Business Monitor MM23";
- (b) Forecast RPI is as provided monthly by Experian Business Strategies Ltd; and
- (c) if in respect of any calendar month the mean average of any of the power indices more particularly referred to in sub-paragraph 3.1(b) is incapable of being derived and/or there is a material change in the basis of that power index, then subject as provided below, for the purpose of sub-paragraph 3.1(b) **The Company** shall determine the wholesale power price index  $PI_m$  for that calendar

month by substituting for the original value of factor p,q, or r as relates to that power index (“the Affected Factor”) the value of zero, and by substituting for the original value of each of the remaining factors p, q, or r a value which is increased from the original value by a pro rata proportion of the original value of the Affected Factor. Provided always that if in respect of any calendar month the mean average of each of such power indices is incapable of being derived and/or there is a material change in the basis of each such power index, then **The Company** shall determine the wholesale power price index  $PI_m$  for that calendar month by substituting for the value  $PI_m$  in the determination of  $I_m$  the value  $FRPI_m/RPI_x$ .

#### 4. **Information Unavailable**

Save where otherwise provided in this Part I, where any information or data required by **The Company** for the calculation of payments to be made pursuant to this Part I is not available to **The Company** at the relevant time, **The Company** shall calculate payments using **The Company's** best estimate of the unavailable information of data. Once such information or data is available, **The Company** shall accordingly make all consequential adjustments to the payments from itself to **Users** as soon as reasonably practicable thereafter to reflect any repayment or additional payment so required to be made by one party to the other in respect of the relevant period (including interest thereon at the **Base Rate** from the original date of payment or due date (as the case may be) until the date of such repayment or additional payment).

#### 5. **Commissioning**

- 5.1 Save in relation to **BM Units** operational prior to 1<sup>st</sup> April, 1997 no utilisation payments referred to in this Appendix 1 shall fall due and payable to any **User** in respect of any **BM Unit** until the **Settlement Period** in which it is demonstrated to the reasonable satisfaction of **The Company**, having regard to industry practice, that the **BM Unit** (or, in the case of a **CCGT Module**, but subject always to sub-paragraph 5.4 below, each relevant **CCGT Unit**) complies with the provisions of **Grid Code CC 6.3.2** and **CC 6.3.4** or (where **The Company** in its sole discretion requires **Reactive Power** from a **BM Unit** before then for the purposes of security of the **GB Transmission System**) such earlier date as **The Company** may agree with a **User** in respect of that **BM Unit**.
- 5.2 Before any demonstration of compliance referred to in sub-paragraph 5.1 above, it shall be necessary for the **User** to demonstrate to **The Company's** reasonable satisfaction, having regard to industry practice, that the **BM Unit's** (or, in the case of a **CCGT Module**, each relevant **CCGT Unit's**) **Excitation System**, and in particular the under-excitation

limiter, has been successfully commissioned and complies with the provisions of **Grid Code CC 6.3.8**.

- 5.3 For the avoidance of doubt the issue by **The Company** in relation to a **BM Unit** of a **Reactive Despatch Instruction** to unity power factor or zero Mvar shall neither imply by itself that **The Company** is reasonably satisfied with compliance as referred to in sub-paragraph 5.1 above nor imply in relation to the **BM Unit** agreement by **The Company** of an earlier date as also referred to therein.
- 5.4 Until such time as it shall be demonstrated to the reasonable satisfaction of **The Company** that, in relation to a **CCGT Module**, all relevant **CCGT Units** comply with the provisions of **Grid Code CC 6.3.2** and **CC 6.3.4** as referred to in sub-paragraph 5.1 above, it is the intention that utilisation payments shall fall due to a **User** in respect of that **CCGT Module** notwithstanding the provisions of sub-paragraph 5.1 above. For such period, and in relation to that **CCGT Module**, only, this Appendix 1 and the definitions of QC and QR set out in Appendix 3 shall be read and construed accordingly.

6. **De-energisation and Disconnection**

Subject to all rights and obligations of **The Company** and the **User** accrued at such date, utilisation payments referred to in this Appendix 1 shall cease to fall due and payable to any **User** in respect of any **BM Unit** with effect from the date of expiry or termination for whatever reason of the relevant **Mandatory Services Agreement** in accordance with its terms or (if earlier) with effect from the date of **De-energisation** or **Disconnection** of that **BM Unit** for any reason pursuant to the relevant **Bilateral Agreement** or the **CUSC**.

## Appendix 2

### Obligatory Reactive Power Service and Enhanced Reactive Power Services – Market Payment Mechanism

The provisions of this Appendix 2, as referred to in sub-Paragraph 3.3(d)(i) of this Part I, shall apply to the calculation of payments in respect of **Tenders** comprising prices for and **Tendered Capability Breakpoints** relating to the **Obligatory Reactive Power Service** and in respect of **Tenders** comprising terms for the provision of the **Enhanced Reactive Power Services** specified in sub-Paragraph 1.2(a) of this Part I, in each case in respect of **BM Units**. All payments shall be expressed in pounds sterling. All algebraic terms contained in this Appendix 2 shall bear the meanings set out in paragraph 1 below unless the context otherwise requires.

#### 1. Definitions

For the purposes of this Appendix 2, unless the context otherwise requires, the following terms shall have the following meanings:-

CA1, CA2 and CA3 = the available capability prices (expressed to apply to both leading and lagging) (£/Mvar/h) (as more particularly described in paragraph 2 of Appendix 5) as specified in the relevant **Market Agreement**;

CS1, CS2 and CS3 = the synchronised capability prices (expressed to apply to both leading and lagging) (£/Mvar/h) (as more particularly described in paragraph 2 of Appendix 5) as specified in the relevant **Market Agreement**;

CU1, CU2 and CU3 = the utilisation prices (expressed to apply to both leading and lagging) (£/Mvar/h) (as more particularly described in paragraph 2 of Appendix 5) as specified in the relevant **Market Agreement**;

K = in respect of **CCGT Modules** and **Power Park Modules** the relevant configuration factor as specified in the relevant **Market Agreement**, otherwise 1;

$Q_{\text{lead}}$  = defined in Section 2 of Appendix 3;

$Q_{\text{lag}}$  = defined in Section 2 of Appendix 3;



|                         |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $QM_{ij}$               | = | <b>BM Unit Metered Volume</b> (as defined in the <b>Balancing and Settlement Code</b> );                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| $Q1$ , $Q2$ and $Q3$    | = | the contracted capability breakpoints (expressed to apply to both leading and lagging) in whole Mvar as may be specified in the relevant <b>Market Agreement</b> , where: <ul style="list-style-type: none"> <li>(i) <math>Q1 = TQ1</math>,<br/> <math>Q2 = TQ2</math><br/> and <math>Q3 = QC</math><br/> where <math>TQ2 &lt; QC \leq TQ3</math></li> <li>(ii) <math>Q1 = TQ1</math>,<br/> <math>Q2 = QC</math><br/> <math>Q3 = \text{null}</math><br/> where <math>TQ1 &lt; QC \leq TQ2</math></li> <li>(iii) <math>Q1 = QC</math>,<br/> <math>Q2 = \text{null}</math><br/> <math>Q3 = \text{null}</math><br/> where <math>0 \leq QC \leq TQ1</math></li> </ul> |
| $SPD$                   | = | the duration of a <b>Settlement Period</b> , being 0.5;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| $TQ1$ , $TQ2$ and $TQ3$ | = | defined in Appendix 5;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| $U_{lead}$              | = | defined in Section 1 of Appendix 3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| $U_{lag}$               | = | defined in Section 1 of Appendix 3;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| $V$                     | = | the system voltage range performance factor (expressed to apply to both leading and lagging) as calculated in accordance with the formulae set out in the relevant <b>Market Agreement</b> , otherwise 1;                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| $MEL_i(t)$              | = | <b>Maximum Export Limit</b> (as defined in the <b>Balancing and Settlement Code</b> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## 2. **Total Payment**

Total Payment (PTM) = PUM + PCA + PCS      *[£ per **Settlement Period** per **BM Unit**]*

where, subject always to paragraphs 6, 7 and 8 below:

PUM = the utilisation payment in respect of a **BM Unit** for a **Settlement Period** determined in accordance with paragraph 3 below;

PCA = the available capability payment in respect of a **BM Unit** for a **Settlement Period** determined in accordance with paragraph 4 below; and

PCS = the synchronised capability payment in respect of a **BM Unit** for a **Settlement Period** determined in accordance with paragraph 5 below.

Provided always that PTM shall be 0 in all **Settlement Periods** from and including that in which:-

- (a) the relevant **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) fails a **Reactive Test** or a **Contract Test** until (and including) the **Settlement Period** in which a subsequent **Reactive Test** or **Contract Test** (as the case may be) is passed in relation to that **BM Unit** (or **CCGT Unit** (as the case may be)); or
- (b) the **User** fails (other than pursuant to an instruction given by **The Company** or as permitted by the **Grid Code**) to set the automatic voltage regulator of the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) to a voltage following mode until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the automatic voltage regulator is so set; or
- (c) the **BM Unit** fails to comply with a **Reactive Despatch Instruction** due to the fact that the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) is unable to increase and/or decrease its Mvar **Output** (other than as a direct result of variations in **System** voltage) until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** is so able to comply; or
- (d) the **BM Unit** fails to have a Mvar range which includes the ability to provide zero Mvar at the **Commercial Boundary** until (and

including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** has or once more has such range; or

- (e) the **BM Unit** is affected by a **Reactive Despatch to Zero Mvar Network Restriction** until (and including) the **Settlement Period** in which notification is given to **The Company** pursuant to the **Grid Code** that such **Reactive Despatch to Zero Mvar Network Restriction** is no longer affecting that **BM Unit**

### 3 Utilisation Payment

#### 3.1 For each **Settlement Period**,

$$PUM = PUM_{lead} + PUM_{lag} \quad [\text{£ per Settlement Period per BM Unit}]$$

where

$PUM_{lead}$  = defined in sub-paragraph 3.2 below;

$PUM_{lag}$  = defined in sub-paragraph 3.3 below.

#### 3.2 Leading Utilisation ( $PUM_{lead}$ )

There are four mutually exclusive cases (a), (b), (c) or (d):

- (a) If  $Q2_{lead} < (U_{lead}/SPD)$  and both  $Q2_{lead}$  and  $Q3_{lead}$  are not deemed null  
(i.e. there are three breakpoints)

then 
$$PUM_{lead} = SPD * [(CU1_{lead} * Q1_{lead}) + (CU2_{lead} * (Q2_{lead} - Q1_{lead})) + (CU3_{lead} * ((U_{lead}/SPD) - Q2_{lead}))]$$

- (b) If  
either  $Q1_{lead} < (U_{lead}/SPD) \leq Q2_{lead}$  and  $Q2_{lead}$  is not deemed null  
(i.e. there are at least two breakpoints)

or  $Q2_{lead} < (U_{lead}/SPD)$  and  $Q2_{lead}$  is not deemed null and  $Q3$  is deemed null  
(i.e. there are only two breakpoints)

then 
$$PUM_{lead} = SPD * [(CU1_{lead} * Q1_{lead}) + (CU2_{lead} * ((U_{lead}/SPD) - Q1_{lead}))]$$

- (c) If
- either  $0 < (U_{\text{lead}}/\text{SPD}) \leq Q_{1\text{lead}}$   
*(i.e. irrespective of the number of breakpoints)*
- or  $Q_{1\text{lead}} < (U_{\text{lead}}/\text{SPD})$  and  $Q_{2\text{lead}}$  and  $Q_{3\text{lead}}$  are  
 deemed null  
*(i.e. there is only one breakpoint)*
- then  $\text{PUM}_{\text{lead}} = \text{CU}_{1\text{lead}} * U_{\text{lead}}$
- (d) otherwise
- $\text{PUM}_{\text{lead}} = 0$  *[£ per **Settlement Period** per **BM Unit**]*

### 3.3 Lagging Utilisation ( $\text{PUM}_{\text{lag}}$ )

There are four mutually exclusive cases (a), (b), (c) or (d):

- (a) If  $Q_{2\text{lag}} < (U_{\text{lag}}/\text{SPD})$  and both  $Q_{2\text{lag}}$  and  $Q_{3\text{lag}}$  are not  
 deemed null  
*(i.e. there are three breakpoints)*
- then  $\text{PUM}_{\text{lag}} = \text{SPD} * [(\text{CU}_{1\text{lag}} * Q_{1\text{lag}}) + (\text{CU}_{2\text{lag}} * (Q_{2\text{lag}} - Q_{1\text{lag}})) + (\text{CU}_{3\text{lag}} * ((U_{\text{lag}}/\text{SPD}) - Q_{2\text{lag}}))]$
- (b) If
- either  $Q_{1\text{lag}} < (U_{\text{lag}}/\text{SPD}) \leq Q_{2\text{lag}}$  and  $Q_{2\text{lag}}$  is not deemed  
 null  
*(i.e. there are at least two breakpoints)*
- or  $Q_{2\text{lag}} < (U_{\text{lag}}/\text{SPD})$  and  $Q_{2\text{lag}}$  is not deemed null and  
 $Q_{3\text{lag}}$  is deemed null  
*(i.e. there are only two breakpoints)*
- then  $\text{PUM}_{\text{lag}} = \text{SPD} * [(\text{CU}_{1\text{lag}} * Q_{1\text{lag}}) + (\text{CU}_{2\text{lag}} * ((U_{\text{lag}}/\text{SPD}) - Q_{1\text{lag}}))]$
- (c) If
- either  $0 < (U_{\text{lag}}/\text{SPD}) \leq Q_{1\text{lag}}$   
*(i.e. irrespective of the number of breakpoints)*
- or  $Q_{1\text{lag}} < (U_{\text{lag}}/\text{SPD})$  and  $Q_{2\text{lag}}$  and  $Q_{3\text{lag}}$  are deemed to  
 be null

(i.e. there is only one breakpoint)

then  $PUM_{lag} = CU1_{lag} * U_{lag}$

(d) otherwise

$PUM_{lag} = 0$  *[£ per **Settlement Period** per **BM Unit**]*

#### 4 Available Capability Payment

4.1 For each **Settlement Period**,

where at any time  $MEL_i(t) > 10MW$

then  $PCA = K * ((V_{lead} * PCA_{lead}) + (V_{lag} * PCA_{lag}))$

otherwise

$PCA = 0$  *[£ per **Settlement Period** per **BM Unit**]*

where

$PCA_{lead}$  = defined in sub-paragraph 4.2 below;

$PCA_{lag}$  = defined in sub-paragraph 4.3 below.

4.2 Available Leading Capability ( $PCA_{lead}$ )

There are four mutually exclusive cases (a), (b), (c) or (d):

(a) If  $Q2_{lead} < Q_{lead} \leq Q3_{lead}$  and both  $Q2_{lead}$  and  $Q3_{lead}$  are not deemed null  
(i.e. there are three breakpoints)

then  $PCA_{lead} = SPD * [(CA1_{lead} * Q1_{lead}) + (CA2_{lead} * (Q2_{lead} - Q1_{lead})) + (CA3_{lead} * (Q_{lead} - Q2_{lead}))]$

(b) If  $Q1_{lead} < Q_{lead} \leq Q2_{lead}$  and  $Q2_{lead}$  is not deemed null  
(i.e. there are at least two breakpoints)

then  $PCA_{lead} = SPD * [(CA1_{lead} * Q1_{lead}) + (CA2_{lead} * (Q_{lead} - Q1_{lead}))]$

(c) If  $0 < Q_{lead} \leq Q1_{lead}$

*(i.e. irrespective of the number of breakpoints)*

then  $PCA_{lead} = SPD * CA1_{lead} * Q_{lead}$

(d) otherwise

$PCA_{lead} = 0$  *[£ per **Settlement Period** per **BM Unit**]*

#### 4.3 Available Lagging Capability ( $PCA_{lag}$ )

There are four mutually exclusive cases (a), (b), (c) or (d):

(a) If  $Q2_{lag} < Q_{lag} \leq Q3_{lag}$  and  $Q2_{lag}$  and  $Q3_{lag}$  are not deemed null  
*(i.e. there are three breakpoints)*

then  $PCA_{lag} = SPD * [(CA1_{lag} * Q1_{lag}) + (CA2_{lag} * (Q2_{lag} - Q1_{lag})) + (CA3_{lag} * (Q_{lag} - Q2_{lag}))]$

(b) If  $Q1_{lag} < Q_{lag} \leq Q2_{lag}$  and  $Q2_{lag}$  is not deemed null  
*(i.e. there are at least two breakpoints)*

then  $PCA_{lag} = SPD * [(CA1_{lag} * Q1_{lag}) + (CA2_{lag} * (Q_{lag} - Q1_{lag}))]$

(c) If  $0 < Q_{lag} \leq Q1_{lag}$   
*(i.e. irrespective of the number of breakpoints)*

then  $PCA_{lag} = SPD * CA1_{lag} * Q_{lag}$

(d) otherwise

$PCA_{lag} = 0$  *[£ per **Settlement Period** per **BM Unit**]*

### 5. Synchronised Capability Payment

5.1 For each **Settlement Period**,

where  $QM_{ij} > 5MWh$

$PCS = K * ((V_{lead} * PCS_{lead}) + (V_{lag} * PCS_{lag}))$

Otherwise

$$PCS = 0 \quad [\text{£ per } \mathbf{Settlement Period} \text{ per } \mathbf{BM Unit}]$$

where

$PCS_{lead}$  = defined in sub-paragraph 5.2 below;

$PCS_{lag}$  = defined in sub-paragraph 5.3 below.

## 5.2 Synchronised Leading Capability ( $PCS_{lead}$ )

There are four mutually exclusive cases (a), (b), (c) and (d):

(a) If  $Q2_{lead} < Q_{lead} \leq Q3_{lead}$  and  $Q2_{lead}$  and  $Q3_{lead}$  are not deemed null  
(i.e. there are three breakpoints)

then  $PCS_{lead} = SPD * [(CS1_{lead} * Q1_{lead}) + (CS2_{lead} * (Q2_{lead} - Q1_{lead})) + (CS3_{lead} * (Q_{lead} - Q2_{lead}))]$

(b) If  $Q1_{lead} < Q_{lead} \leq Q2_{lead}$  and  $Q2_{lead}$  is not deemed null  
(i.e. there are at least two breakpoints)

then  $PCS_{lead} = SPD * [(CS1_{lead} * Q1_{lead}) + (CS2_{lead} * (Q_{lead} - Q1_{lead}))]$

(c) If  $0 < Q_{lead} \leq Q1_{lead}$   
(i.e. irrespective of the number of breakpoints)

then  $PCS_{lead} = SPD * CS1_{lead} * Q_{lead}$

(d) otherwise

$$PCS_{lead} = 0 \quad [\text{£ per } \mathbf{Settlement Period} \text{ per } \mathbf{BM Unit}]$$

## 5.3 Synchronised Lagging Capability ( $PCS_{lag}$ )

There are four mutually exclusive cases (a), (b), (c) or (d):

(a) If  $Q2_{lag} < Q_{lag} \leq Q3_{lag}$  and  $Q2_{lag}$  and  $Q3_{lag}$  are not deemed null  
(i.e. there are three breakpoints)

then  $PCS_{lag} = SPD * [(CS1_{lag} * Q1_{lag}) + (CS2_{lag} * (Q2_{lag} - Q1_{lag})) + (CS3_{lag} * (Q_{lag} - Q2_{lag}))]$

- (b) If  $Q_{1lag} < Q_{lag} \leq Q_{2lag}$  and  $Q_{2lag}$  is not deemed null  
(i.e. there are at least two breakpoints)
- then  $PCS_{lag} = SPD * [(CS_{1lag} * Q_{1lag}) + (CS_{2lag} * (Q_{lag} - Q_{1lag}))]$
- (c) If  $0 < Q_{lag} \leq Q_{1lag}$   
(i.e. irrespective of the number of breakpoints)
- then  $PCS_{lag} = SPD * CS_{1lag} * Q_{lag}$
- (d) otherwise
- $PCS_{lag} = 0$  [(£ per **Settlement Period** per **BM Unit**)]

## 6. Testing

**The Company** reserves the right to require to be included in any **Market Agreement**, on a basis to be agreed with a **Tenderer**, terms with regard to the carrying out of a **Contract Test**. The provisions of **Grid Code OC 5.5.1** relating to the carrying out of a **Reactive Test** (including re-tests) shall apply to the carrying out of **Contract Tests**.

## 7. Termination

Save where expressly provided otherwise in a **Tender**, each **Market Agreement** shall contain terms entitling **The Company** to terminate that **Market Agreement** in the event that the **User** fails to provide a satisfactory level of service and entitling the **User** to terminate the **Market Agreement** in the event that **The Company** fails (without reasonable cause) to make due payment to the **User**, in each case as more particularly defined therein.

## 8. De-energisation and Disconnection

Subject to all rights and obligations of **The Company** and the **User** accrued at such date, utilisation, available capability and synchronised capability payments referred to in this Appendix 2 shall cease to fall due and payable to any **User** in respect of any **BM Unit** with effect from the date of expiry or termination for whatever reason of the relevant **Market Agreement** in accordance with its terms or (if earlier) with effect from the date of **De-energisation** or **Disconnection** of that **BM Unit** for any reason pursuant to the relevant **Bilateral Agreement** or the **CUSC**.





### Appendix 3

#### Technical Data

##### Section 1 Reactive Utilisation Data

This Section 1 of Appendix 3 specifies the technical data to be used to determine the utilisation payments to be made in accordance with Appendix 1 and Appendix 2. For the purposes thereof, the following terms shall have the following meanings:-

$U_{lead}$  = leading Mvarh produced by the relevant **BM Unit** at the **Commercial Boundary** in the relevant **Settlement Period** measured by metering meeting the requirements of Appendix 4 and as specified in the relevant **Mandatory Services Agreement** and/or **Market Agreement** where the **User** has complied with a **Reactive Despatch Instruction** in accordance with **Grid Code BC 2**, otherwise 0;

$U_{lag}$  = lagging Mvarh produced by the relevant **BM Unit** at the **Commercial Boundary** in the relevant **Settlement Period** measured by metering meeting the requirements of Appendix 4 and as specified in the relevant **Mandatory Services Agreement** and/or **Market Agreement** where the **User** has complied with a **Reactive Despatch Instruction** in accordance with **Grid Code BC 2**, otherwise 0;

$U$  = the total Mvarh (leading and lagging)

where

$$U = U_{lead} + U_{lag} \quad [Mvarh \text{ per } \textbf{Settlement Period} \text{ per } \textbf{BM Unit}]$$

For the avoidance of doubt, leading Mvarh shall mean Mvarh imported by the **BM Unit** at the **Commercial Boundary** irrespective of the direction of **Active Power** flow, and lagging Mvarh shall mean Mvarh exported by the **BM Unit** at the **Commercial Boundary** irrespective of the direction of **Active Power** flow.

## Section 2

### Reactive Power Capability Data and Redeclarations

This Section 2 of Appendix 3 specifies the technical data to be used to determine the capability payments to be made in accordance with Appendix 2.

1. For the purposes thereof, the following terms shall have the following meanings:-

$$Q_{\text{lead}} = \min (Q_{R_{\text{lead}}}, Q_{C_{\text{lead}}}) \text{ [Mvar]}$$

$$Q_{\text{lag}} = \min (Q_{R_{\text{lag}}}, Q_{C_{\text{lag}}}) \text{ [Mvar]}$$

where

$Q_C$  = as specified in the relevant **Mandatory Services Agreement** and/or **Market Agreement**, being either (1) the high voltage value (specified in whole Mvar) equivalent at the **Commercial Boundary** to the low voltage Mvar capability (leading or lagging) of the relevant **BM Unit** as described in paragraph 2 below, or (2) where applicable, the high voltage Mvar capability (leading or lagging) of the relevant **BM Unit** as described in paragraph 2 below, in each case representing the capability to supply continuously leading or lagging Mvar (as the case may be);

$Q_R$  = as determined in accordance with the relevant **Mandatory Services Agreement** and/or **Market Agreement**, being, in relation to a **Settlement Period**, either (1) the high voltage value (specified in whole Mvar) equivalent to the redeclared low voltage Mvar capability (leading or lagging) or (2) the redeclared high voltage Mvar capability (leading or lagging), in each case of the relevant **BM Unit** (or, in the absence of such redeclaration, such high voltage value reasonably determined by **The Company** as a result of monitoring and/or testing as provided in the relevant **Mandatory Services Agreement** and/or **Market Agreement**), and  $Q_{R_{\text{lead}}}$  and  $Q_{R_{\text{lag}}}$  shall be construed accordingly.

2. (a) In respect of capability payments made in accordance with Appendix 1:-
  - (i)  $Q_C$  shall be the low voltage (or high voltage, as the case may be) capability required to be provided under and in accordance with the **Connection Conditions** of the **Grid Code** (where applicable, as determined by any direction in

force from time to time and issued by the **Authority** relieving the relevant **User** from the obligation under its **Licence** to comply with such part or parts of the **Grid Code** as may be specified therein); and

- (ii) QC and QR shall represent the high voltage (or high voltage value equivalent capability (or redeclared capability) at **Rated MW** at the **Commercial Boundary**.
- (b) In respect of capability payments made pursuant to a **Market Agreement** in accordance with Appendix 2:-
- (i) QC shall be the capability required to be provided under and in accordance with the **Connection Conditions** of the **Grid Code** or, where the **Market Agreement** is in respect of a **Tender** for terms for the provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.3(a) of this Part I, a capability agreed to be provided in excess of that required under and in accordance with the **Connection Conditions** of the **Grid Code** but so that in such a case QC cannot exceed TQ3 (defined in Appendix 5);
  - (ii) QC shall represent the high voltage value equivalent at a nominated **Registered Capacity** specified by a **Tenderer** in the **Tender** at the **Commercial Boundary** within the system voltage range specified in the relevant **Market Agreement**; and
  - (iii) QR shall represent the high voltage value equivalent at the then current **Registered Capacity** at the **Commercial Boundary** within the system voltage range specified in the relevant **Market Agreement**.
- (c) For the purposes of this Section 2, the figures for QC and QR shall be determined in a manner consistent with the principles and methodologies set out in a document published or to be published from time to time by **The Company** for this purpose.

For the avoidance of doubt, leading capability shall mean the ability to import **Reactive Power** at the **Commercial Boundary** irrespective of the direction of **Active Power** flow, and lagging capability shall mean the ability to export **Reactive Power** at the **Commercial Boundary** irrespective of the direction of **Active Power** flow.

## Appendix 4 Metering

### **1 Balancing and Settlement Code**

For the avoidance of doubt, nothing in this Appendix shall affect the rights and obligations of **The Company** and those **Users** also bound by the **Balancing and Settlement Code** by virtue of being a party to the **BSC Framework Agreement** with regard to **Metering Equipment** and **Metering Systems** insofar as such provisions relate to **Reactive Energy**.

### **2. BM Units**

2.1 For the purposes of this Part I and the Appendices, subject always to sub-paragraph 2.2, the quantities of Mvarh imported and exported by a **BM Unit** shall be derived from the relevant **Metering System** for that **BM Unit** registered pursuant to Section K of the **Balancing and Settlement Code**.

2.2 Where the existing **Metering System** for the **BM Unit** registered pursuant to Section K of the **Balancing and Settlement Code** does not incorporate **Metering Equipment** capable of measuring and recording Mvarh imports and exports for that **BM Unit** for each **Settlement Period**, then the relevant **User** shall register or procure that there is registered pursuant to Section K of the **Balancing and Settlement Code** a **Metering System** which does incorporate such **Metering Equipment**.

2.3 All relevant **Metering Equipment** identification and location codes shall be set out in the relevant **Mandatory Services Agreement**, and the **User** hereby agrees to facilitate agreement between **The Company** and that **User** with respect thereto by providing **The Company** as soon as reasonably practicable following request with all necessary supporting diagrams and other written documentation.

2.4 Where the configuration of the **Metering System** is such that:-

2.4.1 Mvarh import and export values for the **BM Unit** are not measured at the **Commercial Boundary**; and/or

2.4.2 Mvarh import and export values for the **BM Unit** are measured by more than one **Meter**; and/or

2.4.3 the Mvarh import and export values for the **BM Unit** are measured by a **Meter** which also measures the Mvarh import and export values of one or more other **Generating Units, DC Converters, Power Park Modules Plant and Apparatus** or other equipment,

then appropriate loss adjustment factors and aggregation methodologies (as the case may be) shall be used to determine on a **Settlement Period** basis the Mvarh import value and Mvarh export value for the relevant **BM Unit** at the **Commercial Boundary** to be used for the purposes of this Part I.

The appropriate factors and methodologies for each relevant **BM Unit** shall be agreed by **The Company** and each relevant **User** (both acting reasonably) in the relevant **Mandatory Services Agreement** by adoption of one or more of the factors or methodologies set out in the document entitled “Methodology Document for the Aggregation of Reactive Power Metering” (as amended from time to time) published by **The Company** for this purpose. This document shall specify the respective factors and methodologies to be applied for particular **Metering System** configurations in order to determine so far as reasonably practicable the Mvarh import value and Mvarh export value for the relevant **BM Unit** at the **Commercial Boundary** as required by this sub-paragraph 2.4

### **3. Other Plant and/or Apparatus (or other equipment)**

In all other cases not covered by paragraph 2, unless otherwise agreed in writing by The Company, the following provisions shall apply:-

- 3.1 The quantities of Mvarh imported and exported shall be measured and recorded through **Meters** complying with all relevant **Codes of Practice** to the extent applying to **Reactive Energy**, which shall include without limitation those relating to calibration, testing and commissioning.
- 3.2 Such **Meters** shall be capable of providing a Mvarh import and export value for each **Settlement Period** for each item of **Plant** and/or **Apparatus** or other equipment.
- 3.3 Such **Meters** shall be situated as close as reasonably practicable to the **Commercial Boundary** taking into account relevant financial considerations.

- 3.4 The principles set out in paragraph 2.4 in relation to adjustment and aggregation shall apply.
- 3.5 For the purposes of remote interrogation the relevant **Mandatory Services Agreement** shall include appropriate terms with regard to the provision and maintenance of all communication links.

## **Appendix 5**

### **Submission of Tenders**

The provisions of this Appendix 5 specify the manner in which **Users** shall complete **Tenders** comprising prices and **Tendered Capability Breakpoints** relating to the **Obligatory Reactive Power Service** and terms for the provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.3 (a) of this Part I, in each case in respect of **BM Units**.

A **Tender** shall include (inter alia) details of the **Reactive Power** range, the prices tendered for utilisation and capability and an indexation mechanism as set out below. Each **Tender** must relate to one **BM Unit** only. **Users** wishing to tender in relation to more than one **BM Unit** must therefore submit separate **Tenders** for each **BM Unit**.

#### **1. Reactive Power Capability**

- 1.1 In respect of each **BM Unit**, a **Tenderer** must nominate a **Registered Capacity** which it anticipates will be the actual **Registered Capacity** on the **Contract Start Day** for that **BM Unit** (in this Appendix 5 referred to as “**Nominated Registered Capacity**”) to be used for the duration of the **Market Agreement**. All capability data used for the purpose of a **Tender** must be expressed as the capability of a **BM Unit** at the **Commercial Boundary** and must represent the value of **Reactive Power** output which can be supplied continuously at the **Commercial Boundary** when the **BM Unit** is operating at the **Nominated Registered Capacity**.
- 1.2 In respect of each **BM Unit**, all capability data relating to the provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2(a) of this Part I must be expressed as the capability of that **BM Unit** at the **Commercial Boundary** across a system voltage range to be specified by the **Tenderer** in its **Tender** (or otherwise in accordance with directions given by **The Company**).
- 1.3 All **Reactive Power** capability data in respect of a **BM Unit** must be expressed as positive, whole numbers in Mvar, with leading and lagging capability data distinguished by the subscripts <sub>lead</sub> and <sub>lag</sub>.
- 1.4 In respect of each **BM Unit**, and subject to any directions issued from time to time by **The Company** with regard to such values, the **User** must submit at least one **Reactive Power** capability value and may in addition submit up to a further two **Reactive Power** capability values (all three being “**Tendered Capability Breakpoints**”), for both leading and lagging Mvar. One of these **Tendered Capability Breakpoints**, in respect of both leading and lagging Mvar, must be equivalent to the minimum **Reactive Power** capability of a **BM Unit** which a **User** is obliged to provide under



and in accordance with the **Connection Conditions** of the **Grid Code** (to the nearest whole Mvar) after application of the principles set out in subparagraphs 1.2 and 1.3 above and as further described in the package of information referred to in sub-Paragraph 3.3(b)(i) of this Part I.

- 1.5 The **Tendered Capability Breakpoints** shall be defined for the purposes of this Appendix as TQ1, TQ2, TQ3, for leading and lagging Mvar as the case may be, where:-

$$TQ3_{\text{lead}} > TQ2_{\text{lead}} > TQ1_{\text{lead}} > 0$$

and  $TQ3_{\text{lag}} > TQ2_{\text{lag}} > TQ1_{\text{lag}} > 0$

- 1.6 Where only two **Tendered Capability Breakpoints** are tendered, for leading or lagging Mvar as the case may be, then the value of TQ3 shall be deemed to be null for the purposes of calculating payments for capability and utilisation and no additional payments for capability will fall due and payable in respect of a **BM Unit** for the provision of **Reactive Power** capability above **Tendered Capability Breakpoint** TQ2.
- 1.7 Where only one **Tendered Capability Breakpoint** is tendered, for leading or lagging Mvar as the case may be, then the values of TQ2 and TQ3 shall be deemed to be null for the purposes of calculating payments for capability and utilisation and no additional payments for capability will fall due and payable in respect of a **BM Unit** for the provision of **Reactive Power** capability above **Tendered Capability Breakpoint** TQ1.
- 1.8 The **Reactive Power** capability value at zero Mvar (referred to in paragraph 2 below as Q0) shall be treated as a **Tendered Capability Breakpoint** for the purposes of tendering capability and utilisation prices and calculating capability and utilisation payments.

## 2. Prices

In respect of each **Tendered Capability Breakpoint**, prices submitted by **Users** must be zero or positive, quoted in pounds sterling to the nearest tenth of a penny and shall otherwise be tendered as described in subparagraphs 2.1, 2.2 and 2.3 below. The prices shall be described using the following notation:-

$C1_{\text{lag}}$  is the price applicable between **Tendered Capability Breakpoints** Q0 and TQ1<sub>lag</sub> including TQ1<sub>lag</sub>

$C2_{\text{lag}}$  is the price applicable between **Tendered Capability Breakpoints** TQ1<sub>lag</sub> and TQ2<sub>lag</sub> including TQ2<sub>lag</sub>

$C3_{lag}$  is the price applicable between **Tendered Capability Breakpoints**  $TQ2_{lag}$  and  $TQ3_{lag}$  including  $TQ3_{lag}$

$C1_{lead}$  is the price applicable between **Tendered Capability Breakpoints**  $Q0$  and  $TQ1_{lead}$  including  $TQ1_{lead}$

$C2_{lead}$  is the price applicable between **Tendered Capability Breakpoints**  $TQ1_{lead}$  and  $TQ2_{lead}$  including  $TQ2_{lead}$

$C3_{lead}$  is the price applicable between **Tendered Capability Breakpoints**  $TQ2_{lead}$  and  $TQ3_{lead}$  including  $TQ3_{lead}$

where C shall represent CU, CA or CS as the case may be.

## 2.1 Utilisation Prices (CU)

- (a) Utilisation prices submitted by **Users** must be:-
  - (i) quoted in units of £/Mvarh; and
  - (ii) no greater than £999.999/Mvarh.
- (b) Utilisation prices must increase across the **Reactive Power** capability range, for leading or lagging Mvar as the case may be, such that:-

$$CU3_{lead} \geq CU2_{lead} \geq CU1_{lead} \geq 0$$

$$CU3_{lag} \geq CU2_{lag} \geq CU1_{lag} \geq 0$$

- (c) Utilisation payments shall be made for metered **Reactive Power** output and shall be calculated in accordance with Appendix 2.

## 2.2 Available Capability Prices (CA)

- (a) Available capability prices submitted by **Users** must be:-
  - (i) quoted in units of £/Mvar/h; and
  - (ii) no greater than £999.999/Mvar/h.
- (b) Available capability prices must increase across the **Reactive Power** capability range, for leading or lagging Mvar as the case may be, such that:-

$$CA3_{\text{lead}} \geq CA2_{\text{lead}} \geq CA1_{\text{lead}} \geq 0$$

$$CA3_{\text{lag}} \geq CA2_{\text{lag}} \geq CA1_{\text{lag}} \geq 0$$

- (c) Available capability payments shall be calculated in accordance with Appendix 2

## 2.3 Synchronised Capability Prices (CS)

- (a) Synchronised capability prices submitted by **Users** must be:-
- (i) quoted in units of £/Mvar/h; and
  - (ii) no greater than £999.999/Mvar/h.
- (b) Synchronised capability prices must increase across the **Reactive Power** capability range, for leading or lagging Mvar as the case may be, such that:-

$$CS3_{\text{lead}} \geq CS2_{\text{lead}} \geq CS1_{\text{lead}} \geq 0$$

$$CS3_{\text{lag}} \geq CS2_{\text{lag}} \geq CS1_{\text{lag}} \geq 0$$

- (c) Synchronised capability payments shall be calculated in accordance with Appendix 2.

## 3. Indexation

Where a **Tender** is submitted in respect of a period which exceeds the minimum twelve month period required by sub-Paragraph 3.3(d)(v) of this Part I, then the **User** shall submit one mechanism for calculating indexation on an annual basis which shall apply to all prices submitted in the **Tender** for all subsequent periods of twelve months following the minimum twelve month period to which the **Tender** applies. Such mechanism shall be based on either the Retail Prices Index (as referred to in paragraph 3 of Appendix 1), a fixed percentage (which may be positive, zero or negative) or a summation of such Retail Prices Index and such fixed percentage.

## 4. Other Technical Information

A **User** shall submit with a **Tender** such other technical information as reasonably directed by **The Company** in accordance with sub-Paragraph 3.3 (b)(i) of this Part I. Such information may include (without limitation):-

4.1 in relation to a **Tender** for the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2 (a) of this Part I, details of the capability of the **Generating Unit, DC Converter or Power Park Module (as the case may be)** to provide **Reactive Power** either:-

(a) in the case of Generating Unit, at the generator stator terminals: or

(b) in the case of a **Non-Synchronous Generating Unit, DC Converter or Power Park Module**, either at the **Grid Entry Point** in England and Wales or at the HV side of the 33/132 kV or 33/275 kV or 33/400 kV transformer for **Users** connected to the **National Electricity Transmission System** in Scotland or the **User System Entry Point** if **Embedded**,

In each case by reference to the **Generator Performance Chart** submitted in accordance with **Operating Condition 2.4.2** of the **Grid Code**, which capability must represent the true operating characteristics of that **Generating Unit, DC Converter or Power Park Module**; and

4.2 details of the system voltage range over which the **User** proposes to make available from the **Generating Unit, DC Converter or Power park Module** such **Enhanced Reactive Power Service** (and in each case any restrictions thereto); and

4.3 in relation to a **Tender** for the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2 (a) of this Part I, the ambient air temperature at which such **Enhanced Reactive Power Service** is specified, and variations to such **Enhanced Reactive Power Service** in accordance with any air temperature range specified by **The Company**; and

4.4 details, including prices, of any additional services offered as part of any **Enhanced Reactive Power Service** (not being the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2 (a) of this Part I); and

4.5 any restrictions on **The Company** selecting part of an **Enhanced Reactive Power Service**.

## **Appendix 6** **Qualification and Evaluation Criteria**

### **Section A – Qualification Criteria**

1. Without prejudice to the requirements of sub-Paragraph 3.3 of this Part I, all **Tenders** must satisfy the following mandatory qualification criteria:-
  - 1.1 in relation to a **Tender** for provision of the **Enhanced Reactive Power Service** specified in sub-Paragraph 1.2 (a) of this Part I, the leading and/or lagging capability (as the case may be) comprised therein, being the capability in excess of that required under and in accordance with the **Connection Conditions** of the **Grid Code**, must be at least 15 Mvar leading and/or 15 Mvar lagging (as the case may be) or (if lower) such amount of Mvar representing an additional 10% of that required under and in accordance with the **Connection Conditions** of the **Grid Code** (in each case as measured at the **Commercial Boundary**); and
  - 1.2 in relation to a **Tender** for provision of any other **Enhanced Reactive Power Service**, the leading and/or lagging capability (as the case may be) comprised therein meet the requirements of sub-Paragraph 2.8(a) of this Part I; and
  - 1.3 the tendered capability must be subject to Mvar metering meeting the requirements of Appendix 4; and
  - 1.4 the tendered capability must be subject to Mvar despatch facilities reasonably acceptable to **The Company**, incorporating the ability for **The Company** to receive from the **Tenderer** relevant technical, planning and other data in **The Company's** reasonable opinion necessary in connection therewith; and
  - 1.5 the site in question must be the subject of an agreement for connection to, and/or use of, the **GB Transmission System** or (as the case may be) a **Distribution System**.

### **Section B – Evaluation Criteria**

2. The overall economic value of a **Tender** (and where appropriate any part thereof) will be assessed by reference to the following criteria (which are not listed in any order of importance or priority):-

- 2.1 in relation to a **Generating Unit, DC Converter or Power park Module** providing the **Obligatory Reactive Power Service**, a comparison with the default payment arrangements for that **Generating Unit, DC Converter or Power Park Module** including the effect (if any) of the balance of tendered capability and utilisation prices as a hedge against forecast costs of that **Generating Unit, DC Converter or Power Park Module** pursuant to the default payment arrangements;
  - 2.2 the location of the tendered capability and its effectiveness in providing voltage support for the **GB Transmission System**;
  - 2.3 its interaction with other **Tenders**, in terms (inter alia) of relative prices and capability tendered and relative effectiveness in providing voltage support as referred to in sub-paragraph 2.2 above;
  - 2.4 forecast savings (if any) in constraint costs resulting from the consequential effect on power flows; and
  - 2.5 any forecast benefit or detriment attributable to it in the context of the investment planning process referred to at paragraph 4 below.
3. Particular factors affecting the value of a **Tender** (and where appropriate any part thereof) may include (without limitation) the following evaluation criteria (which are not listed in any order of importance or priority):-
  - 3.1 the amount of leading and lagging Mvar tendered and the impact (if any) of any changes in the technical data, the **Registered Capacity** and other information submitted to **The Company** pursuant to the **Data Registration Codes** of the **Grid Code** since the date of submission of the **Tender**;
  - 3.2 prices and other terms offered within the **Tender**;
  - 3.3 the number of months over which capability is tendered;
  - 3.4 forecast Mvarh output, including any revised forecast of Mvarh output taking into account tendered utilisation prices (for the avoidance of doubt of the **Tender** and of all other **Tenders** pursuant to sub-paragraph 2.3 above);
  - 3.5 in relation to a **Generating Unit, DC Converter or Power Park Module** forecast MW output and MW availability;

- 3.6 the expected availability and quality of capability tendered, in terms of reliability and dependability for despatch purposes, derived from:-
    - (i) historical performance (where relevant);
    - (ii) expected reliability of capability tendered signalled by tendered prices;
    - (iii) any programme agreed with **The Company** for the restoration of capability;
  - 3.7 the availability of suitable monitoring facilities;
  - 3.8 the capability (if any) of a **Generating Unit, DC Converter or Power Park Module** to provide voltage support services when not providing **Active Power** (for example pumped storage plant operating in spin-gen mode or when pumping and open cycle gas turbine plant when declutched and operating in **Synchronous Compensation** mode);
  - 3.9 the complexity of the terms offered within the **Tender**;
  - 3.10 the results of any testing carried out pursuant to sub-Paragraph 4.3 (e) (ii) of this Part I and (where applicable) the absence of any such testing; and
  - 3.11 any other factors enhancing or constraining the capability tendered, derived (inter alia) from technical and other information made available to **The Company** (including without limitation operational and planning data provided to **The Company** pursuant to the **Grid Code**).
4. For the avoidance of doubt, **Tenders** will be considered in the investment planning process of **The Company's Transmission Business** only if, and to the extent, required to enable **The Company** to comply with its obligations under the **Act** and the **ESO Licence**, and in such a case any consequential benefit or detriment attributable to the **Tender** will be taken into account in the tender evaluation process and **Tenders** will be evaluated accordingly.
5. For the avoidance of doubt:-
- (a) extant voltage support for the **GB Transmission System** whether via contracted services from third parties or assets owned and/or operated by **The Company's Transmission Business**; and

- (b) forecast Mvarh **Demand** on the **GB Transmission System** and at **Grid Supply Points**

in each case as at the relevant **Market Day** and as anticipated by **The Company** at the subsequent **Contract Start Day** and throughout the term of the **Tender**, will be taken into account in the tender evaluation process and **Tenders** will be evaluated accordingly.



## **Appendix 7**

### **Charging Principles**

In accordance with the relevant provisions of this Part I, the following principles are intended to form the basis of the default payment arrangements for the provision of the **Obligatory Reactive Power Service** set out in this Part I and are intended to be taken into account in any review of the indexation factor referred to in Appendix 1. However, they are not intended to stifle innovation in the development of the default payment arrangements or the giving of appropriate economic signals.

1. The totality of payments that would be made pursuant to the default payment arrangements in the absence of **Market Agreements** shall be based and founded upon the following variable costs (actual or estimated) incurred or to be incurred in respect of, and aggregated across, all **Generating Units, DC Converters and Power Park Modules** providing the **Obligatory Reactive Power Service**:-
  - 1.1 the additional heat losses incurred as a consequence of producing **Reactive Power**, measured at the high voltage side of the generator/transformer terminals, the calculation of such heat losses to take account of the square law relationship between the electric current and the additional heat losses incurred; and
  - 1.2 maintenance costs incurred as a direct result of **Reactive Power** output (including a sum in respect of any reduction in the working life of **Generating Unit, DC Converter or Power Park Module** components consequent upon **Reactive Power** output).
2. For the avoidance of doubt, and without limitation, the totality of payments referred to in paragraph 1 above shall not take into account in respect of any **Generating Unit, DC converter or Power Park Module** providing the **Obligatory Reactive Power Service** the fixed costs incurred in achieving initial compliance with the relevant provisions of the **Grid Code**.
3. Further for the avoidance of doubt, the totality of payments referred to in paragraph 1 above shall, to the extent affecting the specific costs therein identified, take due account of any change in or amendments to, or replacement of, the **Pooling and Settlement Agreement**, the **Balancing and Settlement Code**, the **Grid Code** and any other statutory or regulatory obligation, in each case coming into force or effect after 1<sup>st</sup> October, 1997 and affecting the provision of the **Obligatory Reactive Power Service**.

**Appendix 8**  
**Calculation of Reactive Power Capability**  
**at the Commercial Boundary**

**Part 1**

In accordance with the terms of the **Mandatory Services Agreement**, where applicable the formulae in this Part 1 will be used to convert **Reactive Power** capability of a **BM Unit** at the generator stator terminals to the capability at the **Commercial Boundary**.

$$Q_{lead} = (Q_{Glead} + Q_U) + \left[ \frac{[(P_G - P_U)^2 + (Q_{Glead} + Q_U)^2] * F * X_t}{100. MVA_X} \right] + Q_{ts}$$

Where the **BM Unit** has a **Reactive Power** capability (leading), this shall be expressed as a positive integer. Where the **BM Unit** does not have a **Reactive Power** capability (leading),  $Q_{lead}$  and/or  $Q_{Glead}$  shall be the minimum **Reactive Power** capability (lagging) expressed as a negative integer or zero.

$$Q_{lag} = (Q_{Glag} - Q_U) - \left[ \frac{[(P_G - P_U)^2 + (Q_{Glag} - Q_U)^2] * F * X_t}{100. MVA_X} \right] - Q_{ts}$$

Where the **BM Unit** has a **Reactive Power** capability (lagging), this shall be expressed as a positive integer. Where the **BM Unit** does not have a **Reactive Power** capability (lagging),  $Q_{lag}$  and/or  $Q_{Glag}$  shall be the minimum **Reactive Power** capability (leading) expressed as a negative integer or zero.

Where:

- $Q_{lead}$  = the **Reactive Power** capability (leading) of the **BM Unit** at **Rated MW** at the **Commercial Boundary** in Mvar;
- $Q_{lag}$  = the **Reactive Power** capability (lagging) of the **BM Unit** at **Rated MW** at the **Commercial Boundary** in Mvar;
- $P_G$  = **Rated MW** referred to in Schedule 1 of **Grid Code DRC**;
- $P_U$  = normal auxiliary load (**Active Power**) supplied by the **BM Unit** at **Rated MW** referred to in Schedule 1 of **Grid Code DRC** in MW;
- $Q_U$  = normal auxiliary lagging load (**Reactive Power**) supplied by the **BM Unit** at **Rated MW** referred to in Schedule 1 of **Grid Code DRC** in Mvar;
- $X_t$  = positive sequence reactance, nominal tap, of the **BM Unit** step-up transformer in percentage of rating as referred to in Schedule 1 of **Grid Code DRC**;

- F = the factor (if any) identified as such in the **Mandatory Services Agreement** representing the number of station transformers, otherwise 1;
- $Q_{Glag}$  = the **Reactive Power** capability (lagging) of the **BM Unit** at **Rated MW** at the generator stator terminals, where applicable as set out in Table B of Appendix 1, Section A, Part I of the **Mandatory Services Agreement** or as redeclared by the **User** pursuant to **Grid Code BC**;
- $Q_{Glead}$  = the **Reactive Power** capability (leading) of the **BM Unit** at **Rated MW** at the generator stator terminals, where applicable as set out in Table B of Appendix 1, Section A, Part I of the **Mandatory Services Agreement** or as redeclared by the **User** pursuant to **Grid Code BC**;
- $Q_{ts}$  = the relevant reactive load applicable to each of the relevant **BM Unit** shown in the relevant table in the **Mandatory Services Agreement**, the summation of which represents the lagging reactive load in Mvar taken by a **Trading Unit** calculated in accordance with the values for **Demand (Active Power)** and **Power Factor** referred to in **Grid Code PC.A.4.3.1(a)** or **Grid Code PC.A.5.2.2(a)** (as the case may be), or as agreed between **The Company** and the **User** from time to time (and where such load is leading,  $Q_{ts}$  will be negative);
- $MVA_x$  = **BM Unit** step-up transformer rated MVA referred to in Schedule 1 of **Grid Code DRC**.

N.B. All of the above factors referred to in **Grid Code DRC** shall be expressed in such units as are specified in **Grid Code DRC** and to the same number of significant figures as also specified therein (as varied from time to time).

## Part 2

In accordance with the terms of the **Mandatory Services Agreement**, where applicable the formulae in Section 1 of this Part 2 will be used by **The Company** to convert **Reactive Power** capability of a **CCGT Unit** at the generator stator terminals to the capability at the HV side of the **Generating Unit** step-up transformer, and the formulae in Section 2 of this Part 2 will be used to calculate the **Reactive Power** capability of the **BM Unit** at the **Commercial Boundary**.

### Section 1

$$CQ_{\text{lead}} = (Q_{\text{Glead}} + Q_{\text{u}}) + \left[ \frac{[(P_{\text{G}} - P_{\text{U}})^2 + (Q_{\text{Glead}} + Q_{\text{U}})^2] * F * X_{\text{t}}}{100. \text{MVA}_X} \right]$$

Where the **CCGT Unit** has a **Reactive Power** capability (leading), this shall be expressed as a positive integer. Where the **CCGT Unit** does not have a **Reactive Power** capability (leading),  $Q_{\text{lead}}$  and/or  $Q_{\text{Glead}}$  shall be the minimum **Reactive Power** capability (lagging) expressed as a negative integer or zero.

$$CQ_{\text{lag}} = (Q_{\text{Glag}} - Q_{\text{u}}) - \left[ \frac{[(P_{\text{G}} - P_{\text{U}})^2 + (Q_{\text{Glag}} - Q_{\text{U}})^2] * F * X_{\text{t}}}{100. \text{MVA}_X} \right]$$

Where the **CCGT Unit** has a **Reactive Power** capability (lagging), this shall be expressed as a positive integer. Where the **CCGT Unit** does not have a **Reactive Power** capability (lagging),  $Q_{\text{lag}}$  and/or  $Q_{\text{Glag}}$  shall be the minimum **Reactive Power** capability (leading) expressed as a negative integer or zero.

Where:

|                    |   |                                                                                                                                                                        |
|--------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $CQ_{\text{lead}}$ | = | the <b>Reactive Power</b> capability (leading) of the <b>CCGT Unit</b> at <b>Rated MW</b> at the HV side of the <b>Generating Unit</b> step-up transformer in Mvar;    |
| $CQ_{\text{lag}}$  | = | the <b>Reactive Power</b> capability (lagging) of the <b>CCGT Unit</b> at <b>Rated MW</b> at the HV side of the <b>Generating Unit</b> step-up transformer in Mvar;    |
| $P_{\text{G}}$     | = | <b>Rated MW</b> of a <b>CCGT Unit</b> referred to in Schedule 1 of <b>Grid Code DRC</b> ;                                                                              |
| $P_{\text{U}}$     | = | normal auxiliary load ( <b>Active Power</b> ) supplied by the <b>CCGT Unit</b> at <b>Rated MW</b> referred to in Schedule 1 of <b>Grid Code DRC</b> in MW;             |
| $Q_{\text{u}}$     | = | normal auxiliary lagging load ( <b>Reactive Power</b> ) supplied by the <b>CCGT Unit</b> at <b>Rated MW</b> referred to in Schedule 1 of <b>Grid Code DRC</b> in Mvar; |

|                    |   |                                                                                                                                                                                                                                                                                            |
|--------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F                  | = | the factor (if any) identified as such in the <b>Mandatory Services Agreement</b> representing the number of station transformers, otherwise 1;                                                                                                                                            |
| X <sub>t</sub>     | = | positive sequence reactance, nominal tap, of the <b>CCGT Unit</b> step-up transformer in percentage of rating as referred to in Schedule 1 of <b>Grid Code DRC</b> ;                                                                                                                       |
| Q <sub>Glag</sub>  | = | the <b>Reactive Power</b> capability (lagging) of the <b>CCGT Unit</b> at <b>Rated MW</b> at the <b>User</b> stator terminals as set out in Table B of Appendix 1, Part I of the <b>Mandatory Services Agreement</b> or as redeclared by the <b>User</b> pursuant to <b>Grid Code BC</b> ; |
| Q <sub>Glead</sub> | = | the <b>Reactive Power</b> capability (leading) of the <b>CCGT Unit</b> at <b>Rated MW</b> at the <b>User</b> stator terminals as set out in Table B of Appendix 1, Part I of the <b>Mandatory Services Agreement</b> or as redeclared by the <b>User</b> pursuant to <b>Grid Code BC</b> ; |
| MVA <sub>x</sub>   | = | <b>Generating Unit</b> step-up transformer rated MVA referred to in Schedule 1 of <b>Grid Code DRC</b> .                                                                                                                                                                                   |

## Section 2

$$Q_{\text{lead}} = \left( \sum_n^{CCGT\text{Units}} CQ_{\text{lead}} \right) + Q_{\text{ts}}$$

$$Q_{\text{lag}} = \left( \sum_n^{CCGT\text{Units}} CQ_{\text{lag}} \right) - Q_{\text{ts}}$$

Where

Q<sub>lead</sub> = the **Reactive Power** capability (leading) of the **BM Unit** at the **Commercial Boundary** in Mvar;

$\sum_n^{CCGT\text{Units}}$  = the summation over each relevant **CCGT Unit**;

Q<sub>lag</sub> = the **Reactive Power** capability (lagging) of the **BM Unit** at the **Commercial Boundary** in Mvar;

Q<sub>ts</sub> = the relevant reactive load applicable to each of the **BM Units** shown in the relevant table in the **Mandatory Services Agreement**, the summation of which represents the lagging

reactive load in Mvar taken by a **Trading Unit** calculated in accordance with the values for **Demand (Active Power)** and **Power Factor** referred to in **Grid Code PC.A.4.3.1(a)** or **Grid Code PC.A.5.2.2(a)** (as the case may be), or as agreed between **The Company** and the **User** from time to time (and where such load is leading,  $Q_{ts}$  will be negative).

N.B. All of the above factors referred to in **Grid Code DRC** shall be expressed in such units as are specified in **Grid Code DRC** and to the same number of significant figures as also specified therein (as varied from time to time).

### **Part 3**

In accordance with the terms of the **Mandatory Services Agreement**, where applicable the formulae in Section 1 of this Part 3 will be used by **The Company** to convert **Reactive Power** capability of a **Power Park Unit** at the generator stator terminals to the capability at the HV side of the **Generating Unit** step-up transformer, and the formulae in Section 2 of this Part 3 will be used to calculate the **Reactive Power** capability of the **Power Park Module** at the **Commercial Boundary**.

#### **Section 1**

$$CQ_{\text{lead}} = (Q_{\text{Glead}} + Q_{\text{u}}) + \left[ \frac{[(P_{\text{G}} - P_{\text{U}})^2 + (Q_{\text{Glead}} + Q_{\text{U}})^2] * F * X_{\text{t}}}{100. \text{MVA}_x} \right]$$

Where the **Power Park Unit** has a **Reactive Power** capability (leading), this shall be expressed as a positive integer. Where the **Power Park Unit** does not have a **Reactive Power** capability (leading),  $Q_{\text{lead}}$  and/or  $Q_{\text{Glead}}$  shall be the minimum **Reactive Power** capability (lagging) expressed as a negative integer or zero.

$$CQ_{\text{lag}} = (Q_{\text{Glag}} - Q_{\text{u}}) - \left[ \frac{[(P_{\text{G}} - P_{\text{U}})^2 + (Q_{\text{Glag}} - Q_{\text{U}})^2] * F * X_{\text{t}}}{100. \text{MVA}_x} \right]$$

Where the **Power Park Unit** has a **Reactive Power** capability (lagging), this shall be expressed as a positive integer. Where the **Power Park Unit** does not have a **Reactive Power** capability (lagging),  $Q_{\text{lag}}$  and/or  $Q_{\text{Glag}}$  shall be the minimum **Reactive Power** capability (leading) expressed as a negative integer or zero.

Where:

|                    |   |                                                                                                                                                                           |
|--------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $CQ_{\text{lead}}$ | = | the <b>Reactive Power</b> capability (leading) of the <b>Power Park Unit</b> at <b>Rated MW</b> at the HV side of the <b>Generating Unit</b> step-up transformer in Mvar; |
| $CQ_{\text{lag}}$  | = | the <b>Reactive Power</b> capability (lagging) of the <b>Power Park Unit</b> at <b>Rated MW</b> at the HV side of the <b>Generating Unit</b> step-up transformer in Mvar; |
| $P_{\text{G}}$     | = | <b>Rated MW</b> of a <b>Power Park Unit</b> referred to in Schedule 1 of <b>Grid Code DRC</b> ;                                                                           |

|             |   |                                                                                                                                                                                                                                                                                                  |
|-------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $P_U$       | = | normal auxiliary load ( <b>Active Power</b> ) supplied by the <b>Power Park Unit</b> at <b>Rated MW</b> referred to in Schedule 1 of <b>Grid Code DRC</b> in MW;                                                                                                                                 |
| $Q_U$       | = | normal auxiliary lagging load ( <b>Reactive Power</b> ) supplied by the <b>Power Park Unit</b> at <b>Rated MW</b> referred to in Schedule 1 of <b>Grid Code DRC</b> in Mvar;                                                                                                                     |
| $F$         | = | the factor (if any) identified as such in the <b>Mandatory Services Agreement</b> representing the number of <b>Power Park Units</b> transformers, otherwise 1;                                                                                                                                  |
| $X_t$       | = | positive sequence reactance, nominal tap, of the <b>Power Park Unit</b> step-up transformer in percentage of rating as referred to in Schedule 1 of <b>Grid Code DRC</b> ;                                                                                                                       |
| $Q_{Glag}$  | = | the <b>Reactive Power</b> capability (lagging) of the <b>Power Park Unit</b> at <b>Rated MW</b> at the <b>User</b> stator terminals as set out in Table B of Appendix 1, Part I of the <b>Mandatory Services Agreement</b> or as redeclared by the <b>User</b> pursuant to <b>Grid Code BC</b> ; |
| $Q_{Glead}$ | = | the <b>Reactive Power</b> capability (leading) of the <b>Power Park Unit</b> at <b>Rated MW</b> at the <b>User</b> stator terminals as set out in Table B of Appendix 1, Part I of the <b>Mandatory Services Agreement</b> or as redeclared by the <b>User</b> pursuant to <b>Grid Code BC</b> ; |
| $MVA_x$     | = | <b>Generating Unit</b> step-up transformer rated MVA referred to in Schedule 1 of <b>Grid Code DRC</b> .                                                                                                                                                                                         |

## Section 2

$$Q_{lead} = \left( \sum_n^{PPUnits} CQ_{lead} \right) + Q_{ts} + \left[ \frac{\left[ (P1_G - P1_U)^2 + (Q1_{Glead} + Q1_U)^2 \right] * F1 * X1_t}{100.MVA1_x} \right]$$

$$Q_{lag} = \left( \sum_n^{PPUnits} CQ_{lag} \right) - Q_{ts} - \left[ \frac{\left[ (P1_G - P1_U)^2 + (Q1_{Glag} - Q1_U)^2 \right] * F1 * X1_t}{100.MVA1_x} \right]$$

Where

$Q_{lead}$  = the **Reactive Power** capability (leading) of the **Power Park Module** at the **Commercial Boundary** in Mvar;

$\sum_n^{PPUnits}$  = the summation over each relevant **Power Park Unit**;



$Q_{lag}$  = the **Reactive Power** capability (lagging) of the **BM Unit** at the **Commercial Boundary** in Mvar;

$Q_{ts}$  = [the relevant reactive load applicable to the **Power Park Module** shown in the relevant table in the **Mandatory Services Agreement**, the summation of which represents the lagging reactive load in Mvar taken by a **Trading Unit** calculated in accordance with the values for **Demand (Active Power)** and **Power Factor** referred to in **Grid Code PC.A.4.3.1(a)** or **Grid Code PC.A.5.2.2(a)** (as the case may be), or as agreed between **The Company** and the **User** from time to time (and where such load is leading,  $Q_{ts}$  will be negative).]

$$P1_G = \sum_n^{PPUnits} P_G$$

$$P1_U = \sum_n^{PPUnits} P_U$$

$$Q1_{Glag} = \sum_n^{PPUnits} Q_{Glag}$$

$$Q1_{Glead} = \sum_n^{PPUnits} Q_{Glead}$$

$F1$  = the factor (if any) identified as such in the **Mandatory Services Agreement** representing the number of station transformers, otherwise 1;

$X1_t$  = positive sequence reactance, nominal tap, of the **Power Park Module** step up transformer in percentage of rating as referred to in Schedule 1 of **Grid Code DRC**

$MVA1_x$  = **Power Park Module** step-up transformer rated MVA referred to in Schedule 1 of **Grid Code DRC**

N.B. All of the above factors referred to in **Grid Code DRC** shall be expressed in such units as are specified in **Grid Code DRC** and to the same number of significant figures as also specified therein (as varied from time to time).

## **Appendix 9** **Redundant Provisions**

### **1. Introduction**

This Appendix 9 is included in this Part I for information purposes only as more particularly described in Paragraph 6 of this Part I.

### **2. Definitions - Paragraph 1.1 of MCUSA, Schedule 5.**

In this Appendix 9, except where the context otherwise requires, the following expressions shall have the following meanings:-

**“Reactive Power Zone”** means those separate areas of England and Wales identified as zones in the Seven Year Statement for 1997 for the purpose of specifying local Reactive Power capability and need;

**“Relevant Zone”** means in relations to any Despatch Unit, the Reactive Power Zone to which the Despatch Unit is allocated as specified in an Ancillary Services Agreement.

**“Transmission Users Group”** means the group established pursuant to paragraph 4 of Schedule 4 to this Agreement.

### **3. Variations and Review – Paragraph 2.5 of MCUSA Schedule 5**

The Parties acknowledge and agree that the Transmission Users Group shall be requested to review each of the matters described in Appendix 7 by the respective date (if any) shown opposite each therein. In carrying out such review, the Transmission Users Group shall be requested to take into account the respective applicable principles (if any) set out therein and to give due and proper consideration to any matter referred to it by the Director. For the avoidance of doubt, following each such review The Company or any User may raise a Proposed Variation with respect thereto in accordance with sub-paragraph 2.2(a). It is further agreed that:-

- (a) **The Company** shall consider and no later than 31<sup>st</sup> December 1999, report to the Transmission Users Group on the practicalities of establishing a unified mechanism for the provision of voltage support for **The Company** Transmission System; and

- (b) the Transmission Users Group shall be requested, no later than 31<sup>st</sup> March 2000 to invite the Grid Code Review Panel to review the provisions of the Grid Code with respect to Reactive Power in light of this Schedule.

4. **Obligatory Reactive Power Service – Default Payment Arrangements – Paragraph 4 of MCUSA, Schedule 5**

4.1 ---

4.2 Subject always to Paragraph 5, and notwithstanding:-

- (a) the provisions of the Works Programme for reactive power ancillary services agreed by Pool Members on 1<sup>st</sup> March 1994, as adopted from 1<sup>st</sup> August 1994; and
- (b) the provisions of any **Ancillary Services Agreement** now or hereafter in effect (but subject always to sub-Paragraph 6.2),

the payments to be made by **The Company** to **Users** for the provision of the **Obligatory Reactive Power Service** in all **Mandatory Services Agreements** under which **Users** are or will be paid for the **Obligatory Reactive Power Service** shall, subject always to sub-Paragraph 4.5 and 4.7, comprise solely payments for utilisation determined in respect of each **Settlement Period** in accordance with sub-Paragraph 4.3.

4.3 ---

4.4 The Parties acknowledge and agree that, as at the date this Schedule comes into effect:-

- (a) the totality of payments for the provision of the **Obligatory Reactive Power Service**, determined in accordance with the provisions of this Paragraph 4, reflect so far as reasonably practicable the overall variable costs (on the basis of the charging principles set out in Appendix 8) incurred across the relevant **Generating Units** of the provision of the **Obligatory Reactive Power Service** (whether or not payments are made in respect of those **Generating Units** pursuant to this Paragraph 4 or pursuant to **Market Agreements** entered into in accordance with Paragraph 5); and

- (b) without prejudice to the review of the indexation factor specified as item 4 in Appendix 7, such totality of payments will continue to reflect those overall variable costs notwithstanding all and any variations thereto reasonably anticipated at such date.

4.5 It is hereby agreed and acknowledged that nothing in this Schedule and the Appendices shall affect in any way the obligation on each **User** to comply with the provisions of the **Grid Code** insofar as they relate to **Reactive Power**. For the avoidance of doubt, and without limiting the foregoing, it is hereby agreed and acknowledged that, notwithstanding that the payments for the **Obligatory Reactive Power Service** with affect from 1<sup>st</sup> April 2000, subject always to sub-paragraph 2.5 shall comprise solely payments for utilisation, nothing in this Schedule and the Appendices shall relieve **Users** from the obligations to comply with the provisions of the **Grid Code** in relation to **Reactive Power** by virtue of Sub-Clause 9.3 of this Agreement or otherwise howsoever.

4.6 ---

4.7 ---

4.8 ---

5. **Obligatory Reactive Power Service (Default Payment Arrangements)**  
**– Appendix 1 of MCUSA, Schedule 5**

The provisions of this Appendix 1, as referred to in sub-paragraph 4.2 of this Schedule shall apply to the calculation of default payments for provision of the **Obligatory Reactive Power Service** from **BM Units**. All payments shall be expressed in pounds sterling.

1. **Total Payment**

Total Payment (PT) = PU+PC

Where, subject always to Paragraph 7 and 8 below:

PU = the utilisation payment in respect of a **BM Unit** for a **Settlement Period** determined in accordance with Paragraph 2 below.

PC = the capability payment in respect of BM Unit for a Settlement Period determined in accordance with paragraph 3 below.

## 2. Utilisation Payment

$$PU = BP_U * U \quad [\text{£ per Settlement Period per BM Unit}]$$

Where

$$BP_U = \frac{46,270,000 * 1 * X}{42,054,694} \quad [\text{£/Mvarh}]$$

Where

I = defined in Paragraph 5 below;

X = a factor which should be:-

- (i) in respect of any Settlement Period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March 1998, 0.2; and
- (ii) in respect of any Settlement Period from (and including) 1<sup>st</sup> April 1998 to (and including) 31<sup>st</sup> March 1999, 0.5 (subject as provided below); and
- (iii) subject always to sub-paragraph 2.5 of this Schedule, in respect of any Settlement Period from (and including) 1<sup>st</sup> April 1999 to (and including) 31<sup>st</sup> March 2000, 0.75 (subject as provided below); and
- (iv) subject always to sub-paragraph 2.5 of this Schedule, in respect of all Settlement Periods thereafter, 1.00 (subject as provided below);

Provided always that with effect from 1<sup>st</sup> April 1998, X shall be 0.2 in all **Settlement Periods** from (and including) that in which:-

- (a) the relevant **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) fails a **Reactive Test** until (and including) the **Settlement Period** in which a subsequent **Reactive Test** is passed in relation to that **BM Unit** (or **CCGT Unit** (as the case may be)); or
- (b) the **User** fails (other than pursuant to an instruction given by **The Company** or as permitted by the **Grid Code**) to set the Automatic Voltage Regulator of the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) to a voltage following mode until

(and including) the **Settlement Period** in which the **User** notifies **The Company** that the Automatic Voltage Regulator is so set; or

- (c) the **BM Unit** fails to comply with a **Reactive Despatch Instruction** due to the fact that the **BM Unit** (or, in relation to a **CCGT Module**, any relevant **CCGT Unit**) is unable to increase and/or decrease its Mvar output (other than as a direct result of variations in **System** voltage) until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** is so able to comply; or
- (d) the **BM Unit** fails to have a Mvar range which includes the ability to provide zero Mvar at the Commercial Boundary until (and including) the **Settlement Period** in which the **User** notifies **The Company** that the **BM Unit** has or once more has such rang; and

U = defined in Section 1 of Appendix 3

### 3. Capability Payment

$$PC = \frac{[[BP_c * ZWF_{lead} * QC_{lead} * QSF_{lead}] + (BP_c * ZWF_{lag} * QC_{lag} * QSF_{lag})] * J}{[\text{£ per Settlement Period per Despatch Unit}]}$$

Provided always that PC shall be 0 in all Settlement Periods from (and including) that in which:-

- (i) the User fails (other than pursuant to an instruction given by The Company or as permitted by the Grid Code) to set the Automatic Voltage Regulator of the Despatch Unit (or, in relation to a Centrally Despatched CCGT Module, any relevant CCGT Unit) to a voltage following mode until (and including) the Settlement Period in which the User notifies The Company that the Automatic Voltage Regulator is so set; or
- (ii) the Despatch Unit fails to comply with a Reactive Despatch Instruction due to the fact that the Despatch Unit (or in relation to a Centrally Despatched CCGT Module, any relevant CCGT Unit) is unable to increase and/or decrease its Mvar output (other than as a direct result of variations in System voltage) until (and including) the Settlement Period in which the User notifies The Company that the Despatch Unit is so able to comply; or
- (iii) the Despatch Unit fails to have a Mvar range which includes the ability to provide zero Mvar at the Commercial Boundary until (and including) the Settlement Period in which the User notifies The

Company that the Despatch Unit has or once more has such range;  
or

- (iv) a continuous period of unavailability of a Despatch Unit to be Despatched by The Company in accordance with Grid Code SDC extends beyond 75 consecutive days until (and including) the Settlement Period in which the Despatch Unit is subsequently declared available in accordance with Grid Code SDC.

where

$$BP_c = \frac{46,270,000 * 1 * Y}{0.868178624 * 16,112 * 8,760 * 2} \quad [\text{£/Mvar per Settlement Period}]$$

Where

I = defined in paragraph 5 below;

Y = a factor which shall be:-

- (i) in respect of any Settlement Period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March 1998, 0.8; and
- (ii) in respect of any Settlement period from (and including) 1<sup>st</sup> April, 1998 to (and including) 31<sup>st</sup> March, 1999, 0.5; and
- (iii) subject always to sub-paragraph 2.5 of this Schedule, in respect of any Settlement Period from (and including) 1<sup>st</sup> April, 1999 to (and including) 31<sup>st</sup> March, 2000, 0.25; and
- (iv) subject always to sub-paragraph 2.5 of this Schedule, in respect of all Settlement Periods thereafter, 0;

ZWF = the provisional Zonal Weighting Factor defined in paragraph 4 below (expressed to apply to both leading and lagging Mvar) subject to reconciliation in accordance with that paragraph:

QC = defined in Section 2 of Appendix 3 (expressed to apply to both leading and lagging Mvar);

QSF = the shortfall factor relating to the capability payment (expressed as either  $QSF_{\text{lead}}$  or  $QSF_{\text{lag}}$  to apply respectively to capability leading and capability lagging as applicable), being:-



$$\min \left( 1, \left( \frac{QR}{QC} \right)^2 \right)$$

where

QR = defined in Section 2 of Appendix 3 (expressed to apply to both leading and lagging Mvar); and

J = 1 in each Settlement Period in which, in relation to the Despatch Unit in question, Genset Registered Capacity is greater than 2MW, otherwise 0.

#### 4. Zonal Weighting Factors

ZWF = the Provisional Zonal Weighting Factor (expressed as either ZWF<sub>lead</sub> or ZWF<sub>lag</sub> to apply respectively to the zonal weighting factor leading and the zonal weighting factor lagging) for the Despatch Unit, calculated as follows:-

(a) In respect of the period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March, 1998 and in respect of each subsequent twelve month period ending 31<sup>st</sup> March, provisional zonal weighting factors (“the Provisional Zonal Weighting Factors”) shall be calculated by The Company in respect of both leading and lagging Reactive Power by reference to:-

- (i) the leading or lagging (as the case may be) Mvar “need” for leading or lagging (as the case may be) Reactive Power for that period in each Relevant Zone, divided by
- (ii) the total leading or lagging (as the case may be) Mvar capability for that period in each Relevant Zone as forecast by The Company (“the Total Forecast Capability”),

with the result of that division in each case being multiplied by an adjustment factor being:-

$$\frac{16112}{TAN}$$

Where

TAN = a figure being, for the period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March 1998, 14,775, and for each subsequent twelve month period ending 31<sup>st</sup> March, a figure being the sum total of the leading Mvar “need” for leading Reactive Power plus the sum total of the lagging Mvar “need” for lagging Reactive Power in all Reactive Power Zones for the twelve month period in question, as given each year in the Seven Year Statement,

provided that each Provisional Zonal Weighting Factor (both leading and lagging) shall not in any event be greater than 3.000 and provided further that (for the avoidance of doubt) no determination of  $ZWF_{lead}$ ,  $ZWF_{lag}$  and TAN shall be made in respect of any such twelve month period when  $Y = 0$ .

- (b) The Provisional Zone Weighting Factors, together with the Total Forecast Capability, will be notified by The Company as soon as reasonably practicable by publication in the first practicable Seven Year Statement (or any update thereof).

### Reconciliation

As soon as reasonably practicable following the expiry of each twelve month period ending 31<sup>st</sup> March, The Company shall recalculate  $ZWF_{lead}$  and  $ZWF_{lag}$  for that twelve month period in accordance with the above provision for calculation of the Provisional Zonal Weighting Factors but substituting for the Total Forecast Capability the actual total leading or lagging (as the case may be) Mvar capability for that twelve month period in each Relevant Zone as determined by The Company (“the Total Actual Capability”). Such recalculation of  $ZWF_{lead}$  and  $ZWF_{lag}$  shall be undertaken by The Company in a manner consistent with the principles and methodologies set out in the document entitled “Methodology Document for the Recalculation of Zonal Weighting Factors” published by The Company for this purpose. Such recalculated figures for  $ZWF_{lead}$  and  $ZWF_{lag}$  (“the Final Zonal Weighting Factors”), together with the Total Actual Capability, shall be published by The Company in the Seven Year Statement. Each Final Zonal Weighting Factor (both leading and lagging) shall not in any event be greater than 3.000 and (for the avoidance of doubt) no determination of  $ZWF_{lead}$ ,  $ZWF_{lag}$  and TAN shall be made in respect of any such twelve month period when  $Y=0$ .

The Company shall derive the Total Actual Capability from the Mvar capability (required under and in accordance with the Connection Conditions of the Grid Code) of Generating Units in respect of which Ancillary Services Agreements have been or will be amended or concluded to give effect to the provisions of sub-paragraphs 4.2 and 4.3 of this Schedule. In respect of any twelve month period ending 31<sup>st</sup> March, such Mvar capability shall be reduced pro rata for all Settlement Periods in such twelve month period in respect of which no capability payments referred to in this Appendix 1 shall fall due:-

- (a) by virtue of paragraph 7 below (with effect from the commencement of the twelve month period in question); and
- (b) by virtue of paragraph 8 below (until the end of the twelve month period in question); and
- (c) by virtue of factor J referred to in paragraph 3 above being set to zero (at any time during the twelve month period in question).

As soon as reasonably practicable following publication of the relevant Seven Year Statement, The Company shall pay to each relevant User or be paid by each relevant User such sum as will reconcile:-

- (i) capability payments made to that User and calculated in accordance with paragraph 3 above by reference to the Provisional Zonal Weighting Factors,

with

- (ii) capability payments due to or from that User and calculated in accordance with paragraph 3 above by reference to the Final Zonal Weighting Factors.

For the avoidance of doubt, such reconciliation will include the payment of interest at the Base Rate from the date of payment by The Company to that User of the capability payments referred to at (i) above.

For clarification purposes, each reference in this paragraph 4 to “need” does not imply actual Reactive Power need but is used merely to refer to the figure identified as “need” in the Seven Year Statement. Such figure shall be determined each year using the same principles and methodologies as used to determine the zonal weighting factors for the twelve month periods ended on 31<sup>st</sup> March 1996 and 31<sup>st</sup> March 1997.

## 5. Indexation

The indexation factor I used in the formulae in Paragraph 2 above shall <sup>1</sup>[, with effect from 1<sup>st</sup> October 1997 in respect of the period from (and including) that date to (and including) 31<sup>st</sup> March 1998,] with effect from 1<sup>st</sup> April in respect of each subsequent twelve month period ending 31<sup>st</sup> March, be determined as follows:-

$$I = \frac{RP1_2}{RP1_1}$$

where

For the period from (and including) 1<sup>st</sup> October, 1997 to (and including) 31<sup>st</sup> March, 1998  $RPI_2 = 155.4$ , and thereafter  $RPI_2$  is the RPI for March of the immediately preceding twelve month period ending 31<sup>st</sup> March.

$RPI_1$  is the RPI for March, 1994 (142.5).

The index used is the Retail Price Index (RPI) with 1987 = 100 base. The source of the RPI index is the monthly Department of Employment "Employment Gazette".

Subject always to sub-paragraph 2.5 of this Schedule, In respect of all periods from (and including) 1<sup>st</sup> April, 2001 the indexation factor I applicable for the period from (and including) 1<sup>st</sup> April, 2000 to (and including) 31<sup>st</sup> March 2001 shall apply.

6. ---

7. ---

8. ---

9. Reconciliation

As soon as practicable after this Schedule has taken effect and Ancillary Services Agreements have been amended so as to give effect thereto, The Company will pay to each relevant user or be paid by each relevant User such sum as will reconcile:-

(a) payments (if any) made to such User for the provision of the Obligatory Reactive Power Service from BM Units in respect of the period from 1<sup>st</sup> October, 1997 to (and including) the date of such reconciliation by The Company

with

---

- (b) payments due to or from such User pursuant to any Ancillary Services Agreement giving effect to this Schedule in respect of the period from 1<sup>st</sup> October, 1997 to the date of such reconciliation (both dates inclusive) as if such Ancillary Services Agreements had then been effective. For the avoidance of doubt, such reconciliation will include the payment of interest at Base Rate from the date of the relevant payment by The Company referred to at sub-paragraph 9(a) above.

## 6. **Metering – Appendix 4 of MCUSA Schedule 5**

2.4 Subject always to sub-paragraph 2.5, the appropriate factors and methodologies for each relevant **BM Unit** shall be agreed by **The Company** and each relevant **User** (both acting reasonably) in the relevant **Mandatory Services Agreement** by adoption of one or more of the factors or methodologies set out in the document entitled “Methodology Document for the Aggregation of Reactive Power Metering” (as amended from time to time) published by **The Company** for this purpose. This document shall specify the respective factors and methodologies to be applied for particular **Metering System** configurations in order to determine so far as reasonably practicable the Mvarh import value and Mvarh export value for the relevant **BM Unit** at the **Commercial Boundary** as required by this sub-paragraph 2.4.

2.5 Loss adjustment factors and aggregation methodologies need not be agreed between **The Company** and the relevant **User** in connection with any configuration described in sub-paragraph 2.4.3 in respect of periods prior to (1<sup>st</sup> April 1998).

## 7. **Matters for Review - Appendix 7 of MCUSA, Schedule 5**

### **Matter**

### **Date of review**

- |    |                                                                                                                                   |                              |
|----|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| 1. | The values of X and Y referred to in Appendix 1 in respect of Settlement Periods from (and including) 1 <sup>st</sup> April 1999. | 1 <sup>st</sup> October 1998 |
|----|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|

Applicable principle:

The degree and extent to which a competitive market has been established in accordance with the

- provisions of this Schedule (taking into account, inter alia, the amount of Mvar capability the subject of Market Agreements and the utilisation thereof).
2. Any payment arrangements formulated by The Company in conjunction with any unlicensed providers . 1<sup>st</sup> October 1999  
  
Applicable principle:  
The extent to which it is reasonably practicable to achieve consistency with the provisions of Appendix 1 or Appendices 2 and 5 (as the case may be).  
  
1<sup>st</sup> October 1999
  3. The treatment of Trading Units for the purposes of metering and calculation of Mvar capability in connection with this Schedule.  
  
Applicable principle:  
None  
  
1<sup>st</sup> October 2000
  4. The indexation factor referred to in Appendix 1 to apply in respect of all periods from (and including) 1<sup>st</sup> April 2001.  
  
Applicable principles:  
  
Those charging principles set out in Appendix 8.
  5. (a) The extent of any change in the nature of, or extent of recovery under the Balancing and Settlement Code of, variable costs incurred or to be incurred by Generating Units providing the Obligatory Reactive Power Service; Not applicable

and

- (b) the extent to which such changes should lead to a change in the specific costs identified in paragraph 1 of Appendix 8 upon which the totality of payments referred to therein is based and founded.

Applicable principle:

That, to the extent innovation in the development of the default payment arrangements or the giving of appropriate economic signals is not thereby stifled, the specific costs from time to time identified in paragraph 1 of Appendix 8 (and upon which the totality of payments referred to therein is based and founded) should continue to comprise the totality of variable costs (actual or estimated) incurred or to be incurred in respect of, and aggregated across, all Generating Units providing the Obligatory Reactive Power Service, provided always that each of those specific costs from time to time identified shall only be a variable cost not recovered under the Balancing and Settlement Code which:-

- (i) is not being incurred at the date this Schedule comes into effect; or
- (ii) is being incurred at the date

this Schedule comes into effect and as at that date is either identified as a specific cost in paragraph 1 of Appendix 8 or is being recovered under the Balancing and Settlement Code.

**8. Charging Principles - Appendix 8 of MCUSA Schedule 5**

In accordance with the relevant provisions of this Part I, the following principles are intended to form the basis of the default payment arrangements for the provision of the **Obligatory Reactive Power Service** set out in this Schedule I and are intended to be taken into account in any review of the indexation factor referred to in Appendix 1. However, they are not intended to stifle innovation in the development of the default payment arrangements or the giving of appropriate economic signals. It is therefore the Parties' intention that, upon any change in the nature of, or extent of recovery under the Balancing and Settlement Code of, variable costs (actual or estimated) incurred or to be incurred by Generating Units providing the Obligatory Reactive Power Service, the specific costs identified in paragraph 1 below shall be a matter for review by the Transmission Users Group as more particularly referred to as item 5 of Appendix 7.



## **Part II**

Not Used

**DATED 2001**

**NATIONAL ENERGY SYSTEM OPERATOR LIMITED**

**and**

**[ ]**

---

**THE CONNECTION AND USE OF SYSTEM CODE**

**CUSC ACCESSION AGREEMENT**

---

**CUSC ACCESSION AGREEMENT**

This **CUSC Accession Agreement** is made on [ ]

BETWEEN:

- (1) **National Energy System Operator Limited** a company registered in England with number 11014226 whose registered office is St Catherines Lodge, Bearwood Road, Sindlesham, Berkshire RG41 5BN ("**The Company**", which expression shall include its successors and/or permitted assigns); on its own behalf and on behalf of all the other parties to the **CUSC Framework Agreement**; and
- (2) *[Insert name of person wishing to be admitted to the CUSC]* (the "**Party Applicant**") whose principal office is at [ ].

WHEREAS:

- (A) By the **CUSC Framework Agreement** dated 18 September 2001 made between the **Original Parties** named therein and as now in force between **CUSC Parties** and by virtue of any **CUSC Accession Agreement** entered into by any **New Party** before the date of this **CUSC Accession Agreement**, the **CUSC Parties** agreed to give effect to and be bound by the **CUSC**.
- (B) The **Party Applicant** has complied with the requirements of the **CUSC** (if any) as to accession and wishes to be admitted as a **CUSC Party**.
- (C) By the **CUSC Framework Agreement** and the provisions of the **CUSC** all **CUSC Parties** authorise **The Company** to sign this **CUSC Accession Agreement** on their behalf.

**IT IS HEREBY AGREED** as follows:

- 1 In this **CUSC Accession Agreement**, words and expression defined in or for the purposes of the **CUSC Framework Agreement** and not otherwise defined herein shall have the meanings ascribed thereto under the **CUSC Framework Agreement**.
- 2 **The Company** (acting on its own behalf and on behalf of each of the other **CUSC Parties**) hereby admits the **Party Applicant** as an additional **CUSC Party** under the **CUSC Framework Agreement** with effect from the date of this **CUSC Accession Agreement** on the terms and conditions hereof.
- 3 The **Party Applicant** hereby accepts its admission as a **CUSC Party** and undertakes with **The Company** acting on its own behalf and on behalf of each of the other **CUSC Parties**) to perform and to be bound by the **CUSC Framework Agreement** as a **CUSC Party** as from the date hereof.
- 4 For all purposes in connection with the **CUSC Framework Agreement** the **Party Applicant** shall as from the date hereof be treated as if it has been a signatory of the **CUSC Framework Agreement** from the date hereof, and as if this **CUSC Accession Agreement** were part of the **CUSC Framework Agreement** from the date hereof, and the rights and obligations of the **CUSC Parties** shall be construed accordingly.
- 5 This **CUSC Accession Agreement** and the **CUSC Framework Agreement** shall be read and construed as one document and

references (in or pursuant to the **CUSC Framework Agreement**) to the **CUSC Framework Agreement** (howsoever expressed) should be read and construed as reference to the **CUSC Framework Agreement** and this **CUSC Accession Agreement**.

6 If any provision of this **CUSC Accession Agreement** is or becomes invalid, unenforceable or illegal or is declared to be invalid, unenforceable or illegal by any court of competent jurisdiction or by any other **Competent Authority** (as defined in the **CUSC**), such invalidity, unenforceability or illegality shall not prejudice or affect the remaining provisions of this **CUSC Accession Agreement**, which shall continue in full force and effect notwithstanding the same. The **Party Applicant** and **The Company** (acting on its own behalf and on behalf of each of the other **CUSC Parties**) hereby acknowledge and agree for the purposes of the Contracts (Rights of Third Parties) Act 1999 that no rights, powers or benefits are or shall be conferred on any person pursuant to this **CUSC Accession Agreement**, except for such rights, powers or benefits as are expressly conferred on the **CUSC Parties** and the **Party Applicant** in accordance with and subject to its terms.

7 This **CUSC Accession Agreement** may be executed in counterparts.

8 This **CUSC Accession Agreement** shall be governed by and construed in accordance with the laws of England and Wales and the parties hereby submit to the jurisdiction of the courts of England and Wales and the courts of Scotland only.

Exhibit A

- 9 If the **Party Applicant** is not a company incorporated under the Companies Act 1985, as amended, it shall provide to **The Company** an address in **Great Britain** for service of process on its behalf in any proceedings.

**AS WITNESS** the hands of the duly authorised representatives of the parties hereto the day and year first above written.

**CUSC - EXHIBIT B**

**THE CONNECTION AND USE OF SYSTEM CODE  
CONNECTION APPLICATION**

**DIRECTLY CONNECTED POWER STATION  
NON EMBEDDED CUSTOMER  
DISTRIBUTION SYSTEM DIRECTLY CONNECTED TO THE  
NATIONAL ELECTRICITY TRANSMISSION SYSTEM**

**PLEASE STUDY THE FOLLOWING NOTES BEFORE COMPLETING AND SIGNING THE APPLICATION FORM.**

Please note that certain terms used in the application form are defined in the Interpretation and Definitions (contained in Section 11 to the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold. If the **Applicant** has any queries regarding this application or any related matters then the **Applicant** is recommended to contact **The Company** where our staff will be pleased to help.

1. **The Company** requires the information requested in this application form for the purpose of preparing an **Offer** (the “**Offer**”) to enter into an agreement for connection to and in the case of a directly connected power station, use of the **National Electricity Transmission System**. It is essential that the **Applicant** supplies all information requested in the application form and that every effort should be made to ensure that such information is accurate. Please note that in the case of a **Gated Application** you can apply for a **Gate 1 Offer** or **Gate 2 Offer** and confirmation of which type of **Offer** you are applying for is required.
2. Where **The Company** considers that any information provided by the **Applicant** is incomplete or unclear, or further information is required, the **Applicant** will be requested to provide further information or clarification. The provision/clarification of this information may impact on **The Company's** ability to commence preparation of an **Offer**.
3. Should there be any change in the information provided by the **Applicant** then the **Applicant** should immediately inform **The Company** of such a change. Where this is a change in the information provided for Sections B to D then the **Applicant** should contact **The Company** to see if such a change can be accommodated as it is unlikely that material changes could be accommodated. If **The Company** cannot accommodate such a change bearing in mind the timescales within which the **Offer** must be made then the application will be processed on the original information although it is open to the **Applicant** to withdraw the application.
4. **The Company** shall charge the **Applicant**, and the **Applicant** shall pay to **The Company**, **The Company's** Engineering Charges in relation to the



application. A fee will be charged by **The Company** in accordance with the **Charging Statements**. No application will be considered until such payment has been received.

5. The effective date upon which the application is made shall be the later of the date when **The Company** has received the application fee pursuant to paragraph 4 above or the date when **The Company** is reasonably satisfied that the **Applicant** has completed Sections A-D. **The Company** shall notify the **Applicant** of such date. Please note the additional requirements for a **Letter of Authority** and **Letter of Acknowledgement** in the case of a **Gate 1 Application** and the additional requirements under the **Gated Application and Offer Process** at **CUSC** Section 17 in respect of a **Gate 2 Application**.
  
6. **The Company** will make the **Offer** in accordance with the terms of Paragraphs 2.13, 6.9 (Modifications) and Paragraph 6.10 (New Connection Sites) of the **CUSC** and the **ESO Licence**.
  
7. **The Company** will make the **Offer** (a) if it is not a **Gated Offer** under the **Gated Application and Offer Process**, as soon as is reasonably practicable and, in any event, within three (3) months of the effective date of the application or such later period as the **Authority** may agree and (b) if it is a **Gated Offer** under the **Gated Application and Offer Process**, in accordance with the **Gated Application and Offer Process**. The **Offer** may, where it is necessary to carry out additional extensive system studies to evaluate more fully the impact of the proposed development, indicate the areas that require more detailed analysis. Before such additional studies are required, the **Applicant** shall indicate whether it wishes **The Company** to undertake the work necessary to proceed to make a revised **Offer** within, if it is not a **Gated Offer** under the **Gated Application and Offer Process**, the three (3) month period or, if it is a **Gated Offer** under the **Gated Application and Offer Process**, within the timescales for a **Gate 2 Offer** set out in the **Gated Timetable** for the **Gated Application and Offer Process** or, where relevant the timescale consented to by the **Authority**. To enable **The Company** to carry out any of the above mentioned necessary detailed system studies the **Applicant** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in Part 2 of the Appendix to the **Planning Code** which is part of the **Grid Code**.

8. In the course of processing the application it may be necessary:
- (a) for **The Company** to consult the appropriate **Public Distribution System Operator(s)** on matters of technical compatibility of the **National Electricity Transmission System** with their **Distribution System(s)** or to consult the **Relevant Transmission Licensees** to establish the works required on the **National Electricity Transmission System** or to release information to **The Authority** in accordance with the **Transmission Licence** and the **ESO Licence**. On grounds of commercial confidentiality **The Company** shall need authorisation for the release to the **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** or **The Authority** of certain information contained in the application. Any costs incurred by **The Company** in consulting the **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** would be included in **The Company Charges** for the application. If it is found by the **Public Distribution System Operator(s)** that any work is required on their **Distribution System(s)** (except in the case of an **Application** for a **New Connection Site** located in **Offshore Waters**), then it will be for the **Public Distribution System Operator(s)** and the **Applicant** to reach agreement in accordance with Paragraph 6.10.3 of the **CUSC**;
  - or
  - (b) for **The Company** to share with the **Competent Authority** information from the application relevant in the consideration of control of qualifying assets under (and as defined in) the National Security and Investment Act 2021.
9. In accordance with Paragraph 6.30.3 of **CUSC** **The Company** will need to disclose details of **Bilateral Agreements** entered into and shall need authorisation from the **Applicant** in respect of this.
10. If the **Applicant** is not already a **CUSC Party** the **Applicant** will be required as part of this application form to undertake that they will comply with the provisions of the **Grid Code** for the time being in force. Copies of the **Grid Code** and the **CUSC** are available on **The Company's Website**<sup>1</sup> and the **Applicant** is advised to study them carefully. **Data** submitted pursuant to this application shall be deemed submitted pursuant to the **Grid Code**.
-

11. **The Company's Offer** will be based upon its standard form terms of **Connection Offer** and the **Charging Statements** issued by **The Company** under conditions E10 and E11 of the **ESO Licence**. The **Applicant** should bear in mind **The Company's** standard form terms of **Offer** when making this application. In the case of **The Company's Offer** for a **New Connection Site** located in **Offshore Waters**, the **Offer** will identify the **Onshore Construction Works** based on specified assumptions about the **Offshore Construction Works** and these assumptions will be set out in the **Offer** but (subject to paragraph 24) the **Offshore Construction Works** will not be identified at that stage.
  
12. In particular, and subject to paragraphs 24 – 27 below **The Company** prepares **Offers** upon the basis that each party will design, construct, install, control, operate and maintain, in the case of the **User**, the **Plant** and **Apparatus** which they will own and, in the case of **The Company**, **Transmission Plant** and **Transmission Apparatus** usually but not necessarily applying the ownership rules set out in Paragraph 2.12 of the **CUSC** (Principles of Ownership). If the **Applicant** wishes **The Company** to carry out any of these matters on the **Applicant's** behalf (including where, should the **Transmission** substation at which the **Applicant** is to be connected be of a **Gas Insulated Switchgear** design, the **Applicant** would wish that **The Company** undertake the works but subsequently transfer the **Gas insulated Switchgear** to the **Applicant**) please contact **The Company** for further details.
  
13. **Applicants** of a type set out in **Grid Code** CC 8.1, Generators and DC Converter Station Owners, should appreciate that they will be required to perform **Mandatory Ancillary Services** to ensure that System Operational Standards can be achieved. This requirement may have implications towards **Plant** specification. You should be satisfied that before an application is made that your intended **Plant** design can meet the requirements.
  
14. **Applicants** have the option to request a **Connection Offer** on the basis of a **Design Variation**. In requesting such an **Offer**, the **Applicant** acknowledges that the connection design (which provides for connection to the **National Electricity Transmission System**) will fail to satisfy the deterministic criteria detailed in paragraphs 2.5 to 2.13 or 7.7 to 7.19, as

appropriate, of the **NETS SQSS**. In making such an **Offer**, in accordance with its obligations under Paragraphs 2.13.3 and 2.13.8 or 2.13.12 of **CUSC**, **The Company** may include **Restrictions on Availability**. If **Applicants** require further assistance on this option they are recommended to contact **The Company** before completing this application form.

15. **The Company** will include **Offshore Restrictions on Availability** in any **Offer** made for **New Connection Sites** located in **Offshore Waters** which meet the **Offshore Standard Design and Design Variation** but not where the design is of a standard equivalent to or higher than the deterministic criteria detailed in paragraphs 2.5 to 2.13 of the **NETS SQSS**.
  
16. In the case of **New Connection Sites** located in **Offshore Waters** the **Offer** will be based on an assumption of connection to an **Offshore Transmission System** rather than an **ET Offshore Transmission System**. Consideration may be given as to whether the connection should be to an **ET Offshore Transmission System** and as a result it may be necessary for **The Company** to consult the appropriate **Public Distribution System Operator(s)**. Where the **New Connection Site** is to be connected to an **ET Offshore Transmission System** this will be reflected in the variations to the **Bilateral Connection Agreement** and **Construction Agreement** referred to in **CUSC** Paragraph 2.13.10. The **Company** will include **ET Restrictions on Availability** in any **Offer** made for **New Connection Sites** located in **Offshore Waters** which are connected or to be connected to an **ET Offshore Transmission System**.
  
17. The **Applicant** has the ability to pay a fixed price application fee in respect of their application or pay the actual costs incurred (variable price application fee). The fixed price application fee is derived from analysis of historical costs of similar applications. The variable price application fee is based on an advance of the Transmission Licensee's Engineering and out of pocket expenses and will vary according to the size of the scheme and the amount of work involved. The **Applicant** is requested to indicate their preferred basis of application fee in Section A question 5. The **Applicant** is advised that further information can be obtained from the **Charging Statements** which can be found on **The Company's Website**.

18. **The Company** will provide an **Offer** based upon the National Electricity Transmission System Security and Quality of Supply Standards (NETS SQSS). The criteria presented in the NETS SQSS represent the minimum requirements for the planning and operation of the **National Electricity Transmission System**. The NETS SQSS allows for a generation or demand **Applicant** to request a variation to the connection design. For example, such a connection design variation may be used to take account of the particular characteristics of a power station, the nature of connection of embedded generation or particular load cycles.
19. Any variation to connection design must not reduce the security of the MITS (Main Interconnected Transmission System) to below the minimum planning standard, result in any additional costs to any particular customer and compromise a transmission licensee's ability to meet other statutory obligations or licence obligations. Further details of these conditions and standards can be found on **The Company's Website**.
20. **Applicants** in respect of **New Connection Sites** located in **Offshore Waters** should be aware that their **Connection** will be dependent on the appointment of an **Offshore Transmission Owner** in respect of such **Connection Site** by the **Authority**. **Applicants** should indicate their earliest date for entry into the **Offshore Tender Process** as part of their **Connection Application**.
21. Entry into the **Offshore Tender Process** is conditional on the **Applicant** having procured the appropriate lease(s) from the Crown Estate or Crown Estate Scotland or having secured an appropriate option on such lease or leases. **Applicants** should provide evidence of such leases or options as part of this **Application** or evidence reasonably satisfactory to **The Company** that such leases or options will be obtained prior to the **Applicant's** desired entry date into the **Offshore Tender Process**.
22. **Applicants** in respect of **New Connection Sites** located in **Offshore Waters** should also be aware that except where the **Offshore Construction Works** are being progressed as **Offshore Transmission System Development User Works** the **Onshore Construction Works** will not generally be progressed in advance of the outcome of the **Offshore Tender Process** and acceptance of the variations envisaged in **CUSC** Paragraph 2.13.10. There may be some occasions however where **The**

**Company** considers it better for specific elements of the **Onshore Construction Works** to be undertaken earlier and where this is the case this will be specified in the **Construction Agreement**. **The Company** may also consider a request to undertake specific elements of the **Onshore Construction Works** such as engineering design and preliminary consents works subject to agreement of terms to cover this situation.

23. **Applicants** in respect of **New Connection Sites** located in **Offshore Waters** should indicate at Section A if they are not interested in undertaking **Offshore Transmission System Development User Works**. In such case the **Onshore Construction Works** will be based on assumptions about the **Offshore Construction Works** and these assumptions will be set out in the **Construction Agreement**. The **Offshore Construction Works** will not themselves be identified at that time.
24. The **OTSDUW Arrangements** allow the **Applicant** to undertake **Offshore Transmission System Development User Works** that is: activities and works in respect of the **Offshore Construction Works** which would otherwise be undertaken by an **Offshore Transmission Licensee**.
25. Whilst not compulsory, and recognising that until the **Applicant** receives the **Offer** it will not have received the assumptions referred to in paragraph 11, the **Applicant** may wish to indicate the scope of the **Offshore Transmission Development User Works** that it is interested in undertaking.
26. Any **Offer** made to the **Applicant** in respect of **New Connection Sites** located in **Offshore Waters** (other than an **Applicant** who has indicated at Section A that they are not interested in undertaking **Offshore Transmission System Development User Works**) will be made on the basis of the **OTSDUW Arrangements** and, unless the **Applicant** has requested otherwise, the **Construction Agreement** will be framed on the basis of **OTSDUW Build** although this can be reviewed prior to acceptance. The scope and extent of the **Offshore Transmission System User Assets** and the **Offshore Transmission System Development User Works** will be considered and agreed prior to acceptance.

27. **Applicant's** should note that any assets resulting from the **OTSDUW Build** will not be available for use for the purposes of transmission (except during the **OTSUA Commissioning Period**) until they have been transferred to an **Offshore Transmission Licensee**.
28. Please complete this application form in black print and return it together with the appropriate application fee to **The Company**. In addition to returning the application form to the Customer Services Manager an electronic copy of the application form may be e-mailed to **The Company**.
29. For the most up to date contact details applicants are advised to visit **The Company's Website**.

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION A. DETAILS OF APPLICANT (in respect of this application)

1. Registered Company

Name:.....

Address (of Registered Office in the case of a Company)

.....

.....

.....

Company Number:.....

Parent Company Name (if applicable):.....

2. Company Secretary or person to receive CUSC notices

Name:.....

Email:.....

Telephone:.....

3. Commercial Contact/Agent (person to receive Offer if different from Company Secretary or person to receive CUSC notices identified in 2 above)

Name:.....



## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

Title:.....

Address:.....

.....

.....

Email:.....

Telephone:.....

4. Please confirm whether you agree to us sending the **Offer** in electronic form instead of hard copy and, if so, confirm the address for this as follows.

Yes [ ]

No [ ]

Email address .....

5. Please identify which application fee basis you wish to use for this application.

Fixed price application fee [ ]

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

Variable price application fee [ ]

6. If this is an application for connection to the **National Electricity Transmission System Onshore** in England and Wales please complete 6a. If this is an application for connection to the **National Electricity Transmission System Onshore** in Scotland please complete 6b.

- 6a. Have you made any applications for connection to the **National Electricity Transmission System Onshore** in Scotland which are being processed prior to **Offer** by **The Company** or where an **Offer** has been made that **Offer** has not yet been accepted by you but remains open for acceptance?

If so, are such applications intended as alternatives to this one i.e. you intend to choose which of this or those other applications to proceed with on the basis of the offer made.

Yes – please list the applications.

.....  
.....

No [ ]

Not sure [ ]

(**The Company** will contact you to clarify)

- 6b. Have you made any applications for connection to the **National Electricity Transmission System Onshore** in England and Wales which are being processed prior to **Offer** by **The Company** or where an **Offer** has been made that **Offer** has not yet been accepted by you but remains open for acceptance?

If so, are such applications intended as alternatives to this one i.e. you intend to choose which of this or those other applications to proceed with on the basis of the offer made.

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

Yes – please list the applications.

.....  
.....

No        ☐ ☐

Not sure   ☐ ☐ (The Company will contact you to clarify)

7.     Where the **New Connection Site** is located in **Offshore Waters** please complete the confirmation below if you are not interested in undertaking **Offshore Transmission Development User Works**.

Confirm   ☐ ☐

# APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

## SECTION B. THE PROPOSED POINT OF CONNECTION

1. Please identify (preferably by reference to an extract from an Ordnance Survey Map for **Onshore** locations, or with the latitude and longitude or some other corresponding equivalent for **Offshore** locations) the intended location (the “**Connection Site**”) of the **Plant** and **Apparatus** (the “**User Development**”) which it is desired should be connected to the **National Electricity Transmission System** and where the application is in respect of a proposed **New Connection Site** other than at an existing sub-station. Please specify the proposed location and name of the **New Connection Site** (which name should not be the same as or confusingly similar to the name of any other **Connection Site**) together with details of access to the **Connection Site** including from the nearest main road.

.....

.....

.....

2. Please provide a plan or plans of the proposed **Connection Site** indicating (so far as you are now able) the position of all buildings, structures, **Plant** and **Apparatus** and of all services located on the **Connection Site**.

.....

.....

.....

.....

3. Give details of the intended legal estate in the **Connection Site** (to include leasehold and freehold interests and in the case of **Connection Sites** in Scotland legal interests and heritable or leasehold interests

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

including servitudes or other real rights and in the case of **Connection Sites** located **Offshore** leaseholds granted by the Crown Estate) in so far as you are aware.

.....  
.....  
.....

4. Who occupies the **Connection Site** in so far as you are aware?

.....  
.....

5. If you believe that a new sub-station will be needed, please indicate by reference to the plan referred to in Section B question 2 above the **Applicant's** suggested location for it - giving dimensions of the area.

.....  
.....

6. If you are prepared to make the land necessary for the said sub-station available the **Relevant Transmission Licensee** for **New Connection Sites** Onshore or Offshore, make the land or Offshore, make the land or Offshore Platform available to the Relevant Transmission Licensee ` please set out brief proposals for their interest in it including (if relevant) such interest and the consideration to be paid for it.

.....

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

- .....
7. Is space available on the **New Connection Site** for working storage and accommodation areas for the contractors of the Relevant Transmission Licensee? If so, please indicate by reference to the plan referred to in Section B question 2 above the location of such areas, giving the approximate dimensions of the same.

.....

.....

.....

8. For **Connection Sites** located **Onshore**, please provide details (including copies of any surveys or reports) of the physical nature of land in which you have a legal estate or legal interest at the proposed **Connection Site** including the nature of the ground and the sub-soil.

.....

.....

9. Please give details and provide copies of all existing relevant planning and other consents (statutory or otherwise) relating to the **Connection Site** and the **User Development** and/or details of any pending applications for the same.

.....

.....

10. Is access to or use of the **Connection Site** for the purposes of installing, maintaining and operating **Plant** and **Apparatus** subject to any existing restrictions? If so, please give details.

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND  
SIGNING THIS APPLICATION FORM

.....

.....

.....

.....

11. If you are aware of them, identify by reference to a plan (if possible) the owners and (if different) occupiers of the land adjoining the **Connection Site**. To the extent that you have information, give brief details of the owner's and occupier's estates and/or interests in such land.

.....

.....

.....

12. If the **New Connection Site** is located in **Offshore Waters**, please indicate of the earliest date for entry of this project into the **Offshore Tender Process**. If no date is provided it will be assumed to be for entry into the first **Offshore Tender Process** following acceptance of the **Offer**.

.....

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION C. TECHNICAL INFORMATION

1. Summary of Application (brief description of plant to be connected):  
.....  
.....  
.....

2. Please provide full details of the proposed application together with the relevant **Standard Planning Data** as listed in Part 1 of the appendix to the **Planning Code** which are applicable to you. Note: the data concerned forms part of the **Planning Code** and **Data Registration Code**. **Applicants** should refer to these sections of the **Grid Code** for an explanation.

3. Please provide a copy of your **Safety Rules** if not already provided to **The Company**.

Included [ ]

Already provided [ ]

Will be provided later [ ]

4. Please indicate if your plant may be able to provide (or you could consider providing) the following technical capability):-

a. Generation from Auxiliary Units (Reserve Services) [ ]

b. Spinning Generation [ ]

c. Fast Start capability [ ]



## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

- d. Frequency Response above Mandatory requirements [ ]
- e. Demand Reduction / Management [ ]
- f. Reactive capability above Mandatory requirements [ ]
- g. Synchronous Compensation [ ]
- h. Black Start Capability [ ]
- i. Emergency Maximum Generation [ ]
- j. Intertrip [ ]
- k. Other (please detail below) [ ]

.....

.....

**The Company's Website<sup>5</sup>** provides more information on the terms it offers for such technical capability.

5. Please confirm your intended **Connection Entry Capacity** (MW)

**Connection Site** [ ]

**Generating Unit(s)** (if applicable)

**Generating Unit 1** [ ]

**Generating Unit 2** [ ]

**Generating Unit 3** [ ]

**Generating Unit 4** [ ]

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

Details of additional **Generating Units** are to be provided here

6. Please state the required **Transmission Entry Capacity**.....MW

7. Please confirm if:

- a. You would like an offer that is compliant with the deterministic criteria detailed, in the case of **Onshore Connection Sites**, in paragraphs 2.5 to 2.13 and, in the case of **Offshore Connection Sites**, in paragraphs 7.7 to 7.19 of the NETS **SQSS**

YES/NO

and/or

- b. You would like an offer on the basis of a **Design Variation**.

YES/NO

If yes, please provide any information relevant to such an offer below:

.....

.....

.....

If yes, please confirm if you require information from **The Company** in relation to the probability of **Notification of Restrictions on Availability** being issued.

YES/NO

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

8. Do you wish to suggest an ownership boundary different from that set out in CUSC Paragraph 2.12?

Yes [ ]

No [ ]

If yes please give details:.....

.....  
.....  
.....

9. Please confirm which ownership boundary at **CUSC** Paragraph 2.12.1 (f) you would want in the event that the **Transmission** substation at which the **Applicant** is to be connected is to be of a **Gas Insulated Switchgear** design:

(a) **CUSC** Paragraph 2.12.1 (f) (i) [ ]

(b) **CUSC** Paragraph 2.12.1 (f) (ii) [ ]

Please note that in the case where the ownership boundary is in accordance with **CUSC** Paragraph 2.12.1 (f) (i) restrictions on availability as described within **CUSC** Schedule 2 Exhibit 1 will apply in the event of a **GIS Asset Outage**.

10. Are you considering building any assets that would be identified as **Transmission Connection Assets**? If you indicate yes **The Company** will contact you to discuss further details.

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

Yes [ ]

No [ ]

11. For **New Connection Sites** located in **Offshore Waters** please indicate whether you are including any of the following items of additional information alongside your application. **Applicants** should note that though these items are not compulsory **The Company** will supply such information into the **Offshore Tender Process** in order that it may be expedited and may use the information in developing assumptions prior to the identification of **Construction Works** required **Offshore**.

Feasibility Studies [ ]

Crown Estate Lease [ ]

Identified sub-sea cable routes [ ]

Identified cable landing points [ ]

Other (please specify) [ ]

## APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND  
SIGNING THIS APPLICATION FORM

.....

.....

12. **Applicants** should note that for **Generating Units** proposed to be connected to an **Offshore Transmission System** certain requirements in respect of **Reactive Power** capability (contained within the **STC**, Section K and in the case of **Offshore Transmission System Development User Works**, the **Grid Code**) are placed upon the owner of the **Offshore Transmission System**. However the **Grid Code** also permits part or all of this requirement to be met by the **Generating Units** connected to the **Offshore Transmission System** should it be more efficient to do so. In order that an assessment of the most efficient method of providing **Reactive Power** capability may be made by an owner of an **Offshore Transmission System** an **Applicant** for a **New Connection Site** located **Offshore** is required to indicate (where known) the expected **Reactive Power** capability of the **Generating Units** expected to be connected at the **New Connection Site**. Where applicable please also reference in Section C, part 4f above.

.....

.....

.....

.....

.....

# APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

## SECTION D. PROGRAMME

Please provide a suggested development and construction programme in bar chart form for the work necessary to install the **User Development** (not the **Transmission Connection Assets** needing to be installed) indicating the anticipated date when the connection will be required to be made and any other key dates such as back feed date.

If not already included in the above bar chart please provide details of when the **Applicant** expects to be completing the substantive works that lead to the completion of the following phases of the **User Development** or reach the following relevant key milestones below and other additional milestones as necessary (working backwards from expected connection date at 'year 0'). This information is expected to provide the anticipated project overview at the time of application:-

- In the case of a **Connection Site** located in **Offshore Waters**, procurement of Crown Estate lease
- Planning Application Submitted (Town & Country Planning\*, S36,S37)
- Earliest date of entry into the **Offshore Tender Process**
- Planning Consent Awarded
- Plant Ordered (i.e. **Power Station** or substation)
- Construction Started (site mobilisation)
- Construction Completed

# APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

## Notes

- \* The consent for the **User's Power Station** granted under Section 36 of the Electricity Act or planning permission for the **User's Power Station** granted under the Town and Country Planning Act 1990 or any amendment thereto in England and Wales or the Town and Country Planning (Scotland) Act 1997 or any amendment thereto in Scotland.

# APPLICATION FOR A NEW CONNECTION

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

## **SECTION E.** Enabling Works *[Directly Connected Power Station or Distribution System where associated with Distributed Generation only]*

1. We confirm we do not/do want the **Enabling Works** to be greater in scope than the **MITs Connection Works**.
2. If you want the **Enabling Works** to be greater in scope than the **MITs Connection Works** specify the concerns, reasons or technical requirements that you are seeking to address by this.



## CONNECTION APPLICATION

1. We hereby apply to connect our **Plant** and **Apparatus** to the **National Electricity Transmission System** at a **New Connection Site**. We agree to pay **The Company's** Engineering Charges on the terms specified in the **Notes** to the **Connection Application**.
2. We will promptly inform **The Company** of any change in the information given in this application as quickly as practicable after becoming aware of any such change.
3. If we are not already a **CUSC Party** we undertake for the purposes of this application to be bound by the terms of the **Grid Code** from time to time in force and to sign a **CUSC Accession Agreement**.
4. We authorise the release of certain information, on the grounds of commercial confidentiality, to the appropriate **Public Distribution System Operator(s)** or to the **Relevant Transmission Licensee**, or to the **Authority** in order to comply with **The Company's** obligations with respect to the **Offshore Tender Process**, should it be considered necessary.
5. We confirm that we:  
  
meet **The Company Credit Rating** ☐  
do not meet **The Company Credit Rating**. ☐
6. We confirm our agreement to the disclosure in the manner set out in Paragraph 6.30.3 of **CUSC** of the information specified in such Paragraph.
7. We confirm that we are applying in the category of:  
  
**Directly Connected Power Station** ☐

|                                                      |            |
|------------------------------------------------------|------------|
| <b>Non-Embedded Customer</b>                         | <b>[ ]</b> |
| <b>Distribution System Directly Connected to the</b> |            |
| <b>National Electricity Transmission System</b>      | <b>[ ]</b> |

[Please tick correct option].

8. We confirm that this is an application for a:

**Gate 1 Offer** [ ]

**Gate 2 Offer** [ ]

Please tick correct option

9. If this was to be considered by **The Company**, we would/would not be interested in **Reservation**. [delete as appropriate]

SIGNED BY

.....

For and on behalf of the **Applicant**

Date: .....

**END OF EXHIBIT B**

**CUSC - EXHIBIT C**

**THE CONNECTION AND USE OF SYSTEM CODE  
CONNECTION OFFER**

**DIRECTLY CONNECTED POWER STATIONS  
NON EMBEDDED CUSTOMER  
DISTRIBUTION SYSTEM DIRECTLY  
CONNECTED TO THE NATIONAL ELECTRICITY TRANSMISSION SYSTEM**

The Company Secretary

Date: [ ]

Dear XXXXXX

**CONNECTION OFFER - [site] [reference]**

Set out below is our offer for connection [and use of the **National Electricity Transmission System\***] at [site/substation]. Please note that certain expressions which are used in this **Offer** are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

1. **The Company** offers to enter into a **Bilateral Connection Agreement** and **Construction Agreement** covering the **Connection Site**, reference number [ ]. If you are not already a **CUSC Party** you are required to enter into the enclosed **CUSC Accession Agreement**.
2. It is a condition of this **Offer** that (i) you also enter into an **Interface Agreement** covering the **Connection Site** in a form to be agreed between the parties but substantially in the form of Exhibit O of the complete **CUSC** [and (ii) where required by **The Company** you enter into a **Transmission Related Agreement** (*power station with **Design Variation** and/or **Offshore Standard Design** and/or a connection via an **ET Offshore Transmission System** and/or **Non Standard Boundary** only*)].
3. It is a condition of this **Offer** that the **Connection Site** is not a nominated site under the "NAECI" (the National Agreement for the Engineering Construction Industry) conditions and will not become one and any agreement for this site will be conditional upon this. In the event that this condition should not be met, **The Company** will be entitled to revise all the dates and charges contained in the **Bilateral Connection Agreement** and **Construction Agreement**.
4. The technical conditions with which you must comply as a term of this **Offer** are set out in the **Grid Code**. Additional technical conditions are set out in the Appendices to the **Bilateral Connection Agreement**. It is your responsibility to ensure that your equipment complies with the requirements of the relevant conditions.
5. This **Offer** is open for acceptance according to the terms of Paragraph 2.13 of the **CUSC** and the **ESO Licence**. Please note your right to make an application to the **Authority** to settle the terms of the offer pursuant to condition E13 of the **ESO Licence**.
6. [Please note the provisions of Paragraph 6.10.4 of the **CUSC** in respect of interactive offers which, inter alia, allows **The Company** to vary the

\* Delete if connection only.

---

terms of this **Offer** if a **Connection** or **Modification Offer**, which interacts with this **Offer**, is accepted first. In terms of Paragraph 6.10.4 of the **CUSC**, **The Company** will advise you of another offer being made by **The Company**, which may interact with your **Offer**. *Delete if **Offer** is a **Gated Offer***

7. Please note that in accordance with the obligation in Paragraph 1.3.3 of the **CUSC** a **Mandatory Services Agreement** must be entered into not later than 6 months (or such lesser time as may be agreed) prior to the expected **Commissioning Programme Commencement Date**.
8. In the case of **New Connection Sites** located in **Offshore Waters** this **Connection Offer** identifies the **Onshore Construction Works**. These are based on assumptions about the **Offshore Construction Works**. The assumptions are set out in the **Construction Agreement** but the **Offshore Construction Works** are not themselves be identified at this time. Please note that the **Construction Programme** assumes a date by which the **Offshore Transmission Owner** will be appointed and will be amended should this date not be met.
9. This **Offer** in respect of **New Connection Sites** located in **Offshore Waters** has been prepared on the basis that you wish to undertake **OTSDUW Build**). The **Offer** assumes (unless you have advised us of the extent of the **Offshore Transmission System Development User Works** that you wish to undertake) that these are the works (and the activities associated with them) required to deliver a connection from the **Offshore Grid Entry Point** to the **Onshore Transmission System** at the **Transmission Interface Point** based on the assumptions set out in the **Construction Agreement** although this can be reviewed.
10. Should you wish to revise the nature or extent of the **Offshore Transmission System Development User Works** that you wish to undertake prior to acceptance of the **Offer** please advise us as soon as practicable as to your intentions.] *[clause 9 and 10 will be included in your connection offer unless you have have indicated in your connection application that you are not interested in undertaking OTSDUW.]*
11. To accept this **Offer**, please sign (and where issued by email, having printed off 2 copies of each) and return the originals of the [**CUSC Accession Agreement** and] **Bilateral Connection Agreement** [**Construction Agreement**] attached to this **Offer** as Sections A. **The Company** will then itself countersign these agreements and one original of each will be returned to you for your retention. The agreements are

only effective in accordance with their terms once they have been countersigned by **The Company**.

12. All communications in relation to this **Offer** must, in the first instance, be directed to [description].

[13 This **Offer** is made on the basis of the **Connect and Manage Arrangements** [except that as requested the **Enabling Works** are greater in scope than the **MITS Connection Works**] *[Directly Connected Power Station or Distribution System where associated with Distributed Generation only]*

14. This is a [[**Gate 1 Offer**] [with] [without] **Reservation**]] [**Gate 2 Offer**] for the purposes of the **Gated Application and Offer Process**.

Yours faithfully

for and on behalf of  
National Energy System Operator Limited

**SECTION A**  
**FORM OF BILATERAL CONNECTION AGREEMENT**  
**AND CONSTRUCTION AGREEMENT**  
**[AND CUSC ACCESSION AGREEMENT]**

**END OF EXHIBIT C**

**CUSC - EXHIBIT D**

**THE CONNECTION AND USE OF SYSTEM CODE**

**USE OF SYSTEM APPLICATION**

**EMBEDDED GENERATOR**

**DISTRIBUTION INTERCONNECTOR OWNER**

**SMALL POWER STATION TRADING PARTY**



**PLEASE STUDY THE FOLLOWING NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM.**

Please note that certain expressions which are used in this application form are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold. If the **Applicant** has any queries regarding this application or any related matters then the **Applicant** is recommended to contact **The Company**<sup>1</sup> where our staff will be pleased to help.

1. **The Company** requires the information requested in this application form for the purposes of preparing an **Offer** (the "**Offer**") to enter into an agreement for use of the **National Electricity Transmission System**. It is essential that the **Applicant** should supply all information requested in this application form and that every effort should be made to ensure that such information should be accurate. Please note that in the case of a **Gated Application** under the **Gated Application and Offer Process** you can apply for a **Gate 1 Offer** or **Gate 2 Offer** and confirmation of which type of **Offer** you are applying for is required.
2. Where **The Company** considers that any information provided by the **Applicant** is incomplete or unclear, or further information is required, the **Applicant** will be requested to provide further information or clarification. The provision/clarification of this information may impact on **The Company's** ability to commence preparation of an **Offer**.
3. Should there be any change in the information provided by the **Applicant** immediately inform **The Company** of such a change. Where this is a change in the information provided for Sections B to D then the **Applicant** should inform **The Company** to see if such a change can be accommodated as it is unlikely that material changes could be accommodated. If **The Company** cannot accommodate such a change bearing in mind the timescales within which the **Offer** must be made then the application will be processed on the original information although it is open to the **Applicant** to withdraw the application.
4. **The Company** shall charge the **Applicant**, and the **Applicant** shall pay to **The Company**, **The Company's** Engineering Charges in relation to the application. A fee will be charged by **The Company** in accordance with the **Charging Statements**. No application will be considered until such payment has been received.
5. The effective date upon which the application is made shall be the later of the date when **The Company** has received the application fee pursuant to Paragraph 4 above or the date when **The Company** is reasonably satisfied that the **Applicant** has completed Sections A-D. **The Company** shall notify the **Applicant** of such date. Please note the additional requirements for a **Gate 2 Application** under the **Gated Application and Offer Process** at **CUSC** Section 17. Also note that whilst a **Distribution EG Related Application** is not necessary for progressing a **Gate 1 Application** or for the making of a **Gate 1 Offer** a **Gate 2 Application** will only be progressed in a **Gated Application and Offer Run** where the **Distribution EG Related Application** is also effective in the **Gate 2 Application Window** for that **Gated Application and Offer Run**.

**The Company** will make the **Offer** in accordance with the terms of Paragraph 3.7 (**Use of System Application**) and Paragraph 6.10 (**Modifications and New Connection Sites**) of the **CUSC** and the **ESO Licence**.

7. **The Company** will make the **Offer** (a) if it is not a **Gated Offer** under the **Gated Application and Offer Process**, as soon as is reasonably practicable and, in any event, within 28 days of the effective date of the application or such later period as the **Authority** agrees to and (b) if it is a **Gated Offer**, in accordance with the **Gated Application and Offer Process** or such later period as the **Authority** agrees to. The **Offer** may, where it is necessary to carry out additional extensive system studies to evaluate more fully the impact of the proposed development, indicate the areas that require more detailed analysis. Before such additional studies are required, the **Applicant** shall indicate whether it wishes **The Company** to undertake the work necessary to proceed to make a revised **Offer** within, if it is not a **Gated Offer** under the **Gated Application and Offer Process** the 28 days period or, where it is a **Gated Offer** under the **Gated Application and Offer Process**, within the timescales for a Gate 2 Offer set out in the Timetable for the **Gated Application and Offer Process** or, where relevant the timescale consented to by the **Authority**. To enable **The Company** to carry out any of the above mentioned necessary detailed system studies the **Applicant** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in Part 2 of the Appendix to the **Planning Code** which is part of the **Grid Code**.
8. In the course of processing your application, it may be necessary:
  - (a) for **The Company** to consult the appropriate **Public Distribution System Operator(s)** on matters of technical compatibility of the **National Electricity Transmission System** with their **Distribution System(s)** or to consult the **Relevant Transmission Licensees** to establish the works required on the **National Electricity Transmission System**. On grounds of commercial confidentiality **The Company** shall need your authorisation to the release to the **Public Distribution System Operator(s)** or the **Relevant Transmission Licensees** of certain information contained in your application. Any costs incurred by **The Company** in consulting the **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** would be included in **The Company Charges** for the application. If it is found by the **Public Distribution System Operator(s)** that any work is required on their **Distribution System(s)**, then it will be for the **Public Distribution System Operator(s)** and the **Applicant** to reach agreement in accordance with Paragraph 6.10.3 of the **CUSC**; or
  - (b) for **The Company** to share with the **Competent Authority** information from the application relevant in the consideration of control of qualifying assets under (and as defined in) the National Security and Investment Act 2021.
9. In accordance with 6.30.3 of **CUSC** **The Company** will need to disclose details of the **Bilateral Embedded Generation Agreement** entered into and shall need authorisation from the **Applicant** in respect of this.

10. If the **Applicant** is not already a **CUSC Party** the **Applicant** will be required as part of this application form to undertake that he will comply with the provisions of the **Grid Code** for the time being in force. Copies of the **Grid Code** and the **CUSC** are available on **The Company's Website** and the **Applicant** is advised to study them carefully. **Data** submitted pursuant to this application shall be deemed submitted pursuant to the **Grid Code**.
11. **The Company's Offer** will be based to the extent appropriate upon its standard form terms for **Use of System Offer** and the **Charging Statements** issued by **The Company** under conditions E10 and E11 of the **ESO Licence**. The **Applicant** should bear in mind **The Company's** standard form terms of **Offer** when making this application.
12. In particular please note that **The Company** may require as a condition of the **Offer**, that the **Applicant's Plant** or **Apparatus** should meet or provide some or all of the technical requirements set out in the Appendices of the draft **Bilateral Embedded Generation Agreement** attached to **The Company's** standard form terms of **Offer** and may propose that the **Applicant's Plant** or **Apparatus** should have the capability to provide **Mandatory Ancillary Services**.
13. As provided for in **Grid Code** CC8.1 Generators and DC Converter station owner should appreciate that they will be required to perform **Mandatory Ancillary Services** to ensure that System Operational Standards can be achieved. This requirement may have implications towards plant specification. You should be satisfied before an application is made that your intended plant design can meet the requirements.
14. **The Applicant** has the ability to pay a fixed price application fee in respect of their application or pay the actual costs incurred (variable price application fee). The fixed price application fee is derived from analysis of historical costs of similar applications. The variable price application fee is based on an advance of the Transmission Licensee's Engineering and out of pocket expenses and will vary according to the size of the scheme and the amount of work involved. The **Applicant** is requested to indicate their preferred basis of application fee in Section A question 4. The **Applicant** is advised that further information can be obtained from the **Charging Statements** which can be found on **The Company's Website**<sup>3</sup>.
15. **Applicants** have the option to request a **Connection Offer** on the basis of a **Design Variation**. In requesting such an **Offer**, the **Applicant** acknowledges that the connection design (which provides for connection to the **National Electricity Transmission System**) will fail to satisfy the deterministic criteria detailed in paragraphs 2.5 to 2.13 of the **NETSSQSS**. In making such an **Offer**, in accordance with its obligations under Paragraphs 2.13.2 and 2.13.7 of **CUSC**. **The Company** may include **Restrictions on Availability**. If **Applicants** require further assistance on this option they are recommended to contact **The Company** before completing this application form.

16. Please complete this application form in black print and return it together with the appropriate application fee to The Company. In addition to returning the application to the Customer Services Manager an electronic form may be e-mailed to **The Company**.
17. For the most up to date contact details applicants are advised to contact **The Company Website**.

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION A. DETAILS OF APPLICANT (in respect of this application)

1. **Registered Company**

Name:

Address (of Registered Office in the case of a Company):

.....

.....

.....

Company Number:

Parent Company Name (if applicable):

2. **Company Secretary or person to receive CUSC notices**

Name:

Email:

Telephone:

F            a            x            :

3. **Commercial Contact/Agent (person to receive Offer if different from  
Company Secretary or person to receive CUSC notices identified in  
2 above)**

Name:

Title:

Address:

.....

.....

Email:

Telephone:

F            a            x            :

## APPLICATION FOR USE OF SYSTEM

**PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM**

4. Please identify which application fee basis you wish to use for this application.

Fixed application fee ☐

Variable application fee ☐

5. If this is an application for connection to the **National Electricity Transmission System** in England and Wales please complete 5a. If this is an application for connection to the **National Electricity Transmission System** in Scotland please complete 5b.

- 5a Have you made any applications for connection to the **National Electricity Transmission System** in Scotland which are being processed prior to **Offer** by **The Company** or where an **Offer** has been made that **Offer** has not yet been accepted by you but remains open for acceptance?

If so, are such applications intended as alternatives to this one i.e. you intend to choose which of this or those other applications to proceed with on the basis of the offer made.

Yes – please list the applications.

.....  
.....

No ☐

Not sure ☐

(**The Company** will contact you to clarify)

- 5b Have you made any applications for connection to the **National Electricity Transmission System** in England and Wales which are being processed prior to **Offer** by **The Company** or where an **Offer** has been made that **Offer** has not yet been accepted by you but remains open for acceptance?

If so, are such applications intended as alternatives to this one i.e. you intend to choose which of this or those other applications to proceed with on the basis of the offer made.

Yes – please list the applications.

.....  
.....

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

No ☐

Not sure ☐

**(The Company** will contact you to clarify)

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION B: THE PROPOSED SITE OF CONNECTION TO A DISTRIBUTION SYSTEM

1. Please identify (preferably by reference to an extract from Ordnance Survey Map) the intended location of the **Plant** and **Apparatus** (the "User Development") which it is desired should be connected to the **Distribution System**.

.....

.....

.....

2. If you believe that a new sub-station will be needed, please indicate by reference to a plan your suggested location for it.

.....

.....

.....



## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION C. TECHNICAL INFORMATION

1. Summary of Application (brief description of plant to be connected):  
.....  
.....
2. Please provide the data listed in Part 1 of the Appendix to the **Planning Code** which are applicable to you. Note: the data concerned forms part of the **Planning Code** and **Data Registration Code**. **Applicants** should refer to these sections of the **Grid Code** for an explanation. Further guidance is available from **The Company** on request.
3. Please provide a copy of your **Safety Rules** if not already provided to **The Company**.  

|                        |                          |
|------------------------|--------------------------|
| Included               | <input type="checkbox"/> |
| Already provided       | <input type="checkbox"/> |
| Will be provided later | <input type="checkbox"/> |
4. Please indicate if your plant may be able to provide (or you could consider providing) the following technical capability:-
  - a. Generation from Auxiliary Units (Reserve Services) ☐
  - b. Spinning Generation ☐
  - c. Fast Start capability ☐
  - d. Frequency Response above Mandatory requirements ☐
  - e. Demand Reduction / Management ☐
  - f. Reactive capability above Mandatory requirements ☐
  - g. Synchronous Compensation ☐
  - h. Black Start Capability ☐
  - i. Emergency Maximum Generation ☐
  - j. Intertrip ☐
  - k. Other (please detail below) ☐

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

.....

.....

**The Company's Website** provides more information on the terms it offers  
for such technical capability.

5. Please state the required **Transmission Entry Capacity**.....MW

5. Please confirm if:

a. You would like an offer that is compliant with the deterministic criteria  
detailed in paragraphs 2.5 to 2.13 of the **National Electricity  
Transmission System** SQSS YES/NO

and/or

b. You would like an offer on the basis of a Design Variation  
YES/NO

If yes, please provide any information relevant to such an offer below.

.....

.....

.....

If yes, please confirm if you require information from The Company  
~~in relation to the probability~~ of Notification of Restrictions on

## **APPLICATION FOR USE OF SYSTEM**

**PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM**

Availability being issued YES/NO

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

### SECTION D. PROGRAMME

Please provide a suggested development and construction programme in bar chart form for the work necessary to install the **User Development** indicating the anticipated date when the connection will be required to be made and any other key dates such as back feed date.

If not already included in the above bar chart please provide details of when the **Applicant** expects to be completing the substantive works that lead to the completion of the following phases of the **User Development** or reach the following relevant key milestones below and other additional milestones as necessary (working backwards from expected connection date at 'year 0'). This information is expected to provide the anticipated project overview at the time of application:-

- Planning Application Submitted (Town & Country Planning\*, S36,S37)
- Planning Consent Awarded
- Plant Ordered (i.e. **Power Station** or substation)
- Construction Started (site mobilisation)
- Construction Completed

#### Notes

- \* The consent for the **User's Power Station** granted under Section 36 of the Electricity Act or planning permission for the **User's Power Station** granted under the Town and Country Planning Act 1990 or any amendment thereto in England and Wales or the Town and Country Planning (Scotland) Act 1997 or any amendment thereto in Scotland.

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

### Section E. ENABLING WORKS [EXCEPT *DISTRIBUTION* *INTERCONNECTOR OWNER*]

1. We confirm we do not/do want the **Enabling Works** to be greater in scope than the **MIT S Connection Works**.
2. If you want the **Enabling Works** to be greater in scope than the **MIT S Connection Works** specify the concerns, reasons or technical requirements that you are seeking to address by this.

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM

### USE OF SYSTEM APPLICATION

Please study the notes before completing and signing this application form.

1. We hereby apply to use the **National Electricity Transmission System** from our connection to [                      ] **Distribution System**.
2. We will promptly inform **The Company** of any change in the information given in this application as quickly as practicable after becoming aware of any such change.
3. If we are not already a **CUSC Party** we undertake for the purposes of this application to be bound by the terms of the **Grid Code** from time to time in force and to sign a **CUSC Accession Agreement**.
4. We authorise the release of certain information, on the grounds of commercial confidentiality, (a) to the appropriate **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** should it be considered necessary and (b) to the **Competent Authority** relevant in the consideration of control of qualifying assets under (and as defined in) the National Security and Investment Act 2021.
5. We confirm that we do/do not meet the **Approved Credit Rating** [and **The Company Credit Rating**].
6. We confirm our agreement to the disclosure in the manner set out in Paragraph 6.30.3 of **CUSC** of the information specified in such Paragraph.
7. We confirm that we are applying in the category of :

|                                          |                          |
|------------------------------------------|--------------------------|
| <b>Embedded Generator</b>                | <input type="checkbox"/> |
| <b>Distribution Interconnector Owner</b> | <input type="checkbox"/> |
| <b>Small Power Station Trading Party</b> | <input type="checkbox"/> |

[Please tick correct option].

8. We confirm that this is an application for a:

|                     |                          |
|---------------------|--------------------------|
| <b>Gate 1 Offer</b> | <input type="checkbox"/> |
| <b>Gate 2 Offer</b> | <input type="checkbox"/> |

Please tick correct option

9. Where the **Application** is in respect of a **Large Embedded Generator**, if this was to be considered by **The Company**, we would/would not be interested in **Reservation**. [delete as appropriate]

SIGNED BY:

For and on behalf of the **Applicant**

Date:

**END OF EXHIBIT D**

**CUSC – EXHIBIT E**

**THE CONNECTION AND USE OF SYSTEM CODE**

**USE OF SYSTEM OFFER**

**EMBEDDED GENERATOR  
DISTRIBUTION INTERCONNECTOR OWNER  
SMALL POWER STATION TRADING PARTY**



The Company Secretary

Date: [                      ]

Dear XXXXXX

**USE OF SYSTEM OFFER**  
**[SITE OF CONNECTION] [REFERENCE]**

Set out below is our offer for use of the **National Electricity Transmission System** at [site/substation]. Please note that certain expressions which are used in this **Offer** are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

- 1     **The Company** offers to enter into a **Bilateral Embedded Generation Agreement** [and **Construction Agreement**] reference number [                      ] in the form and terms attached as Section A.
- 2     It is a condition of this offer that:
  - (i)    if not already a **CUSC** Party you enter into a **CUSC Accession Agreement**;
  - (ii)   you satisfy **The Company** that you have entered into a **Distribution Agreement** with the owner/operator of the **Distribution System** for the connection of the **User's Plant** to and the use of such **Distribution System**;
  - [(iii) where required by **The Company** that you enter into a **Transmission Related Agreement** (*power station with **Design Variation** only*)]
- 3     The technical conditions with which you must comply as a term of this offer are set out in the **Grid Code**. Additional or different technical conditions are set out in the Appendices to the **Bilateral Embedded Generation Agreement**. It is your responsibility to ensure that your equipment complies with the requirements of the relevant conditions.
- 4     This offer is open for acceptance according to the terms of Paragraph 3.7.4 of the **CUSC** and the **ESO Licence**. Please note your right to make an application to the **Authority** to settle the terms of the offer pursuant to condition E13 of the **ESO Licence**.
- [5    Please note the provisions of Paragraph 6.10.4 of the **CUSC** in respect of interactive offers which, inter alia, allows **The Company** to vary the terms of this **Offer** if a **Connection** or **Modification Offer**, which

interacts with this **Offer**, is accepted first. In terms of Paragraph 6.10.4 of the **CUSC**, **The Company** will advise you of another offer being made by **The Company**, which may interact with your **Offer**. *Delete if **Offer** is a **Gated Offer***

- 6 To accept this offer, please sign (and where issued by email, having printed off 2 copies of each) and return the originals of the **Bilateral Embedded Generation Agreement** [and **CUSC Accession Agreement**] [and **Construction Agreement**] attached to this offer as Section A. **The Company** will then itself execute the Agreements and one original of each will be returned to you for your retention. The Agreements are only effective in accordance with their terms once they have been countersigned by **The Company**.
- 7 All communications in relation to this **Offer** should, in the first instance, be directed to [Description].
- 8 [This **Offer** is made on the basis of the **Connect and Manage Arrangements** [except that as requested the **Enabling Works** are greater in scope than the **MITS Connection Works**] *[except Distribution Interconnector Owner]*"].
- 9 Include where a **Gated Offer** -This is a [Gate 1 Offer] [Gate 2 Offer] for the purposes of the **Gated Application and Offer Process**.

Yours faithfully

.....

for and on behalf of

NATIONAL ENERGY SYSTEM OPERATOR LIMITED

**SECTION A**  
**FORM OF BILATERAL EMBEDDED GENERATION AGREEMENT**  
**AND CONSTRUCTION AGREEMENT**  
**AND CUSC ACCESSION AGREEMENT**

**END OF EXHIBIT E**

**CUSC - EXHIBIT F**

**THE CONNECTION AND USE OF SYSTEM CODE  
USE OF SYSTEM APPLICATION**

**SUPPLIER  
INTERCONNECTOR USER  
INTERCONNECTOR ERROR ADMINISTRATOR  
VIRTUAL LEAD PARTY**

**PLEASE STUDY THE FOLLOWING NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM.**

Please note that certain expressions which are used in this application form are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold. If the **Applicant** has any queries regarding this application or any related matters then the **Applicant** is recommended to contact **The Company** where our staff will be pleased to help.

1. **The Company** requires the information requested in this application form for the purposes of preparing an **Offer** (the "**Offer**") to allow the **Applicant** to use the **National Electricity Transmission System**. It is essential that the **Applicant** supplies all information requested in this application form and that every effort should be made to ensure that such information is accurate.
2. Where **The Company** considers that any information provided by the **Applicant** is incomplete or unclear or further information is required, the **Applicant** will be requested to provide further information or clarification. The provision/clarification of this information may impact on **The Company's** ability to commence preparation of an **Offer**.
3. Should there be any change in any information provided by the **Applicant** after it has been submitted to **The Company**, the **Applicant** must immediately inform **The Company** of such a change.
4. The effective date upon which the application is deemed to have been received by **The Company** shall be the date when **The Company** is reasonably satisfied that the **Applicant** has completed Section A and paid **The Company** the application fee set out in the Statement of Use of System Charges<sup>2</sup>. **The Company** shall notify the **Applicant** of such date.
5. **The Company** will make the **Offer** in accordance with the terms of Paragraph 3.7 or 9.21 (**Use of System Application**) of the **CUSC** and the **ESO Licence**.
6. **The Company** will make the **Offer** as soon as is reasonably practicable and in any event within 28 days of the effective date of the application or such longer period as the **Authority** agrees to.
7. If the **Applicant** is not already a **CUSC Party** the **Applicant** will be required as part of this application form to undertake that they will comply with the provisions of the **Grid Code** for the time being in force. Copies of the **Grid Code** and the **CUSC** are available on **The Company's**

---

<sup>1</sup> Electricity Connections, National Grid Electricity System Operator, Faraday House, Warwick Technology Park, Gallows Hill, Warwick, CV34 6DA

<sup>2</sup> <https://www.nationalgrideso.com/node/120336>

**Website<sup>3</sup>** and the **Applicant** is advised to study them carefully. **Data** submitted pursuant to this application shall be deemed submitted pursuant to the **Grid Code**.

8. **The Company's Offer** will be based to the extent appropriate upon its standard form terms for **Use of System Offer** and the **Charging Statements** issued by **The Company** under conditions E10 and E11 of the **ESO Licence**. The **Applicant** should bear in mind **The Company's** standard form terms of offer when making this application.
9. Please complete this application form in black print and return it duly signed to **Electricity Connections, National Energy System Operator, Faraday House, Warwick Technology Park, Gallows Hill, Warwick, CV34 6DA**. In addition to returning the application to the Customer Services Manager an electronic form may be e-mailed to **The Company**.
10. For the most up to date contact details applicants are advised to visit **The Company Website<sup>4</sup>**.

---

<sup>3</sup> <https://www.nationalgrideso.com/codes>

<sup>4</sup> <https://www.nationalgrideso.com/connections>

# APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

## SECTION A. DETAILS OF APPLICANT (in respect of this application)

### 1. Registered Company

Name:.....

Address (of Registered Office in the case of a Company):

.....

.....

.....

Company Number:.....

VAT Number (if applicable):.....

Parent Company Name (if applicable):.....

### 2. UK Address if company is registered outside the UK

Name:.....

Address:.....

Email:.....

Telephone:.....

### 3. Company Secretary or person to receive CUSC notices

Name:.....

Email:.....

Telephone:.....

## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

4. **Commercial Contact/Agent (person to receive application fee  
invoice and Offer if different from Company Secretary or person to  
receive CUSC notices identified in 2 above)**

Name:.....

Title:.....

Address:.....

.....

.....

Email:.....

Telephone:.....

5. Please confirm whether you agree to us sending the **Offer** in electronic form instead of hard copy and, if so, confirm the address for this as follows.

Yes [ ]

No [ ]

Email address .....



## APPLICATION FOR USE OF SYSTEM

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

### **USE OF SYSTEM APPLICATION**

1. We hereby apply to use the **National Electricity Transmission System**.
2. We will promptly inform **The Company** of any change in the information given in this **Application** as quickly as practicable after becoming aware of any such change.
3. If we are not already a **CUSC Party** we undertake for the purposes of this **Application** to be bound by the terms of the **Grid Code** from time to time in force and to sign a **CUSC Accession Agreement**.
4. We confirm that we are applying in the category of:  

|                                           |     |
|-------------------------------------------|-----|
| <b>Supplier</b>                           | [ ] |
| <b>Interconnector User</b>                | [ ] |
| <b>Interconnector Error Administrator</b> | [ ] |
| <b>Virtual Lead Party</b>                 | [ ] |
5. Where applying in the category of a Supplier, we confirm that we:  

|                                               |     |
|-----------------------------------------------|-----|
| <b>meet the</b> Approved Credit Rating        | [ ] |
| <b>do not meet the</b> Approved Credit Rating | [ ] |

**APPLICATION FOR USE OF SYSTEM**

PLEASE ENSURE THAT YOU HAVE STUDIED THE NOTES BEFORE  
COMPLETING AND SIGNING THIS APPLICATION FORM

6. Where applying in the category of a Supplier, without prejudice to our  
right to provide security by other means, we can confirm that we intend to  
provide security via:

- |                                         |            |
|-----------------------------------------|------------|
| <b>Qualifying Guarantee</b>             | <b>[ ]</b> |
| <b>Letter of Credit</b>                 | <b>[ ]</b> |
| <b>Cash in Escrow Account</b>           | <b>[ ]</b> |
| <b>Bilateral Insurance Policy</b>       | <b>[ ]</b> |
| <b>Insurance Performance Bond</b>       | <b>[ ]</b> |
| <b>Independent Security Arrangement</b> | <b>[ ]</b> |

SIGNED BY:

.....  
For and on behalf of the **Applicant**

Date:.....

**END OF EXHIBIT F**

**CUSC - EXHIBIT G**

**USE OF SYSTEM SUPPLY OFFER AND  
CONFIRMATION NOTICE**

**SUPPLIERS**

CUSC v1.67The Company Secretary

Date: [ ]

Dear XXXXXX,

We refer to your application dated [ ] for use of the **National Electricity Transmission System** and to *[here list other documents submitted by applicant in support of their application together with any relevant The Company communications relating to the application]* and now set out below our offer for the use of the **National Electricity Transmission System**. Please note that certain expressions which are used in this **Offer** are defined in the Interpretation and Definitions Section of the **CUSC** (Section 11) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

1. **The Company** offers to provide use of the **National Electricity Transmission System** on the terms of the **CUSC** and as set out in the attached combined **Use of System Supply Offer and Confirmation Notice**. [As you are not already a **CUSC Party** you are also required to enter into the enclosed **CUSC Accession Agreement**].
2. If at the date you sign and return the acknowledgement and acceptance of the **Use of System Supply Offer Notice** you hold an **Approved Credit Rating**, you should delete Option B in the acknowledgement.
3. If at the date that you sign and return the acknowledgement and acceptance of the **Use of System Supply Offer Notice** you do not have an **Approved Credit Rating**, then you should delete Option A in the acknowledgement and then in accordance with Paragraph 3.21 of the **CUSC** you must put in place **Security Cover** to take effect from the date set out in the **Use of System Supply Confirmation Notice**.
4. The technical conditions with which you must comply as a term of this **Offer** are set out in the **Grid Code**.
5. This **Offer** is open for acceptance according to the terms of Paragraph 3.7 of the **CUSC** and the **ESO Licence**. Please note your right to make an application to the **Authority** to settle the terms of the **Offer** pursuant to condition E13 of the **ESO Licence**.
6. To accept this **Offer**, please sign (and where issued by email, having printed off 2 copies of each) and return the acknowledgement and acceptance on the duplicate copy of the **Use of System Supply Offer and Confirmation Notice** [and execute and return the **CUSC Accession Agreement**]. Subject to providing **Security Cover** in accordance with the provisions referred to in paragraph 3 above **The Company** will then itself [execute the **CUSC Accession Agreement**

and] return a copy of the **Use of System Offer and Confirmation Notice** to the **User** having completed, signed and dated Part II.

7. The **CUSC Accession Agreement** and use of the **National Electricity Transmission System** pursuant to the **CUSC** as indicated in the **Confirmation Notice** are only effective in accordance with their terms once they have been executed (or signed in the case of the **Confirmation Notice**) and dated by **The Company**.
8. All communications in relation to this **Offer** must, in the first instance, be directed to [description].

Yours faithfully

.....

for and on behalf of  
National Energy System Operator Limited

---

## FORM OF USE OF SYSTEM SUPPLY OFFER AND CONFIRMATION NOTICE

To: [ ] (“**User**”, which expression shall include its successors and/or permitted assigns)

From: National Energy System Operator Limited

Date: [ ]

### 1. DEFINITIONS, INTERPRETATIONS AND CONSTRUCTION

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** have the same meanings, interpretations or constructions in this **Use of System Supply Offer and Confirmation Notice** (the “**Notice**”).

#### Part I - Use of System Supply Offer Notice

### 2. COMMENCEMENT

Subject to the other terms of this **Notice**, use of the **National Electricity Transmission System** and the requirement to pay **Use of System Charges** shall commence on the date **The Company** signs and dates Part II of this **Notice**,

### 3. CREDIT REQUIREMENTS

The amount to be secured by the **User** if Option A in the acknowledgement is deleted is set out in the Appendix to this **Notice**.

### 4. TERM

Subject to the provisions for earlier termination set out in the **CUSC**, the **User’s** right to use the **National Electricity Transmission System** pursuant to this **Notice** shall continue until the **User** gives **The Company** a **Use of System Termination Notice** pursuant to Paragraph 3.8 of the **CUSC** or use ceases under the provisions of the **CUSC**.

We acknowledge and agree to the terms set out above.

[ ]

[Name of User]

Date:

Option A: We meet the Approved Credit Rating

Option B: We do not meet the Approved Credit Rating

**Part II - Use of System Supply Confirmation Notice**

CONFIRMATION

We hereby confirm that with effect from the date set out below you can use the **National Electricity Transmission System** as a **Supplier** in accordance with the terms of the **CUSC** and this **Notice** and are required to pay **Use of System Charges**.

[ ]

National Energy System Operator Limited

Date: \_\_\_\_\_

**Appendix**

Amount of **Security Cover** required if Option A deleted: £[                      ]

**END OF EXHIBIT G**



**CUSC – EXHIBIT H**

**USE OF SYSTEM INTERCONNECTOR OFFER  
AND CONFIRMATION NOTICE**

**INTERCONNECTOR USER  
INTERCONNECTOR ERROR ADMINISTRATOR**

Date: [ ]

Dear XXXXXX

We refer to your application dated [ ] for use of the **National Electricity Transmission System** as an **[Interconnector User / Interconnector Error Administrator]** under Part II of Section 9 and to *[here list other documents submitted by applicant in support of their application together with any relevant The Company communications relating to the application]* and now set out below our offer for the use of the **National Electricity Transmission System**. Please note that certain expressions which are used in this **Offer** are defined in the Interpretation and Definitions Section of the **CUSC** (Section 11) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

1. **The Company** offers to provide use of the **National Electricity Transmission System** to you as an **[Interconnector User / Interconnector Error Administrator]** on the terms of the **CUSC** and as set out in the attached combined **Use of System Interconnector Offer Notice and Confirmation Notice**. [As you are not already a **CUSC Party** you are also required to enter into the enclosed **CUSC Accession Agreement**.]
2. The technical conditions with which you must comply as a term of this **Offer** are set out in the **Grid Code**.
3. This **Offer** is open for acceptance according to the terms of Paragraph 9.21.4 of the **CUSC** and the **ESO Licence**. Please note your right to make an application to the **Authority** to settle the terms of the **Offer** pursuant to condition E13 of the **ESO Licence**.
4. To accept this **Offer**, please sign (and where issued by email, having printed off 2 copies of each) and return the acknowledgement and acceptance on the duplicate copy of the **Use of System Interconnector Offer and Confirmation Notice** [and execute and return the **CUSC Accession Agreement**]. Subject to providing **Security Cover** in accordance with paragraph 3 above **The Company** will then itself [execute the **CUSC Accession Agreement** and] return a copy of the **Use of System Interconnector Offer and Confirmation Notice** .
5. The [**CUSC Accession Agreement** and] use of the **National Electricity Transmission System** pursuant to the **CUSC** as indicated in the **Confirmation Notice** are only effective in accordance with their terms once they have been signed [(or executed in the case of the **CUSC Accession Agreement**)] and dated by **The Company**.

6. All communications in relation to this **Offer** must, in the first instance, be directed to [description].

Yours faithfully

.....  
for and on behalf of  
National Energy System Operator Limited

## **FORM OF USE OF SYSTEM INTERCONNECTOR OFFER AND CONFIRMATION NOTICE**

To: [ ] (“**User**”, which expression shall include its successors and/or permitted assigns)

From: National Energy System Operator Limited (“**The Company**”)

Date: [ ]

### 1. DEFINITIONS, INTERPRETATIONS AND CONSTRUCTION

Unless the subject matter or context otherwise requires or is inconsistent therewith, terms and expressions defined in Section 11 of the **CUSC** have the same meanings, interpretations or constructions in this **Use of System Interconnector Offer and Confirmation Notice** (“**Notice**”).

#### **Part I - Use of System Interconnector Offer Notice**

### 2. COMMENCEMENT

Subject to the other terms of this **Notice**, use of the **National Electricity Transmission System** as an [Interconnector User/Interconnector Error Administrator] shall commence on the date **The Company** signs and dates Part II of this **Notice**.

3. TERM

Subject to the provisions for earlier termination set out in the **CUSC**, the User's right to use the **National Electricity Transmission System** pursuant to this **Notice** shall continue until the **User** gives **The Company** a **Use of System [Interconnector] Termination Notice** pursuant to Paragraph [9.23.1] of the **CUSC** or use ceases under the provisions of the **CUSC**.

We acknowledge and agree to the terms set out above.

[ ]

[Name of User]

Date:

**Part II - Use of System Interconnector Confirmation Notice**

**CONFIRMATION**

We hereby confirm that with effect from the date set out below you can use the **National Electricity Transmission System** as an **[Interconnector User / Interconnector Error Administrator]** in accordance with the terms of the **CUSC** and this **Notice**.

[ ]

**National Energy System Operator Limited**

Date:

**END OF EXHIBIT H**

## **CUSC - EXHIBIT I**

### **THE CONNECTION AND USE OF SYSTEM CODE MODIFICATION APPLICATION**

## MODIFICATION APPLICATION – NOTES

Please study the following notes before completing and signing this application form.

Please note that certain expressions which are used in this application form are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold. If the **Applicant** has any queries regarding this application or any related matters then the **Applicant** is recommended to contact **The Company** where our staff will be pleased to help.

1. **The Company** requires the information requested in this application form for the purposes of preparing an offer (the “**Offer**”) of a **Construction Agreement** for the construction of a proposed **Modification** and for the variation of the existing [**Bilateral Connection Agreement** or **Bilateral Embedded Generation Agreement** or **Construction Agreement**] affected by the **Modification**. It is essential that the **Applicant** should supply all information requested in this application form and that every effort should be made to ensure that such information is accurate. Please note that if this is a **Gated Application** or **Gated Modification** under the **Gated Application and Offer process** this **Modification Application** will need to follow the **Gated Application and Offer Process**.
2. Where **The Company** considers that any information provided by the **Applicant** is incomplete or unclear, or further information is required, the **Applicant** will be requested to provide further information or clarification. The provision/clarification of this information may impact on **The Company’s** ability to commence preparation of an **Offer**.
3. Should there be any change in the information provided by the **Applicant** then the **Applicant** should immediately inform **The Company** of such a change. Where this is a change in the information provided for Sections B to D then the **Applicant** should contact **The Company** to see if such a change can be accommodated as it is unlikely that material changes could be accommodated. If **The Company** cannot accommodate such a change bearing in mind the timescales within which the **Offer** must be made then the application will be processed on the original information although it is open to the **Applicant** to withdraw the application.
4. **The Company** shall charge the **Applicant**, and the **Applicant** shall pay to **The Company**, **The Company’s** engineering charges in relation to the application. A fee will be charged by **The Company** in accordance with the **Charging Statements**. No application will be considered until such payment has been received.
5. The effective date upon which the application is made shall be the later of the date when **The Company** has received the application fee pursuant to paragraph 4 above or the date when **The Company** is reasonably satisfied

that the **Applicant** has completed Sections A-D. **The Company** shall notify the **Applicant** of such date.

6. **The Company** will make the **Offer** in accordance with the terms of Paragraphs 6.9 (Modification) and 6.10 (**Modifications and New Connection Sites**) of the **CUSC** and the **ESO Licence**.
7. **The Company** will make an **Offer** (a) if it is not a **Gated Modification Offer**, as soon as is reasonably practicable and, in any event, within three (3) months of the effective date of the application or such later period as the **Authority** may agree and (b) if it is a **Gated Modification Offer**, in accordance with the **Gated Application and Offer Process** or such later period as the **Authority** may agree. The **Offer** may, where it is necessary to carry out additional extensive system studies to evaluate more fully the impact of the proposed development, indicate the areas that require more detailed analysis. Before such additional studies are required, the **Applicant** shall indicate whether it wishes **The Company** to undertake the work necessary to proceed to make a revised **Offer** within, if it is not a **Gated Modification Offer**, the three (3) month period or, if it is a **Gated Modification Offer**, the **Gated Application and Offer Process** or, where relevant, the timescale consented to by the **Authority**. To enable **The Company** to carry out any of the above mentioned necessary detailed system studies the **Applicant** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in Part 2 of the Appendix to the **Planning Code** which is part of the **Grid Code**.
8. In the course of processing the application, it may be necessary:
  - (a) for **The Company** to consult the appropriate **Public Distribution System Operator(s)** on matters of technical compatibility of the **National Electricity Transmission System** with their **Distribution System(s)** or to consult the **Relevant Transmission Licensees** to establish the works required on the **National Electricity Transmission System**. On grounds of commercial confidentiality, **The Company** shall need authorisation for the release to the **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** of certain information contained in your application. Any costs incurred by **The Company** in consulting the **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** would be included in **The Company** charges for the application. If it is found by the **Public Distribution System Operator(s)** that any work is required on their **Distribution System(s)**, then it will be for the **Public Distribution System Operator(s)** and the **Applicant** to reach agreement in accordance with Paragraph 6.10.3 of the **CUSC**.
  - (b) for **The Company** to share with the **Competent Authority** information from the application relevant in the consideration of



control of qualifying assets under (as defined in) the National Security and Investment Act 2021.

9. In accordance with Paragraph 6.30.3 of **CUSC**, **The Company** will need to disclose details of any agreement to vary **Bilateral Agreements** and shall need authorisation from the **Applicant** in respect of this.
10. Data submitted pursuant to this application shall be deemed submitted pursuant to the **Grid Code**.
11. **The Company's Offer** will, to the extent appropriate, be based upon its standard form terms of **Modification Offer** and the statement of charges issued by **The Company** under conditions E10 and E11 of the **ESO Licence**. The **Applicant** should bear in mind **The Company's** standard form terms of **Offer** when making this application.
12. As provided for in **Grid Code** CC 8.1, Generators and Dc Converter Station owners should appreciate that they will be required to perform **Mandatory Ancillary Services** to ensure that System Operational Standards can be achieved. This requirement may have implications towards **Plant** specification. You should be satisfied that before an application is made that your intended **Plant** design can meet the requirements. **Applicants** are recommended to contact **The Company**<sup>1</sup> where our staff will be pleased to help.
13. **The Applicant** has the ability to pay a fixed price application fee in respect of their application or pay the actual costs incurred (variable price application fee). The fixed price application fee is derived from analysis of historical costs of similar applications. The variable price application fee is based on an advance of the Transmission Licensee's Engineering and out of pocket expenses and will vary according to the size of the scheme and the amount of work involved. **The Applicant** is requested to indicate their preferred basis of application fee in Section A question 4. **The Applicant** is advised that further information can be obtained from the **Charging Statements** which can be found on **The Company's Website**.
14. Please complete this application form in black print and return it duly signed to **The Company**. In addition to returning the application to the Customer Services Manager an electronic form may be e-mailed to **The Company**.
15. For the most up to date contact details applicants are advised to visit **The Company's Website**.

**SECTION A. DETAILS OF APPLICANT (in respect of this application)**

**1. Registered Company**

Name:.....

Address (of Registered Office in the case of a Company):

.....

.....

.....

Company Number:.....

Parent Company Name (if applicable):.....

**2. Company Secretary or person to receive CUSC notices**

Name:.....

Email:.....

Telephone:.....

**3. Commercial Contact/Agent (person to receive Offer if different from Company Secretary or person to receive CUSC notices as identified in 2 above)**

Name:.....

Title:.....

Address:.....

.....

.....

Email:.....

Telephone:.....

4. Please identify which application fee basis you wish to use for this application.

Fixed price application fee [ ]

Variable price application fee [ ]

5. Please confirm whether you agree to us sending the **Offer** in electronic form instead of hard copy and, if so, confirm the address for this as follows.

Yes [ ]

No [ ]

Email address .....

**SECTION B THE CONNECTION SITE [AND, IN THE CASE OF A USER UNDERTAKING OTSDUW, THE TRANSMISSION INTERFACE SITE] TO BE MODIFIED**

1. Please provide agreement reference number.

.....

2. Please identify by name the **Connection Site** [and, in the case of a **User** undertaking **OTSDUW**, the **Transmission Interface Site**] at which the **Modification** is to be undertaken.

.....

3. Give details of the rights in any additional land which you are proposing to acquire at the **Connection Site** [or, in the case of a **User** undertaking **OTSDUW**, the **Transmission Interface Site**] (to include leasehold and freehold interests and in the case of **Connection Sites** [or, in the case of a **User** undertaking **OTSDUW**, the **Transmission Interface Site**] in Scotland legal interests and heritable or leasehold interests including servitudes or other real rights) so as to undertake the **Modification**).

.....

.....

.....

4. Is space available on the **Connection Site** [or, in the case of a **User** undertaking **OTSDUW**, the **Transmission Interface Site**] for working storage and accommodation areas for the contractors of the **Relevant Transmission Licensees**? If so, please indicate by reference to a plan the location of such areas, giving the approximate dimensions of the same.

.....

.....

.....

5. Please provide details (including copies of any surveys or reports) of the physical nature of any additional land the subject to your answer to Question 2 above including the nature of the ground and the sub-soil.

.....

6. Please give details and provide copies of all existing relevant planning and other consents (statutory or otherwise) held by you relating to the **Connection Site** [and/or, in the case of a **User** undertaking **OTSDUW**, the **Transmission Interface Site**] or the **Modification** and/or details of any pending applications for the same.

.....

.....

7. Please indicate what, if any, of the necessary construction works necessary for the **Modification** you would like **The Company** to conduct upon your behalf.

.....

.....

**SECTION C. TECHNICAL INFORMATION**

1. Summary of Application (brief description of plant to be connected):  
.....  
.....  
.....
2. Please provide full details of the proposed **Modification** together with the relevant **Standard Planning Data** as listed in Part 1 of the Appendix to the **Planning Code** to the extent that the data will change from previously submitted Committed Project Planning Data or Connected Planning Data as a result of the proposed **Modification**. Note: the data concerned form part of the **Planning Code** and **Data Registration Code**. **Applicants** should refer to these sections of the **Grid Code** for an explanation. Further guidance is available from **The Company** on request.
3. Please notify **The Company** as to whether the **Modification** is associated with a **BELLA/BEGA Application** and if so details of the relevant **BELLA/BEGA Application**.
- BELLA/BEGA Agreement Ref: .....
- Site of Connection.....
4. Please notify **The Company** as to whether the **Modification** is in respect of a request for a connection to and / or for the use of the **User's Distribution System** from a **Relevant Embedded Power Station**
- Yes / No.....

## SECTION D. PROGRAMME

Please provide a suggested development and construction programme in bar chart form for the work necessary to install the **User Development** (not the **Transmission Connection Assets** needing to be installed or, in the case of a **User** undertaking **OTSDUW**, any **OTSUA**) indicating the anticipated date when the connection will be required to be made and any other key dates such as back feed date.

If not already included in the above bar chart please provide details of when the **Applicant** expects to be completing the following relevant phases of the **User Development** or reach the following relevant key milestones below and other additional milestones as necessary (working backwards from expected connection date at 'year 0'). Where applicable this information is expected to provide the anticipated project overview at the time of application:-

- Planning Application Submitted (Town & Country Planning, S36,S37\*)
- Planning Consent Awarded
- Plant Ordered (i.e. **Power Station** or substation)
- Construction Started (site mobilisation)
- Construction Completed

### Notes

- \* The consent for the **User's Power Station** granted under Section 36 of the Electricity Act or planning permission for the **User's Power Station** granted under the Town and Country Planning Act 1990 or any amendment thereto in England and Wales or the Town and Country Planning (Scotland) Act 1997 or any amendment thereto in Scotland

**SECTION E. ENABLING WORKS [CONNECT AND MANAGE POWER STATION ONLY]**

1. We confirm we do not/do want the **Enabling Works** to be greater in scope than the **MTS Connection Works**.
2. If you want the **Enabling Works** to be greater in scope than the **MTS Connection Works** specify the concerns, reasons or technical requirements that you are seeking to address by this.



1. We hereby apply to modify our connection to the **National Electricity Transmission System** at [ ] **Connection Site** [and/or in the case of a **User** undertaking **OTSDUW** [ ] **Transmission Interface Site**].
2. We agree to pay **The Company's** Engineering Charges on the terms specified in the Notes to the **Connection Application**.
3. We will promptly inform **The Company** of any change in the information given in this **Application** as quickly as practicable after becoming aware of any such change.
4. We authorise the release of certain information, on the grounds of commercial confidentiality, (a) to the appropriate **Public Distribution System Operator(s)** or **Relevant Transmission Licensees** should it be considered necessary and (b) to the **Competent Authority** relevant in the consideration of control of qualifying assets under (and as defined in) the National Security and Investment Act 2021.
5. We confirm that we do/do not meet **The Company's Credit Rating/Approved Credit Rating**.
6. We confirm our agreement to the disclosure in the manner set out in Paragraph 6.30.3 of **CUSC** of the information specified in such Paragraph.
7. We confirm that this **Modification** is associated with a:  
  
    BELLA Application [ ]  
    BEGA Application [ ]  
    [small or medium] Embedded Power Station [ ]  
    None of the above [ ]
8. We confirm that this **Modification** is associated with:  
  
    **Gate 1 Agreements** with/without **Reservation** [ ]  
    **Gate 1 Agreements** which are to remain as **Gate 1 Agreements** [ ]  
    **Gate 1 Agreements** which the **Applicant** wishes to modify into **Gate 2 Agreements** [ ]
9. We confirm this **Modification** is/is not a **Modification** of a type which is a **Gated Modification** in accordance with the **Gated Modification Guidance**.

SIGNED BY:

.....

For and on behalf of the **Applicant**

v1.18

Date.....

END OF EXHIBIT I

**CUSC - EXHIBIT J**

**THE CONNECTION AND USE OF SYSTEM CODE  
MODIFICATION OFFER**



**Agreement]**. It is your responsibility to ensure that your equipment complies with the requirements of the relevant conditions.

6. This offer is open for acceptance according to the terms of Paragraph 6.9 (**Modifications**) of the **CUSC** and the **ESO Licence**. Please note your right to make an application to the **Authority** to settle the terms of the **Offer** pursuant to condition E13 of the **ESO Licence**.
7. [Please note the provisions of Paragraph 6.10.4 of the **CUSC** in respect of interactive offers which, inter alia, allows **The Company** to vary the terms of this offer if a **Connection** or **Modification Offer** which interacts with this offer is accepted first. In terms of Paragraph 6.10.4 of the **CUSC** **The Company** will advise you of another offer being made by **The Company** which may interact with your offer. – *delete if this is a Gated Modification Offer*]
8. To accept this offer, please sign (and where issued by email, having printed off 2 copies of each) and return the [**Construction Agreement**] [**Bilateral Construction Agreement**] and [**Bilateral Embedded Generation Agreement**] attached to this offer as Section A and Section B. **The Company** will then itself countersign these agreements and one original of each will be returned to you for your retention. The agreements are only effective in accordance with their terms once they have been executed by **The Company**.
9. [This **Offer** is made on the basis of the **Connect and Manage Arrangements** [except that as requested the **Enabling Works** are greater in scope than the **MITS Connection Works**] [and on the basis of the **OTSDUW Arrangements** [*Connect and Manage Power Station only*].]
10. [Include where a **Gated Modification Offer** – This **Offer** is a **Gated Modification Offer**.]

Yours faithfully

for and on behalf of

National Energy System Operator Limited

**SECTION A**  
**FORM OF CONSTRUCTION AGREEMENT**

**SECTION B**  
**FORM OF VARIED BILATERAL AGREEMENT**

**END OF SECTION J**

## **CUSC - EXHIBIT K**

### **THE CONNECTION AND USE OF SYSTEM CODE MODIFICATION NOTIFICATION**



## **MODIFICATION NOTIFICATION**

1. This **Modification Notification** is issued by **The Company** pursuant to Paragraph 6.9 of the **CUSC**. The **User** has certain rights under Paragraph 6.9 of the **CUSC** and is advised to consider whether it wishes to avail itself to such rights upon receipt of this **Modification Notification**.
2. **The Company** proposes to make the **Modification** to the **National Electricity Transmission System** (or in the case of **Offshore Transmission System Development User Works** those works) set out below:-
3. **The Company** reasonably believes that you may have to carry out the following works as a result of the proposed **Modification**:-
4. The latest date upon which you may apply to the **Authority** under condition E13 of the **ESO Licence** is [date: to be supplied by **The Company**, subject to Paragraph 6.9 of the **CUSC**.]

Dated:

Signed for and on behalf of  
National Energy System Operator Limited

**END OF SECTION K**

**CUSC - EXHIBIT L**

**BI-ANNUAL ESTIMATE FOR BILATERAL AGREEMENT**  
**DATED [ ]**

COMPANY: [ ]

CONNECTION SITE: [ ]

Amount due and amount which will  
or might fall due for the period  
commencing on and including  
[ ] and ending on and  
including [ ] in  
respect of which security is required

1. The Company Engineering Charges and expenses for obtaining Consents pursuant to Clause 2.4;
2. Termination Amounts.

**END OF EXHIBIT L**

**CUSC - EXHIBIT M**

## SECURED AMOUNT STATEMENT

**BILATERAL AGREEMENT DATED [     ]**

COMPANY: [ ]

CONNECTION SITE: [ ]

Amount in which security is required for the period commencing on and including [ ] and ending on and including [ ]

We hereby certify that the amount to be secured in respect of [Termination Amounts] is as stated above in respect of the named period.

for and on behalf of  
**National Energy System Operator Limited**

Duly authorised officer

**END OF SECTION M**

**CUSC - EXHIBIT MM1**

**CANCELLATION CHARGE STATEMENT**

**DATED [ ]**

**COMPANY:** [ ]

**CONNECTION SITE/SITE OF CONNECTION:** [ ]

**CONSTRUCTION AGREEMENT:** [ ]

**Part 1 CANCELLATION CHARGE**

The **Cancellation Charge** which will or might fall due on termination of the **Construction Agreement** during the period commencing on and including [1 April/1October] and ending on and including [30 September/31 March] is:

[£] [£/MW]

This figure is based on *[A or B -strike out as appropriate] and C*

**[A Estimate of Actual Attributable Works Cancellation Charge**

[£ ] [£/MW]

*or, where User has elected for the Fixed Cancellation Charge*

**B Fixed Cancellation Charge**

*[£X being £X/YMW] - insert figure/calculation from relevant Notification of Fixed Attributable Works Cancellation Charge]*

**C Wider Cancellation Charge**

[£X] being [£X/YMW]

**Generation Zone** in which **Power Station** or **Interconnector** is/will be located [ ]

**[Part 2                    Estimates of the Actual Attributable Works Cancellation Charge**

*insert estimate of Actual Attributable Works Cancellation Charge  
(including sharing etc) until User has elected to fix.]*

for and on behalf of  
**National Energy System Operator Limited**

**END OF EXHIBIT MM1**

**CUSC - EXHIBIT MM2**

**CANCELLATION CHARGE SECURED AMOUNT STATEMENT**  
**DATED [ ]**

**COMPANY:** [ ]

**CONNECTION SITE/SITE OF CONNECTION:** [ ]

**CONSTRUCTION AGREEMENT:** [ ]

The **Cancellation Charge Secured Amount** for the period commencing on and including [1 April/1 October] and ending on and including [30 September/31 March] is [£ ]

Based on [%] of [£ ] being the **Cancellation Charge** as set out in the **Cancellation Charge Statement** for such period.

for and on behalf of  
**National Energy System Operator Limited**

**END OF EXHIBIT MM2**

**CUSC - EXHIBIT MM3**

**NOTIFICATION OF FIXED ATTRIBUTABLE WORKS CANCELLATION CHARGE**  
**DATED [ ]**

**COMPANY:** [ ]

**CONNECTION SITE/SITE OF CONNECTION:** [ ]

**CONSTRUCTION AGREEMENT:** [ ]

**Fixed Attributable Works Cancellation Charge [£ ] [£x/MW]**

|                                  | <b>Pre Trigger Amount</b>                     | <b>Cancellation Charge Profile</b> | <b>TEC/DC</b> | <b>£/MW</b> |
|----------------------------------|-----------------------------------------------|------------------------------------|---------------|-------------|
| Financial Year [1]               |                                               |                                    |               |             |
| Financial Year [2]               |                                               |                                    |               |             |
| Financial Year [3]               |                                               |                                    |               |             |
|                                  |                                               |                                    |               |             |
|                                  | <b>Attributable Works Cancellation Amount</b> | <b>Cancellation Charge Profile</b> |               | <b>£/MW</b> |
| Financial Year [1]               | £                                             | %                                  |               |             |
| Financial Year [2]               | £                                             | %                                  |               |             |
| Financial Year [3]               | £                                             | %                                  |               |             |
| Charging Date/Financial Year [0] | £                                             | %                                  |               |             |

**Fixed Attributable Works Cancellation Amount based on**

**Estimated Attributable Works Capital Cost** [ ]

**Local Asset Reuse Factor** *[by ref to each component within the Attributable Works]* [ ]

**Strategic Investment Factor** *by ref to each*

*component within the Attributable Works]* [ ]

**Distance Factor** *[by ref to each relevant component within the Attributable Works]* [ ]

We elect for the **Attributable Works Cancellation Charge** to be calculated on the basis of the **Fixed Cancellation Charge** as set out above.

**Signed**

**for and on behalf of**  
***[User]***

**Dated [ ]**

**END OF EXHIBIT MM3**



**CUSC - EXHIBIT N**  
**NOTICE OF DRAWING**

To [            ] Bank/Public Limited Company/Limited

copy to:

[date]

Dear XXXXXX,

RE: **BILATERAL AGREEMENT DATED [            ]**  
**PERFORMANCE BOND NO./DATED [            ]/LETTER OF CREDIT**  
**NO. [            ]/BANK ACCOUNT NO. [            ] (THE "SECURITY")**

We refer to the above Security in our favour. We hereby demand immediate payment thereunder in the amount of £[            ].

We require payment to be made by telegraphic transfer to:-

Bank plc

Address:

Sort Code:

Account Name:            National Energy System Operator Limited

Account No:

Yours faithfully,

for and on behalf of  
**National Energy System Operator Limited**

Duly authorised officer

**END OF SECTION N**

**CUSC - EXHIBIT O - PART I B**

**THE CONNECTION AND USE OF SYSTEM CODE  
INTERFACE AGREEMENTS**

**PART I B - RELEVANT TRANSMISSION LICENSEE ASSETS ON USER  
LAND**

**CUSC - EXHIBIT O - PART I B**

DATED \_\_\_\_\_ 200[ ]

[ ] (User)

- and -

[Insert name of Relevant Transmission Licensee (RTL)]

**INTERFACE AGREEMENT**

Relating to Relevant Transmission Licensee Assets on  
User Land at [ ]

## I N D E X

| <u>Clause</u> | <u>Title</u>                                   | <u>Page</u> |
|---------------|------------------------------------------------|-------------|
| 1             | Definitions and Interpretation                 | 1           |
| 2             | Right to Install and Retain Asset              | 8           |
| 3             | Modifications, Replacements and Alterations    | 8           |
| 4             | Security and Compliance with Statutes etc.     | 10          |
| 5             | Relocations                                    | 11          |
| 6             | Removals                                       | 13          |
| 7             | Rights of Access                               | 13          |
| 8             | Services and Use of Assets                     | 15          |
| 9             | Non-Interference                               | 16          |
| 10            | Dispute Resolution                             | 17          |
| 11            | Governing Law and Jurisdiction                 | 19          |
| 12            | Confidentiality                                | 20          |
| 13            | Title to Assets                                | 26          |
| 14            | Limitation of Liability                        | 27          |
| 15            | Intellectual Property                          | 29          |
| 16            | Force Majeure                                  | 29          |
| 17            | Waiver                                         | 30          |
| 18            | Notices                                        | 30          |
| 19            | Variations                                     | 31          |
| 20            | Overriding Provisions & Good Industry Practice | 31          |
| 21            | Assignment and Sub-Contracting                 | 32          |
| 22            | Illegality and Partial Invalidity              | 32          |
| 23            | Term and Termination                           | 32          |
| 24            | Registration and Memorandum                    | 33          |
| 25            | Entire Agreement                               | 33          |

Schedule 1 RTL Assets on User's Land

Schedule 2 User's Land - Description

Schedule 3 Part I - Security Details

Part II - Plant MV LV Apparatus

Safety Co-ordination Procedures

Schedule 4 User Owned Facility Assets

Schedule 5 Shared Services provided by User

Schedule 6 Addresses, Email Addresses etc.

**INTERFACE AGREEMENT**  
**(ASSET LICENCE FACILITY AGREEMENT)**

**(RELEVANT TRANSMISSION LICENSEE ASSETS)**

**THIS DEED OF AGREEMENT** is made on the \_\_\_\_\_ day of \_\_\_\_\_ 200[ ]

## BETWEEN

- (1) [ ] a company registered in [ ] (with number [ ]) whose registered office is at [ ] (“User”, which expression shall include its successors and/or permitted assigns); and
- (2) [Insert name of Relevant Transmission Licensee] a company registered in [ ] with number [ ] whose registered office is at [ ] (“RTL”, which expression shall include its successors and/or permitted assigns)]

**WHEREAS**

Certain assets and facilities of the RTL are to be installed on property title to which is vested in User and this Agreement is entered into by the Parties to give effect to appropriate arrangements in respect of such assets and the use of such assets and facilities.

**NOW IT IS HEREBY AGREED** as follows:-

## 1. DEFINITIONS AND INTERPRETATION

In this Agreement, the following words and expressions shall, unless the subject-matter or context otherwise requires or is inconsistent therewith, bear the following meanings:-

“Act” the Electricity Act 1989 as amended by

Utilities Act 2000;

“Affiliate”

in relation to User means any holding company or subsidiary of that Party or any subsidiary of a holding company of User, in each case within the meaning of Sections 736, 736A and 736B of the Companies Act 1985 as substituted by Section 144 of the Companies Act 1989 and if that section is not in force at the date of this Agreement as if such section were in force at such date;

“Apparatus”

all equipment in which electrical conductors are used, supported or of which they may form a part;

“Authority”

the Gas and Electricity Markets Authority established by Section 1 of the Utilities Act 2000;

“Authorised Electricity Operator”

any person (other than The Company) who is authorised to generate, participate in the transmission of, distribute or supply electricity and for the purposes of Standard Condition C4 of the Transmission Licence shall include any person who has made application to be so authorised which application

|                                  |                                                                                                                                                                                                                                                                                                                   |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | has not been refused and any person transferring electricity to or from Great Britain across an interconnector or who has made application for use of interconnector which has not been refused;                                                                                                                  |
| “Bilateral Connection Agreement” | a Bilateral Connection Agreement entered into between the User and The Company pursuant to the Connection Agreement and dated [ ];                                                                                                                                                                                |
| “Competent Authority”            | the Secretary of State, the Authority and any local or national agency, authority, department, inspectorate, minister (including the Scottish Ministers), ministry, official or public or statutory person (whether autonomous or not) of, or of the government of, the United Kingdom or the European Community; |
| “Connection Agreement”           | the Connection and Use of System Code given contractual force by the CUSC Framework Agreement entered into by, amongst others, the User regarding, amongst other things, the connection of User’s Plant and Apparatus to the National Electricity                                                                 |



Transmission System and the use by the User of such system;

“Connection Site” [            ];

“CUSC Framework Agreement” means the agreement of that title, in the form approved by the Secretary of State, by which the Connection Agreement is made contractually binding between the parties to that agreement, as amended from time to time with the approval of the Secretary of State;

“Customer” a person to whom electrical power is provided (whether or not they are the provider of such electrical power) other than power to meet station demand of that person;

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Directive”           | includes any present or future directive, requirement, instruction, direction or rule of any Competent Authority, (but only, if not having the force of law, if compliance with the Directive is in accordance with the general practice of persons to whom the Directive is addressed) and includes any modification, extension or replacement thereof then in force;                                                                                                                                                                                                                                                                     |
| “Distribution System” | the system consisting (wholly or mainly) of electric lines owned or operated by any Authorised Electricity Operator and used for the distribution of electricity from grid supply points or generation sets or other entry points to the point of delivery to Customers or Authorised Electricity Operators, and includes any Remote Transmission Assets operated by such Authorised Electricity Operator and any electrical plant and meters owned or operated by the Authorised Electricity Operator in connection with the distribution of electricity, but shall not include any part of the National Electricity Transmission System; |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Emergency Personnel” | in relation to a Party, all employees of that Party who have appropriate knowledge and experience and are recognised by that Party as being able to carry out competently and safely emergency action for the purposes of clause 9;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| “Facility Asset”      | those assets listed in Schedule 4;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| “Force Majeure”       | in relation to a Party, any event or circumstance which is beyond the reasonable control of that Party, and which results in or causes the failure of that Party to perform any of its obligations under this Agreement including any act of God, strike, lockout or other industrial disturbance, act of the public enemy, war declared or undeclared, threat of war, terrorist act, blockade, revolution, riot, insurrection, civil commotion, public demonstration, sabotage, act of vandalism, lightning, fire, storm, flood, earthquake, accumulation of snow or ice, lack of water arising from weather or environmental problems, explosion, fault or failure of plant and apparatus which could not have been prevented |

by Good Industry Practice, governmental restraint, Act of Parliament legislation, bye-law, and Directive (not being any order, regulation or directive under Section 32, 33, 34 or 35 of the Act) Provided that lack of funds shall not be interpreted as a cause beyond the reasonable control of that Party;

“Fuel Security Code”

the document of that title designated as such by the Secretary of State as from time to time amended;

“GB Transmission System”

the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within Great Britain and used for the transmission of electricity from one power station to a sub-station or to another power station or between sub-stations or to or from any external interconnection and includes any electrical plant or apparatus or meters owned or operated by any transmission licensee within Great Britain in connection with the transmission of electricity but shall not include

|                          |                                                                                                                                                                                                                                                                                                          |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | Remote Transmission Assets;                                                                                                                                                                                                                                                                              |
| “Good Industry Practice” | in relation to any undertaking and any circumstances, the exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and experienced operator engaged in the same type of undertaking under the same or similar circumstances; |
| “Grid Code”              | the document or documents produced pursuant to condition E3 of The ESOLicence, as from time to time revised in accordance with The ESOLicence;                                                                                                                                                           |
| “High Voltage Lines”     | electric lines of a nominal voltage of or exceeding 132 kilovolts;                                                                                                                                                                                                                                       |
| “HV”                     | of a nominal voltage exceeding 650 volts;                                                                                                                                                                                                                                                                |
| “Intellectual Property”  | patents, trademarks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same is registered and including applications for registration of any of the same) and rights under licences and                                                         |

|                                            |  |                                                                                                                                                                                                                                                                                             |
|--------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                            |  | consents in relation to any of the same and all rights or forms of protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world;                                                                                        |
| "Licence"                                  |  | any licence granted pursuant to Section 6 of the Act;                                                                                                                                                                                                                                       |
| "Location Managers"                        |  | [            ];                                                                                                                                                                                                                                                                             |
| "Low Voltage" or "LV"                      |  | means a voltage not exceeding 250 volts;                                                                                                                                                                                                                                                    |
| "Medium Voltage" or "MV"                   |  | means a voltage exceeding 250 volts but not exceeding 650 volts;                                                                                                                                                                                                                            |
| "Modification"                             |  | any alteration to or replacement of RTL Assets pursuant to clause 3.1 of this Agreement and "Modify" and "Modified" shall be construed accordingly;                                                                                                                                         |
| "National Electricity Transmission System" |  | the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within Great Britain and used for transmission of electricity from one power station to a sub-station or to another power station or between or between sub-stations or |

|                     |                                                                                                                                                                                                                                                                           |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     | to or from any external interconnection and includes any electrical plant or apparatus or meters owned or operated by any transmission licensee within Great Britain in connection with the transmission of electricity but shall not include Remote Transmission Assets; |
| “NGET”              | means National Grid Electricity Transmission plc (Company number: 02366977) with registered office at 1-3 Strand, London, WC2N 5EH;                                                                                                                                       |
| “Party”             | each person for the time being and from time to time party to this Agreement and any successor(s) in title to, or permitted assign(s) of, such person;                                                                                                                    |
| “Permitted Purpose” | means the maintenance, inspection, testing, removal, operation, modification or repair of the RTL Assets;                                                                                                                                                                 |
| “Plant”             | fixed and moveable items used in the generation and/or supply and/or transmission of electricity other than Apparatus;                                                                                                                                                    |
| “Regulations”       | the Electricity Safety Quality and Continuity Regulations 2002 as                                                                                                                                                                                                         |

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Relevant Transmission Licensee” | amended from time to time;<br>Means in the context of this agreement [National Grid Electricity Transmission plc in England & Wales], [SP Transmission Limited in south of Scotland] and [Scottish Hydro-Electric Transmission Limited in north of Scotland];                                                                                                                                                |
| “Relocation Proposal”            | a proposal by User to the RTL pursuant to sub-clause 5.1 for the relocation of any of the RTL Assets;                                                                                                                                                                                                                                                                                                        |
| “Remote Transmission Assets”     | any Plant and Apparatus or meters owned by NGET which (a) are embedded in a Distribution System or a user system and which are not directly connected by Plant and/or Apparatus owned by NGET to a sub-station owned by NGET and (b) are by agreement between NGET and such public distribution system operator or user under the direction and control of such public distribution system operator or user; |
| “Right of Access”                | full right and liberty during the currency of this Agreement to enter upon and through and remain upon any part of User’s Land (including where relevant any land over which User has a right of servitude,                                                                                                                                                                                                  |



wayleave or similar right which benefits the User's Land and the use of which by the RTL is necessary to enable it to exercise the Right of Access hereby granted) PROVIDED to the extent necessary for a Permitted Purpose and subject to the provisions of clause 5;

"RTL Assets"

those assets listed in Schedule 1 (including any plinths or other structures (excluding buildings) to or upon which the same are affixed and to or upon which no assets of any other person are affixed and any straps, bolts or other such things for attachment thereto) as any of the same may be Modified pursuant to this Agreement;

"RTL Licence"

the licence granted to the Relevant Transmission Licensee under Section 6 of the Act;

"Secretary of State"

has the meaning given to that term in the Act;

"Services"

in the context of Clause 8, the goods and services specified in Schedule 5;

"Site Specific Safety Rules"

means the rules, procedures or

current arrangements for and relating to safety co-ordination across boundaries (to permit work to or testing on the system of one of the Parties which, for this to be done safely, requires isolation and/or other precautions on Plant and/ or MV and/or LV Apparatus whether at, adjacent to or remote from the location of the work or testing) which the Parties mutually agree to use their best endeavours to formulate as soon as possible after the date of this Agreement and on the basis that any dispute as to their content shall be resolved in accordance with the provisions of Clause 10;

“The Company”

The Company with registered number 11014226 with registered office at 1-3 Strand, London, WC2N 5EH;

“User’s Land”

the land described in Schedule 2;

“User’s Licence”

the licence granted to the User under Section 6 of the Act;

In this Agreement:

- (i) unless the context otherwise requires all references to a

particular clause, sub-clause, paragraph or Schedule shall be a reference to that clause, sub-clause, paragraph or Schedule in or to this Agreement;

- (ii) the table of contents and headings are inserted for convenience only and shall be ignored in construing this Agreement;
- (iii) references to the words “include” or “including” are to be construed without limitation to the generality of the preceding words;
- (iv) unless there is something in the subject matter or the context which is inconsistent therewith, any reference to an Act of Parliament or any Section thereof or Schedule thereto, or other provision thereof or any instrument, order or regulation made thereunder shall be construed at the particular time as including a reference to any modification, extension, replacement or re-enactment thereof then in force and to all instruments, orders or regulations then in force and made under or deriving validity from the relevant Act of Parliament; and
- (v) references to the masculine shall include the feminine and references in the singular shall include the plural and vice versa and words denoting natural persons shall include companies, corporations and any other legal entity and vice versa.
- (vi) unless otherwise provided to the contrary herein, defined terms used in this Agreement and not defined herein shall have the meaning set forth in the Connection and Use of System Code or the Bilateral Connection Agreement.

## **2. RIGHT TO INSTALL AND RETAIN ASSET**

- 2.1 Subject to sub-clause 5.1, User hereby grants to the RTL the right to install and thereafter retain and replace as provided in this Agreement RTL Assets on User's Land in such places as are currently proposed (subject to such variations between the date hereof and the actual date of installation as may be agreed to by User) and such right shall extend to any Modified RTL Assets. User shall maintain any shelter and/or support enjoyed by any RTL Assets at the date of this Agreement or, if later, when relocated on User's Land in accordance with clause 5 and grants to the RTL a Right of Access for the purpose of the maintenance, inspection, testing, removal, operation, Modification or repair of any RTL Assets.

### **3. MODIFICATIONS REPLACEMENTS AND ALTERATIONS**

- 3.1 The RTL may at its own expense replace or alter any RTL Assets provided that:-

- 3.1.1 the replacement RTL Assets or the RTL Assets as so altered:-

- (i) are placed in the same or approximately the same position;
  - (ii) fulfil the same or a similar purpose;
  - (iii) can, where relevant, be accommodated in and on existing buildings or structures;
  - (iv) do not require additional or improved facilities or services from User;
  - (v) do not restrict the actual and intended use of User's Land and any equipment thereon or therein to any materially greater extent than the RTL Assets so replaced or altered;
- and

- (vi) are either of the same or a similar or smaller size or the alteration is effected substantially within the space occupied by such RTL Assets to enable the RTL Assets to be used up to their full capability; and

3.1.2 prior written notification has been given to User.

- 3.2 If any replacement or alteration permitted by clause 3.1 shall require minor alterations or work to the existing buildings or structures housing or supporting the RTL Assets in question, such alterations or works may be carried out (with the prior written approval of User (such approval not to be unreasonably withheld or delayed)) but at the cost of the RTL.
- 3.3 To the extent that any of the conditions of clause 3.1 are not in User's reasonable opinion met in relation to any replacement or alteration, User may by notice in writing require the RTL promptly to remove such replacement or alteration and, if the RTL fails to do so, may remove the same itself at the cost and expense of the RTL. On such removal, the RTL may reinstate the RTL Assets so replaced or altered.
- 3.4 The RTL shall, if considering moving, replacing, or altering any of the RTL Assets, give due consideration as to whether it shall be operationally practicable, desirable and reasonably economic to move such RTL Assets to (or place the replacement or altered RTL Assets on) its own property.
- 3.5 For the avoidance of doubt it is hereby agreed that any dispute between the Parties regarding this clause shall be determined in accordance with the provisions of Clause 10 of this Agreement.

#### **4. SECURITY AND COMPLIANCE WITH STATUTES etc**

- 4.1 User undertakes to maintain and provide security in relation to the RTL Assets in accordance with the arrangements set out in Part I of Schedule 3.
- 4.2 Each Party shall procure that, as between the Parties, all reasonable and necessary steps are taken, as and when necessary or desirable, in co-operation with the other (and, so far as applicable, with any third party), to ensure compliance with the provisions (each such provision or part thereof being in this clause 4 an “Obligation”) of:-
- (i) all statutes and Directives applicable to any RTL Assets and/or any part (including the whole) of User’s Land;
  - (ii) any statute or Directive which may affect any other property (of whatever nature) of either Party as a result of the existence, nature, location, or manner of operation of any RTL Assets; and
  - (iii) any statute or Directive requiring the reporting of any occurrence relating to or affecting any RTL Assets and/or User’s Land (including the Reporting of Injuries Diseases and Dangerous Occurrence Regulations 1985 and the Regulations).
- 4.3 Each Party shall, so far as it is aware of the same, unless it has reasonable grounds for believing that the other Party possesses the information, keep the other Party informed of all matters relating to any Obligation or potential Obligation and/or the extent to which such Obligation may be applicable.
- 4.4 In the event of any dispute as to responsibility, as between the Parties, pursuant to clause 4.2, for compliance with an Obligation, that responsibility shall be allocated, so far as practicable, on the basis that:-

- (i) each Party shall refrain from taking or permitting any act or omission which would prevent compliance with an Obligation; and
- (ii) positive action required in relation to a Party's property as a consequence of the existence, nature, location or manner of operation of that property or any other property of that Party shall be the responsibility of that Party, and, to the extent that such action is required in respect of or affecting any property of the other Party (or property of a third party located in or on that other Party's land), such action may be taken with the prior approval of that other Party (such approval, subject to (i) above, not to be unreasonably withheld or delayed).

4.5 The provisions for safety co-ordination between the Parties contained in Part II of Schedule 3 shall apply.

## **5. RELOCATIONS**

5.1 At any time and from time to time during the term of this Agreement, User may with the prior written consent of the RTL (such consent not to be unreasonably withheld or delayed) require the RTL to relocate any RTL Assets either to a different location on the User Land or to the RTL's or a third party's land, such consent to be sought and given or refused in accordance with the following procedure:-

5.1.1 User shall serve a written notice on the RTL, which notice shall specify:-

- (a) the RTL Assets which User wishes to be relocated;
- (b) the reasons for such wish;

- (c) the proposed new location for such RTL Assets; and
- (d) the timing of the carrying out of such relocation.

5.1.2 The RTL shall within one month of receipt of any such notice (or such longer period as shall be reasonably necessary) serve a counter notice stating:-

- (a) whether or not in its reasonable opinion such Relocation Proposal is acceptable to it;
- (b) if the Relocation Proposal is not acceptable to the RTL, the grounds for such opinion and the terms of any alternative proposal (the “Alternative Relocation Proposal”) covering so far as relevant the matters referred to in items (a) - (d) of clause 5.1.1 which would be acceptable to the RTL; and
- (c) in respect of the Relocation Proposal (if accepted) or of any Alternative Relocation Proposal, the costs likely to be incurred in connection with considering the Relocation Proposal or the Alternative Relocation Proposal and effecting the said relocation of the RTL Assets and the proper and reasonable costs of relocating any other equipment that may be necessary as a result of the relocation of those RTL Assets and any consequential losses including payments to third parties incurred as a result of the relocation of those RTL Assets and the proposed manner and timing of payment of the same by User.

5.1.3 If within one month of the date of such counter notice (or such longer period as shall be reasonably necessary) User has not



withdrawn the Relocation Proposal and the Parties have not agreed upon it or the Alternative Relocation Proposal (if any) or a variation of either of them (such agreement to include agreement on the costs referred to in item (c) of clause 5.1.2) the matter shall be dealt with in accordance with Clause 10.

- 5.2 Upon approval or settlement of any Relocation Proposal, Alternative Relocation Proposal or variation thereof pursuant to clause 5.1, the RTL shall (conditionally upon it being able to obtain all necessary licences and consents which it will use reasonable endeavours to do) relocate or procure the relocation of the relevant RTL Assets as quickly as reasonably practicable (having regard to, amongst other things, technical and operational requirements and to the availability of all necessary licences and consents).
- 5.3 User shall render all reasonable assistance to the RTL in connection with such relocation licences and consents and pay to the RTL all costs referred to in item (c) of clause 5.1.2 as agreed or settled pursuant to clause 5.1 provided that all reasonable endeavours are used to minimise such costs and in the event that a Relocation Proposal is withdrawn or consent thereto is reasonably withheld pursuant to clause 5.1, User shall pay to the RTL all costs reasonably incurred by the RTL in connection with considering the Relocation Proposal and any counter notice.
- 5.4 Such of the provisions of this Agreement as are appropriate and relevant (including the provisions of this clause 5), shall continue to apply to any relocated RTL Assets.

## **6. REMOVALS**

- 6.1 In the event that there shall cease to be a Bilateral Connection

Agreement relating to any RTL Assets on User's Land the RTL shall remove all RTL Assets from User's Land in accordance with the provisions relating thereto contained in the Connection Agreement and the Bilateral Connection Agreement.

- 6.2 Where the RTL is obliged to remove any of the RTL Assets from User's Land, whether under this Clause 6, and fails to do so in accordance with the relevant provisions, (whether they be contained in this Clause 6, Clause 3 or Clause 5) User shall be entitled to remove those RTL Assets to land belonging to the RTL and the RTL shall provide all reasonable assistance to enable User safely so to do and shall pay and reimburse to User all costs and expenses reasonably incurred by User in so doing.

## **7. RIGHTS OF ACCESS**

- 7.1 A Right of Access includes the right to bring on to User's Land such vehicles, plant, machinery and maintenance or construction materials as shall be reasonably necessary for the Permitted Purpose.
- 7.2 A Right of Access given to the RTL may be exercised by any person, including third party contractors, reasonably nominated from time to time by the RTL. To the extent (if any) that any particular authorisation or clearances may be required to be given by User and the procedures for giving and obtaining the same are not for the time being stipulated in arrangements made pursuant to clause 7.3, the same shall be given within a reasonable time from the date of the request therefor, save in the case of emergency in which case it shall be given without delay.
- 7.3 The RTL shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable, to facilitate the safe exercise by it of any Right of Access with

the minimum of disruption, disturbance or inconvenience to User. Such arrangements and provisions shall provide for User to have the right to make directions or regulations from time to time in relation to a specified matter. Matters to be covered by such arrangements and/or provision shall include:-

- (i) the identification of any relevant RTL Assets;
- (ii) the particular access routes applicable to the land in question having particular regard for the weight and size limits on those routes;
- (iii) any limitations on times of exercise of a Right of Access;
- (iv) any requirements as to prior notification and as to authorisation or security clearance of individuals exercising such Rights of Access, and procedures for obtaining the same;
- (v) the means of communication between the Parties and all employees and/or contractors who may be authorised from time to time by the RTL to exercise a Right of Access of any relevant directions or regulations made by the RTL;
- (vi) the identification of and arrangements applicable to Emergency Personnel.
- (vii) any limitation or restriction on the exercise of such Right of Access to the extent that in the circumstances is reasonable.

7.4 The RTL shall procure that any such arrangements and/or provisions (or directions or regulations issued by User pursuant thereto) made from time to time between the Parties shall be observed and performed by it and all persons authorised by it to exercise any Right of Access.

7.4.1 The RTL shall procure that all reasonable steps are taken in the exercise of any Right of Access to:

- (a) avoid or minimise damage to User's Land, or any other property thereon or therein;
- (b) cause as little disturbance and inconvenience as possible to User or other occupier of User's Land;

and shall promptly make good any damage caused to User's Land and/or such other property in the course of the exercise of such rights and shall indemnify User against all actions, claims, proceedings, losses, costs and demands arising out of such exercise.

7.4.2 Subject to clause 7.4.1, all such rights shall be exercisable free of any charge or payment of any kind.

7.5 Subject to any contrary arrangements for the time being made under clause 7.3,

7.5.1 a Right of Access for operation or inspection shall be available without prior notice;

7.5.2 a Right of Access for the purpose of maintenance, testing or repair of HV Apparatus granted shall only be exercisable on the giving of at least seven days prior written notice to User except in the case of loss of generation or demand or other emergency (in which event User shall render all possible assistance in procuring that the Right of Access shall be exercisable as soon as possible); and

7.5.3 a Right of Access for the purpose of Modifying any RTL Asset

shall be exercisable only after two weeks prior written notice to User.

**8. SERVICES AND USE OF ASSETS**

8.1 Subject as hereinafter provided, in relation to each Facility Asset, User shall, if required by the RTL, make the Facility Asset in question available for use by the RTL to such extent as is necessary for the purposes of the RTL's undertaking but not so as to prejudice the use now or hereafter of such Facility Asset by User for its undertaking.

8.2 Subject as hereinafter provided, in relation to each of the Services, User shall, if required by the RTL, provide the same to the RTL. Such provision shall be of such a quality and quantity and shall be provided at such times as the RTL shall reasonably request. User shall not be required to exceed the level of quality or quantity of the Services as is anticipated by the Parties at the date of this Agreement, unless specifically agreed otherwise between the Parties.

8.3 Where the use of any Facility Asset is made available or such Services are supplied as aforesaid, the Parties shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable between the local personnel employed by each of them in that regard, such arrangements to include:-

8.3.1 the identification of the Facility Asset and/or Services in question including (where relevant) the extent of their availability;

8.3.2 the hours during which such use or provision shall be allowed or made;

8.3.3 any requirements as to notification of use or call for supply or

temporary suspension thereof;

8.3.4 any requirements as to authorisation or security clearance of individuals and the procedures for obtaining the same; and

8.3.5 any safety requirements;

8.4 The provision of use of the Facility Asset listed in Schedule 4, Part One and the supply of the Services listed in Schedule 5, Part One shall not be terminated unless User ceases to require the Facility Asset or Services for its own use in which case the supply of the Services or use of the Facility Asset may be terminated by not less than one year's notice in writing;

8.5 The provision of use of the Facility Asset listed in Schedule 4, Part Two and the supply of the Services listed in Schedule 5, Part Two shall continue until terminated by not less than six months notice in writing by either Party. User shall maintain the Facility Asset in accordance with Good Industry Practice.

## **9. NON-INTERFERENCE**

9.1 User agrees that neither it nor its agents, employees and invitees will interfere in any way with any of the RTL Assets without the consent of the RTL. For the purposes of this clause "interfere" shall include:

9.1.1 disconnecting or altering the connection of any RTL Assets to any system of cables, foundations, pipes, drains or other media to which it may be connected from time to time or to prevent supply of any substance or thing through such connected system;

9.1.2 affixing or removing any item or substance of any nature

whatsoever to or from any RTL Assets;

9.1.3 damaging any RTL Assets;

9.1.4 allowing any other person to interfere with any RTL Assets;

9.1.5 altering any meters or settings on any RTL Assets.

9.1.6 the obstruction of access to any RTL Assets.

9.2 The obligations contained in this clause 9 shall be suspended to the extent that emergency action is taken by Emergency Personnel in good faith to protect the health and safety of persons or to prevent damage to property. All reasonable care shall be taken in the course of such emergency action. When the emergency has ended, any damaged property will be reinstated by the RTL, save for damage occurring by reason of lack of reasonable care in the course of the emergency action taken by User which shall be the responsibility of User.

## **10. DISPUTE RESOLUTION**

10.1 Any dispute arising under this Agreement between Location Managers of the Parties shall, if not resolved within 14 days of first arising, be referred at the instance of either party to the respective line managers, or those fulfilling a similar function whether or not so called, of User and the RTL who shall use all reasonable endeavours to resolve the matter in dispute within one month.

10.2 Save where expressly stated in this Agreement to the contrary (including the procedure for initial dispute resolution contained in Clause 10.1) and subject to any contrary provision of the Act, any Licence, or the Regulations, or the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any Licence or otherwise

howsoever, any dispute or difference of whatever nature howsoever arising under out of or in connection with this Agreement between the Parties shall (subject to initial dispute resolution procedures referred to in Clause 1 having been exhausted) be and is hereby referred to arbitration pursuant to the rules of the London Court of International Arbitration in force from time to time.

- 10.3 Whatever the nationality residence or domicile of any Party and wherever the dispute or difference or any part thereof arose the law of England and Wales shall be the proper law of any reference to arbitration hereunder and in particular (but not so as to derogate from the generality of the foregoing) the provisions of the Arbitration Act 1996 (including any modification, extension, replacement or re-enactment thereof for the time being in force) shall apply to any such arbitration wherever the same or any part of it shall be conducted.

## **11. GOVERNING LAW AND JURISDICTION**

- 11.1 This Agreement shall be governed by and construed in all respects in accordance with English law.
- 11.2 Subject and without prejudice to clause 10 and to clause 11.4 the Parties irrevocably agree that only the courts of England and Wales and the courts of Scotland are to have jurisdiction to settle any dispute which may arise out of or in connection with this Agreement and that accordingly any suit, action or proceeding (together in this clause 11 referred to as "Proceedings") arising out of or in connection with this Agreement may be brought in such courts.
- 11.3 Each Party irrevocably waives any objection which it may have now or hereafter to the laying of the venue of any Proceedings in any such court



as is referred to in this clause 11 and any claim that any such Proceedings have been brought in an inconvenient forum and further irrevocably agrees that a judgment in any Proceedings brought in the courts of England and Wales or the courts of Scotland shall be conclusive and binding upon such Party and may be enforced in the courts of any other jurisdiction.

- 11.4 For the avoidance of doubt nothing contained in the foregoing provisions of this clause 11 shall be taken as permitting a Party to commence Proceedings in the courts where this Agreement otherwise provides for proceedings to be referred to arbitration.

## **12. CONFIDENTIALITY<sup>1</sup>**

- 12.1 For the purposes of this Clause 12 except where the context otherwise requires:

12.1.1 “Authorised Recipient”, in relation to any Protected Information, means any Business Person who, before the Protected Information had been divulged to them by the RTL or any subsidiary of the RTL, had been informed of the nature and effect of this clause 12 and who requires access to such Protected Information for the proper performance of their duties as a Business Person in the course of Permitted Activities;

12.1.2 “Business Person” means any person who is a Licensed Business Person, or a Corporate Functions Person and “Business Personnel” shall be construed accordingly.

12.1.3 “Confidential Information” means all data and other information

---

<sup>1</sup> To consider simplifying?

supplied to User under the provisions of this Agreement.

12.1.4 “Corporate Functions Person” means any person who:-

- (a) is a director of the RTL; or
- (b) is an employee of the RTL or any of its subsidiaries carrying out any administrative, finance or other corporate services of any kind which in part relate to the Licensed Business; or
- (c) is engaged as an agent of or adviser to or performs work in relation to or services for the Licensed Business.

12.1.6 “Licensed Business” means any business or activity of the RTL or any of its associates authorised by its RTL Licence;

12.1.7 “Licensed Business Person” means any employee of the RTL or any director or employee of its subsidiaries who is engaged solely in its Licensed Business and “Licensed Business Personnel” shall be construed accordingly;

12.1.8 “Permitted Activities” means activities carried on for the purposes of the Licensed Business;

12.1.9 “Protected Information” means any information relating to the affairs of a Party which is furnished to Business Personnel pursuant to this Agreement unless, prior to such information being furnished, such Party has informed the recipient thereof by notice in writing or by endorsement on such information, that the said information is not to be regarded as Protected Information.

## 12.2 Confidentiality for the RTL and its Subsidiaries

The RTL and its subsidiaries in each of their capacities in this Agreement

shall secure that Protected Information is not:-

12.2.1 divulged by Business Personnel to any person unless that person is an Authorised Recipient;

12.2.2 used by Business Personnel for the purposes of obtaining for the RTL or any of its subsidiaries or for any other person:-

- (a) any Licence; or
- (b) any right to purchase or otherwise acquire, or to distribute, electricity including by means of an electricity purchase contract (as defined in the Transmission Licence); or
- (c) any contract or arrangement for the supply of electricity to customers or suppliers; or
- (d) any contract for the use of any electrical lines or electrical plant belonging to or under the control of a supplier.

12.2.3 used by Business Personnel for the purpose of carrying on any activities other than Permitted Activities except with the consent in writing of the Party to whose affairs such Protected Information relates.

12.3 Nothing in this Clause 12 shall apply:

12.3.1 to any Protected Information which, before it is furnished to Business Personnel is in the public domain;

12.3.2 to any Protected Information which, after it is furnished to Business Personnel:

- (a) is acquired by the RTL or any subsidiary of the RTL in

circumstances in which this Clause 12 does not apply; or

- (b) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
- (c) enters the public domain otherwise than as a result of a breach by the RTL or any subsidiary of the RTL of its obligations in this Clause 12.

12.3.3 to the disclosure of any Protected Information to any person if the RTL or any subsidiary is required or permitted to make such disclosure to such person:

- (a) in compliance with the duties of the RTL or any associate under the Act or any other requirement of a Competent Authority; or
- (b) in compliance with the conditions of its RTL Licence or any document referred to in its RTL Licence with which the RTL is required to comply; or
- (c) in compliance with any other requirement of law; or
- (d) in response to a requirement of any recognised stock exchange or regulatory authority or the Panel on Takeovers and Mergers; or
- (e) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal.

- 12.3.4 to any Protected Information to the extent that the RTL or any of its subsidiaries is expressly permitted or required to disclose that information under the terms of any agreement or arrangement (including the Fuel Security Code) with the Party to whose affairs such Protected Information relates.
- 12.4 The RTL and its subsidiaries may use all and any information or data supplied to or acquired by it, from or in relation to the other Party to this Agreement in performing its Permitted Activities and may pass the same to subsidiaries of the RTL which carry out such activities and the User hereto agrees to provide all information to the RTL and its subsidiaries for such purpose.
- 12.5 The Company and its subsidiaries may use all and any information or data supplied to or acquired by it from the RTL pursuant to Clause 12.3.3 in relation to this Agreement in performing its activities under the ESO Licence including for the following purposes:
- 12.5.1 the operation and planning of the National Electricity Transmission System;
- 12.5.2 the calculation of charges and preparation of offers of terms for connection to or use of the National Electricity Transmission System;
- and the User agrees to provide all information to the RTL and its subsidiaries for such purposes.
- 12.6 The RTL undertakes that, having regard to the activities in which any Business Person is engaged and the nature and effective life of the Protected Information divulged to them by virtue of such activities, neither the RTL nor any of its subsidiaries shall unreasonably continue (taking

into account any industrial relations concerns reasonably held by it) to divulge Protected Information or permit Protected Information to be divulged to any Business Person:

- (a) who has notified the RTL or the relevant subsidiary of their intention to become engaged as an employee or agent of any other person (other than of the RTL or any subsidiary thereof); or
- (b) who is authorised by licence or exemption to generate or supply electricity.

12.7 Without prejudice to other provisions of this clause 12 the RTL shall procure that any additional copies of the Protected Information, whether in hard copy or computerised form, will clearly identify the Protected Information as protected.

12.8 The RTL undertakes to use all reasonable endeavours to procure that no employee is a Corporate Functions Person unless the same is necessary for the proper performance of their duties.

12.9 Confidentiality for User

12.9.1 User hereby undertakes with the RTL and its subsidiaries that it shall preserve the confidentiality and secrecy of, and not directly or indirectly reveal, report, publish, disclose or transfer or use for its own purposes Confidential Information except:

- (a) in the circumstances set out in Clause 12.9.2;
- (b) to the extent expressly permitted by this Agreement; or
- (c) with the consent in writing of the RTL.

12.9.2 Exceptions: the circumstances referred to in Clause 12.9.1(a)

are:

- (a) where the Confidential Information, before it is furnished to User, is in the public domain; or
- (b) where the Confidential Information, after it is furnished to User:
  - (i) is acquired by User in circumstances in which this Clause 12 does not apply; or
  - (ii) is acquired by User in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
  - (iii) enters the public domain otherwise than as a result of a breach by User of its obligations in this Clause 12; or
- (c) if User is required or permitted to make disclosure of the Confidential Information to any person:
  - (i) in compliance with the duties of User under the Act or any other requirement of a Competent Authority;
  - (ii) in compliance with the conditions of any Licence or any document referred to in any Licence with which User is required to comply;
  - (iii) in compliance with any other requirement of law;
  - (iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Takeovers and

Mergers; or

(v) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal; or

(d) where Confidential Information is furnished by User to the employees, directors, agents, lenders, consultants and professional advisers of User in each case on the basis set out in Sub-Clause 12.10.

12.10 With effect from the date of this Agreement User shall adopt procedures within its organisation for ensuring the confidentiality of all Confidential Information which it is obliged to preserve as confidential under this Clause 12. These procedures will include:

12.10.1 the Confidential Information will be disseminated within User only on a “need to know” basis;

12.10.2 employees, directors, agents, lenders, consultants and professional advisers of User in receipt of Confidential Information will be made fully aware of User’s obligations of confidence in relation thereto.

### **13. TITLE TO ASSETS**

13.1 The RTL acknowledges that it does not have and will not acquire any title, right or interest in User’s Land save for such rights as are expressly granted herein or otherwise provided nevertheless that, if according to any rule of law, the RTL could acquire any such title, right or interest in any of User’s Land, then:

13.1.1 in the case of land in England & Wales, such title right or interest



shall be held upon trust, insofar as it relates to the User's land for such User absolutely; or

13.1.2 in the case of land in Scotland, the RTL undertakes to do all that is required to transfer such right or interest to User to ensure that User shall not, by reason of such right or interest arising, have its full rights in such land diminished (and in the interim to hold such rights in trust for User) and shall if requested by User, be obliged forthwith to establish trust arrangements valid under Scottish law so as to ensure that any such right or interest shall be held on behalf of User.

13.2 User agrees that it shall not by any act or default render the RTL Assets liable to any distress execution or other legal process, and in the event that the RTL Assets shall become so liable, shall forthwith give notice of any such proceedings to the RTL and shall forthwith notify any third party instituting any such process of the ownership of such RTL Assets.

13.3 If User desires to mortgage or charge User's Land or its interest therein on which any RTL Assets are located or to enter into any arrangement which, if made, might affect the rights of the RTL expressly granted herein, then User shall ensure that the RTL Assets are not and will not be subject to the rights granted therein and are not and will not be affected by the mortgage, legal charge or other agreement or arrangement, and shall give prior written notification thereof to the RTL.

13.4 In the event that User shall wish to grant rights over or dispose of any interest in or change the use of User's Land User shall notify the RTL of such wish and fully consult the RTL in respect thereof and shall not grant such rights or make such disposal or change of use save on terms securing to the reasonable satisfaction of that other the Rights of Access granted in respect of User's Land.

**14. LIMITATION OF LIABILITY**

14.1 Subject to sub-clauses 5.3, 6.2, 9.2 and 14.5 and save as provided in this sub-clause 14.1 and sub-clause 14.2 neither Party ("the Party Liable") nor any of its officers, employees or agents shall be liable to the other Party for loss arising from any breach of this Agreement other than for loss directly resulting from such breach and which at the date hereof was reasonably foreseeable as not unlikely to occur in the ordinary course of events from such breach and which resulted from:

14.1.1 physical damage to the property of the other Party, its officers, employees or agents; and/or

14.1.2 the liability of the other Party to any other person for loss arising from physical damage to the property of any person.

14.2 Nothing in this Agreement shall exclude or limit the liability of the Party Liable for death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents and the Party Liable shall indemnify and keep indemnified the other Party, its officers, employees or agents, from and against all such and any loss or liability which the other Party may suffer or incur by reason of any claim on account of death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents.

14.3 Subject to sub-clauses 5.3, 6.2, 9.2 and 14.5 neither Party, nor any of its officers, employees or agents shall in any circumstances whatsoever be liable to the other Party for:-

14.3.1 any loss of profit, loss of revenue, loss of use, loss of contract or loss of goodwill; or

14.3.2 any indirect or consequential loss; or

14.3.3 loss resulting from the liability of the other Party to any other person howsoever and whensoever arising save as provided in sub-clauses 14.1.2 and 14.2.

14.4 The rights and remedies provided by this Agreement to the Parties are exclusive and not cumulative and exclude and are in place of all substantive (but not procedural) rights or remedies express or implied and provided by common law or statute in respect of the subject matter of this Agreement, including any rights either Party may possess in tort which shall include actions brought in negligence and/or nuisance. Accordingly, each of the Parties hereby waives in the fullest extent possible all such rights and remedies provided by common law or statute, and releases the Party Liable, its officers, employees and agents to the same extent from all duties, liabilities, responsibilities or obligations provided by common law or statute in respect of the matters dealt with in this Agreement and undertakes not to enforce any of the same except as expressly provided herein.

14.5 Save as otherwise expressly provided in this Agreement, this clause 14 insofar as it excludes or limits liability shall override any other provision in this Agreement provided that nothing in this clause 14 shall exclude or restrict or otherwise prejudice or affect any of:

14.5.1 the rights, powers, duties and obligations of either Party which are conferred or created by the Act, the User's Licence, RTL's Licence or the Regulations or any amendment or re-enactment thereof; or

14.5.2 the rights, powers, duties and obligations of the Authority or the

Secretary of State under the Act, any such licence as aforesaid or otherwise howsoever.

14.6 Each of the sub-clauses of this clause 14 shall:

14.6.1 be construed as a separate and severable contract term, and if one or more of such sub-clauses is held to be invalid, unlawful or otherwise unenforceable the other or others of such sub-clauses shall remain in full force and effect and shall continue to bind the Parties; and

14.6.2 survive termination of this Agreement.

14.7 Each Party agrees that the other Party holds the benefit of sub clauses 14.1, 14.2 and 14.3 above for itself and as trustee and agent for its officers, employees and agents

14.8 Each Party hereby acknowledges and agrees that the provisions of this clause 14 have been the subject of discussion and negotiation and are fair and reasonable having regard to the circumstances as at the date hereof.

## **15. INTELLECTUAL PROPERTY**

All Intellectual Property relating to the subject matter of this Agreement conceived, originated, devised, developed or created by a Party, its officers, employees, agents or consultants during the currency of this Agreement shall vest in such Party as the sole beneficial owner thereof save where the Parties agree in writing otherwise.

## **16. FORCE MAJEURE**

If either Party (the “Non-Performing Party”) shall be unable to carry out

any of its obligations under this Agreement due to a circumstance of Force Majeure this Agreement shall remain in effect but save as otherwise provided herein the Non-Performing Party's obligations hereunder shall be suspended without liability for a period equal to the circumstance of Force Majeure provided that:

- (i) the Non-Performing Party gives the other Party prompt notice describing the circumstance of Force Majeure, including the nature of the occurrence, its expected duration and the particular obligations affected by it, and continues to furnish regular reports with respect thereto during the period of Force Majeure;
- (ii) the suspension of performance is of no greater scope and of no longer duration than is required by the Force Majeure;
- (iii) no liabilities of either Party that arose before the Force Majeure causing the suspension of performance are excused as a result of the Force Majeure;
- (iv) the non-performing Party uses all reasonable efforts to remedy its inability to perform; and
- (v) as soon as practicable after the event which constitutes Force Majeure the Parties shall discuss how best to continue their operations so far as possible in accordance with this Agreement.

## **17. WAIVER**

No delay by or omission of a Party in exercising any right, power, privilege or remedy under this Agreement shall operate to impair such right, power, privilege or remedy or be construed as a waiver thereof. Any single or partial exercise of any such right, power, privilege or remedy shall not

preclude any other or future exercise thereof or the exercise of any other right, power, privilege or remedy.

**18. NOTICES**

18.1 Any notice or other communication to be given by one Party to the other under, or in connection with the matters contemplated by, this Agreement shall be addressed to the recipient and sent to the address, or email address of such other Party given in Schedule 6 and marked for the attention of the person so given or to such other address, and/or email address and/or marked for such other attention as such other Party may from time to time specify by notice given in accordance with this clause 18 to the Party giving the relevant notice or other communication to it.

18.2 Any notice or other communication to be given by one Party to the other Party under, or in connection with the matters contemplated by, this Agreement shall be in writing and shall be given by letter delivered by hand or sent by first class prepaid post (airmail if overseas) or email, and shall be deemed to have been received:

18.2.1 in the case of delivery by hand, when delivered; or

18.2.2 in the case of first class prepaid post, on the second day following the day of posting or (if sent airmail from overseas) on the fifth day following the day of posting; or

18.2.3 in the case of telex, on the transmission of the automatic answerback of the addressee (where such transmission occurs before 1700 hours on the day of transmission) and in any other case on the day following the day of transmission; or

18.2.4 in the case of email, when delivered to the email address (where

such delivery occurs before 1700 hours on the day of delivery)  
and in any other case on the day following the day of delivery.

**19. VARIATIONS**

The provisions of Schedules 1, 3, 4, 5 and 6 may be varied from time to time by written memorandum signed by an authorised officer of each of the Parties. Subject thereto no variations to this Agreement shall be effective unless made by way of supplemental deed.

**20. OVERRIDING PROVISIONS & GOOD INDUSTRY PRACTICE**

20.1 In the event of any conflict between RTL's or User's obligations hereunder and their obligations under the User's Licence and RTL's Licence, the Act, any direction of the Secretary of State, the Authority or ruling of the Competition Commission, the Grid Code, Connection Agreement or the Bilateral Connection Agreement, the provisions of the User's Licence and RTL's Licence, the Act, the Grid Code, the Connection Agreement or Bilateral Agreement the direction of the Secretary of State, the Authority, or ruling of the Competition Commission shall prevail and accordingly the RTL and User respectively shall not be responsible for any failure to perform their respective obligations hereunder to the extent that any such failure is directly attributable to proper compliance with such provisions, rulings or directions.

20.2 Both parties shall observe their respective obligations hereunder in accordance with Good Industry Practice.

**21. ASSIGNMENT AND SUB-CONTRACTING**

21.1 The rights and obligations of a Party may not be assigned (otherwise than to an Affiliate or by way of a charge or an assignment by way of security)

without the consent of the other Party, such consent not to be unreasonably withheld.

- 21.2 Each Party shall have the right to sub-contract or delegate the performance of any of its obligations or duties arising under this Agreement without the consent of the other. The sub-contracting by either Party of the performance of any obligations or duties under this Agreement shall not relieve such Party from the liability for performance of such obligation or duty.

## **22. ILLEGALITY AND PARTIAL INVALIDITY**

- 22.1 If at any time any provision of this Agreement should become or be declared unlawful, invalid, illegal or unenforceable in any respect under the law of any jurisdiction, neither the validity, legality or enforceability of the remaining provisions nor the validity, legality or enforceability of such provision under the law of any other jurisdiction shall be affected.
- 22.2 If any part of a provision of this Agreement is or becomes or is declared invalid, unlawful, illegal or unenforceable but the rest of such provision would remain valid, lawful or enforceable if part of the wording were deleted the provision shall apply with such modifications as may be necessary to make it valid, lawful, enforceable and effective but without affecting the meaning of legality, validity or enforceability of any other provision of this Agreement.

## **23. TERM AND TERMINATION**

This Agreement shall continue until no RTL Assets are on User's land and no Facility Assets or Services are shared or provided.

## **24. REGISTRATION AND MEMORANDUM**



- 24.1 Where any or all of User's Land is registered or the RTL's interest therein is subject to compulsory registration at H.M Land Registry or the Land Register of Scotland (as relevant), the parties hereto agree to apply to the Chief Land Registrar or the Keeper (as relevant)] for the registration as appropriate of the rights and obligations granted by or contained in this Agreement and User agrees to place on deposit at H.M Land Registry or the Land Register of Scotland (as relevant) all relevant Land or Charge Certificates to enable such registration to be effected.
- 24.2 Where any of User's Land is not so registered or subject to compulsory registration, User shall procure within six months of the date hereof that certified copies of any such agreement are attached to the most recent conveyance (in the case of a heritable interest) or the lease under or pursuant to which they hold such land.

**25. ENTIRE AGREEMENT**

- 25.1 This Agreement contains the entire agreement between the Parties with respect to the subject-matter hereof, and expressly excludes any warranty, condition or other undertaking implied at law or by custom, and supersedes all previous agreements and understandings between the Parties with respect thereto and:
- (i) each of the Parties acknowledges and confirms that it does not enter into this Agreement in reliance on any representation, warranty or other undertaking not fully reflected in the terms of this Agreement; but
  - (ii) the RTL acknowledges that User may have entered or may enter into agreements with other parties who hold a Licence containing

similar rights and/or liabilities to those contained in this Agreement affecting User's Land and any assets thereon. User shall, when entering into such agreement with any such party use reasonable endeavours to avoid conflicts between the provisions thereof and the provisions of this Agreement but in the event of any conflict User shall use all reasonable endeavours to procure that appropriate arrangements are made to settle the same to give full effect (so far as practicable) to the rights and liabilities under this Agreement and under such other agreements as aforesaid. In the event of any dispute as to such conflict and/or arrangements the dispute shall be dealt with in accordance with Clause 10.

IN WITNESS whereof this Agreement has been entered into as a deed the day and year first above written.

**SCHEDULE 1**

RTL ASSETS ON USER LAND

**SCHEDULE 2**

USER'S LAND

### **SCHEDULE 3**

#### **Part I**

##### **Security Details (Cl. 4.1)**

##### **User's Land**

#### **Part II**

##### **Plant MV LV Apparatus Safety Co-Ordination Procedures (Cl. 4.5)**

- (1) The Parties will comply with the Site Specific Safety Rules and any agreed modifications thereto.
- (2) The Parties will arrange for the Site Specific Safety Rules to be written down and to be implemented by the person or persons responsible on behalf of the relevant Parties for the co-ordination of safety.

**SCHEDULE 4**

**USER OWNED FACILITY ASSETS**

PART ONE

PART TWO

**SCHEDULE 5**

**SHARED SERVICES PROVIDED BY USER**

PART ONE

PART TWO

**SCHEDULE 6**

Addresses, Email Addresses etc (Cl. 19.)

[Insert details of Relevant Transmission Licensee]

[            ]

Telephone:

Email Address:

[Insert details of User]

[            ]

Telephone:

Email Address



THE COMMON SEAL of )  
 )  
[RELEVANT TRANSMISSION LICENSEE] )  
was hereunto affixed in the presence of:- )

THE COMMON SEAL of )  
[ ] )  
was hereunto affixed in the presence of:- )

END OF SECTION O PART I B

**CUSC - EXHIBIT O - PART I C**

**THE CONNECTION AND USE OF SYSTEM CODE**

**INTERFACE AGREEMENTS**

**PART I C - RELEVANT TRANSMISSION LICENSEE ASSETS ON USER  
OFFSHORE PLATFORM**

**CUSC - EXHIBIT O - PART I C**

DATED

200[ ]

[ ] (User)

- and -

[Insert name of Relevant Transmission Licensee  
(RTL)]

**INTERFACE AGREEMENT**

Relating to Relevant Transmission Licensee Assets  
on  
User Offshore Platform at [ ]

## I N D E X

| Clause | Title                                       | Page |
|--------|---------------------------------------------|------|
| 1      | Definitions and Interpretation              | 1    |
| 2      | Right to Install and Retain Asset           | 8    |
| 3      | Modifications, Replacements and Alterations | 8    |
| 4      | Security and Compliance with Statutes etc.  | 10   |
| 5      | Relocations                                 | 11   |
| 6      | Removals                                    | 13   |
| 7      | Rights of Access                            | 13   |
| 8      | Services and Use of Assets                  | 15   |
| 9      | Non-Interference                            | 16   |
| 10     | Dispute Resolution                          | 17   |
| 11     | Governing Law and Jurisdiction              | 19   |
| 12     | Confidentiality                             | 20   |
| 13     | Title to Assets                             | 26   |
| 14     | Limitation of Liability                     | 27   |
| 15     | Intellectual Property                       | 29   |
| 16     | Force Majeure                               | 29   |
| 17     | Waiver                                      | 30   |
| 18     | Notices                                     | 30   |
| 19     | Variations                                  | 31   |
| 20     | Overriding Provisions                       | 31   |
| 21     | Assignment and Sub-Contracting              | 32   |
| 22     | Illegality and Partial Invalidity           | 32   |

|    |                             |    |
|----|-----------------------------|----|
| 23 | Term and Termination        | 32 |
| 24 | Registration and Memorandum | 33 |
| 25 | Entire Agreement            | 33 |

Schedule 1 RTL Assets on User's Offshore Platform

Schedule 2 Offshore Platform

Schedule 3 Part I - Security Details

Part II - Plant MV LV Apparatus

Safety Co-ordination Procedures

Schedule 4 User Owned Facilities

Schedule 5 Services

Schedule 6 Addresses, Email Addresses etc.

**(RELEVANT TRANSMISSION LICENSEE ASSETS)**

In this Agreement, the following words and expressions shall, unless the subject-matter or context otherwise requires or is inconsistent therewith, bear the following meanings:-

|                                   |                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Act”                             | the Electricity Act 1989 as amended by Utilities Act 2000;                                                                                                                                                                                                                                                                                                                                  |
| “Affiliate”                       | in relation to User means any holding company or subsidiary of that Party or any subsidiary of a holding company of User, in each case within the meaning of Sections 736, 736A and 736B of the Companies Act 1985 as substituted by Section 144 of the Companies Act 1989 and if that section is not in force at the date of this Agreement as if such section were in force at such date; |
| “Apparatus”                       | all equipment in which electrical conductors are used, supported or of which they may form a part;                                                                                                                                                                                                                                                                                          |
| “Authority”                       | the Gas and Electricity Markets Authority established by Section 1 of the Utilities Act 2000;                                                                                                                                                                                                                                                                                               |
| “Authorised Electricity Operator” | any person (other than The Company) who is authorised to generate, participate in the transmission of, distribute or supply electricity and for the purposes of Standard Condition C4 of the Transmission Licence shall include                                                                                                                                                             |

any person who has made

application to be so authorised which application has not been refused and any person transferring electricity to or from Great Britain across an interconnector or who has made application for use of interconnector which has not been refused;

“Bilateral Connection  
“Agreement”

the Bilateral Connection Agreement entered into between the User and The Company pursuant to the Connection Agreement and dated [ ];

“Connection Agreement”

the Connection and Use of System Code given contractual force by the CUSC Framework Agreement entered into by, amongst others, the User regarding, amongst other things, the connection of User’s Plant and Apparatus to the National Electricity Transmission System and the use by the User of such system;

“Competent Authority”

the Secretary of State, the Authority and any local or national



agency, authority,  
department, inspectorate,  
minister (including the  
Scottish Ministers),  
ministry, official or public or  
statutory person (whether  
autonomous or not) of, or of the  
government of, the United Kingdom or  
the European Community;

“Connection Site” [ ];

“CUSC Framework Agreement” means the agreement of that title, in the form approved by the Secretary of State, by which the Connection Agreement is made contractually binding between the parties to that agreement, as amended from time to time with the approval of the Secretary of State;

“Customer” a person to whom electrical power is provided (whether or not they are the provider of such electrical power) other than power to meet station demand of that person;

“Directive”

includes any present or future directive, requirement, instruction, direction or rule of any Competent Authority, (but only, if not having the force of law, if compliance with the Directive is in accordance with the general practice of persons to whom the Directive is addressed) and includes any modification, extension or replacement thereof then in force;

“Distribution System”

the system consisting (wholly or mainly) of electric lines owned or operated by any Authorised Electricity Operator and used for the distribution of electricity from grid supply points or generation sets or other entry points to the point of delivery to Customers or Authorised Electricity Operators, and includes any Remote Transmission Assets operated by such Authorised Electricity Operator and any electrical plant and meters owned or operated by the Authorised Electricity Operator in connection with the distribution of electricity, but shall not include any part of the National Electricity Transmission

System;

“Emergency Personnel”

in relation to a Party, all employees of that Party who have appropriate knowledge and experience and are recognised by that Party as being able to carry out competently and safely emergency action for the purposes of clause 9;

“Facilities”

those assets or services listed in Schedule 4;

“Force Majeure”

in relation to a Party, any event or circumstance which is beyond the reasonable control of that Party, and which results in or causes the failure of that Party to perform any of its obligations under this Agreement including any act of God, strike, lockout or other industrial disturbance, act of the public enemy, war declared or undeclared, threat of war, terrorist act, blockade, revolution, riot, insurrection, civil commotion, public demonstration, sabotage, act of vandalism, lightning, fire, storm, flood, earthquake, accumulation of snow or ice, lack of water arising from weather or

environmental problems, explosion, fault or failure of plant and apparatus which could not have been prevented by Good Industry Practice, governmental restraint, Act of Parliament legislation, bye-law, and Directive (not being any order, regulation or directive under Section 32, 33, 34 or 35 of the Act) Provided that lack of funds shall not be interpreted as a cause beyond the reasonable control of that Party and provided, for the avoidance of doubt, that weather conditions which are reasonably to be expected at the location of the event or circumstance are also excluded as not being beyond the reasonable control of that **CUSC Party**;

“Fuel Security Code”

the document of that title designated as such by the Secretary of State as from time to time amended;

“Good Industry Practice”

in relation to any undertaking and any circumstances, the exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and

experienced operator engaged in the same type of undertaking under the same or similar circumstances;

“Grid Code”

the document or documents produced pursuant to condition E3 of the ESO Licence, as from time to time revised in accordance with the ESO Licence;

“High Voltage Lines”

electric lines of a nominal voltage of or exceeding 132 kilovolts;

“HV”

of a nominal voltage exceeding 650 volts;

“Intellectual Property”

patents, trademarks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same is registered and including applications for registration of any of the same) and rights under licences and consents in relation to any of the same and all rights or forms of protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world;

“Licence”

any licence granted pursuant to Section 6 of the Act;

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Location Manager”                         | [            ];                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| “Low Voltage” or “LV”                      | means a voltage not exceeding 250 volts;                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| “Medium Voltage” or “MV”                   | means a voltage exceeding 250 volts but not exceeding 650 volts;                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| “Modification”                             | any alteration to or replacement of RTL Assets pursuant to clause 3.1 of this Agreement and “Modify” and “Modified” shall be construed accordingly;                                                                                                                                                                                                                                                                                                                                               |
| “National Electricity Transmission System” | the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within Great Britain and Offshore and used for the transmission of electricity from one power station to a sub-station or to another power station or between sub-stations or to or from any external interconnection and includes any electrical plant or apparatus or meters owned or operated by any transmission licensee within Great Britain and Offshore in connection |

with the transmission of electricity but shall not include Remote

Transmission Assets;

“NGET” means National Grid Electricity Transmission plc (Company number 02366977) with registered office at 13 Strand, London, WC2N 5EH;

“Offshore” Means, wholly or partly, in the Offshore Waters and when used in conjunction with another term and the terms together are not otherwise defined means that the associated term is to be read accordingly.

“Offshore Platform” a single structure comprising of Plant and Apparatus located Offshore which includes one or more Offshore Grid Entry Points and which is more particularly described in Schedule 2

“Offshore Waters” has the meaning given to “offshore waters” in Section 90(9) of the Energy Act 2004

“Party” each person for the time being and from time to time party to this Agreement and any successor(s) in title to, or permitted assign(s) of, such person;

“Permitted Purpose” means the maintenance, inspection, testing, removal, operation,

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | modification or repair of the RTL Assets;                                                                                                                                                                                                                                                                                                                                                                   |
| “Plant”                          | fixed and moveable items used in the generation and/or supply and/or transmission of electricity other than Apparatus;                                                                                                                                                                                                                                                                                      |
| “Regulations”                    | the Electricity Safety Quality and Continuity Regulations 2002 as amended from time to time;                                                                                                                                                                                                                                                                                                                |
| “Relevant Transmission Licensee” | means [ <i>insert name of Offshore Transmission Owner</i> ];                                                                                                                                                                                                                                                                                                                                                |
| “Relocation Proposal”            | a proposal by User to the RTL pursuant to sub-clause 5.1 for the relocation of any of the RTL Assets;                                                                                                                                                                                                                                                                                                       |
| “Remote Transmission Assets”     | any Plant and Apparatus or meters owned by NGET which (a) are embedded in a Distribution System or a user system and which are not directly connected by Plant and/or Apparatus owned by NGET to a substation owned by NGET and (b) are by agreement between NGET and such public distribution system operator or user under the direction and control of such public distribution system operator or user; |
| Right of Access”                 | full right and liberty during the currency of this Agreement to enter upon and through and remain upon [any part] [those parts                                                                                                                                                                                                                                                                              |



of the Offshore Platform identified on the Plan] of User's Offshore Platform PROVIDED to the extent necessary for a Permitted Purpose and subject to the provisions of clause 5;

"RTL Assets"

those assets listed in Schedule 1 (including any plinths or other structures (excluding buildings) to or upon which the same are affixed and to or upon which no assets of any other person are affixed and any straps, bolts or other such things for attachment thereto) as any of the same may be Modified pursuant to this Agreement;

"RTL Licence"

the licence granted to the Relevant Transmission Licensee under Section 6 of the Act;

"Secretary of State"

has the meaning given to that term in the Act;

"Services"

in the context of Clause 8, the goods and services specified in Schedule 5;

"Site Specific Safety Rules"

means the rules, procedures or current arrangements for and relating to safety co-ordination across boundaries (to permit work to or testing on the system of one of the

Parties which, for this to be done safely, requires isolation and/or other precautions on Plant and/ or MV and/or LV Apparatus whether at, adjacent to or remote from the location of the work or testing) which the Parties mutually agree to use their best endeavours to formulate as soon as possible after the date of this Agreement and on the basis that any dispute as to their content shall be resolved in accordance with the provisions of Clause 10;

“The Company”

NThe company with registered number 11014226

“User’s Licence”

the licence granted to the User under Section 6 of the Act;

In this Agreement:

- (i) unless the context otherwise requires all references to a particular clause, sub-clause, paragraph or Schedule shall be a reference to that clause, sub-clause, paragraph or Schedule in or to this Agreement;
- (ii) the table of contents and headings are inserted for convenience only and shall be ignored in construing this Agreement;
- (iii) references to the words “include” or “including” are to be construed without limitation to the generality of the preceding words;
- (iv) unless there is something in the subject matter or the context which is inconsistent therewith, any reference to an Act of Parliament or any Section thereof or Schedule thereto, or other provision thereof or any instrument, order or regulation made thereunder shall be construed at the particular time as including a reference to any modification, extension, replacement or re-enactment thereof then in force and to all instruments, orders or regulations then in force and made under or deriving validity from the relevant Act of Parliament; and
- (v) references to the masculine shall include the feminine and references in the singular shall include the plural and vice versa and words denoting natural persons shall include companies, corporations and any other legal entity and vice versa.
- (vi) unless otherwise provided to the contrary herein, defined terms used in this Agreement and not defined herein shall have the meaning set forth in the Connection and Use of System Code or the Bilateral Connection Agreement.

## **2. RIGHT TO INSTALL AND RETAIN ASSET**

2.1 Subject to sub-clause 5.1, User hereby grants to the RTL the right to install and thereafter retain and replace as provided in this Agreement RTL Assets on User's Offshore Platform in such places as are currently proposed (subject to such variations between the date hereof and the actual date of installation as may be agreed to by User) and such right shall extend to any Modified RTL Assets. User shall maintain any shelter and/or support enjoyed by any RTL Assets at the date of this Agreement or, if later, when relocated on User's Offshore Platform in accordance with clause 5 and grants to the RTL a Right of Access for the purpose of the maintenance, inspection, testing, removal, operation, Modification or repair of any RTL Assets.

## **3. MODIFICATIONS REPLACEMENTS AND ALTERATIONS**

3.1 The RTL may at its own expense replace or alter any RTL Assets provided that:-

3.1.1 the replacement RTL Assets or the RTL Assets as so altered:-

- (i) are placed in the same or approximately the same position;
- (ii) fulfil the same or a similar purpose;
- (iii) can, where relevant, be accommodated in and on existing buildings or structures;
- (iv) do not require additional or improved facilities or services from User;
- (v) do not restrict the actual and intended use of User's

Offshore Platform and any equipment thereon or therein to any materially greater extent than the RTL Assets so replaced or altered; and

(vi) are either of the same or a similar or smaller size or the alteration is effected substantially within the space occupied by such RTL Assets to enable the RTL Assets to be used up to their full capability; and

3.1.2 prior written notification has been given to User.

3.2 If any replacement or alteration permitted by clause 3.1 shall require minor alterations or work to the existing buildings or structures housing or supporting the RTL Assets in question, such alterations or works may be carried out (with the prior written approval of User (such approval not to be unreasonably withheld or delayed)) but at the cost of the RTL.

3.3 To the extent that any of the conditions of clause 3.1 are not in User's reasonable opinion met in relation to any replacement or alteration, User may by notice in writing require the RTL promptly to remove such replacement or alteration and, if the RTL fails to do so, may remove the same itself at the cost and expense of the RTL. On such removal, the RTL may reinstate the RTL Assets so replaced or altered.

3.4 For the avoidance of doubt it is hereby agreed that any dispute between the Parties regarding this clause shall be determined in accordance with the provisions of Clause 10 of this Agreement.

#### **4. SECURITY AND COMPLIANCE WITH STATUTES etc**

4.1 User undertakes to maintain and provide security in relation to the RTL Assets in accordance with the arrangements set out in Part I of

Schedule 3.

4.2 Each Party shall procure that, as between the Parties, all reasonable and necessary steps are taken, as and when necessary or desirable, in co-operation with the other (and, so far as applicable, with any third party), to ensure compliance with the provisions (each such provision or part thereof being in this clause 4 an "Obligation") of:-

- (i) all statutes and Directives applicable to any RTL Assets and/or any part (including the whole) of User's Offshore Platform;
- (ii) any statute or Directive which may affect any other property (of whatever nature) of either Party as a result of the existence, nature, location, or manner of operation of any RTL Assets; and
- (iii) any statute or Directive requiring the reporting of any occurrence relating to or affecting any RTL Assets and/or User's Offshore Platform (including the Reporting of Injuries Diseases and Dangerous Occurrence Regulations 1985 and the Regulations).

4.3 Each Party shall, so far as it is aware of the same, unless it has reasonable grounds for believing that the other Party possesses the information, keep the other Party informed of all matters relating to any Obligation or potential Obligation and/or the extent to which such Obligation may be applicable.

4.4 In the event of any dispute as to responsibility, as between the Parties, pursuant to clause 4.2, for compliance with an Obligation, that responsibility shall be allocated, so far as practicable, on the basis that:-

- (i) each Party shall refrain from taking or permitting any act or

omission which would prevent compliance with an Obligation;  
and

- (ii) positive action required in relation to a Party's property as a consequence of the existence, nature, location or manner of operation of that property or any other property of that Party shall be the responsibility of that Party, and, to the extent that such action is required in respect of or affecting any property of the other Party (or property of a third party located in or on that other Party's Offshore Platform), such action may be taken with the prior approval of that other Party (such approval, subject to (i) above, not to be unreasonably withheld or delayed).

4.5 The provisions for safety co-ordination between the Parties contained in Part II of Schedule 3 shall apply.

## **5. RELOCATIONS**

5.1 At any time and from time to time during the term of this Agreement, User may with the prior written consent of the RTL (such consent not to be unreasonably withheld or delayed) require the RTL to relocate any RTL Assets to a different location on the User Offshore Platform, such consent to be sought and given or refused in accordance with the following procedure:-

5.1.1 User shall serve a written notice on the RTL, which notice shall specify:-

- (a) the RTL Assets which User wishes to be relocated;
- (b) the reasons for such wish;

- (d) the proposed new location for such RTL Assets; and the timing of the carrying out of such relocation.

5.1.2 The RTL shall within one month of receipt of any such notice (or such longer period as shall be reasonably necessary) serve a counter notice stating:-

- (a) whether or not in its reasonable opinion such Relocation Proposal is acceptable to it;
- (b) if the Relocation Proposal is not acceptable to the RTL, the grounds for such opinion and the terms of any alternative proposal (the “Alternative Relocation Proposal”) covering so far as relevant the matters referred to in items (a) - (d) of clause 5.1.1 which would be acceptable to the RTL; and
- (c) in respect of the Relocation Proposal (if accepted) or of any Alternative Relocation Proposal, the costs likely to be incurred in connection with considering the Relocation Proposal or the Alternative Relocation Proposal and effecting the said relocation of the RTL Assets and the proper and reasonable costs of relocating any other equipment that may be necessary as a result of the relocation of those RTL Assets and any consequential losses including payments to third parties incurred as a result of the relocation of those RTL Assets and the proposed manner and timing of payment of the same by User.

5.1.3 If within one month of the date of such counter notice (or such longer period as shall be reasonably necessary) User has not withdrawn the Relocation Proposal and the Parties have not agreed upon it or the Alternative Relocation Proposal (if any) or a variation of either of them (such agreement to include agreement on the costs referred to in item (c) of clause 5.1.2) the matter shall be dealt with in accordance with Clause 10.



- 5.2 Upon approval or settlement of any Relocation Proposal, Alternative Relocation Proposal or variation thereof pursuant to clause 5.1, the RTL shall [(conditionally upon it being able to obtain all necessary licences and consents which it will use reasonable endeavours to do)] relocate or procure the relocation of the relevant RTL Assets as quickly as reasonably practicable (having regard to, amongst other things, technical and operational requirements [and to the availability of all necessary licences and consents]).
- 5.3 User shall render all reasonable assistance to the RTL in connection with such relocation [licences and consents] and pay to the RTL all costs referred to in item (c) of clause 5.1.2 as agreed or settled pursuant to clause 5.1 provided that all reasonable endeavours are used to minimise such costs and in the event that a Relocation Proposal is withdrawn or consent thereto is reasonably withheld pursuant to clause 5.1, User shall pay to the RTL all costs reasonably incurred by the RTL in connection with considering the Relocation Proposal and any counter notice.
- 5.4 Such of the provisions of this Agreement as are appropriate and relevant (including the provisions of this clause 5), shall continue to apply to any relocated RTL Assets.

**6. REMOVALS**

- 6.1 In the event that there shall cease to be a Bilateral Connection Agreement relating to any RTL Assets on User's Offshore Platform the RTL shall remove all RTL Assets from User's Offshore Platform within [ ] or such longer period as shall be agreed between the User and the RTL and in accordance with the provisions relating thereto contained in the Connection Agreement and the Bilateral Connection Agreement.
- 6.2 Where the RTL is obliged to remove any of the RTL Assets from User's Offshore Platform, under this Clause 6, and fails to do so in accordance with the relevant provisions, (whether they be contained in this Clause 6, Clause 3 or Clause 5) User shall be entitled to remove those RTL Assets to land belonging to the RTL and the RTL shall provide all reasonable assistance to enable User safely so to do and shall pay and reimburse to User all costs and expenses reasonably incurred by User in so doing.

## **7. RIGHTS OF ACCESS**

- 7.1 A Right of Access includes the right to bring on to User's Offshore Platform such vehicles, plant, machinery and maintenance or construction materials as shall be reasonably necessary for the Permitted Purpose.
- 7.2 A Right of Access given to the RTL may be exercised by any person, including third party contractors, reasonably nominated from time to time by the RTL. To the extent (if any) that any particular authorisation or clearances may be required to be given by User and the procedures for giving and obtaining the same are not for the time being stipulated in arrangements made pursuant to clause 7.3, the same shall be given within a reasonable time from the date of the request therefor, save in the case of emergency in which case it shall be given without delay.

7.3 The RTL shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable, to facilitate the safe exercise by it of any Right of Access with the minimum of disruption, disturbance or inconvenience to User. Such arrangements and provisions shall provide for User to have the right to make directions or regulations from time to time in relation to a specified matter. Matters to be covered by such arrangements and/or provision shall include:-

- (i) the identification of any relevant RTL Assets;
- (ii) the particular access routes applicable to the Offshore Platform in question having particular regard for the weight and size limits on those routes;
- (iii) any limitations on times of exercise of a Right of Access;
- (iv) any requirements as to prior notification and as to authorisation or security clearance of individuals exercising such Rights of Access, and procedures for obtaining the same;
- (v) the means of communication between the Parties and all employees and/or contractors who may be authorised from time to time by the RTL to exercise a Right of Access of any relevant directions or regulations made by the RTL;
- (vi) the identification of and arrangements applicable to Emergency Personnel.
- (vii) any limitation or restriction on the exercise of such Right of Access to the extent that in the circumstances is reasonable.

7.4 The RTL shall procure that any such arrangements and/or provisions (or directions or regulations issued by User pursuant thereto) made from time to time between the Parties shall be observed and performed by it and all persons authorised by it to exercise any Right of Access.

7.4.1 The RTL shall procure that all reasonable steps are taken in the exercise of any Right of Access to:

- (a) avoid or minimise damage to User's Offshore Platform, or any other property thereon or therein;
- (b) cause as little disturbance and inconvenience as possible to User or other occupier of User's Offshore Platform;

and shall promptly make good any damage caused to User's Offshore Platform and/or such other property in the course of the exercise of such rights and shall indemnify User against all actions, claims, proceedings, losses, costs and demands arising out of such exercise.

7.4.2 Subject to clause 7.4.1, all such rights shall be exercisable free of any charge or payment of any kind.

7.5 Subject to any contrary arrangements for the time being made under clause 7.3,

7.5.1 a Right of Access for operation or inspection shall be available without prior notice;

7.5.2 a Right of Access for the purpose of maintenance, testing or repair of HV Apparatus shall only be exercisable on the giving of at

least [seven days] prior written notice to User except in the case of loss of generation or demand or other emergency (in which event User shall render all possible assistance in procuring that the Right of Access shall be exercisable as soon as possible); and

7.5.3 a Right of Access for the purpose of Modifying any RTL Asset shall be exercisable only after [two weeks] prior written notice to User.

## **8. SERVICES AND USE OF ASSETS**

- 8.1 Subject as hereinafter provided, in relation to the Facilities, User shall, if required by the RTL, make the Facilities in question available for use by the RTL to such extent as is necessary for the purposes of the RTL's undertaking but not so as to prejudice the use now or hereafter of such Facilities by User for its undertaking.
- 8.2 Subject as hereinafter provided, in relation to each of the Services, User shall, if required by the RTL, provide the same to the RTL. Such provision shall be of such a quality and quantity and shall be provided at such times as the RTL shall reasonably request. User shall not be required to exceed the level of quality or quantity of the Services as is anticipated by the Parties at the date of this Agreement, unless specifically agreed otherwise between the Parties.
- 8.3 Where the use of any Facilities made available or such Services are supplied as aforesaid, the Parties shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable between the local personnel employed by each of them in that regard, such arrangements to include:-

8.3.1 the identification of the Facilities and/or Services in question including (where relevant) the extent of their availability;

8.3.2 the hours during which such use or provision shall be allowed or made;

8.3.3 any requirements as to notification of use or call for supply or temporary suspension thereof;

8.3.4 any requirements as to authorisation or security clearance of individuals and the procedures for obtaining the same; and

8.3.5 any safety requirements;

8.4 The provision of use of the Facilities listed in Schedule 4, Part One and the supply of the Services listed in Schedule 5, Part One shall not be terminated unless User ceases to require the Facilities or Services for its own use in which case the supply of the Services or use of the Facilities may be terminated by not less than one year's notice in writing;

8.5 The provision of use of the Facilities listed in Schedule 4, Part Two and the supply of the Services listed in Schedule 5, Part Two shall continue until terminated by not less than six months notice in writing by either Party. User shall maintain the Facilities in accordance with Good Industry Practice.

## **9. NON-INTERFERENCE**

9.1 User agrees that neither it nor its agents, employees and invitees will interfere in any way with any of the RTL Assets without the consent of the RTL. For the purposes of this clause "interfere" shall include:

9.1.1 disconnecting or altering the connection of any RTL Assets to any

system of cables, foundations, pipes, drains or other media to which it may be connected from time to time or to prevent

supply of any substance or thing through such connected system;

9.1.2 affixing or removing any item or substance of any nature whatsoever to or from any RTL Assets;

9.1.3 damaging any RTL Assets;

9.1.4 allowing any other person to interfere with any RTL Assets;

9.1.5 altering any meters or settings on any RTL Assets.

9.1.6 the obstruction of access to any RTL Assets.

9.2 The obligations contained in this clause 9 shall be suspended to the extent that emergency action is taken by Emergency Personnel in good faith to protect the health and safety of persons or to prevent damage to property. All reasonable care shall be taken in the course of such emergency action. When the emergency has ended, any damaged property will be reinstated by the RTL, save for damage occurring by reason of lack of reasonable care in the course of the emergency action taken by User which shall be the responsibility of User.

## **10. DISPUTE RESOLUTION**

10.1 Any dispute arising under this Agreement between Location Managers of the Parties shall, if not resolved within 14 days of first arising, be referred at the instance of either party to the respective line managers, or those fulfilling a similar function whether or not so called, of User and the

RTL who shall use all reasonable endeavours to resolve the matter in dispute within one month.

10.2 Save where expressly stated in this Agreement to the contrary



(including the procedure for initial dispute resolution contained in Clause 10.1) and subject to any contrary provision of the Act, any Licence, or the Regulations, or the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any Licence or otherwise howsoever, any dispute or difference of whatever nature howsoever arising under out of or in connection with this Agreement between the Parties shall (subject to any relevant initial dispute resolution procedures referred to in Clause 10.1 having been exhausted) be and is hereby referred to arbitration pursuant to the rules of the London Court of International Arbitration in force from time to time.

- 10.3 Whatever the nationality residence or domicile of any Party and wherever the dispute or difference or any part thereof arose the law of England and Wales shall be the proper law of any reference to arbitration hereunder and in particular (but not so as to derogate from the generality of the foregoing) the provisions of the Arbitration Act 1996 (including any modification, extension, replacement or re-enactment thereof for the time being in force) shall apply to any such arbitration wherever the same or any part of it shall be conducted.

## **11. GOVERNING LAW AND JURISDICTION**

- 11.1 This Agreement shall be governed by and construed in all respects in accordance with English law.
- 11.2 Subject and without prejudice to clause 10 and to clause 11.4 the Parties irrevocably agree that only the courts of England and Wales and the courts of Scotland are to have jurisdiction to settle any dispute which may arise out of or in connection with this Agreement and that accordingly any suit, action or proceeding (together in this clause 11

referred to as “Proceedings”) arising out of or in connection with this Agreement may be brought in such courts.

11.3 Each Party irrevocably waives any objection which it may have now or hereafter to the laying of the venue of any Proceedings in any such court as is referred to in this clause 11 and any claim that any such Proceedings have been brought in an inconvenient forum and further irrevocably agrees that a judgment in any Proceedings brought in the courts of England and Wales or the courts of Scotland shall be conclusive and binding upon such Party and may be enforced in the courts of any other jurisdiction.

11.4 For the avoidance of doubt nothing contained in the foregoing provisions of this clause 11 shall be taken as permitting a Party to commence Proceedings in the courts where this Agreement otherwise provides for proceedings to be referred to arbitration.

## **12. CONFIDENTIALITY**

12.1 For the purposes of this Clause 12 except where the context otherwise requires:

12.1.1 “Authorised Recipient”, in relation to any Protected Information, means any Business Person who, before the Protected Information had been divulged to them by the RTL or any subsidiary of the RTL, had been informed of the nature and effect of this clause 12 and who requires access to such Protected Information for the proper performance of their duties as a Business Person in the course of Permitted Activities;

12.1.2 “Business Person” means any person who is a Licensed

---

Business Person, or a Corporate Functions Person and “Business Personnel” shall be construed accordingly.

12.1.3 “Confidential Information” means all data and other information supplied to User under the provisions of this Agreement.

12.1.4 “Corporate Functions Person” means any person who:-

- (a) is a director of the RTL; or
- (b) is an employee of the RTL or any of its subsidiaries carrying out any administrative, finance or other corporate services of any kind which in part relate to the Licensed Business; or
- (c) is engaged as an agent of or adviser to or performs work in relation to or services for the Licensed Business.

12.1.5 “Licensed Business” means any business or activity of the RTL or any of its associates authorised by its RTL Licence;

12.1.6 “Licensed Business Person” means any employee of the RTL or any director or employee of its subsidiaries who is engaged solely in its Licensed Business and “Licensed Business Personnel” shall be construed accordingly;

12.1.7 “Permitted Activities” means activities carried on for the purposes of the Licensed Business;

12.1.8 “Protected Information” means any information relating to the affairs of a Party which is furnished to Business Personnel pursuant to this Agreement unless, prior to such information being furnished, such Party has informed the recipient thereof

by notice in writing or by endorsement on such information, that the said information is not to be regarded as Protected Information.

12.2 Confidentiality for the RTL and its Subsidiaries

The RTL and its subsidiaries in each of their capacities in this Agreement shall secure that Protected Information is not:-

12.2.1 divulged by Business Personnel to any person unless that person is an Authorised Recipient;

12.2.2 used by Business Personnel for the purposes of obtaining for the RTL or any of its subsidiaries or for any other person:-

- (a) any Licence; or
- (b) any right to purchase or otherwise acquire, or to distribute, electricity including by means of an electricity purchase contract (as defined in the Transmission Licence); or
- (c) any contract or arrangement for the supply of electricity to customers or suppliers; or
- (d) any contract for the use of any electrical lines or electrical plant belonging to or under the control of a supplier.

12.2.3 used by Business Personnel for the purpose of carrying on any activities other than Permitted Activities except with the consent in writing of the Party to whose affairs such Protected Information relates.

12.3 Nothing in this Clause 12 shall apply:

12.3.1 to any Protected Information which, before it is furnished to Business Personnel is in the public domain;

12.3.2 to any Protected Information which, after it is furnished to Business Personnel:

- (a) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does not apply; or
- (b) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
- (c) enters the public domain otherwise than as a result of a breach by the RTL or any subsidiary of the RTL of its obligations in this Clause 12.

12.3.3 to the disclosure of any Protected Information to any person if the RTL or any subsidiary is required or permitted to make such disclosure to such person:

- (a) in compliance with the duties of the RTL or any associate under the Act or any other requirement of a Competent Authority; or
- (b) in compliance with the conditions of its RTL Licence or any document referred to in its RTL Licence with which the RTL is required to comply; or
- (c) in compliance with any other requirement of law; or
- (d) in response to a requirement of any recognised stock

exchange or regulatory authority or the Panel on Takeovers and Mergers; or

- (e) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal.

12.3.4 to any Protected Information to the extent that the RTL or any of its subsidiaries is expressly permitted or required to disclose that information under the terms of any agreement or arrangement (including the Fuel Security Code) with the Party to whose affairs such Protected Information relates.

12.4 The RTL and its subsidiaries may use all and any information or data supplied to or acquired by it, from or in relation to the other Party to this Agreement in performing its Permitted Activities and may pass the same to subsidiaries of the RTL which carry out such activities and the User hereto agrees to provide all information to the RTL and its subsidiaries for such purpose.

12.5 The Company and its subsidiaries may use all and any information or data supplied to or acquired by it from the RTL pursuant to Clause 12.3.3 in relation to this Agreement in performing its activities under the ESO Licence including for the following purposes:

12.5.1 the operation and planning of the National Electricity Transmission System;

12.5.2 the calculation of charges and preparation of offers of terms for connection to or use of the National Electricity Transmission System;

and the User agrees to provide all information to the RTL and its subsidiaries for such purposes.

12.6 The RTL undertakes that, having regard to the activities in which any Business Person is engaged and the nature and effective life of the Protected Information divulged to them by virtue of such activities, neither the RTL nor any of its subsidiaries shall unreasonably continue (taking into account any industrial relations concerns reasonably held by it) to divulge Protected Information or permit Protected Information to be divulged to any Business Person:

(a) who has notified the RTL or the relevant subsidiary of their intention to become engaged as an employee or agent of any other person (other than of the RTL or any subsidiary thereof);

or

(b) who is authorised by licence or exemption to generate or supply electricity.

12.7 Without prejudice to other provisions of this clause 12 the RTL shall procure that any additional copies of the Protected Information, whether in hard copy or computerised form, will clearly identify the Protected Information as protected.

12.8 The RTL undertakes to use all reasonable endeavours to procure that no employee is a Corporate Functions Person unless the same is necessary for the proper performance of their duties.

12.9 Confidentiality for User

12.9.1 User hereby undertakes with the RTL and its subsidiaries that it shall preserve the confidentiality and secrecy of, and not directly

or indirectly reveal, report, publish, disclose or transfer or use for its own purposes Confidential Information except:

- (a) in the circumstances set out in Clause 12.9.2;
- (b) to the extent expressly permitted by this Agreement; or
- (c) with the consent in writing of the RTL.

12.9.2 Exceptions: the circumstances referred to in Clause 12.9.1(a) are:

(a) where the Confidential Information, before it is furnished to User, is in the public domain; or

(b) where the Confidential Information, after it is furnished to User:

(i) is acquired by User in circumstances in which this Clause 12 does not apply; or

(ii) is acquired by User in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12;

or

(iii) enters the public domain otherwise than as a result of a breach by User of its obligations in this Clause 12; or

(c) if User is required or permitted to make disclosure of the Confidential Information to any person:

(i) in compliance with the duties of User under the Act



or any other requirement of a Competent Authority;

(ii) in compliance with the conditions of any Licence or any document referred to in any Licence with which User is required to comply;

(iii) in compliance with any other requirement of law;

(iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Takeovers and Mergers; or

(v) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal; or

(d) where Confidential Information is furnished by User to the employees, directors, agents, lenders, consultants and professional advisers of User in each case on the basis set out in Sub-Clause 12.10.

12.10 With effect from the date of this Agreement User shall adopt procedures within its organisation for ensuring the confidentiality of all Confidential Information which it is obliged to preserve as confidential under this Clause 12. These procedures will include:

12.10.1 the Confidential Information will be disseminated within User only on a “need to know” basis;

12.10.2 employees, directors, agents, lenders, consultants and professional advisers of User in receipt of Confidential Information will be made fully aware of User’s obligations of

confidence in relation thereto.

### **13. TITLE TO ASSETS**

- 13.1 The RTL acknowledges that it does not have and will not acquire any title, right or interest in User's Offshore Platform save for such rights as are expressly granted herein or otherwise provided nevertheless that, if according to any rule of law, the RTL could acquire any such title, right or interest in any of User's Offshore Platform, the RTL undertakes to do all that is required to transfer such right or interest to User to ensure that User shall not, by reason of such right or interest arising, have its full rights in such Offshore Platform diminished (and in the interim to hold such rights in trust for User) and shall if requested by User, be obliged forthwith to establish trust arrangements valid under Scottish law so as to ensure that any such right or interest shall be held on behalf of User.
- 13.2 User agrees that it shall not by any act or default render the RTL Assets liable to any distress execution or other legal process, and in the event that the RTL Assets shall become so liable, shall forthwith give notice of any such proceedings to the RTL and shall forthwith notify any third party instituting any such process of the ownership of such RTL Assets.
- 13.3 If User desires to mortgage or charge User's Offshore Platform or its interest therein on which any RTL Assets are located or to enter into any arrangement which, if made, might affect the rights of the RTL expressly granted herein, then User shall ensure that the RTL Assets are not and will not be subject to the rights granted therein and are not and will not be affected by the mortgage, legal charge or other agreement or arrangement, and shall give prior written notification thereof to the RTL.
- 13.4 In the event that User shall wish to grant rights over or dispose of any interest in [or change the use of User's Offshore Platform] User shall notify the

RTL of such wish and fully consult the RTL in respect thereof and shall not grant such rights or make such disposal or change of use save on terms securing to the reasonable satisfaction of that other the Rights of Access granted in respect of User's Land Offshore Platform.

#### **14. LIMITATION OF LIABILITY**

14.1 Subject to sub-clauses 5.3, 6.2, 9.2 and 14.5 and save as provided in this sub-clause 14.1 and sub-clause 14.2 neither Party ("the Party Liable") nor any of its officers, employees or agents shall be liable to the other Party for loss arising from any breach of this Agreement other than for loss directly resulting from such breach and which at the date hereof was reasonably foreseeable as not unlikely to occur in the ordinary course of events from such breach and which resulted from:

14.1.1 physical damage to the property of the other Party, its officers, employees or agents; and/or

14.1.2 the liability of the other Party to any other person for loss arising from physical damage to the property of any person.

14.2 Nothing in this Agreement shall exclude or limit the liability of the Party Liable for death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents and the Party Liable shall indemnify and keep indemnified the other Party, its officers, employees or agents, from and against all such and any loss or liability which the other Party may suffer or incur by reason of any claim on account of death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents.

14.3 Subject to sub-clauses 5.3, 6.2, 9.2 and 14.5 neither Party, nor any of its

officers, employees or agents shall in any circumstances whatsoever be liable to the other Party for:-

14.3.1 any loss of profit, loss of revenue, loss of use, loss of contract or loss of goodwill; or

14.3.2 any indirect or consequential loss; or

14.3.3 loss resulting from the liability of the other Party to any other person howsoever and whensoever arising save as provided in sub-clauses 14.1.2 and 14.2.

14.4 The rights and remedies provided by this Agreement to the Parties are exclusive and not cumulative and exclude and are in place of all substantive (but not procedural) rights or remedies express or implied and provided by common law or statute in respect of the subject matter of this Agreement, including any rights either Party may possess in tort which shall include actions brought in negligence and/or nuisance. Accordingly, each of the Parties hereby waives in the fullest extent possible all such rights and remedies provided by common law or statute, and releases the Party Liable, its officers, employees and agents to the same extent from all duties, liabilities, responsibilities or obligations provided by common law or statute in respect of the matters dealt with in this Agreement and undertakes not to enforce any of the same except as expressly provided herein.

14.5 Save as otherwise expressly provided in this Agreement, this clause 14 insofar as it excludes or limits liability shall override any other provision in this Agreement provided that nothing in this clause 14 shall exclude or restrict or otherwise prejudice or affect any of:

14.5.1 the rights, powers, duties and obligations of either Party which

are conferred or created by the Act, the User's Licence, RTL's Licence or the Regulations or any amendment or re-enactment thereof; or

14.5.2 the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any such licence as aforesaid or otherwise howsoever.

14.6 Each of the sub-clauses of this clause 14 shall:

14.6.1 be construed as a separate and severable contract term, and if one or more of such sub-clauses is held to be invalid, unlawful or otherwise unenforceable the other or others of such sub-clauses shall remain in full force and effect and shall continue to bind the Parties; and

14.6.2 survive termination of this Agreement.

14.7 Each Party agrees that the other Party holds the benefit of sub clauses 14.1, 14.2 and 14.3 above for itself and as trustee and agent for its officers, employees and agents

14.8 Each Party hereby acknowledges and agrees that the provisions of this clause 14 have been the subject of discussion and negotiation and are fair and reasonable having regard to the circumstances as at the date hereof.

## **15. INTELLECTUAL PROPERTY**

All Intellectual Property relating to the subject matter of this Agreement conceived, originated, devised, developed or created by a Party, its officers, employees, agents or consultants during the currency of this

Agreement shall vest in such Party as the sole beneficial owner thereof save where the Parties agree in writing otherwise.

**16. FORCE MAJEURE**

If either Party (the “Non-Performing Party”) shall be unable to carry out any of its obligations under this Agreement due to a circumstance of Force Majeure this Agreement shall remain in effect but save as otherwise provided herein the Non-Performing Party’s obligations hereunder shall be suspended without liability for a period equal to the circumstance of Force Majeure provided that:

- (i) the Non-Performing Party gives the other Party prompt notice describing the circumstance of Force Majeure, including the nature of the occurrence, its expected duration and the particular obligations affected by it, and continues to furnish regular reports with respect thereto during the period of Force Majeure;
- (ii) the suspension of performance is of no greater scope and of no longer duration than is required by the Force Majeure;
- (iii) no liabilities of either Party that arose before the Force Majeure causing the suspension of performance are excused as a result of the Force Majeure;
- (iv) the non-performing Party uses all reasonable efforts to remedy its inability to perform; and
- (v) as soon as practicable after the event which constitutes Force Majeure the Parties shall discuss how best to continue their operations so far as possible in accordance with this Agreement.

**17. WAIVER**

No delay by or omission of a Party in exercising any right, power, privilege or remedy under this Agreement shall operate to impair such right, power, privilege or remedy or be construed as a waiver thereof. Any single or partial exercise of any such right, power, privilege or remedy shall not preclude any other or future exercise thereof or the exercise of any other right, power, privilege or remedy.

**18. NOTICES**

18.1 Any notice or other communication to be given by one Party to the other under, or in connection with the matters contemplated by, this Agreement shall be addressed to the recipient and sent to the address, or email address of such other Party given in Schedule 6 and marked for the attention of the person so given or to such other address, and/or email address and/or marked for such other attention as such other Party may from time to time specify by notice given in accordance with this clause 18 to the Party giving the relevant notice or other communication to it.

18.2 Any notice or other communication to be given by one Party to the other Party under, or in connection with the matters contemplated by, this Agreement shall be in writing and shall be given by letter delivered by hand or sent by first class prepaid post (airmail if overseas) or email and shall be deemed to have been received:

18.2.1 in the case of delivery by hand, when delivered; or

18.2.2 in the case of first class prepaid post, on the second day following the day of posting or (if sent airmail from overseas) on the fifth day following the day of posting; or



18.2.3 in the case of telex, on the transmission of the automatic answerback of the addressee (where such transmission occurs before 1700 hours on the day of transmission) and in any other case on the day following the day of transmission; or

18.2.4 in the case of email, when delivered to the email address (where such delivery occurs before 1700 hours on the day of delivery) and in any other case on the day following the day of delivery.

## **19. VARIATIONS**

The provisions of Schedules 1, 3, 4, 5 and 6 may be varied from time to time by written memorandum signed by an authorised officer of each of the Parties. Subject thereto no variations to this Agreement shall be effective unless made by way of supplemental deed.

## **20. OVERRIDING PROVISIONS & GOOD INDUSTRY PRACTICE**

20.1 In the event of any conflict between RTL's or User's obligations hereunder and their obligations under the User's Licence and RTL's Licence, the Act, any direction of the Secretary of State, the Authority or ruling of the Competition Commission, the Grid Code, Connection Agreement or the Bilateral Connection Agreement, the provisions of the User's Licence and RTL's Licence, the Act, the Grid Code, the Connection Agreement or Bilateral Connection Agreement the direction of the Secretary of State, the Authority, or ruling of the Competition Commission shall prevail and accordingly the RTL and User respectively shall not be responsible for any failure to perform their respective obligations hereunder to the extent that any such failure is

directly attributable to proper compliance with such provisions, rulings or directions.

- 20.2 Both parties shall observe their respective obligations hereunder in accordance with Good Industry Practice.

## **21. ASSIGNMENT AND SUB-CONTRACTING**

- 21.1 The rights and obligations of a Party may not be assigned (otherwise than to an Affiliate or by way of a charge or an assignment by way of security) without the consent of the other Party, such consent not to be unreasonably withheld.

- 21.2 Each Party shall have the right to sub-contract or delegate the performance of any of its obligations or duties arising under this Agreement without the consent of the other. The sub-contracting by either Party of the performance of any obligations or duties under this Agreement shall not relieve such Party from the liability for performance of such obligation or duty.

## **22. ILLEGALITY AND PARTIAL INVALIDITY**

- 22.1 If at any time any provision of this Agreement should become or be declared unlawful, invalid, illegal or unenforceable in any respect under the law of any jurisdiction, neither the validity, legality or enforceability of the remaining provisions nor the validity, legality or enforceability of such provision under the law of any other jurisdiction shall be affected.
- 22.2 If any part of a provision of this Agreement is or becomes or is declared invalid, unlawful, illegal or unenforceable but the rest of such provision would remain valid, lawful or enforceable if part of the wording were deleted the provision shall apply with such modifications as may be

necessary to make it valid, lawful, enforceable and effective but without affecting the meaning of legality, validity or enforceability of any other provision of this Agreement.

**23. TERM AND TERMINATION**

This Agreement shall continue until no RTL Assets are on User's Offshore Platform and no Facilities or Services are shared or provided.

**24. ENTIRE AGREEMENT**

24.1 This Agreement contains the entire agreement between the Parties with respect to the subject-matter hereof, and expressly excludes any warranty, condition or other undertaking implied at law or by custom, and supersedes all previous agreements and understandings between the Parties with respect thereto and:

- (i) each of the Parties acknowledges and confirms that it does not enter into this Agreement in reliance on any representation, warranty or other undertaking not fully reflected in the terms of this Agreement; but
- (ii) the RTL acknowledges that User may have entered or may enter into agreements with other parties who hold a Licence containing similar rights and/or liabilities to those contained in this Agreement affecting User's Offshore Platform and any assets thereon. User shall, when entering into such agreement with any such party use reasonable endeavours to avoid conflicts between the provisions thereof and the provisions of this Agreement but in the event of any conflict User shall use all reasonable endeavours to procure

that appropriate arrangements are made to settle the same to give full effect (so far as practicable) to the rights and liabilities under this Agreement and under such other agreements as aforesaid. In the event of any dispute as to such conflict and/or arrangements the dispute shall be dealt with in accordance with Clause 10.

IN WITNESS whereof this Agreement has been entered into as a deed the day and year first above written.

## **SCHEDULE 1**

RTL ASSETS ON USER OFFSHORE PLATFORM

## **SCHEDULE 2**

USER'S OFFSHORE PLATFORM

### **SCHEDULE 3**

#### **Part I**

##### **Security Details** (Clause 4.1)

##### **User's Offshore Platform**

#### **Part II**

##### **Plant MV LV Apparatus Safety Co-Ordination Procedures** (Cl. 4.5)

- (1) The Parties will comply with the Site Specific Safety Rules and any agreed modifications thereto.
- (2) The Parties will arrange for the Site Specific Safety Rules to be written down and to be implemented by the person or persons responsible on behalf of the relevant Parties for the co-ordination of safety.

## **SCHEDULE 4**

### **USER OWNED FACILITIES**

PART ONE

PART TWO



**SCHEDULE 5**

**SHARED SERVICES PROVIDED BY USER**

PART ONE

PART TWO

## SCHEDULE 6

Addresses, Email Addresses etc (Clause 19.)

[Insert details of Relevant Transmission Licensee]

[            ]

Telephone:

Email

Address:

[Insert details of User]

[            ]

Telephone:

Email

Address:

**THE COMMON SEAL** of )  
 )  
**[RELEVANT TRANSMISSION LICENSEE]** )  
was hereunto affixed in the presence of:- )

**THE COMMON SEAL** of )  
[ ] )  
was hereunto affixed in the presence of:- )

**END OF SECTION O PART I C**

**CUSC - EXHIBIT O - PART II B**

**THE CONNECTION AND USE OF SYSTEM CODE**

**INTERFACE AGREEMENTS**

**PART II B- USER ASSETS ON RTL LAND**

**CUSC - EXHIBIT O - PART II B**

DATED \_\_\_\_\_ 200[ ]

(1) [Insert name of Relevant Transmission Licensee (RTL)]

- and -

(2)

(User)

**INTERFACE AGREEMENT**

Relating to User Assets on  
RTL Land at [ ]

**I N D E X**

| <u>Clause</u> | <u>Title</u>                                | <u>Page</u> |
|---------------|---------------------------------------------|-------------|
| 1             | Definitions and Interpretation              | 1           |
| 2             | Right to Install and Retain Asset           | 8           |
| 3             | Modifications, Replacements and Alterations | 9           |
| 4             | Security and Compliance with Statutes etc.  | 10          |
| 5             | Relocations                                 | 11          |
| 6             | Removals                                    | 13          |
| 7             | Rights of Access                            | 14          |
| 8             | Services and Use of Assets                  | 16          |
| 9             | Non-Interference                            | 18          |
| 10            | Dispute Resolution                          | 19          |
| 11            | Governing Law and Jurisdiction              | 21          |
| 12            | Confidentiality                             | 22          |
| 13            | Title to Assets                             | 28          |
| 14            | Limitation of Liability                     | 29          |
| 15            | Intellectual Property                       | 32          |
| 16            | Force Majeure                               | 32          |
| 17            | Waiver                                      | 33          |
| 18            | Notices                                     | 33          |
| 19            | Variations                                  | 34          |
| 20            | Overriding Provisions                       | 34          |
| 21            | Assignment and Sub-contracting              | 35          |
| 22            | Illegality and Partial Invalidity           | 35          |
| 23            | Term and Termination                        | 36          |
| 24            | Registration and Memorandum                 | 36          |

|            |                                                                                                 |    |
|------------|-------------------------------------------------------------------------------------------------|----|
| 25         | Entire Agreement                                                                                | 36 |
| Schedule 1 | User's Assets on RTL's Land                                                                     |    |
| Schedule 2 | RTL's Land                                                                                      |    |
| Schedule 3 | Part I - Security Details<br>Part II - Plant MV LV Apparatus<br>Safety Co-ordination Procedures |    |
| Schedule 4 | RTL Owned Facility Assets                                                                       |    |
| Schedule 5 | Services                                                                                        |    |
| Schedule 6 | Addresses, email addresses etc.                                                                 |    |

**INTERFACE AGREEMENT**  
**(ASSET LICENCE FACILITY AGREEMENT)**  
**(USER ASSETS)**

**THIS DEED OF AGREEMENT** is made on the \_\_\_\_\_ day of \_\_\_\_\_ 200[ ]

## BETWEEN

(1) [Insert name of Relevant Transmission Licensee] a company registered in [ ] with number [ ] whose registered office is at [ ] (“RTL”, which expression shall include its successors and/or permitted assigns); and

(2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“User”, which expression shall include its successors and/or permitted assigns)

**WHEREAS**

Certain assets and facilities of User are to be installed on property title to which is vested in RTL and this Agreement is entered into by the Parties to give effect to appropriate arrangements in respect of such assets and the use of such assets and facilities.

**NOW IT IS HEREBY AGREED** as follows:-

## 1. DEFINITIONS AND INTERPRETATION

In this Agreement, the following words and expressions shall, unless the subject matter- or context otherwise requires or is inconsistent therewith, bear the following meanings:-



|                                   |                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Act”                             | the Electricity Act 1989 as amended by Utilities Act 2000 and the Energy Act 2023;                                                                                                                                                                                                                                                                                                          |
| “Affiliate”                       | in relation to User means any holding company or subsidiary of that Party or any subsidiary of a holding company of User, in each case within the meaning of Sections 736, 736A and 736B of the Companies Act 1985 as substituted by Section 144 of the Companies Act 1989 and if that section is not in force at the date of this Agreement as if such section were in force at such date; |
| “Apparatus”                       | all equipment in which electrical conductors are used, supported or of which they may form a part;                                                                                                                                                                                                                                                                                          |
| “Authority”                       | the Gas and Electricity Markets authority established by Section 1 of the Utilities Act 2000;                                                                                                                                                                                                                                                                                               |
| “Authorised Electricity Operator” | any person (other than The Company in its capacity as operator of the National Electricity Transmission System who is authorised to generate, participate in the transmission of, distribute or supply electricity and for the purposes of                                                                                                                                                  |

Standard Condition C4 of the Transmission Licence shall include any person who has made application to be so authorised which application has not been refused and any person transferring electricity to or from Great Britain across an interconnector or who has made application for use of interconnector which has not been refused;

“Bilateral Connection Agreement”

the Bilateral Connection Agreement entered into between the User and The Company pursuant to the Connection Agreement and dated [ ];

“Connection Agreement”

the Connection and Use of System Code given contractual force by the CUSC Framework Agreement entered into by, amongst others, the User regarding, amongst other things, the connection of User’s Plant and Apparatus to the National Electricity Transmission System and the use by the User of such system;

“Competent Authority”

the Secretary of State, the Authority and any local or national agency, authority, department, inspectorate,

minister (including the Scottish Ministers), ministry, official or public or statutory person (whether autonomous or not) of, or of the government of, the United Kingdom or the European Community;

“Connection Site” [ ];

“CUSC Framework Agreement” means the agreement of that title, in the form approved by the Secretary of State, by which the Connection Agreement is made contractually binding between the parties to that agreement, as amended from time to time with the approval of the Secretary of State;

“Customer” a person to whom electrical power is provided (whether or not they are the provider of such electrical power) other than power to meet station demand of that person;

“Directive” includes any present or future directive, requirement, instruction, direction or rule of any Competent Authority, (but only, if not having the force of law, if compliance with the Directive is in accordance with the general practice of persons to whom

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | the Directive is addressed) and includes any modification, extension or replacement thereof then in force;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| “Distribution System” | the system consisting (wholly or mainly) of electric lines owned or operated by any Authorised Electricity Operator and used for the distribution of electricity from grid supply points or generation sets or other entry points to the point of delivery to Customers or Authorised Electricity Operators, and includes any Remote Transmission Assets operated by such Authorised Electricity Operator and any electrical plant and meters owned or operated by the Authorised Electricity Operator in connection with the distribution of electricity, but shall not include any part of the National Electricity Transmission System; |
| “Facility Asset”      | those assets listed in Schedule 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| “Force Majeure”       | in relation to a Party, any event or circumstance which is beyond the reasonable control of that Party, and which results in or causes the failure of that Party to perform any of its                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

obligations under this Agreement including any act of God, strike, lockout or other industrial disturbance, act of the public enemy, war declared or undeclared, threat of war, terrorist act, blockade, revolution, riot, insurrection, civil commotion, public demonstration, sabotage, act of vandalism, lightning, fire, storm, flood, earthquake, accumulation of snow or ice, lack of water arising from weather or environmental problems, explosion, fault or failure of plant and apparatus which could not have been prevented by Good Industry Practice, governmental restraint, Act of Parliament legislation, bye-law, and Directive (not being any order, regulation or directive under Section 32, 33, 34 or 35 of the Act) Provided that lack of funds shall not be interpreted as a cause beyond the reasonable control of that Party;

“Fuel Security Code”

the document of that title designated as such by the Secretary of State as from time to time amended;

|                          |                                                                                                                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Good Industry Practice” | in relation to any undertaking and any circumstances, the exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and experienced operator engaged in the same type of undertaking under the same or similar circumstances;            |
| “Grid Code”              | the document or documents produced pursuant to condition E3 of the ESO Licence, as from time to time revised in accordance with the ESO Licence;                                                                                                                                                                    |
| “High Voltage Lines”     | electric lines of a nominal voltage of or exceeding 132 kilovolts;                                                                                                                                                                                                                                                  |
| “HV”                     | of a nominal voltage exceeding 650 volts;                                                                                                                                                                                                                                                                           |
| “Intellectual Property”  | patents, trademarks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same is registered and including applications for registration of any of the same) and rights under licences and consents in relation to any of the same and all rights or forms of |

|                                           |                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                           | protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world;                                                                                                                                                                                                                                 |
| “Licence”                                 | any licence granted pursuant to the Act;                                                                                                                                                                                                                                                                                                                          |
| “Location Manager”                        | [     ];                                                                                                                                                                                                                                                                                                                                                          |
| “Low Voltage” or “LV”                     | Means a voltage not exceeding 250 volts;                                                                                                                                                                                                                                                                                                                          |
| “Medium Voltage” or “MV”                  | means a voltage exceeding 250 volts but not exceeding 650 volts;                                                                                                                                                                                                                                                                                                  |
| “Modification”                            | any alteration to or replacement of User Assets pursuant to clause 3.1 of this Agreement and “Modify” and “Modified” shall be construed accordingly;                                                                                                                                                                                                              |
| “National Electricity Transmission System | the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within Great Britain and used for the transmission of electricity from one power station to a sub-station or to another power station or between sub-stations or to or from any external interconnection and includes any electrical plant or |

apparatus or meters owned or operated by any transmission licensee within Great Britain in connection with the transmission of electricity but shall not include Remote Transmission Assets;

“NGET”

means National Grid Electricity Transmission plc (Company number 02366977) with registered office at 1-3 Strand, London, WC2N 5 EH;

“Party”

each person for the time being and from time to time party to this Agreement and any successor(s) in title to, or permitted assign(s) of, such person;

“Permitted Purpose”

means the maintenance, inspection, testing, removal, operation, modification or repair of the User’s Assets;

“Plant”

fixed and moveable items used in the generation and/or supply and/or transmission of electricity other than Apparatus;

“Regulations”

the Electricity Safety Quality and Continuity Regulations 2002 as amended from time to time;



|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Relocation Proposal”        | a proposal by RTL to the User pursuant to sub-clause 5.1 for the relocation of any of the User Assets;                                                                                                                                                                                                                                                                                                                                                                       |
| “Remote Transmission Assets” | any Plant and Apparatus or meters owned by The Company which (a) are embedded in a Distribution System or a user system and which are not directly connected by Plant and/or Apparatus owned by NGET to a sub-station owned by NGET and (b) are by agreement between NGET and such public distribution system operator or user under the direction and control of such public distribution system operator or user;                                                          |
| “Right of Access”            | full right and liberty during the currency of this Agreement to enter upon and through and remain upon any part of RTL’s Land (including where relevant any land over which RTL has a right of servitude, wayleave or similar right which benefits the RTL’s Land and the use of which by User is necessary to enable it to exercise the Right of Access hereby granted) PROVIDED to the extent necessary for a Permitted Purpose and subject to the provisions of clause 5; |

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Relevant Transmission Licensee” | means [National Grid Electricity Transmission plc in England & Wales], [SP Transmission Limited in south of Scotland] and [Scottish Hydro-Electric Transmission Limited in north of Scotland];                                                                                                                                                                                                                              |
| “RTL’s Land”                     | the land described in Schedule 2;                                                                                                                                                                                                                                                                                                                                                                                           |
| “RTL Licence”                    | the licence granted to the Relevant Transmission Licensee under Section 6 of the Act;                                                                                                                                                                                                                                                                                                                                       |
| “Secretary of State”             | has the meaning given to that term in the Act;                                                                                                                                                                                                                                                                                                                                                                              |
| “Services”                       | In the context of Clause 8, the goods and services specified in Schedule 5;                                                                                                                                                                                                                                                                                                                                                 |
| “Site Specific Safety Rules”     | the rules, procedures or current arrangements for and relating to safety co-ordination across boundaries (to permit work to or testing on the System of one of the Parties which, for this to be done safely, requires isolation and/or other precautions on Plant and/ or MV and/or LV Apparatus whether at, adjacent to or remote from the location of the work or testing) which the Parties mutually agree to use their |

best endeavours to formulate as soon as possible after the date of this Agreement and on the basis that any dispute as to their content shall be resolved in accordance with the provisions of Clause 10;

“The Company”

The company with registered number 11014226

“User’s Assets”

those assets listed in Schedule 1 (including any plinths or other structures (excluding buildings) to or upon which the same are affixed and to or upon which no assets of any other person are affixed and any straps, bolts or other such things for attachment thereto) as any of the same may be Modified pursuant to this Agreement;

“User’s Licence”

the licence granted to the User under Section 6 of the Act;

In this Agreement:-

- (i) unless the context otherwise requires all references to a particular clause, sub-clause, paragraph or Schedule shall be a reference to that clause, sub-clause, paragraph or Schedule in or to this Agreement;

- (ii) the table of contents and headings are inserted for convenience only and shall be ignored in construing this Agreement;
- (iii) references to the words “include” or “including” are to be construed without limitation to the generality of the preceding words;
- (iv) unless there is something in the subject matter or the context which is inconsistent therewith, any reference to an Act of Parliament or any Section thereof or Schedule thereto, or other provision thereof or any instrument, order or regulation made thereunder shall be construed at the particular time as including a reference to any modification, extension, replacement or re-enactment thereof then in force and to all instruments, orders or regulations then in force and made under or deriving validity from the relevant Act of Parliament; and
- (v) references to the masculine shall include the feminine and references in the singular shall include the plural and vice versa and words denoting natural persons shall include companies, corporations and any other legal entity and vice versa.
- (vi) unless otherwise provided to the contrary herein, defined terms used in this agreement and not defined herein shall have the meaning set forth in the connection and Use of System Code or the Bilateral Connection Agreement.

## **2. RIGHT TO INSTALL AND RETAIN ASSET**

- 2.1 Subject to sub-clause 5.1, the RTL hereby grants to User the right to install and thereafter retain and replace as provided in this Agreement User Assets on the RTL’s Land in such places as are currently proposed

(subject to such variations between the date hereof and the actual date of installation as may be agreed to by the RTL) and such right shall extend to any Modified User Assets. The RTL shall maintain any shelter and/or support enjoyed by any User Assets at the date of this Agreement or, if later, when relocated on the RTL's Land in accordance with clause 5 and grants to User a Right of Access for the purpose of the maintenance, inspection, testing, removal, operation, modification or repair of any of User Assets.

### **3. MODIFICATIONS REPLACEMENTS AND ALTERATIONS**

3.1 User may at its own expense replace or alter any User Assets provided that:-

3.1.1 the replacement User Assets or the User Assets as so altered:-

- (i) are placed in the same or approximately the same position;
- (ii) fulfil the same or a similar purpose;
- (iii) can, where relevant, be accommodated in and on existing buildings or structures;
- (iv) do not require additional or improved facilities or services from the RTL;
- (v) do not restrict the actual and intended use of the RTL's Land and any equipment thereon or therein to any materially greater extent than the User Assets so replaced or altered; and
- (vi) are either of the same or a similar or smaller size or the alteration is effected substantially within the space occupied

by such User Assets to enable the User Assets to be used up to their full capability; and

3.1.2 prior written notification has been given to the RTL.

3.2 If any replacement or alteration permitted by clause 3.1 shall require minor alterations or works to the existing buildings or structures housing or supporting the User Asset in question, such alterations or works may be carried out (with the prior written approval of the RTL (such approval not to be unreasonably withheld or delayed)) but at the cost of User.

3.3 To the extent that any of the conditions of clause 3.1 are not in RTL's reasonable opinion met in relation to any replacement or alteration, the RTL may by notice in writing require User promptly to remove such replacement or alteration and, if User fails to do so, may remove the same itself at the cost and expense of User. On such removal, User may reinstate the User Assets so replaced or altered.

3.4 User shall, if considering moving, replacing, or altering any User Assets, give due consideration as to whether it shall be operationally practicable, desirable and reasonably economic to move such User Assets to (or place the replacement or altered User Assets on) its own property.

3.5 For avoidance of doubt it is hereby agreed that any dispute between the Parties regarding this clause shall be determined in accordance with the provisions of Clause 10 of this Agreement.

#### **4. SECURITY AND COMPLIANCE WITH STATUTES etc**

4.1 The RTL undertakes to maintain and provide security in relation to User Assets in accordance with the arrangements set out in Part I of Schedule 3.

4.2 Each Party shall procure that, as between the Parties, all reasonable and necessary steps are taken, as and when necessary or desirable, in co-operation with the other Party (and, so far as applicable, with any third party), to ensure compliance with the provisions (each such provision or part thereof being in this clause 4 an "Obligation") of:-

- (i) all statutes and Directives applicable to any User Assets and/or any part (including the whole) of the RTL's Land;
- (ii) any statute or Directive which may affect any other property (of whatever nature) of either Party as a result of the existence, nature, location, or manner of operation of any User Assets; and
- (iii) any statute or Directive requiring the reporting of any occurrence relating to or affecting any User Assets and/or the RTL's Land (including the Reporting of Injuries Diseases and Dangerous Occurrence Regulations 1985 and the Regulations).

4.3 Each Party shall, so far as it is aware of the same, unless it has reasonable grounds for believing that the other Party possesses the information, keep the other Party informed of all matters relating to any Obligation or potential Obligation and/or the extent to which such Obligation may be applicable.

4.4 In the event of any dispute as to responsibility, as between the Parties, pursuant to clause 4.2, for compliance with an Obligation, that responsibility shall be allocated, so far as practicable, on the basis that:-

- (i) each Party shall refrain from taking or permitting any act or omission which would prevent compliance with an Obligation; and

- (ii) positive action required in relation to a Party's property as a consequence of the existence, nature, location or manner of operation of that property or any other property of that Party shall be the responsibility of that Party, and, to the extent that such action is required in respect of or affecting any property of the other Party (or property of a third party located in or on that other Party's Land), such action may be taken with the prior approval of that other Party (such approval, subject to (i) above, not to be unreasonably withheld or delayed).

4.5 The provisions for safety co-ordination between the Parties contained in Part II of Schedule 3 shall apply.

## **5. RELOCATIONS**

5.1 At any time and from time to time during the term of this Agreement, the RTL may with the prior written consent of User (such consent not to be unreasonably withheld or delayed) require User to relocate any User Assets either to a different location on the RTL Land or to User's or a third party's land, such consent to be sought and given or refused in accordance with the following procedure:-

5.1.1 The RTL shall serve a written notice on User, which notice shall specify:-

- (a) the User Assets which the RTL wishes to be relocated;
- (b) the reasons for such wish;
- (c) the proposed new location for such User Assets; and
- (d) the timing of the carrying out of such relocation.



5.1.2 User shall within one month of receipt of any such notice (or such longer period as shall be reasonably necessary) serve a counter notice stating:-

- (a) whether or not in its reasonable opinion such Relocation Proposal is acceptable to it;
- (b) if the Relocation Proposal is not acceptable to User, the grounds for such opinion and the terms of any alternative proposal (the “Alternative Relocation Proposal”) covering so far as relevant the matters referred to in items (a) - (d) of clause 5.1.1 which would be acceptable to User; and
- (c) in respect of the Relocation Proposal (if accepted) or of any Alternative Relocation Proposal, the costs likely to be incurred in connection with considering the Relocation Proposal or the Alternative Relocation Proposal and effecting the said relocation of the User Assets and the proper and reasonable costs of relocating any other equipment that may be necessary as a result of the relocation of those User Assets and any consequential losses including payments to third parties incurred as a result of the relocation of those User Assets and the proposed manner and timing of payment of the same by the RTL.

5.1.3 If within one month of the date of such counter notice (or such longer period as shall be reasonably necessary) the RTL has not withdrawn the Relocation Proposal and the Parties have not agreed upon it or the Alternative Relocation Proposal (if any) or a variation of either of them (such agreement to include

agreement on the costs referred to in item (c) of clause 5.1.2) the matter shall be dealt with in accordance with Clause 10.

- 5.2 Upon approval or settlement of any Relocation Proposal, Alternative Relocation Proposal or variation thereof pursuant to clause 5.1, User shall (conditionally upon it being able to obtain all necessary licences and consents which it will use reasonable endeavours to do) relocate or procure the relocation of the relevant User Assets as quickly as reasonably practicable (having regard to, amongst other things, technical and operational requirements and to the availability of all necessary licences and consents).
- 5.3 The RTL shall render all reasonable assistance to User in connection with such relocation licences and consents and pay to User all costs referred to in item (c) of clause 5.1.2 as agreed or settled pursuant to clause 5.1 provided that all reasonable endeavours are used to minimise such costs and in the event that a Relocation Proposal is withdrawn or consent thereto is reasonably withheld pursuant to clause 5.1, the RTL shall pay to User all costs reasonably incurred by User in connection with considering the Relocation Proposal and any counter notice.
- 5.4 Such of the provisions of this Agreement as are appropriate and relevant (including the provisions of this clause 5), shall continue to apply to any relocated User Assets.

## **6. REMOVALS**

- 6.1 In the event that there shall cease to be a Bilateral Connection Agreement relating to any User Assets on the RTL's Land User shall remove all User Assets from the RTL's Land in accordance with the

provisions relating thereto contained in the Connection Agreement and the Bilateral Connection Agreement.

- 6.2 Where User is obliged to remove any User Assets from the RTL's Land, under this Clause 6, and fails to do so in accordance with the relevant provisions, (whether they be contained in this clause 6, clause 3 or clause 5) the RTL shall be entitled to remove those User Assets to land belonging to User and User shall provide all reasonable assistance to enable the RTL safely so to do and shall pay and reimburse to the RTL all costs and expenses reasonably incurred by the RTL in so doing.

## **7. RIGHTS OF ACCESS**

- 7.1 A Right of Access includes the right to bring on to the RTL's Land such vehicles, plant, machinery and maintenance or construction materials as shall be reasonably necessary for the Permitted Purpose.
- 7.2 A Right of Access given to User may be exercised by any person, including third party contractors, reasonably nominated from time to time by User. To the extent (if any) that any particular authorisation or clearances may be required to be given by the RTL and the procedures for giving and obtaining the same are not for the time being stipulated in arrangements made pursuant to clause 7.3, the same shall be given within a reasonable time from the date of the request therefor, save in the case of emergency in which case it shall be given without delay.
- 7.3 User shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable, to facilitate the safe exercise by it of any Right of Access with the minimum of disruption, disturbance or inconvenience to the RTL. Such arrangements and provisions shall provide for the RTL to have the

right to make directions or regulations from time to time in relation to a specified matter. Matters to be covered by such arrangements and/or provision shall include:-

- (i) the identification of any relevant User Assets;
- (ii) the particular access routes applicable to the land in question having particular regard for the weight and size limits on those routes;
- (iii) any limitations on times of exercise of a Right of Access;
- (iv) any requirements as to prior notification and as to authorisation or security clearance of individuals exercising such Rights of Access, and procedures for obtaining the same;
- (v) the means of communication between the Parties and all employees and/or contractors who may be authorised from time to time by User to exercise a Right of Access of any relevant directions or regulations made by the RTL;
- (vi) the identification of and arrangements applicable to Emergency Personnel.
- (vii) Any limitation or restriction on the exercise of such Right of Access to the extent that in the circumstances is reasonable

7.4 User shall procure that any such arrangements and/or provisions (or directions or regulations issued by the RTL pursuant thereto) made from time to time between the Parties shall be observed and performed by it and all persons authorised by it to exercise any Right of Access.

7.4.1 User shall procure that all reasonable steps are taken in the exercise of any Right of Access to:-

- (a) avoid or minimise damage to the RTL's Land, or any other property thereon or therein;
- (b) cause as little disturbance and inconvenience as possible to the RTL or other occupier of the RTL's Land;

and shall promptly make good any damage caused to the RTL's Land and/or such other property in the course of the exercise of such rights and shall indemnify the RTL against all actions, claims, proceedings, losses, costs and demands arising out of such exercise.

7.4.2 Subject to clause 7.4.1, all such rights shall be exercisable free of any charge or payment of any kind.

7.5 Subject to any contrary arrangements for the time being made under clause 7.3,

7.5.1 a Right of Access for operation or inspection shall be available without prior notice;

7.5.2 a Right of Access for the purpose of maintenance, testing or repair of HV Apparatus shall only be exercisable on the giving of at least seven days prior written notice to the RTL except in the case of loss of generation or demand or other emergency (in which event the RTL shall render all possible assistance in procuring that the Right of Access shall be exercisable as soon as possible); and

7.5.3 a Right of Access for the purpose of Modifying any User Assets shall be exercisable only after two weeks prior written notice to the RTL.

## **8. SERVICES AND USE OF ASSETS**

8.1 Subject as hereinafter provided, in relation to each Facility Asset, RTL shall, if required by User, make the Facility Asset in question available for use by User to such extent as is necessary for the purposes of User's undertaking but not so as to prejudice the use now or hereafter of such Facility Asset by the RTL for its undertaking.

8.2 Subject as hereinafter provided, in relation to each Services, the RTL shall, if required by User, provide the same to User. Such provision shall be of such a quality and quantity and shall be provided at such times as User shall reasonably request. The RTL shall not be required to exceed the level of quality or quantity of the Services as are anticipated by the Parties at the date of this Agreement, unless specifically agreed otherwise between the Parties.

8.3 Where the use of any Facility Asset is made available or such Services are supplied as aforesaid, the Parties shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable between the local personnel employed by each of them in that regard, such arrangements to include:-

8.3.1 the identification of the Facility Asset and/or Services in question including (where relevant) the extent of their availability;

8.3.2 the hours during which such use or provision shall be allowed or made;

- 8.3.3 any requirements as to notification of use or call for supply or temporary suspension thereof;
  - 8.3.4 any requirements as to authorisation or security clearance of individuals and the procedures for obtaining the same; and
  - 8.3.5 any safety requirements.
- 8.4 The provision of use of the Facility Asset listed in Schedule 4, Part One and the supply of the Services listed in Schedule 5, Part One shall not be terminated unless the RTL ceases to require the Facility Asset or Services for its own use in which case the supply of the Services or use of the Facility Asset may be terminated by not less than one year's notice in writing;
- 8.5 The provision of use of the Facility Assets listed in Schedule 4, Part Two and the supply of the Services listed in Schedule 5, Part Two shall continue until terminated by not less than six months notice in writing by either Party. The RTL shall maintain the Facility Asset in accordance with Good Industry Practice.

## **9. NON-INTERFERENCE**

- 9.1 The RTL agrees that neither it nor its agents, employees and invitees will interfere in any way with any of User Assets without the consent of User. For the purposes of this clause "interfere" shall include:-
  - 9.1.1 disconnecting or altering the connection of any User Assets to any system of cables, foundations, pipes, drains or other media to which it may be connected from time to time or to prevent supply of any substance or thing through such connected system;

- 9.1.2 affixing or removing any item or substance of any nature whatsoever to or from any User Assets;
  - 9.1.3 damaging any User Assets;
  - 9.1.4 allowing any other person to interfere with any User Assets;
  - 9.1.5 alter any meters or settings on any User Assets;
  - 9.1.6 the obstruction of access to any User Assets.
- 9.2 The obligations contained in this clause 9 shall be suspended to the extent that emergency action is taken by Emergency Personnel in good faith to protect the health and safety of persons or to prevent damage to property. All reasonable care shall be taken in the course of such emergency action. When the emergency has ended, any damaged property will be reinstated by User, save for damage occurring by reason of lack of reasonable care in the course of the emergency action taken by the RTL which shall be the responsibility of the RTL.

## **10. DISPUTE RESOLUTION**

- 10.1 Any dispute arising under this Agreement between Location Managers of the Parties shall, if not resolved within 14 days of first arising, be referred at the instance of either party to the respective line managers, or those fulfilling a similar function whether or not so called, of the RTL and User who shall use all reasonable endeavours to resolve the matter in dispute within one month.
- 10.2 Save where expressly stated in this Agreement to the contrary (including the procedure for initial dispute resolution contained in clause 10.1) and subject to any contrary provision of the Act, any Licence, or the Regulations, or the rights, powers, duties and obligations of the Authority



or the Secretary of State under the Act, any Licence or otherwise howsoever, any dispute or difference of whatever nature howsoever arising under out of or in connection with this Agreement between the Parties shall (subject to any relevant initial dispute resolution procedures referred to in Clause 10.1 having been exhausted) be and is hereby referred to arbitration pursuant to the rules of the London Court of International Arbitration in force from time to time.

- 10.3 Whatever the nationality residence or domicile of any Party and wherever the dispute or difference or any part thereof arose the law of England and Wales shall be the proper law of any reference to arbitration hereunder and in particular (but not so as to derogate from the generality of the foregoing) the provisions of the Arbitration Act 1996 (including any modification, extension, replacement or re-enactment thereof for the time being in force) shall apply to any such arbitration wherever the same or any part of it shall be conducted.

## **11. GOVERNING LAW AND JURISDICTION**

- 11.1 This Agreement shall be governed by and construed in all respects in accordance with English law.
- 11.2 Subject and without prejudice to clause 10 and to clause 11.4 the Parties irrevocably agree that only the courts of England and Wales and the courts of Scotland are to have jurisdiction to settle any dispute which may arise out of or in connection with this Agreement and that accordingly any suit, action or proceeding (together in this clause 11 referred to as "Proceedings") arising out of or in connection with this Agreement may be brought in such courts.

11.3 Each Party irrevocably waives any objection which it may have now or hereafter to the laying of the venue of any Proceedings in any such court as is referred to in this clause 11 and any claim that any such Proceedings have been brought in an inconvenient forum and further irrevocably agrees that a judgment in any Proceedings brought in the courts of England and Wales or the courts of Scotland shall be conclusive and binding upon such Party and may be enforced in the courts of any other jurisdiction.

11.4 For the avoidance of doubt nothing contained in the foregoing provisions of this clause 11 shall be taken as permitting a Party to commence Proceedings in the courts where this Agreement otherwise provides for proceedings to be referred to arbitration.

## **12. CONFIDENTIALITY<sup>1</sup>**

12.1 For the purposes of this Clause 12 except where the context otherwise requires:-

12.1.1 “Authorised Recipient”, in relation to any Protected Information, means any Business Person who, before the Protected Information had been divulged to them by the RTL or any <sup>2</sup>subsidiary of the RTL, had been informed of the nature and effect of this clause 12 and who requires access to such Protected Information for the proper performance of their duties as a Business Person in the course of Permitted Activities;

---

<sup>1</sup> To consider simplifying?

12.1.2 “Business Person” means any person who is a Licensed Business Person, or a Corporate Functions Person and “Business Personnel” shall be construed accordingly.

12.1.3 “Confidential Information” means all data and other information supplied to User under the provisions of this Agreement.

12.1.4 “Corporate Functions Person” means any person who:-

- (a) is a director of the RTL; or
- (b) is an employee of the RTL or any of its subsidiaries carrying out any administrative, finance or other corporate services of any kind which in part relate to the Licensed Business; or
- (c) is engaged as an agent of or adviser to or performs work in relation to or services for the Licensed Business.

12.1.5 “Licensed Business” means any business of RTL or any of its associates authorised by its RTL Licence;

12.1.6 “Licensed Business Person” means any employee of the RTL or any Authority or employee of its subsidiaries who is engaged solely in its Licensed Business and “Licensed Business Personnel” shall be construed accordingly;

12.1.7 “Permitted Activities” means activities carried on for the purposes of the Licensed Business;

12.1.8 “Protected Information” means any information relating to the affairs of a Party which is furnished to Business Personnel pursuant to this Agreement unless, prior to such information being furnished, such Party has informed the recipient thereof by

notice in writing or by endorsement on such information, that the said information is not to be regarded as Protected Information;

12.2 Confidentiality for the RTL and its Subsidiaries

The RTL and its subsidiaries in each of their capacities in this Agreement shall secure that Protected Information is not:-

12.2.1 divulged by Business Personnel to any person unless that person is an Authorised Recipient;

12.2.2 used by Business Personnel for the purposes of obtaining for the RTL or any of its subsidiaries or for any other person:-

- (a) any Licence; or
- (b) any right to purchase or otherwise acquire, or to distribute, electricity including by means of an electricity purchase contract (as defined in the Transmission Licence); or
- (c) any contract or arrangement for the supply of electricity to customers or suppliers; or
- (d) any contract for the use of any electrical lines or electrical plant belonging to or under the control of a supplier.

12.2.3 used by Business Personnel for the purpose of carrying on any activities other than Permitted Activities except with the consent in writing of the Party to whose affairs such Protected Information relates.

12.3 Nothing in this Clause 12 shall apply:-

12.3.1 to any Protected Information which, before it is furnished to Business Personnel is in the public domain;

12.3.2 to any Protected Information which, after it is furnished to Business Personnel:-

- (a) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does not apply; or
- (b) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
- (c) enters the public domain otherwise than as a result of a breach by the RTL or any subsidiary of the RTL of its obligations in this Clause 12.

12.3.3 to the disclosure of any Protected Information to any person if the RTL or any subsidiary is required or permitted to make such disclosure to such person:-

- (a) in compliance with the duties of the RTL or any associate under the Act or any other requirement of a Competent Authority; or
- (b) in compliance with the conditions of its RTL Licence or any document referred to in its RTL Licence with which the RTL is required to comply; or
- (c) in compliance with any other requirement of law; or

- (d) in response to a requirement of any recognised stock exchange or regulatory authority or the Panel on Take-overs and Mergers; or
- (e) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal.

12.3.4 to any Protected Information to the extent that the RTL or any of its subsidiaries is expressly permitted or required to disclose that information under the terms of any agreement or arrangement (including the Grid Code and the Fuel Security Code) with the Party to whose affairs such Protected Information relates.

12.4. The RTL and its subsidiaries may use all and any information or data supplied to or acquired by it, from or in relation to the other Party to this Agreement in performing its Permitted Activities and may pass the same to subsidiaries of the RTL which carry out such activities and the User hereto agrees to provide all information to the RTL and its subsidiaries for such purposes.

12.5 The Company and its subsidiaries may use all and any information or data supplied to or acquired by it from the RTL pursuant to Clause 12.3.3 in relation to this Agreement in performing its activities under the ESO Licence including for the following purposes:

12.5.1 the operation and planning of the GB Transmission System;

12.5.2 the calculation of charges and preparation of offers of terms for connection to or use of the GB Transmission System;

and the User agrees to provide all information to the RTL and its subsidiaries for such purposes.

12.6 The RTL undertakes that, having regard to the activities in which any Business Person is engaged and the nature and effective life of the Protected Information divulged to them by virtue of such activities, neither the RTL nor any of its subsidiaries shall unreasonably continue (taking into account any industrial relations concerns reasonably held by it) to divulge Protected Information or permit Protected Information to be divulged to any Business Person:

- (a) who has notified the RTL or the relevant subsidiary of their intention to become engaged as an employee or agent of any other person (other than of the RTL or any subsidiary thereof);
- (b) who is authorised by licence or exemption to generate or supply electricity.

12.7 Without prejudice to other provisions of this clause 12 the RTL shall procure that any additional copies of the Protected Information, whether in hard copy or computerised form, will clearly identify the Protected Information as protected.

12.8 The RTL undertakes to use all reasonable endeavours to procure that no employee is a Corporate Functions Person unless the same is necessary for the proper performance of their duties.

12.9 Confidentiality for User

12.9.1 User hereby undertakes with the RTL and its subsidiaries that it shall preserve the confidentiality and secrecy of, and not directly

or indirectly reveal, report, publish, disclose or transfer or use for its own purposes Confidential Information except:-

- (a) in the circumstances set out in Clause 12.9.2;
- (b) to the extent expressly permitted by this Agreement; or
- (c) with the consent in writing of the RTL.

12.9.2 Exceptions: the circumstances referred to in Clause 12.9.1(a) are:-

- (a) where the Confidential Information, before it is furnished to User, is in the public domain; or
- (b) where the Confidential Information, after it is furnished to User:-
  - (i) is acquired by User in circumstances in which this Clause 12 does not apply; or
  - (ii) is acquired by User in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
  - (iii) enters the public domain otherwise than as a result of a breach by User of its obligations in this Clause 12; or
- (c) if User is required or permitted to make disclosure of the Confidential Information to any person:-



- (i) in compliance with the duties of User under the Act or any other requirement of a Competent Authority;
  - (ii) in compliance with the conditions of any Licence or any document referred to in any Licence with which User is required to comply;
  - (iii) in compliance with any other requirement of law;
  - (iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Takeovers and Mergers; or
  - (v) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal; or
- (d) where Confidential Information is furnished by User to the employees, directors, agents, lenders, consultants and professional advisers of User in each case on the basis set out in Sub-Clause 12.10.

12.10 With effect from the date of this Agreement User shall adopt procedures within its organisation for ensuring the confidentiality of all Confidential Information which it is obliged to preserve as confidential under this Clause 12. These procedures will include:

12.10.1 the Confidential Information will be disseminated within User only on a “need to know” basis;

12.10.2 employees, Authorities, agents, lenders, consultants and professional advisers of User in receipt of Confidential

Information will be made fully aware of User's obligations of confidence in relation thereto.

**13. TITLE TO ASSETS**

13.1 User acknowledges that it does not have and will not acquire any title, right or interest in the RTL's Land save for such rights as are expressly granted herein or otherwise provided nevertheless that, if according to any rule of law, User could acquire any such title, right or interest in any of the RTL's Land, then:

13.1.1 in the case of land in England & Wales, such title right or interest shall be held upon trust, insofar as it relates to the RTL's land for such RTL absolutely; or

13.1.2 in the case of Land in Scotland, the User undertakes to do all that is required to transfer such right or interest to the RTL to ensure that the RTL shall not, by reason of such right or interest arising, have its full rights in such land diminished (and in the interim to hold such rights in trust for the RTL) and shall if requested by the RTL, be obliged forthwith to establish trust arrangements valid under Scottish law so as to ensure that any such right or interest shall be held on behalf of RTL .

13.2 The RTL agrees that it shall not by any act or default render User Assets liable to any distress execution or other legal process, and in the event that User Assets shall become so liable, shall forthwith give notice of any such proceedings to User and shall forthwith notify any third party instituting any such process of the ownership of such User Assets.

13.3 If the RTL desires to mortgage or charge RTL's Land or its interest therein on which any User Assets are located or to enter into any arrangement

which, if made, might affect the rights of User expressly granted herein, then the RTL shall ensure that User Assets are not and will not be subject to the rights granted therein and are not and will not be affected by the mortgage, legal charge or other agreement or arrangement, and shall give prior written notification thereof to User.

- 13.4 In the event that the RTL shall wish to grant rights over or dispose of any interest in or change the use of the RTL's Land the RTL shall notify User of such wish and fully consult User in respect thereof and shall not grant such rights or make such disposal or change of use save on terms securing to the reasonable satisfaction of that other the Rights of Access granted in respect of the RTL's Land.

#### **14. LIMITATION OF LIABILITY**

- 14.1 Subject to sub-clauses 5.3, 6.2, 9.2, and 14.5 and save as provided in this sub-clause 14.1 and sub-clause 14.2 neither Party ("the Party Liable") nor any of its officers, employees or agents shall be liable to the other Party for loss arising from any breach of this Agreement other than for loss directly resulting from such breach and which at the date hereof was reasonably foreseeable as not unlikely to occur in the ordinary course of events from such breach and which resulted from:-

14.1.1 physical damage to the property of the other Party, its officers, employees or agents; and/or

14.1.2 the liability of the other Party to any other person for loss arising from physical damage to the property of any person.

- 14.2 Nothing in this Agreement shall exclude or limit the liability of the Party Liable for death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents and the Party

Liabe shall indemnify and keep indemnified the other Party, its officers, employees or agents, from and against all such and any loss or liability which the other Party may suffer or incur by reason of any claim on account of death or personal injury resulting from the negligence of the Party Liabe or any of its officers, employees or agents.

14.3 Subject to sub-clauses 5.3, 6.2, 9.2, and 14.5 neither Party, nor any of its officers, employees or agents shall in any circumstances whatsoever be liable to the other Party for:-

14.3.1 any loss of profit, loss of revenue, loss of use, loss of contract or loss of goodwill; or

14.3.2 any indirect or consequential loss; or

14.3.3 loss resulting from the liability of the other Party to any other person howsoever and whensoever arising save as provided in sub-clauses 14.1.2 and 14.2.

14.4 The rights and remedies provided by this Agreement to the Parties are exclusive and not cumulative and exclude and are in place of all substantive (but not procedural) rights or remedies express or implied and provided by common law or statute in respect of the subject matter of this Agreement, including any rights either Party may possess in tort which shall include actions brought in negligence and/or nuisance. Accordingly, each of the Parties hereby waives in the fullest extent possible all such rights and remedies provided by common law or statute, and releases the Party Liabe, its officers, employees and agents to the same extent from all duties, liabilities, responsibilities or obligations provided by common law or statute in respect of the matters dealt with in

this Agreement and undertakes not to enforce any of the same except as expressly provided herein.

14.5 Save as otherwise expressly provided in this Agreement, this clause 14 insofar as it excludes or limits liability shall override any other provision in this Agreement provided that nothing in this clause 14 shall exclude or restrict or otherwise prejudice or affect any of:-

14.5.1 the rights, powers, duties and obligations of either Party which are conferred or created by the Act, the User's Licence, the RTL's Licence or the Regulations or any amendment or re-enactment thereof; or

14.5.2 the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any such licence as aforesaid or otherwise howsoever.

14.6 Each of the sub-clauses of this clause 14 shall:-

14.6.1 be construed as a separate and severable contract term, and if one or more of such sub-clauses is held to be invalid, unlawful or otherwise unenforceable the other or others of such sub-clauses shall remain in full force and effect and shall continue to bind the Parties; and

14.6.2 survive termination of this Agreement.

14.7 Each Party agrees that the Other Party holds the benefit of sub clauses 14.1, 14.2 and 14.3 above for itself and as trustee and agent for its officers, employees and agents

14.8 Each Party hereby acknowledges and agrees that the provisions of this clause 14 have been the subject of discussion and negotiation and are

fair and reasonable having regard to the circumstances as at the date hereof.

**15. INTELLECTUAL PROPERTY**

All Intellectual Property relating to the subject matter of this Agreement conceived, originated, devised, developed or created by a Party, its officers, employees, agents or consultants during the currency of this Agreement shall vest in such Party as the sole beneficial owner thereof save where the Parties agree in writing otherwise.

**16. FORCE MAJEURE**

If either Party (the “Non-Performing Party”) shall be unable to carry out any of its obligations under this Agreement due to a circumstance of Force Majeure this Agreement shall remain in effect but save as otherwise provided herein the Non-Performing Party’s obligations hereunder shall be suspended without liability for a period equal to the circumstance of Force Majeure provided that:-

- (i) the Non-Performing Party gives the other Party prompt notice describing the circumstance of Force Majeure, including the nature of the occurrence, its expected duration and the particular obligations affected by it, and continues to furnish regular reports with respect thereto during the period of Force Majeure;
- (ii) the suspension of performance is of no greater scope and of no longer duration than is required by the Force Majeure;

- (iii) no liabilities of either Party that arose before the Force Majeure causing the suspension of performance are excused as a result of the Force Majeure;
- (iv) the non-performing Party uses all reasonable efforts to remedy its inability to perform; and
- (v) as soon as practicable after the event which constitutes Force Majeure the Parties shall discuss how best to continue their operations so far as possible in accordance with this Agreement.

## **17. WAIVER**

No delay by or omission of a Party in exercising any right, power, privilege or remedy under this Agreement shall operate to impair such right, power, privilege or remedy or be construed as a waiver thereof. Any single or partial exercise of any such right, power, privilege or remedy shall not preclude any other or future exercise thereof or the exercise of any other right, power, privilege or remedy.

## **18. NOTICES**

- 18.1 Any notice or other communication to be given by one Party to the other under, or in connection with the matters contemplated by, this Agreement shall be addressed to the recipient and sent to the address, or email address of such other Party given in Schedule 6 and marked for the attention of the person so given or to such other address, and/or email address and/or marked for such other attention as such other Party may from time to time specify by notice given in accordance with this clause 18 to the Party giving the relevant notice or other communication to it.

18.2 Any notice or other communication to be given by one Party to the other Party under, or in connection with the matters contemplated by, this Agreement shall be in writing and shall be given by letter delivered by hand or sent by first class prepaid post (airmail if overseas) or email, and shall be deemed to have been received:-

18.2.1 in the case of delivery by hand, when delivered; or

18.2.2 in the case of first class prepaid post, on the second day following the day of posting or (if sent airmail from overseas) on the fifth day following the day of posting; or

18.2.3 in the case of telex, on the transmission of the automatic answerback of the addressee (where such transmission occurs before 1700 hours on the day of transmission) and in any other case on the day following the day of transmission; or

18.2.4 in the case of email, when delivered to the email address (where such delivery occurs before 1700 hours on the day of delivery) and in any other case on the day following the day of delivery.

## **19. VARIATIONS**

The provisions of Schedules 1, 3, 4, 5 and 6 may be varied from time to time by written memorandum signed by an authorised officer of each of the Parties. Subject thereto no variations to this Agreement shall be effective unless made by way of supplemental deed.

## **20. OVERRIDING PROVISIONS & GOOD INDUSTRY PRACTICE**

20.1 In the event of any conflict between the RTL's or User's obligations hereunder and their obligations under the User's Licence and RTL's Licence, the Act, any direction of the Secretary of State, the Authority or



ruling of the Competition Commission, the Grid Code, Connection Agreement or the Bilateral Connection Agreement, the provisions of the User's Licence and RTL's Licence, the Act, the Grid Code, Connection Agreement or Bilateral Connection Agreement, the direction of the Secretary of State, the Authority, or ruling of the Competition Commission shall prevail and accordingly the RTL and User respectively shall not be responsible for any failure to perform their respective obligations hereunder to the extent that any such failure is directly attributable to proper compliance with such provisions, rulings or directions.

- 20.2 Both parties shall observe their respective obligations hereunder in accordance with Good Industry Practice

## **21. ASSIGNMENT AND SUB-CONTRACTING**

- 21.1 The rights and obligations of a Party may not be assigned (otherwise than to an Affiliate or by way of a charge or an assignment by way of security) without the consent of the other Party, such consent not to be unreasonably withheld.

- 21.2 Each Party shall have the right to sub-contract or delegate the performance of any of its obligations or duties arising under this Agreement without the consent of the other. The sub-contracting by either Party of the performance of any obligations or duties under this Agreement shall not relieve such Party from the liability for performance of such obligation or duty.

## **22. ILLEGALITY AND PARTIAL INVALIDITY**

- 22.1 If at any time any provision of this Agreement should become or be declared unlawful, invalid, illegal or unenforceable in any respect under the law of any jurisdiction, neither the validity, legality or enforceability of

the remaining provisions nor the validity, legality or enforceability of such provision under the law of any other jurisdiction shall be affected.

- 22.2 If any part of a provision of this Agreement is or becomes or is declared invalid, unlawful, illegal or unenforceable but the rest of such provision would remain valid, lawful or enforceable if part of the wording were deleted the provision shall apply with such modifications as may be necessary to make it valid, lawful, enforceable and effective but without affecting the meaning of legality, validity or enforceability of any other provision of this Agreement.

## **23. TERM AND TERMINATION**

This Agreement shall continue until no User Assets are on the RTL's land and no Facility Assets or Services are shared or provided.

## **24. REGISTRATION AND MEMORANDUM**

- 24.1 Where any or all of the RTL's Land is registered or User's interest therein is subject to compulsory registration at H.M Land Registry or the land register of Scotland (as relevant), the parties hereto agree to apply to the Chief Land Registrar or the Keeper (as relevant) for the registration as appropriate of the rights and obligations granted by or contained in this Agreement and the RTL agrees to place on deposit at H.M. Land Registry or the Land Registry Scotland (as relevant) all relevant Land or Charge Certificates to enable such registration to be effected.
- 24.2 Where any of the RTL's Land is not so registered or subject to compulsory registration, the RTL shall procure within six months of the date hereof that memoranda of this Agreement are endorsed on or otherwise securely attached to the most recent conveyance (in the case

of a heritable interest) or the lease under or pursuant to which they hold such land.

**25. ENTIRE AGREEMENT**

25.1 This Agreement contains the entire agreement between the Parties with respect to the subject-matter hereof, and expressly excludes any warranty, condition or other undertaking implied at law or by custom, and supersedes all previous agreements and understandings between the Parties with respect thereto and:-

- (i) each of the Parties acknowledges and confirms that it does not enter into this Agreement in reliance on any representation, warranty or other undertaking not fully reflected in the terms of this Agreement; but
- (ii) User acknowledges that the RTL may have entered or may enter into agreements with other parties who hold a licence containing similar rights and/or liabilities to those contained in this Agreement affecting the RTL's Land and any assets thereon. The RTL shall, when entering into such agreement with any such party, use reasonable endeavours to avoid conflicts between the provisions thereof and the provisions of this Agreement but in the event of any conflict the RTL shall use all reasonable endeavours to procure that appropriate arrangements are made to settle the same to give full effect (so far as practicable) to the rights and liabilities under this Agreement and under such other agreements as aforesaid. In the event of any dispute as to such conflict and/or arrangements the dispute shall be dealt with in accordance with Clause 10.

IN WITNESS whereof this Agreement has been entered into as a Deed the day and year first above written.

**SCHEDULE 1**

**User's Assets on RTL Land**

**SCHEDULE 2**

RTL's Land

### **SCHEDULE 3**

#### **Part I**

##### **Security Details (Clause 4.1)**

#### **Part II**

##### **Plant MV LV Apparatus Safety Co-Ordination Procedures (Cl.4.5)**

- (1) The Parties will comply with the Site Specific Safety Rules and any agreed modifications thereto.
- (2) The Parties will arrange for the Site Specific Safety Rules to be written down and to be implemented by the person or persons responsible on behalf of the relevant Parties for the co-ordination of safety.

**SCHEDULE 4**

**RTL OWNED FACILITY ASSETS**

Part One

Part Two



**SCHEDULE 5**

**SHARED SERVICES PROVIDED BY RTL**

Part One

Part Two

**SCHEDULE 6**

Addresses, Email Addresses etc (Cl. 18.)

[Insert details of RTL]

[       ]

Telephone:  
Email address:

[Insert details of User]

[       ]

Telephone:  
Email address:

**THE COMMON SEAL** of )  
[**RELEVANT TRANSMISSION LICENSEE**]..... )  
was hereunto affixed in the presence of:- )

**THE COMMON SEAL** of )  
[ ] )  
was hereunto affixed in the presence of:- )

**END OF SECTION O PART II B**

**CUSC - EXHIBIT O - PART II C**

**THE CONNECTION AND USE OF SYSTEM CODE**

**INTERFACE AGREEMENTS**

**PART II B- USER ASSETS ON RTL OFFSHORE PLATFORM**

**CUSC - EXHIBIT O - PART II C**

DATED \_\_\_\_\_ 200[ ]

(1) [Insert name of Relevant Transmission Licensee (RTL)]

- and -

(2)

(User)

**INTERFACE AGREEMENT**

Relating to User Assets on  
RTL Offshore Platform at [ ]

**I N D E X**

| <u>Clause</u> | <u>Title</u>                                | <u>Page</u> |
|---------------|---------------------------------------------|-------------|
| 1             | Definitions and Interpretation              | 1           |
| 2             | Right to Install and Retain Asset           | 8           |
| 3             | Modifications, Replacements and Alterations | 9           |
| 4             | Security and Compliance with Statutes etc.  | 10          |
| 5             | Relocations                                 | 11          |
| 6             | Removals                                    | 13          |
| 7             | Rights of Access                            | 14          |
| 8             | Services and Use of Assets                  | 16          |
| 9             | Non-Interference                            | 18          |
| 10            | Dispute Resolution                          | 19          |
| 11            | Governing Law and Jurisdiction              | 21          |
| 12            | Confidentiality                             | 22          |
| 13            | Title to Assets                             | 28          |
| 14            | Limitation of Liability                     | 29          |
| 15            | Intellectual Property                       | 32          |
| 16            | Force Majeure                               | 32          |
| 17            | Waiver                                      | 33          |
| 18            | Notices                                     | 33          |
| 19            | Variations                                  | 34          |
| 20            | Overriding Provisions                       | 34          |
| 21            | Assignment and Sub-contracting              | 35          |
| 22            | Illegality and Partial Invalidity           | 35          |
| 23            | Term and Termination                        | 36          |
| 24            | Registration and Memorandum                 | 36          |

|            |                                                                                                 |    |
|------------|-------------------------------------------------------------------------------------------------|----|
| 25         | Entire Agreement                                                                                | 36 |
| Schedule 1 | User's Assets on RTL's Offshore Platform                                                        |    |
| Schedule 2 | RTL's Offshore Platform                                                                         |    |
| Schedule 3 | Part I - Security Details<br>Part II - Plant MV LV Apparatus<br>Safety Co-ordination Procedures |    |
| Schedule 4 | RTL Owned Facilities                                                                            |    |
| Schedule 5 | Services                                                                                        |    |
| Schedule 6 | Addresses, Email Addresses etc.                                                                 |    |

**INTERFACE AGREEMENT**  
**(ASSET LICENCE FACILITY AGREEMENT)**  
**(USER ASSETS)**

**THIS DEED OF AGREEMENT** is made on the \_\_\_\_\_ day of \_\_\_\_\_ 200[ ]

## BETWEEN

- (1) [Insert name of Relevant Transmission Licensee] a company registered in [ ] with number [ ] whose registered office is at [ ] (“RTL”, which expression shall include its successors and/or permitted assigns); and
- (2) [ ] a company registered in [ ] with number [ ] whose registered office is at [ ] (“User”, which expression shall include its successors and/or permitted assigns)

**WHEREAS**

Certain assets of the User are to be installed on the Offshore Platform title to which is vested in RTL and this Agreement is entered into by the Parties to give effect to appropriate arrangements in respect of such assets and also the use of certain facilities provided by RTL.

**NOW IT IS HEREBY AGREED** as follows:-

## 1. DEFINITIONS AND INTERPRETATION

In this Agreement, the following words and expressions shall, unless the subject-matter or context otherwise requires or is inconsistent therewith, bear the following meanings:-



|                                   |                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Act”                             | the Electricity Act 1989 as amended by Utilities Act 2000 and the Energy Act 2023;                                                                                                                                                                                                                                                                                                          |
| “Affiliate”                       | in relation to User means any holding company or subsidiary of that Party or any subsidiary of a holding company of User, in each case within the meaning of Sections 736, 736A and 736B of the Companies Act 1985 as substituted by Section 144 of the Companies Act 1989 and if that section is not in force at the date of this Agreement as if such section were in force at such date; |
| “Apparatus”                       | all equipment in which electrical conductors are used, supported or of which they may form a part;                                                                                                                                                                                                                                                                                          |
| “Authority”                       | the Gas and Electricity Markets authority established by Section 1 of the Utilities Act 2000;                                                                                                                                                                                                                                                                                               |
| “Authorised Electricity Operator” | any person (other than The Company) who is authorised to generate, participate in the transmission of, distribute or supply electricity and for the purposes of Standard Condition C4 of the Transmission Licence shall include                                                                                                                                                             |

any person who has made application to be so authorised which application has not been refused and any person transferring electricity to or from Great Britain across an interconnector or who has made application for use of interconnector which has not been refused;

“Bilateral Connection Agreement”

the Bilateral Connection Agreement entered into between the User and The Company pursuant to the Connection Agreement and dated [ ];

“Connection Agreement”

the Connection and Use of System Code given contractual force by the CUSC Framework Agreement entered into by, amongst others, the User regarding, amongst other things, the connection of User’s Plant and Apparatus to the National Electricity Transmission System and the use by the User of such system;

“Competent Authority”

the Secretary of State, the Authority and any local or national agency, authority, department, inspectorate, minister (including the Scottish Ministers), ministry, official or public

or statutory person (whether autonomous or not) of, or of the government of, the United Kingdom or the European Community;

“Connection Site” [ ];

“CUSC Framework Agreement” means the agreement of that title, in the form approved by the Secretary of State, by which the Connection Agreement is made contractually binding between the parties to that agreement, as amended from time to time with the approval of the Secretary of State;

“Customer” a person to whom electrical power is provided (whether or not they are the provider of such electrical power) other than power to meet station demand of that person;

“Directive” includes any present or future directive, requirement, instruction, direction or rule of any Competent Authority, (but only, if not having the force of law, if compliance with the Directive is in accordance with the general practice of persons to whom the Directive is addressed) and

“Distribution System”

includes any modification, extension or replacement thereof then in force;

the system consisting (wholly or mainly) of electric lines owned or operated by any Authorised Electricity Operator and used for the distribution of electricity from grid supply points or generation sets or other entry points to the point of delivery to Customers or Authorised Electricity Operators, and includes any Remote Transmission Assets operated by such Authorised Electricity Operator and any electrical plant and meters owned or operated by the Authorised Electricity Operator in connection with the distribution of electricity, but shall not include any part of the National Electricity Transmission System;

“Emergency Personnel”

in relation to a Party, all employees of that Party who have appropriate knowledge and experience and are recognised by that Party as being able to carry out competently and safely emergency action for the purposes of clause 9;

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Facilities”    | those assets or services listed in Schedule 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| “Force Majeure” | in relation to a Party, any event or circumstance which is beyond the reasonable control of that Party, and which results in or causes the failure of that Party to perform any of its obligations under this Agreement including any act of God, strike, lockout or other industrial disturbance, act of the public enemy, war declared or undeclared, threat of war, terrorist act, blockade, revolution, riot, insurrection, civil commotion, public demonstration, sabotage, act of vandalism, lightning, fire, storm, flood, earthquake, accumulation of snow or ice, lack of water arising from weather or environmental problems, explosion, fault or failure of plant and apparatus which could not have been prevented by Good Industry Practice, governmental restraint, Act of Parliament legislation, bye-law, and Directive (not being any order, regulation or directive under Section 32, 33, 34 or 35 of the Act) Provided |

that lack of funds shall not be interpreted as a cause beyond the reasonable control of that Party and provided, for the avoidance of doubt, that weather conditions which are reasonably to be expected at the location of the event or circumstance are also excluded as not being beyond the reasonable control of that **CUSC Party**;

“Fuel Security Code”

the document of that title designated as such by the Secretary of State as from time to time amended;

“Good Industry Practice”

in relation to any undertaking and any circumstances, the exercise of that degree of skill, diligence, prudence and foresight which would reasonably and ordinarily be expected from a skilled and experienced operator engaged in the same type of undertaking under the same or similar circumstances;

“Grid Code”

the document or documents produced pursuant to condition E3 of the ESO Licence, as from time to time revised in accordance with the ESO Licence;

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “High Voltage Lines”     | electric lines of a nominal voltage of or exceeding 132 kilovolts;                                                                                                                                                                                                                                                                                                                                                                                    |
| “HV”                     | of a nominal voltage exceeding 650 volts;                                                                                                                                                                                                                                                                                                                                                                                                             |
| “Intellectual Property”  | patents, trademarks, service marks, rights in designs, trade names, copyrights and topography rights (whether or not any of the same is registered and including applications for registration of any of the same) and rights under licences and consents in relation to any of the same and all rights or forms of protection of a similar nature or having equivalent or similar effect to any of the same which may subsist anywhere in the world; |
| “Licence”                | any licence granted pursuant to Section 6 of the Act;                                                                                                                                                                                                                                                                                                                                                                                                 |
| “Location Manager”       | [     ];                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| “Low Voltage” or “LV”    | Means a voltage not exceeding 250 volts;                                                                                                                                                                                                                                                                                                                                                                                                              |
| “Medium Voltage” or “MV” | means a voltage exceeding 250 volts but not exceeding 650 volts;                                                                                                                                                                                                                                                                                                                                                                                      |

“Modification” any alteration to or replacement of User Assets pursuant to clause 3.1 of this Agreement and “Modify” and “Modified” shall be construed accordingly;

“National Electricity Transmission System” the system consisting (wholly or mainly) of high voltage electric wires owned or operated by transmission licensees within Great Britain and Offshore and used for the transmission of electricity from one power station to a sub-station or to another power station or between sub-stations or to or from any external interconnection and includes any electrical plant or apparatus or meters owned or operated by any transmission licensee within Great Britain and Offshore in connection with the transmission of electricity but shall not include Remote Transmission Assets;

“NGET” means National Grid Electricity Transmission plc (Company number:



02366977) with registered office at 1-3 Strand, London, WC2N 5EH;

“Offshore”

Means, wholly or partly, in the Offshore Waters and when used in conjunction with another term and the terms together are not otherwise defined means that the associated term is to be read accordingly.

“Offshore Platform”

a single structure comprising of Plant and Apparatus located Offshore which includes one or more Offshore Grid Entry Points and which is more particularly described in Schedule 2

“Offshore Waters”

has the meaning given to “offshore waters” in Section 90(9) of the Energy Act 2004

“Party”

each person for the time being and from time to time party to this Agreement and any successor(s) in title to, or permitted assign(s) of, such person;

“Permitted Purpose”

means the maintenance, inspection, testing, removal, operation, modification or repair of the User’s Assets;

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Plant”                      | fixed and moveable items used in the generation and/or supply and/or transmission of electricity other than Apparatus;                                                                                                                                                                                                                                                                                              |
| “Regulations”                | the Electricity Safety Quality and Continuity Regulations 2002 as amended from time to time;                                                                                                                                                                                                                                                                                                                        |
| “Relocation Proposal”        | a proposal by RTL to the User pursuant to sub-clause 5.1 for the relocation of any of the User Assets;                                                                                                                                                                                                                                                                                                              |
| “Remote Transmission Assets” | any Plant and Apparatus or meters owned by The Company which (a) are embedded in a Distribution System or a user system and which are not directly connected by Plant and/or Apparatus owned by NGET to a sub-station owned by NGET and (b) are by agreement between NGET and such public distribution system operator or user under the direction and control of such public distribution system operator or user; |
| “Right of Access”            | full right and liberty during the currency of this Agreement to enter upon and through and remain upon [any part] [those parts of the Offshore Platform identified on the Plan] of RTL’s Offshore Platform PROVIDED to the extent necessary for a                                                                                                                                                                   |

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | Permitted Purpose and subject to the provisions of clause 5;                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| “Relevant Transmission Licensee” | means [insert name of Offshore Transmission Owner]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| “RTL Licence”                    | the licence granted to the Relevant Transmission Licensee under Section 6 of the Act;                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| “Secretary of State”             | has the meaning given to that term in the Act;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| “Services”                       | In the context of Clause 8, the goods and services specified in Schedule 5;                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| “Site Specific Safety Rules”     | the rules, procedures or current arrangements for and relating to safety co-ordination across boundaries (to permit work to or testing on the System of one of the Parties which, for this to be done safely, requires isolation and/or other precautions on Plant and/ or MV and/or LV Apparatus whether at, adjacent to or remote from the location of the work or testing) which the Parties mutually agree to use their best endeavours to formulate as soon as possible after the date of this Agreement and on the basis that any |

dispute as to their content shall be resolved in accordance with the provisions of Clause 10;

“The Company”

The company with registered number 11014226;

“User’s Assets”

those assets listed in Schedule 1 (including any plinths or other structures (excluding buildings) to or upon which the same are affixed and to or upon which no assets of any other person are affixed and any straps, bolts or other such things for attachment thereto) as any of the same may be Modified pursuant to this Agreement;

“User’s Licence”

the licence granted to the User under Section 6 of the Act;

In this Agreement:-

- (i) unless the context otherwise requires all references to a particular clause, sub-clause, paragraph or Schedule shall be a reference to that clause, sub-clause, paragraph or Schedule in or to this Agreement;
- (ii) the table of contents and headings are inserted for convenience only and shall be ignored in construing this Agreement;

- (iii) references to the words “include” or “including” are to be construed without limitation to the generality of the preceding words;
- (iv) unless there is something in the subject matter or the context which is inconsistent therewith, any reference to an Act of Parliament or any Section thereof or Schedule thereto, or other provision thereof or any instrument, order or regulation made thereunder shall be construed at the particular time as including a reference to any modification, extension, replacement or re-enactment thereof then in force and to all instruments, orders or regulations then in force and made under or deriving validity from the relevant Act of Parliament; and
- (v) references to the masculine shall include the feminine and references in the singular shall include the plural and vice versa and words denoting natural persons shall include companies, corporations and any other legal entity and vice versa.
- (vi) unless otherwise provided to the contrary herein, defined terms used in this Agreement and not defined herein shall have the meaning set forth in the Connection and Use of System Code or the Bilateral Connection Agreement.

## **2. RIGHT TO INSTALL AND RETAIN ASSET**

- 2.1 Subject to sub-clause 5.1, the RTL hereby grants to User the right to install and thereafter retain and replace as provided in this Agreement User Assets on the RTL's Offshore Platform in such places as are currently proposed (subject to such variations between the date hereof and the actual date of installation as may be agreed to by the RTL) and

such right shall extend to any Modified User Assets. The RTL shall maintain any shelter and/or support enjoyed by any User Assets at the date of this Agreement [or, if later, when relocated on the RTL's Offshore Platform in accordance with clause 5 and grants to User a Right of Access for the purpose of the maintenance, inspection, testing, removal, operation, modification or repair of any of User Assets.

### **3. MODIFICATIONS REPLACEMENTS AND ALTERATIONS**

3.1 User may at its own expense replace or alter any User Assets provided that:-

3.1.1 the replacement User Assets or the User Assets as so altered:-

- (i) are placed in the same or approximately the same position;
- (ii) fulfil the same or a similar purpose;
- (iii) can, where relevant, be accommodated in and on existing buildings or structures;
- (iv) do not require additional or improved facilities or services from the RTL;
- (v) do not restrict the actual and intended use of the RTL's Offshore Platform and any equipment thereon or therein to any materially greater extent than the User Assets so replaced or altered; and
- (vi) are either of the same or a similar or smaller size or the alteration is effected substantially within the space occupied by such User Assets to enable the User Assets to be used up to their full capability; and

- 3.1.2 prior written notification has been given to the RTL.
- 3.2 If any replacement or alteration permitted by clause 3.1 shall require minor alterations or works to the existing buildings or structures housing or supporting the User Asset in question, such alterations or works may be carried out (with the prior written approval of the RTL (such approval not to be unreasonably withheld or delayed)) but at the cost of User.
- 3.3 To the extent that any of the conditions of clause 3.1 are not in RTL's reasonable opinion met in relation to any replacement or alteration, the RTL may by notice in writing require User promptly to remove such replacement or alteration and, if User fails to do so, may remove the same itself at the cost and expense of User. On such removal, User may reinstate the User Assets so replaced or altered.
- 3.4 For avoidance of doubt it is hereby agreed that any dispute between the Parties regarding this clause shall be determined in accordance with the provisions of Clause 10 of this Agreement.

#### **4. SECURITY AND COMPLIANCE WITH STATUTES etc**

- 4.1 The RTL undertakes to maintain and provide security in relation to User Assets in accordance with the arrangements set out in Part I of Schedule 3.
- 4.2 Each Party shall procure that, as between the Parties, all reasonable and necessary steps are taken, as and when necessary or desirable, in co-operation with the other Party (and, so far as applicable, with any third party), to ensure compliance with the provisions (each such provision or part thereof being in this clause 4 an "Obligation") of:-

- (i) all statutes and Directives applicable to any User Assets and/or any part (including the whole) of the RTL's Offshore Platform;
- (ii) any statute or Directive which may affect any other property (of whatever nature) of either Party as a result of the existence, nature, location, or manner of operation of any User Assets; and
- (iii) any statute or Directive requiring the reporting of any occurrence relating to or affecting any User Assets and/or the RTL's Offshore Platform (including the Reporting of Injuries Diseases and Dangerous Occurrence Regulations 1985 and the Regulations).

4.3 Each Party shall, so far as it is aware of the same, unless it has reasonable grounds for believing that the other Party possesses the information, keep the other Party informed of all matters relating to any Obligation or potential Obligation and/or the extent to which such Obligation may be applicable.

4.4 In the event of any dispute as to responsibility, as between the Parties, pursuant to clause 4.2, for compliance with an Obligation, that responsibility shall be allocated, so far as practicable, on the basis that:-

- (i) each Party shall refrain from taking or permitting any act or omission which would prevent compliance with an Obligation; and
- (ii) positive action required in relation to a Party's property as a consequence of the existence, nature, location or manner of operation of that property or any other property of that Party shall be the responsibility of that Party, and, to the extent that such action is required in respect of or affecting any property of the other Party (or property of a third party located in or on that other



Party's Offshore Platform), such action may be taken with the prior approval of that other Party (such approval, subject to (i) above, not to be unreasonably withheld or delayed).

4.5 The provisions for safety co-ordination between the Parties contained in Part II of Schedule 3 shall apply.

## **5. RELOCATIONS**

5.1 At any time and from time to time during the term of this Agreement, the RTL may with the prior written consent of User (such consent not to be unreasonably withheld or delayed) require User to relocate any User Assets to a different location on the RTL Offshore Platform, such consent to be sought and given or refused in accordance with the following procedure:-

5.1.1 The RTL shall serve a written notice on User, which notice shall specify:-

- (a) the User Assets which the RTL wishes to be relocated;
- (b) the reasons for such wish;
- (c) the proposed new location for such User Assets; and
- (d) the timing of the carrying out of such relocation.

5.1.2 User shall within one month of receipt of any such notice (or such longer period as shall be reasonably necessary) serve a counter notice stating:-

- (a) whether or not in its reasonable opinion such Relocation Proposal is acceptable to it;

- (b) if the Relocation Proposal is not acceptable to User, the grounds for such opinion and the terms of any alternative proposal (the “Alternative Relocation Proposal”) covering so far as relevant the matters referred to in items (a) - (d) of clause 5.1.1 which would be acceptable to User; and
- (c) in respect of the Relocation Proposal (if accepted) or of any Alternative Relocation Proposal, the costs likely to be incurred in connection with considering the Relocation Proposal or the Alternative Relocation Proposal and effecting the said relocation of the User Assets and the proper and reasonable costs of relocating any other equipment that may be necessary as a result of the relocation of those User Assets and any consequential losses including payments to third parties incurred as a result of the relocation of those User Assets and the proposed manner and timing of payment of the same by the RTL.

5.1.3 If within one month of the date of such counter notice (or such longer period as shall be reasonably necessary) the RTL has not withdrawn the Relocation Proposal and the Parties have not agreed upon it or the Alternative Relocation Proposal (if any) or a variation of either of them (such agreement to include agreement on the costs referred to in item (c) of clause 5.1.2) the matter shall be dealt with in accordance with Clause 10.

5.2 Upon approval or settlement of any Relocation Proposal, Alternative Relocation Proposal or variation thereof pursuant to clause 5.1, User shall [(conditionally upon it being able to obtain all necessary licences

and consents which it will use reasonable endeavours to do)] relocate or procure the relocation of the relevant User Assets as quickly as reasonably practicable (having regard to, amongst other things, technical and operational requirements [and to the availability of all necessary licences and consents])).

5.3 The RTL shall render all reasonable assistance to User in connection with such relocation [licences and consents] and pay to User all costs referred to in item (c) of clause 5.1.2 as agreed or settled pursuant to clause 5.1 provided that all reasonable endeavours are used to minimise such costs and in the event that a Relocation Proposal is withdrawn or consent thereto is reasonably withheld pursuant to clause 5.1, the RTL shall pay to User all costs reasonably incurred by User in connection with considering the Relocation Proposal and any counter notice.

5.4 Such of the provisions of this Agreement as are appropriate and relevant (including the provisions of this clause 5), shall continue to apply to any relocated User Assets.

## **6. REMOVALS**

6.1 In the event that there shall cease to be a Bilateral Connection Agreement relating to any User Assets on the RTL's Offshore Platform User shall remove all User Assets from the RTL's Offshore Platform within [ ] or such longer period as shall be agreed between the RTL and the User and in accordance with the provisions relating thereto contained in the Connection Agreement and the Bilateral Connection Agreement.

6.2 Where User is obliged to remove any User Assets from the RTL's Offshore Platform, under this Clause 6, and fails to do so in accordance with the relevant provisions, (whether they be contained in this clause 6,

clause 3 or clause 5) the RTL shall be entitled to remove those User Assets to land belonging to User and User shall provide all reasonable assistance to enable the RTL safely so to do and shall pay and reimburse to the RTL all costs and expenses reasonably incurred by the RTL in so doing.

## **7. RIGHTS OF ACCESS**

- 7.1 A Right of Access includes the right to bring on to the RTL's Offshore Platform such vehicles, plant, machinery and maintenance or construction materials as shall be reasonably necessary for the Permitted Purpose.
- 7.2 A Right of Access given to User may be exercised by any person, including third party contractors, reasonably nominated from time to time by User. To the extent (if any) that any particular authorisation or clearances may be required to be given by the RTL and the procedures for giving and obtaining the same are not for the time being stipulated in arrangements made pursuant to clause 7.3, the same shall be given within a reasonable time from the date of the request therefor, save in the case of emergency in which case it shall be given without delay.
- 7.3 User shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable, to facilitate the safe exercise by it of any Right of Access with the minimum of disruption, disturbance or inconvenience to the RTL. Such arrangements and provisions shall provide for the RTL to have the right to make directions or regulations from time to time in relation to a specified matter. Matters to be covered by such arrangements and/or provision shall include:-

- (i) the identification of any relevant User Assets;
- (ii) the particular access routes applicable to the Offshore Platform in question having particular regard for the weight and size limits on those routes;
- (iii) any limitations on times of exercise of a Right of Access;
- (iv) any requirements as to prior notification and as to authorisation or security clearance of individuals exercising such Rights of Access, and procedures for obtaining the same;
- (v) the means of communication between the Parties and all employees and/or contractors who may be authorised from time to time by User to exercise a Right of Access of any relevant directions or regulations made by the RTL;
- (vi) the identification of and arrangements applicable to Emergency Personnel.
- (vii) Any limitation or restriction on the exercise of such Right of Access to the extent that in the circumstances is reasonable

7.4 User shall procure that any such arrangements and/or provisions (or directions or regulations issued by the RTL pursuant thereto) made from time to time between the Parties shall be observed and performed by it and all persons authorised by it to exercise any Right of Access.

7.4.1 User shall procure that all reasonable steps are taken in the exercise of any Right of Access to:-

- (a) avoid or minimise damage to the RTL's Offshore Platform, or any other property thereon or therein;

(b) cause as little disturbance and inconvenience as possible to the RTL or other occupier of the RTL's Offshore Platform;

and shall promptly make good any damage caused to the RTL's Offshore Platform and/or such other property in the course of the exercise of such rights and shall indemnify the RTL against all actions, claims, proceedings, losses, costs and demands arising out of such exercise.

7.4.2 Subject to clause 7.4.1, all such rights shall be exercisable free of any charge or payment of any kind.

7.5 Subject to any contrary arrangements for the time being made under clause 7.3,

7.5.1 a Right of Access for operation or inspection shall be available without prior notice;

7.5.2 a Right of Access for the purpose of maintenance, testing or repair of HV Apparatus shall only be exercisable on the giving of at least [seven days] prior written notice to the RTL except in the case of loss of generation or demand or other emergency (in which event the RTL shall render all possible assistance in procuring that the Right of Access shall be exercisable as soon as possible); and

7.5.3 a Right of Access for the purpose of Modifying any User Assets shall be exercisable only after [two weeks] prior written notice to the RTL.

## **8. SERVICES AND USE OF ASSETS**

- 8.1 Subject as hereinafter provided, in relation to the Facilities, RTL shall, if required by User, make the Facilities in question available for use by User to such extent as is necessary for the purposes of User's undertaking but not so as to prejudice the use now or hereafter of such Facilities by the RTL for its undertaking.
- 8.2 Subject as hereinafter provided, in relation to each of the Services, the RTL shall, if required by User, provide the same to User. Such provision shall be of such a quality and quantity and shall be provided at such times as User shall reasonably request. The RTL shall not be required to exceed the level of quality or quantity of the Services as are anticipated by the Parties at the date of this Agreement, unless specifically agreed otherwise between the Parties.
- 8.3 Where the use of any Facilities is made available or such Services are supplied as aforesaid, the Parties shall procure that all reasonable arrangements and provisions are made and/or revised from time to time, as and when necessary or desirable between the local personnel employed by each of them in that regard, such arrangements to include:-
- 8.3.1 the identification of the Facilities and/or Services in question including (where relevant) the extent of their availability;
  - 8.3.2 the hours during which such use or provision shall be allowed or made;
  - 8.3.3 any requirements as to notification of use or call for supply or temporary suspension thereof;
  - 8.3.4 any requirements as to authorisation or security clearance of individuals and the procedures for obtaining the same; and

8.3.5 any safety requirements.

8.4 The provision of use of the Facilities listed in Schedule 4, Part One and the supply of the Services listed in Schedule 5, Part One shall not be terminated unless the RTL ceases to require the Facilities or Services for its own use in which case the supply of the Services or use of the Facilities may be terminated by not less than one year's notice in writing;

8.5 The provision of use of the Facilities listed in Schedule 4, Part Two and the supply of the Services listed in Schedule 5, Part Two shall continue until terminated by not less than six months notice in writing by either Party. The RTL shall maintain the Facilities in accordance with Good Industry Practice.

## **9. NON-INTERFERENCE**

9.1 The RTL agrees that neither it nor its agents, employees and invitees will interfere in any way with any of User Assets without the consent of User. For the purposes of this clause "interfere" shall include:-

9.1.1 disconnecting or altering the connection of any User Assets to any system of cables, foundations, pipes, drains or other media to which it may be connected from time to time or to prevent supply of any substance or thing through such connected system;

9.1.2 affixing or removing any item or substance of any nature whatsoever to or from any User Assets;

9.1.3 damaging any User Assets;

9.1.4 allowing any other person to interfere with any User Assets;

9.1.5 alter any meters or settings on any User Assets;



9.1.6 the obstruction of access to any User Assets.

9.2 The obligations contained in this clause 9 shall be suspended to the extent that emergency action is taken by Emergency Personnel in good faith to protect the health and safety of persons or to prevent damage to property. All reasonable care shall be taken in the course of such emergency action. When the emergency has ended, any damaged property will be reinstated by User, save for damage occurring by reason of lack of reasonable care in the course of the emergency action taken by the RTL which shall be the responsibility of the RTL.

## **10. DISPUTE RESOLUTION**

10.1 Any dispute arising under this Agreement between Location Managers of the Parties shall, if not resolved within 14 days of first arising, be referred at the instance of either party to the respective line managers, or those fulfilling a similar function whether or not so called, of the RTL and User who shall use all reasonable endeavours to resolve the matter in dispute within one month.

10.2 Save where expressly stated in this Agreement to the contrary (including the procedure for initial dispute resolution contained in clause 10.1) and subject to any contrary provision of the Act, any Licence, or the Regulations, or the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any Licence or otherwise howsoever, any dispute or difference of whatever nature howsoever arising under out of or in connection with this Agreement between the Parties shall (subject to any relevant initial dispute resolution procedures referred to in Clause 10.1 having been exhausted) be and is hereby referred to arbitration pursuant to the rules of the London Court of International Arbitration in force from time to time.

- 10.3 Whatever the nationality residence or domicile of any Party and wherever the dispute or difference or any part thereof arose the law of England and Wales shall be the proper law of any reference to arbitration hereunder and in particular (but not so as to derogate from the generality of the foregoing) the provisions of the Arbitration Act 1996 (including any modification, extension, replacement or re-enactment thereof for the time being in force) shall apply to any such arbitration wherever the same or any part of it shall be conducted.

**11. GOVERNING LAW AND JURISDICTION**

- 11.1 This Agreement shall be governed by and construed in all respects in accordance with English law.
- 11.2 Subject and without prejudice to clause 10 and to clause 11.4 the Parties irrevocably agree that only the courts of England and Wales and the courts of Scotland are to have jurisdiction to settle any dispute which may arise out of or in connection with this Agreement and that accordingly any suit, action or proceeding (together in this clause 11 referred to as "Proceedings") arising out of or in connection with this Agreement may be brought in such courts.
- 11.3 Each Party irrevocably waives any objection which it may have now or hereafter to the laying of the venue of any Proceedings in any such court as is referred to in this clause 11 and any claim that any such Proceedings have been brought in an inconvenient forum and further irrevocably agrees that a judgment in any Proceedings brought in the courts of England and Wales or the courts of Scotland shall be conclusive and binding upon such Party and may be enforced in the courts of any other jurisdiction.

- 11.4 For the avoidance of doubt nothing contained in the foregoing provisions of this clause 11 shall be taken as permitting a Party to commence Proceedings in the courts where this Agreement otherwise provides for proceedings to be referred to arbitration.

## **12. CONFIDENTIALITY<sup>1</sup>**

- 12.1 For the purposes of this Clause 12 except where the context otherwise requires:-

12.1.1 “Authorised Recipient”, in relation to any Protected Information, means any Business Person who, before the Protected Information had been divulged to them by the RTL or any subsidiary of the RTL, had been informed of the nature and effect of this clause 12 and who requires access to such Protected Information for the proper performance of their duties as a Business Person in the course of Permitted Activities;

12.1.2 “Business Person” means any person who is a Licensed Business Person, or a Corporate Functions Person and “Business Personnel” shall be construed accordingly.

12.1.3 “Confidential Information” means all data and other information supplied to User under the provisions of this Agreement.

12.1.4 “Corporate Functions Person” means any person who:-

- (a) is a director of the RTL; or

---

<sup>1</sup> To consider simplifying?

- (b) is an employee of the RTL or any of its subsidiaries carrying out any administrative, finance or other corporate services of any kind which in part relate to the Licensed Business; or
- (c) is engaged as an agent of or adviser to or performs work in relation to or services for the Licensed Business.

12.1.5 “Licensed Business” means any business of RTL or any of its associates authorised by its RTL Licence;

12.1.6 “Licensed Business Person” means any employee of the RTL or any Authority or employee of its subsidiaries who is engaged solely in its Licensed Business and “Licensed Business Personnel” shall be construed accordingly;

12.1.7 “Permitted Activities” means activities carried on for the purposes of the Licensed Business;

12.1.8 “Protected Information” means any information relating to the affairs of a Party which is furnished to Business Personnel pursuant to this Agreement unless, prior to such information being furnished, such Party has informed the recipient thereof by notice in writing or by endorsement on such information, that the said information is not to be regarded as Protected Information;

## 12.2 Confidentiality for the RTL and its Subsidiaries

The RTL and its subsidiaries in each of their capacities in this Agreement shall secure that Protected Information is not:-

- 12.2.1 divulged by Business Personnel to any person unless that person is an Authorised Recipient;

12.2.2 used by Business Personnel for the purposes of obtaining for the RTL or any of its subsidiaries or for any other person:-

- (a) any Licence; or
- (b) any right to purchase or otherwise acquire, or to distribute, electricity including by means of an electricity purchase contract (as defined in the Transmission Licence); or
- (c) any contract or arrangement for the supply of electricity to customers or suppliers; or
- (d) any contract for the use of any electrical lines or electrical plant belonging to or under the control of a supplier.

12.2.3 used by Business Personnel for the purpose of carrying on any activities other than Permitted Activities except with the consent in writing of the Party to whose affairs such Protected Information relates.

12.3 Nothing in this Clause 12 shall apply:-

12.3.1 to any Protected Information which, before it is furnished to Business Personnel is in the public domain;

12.3.2 to any Protected Information which, after it is furnished to Business Personnel:-

- (a) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does not apply; or
- (b) is acquired by the RTL or any subsidiary of the RTL in circumstances in which this Clause 12 does apply and

thereafter ceases to be subject to the restrictions imposed by this Clause 12; or

- (c) enters the public domain otherwise than as a result of a breach by the RTL or any subsidiary of the RTL of its obligations in this Clause 12.

12.3.3 to the disclosure of any Protected Information to any person if the RTL or any subsidiary is required or permitted to make such disclosure to such person:-

- (a) in compliance with the duties of the RTL or any associate under the Act or any other requirement of a Competent Authority; or
- (b) in compliance with the conditions of its RTL Licence or any document referred to in its RTL Licence with which the RTL is required to comply; or
- (c) in compliance with any other requirement of law; or
- (d) in response to a requirement of any recognised stock exchange or regulatory authority or the Panel on Take-overs and Mergers; or
- (e) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal.

12.3.4 to any Protected Information to the extent that the RTL or any of its subsidiaries is expressly permitted or required to disclose that information under the terms of any agreement or arrangement

(including the Grid Code and the Fuel Security Code) with the Party to whose affairs such Protected Information relates.

12.4. The RTL and its subsidiaries may use all and any information or data supplied to or acquired by it, from or in relation to the other Party to this Agreement in performing its Permitted Activities and may pass the same to subsidiaries of the RTL which carry out such activities and the User hereto agrees to provide all information to the RTL and its subsidiaries for such purposes.

12.5 The Company and its subsidiaries may use all and any information or data supplied to or acquired by it from the RTL pursuant to Clause 12.3.3 in relation to this Agreement in performing its activities under the ESO Licence including for the following purposes:

12.5.1 the operation and planning of the National Electricity Transmission System;

12.5.2 the calculation of charges and preparation of offers of terms for connection to or use of the National Electricity Transmission System;

and the User agrees to provide all information to the RTL and its subsidiaries for such purposes.

12.6 The RTL undertakes that, having regard to the activities in which any Business Person is engaged and the nature and effective life of the Protected Information divulged to them by virtue of such activities, neither the RTL nor any of its subsidiaries shall unreasonably continue (taking into account any industrial relations concerns reasonably held by it) to divulge Protected Information or permit Protected Information to be divulged to any Business Person:

- (a) who has notified the RTL or the relevant subsidiary of their intention to become engaged as an employee or agent of any other person (other than of the RTL or any subsidiary thereof);
- (b) who is authorised by licence or exemption to generate or supply electricity.

12.7 Without prejudice to other provisions of this clause 12 the RTL shall procure that any additional copies of the Protected Information, whether in hard copy or computerised form, will clearly identify the Protected Information as protected.

12.8 The RTL undertakes to use all reasonable endeavours to procure that no employee is a Corporate Functions Person unless the same is necessary for the proper performance of their duties.

12.9 Confidentiality for User

12.9.1 User hereby undertakes with the RTL and its subsidiaries that it shall preserve the confidentiality and secrecy of, and not directly or indirectly reveal, report, publish, disclose or transfer or use for its own purposes Confidential Information except:-

- (a) in the circumstances set out in Clause 12.9.2;
- (b) to the extent expressly permitted by this Agreement; or
- (c) with the consent in writing of the RTL.

12.9.2 Exceptions: the circumstances referred to in Clause 12.9.1(a) are:-

- (a) where the Confidential Information, before it is furnished to User, is in the public domain; or



- (b) where the Confidential Information, after it is furnished to User:-
  - (i) is acquired by User in circumstances in which this Clause 12 does not apply; or
  - (ii) is acquired by User in circumstances in which this Clause 12 does apply and thereafter ceases to be subject to the restrictions imposed by this Clause 12; or
  - (iii) enters the public domain otherwise than as a result of a breach by User of its obligations in this Clause 12; or
- (c) if User is required or permitted to make disclosure of the Confidential Information to any person:-
  - (i) in compliance with the duties of User under the Act or any other requirement of a Competent Authority;
  - (ii) in compliance with the conditions of any Licence or any document referred to in any Licence with which User is required to comply;
  - (iii) in compliance with any other requirement of law;
  - (iv) in response to a requirement of any stock exchange or regulatory authority or the Panel on Takeovers and Mergers; or

(v) pursuant to the rules for the London Court of International Arbitration or pursuant to any judicial or other arbitral process or tribunal; or

(d) where Confidential Information is furnished by User to the employees, directors, agents, lenders, consultants and professional advisers of User in each case on the basis set out in Sub-Clause 12.10.

12.10 With effect from the date of this Agreement User shall adopt procedures within its organisation for ensuring the confidentiality of all Confidential Information which it is obliged to preserve as confidential under this Clause 12. These procedures will include:

12.10.1 the Confidential Information will be disseminated within User only on a “need to know” basis;

12.10.2 employees, directors, agents, lenders, consultants and professional advisers of User in receipt of Confidential Information will be made fully aware of User’s obligations of confidence in relation thereto.

### **13. TITLE TO ASSETS**

13.1 User acknowledges that it does not have and will not acquire any title, right or interest in the RTL’s Offshore Platform save for such rights as are expressly granted herein or otherwise provided nevertheless that, if according to any rule of law, User could acquire any such title, right or interest in any of the RTL’s Offshore Platform, then the User undertakes to do all that is required to transfer such right or interest to the RTL to ensure that the RTL shall not, by reason of such right or interest arising, have its full rights in such Offshore Platform diminished (and in the interim

to hold such rights in trust for the RTL) and shall if requested by the RTL, be obliged forthwith to establish trust arrangements valid under Scottish law so as to ensure that any such right or interest shall be held on behalf of RTL .

13.2 The RTL agrees that it shall not by any act or default render User Assets liable to any distress execution or other legal process, and in the event that User Assets shall become so liable, shall forthwith give notice of any such proceedings to User and shall forthwith notify any third party instituting any such process of the ownership of such User Assets.

13.3 If the RTL desires to mortgage or charge RTL's Offshore Platform or its interest therein on which any User Assets are located or to enter into any arrangement which, if made, might affect the rights of User expressly granted herein, then the RTL shall ensure that User Assets are not and will not be subject to the rights granted therein and are not and will not be affected by the mortgage, legal charge or other agreement or arrangement, and shall give prior written notification thereof to User.

13.4 In the event that the RTL shall wish to grant rights over or dispose of any interest in [or change the use of] the RTL's Offshore Platform the RTL shall notify User of such wish and fully consult User in respect thereof and shall not grant such rights or make such disposal or change of use save on terms securing to the reasonable satisfaction of that other the Rights of Access granted in respect of the RTL's Offshore Platform.

#### **14. LIMITATION OF LIABILITY**

14.1 Subject to sub-clauses 5.3, 6.2, 9.2, and 14.5 and save as provided in this sub-clause 14.1 and sub-clause 14.2 neither Party ("the Party Liable") nor any of its officers, employees or agents shall be liable to the

other Party for loss arising from any breach of this Agreement other than for loss directly resulting from such breach and which at the date hereof was reasonably foreseeable as not unlikely to occur in the ordinary course of events from such breach and which resulted from:-

14.1.1 physical damage to the property of the other Party, its officers, employees or agents; and/or

14.1.2 the liability of the other Party to any other person for loss arising from physical damage to the property of any person.

14.2 Nothing in this Agreement shall exclude or limit the liability of the Party Liable for death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents and the Party Liable shall indemnify and keep indemnified the other Party, its officers, employees or agents, from and against all such and any loss or liability which the other Party may suffer or incur by reason of any claim on account of death or personal injury resulting from the negligence of the Party Liable or any of its officers, employees or agents.

14.3 Subject to sub-clauses 5.3, 6.2, 9.2, and 14.5 neither Party, nor any of its officers, employees or agents shall in any circumstances whatsoever be liable to the other Party for:-

14.3.1 any loss of profit, loss of revenue, loss of use, loss of contract or loss of goodwill; or

14.3.2 any indirect or consequential loss; or

14.3.3 loss resulting from the liability of the other Party to any other person howsoever and whensoever arising save as provided in sub-clauses 14.1.2 and 14.2.

14.4 The rights and remedies provided by this Agreement to the Parties are exclusive and not cumulative and exclude and are in place of all substantive (but not procedural) rights or remedies express or implied and provided by common law or statute in respect of the subject matter of this Agreement, including any rights either Party may possess in tort which shall include actions brought in negligence and/or nuisance. Accordingly, each of the Parties hereby waives in the fullest extent possible all such rights and remedies provided by common law or statute, and releases the Party Liable, its officers, employees and agents to the same extent from all duties, liabilities, responsibilities or obligations provided by common law or statute in respect of the matters dealt with in this Agreement and undertakes not to enforce any of the same except as expressly provided herein.

14.5 Save as otherwise expressly provided in this Agreement, this clause 14 insofar as it excludes or limits liability shall override any other provision in this Agreement provided that nothing in this clause 14 shall exclude or restrict or otherwise prejudice or affect any of:-

14.5.1 the rights, powers, duties and obligations of either Party which are conferred or created by the Act, the User's Licence, the RTL's Licence or the Regulations or any amendment or re-enactment thereof; or

14.5.2 the rights, powers, duties and obligations of the Authority or the Secretary of State under the Act, any such licence as aforesaid or otherwise howsoever.

14.6 Each of the sub-clauses of this clause 14 shall:-

14.6.1 be construed as a separate and severable contract term, and if one or more of such sub-clauses is held to be invalid, unlawful or otherwise unenforceable the other or others of such sub-clauses shall remain in full force and effect and shall continue to bind the Parties; and

14.6.2 survive termination of this Agreement.

14.7 Each Party agrees that the Other Party holds the benefit of sub clauses 14.1, 14.2 and 14.3 above for itself and as trustee and agent for its officers, employees and agents

14.8 Each Party hereby acknowledges and agrees that the provisions of this clause 14 have been the subject of discussion and negotiation and are fair and reasonable having regard to the circumstances as at the date hereof.

## **15. INTELLECTUAL PROPERTY**

All Intellectual Property relating to the subject matter of this Agreement conceived, originated, devised, developed or created by a Party, its officers, employees, agents or consultants during the currency of this Agreement shall vest in such Party as the sole beneficial owner thereof save where the Parties agree in writing otherwise.

## **16. FORCE MAJEURE**

If either Party (the “Non-Performing Party”) shall be unable to carry out any of its obligations under this Agreement due to a circumstance of Force Majeure this Agreement shall remain in effect but save as otherwise provided herein the Non-Performing Party’s obligations

hereunder shall be suspended without liability for a period equal to the circumstance of Force Majeure provided that:-

- (i) the Non-Performing Party gives the other Party prompt notice describing the circumstance of Force Majeure, including the nature of the occurrence, its expected duration and the particular obligations affected by it, and continues to furnish regular reports with respect thereto during the period of Force Majeure;
- (ii) the suspension of performance is of no greater scope and of no longer duration than is required by the Force Majeure;
- (iii) no liabilities of either Party that arose before the Force Majeure causing the suspension of performance are excused as a result of the Force Majeure;
- (iv) the non-performing Party uses all reasonable efforts to remedy its inability to perform; and
- (v) as soon as practicable after the event which constitutes Force Majeure the Parties shall discuss how best to continue their operations so far as possible in accordance with this Agreement.

## **17. WAIVER**

No delay by or omission of a Party in exercising any right, power, privilege or remedy under this Agreement shall operate to impair such right, power, privilege or remedy or be construed as a waiver thereof. Any single or partial exercise of any such right, power, privilege or remedy shall not preclude any other or future exercise thereof or the exercise of any other right, power, privilege or remedy.

**18. NOTICES**

18.1 Any notice or other communication to be given by one Party to the other under, or in connection with the matters contemplated by, this Agreement shall be addressed to the recipient and sent to the address, or email address of such other Party given in Schedule 6 and marked for the attention of the person so given or to such other address, and/or email address and/or marked for such other attention as such other Party may from time to time specify by notice given in accordance with this clause 18 to the Party giving the relevant notice or other communication to it.

18.2 Any notice or other communication to be given by one Party to the other Party under, or in connection with the matters contemplated by, this Agreement shall be in writing and shall be given by letter delivered by hand or sent by first class prepaid post (airmail if overseas) or email, and shall be deemed to have been received:-

18.2.1 in the case of delivery by hand, when delivered; or

18.2.2 in the case of first class prepaid post, on the second day following the day of posting or (if sent airmail from overseas) on the fifth day following the day of posting; or

18.2.3 in the case of telex, on the transmission of the automatic answerback of the addressee (where such transmission occurs before 1700 hours on the day of transmission) and in any other case on the day following the day of transmission; or

18.2.4 in the case of email, when delivered to the email address (where such delivery occurs before 1700 hours on the day of delivery) and in any other case on the day following the day of delivery.



**19. VARIATIONS**

The provisions of Schedules 1, 3, 4, 5 and 6 may be varied from time to time by written memorandum signed by an authorised officer of each of the Parties. Subject thereto no variations to this Agreement shall be effective unless made by way of supplemental deed.

**20. OVERRIDING PROVISIONS & GOOD INDUSTRY PRACTICE**

20.1 In the event of any conflict between the RTL's or User's obligations hereunder and their obligations under the User's Licence and RTL's Licence, the Act, any direction of the Secretary of State, the Authority or ruling of the Competition Commission, the Grid Code, Connection Agreement or the Bilateral Connection Agreement, the provisions of the User's Licence and RTL's Licence, the Act, the Grid Code, Connection Agreement or Bilateral Connection Agreement, the direction of the Secretary of State, the Authority, or ruling of the Competition Commission shall prevail and accordingly the RTL and User respectively shall not be responsible for any failure to perform their respective obligations hereunder to the extent that any such failure is directly attributable to proper compliance with such provisions, rulings or directions.

20.2 Both parties shall observe their respective obligations hereunder in accordance with Good Industry Practice

**21. ASSIGNMENT AND SUB-CONTRACTING**

21.1 The rights and obligations of a Party may not be assigned (otherwise than to an Affiliate or by way of a charge or an assignment by way of security) without the consent of the other Party, such consent not to be unreasonably withheld.

- 21.2 Each Party shall have the right to sub-contract or delegate the performance of any of its obligations or duties arising under this Agreement without the consent of the other. The sub-contracting by either Party of the performance of any obligations or duties under this Agreement shall not relieve such Party from the liability for performance of such obligation or duty.

## **22. ILLEGALITY AND PARTIAL INVALIDITY**

- 22.1 If at any time any provision of this Agreement should become or be declared unlawful, invalid, illegal or unenforceable in any respect under the law of any jurisdiction, neither the validity, legality or enforceability of the remaining provisions nor the validity, legality or enforceability of such provision under the law of any other jurisdiction shall be affected.
- 22.2 If any part of a provision of this Agreement is or becomes or is declared invalid, unlawful, illegal or unenforceable but the rest of such provision would remain valid, lawful or enforceable if part of the wording were deleted the provision shall apply with such modifications as may be necessary to make it valid, lawful, enforceable and effective but without affecting the meaning of legality, validity or enforceability of any other provision of this Agreement.

## **23. TERM AND TERMINATION**

This Agreement shall continue until no User Assets are on the RTL's Offshore Platform and no Facilities or Services are shared or provided.

## **24. ENTIRE AGREEMENT**

- 24.1 This Agreement contains the entire agreement between the Parties with respect to the subject-matter hereof, and expressly excludes any

warranty, condition or other undertaking implied at law or by custom, and supersedes all previous agreements and understandings between the Parties with respect thereto and:-

- (i) each of the Parties acknowledges and confirms that it does not enter into this Agreement in reliance on any representation, warranty or other undertaking not fully reflected in the terms of this Agreement; but
- (ii) User acknowledges that the RTL may have entered or may enter into agreements with other parties who hold a licence containing similar rights and/or liabilities to those contained in this Agreement affecting the RTL's Offshore Platform and any assets thereon. The RTL shall, when entering into such agreement with any such party, use reasonable endeavours to avoid conflicts between the provisions thereof and the provisions of this Agreement but in the event of any conflict the RTL shall use all reasonable endeavours to procure that appropriate arrangements are made to settle the same to give full effect (so far as practicable) to the rights and liabilities under this Agreement and under such other agreements as aforesaid. In the event of any dispute as to such conflict and/or arrangements the dispute shall be dealt with in accordance with Clause 10.

IN WITNESS whereof this Agreement has been entered into as a Deed the day and year first above written.

**SCHEDULE 1**

**User's Assets on RTL Offshore Platform**

**SCHEDULE 2**

**RTL's Offshore Platform**

### **SCHEDULE 3**

#### **Part I**

##### **Security Details (Clause 4.1)**

#### **Part II**

##### **Plant MV LV Apparatus Safety Co-Ordination Procedures (Cl.4.5)**

- (1) The Parties will comply with the Site Specific Safety Rules and any agreed modifications thereto.
- (2) The Parties will arrange for the Site Specific Safety Rules to be written down and to be implemented by the person or persons responsible on behalf of the relevant Parties for the co-ordination of safety.

**SCHEDULE 4**  
**RTL OWNED FACILITIES**

Part One

Part Two

**SCHEDULE 5**

**SHARED SERVICES PROVIDED BY RTL**

Part One

Part Two



**SCHEDULE 6**

Addresses, Email Addresses etc (Cl. 18.)

[Insert details of RTL]

[       ]

Telephone:  
Email Address:

[Insert details of User]

[       ]

Telephone:  
Email Address:

THE COMMON SEAL of )  
[RELEVANT TRANSMISSION LICENSEE]..... )  
was hereunto affixed in the presence of:- )

THE COMMON SEAL of )  
[ ] )  
was hereunto affixed in the presence of:- )

END OF SECTION O PART II C

**CUSC – EXHIBIT P**

**THE CONNECTION AND USE OF SYSTEM CODE – STTEC REQUEST  
FORM**

**DIRECTLY CONNECTED POWER STATION**

**EMBEDDED POWER STATION**

**INTERCONNECTOR OWNER**

**DISTRIBUTION INTERCONNECTOR**

**Please study the following notes before completing and signing the STTEC Request Form.**

1. **The Company** requires the information requested in this form for the purposes of considering and assessing whether or not to grant your **STTEC Request**. It is essential that the **User** supplies all information requested and provides all the confirmations required and that every effort should be made to ensure that such informations and confirmations are accurate.

Please note the same terms used in this form are defined in the Interpretation in Definitions (contained in Section 11 to the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

2. Where **The Company** considers that any information provided by the **User** is incomplete or unclear then **The Company** will reject the **STTEC Request**.
3. The **User** may not make any change to the information provided.
4. **The Company** shall charge the **User**, and the **User** shall pay to **The Company** the non-refundable **STTEC Request Fee**. The fee will be charged by **The Company** in accordance with the **Charging Statements**. No **STTEC Request** will be considered until such payment has been received.
5. **The Company** will consider the **STTEC Request** in accordance with the terms of Paragraph 6.31 of the **CUSC**.
6. **The Company** may publish certain information in relation to **STTEC Requests** as specified in Paragraph 6.31.6 of **CUSC**.
7. Please complete this form and email it to [                      ] an].

**The Company – REQUEST FOR SHORT TERM CAPACITY**

**Please ensure that you have studied the notes before completing and signing this form.**

**A. Details of User**

Name:

Address:

Email Address:

Registered Number:

Name Title and Contact Details (including email address) for the person authorised to deal with this **STTEC Request** for and on behalf of the **User**.

.....  
.....

**B. Bilateral Agreement details**

Please detail the **Bilateral Agreement** reference number.

.....  
....

**C. Connection Site**

Please detail the **Connection Site** or site of **Connection** to which the **STTEC Request** relates.

.....  
.....

**D. Type of STTEC Request**

Please indicate whether the **STTEC Request** is a **Request for a STTEC Authorisation** or an **Application for a STTEC Offer**.

.....  
.....

**E. STTEC Period**

Please provide the dates of the **STTEC Period** commencing on a Monday to which the **STTEC Request** relates.

For a **Request for a STTEC Authorisation**:

| <b><u>STTEC Period</u></b> | <b><u>From</u></b> | <b><u>To</u></b> |
|----------------------------|--------------------|------------------|
|                            | Must be a Monday   | 28 days later    |
| 28 days                    | .....              | .....            |

For an **Application for a STTEC Offer**:

| <u><b>STTEC Period</b></u> | <u><b>From</b></u> | <u><b>To</b></u>      |
|----------------------------|--------------------|-----------------------|
| No. of Days<br>[28/35/42]  | Must be a Monday   | [28/35/42] days later |

.....

**F. Minimum and Maximum Levels (in whole MW)**

Please provide details of the minimum and maximum level (in whole MW) of **Short Term Capacity** requested.

Minimum [ ] MW (Positive only)

Maximum [ ] MW (Positive only)  
 $STTEC + TEC \leq CEC$  (on a station basis)

**STTEC REQUEST FORM**

1. We agree to pay the **STTEC Request Fee** on the terms specified in the **Notes** to this **Request Form**.
2. We confirm that the data submissions in respect of the **Connection Site** or site of **Connection** under the **Grid Code** are complete, accurate and up to date.
3. We confirm that our **STTEC Request** for the maximum level of **STTEC** requested plus **Transmission Entry Capacity** (plus any **STTEC** previously granted for any part of the **STTEC Period**) shall not exceed the total station **Connection Entry Capacity**.

Signed for and on behalf of the **User**



**EXHIBIT Q**

**THE CONNECTION AND USE OF SYSTEM CODE**

**BELLA APPLICATION**

**EMBEDDED EXEMPTABLE LARGE POWER STATION**

**PLEASE STUDY THE FOLLOWING NOTES BEFORE COMPLETING AND  
SIGNING THIS APPLICATION FORM.**

1. **The Company** requires the information requested in this application form for the purposes of preparing a **BELLA Offer** the "**Offer**". It is essential that the **Applicant** should supply all information requested in this application form and that every effort should be made to ensure that such information should be accurate. Please note that you can apply for a **Gate 1 Offer** or **Gate 2 Offer** and confirmation of which type of **Offer** you are applying for is required.
2. Please note that certain expressions which are used in this application form are defined in the Interpretations in Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.
3. Should **The Company** consider that any information provided is incomplete or unclear or **The Company** require further information in order that it may prepare the **Offer**, the **Applicant** will be requested to provide further information or clarification.
4. Should there be any change in any information provided by the **Applicant** after it has been submitted to **The Company**, the **Applicant** must immediately inform **The Company** of such a change.
5. **The Company** shall charge the **Applicant**, and the **Applicant** shall pay to **The Company**, **The Company's Engineering Charges** in relation to the application. An advance will be charged by **The Company** in accordance with the **Charging Statements**. No application will be considered until such advance has been paid. The balance of **The Company Engineering Charges** shall be notified and invoiced by **The Company** to the **Applicant** together with a breakdown of such charges and the **Applicant** shall pay the same within 28 days of the date of **The Company's** invoice. In the event that the advance and any other payments exceed the appropriate **The Company Engineering Charges** the excess shall be repaid forthwith to the **Applicant**. If **The Company** does not make an **Offer** to the **Applicant** in accordance with Paragraph 1.5 of the **CUSC** otherwise than by reason of withdrawal of the application by the **Applicant**, **The Company** will return the charges to the **Applicant**.
6. The effective date upon which the application is made shall be the later of the date when **The Company** has received the application fee under Paragraph 5 above, the date when **The Company** is reasonably satisfied that the **Applicant** has completed Sections A-C, and in the case of a **Gate 2 Application**, the date when the owner/operator of the **Distribution System** to whom the **Applicant** is connecting makes an effective **Modification Application** to **The Company**. **The Company** shall notify the **Applicant** of such date. Please note the additional requirements for a **Gate 2 Application** under the **Gated Application and Offer Process** at **CUSC** Section 17. Also note that whilst a **Distribution EG Related Application** is not necessary for progressing a **Gate 1 Application** or for the making of a **Gate 1 Offer**, a **Gate 2 Application** will

only be progressed in a **Gated Application and Offer Run** where the **Distribution EG Related Application** is also effective in the **Gate 2 Application Window** for that **Gated Application and Offer Run**.

7. **The Company** will make the **Offer**, in accordance with the terms of Paragraph 1.5 of the **CUSC**
8. **The Company** will make the **Offer** in accordance with the **Gated Application and Offer Process** or such longer period as the **Authority** agrees to. The **Offer** may, where it is necessary to carry out additional extensive system studies to evaluate more fully the impact of the proposed development, indicate the areas that require more detailed analysis. Before such additional studies are required, the **Applicant** shall indicate whether it wishes **The Company** to undertake the work necessary to make a revised **Offer** within the timescales for the **Offer** in the **Timetable** for the **Gated Application and Offer Process** or, where relevant the timescale consented to by the **Authority**. To enable **The Company** to carry out any of the above mentioned necessary detailed system studies the **Applicant** may, at the request of **The Company**, be required to provide some or all of the **Detailed Planning Data** listed in Part 2 of the Appendix to the **Planning Code** which is part of the **Grid Code**.
9. In the course of processing your application, it may be necessary for **The Company** to consult the appropriate **Public Distribution System Operator(s)** on matters of technical compatibility of the **National Electricity Transmission System** with their **Distribution Systems** or to consult the **Relevant Transmission Licensees** to establish the works required on the **National Electricity Transmission System**. **The Company** shall need your authorisation to the release to the **Public Distribution System Operator(s)** or the **Relevant Transmission Licensees** of certain information contained in your application. If it is found by the **Public Distribution System Operator(s)** that any work is required on their **Distribution Systems** then it will be for the **Public Distribution System Operator(s)** and the **Applicant** to reach agreement in accordance with Paragraph 6.10.3 of the **CUSC**.
10. **The Company 's** offer will be based to the extent appropriate upon its standard form terms for a **BELLA**. The **Applicant** should bear in mind **The Company** standard form terms when making this application.
11. In particular please note that **The Company** will require as a condition of **Offer** that the **Applicant's Plant** or **Apparatus** should meet or provide the relevant technical requirements set out in the appendices of the **BELLA** to the **Offer**.
12. **Applicants** should appreciate that they will be required to perform **Mandatory Ancillary Services** to ensure that system operational standards can be achieved. This requirement may have implications towards plant specification. You should be satisfied before an application is made that your intended plant design can meet the requirements. The **Applicants** are therefore recommended to contact **The Company 's** headquarters for further information where our staff will be pleased to help.

13. Please complete this application form in black print and return it duly signed to Customer Agreements Manager, **National Energy System Operator Limited**, Warwick Technology Park, Gallows Hill, Warwick CV34 6DA (Tel No. 01926 653000).
14. For most up to date contact details Applicants are advised to contact The Company Website at [www.nationalgrid.com/uk](http://www.nationalgrid.com/uk).
15. Applicants have the ability to choose whether they wish to apply on a fixed or variable application fee basis. Fixed application fee is derived from analysis of historical costs of similar applications. Variable application fee is based on an advance of the Transmission Licensee's Engineering and out of pocket expenses and will vary according to the size of the scheme and the amount of work involved. Applicants are requested to indicate their preferred application fee in question 6. Applicants are advised that further information can be obtained from the Charging Statements which can be found on the **Website**. If Applicants require further assistance they are recommended to contact **The Company's** Headquarters, where our staff will be pleased to help.

## APPLICATION FOR A BELLA

Please study the notes before completing and signing this application form

### A. Details of Applicant

1. Name:  
.....  
.....

2. Address:  
.....  
.....

3. Registered Office/Address [including email address for CUSC notices]:  
.....  
.....

4. Name, Title and Address of Contacts for the purposes of this application  
given description of the field of the responsibility of each person:  
.....  
.....

5. If the Applicant is an agent please give name(s) and addresses of person(s)  
for whom the Applicant is acting:  
.....  
.....

6. Please confirm whether you agree to us sending the **Offer** in electronic form  
instead of hard copy and, if so, confirm the address for this as follows.

Yes [ ]

No [ ]

Email address .....

7. Please identify which application fee basis you wish to use for this application.

☐ Fixed application fee

☐ Variable application fee

**B. The Proposed Point of Connection to a Distribution System**

1. Please identify [preferably by reference to an extract from ordinance survey map] the intended point of connection to the Distribution System.

.....  
.....

**C. Technical Information**

1. Please provide the **Data** listed in Part 1 of the Appendix to the **Planning Code**. Note: the **Data** concerned forms part of the **Planning Code** and **Data Registration Code**. Applicants should refer to these sections of the **Grid Code** for an explanation.
2. Please indicate any terms which you are prepared to offer for:
  - A. Black Start Capability
  - B. Gas Turbine Fast Unit Fast Start
  - C. Synchronous Compensation
  - D. Pump Storage Units Spinning-in-Air
  - E. Pump Storage
  - F. Pump Storage Plant Fast Start from Standstill
  - G. Demand Reduction
  - H. Adjustment to Pumped Storage Unit Pumping Programme
  - I. Hot Standby



**D. Enabling Works**

1. We confirm we do not/do want the **Enabling Works** to be greater in scope than the **MIT S Connection Works**.
2. If you want the **Enabling Works** to be greater in scope than the **MIT S Connection Works** specify the concerns, reasons or technical requirements that you are seeking to address by this.

## BELLA APPLICATION

**Please study the notes before completing and signing this application form**

1. We hereby apply for a **BELLA**.
2. We will promptly inform **The Company** of any change in the information given in this application as quickly as practicable after becoming aware of any such change.
3. We authorise the release of certain information to the appropriate **Public Distribution System Operators** or the **Relevant Transmission Licensees** should it be considered necessary.
4. We confirm that we are applying in the category of an **Embedded Exemptable Large Power Station** whose **Boundary Point Metering System** is [to be] registered in **SMRS** or in **CMRS** by a **User** who is responsible for the **Use of System Charges** associated with the **BM Unit** [to be] registered in **CMRS**.
5. We confirm that this is an application for a:  
  
**Gate 1 Offer** [ ☐ ]  
**Gate 2 Offer** [ ☐ ]  
  
Please tick correct option
6. If **Reservation** was to be considered by **The Company**, we would/would not be interested in **Reservation**. [delete as appropriate]

Signed: .....  
for and on behalf of the **Applicant**

Date: .....

**END OF EXHIBIT Q**

**CUSC - EXHIBIT R**

**THE CONNECTION AND USE OF SYSTEM CODE**

**BELLA OFFER**

**EMBEDDED EXEMPTABLE LARGE POWER STATION**

Our Ref: [ ]

Date: [ ]

The Company Secretary  
[ ]

Dear XXXXXX

**BELLA Offer**  
**[Site of Connection]/[Reference]**

Set out below is our offer to enter into a **BELLA** in respect of [Sites/Sub Station]. Please note that certain expressions which are used in this Offer are defined in the Interpretation and Definitions (contained in Section 11 of **CUSC**) and where this occurs the expressions have capital letters at the beginning of each word and are in bold.

1. **The Company** offers to enter into a **BELLA** reference no. [ ] in the form and terms attached at Section A.
2. It is a condition of this offer that:
  - (i) if not already a **CUSC Party** you enter into a **CUSC Accession Agreement**;
  - (ii) you satisfy **The Company** that you have entered into a **Distribution Agreement** with the owner/operator of the **Distribution System** for the connection of the **User's Plant** to and the use of such **Distribution System**.
3. The technical conditions with which you must comply as a term of this offer are set out in the **Grid Code**. Additional or different technical conditions are set out in the appendices to the **BELLA**. It is your responsibility to ensure that your equipment complies with the requirements of the relevant conditions.
4. This offer is open for acceptance according to the terms of Paragraph 1.5 of the **CUSC**. Please note your right to make an application to the Authority to settle the terms of the **Offer** pursuant to Paragraph 1.6 of the **CUSC**.
5. To accept this offer, please sign (and where issued by email, having printed off 2 copies of each) and return the originals of the **BELLA** [and **CUSC Accession Agreement**] attached to this offer as Section A. **The Company** will then itself execute the Agreements and one original of each will be returned to you for your retention. The Agreements are only affective in accordance with their terms once they have been countersigned by **The Company**.
6. This **Offer** is made on the basis of the **Connect and Manage Arrangements** [except that as requested the **Enabling Works** are greater in scope than the **MITS Connection Works**].
7. All communications in relation to this offer should, in the first instance, be directed to [ ].
8. This is a [**Gate 1 Offer**][**Gate 2 Offer**]

Yours faithfully

.....  
for and on behalf of National Energy System Operator Limited

**SECTION A**  
**FORM OF BELLA AND CUSC ACCESSION AGREEMENT**

V3.0

**CUSC – EXHIBIT S**

***THE CONNECTION AND USE OF SYSTEM CODE – LDTEC REQUEST  
FORM***

**DIRECTLY CONNECTED POWER STATION**

**EMBEDDED POWER STATION**

**INTERCONNECTOR OWNER**

**DISTRIBUTION INTERCONNECTOR**

**Please study the following notes before completing and signing the LDTEC Request Form.**

1. **The Company** requires the information requested in this form for the purposes of considering and assessing whether or not to grant your **LDTEC Request**. It is essential that the **User** supplies all information requested and provides all the confirmations required and that every effort should be made to ensure that such information and confirmations are accurate.

Please note the same terms used in this form are defined in the Interpretation in Definitions (contained in Section 11 to the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

2. Where **The Company** considers that any information provided by the **User** is incomplete or unclear then **The Company** will reject the **LDTEC Request**.
3. The **User** may not make any change to the information provided.
4. **The Company** shall charge the **User**, and the **User** shall pay to **The Company** the non-refundable **LDTEC Request Fee**. The fee will be charged by **The Company** in accordance with the **Charging Statements**. No **LDTEC Request** will be considered until such payment has been received.
5. **The Company** will consider the **LDTEC Request** in accordance with the terms of Paragraph 6.31 of the **CUSC**.
6. **The Company** may publish certain information in relation to **LDTEC Requests** as specified in Paragraph 6.32.7 of **CUSC**.
7. Please complete this form and email it to [       ]

**The Company – REQUEST FOR SHORT TERM CAPACITY**

**Please ensure that you have studied the notes before completing and signing this form.**

**A. Details of User**

Name:

Address:

Email Address:

Registered Number:

Name Title and Contact Details (including email address) for the person authorised to deal with this **LDTEC Request** for and on behalf of the **User**.

.....

**B. Bilateral Agreement details**

Please detail the **Bilateral Agreement** date and reference number.

.....

**C. Connection Site**

Please detail the **Connection Site** or site of **Connection** to which the **LDTEC Request** relates.

.....

**D. LDTEC Period**

Please provide the dates of the **LDTEC Period** commencing on a Monday to which the **LDTEC Request** relates.

| <b>LDTEC Period</b> | <b>From</b>            | <b>To</b>                                                         |
|---------------------|------------------------|-------------------------------------------------------------------|
| No. of Weeks        | 00.00 from<br>[Monday] | 23.59<br>[on any day no later than last day<br>of Financial year] |

.....

**E. Minimum and Maximum Levels (in whole MW)**



Please provide details of the minimum and maximum level (in whole MW) of **Short Term Capacity** requested.

Minimum [ ] MW (Positive only)

Maximum [ ] MW (Positive only)  
 $LDTEC + STTEC + TEC < CEC$  (on a station basis)

**F. Type of LDTEC**

Please confirm what type of **LDTEC** is being requested

[**LDTEC Block** only]

[**LDTEC Indicative Block** only ]

[**LDTEC Block** and **LDTEC Indicative Block**]

## **LDTEC Request Form**

1. We agree to pay the **LDTEC Request Fee** on the terms specified in the **Notes** to this **Request Form**.
2. We confirm that the data submissions in respect of the **Connection Site** or site of **Connection** under the **Grid Code** are complete, accurate and up to date.
3. We confirm that our **LDTEC Request** for the maximum level of **LDTEC** requested plus **Transmission Entry Capacity** (plus any **STTEC** or **LDTEC** previously granted for any part of the **LDTEC Period**) shall not exceed the total station **Connection Entry Capacity**.

We consent to the disclosure of information by **The Company** in accordance with **CUSC** Paragraph 6.32.7.

Signed for and on behalf of the **User**

**V1.1**

**CUSC EXHIBIT T**

***LDTEC AVAILABILITY NOTIFICATION***

To [Title and Contact Details of **User**]

[Date]

Regarding **Bilateral Agreement** [reference number]

**The Company** hereby notifies the **User** that its **Available LDTEC** shall be:

[ ] MW (positive number)

for the **LDTEC Week[s]** commencing [ ]

Signed on behalf of **The Company**

**CUSC - EXHIBIT U**

**THE CONNECTION AND USE OF SYSTEM CODE**

**TRANSMISSION EVALUATION APPLICATION  
USER THAT OWNS OR OPERATES A DISTRIBUTION SYSTEM**

**PLEASE STUDY THE FOLLOWING NOTES BEFORE COMPLETING AND SIGNING THIS APPLICATION FORM.**

- 1 **The Company** requires the information requested in this application form for the purposes of assessing the impact of a **Relevant Embedded Medium Power Station** or a **Relevant Embedded Small Power Station** (or where the User chooses, a number of **Relevant Embedded Medium Power Stations** or a **Relevant Embedded Small Power Stations** in which case this application form shall be completed and construed accordingly) upon the **National Electricity Transmission System**. It is essential that the **User** submitting this **Transmission Evaluation Application** should supply all information requested in this application form and that every effort should be made to ensure that such information should be accurate. Please note certain information provided in this application may be used in accordance with Paragraph 6.35.

This **Transmission Evaluation Application** (together with the appropriate fee), shall be deemed to be **Modification Application** for the purposes of the **Charging Statements** and for Paragraphs 1.3.2, 6.9.2, 6.9.3 and 6.10 of the **CUSC** which shall apply.

- 2 Please note that certain expressions which are used in this application form are defined in the Interpretation and Definitions (contained in Section 11 of the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.
- 3 Should **The Company** consider that any information provided is incomplete or unclear or should **The Company** require further information in order that it may assess the impact of a **Relevant Embedded Medium Power Station** or a **Relevant Embedded Small Power Station** upon the **National Electricity Transmission System**, the **User** submitting this **Transmission Evaluation Application** will be requested to provide further information or clarification.
- 4 Should there be any change in any information provided by the **User** submitting this **Transmission Evaluation Application** after it has been submitted to **The Company**, the **User** requesting this must immediately inform **The Company** of such a change.
- 5 **The Company** shall charge and the **User** submitting this **Transmission Evaluation Application** shall pay to **The Company**, **The Company's** Engineering Charges in relation to the assessment. An advance will be charged by **The Company** in accordance with the **Charging Statements**. No **Transmission Evaluation Application** will be considered until such advance has been paid. The balance of **The Company Engineering Charges** shall be notified and invoiced by **The Company** to the **User** submitting this **Transmission Evaluation Application** together with a breakdown of such charges and the **User** submitting this **Transmission Evaluation Application** shall pay the same within 28 days of the date of **The Company's** invoice. In the event

that the advance and any other payments exceed the appropriate **The Company Engineering Charges** the excess shall be repaid forthwith to the **User** submitting this **Transmission Evaluation Application**.

- 6 The effective date upon which the application is made shall be the later of the date when **The Company** has received the advance application fee pursuant to Paragraph 5 above or the date when **The Company** is reasonably satisfied that the **User** submitting this **Transmission Evaluation Application** has completed Sections AD. **The Company** shall notify the **User** submitting this **Transmission Evaluation Application** of such date.
- 7 **The Company** will assess the **Transmission Evaluation Application** in accordance with the terms of Paragraph 6.5.5 (**Transmission Evaluation Application**) and (where applicable) Paragraph 6.9 (**Modifications**) and Paragraph 6.10 (**Modifications** and **New Connection Sites**) of the **CUSC** and the **ESO Licence**.
- 8 **The Company** will assess the **Transmission Evaluation Application** as soon as is reasonably practicable and, in any event, (unless there are no works required on the **National Electricity Transmission System**) will respond to the **User** with a **Gated Modification Offer or Connection Offer** in accordance with the **Gated Application and Offer Process** or such later period as the **Authority** agrees to.
- 9 In the course of processing your **Transmission Evaluation Application**, it may be necessary for **The Company** to consult the appropriate **Distribution System Operator(s)** on matters of technical compatibility of the **National Electricity Transmission System** with their **Distribution System(s)** or to consult the **Relevant Transmission Licensees** to establish the works required on the **National Electricity Transmission System**. On grounds of commercial confidentiality **The Company** shall need your authorisation to the release to the **Distribution System Operator(s)** or the **Relevant Transmission Licensees** of certain information contained in your application. Any costs incurred by **The Company** in consulting the **Distribution System Operator(s)** or **Relevant Transmission Licensees** would be included in the **The Company Charges** for the application. If it is found by the **Distribution System Operator(s)** that any work is required on their **Distribution System(s)**, then it will be for the **Distribution System Operator(s)** and the **User** submitting this **Transmission Evaluation Application** to reach agreement in accordance with Paragraph 6.10.3 of the **CUSC**.
- 10 If the **User** submitting this **Transmission Evaluation Application** is not already a **CUSC Party** the **User** submitting this **Transmission Evaluation Application** will be required as part of this application form to undertake that they will comply with the provisions of the **Grid Code** for the time being in force. Copies of the **Grid Code** and the **CUSC** are available on the **The Company** website and the **User** submitting this

**Transmission Evaluation Application** is advised to study them carefully. Further copies are available on payment of **The Company's** copying charge, postage and packing. **Data** submitted pursuant to this application shall be deemed submitted pursuant to the **Grid Code**.

- 11 Any **Gated Modification Offer** or **Connection Offer** made following this **Transmission Evaluation Application** will be based to the extent appropriate upon its standard form terms for a **Gated Modification Offer** or **Connection Offer** and the **Charging Statements**.
- 12 The Applicant has the ability to choose whether they wish to apply for a **Transmission Evaluation Application** on a fixed price or variable price application fee basis. Fixed price application fee is derived from analysis of historical costs of similar applications. Variable price application fee is based on an advance of the Transmission Licensee's Engineering and out of pocket expenses and will vary according to the size of the scheme and the amount of work involved. Applicants are requested to indicate their preferred basis in the **Transmission Evaluation Application**. Applicants are advised that further information (including circumstances when the application fee may be refunded under the Statement of Use of System Charging Methodology) can be obtained from the Charging Statements which can be found on the **Website**. If Applicants require further assistance they are recommended to contact **The Company's** Headquarters', where our staff will be pleased to help.
- 13 Please complete this application form in black print and return it duly signed to **The Company**, contact details on the **Website**.

For the most up to date contact details **Users** submitting this **Transmission Evaluation Application** are advised to review the **The Company** website.

**A. DETAILS OF USER  
SUBMITTING THIS  
TRANSMISSION EVALUATION  
APPLICATION**

1. Name: .....  
.....
2. Address: .....  
.....  
.....  
.....
3. Registered Office/Address (including e-mail address for CUSC notices and Registration Number): .....  
.....  
.....  
.....  
.....  
.....  
.....
4. Name, title and address of contacts for the purposes of this application, giving description of the field of responsibility of each person:  
.....  
.....  
.....
5. If **User submitting this Transmission Evaluation Application** is an agent, please give name(s) and address(es) of person(s) for whom the **User** submitting this **Transmission Evaluation Application** is acting:  
.....  
.....  
.....



## **B THE PROPOSED POINT OF CONNECTION TO A DISTRIBUTION SYSTEM**

1. Please identify (preferably by reference to an extract from Ordnance Survey Map) the intended location of the **Plant** and **Apparatus** (the "User Development") which it is desired should be connected to the **Distribution System**.

.....

.....

.....

2. Please identify the intended **Grid Supply Point** through which that part of the **User's Distribution System** to which the **Relevant Embedded Medium Power Station** or **Relevant Embedded Small Power Station** is connected, connects to the **National Electricity Transmission System**.

.....

.....

.....

## **C TECHNICAL INFORMATION**

Please provide the **Data** listed in Part 1 of the Appendix to the **Planning Code** in respect of the relevant **Distribution System** and the **Embedded Power Station** to the extent that the data will change from previously submitted Committed Project Planning Data or Connected Planning Data. Note: the **Data** concerned form part of the **Planning Code** and **Data Registration Code**. **User** submitting this **Transmission Evaluation Application** should refer to these sections of the **Grid Code** for an explanation.

## **D PROGRAMME**

Please provide the anticipated date when the **Embedded Power Station(s)** will have its connection **Energised** and/or commence use of the **Distribution System**

## TRANSMISSION EVALUATION APPLICATION

Please study the notes before completing and signing this application form.

- 1 We hereby submit this **Transmission Evaluation Application** in respect of [.....] **Embedded Power Station** that is connecting to and/or using [.....]**Distribution System**.
- 2 We will promptly inform **The Company** of any change in the information given in this **Transmission Evaluation Application** as quickly as practicable after becoming aware of any such change.
- 3 If we are not already a **CUSC Party** we undertake for the purposes of this application to be bound by the terms of the **Grid Code** from time to time in force and to sign a **CUSC Accession Agreement**.
- 4 We authorise the release of certain information, on the grounds of commercial confidentiality, to the appropriate operators of **Distribution System's** or **Relevant Transmission Licensees** should it be considered necessary.
- 5 We confirm that we do/do not meet the **Approved Credit Rating** and **The Company Credit Rating**.
- 6 We confirm that we are applying in the category of **Distribution System** directly connected to the **National Electricity Transmission System**.
- 7 We confirm that as part of this application we want to introduce the **Transmission Impact Assessment** process into the **Bilateral Connection Agreement**.

Signed:

.....  
For and on behalf of the Applicant

Date:.....

**END OF EXHIBIT U**

**EXHIBIT V**  
**STATEMENT THAT THERE ARE NO TRANSMISSION WORKS OR SITE  
SPECIFIC REQUIREMENTS**

The Company Secretary  
DNO name  
Address1  
Address2  
Town  
Postcode

Name.uk.ngrid.com  
Direct tel +44 (0)

www.nationalgrid.com

XX Month Year

For the Attention of ##

Dear XXXXXX

**Re: Transmission Evaluation Application Dated XXXXXX**  
**[Generator]**  
**[at GSP]**  
**[User Agreement Reference No A/###/###-##EX(##) (“Bilateral Agreement”)]**

I refer to your **Transmission Evaluation Application** dated [ ] in relation to the possible connection of the above Licence Exempt **Embedded Generator** in your **Distribution System** (the “Project”).

We have now undertaken an initial assessment of the significance of the Project and [believe the **Power Station** does not have a significant impact on the **National Electricity Transmission System** (for the avoidance of doubt, such significant impact involves either party in an expenditure of more than £10,000)] and would advise you of the following implications:-

- i. There is no requirement for works on the **National Electricity Transmission System** where such works are not at a **Connection Site**  
**Yes/No**
- ii. There is no requirement for works to the **National Electricity Transmission System** at a **Connection Site (Grid Supply Point)**  
**Yes/No**

**Yes/No**

- iii. Necessity for **Site Specific Requirements** (at the site of connection) of the **Power Station** ) **Yes/No**

*If no works have been identified include the following:*

[Where this statement confirms that works are not required nor any **Site Specific Requirements** as being necessary, our letter completes the process required for the purposes of Paragraph 6.5.1(a)(i)]

Yours faithfully

For and on behalf of  
National Energy System Operator Limited

**CUSC – EXHIBIT W**

***THE CONNECTION AND USE OF SYSTEM CODE – TEMPORARY TEC  
EXCHANGE RATE REQUEST FORM***

**DIRECTLY CONNECTED POWER STATION**

**EMBEDDED POWER STATION**

**INTERCONNECTOR OWNER**

**DISTRIBUTION INTERCONNECTOR**

**Please study the following notes before completing and signing the Temporary TEC Exchange Rate Request Form.**

1. **The Company** requires the information requested in this form for the purposes of considering and assessing whether or not to grant your **Temporary TEC Exchange Rate Request**. It is essential that both **Joint TEC Exchange Users** supply all information requested and provides all the confirmations required and that every effort should be made to ensure that such information and confirmations are accurate.

Please note the same terms used in this form are defined in the Interpretation in Definitions (contained in Section 11 to the **CUSC**) and when this occurs the expressions have capital letters at the beginning of each word and are in bold.

2. Where **The Company** considers that any information provided by the **Joint TEC Exchange Users** is incomplete or unclear then **The Company** will reject the **Temporary TEC Exchange Rate Request**.
3. Neither **Joint TEC Exchange Users** may make any change to the information provided.
4. **The Company** shall charge the **Joint TEC Exchange Users**, and the **Joint TEC Exchange Users** shall pay to **The Company** the **Temporary TEC Exchange Rate Request Fee**. The fee will be charged by **The Company** in accordance with the **Charging Statements**. No **Temporary TEC Exchange Rate Request** will be considered until such payment has been received.
5. **The Company** will consider the **Temporary TEC Exchange Rate Request** in accordance with the terms of Paragraph 6.34 of the **CUSC**.
6. **The Company** may publish certain information in relation to **Temporary TEC Exchange Rate Requests** as specified in Paragraph 6.34.7 of **CUSC**.
7. Please complete this form and email it to [            ].

## REQUEST FOR A TEMPORARY TEC EXCHANGE RATE

Please ensure that you have studied the notes before completing and signing this form.

### Temporary TEC Exchange Donor User

#### **A1. Details of User**

Name:

Address:

Email Address:

Registered Number:

Name Title and Contact Details (including email address) for the person authorised to deal with this **Temporary TEC Exchange Rate Request** for and on behalf of the **User**.

.....

#### **B1. Bilateral Agreement details**

Please detail the **Bilateral Agreement** date and reference number.

.....

#### **C1. Connection Site**

Please detail the **Connection Site** or site of **Connection** to which the **Temporary TEC Exchange Rate Request** relates.

.....

### Temporary TEC Exchange Recipient User

#### **A2. Details of User**

Name:

Address:

Email Address:

Registered Number:

Name Title and Contact Details (including email address) for the person authorised to deal with this **Temporary TEC Exchange Rate Request** for and on behalf of the **User**.

.....

**B2. Bilateral Agreement details**

Please detail the **Bilateral Agreement** date and reference number.

.....

**C2. Connection Site**

Please detail the **Connection Site** or site of **Connection** to which the **Temporary TEC Exchange Rate Request** relates.

.....

**D. Temporary TEC Exchange Period**

Please provide the dates of the **Temporary TEC Exchange Period** (being for a minimum of four weeks and commencing on a Monday) to which the **Temporary TEC Exchange Rate Request** relates.

**Temporary TEC Exchange Period**

| <b><u>From</u></b>      | <b><u>To</u></b>                                      |
|-------------------------|-------------------------------------------------------|
| No. of Weeks 00.00 from | 23.59                                                 |
| [Monday]                | [on any day no later than last day of Financial Year] |

.....

**E. MW donated by the Temporary TEC Exchange Donor User**

Please provide details the level (in whole MW) of **Temporary Donated TEC**.

[.....] MW (Positive only)



**Temporary TEC Exchange Rate Request Form**

1. We agree to pay the **Temporary TEC Exchange Rate Request Fee**.
2. As Temporary **TEC Exchange Donor User** we confirm that the data submissions in respect of our **Connection Site** or site of **Connection** under the **Grid Code** are complete, accurate and up to date.
3. As Temporary **TEC Exchange Recipient User** we confirm that the data submissions in respect of our **Connection Site** or site of **Connection** under the **Grid Code** are complete, accurate and up to date
4. We consent to the disclosure of information by **The Company** in accordance with **CUSC** Paragraph 6.34.7

Signed for and on behalf of the:

**Temporary TEC Exchange Donor User**

.....

**Temporary TEC Exchange Recipient User**

.....

## CUSC – EXHIBIT X

### ***THE CONNECTION AND USE OF SYSTEM CODE – TEMPORARY TEC EXCHANGE NOTIFICATION OF INTEREST FORM***

The Company will use the information provided in this form to enable it to publish information about the potential willingness of **User's** to enter into a **Temporary TEC Exchange Rate Request**.

Please complete this form and email it to [                      ]

#### **Details of the time period**

*Date must be within the current Financial Year*

The earliest start date: .....

The earliest end date: .....

#### **Details of the capacity that could be donated**

*Must be a whole number of MWs and shall not exceed the User's TEC*

.....MW [must be positive]

#### **Details of the User**

The name of the **User**

.....

Preferred contact details of the **User**

.....

The **Connection Site** or site of **Connection**

.....

Date by which prospective recipients should contact the **User** if interested in proceeding with a **Temporary TEC Exchange**

*Date must be within the current Financial Year*

.....

We consent to the disclosure of information by **The Company** in accordance with **CUSC** Paragraph 6.34.7

Signed for and on behalf of the **User**

.....  
*To avoid any misunderstanding this is not to be construed as constituting an offer or invitation to treat in respect any TEC Exchange Trade*

**Exhibit Y**  
**Mapping of EBR Article 18 Terms and Conditions for Balancing Service Providers and Balancing Responsible Parties to the CUSC**

This table constitutes the mapping of the Terms and Conditions for Balancing Services Providers to the CUSC.

| <i><b>Article</b></i> | <i><b>Text</b></i>                                                                                                                                                                                                                                                                                                                                                                       | <i><b>Code</b></i> | <i><b>Section</b></i>                   |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------|
| <b>18.4</b>           | The terms and conditions for balancing service providers shall:                                                                                                                                                                                                                                                                                                                          |                    |                                         |
| <b>18.4.a</b>         | define reasonable and justified requirements for the provisions of balancing services;                                                                                                                                                                                                                                                                                                   | CUSC               | Section 4.1.3                           |
| <b>18.5</b>           | The terms and conditions for balancing service providers shall contain:                                                                                                                                                                                                                                                                                                                  | -                  | -                                       |
| <b>18.5.a</b>         | the rules for the qualification process to become a balancing service provider pursuant to Article 16;                                                                                                                                                                                                                                                                                   | CUSC               | Section 4.1                             |
| <b>18.5.d</b>         | the requirements on data and information to be delivered to the connecting TSO and, where relevant, to the reserve connecting DSO during the prequalification process and operation of the balancing market;                                                                                                                                                                             | CUSC               | Section 4.1.3.14 and 4.1.3.19           |
| <b>18.5. f</b>        | the requirements on data and information to be delivered to the connecting TSO and, where relevant, to the reserve connecting DSO to evaluate the provisions of <b>Balancing Services</b> pursuant to Article 154(1), Article 154(8), Article 158(1)(e), Article 158(4)(b), Article 161(1)(f) and Article 161(4)(b) of <b>the Electricity Transmission System Operation Regulation</b> ; | CUSC               | Section 4.1.3.19                        |
| <b>18.5. i</b>        | the rules for the settlement of balancing service providers defined pursuant to Chapters 2 and 5 of Title V;                                                                                                                                                                                                                                                                             | CUSC               | Section 4.1.3.9 and 4.1.3.9A            |
| <b>18.5. j</b>        | a maximum period for the finalisation of the settlement of balancing energy with a balancing service provider in accordance with Article 45, for any given imbalance settlement period;                                                                                                                                                                                                  | CUSC               | Section 4.3.2.6                         |
| <b>18.5. k</b>        | the consequences in case of non-compliance with the terms and conditions applicable to balancing service providers.                                                                                                                                                                                                                                                                      | CUSC               | Sections 4.1.3.9, 4.1.3.9A and 4.1.3.14 |